

ETSI TS 138 521-4 V18.10.0 (2026-04)



TECHNICAL SPECIFICATION

**5G;
NR;
User Equipment (UE) conformance specification;
Radio transmission and reception;
Part 4: Performance
(3GPP TS 38.521-4 version 18.10.0 Release 18)**



Reference

RTS/TSGR-0538521-4via0

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our [Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	23
1 Scope	24
2 References	24
3 Definition of terms, symbols and abbreviations.....	25
3.1 Terms.....	25
3.2 Symbols.....	26
3.3 Abbreviations	26
4 General	28
4.1 Relationship between minimum requirements and test requirements	28
4.2 Applicability of minimum requirements	28
4.3 Specification suffix information.....	29
4.4 Conducted requirements.....	29
4.4.0 Introduction.....	29
4.4.1 Reference point.....	29
4.4.2 SNR definition.....	29
4.4.3 Noc.....	30
4.4.3.1 Introduction.....	30
4.4.3.2 Noc for NR operating bands in FR1.....	30
4.4.3.2.1 Derivation of Noc values for NR operating bands in FR1.....	30
4.4.4 Es	30
4.4.4.1 Introduction.....	30
4.4.4.2 Es for NR operating bands in FR1	31
4.4.4.2.1 Derivation of Es values for NR operating bands in FR1	31
4.4.5 SINR definition.....	31
4.5 Radiated requirements.....	32
4.5.0 Introduction.....	32
4.5.1 Reference point.....	32
4.5.2 SNR definition	32
4.5.3 Noc.....	33
4.5.3.1 Introduction.....	33
4.5.3.2 Noc for NR operating bands in FR2.....	33
4.5.3.3 Derivation of Noc values for NR operating bands in FR2	33
4.5.4 Angle of arrival.....	34
4.5.5 Es	34
4.6 Test coverage across 5G NR connectivity options	34
5 Demodulation performance requirements (Conducted requirements)	35
5.1 General	35
5.1.1 Applicability of requirements	35
5.1.1.1 General.....	35
5.1.1.2 Applicability of requirements for different number of RX antenna ports	35
5.1.1.3 Applicability of requirements for optional UE features	36
5.1.1.4 Applicability of requirements for mandatory UE features with capability signalling.....	40
5.1.1.5 Applicability of CA requirements	42
5.1.1.5.1 Definition of CA capability	42
5.1.1.5.2 Applicability and test rules for different CA configurations and bandwidth combination sets	42
5.1.1.5.3 Applicability rule and antenna connection for CA tests with 4 RX.....	43
5.1.1.5.4 Applicability of different requirements for HST.....	43
5.1.1.5.5 Applicability and test rules for different CA configurations and bandwidth combination sets for 8Rx UE	45
5.1.1.5.6 Applicability rule and antenna connection for CA tests with 8 RX.....	47

5.1.1.5.7	Applicability rule for optional UE features for 8Rx	47
5.1.1.6	Applicability and test rules for PDSCH performance requirements with power imbalance for intra-band contiguous CA	47
5.1.1.7	Applicability of different requirements for HST.....	47
5.1.1.8	Applicability of different requirements with Multi-TRxP	48
5.1.1.9	Applicability of requirements for PDSCH on bands with shared spectrum access.....	49
5.1.1.10	Applicability of requirements for PDSCH with inter cell interference	49
5.1.1.11	Applicability of requirements for RedCap	49
5.1.1.12	Applicability of requirements for ATG.....	49
5.1.1.14	Applicability of requirements for eRedCap	51
5.2	PDSCH demodulation requirements	51
5.2.1	1RX requirements	54
5.2.1.1	FDD.....	54
5.2.1.1.1	1Rx FDD FR1 PDSCH performance for RedCap	54
5.2.1.1.2	1Rx FDD FR1 PDSCH performance for eRedCap	57
5.2.1.2	TDD	61
5.2.1.2.1	1Rx TDD FR1 PDSCH performance for RedCap	61
5.2.1.2.2	1Rx TDD FR1 PDSCH performance for eRedCap	64
5.2.2	2RX requirements	68
5.2.2.1	FDD.....	68
5.2.2.1.1	2Rx FDD FR1 PDSCH mapping Type A performance	68
5.2.2.1.1_1	2Rx FDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	69
5.2.2.1.1_2	2Rx FDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with enhanced receiver type 1 for both SA and NSA	72
5.2.2.1.1_3	2Rx FDD FR1 PDSCH mapping Type A performance – 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA.....	73
5.2.2.1.1_4	2Rx FDD FR1 PDSCH mapping Type A performance – 2x2 MIMO with enhanced DMRS for both SA and NSA.....	75
5.2.2.1.2	2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance	76
5.2.2.1.2_1	2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA	77
5.2.2.1.3	2Rx FDD FR1 PDSCH mapping Type B performance	80
5.2.2.1.3_1	2Rx FDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	80
5.2.2.1.4	2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance	83
5.2.2.1.4_1	2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA.....	84
5.2.2.1.5	2Rx FDD FR1 PDSCH 0.001% BLER performance	88
5.2.2.1.5_1	2Rx FDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA.....	89
5.2.2.1.6	2Rx FDD FR1 PDSCH repetitions over multiple slots performance	91
5.2.2.1.6_1	2Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA	92
5.2.2.1.7	2Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance	93
5.2.2.1.7_1	2Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	94
5.2.2.1.8	2Rx FDD FR1 PDSCH pre-emption performance	96
5.2.2.1.8_1	2Rx FDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA	97
5.2.2.1.9	2Rx FDD FR1 HST-SFN performance	100
5.2.2.1.9_1	2Rx FDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	101
5.2.2.1.10	2Rx FDD FR1 HST DPS performance.....	103
5.2.2.1.10_1	2Rx FDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	105
5.2.2.1.11	2Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance.....	111
5.2.2.1.11_1	2Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	112
5.2.2.1.12	2Rx FDD FR1 PDSCH Multi-DCI based transmission scheme performance.....	116
5.2.2.1.12_1	2Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA.....	117

5.2.2.1.13	2Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance	121
5.2.2.1.13_1	2Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	123
5.2.2.1.14	2Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance	126
5.2.2.1.14_1	2Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA.....	128
5.2.2.1.15	2Rx FDD FR1 PDSCH with inter-cell interference	131
5.2.2.1.15_1	2Rx FDD FR1 PDSCH with inter-cell interference performance - 2x2 MIMO for both SA and NSA.....	133
5.2.2.1.16	2Rx FDD FR1 for PDSCH with intra-cell inter user interference.....	135
5.2.2.1.16_1	2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA	137
5.2.2.1.16_2	2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA.....	139
5.2.2.1.17	2Rx FDD FR1 PDSCH performance for RedCap	141
5.2.2.1.18	2Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario ...	145
5.2.2.1.18_1	2Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x2 MIMO for both NSA and SA	146
5.2.2.1.19	2Rx FDD FR1 for PDSCH with inter cell CRS interference.....	149
5.2.2.1.19_1	2Rx FDD FR1 for PDSCH with inter cell CRS interference scenario – 4x2 MIMO for both NSA and SA	151
5.2.2.1.20	2Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA.....	154
5.2.2.1.21	2Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA.....	161
5.2.2.1.22	2Rx FDD FR1 PDSCH ATG performance.....	165
5.2.2.1.23	2Rx FDD FR1 PDSCH performance for eRedCap	168
5.2.2.2	TDD	173
5.2.2.2.1	2Rx TDD FR1 PDSCH mapping Type A performance.....	173
5.2.2.2.1_1	2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA	175
5.2.2.2.1_2	2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with enhanced receiver type 1 for both SA and NSA	180
5.2.2.2.1_3	2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA	181
5.2.2.2.1_4	2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with enhanced DMRS for both SA and NSA.....	182
5.2.2.2.2	2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance	184
5.2.2.2.2_1	2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA	184
5.2.2.2.3	2Rx TDD FR1 PDSCH mapping Type B performance.....	188
5.2.2.2.3_1	2Rx TDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	189
5.2.2.2.4	2Rx TDD FR1 PDSCH mapping Type A and LTE-NR coexistence performance	191
5.2.2.2.4_1	2Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA.....	192
5.2.2.2.5	2Rx TDD FR1 PDSCH 0.001% BLER performance	197
5.2.2.2.5_1	2Rx TDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA.....	198
5.2.2.2.6	2Rx TDD FR1 PDSCH repetitions over multiple slots performance	199
5.2.2.2.6_1	2Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA	200
5.2.2.2.7	2Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance.....	202
5.2.2.2.7_1	2Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	203
5.2.2.2.8	2Rx TDD FR1 PDSCH pre-emption performance	205
5.2.2.2.8_1	2Rx TDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA	206
5.2.2.2.9	2Rx TDD FR1 HST-SFN performance	207
5.2.2.2.9_1	2Rx TDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	208
5.2.2.2.10	2Rx TDD FR1 HST DPS performance	211

5.2.2.2.10_1	2Rx TDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA.....	213
5.2.2.2.11	2Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance.....	218
5.2.2.2.11_1	2Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	220
5.2.2.2.12	2Rx TDD FR1 PDSCH Multi-DCI based transmission scheme performance	223
5.2.2.2.12_1	2Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA.....	225
5.2.2.2.13	2Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance.....	226
5.2.2.2.13_1	2Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	227
5.2.2.2.14	2Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance.....	228
5.2.2.2.14_1	2Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA.....	230
5.2.2.2.15	2Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access	231
5.2.2.2.15_1	2Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access – 2x2 MIMO for both NSA and SA.....	232
5.2.2.2.16	2Rx TDD FR1 for PDSCH with inter-cell interference performance.....	235
5.2.2.2.16_1	2Rx TDD FR1 for PDSCH with inter-cell interference performance – 2x2 MIMO for both NSA and SA.....	236
5.2.2.2.17	2Rx TDD FR1 for PDSCH with intra-cell inter user interference.....	239
5.2.2.2.17_1	2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA.....	241
5.2.2.2.17_2	2Rx TDD FR1 for PDSCH with Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA	242
5.2.2.2.18	2Rx TDD FR1 PDSCH performance for RedCap	244
5.2.2.2.19	2Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario ...	248
5.2.2.2.19_1	2Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x2 MIMO for both NSA and SA	249
5.2.2.2.20	2Rx TDD FR1 for PDSCH with inter cell CRS interference	252
5.2.2.2.20_1	2Rx TDD FR1 for PDSCH with inter cell CRS interference scenario – 4x2 MIMO for both NSA and SA	254
5.2.2.2.21	2Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA	257
5.2.2.2.22	2Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA	265
5.2.2.2.23	2Rx TDD FR1 PDSCH ATG performance	268
5.2.3	4RX requirements	276
5.2.3.1	FDD.....	276
5.2.3.1.1	4Rx FDD FR1 PDSCH mapping Type A performance.....	276
5.2.3.1.1_1	4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA.....	278
5.2.3.1.1_2	4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA.....	281
5.2.3.1.1_3	FFS.....	282
5.2.3.1.1_4	4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA	282
5.2.3.1.1_5	4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA.....	283
5.2.3.1.1_6	4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA.....	285
5.2.3.1.2	4Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance	286
5.2.3.1.2_1	4Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 4x4 MIMO with baseline receiver for both SA and NSA	287
5.2.3.1.3	4Rx FDD FR1 PDSCH mapping Type B performance	290
5.2.3.1.3_1	4Rx FDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA.....	291
5.2.3.1.4	4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance.....	293
5.2.3.1.4_1	4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA.....	294
5.2.3.1.5	4Rx FDD FR1 PDSCH 0.001% BLER performance	295

5.2.3.1.5_1	4Rx FDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA	296
5.2.3.1.6	4Rx FDD FR1 PDSCH repetitions over multiple slots performance	298
5.2.3.1.6_1	4Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA	298
5.2.3.1.7	4Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance	300
5.2.3.1.7_1	4Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA	301
5.2.3.1.8	4Rx FDD FR1 PDSCH pre-emption performance	303
5.2.3.1.8_1	4Rx FDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA	304
5.2.3.1.9	4Rx FDD FR1 HST-SFN performance	306
5.2.3.1.9_1	4Rx FDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA	307
5.2.3.1.10	4Rx FDD FR1 HST DPS performance	309
5.2.3.1.10_1	4Rx FDD FR1 HST-DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA	311
5.2.3.1.11	4Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance	317
5.2.3.1.11_1	4Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x4 MIMO for both SA and NSA	318
5.2.3.1.12	4Rx FDD FR1 PDSCH Multi-DCI based transmission scheme performance	322
5.2.3.1.12_1	4Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x4 MIMO for both SA and NSA	324
5.2.3.1.13	4Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance	327
5.2.3.1.13_1	4Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x4 MIMO for both SA and NSA	329
5.2.3.1.14	4Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance	332
5.2.3.1.14_1	4Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x4 MIMO for both SA and NSA	334
5.2.3.1.15	4Rx FDD FR1 PDSCH with inter-cell interference	337
5.2.3.1.15_1	4Rx FDD FR1 PDSCH with inter-cell interference performance - 2x4 MIMO for both SA and NSA	339
5.2.3.1.16	4Rx FDD FR1 for PDSCH with intra-cell inter-user interference	341
5.2.3.1.16_1	4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 2x4 MIMO for both NSA and SA	344
5.2.3.1.16_2	4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA	345
5.2.3.1.16_3	4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA	347
5.2.3.1.16_4	4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA	349
5.2.3.1.17	4Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario	351
5.2.3.1.17_1	4Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x4 MIMO for both NSA and SA	352
5.2.3.1.18	4Rx FDD FR1 for PDSCH with inter cell CRS interference	355
5.2.3.1.18_1	4Rx FDD FR1 for PDSCH with inter cell CRS interference scenario – 4x4 MIMO for both NSA and SA	357
5.2.3.1.19	4Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA	360
5.2.3.1.20	4Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA	367
5.2.3.1.21	4Rx FDD FR1 PDSCH ATG performance	371
5.2.3.2	TDD	374
5.2.3.2.1	4Rx TDD FR1 PDSCH mapping Type A performance	374
5.2.3.2.1_1	4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA	377
5.2.3.2.1_2	4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA	382
5.2.3.2.1_3	4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with enhanced receiver type 1 for both SA and NSA	383
5.2.3.2.1_4	4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA	383

5.2.3.2.1_5	4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA	384
5.2.3.2.1_6	4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA.....	386
5.2.3.2.2	4Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance	387
5.2.3.2.2_1	4Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x4 MIMO with baseline receiver for both SA and NSA	388
5.2.3.2.3	4Rx TDD FR1 PDSCH mapping Type B performance.....	391
5.2.3.2.3_1	4Rx TDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA.....	391
5.2.3.2.4	4Rx TDD FR1 PDSCH mapping Type A performance.....	393
5.2.3.2.4_1	4Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA.....	395
5.2.3.2.5	4Rx TDD FR1 PDSCH 0.001% BLER performance	396
5.2.3.2.5_1	4Rx TDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA.....	397
5.2.3.2.6	4Rx TDD FR1 PDSCH repetitions over multiple slots performance	398
5.2.3.2.6_1	4Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA	399
5.2.3.2.7	4Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance.....	401
5.2.3.2.7_1	4Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA.....	402
5.2.3.2.8	4Rx TDD FR1 PDSCH pre-emption performance	404
5.2.3.2.8_1	4Rx TDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA	405
5.2.3.2.9	4Rx TDD FR1 HST-SFN performance	406
5.2.3.2.9_1	4Rx TDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA.....	407
5.2.3.2.10	4Rx TDD FR1 HST DPS performance	410
5.2.3.2.10_1	4Rx TDD FR1 HST DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA.....	412
5.2.3.2.11	4Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance.....	417
5.2.3.2.11_1	4Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x4 MIMO for both SA and NSA	419
5.2.3.2.12	4Rx TDD FR1 PDSCH Multi-DCI based transmission scheme performance	422
5.2.3.2.12_1	4Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x4 MIMO for both SA and NSA.....	424
5.2.3.2.13	4Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance.....	425
5.2.3.2.13_1	4Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x4 MIMO for both SA and NSA	426
5.2.3.2.14	4Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance	427
5.2.3.2.14_1	4Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x4 MIMO for both SA and NSA.....	429
5.2.3.2.15	4Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access	430
5.2.3.2.15_1	4Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access – 2x4 MIMO for both NSA and SA.....	431
5.2.3.2.16	4Rx TDD FR1 for PDSCH with inter-cell interference performance.....	432
5.2.3.2.16_1	4Rx TDD FR1 for PDSCH with inter-cell interference performance – 2x4 MIMO for both NSA and SA.....	434
5.2.3.2.17	4Rx TDD FR1 for PDSCH with intra-cell inter-user interference	436
5.2.3.2.17_1	2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA.....	439
5.2.3.2.17_2	4Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA.....	440
5.2.3.2.17_3	4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA.....	442
5.2.3.2.17_4	4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA.....	444
5.2.3.2.18	4Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario ...	446
5.2.3.2.18_1	4Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x4 MIMO for both NSA and SA	448
5.2.3.2.19	4Rx TDD FR1 for PDSCH with inter cell CRS interference	450

5.2.3.2.19_1	4Rx TDD FR1 for PDSCH with inter cell CRS interference scenario – 4x4 MIMO for both NSA and SA	452
5.2.3.2.20	4Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA	456
5.2.3.2.21	4Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA	463
5.2.3.2.22	4Rx TDD FR1 PDSCH ATG performance	467
5.2.4	8RX requirements	470
5.2.4.1	FDD	470
5.2.4.1.1	8Rx FDD FR1 PDSCH mapping Type A performance	470
5.2.4.1.1_1	8Rx FDD FR1 PDSCH mapping Type A performance - 2x8 MIMO with baseline 8Rx receiver for both SA and NSA	472
5.2.4.1.1_2	8Rx TDD FR1 PDSCH mapping Type A performance - 4x8 MIMO with baseline receiver for both SA and NSA	473
5.2.4.1.1_3	474	
5.2.4.1.1_4	474	
5.2.4.1.1_5	8Rx FDD FR1 PDSCH mapping Type A performance - 8x8 MIMO with baseline receiver for both SA and NSA	474
5.2.4.1.3	8Rx FDD FR1 for PDSCH with intra-cell inter-user interference	475
5.2.4.1.3_1	8Rx FDD FR1 for PDSCH with intra-cell inter-user interference – 4x8 MIMO with baseline 8Rx receiver for both SA and NSA	477
5.2.4.2	TDD	479
5.2.4.2.1	8Rx TDD FR1 PDSCH mapping Type A performance	479
5.2.4.2.1_1	8Rx TDD FR1 PDSCH mapping Type A performance - 2x8 MIMO with baseline receiver for both SA and NSA	480
5.2.4.2.1_2	8Rx TDD FR1 PDSCH mapping Type A performance - 4x8 MIMO with baseline receiver for both SA and NSA	482
5.2.4.2.1_3	8Rx TDD FR1 PDSCH mapping Type A performance – 2x8 MIMO with simplified receiver for both SA and NSA	483
5.2.4.2.1_4	8Rx TDD FR1 PDSCH mapping Type A performance – 4x8 MIMO with simplified receiver for both SA and NSA	485
5.2.4.2.1_5	8Rx TDD FR1 PDSCH mapping Type A performance - 8x8 MIMO with baseline receiver for both SA and NSA	486
5.2A	PDSCH demodulation requirements for CA	487
5.2A.1	1RX requirements (Void)	489
5.2A.2	2RX requirements	489
5.2A.2.1	Requirements for 2RX normal PDSCH	489
5.2A.2.1.0	Minimum conformance requirements for 2RX normal PDSCH	489
5.2A.2.1.1	2Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	490
5.2A.2.1.2	2Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	493
5.2A.2.1.3	2Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	494
5.2A.2.1.4	2Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	495
5.2A.2.1.5	2Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	495
5.2A.2.2	Requirements for 2RX PDSCH carrier aggregation with power imbalance	496
5.2A.2.2.0	Minimum conformance requirements for 2RX PDSCH CA with power imbalance	496
5.2A.2.2.1	2Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)	497
5.2A.2.2.2	Void	499
5.2A.2.2.3	Void	499
5.2A.2.3	2Rx TDD FR1 PDSCH mapping type A performance of SCell on band with shared spectrum access	499
5.2A.2.4	Requirements for 2RX HST-SFN CA PDSCH	501
5.2A.2.4.0	Minimum conformance requirements for 2RX HST-SFN CA PDSCH	501
5.2A.2.4.1	2Rx PDSCH Demodulation Performance for HST-SFN CA	503
5.2A.2.5	Requirements for 2RX HST-DPS CA PDSCH	507
5.2A.2.5.0	Minimum conformance requirements for 2RX HST-DPS CA PDSCH	507
5.2A.2.5.1	2RX PDSCH Demodulation Performance for HST-DPS CA	512
5.2A.3	4RX requirements	518
5.2A.3.1	Requirements for 4RX normal PDSCH	518
5.2A.3.1.0	Minimum conformance requirements for 4RX normal PDSCH	518
5.2A.3.1.1	4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	520
5.2A.3.1.2	4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	523
5.2A.3.1.3	4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	523

5.2.A.3.1.4	4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	524
5.2.A.3.1.5	4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	525
5.2.A.3.2	Requirements for 4RX PDSCH carrier aggregation with power imbalance	525
5.2.A.3.2.0	Minimum requirements for carrier aggregation with power imbalance	525
5.2.A.3.2.1	4Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA).....	527
5.2.A.3.3	4Rx TDD FR1 PDSCH mapping type A performance of SCell on band with shared spectrum access.....	528
5.2.A.3.4	Requirements for 4RX HST-SFN CA PDSCH.....	530
5.2.A.3.4.0	Minimum conformance requirements for 4RX HST-SFN CA PDSCH.....	530
5.2.A.3.4.1	4RX PDSCH Demodulation Performance for HST-SFN CA	533
5.2.A.3.5	Requirements for 4RX HST-DPS CA PDSCH.....	536
5.2.A.3.5.0	Minimum conformance requirements for 4RX HST-DPS CA PDSCH.....	536
5.2.A.3.5.1	4RX PDSCH Demodulation Performance for HST-DPS CA	541
5.2.A.3A	2Rx-4Rx requirements	548
5.2.A.3A.1	Requirements for 2Rx-4Rx normal PDSCH	548
5.2.A.3A.1.0	Minimum conformance requirements for 2Rx-4Rx normal PDSCH.....	548
5.2.A.3A.1.1	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	548
5.2.A.3A.1.2	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	552
5.2.A.3A.1.3	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	552
5.2.A.3A.1.4	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	553
5.2.A.3A.1.5	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	553
5.3	PDCCH demodulation requirements	554
5.3.1	1RX requirements	555
5.3.1.1	FDD.....	555
5.3.1.1.1	1Rx FDD FR1 PDCCH performance for RedCap.....	556
5.3.1.2	TDD	558
5.3.1.2.1	1Rx TDD FR1 PDCCH performance for RedCap.....	558
5.3.2	2RX requirements	560
5.3.2.1	FDD.....	560
5.3.2.1.1	2Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	561
5.3.2.1.2	2Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	564
5.3.2.1.3	2Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving.....	567
5.3.2.1.4	2Rx FDD FR1 PDCCH performance for RedCap.....	572
5.3.2.1.5	2RX FDD Minimum requirements for PDCCH with intra-slot repetition	574
5.3.2.1.7	2RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	578
5.3.2.2	TDD	580
5.3.2.2.1	2Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA.....	581
5.3.2.2.2	2Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA.....	584
5.3.2.2.3	2Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving	586
5.3.2.2.4	2Rx TDD FR1 PDCCH performance for RedCap.....	592
5.3.2.2.5	2RX TDD Minimum requirements for PDCCH with intra-slot repetition	594
5.3.3	4RX requirements	597
5.3.3.1	FDD.....	597
5.3.3.1.1	4Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	598
5.3.3.1.2	4Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	601
5.3.3.1.3	4Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving.....	604
5.3.3.1.4	4RX FDD Minimum requirements for PDCCH with intra-slot repetition	609
5.3.3.1.5	613	
5.3.3.1.6	4RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	613
5.3.3.2	TDD	616
5.3.3.2.1	4Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA.....	616
5.3.3.2.2	4Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA.....	619
5.3.3.2.3	4Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving	622
5.3.3.2.4	4RX TDD Minimum requirements for PDCCH with intra-slot repetition	627
5.4	PBCH demodulation requirements	630
5.5	Sustained downlink data rate provided by lower layers	630
5.5.1	FR1 Sustained downlink data rate performance for single carrier.....	630

5.5.1_1	FR1 Sustained downlink data rate performance for single carrier for 8Rx.....	638
5.5.2	FR1 Sustained downlink data rate performance for single carrier with DL1024QAM	642
5.5.3	FR1 Sustained downlink data rate performance for RedCap	644
5.5.4	FR1 Sustained downlink data rate performance for eRedCap	645
Same as in Clause 5.5.1.5.5.5A.1	FR1 Sustained downlink data rate performance for carrier aggregation	646
5.5A.1.1	FR1 SDR performance for CA (2DL CA).....	646
5.5A.1.2	FR1 SDR performance for CA (3DL CA)	654
5.5A.1.2.1	Test Purpose	654
5.5A.1.2.2	Test applicability	654
5.5A.1.2.3	Minimum conformance requirements.....	654
5.5A.1.2.4	Test description	654
5.5A.1.2.5	Test requirement.....	654
5.5A.1.3	FR1 SDR performance for CA (4DL CA)	654
5.5A.1.3.1	Test Purpose	654
5.5A.1.3.2	Test applicability	654
5.5A.1.3.3	Minimum conformance requirements.....	654
5.5A.1.3.4	Test description	655
5.5A.1.3.5	Test requirement.....	655
5.5A.1.4	FR1 SDR performance for CA (5DL CA)	655
5.5A.1.4.1	Test Purpose	655
5.5A.1.4.2	Test applicability	655
5.5A.1.4.3	Minimum conformance requirements.....	655
5.5A.1.4.4	Test description	655
5.5A.1.4.5	Test requirement.....	655
5.6	PDSCH absolute physical layer throughput requirements	655
5.6.1	1RX requirements	655
5.6.2	2RX requirements	656
5.6.2.1	FDD.....	656
5.6.2.1.1	2Rx FDD FR1 PDSCH absolute physical layer throughput performance with link adaptation	656
5.6.2.1.1_1	2Rx FDD FR1 PDSCH performance with link adaptation - 2x2 MIMO for both SA and NSA	657
5.6.2.2	TDD	659
5.6.2.2.1	2Rx TDD FR1 PDSCH absolute physical layer throughput performance with link adaptation	659
5.6.2.2.1_1	2Rx TDD FR1 PDSCH performance with link adaptation - 2x2 MIMO for both SA and NSA	661
5.6.3	4Rx requirements.....	662
5.6.3.1	FDD.....	662
5.6.3.1.1	4Rx FDD FR1 PDSCH absolute physical layer throughput performance with link adaptation	662
5.6.3.1.1_1	4Rx FDD FR1 PDSCH performance with link adaptation - 2x4 MIMO for both SA and NSA	664
5.6.3.2	TDD	665
5.6.3.2.1	4Rx TDD FR1 PDSCH absolute physical layer throughput performance with link adaptation	665
5.6.3.2.1_1	4Rx TDD FR1 PDSCH performance with link adaptation - 2x4 MIMO for both SA and NSA	667
6	CSI reporting requirements (Conducted requirements)	669
6.1	General	669
6.1.1	Applicability of requirements	669
6.1.1.1	General	669
6.1.1.2	Applicability of requirements for different number of RX antenna ports	669
6.1.1.3	Applicability of requirements for optional UE features	670
6.1.1.4	Applicability of requirements for mandatory UE features with capability signalling.....	671
6.1.1.5	Applicability of Channel Quality Indicator (CQI) reporting requirements for CA.....	671
6.1.1.5.1	Applicability and test rules for different duplex modes and SCS combinations	671
6.1.1.5.2	Applicability and test rules for different CA configurations and bandwidth combination sets	672
6.1.1.5.3	Test coverage for different number of component carriers.....	672
6.1.1.5.4	Applicability rule and antenna connection for CA tests with 4 RX.....	672
6.1.1.6	Applicability of requirements for RedCap	672
6.1.1.7	Applicability of requirements for eRedCap	673
6.1.2	Common test parameters	673
6.2	Reporting of Channel Quality Indicator (CQI).....	676

6.2.1	1RX requirements	676
6.2.1.1	FDD.....	676
6.2.1.1.1	CQI reporting definition under AWGN conditions	676
6.2.1.1.1.1	1Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	676
6.2.1.1.1.2	1Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	679
6.2.1.1.2	CQI reporting under fading conditions.....	683
6.2.1.1.2.1	1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	683
6.2.1.1.2.2	1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	688
6.2.1.2	TDD	692
6.2.1.2.1	CQI reporting definition under AWGN conditions	692
6.2.1.2.1.1	1Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	692
6.2.1.2.1.2	1Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	696
6.2.1.2.2	CQI reporting definition under fading conditions	699
6.2.1.2.2.1	1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap.....	699
6.2.1.2.2.2	1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	704
6.2.2	2RX requirements	710
6.2.2.1	FDD.....	710
6.2.2.1.1	CQI reporting definition under AWGN conditions	710
6.2.2.1.1.1	2Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	710
6.2.2.1.1.2	2Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA.....	713
6.2.2.1.1.3	2Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA.....	717
6.2.2.1.1.4	2Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	720
6.2.2.1.1.5	2Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	723
6.2.2.1.2	CQI reporting under fading conditions.....	726
6.2.2.1.2.1	2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	726
6.2.2.1.2.2	2Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	731
6.2.2.1.2.3	2Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA... 736	
6.2.2.1.2.4	2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	739
6.2.2.1.2.5	2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	742
6.2.2.2	TDD	746
6.2.2.2.1	CQI Reporting definition under AWGN conditions.....	746
6.2.2.2.1.1	2Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	746
6.2.2.2.1.2	2Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA.....	749
6.2.2.2.1.3	2Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA.....	753
6.2.2.2.1.4	2Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA.....	757
6.2.2.2.1.5	2Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	760
6.2.2.2.1.6	2Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	764
6.2.2.2.2	CQI reporting under fading conditions.....	766
6.2.2.2.2.1	2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	766
6.2.2.2.2.2	2Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	769
6.2.2.2.2.3	2Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA .. 773	
6.2.2.2.2.4	2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap.....	776
6.2.3	4RX requirements	780
6.2.3.1	FDD.....	780
6.2.3.1.1	CQI reporting definition under AWGN conditions	780
6.2.3.1.1.1	4Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	781
6.2.3.1.1.2	4Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA.....	784
6.2.3.1.1.3	4Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA.....	787
6.2.3.1.2	CQI reporting definition under fading conditions	790
6.2.3.1.2.1	4Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	790

6.2.3.1.2.2	4Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	792
6.2.3.1.2.3	4Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA...	795
6.2.3.2	TDD	798
6.2.3.2.1	CQI reporting definition under AWGN conditions	798
6.2.3.2.1.1	4Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	798
6.2.3.2.1.2	4Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA.....	801
6.2.3.2.1.3	4Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA	804
6.2.3.2.1.4	4Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA.....	808
6.2.3.2.2	CQI reporting under fading conditions.....	811
6.2.3.2.2.1	4Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	811
6.2.3.2.2.2	4Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	814
6.2.3.2.2.3	4Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA ..	816
6.2.4	8RX requirements	819
6.2.4.1	FFS	819
6.2.4.2	TDD	819
6.2.4.2.1	CQI reporting definition under AWGN conditions	819
6.2.4.2.1.1	8Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	820
6.2A	Reporting of Channel Quality Indicator (CQI) for CA.....	823
6.2A.1	General.....	823
6.2A.2	1RX requirements	823
6.2A.3	2RX and 4RX requirements.....	823
6.2A.3.1	CQI reporting definition under AWGN conditions.....	823
6.2A.3.1.0	Minimum requirement for periodic CQI reporting.....	823
6.2A.3.1.1	CQI reporting accuracy under AWGN conditions for CA (2DL CA).....	826
6.2A.3.1.1_1	2Rx FR1 CQI reporting under AWGN for Scell on band with shared spectrum access for CA (2DLCA)	830
6.2A.3.1.2	CQI reporting accuracy under AWGN conditions for CA (3DL CA).....	836
6.2A.3.1.3	CQI reporting accuracy under AWGN conditions for CA (4DL CA).....	837
6.2A.3.1.4	CQI reporting accuracy under AWGN conditions for CA (5DL CA).....	838
6.2A.3.1.5	CQI reporting accuracy under AWGN conditions for CA (6DL CA).....	839
6.2A.4	4RX requirements	840
6.2A.4.1	CQI reporting definition under AWGN conditions.....	840
6.2A.4.1.1	4Rx FR1 CQI reporting under AWGN for Scell on band with shared spectrum access for CA (2DLCA)	840
6.3	Reporting of Precoding Matrix Indicator (PMI).....	847
6.3.0	General.....	847
6.3.1	1RX requirements	847
6.3.1.1	FDD.....	847
6.3.1.1.1	1Rx FDD Single PMI with 4TX TypeI-SinglePanel Codebook for RedCap	847
6.3.1.1.2	1Rx FDD Single PMI with 4TX TypeI-SinglePanel Codebook for eRedCap.....	852
6.3.1.2	TDD	856
6.3.1.2.1	1Rx TDD Single PMI with 4TX TypeI-SinglePanel Codebook for RedCap	856
6.3.1.2.2	1Rx TDD Single PMI with 4TX TypeI-SinglePanel Codebook for eRedCap	860
6.3.2	2RX requirements	865
6.3.2.1	FDD.....	865
6.3.2.1.1	2Rx FDD FR1 Single PMI with 4TX TypeI-SinglePanel codebook for both SA and NSA	865
6.3.2.1.1_1	2Rx FDD FR1 Single PMI with 4Tx TypeI-SinglePanel codebook for RedCap	869
6.3.2.1.2	2Rx FDD FR1 Single PMI with 8TX TypeI-SinglePanel codebook for both SA and NSA	870
6.3.2.1.3	2Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA	875
6.3.2.1.4	2Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA.....	878
6.3.2.1.5	2Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA.....	882
6.3.2.1.6	2Rx FDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	886
6.3.2.1.7	2Rx FDD FR1 Single PMI with 8TX TypeI-SinglePanel codebook for Single-DCI based transmission scheme for both SA and NSA.....	890

6.3.2.1.8	2Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI for both SA and NSA	901
6.3.2.1.9	2Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA	906
6.3.2.1.10	2Rx FDD FR1 Single PMI with 4Tx TypeI-SinglePanel codebook for eRedCap.....	913
6.3.2.2	TDD	918
6.3.2.2.1	2Rx TDD FR1 Single PMI with 4Tx TypeI-SinglePanel codebook for both SA and NSA	918
6.3.2.2.2	2Rx TDD FR1 Single PMI with 8Tx TypeI-SinglePanel codebook for both SA and NSA	923
6.3.2.2.3	2Rx TDD FR1 Multiple PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA..	927
6.3.2.2.4	2Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	931
6.3.2.2.5	2Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA.....	935
6.3.2.2.6	2Rx TDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	938
6.3.2.2.7	2Rx TDD Single PMI with 4Tx TypeI-SinglePanel Codebook for RedCap	942
6.3.2.2.8	2Rx TDD FR1 Single PMI with 8Tx TypeI-SinglePanel Codebook for Single-DCI based transmission scheme for both SA and NSA.....	947
6.3.2.2.9	2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI.....	958
6.3.2.2.10	2Rx TDD Single PMI with 4Tx TypeI-SinglePanel Codebook for eRedCap	962
6.3.3	4RX requirements	967
6.3.3.1	FDD.....	967
6.3.3.1.1	4Rx FDD FR1 Single PMI with 4Tx TypeI-SinglePanel codebook for both SA and NSA	967
6.3.3.1.2	4Rx FDD FR1 Single PMI with 8Tx TypeI-SinglePanel codebook for both SA and NSA	972
6.3.3.1.3	4Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA	976
6.3.3.1.4	4Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA.....	980
6.3.3.1.5	4Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA.....	984
6.3.3.1.6	4Rx FDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	988
6.3.3.1.7	4Rx FDD FR1 Single PMI with 8 ports TypeI-SinglePanel Codebook for Single-DCI based transmission scheme	992
6.3.3.1.9	4Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA	1000
6.3.3.2	TDD	1004
6.3.3.2.1	4Rx TDD FR1 Single PMI with 4Tx TypeI-SinglePanel codebook for both SA and NSA	1004
6.3.3.2.2	4Rx TDD FR1 Single PMI with 8Tx TypeI-SinglePanel codebook for both SA and NSA	1009
6.3.3.2.3	4Rx TDD FR1 Multiple PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	1013
6.3.3.2.4	4Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA ...	1017
6.3.3.2.5	4Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA.....	1021
6.3.3.2.6	4Rx TDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	1025
6.3.3.2.7	4Rx TDD FR1 Single PMI with 8 ports TypeI-SinglePanel Codebook for Single-DCI based transmission scheme	1029
6.4	Reporting of Rank Indicator (RI)	1033
6.4.1	1RX requirements (Void)	1033
6.4.2	2RX requirements	1033
6.4.2.1	FDD.....	1033
6.4.2.1_1	2Rx FDD FR1 RI reporting for both SA and NSA.....	1033
6.4.2.1.1	2Rx FDD FR1 RI reporting for RedCap.....	1037
6.4.2.2	TDD	1041
6.4.2.2_1	2Rx TDD FR1 RI reporting for both SA and NSA	1041
6.4.2.2.1	2Rx TDD FR1 RI reporting for RedCap	1046
6.4.3	4RX requirements	1050
6.4.3.1	FDD.....	1050
6.4.3.1_1	4Rx FDD FR1 RI reporting for both SA and NSA.....	1050
6.4.3.2	TDD	1054
6.4.3.2_1	4Rx TDD FR1 RI reporting for both SA and NSA	1054
7	Demodulation performance requirements (Radiated requirements)	1059
7.1	General	1059
7.1.1	Applicability of requirements	1059
7.1.1.1	General	1059
7.1.1.2	Applicability of requirements for different number of RX antenna ports	1059
7.1.1.3	Applicability of requirements for optional UE features	1059
7.1.1.4	Applicability of requirements for mandatory UE features with capability signaling	1060
7.1.1.5	Applicability of CA requirements	1060

7.1.1.5.1	Definition of CA capability	1060
7.1.1.5.2	Applicability and test rules for different CA configurations and bandwidth combination sets ...	1061
7.1.1.6	FFS	1061
7.1.1.7	Applicability of requirements for RedCap	1061
7.1.1_1	Applicability of test requirements due to maximum achievable SNR	1062
7.2	PDSCH demodulation requirements	1064
7.2.1	1RX requirements (Void)	1067
7.2.2	2RX requirements	1067
7.2.2.1	FDD (Void)	1067
7.2.2.2	TDD	1067
7.2.2.2.1	2Rx TDD FR2 PDSCH mapping Type A performance	1067
7.2.2.2.1_1	2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for SA and NSA	1069
7.2.2.2.1_2	2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with enhanced type 1 receiver for SA and NSA	1073
7.2.2.2.1_3	2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with 256QAM for SA and NSA (Rel-16 and forward)	1074
7.2.2.2.2	2Rx TDD FR2 PDSCH repetitions over multiple slots	1075
7.2.2.2.2_1	2Rx TDD FR2 PDSCH repetitions over multiple slots - 2x2 MIMO with baseline receiver for SA and NSA	1076
7.2.2.2.3	2Rx TDD FR2 PDSCH Mapping Type B	1078
7.2.2.2.3_1	2Rx TDD FR2 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for SA and NSA	1079
7.2.2.2.4	2Rx TDD FR2 PDSCH for HST-DPS	1081
7.2.2.2.4_1	2Rx TDD FR2 PDSCH for HST-DPS - 2x2 MIMO with baseline receiver for SA and NSA	1088
7.2.2.2.5	TDD FR2 PDSCH using Multi-DCI non-overlapping based transmission scheme performance	1093
7.2.2.2.5_1	TDD FR2 PDSCH using Multi-DCI non-overlapping based transmission scheme performance – MultiRx	1095
7.2.2.2.6	TDD FR2 PDSCH using Multi-DCI fully-overlapping based transmission scheme	1100
7.2.2.2.6_1	TDD FR2 PDSCH using Multi-DCI fully-overlapping based transmission scheme performance – MultiRx	1102
7.2.2.2.7	TDD FR2 PDSCH using Single-DCI based SDM scheme performance	1106
7.2.2.2.7_1	TDD FR2 PDSCH using Single-DCI based SDM scheme performance – MultiRx	1108
7.2A	PDSCH demodulation requirements for CA	1110
7.2A.1	1RX requirements (Void)	1110
7.2A.2	2RX requirements	1110
7.2A.2.1	2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (2DLCA)	1111
7.2A.2.2	2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (3DLCA)	1113
7.2A.2.3	2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (4DLCA)	1113
7.3	PDCCH demodulation requirements	1124
7.3.1	1RX requirements	1126
7.3.2	2RX requirements	1126
7.3.2.1	FDD	1126
7.3.2.2	TDD	1126
7.3.2.2.1	2Rx TDD FR2 PDCCH 1 Tx antenna performance for both SA and NSA	1126
7.3.2.2.2	2Rx TDD FR2 PDCCH 2 Tx antenna performance for both SA and NSA	1129
7.3.2.2.3	2Rx TDD FR2 PDCCH 1 Tx antenna performance for power saving	1132
7.4	PBCH demodulation requirements	1136
7.5	Sustained downlink data rate provided by lower layers	1136
7.5.1	FR2 Sustained downlink data rate performance for single carrier	1136
7.5.2	FR2 Sustained downlink data rate performance for RedCap	1144
7.5A.1	FR2 Sustained downlink data rate performance for carrier aggregation	1144
7.5A.1.1	FR2 SDR performance for CA (2DL CA)	1144
7.5A.1.2	FR2 SDR performance for CA (3DL CA)	1147
7.5A.1.3	FR2 SDR performance for CA (4DL CA)	1148
7.5A.1.4	FR2 SDR performance for CA (5DL CA)	1148
7.5A.1.5	FR2 SDR performance for CA (6DL CA)	1149

7.5A.1.6	FR2 SDR performance for CA (7DL CA)	1149
7.5A.1.7	FR2 SDR performance for CA (8DL CA)	1150
7.6	PDSCH absolute physical layer throughput requirements	1150
7.6.1	1Rx requirements.....	1150
7.6.2	2Rx requirements.....	1150
7.6.2.1	FDD.....	1150
7.6.2.2	TDD	1150
7.6.2.2.1	2Rx TDD FR2 PDSCH absolute physical layer throughput performance with link adaptation ..	1150
7.6.2.2.1_1	2Rx TDD FR2 PDSCH performance with link adaptation - 2x2 MIMO for both SA and NSA	1152
8	CSI reporting requirements (Radiated requirements).....	1153
8.1	General	1153
8.1.1	Applicability of requirements	1154
8.1.1.1	General	1154
8.1.1.2	Applicability of requirements for different number of RX antenna ports	1154
8.1.1.3	Applicability of requirements for optional UE features	1154
8.1.1.4	Applicability of requirements for mandatory UE features with capability signalling.....	1154
8.1.1.5	Applicability of Channel Quality Indicator (CQI) reporting requirements for CA.....	1155
8.1.1.5.1	Applicability and test rules for different CA configurations and bandwidth combination sets ...	1155
8.1.1.5.2	Test coverage for different number of component carriers.....	1155
8.1.1.6	Applicability of requirements for RedCap	1155
8.1.1_1	Applicability of test requirements due to maximum achievable SNR	1155
8.1.2	Common test parameters	1156
8.2	Reporting of Channel Quality Indicator (CQI).....	1158
8.2.1	1RX requirements	1159
8.2.2	2RX requirements	1159
8.2.2.1	FDD.....	1159
8.2.2.2	TDD	1159
8.2.2.2.1	CQI reporting under AWGN conditions.....	1159
8.2.2.2.1.1	2Rx TDD FR2 periodic wideband CQI reporting under AWGN performance for both SA and NSA.....	1159
8.2.2.2.2	CQI reporting under fading conditions.....	1163
8.2.2.2.2.1	2Rx TDD FR2 aperiodic wideband CQI reporting under fading performance for both SA and NSA.....	1163
8.2.2.2.2.1_1	2Rx TDD FR2 aperiodic CQI wideband reporting under fading performance for both SA and NSA – 256QAM (Rel-16 and forward).....	1168
8.2A	Reporting of Channel Quality Indicator (CQI) for CA.....	1172
8.2A.1	General.....	1172
8.2A.2	1RX requirements	1172
8.2A.3	2RX requirements	1172
8.2A.3.1	CQI reporting definition under AWGN conditions.....	1172
8.2A.3.1.0	Minimum requirement for periodic CQI reporting.....	1172
8.2A.3.1.1	2Rx CQI reporting accuracy under AWGN conditions for CA (2DL CA)	1174
8.2A.3.1.2	2Rx CQI reporting accuracy under AWGN conditions for CA (3DL CA)	1176
8.2A.3.1.3	2Rx CQI reporting accuracy under AWGN conditions for CA (4DL CA)	1177
8.3	Reporting of Precoding Matrix Indicator (PMI).....	1178
8.3.0	General.....	1178
8.3.1	1RX requirements (Void)	1178
8.3.2	2RX requirements	1178
8.3.2.1	FDD.....	1178
8.3.2.2	TDD	1178
8.3.2.2.1	2Rx TDD FR2 Single PMI with 2TX TypeI-SinglePanel codebook for both SA and NSA	1178
8.3.3	1184	
8.3.3.1	1184	
8.3.3.2	1184	
8.3.3.2.1	1184	
8.3.3.2.2	4Rx TDD FR2 Single PMI with 2TX TypeI-SinglePanel codebook Single-DCI based transmission scheme with simultaneous reception - MultiRx	1184
8.4	Reporting of Rank Indicator (RI)	1189
8.4.1	1RX requirements	1189
8.4.2	2RX requirements	1189

8.4.2.1	FDD.....	1189
8.4.2.2	TDD	1189
8.4.2.2.1	2Rx TDD FR2 RI reporting for both SA and NSA	1189
9	Demodulation performance requirements for interworking.....	1193
9.1	General	1193
9.1.1	Applicability of requirements	1194
9.1.1.1	Applicability of requirements for optional UE features	1195
9.1.1.2	Applicability of requirements for mandatory UE features with capability signalling.....	1195
9.1.2	E-UTRA Cell setup.....	1195
9.1.2.1	FDD.....	1195
9.1.2.2	TDD	1196
9.2	Void.....	1197
9.2A	PDSCH Demodulation for CA	1197
9.2A.1	NR CA between FR1 and FR2.....	1197
9.2B	PDSCH Demodulation for DC	1197
9.2B.1	EN-DC	1197
9.2B.1.1	EN-DC within FR1	1197
9.2B.1.2	EN-DC including FR2 NR carrier only.....	1197
9.2B.1.3	EN-DC including FR1 and FR2 NR carriers.....	1197
9.2B.2	NR DC between FR1 and FR2.....	1197
9.3	Void.....	1198
9.3A	PDCCH Demodulation for CA.....	1198
9.3A.1	NR CA between FR1 and FR2.....	1198
9.3B	PDCCH Demodulation for DC.....	1198
9.3B.1	EN-DC	1198
9.3B.1.1	EN-DC within FR1	1198
9.3B.1.2	EN-DC including FR2 NR carrier only.....	1198
9.3B.1.3	EN-DC including FR1 and FR2 NR carriers.....	1198
9.3B.2	NR DC between FR1 and FR2.....	1198
9.4	Void.....	1198
9.4A	SDR test for CA	1198
9.4A.1	Sustained downlink data rate performance for NR CA between FR1 and FR2.....	1198
9.4B	SDR test for DC	1199
9.4B.1	EN-DC	1199
9.4B.1.1	Sustained downlink data rate performance for EN-DC within FR1	1199
9.4B.1.1A	Sustained downlink data rate performance for EN-DC within FR1 with DL 1024QAM	1209
9.4B.1.1_1	Sustained downlink data rate performance for EN-DC within FR1 (2 NR CCs).....	1211
9.4B.1.1_2	Sustained downlink data rate performance for EN-DC within FR1 (3 NR CCs).....	1212
9.4B.1.1_3	Sustained downlink data rate performance for EN-DC within FR1 (4 NR CCs).....	1213
9.4B.1.2	Sustained downlink data rate performance for EN-DC including FR2 NR carrier.....	1213
9.4B.1.2_1	Sustained downlink data rate performance for EN-DC including FR2 (2 NR CCs).....	1222
9.4B.1.2_2	Sustained downlink data rate performance for EN-DC including FR2 (3 NR CCs).....	1223
9.4B.1.2_3	Sustained downlink data rate performance for EN-DC including FR2 (4 NR CCs).....	1223
9.4B.2	NR DC between FR1 and FR2.....	1224
9.4B.2.1	Sustained downlink data rate performance for NR DC between FR1 and FR2	1224
9.4B.3	NE-DC	1224
9.4B.3.1	Sustained downlink data rate performance for NE-DC within FR1	1224
10	CSI reporting requirements for interworking.....	1224
10.1	General	1224
10.1.1	Applicability of requirements	1224
10.1.1.1	Applicability of requirements for optional UE features	1225
10.1.1.2	Applicability of requirements for mandatory UE features with capability signalling.....	1225
10.2	Void.....	1225
10.2A	Reporting of Channel Quality Indicator (CQI) for CA.....	1225
10.2B	Reporting of Channel Quality Indicator (CQI) for DC.....	1225
10.2B.1	EN-DC	1225
10.2B.1.1	EN-DC within FR1	1225
10.2B.1.2	EN-DC including FR2 NR carrier.....	1225
10.2B.1.3	EN-DC including FR1 and FR2 NR carriers.....	1225
10.2B.2	NR DC between FR1 and FR2.....	1226

10.3A	Reporting of Precoding Matrix Indicator (PMI) for CA.....	1226
10.3B	Reporting of Precoding Matrix Indicator (PMI) for DC.....	1226
10.3B.1	EN-DC	1226
10.3B.1.1	EN-DC within FR1	1226
10.3B.1.2	EN-DC including FR2 NR carrier.....	1226
10.3B.1.3	EN-DC including FR1 and FR2 NR carriers.....	1226
10.3B.2	NR DC between FR1 and FR2.....	1226
10.4A	Reporting of Rank Indicator (RI) for CA	1226
10.4B	Reporting of Rank Indicator (RI) for DC	1227
10.4B.1	EN-DC	1227
10.4B.1.1	EN-DC within FR1	1227
10.4B.1.2	EN-DC including FR2 NR carrier.....	1227
10.4B.1.3	EN-DC including FR1 and FR2 NR carriers.....	1227
10.4B.2	NR DC between FR1 and FR2.....	1227
11	V2X requirements	1227
11.1	Demodulation performance requirements (Conducted requirements).....	1227
11.1.1	General.....	1227
11.1.1.1	Applicability of requirements.....	1227
11.1.1.1.1	General	1227
11.1.1.1.2	Applicability of requirements for mandatory UE V2X features with capability signalling	1228
11.1.1.2	Common test parameters	1228
11.1.2	PSSCH demodulation requirements	1229
11.1.2.1	2Rx requirements	1229
11.1.2.1.1	2Rx FR1 PSSCH performance	1229
11.1.3	PSCCH demodulation requirements	1232
11.1.3.1	2Rx requirements	1232
11.1.3.1.1	2Rx FR1 PSCCH performance.....	1232
11.1.4	PSBCH demodulation requirements	1234
11.1.4.1	2Rx requirements.....	1234
11.1.4.1.1	2Rx FR1 PSBCH performance.....	1234
11.1.5	PSFCH demodulation requirements	1234
11.1.5.1	2Rx requirements	1234
11.1.5.1.1	2Rx FR1 PSFCH performance	1234
11.1.6	Power imbalance performance with two links	1237
11.1.6.1	2Rx requirements	1237
11.1.6.1.1	2Rx FR1 Power imbalance performance	1237
11.1.7	HARQ buffer soft combining	1240
11.1.7.1	2Rx requirements	1240
11.1.7.1.1	2Rx FR1 HARQ buffer soft combining performance.....	1240
11.1.8	PSCCH decoding capability test.....	1242
11.1.8.1	2Rx requirements	1242
11.1.8.1.1	2Rx FR1 PSCCH decoding capability.....	1242
11.1.9	PSFCH decoding capability Test	1245
11.1.9.1	2Rx requirements	1245
11.1.9.1.1	2Rx FR1 PSFCH decoding capability	1245
Annex A (normative):	Measurement channels.....	1249
A.1	General	1249
A.1.1	Throughput definition.....	1249
A.1.2	TDD UL-DL configurations for FR1	1249
A.1.3	TDD UL-DL configurations for FR2	1253
A.2	UL Reference measurement channels	1255
A.2.1	General	1255
A.2.2	Reference measurement channels for FDD.....	1256
A.2.2.1	RMC for Sustained downlink data rate.....	1256
A.2.2.1.1	CP-OFDM 64QAM.....	1256
A.2.3	Reference measurement channels for TDD.....	1257
A.2.3.1	RMC for Sustained downlink data rate.....	1257
A.2.3.1.1	CP-OFDM 16QAM.....	1257

A.3	DL reference measurement channels	1260
A.3.1	General	1260
A.3.2	Reference measurement channels for PDSCH performance requirements	1260
A.3.2.1	FDD	1260
A.3.2.1.1	Reference measurement channels for SCS 15 kHz FR1	1260
A.3.2.1.2	Reference measurement channels for SCS 30 kHz FR1	1277
A.3.2.1.3	Reference measurement channels for SCS 60 kHz FR1	1278
A.3.2.1.4	Reference measurement channels for E-UTRA	1278
A.3.2.1.5	Reference measurement channels for Intra-cell Inter-UE interference scenario	1282
A.3.2.2	TDD	1283
A.3.2.2.1	Reference measurement channels for SCS 15 kHz FR1	1283
A.3.2.2.2	Reference measurement channels for SCS 30 kHz FR1	1288
A.3.2.2.3	Reference measurement channels for SCS 60 kHz FR1	1337
A.3.2.2.4	Reference measurement channels for SCS 60 kHz FR2	1337
A.3.2.2.5	Reference measurement channels for SCS 120 kHz FR2	1338
A.3.2.2.6	Reference measurement channels for E-UTRA	1351
A.3.2.2.7	Reference measurement channels for Intra-cell Inter-UE interference scenario	1356
A.3.2.3	HD-FDD	1357
A.3.2.3.1	Reference measurement channels for SCS 15 kHz FR1	1357
A.3.2_1	Reference measurement channels for Sustained downlink data rate performance requirements	1361
A.3.2_1.1	FDD	1361
A.3.2_1.1.1	Reference measurement channels for SCS 15 kHz FR1	1361
A.3.2_1.2	TDD	1371
A.3.2_1.2.1	Reference measurement channels for SCS 30 kHz FR1	1371
A.3.2_1.2.2	Reference measurement channels for SCS 120 kHz FR2	1382
A.3.3	Reference measurement channels for PDCCH performance requirements	1384
A.3.3.1	FDD	1384
A.3.3.1.1	Reference measurement channels for SCS 15 kHz FR1	1384
A.3.3.1.2	Reference measurement channels for SCS 30 kHz FR1	1387
A.3.3.2	TDD	1387
A.3.3.2.1	Reference measurement channels for SCS 15 kHz FR1	1387
A.3.3.2.2	Reference measurement channels for SCS 30 kHz FR1	1388
A.3.3.2.3	Reference measurement channels for SCS 60 kHz FR1	1390
A.3.3.2.4	Reference measurement channels for SCS 60 kHz FR2	1390
A.3.3.2.5	Reference measurement channels for SCS 120 kHz FR2	1390
A.3.4	Reference measurement channels for PBCH demodulation requirements	1392
A.3.4.1	Reference measurement channels for FR1	1392
A.3.4.2	Reference measurement channels for FR2	1392
A.4	CSI reference measurement channels	1393
A.5	OFDMA Channel Noise Generator (OCNG)	1396
A.5.1	OCNG Patterns for FDD	1396
A.5.1.1	OCNG FDD pattern 1: Generic OCNG FDD Pattern for all unused REs	1396
A.5.2	OCNG Patterns for TDD	1397
A.5.2.1	OCNG TDD pattern 1: Generic OCNG TDD Pattern for all unused REs	1397
A.6	SL reference measurement channels	1397
A.6.1	General	1397
A.6.2	Reference measurement channels for PSSCH performance requirements	1397
A.6.2.1	Reference measurement channels for SCS 15 kHz FR1	1397
A.6.2.2	Reference measurement channels for SCS 30 kHz FR1	1397
A.6.3	Reference measurement channels for PSCCH performance requirements	1398
A.6.3.1	Reference measurement channels for SCS 15 kHz FR1	1398
A.6.3.2	Reference measurement channels for SCS 30 kHz FR1	1398
A.6.4	Reference measurement for PSBCH performance requirements	1398
A.6.4.1	Reference measurement channels for SCS 15 kHz FR1	1398
A.6.4.2	Reference measurement channels for SCS 30 kHz FR1	1399
Annex B (normative):	Propagation conditions	1400
B.0	No interference	1400
B.1	Static propagation condition	1400

B.1.0	UE Receiver with 1Rx.....	1400
B.1.1	UE Receiver with 2Rx.....	1400
B.1.2	UE Receiver with 4Rx.....	1400
B.1.3	UE Receiver with 8Rx.....	1401
B.2	Multi-path fading propagation conditions.....	1402
B.2.1	Delay profiles.....	1403
B.2.1.1	Delay profiles for FR1.....	1404
B.2.1.2	Delay profiles for FR2.....	1405
B.2.2	Combinations of channel model parameters.....	1406
B.2.3	MIMO Channel Correlation Matrices.....	1407
B.2.3.1	MIMO Correlation Matrices using Uniform Linear Array (ULA).....	1407
B.2.3.1.1	Definition of MIMO Correlation Matrices.....	1407
B.2.3.1.2	MIMO Correlation Matrices at High, Medium and Low Level.....	1410
B.2.3.2	MIMO Correlation Matrices using Cross Polarized Antennas (X-pol).....	1414
B.2.3.2.1	Definition of MIMO Correlation Matrices using cross polarized antennas.....	1414
B.2.3.2.2	MIMO Correlation Matrices using cross polarized antennas.....	1416
B.2.3.2.3	Beam steering approach.....	1418
B.2.3.2.3A	Beam steering approach with dual cluster beams.....	1419
B.2.4	Two-tap propagation conditions for CQI tests.....	1421
B.3	High Speed Train Scenario.....	1421
B.3.1	Single Tap Channel Profile.....	1421
B.3.2	HST-SFN Channel Profile.....	1425
B.3.3	HST-DPS Channel Profile.....	1428
B.3.4	FR2 HST-DPS Channel Profile.....	1432
B.3.4.1	Unidirectional Deployment Channel Profile.....	1432
B.3.4.2	Bidirectional Deployment Channel Profile.....	1434
B.3.5	HST-SFN Scheme A Channel Profile.....	1436
B.3.6	HST-SFN Scheme B Channel Profile.....	1439
B.4	Physical signals, channels mapping and precoding.....	1442
B.4.1	General.....	1442
B.4.2	Beamforming for MU-MIMO.....	1443
B.5	Downlink Transmission Model for requirements on bands with shared spectrum access.....	1444
B.5.1	Downlink Transmission Model for bands with shared spectrum access.....	1444
B.6	Interference model for PDSCH requirements with intercell interference.....	1445
B.6.1	Interference to Noise ratio (INR).....	1445
B.6.2	Interference model for PDSCH requirements and CSI Reporting requirements.....	1445
B.7	Interference model for PDSCH requirements with LTE-NR spectrum sharing.....	1445
Annex C (normative): Downlink physical channels.....		1447
C.0	Downlink signal levels.....	1447
C.0.1	FR1 Downlink Signal Levels (Conducted).....	1447
C.0.2	FR2 Downlink Signal Levels (Radiated).....	1447
C.1	Setup.....	1448
C.1.1	FR1 Setup.....	1448
C.1.2	FR2 Setup.....	1450
C.2	Connection.....	1451
C.2.1	FR1 Measurement of Performance Characteristics.....	1451
C.2.2	FR2 Measurement of Performance Characteristics.....	1451
Annex D (normative): E-UTRA link setup config for NSA testing.....		1453
D.0	General.....	1453
D.1	E-UTRA test parameters.....	1453
D.2	E-UTRA configuration.....	1454
D.3	E-UTRA link common physical channel setup.....	1455

D.4	E-UTRA power level.....	1456
D.4.1	E-UTRA power level (conducted).....	1456
D.4.2	E-UTRA power level (radiated).....	1456
Annex E (normative):	Environmental conditions	1457
Annex F (normative):	Measurement uncertainties and test tolerances	1458
F.1	Measurement uncertainties and test tolerances for FR1.....	1458
F.1.1	Acceptable uncertainty of test system (normative).....	1458
F.1.1.1	Measurement of test environments.....	1458
F.1.1.2	Measurement of Demod Performance requirements.....	1458
F.1.1.3	Measurement of Channel State Information reporting.....	1476
F.1.2	Interpretation of measurement results (normative).....	1481
F.1.3	Test Tolerance and Derivation of Test Requirements (informative).....	1482
F.1.3.1	Measurement of test environments.....	1482
F.1.3.2	Measurement of Demod Performance requirements.....	1482
F.1.3.3	Measurement of Channel State Information reporting.....	1493
F.2	Measurement uncertainties and test tolerances for FR2.....	1499
F.2.1	Acceptable uncertainty of test system (normative).....	1499
F.2.1.1	Measurement of test environments.....	1499
F.2.1.2	Measurement of Demod Performance requirements.....	1499
F.2.1.3	Measurement of Channel State Information reporting.....	1504
F.2.2	Interpretation of measurement results (normative).....	1506
F.2.3	Test Tolerance and Derivation of Test Requirements (informative).....	1506
F.2.3.1	Measurement of test environments.....	1506
F.2.3.2	Measurement of Demod Performance requirements.....	1506
F.2.3.3	Measurement of Channel State Information reporting.....	1508
Annex G (normative):	Statistical Testing.....	1510
G.1	Statistical testing of Performance Requirements with throughput.....	1510
G.1.1	General.....	1510
G.1.2	Mapping throughput to error ratio.....	1510
G.1.3	Design of the test.....	1511
G.1.4	Void.....	1511
G.1.5	Minimum Test time.....	1511
G.1.5.0_1	Minimum Test Time procedure for PDSCH scenarios with 30% or 35% or 50% or 70% Throughput requirement.....	1512
G.1.5.0_2	Minimum Test Time procedure for PDSCH and PDCCH scenarios with 1% BLER requirement.....	1512
G.2	Theory to derive the numbers for statistical testing (informative).....	1520
G.2.1	Error Ratio (ER).....	1520
G.2.2	Test Design.....	1520
G.2.3	Confidence level.....	1520
G.2.4	Introduction: Supplier Risk versus Customer Risk.....	1520
G.2.5	Supplier Risk versus Customer Risk.....	1521
G.2.6	Introduction: Standard test versus early decision concept.....	1521
G.2.7	Standard test versus early decision concept.....	1522
G.2.8	Selectivity.....	1522
G.2.9	Design of the test.....	1523
G.2.10	Simulation to derive the pass fail limits.....	1524
G.3	Measuring throughput ratio.....	1525
G.3.1	General.....	1525
G.3.2	Establishing SNR.....	1525
G.3.3	Measuring T-put.....	1525
G.3.4	Number of samples for throughput ratios.....	1525
G.4	Statistical testing of Performance Requirements with BLER limit.....	1526
G.4.1	General.....	1526
G.4.2	Design of the test.....	1526
G.4.3	Numerical definition of the pass fail limits for 0.001% BLER.....	1526

G.4.3a Pass fail decision rules 1531

G.4.4 Simulation to derive the pass-fail limits for 0.001% BLER 1531

G.5 Statistical Testing of NR sidelink Performance Requirements – Non concurrent 1532

G.5.1 General 1532

G.5.2 Test method for PSCCH/PSSCH performance using sidelink HARQ feedback 1532

G.5.3 Test method for PSFCH performance 1534

G.5.4 Test time for PSSCH performance requirements with throughput 1536

G.5.5 Test time for PSCCH performance requirements with miss-detection probability 1537

G.5.6 Test time for PSFCH performance requirements with miss-detection probability 1537

Annex H: Approach for finding UE direction for FR2 Demod and CSI Testing1539

H.0 Normative criteria for determining UE direction for Demod and CSI 1539

H.1 Procedure for finding UE direction 1539

H.1.1 Using Rx beam peak direction search 1539

H.1.2 RSRPB based scan with fallback option to Rx beam peak direction search 1539

H.1.3 Isolation based scan with fallback option to Rx beam peak direction search 1540

H.2 Wireless cable mode isolation procedure 1540

Annex I (informative): Change history1542

History 1562

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

x the first digit:

- 1 presented to TSG for information;
- 2 presented to TSG for approval;
- 3 or greater indicates TSG approved document under change control.

Y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.

z the third digit is incremented when editorial only changes have been incorporated in the document.

The present document is part 4 of a multi-part Technical Specification (TS) covering the New Radio (NR) User Equipment (UE) conformance specification, which is divided in the following parts:

FFS.

1 Scope

The present document specifies the measurement procedures for the conformance test of the user equipment (UE) that contain performance requirements as part of 5G-NR.

The requirements are listed in different clauses only if the corresponding parameters deviate. More generally, tests are only applicable to those mobiles that are intended to support the appropriate functionality. To indicate the circumstances in which tests apply, this is noted in the "*definition and applicability*" part of the test.

For example only Release 15 and later UE declared to support 5G-NR shall be tested for this functionality. In the event that for some tests different conditions apply for different releases, this is indicated within the text of the test itself.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".
- [3] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".
- [4] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".
- [5] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".
- [6] 3GPP TS 38.508-1: "5GS; User Equipment (UE) conformance specification; Part 1: Common test environment".
- [7] 3GPP TS 38.521-1: "NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 1: Range 1 Standalone".
- [8] 3GPP TS 38.521-2: "NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 2: Range 2 Standalone".
- [9] 3GPP TS 38.211: "NR; Physical channels and modulation".
- [10] 3GPP TS 38.212: "NR; Multiplexing and channel coding".
- [11] 3GPP TS 38.213: "NR; Physical layer procedures for control".
- [12] 3GPP TS 38.214: "NR; Physical layer procedures for data".
- [13] 3GPP TS 37.340: "Evolved Universal Terrestrial Radio Access (E-UTRA) and NR; Multi-connectivity", Stage 2.
- [14] 3GPP TS 38.306: "NR; User Equipment (UE) radio access capabilities".

- [15] 3GPP TR 38.901: "Study on channel model for frequencies from 0.5 to 100 GHz".
- [16] 3GPP TS 36.521-1: "E-UTRA; User Equipment (UE) conformance specification; Radio transmission and reception; Part1: conformance testing"
- [17] 3GPP TS 36.211: "Physical Channels and Modulation".
- [18] Recommendation ITU-R M.1545: "Measurement uncertainty as it applies to test limits for the terrestrial component of International Mobile Telecommunications-2000".
- [19] 3GPP TS 36.508: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Packet Core (EPC); Common test environments for User Equipment (UE) conformance testing".
- [20] 3GPP TS 38.331: "Radio Resource Control (RRC) protocol specification".
- [21] 3GPP TS 38.521-3: "NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".
- [22] 3GPP TS 38.509: "5GS; Special conformance testing functions for User Equipment (UE)".
- [23] 3GPP TS 23.287: "Architecture enhancements for 5G System (5GS) to support Vehicle-to-Everything (V2X) services".
- [24] 3GPP TS 38.321: "NR; Medium Access Control (MAC) protocol specification".
- [25] 3GPP TS 38.133: "NR; Requirements for support of radio resource management".
- [26] 3GPP TR 38.903: "NR; Derivation of test tolerances and measurement uncertainty for User Equipment (UE) conformance test cases".
- [27] 3GPP TR 37.977: "Verification of radiated multi-antenna reception performance of User Equipment (UE)".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

Aggregated channel bandwidth: The RF bandwidth in which a UE transmits and receives multiple contiguously aggregated carriers.

Baseline 8Rx Receiver: 8Rx receivers for MIMO transmissions with support of up to 8 layers with joint 8Rx MIMO detector.

Carrier aggregation: Aggregation of two or more component carriers in order to support wider transmission bandwidths.

Carrier aggregation band: A set of one or more operating bands across which multiple carriers are aggregated with a specific set of technical requirements.

Carrier aggregation bandwidth class: A class defined by the aggregated transmission bandwidth configuration and maximum number of component carriers supported by a UE.

Carrier aggregation configuration: A combination of CA operating band(s) and CA bandwidth class(es) supported by a UE.

DL BWP: DL bandwidth part as defined in TS 38.213 [11].

EN-DC: E-UTRA-NR Dual Connectivity as defined in TS 37.340 [13] clause 4.1.2.

Enhanced Receiver Type 1: SU-MIMO interference mitigation advanced receiver [14]

- R-ML (reduced complexity ML) receiver with enhanced inter-stream interference suppression for SU-MIMO transmissions with rank 2 with 2 RX antennas
- R-ML (reduced complexity ML) receiver with enhanced inter-stream interference suppression for SU-MIMO transmissions with rank 2, 3, and 4 with 4 RX antennas

Enhanced Receiver Type 2: MU-MIMO interference mitigation advanced receiver [14]

- **Enhanced Receiver Type 2-1:** R-ML (reduced complexity ML) receivers with enhanced inter-user interference suppression, for MU-MIMO up to $\text{maxNumberMIMO-LayersPDSCH}$ layers across target and co-scheduled UEs with 2 RX and 4RX antennas, when co-scheduled UE(s)' modulation order is explicitly signalled by DCI index 1-5 in Table 7.3.1.2.2-12 of TS38.212 [10].
- **Enhanced Receiver Type 2-2a:** R-ML (reduced complexity ML) receivers with enhanced inter-user interference suppression for MU-MIMO for 2 layers across target and co-scheduled UEs with 2RX and 4RX when the co-scheduled UE information with DCI index 6 or 7 in Table 7.3.1.2.2-12 of TS38.212 [10] is signalled.
- **Enhanced Receiver Type 2-2b:** R-ML (reduced complexity ML) receivers with enhanced inter-user interference suppression for MU-MIMO for 2 layers across target and co-scheduled UEs with 2RX and $\text{maxNumberMIMO-LayersPDSCH}$ layers across target and co-scheduled UEs with 4RX when the co-scheduled UE information with DCI index 6 in Table 7.3.1.2.2-12 of TS38.212 [10] is signalled.

FR1: Frequency range 1 as defined in TS 38.101-3 [4] clause 5.1.

FR2: Frequency range 2 as defined in TS 38.101-3 [4] clause 5.1.

PDSCH mapping type A or B: A type of PDSCH allocation sent in the RRC message which defines the time domain allocation of PDSCH DMRS symbols. PDSCH mapping type A is slot based assignment with fixed starting OFDM symbol with variable length. PDSCH mapping type B is non-slot based assignment used for configuring min-slots.

RedCap: A UE with reduced capabilities as defined in clause 4.2 in TS 38.306 [14].

eRedCap: A UE with reduced peak data rate, with or without reduced baseband bandwidth in FR1 as defined in clause 4.2.22 in TS 38.306 [14].

Simplified 8Rx Receiver: 8Rx receivers for MIMO transmissions with support of only up to 4 layers with two joint 4Rx MIMO detectors.

SSB: SS/PBCH block as defined in TS 38.211 [9] clause 7.8.3.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

E_s	The averaged received energy per Hz of the wanted signal during the useful part of the symbol, i.e. excluding the cyclic prefix, at the UE antenna connector; average power is computed within a set of REs used for the transmission of physical, divided transmission bandwidth within the set
μ	Subcarrier spacing configuration as defined in TS 38.211 [9] clause 4.2]
N_{oc}	The power spectral density of a white noise source with average power per RE normalized to the subcarrier spacing as defined in Section 4.4.3 for conducted requirements and Section 4.5.3 for radiated requirements

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

AGC	Automatic Gain Control
ATG	Air-To-Ground
CA	Carrier Aggregation
CC	Component Carrier

CCE	Control Channel Element
CORESET	Control Resource Set
CP	Cyclic Prefix
CSI	Channel-State Information
CSI-IM	CSI Interference Measurement
CSI-RS	CSI Reference Signal
CW	Codeword
CQI	Channel Quality Indicator
CRC	Cyclic Redundancy Check
CRI	CSI-RS Resource Indicator
CRS	Cell-specific Reference Signal
CRS-IM	CRS-Interference MitigationDC Dual Connectivity
DCI	Downlink Control Information
DL	Downlink
DMRS	Demodulation Reference Signal
DPS	Dynamic Point Selection
EPRE	Energy Per Resource Element
EN-DC	E-UTRA-NR Dual Connectivity
FR	Frequency Range
FRC	Fixed Reference Channel
GNSS	Global Navigation Satellite System
HARQ	Hybrid Automatic Repeat Request
HST	High Speed Train
HST-SFN	High Speed Train Single Frequency Network
LI	Layer Indicator
MAC	Medium Access Control
MCS	Modulation and Coding Scheme
MIB	Master Information Block
NE-DC	NR-E-UTRA Dual Connectivity
NR	New Radio
NR/5GC	NR connected to 5GC NSA Non-Standalone Operation Mode
NSA	Non-Standalone Operation Mode
OCC	Orthogonal Cover Code
OCNG	OFDMA Channel Noise Generator
OFDM	Orthogonal Frequency Division Multiplexing
OFDMA	Orthogonal Frequency Division Multiple Access
PBCH	Physical Broadcast Channel
Pcell	Primary Cell
PDCCH	Physical Downlink Control Channel
PDSCH	Physical Downlink Shared Channel
PMI	Precoding Matrix Indicator
PRB	Physical Resource Block
PRG	Physical resource block group
PSS	Primary Synchronization Signal
PTRS	Phase Tracking Reference Signal
PUCCH	Physical Uplink Control Channel
PUSCH	Physical Uplink Shared Channel
QCL	Quasi Co-location
RB	Resource Block
RBG	Resource Block Group
RE	Resource Element
REG	Resource Element Group
RI	Rank Indicator
RRC	Radio Resource Control
SA	Standalone operation mode
SCS	Subcarrier Spacing
SINR	Signal-to-Interference-and-Noise Ratio
SNR	Signal-to-Noise Ratio
SS	Synchronization Signal
SSB	Synchronization Signal Block
SSS	Secondary Synchronization Signal
TCI	Transmission Configuration Indicator

TDM	Time division multiplexing
TRxP	Transmission and Reception Point
TTI	Transmission Time Interval
UL	Uplink
VRB	Virtual Resource Block

4 General

4.1 Relationship between minimum requirements and test requirements

TS 38.101-4 [5] is a Single-RAT and interwork specification for NR UE, covering minimum performance requirements of both conducted and radiated requirements. Conformance to the TS 38.101-4 [5] is demonstrated by fulfilling the test requirements specified in the present document.

The Minimum Requirements given in TS 38.101-4 [5] makes no allowance for measurement uncertainty (MU). The present document defines test tolerances (TT). These test tolerances are individually calculated for each test. The test tolerances are used to relax the minimum requirements in TS 38.101-4 [5] to create test requirements. For some requirements, including regulatory requirements, the test tolerance is set to zero.

The measurement results returned by the test system are compared - without any modification - against the test requirements as defined by various levels of "Shared Risk" principle as described below

- a) Core specification value is not relaxed by any relaxation value ($TT=0$). For each single measurement, the probability of a borderline good UE being judged as FAIL equals the probability of a borderline bad UE being judged as PASS.
 - Test tolerances equal to 0 ($TT=0$) are considered in this specification.
- b) Core specification value is relaxed by a relaxation value ($TT>0$). For each single measurement, the probability of a borderline bad UE being judged as PASS is greater than the probability of a borderline good UE being judged as FAIL.
 - Test tolerances lower than measurement uncertainty and greater than 0 ($0 < TT < MU$) are considered in this specification.
 - Test tolerances high up to measurement uncertainty ($TT = MU$) are considered in this specification which is also known as "Never fail a good DUT" principle.
- c) Core specification value is tightened by a stringent value ($TT<0$). For each single measurement, the probability of a borderline good UE being judged as FAIL is greater than the probability of a borderline bad UE being judged as PASS.

Test tolerances lower than 0 ($TT<0$) are not considered in this specification. The "Never fail a good DUT" and the "Shared Risk" principles are defined in Recommendation ITU-R M.1545 [18].

4.2 Applicability of minimum requirements

The applicability of each requirement is described under each clause in 5.1, 6.1, 7.1, 8.1, 9.1 and 10.1 of TS 38.101-4.

The conducted minimum requirements specified in TS 38.101-4 [5] shall be met in all applicable scenarios for FR1. The radiated minimum requirements specified in TS 38.101-4 [5] shall be met in all applicable scenarios for FR2. The interwork minimum requirement specified in TS 38.101-4 [5] shall be met in all applicable scenarios for NR interworking operation.

All minimum performance requirements defined in TS 38.101-4 [5] Sections 5-8 are applicable to NR/5GC, EN-DC and NE-DC unless otherwise explicitly stated in TS 38.101-4 [5] Section 9 and 10.

All minimum performance requirements defined in Sections 5-10 are applicable to all UE power classes unless otherwise stated.

For radiated minimum requirements specified in the specification, if maximum achievable SNR in the TE chamber for certain test conditions is less than the defined SNR requirement for those tests, those tests will not be tested.

4.3 Specification suffix information

Unless stated otherwise the following suffixes are used for indicating at 2nd level clause, shown in table 4.3-1.

Table 4.3-1: Definition of suffixes

Clause suffix	Variant
None	Single Carrier
A	Carrier Aggregation (CA)
B	Dual-Connectivity (DC)
C	Supplement Uplink (SUL)

A terminal which supports the above features needs to meet the requirement defined in the additional clause (suffix A, B, C) in clauses 5, 6, 7, 8, 9, 10.

4.4 Conducted requirements

4.4.0 Introduction

The requirements are defined for the following modes:

- Mode 1: Conditions with external noise source
 - Wanted signal with power level E_s is transmitted.
 - External white noise source with power spectral density N_{oc} is used.
 - E_s and N_{oc} levels are selected to achieve target SNR as described in Clause 4.4.2.
- Mode 2: Noise free conditions
 - Wanted signal with power level E_s is transmitted.
 - No external noise transmitted.

4.4.1 Reference point

The reference point for SNR, E_s and N_{oc} of DL signal is the UE antenna connector or connectors.

4.4.2 SNR definition

For Mode 1 conditions conducted UE demodulation and CSI requirements, the SNR is defined as:

$$SNR = \frac{\sum_{j=1}^{N_{RX}} E_s^{(j)}}{\sum_{j=1}^{N_{RX}} N_{oc}^{(j)}}$$

Where:

- N_{RX} denotes the number of receiver antenna connectors and the superscript receiver antenna connector j .
- The above SNR definition assumes that the REs are not precoded, and does not account for any gain which can be associated to the precoding operation.
- Unless otherwise stated, the SNR refers to the SSS wanted signal.

- The downlink SSS transmit power is defined as the linear average over the power contributions in [W] of all resource elements that carry the SSS within the operating system bandwidth.
- The power ratio of other wanted signals to the SSS is defined in clause C.3.1.

4.4.3 Noc

4.4.3.1 Introduction

This clause describes the Noc power level for Mode 1 conditions conducted testing of demodulation and CSI requirements.

Unless otherwise stated for CA and EN-DC testing, the same Noc level shall be provided on different component carriers.

4.4.3.2 Noc for NR operating bands in FR1

The Noc power spectrum density shall be larger or equal to the minimum Noc power level for each operating band supported by the UE as defined in clause 4.4.3.2.1.

Unless otherwise stated, a fixed Noc power level of -134 dBm/Hz shall be used for all operating bands.

4.4.3.2.1 Derivation of Noc values for NR operating bands in FR1

The minimum Noc power level for an operating band, subcarrier spacing and channel bandwidth is derived based on the following equation:

$$\text{Noc}_{\text{Band}_X, \text{SCS}_Y, \text{CBW}_Z} = \text{REFSENS}_{\text{Band}_X, \text{SCS}_Y, \text{CBW}_Z} - 10 \cdot \log_{10}(12 \cdot \text{SCS}_Y \cdot n_{\text{PRB}}) + D - \text{SNR}_{\text{REFSENS}} + \Delta_{\text{thermal}}$$

where

- $\text{REFSENS}_{\text{Band}_X, \text{SCS}_Y, \text{CBW}_Z}$ is the REFSENS value in dBm for Band X, SCS Y and CBW Z specified in Table 7.3.2-1 of TS 38.101-1 [2]
- 12 is the number of subcarriers in a PRB
- SCS Y is the subcarrier spacing associated with the REFSENS value
- n_{PRB} is the maximum number of PRB for SCS Y and CBW Z associated with the REFSENS value, and is specified in Table 5.3.2-1 of TS 38.101-1 [2]
- D is diversity gain equal to 3 dB
- $\text{SNR}_{\text{REFSENS}} = -1$ dB is the SNR used for simulation of REFSENS
- Δ_{thermal} is the amount of dB that the wanted noise is set above UE thermal noise, giving a defined rise in total noise. $\Delta_{\text{thermal}} = 16$ dB, giving a rise in total noise of 0.1 dB, regarded as insignificant.

The calculated Noc value for the baseline of Band n12, 15 kHz SCS, 15 MHz CBW is -135.5 dBm/Hz.

An allowance of 1.5 dB is made for CA and for future bands, giving an Noc power level of -134 dBm/Hz.

4.4.4 Es

4.4.4.1 Introduction

This clause describes the Es power level for Mode 2 conditions conducted testing of demodulation and CSI requirements.

Unless otherwise stated for CA and EN-DC testing, the same Es level shall be provided on different component carriers.

4.4.4.2 Es for NR operating bands in FR1

The Es power spectrum density shall be larger or equal to the minimum Es power level for each operating band supported by the UE as defined in Clause 4.4.4.2.1.

Unless otherwise stated, a fixed Es power level of -112 dBm/Hz shall be used for all operating bands.

4.4.4.2.1 Derivation of Es values for NR operating bands in FR1

The minimum Es power level for an operating band, subcarrier spacing and channel bandwidth is derived based on the following equation:

$$E_{S_{\text{Band}_X, \text{SCS}_Y, \text{CBW}_Z}} = \text{REFSENS}_{\text{Band}_X, \text{SCS}_Y, \text{CBW}_Z} - 10 \cdot \log_{10}(12 \cdot \text{SCS}_Y \cdot n_{\text{PRB}}) + D - \text{SNR}_{\text{REFSENS}} + \text{dB}_{\text{EVM}} + \Delta_{\text{thermal}}$$

where:

- $\text{REFSENS}_{\text{Band}_X, \text{SCS}_Y, \text{CBW}_Z}$ is the REFSENS value in dBm for Band X, SCS Y and CBW Z specified in Table 7.3.2-1 of TS 38.101-1 [2]
- 12 is the number of subcarriers in a PRB
- SCS Y is the subcarrier spacing associated with the REFSENS value
- n_{PRB} is the maximum number of PRB for SCS Y and CBW Z associated with the REFSENS value, and is specified in Table 5.3.2-1 of TS 38.101-1 [2]
- D is diversity gain equal to 3 dB
- $\text{SNR}_{\text{REFSENS}} = -1$ dB is the SNR used for simulation of REFSENS
- dB_{EVM} is the SNR of the applied signal due to EVM impairment on the wanted Es. An allowed EVM of 3% gives a dB_{EVM} of 30.5dB, derived as $20 \cdot \log_{10}(1/0.03)$. An allowed EVM of 2.5% gives a dB_{EVM} of 32dB, derived as $20 \cdot \log_{10}(1/0.025)$.
- Δ_{thermal} is the amount of dB that the impairment due to EVM on the wanted Es is set above UE thermal noise, giving a defined rise in total impairment. $\Delta_{\text{thermal}} = 7.6$ dB, giving a rise in total impairment of 0.7dB, regarded as acceptable.

For an allowed EVM of 3%, the calculated Es value for the baseline of Band n12, 15kHz SCS, 15MHz CBW is -113.5 dBm/Hz.

For an allowed EVM of 2.5%, the calculated Es value for the baseline of Band n12, 15kHz SCS, 15MHz CBW is -112 dBm/Hz.

An allowance of 1.5dB is made for CA and for future bands, giving an Es power level of -112 dBm/Hz for EVM of 3%, and -110.5 dBm/Hz for EVM of 2.5%.

4.4.5 SINR definition

$$\text{SINR} = \frac{\sum_{j=1}^{N_{RX}} E_s^{(j)}}{\sum_{j=1}^{N_{RX}} N_{oc}^{(j)}}$$

Where $E_s^{(j)}$ is the averaged received energy per Hz of the wanted signal during the useful part of the symbol, i.e. excluding the cyclic prefix, at the j-th UE receiver antenna connector; average power is computed within a set of REs used for the transmission of physical, divided transmission bandwidth within the set.

And $N_{oc}^{(j)}$ is the power spectral density (average power per RE normalised to the subcarrier spacing) of the summation of the received power spectral densities of the strongest interfering cells explicitly defined in a test procedure plus $N_{oc}^{(j)}$, as measured at the j-th UE receiver antenna connector. The respective power spectral density of each interfering cell relative to $N_{oc}^{(j)}$ is defined by its associated Es/Noc value.

4.5 Radiated requirements

4.5.0 Introduction

The requirements are defined for the following modes:

- Mode 1: conditions with external noise source
 - Wanted signal with power level E_s is transmitted.
 - External white noise source with power spectral density N_{oc} is used.
 - E_s and N_{oc} levels are selected to achieve target SNR as described in Clause 4.5.2.
- Mode 2: Noise free conditions
 - Wanted signal with power level E_s is transmitted.
 - No external noise transmitted.

4.5.1 Reference point

The reference point for SNR, E_s and N_{oc} of DL signal from the UE perspective is the input of UE antenna array.

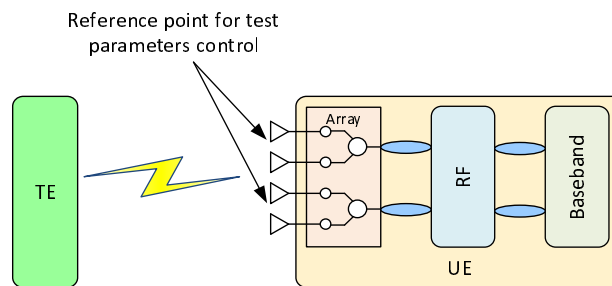


Figure 4.5.1-1: Reference point for radiated Demodulation and CSI requirements

4.5.2 SNR definition

For Mode 1 conditions UE demodulation and CSI requirements, the Minimum performance requirement in clause 7, 8, 9 and 10 are defined relative to the baseband SNR level SNR_{BB} . The SNR at the reference point is defined as

$$SNR = SNR_{BB} + \Delta_{BB}$$

where Δ_{BB} is specified in clause 4.5.3.

The reference point SNR is defined as:

$$SNR = \frac{\sum_{j=1}^{N_{RX}} E_s^{(j)}}{\sum_{j=1}^{N_{RX}} N_{oc}^{(j)}}$$

- N_{RX} denotes the number of receiver reference points, and the super script receiver reference point j .
- The above SNR definition assumes that the REs are not precoded, and does not account for any gain which can be associated to the precoding operation.
- Unless otherwise stated, the SNR refers to the SSS wanted signal.
- The downlink SSS transmit power is defined as the linear average over the power contributions in [W] of all resource elements that carry the SSS within the operating system bandwidth.
- The power ratio of other wanted signals to the SSS is defined in clause C.3.1.

4.5.3 Noc

4.5.3.1 Introduction

For Mode 1 conditions radiated testing of demodulation and CSI requirements it is not feasible in practice to use signal levels high enough to make the noise contribution of the UE negligible. Demodulation requirements are therefore specified with the applied noise higher than the UE peak EIS level in TS 38.101-2 [3] by a defined amount, so that the impact of UE noise floor is limited to no greater than a value Δ_{BB} at the specified Noc level. As UEs have EIS levels that are dependent on operating band and power class, Noc level is dependent on operating band and power class.

The Noc power level for test case execution shall be further increased by 5.19dB for UE power class 3 on top of the Noc power level defined in 4.5.3.2.

4.5.3.2 Noc for NR operating bands in FR2

Values for Noc according to operating band and power class for single carrier requirements are specified in Table 4.5.3.2-1 for $\Delta_{\text{BB}}=1\text{dB}$.

Table 4.5.3.2-1: Noc power level for different UE power classes and frequency bands

Operating band	UE Power class						
	1	2	3	4	5	6	7
n257	-167.3	-161.8	-158.1	-166.8	-162.4	-162.4	-155.1
n258	-167.3	-161.8	-158.1	-166.8	-162.6	-162.6	-155.1
n259		-158.5	-154.5		-159.5		
n260	-164.3		-155.5	-164.8			
n261	-167.3	-161.8	-158.1	-166.8		-162.4	-155.1
Note 1: Noc levels are specified in dBm/Hz							

For PC3 multi-band devices, the Noc power level (Noc_{MB}) shall increase by multi-band relaxation defined in TS 38.101-2 [3] Table 6.2.1.3-4.

$$\text{Noc}_{\text{MB}} = \text{Noc}_{\text{SB}} + \Delta\text{MB}_{\text{P},n}$$

- Noc_{SB} is the Noc defined in Table 4.5.3.2-1
- $\Delta\text{MB}_{\text{P},n}$ values are specified in TS 38.101-2 [3].

For CA case, the Noc power level (Noc_{CA}) shall increase by a relaxation factor defined in TS 38.101-2 [3] Table 7.3A.2.1-1:

$$\text{Noc}_{\text{CA}} = \text{Noc}_{\text{SC}} + \Delta\text{R}_{\text{IB}}$$

- Noc_{SC} is derived by assuming UE supports single carrier.
- $\Delta\text{R}_{\text{IB}}$ values are specified in TS 38.101-2 [3].

4.5.3.3 Derivation of Noc values for NR operating bands in FR2

The Noc values in Table 4.5.3.2-1 are based on REFSSENS for the operating band X and on the UE Power class P, derived based on the following equation.

$$\text{Noc}_{\text{PC}_P, \text{Band}_X} = \text{REFSENS}_{\text{PC}_P, \text{Band}_X, 50\text{MHz}} - 10\text{Log}_{10}(12 \times 120\text{kHz} \times \text{PRB}_{\text{REFSENS}}) - \text{SNR}_{\text{REFSENS}} + \Delta_{\text{thermal}}$$

where:

- $\text{REFSENS}_{\text{PC}_P, \text{Band}_X, 50\text{MHz}}$ is the REFSSENS value in dBm specified for Power Class P of UE in Band X for 50MHz Channel bandwidth in TS 38.101-2 [3] Table 7.3.2.3-1.
- 12 is the number of subcarriers in a PRB
- 120 kHz is chosen as a subcarrier spacing to select $\text{PRB}_{\text{REFSENS}}$. - $\text{PRB}_{\text{REFSENS}}$ is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [3] Table 5.3.2-1 and is 32.

- $SNR_{REFSENS} = -1$ dB is the SNR used for simulation of R EFSENS.
- $\Delta_{thermal}$ is the amount of dB that the wanted noise is set above UE thermal noise, giving a rise in total noise of Δ_{BB} . $\Delta_{thermal} - 10 \log_{10}(10^{(\Delta_{BB}/10)} - 1) = 5.87$ dB, giving a rise in total noise Δ_{BB} of 1 dB.

For example, the calculated Noc value for the baseline of UE Power class 3 in Band n260 is rounded to -155.5 dBm/Hz.

4.5.4 Angle of arrival

Unless otherwise stated, the downlink signal and noise are aligned to the direction with the following criteria:

- Select the known Rx beam peak direction reused from RF testing if available, as far as it satisfies the minimum isolation requirement and rank number defined in the present document corresponding to the test cases.
- Otherwise select one direction which satisfies the REFSENS defined in TS 38.101-2 [3], minimum isolation requirement and rank number defined in the present document corresponding to the test cases.

4.5.5 Es

For Mode 2 the test system shall transmit the wanted signal with power level Es which is the best achievable power level by the test system.

The test system shall be able to determine achievable Es level and the maximum achievable SNR level

4.6 Test coverage across 5G NR connectivity options

The test cases in the present document cover both NR/5GC (including FR1+FR2 CA or FR1+FR2 NR-DC) as well as EN-DC, NE-DC and NGEN-DC testing. Below shall be the understanding with respect to coverage across 5G NR connectivity options:

- 1) Unless otherwise stated within the test case, it shall be understood that test requirements are agnostic of the NR/5GC, EN-DC, NE-DC and NGEN-DC connectivity options configured within the test. The test coverage across the NR/5GC, EN-DC, NE-DC and NGEN-DC connectivity options shall be considered fulfilled by executing the test case in one of these connectivity options.
- 2) Except for sustained data rate test cases, NR/5GC, EN-DC, NE-DC and NGEN-DC connectivity option types are utilized in the definition of each test case within this test specification. NR/5GC is the default connectivity option if supported.

Editor's Note: Generic procedure parameter to be used in Initial Conditions for NE-DC and NGEN-DC is FFS

- 3) If UE supports NR/5GC in addition to other connectivity options, it suffices to test the requirements using NR/5GC connectivity option for all test cases. Additionally for sustained data rate test case, if UE supports EN-DC and NE-DC, test coverage is fulfilled by testing the UE using EN-DC connectivity option.

Table 4.6-1: Void

Table 4.6-2: Void

5 Demodulation performance requirements (Conducted requirements)

5.1 General

5.1.1 Applicability of requirements

5.1.1.1 General

The minimum performance requirements are applicable to all FR1 operating bands defined in TS 38.101-1 [2].

The minimum performance requirements in Clause 5 are mandatory for UE supporting NR operation, except test cases listed in Clauses 5.1.1.3, 5.1.1.4, 5.1.1.5, 5.1.1.6, 5.1.1.7, 5.1.1.8 and 5.1.1.12.

If same test is listed for different UE features/capabilities in Clauses 5.1.1.3 and 5.1.1.4, then this test shall apply for UEs which support all corresponding UE features/capabilities.

5.1.1.2 Applicability of requirements for different number of RX antenna ports

The number of RX antenna ports for different RF operating bands is up to UE declaration.

The UE shall support 2, 4 or 8 RX antenna ports for different RF operating bands. The operating bands, where 4 RX antenna ports shall be the baseline, are defined in Clause 7.2 of TS 38.101-1 [3]. The UE requirements applicability for UEs with different number of RX antenna ports is defined in Table 5.1.1.2-1.

Table 5.1.1.2-1: Requirements applicability

Supported RX antenna ports	Test type	Test list	Exceptions
UE supports only 2RX	PDSCH	All tests in Clause 5.2.2 All tests in Clause 5.6.2	
	PDCCH	All tests in Clause 5.3.2	
	PBCH	All tests in Clause 5.4.2	
UE supports only 4RX or both 2RX and 4RX	PDSCH	All tests in Clause 5.2.3 (Note 2) All tests in Clause 5.6.3	
	PDCCH	All tests in Clause 5.3.3 (Note 2)	
	PBCH	All tests in Clause 5.4.2 or 5.4.3 Note 1	
UE supports 8Rx, 4Rx and 2Rx or UE supports both 8Rx and 4Rx	PDSCH	All tests in Clause 5.2.3 (Note 2, 3) All tests in Clause 5.2.4 (Note 2)	If UE passes tests in Clause 5.2.4, UE can skip Test 2-1 and Test 2-2 in Clause 5.2.3 Table 5.2.3.1.1-4, Table 5.2.3.2.1-4 and Test 4-1 in Clause 5.2.3 Table 5.2.3.1.1-6, Table 5.2.3.2.1-6
	PDCCH	All tests in Clause 5.3.3 (Note 2,3)	
	PBCH	All tests in Clause 5.4.2 or 5.4.3 (Note 1)	
UE supports both 8Rx and 2Rx	PDSCH	All tests in Clause 5.2.2 (Note 2, 4) All tests in Clause 5.2.4 (Note 2)	If UE passes tests in Clause 5.2.4, UE can skip Test 2-1 and Test 2-2 in Clause 5.2.2 Table 5.2.2.1.1-4, Table 5.2.2.2.1-4
	PDCCH	All tests in Clause 5.3.2 (Note 2,4)	
	PBCH	All tests in Clause 5.4.2	
UE supports only 8Rx	PDSCH	All tests in Clause 5.2.4 (Note 2)	
	PDCCH	N/A	
	PBCH	N/A	
Note 1: Requirements for PBCH with 4Rx is up to UE declaration. Note 2: 'maxMIMO-Layers-r16' is not configured during the performance requirements testing for UE supporting Release 16 per-BWP MIMO layer adaptation. Note 3: 8Rx capable UEs are tested on any of the 4Rx supported RF bands by connecting 4 out of 8 Rx with data source from system simulator, and the other 4 Rx are connected with zero input, depending on UE's			

<p>Note 4: 8Rx capable UEs are tested on any of the 2Rx supported RF bands by connecting 2 out of 8 Rx with data source from system simulator, and the other 6 Rx are connected with zero input, depending on UE's declaration and AP configuration. Requirements specified with 4Rx should be applied.</p> <p>Note 5: Tests defined for 8Rx capable UEs according to whether the UE is a 'simplified 8Rx receiver' or 'baseline 8Rx receiver' are specified in Table 5.1.1.3-1.</p>	<p>declaration and AP configuration. Requirements specified with 4Rx should be applied.</p>
--	---

5.1.1.3 Applicability of requirements for optional UE features

The performance requirements in Table 5.1.1.3-1 shall apply for UEs which support optional UE features only.

Table 5.1.1.3-1: Requirements applicability for optional UE features

UE feature/capability [14]	Test type		Test list	Applicability notes
SU-MIMO Interference Mitigation advanced receiver	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 3-1) Clause 5.2.3.1.1 (Test 5-1)	
	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 3-1) Clause 5.2.3.2.1 (Test 5-1)	
Alternative additional DMRS position for co-existence with LTE CRS (<i>additionalDMRS-DL-Alt</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.4 (Test 1-2) Clause 5.2.3.1.4 (Test 1-2)	
	FR1 TDD	PDSCH	Clause 5.2.2.2.4 (Test 1-2) Clause 5.2.3.2.4 (Test 1-2)	
Basic DL NR-NR CA operation (<i>supportedBandCombinationList</i>)	NR CA	SDR	Clause 5.5A.1	1) Up to 16 DL carriers 2) Same numerology across carrier for data/control channel at a given time
Enhanced demodulation processing for HST-SFN joint transmission scheme with velocity up to 500km/h	FR1 FDD	PDSCH	Clause 5.2.2.1.9 (Test 1-1) Clause 5.2.3.1.9 (Test 1-1)	
	FR1 TDD	PDSCH	Clause 5.2.2.2.9 (Test 1-1) Clause 5.2.3.2.9 (Test 1-1)	
Single DCI based SDM transmission for multi-TRxP (<i>singleDCI-SDM-scheme-r16</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.11 Clause 5.2.3.1.11	
	FR1 TDD	PDSCH	Clause 5.2.2.2.11 Clause 5.2.3.2.11	
Multi DCI based multi-TRxP support (<i>multiDCI-MultiTRP-r16</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.12 Clause 5.2.3.1.12	
	FR1 TDD	PDSCH	Clause 5.2.2.2.12 Clause 5.2.3.2.12	
Single DCI based FDM Scheme-A for multi-TRxP (<i>supportFDM-SchemeA-r16</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.13 Clause 5.2.3.1.13	
	FR1 TDD	PDSCH	Clause 5.2.2.2.13 Clause 5.2.3.2.13	
Single DCI based inter-slot TDM for multi-TRxP (<i>supportInter-slotTDM-r16</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.14 Clause 5.2.3.1.14	
	FR1 TDD	PDSCH	Clause 5.2.2.2.14	

			Clause 5.2.3.2.14	
Maximum number of TCI states in Single-DCI based inter-slot TDM (maxNumberTCI-states-r16)	FR1 FDD	PDSCH	Clause 5.2.2.1.14 Clause 5.2.3.1.14	The requirements apply only when maxNumberTCI-states-r16 = 2.
	FR1 TDD	PDSCH	Clause 5.2.2.2.14 Clause 5.2.3.2.14	
Alternative 64QAM MCS table for PDSCHNew 64QAM MCS table for PDSCH (dl-64QAM-MCS-TableAlt)	FR1 FDD	PDSCH	Clause 5.2.2.1.5 Clause 5.2.3.1.5 Clause 5.2.2.1.6 Clause 5.2.3.1.6	
	FR1 TDD	PDSCH	Clause 5.2.2.2.5 Clause 5.2.3.2.5 Clause 5.2.2.2.6 Clause 5.2.3.2.6	
CQI table with target BLER of 10 ⁻⁵ New CQI table (cqi-TableAlt)	FR1 FDD	PDSCH	Clause 5.2.2.1.5 Clause 5.2.3.1.5	
	FR1 TDD	PDSCH	Clause 5.2.2.2.5 Clause 5.2.3.2.5	
PDSCH repetitions over multiple slots (pdsch-RepetitionMultiSlots)	FR1 FDD	PDSCH	Clause 5.2.2.1.6 Clause 5.2.3.1.6	
	FR1 TDD	PDSCH	Clause 5.2.2.2.6 Clause 5.2.3.2.6	
UE PDSCH processing capability #2 (pdsch-ProcessingType2)	FR1 FDD	PDSCH	Clause 5.2.2.1.7 Clause 5.2.3.1.7	
	FR1 TDD	PDSCH	Clause 5.2.2.2.7 Clause 5.2.3.2.7	
Pre-emption indication for DL (pre-EmptIndication-DL)	FR1 FDD	PDSCH	Clause 5.2.2.1.8 Clause 5.2.3.1.8	
	FR1 TDD	PDSCH	Clause 5.2.2.2.8 Clause 5.2.3.2.8	
1024QAM modulation for PDSCH for FR1 (pdsch-1024QAM-FR1-r17 or pdsch-1024QAM-2MIMO-FR1-r17)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-8) Clause 5.2.3.1.1 (Test 1-8)	
	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 1-12) Clause 5.2.3.2.1 (Test 1-12)	
		SDR	Clause 5.5.1 Clause 5.5A.1	1024QAM MCS indexes are used only if UE supports 1024QAM for FR1 DL.
DRX Adaptation (drx-adaptation-r16)	FR1 FDD	PDCCH	Clause 5.3.2.1.3	If the Test 1-1 in Clause 5.3.2.1.3 is passed, the test coverage can be considered fulfilled without executing Test 1-3 in clause 5.3.2.1.1.
	FR1 TDD	PDCCH	Clause 5.3.2.2.3	If the Test 1-1 in Clause 5.3.2.2.3 is passed, the test coverage can be considered fulfilled without executing Test 1-2 in clause 5.3.2.2.1.
	FR1 FDD	PDCCH	Clause 5.3.3.1.3	If the Test 1-1 in Clause 5.3.3.1.3 is passed, the test coverage can be considered fulfilled without executing Test 1-3 in clause 5.3.3.1.1.
	FR1 TDD	PDCCH	Clause 5.3.3.2.3	If the Test 1-1 in Clause 5.3.3.2.3 is passed, the test coverage can be considered fulfilled without executing Test 1-2 in clause 5.3.3.2.1.

Support of neighboring LTE cell CRS-IM in DSS scenario with NR 15 kHz SCS (CRS-IM-DSS-15kHzSCS-r17)	FR1 FDD	PDSCH	Clause 5.2.2.1.18 Clause 5.2.3.1.17	UE can support the feature on the CC(s) in a band only if the UE indicates support of rateMatchingLTE-CRS on that band.
	FR1 TDD	PDSCH	Clause 5.2.2.2.19 Clause 5.2.3.2.18	
Support of neighboring LTE cell CRS-IM in non-DSS and 15 kHz NR SCS scenario, without the assistance of network signalling on LTE channel bandwidth (CRS-IM-nonDSS-15kHzSCS-r17)	FR1 FDD	PDSCH	Clause 5.2.2.1.19 (Test 2-1) Clause 5.2.3.1.18 (Test 2-1)	The UE can perform CRS-IM when MeasObjectEUTRA IE is configured, and the configured measurement gaps overlap with neighbour LTE cell PBCH position.
	FR1 TDD	PDSCH	Clause 5.2.2.2.20 (Test 2-1) Clause 5.2.3.2.19 (Test 2-1)	
Support of neighboring LTE cell CRS-IM in non-DSS and 15 kHz NR SCS scenario, with the assistance of network signalling on LTE channel bandwidth (CRS-IM-nonDSS-NWA-15kHzSCS-r17)	FR1 FDD	PDSCH	Clause 5.2.2.1.19 (Test 1-1) Clause 5.2.3.1.18 (Test 1-1)	If the Test 2-1 in Clause 5.2.2.1.19 is passed, the test coverage can be considered fulfilled without executing Test 1-1 in clause 5.2.2.1.19. If the Test 2-1 in Clause 5.2.3.1.18 is passed, the test coverage can be considered fulfilled without executing Test 1-1 in clause 5.2.3.1.18.
	FR1 TDD	PDSCH	Clause 5.2.2.2.20 (Test 1-1) Clause 5.2.3.2.19 (Test 1-1)	If the Test 2-1 in Clause 5.2.2.2.20 is passed, the test coverage can be considered fulfilled without executing Test 1-1 in clause 5.2.2.2.20. If the Test 2-1 in Clause 5.2.3.2.19 is passed, the test coverage can be considered fulfilled without executing Test 1-1 in clause 5.2.3.2.19.
CRS-IM in non-DSS and 30 kHz NR SCS scenario, without the assistance of network signalling on LTE channel bandwidth (crs-IM-nonDSS-30kHzSCS-r17)	FR1 TDD	PDSCH	Clause 5.2.2.2.20 (Test 2-2) Clause 5.2.3.2.19 (Test 2-2)	The UE can perform CRS-IM when MeasObjectEUTRA IE is configured, and the configured measurement gaps overlap with neighbour LTE cell PBCH position.
CRS-IM in non-DSS and 30 kHz NR SCS scenario, with the assistance of network signalling on LTE channel bandwidth (crs-IM-nonDSS-NWA-30kHzSCS-r17)	FR1 TDD	PDSCH	Clause 5.2.2.2.20 (Test 1-2) Clause 5.2.3.2.19 (Test 1-2)	If the Test 2-2 in Clause 5.2.2.2.20 is passed, the test coverage can be considered fulfilled without executing Test 1-2 in clause 5.2.2.2.20. If the Test 2-2 in Clause 5.2.3.2.19 is passed, the test coverage can be considered fulfilled without executing Test 1-2 in clause 5.2.3.2.19.
Support for SFN scheme A for PDCCH scheduling SFN Scheme A PDSCH (sfn-SchemeA-r17)	FR1 FDD	PDSCH	Clause 5.2.2.1.20 Clause 5.2.3.1.19	
	FR1 TDD	PDSCH	Clause 5.2.2.2.21	

			Clause 5.2.3.2.20	
Support for SFN scheme B for PDCCH scheduling SFN Scheme B PDSCH (sfn-SchemeB-r17)	FR1 FDD	PDSCH	Clause 5.2.2.1.21 Clause 5.2.3.1.20	
	FR1 TDD	PDSCH	Clause 5.2.2.2.22 Clause 5.2.3.2.21	
Support for MU-MIMO Interference Mitigation advanced receiver (R-ML), when co-scheduled UE(s) modulation order is explicitly signalled by DCI index 1-5 in Table 7.3.1.2.2-12 of TS38.212 [10]. (advReceiver-MU-MIMO-r18)	FR1 FDD	PDSCH	Clause 5.2.2.1.16 (Test 2-1) Clause 5.2.3.1.16 (Test 3-1, Test 4-1)	If the Test 2-2 in Clause 5.2.2.1.16 is passed, the test coverage can be considered fulfilled without executing Test 2-1 in clause 5.2.2.1.16. If the Test 3-2 in Clause 5.2.3.1.16 is passed, the test coverage can be considered fulfilled without executing Test 3-1 in clause 5.2.3.1.16. If the Test 4-2 in Clause 5.2.3.1.16 is passed, the test coverage can be considered fulfilled without executing Test 4-1 in clause 5.2.3.1.16.
	FR1 TDD	PDSCH	Clause 5.2.2.2.17 (Test 2-1) Clause 5.2.3.2.17 (Test 3-1, Test 4-1)	If the Test 2-2 in Clause 5.2.2.2.17 is passed, the test coverage can be considered fulfilled without executing Test 2-1 in clause 5.2.2.2.17. If the Test 3-2 in Clause 5.2.3.2.17 is passed, the test coverage can be considered fulfilled without executing Test 3-1 in clause 5.2.3.2.17. If the Test 4-2 in Clause 5.2.3.2.17 is passed, the test coverage can be considered fulfilled without executing Test 4-1 in clause 5.2.3.2.17.
Support for MU-MIMO Interference Mitigation advanced receiver with modulation order detection or MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh in 38.306 [14]	FR1 FDD	PDSCH	Clause 5.2.2.1.16 (Test 2-2) Clause 5.2.3.1.16 (Test 3-2, Test 4-2)	Test 4-2 is only applicable for UE supporting 'MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh' in TS38.306 [14].
	FR1 TDD	PDSCH	Clause 5.2.2.2.17 (Test 2-2) Clause 5.2.3.2.17 (Test 3-2, Test 4-2)	
Baseline 8Rx receiver	FR1 FDD	PDSCH	Clause 5.2.4.1.1(Tests 1-1,3-1)	
	FR1 TDD	PDSCH	Clause 5.2.4.2.1(Tests 1-1,3-1)	
Simplified 8Rx receiver	FR1 FDD	PDSCH	Clause 5.2.4.1.1(Tests 2-1,4-1)	
	FR1 TDD	PDSCH	Clause 5.2.4.2.1(Tests 2-1,4-1)	
Support for enhanced DMRS (pdsch-TypeA-DMRS-r18)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 2-3)	

			Clause 5.2.3.1.1 (Test 4-2)	
	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 2-3) Clause 5.2.3.2.1 (Test 4-2)	
Support for Dedicated Spectrum of Less than 5MHz (<i>support3MHz-ChannelBW-Symmetric-r18</i>)	FR1 FDD	PDCCH	Clause 5.3.2.1.7 (Test 1-1) Clause 5.3.3.1.6 (Test 1-1)	

5.1.1.4 Applicability of requirements for mandatory UE features with capability signalling

The performance requirements in Table 5.1.1.4-1 shall apply for UEs which support mandatory UE features with capability signalling only.

Table 5.1.1.4-1: Requirements applicability for mandatory features with UE capability signalling

UE feature/capability [14]	Test type		Test list	Applicability notes
256QAM modulation scheme for PDSCH for FR1 (<i>pdsch-256QAM-FR1</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-3) Clause 5.2.3.1.1 (Test 1-3)	
	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 1-3) Clause 5.2.3.2.1 (Test 1-3)	
PDSCH mapping type B (<i>pdsch-MappingTypeB</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.3 Clause 5.2.3.1.3 Clause 5.2.2.1.7 Clause 5.2.3.1.7	
	FR1 TDD	PDSCH	Clause 5.2.2.2.3 Clause 5.2.3.2.3 Clause 5.2.2.2.7 Clause 5.2.3.2.7	
Rate-matching around LTE CRS (<i>rateMatchingLTE-CRS</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.4 Clause 5.2.3.1.4	For UEs supporting “Alternative additional DMRS position for co-existence with LTE CRS”, if Test 1-2 is tested, the test coverage can be considered fulfilled without executing Test 1-1. Otherwise, only Test 1-1 is tested.
	FR1 TDD	PDSCH	Clause 5.2.2.2.4 Clause 5.2.3.2.4	
Supported maximum number of ports across all configured NZP-CSI-RS resources per CC (<i>maxConfigNumberPortsAcrossNZP-CSI-RS-PerCC</i>)	FR1 FDD	PDSCH	Clause 5.2.2.1.4 (Tests 1-1, 1-2) Clause 5.2.2.1.19 (Tests 1-1, 2-1) Clause 5.2.3.1.1 (Tests 3-1, 4-1, 5-1, 4-2) Clause 5.2.3.1.4 (Tests 1-1, 1-2) Clause 5.2.3.1.16 (Test 3-1, 3-2, 4-1, 4-2) Clause 5.2.3.1.18 (Tests 1-1, 2-1) Clause 5.2.4.1.1 (Tests 3-1, 4-1, 5-1)	The requirements apply only in case the number of NZP-CSI-RS ports in the test case satisfies UE capability on maximum number of NZP-CSI-RS ports

	FR1 TDD	PDSCH	<p>Clause 5.2.2.2.19 (Test 1-1)</p> <p>Clause 5.2.2.2.20 (Tests 1-1, 1-2, 2-1, 2-2)</p> <p>Clause 5.2.3.2.1 (Tests 3-1, 4-1, 5-1, 4-2)</p> <p>Clause 5.2.3.2.17 (Test 2-1, 4-1, 4-2)</p> <p>Clause 5.2.3.2.18 (Test 1-1)</p> <p>Clause 5.2.3.2.19 (Tests 1-1, 1-2, 2-1, 2-2)</p> <p>Clause 5.2.4.2.1 (Tests 3-1, 4-1, 5-1)</p>	
Supported maximum number of PDSCH MIMO layers (<i>maxNumberMIMO-LayersPDSCH</i>)	FR1 FDD	PDSCH	<p>Clause 5.2.2.1.1 (Tests 2-1, 2-2, 2-3, 3-1)</p> <p>Clause 5.2.2.1.2</p> <p>Clause 5.2.3.1.1 (Tests 2-1, 2-2, 3-1, 4-1, 5-1, 4-2)</p> <p>Clause 5.2.3.1.2</p> <p>Clause 5.2.4.1.1 (Tests 1-1, 2-1, 3-1, 4-1, 5-1)</p>	The requirements apply only in case the PDSCH MIMO rank in the test case does not exceed UE PDSCH MIMO layers capability
	FR1 TDD	PDSCH	<p>Clause 5.2.2.2.1 (Tests 2-1, 2-2, 2-3, 3-1)</p> <p>Clause 5.2.2.2.2</p> <p>Clause 5.2.3.2.1 (Tests 2-1, 2-2, 3-1, 4-1, 5-1, 4-2)</p> <p>Clause 5.2.3.2.2</p> <p>Clause 5.2.4.2.1 (Tests 1-1, 2-1, 3-1, 4-1, 5-1)</p>	
Support number of active TCI states per BWP per CC, including control and data (<i>maxNumberActiveTCI-PerBWP</i>)	FR1 FDD	PDSCH	<p>Clause 5.2.2.1.10 (Test 1-2)</p> <p>Clause 5.2.3.1.10 (Test 1-2)</p>	The requirements apply only when <i>maxNumberActiveTCI-PerBWP</i> is other than n1.
	FR1 TDD	PDSCH	<p>Clause 5.2.2.2.10 (Test 1-2)</p> <p>Clause 5.2.3.2.10 (Test 1-2)</p>	
Support for maximum number of TRS resource sets per CC which the UE can track simultaneously (<i>maxSimultaneousResourceSetsPerCC</i>)	FR1 FDD	PDSCH	<p>Clause 5.2.2.1.10 (Test 1-2)</p> <p>Clause 5.2.3.1.10 (Test 1-2)</p> <p>Clause 5.2.2.1.11</p> <p>Clause 5.2.2.1.12</p> <p>Clause 5.2.2.1.13</p> <p>Clause 5.2.2.1.14</p> <p>Clause 5.2.3.1.11</p> <p>Clause 5.2.3.1.12</p> <p>Clause 5.2.3.1.13</p> <p>Clause 5.2.3.1.14</p>	The requirements apply only when <i>maxSimultaneousResourceSetsPerCC</i> ≥ 2
	FR1 TDD	PDSCH	<p>Clause 5.2.2.2.10 (Test 1-2)</p> <p>Clause 5.2.3.2.10 (Test 1-2)</p> <p>Clause 5.2.2.2.11</p> <p>Clause 5.2.2.2.12</p> <p>Clause 5.2.2.2.13</p>	

			Clause 5.2.2.2.14 Clause 5.2.3.2.11 Clause 5.2.3.2.12 Clause 5.2.3.2.13 Clause 5.2.3.2.14	
--	--	--	---	--

5.1.1.5 Applicability of CA requirements

5.1.1.5.1 Definition of CA capability

The definition with respect to CA capabilities is given as in Table 5.1.1.5.1-1.

Table 5.1.1.5.1-1: Definition of CA capability

CA Capability	CA Capability Description
CA_C	Intra-band contiguous CA
CA_N	Intra-band non-contiguous CA
CA_AX	Inter-band CA (X bands)
NOTE 1: CA_C corresponds to NR CA configurations and bandwidth combination sets defined in Section 5.5A.1 of TS 38.101-1[2]. CA_N corresponds to NR CA configurations and bandwidth combination sets defined in Section 5.5A.2 of TS 38.101-1[2]. CA_AX corresponds to NR CA configurations and bandwidth combination sets defined in Section 5.5A.3 of TS 38.101-1[2].	

5.1.1.5.2 Applicability and test rules for different CA configurations and bandwidth combination sets

The performance requirement for CA UE demodulation tests in Section 5.2A are defined independent of CA configurations and bandwidth combination sets specified in Section 5.5A of TS 38.101-1[2]. For UEs supporting different CA configurations and bandwidth combination sets, the applicability and test rules are defined in Table 5.1.1.5.2-1 and Table 5.1.1.5.2-2. For simplicity, CA configuration below refers to combination of CA configuration and bandwidth combination set.

Table 5.1.1.5.2-1: Applicability and test rules for CA UE demodulation tests

Tests	CA capability where the tests apply	CA configuration from the selected CA capability where the tests apply	CA Bandwidth combination to be tested in priority order	PCell CC configuration
Test 1 in Section 5.2A.2.1 and 5.2A.3.1	CA_C, CA_N, CA_AX	Table 5.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs
Test 2 in Section 5.2A.2.1 and 5.2A.3.1	CA_C, CA_N, CA_AX	Table 5.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs
Test 3 in Section 5.2A.2.1 and 5.2A.3.1	CA_AX	Table 5.1.1.5.2-2	Largest aggregated CA bandwidth combination	TDD CC if supported, otherwise FDD CC
Test 4 in Section 5.2A.2.1 and 5.2A.3.1 (NOTE 2)	CA_AX	Table 5.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs
Test 5 in Section 5.2A.2.1 and 5.2A.3.1 (NOTE 3)	CA_AX	Table 5.1.1.5.2-2	Largest aggregated CA bandwidth combination	15 kHz CC if supported, otherwise 30 kHz CC
NOTE 1: In case CA_AX with different number of X is supported then one or two CA configurations are selected based on procedure from Table 5.1.1.5.2-2. NOTE 2: These scenarios are only tested for UEs which are not verified with Test 3 in Section 5.2A.2.1 and 5.2A.3.1 NOTE 3: These scenarios are only tested for UEs which are not verified with Test 2 in Section 5.2A.2.1 and 5.2A.3.1				

Table 5.1.1.5.2-2: Selection of CA configurations

CA capability	Step 1	Step 2	Step 3	Step 4
CA_C or CA_N	Select the CA configurations with the maximum number of CCs, for which the supported maximum number of MIMO layers is not lower than 2.	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested data rate, among all the selected CA configurations from Step 1.	N/A	N/A
CA_AX	Select the CA configurations with the maximum number of CCs, for which the supported maximum number of MIMO layers is not lower than 2.	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested data rate, among all the selected CA configurations from Step 1.	Select the CA configurations with the largest number of bands and with the maximum number of CCs, for which the supported maximum number of MIMO layers is not lower than 2.	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested data rate, among all the selected CA configurations from Step 3.
<p>NOTE 1: For CA_AX capability, if CA configuration from step 2 is CA configuration with the largest number of bands then Step 3 and Step 4 are skipped. Otherwise, the two CA configurations selected from Step 2 and Step 4 are used for testing.</p> <p>NOTE 2: Maximum supported data rate for Step 2 and Step 4 is calculated based clause 4.1.2 of TS 38.306 [14].</p> <p>NOTE 3: Tested data rate for Step 2 and Step 4 is calculated based on the equation $DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$ and FRCs used in the test.</p>				

5.1.1.5.3 Applicability rule and antenna connection for CA tests with 4 RX

Within the CA configuration if any of the PCell and/or the SCells is a 2Rx supported RF band, 2 out of the 4Rx should be connected with data source from system simulator, depending on UE’s declaration and AP configuration. Requirements from Clause 5.2A.2.1 are applied.

Within the CA configuration if any of the PCell and/or the SCells is a 4Rx supported RF band, all 4Rx should be connected with data source from system simulator. Requirements from Clause 5.2A.3.1 are applied.

For 4Rx capable UEs, the 2Rx supported RF bands and 4Rx supported RF bands are up to UE’s declaration.

5.1.1.5.4 Applicability of different requirements for HST

The applicability rules for different HST requirements in section 5 are specified in Table 5.1.1.5.4-1.

Table 5.1.1.5.4-1: Applicability of requirements for HST

If UE has passed			UE can skip			Applicability notes
Test type		Test list	Test type		Test list	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 3), and Clause 5.2A.2.5 (Test 1-2)	FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 2), and Clause 5.2A.2.5 (Test 1-3)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 1), and Clause 5.2A.2.5 (Test	FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 2), and Clause 5.2A.2.5 (Test	

		1-2)			1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 3), and Clause 5.2A.3.5 (Test 1-2)	FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 2), and Clause 5.2A.3.5 (Test 1-3),	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 1), and Clause 5.2A.3.5 (Test 1-2)	FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 2), and Clause 5.2A.3.5 (Test 1-1),	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-3)	FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 3)	FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-3)	FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 3)	FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 3)	FR1 2Rx	PDSCH	Clause 5.2.2.1.9 (Test 1-1), Clause 5.2.2.2.1 (Test 1-11), Clause 5.2.2.2.9 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-3)	FR1 2Rx	PDSCH	Clause 5.2.2.1.10 (Test 1-1), Clause 5.2.2.2.1 (Test 1-11), Clause 5.2.2.2.10 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 1)	FR1 2Rx	PDSCH	Clause 5.2.2.1.9 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-1)	FR1 2Rx	PDSCH	Clause 5.2.2.1.10 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 2)	FR1 2Rx	PDSCH	Clause 5.2.2.2.1 (Test 1-11), Clause 5.2.2.2.9 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-2)	FR1 2Rx	PDSCH	Clause 5.2.2.2.1 (Test 1-11), Clause 5.2.2.2.10 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 3)	FR1 4Rx	PDSCH	Clause 5.2.3.1.9 (Test 1-1), Clause 5.2.3.2.1 (Test 1-11), Clause 5.2.3.2.9 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-3)	FR1 4Rx	PDSCH	Clause 5.2.3.1.10 (Test 1-1), Clause 5.2.3.2.1 (Test 1-11), Clause 5.2.3.2.10 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 1)	FR1 4Rx	PDSCH	Clause 5.2.3.1.9 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-1)	FR1 4Rx	PDSCH	Clause 5.2.3.1.10 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 2)	FR1 4Rx	PDSCH	Clause 5.2.3.2.1 (Test 1-11), Clause 5.2.3.2.9 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-2)	FR1 4Rx	PDSCH	Clause 5.2.3.2.1 (Test 1-11), Clause 5.2.3.2.10 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-1)	FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-2)	FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-2)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-3)	FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 1-3)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-1)	FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-2)	FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-2)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-3)	FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 1-3)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 3), and Clause 5.2A.2.5 (Test 2-2)	FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 2), and Clause 5.2A.2.5 (Test 2-3)	
FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 1), and Clause 5.2A.2.5 (Test 2-2)	FR1 2Rx	PDSCH	Clause 5.2A.2.4 (Test 2), and Clause 5.2A.2.5 (Test 2-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 3), and Clause 5.2A.3.5 (Test 2-2)	FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 2), and Clause 5.2A.3.5 (Test 2-3),	
FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 1), and Clause 5.2A.3.5 (Test 2-2)	FR1 4Rx	PDSCH	Clause 5.2A.3.4 (Test 2), and Clause 5.2A.3.5 (Test 2-1),	

FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-3)	FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-1)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-3)	FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-1)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-3)	FR1 2Rx	PDSCH	Clause 5.2.2.1.10 (Test 1-1), Clause 5.2.2.2.1 (Test 1-11), Clause 5.2.2.2.10 (Test 1-1), Clause 5.2.2.1.10 (Test 1-2), Clause 5.2.2.2.10 (Test 1-2)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-1)	FR1 2Rx	PDSCH	Clause 5.2.2.1.10 (Test 1-1), Clause 5.2.2.1.10 (Test 1-2)	
FR1 2Rx	PDSCH	Clause 5.2A.2.5 (Test 2-2)	FR1 2Rx	PDSCH	Clause 5.2.2.2.1 (Test 1-11), Clause 5.2.2.2.10 (Test 1-1), Clause 5.2.2.2.10 (Test 1-2)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-3)	FR1 4Rx	PDSCH	Clause 5.2.3.1.10 (Test 1-1), Clause 5.2.3.2.1 (Test 1-11), Clause 5.2.3.2.10 (Test 1-1), Clause 5.2.3.1.10 (Test 1-2), Clause 5.2.3.2.10 (Test 1-2)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-1)	FR1 4Rx	PDSCH	Clause 5.2.3.1.10 (Test 1-1), Clause 5.2.3.1.10 (Test 1-2)	
FR1 4Rx	PDSCH	Clause 5.2A.3.5 (Test 2-2)	FR1 4Rx	PDSCH	Clause 5.2.3.2.1 (Test 1-11), Clause 5.2.3.2.10 (Test 1-1), Clause 5.2.3.2.10 (Test 1-2)	

5.1.1.5.5 Applicability and test rules for different CA configurations and bandwidth combination sets for 8Rx UE

The performance requirement for CA UE demodulation tests for 8Rx UE in Clause 5.2A.4 are defined independent of CA configurations and bandwidth combination sets specified in Clause 5.5A of TS 38.101-1. For 8Rx UEs supporting different CA configurations and bandwidth combination sets, the applicability and test rules are defined in Table 5.1.1.5.5-1 and Table 5.1.1.5.5-2. For simplicity, CA configuration below refers to combination of CA configuration and bandwidth combination set.

Table 5.1.1.5.5-1: Applicability and test rules for CA UE demodulation tests

Tests	CA capability where the tests apply	CA configuration from the selected CA capability where the tests apply	CA Bandwidth combination to be tested in priority order	PCell CC configuration
[Test 1 in Clause 5.2A.2.1, 5.2A.3.1 and 5.2A.4.1]	CA_C, CA_N, CA_AX	Table 5.1.1.5.5-2	Largest aggregated CA bandwidth combination	Any of CCs
[Test 2 in Clause 5.2A.2.1, 5.2A.3.1 and 5.2A.4.1]	CA_C, CA_N, CA_AX	Table 5.1.1.5.5-2	Largest aggregated CA bandwidth combination	Any of CCs
[Test 3 in Clause	CA_AX	Table 5.1.1.5.5-2	Largest aggregated CA	TDD CC if supported,

5.2A.2.1, 5.2A.3.1and 5.2A.4.1]			bandwidth combination	otherwise FDD CC
NOTE 1: In case CA_AX with different number of X is supported then one or two CA configurations are selected based on procedure from Table 5.1.1.5.5-2.				

Table 5.1.1.5.5-2: Selection of CA configurations

CA capability	Step 1	Step 2	Step 3	Step 4
CA_C or CA_N	If the UE supports CA configuration that for each CC, supported maximum number of Rx and maximum number of MIMO layers is 8: Select the CA configurations with the maximum number of CCs, for which the supported maximum number of Rx and MIMO layers is 8. Otherwise: Select the CA configurations with the maximum number of CCs, conditioned that at least for one CC the supported maximum number of Rx is 8 and for each CC the supported maximum number of MIMO layers is not lower than 2	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested date rate, among all the selected CA configurations from Step 1.	N/A	N/A
CA_AX	If the UE supports CA configuration that for each CC, supported maximum number of Rx and maximum number of MIMO layers is 8: Select the CA configurations with the maximum number of CCs, for which the supported maximum number of Rx and MIMO layers is 8. Otherwise: Select the CA configurations with the maximum number of CCs, conditioned that at least for one CC the supported maximum number of Rx is 8 and for each CC the supported maximum number of MIMO layers is not lower than 2	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested date rate, among all the selected CA configurations from Step 1.	If the tested UE support CA configuration that for each CC, supported maximum number of Rx and maximum number of MIMO layers is 8: Select the CA configurations with the largest number of bands and with the maximum number of CCs, for which the supported maximum number of Rx and MIMO layers is 8. Otherwise: Select the CA configurations with the largest number of bands and with the maximum number of CCs, conditioned that at least for one CC the supported maximum number of Rx is 8 and for each CC the supported maximum number of MIMO layers is not lower than 2	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested date rate, among all the selected CA configurations from Step 3.

NOTE 1: For CA_AX capability, if CA configuration from step 2 is CA configuration with the largest number of bands then Step 3 and Step 4 are skipped. Otherwise, the two CA configurations selected from Step 2 and Step 4 are used for testing.

NOTE 2: Maximum supported data rate for Step 2 and Step 4 is calculated based clause 4.1.2 of TS 38.306 [14].

NOTE 3: Tested data rate for Step 2 and Step 4 is calculated based on the equation $DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$ and FRCs used in the test.

5.1.1.5.6 Applicability rule and antenna connection for CA tests with 8 RX

Within the CA configuration if any of the PCell and/or the SCells is a 4Rx supported RF band, 4 out of the 8Rx should be connected with data source from system simulator, depending on UE’s declaration and AP configuration. Requirements from Clause 5.2A.3.1 are applied.

Within the CA configuration if any of the PCell and/or the SCells is a 2Rx supported RF band, 2 out of the 8Rx should be connected with data source from system simulator, depending on UE’s declaration and AP configuration. Requirements from Clause 5.2A.2.1 are applied.

Within the CA configuration if any of the PCell and/or the SCells is a 8Rx supported RF band, all 8Rx should be connected with data source from system simulator. Requirements from Clause 5.2A.4.1 are applied.

For 8Rx capable UEs, the 2Rx supported RF bands, 4Rx supported RF bands and 8Rx supported RF bands are up to UE’s declaration.

5.1.1.5.7 Applicability rule for optional UE features for 8Rx

The performance requirements in Table 5.1.1.5.7-1 shall apply for UEs which support optional UE features only.

Table 5.1.1.5.7-1: Requirements applicability for optional UE features

UE feature/capability [14]	Test type	Test list	Applicability notes
Baseline 8Rx receiver	PDSCH	Tests listed in Table 5.2A.4.1-7	
Simplified 8Rx receiver	PDSCH	Tests listed in Table 5.2A.4.1-8	

5.1.1.6 Applicability and test rules for PDSCH performance requirements with power imbalance for intra-band contiguous CA

For UE passing the FDD and TDD CA power imbalance performance requirements with 2 DL CCs as defined in sections 5.2A.2.2 and 5.2A.3.2, the test coverage can be considered fulfilled with FDD or TDD intra-band contiguous CA with 3 or more DL CCs supported by the UE. During the test, UE is required to test the supported intra-band contiguous CA configurations with 2 DL CCs covering the lowest and highest operating bands.

The channel bandwidth combination for testing is determined by following procedure:

- First select the bandwidth combinations with the same bandwidth in each carrier.
- If there is no such bandwidth combination, select the bandwidth combinations with smallest bandwidth difference between the two carriers, and the carrier with smaller bandwidth will be used for test.
- Among the bandwidth combinations selected, select the CA combination with largest aggregated bandwidth combination.

5.1.1.7 Applicability of different requirements for HST

The applicability rules for different HST requirements in section 5 are specified in Table 5.1.1.7-1.

Table 5.1.1.7-1: Applicability of requirements for HST

If UE has passed			UE can skip			Applicability notes
Test type	Test list		Test type	Test list		
FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-6)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-5)	
FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 1-11)	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 1-7)	
FR1 FDD	PDSCH	Clause 5.2.3.1.1 (Test 1-6)	FR1 FDD	PDSCH	Clause 5.2.3.1.1 (Test 1-5)	
FR1 TDD	PDSCH	Clause 5.2.3.2.1 (Test 1-11)	FR1 TDD	PDSCH	Clause 5.2.3.2.1 (Test 1-7)	

FR1 FDD	PDSCH	Clause 5.2.2.1.9 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-5)	
FR1 TDD	PDSCH	Clause 5.2.2.2.9 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 1-7 and 1-11)	
FR1 FDD	PDSCH	Clause 5.2.3.1.9 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.3.1.1 (Test 1-5)	
FR1 TDD	PDSCH	Clause 5.2.3.2.9 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.3.2.1 (Test 1-7 and 1-11)	
FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-7)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.3.1.1 (Test 1-7)	FR1 FDD	PDSCH	Clause 5.2.3.1.1 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.2.1.10 (Test 1-1 or 1-2)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 1-5)	
FR1 TDD	PDSCH	Clause 5.2.2.2.10 (Test 1-1 or 1-2)	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 1-7 and 1-11)	
FR1 FDD	PDSCH	Clause 5.2.3.1.10 (Test 1-1 or 1-2)	FR1 FDD	PDSCH	Clause 5.2.3.1.1 (Test 1-5)	
FR1 TDD	PDSCH	Clause 5.2.3.2.10 (Test 1-1 or 1-2)	FR1 TDD	PDSCH	Clause 5.2.3.2.1 (Test 1-7 and 1-11)	
FR1 FDD	PDSCH	Clause 5.2.2.1.10 (Test 1-2)	FR1 FDD	PDSCH	Clause 5.2.2.1.10 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.2.2.10 (Test 1-2)	FR1 TDD	PDSCH	Clause 5.2.2.2.10 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.3.1.10 (Test 1-2)	FR1 FDD	PDSCH	Clause 5.2.3.1.10 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.3.2.10 (Test 1-2)	FR1 TDD	PDSCH	Clause 5.2.3.2.10 (Test 1-1)	

Table 5.1.1.7-2: Applicability of requirements for HST Enhanced SFN Transmission schemes

If UE has passed			UE can skip			Applicability notes
Test type	Test list		Test type	Test list		
FR1 FDD	PDSCH	Clause 5.2.2.1.20	FR1 FDD	PDSCH	Clause 5.2.2.1.21	
FR1 TDD	PDSCH	Clause 5.2.2.2.21	FR1 TDD	PDSCH	Clause 5.2.2.2.22	
FR1 FDD	PDSCH	Clause 5.2.3.1.19	FR1 FDD	PDSCH	Clause 5.2.3.1.20	
FR1 TDD	PDSCH	Clause 5.2.3.2.20	FR1 TDD	PDSCH	Clause 5.2.3.2.21	

5.1.1.8 Applicability of different requirements with Multi-TRxP

The applicability rules for requirements with multi-TRxP transmission schemes in section 5 are specified in Table 5.1.1.8-1.

Table 5.1.1.8-1: Applicability of requirements with Multi-TRxP Transmission

If UE has passed			UE can skip			Applicability notes
Test type	Test list		Test type	Test list		
FR1 FDD	PDSCH	Clause 5.2.2.1.12 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.2.1.11 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.2.1.12 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.2.1.13 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.2.1.6 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.2.1.14 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.2.2.12 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.2.2.11 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.2.2.12 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.2.2.13 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.2.2.6 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.2.2.14 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.3.1.12 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.3.1.11 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.3.1.12 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.3.1.13 (Test 1-1)	
FR1 FDD	PDSCH	Clause 5.2.3.1.6 (Test 1-1)	FR1 FDD	PDSCH	Clause 5.2.3.1.14 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.3.2.12 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.3.2.11 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.3.2.12 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.3.2.13 (Test 1-1)	
FR1 TDD	PDSCH	Clause 5.2.3.2.6 (Test 1-1)	FR1 TDD	PDSCH	Clause 5.2.3.2.14 (Test 1-1)	

5.1.1.9 Applicability of requirements for PDSCH on bands with shared spectrum access

Tests	Applicability notes
All tests in Clause 5.2.2.2.15 and 5.2.3.2.15	Only test the supported largest channel bandwidth.
All tests in Clause 5.2A.2.3 and 5.2A.3.3	Only test the supported largest channel bandwidth on SCell.

5.1.1.10 Applicability of requirements for PDSCH with inter cell interference

Tests	Applicability notes
All tests in Clause 5.2.2.1.15, 5.2.3.1.15, 5.2.2.2.16 and 5.2.3.2.16	If UE supporting both duplex mode TDD and FDD with 2RX, only test 1-1 in clause 5.2.2.1.15 and test 1-2 in clause 5.2.2.2.16 will be applied. If UE supporting both duplex mode TDD and FDD with 4RX, only test 1-1 in clause 5.2.3.1.15 and test 1-2 in clause 5.2.3.2.16 will be applied.

5.1.1.11 Applicability of requirements for RedCap

The performance requirements in Table 5.1.1.11-1 shall apply for UEs which support optional feature *supportOfRedCap*.

Other performance requirements mandatory for UE supporting NR operation defined in Section 5 but not included in table 5.1.1.11-1 should not be considered applicable to RedCap UEs.

Table 5.1.1.11-1: Requirements applicability for RedCap

UE capability	Test type	Test list	Applicability notes
RedCap with 1RX	FR1 FDD and HD-FDD (Note 1)	PDSCH	All tests in Clause 5.2.1.1.1
		PDCCH	All tests in Clause 5.3.1.1.1
		PBCH	All tests in Clause 5.4.1.1
		SDR	Clause 5.5.3
	FR1 TDD	PDSCH	All tests in Clause 5.2.1.2.1
		PDCCH	All tests in Clause 5.3.1.2.1
		PBCH	All tests in Clause 5.4.1.2
		SDR	Clause 5.5.3
RedCap with 2RX	FR1 FDD and HD-FDD (Note 1)	PDSCH	All tests in Clause 5.2.2.1.17
		PDCCH	All tests in Clause 5.3.2.1.4
		PBCH	Clause 5.4.2.1 (Table 5.4.2.1-2 Test 1)
			Clause 5.4.2.1 (Table 5.4.2.1-3 Test 1)
	SDR	Clause 5.5.3	
	FR1 TDD	PDSCH	All tests in Clause 5.2.2.2.18
		PDCCH	All tests in Clause 5.3.2.2.4
		PBCH	Clause 5.4.2.2 (Table 5.4.2.2-4 Test 1)
			Clause 5.4.2.2 (Table 5.4.2.2-5 Test 1)
			SDR
Note 1: If UE support only HD-FDD in a FDD band, this UE is tested with HD-FDD mode otherwise UE is tested with full-duplex FDD mode			

5.1.1.12 Applicability of requirements for ATG

The performance requirements in Table 5.1.1.12-1 shall apply for ATG UEs which support optional feature *airToGroundNetwork-r18*.

Other performance requirements mandatory for UE supporting NR operation defined in Section 5 but not included in table 5.1.1.12-1 should not be considered applicable to ATG UEs.

Table 5.1.1.12-1: Requirements applicability for ATG UEs

UE capability	Test type		Test list	Applicability notes		
ATG UE with 2RX	FR1 FDD	PDSCH	All tests in Clause 5.2.2.1.22			
		PDCCH	Test number 1-1, 1-3 and 1-5 in Table 5.3.2.1.1-1 Test number 1-3 in Table 5.3.2.1.2-1			
		PBCH	Clause 5.4.2.1			
		SDR	Clause 5.5.1			
	FR1 TDD	PDSCH	Tests 1-1, 1-2, 1-3 in Clause 5.2.2.2.23	Only if ATG UE does not supports optional features <i>k1-RangeExtensionATG-r18</i> , or <i>maxHARQ-ProcessNumberATG-r18</i> with 32 DL processes.		
			Tests 1-4, 1-5, 1-6 in Clause 5.2.2.2.23	Only if ATG UE supports the optional features <i>k1-RangeExtensionATG-r18</i> , and <i>maxHARQ-ProcessNumberATG-r18</i> with 32 DL processes.	If UE supports <i>outOfOrderOperationDL-r16</i> .	
			Tests 1-7, 1-8, 1-9 in Clause 5.2.2.2.23		If UE does not support <i>outOfOrderOperationDL-r16</i> .	
		PDCCH	All test cases in Table 5.3.2.2.1 All test cases in Table 5.3.2.2.2			
		PBCH	Clause 5.4.2.2			
		SDR	Clause 5.5.1			
ATG UE with 4RX	FR1 FDD	PDSCH	All tests in Clause 5.2.3.1.21			
		PDCCH	Test number 1-1, 1-3 and 1-5 in Table 5.3.3.1.1-1 Test number 1-3 in Table 5.3.3.1.2-1			
		PBCH	Clause 5.4.3.1			
		SDR	Clause 5.5.1			
	FR1 TDD	PDSCH	Tests 1-1, 1-2, 1-3 in Clause 5.2.3.2.22	Only if ATG UE does not supports optional features <i>k1-RangeExtensionATG-r18</i> , or <i>maxHARQ-ProcessNumberATG-r18</i> with 32 DL processes.		
			Tests 1-4, 1-5, 1-6 in Clause 5.2.3.2.22	Only if ATG UE supports the optional features <i>k1-RangeExtensionATG-r18</i> , or <i>maxHARQ-ProcessNumberATG-r18</i> with 32 DL processes.	If UE supports <i>outOfOrderOperationDL-r16</i> .	
			Tests 1-7, 1-8, 1-9 in Clause 5.2.3.2.22		If UE does not support <i>outOfOrderOperationDL-r16</i> .	
		PDCCH	All test cases in Table 5.3.3.2.1 All test cases in Table 5.3.3.2.2			
		PBCH	Clause 5.4.3.2			
		SDR	Clause 5.5.1			

5.1.1.13 Applicability of requirements with enhanced DMRS

The applicability rules for different requirements with enhanced DMRS in section 5 are specified in Table 5.1.1.13-1.

Table 5.1.1.13-1: Applicability of different requirements with enhanced DMRS

If UE is tested			UE can skip			Applicability notes
Test type	Test list		Test type	Test list		
FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 2-3)	FR1 FDD	PDSCH	Clause 5.2.2.1.1 (Test 2-1)	If UE supports enhanced DMRS, UE is not tested for corresponding test with legacy DMRS.
FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 2-3)	FR1 TDD	PDSCH	Clause 5.2.2.2.1 (Test 2-1)	

5.1.1.14 Applicability of requirements for eRedCap

The performance requirements in Table 5.1.1.14-1 shall apply for UEs which support optional feature *supportOfERedCap-r18*.

Other performance requirements mandatory for UE supporting NR operation defined in Section 5 but not included in table 5.1.1.14-1 should not be considered applicable to eRedCap UEs.

Table 5.1.1.14-1: Requirements applicability for eRedCap UEs

UE capability	Test type	Test list	Applicability notes
eRedCap with 1RX	FR1 FDD and HD-FDD (Note 1)	PDSCH	Clause 5.2.1.1.2
		PDCCH	All tests in Clause 5.3.1.1.1
		PBCH	All tests in Clause 5.4.1.1
		SDR	Clause 5.5.4
	FR1 TDD	PDSCH	Clause 5.2.1.2.2
		PDCCH	All tests in Clause 5.3.1.2.1
		PBCH	All tests in Clause 5.4.1.2
		SDR	Clause 5.5.4
eRedCap with 2RX	FR1 FDD and HD-FDD (Note 1)	PDSCH	Clause 5.2.2.1.23
		PDCCH	All tests in Clause 5.3.2.1.4
		PBCH	Clause 5.4.2.1 (Table 5.4.2.1-2 Test 1-1)
			Clause 5.4.2.1 (Table 5.4.2.1-3 Test 2-1)
	SDR	Clause 5.5.4	
	FR1 TDD	PDSCH	Clause 5.2.2.2.24
		PDCCH	All tests in Clause 5.3.2.2.4
		PBCH	Clause 5.4.2.2 (Table 5.4.2.2-4 Test 3-1)
			Clause 5.4.2.2 (Table 5.4.2.2-5 Test 4-1)
		SDR	Clause 5.5.4
Note 1: If UE support only HD-FDD in a FDD band, this UE is tested with HD-FDD mode otherwise UE is tested with full-duplex FDD mode			

5.2 PDSCH demodulation requirements

The parameters specified in Table 5.2-1 are valid for all PDSCH tests unless otherwise stated.

Table 5.2-1: Common test parameters

Parameter	Unit	Value
PDSCH transmission scheme		Transmission scheme 1
Carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 2)	RBs 0
	Subcarrier spacing	kHz 15 or 30
DL BWP	Cyclic prefix	Normal

configuration #1	RB offset	RBs	0
	Number of contiguous PRB	PRBs	Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH	Symbols	0, 1
	Number of PRBs in CORESET		Table 5.2-2 for tested channel bandwidth and subcarrier spacing
	Number of PDCCH candidates and aggregation levels		1/AL8
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1_1
	TCI state		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of each applicable i1/i2 combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12]
Cross carrier scheduling			Not configured
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 1 and 3 $l_0 = 10$ for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	15 kHz SCS: 20 for CSI-RS resource 1,2,3,4 30 kHz SCS: 40 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS: 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
	NZP CSI-RS for CSI acquisition	First subcarrier index in the PRB used for CSI-RS	
First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$
Number of CSI-RS ports (X)			Same as number of transmit antenna
CDM Type			'No CDM' for 1 transmit antenna 'FD-CDM2' for 2 and 4 transmit antenna
Density (ρ)			1
CSI-RS periodicity		Slots	15 kHz SCS: 20 30 kHz SCS: 40
CSI-RS offset		Slots	0
Frequency Occupation			Start PRB 0 Number of PRB = BWP size
QCL info		TCI state #1	
ZP CSI-RS for CSI acquisition	First subcarrier index in the PRB used for CSI-RS		$k_0 = 4$

	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		4
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity	Slots	15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset	Slots	0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
PDSCH DMRS configuration	Antenna ports indexes		{1000} for Rank 1 tests {1000, 1001} for Rank 2 tests {1000-1002} for Rank 3 tests {1000-1003} for Rank 4 tests
	Position of the first DMRS for PDSCH mapping type A		2
	Number of PDSCH DMRS CDM group(s) without data		1 for Rank 1 and Rank 2 tests 2 for Rank 3 and Rank 4 tests
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
PT-RS configuration			PT-RS is not configured
Maximum number of code block groups for ACK/NACK feedback			1
Maximum number of HARQ transmission			4
HARQ ACK/NACK bundling			Multiplexed
Redundancy version coding sequence			{0,2,3,1}
PDSCH & PDSCH DMRS Precoding configuration			For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot with equal probability of each applicable $i1/i2$ combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12]
Symbols for all unused REs			OCNG Annex A.5
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
Note 1: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission.			
Note 2: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing.			

Table 5.2-2: Number of PRBs in CORESET

SCS (kHz)	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	80 MHz	100 MHz
15	24	48	78	102	132	156	216	270	N/A	N/A	N/A
30	6	24	36	48	60	78	102	132	162	216	270

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2

5.2.1 1RX requirements

5.2.1.1 FDD

5.2.1.1.1 1Rx FDD FR1 PDSCH performance for RedCap

5.2.1.1.1.1 Test Purpose

To verify the PDSCH performance mapping Type A under 1 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.1.1.1.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

5.2.1.1.1.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.1.1.1.3-3, with the addition of test parameters in Table 5.2.1.1.1.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.1.1.1.3-1.

Table 5.2.1.1.1.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 1 receive antenna conditions and with different channel models and MCSs for RedCap	1-1, 1-2, 1-3, 1-4

Table 5.2.1.1.1.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD / HD-FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	4 for Test 1-1 2 for other tests
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
	VRB-to-PRB mapping interleaver bundle size	N/A
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	2 for Test 1-1, 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS	1
CSI-RS for tracking	CSI-RS periodicity	Slots Table 5.2-1
	CSI-RS offset	Slots Table 5.2-1
Number of HARQ Processes		4
The number of slots between PDSCH and corresponding HARQ-ACK information		FDD: 2 HD-FDD: 4 if mod(i,5) = 0 3 if mod(i,5) = 1 2 if mod(i,5) = 2

		6 if mod(i,5) = 3
Note 1: i is the slot index per frame; i = {0,...,9}.		

Table 5.2.1.1.1.3-3: Minimum performance for Rank 1

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD R.PDSCH.1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x1 Low	70	3.7
1-2	R.PDSCH.1-2.1 FDD R.PDSCH.1-1.2 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x1 Low	70	12.2
1-3	R.PDSCH.1-3.5 FDD R.PDSCH.1-1.3 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x1 Low	70	16.5
1-4	R.PDSCH.1-4.2 FDD R.PDSCH.1-1.4 HD-FDD	10 / 15	256QAM, 0.67	TDLA30-10	2x1 Low	70	25.3
Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.1.1.1.

5.2.1.1.1.4 Test description

5.2.1.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.1.1.1.4.3.

5.2.1.1.1.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.1.1.1.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.1.1.1.5-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.1.1.1.5-1 as appropriate.

5.2.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.1.1.1.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2 Not present	n4 for test 1-1 n2 will be used by default	test 1-1 test point other than test 1-1
}			
}			
}			

Table 5.2.1.1.1.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10 (for CSI-RS resources 1 and 2) 11 (for CSI-RS resources 3 and 4)	CSI-RS offset: 10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
}			

5.2.1.1.1.5 Test Requirement

Table 5.2.1.1.1.5-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.3 for each throughput test shall meet or exceed the specified value in Table 5.2.1.1.1.5-1 the specified SNR including test tolerances for all throughput tests.

Table 5.2.1.1.1.5-1: Test Requirements for Rank 1

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value

						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD R.PDSCH. 1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x1 Low	70	3.7 + 0.9
1-2	R.PDSCH.1-2.1 FDD R.PDSCH. 1-1.2 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x1 Low	70	12.2 + 0.9
1-3	R.PDSCH.1-3.5 FDD R.PDSCH. 1-1.3 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x1 Low	70	16.5 + 1.0
1-4	R.PDSCH.1-4.2 FDD R.PDSCH. 1-1.4 HD-FDD	10 / 15	256QAM, 0.67	TDLA30-10	2x1 Low	70	25.3 + 1.0

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

5.2.1.1.2 1Rx FDD FR1 PDSCH performance for eRedCap

5.2.1.1.2.1 Test Purpose

To verify the PDSCH performance mapping Type A under 1 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.1.1.2.2 Test applicability

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.2.1.1.2.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.1.1.2.3-3, with the addition of test parameters in Table 5.2.1.1.2.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.1.1.2.3-1.

Table 5.2.1.1.2.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 1 receive antenna conditions and with different channel models and MCSs for eRedCap UE with reduced baseband bandwidth in FR1.	1-1, 1-2, 1-3
Verify the PDSCH mapping Type A normal performance under 1 receive antenna conditions and with different channel models and MCSs for eRedCap without reduced baseband bandwidth in FR1.	2-1, 2-2, 2-3

Table 5.2.1.1.2.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD / HD-FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	

	PRB bundling size		4 for Test 1-1 and Test 2-1 2 for other tests
	Resource allocation type		Type 1 for Tests 1-1, 1-2, 1-3, 2-3 Type 0 for Tests 2-1, 2-2
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2 for Test 1-1 and Test 2-1, 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			FDD: 2, HD-FDD: 4 if mod(i,5) = 0 3 if mod(i,5) = 1 2 if mod(i,5) = 2 6 if mod(i,5) = 3
Note 1: i is the slot index per frame; i = {0,...,9}.			

Table 5.2.1.1.2.3-3: Minimum performance for Rank 1 with reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.5 FDD R.PDSCH.1-2.2 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x1 Low	70	4.4
1-2	R.PDSCH.1-25.1 FDD R.PDSCH.1-2.3 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x1 Low	70	12.3
1-3	R.PDSCH.1-12.4 FDD R.PDSCH.1-4.1 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x1 Low	70	16.1
Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.							

Table 5.2.1.1.2.3-4: Minimum performance for Rank 1 without reduced baseband bandwidth.

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-1.1 FDD R.PDSCH.1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x1 Low	70	3.9

2-2	R.PDSCH.1-12.3 FDD R.PDSCH.1-2.4 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x1 Low	70	12.5
2-3	R.PDSCH.1-12.4 FDD R.PDSCH.1-4.1 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x1 Low	70	16.1

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.1.1.2.

5.2.1.1.2.4 Test description

5.2.1.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.1.1.2.4.3.

5.2.1.1.2.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.1.1.2.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.1.1.2.5-1 or Table 5.2.1.1.2.5-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.1.1.2.5-1 or Table 5.2.1.1.2.5-2 as appropriate.

5.2.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.1.1.2.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26

Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Tests 1-1, 1-2, 1-3, 2-3
	resourceAllocationType0		Tests 2-1, 2-2
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2	n4 for test 1-1 and test 2-1	test 1-1, test 2-1
	Not present	n2 will be used by default	test point other than test 1-1 and test 2-1
}			
}			
}			

Table 5.2.1.1.2.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10 (for CSI-RS resources 1 and 2) 11 (for CSI-RS resources 3 and 4)	CSI-RS offset: 10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
}			

5.2.1.1.2.5 Test Requirement

Table 5.2.1.1.2.5-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.3 for each throughput test shall meet or exceed the specified value in Table 5.2.1.1.2.5-1 the specified SNR including test tolerances for all throughput tests.

Table 5.2.1.1.2.5-1: Test Requirements for Rank 1 with reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.5 FDD R.PDSCH.1-2.2 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x1 Low	70	4.4 + 0.9
1-2	R.PDSCH.1-25.1 FDD R.PDSCH.1-2.3 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x1 Low	70	12.3 + 0.9
1-3	R.PDSCH.1-12.4 FDD R.PDSCH.1-4.1 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x1 Low	70	16.1 + 1.0

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.
 Note 2: Test index 1-1, 1-2, 1-3 is only applicable for UE with reduced baseband bandwidth.

Table 5.2.1.1.2.5-2: Test Requirements for Rank 1 without reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-1.1 FDD R.PDSCH.1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x1 Low	70	3.9 + 0.9
2-2	R.PDSCH.1-12.3 FDD R.PDSCH.1-2.4 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x1 Low	70	12.5 + 0.9
2-3	R.PDSCH.1-12.4 FDD R.PDSCH.1-4.1 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x1 Low	70	16.1 + 0.9

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.
 Note 2: Test index 2-1, 2-2, 2-3 is only applicable for UE without reduced baseband bandwidth, supporting eRedCapNotReducedBB-BW-r18.

5.2.1.2 TDD

5.2.1.2.1 1Rx TDD FR1 PDSCH performance for RedCap

5.2.1.2.1.1 Test Purpose

To verify the PDSCH performance mapping Type A under 1 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.1.2.1.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

5.2.1.2.1.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.1.2.1.3-3, with the addition of test parameters in Table 5.2.1.2.1.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.1.2.1.3-1.

Table 5.2.1.2.1.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs for RedCap UEs	1-1, 1-2, 1-3, 1-4

Table 5.2.1.2.1.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1

PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1, 2 for other tests
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2 for Test 1-1, 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		Table 5.2-1
	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
	Frequency Occupation		Table 5.2-1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.1.2.1.3-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.5 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x1 Low	70	3.8
1-2	R.PDSCH.2-26.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x1 Low	70	12.3
1-3	R.PDSCH.2-3.5 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x1 Low	70	17.1
1-4	R.PDSCH.2-4.3 TDD	20 / 30	256QAM, 0.67	FR1.30-1	TDLA30-10	2x1 Low	70	25.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.1.2.1.

5.2.1.2.1.4 Test description

5.2.1.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.1.2.1.4.3.

5.2.1.2.1.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.1.2.1.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.1.2.1.5-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.1.2.1.5-1 as appropriate.

5.2.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.1.2.1.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2 Not present	n4 for test 1-1 n2 will be used by default	test 1-1 test point other than test 1-1
}			
}			
}			

Table 5.2.1.2.1.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots40	20 (for CSI-RS resources 1 and 2) 21 (for CSI-RS resources 3 and 4)	CSI-RS offset: 20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 CSI-RS periodicity: 40 slots	
}			

5.2.1.2.1.5 Test Requirement

Table 5.2.1.2.1. 5-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.1.2.1.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.1.2.1.5-1: Test Requirements for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.5 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x1 Low	70	4.7
1-2	R.PDSCH.2-26.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x1 Low	70	13.2
1-3	R.PDSCH.2-3.5 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x1 Low	70	18.1
1-4	R.PDSCH.2-4.3 TDD	20 / 30	256QAM, 0.67	FR1.30-1	TDLA30-10	2x1 Low	70	26.5

5.2.1.2.2 1Rx TDD FR1 PDSCH performance for eRedCap

5.2.1.2.2.1 Test Purpose

To verify the PDSCH performance mapping Type A under 1 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.1.2.2.2 Test applicability

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.2.1.2.2.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.1.2.2.3-3, with the addition of test parameters in Table 5.2.1.2.2.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.1.2.2.3-1.

Table 5.2.1.2.2.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 1 receive antenna conditions and with different channel models and MCSs for eRedCap UE with reduced baseband bandwidth in FR1.	1-1, 1-2, 1-3
Verify the PDSCH mapping Type A normal performance under 1 receive antenna conditions and with different channel models and MCSs for eRedCap without reduced baseband bandwidth in FR1.	2-1, 2-2, 2-3

Table 5.2.1.2.2.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0

	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1, 2 for other tests
	Resource allocation type		Type 1 for Tests 1-1, 1-2, 1-3, 2-3 Type 0 for Tests 2-1, 2-2
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2 for Test 1-1, 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		Table 5.2-1
	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
	Frequency Occupation		Table 5.2-1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.1.2.2.3-3: Minimum performance for Rank 1 with reduced baseband bandwidth (1Rx)

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-34.1 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x1 Low	70	4.4
1-2	R.PDSCH.2-26.2 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x1 Low	70	12.7
1-3	R.PDSCH.2-27.2 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x1 Low	70	16.2

Table 5.2.1.2.2.3-4: Minimum performance for Rank 1 without reduced baseband bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-34.2 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x1 Low	70	3.6
2-2	R.PDSCH.2-26.3 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x1 Low	70	12.3
2-3	R.PDSCH.2-27.2 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x1 Low	70	16.2

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.1.2.2.

5.2.1.2.2.4 Test description

5.2.1.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.1.2.2.4.3.

5.2.1.2.2.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.1.2.2.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.1.2.2.5-1 or Table 5.2.1.2.2.5-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.1.2.2.5-1 or Table 5.2.1.2.2.5-2 as appropriate.

5.2.1.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.1.2.2.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
resourceAllocation	resourceAllocationType1		Tests 1-1, 1-2, 1-3, 2-3
	resourceAllocationType0		Tests 2-1, 2-2
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2 Not present	n4 for test 1-1 n2 will be used by default	test 1-1 test point other than test 1-1
}			
}			

}			
}			

Table 5.2.1.2.2.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots20	10 (for CSI-RS resources 1 and 2) 11 (for CSI-RS resources 3 and 4)	CSI-RS offset: 10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
}			

5.2.1.2.2.5 Test Requirement

Table 5.2.1.2.2.5-1 and Table 5.2.1.2.2.5-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.1.2.2.5-1 and Table 5.2.1.2.2.5-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.1.2.2.5-1: Test Requirements for Rank 1 with reduced baseband bandwidth (1Rx)

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-34.1 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x1 Low	70	5.4
1-2	R.PDSCH.2-26.2 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x1 Low	70	13.6
1-3	R.PDSCH.2-27.2 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x1 Low	70	17.2

Note 1: Test index 1-1, 1-2, 1-3 is only applicable for UE with reduced baseband bandwidth.

Table 5.2.1.2.2.5-2: Test Requirements for Rank 1 without reduced baseband bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-34.2 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x1 Low	70	4.5
2-2	R.PDSCH.2-26.3 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x1 Low	70	13.2
2-3	R.PDSCH.2-27.2 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x1 Low	70	17.2

Note 1: Test index 2-1, 2-2, 2-3 is only applicable for UE without reduced baseband bandwidth, supporting eRedCapNotReducedBB-BW-r18.

5.2.2 2RX requirements

5.2.2.1 FDD

5.2.2.1.1 2Rx FDD FR1 PDSCH mapping Type A performance

5.2.2.1.1.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.1.0-3 and Table 5.2.2.1.1.0-4, with the test parameters defined in table 5.2.2.1.1.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.1.1.0-1.

Table 5.2.2.1.1.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 1-2, 1-3, 1-5, 1-6, 1-7, 1-8, 2-1, 2-2
Verify the PDSCH mapping Type A HARQ soft combining performance under 2 receive antenna conditions.	1-4
Verify the PDSCH mapping Type A performance requirements for Enhanced Receiver Type 1 under 2 receive antenna conditions.	3-1
Verify the PDSCH mapping Type A performance requirements with R18 DMRS	2-3

Table 5.2.2.1.1.0-2: Test Parameters for Testing

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1 2 for other tests
	Resource allocation type		Test 1-2: Type 1 with start RB = 23, L _{RBs} = 6 Other tests: Type 0
	RBG size		Test 1-2: N/A Other tests: Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1 for all but Test 2-3. Enhanced Type 1 for Test 2-3.
	Number of additional DMRS		2 for Tests 1-1, 1-5, 1-6, 1-7 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
	Antenna ports indexes		Test 2-3: {1008, 1009} Other tests: Table 5.2-1
CSI-RS for tracking	CSI-RS periodicity	Slots	Test 1-5, 1-6, 1-7: 10 for CSI-RS resource 1,2,3,4. Other tests: Table 5.2-1.
	CSI-RS offset	Slots	Test 1-5, 1-6, 1-7: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4.

		Other tests: Table 5.2-1.
Number of HARQ Processes		8 for Test 1-4 4 for other tests
The number of slots between PDSCH and corresponding HARQ-ACK information		2

Table 5.2.2.1.1.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	-0.8
1-2	R.PDSCH.1-1.2 FDD	10 / 15	QPSK, 0.30	TDLC300-100	2x2, ULA Low	70	0.2
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	TDLA30-10	2x2, ULA Low	70	24.6
1-4	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	30	1.1
1-5	R.PDSCH.1-8.1 FDD	10 / 15	16QAM, 0.48	HST-750	1x2	70	6.2
1-6	R.PDSCH.1-8.2 FDD	10 / 15	64QAM, 0.43	HST-972	1x2	70	9.9
1-7	R.PDSCH.1-8.1 FDD	10 / 15	16QAM, 0.48	TDLC300-600	2x2	70	8.6
1-8	R.PDSCH.1-17.1 FDD	10 / 15	1024QAM, 0.79	TDLD30-5	2x2, ULA Low	70	29.5

Table 5.2.2.1.1.0-4: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.4
2-2	R.PDSCH.2-1.1 FDD	20 / 30	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.7
2-3	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.4

Table 5.2.2.1.1.0-5: Minimum performance for Rank 2 and Enhanced Receiver Type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-2.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x2, ULA Medium	70	17.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.1.

5.2.2.1.1_1 2Rx FDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA

Editor's Note: This test cases is incomplete in following aspects:

- SNR in test requirements table is within square brackets for test point 1-6, 1-7.

5.2.2.1.1_1.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 1 and Rank 2 scenarios.

5.2.2.1.1_1.2 Test applicability

This test applies to all types of UE release 15 and forward supporting NR/5GC.

This test also applies to all types of UE release 15 and forward supporting EN-DC.

5.2.2.1.1_1.3 Test description

5.2.2.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.1.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for NR/5GC with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.1_1.3.3.

5.2.2.1.1_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.1_1.4-1 and 5.2.2.1.1_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.1_1.4-1 and 5.2.2.1.1_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.1.1_1.4-1 and 5.2.2.1.1_1.4-2 as appropriate.

5.2.2.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.1_1.3.3_1 Message exceptions for NR/5GC

Table 5.2.2.1.1_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4	n4 for test 1-1	test 1-1
	Not present	n2 will be used by default	test point other than test 1-1
}			
}			
}			

Table 5.2.2.1.1_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	For test 1-1, 1-5, 1-6 and 1-7	
	pos1	For other tests	
}			

Table 5.2.2.1.1_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8, n4	n8 for Test 1-4 n4 for other tests	
}			

Table 5.2.2.1.1_1.3.3_1-4: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots10	1 (for CSI-RS resources 1 and 2) 2 (for CSI-RS resources 3 and 4)	For test 1-5, 1-6, 1-7: CSI-RS offset: 1 for CSI-RS resources 1 and 2 2 for CSI-RS resources 3 and 4 CSI-RS periodicity: 10 slots	
slots40	20 (for CSI-RS resources 1 and 2) 21 (for CSI-RS resources 3 and 4)	For test 2-2: CSI-RS offset: 20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 CSI-RS periodicity: 40	

slots20	10 (for CSI-RS resources 1 and 2) 11 (for CSI-RS resources 3 and 4)	For other tests: CSI-RS offset: 10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
}			

5.2.2.1.1_1.3.3_2 Message exceptions for EN-DC

Same as 5.2.2.1.1_1.3.3_1.

5.2.2.1.1_1.4 Test requirement

Tables 5.2.2.1.1_1.4-1 and 5.2.2.1.1_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.1_1.4-1 and Table 5.2.2.1.1_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.1_1.4-1: Test Requirements for Rank 1

Test num.	Reference channel	Modulation format	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	0.1
1-2	R.PDSCH.1-1.2 FDD	QPSK, 0.30	TDLC300-100	2x2, ULA Low	70	1.1
1-3	R.PDSCH.1-4.1 FDD	256QAM, 0.82	TDLA30-10	2x2, ULA Low	70	25.6
1-4	R.PDSCH.1-2.1 FDD	16QAM, 0.48	TDLC300-100	2x2, ULA Low	30	2
1-5	R.PDSCH.1-8.1 FDD	16QAM, 0.48	HST-750	1x2	70	7.1
1-6	R.PDSCH.1-8.2 FDD	64QAM, 0.43	HST-972	1x2	70	[10.5]
1-7	R.PDSCH.1-8.1 FDD	16QAM, 0.48	TDLC300-600	2x2	70	[9.5]

Table 5.2.2.1.1_1.4-2: Test Requirements for Rank 2

Test num.	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD	64QAM, 0.51	TDLA30-10	2x2, ULA Low	70	20.4
2-2	R.PDSCH.2-1.1 FDD	64QAM, 0.51	TDLA30-10	2x2, ULA Low	70	20.7

5.2.2.1.1_2 2Rx FDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with enhanced receiver type 1 for both SA and NSA

5.2.2.1.1_2.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with enhanced receiver type 1 configuration, for Rank 2 scenarios.

5.2.2.1.1_2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting NR enhanced receiver type 1.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and NR enhanced receiver type 1.

5.2.2.1.1_2.3 Test description

Same test description as in clause 5.2.2.1.1_1.3.

5.2.2.1.1_2.3.1 Initial conditions

Same initial conditions as in clause 5.2.2.1.1_1.3.1.

5.2.2.1.1_2.3.2 Test procedure

Same test procedure as in clause 5.2.2.1.1_1.3.2.

5.2.2.1.1_2.3.3 Message contents

Same message contents as in clause 5.2.2.1.1_1.3.3.

5.2.2.1.1_2.3.3_1 Message exceptions for SA

Same message exceptions for SA as in clause 5.2.2.1.1_1.3.3_1.

5.2.2.1.1_2.3.3_2 Message exceptions for NSA

Same message exceptions for NSA as in clause 5.2.2.1.1_1.3.3_2.

5.2.2.1.1_2.3.4 Test requirement

Same test requirement as in clause 5.2.2.1.1_1.3.4.

Table 5.2.2.1.1_2.3.4-1: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-2.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x2, ULA Medium	70	18.6

5.2.2.1.1_3 2Rx FDD FR1 PDSCH mapping Type A performance – 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA

Editor's Note: Following aspects needs further investigation

- DL EVM of $\leq 2.5\%$ for $f > 4.2$ GHz pending further analysis by the TE vendors.

5.2.2.1.1_3.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with DL1024QAM for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput for Rank 1 scenario.

5.2.2.1.1_3.2 Test applicability

This test applies to all types of UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of UE release 17 and forward supporting EN-DC and DL1024QAM.

5.2.2.1.1_3.3 Test description

5.2.2.1.1_3.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.1.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for NR/5GC with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.1_3.3.3.

5.2.2.1.1_3.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.1_3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.1_3.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.1_3.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.2.1.1_3.3.3_1 Message exceptions for NR/5GC

Same as 5.2.2.1.1_3.3.3_1 with the following exceptions.

Table 5.2.2.1.1_3.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		Test 1-8
}			

5.2.2.1.1_3.3.3_2 Message exceptions for EN-DC

Same as 5.2.2.1.1_3.3.3_1.

5.2.2.1.1_3.4 Test requirement

Table 5.2.2.1.1_3.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.1_3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.1_3.4-1: Test Requirements for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-8	R.PDSCH.1-17.1 FDD	10 / 15	1024QAM, 0.79	TDLD30-5	2x2, ULA Low	70	30.4

5.2.2.1.1_4 2Rx FDD FR1 PDSCH mapping Type A performance – 2x2 MIMO with enhanced DMRS for both SA and NSA

5.2.2.1.1_4.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with R18 enhanced DMRS.

5.2.2.1.1_4.2 Test applicability

This test applies to all types of UE release 18 and forward supporting NR/5GC and enhanced DMRS.

This test also applies to all types of UE release 18 and forward supporting EN-DC and enhanced DMRS.

UE can skip Test 2-1 in 5.2.2.1.1_1 if this test is passed.

5.2.2.1.1_4.3 Test description

5.2.2.1.1_4.3.1 Initial conditions

Same initial conditions as in clause 5.2.2.1.1_1.3.1.

5.2.2.1.1_4.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.1_4.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.1_4.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.1_4.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.2.1.1_4.3.3_1 Message exceptions for NR/5GC

Same message contents as in clause 5.2.2.1.1_1.3.3 with the following exception

Table 5.2.2.1.1_4.3.3_1-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-TypeEnh-r18	enabled		
}			

Table 5.2.2.1.1_4.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 8 and DMRS port 9 as per Table 7.3.1.2.2-7 in TS 38.212 (<i>dmrs-Type</i> = DMRS type 1, <i>dmrs-TypeEnh</i> is configured and <i>maxLength</i> = len1 as per Table 4.6.3-50 in 38.508-1)	"1110"	

5.2.2.1.1_4.3.3_2 Message exceptions for EN-DC

Same as 5.2.2.1.1_4.3.3_1.

5.2.2.1.1_4.4 Test requirement

Table 5.2.2.1.1_4.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.1_4.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.1_4.4-1: Test Requirements for enhanced DMRS with Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-3	R. PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	20.4

5.2.2.1.2 2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance

5.2.2.1.2.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.2.0-3, with the addition of test parameters in table 5.2.2.1.2.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.1.2.0-1.

Table 5.2.2.1.2.0-1: Tests purpose

Purpose	Test index
[Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and CSI-RS overlapped with PDSCH]	1-1

Table 5.2.2.1.2.0-2: Test parameters

Parameter	Unit	Value	
Duplex mode		FDD	
Active DL BWP index		1	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	2	
	Length (L)	12	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	PRB size	Config2	
	Resource allocation type	Type 0	
	VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	DMRS Type	Type 1	
	Number of additional DMRS	1	
	Length	1	
NZP CSI-RS for CSI acquisition	OFDM symbols in the PRB used for CSI-RS	$l_0 = 13$	
	CSI-RS periodicity	Slots	5
ZP CSI-RS for CSI acquisition	Subcarrier index in the PRB used for CSI-RS		$(k_0, k_1, k_2, k_3) = (2, 4, 6, 8)$
	Number of CSI-RS ports (X)		8
	CSI-RS periodicity	Slots	5
Number of HARQ Processes		4	
K1 value (PDSCH-to-HARQ-timing-indicator)		2	

Table 5.2.2.1.2.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-5.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	14.8

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.2.1.2.

5.2.2.1.2_1 2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.2_1.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and CSI-RS overlapped with PDSCH

5.2.2.1.2_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.2.2.1.2_1.3 Test description

5.2.2.1.2_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.1.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.2_1.3.3.

5.2.2.1.2_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.2_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.2_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.

5.2.2.1.2_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.2_1.3.3_1 Message exceptions for SA

Same as for test number 1-2 in 5.2.2.1.1_1.3.3_1 with following exceptions:

Table 5.2.2.1.2_1.3.3_1-1: NZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	13	$l_0 = 13$	
}			

Table 5.2.2.1.2_1.3.3_1-2: CSI-ResourcePeriodicityAndOffset for ZP and NZP CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	0	CSI-RS offset: 0 CSI-RS periodicity: 5 slots	
}			

Table 5.2.2.1.2_1.3.3_1-3: ZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], clause 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	011110	(k0, k1, k2, k3)=(2, 4, 6, 8)	
}			
nrofPorts	P8	Number of CSI- RS ports (X) = 8	
firstOFDMSymbolInTimeDomain	12	$l_0 = 12$	
cdm-Type	fd-CDM2		
density CHOICE {			
one	NULL	Density (ρ) = 1	
}			
freqBand	CSI- FrequencyOccupation	Frequency Occupation: Start PRB 0 (see Table 4.6.3-33 in TS 38.508-1) Number of PRB = 52 (see Table 5.4.2.0-23 in TS 38.508-1 [6]).	
}			

Table 5.2.2.1.2_1.3.3_1-4: Void

5.2.2.1.2_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.2_1.3.3_1

5.2.2.1.2_1.4 Test requirement

Table 5.2.2.1.2.0-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.2_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.2_1.4-1: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-5.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	15.7

5.2.2.1.3 2Rx FDD FR1 PDSCH mapping Type B performance

5.2.2.1.3.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.3.0-3, with the addition of test parameters in Table 5.2.2.1.3.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.3.0-1.

Table 5.2.2.1.3.0-1: Tests purpose

Purpose	Test index
Verify PDSCH mapping Type B performance under 2 receive antenna conditions	1-1

Table 5.2.2.1.3.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	5
	Length (L)	7
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle size	N/A	
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between PDSCH and corresponding HARQ-ACK information		2

Table 5.2.2.1.3.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x2, ULA Low	70	-0.9

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.3.

5.2.2.1.3.1_1 2Rx FDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.3.1_1.1 Test purpose

To verify PDSCH mapping Type B performance under 2 receive antenna conditions.

5.2.2.1.3_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting PDSCH mapping type B.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and PDSCH mapping type B.

5.2.2.1.3_1.3 Test description

5.2.2.1.3_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3.4 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.3.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.2.1.3_1.3.3.

5.2.2.1.3_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.3_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.3_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.3_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

5.2.2.1.3_1.3.3_1 Message exceptions for SA

Table 5.2.2.1.3_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			

nrofHARQ-ProcessesForPDSCH	n4		
}			

Table 5.2.2.1.3_1.3.3_1-2: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeB		
startSymbolAndLength	89	Start symbol(S)=5, Length(L)=7	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 5.2.2.1.3_1.3.3_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
dmrs-DownlinkForPDSCH-MappingTypeB CHOICE			
{			
setup	DMRS-DownlinkConfig		
}			
}			

5.2.2.1.3_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.3_1.3.3_1

5.2.2.1.3_1.4 Test requirement

Table 5.2.2.1.3_1.4-1 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.3_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.3_1.4-1: Test Requirements for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x2, ULA Low	70	0.1

5.2.2.1.4 2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance

5.2.2.1.4.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.4.0-3, with the addition of test parameters in Table 5.2.2.1.4.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.1.4.0-1.

Table 5.2.2.1.4.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with CRS rate matching configured	1-1, 1-2

Table 5.2.2.1.4.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
NR UL transmission with a 7.5 kHz shift to the LTE raster			true
PDCCH configuration	Symbols with PDCCH		Symbol# 2
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		3
	Length (L)		9 for Test 1-1 11 for Test 1-2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Position of the first DM-RS for downlink		3
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CRS for rate matching (Note 1)	LTE carrier centre subcarrier location		Same as NR carrier centre subcarrier location
	LTE carrier BW	MHz	10
	Number of antenna ports		4
	v-shift		0
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Note 1: No MBSFN is configured on LTE carrier

Table 5.2.2.1.4.0-3: Minimum performance for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
.							

1-1	R.PDSCH.1-7.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x2, ULA Low	70	-1.0
1-2	R.PDSCH.1-7.2 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x2, ULA Low	70	-1.0

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.4.

5.2.2.1.4_1 2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.4_1.1 Test purpose

To verify the Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with CRS rate matching configured.

5.2.2.1.4_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward supporting capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test1-1 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test 1-2 applies to all types of NR UE release 15 and forward supporting capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

Test 1-2 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

5.2.2.1.4_1.3 Test description

5.2.2.1.4_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.4.0-2 and Table 5.2.2.1.4.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.4_1.3.3.

5.2.2.1.4_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.4.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.4_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

NOTE: In the test using the NR/5GC connectivity option, collisions between NR SIB1 scheduling and LTE CRS can occur. However, these do not impact the throughput.

5.2.2.1.4_1.3.3 Message contents

5.2.2.1.4_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.4_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	94	Start symbol(S)=3, Length(L)=9 for Test 1-1	
	66	Start symbol(S)=3, Length(L)=11 for Test 1-2	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	66	Start symbol(S)=3, Length(L)=11 for Test 1-2	
}			
}			

Table 5.2.2.1.4_1.3.3_1-2: SearchSpace

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition USS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
controlResourceSetId	2		
monitoringSymbolsWithinSlot	00100000000000		
}			

Table 5.2.2.1.4_1.3.3_1-3: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 5.4.2-1

Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE {			
dmrs-TypeA-Position	pos3		
lte-CRS-ToMatchAround	RateMatchPatternLTE-CRS		
}			

Table 5.2.2.1.4_1.3.3_1-4: RateMatchPatternLTE-CRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2-20			
Information Element	Value/remark	Comment	Condition
RateMatchPatternLTE-CRS ::= SEQUENCE {			
carrierFreqDL	Same as NR carrier centre subcarrier location		
carrierBandwidthDL	n50	10MHz	
mbsfn-SubframeConfigList	Not present		
nrofCRS-Ports	n4		
v-Shift	n0		
}			

Table 5.2.2.1.4_1.3.3_1-5: Void

Table 5.2.2.1.4_1.3.3_1-6: FrequencyInfoUL-SIB

Derivation Path: TS 38.508-1 [6], Table 4.6.3-62			
Information Element	Value/remark	Comment	Condition
FrequencyInfoUL-SIB SEQUENCE {			
frequencyShift7p5khz	true		
}			

Table 5.2.2.1.4_1.3.3_1-7: PDCCH-ControlResourceSet

Derivation Path: Table TS 38.508-1 [6], 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		SA
duration	1	SearchSpace duration of 1 symbol from third symbol	
}			

Table 5.2.2.1.4_1.3.3_1-8: Void

Table 5.2.2.1.4_1.3.3_1-9: SearchSpace for CSS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0.7 using condition CSS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	SearchSpaceId with condition CSS		CSS
controlResourceSetId	1		
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
duration	Not present	1 slot per default	
monitoringSymbolsWithinSlot	00100000000000		
nrofCandidates SEQUENCE {			SA
aggregationLevel2	n1		
aggregationLevel8	n0		

}		
---	--	--

Table 5.2.2.1.4_1.3.3_1-10: PDCCH-ConfigCommon

Derivation Path: TS 38.508-1 [6], Table 4.6.3-96			
Information Element	Value/remark	Comment	Condition
PDCCH-ConfigCommon ::= SEQUENCE {			
commonControlResourceSet ::= SEQUENCE {			SA
controlResourceSetId	1		
frequencyDomainResources	01110000 00000000 00000000 00000000 00000000 000000		
Duration	1		
cce-REG-MappingType CHOICE {			
nonInterleaved	Null		
}			
precoderGranularity	sameAsREG-bundle		
}			
}			

Table 5.2.2.1.4_1.3.3_1-11: SearchSpace for USS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition USS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			SA
searchSpaceId	2		
controlResourceSetId	2		
monitoringSymbolsWithinSlot	0010000000000000		
}			

5.2.2.1.4_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.4_1.3.3_1 with the following exceptions:

Table 5.2.2.1.4_1.3.3_2-1: SearchSpace

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition USS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
controlResourceSetId	1		
monitoringSymbolsWithinSlot	0010000000000000		
}			

Table 5.2.2.1.4_1.3.3_2-2: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
duration	1	SearchSpace duration of 1 symbol from third symbol	
}			

5.2.2.1.4_1.3.4 Test requirement

Table 5.2.2.1.4.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.4_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.4_1.3.4-1: Test requirement for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-7.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x2, ULA Low	70	0.0
1-2	R.PDSCH.1-7.2 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x2, ULA Low	70	0.0

5.2.2.1.5 2Rx FDD FR1 PDSCH 0.001% BLER performance

5.2.2.1.5.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.5.0-3, with the addition of test parameters in Table 5.2.2.1.5.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.5.0-1.

Table 5.2.2.1.5.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH 0.001% BLER performance under 2 receive antenna conditions	1-1

Table 5.2.2.1.5.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
	Maximum number of HARQ transmission	1
	Number of HARQ Processes	4
	The number of slots between PDSCH and corresponding HARQ-ACK information	2

Table 5.2.2.1.5.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Antenna configuration	Reference value	
						Target BLER	SNR (dB)
1-1	R.PDSCH.1-1.4 FDD	10 / 15	QPSK, 0.59	AWGN	1x2 with static channel specified in Annex B.1	0.001%	3.2

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.5.

5.2.2.1.5_1 2Rx FDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.5_1.1 Test purpose

To verify the PDSCH 0.001% BLER performance under 2 receive antenna conditions.

5.2.2.1.5_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

Test 1-1 applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

5.2.2.1.5_1.3 Test description

5.2.2.1.5_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.5.0-2 and Table 5.2.2.1.5.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.5_1.3.3.

5.2.2.1.5_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.5.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.5_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.4. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.4.3-1 in Annex G.

5.2.2.1.5_1.3.3 Message contents

5.2.2.1.5_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.5_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 5.2.2.1.5_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam64LowSE		
}			

5.2.2.1.5_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.5_1.3.3_1.

5.2.2.1.5_1.3.4 Test requirement

Table 5.2.2.1.5.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.5_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.5_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Antenna configuration	Reference value	
						Target BLER	SNR (dB)

1-1	R.PDSCH.1-1.4 FDD	10 / 15	QPSK, 0.59	AWGN	1x2 with static channel specified in Annex B.1	0.001%	4.3
-----	----------------------	---------	------------	------	---	--------	-----

5.2.2.1.6 2Rx FDD FR1 PDSCH repetitions over multiple slots performance

5.2.2.1.6.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.6.0-3, with the addition of test parameters in Table 5.2.2.1.6-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.6.0-1.

Table 5.2.2.1.6.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH repetitions over multiple slots performance under 2 receive antenna conditions	1-1

Table 5.2.2.1.6.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	2
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between final repetition of PDSCH and corresponding HARQ-ACK information		2

Table 5.2.2.1.6.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Target BLER	SNR (dB)
1-1	R.PDSCH.1-11.1 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	1% (Note 1)	1.6
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.6.

5.2.2.1.6_1 2Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.6_1.1 Test purpose

To Verify the PDSCH repetitions over multiple slots performance under 2 receive antenna conditions.

5.2.2.1.6_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE dl-64QAM-MCS-TableAlt and *pdsch-RepetitionMultiSlots*.

Test 1-1 also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE dl-64QAM-MCS-TableAlt and *pdsch-RepetitionMultiSlots*.

5.2.2.1.6_1.3 Test description

5.2.2.1.6_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.6.0-2 and Table 5.2.2.1.6.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.6_1.3.3.

5.2.2.1.6_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.5.0-3. The SS sends downlink MAC padding bits on the DL RMC. The UE may expect that the TB is repeated with same symbol allocation among each of the *pdsch-AggregationFactor* consecutive slots.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.5_1.3.4-1.
3. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to clause G.1.5 and Table G.1.5-1a in Annex G clause G.1.5.

5.2.2.1.6_1.3.3 Message contents

5.2.2.1.6_1.3.3_1 Message exceptions for SA & NSA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.6_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
pdsch-AggregationFactor	2		
}			

5.2.2.1.6_1.3.4 Test requirement

Table 5.2.2.1.6.0-3 defines the primary level settings.

The target BLER percentage for the downlink reference measurement channels specified in Annex 3.2.1 for each BLER test shall meet or exceed the specified value in Table 5.2.2.1.6_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.6_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Target BLER	SNR (dB)
1-1	R.PDSCH.1-11.1 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	1% (Note 1)	2.5
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.							

5.2.2.1.7 2Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance

5.2.2.1.7.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.7.0-3, with the addition of test parameters in Table 5.2.2.1.7.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.7.0-1.

Table 5.2.2.1.7.0-1: Tests purpose

Purpose	Test index
Verify PDSCH mapping Type B performance and UE processing capability 2 under two receive antenna conditions	1-1

Table 5.2.2.1.7.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	2
	Length (L)	2

	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		0
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Maximum number of HARQ transmission			1
Number of HARQ Processes			2
The number of slots between PDSCH and corresponding HARQ-ACK information			0

Table 5.2.2.1.7.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-12.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x2, ULA Low	70	0.8

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.7.

5.2.2.1.7_1 2Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.7_1.1 Test purpose

To verify PDSCH mapping Type B performance and UE processing capability 2 under two receive antenna conditions.

5.2.2.1.7_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pdsch-ProcessingType2*.

5.2.2.1.7_1.3 Test description

5.2.2.1.7_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.

2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.7.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, *Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.7_1.3.3.

5.2.2.1.7_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.7.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.7_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.7_1.3.3 Message contents

5.2.2.1.7_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.7_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entries		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeB		
startSymbolAndLength	16	Start symbol(S)=2, Length(L)=2	
}			
}			

Table 5.2.2.1.7_1.3.3_1-2: PUCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-112			
Information Element	Value/remark	Comment	Condition
PUCCH-Config ::= SEQUENCE {			FR1
dl-DataToUL-ACK SEQUENCE (SIZE (1)) OF INTEGER {	1 entry		
INTEGER[1]	0	entry 1	
}			
}			

Table 5.2.2.1.7_1.3.3_1-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1=0 as per dl-	"000"	

	DataToUL-ACK in Table 5.2.2.1.7_1.3.3_1-3		
--	---	--	--

Table 5.2.2.1.7_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
processingType2Enabled	true		
}			

5.2.2.1.7_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.7_1.3.3_1.

5.2.2.1.7_1.4 Test requirement

Table 5.2.2.1.7.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.7_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.7_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-12.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x2, ULA Low	70	1.8

5.2.2.1.8 2Rx FDD FR1 PDSCH pre-emption performance

5.2.2.1.8.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.8.0-3, with the addition of test parameters in Table 5.2.2.1.8.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.8.0-1.

Table 5.2.2.1.8.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH pre-emption performance under 2 receive antenna conditions	1-1

Table 5.2.2.1.8.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDCCH configuration (Note 4)	Symbols with PDCCH	0, 1
	DCI format	2_1
	timeFrequencySet	14x1
PDSCH configuration	Mapping type	Type A

	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Pre-emption configuration (Note 2)	Starting symbol (S)		3
	Length (L)		2
	Pre-emption periodicity and offset (Note 3)	Slots	10/1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2
Note 1: Void			
Note 2: Interference modelled as random data on pre-empted REs.			
Note 3: Pre-emption is scheduled with a fixed scheduling with 10% probability within 10ms periodicity.			
Note 4: In addition to PDCCH configuration in Table 5.2-1.			

Table 5.2.2.1.8.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.5 FDD	10 / 15	16QAM 0.64	TDLA30-10	2x2, ULA Low	70	10.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.8.

5.2.2.1.8_1 2Rx FDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.8_1.1 Test purpose

To Verify the PDSCH pre-emption performance under 2 receive antenna conditions.

5.2.2.1.8_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pre-EmptIndication-DL-r16*.

5.2.2.1.8_1.3 Test description

5.2.2.1.8_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.8.0-2 and Table 5.2.2.1.8.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.8_1.3.3.

5.2.2.1.8_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.8.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. SS transmits PDCCH DCI format 2_1 for int_RNTI with 10% probability to transmit the DL Preemption indication according to Table 5.2.2.1.8.0-2. In the time and frequency set indicated by PDCCH DCI format 2_1, SS stops transmission of PDSCH.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.8_1.3.4-1.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.8_1.3.3 Message contents

5.2.2.1.8_1.3.3_1 Message exceptions for SA

Table 5.2.2.1.8_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 5.2.2.1.8_1.3.3_1-2: PDCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-95
--

Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
DownlinkPreemption ::= SEQUENCE {	SS arbitrarily selects a value between '0001'H and 'FFEF'H different from the MCG (and SCG) RNTI-Value.		
int-RNTI			
timeFrequencySet	set0		
dci-PayloadSize	14		
Int-ConfigurationPerServingCell SEQUENCE (SIZE (1..maxNrofServingCells)) OF SEQUENCE {			
servingCellId	ServCellIndex		
positionInDCI	0		
}			
}			
}			
}			

Table 5.2.2.1.8_1.3.3_1-3: Physical layer parameters for DCI format 2_1

Parameter	Value	Value in binary	Condition
Pre-emption indication 1	Indicating symbols 3 and 4	00011000000000	

Table 5.2.2.1.8_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
processingType2Enabled	true		
}			

Table 5.2.2.1.8_1.3.3_1-5: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceType CHOICE {			
common SEQUENCE {			
dci-Format0-0-AndFormat1-0 SEQUENCE {			
}			
dci-Format2-1		Search Space for DCI Format 2-1	
}			
}			

5.2.2.1.8_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.8_1.3.3_1.

5.2.2.1.8_1.3.4 Test requirement

Table 5.2.2.1.8.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.8_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.8_1.3.4-1: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.5 FDD	10 / 15	16QAM 0.64	TDLA30-10	2x2, ULA Low	70	11.5

5.2.2.1.9 2Rx FDD FR1 HST-SFN performance

5.2.2.1.9.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.9.0-3, with the test parameters defined in Table 5.2.2.1.9.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.1.9.0-1.

Table 5.2.2.1.9.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions in the HST-SFN scenario defined in B.3.2 when highSpeedDemodFlag-r16 IE [20] is configured	1-1

Table 5.2.2.1.9.0-2: Test Parameters for Testing

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	2
	Maximum number of OFDM symbols for DL front loaded DMRS	1
CSI-RS for tracking	CSI-RS periodicity	Slots 10 for CSI-RS resource 1,2,3,4.
	CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4.
Number of HARQ Processes		4
The number of slots between PDSCH and corresponding HARQ-ACK information		2

Table 5.2.2.1.9.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)

1-1	R.PDSCH.1-8.3 FDD	10 / 15	16QAM, 0.48	HST-SFN	2x2	70	13.0
-----	----------------------	---------	----------------	---------	-----	----	------

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.9.

5.2.2.1.9_1 2Rx FDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.9_1.1 Test purpose

To verify the PDSCH performance under 2 receive antennas conditions in the HST-SFN scenario defined in B.3.2 when *highSpeedDemodFlag-r16* IE [20] is configured and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.2.1.9_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC that supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

5.2.2.1.9_1.3 Test description

5.2.2.1.9_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.9.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.9_1.3.3.

5.2.2.1.9_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.9_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.9_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.1.9_1.4-1 as appropriate.

5.2.2.1.9_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.9_1.3.3_1 Message exceptions for SA

Table 5.2.2.1.9_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 for test 1-1	
}			
}			
}			

Table 5.2.2.1.9_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1	
}			

Table 5.2.2.1.9_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	for test 1-1	
}			

Table 5.2.2.1.9_1.3.3_1-4: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots10	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	For test 1-1: offset = 1 for CSI-RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	
}			

5.2.2.1.9_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.9_1.3.3_1

5.2.2.1.9_1.4 Test requirement

Tables 5.2.2.1.9_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.9_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.9_1.4-1: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.3 FDD	10 / 15	16QAM, 0.48	HST-SFN	2x2	70	13.6

5.2.2.1.10 2Rx FDD FR1 HST DPS performance

5.2.2.1.10.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.10.0-3, with the test parameters defined in Table 5.2.2.1.10.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.1.10.0-1.

Table 5.2.2.1.10.0-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-DPS scenario defined in B.3.3	1-1, 1-2

Table 5.2.2.1.10.0-2: Test Parameters for Testing

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
		TCI state	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 10 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #2
	Resource set #2	First OFDM symbol in the	$l_0 = 6$ for CSI-RS resource 5 and 7

		PRB used for CSI-RS		$l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots	10 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots	1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info		TCI state #3
NZP CSI-RS for CSI acquisition	Resource set #3	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
		QCL info		TCI state #0
	Resource set #4	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
		QCL info		TCI state #1
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #2	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #3	Type 1 QCL information	SSB index		SSB #1
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
Number of HARQ Processes				4
The number of slots between PDSCH and corresponding HARQ-ACK information				2
<p>Note 1: SSB # $(k \bmod 2)$, CSI-RS (for tracking) resource set # $((k \bmod 2) + 1)$ and CSI-RS (for CSI acquisition) resource set # $((k \bmod 2) + 3)$ are transmitted by k^{th} RRH.</p> <p>For Test 1-1, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 24, NumOfRB 28 is transmitted in slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of $2n$. PDCCH and PDSCH associated with TCI # $(k \bmod 2)$ is transmitted by k^{th} RRH from</p> <p>slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstTRS}} + T_{\text{TRS proc}}, 0]$ <p>to</p> <p>slot#</p> $(2k + 1)n,$ <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 24, NumOfRB 28 is transmitted in slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of $2n$. PDCCH and PDSCH associated with TCI # $(k \bmod 2)$ is transmitted by k^{th} RRH from.</p> <p>slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}}, 0]$ <p>to</p> <p>slot#</p> $(2k + 1)n$ <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p>				

Where $k=0, 1, 2, \dots$ is the RRH number, $n = 2520$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 2$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 3$ is the number of slots for MAC CE processing, $T_{\text{first TRS}} = 6$ is the number of slots to first TRS transmission occasion after MAC CE command is decoded by the UE, $T_{\text{TRS proc}} = 2$ is the number of slots for TRS processing.

Table 5.2.2.1.10.0-3: Minimum performance for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
1-2	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	2	2x2	70	13.4

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.10.

5.2.2.1.10_1 2Rx FDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.1.10_1.1 Test purpose

To verify UE performance in the HST-DPS scenario defined in B.3.3 and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.2.1.10_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward.

Test 1-1 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

Test 1-2 applies to all types of NR UE release 15 and forward supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

Test 1-2 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

5.2.2.1.10_1.3 Test description

5.2.2.1.10_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.10.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.10_1.3.3.

5.2.2.1.10_1.3.2 Test procedure

Test 1-1:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.10_1.4-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.2.1.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.2.1.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

Test 1-2:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.10_1.4-1 as appropriate.
2. SS activates TCI state 0 and TCI 1 for PDSCH at the same time via MAC CE command “TCI States Activation/Deactivation for UE-specific PDSCH”.
3. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.2.1.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

4. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.2.1.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
5. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.10_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.10_1.3.3_1 Message exceptions for SA

Table 5.2.2.1.10_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	test 1-1, 1-2
}			
}			
}			

Table 5.2.2.1.10_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1, 1-2	
}			

Table 5.2.2.1.10_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	for test 1-1, 1-2	
}			

Table 5.2.2.1.10_1.3.3_1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	2 for CSI-RS resource #1, #2, #3, #4 3 for CSI-RS resource #5, #6, #7, #8	for test 1-1, 1-2: TCI-StateId for TCI- State #2 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI- State #3 for CSI-RS resource #5, #6, #7, #8	
}			

Table 5.2.2.1.10_1.3.3_1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.2.1.10_1.3.3_1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7	for test 1-1, 1-2: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4	

	10 for CSI-RS resource #6 and #8	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8	
}			

Table 5.2.2.1.10_1.3.3_1-5A: CSI-ResourcePeriodicityAndOffset for CSI Tracking (Table 5.2.2.1.10_1.3.3_1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots10	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	For test 1-1, 1-2: periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	
}			

Table 5.2.2.1.10_1.3.3_1-6: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE { nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 0	For test 1-1, 1-2 entry 1 CSI-RS resource #1	Resource set #1
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 4	For test 1-1, 1-2 entry 1 CSI-RS resource #5	Resource set #2
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			

}			
---	--	--	--

Table 5.2.2.1.10_1.3.3_1-7: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8 for CSI-RS resource #9 9 for CSI-RS resource #10	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #9 1 for CSI-RS resource #10	for test 1-1, 1-2: TCI-State #0 for CSI-RS resource #9 TCI-State #1 for CSI-RS resource #10	
}			

Table 5.2.2.1.10_1.3.3_1-8: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.2.1.10_1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #9 13 for CSI-RS resource #10	for test 1-1, 1-2 l ₀ =12 for CSI-RS resource #9 l ₀ =13 for CSI-RS resource #10	
}			

Table 5.2.2.1.10_1.3.3_1-9: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.2.1.10_1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	0	For test 1-1, 1-2: periodicity = 20 slots. offset = 0 slots	
}			

Table 5.2.2.1.10_1.3.3_1-10: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	2 for Resource set #3 3 for Resource set #4	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF	1 entry	For test 1-1, 1-2	Resource set #4

NZP-CSI-RS-ResourceId {			
NZP-CSI-RS-ResourceId[1]	9	entry 1 CSI-RS resource #10	
}			
}			

Table 5.2.2.1.10_1.3.3_1-10: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3	For test 1-1, 1-2	
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1
	Not present		TCI state #2, TCI state #3
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
ssb	0	SSB #0	TCI state #2
	1	SSB #1	TCI state #3
}			
qcl-Type	typeA		TCI state #0, TCI state #1
	typeC		TCI state #2, TCI state #3
}			
}			

5.2.2.1.10_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.10_1.3.3_1

5.2.2.1.10_1.4 Test requirement

Tables 5.2.2.1.10_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.10_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.10_1.4-1: Test Requirements for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	1	2x2	70	14.0
1-2	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	2	2x2	70	14.0

5.2.2.1.11 2Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance

5.2.2.1.11.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.11.0-3, with the addition of test parameters in Table 5.2.2.1.11.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.11.0-1.

Table 5.2.2.1.11.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance with Single-DCI based SDM scheme under 2 receive antenna conditions	1-1,1-2

Table 5.2.2.1.11.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
QCL info			TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL	CSI-RS resource	N/A	N/A

	information	QCL Type		N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type A
	Type 2 QCL information	CSI-RS resource		N/A	N/A
		QCL Type		N/A	N/A
Resource allocation				Full-overlapping	
Timing offset of the second TRxP from the first TRxP			us	-0.5 for test 1-1 2 for test 1-2	
Frequency offset of the second TRxP from the first TRxP			Hz	200 for test 1-1 0 for test 1-2	
Number of HARQ Processes				4	
The number of slots between PDSCH and corresponding HARQ-ACK information				2	
Precoding configuration				SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)					

Table 5.2.2.1.11.0-3: Minimum performance

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration(Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	20.7
1-2	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	20.1
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent							
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2							
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.11.

5.2.2.1.11_1 2Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA

5.2.2.1.11_1.1 Test purpose

To verify the PDSCH performance with Single-DCI based SDM scheme under 2 receive antenna conditions.

5.2.2.1.11_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *singleDCI-SDM-scheme-r16*.

5.2.2.1.11_1.3 Test description

5.2.2.1.11_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.11.0-2 and Table 5.2.2.1.11.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, *Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.11_1.3.3.

5.2.2.1.11_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.11_1.3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.11_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.2.1.11_1.3.4-1 as appropriate.

5.2.2.1.11_1.3.3 Message contents

5.2.2.1.11_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.11_1.3.3_1-1: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1 = 2	"010"	
Antenna port(s)	DMRS port 0 and 2	"1011"	
Transmission configuration indication	TCI state 1 and 2	"000"	

Table 5.2.2.1.11_1.3.3_1-2: CellGroupConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-19			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
simultaneousTCI-UpdateList1-r16 SEQUENCE {			
ServCellIndex [1]	ServCellIndex		
}			

}		
---	--	--

Table 5.2.2.1.11_1.3.3_1-3: ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.2.1.11_1.3.3_1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1]	TCI-State with condition TCI-state-0		
TCI-State[2]	TCI-State with condition TCI-state-1		
TCI-State[3]	TCI-State with condition TCI-state-2		
}			
rbg-Size	config2		
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present		
}			
}			
}			

Table 5.2.2.1.11_1.3.3_1-5: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0		TCI-state-0
	1		TCI-state-1
	2		TCI-state-2
qcl-Type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		TCI-state-0
csi-rs	1		TCI-state-1
	5		TCI-state-2
}			
qcl-Type	typeA		
}			
qcl-Type2	Not present		
}			

Table 5.2.2.1.11_1.3.3_1-6: NZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-85			
Information Element	Value/remark	Comment	Condition

NZP-CSI-RS-Resource ::= SEQUENCE {			
resourceMapping SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
cdm-Type	noCDM		
density CHOICE {			
three	NULL		
}			
periodicityAndOffset CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			
qcl-InfoPeriodicCSI-RS	0		
}			

5.2.2.1.11_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.11_1.3.3_1.

5.2.2.1.11_1.3.4 Test requirement

Table 5.2.2.1.11.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.11_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.11_1.3.4-1: Test requirement

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration(Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	21.7
1-2	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	21.1

Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent
 Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2
 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP

5.2.2.1.12 2Rx FDD FR1 PDSCH Multi-DCI based transmission scheme performance

5.2.2.1.12.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.12.0-3, with the addition of test parameters in Table 5.2.2.1.12.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.12.0-1.

Table 5.2.2.1.12.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs	1-1

Table 5.2.2.1.12.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	TCI State #2
	CORESETPoolIndex		0,1	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		{1000,1001}	{1002,1003}
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A

		QCL Type		Type A	N/A
	Type 2 QCL information	CSI-RS resource		N/A	N/A
TCI State #2	Type 1 QCL information	QCL Type		N/A	N/A
		CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
	Type 2 QCL information	QCL Type		N/A	Type A
		CSI-RS resource		N/A	N/A
		QCL Type		N/A	N/A
Resource allocation				Non-overlapping	
Timing offset of the second TRxP from the first TRxP			us	-0.5	
Frequency offset of the second TRxP from the first TRxP			Hz	200	
Number of HARQ Processes				4	
The number of slots between PDSCH and corresponding HARQ-ACK information				2	
Precoding configuration				SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs. Transmission from TRxP #1 uses CORESETPoolIndex 0 and transmission from TRxP #2 uses CORESETPoolIndex 1					

Table 5.2.2.1.12.0-3: Minimum performance

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
	TRxP #1	TRxP #2						
1-1	R.PDSCH. 1-3.3 FDD	R.PDSCH. 1-3.4 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	20.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent								
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2								
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.12.

5.2.2.1.12_1 2Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA

5.2.2.1.12_1.1 Test purpose

To verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs.

5.2.2.1.12_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *multiDCI-MultiTRP-r16*.

5.2.2.1.12_1.3 Test description

5.2.2.1.12_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.9 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.12.0-2 and Table 5.2.2.1.12.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, *Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.12_1.3.3.

5.2.2.1.12_1.3.2 Test procedure

1. SS transmits PDSCH in TRxP#1 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetId1 (Table 5.2.2.1.12_1.3.3_1-2), and transmits PDSCH in TRxP#2 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetId2 (Table 5.2.2.1.12_1.3.3_1-3), to transmit the DL RMC according to Table 5.2.2.1.12_1.3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Table 5.2.2.1.12_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.12_1.3.3 Message contents

5.2.2.1.12_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.12_1.3.3_1-1: PDCCH-Config (Preamble)

Derivation Path: TS 38.508-1 [4], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	2 entries		
SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet {			
ControlResourceSet[1]	ControlResourceSetId1	entry 1	
ControlResourceSet[2]	ControlResourceSetId2	entry 2	
}			
}			

Table 5.2.2.1.12_1.3.3_1-2: ControlResourceSetId1 (Table 5.2.2.1.12_1.3.3_1-1: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			

controlResourceSetId	1		
frequencyDomainResources	11110000 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 24 RBs of the BWP	
tcI-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	1		
}			
tcI-PresentInDCI	enabled		
coresetPoolIndex-r16	0		
}			

Table 5.2.2.1.12_1.3.3_1-3: ControlResourceSetId2 (Table 5.2.2.1.12_1.3.3_1-1: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
frequencyDomainResources	00001111 00000000 00000000 00000000 00000000 00000	CORESET to use the RBs 24~47 of the BWP	
tcI-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	2		
}			
tcI-PresentInDCI	enabled		
coresetPoolIndex-r16	1		
}			

Table 5.2.2.1.12_1.3.3_1-4: Physical layer parameters for DCI format 1_1 in ControlResourceSetId1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 1	"0111"	
Transmission configuration indication	TCI State #1	"000"	

Table 5.2.2.1.12_1.3.3_1-5: Physical layer parameters for DCI format 1_1 in ControlResourceSetId2

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 2 and 3	"1000"	
Transmission configuration indication	TCI State #2	"001"	

Table 5.2.2.1.12_1.3.3_1-6: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tcI-StatesToAddModList SEQUENCE(SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tcI-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		

}			
qcl-Type	typeC		
}			
TCI-State[2]		TCI-state-1	
tci-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
TCI-State[3]		TCI-state-2	
tci-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			
}			
}			
}			

Table 5.2.2.1.12_1.3.3_1-7: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 5.2.2.1.12_1.3.3_1-8: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			

5.2.2.1.12_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.12_1.3.3_1.

5.2.2.1.12_1.4 Test requirement

Table 5.2.2.1.12.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.12_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.12_1.4-1: Test requirement

Test num.	Reference channel		Bandwidth / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Notes 1)	Correlation matrix and antenna configuration(Notes 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)(Note 3)
	TRxP #1	TRxP #2						
1-1	R.PDSCH. 1-3.3 FDD	R.PDSCH. 1-3.4 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	21.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

5.2.2.1.13 2Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance

5.2.2.1.13.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.13.0-3, with the addition of test parameters in Table 5.2.2.1.13.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.13.0-1.

Table 5.2.2.1.13.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions when UE is configured with "FDMSchemeA" in "RepetitionScheme-r16" defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.2.1.13.0-2: Test parameters

Parameter	Unit	Value	
		TRxP #1(Notes 1)	TRxP #2(Notes 1)
Transmit TRxP of SSB		TRxP #1	
PDCCH configuration	TCI state	TCI State #1	
	CORESETPoolIndex	Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS	k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS	l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)	1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type	'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	

	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		Wideband	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000,1001	1000,1001
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	-0.5	
Frequency offset of the second TRxP from the first TRxP		Hz	200	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
Precoding configuration			SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs				

Table 5.2.2.1.13.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.1-2.5 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	70	17.3
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent.							
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2.							
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.13.

5.2.2.1.13_1 2Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA

5.2.2.1.13_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions when UE is configured with “FDMSchemeA” in “RepetitionScheme-r16”.

5.2.2.1.13_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportFDM-SchemeA-r16*.

5.2.2.1.13_1.3 Test description

5.2.2.1.13_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.9 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.13.0-2 and Table 5.2.2.1.13.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.13_1.3.3.

5.2.2.1.13_1.3.2 Test procedure

1. SS transmits PDSCH in TRxP#1 and TRxP#2 via PDCCH DCI format 1_1 for C_RNTI (Table 5.2.2.1.13_1.3.3_1-2), to transmit the DL RMC according to Table 5.2.2.1.13_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Table 5.2.2.1.13_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.13_1.3.3 Message contents

5.2.2.1.13_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.13_1.3.3_1-1: PDCCH-ControlResourceSet (Preamble)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.2.1.13_1.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 1	"0111"	
Transmission configuration indication	TCI codepoint 0, corresponding to TCI State #1 and #2	"000"	

Table 5.2.2.1.13_1.3.3_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tci-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		
}			
qcl-Type	typeC		
}			
TCI-State[2]		TCI-state-1	
tci-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
TCI-State[3]		TCI-state-2	
tci-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			

}			
}			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	wideband		
}			
}			
repetitionSchemeConfig-r16 CHOICE {			
setup SEQUENCE {			
fdm-TDM-r16 CHOICE {			
setup SEQUENCE {			
repetitionScheme-r16	fdmSchemeA		
startingSymbolOffsetK-r16	Not present		
}			
}			
}			
}			
}			
}			
}			

Table 5.2.2.1.13_1.3.3_1-4: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 5.2.2.1.13_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			

5.2.2.1.13_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.13_1.3.3_1.

5.2.2.1.13_1.4 Test requirement

Table 5.2.2.1.13.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.13_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.13_1.4-1: Test requirement for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.1-2.5 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	70	18.3
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

5.2.2.1.14 2Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance

5.2.2.1.14.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.14.0-3, with the addition of test parameters in Table 5.2.2.1.14.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.14.0-1.

Table 5.2.2.1.14.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.2.1.14.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH	Mapping type		Type A	

configuration	k0			0
	Starting symbol (S)			2
	Length (L)			12
	Repetition number			2
	PRB bundling type			Static
	PRB bundling size			2
	Resource allocation type			Type 0
	RBG size			Config2
	VRB-to-PRB mapping type			Non-interleaved
	VRB-to-PRB mapping interleaver bundle size			N/A
PDSCH DMRS configuration	Antenna port indexes		1000	1000
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	2	
Frequency offset of the second TRxP from the first TRxP		Hz	200	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
Precoding configuration			SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs				

Table 5.2.2.1.14.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.1-11.2 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	1 (Note 3)	2.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent.							
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2.							
Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.							
Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.14.

5.2.2.1.14_1 2Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA

5.2.2.1.14_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states.

5.2.2.1.14_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportTDM-SchemeA-r16*.

5.2.2.1.14_1.3 Test description

5.2.2.1.14_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.9 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.14.0-2 and Table 5.2.2.1.14.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.14_1.3.3.

5.2.2.1.14_1.3.2 Test procedure

1. SS transmits PDSCH in TRxP#1 and TRxP#2 via PDCCH DCI format 1_1 for C_RNTI (Table 5.2.2.1.14_1.3.3_1-2), to transmit the DL RMC according to Table 5.2.2.1.14_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Table 5.2.2.1.14_1.4-1.
3. Measure the residual BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to Table G.1.5-1a in Annex G clause G.1.5.

5.2.2.1.14_1.3.3 Message contents

5.2.2.1.14_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.14_1.3.3_1-1: PDCCH-ControlResourceSet (Preamble)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.2.1.14_1.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0	"0000"	
Transmission configuration indication	TCI codepoint 0, corresponding to TCI State #1 and #2	"000"	

Table 5.2.2.1.14_1.3.3_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tci-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		
}			
qcl-Type	typeC		
}			
TCI-State[2]		TCI-state-1	
tci-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
TCI-State[3]		TCI-state-2	
tci-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			

}			
}			
pdsch-TimeDomainAllocationList	Not present		
pdsch-TimeDomainAllocationList-r16 CHOICE {			
setup SEQUENCE (SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation-r16 {			
PDSCH-TimeDomainResourceAllocation-r16[1] SEQUENCE {			
k0-r16	Not present		
mappingType-r16	typeA		
startSymbolAndLength-r16	44	Start symbol(S)=2, Length(L)=4	For Slot i, if mod(i, 10) = 7 for i from {0,...,39}
repetitionNumber-r16	2		
}			
PDSCH-TimeDomainResourceAllocation-r16[2] SEQUENCE {			
k0-r16	Not present		
mappingType-r16	typeA		
startSymbolAndLength-r16	53	Start symbol(S)=2, Length(L)=12	For Slot i, if mod(i, 10) = {0,1,2,3,4,5,} for i from {1,...,39}
repetitionNumber-r16	2		
}			
}			
}			
}			
}			
}			

Table 5.2.2.1.14_1.3.3_1-4: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMsymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 5.2.2.1.14_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS	

		resources 3,4,7,8	
}			

5.2.2.1.14_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.14_1.3.3_1.

5.2.2.1.14_1.4 Test requirement

Table 5.2.2.1.14.0-3 defines the primary level settings.

The residual BLER specified in Note 3 of Table 5.2.2.1.14_1.4-1 test shall meet or be lower than the specified value in Table 5.2.2.1.14_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.14_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.1-11.2 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	1 (Note 3)	3.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block. Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

5.2.2.1.15 2Rx FDD FR1 PDSCH with inter-cell interference

5.2.2.1.15.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.15.0-3, with the addition of test parameters in Table 5.2.2.1.15.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.15.0-1.

Table 5.2.2.1.15.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance under 2 receive antenna conditions, when transmission from the serving cell is interfered by 1 or 2 interfering cells.	1-1, 1-2

Table 5.2.2.1.15.0-2: Test parameters

Parameter	Unit	Value		
		Cell 1	Cell 2	Cell 3
		Enabled	Enabled	Enabled for Test 1-1 Disabled for Test 1-2
Duplex mode		FDD		
Active DL BWP index		1		
Physical cell ID		0	1	2
Transmission rank		1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for

				Test 1-1 N/A for Test 1-2
Time offset to Cell1	us	N/A	3	-1
Frequency offset to Cell 1	Hz	N/A	300	-100
Interference Model		N/A	As specified in B.6.2	
INR (Note 2)	dB	N/A	7.77 for Test 1-1 7.58 for Test 1-2	2.29 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	1 st SSB in Slot#0 for Test 1-1 2 nd SSB in Slot #0 for Test 1-2
	SSB periodicity	ms	20	20
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A	
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
Note1: Cell 1 is the serving cell; Cells 2, 3 are interfering cells				
Note 2: INR is defined in Annex B.6.1				

Table 5.2.2.1.15.0-3: Minimum performance for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	15.4
1-2	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	12.5
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Sub carrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.15.

5.2.2.1.15_1 2Rx FDD FR1 PDSCH with inter-cell interference performance - 2x2 MIMO for both SA and NSA

5.2.2.1.15_1.1 Test purpose

Verify the PDSCH performance under 2 receive antenna conditions, when transmission from the serving cell is interfered by 1 or 2 interfering cells.

5.2.2.1.15_1.2 Test applicability

Test 1-1 and test 1-2 applies to all types of release 15 and release 16 NR UEs and E-UTRAN UEs supporting EN-DC and supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

Test 1-1 and test 1-2 applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.2.1.15_1.3 Test description

5.2.2.1.15_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the serving cell and interfering cells are set up according to Table 5.2-1 and Table 5.2.2.1.15.0-2 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.15_1.3.3.

5.2.2.1.15_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.15_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for the serving cell and interfering cells according to Table 5.2.2.1.15_1.4-2.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.2.1.15_1.4-2 as appropriate.

5.2.2.1.15_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.15_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.2.1.15_1.3.3_2 Message exceptions for NSA

No message exceptions for NSA

5.2.2.1.15_1.4 Test requirement

Tables 5.2.2.1.15_1.4-1 and 5.2.2.1.15_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.15_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.15_1.4-1: Test parameters

Parameter		Unit	Value		
			Cell 1	Cell 2	Cell 3
			Enabled	Enabled	Enabled for Test 1-1 Disabled for Test 1-2
Duplex mode			FDD		
Active DL BWP index			1		
Physical cell ID			0	1	2
Transmission rank			1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell1		us	N/A	3	-1
Frequency offset to Cell 1		Hz	N/A	300	-100
Interference Model			N/A		
INR (Note 2)		dB	N/A	7.77+0.8 for Test 1-1 7.58+0.8 for Test 1-2	2.29+0.8 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	1 st SSB in Slot#0 for Test 1-1 2 nd SSB in Slot #0 for Test 1-2	1 st SSB in Slot#0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PDSCH aggregation factor		1		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 0		
	RBG size		Config2		
	VRB-to-PRB mapping type		Non-interleaved		
VRB-to-PRB mapping interleaver bundle size		N/A			

PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2
Note1: Cell 1 is the serving cell; Cells 2, 3 are interfering cells			
Note 2: INR is defined in Annex B.6.1			

Table 5.2.2.1.15_1.4-2: Test Requirements for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	17.1
1-2	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.3
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Sub carrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

5.2.2.1.16 2Rx FDD FR1 for PDSCH with intra-cell inter user interference

5.2.2.1.16.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.16.0-3, with the addition of test parameters in Table 5.2.2.1.16.0-2 and the downlink physical channel setup according to Annex C.3.1.

The performance requirements for UE supporting Enhanced Receiver Type 2 are specified in Table 5.2.2.1.16.0-5, with the addition of test parameters in Tables 5.2.2.1.16.0-2, 5.2.2.1.16.0-4 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.16.0-1.

Table 5.2.2.1.16.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance under 2 receive antenna conditions when the PDSCH transmission of target UE is interfered by co-scheduled UE	1-1
Verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.	2-1
Verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.	2-2

Table 5.2.2.1.16.0-2: Test parameters

Parameter	Unit	Target UE	Co-scheduled UE
Duplex mode			FDD
Active DL BWP index			1

PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
	PDSCH DMRS configuration	DMRS Type		Type 1
Number of additional DMRS			1	
Maximum number of OFDM symbols for DL front loaded DMRS			1	
Antenna ports indexes			1000	1001
Number of PDSCH DMRS CDM group(s) without data			1	1
PDSCH & PDSCH DMRS Precoding configuration			Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable i1/i2 combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12].	Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable i1/i2 combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12]. Any column of precoder matrix is not equal to any column of precoder matrix of Target UE for test 1-1. Select the precoder to ensure any column of precoder is orthogonal to any column of precoder for the target PDSCH for test 2-1 and 2-2.
MU-MIMO Beamforming Model			As specified in B.4.2	
Number of HARQ Processes			4	N/A
The number of slots between PDSCH and corresponding HARQ-ACK information			2	N/A
Note 1: The DMRS scrambling ID is same for both target UE and Co-scheduled UE.				

Table 5.2.2.1.16.0-3: Minimum performance for PDSCH of target UE with intra-cell inter user interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	Random 16QAM symbols	TDLC300-100	2x2, ULA Low	70	18.0

The parameters in Table 5.2.2.1.16.0-4 are configured for requirements with Enhanced Receiver Type 2

Table 5.2.2.1.16.0-4: Assistance information parameters for requirements with Enhanced Receiver Type 2

Parameter		Value
AdvancedReceiver-MU-MIMO-r18	precodingAndResourceAllocation	True
	pdsch-TimeDomainAllocation	True
	mcs-Table	qam256
	advReceiver-MU-MIMO-DCI-1-1	Enabled
Co-scheduled UE information in DCI (Table 7.3.1.2.2-12 of TS38.212 [10])		1 for Test 2-1 6 for Test 2-2

Table 5.2.2.1.16.0-5: Minimum performance for target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	Random QPSK symbols	TDLC300-100	2x2, ULA Medium	70	16.2
2-2	R.PDSCH.5-1.3 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLC300-100	2x2, ULA Medium	70	24.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.16.

5.2.2.1.16_1 2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA

5.2.2.1.16_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.2.1.16_1.2 Test applicability

Test 1-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

Test 1-1 applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.2.1.16_1.3 Test description

5.2.2.1.16_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.16.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.16_1.3.3.

5.2.2.1.16_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.16_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.16_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.1.16_1.4-1 as appropriate.

5.2.2.1.16_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.16_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.2.1.16_1.3.3_1 Message exceptions for NSA

No message exceptions for NSA

5.2.2.1.16_1.4 Test requirement

Table 5.2.2.1.16_1.4-1: Test requirement for PDSCH of target UE with intra-cell inter user interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	Random 16QAM symbols	TDLC300-100	2x2, ULA Low	70	18.9

5.2.2.1.16_2 2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA

5.2.2.1.16_2.1 Test purpose

Test 2-1 is to verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signalled by DCI.

Test 2-2 is to verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.

5.2.2.1.16_2.2 Test applicability

Test 2-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18*.

Test 2-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18* and capability ‘*MU-MIMO Interference Mitigation advanced receiver with modulation order detection*’ or ‘*MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh*’ in TS38.306 [14].

5.2.2.1.16_2.3 Test description

5.2.2.1.16_2.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.16.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.16_2.3.3.

5.2.2.1.16_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.16_2.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.16_2.4-1 as appropriate.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.1.16_2.4-1 as appropriate.

5.2.2.1.16_2.3.3 Message contents

5.2.2.1.16_2.3.3_1 Message exceptions for SA

Same as 5.2.2.1.16_1.3.3_1 with the following exceptions:

Table 5.2.2.1.16_2.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.1-20			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {	1 entry		
AdvancedReceiver-MU-MIMO-r18 ::= SEQUENCE {			
precodingAndResourceAllocation-r18	true		
pdsch-TimeDomainAllocation-r18	true		
mcs-Table-r18	qam256		
advReceiver-MU-MIMO-DCI-1-1-r18	enabled		
}			
}			

Table 5.2.2.1.16_2.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Co-scheduled UE information	'In all the PRBs allocated to the UE, all the co-scheduled UE(s), if any, which have the same root DMRS sequence as the UE, are scheduled with modulation scheme QPSK' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'001' B	Test 2-1
	'In each individual PRB allocated to the UE, all the co-scheduled UE(s), which have the same root DMRS sequence as the UE, are scheduled with the same modulation scheme, except the cases corresponding to index 0~5' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'110' B	Test 2-2

5.2.2.1.16_2.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.16_2.3.3_1.

5.2.2.1.16_2.4 Test requirement

Table 5.2.2.1.16_2.4-1: Test requirement for PDSCH of target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	Random QPSK symbols	TDLC300-100	2x2, ULA Medium	70	17.1
2-2	R.PDSCH.5-1.3 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLC300-100	2x2, ULA Medium	70	25.4

5.2.2.1.17 2Rx FDD FR1 PDSCH performance for RedCap

5.2.2.1.17.1 Test Purpose

To verify the PDSCH performance mapping Type A under 2 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.2.1.17.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

5.2.2.1.17.3 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.2.1.17.3-3 and 5.2.2.1.17.3-4, with the addition of test parameters in Table 5.2.2.1.17.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.17.3-1.

Table 5.2.2.1.17.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs for RedCap	1-1, 1-2, 1-3, 2-1

Table 5.2.2.1.17.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD / HD-FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1 2 for other tests
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2 for Test 1-1 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			FDD: 2 HD-FDD: 4 if mod(i,5) = 0 3 if mod(i,5) = 1 2 if mod(i,5) = 2 6 if mod(i,5) = 3
Note 1: i is the slot index per frame; i = {0,...,9}.			

Table 5.2.2.1.17.3-3: Minimum performance for Rank 1

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD R.PDSCH. 1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	-0.8
1-2	R.PDSCH.1-2.1 FDD R.PDSCH. 1-1.2 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	8.1
1-3	R.PDSCH.1-4.1 FDD R.PDSCH. 1-1.5 HD-FDD	10 / 15	256QAM, 0.82	TDLA30-10	2x2, ULA Low	70	24.6

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.17.3-4: Minimum performance for Rank 2

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD R.PDSCH. 1-2.1 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.4

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.17.

5.2.2.1.17.4 Test description

5.2.2.1.17.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.

3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.17.4.3.

5.2.2.1.17.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.17.5-1 and 5.2.2.1.17.5-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.17.5-1 and 5.2.2.1.17.5-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Tables 5.2.2.1.17.5-1 and 5.2.2.1.17.5-2 as appropriate.

5.2.2.1.17.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.2.1.17.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2 Not present	n4 for test 1-1 n2 will be used by default	test 1-1 test point other than test 1-1
}			
}			
}			

Table 5.2.2.1.17.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots40	20 (for CSI-RS resources 1 and 2) 21 (for CSI-RS resources 3 and 4)	CSI-RS offset: 20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 CSI-RS periodicity: 40 slots	
slots20	10 (for CSI-RS resources 1 and 2) 11 (for CSI-RS resources 3 and 4)	CSI-RS offset: 10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
}			

Table 5.2.2.1.17.4.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4		
}			

5.2.2.1.17.5 Test Requirement

Tables 5.2.2.1.17.5-1 and 5.2.2.1.17.5-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Tables 5.2.2.1.17.5-1 and 5.2.2.1.17.5-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.17.5-1: Test Requirements for Rank 1

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD R.PDSCH. 1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	0.1
1-2	R.PDSCH.1-2.1 FDD R.PDSCH. 1-1.2 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	9.0
1-3	R.PDSCH.1-4.1 FDD R.PDSCH. 1-1.5 HD-FDD	10 / 15	256QAM, 0.82	TDLA30-10	2x2, ULA Low	70	25.6

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.17.5-2: Test Requirements for Rank 2

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD R.PDSCH. 1-2.1 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	20.4

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

5.2.2.1.18 2Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario

5.2.2.1.18.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.18.0-4, with the addition of test parameters in Tables 5.2.2.1.18.0-2 and 5.2.2.1.18.0-3 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.18.0-1.

Table 5.2.2.1.18.0-1: Tests purpose

Purpose	Test index
Verify PDSCH CRS interference mitigation performance under 2 receive antenna conditions with CRS rate matching configured for the serving cell	1-1

Table 5.2.2.1.18.0-2: Test parameters for the serving cell

Parameter	Unit	Value	
Duplex mode		FDD	
Active DL BWP index		1	
NR UL transmission with a 7.5 kHz shift to the LTE raster		true	
PDCCH configuration	Symbols with PDCCH	Symbol# 2	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	3	
	Length (L)	9	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	DMRS Type	Type 1	
	Position of the first DM-RS for downlink	3	
	Number of additional DMRS	1	
	Maximum number of OFDM symbols for DL front loaded DMRS	1	
CRS for rate matching (Note 1)	LTE carrier centre subcarrier location	Same as NR carrier centre subcarrier location	
	LTE carrier BW	MHz	10
	Number of antenna ports		2
	v-shift		0
Number of HARQ Processes		4	
The number of slots between PDSCH and corresponding HARQ-ACK information		2	
Note 1: No MBSFN is configured on LTE carrier.			
Note 2: Network-based CRS interference mitigation is disabled on LTE carrier.			

Table 5.2.2.1.18.0-3: Test parameters for the LTE interference cells

Parameter	Unit	Cell 1	Cell 2
Propagation conditions and MIMO configuration (Note 1)		TDLA30-10 ULA Low	TDLA30-10 ULA Low
INR (Note 2)	dB	10.45	4.6
Cell-specific reference signals		Antenna ports 0,1	Antenna ports 0,1
Carrier centre subcarrier location		Same as the serving	Same as the serving

		carrier centre subcarrier location	carrier centre subcarrier location
BW_{Channel}	MHz	10	10
Cyclic Prefix		Normal	Normal
Physical cell ID		1	2
Number of control OFDM symbols		2	2
PDSCH transmission mode		4	4
Interference model		As specified in clause B.7	As specified in clause B.7
Probability of occurrence of PDSCH data	%	20	20
Probability of occurrence of transmission rank	Rank 1	%	80
	Rank 2	%	20
Downlink power allocation	ρ_A	dB	-3
	ρ_B	dB	-3
	σ	dB	0
Precoding granularity	PRB	6	6
Time offset to the serving cell	us	3	-1
Frequency offset to the serving cell	Hz	300	-100
MBSFN		Not configured	Not configured
Network-based CRS interference mitigation		Disabled	Disabled
Note 1: The channel for the LTE interference cells and the serving cell are independent.			
Note 2: Defined in B.6.1.			

Table 5.2.2.1.18.0-4: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-7.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	11.9

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.18.

5.2.2.1.18_1 2Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x2 MIMO for both NSA and SA

5.2.2.1.18_1.1 Test purpose

To verify PDSCH CRS interference mitigation performance under 2 receive antenna conditions with CRS rate matching configured for the serving cell.

5.2.2.1.18_1.2 Test applicability

This test applies to all types of NR UE release 17 and forward that support *CRS-IM-DSS-15kHzSCS-r17*.

5.2.2.1.18_1.3 Test description

5.2.2.1.18_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.2.1.18.0-2 and 5.2.2.1.18.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.18_1.3.3.

5.2.2.1.18_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.18_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.18_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.2.1.18_1.4-2 as appropriate.

5.2.2.1.18_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.18_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.18_1.3.3_1-1: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 5.4.2-1			
Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE {			
dmrs-TypeA-Position	pos3		
lte-CRS-ToMatchAround	RateMatchPatternLTE-CRS		
}			

Table 5.2.2.1.18_1.3.3_1-2: RateMatchPatternLTE-CRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2-20			
Information Element	Value/remark	Comment	Condition
RateMatchPatternLTE-CRS ::= SEQUENCE {			
carrierFreqDL	Same as NR carrier centre subcarrier location		
carrierBandwidthDL	n50	10MHz	
mbsfn-SubframeConfigList	Not present		

nrofCRS-Ports	n2		
v-Shift	n0		
}			

Table 5.2.2.1.18_1.3.3_1-3: FrequencyInfoUL-SIB

Derivation Path: TS 38.508-1 [6], Table 4.6.3-62			
Information Element	Value/remark	Comment	Condition
FrequencyInfoUL-SIB SEQUENCE {			
frequencyShift7p5khz	true		
}			

5.2.2.1.18_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.18_1.3.3_1

5.2.2.1.18_1.4 Test requirement

Tables 5.2.2.1.18_1.4-1 and 5.2.2.1.18_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.18_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.18_1.4-1: Test parameters for the LTE interference cells

Parameter		Unit	Cell 1	Cell 2
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
INR (Note 2)		dB	11.25	5.4
Cell-specific reference signals			Antenna ports 0,1	Antenna ports 0,1
Carrier centre subcarrier location			Same as the serving carrier centre subcarrier location	Same as the serving carrier centre subcarrier location
BW _{Channel}		MHz	10	10
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
Number of control OFDM symbols			2	2
PDSCH transmission mode			4	4
Interference model			As specified in clause B.7	As specified in clause B.7
Probability of occurrence of PDSCH data		%	20	20
Probability of occurrence of transmission rank	Rank 1	%	80	80
	Rank 2	%	20	20
Downlink power allocation	ρ_A	dB	-3	-3
	ρ_B	dB	-3	-3
	σ	dB	0	0
Precoding granularity		PRB	6	6
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
MBSFN			Not configured	Not configured
Network-based CRS interference mitigation			Disabled	Disabled
Note 1: The channel for the LTE interference cells and the serving cell are independent.				
Note 2: Defined in B.6.1.				

Table 5.2.2.1.18_1.4-2: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum	SNR (dB)

		(kHz)				throughput (%)	
1-1	R.PDSCH.1-7.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.7

5.2.2.1.19 2Rx FDD FR1 for PDSCH with inter cell CRS interference

5.2.2.1.19.0 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.2.1.19.0-4 and 5.2.2.1.19.0-6, with the addition of test parameters in Tables 5.2.2.1.19.0-2 and 5.2.2.1.19.0-3 and the downlink physical channel setup according to Annex C.3.1.

The requirements for UE capable of performing CRS-IM with the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.2.1.19.0-4.

The requirements for UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.2.1.19.0-6.

The test purposes are specified in Table 5.2.2.1.19.0-1.

Table 5.2.2.1.19.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions when PDSCH is interfered by inter cell CRS signal	1-1, 2-1

Table 5.2.2.1.19.0-2: Tests parameter for serving cell PDSCH

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.2.1.19.0-3: Tests parameter for interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		FDD	FDD
INR	dB	10.45	4.6
LTE Bandwidth (Note 5)	MHz	20	20

Carrier centre subcarrier location (Note 6)			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
<p>Note 1: The channel for the LTE interference cells and the serving cell are independent.</p> <p>Note 2: No MBSFN is configured on LTE carrier.</p> <p>Note 3: Network-based CRS interference mitigation is disabled on LTE carrier.</p> <p>Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame</p> <p>Note 5: This parameter is informed to UE via network assistance signalling for Test 1-1 in Table 5.2.2.1.19.0-4.</p> <p>Note 6: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases</p>				

Table 5.2.2.1.19.0-4: Minimum performance for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-18.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x2, ULA Low	70	11.9

Table 5.2.2.1.19.0-5: Measurement Gap configurations

Parameter	Unit	Value
Measurement Gap Length	ms	6
Measurement Gap Repetition Period	ms	40
Gap offset	ms	7
Measurement gap timing advance	ms	0

Table 5.2.2.1.19.0-6: Minimum performance for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput	SNR (dB)

						(%)	
2-1	R.PDSCH.1-17.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x2, ULA Low	70	11.9

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.19.

5.2.2.1.19_1 2Rx FDD FR1 for PDSCH with inter cell CRS interference scenario – 4x2 MIMO for both NSA and SA

5.2.2.1.19_1.1 Test purpose

To verify PDSCH performance under 2 receive antenna conditions when PDSCH is interfered by inter cell CRS signal.

5.2.2.1.19_1.2 Test applicability

Test 2-1 applies to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-15kHzSCS-r17*.

Test 1-1 applies to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-NWA-15kHzSCS-r17*.

5.2.2.1.19_1.3 Test description

5.2.2.1.19_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.2.1.19.0-2 and 5.2.2.1.19_1.4-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.19_1.3.3.
6. For UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth, ensure the network configures an inter-RAT LTE measurement object of the interfering cells to the tested UE. Inter-RAT measurement is configured at the beginning of the test and applied throughout the test with gap pattern configurations according to Table 5.2.2.1.19.0-5. PDSCH is not scheduled, and throughput is not counted during 4.64s after the beginning of test. PDSCH is not scheduled in the measurement gaps.

5.2.2.1.19_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.19_1.4-2 and 5.2.2.1.19_1.4-3 as appropriate. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.19_1.4-2 and 5.2.2.1.19_1.4-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.1.19_1.4-2 and 5.2.2.1.19_1.4-3 as appropriate.

5.2.2.1.19_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.19_1.3.3_1 Message exceptions for SA

As defined in clause 4.6.3 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.1.19_1.3.3_1-1: LTE-NeighCellsCRS-AssistInfoList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-67A			
Information Element	Value/remark	Comment	Condition
LTE-NeighCellsCRS-AssistInfoList-r17 ::= SEQUENCE (SIZE (1..maxNrofCRS-IM-InterfCell-r17)) OF LTE-NeighCellsCRS-AssistInfo-r17 {	1 entry		Test 1-1
LTE-NeighCellsCRS-AssistInfo-r17[1] SEQUENCE {			
neighCarrierBandwidthDL-r17	n100		
neighNrofCRS-Ports-r17	n4		
}			
}			

Table 5.2.2.1.19_1.3.3_1-2: MeasGapConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-70			
Information Element	Value/remark	Comment	Condition
MeasGapConfig ::= SEQUENCE {			Test 2-1
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	7		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			
}			

5.2.2.1.19_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.19_1.3.3_1

5.2.2.1.19_1.4 Test requirement

Tables 5.2.2.1.19_1.4-1, 5.2.2.1.19_1.4-2 and 5.2.2.1.19_1.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Tables 5.2.2.1.19_1.4-2 and Tables 5.2.2.1.19_1.4-3 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.19_1.4-1: Tests parameter for interference cells

Parameter		Unit	Cell 1	Cell 2
Duplex mode			FDD	FDD
INR		dB	11.25	5.4
LTE Bandwidth (Note 5)		MHz	20	20
Carrier centre subcarrier location (Note 6)			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
Note 1: The channel for the LTE interference cells and the serving cell are independent. Note 2: No MBSFN is configured on LTE carrier. Note 3: Network-based CRS interference mitigation is disabled on LTE carrier. Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame Note 5: This parameter is informed to UE via network assistance signalling for Test 1-1 in Table 5.2.2.1.19.0-4. Note 6: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases				

Table 5.2.2.1.19_1.4-2: Test requirement for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-18.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x2, ULA Low	70	13.7

Table 5.2.2.1.19_1.4-3: Test requirement for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier	Modulation format and code rate	Propagation condition	Correlation matrix and antenna	Reference value	
						Fraction of maximum	SNR (dB)

		spacing (kHz)			configuration	throughput (%)	
2-1	R.PDSCH.1- 17.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x2, ULA Low	70	13.7

5.2.2.1.20 2Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA

5.2.2.1.20.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme A scenario.

5.2.2.1.20.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme A for PDCCH scheduling SFN Scheme A PDSCH.

This test case applies to all types of EUTRA UE release 17 and forward that support EN-DC and SFN scheme A for PDCCH scheduling SFN Scheme A PDSCH.

5.2.2.1.20.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.20.3-3, with the addition of test parameters in Table 5.2.2.1.20.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.20.3-1.

Table 5.2.2.1.20.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme A scenario defined in B.3. 5	1-1

Table 5.2.2.1.20.3-2: Test parameters

Parameter		Unit	Value	
Duplex mode			FDD	
Active DL BWP index			1	
PDCCH configuration	TCI state		Note 1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	TCI state		Note 1	
	DMRS Type		Type 1	
	Number of additional DMRS		2	
CSI-RS for tracking	Maximum number of OFDM symbols for DL front loaded DMRS		1	
	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4	
		CSI-RS periodicity	Slots	10 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots	1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
	QCL info		TCI state #3	

	Resource set #2	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots	10 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots	1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info		TCI state #4
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots	10 for CSI-RS resource 9,10,11,12.
		CSI-RS offset	Slots	1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12
		QCL info		TCI state #5
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
		QCL info		TCI state #0
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
		QCL info		TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 7$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
		QCL info		TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #3	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #4	Type 1 QCL information	SSB index		SSB #1
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #5	Type 1 QCL information	SSB index		SSB #2
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
Number of HARQ Processes				4
The number of slots between PDSCH and corresponding HARQ-ACK information				2
<p>Note 1: SSB # $(k \bmod 3)$, CSI-RS (for tracking) resource set # $((k \bmod 3) + 1)$ and CSI-RS (for CSI acquisition) resource set # $((k \bmod 3) + 4)$ are transmitted by k^{th} RRH. Codepoint #0 is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1 with TCI States TCI state #0, TCI State #1. Codepoint #1 is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2 with TCI States TCI state #1, TCI State #2. Codepoint #2 is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3 with TCI States TCI state #2, TCI State #0.</p>				

Table 5.2.2.1.20.3-3: Minimum performance for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10 / 15	16QAM, 0.48	HST-SFN Scheme A	2x2	70	11.8

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.20.

5.2.2.1.20.4 Test description

5.2.2.1.20.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.20.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.5.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.20.4.3.

5.2.2.1.20.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.20.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.2.1.20.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.20.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command "Enhanced TCI States Indication for UE-specific PDCCH MAC CE" according to the timing described in Note 1 of Table 5.2.2.1.20.3-2 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.

4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.20.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.1.20.4.3.1 Message exceptions for SA

Table 5.2.2.1.20.4.3.1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	Test 1-1
}			
}			
}			

Table 5.2.2.1.20.4.3.1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1
}			

Table 5.2.2.1.20.4.3.1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4		Test 1-1
}			

Table 5.2.2.1.20.4.3.1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8,9,10,11,12	for test 1-1	
qcl-InfoPeriodicCSI-RS	3 for CSI-RS resource #1, #2, #3, #4 4 for CSI-RS resource #5, #6, #7, #8 5 for CSI-RS resource #9, #10, #11, #12	for test 1-1: TCI-StateId for TCI-State #3 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI-State #4 for CSI-RS resource #5, #6, #7, #8 TCI-StateId for TCI-State #5 for CSI-RS resource #9, #10, #11, #12	
}			

Table 5.2.2.1.20.4.3.1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.2.1.20.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE { firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8 4 for CSI-RS resource #9 and #11 8 for CSI-RS resource #10 and #12	for test 1-1: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4 l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8 l ₀ = 4 for CSI-RS resource 9 and 11 l ₀ = 8 for CSI-RS resource 10 and 12	
}			

Table 5.2.2.1.20.4.3.1-6: CSI-ResourcePeriodicityAndOffset for CSI Tracking (Table 5.2.2.1.20.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots10	1 for CSI-RS resource #1, #2, #5, #6, #9, #10 2 for CSI-RS resource #3 #4, #7, #8, #11, #12	For test 1-1: periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12	
}			

Table 5.2.2.1.20.4.3.1-7: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE { nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2 2 for Resource set #3	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 0	For test 1-1 entry 1 CSI-RS resource #1	Resource set #1
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	

NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
NZP-CSI-RS-ResourceId[2]	9	entry 2 CSI-RS resource #10	
NZP-CSI-RS-ResourceId[3]	10	entry 3 CSI-RS resource #11	
NZP-CSI-RS-ResourceId[4]	11	entry 4 CSI-RS resource #12	
}			
trs-Info	true		
}			

Table 5.2.2.1.20.4.3.1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	12 for CSI-RS resource #13 13 for CSI-RS resource #14 14 for CSI-RS resource #15	for test 1-1	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #13 1 for CSI-RS resource #14 2 for CSI-RS resource #15	for test 1-1: TCI-State #0 for CSI-RS resource #13 TCI-State #1 for CSI-RS resource #14 TCI-State #2 for CSI-RS resource #15	
}			

Table 5.2.2.1.20.4.3.1-9: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.2.1.20.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition

CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #13 13 for CSI-RS resource #14 7 for CSI-RS resource #15	for test 1-1 l0=12 for CSI-RS resource #13 l0=13 for CSI-RS resource #14 l0=7 for CSI-RS resource #15	
}			

Table 5.2.2.1.20.4.3.1-10: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.2.1.20.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	0	For test 1-1 periodicity = 20 slots. offset = 0 slots	
}			

Table 5.2.2.1.20.4.3.1-11: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	3 for Resource set #4 4 for Resource set #5 5 for Resource set #6	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #4
NZP-CSI-RS-ResourceId[1]	12	entry 1 CSI-RS resource #13	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #5
NZP-CSI-RS-ResourceId[1]	13	entry 1 CSI-RS resource #14	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #5
NZP-CSI-RS-ResourceId[1]	14	entry 1 CSI-RS resource #15	
}			
}			

Table 5.2.2.1.20.4.3.1-12: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3 4 for TCI state #4	For test 1-1	

	5 for TCI state #5		
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1, TCI state #2
	Not present		TCI state #3, TCI state #4, TCI state #5
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
	8	CSI-RS resource #9	TCI state #2
ssb	0	SSB #0	TCI state #3
	1	SSB #1	TCI state #4
	2	SSB #2	TCI state #5
}			
qcl-Type	typeA		TCI state #0, TCI state #1, TCI state #2
	typeC		TCI state #3, TCI state #4, TCI state #5
}			
}			

5.2.2.1.20.4.3.2 Message exceptions for NSA

Same as 5.2.2.1.20.4.3.1.

5.2.2.1.20.5 Test Requirement

Tables 5.2.2.1.20.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.20.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.20.5-1: Test Requirements for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10 / 15	16QAM, 0.48	HST-SFN Scheme A	2x2	70	12.4

5.2.2.1.21 2Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA

5.2.2.1.21.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme B scenario.

5.2.2.1.21.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme B for PDCCH scheduling SFN Scheme B PDSCH.

This test case applies to all types of EUTRA UE release 17 and forward that support EN-DC and SFN scheme B for PDCCH scheduling SFN Scheme B PDSCH.

This test case could be skipped if UE has passed 5.2.2.1.20.

5.2.2.1.21.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.21.3-3, with the addition of test parameters in Table 5.2.2.1.21.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.21.3-1.

Table 5.2.2.1.21.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme B scenario defined in B.3.6	1-1

Table 5.2.2.1.21.3-2: Test parameters

Parameter		Unit	Value	
Duplex mode			FDD	
Active DL BWP index			1	
PDCCH configuration	TCI state		Note 1	
	Mapping type		Type A	
PDSCH configuration	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
	TCI state		Note 1	
PDSCH DMRS configuration	DMRS Type		Type 1	
	Number of additional DMRS		2	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4	
		CSI-RS periodicity	Slots 10 for CSI-RS resource 1,2,3,4.	
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4	
		QCL info	TCI state #3	
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 10 for CSI-RS resource 5,6,7,8.	
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	
		QCL info	TCI state #4	
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots 10 for CSI-RS resource 9,10,11,12.	
		CSI-RS offset	Slots 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12	
		QCL info	TCI state #5	
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$	
		CSI-RS periodicity	Slots 20	
		CSI-RS offset	Slots 0	
		QCL info	TCI state #0	

	Resource set #5	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$	
		CSI-RS periodicity	Slots	20	
		CSI-RS offset	Slots	0	
		QCL info			TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 7$
		CSI-RS periodicity	Slots		20
CSI-RS offset		Slots		0	
	QCL info			TCI state #2	
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #3	Type 1 QCL information	SSB index		SSB #0	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
TCI state #4	Type 1 QCL information	SSB index		SSB #1	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
TCI state #5	Type 1 QCL information	SSB index		SSB #2	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
Number of HARQ Processes				4	
The number of slots between PDSCH and corresponding HARQ-ACK information				2	
<p>Note 1: SSB # $(k \bmod 3)$, CSI-RS (for tracking) resource set # $((k \bmod 3) + 1)$ and CSI-RS (for CSI acquisition) resource set # $((k \bmod 3) + 4)$ are transmitted by k^{th} RRH. Codepoint#0 {TCI state #0, TCI State #1} is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1. Codepoint#1 {TCI state #1, TCI State #2} is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2. Codepoint#2 {TCI state #2, TCI State #0} is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3. The second indicated TCI state in each codepoint is not used for quasi co-location parameters {Doppler shift, Doppler spread}.</p>					

Table 5.2.2.1.21.3-3: Minimum performance for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10/15	16QAM, 0.48	HST-SFN-Scheme B	2x2	70	11.3

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.21.

5.2.2.1.21.4 Test description

5.2.2.1.21.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.21.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.6.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.21.4.3.

5.2.2.1.21.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.1.21.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.2.1.21.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.1.21.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of table 5.2.2.1.21.5-1 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.1.21.4.3 Message contents

Same as message contents in 5.2.2.1.20.4.3.

5.2.2.1.21.5 Test Requirement

Tables 5.2.2.1.21.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.21.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.21.5-1: Test Requirements for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10/15	16QAM, 0.48	HST-SFN-Scheme B	2x2	70	11.9

5.2.2.1.22 2Rx FDD FR1 PDSCH ATG performance

5.2.2.1.22.1 Test Purpose

To verify UE PDSCH performance under the ATG scenario.

5.2.2.1.22.2 Test applicability

This test applies to all types of 2Rx NR ATG UE release 18 and forward.

5.2.2.1.22.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.22.3-3, with the addition of test parameters in Table 5.2.2.1.22.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.22.3-1.

Table 5.2.2.1.22.3-1: Tests purpose

Purpose	Test index
Verify UE PDSCH performance under the ATG scenario	1-1, 1-2, 1-3

Table 5.2.2.1.22.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.2.1.22.3-3: Minimum performance for ATG

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	AWGN	220Hz	2x2	70	6.0
1-2	R.PDSCH.1-3.6 FDD	10 / 15	64QAM, 0.65	AWGN	220Hz	2x2	70	13.6
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	AWGN	220Hz	2x2	70	22.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.23.

5.2.2.1.22.4 Test description

5.2.2.1.22.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.1.22.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.22.4.3.

5.2.2.1.22.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.22.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.22.3-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.2.1.22.5-1 as appropriate.

5.2.2.1.22.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.2.1.22.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used for test 1-1, test 1-2 and 1-3	
}			
}			
}			

Table 5.2.2.1.22.4.3-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos1	1 additional DMRS symbol for test 1-1, test 1-2 and 1-3	
}			

Table 5.2.2.1.22.4.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	n4 is used for test 1-1, test 1-2 and 1-3	
}			

5.2.2.1.22.5 Test Requirement

Tables 5.2.2.1.22.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.22.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.22.5-1: Test Requirements for ATG

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	AWGN	220Hz	2x2	70	6.6
1-2	R.PDSCH.1-3.6 FDD	10 / 15	64QAM, 0.65	AWGN	220Hz	2x2	70	14.2
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	AWGN	220Hz	2x2	70	23.1

5.2.2.1.23 2Rx FDD FR1 PDSCH performance for eRedCap

5.2.2.1.23.1 Test Purpose

To verify the PDSCH performance mapping Type A under 2 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.2.1.23.2 Test applicability

This test applies to all types of 2Rx NR UE release 18 and forward supporting eRedCap.

5.2.2.1.23.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.1.23.3-3, Table 5.2.2.1.23.3-4, Table 5.2.2.1.23.3-5, and Table 5.2.2.1.23.3-6, with the addition of test parameters in Table 5.2.2.1.23.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.1.23.3-1.

Table 5.2.2.1.23.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs for for eRedCap UE with reduced baseband bandwidth in FR1.	1-1, 1-2, 2-1
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs for for eRedCap UE without reduced baseband bandwidth in FR1.	3-1, 3-2, 4-1

Table 5.2.2.1.23.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD / HD-FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1 and Test 3-1 2 for other tests
	Resource allocation type		Type 1 for Tests 1-1, 1-2, 2-1, 4-1 Type 0 for Tests 3-1, 3-2
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2 for Test 1-1 and Test 3-1 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			FDD: 2, HD-FDD: 4 if mod(i,5) = 0 3 if mod(i,5) = 1

		2 if $\text{mod}(i,5) = 2$ 6 if $\text{mod}(i,5) = 3$
Note 1: i is the slot index per frame; $i = \{0, \dots, 9\}$.		

Table 5.2.2.1.23.3-3: Minimum performance for Rank 1 with reduced baseband bandwidth.

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.5 FDD R.PDSCH.1-2.2 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	0.5
1-2	R.PDSCH.1-25.1 FDD R.PDSCH.1-2.3 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	8.1

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.23.3-4: Minimum performance for Rank 2 with reduced baseband bandwidth.

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-12.5 FDD R.PDSCH.1-4.2 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.2

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.23.3-5: Minimum performance for Rank 1 without reduced baseband bandwidth.

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-1.1 FDD R.PDSCH.1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	0.2
3-2	R.PDSCH.1-12.3 FDD R.PDSCH.1-2.4 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	8.3

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.23.3-6: Minimum performance for Rank 2 without reduced baseband bandwidth.

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.1-12.5 FDD R.PDSCH.1-4.2 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.2
Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.1.23.

5.2.2.1.23.4 Test description

5.2.2.1.23.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.23.4.3.

5.2.2.1.23.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.1.23.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.1.23.5-1 or Table 5.2.2.1.23.5-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.2.1.23.5-1 or Table 5.2.2.1.23.5-2 as appropriate.

5.2.2.1.23.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.2.1.23.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Tests 1-1, 1-2, 2-1, 4-1
	resourceAllocationType0		Tests 3-1, 3-2
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4	n4 for test 1-1 and test 3-1	test 1-1, test 3-1
	Not present	PRB Bundling size of 2	test point other than test 1-1 and test 3-1
}			
}			
}			

Table 5.2.2.1.23.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10 (for CSI-RS resources 1 and 2) 11 (for CSI-RS resources 3 and 4)	CSI-RS offset: 10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
}			

Table 5.2.2.1.23.4.3-3: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	2 additional DMRS symbols	test 1-1, test 3-1
	pos1	1 additional DMRS symbol	test point other than test 1-1 and test 3-1
}			

5.2.2.1.23.5 Test Requirement

Table 5.2.2.1.23.5-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.3 for each throughput test shall meet or exceed the specified value in Table 5.2.2.1.23.5-1 the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.1.23.5-1: Test Requirements for Rank 1 with reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.5 FDD R.PDSCH.1-2.2 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	0.5 + 0.9
1-2	R.PDSCH.1-25.1 FDD R.PDSCH.1-2.3 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	8.1 + 0.9

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.23.5-2: Test Requirements for Rank 2 with reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-12.5 FDD R.PDSCH.1-4.2 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.2 + 1.0

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.23.5-3: Test Requirements for Rank 1 without reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-1.1 FDD R.PDSCH.1-1.1 HD-FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x2, ULA Low	70	0.2 + 0.9
3-2	R.PDSCH.1-12.3 FDD R.PDSCH.1-2.4 HD-FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	8.3 + 0.9

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

Table 5.2.2.1.23.5-4: Test Requirements for Rank 2 without reduced baseband bandwidth

Test num.	Reference channel (Note 1)	Bandwidth (MHz) / Subcarrier	Modulation format and code rate	Propagation condition	Correlation matrix and antenna	Reference value
-----------	----------------------------	------------------------------	---------------------------------	-----------------------	--------------------------------	-----------------

		spacing (kHz)			configuration		
						Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.1-12.5 FDD R.PDSCH.1-4.2 HD-FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x2, ULA Low	70	19.2 + 1.0

Note 1: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.

5.2.2.2 TDD

5.2.2.2.1 2Rx TDD FR1 PDSCH mapping Type A performance

5.2.2.2.1.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.1.0-3 and Table 5.2.2.2.1.0-4, with the addition of test parameters in Table 5.2.2.2.1.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.2.1.0-1.

Table 5.2.2.2.1.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 1-2, 1-3, 1-5, 1-6, 1-7, 1-8, 1-9, 1-10, 1-11, 1-12, 2-1, 2-2
Verify the PDSCH mapping Type A HARQ soft combining performance under 2 receive antenna conditions.	1-4
Verify the PDSCH mapping Type A performance requirements for Enhanced Receiver Type 1 under 2 receive antenna conditions.	3-1
Verify the PDSCH mapping Type A performance requirements with R18 DMRS	2-3

Table 5.2.2.2.1.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k ₀	0
	Starting symbol (S)	2
	Length (L)	Specific to each Reference channel
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	4 for Tests 1-1, 1-8, 1-9 2 for other tests
	Resource allocation type	Test 1-2: Type 1 with start RB = 50, L _{RBs} = 6 Other tests: Type 0
	RBG size	Test 1-2: N/A Other tests: Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle size	N/A	
PDSCH DMRS configuration	DMRS Type	Type 1 for all but Test 2-3 Enhanced Type 1 for Test 2-3.
	Number of additional DMRS	2 for Tests 1-1, 1-7, 1-8, 1-9, 1-10, 1-11 1 for other tests
	Maximum number of OFDM symbols for DL	1

	front loaded DMRS		
	Antenna ports indexes		Test 2-3: {1008, 1009} Other tests: Table 5.2-1
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		Tests 1-8, 1-9: l0 = 4 for CSI-RS resource 1 and 3 l0 = 8 for CSI-RS resource 2 and 4 Other tests; Table 5.2-1.
	CSI-RS periodicity	Slots	Test 1-7, 1-10, 1-11: 20 for CSI-RS resource 1,2,3,4. Other tests: Table 5.2-1.
	CSI-RS offset	Slots	Test 1-7: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4. Other tests: Table 5.2-1.
	Frequency Occupation		Test 1-7, 1-10, 1-11: Start PRB 0 Number of PRB = 52 Other tests: Table 5.2-1.
Number of HARQ Processes			16 for Test 1-4 10 for Test 1-9 8 for other tests
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.2.1.0-3: Minimum performance for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.1 TDD	40 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	-1.1
1-2	R.PDSCH.2-1.2 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLC300-100	2x2, ULA Low	70	0.2
1-3	R.PDSCH.2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30-1	TDLA30-10	2x2, ULA Low	70	25.3
1-4	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	30	1.6
1-5	R.PDSCH.2-5.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x2, ULA Low	70	-0.9
1-6	R.PDSCH.2-6.1 TDD	40 / 30	QPSK, 0.30	FR1.30-3	TDLA30-10	2x2, ULA Low	70	-0.8
1-7	R.PDSCH.2-10.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-1000	1x2	70	6.4
1-8	R.PDSCH.2-11.1 TDD	40 / 30	QPSK, 0.30	FR1.30-5	TDLB100-400	2x2, ULA Low	70	-1.0
1-9	R.PDSCH.2-12.1 TDD	40 / 30	QPSK, 0.30	FR1.30-6	TDLB100-400	2x2, ULA Low	70	-1.1
1-10	R.PDSCH.2-10.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-1200	2x2	70	9.5
1-11	R.PDSCH.2-10.3 TDD	40 / 30	64QAM, 0.43	FR1.30-1	HST-1667	1x2	70	9.6
1-12	R.PDSCH.2-25.1 TDD	40 / 30	1024QAM, 0.79	FR1.30-1	TDLD30-5	2x2, ULA Low	70	29.4

Table 5.2.2.2.1.0-4: Minimum performance for Rank 2

Test	Reference	Bandwidth	Modulation	TDD UL-	Propagation	Correlation	Reference value
------	-----------	-----------	------------	---------	-------------	-------------	-----------------

num	channel	h (MHz) / Subcarrier spacing (kHz)	n format and code rate	DL pattern	n condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	19.8
2-2	R.PDSCH.2-9.1 TDD	20 / 30	64QAM, 0.50	FR1.30-4	TDLA30-10	2x2, ULA Low	70	19.8
2-3	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	19.8

Table 5.2.2.2.1.0-5: Minimum performance for Rank 2 and Enhanced Receiver Type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-2.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	2x2, ULA Medium	70	18.0

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.2.2.1.0.

5.2.2.2.1_1 2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.1_1.1 Test Purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers

5.2.2.2.1_1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.2.2.2.1_1.3 Test Description

5.2.2.2.1_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 5.2-1 and Table 5.2.2.2.1.0-2 and as appropriate.

3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.1_1.4.3.

5.2.2.2.1_1.3.2 Test Procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.1_1.4-1 and Table 5.2.2.2.1_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.1_1.4-1 and 5.2.2.2.1_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.2.2.1_1.4-1 and Table 5.2.2.2.1_1.4-2 as appropriate.

5.2.2.2.1_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.2.2.1_1.3.3_1 Message exceptions for SA

Table 5.2.2.2.1_1.3.3_1-1: Void

Table 5.2.2.2.1_1.3.3_1-2: Void

Table 5.2.2.2.1_1.3.3_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
dmrs-DownlinkForPDSCH-MappingTypeA CHOICE {			
setup	DMRS-DownlinkConfig		
}			
mcs-Table	qam256	256qam table for test 1-3	
	Not present	64qam table for all tests except test 1-3	
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4	n4 for test 1-1 n2 for other tests n2 is used by default	test 1-1
	Not present		all test points except test 1-1
}			
}			
}			
}			

Table 5.2.2.2.1_1.3.3_1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	For tests 1-1, 1-7, 1-8, 1-9, 1-10, and 1-11	
	pos1	For other tests	
}			

Table 5.2.2.2.1_1.3.3_1-5: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n16, n10, n8	n16 for Test 1-4, n10 for Test 1-9 n8 for other tests	
}			

Table 5.2.2.2.1_1.3.3_1-6: RACH-ConfigGeneric

Derivation Path: TS 38.508-1 [6], Table 4.6.3-130			
Information Element	Value/remark	Comment	Condition
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	163	Only for test 2-2	
}			

Table 5.2.2.2.1_1.3.3_1-7: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	1 (for CSI-RS resources 1 and 2) 2 (for CSI-RS resources 3 and 4)	For test 1-7, 1-10, 1-11: CSI-RS offset: 1 for CSI-RS resources 1 and 2 2 for CSI-RS resources 3 and 4 CSI-RS periodicity: 20 slots	
Slots40	20 (for CSI-RS resources 1 and 2) 21 (for CSI-RS resources 3 and 4)	For other tests: CSI-RS offset: 20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 CSI-RS periodicity: 40 slots	
}			

Table 5.2.2.2.1_1.3.3_1-8: CSI-FrequencyOccupation for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-11			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	52	52 for tests 1-7, 1-10, 1-11, 2-2	

	108	108 for other tests	
}			

Table 5.2.2.2.1_1.3.3_1-9: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl20	7	For test 1-9	
sl20	5	For test 2-2	
}			
}			

Table 5.2.2.2.1_1.3.3_1-10: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PUCCH resource indicator	<i>PUCCH-ResourceID[1]</i> = 6 in <i>pucch-ResourceSetID[1]</i> or <i>PUCCH-ResourceID[1]</i> = 14 in <i>pucch-ResourceSetID[2]</i> as defined in Table 4.6.3-112 (Mapping as per Table 9.2.3-2 in TS 38.213)	'110'B	Slot S1 for test 1-9

Table 5.2.2.2.1_1.3.3_1-11: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	3 entry		Test 1-5, Test 1-6
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	100	Start symbol(S)=2, Length(L)=8	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[3]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	5 entry		Test 1-9
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		

startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	100	Start symbol(S)=2, Length(L)=8	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	81	Start symbol(S)=2, Length(L)=10	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[5] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

5.2.2.2.1_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.1_1.3.3_1.

5.2.2.2.1_1.4 Test Requirements

Table 5.2.2.2.1_1.3-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.1_1.4-1 and 1 and Table 5.2.2.2.1_1.4-2 for the specified SNR including test tolerances for all throughput tests

Table 5.2.2.2.1_1.4-1: Test requirement for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.1 TDD	40 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	-0.2
1-2	R.PDSCH.2-1.2 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLC300-100	2x2, ULA Low	70	1.1
1-3	R.PDSCH.2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30-1	TDLA30-10	2x2, ULA Low	70	26.3

1-4	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	30	2.5
1-5	R.PDSCH.2-5.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x2, ULA Low	70	0.1
1-6	R.PDSCH.2-6.1 TDD	40 / 30	QPSK, 0.30	FR1.30-3	TDLA30-10	2x2, ULA Low	70	0.2
1-7	R.PDSCH.2-10.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-1000	1x2	70	7.3
1-8	R.PDSCH.2-11.1 TDD	40 / 30	QPSK, 0.30	FR1.30-5	TDLB100-400	2x2, ULA Low	70	-0.1
1-9	R.PDSCH.2-12.1 TDD	40 / 30	QPSK, 0.30	FR1.30-6	TDLB100-400	2x2, ULA Low	70	-0.2
1-10	R.PDSCH.2-10.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-1200	2x2	70	10.4
1-11	R.PDSCH.2-10.3 TDD	40 / 30	64QAM, 0.43	FR1.30-1	HST-1667	1x2	70	10.2

Table 5.2.2.2.1_1.4-2: Test requirement for Rank 2

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	20.8
2-2	R.PDSCH.2-9.1 TDD	20 / 30	64QAM, 0.50	FR1.30-4	TDLA30-10	2x2, ULA Low	70	20.8

5.2.2.2.1_2 2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with enhanced receiver type 1 for both SA and NSA

5.2.2.2.1_2.1 Test Purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers

5.2.2.2.1_2.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting NR enhanced receiver type 1.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and NR enhanced receiver type 1.

5.2.2.2.1_2.3 Test Description

Same test description as in clause 5.2.2.2.1_1.4 with the following exception:

- Table 5.2.2.2.1_2.4-1 instead of 5.2.2.2.1_1.4-1

5.2.2.2.1_2.4 Test Requirements

Table 5.2.2.2.1_1.3-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.1.4.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.1_2.4-1: Test requirement for Rank 2 and EnhancedReceiver Type 1

Test	Reference	Bandwidth	Modulation	TDD UL-	Propagation	Correlation	Reference value
------	-----------	-----------	------------	---------	-------------	-------------	-----------------

num.	channel	(MHz) / Subcarrier spacing (kHz)	format and code rate	DL pattern	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2- 2.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	2x2, ULA Medium	70	19.0

5.2.2.2.1_3 2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA

Editor's Note: Following aspects needs further investigation

- **DL EVM of $\leq 2.5\%$ for $f > 4.2$ GHz pending further analysis by the TE vendors**

5.2.2.2.1_3.1 Test Purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with DL1024QAM for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput for Rank 1 scenario.

5.2.2.2.1_3.2 Test Applicability

This test applies to all types of UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of UE release 17 and forward supporting EN-DC and DL1024QAM.

5.2.2.2.1_3.3 Test Description

5.2.2.2.1_3.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 5.2-1 and Table 5.2.2.2.1.0-2 and as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.1_3.3.3.

5.2.2.2.1_3.3.2 Test Procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.1_3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.1_3.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.1_3.3.3 Message Contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.2.2.1_3.3.3_1 Message exceptions for NR/5GC

Same as 5.2.2.2.1_3.3.3_1 with the following exceptions.

Table 5.2.2.2.1_3.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		Test 1-12
}			

5.2.2.2.1_3.3.3_2 Message exceptions for EN-DC

Same as 5.2.2.2.1_3.3.3_1.

5.2.2.2.1_3.4 Test Requirements

Table 5.2.2.2.1_3.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.1_3.4-1 for the specified SNR including test tolerances for all throughput tests

Table 5.2.2.2.1_3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-12	R.PDSCH.2-25.1 TDD	40 / 30	1024QAM, 0.79	FR1.30-1	TDLD30-5	2x2, ULA Low	70	30.3

5.2.2.2.1_4 2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with enhanced DMRS for both SA and NSA

5.2.2.2.1_4.1 Test Purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with enhanced DMRS.

5.2.2.2.1_4.2 Test Applicability

This test applies to all types of NR UE release 18 and forward supporting NR/5GC and enhanced DMRS.

This test also applies to all types of UE release 18 and forward supporting EN-DC and enhanced DMRS.

UE can skip Test 2-1 in 5.2.2.2.1_1 if this test is passed.

5.2.2.2.1_4.3 Test Description

5.2.2.2.1_4.3.1 Initial conditions

Same initial conditions as in clause 5.2.2.2.1_1.3.1.

5.2.2.2.1_4.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.1_4.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.1_4.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.1_4.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.2.2.1_4.3.3_1 Message exceptions for NR/5GC

Same as in clause 5.2.2.2.1_1.3.3 with the following exception

Table 5.2.2.2.1_4.3.3_1-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-TypeEnh-r18	enabled		
}			

Table 5.2.2.2.1_4.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 8 and DMRS port 9 as per Table 7.3.1.2.2-7 in TS 38.212 (<i>dmrs-Type</i> = DMRS type 1, <i>dmrs-TypeEnh</i> is configured and <i>maxLength</i> = len1 as per Table 4.6.3-50 in 38.508-1)	"1110"	

5.2.2.2.1_4.3.3_2 Message exceptions for EN-DC

Same as 5.2.2.2.1_4.3.3_1.

5.2.2.2.1_4.4 Test Requirements

Table 5.2.2.2.1_4.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.1_4.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.1_4.4-1: Test requirement for Rank 2 and enhanced DMRS type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-3	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	20.8

5.2.2.2.2 2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance

5.2.2.2.2_1 2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.2_1.1 Test Purpose

Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and CSI-RS overlapped with PDSCH

5.2.2.2.2_1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.2.2.2.2_1.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.2_1.3-3, with the addition of test parameters in table 5.2.2.2.2_1.3-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.2.2_1.3-1.

Table 5.2.2.2.2_1.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and CSI-RS overlapped with PDSCH	1-1

Table 5.2.2.2.2_1.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	Specific to each Reference channel
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle	N/A	

	size		
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
NZP CSI-RS for CSI acquisition	OFDM symbols in the PRB used for CSI-RS		$l_0 = 13$
	CSI-RS periodicity	Slots	5
ZP CSI-RS for CSI acquisition	Subcarrier index in the PRB used for CSI-RS		$(k_0, k_1, k_2, k_3) = (2, 4, 6, 8)$
	Number of CSI-RS ports (X)		8
	CSI-RS periodicity	Slots	5
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.2_1.3-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-7.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	14.8

The normative reference for this requirement is TS 38.101-4 [2] clause 5.2.2.1.2

5.2.2.2.2_1.4 Test Description

5.2.2.2.2_1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 5.1.2.1 and 5.1.2.2.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 5.2-1 and Table 5.2.2.2_1.3-2 and as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2_1.4.3.

5.2.2.2.2_1.4.2 Test Procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.2_1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.2_1.5-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.2_1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.2.2.2_1.4.3_1 Message exceptions for SA

Table 5.2.2.2.2_1.4.3_1-1: Void

Table 5.2.2.2.2_1.4.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
dataScramblingIdentityPDSCH	0		
dmrs-DownlinkForPDSCH-MappingTypeA CHOICE {			
Setup	DMRS-DownlinkConfig		
}			
resourceAllocation	resourceAllocationType0		Used_for_Type0
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize		If a bundleSize(Set) value is absent, the UE applies the value n2.	
}			
}			
}			

Table 5.2.2.2.2_1.4.3_1-3: Void

Table 5.2.2.2.2_1.4.3_1-4: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 11111111 10000000 00000000 00000000 000000	CORESET to use the least significant 102 RBs of the BWP	
tci-StatesPDCCH-ToAddList {			
0		TCI State #0	
1		TCI State #1	
}			
}			

Table 5.2.2.2.2_1.4.3_1-5: Void

Table 5.2.2.2.2_1.4.3_1-6: NZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	13	$l_0 = 13$	
}			

Table 5.2.2.2.2_1.4.3_1-7: CSI-ResourcePeriodicityAndOffset for CSI Acquisition for NZP CSI-RS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots5	0	Periodicity 5 slots and offset 0	
}			

Table 5.2.2.2.2_1.4.3_1-8: ZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
nrofPorts	P8	Eight Ports	
}			

Table 5.2.2.2.2_1.4.3_1-9: DMRS-DownlinkConfig

Derivation Path: TS 38.508 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	Not present	pos2 If the field is absent, the UE applies the value pos2	FR1_TDD,
}			

Table 5.2.2.2.2_1.4.3_1-10: CSI-ResourcePeriodicityAndOffset for CSI Acquisition for ZP CSI-RS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-22			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots5	0	Periodicity 5 slots and offset 0	
}			

5.2.2.2.2_1.4.3_2 Message exceptions for NSA

Same as 5.2.2.2.2_1.4.3_2

5.2.2.2.2_1.5 Test Requirements

Table 5.2.2.2.2_1.3-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.2_1.3-3 for the specified SNR including test tolerances for all throughput tests

Table 5.2.2.2.2_1.5-1: Test requirement for Rank 2

Test num.	Reference channel	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-7.1 TDD	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	15.7

5.2.2.2.3 2Rx TDD FR1 PDSCH mapping Type B performance

5.2.2.2.3.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.3.0-3, with the addition of test parameters in Table 5.2.2.2.3.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.3.0-1.

Table 5.2.2.2.3.0-1: Tests purpose

Purpose	Test index
Verify PDSCH mapping Type B performance under 2 receive antenna conditions	1-1

Table 5.2.2.2.3.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	5
	Length (L)	7
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		8
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.3.0-3: Minimum performance for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.3 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLA30-10	2x2, ULA Low	70	-0.9

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.2.3.

5.2.2.3_1 2Rx TDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.3_1.1 Test purpose

To verify the PDSCH mapping Type B normal performance under 2 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput with baseline receiver configuration.

5.2.2.3_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting PDSCH mapping type B.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and PDSCH mapping type B.

5.2.2.3_1.3 Test description

5.2.2.3_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.2.3.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.3.2.3_1.3.3.

5.2.2.2.3_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.3.0-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.3_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.3_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.2.2.2.3_1.3.3_1 Message exceptions for SA

Table 5.2.2.2.3_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-102			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present		
}			

Table 5.2.2.2.3_1.3.3_1-2: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-103			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeB		
startSymbolAndLength	89	Start symbol(S)=5, Length(L)=7	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

5.2.2.2.3_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.3_1.3.3_1

5.2.2.2.3_1.4 Test requirement

Table 5.2.2.2.3.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.3_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.3_1.4-1: Test Requirement for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.3 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLA30-10	2x2, ULA Low	70	0.1

5.2.2.2.4 2Rx TDD FR1 PDSCH mapping Type A and LTE-NR coexistence performance

5.2.2.2.4.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.4.0-3, with the addition of test parameters in Table 5.2.2.2.4.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.2.2.4.0-1.

Table 5.2.2.2.4.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions with CRS rate matching configured	1-1, 1-2

Table 5.2.2.2.4.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
NR UL transmission with a 7.5 kHz shift to the LTE raster			true
PDCCH configuration	Symbols with PDCCH		Symbol# 2
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		3
	Length (L)		9 for Test 1-1 11 for Test 1-2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Position of the first DM-RS for downlink		3
	Number of additional DMRS		1
CRS for rate matching (Note 1)	Maximum number of OFDM symbols for DL front loaded DMRS		1
	LTE carrier centre subcarrier location		Same as NR carrier centre subcarrier location
	LTE carrier BW	MHz	10
	Number of antenna ports		4
	v-shift		0
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Note 1: No MBSFN is configured on LTE carrier

Table 5.2.2.4.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x2, ULA Low	70	-0.8
1-2	R.PDSCH.1-1.2 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x2, ULA Low	70	-0.8

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.2.2.4.

5.2.2.2.4_1 2Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.4_1.1 Test purpose

To verify the PDSCH mapping Type A coexistence performance under 2 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput with baseline receiver configuration.

5.2.2.2.4_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward supporting capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test 1-1 also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test 1-2 applies to all types of NR UE release 15 and forward supporting capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

Test 1-2 also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

5.2.2.2.4_1.3 Test description

5.2.2.2.4_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.2.2.4.0-2 and as appropriate.

3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.2.2.4_1.3.3.

5.2.2.2.4_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.4.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.4_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

NOTE: In the test using the NR/5GC connectivity option, collisions between NR SIB1 scheduling and LTE CRS can occur. However, these do not impact the throughput.

5.2.2.2.4_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.2.2.2.4_1.3.3_1 Message exceptions for SA

Table 5.2.2.2.4_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-102			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8		
}			

Table 5.2.2.2.4_1.3.3_1-2: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-103			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	94	Start symbol(S)=3, Length(L)=9	Test 1-1
	66	Start symbol(S)=3, Length(L)=11	Test 1-2
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	66	Start symbol(S)=3, Length(L)=11	Test 1-2

}			
}			

Table 5.2.2.2.4_1.3.3_1-3: SearchSpace

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition USS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
controlResourceSetId	2		
monitoringSymbolsWithinSlot	00100000000000		
}			

Table 5.2.2.2.4_1.3.3_1-4: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-2			
Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE {			
dmrs-TypeA-Position	pos3		
lte-CRS-ToMatchAround	RateMatchPatternLTE-CRS		
}			

Table 5.2.2.2.4_1.3.3_1-5: RateMatchPatternLTE-CRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-28			
Information Element	Value/remark	Comment	Condition
RateMatchPatternLTE-CRS ::= SEQUENCE {			
carrierFreqDL	Same as NR carrier centre subcarrier location		
carrierBandwidthDL	n50	10MHz	
mbsfn-SubframeConfigList	Not present		
nrofCRS-Ports	n4		
v-Shift	n0		
}			

Table 5.2.2.2.4_1.3.3_1-6: FrequencyInfoUL-SIB

Derivation Path: TS 38.508-1 [6], Table 4.6.3-62			
Information Element	Value/remark	Comment	Condition
FrequencyInfoUL-SIB SEQUENCE {			
frequencyShift7p5khz	true	For bands n34, n38, n39, n40, n48	
	Not present	For other TDD bands	
}			

Table 5.2.2.2.4_1.3.3_1-7: PDCCH-ControlResourceSet

Derivation Path: Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	1	SearchSpace duration of 1 symbol from third symbol	
}			

Table 5.2.2.2.4_1.3.3_1-8: *PDCCH-ConfigCommon*

Derivation Path: TS 38.508-1 [6], Table 4.6.3-96			
Information Element	Value/remark	Comment	Condition
PDCCH-ConfigCommon ::= SEQUENCE {			
commonControlResourceSet ::= SEQUENCE {			SA
controlResourceSetId	1		
frequencyDomainResources	01110000 00000000 00000000 00000000 00000000 00000		
Duration	1		
cce-REG-MappingType CHOICE {			
nonInterleaved	Null		
}			
precoderGranularity	sameAsREG-bundle		
}			
}			

Table 5.2.2.2.4_1.3.3_1-9: *SearchSpace for CSS*

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition CSS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	SearchSpaceId with condition CSS		CSS
controlResourceSetId	1		
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
duration	Not present	1 slot per default	
monitoringSymbolsWithinSlot	00100000000000		
nrofCandidates SEQUENCE {			SA
aggregationLevel2	n1		
aggregationLevel8	n0		
}			

Table 5.2.2.2.4_1.3.3_1-10: *SearchSpace for USS*

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition USS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			SA
searchSpaceId	2		
controlResourceSetId	2		
monitoringSymbolsWithinSlot	00100000000000		
}			

Table 5.2.2.2.4_1.3.3_1-11: *PUCCH-Config*

Derivation Path: TS 38.508-1 [6], Table 4.6.3-112 and Table 5.4.2.0-41 using condition FR1.15-1			
Information Element	Value/remark	Comment	Condition
PUCCH-Config ::= SEQUENCE {			
dl-DataToUL-ACK SEQUENCE (SIZE (1..8)) OF INTEGER {	5 entries		FR1.15-1
INTEGER[1]	2	entry 1	
INTEGER[2]	3	entry 2	
INTEGER[3]	4	entry 3	
INTEGER[4]	6	entry 4	
INTEGER[5]	7	entry 5 This is a dummy	

		setting for adjusting the bit length of "PDSCH-to-HARQ_feedback timing indicator" of DCI Format Format 1_1.	
}			
}			

5.2.2.2.4_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.4_1.3.3_1 with the following exceptions:

Table 5.2.2.2.4_1.3.3_2-1: SearchSpace

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162 and 5.4.2.0-7 using condition USS, FR1_10MHz, Long_DCI			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
controlResourceSetId	1		
monitoringSymbolsWithinSlot	00100000000000		
}			

Table 5.2.2.2.4_1.3.3_2-2: PDCCH-ControlResourceSet

Derivation Path: Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
duration	1	SearchSpace duration of 1 symbol from third symbol	
}			

5.2.2.2.4_1.4 Test requirement

Table 5.2.2.2.4.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.4_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.4_1.4-1: Test Requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x2, ULA Low	70	0.1
1-2	R.PDSCH.1-1.2 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x2, ULA Low	70	0.1

5.2.2.2.5 2Rx TDD FR1 PDSCH 0.001% BLER performance

5.2.2.2.5.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.5.0-3, with the addition of test parameters in Table 5.2.2.2.5.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.5.0-1.

Table 5.2.2.2.5.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH 0.001% BLER performance under 2 receive antenna conditions	1-1

Table 5.2.2.2.5.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k ₀		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
Maximum number of OFDM symbols for DL front loaded DMRS			1
Maximum number of HARQ transmission			1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Defined in Annex A.1.2 for TDD pattern FR1.30-1

Table 5.2.2.2.5.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-1.4 TDD	40 / 30	QPSK, 0.59	FR1.30-1	AWGN	1x2 with static channel specified in Annex B.1	0.001%	3.3

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.5.

5.2.2.2.5_1 2Rx TDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.5_1.1 Test purpose

To verify the PDSCH 0.001% BLER performance under 2 receive antenna conditions.

5.2.2.2.5_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

Test 1-1 applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

5.2.2.2.5_1.3 Test description

5.2.2.2.5_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.2.5.0-2 and Table 5.2.2.2.5.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.5_1.3.3.

5.2.2.2.5_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.5.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.5_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.4. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.4.3-1 in Annex G.

5.2.2.2.5_1.3.3 Message contents

5.2.2.2.5_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.2.5_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 5.2.2.2.5_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam64LowSE		
}			

5.2.2.2.5_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.5_1.3.3_1.

5.2.2.2.5_1.3.4 Test requirement

Table 5.2.2.2.5.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.5_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.5_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-1.4 TDD	40 / 30	QPSK, 0.59	FR1.30-1	AWGN	1x2 with static channel specified in Annex B.1	0.001%	4.4

5.2.2.2.6 2Rx TDD FR1 PDSCH repetitions over multiple slots performance

5.2.2.2.6.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.6.0-3, with the addition of test parameters in Table 5.2.2.2.6.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.6.0-1.

Table 5.2.2.2.6.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH repetitions over multiple slots performance under 2 receive antenna conditions	1-1

Table 5.2.2.2.6.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	2
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between final repetition of PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2 (Note 1)
Note 1: ACK/NACK feedback is generated for PDSCH on slot i , where $\text{mod}(i,10) = \{2, 4, 6\}$.		

Table 5.2.2.2.6.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-16.1 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x2, ULA Low	1% (Note 1)	1.4
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.6.

5.2.2.2.6_1 2Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.6_1.1 Test purpose

To Verify the PDSCH repetitions over multiple slots performance under 2 receive antenna conditions.

5.2.2.2.6_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE dl-64QAM-MCS-TableAlt and *pdsch-RepetitionMultiSlots*.

Test 1-1 also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE dl-64QAM-MCS-TableAlt and pdsch-RepetitionMultiSlots.

5.2.2.2.6_1.3 Test description

5.2.2.2.6_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.1.6.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.6_1.3.3.

5.2.2.2.6_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.6.0-3. The SS sends downlink MAC padding bits on the DL RMC. The UE may expect that the TB is repeated with same symbol allocation among each of the *pdsch-AggregationFactor* consecutive slots.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.6_1.3.4-1.
3. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to clause G.1.5 and Table G.1.5-1a in Annex G clause G.1.5.

5.2.2.2.6_1.3.3 Message contents

5.2.2.2.6_1.3.3_1 Message exceptions for SA

Same as 5.2.2.1.6_1.3.3_1.

5.2.2.2.6_1.3.3_2 Message exceptions for SA

Same as 5.2.2.1.6_1.3.3_1.

5.2.2.2.6_1.3.4 Test requirement

Table 5.2.2.2.6.0-3 defines the primary level settings.

The target BLER percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each BLER test shall meet or exceed the specified value in Table 5.2.2.2.6_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.6_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-16.1 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x2, ULA Low	1% (Note 1)	2.3
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.								

5.2.2.2.7 2Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance

5.2.2.2.7.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.7.0-3, with the addition of test parameters in Table 5.2.2.2.7.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.7.0-1.

Table 5.2.2.2.7.0-1: Tests purpose

Purpose	Test index
Verify PDSCH mapping Type B performance and UE processing capability 2 under two receive antenna conditions	1-1

Table 5.2.2.2.7.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	2
	Length (L)	2
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	0
Maximum number of OFDM symbols for DL front loaded DMRS	1	
Maximum number of HARQ transmission	1	
Number of HARQ Processes	2	
The number of slots between PDSCH and corresponding HARQ-	0	

ACK information		
-----------------	--	--

Table 5.2.2.7.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-17.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x2, ULA Low	70	0.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.7.

5.2.2.2.7_1 2Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.7_1.1 Test purpose

To verify PDSCH mapping Type B performance and UE processing capability 2 under two receive antenna conditions.

5.2.2.2.7_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pdsch-ProcessingType2*.

5.2.2.2.7_1.3 Test description

5.2.2.2.7_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.2.7.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.7_1.3.3.

5.2.2.2.7_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.7.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.7_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.7_1.3.3 Message contents

5.2.2.2.7_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.2.7_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entries		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeB		
startSymbolAndLength	16	Start symbol(S)=2, Length(L)=2	
}			
}			

Table 5.2.2.2.7_1.3.3_1-2: PUCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-112			
Information Element	Value/remark	Comment	Condition
PUCCH-Config ::= SEQUENCE {			FR1
dl-DataToUL-ACK SEQUENCE (SIZE (1)) OF	1 entry		
INTEGER {			
INTEGER[1]	0	entry 1	
}			
}			

Table 5.2.2.2.7_1.3.3_1-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1=0 as per dl-DataToUL-ACK in Table 5.2.2.2.7_1.3.3_1-3	"000"	

Table 5.2.2.2.7_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
processingType2Enabled	true		
}			

5.2.2.2.7_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.7_1.3.3_1.

5.2.2.2.7_1.4 Test requirement

Table 5.2.2.2.7.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.7_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.7_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-17.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x2, ULA Low	70	1.6

5.2.2.2.8 2Rx TDD FR1 PDSCH pre-emption performance

5.2.2.2.8.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.8.0-3, with the addition of test parameters in Table 5.2.2.2.8.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.8.0-1.

Table 5.2.2.2.8.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH pre-emption performance under 2 receive antenna conditions	1-1

Table 5.2.2.2.8.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration (Note 4)	Symbols with PDCCH		0, 1
	DCI format		2_1
timeFrequencySet			14x1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Pre-emption	Starting symbol (S)		3

configuration (Note 2)	Length (L)		2
	Pre-emption periodicity and offset	Slots	40/(1,12,23,34) (Note 3)
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			FR1.30-1
Note 1: Void			
Note 2: Interference modelled as random data on pre-empted REs.			
Note 3: Pre-emption is scheduled with 10% probability within 20ms periodicity.			
Note 4: In addition to PDCCH configuration in Table 5.2-1.			

Table 5.2.2.8.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.5 TDD	40 / 30	16QAM 0.48	FR1.30-1	TDLA30-10	2x2, ULA Low	70	12.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.8.

5.2.2.2.8_1 2Rx TDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.8_1.1 Test purpose

To Verify the PDSCH pre-emption performance under 2 receive antenna conditions.

5.2.2.2.8_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pre-EmptIndication-DL-r16*.

5.2.2.2.8_1.3 Test description

5.2.2.2.8_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.2.8.0-2 and Table 5.2.2.2.8.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.8_1.3.3.

5.2.2.2.8_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.8.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. SS transmits PDCCH DCI format 2_1 for int_RNTI with 10% probability to transmit the DL Preemption indication according to Table 5.2.2.2.8.0-2. In the time and frequency set indicated by PDCCH DCI format 2_1, SS stops transmission of PDSCH.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.8_1.3.4-1.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.8_1.3.3 Message contents

5.2.2.2.8_1.3.3_1 Message exceptions for SA

Same as 5.2.2.1.8_1.3.3_1

5.2.2.2.8_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.8_1.3.3_1

5.2.2.2.8_1.3.4 Test requirement

Table 5.2.2.2.8.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.8_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.8_1.3.4-1: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.5 TDD	40 / 30	16QAM 0.48	FR1.30-1	TDLA30-10	2x2, ULA Low	70	13.5

5.2.2.2.9 2Rx TDD FR1 HST-SFN performance

5.2.2.2.9.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.9.0-3, with the test parameters defined in Table 5.2.2.2.9.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.9.0-1.

Table 5.2.2.2.9.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna	1-1

conditions in the HST-SFN scenario defined in B.3.2 when <i>highSpeedDemodFlag-r16</i> [17] is configured	
---	--

Table 5.2.2.2.9.0-2: Test Parameters for Testing

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	CSI-RS periodicity	Slots	20 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = 52
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.2.9.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.4 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN	2x2	70	14.2

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.9.

5.2.2.2.9_1 2Rx TDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA

Editor's note: The minimum test time value is in []

5.2.2.2.9_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 when *highSpeedDemodFlag-r16* IE [20] is configured and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.2.2.9_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC that supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

5.2.2.2.9_1.3 Test description

5.2.2.2.9_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.2.9.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.9_1.3.3.

5.2.2.2.9_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.9_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.9_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.2.9_1.4-1 as appropriate.

5.2.2.2.9_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.9_1.3.3_1 Message exceptions for SA

Table 5.2.2.2.9_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			

bundleSize	Not present	n2 for test 1-1	
}			
}			
}			

Table 5.2.2.2.9_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1	
}			

Table 5.2.2.2.9_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8	for test 1-1	
}			

Table 5.2.2.2.9_1.3.3_1-4: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	For test 1-1: offset = 1 for CSI-RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	
}			

5.2.2.2.9_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.9_1.3.3_1

5.2.2.2.9_1.4 Test requirement

Tables 5.2.2.2.9_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.9_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.9_1.4-1: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.4 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN	2x2	70	14.8

5.2.2.2.10 2Rx TDD FR1 HST DPS performance

5.2.2.2.10.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.10.0-3, with the test parameters defined in Table 5.2.2.2.10.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.10.0-1.

Table 5.2.2.2.10.0-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-DPS scenario defined in B.3.3	1-1, 1-2

Table 5.2.2.2.10.0-2: Test Parameters for Testing

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	TCI state		Note 1
	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 20 for CSI-RS resource 1,2,3,4
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #2
		Frequency Occupation	Start PRB 0 Number of PRB = 52
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #3
		Frequency Occupation	Start PRB 0 Number of PRB = 52
NZP CSI-RS for CSI acquisition	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
		QCL info	TCI state #0
	Resource set #4	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
	QCL info	TCI state #1	

TCI state #0	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
TCI state #2	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
TCI state #3	Type 1 QCL information	SSB index	SSB #1
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
<p>Note 1: SSB # (k mod 2) , CSI-RS (for tracking) resource set # ((k mod 2) + 1) and CSI-RS (for CSI acquisition) resource set # ((k mod 2) + 3) are transmitted by kth RRH. For Test 1-1, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 32, NumOfRB 74 is transmitted in slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of 2n. PDCCH and PDSCH associated with TCI # (k mod 2) is transmitted by kth RRH from. slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstTRS}} + T_{\text{TRS proc}}, 0]$ <p>to slot# (2k + 1)n , PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 32, NumOfRB 74 is transmitted slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of 2n. PDCCH and PDSCH associated with TCI # (k mod 2) is transmitted by kth RRH from. slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}}, 0]$ <p>to slot# (2k + 1)n, PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>Where k=0, 1, 2... is the RRH number, n = 5040 is half of the number of slots between two RRH, T_{HARQ} = 8 is the number of slots between PDSCH and corresponding HARQ-ACK information, T_{MAC proc} = 6 is the number of slots for MAC CE processing, T_{firstTRS} = 7 is the number of slots to first TRS transmission occasion after MAC CE command is decoded by the UE, T_{TRS proc} = 4 is the number of slots for TRS processing.</p>			

Table 5.2.2.10.0-3: Minimum performance for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	1	2x2	70	13.0
1-2	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	2	2x2	70	13.0

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.10.

5.2.2.2.10_1 2Rx TDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA

5.2.2.2.10_1.1 Test purpose

To verify UE performance in the HST-DPS scenario defined in B.3.3 and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.2.2.10_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward.

Test 1-1 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

Test 1-2 applies to all types of NR UE release 15 and forward supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

Test 1-2 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

5.2.2.2.10_1.3 Test description

5.2.2.2.10_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.2.10.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.10_1.3.3.

5.2.2.2.10_1.3.2 Test procedure

Test 1-1:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.10_1.4-1 as appropriate.

2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.2.2.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.2.2.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

Test 1-2:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.10_1.4-1 as appropriate.
2. SS activates TCI state 0 and TCI 1 for PDSCH at the same time via MAC CE command “TCI States Activation/Deactivation for UE-specific PDSCH”.
3. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.2.2.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

4. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.2.2.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
5. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.5.2.2.10_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.10_1.3.3_1 Message exceptions for SA

Table 5.2.2.2.10_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	test 1-1, 1-2
}			
}			
}			

Table 5.2.2.2.10_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition

DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1, 1-2	
}			

Table 5.2.2.2.10_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8	for test 1-1, 1-2	
}			

Table 5.2.2.2.10_1.3.3_1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	2 for CSI-RS resource #1, #2, #3, #4 3 for CSI-RS resource #5, #6, #7, #8	for test 1-1, 1-2: TCI-StateId for TCI-State #2 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI-State #3 for CSI-RS resource #5, #6, #7, #8	
}			

Table 5.2.2.2.10_1.3.3_1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.2.2.10_1.3.3_1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8	for test 1-1, 1-2: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4 l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8	
}			

Table 5.2.2.2.10_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for CSI Tracking (Table 5.2.2.2.10_1.3.3_1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	For test 1-1, 1-2: periodicity: 20 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS	

		resource 7 and 8	
}			

Table 5.2.2.2.10_1.3.3_1-6: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1, 1-2	Resource set #1
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource #1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1, 1-2	Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
}			

Table 5.2.2.2.10_1.3.3_1-7: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8 for CSI-RS resource #9 9 for CSI-RS resource #10	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #9 1 for CSI-RS resource #10	for test 1-1, 1-2: TCI-State #0 for CSI-RS resource #9 TCI-State #1 for CSI-RS resource #10	
}			

Table 5.2.2.2.10_1.3.3_1-8: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.2.2.10_1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #9 13 for CSI-RS resource #10	for test 1-1, 1-2 l ₀ =12 for CSI-RS resource #9 l ₀ =13 for CSI-RS resource #10	
}			

Table 5.2.2.2.10_1.3.3_1-9: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.2.2.10_1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	0	For test 1-1, 1-2: periodicity = 40 slots. offset = 0 slots	
}			

Table 5.2.2.2.10_1.3.3_1-10: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	2 for Resource set #3 3 for Resource set #4	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #4
NZP-CSI-RS-ResourceId[1]	9	entry 1 CSI-RS resource #10	
}			
}			

Table 5.2.2.2.10_1.3.3_1-11: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3	For test 1-1, 1-2	
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1
	Not present		TCI state #2,

			TCI state #3
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
ssb	0	SSB #0	TCI state #2
	1	SSB #1	TCI state #3
}			
qcl-Type	typeA		TCI state #0, TCI state #1
	typeC		TCI state #2, TCI state #3
}			
}			

5.2.2.2.10_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.10_1.3.3_1

5.2.2.2.10_1.4 Test requirement

Tables 5.2.2.2.10_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.10_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.10_1.4-1: Test Requirements for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
1-2	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	2	2x2	70	13.6

5.2.2.2.11 2Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance

5.2.2.2.11.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.11.0-3, with the addition of test parameters in Table 5.2.2.2.11.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.11.0-1.

Table 5.2.2.2.11.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance with Single-DCI based SDM scheme under 2 receive antenna conditions	1-1,1-2

Table 5.2.2.2.11.0-2: Test parameters

Parameter	Unit	Value	
		TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB		TRxP #1	

PDCCH configuration	TCI state		TCI State #1		
	CORESETPoolIndex		0		
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8	
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8	
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8	
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8		
	Density		3		
	CSI-RS periodicity		Slots	40	
	CSI-RS offset		Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0		
Duplex mode		TDD			
Active DL BWP index		1			
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 1		
	RBG size		Config2		
	VRB-to-PRB mapping type		Non-interleaved		
VRB-to-PRB mapping interleaver bundle size		N/A			
PDSCH DMRS configuration	Antenna port indexes		1000	1002	
	TCI state		TCI State #1	TCI State #2	
	DMRS Type		Type 1		
	Number of additional DMRS		1		
	Maximum number of OFDM symbols for DL front loaded DMRS		1		
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A	
		QCL Type	Type A	N/A	
	Type 2 QCL information	CSI-RS resource	N/A	N/A	
		QCL Type	N/A	N/A	
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration	
		QCL Type	N/A	Type A	
	Type 2 QCL information	CSI-RS resource	N/A	N/A	
		QCL Type	N/A	N/A	
Resource allocation		Full-overlapping			
Timing offset of the second TRxP from the first TRxP		us	-0.25 for test 1-1 1 for test 1-2		
Frequency offset of the second TRxP from the first TRxP		Hz	300 for test 1-1 0 for test 1-2		
Number of HARQ Processes		8			
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2			
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity			
Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH					

layer 1 is transmitted from TRxP #2)

Table 5.2.2.11.0-3: Minimum performance

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition(No te 1)	Correlation matrix and antenna configuration(No te 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	R.PDSCH. 2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30 -1	TDLA30-10	2x2, ULA Low	70	20.2
1-2	R.PDSCH. 2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30 -1	TDLA30-10	2x2, ULA Low	70	20.0
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.11.

5.2.2.2.11_1 2Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA

5.2.2.2.11_1.1 Test purpose

To verify the PDSCH performance with Single-DCI based SDM scheme under 2 receive antenna conditions.

5.2.2.2.11_1.2 Test applicability

Test applies to all types of NR UE release 16 and forward supporting capability IE *singleDCI-SDM-scheme-r16*.

5.2.2.2.11_1.3 Test description

5.2.2.2.11_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.2.11.0-2 and Table 5.2.2.2.11.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG and SCG, Connected without release On, Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.11_1.3.3.

5.2.2.2.11_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.11_1.3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.11_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.2.2.11_1.3.4-1 as appropriate.

5.2.2.2.11_1.3.3 Message contents

5.2.2.2.11_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.2.11_1.3.3_1-1: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 2	"1011"	
Transmission configuration indication	TCI state 1 and 2	"000"	

Table 5.2.2.2.11_1.3.3_1-2: CellGroupConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-19			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
simultaneousTCI-UpdateList1-r16 SEQUENCE {			
ServCellIndex [1]	ServCellIndex		
}			
}			

Table 5.2.2.2.11_1.3.3_1-3: ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.2.2.11_1.3.3_1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		

TCI-State[1]	TCI-State with condition TCI-state-0		
TCI-State[2]	TCI-State with condition TCI-state-1		
TCI-State[3]	TCI-State with condition TCI-state-2		
}			
rbg-Size	config2		
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present		
}			
}			
}			

Table 5.2.2.2.11_1.3.3_1-5: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0		TCI-state-0
	1		TCI-state-1
	2		TCI-state-2
qcl-Type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		TCI-state-0
csi-rs	1		TCI-state-1
	5		TCI-state-2
}			
qcl-Type	typeA		
}			
qcl-Type2	Not present		
}			

Table 5.2.2.2.11_1.3.3_1-6: NZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-85			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
resourceMapping SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMsymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
cdm-Type	noCDM		
density CHOICE {			
three	NULL		
}			
}			

periodicityAndOffset CHOICE {			
slots40	20	For CSI-RS resources 1,2,5,6	
slots40	21	For CSI-RS resources 3,4,7,8	
}			
qcl-InfoPeriodicCSI-RS	0		
}			

5.2.2.2.11_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.11_1.3.3_1.

5.2.2.2.11_1.3.4 Test requirement

Table 5.2.2.2.11.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.11_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.11_1.3.4-1: Test requirement

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	21.2
1-2	R.PDSCH.2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	21.0

Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent
 Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2
 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP

5.2.2.2.12 2Rx TDD FR1 PDSCH Multi-DCI based transmission scheme performance

5.2.2.2.12.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.12.0-3, with the addition of test parameters in Table 5.2.2.2.12.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.12.0-1.

Table 5.2.2.2.12.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCBs scheduling PDSCHs	1-1

Table 5.2.2.2.12.0-2: Test parameters

Parameter	Unit	Value	
		TRxP #1 (Note 1)	TRxP #2 (Note 1)
Transmit TRxP of SSB		TRxP #1	

PDCCH configuration	TCI state		TCI State #1	TCI State #2
	CORESETPoolIndex		0,1	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity		Slots	40
	CSI-RS offset		Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode		TDD		
Active DL BWP index		1		
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		{1000,1001}	{1002,1003}
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation		Non-overlapping		
Timing offset of the second TRxP from the first TRxP		us	-0.25	
Frequency offset of the second TRxP from the first TRxP		Hz	300	
Number of HARQ Processes		8		
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity		
Note 1: PDSCH transmission is done from both TRxPs. Transmission from TRxP #1 uses CORESETPoolIndex 0 and transmission from TRxP #2 uses CORESETPoolIndex 1				

Table 5.2.2.2.12.0-3: Minimum performance

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
								Fraction of maximum throughput (%)	SNR (dB) (Note 3)
	TRxP #1	TRxP #2							
1-1	R.PDSCH .2-3.3 TDD	R.PDSCH .2-3.4 TDD	40 / 30	64QAM, 0.50	FR1.3 0-1	TDLA30-10	2x2, ULA Low	70	20.4
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2									

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.12.

5.2.2.2.12_1 2Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA

5.2.2.2.12_1.1 Test purpose

To verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs.

5.2.2.2.12_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *multiDCI-MultiTRP-r16*.

5.2.2.2.12_1.3 Test description

Same test description as in clause 5.2.2.1.12_1.3 with the following exception:

- Table 5.2.2.2.12_1.4-1 instead of 5.2.2.1.12_1.4-1
- Table 5.2.2.2.12_1.3-1 instead of Table 5.2.2.1.12_1.3.3_1-8

Table 5.2.2.2.12_1.3-1: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	20	For CSI-RS resources 1,2,5,6	
Slots40	21	For CSI-RS resources 3,4,7,8	
}			

5.2.2.2.12_1.4 Test requirement

Table 5.2.2.2.12.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.12_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.12_1.4-1: Test requirement

Test ID	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
	TRxP #1	TRxP #2						Fraction of maximum throughput (%)	SNR (dB) (Note 3)
I-1	R.PDSCH.2-3.3 TDD	R.PDSCH.2-3.4 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	21.4

Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent

Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2

Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2

5.2.2.2.13 2Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance

5.2.2.2.13.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.13.0-3, with the addition of test parameters in Table 5.2.2.2.13.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.13.0-1.

Table 5.2.2.2.13.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions when UE is configured with "FDMSchemeA" in "RepetitionScheme-r16" defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.2.2.13.0-2: Test parameters

Parameter	Unit	Value		
		TRxP #1 (Note 1)	TRxP #2 (Note 1)	
Transmit TRxP of SSB		TRxP #1		
PDCCH configuration	TCI state	TCI State #1		
	CORESETPoolIndex	Not configured		
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS	k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8	
	First OFDM symbol in the PRB used for CSI-RS	l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8	
	Number of CSI-RS ports (X)	1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8	
	CDM Type	'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8		
	Density	3		
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
QCL info		TCI state #0		
Duplex mode		TDD		
Active DL BWP index		1		
PDSCH configuration	Mapping type	Type A		
	k0	0		
	Starting symbol (S)	2		
	Length (L)	12		
	PRB bundling type	Static		

	PRB bundling size		Wideband	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000,1001	1000,1001
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	-0.25	
Frequency offset of the second TRxP from the first TRxP		Hz	300	
Number of HARQ Processes		8		
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity		
Note 1: PDSCH transmission is done from both TRxPs				

Table 5.2.2.13.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.2-2.5 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x2, ULA Low	70	17.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.13.

5.2.2.2.13_1 2Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA

5.2.2.2.13_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions when UE is configured with “FDMSchemeA” in “RepetitionScheme-r16”.

5.2.2.2.13_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportFDM-SchemeA-r16*.

5.2.2.2.13_1.3 Test description

Same test description as in clause 5.2.2.1.13_1.3 with the following exception:

- Table 5.2.2.2.13_1.4-1 instead of 5.2.2.1.13_1.4-1
- Table 5.2.2.2.13_1.3-1 instead of Table 5.2.2.1.13_1.3.3_1-5

Table 5.2.2.2.13_1.3-1: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { Slots40	20	For CSI-RS resources 1,2,5,6	
Slots40	21	For CSI-RS resources 3,4,7,8	
}			

5.2.2.2.13_1.4 Test requirement

Table 5.2.2.2.13.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.13_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.13_1.4-1: Test requirement

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.2-2.5 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x2, ULA Low	70	18.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

5.2.2.2.14 2Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance

5.2.2.2.14.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.14.0-3, with the addition of test parameters in Table 5.2.2.2.14.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.14.0-1.

Table 5.2.2.2.14.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.2.2.14.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			TDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	Repetition number		2	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000	1000
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	1	
Frequency offset of the second TRxP from the first TRxP		Hz	300	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2 (Note 2)	
Precoding configuration			SP Type I, independent precoding generation is applied for both TRxPs,	

		random per slot with PRB bundling granularity
Note 1:	PDSCH transmission is done from both TRxPs	
Note 2:	ACK/NACK feedback is generated for PDSCH on slot i , where $\text{mod}(i,10) = \{2, 4, 6\}$.	

Table 5.2.2.2.14.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.2-16.2 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x2, ULA Low	1 (Note 3)	2.8
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block. Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.14.

5.2.2.2.14_1 2Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA

5.2.2.2.14_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states.

5.2.2.2.14_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportTDM-SchemeA-r16*.

5.2.2.2.14_1.3 Test description

Same test description as in clause 5.2.2.1.14_1.3 with the following exception:

- Table 5.2.2.2.14_1.4-1 instead of 5.2.2.1.14_1.4-1
- Table 5.2.2.2.14_1.3-1 instead of Table 5.2.2.1.14_1.3.3_1-5

Table 5.2.2.2.14_1.3-1: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	20	For CSI-RS resources 1,2,5,6	
Slots40	21	For CSI-RS resources 3,4,7,8	
}			

5.2.2.2.14_1.4 Test requirement

Table 5.2.2.2.14.0-3 defines the primary level settings.

The residual BLER specified in Note 3 of Table 5.2.2.2.14_1.4-1 test shall meet or be lower than the specified value in Table 5.2.2.2.14_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.14_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.2-16.2 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x2, ULA Low	1 (Note 3)	3.8
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block. Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

5.2.2.2.15 2Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access

5.2.2.2.15.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.15-3, with the addition of test parameters in Table 5.2.2.2.15-2 and the downlink physical channel setup according to Annex C.3.1.

Table 5.2.2.2.15.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance for UE supporting operations in shared spectrum access	1-1, 1-2, 1-3, 1-4

Table 5.2.2.2.15.0-2: Test parameters

Parameter	Unit	Value	
Duplex mode		TDD	
Active DL BWP index		1	
DL transmission model		As specified in B.5	
Downlink Model Parameters	SSB Q factor ^(Note 2)	8	
	Downlink transmission duration values	Slots	{2,4,6,7}
	Occupied OFDM symbols in slot other than the last slot of the downlink duration	Symbols	14
	Occupied OFDM symbols in the last slot of the downlink duration	Symbols	{6,9,12,14} ^(Note 1)
	Downlink period	ms	5
	LBT failure probability (p_{LBT})		0.25
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	dmrs-AdditionalPosition		pos1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes		8	
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
Note 1: If DL Transmission duration is 2 Slot, the occupied OFDM symbols in the last slot of the downlink duration is 14.			

Note 2: SSB Q Factor indicates the QCL relation between SS/PBCH blocks, and equals N_{SSB}^{QCL} (see 38.213, Section 4.1).

Table 5.2.2.2.15.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-18.1 TDD	20 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	13.8
1-2	R.PDSCH.2-18.2 TDD	40 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	14.1
1-3	R.PDSCH.2-18.3 TDD	60 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	14.2
1-4	R.PDSCH.2-18.4 TDD	80 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	14.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.15.

5.2.2.2.15_1 2Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access – 2x2 MIMO for both NSA and SA

5.2.2.2.15_1.1 Test purpose

To verify the PDSCH mapping Type A performance under 2 receive antenna conditions on a band with shared spectrum access and with different channel bandwidth, for a specific fading channel model for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.2.2.15_1.2 Test applicability

This test applies to all types of UE release 16 and forward supporting NR/5GC and NR-U and supporting UL shared channel access.

This test also applies to all types of UE release 16 and forward supporting EN-DC and NR-U and supporting UL shared channel access.

5.2.2.2.15_1.3 Test description

5.2.2.2.15_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Test point selection: largest supported channel bandwidth as per clause 5.1.1.9.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.2.15.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for NR/5GC with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.15_1.3.3.

5.2.2.2.15_1.3.2 Test procedure

For UE’s supporting semi-static channel access

1. The downlink signal transmission is as per the parameters defined in Table 5.2.2.2.15.0-2 and as referenced in B.5.1
2. SS transmits PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.15_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.15_1.4-1 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause TBD. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table TBD in Annex G clause TBD.

For UE’s supporting dynamic channel access

1. The downlink signal transmission is as per the parameters defined in Table 5.2.2.2.15.0-2 and as referenced in B.5.1
2. SS transmits PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.15_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.15_1.4-1 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause TBD. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table TBD in Annex G clause TBD.

5.2.2.2.15_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.15_1.3.3_1 Message exceptions for NR/5GC

Same as 5.2.2.2.1_1.3.3_1 with following exceptions.

Table 5.2.2.2.15_1.3.3_1-1: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 4.6.3-168			
Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE { channelAccessMode-r16 CHOICE {			
dynamic	NULL	gNB to configure dynamic or semi	SharedSpec trum-

		Static mode depending on UE support	DynChAccessMode
semiStatic	SemiStaticChannelAccessConfig-r16		SharedSpectrumSemiStaticChAccessMode
ssb-PositionQCL-r16 {	SSB-PositionQCL-Relation-r16		SharedSpectrum
}			

Table 5.2.2.2.15_1.3.3_1-2: SemiStaticChannelAccessConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-165A			
Information Element	Value/remark	Comment	Condition
SemiStaticChannelAccessConfig-r16 ::= SEQUENCE {			
Period-r16	ms5		channelAccessMode-r16 is semiStatic
}			

Table 5.2.2.2.15_1.3.3_1-3: SSB-PositionQCL-Relation

Derivation Path: TS 38.508-1 [6], Table 4.6.3-186A			
Information Element	Value/remark	Comment	Condition
SSB-PositionQCL-Relation-r16	n8		

5.2.2.2.15_1.3.3_2 Message exceptions for EN-DC

Same as in Clause 5.2.2.2.15_1.3.3_1

5.2.2.2.15_1.4 Test requirement

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.15_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.15_1.4-1: Test requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-18.1 TDD	20 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	14.8
1-2	R.PDSCH.2-18.2 TDD	40 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	15.1
1-3	R.PDSCH.2-18.3 TDD	60 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	15.2
1-4	R.PDSCH.2-18.4 TDD	80 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x2, ULA Low	70	15.5

5.2.2.2.16 2Rx TDD FR1 for PDSCH with inter-cell interference performance

5.2.2.2.16.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.16.0-3, with the addition of test parameters in Table 5.2.2.2.16.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.16.0-1.

Table 5.2.2.2.16.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance under 2 receive antenna conditions, when transmission from the serving cell is interfered by 1 or 2 interfering cells.	1-1, 1-2

Table 5.2.2.2.16.0-2: Test parameters

Parameter		Unit	Value		
			Cell 1	Cell 2	Cell 3
			Enabled	Enabled	Enabled for test 1-1 Disabled for test 1-2
Duplex mode			TDD		
TDD UL-DL pattern			FR1.30-1		
Active DL BWP index			1		
Physical cell ID			0	1	2
Transmission rank			1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell 1		us	N/A	1.5	-0.5
Frequency shift to Cell 1		Hz	N/A	300	-100
Interference Model			N/A	As specified in B.6.2	
INR (Note 2)		dB	N/A	7.77 for Test 1-1 7.58 for Test 1-2	2.29 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	First SSB in Slot #0 for Test 1-1 Second SSB in Slot #0 for Test 1-2	First SSB in Slot #0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PDSCH aggregation factor		1		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 0		
	RBG size		Config2		
	VRB-to-PRB mapping type		Non-interleaved		
PDSCH DMRS configuration	DMRS Type		Type 1		
	Number of additional		1		

	DMRS		
	Maximum number of OFDM symbols for DL front loaded DMRS		1
	Number of HARQ Processes		8
	The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
Note 1: Cell 1 is the serving cell, Cell 2, 3 are interference cells.			
Note 2: INR is defined in Annex B.6.1			

Table 5.2.2.2.16.0-3: Minimum performance for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Cell1			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	15.7
1-2	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	12.6
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Subcarrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.16.

5.2.2.2.16_1 2Rx TDD FR1 for PDSCH with inter-cell interference performance – 2x2 MIMO for both NSA and SA

5.2.2.2.16_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions, when transmission from the serving cell is interfered by 1 or 2 interfering cells.

5.2.2.2.16_1.2 Test applicability

Test 1-1 and test 1-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

Test 1-1 and test 1-2 applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.2.2.16_1.3 Test description

5.2.2.2.16_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the serving cell and interfering cells are set up according to Table 5.2-1 and Table 5.2.2.2.16.0-2 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.16_1.3.3.

5.2.2.2.16_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.16_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for the serving cell and interfering cells according to Table 5.2.2.2.16_1.4-2.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.2.16_1.4-2 as appropriate.

5.2.2.2.16_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.16_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.2.2.16_1.3.3_1 Message exceptions for NSA

No message exceptions for NSA

5.2.2.2.16_1.4 Test requirement

Tables 5.2.2.2.16_1.4-1 and 5.2.2.2.16_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.16_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.16_1.4-1: Test parameters

Parameter	Unit	Value		
		Cell 1	Cell 2	Cell 3
		Enabled	Enabled	Enabled for test 1-1 Disabled for test 1-2
Duplex mode		TDD		
TDD UL-DL pattern		FR1.30-1		
Active DL BWP index		1		
Physical cell ID		0	1	2
Transmission rank		1	Random rank with 70% and	Random rank with 70% and

				30% probability for rank 1 and rank 2	30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell 1		us	N/A	1.5	-0.5
Frequency shift to Cell 1		Hz	N/A	300	-100
Interference Model			N/A	As specified in B.6.2	
INR (Note 2)		dB	N/A	7.77+0.8 for Test 1-1 7.58+0.8 for Test 1-2	2.29+0.8 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	First SSB in Slot #0 for Test 1-1 Second SSB in Slot #0 for Test 1-2	First SSB in Slot #0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PDSCH aggregation factor		1		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 0		
	RBG size		Config2		
	VRB-to-PRB mapping type		Non-interleaved		
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A		
	DMRS Type		Type 1		
	Number of additional DMRS		1		
	Maximum number of OFDM symbols for DL front loaded DMRS		1		
Number of HARQ Processes			8		
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Note 1: Cell 1 is the serving cell, Cell 2, 3 are interference cells.					
Note 2: INR is defined in Annex B.6.1					

Table 5.2.2.2.16_1.4-2: Test requirement for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Cell1			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	17.4
1-2	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.4
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Subcarrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

5.2.2.2.17 2Rx TDD FR1 for PDSCH with intra-cell inter user interference

5.2.2.2.17.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.17.0-3, with the addition of test parameters in Table 5.2.2.2.17.0-2 and the downlink physical channel setup according to Annex C.3.1.

The performance requirements for UE supporting Enhanced Receiver Type 2 are specified in Table 5.2.2.2.17.0-5, with the addition of test parameters in Table 5.2.2.2.17.0-2 and Table 5.2.2.2.17.0-4, and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.17.0-1.

Table 5.2.2.2.17.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance under 2 receive antenna conditions when the PDSCH transmission of target UE is interfered by co-scheduled UE	1-1
Verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.	2-1
Verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.	2-2

Table 5.2.2.2.17.0-2: Test parameters

Parameter	Unit	Target UE	Co-scheduled UE
Duplex mode		TDD	
Active DL BWP index		1	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	2	
	Length (L)	12	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size	N/A	
PDSCH DMRS configuration	DMRS Type	Type 1	
	Number of additional DMRS	1	
	Maximum number of OFDM symbols for DL front loaded DMRS	1	
	Antenna ports indexes	1000	1001
	Number of PDSCH DMRS CDM group(s) without data	1	1
PDSCH & PDSCH DMRS Precoding configuration		Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable $i1/i2$ combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12].	Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable $i1/i2$ combination or codebook Index, chosen from section 5.2.2.2.1 of TS

			38.214 [12].Any column of precoder matrix is not equal to any column of precoder matrix of Target UE for test 1-1. Select the precoder to ensure any column of precoder is orthogonal to any column of precoder for the target PDSCH for test 2-1 and 2-2.
MU-MIMO Beamforming Model		As specified in B.4.2	
Number of HARQ Processes		8	N/A
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	N/A
Note 1: The DMRS scrambling ID is same for both target UE and Co-scheduled UE.			

Table 5.2.2.2.17.0-3: Minimum performance for PDSCH of target UE with Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	Random 16QAM symbols	FR1.30-1	TDLC300-100	2x2, ULA Low	70	18.9

The parameters in Table 5.2.2.2.17.0-4 are configured for requirements with enhanced Receiver Type 2.

Table 5.2.2.2.17.0-4: Assistance Information parameters for requirements with Enhanced Receiver Type 2

Parameter		Value
AdvancedReceiver-MU-MIMO-r18	precodingAndResourceAllocation	True
	pdsch-TimeDomainAllocation	True
	mcs-Table	qam256
	advReceiver-MU-MIMO-DCI-1-1	Enabled
Co-scheduled UE information in DCI (Table 7.3.1.2.2-12 of TS38.212[10])		1 for Test 2-1 6 for Test 2-2

Table 5.2.2.2.17.0-5: Minimum performance for target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	Random QPSK symbols	FR1.30-1	TDLC300-100	2x2, ULA Medium	70	16.9
2-2	R.PDSCH.7-1.3 TDD	40 / 30	64QAM, 0.43	Random 16QAM symbols	FR1.30-1	TDLC300-100	2x2, ULA Medium	70	26.0

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.17.

5.2.2.2.17_1 2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA

5.2.2.2.17_1.1 Test purpose

To verify the PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.2.2.17_1.2 Test applicability

Test 1-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

Test 1-1 applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.2.2.17_1.3 Test description

5.2.2.2.17_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.2.17.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.17_1.3.3.

5.2.2.2.17_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.17_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.17_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.2.17_1.4-1 as appropriate.

5.2.2.2.17_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.17_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.2.2.17_1.3.3_1 Message exceptions for NSA

No message exceptions for NSA

5.2.2.2.17_1.4 Test requirement

Table 5.2.2.2.17_1.4-1: Test requirement for PDSCH of target UE with Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	Random 16QAM symbols	FR1.30-1	TDLC300-100	2x2, ULA Low	70	19.8

5.2.2.2.17_2 2Rx TDD FR1 for PDSCH with Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD.

- TC applicability is FFS in TS38.522
- Measurement Uncertainties and Test Tolerances are FFS
- Minimum test time analysis is pending

5.2.2.2.17_2.1 Test purpose

Test 2-1 is to verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signalled by DCI.

Test 2-2 is to verify PDSCH performance under 2 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.

5.2.2.2.17_2.2 Test applicability

Test 2-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18*.

Test 2-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward which declare supporting '*MU-MIMO Interference Mitigation advanced receiver with modulation order detection*' or '*MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh*' in TS38.306 [14].

5.2.2.2.17_2.3 Test description

5.2.2.2.17_2.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.2.2.17.0-2 and Table 5.2.2.2.17.0-4 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.17_2.3.3.

5.2.2.2.17_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.17_2.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.17_2.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.2.17_2.4-1 as appropriate.

5.2.2.2.17_2.3.3 Message contents

5.2.2.2.17_2.3.3_1 Message exceptions for SA

Same as 5.2.2.2.17_1.3.3_1 with the following exceptions:

Table 5.2.2.2.17_2.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.1-20			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {	1 entry		
AdvancedReceiver-MU-MIMO-r18 ::= SEQUENCE {			
precodingAndResourceAllocation-r18	true		
pdsch-TimeDomainAllocation-r18	true		
mcs-Table-r18	qam256		
advReceiver-MU-MIMO-DCI-1-1-r18	enabled		
}			
}			

Table 5.2.2.2.17_2.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1

Parameter	Value	Value in binary	Condition
Co-scheduled UE information	'In all the PRBs allocated to the UE, all the co-scheduled UE(s), if any, which have the same root DMRS sequence as the UE, are scheduled with modulation scheme QPSK' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'001' B	Test 2-1
	'In each individual PRB allocated to the UE, all the co-scheduled UE(s), which have the same root DMRS sequence as the UE, are scheduled with the same modulation scheme, except the cases corresponding to index 0~5' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'110' B	Test 2-2

5.2.2.2.17_2.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.17_2.3.3_1.

5.2.2.2.17_2.4 Test requirement

Table 5.2.2.2.17_2.4-1: Test requirement for PDSCH of target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	Random QPSK symbols	FR1.30-1	TDLC300-100	2x2, ULA Medium	70	16.9+TT
2-2	R.PDSCH.7-1.3 TDD	40 / 30	64QAM, 0.43	Random 16QAM symbols	FR1.30-1	TDLC300-100	2x2, ULA Medium	70	26.0+TT

5.2.2.2.18 2Rx TDD FR1 PDSCH performance for RedCap

5.2.2.2.18.1 Test Purpose

To verify the PDSCH performance mapping Type A under 2 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.2.2.18.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

5.2.2.2.18.3 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.2.2.18.3-3 and 5.2.2.2.18.3-4, with the addition of test parameters in Table 5.2.2.2.18.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.18.3-1.

Table 5.2.2.2.18.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for RedCap UEs	1-1, 1-2, 1-3, 2-1

Table 5.2.2.2.18.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1 2 for other tests
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2 for Test 1-1 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		Table 5.2-1
	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
	Frequency Occupation		Table 5.2-1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.2.18.3-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.5 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	0.2
1-2	R.PDSCH.2-4.2 TDD	20 / 30	256QAM, 0.82	FR1.30-1	TDLA30-10	2x2, ULA Low	70	25.3
1-3	R.PDSCH.2-26.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	8.1

Table 5.2.2.2.18.3-4: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-27.1 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	20.1

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.18.

5.2.2.2.18.4 Test description

5.2.2.2.18.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.18.4.3.

5.2.2.2.18.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.18.5-1 and 5.2.2.2.18.5-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.18.5-1 and 5.2.2.2.18.5-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Tables 5.2.2.2.18.5-1 and 5.2.2.2.18.5-2 as appropriate.

5.2.2.2.18.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.2.2.18.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2 Not present	n4 for test 1-1 n2 will be used by default	test 1-1 test point other than test 1-1
}			
}			
}			

Table 5.2.2.2.18.4.3-2: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots40	20 (for CSI-RS resources 1 and 2) 21 (for CSI-RS resources 3 and 4)	CSI-RS offset: 20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 CSI-RS periodicity: 40 slots	
}			

Table 5.2.2.2.18.4.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE { nrofHARQ-ProcessesForPDSCH	n8		
}			

5.2.2.2.18.5 Test Requirement

Tables 5.2.2.2.18.5-1 and 5.2.2.2.18.5-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test shall meet or exceed the specified value in Tables 5.2.2.2.18.5-1 and 5.2.2.2.18.5-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.18.5-1: Test Requirements for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.5 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	1.1
1-2	R.PDSCH.2-4.2 TDD	20 / 30	256QAM, 0.82	FR1.30-1	TDLA30-10	2x2, ULA Low	70	26.3
1-3	R.PDSCH.2-26.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	9.0

Table 5.2.2.2.18.5-2: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-27.1 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	21.1

5.2.2.2.19 2Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario

5.2.2.2.19.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.19.0-4, with the addition of test parameters in Tables 5.2.2.2.19.0-2 and 5.2.2.2.19.0-3 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.19.0-1.

Table 5.2.2.2.19.0-1: Tests purpose

Purpose	Test index
Verify PDSCH CRS interference mitigation performance under 2 receive antenna conditions with CRS rate matching configured for the serving cell	1-1

Table 5.2.2.2.19.0-2: Tests parameters for serving cell PDSCH

Parameter	Unit	Value	
Duplex mode		TDD	
Active DL BWP index		1	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	3	
	Length (L)	9	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	DMRS Type	Type 1	
	Number of additional DMRS	1	
	Maximum number of OFDM symbols for DL front loaded DMRS	1	
CRS for rate Matching (Note 1)	LTE carrier centre subcarrier location	Same as NR carrier centre subcarrier location	
	LTE carrier BW	Hz	20
Number of HARQ Processes	Number of antenna ports		4
	v-shift		0
The number of slots between PDSCH and corresponding HARQ-ACK information			8
Note 1: No MBSFN is configured on LTE carrier.			
Note 2: Network-based CRS interference mitigation is disabled on LTE carrier			

Table 5.2.2.2.19.0-3: Tests parameter for interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		TDD	TDD
TDD UL-DL pattern		DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR (Note 1)	dB	10.45	4.6
LTE Bandwidth	MHz	20	20
Carrier centre subcarrier location		Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix		Normal	Normal

Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level	%		20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.
Transmission rank	%		80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell	us		3	-1
Frequency offset to the serving cell	Hz		300	-100
Propagation conditions and MIMO configuration (Note 2)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity	PRB		8	8
Note 1: Defined in B.6.1				
Note 2: The channel for the LTE interference cells and the serving cell are independent.				

Table 5.2.2.19.0-4: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x2, ULA Low	70	12.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.19.

5.2.2.2.19_1 2Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x2 MIMO for both NSA and SA

5.2.2.2.19_1.1 Test purpose

To verify PDSCH CRS interference mitigation performance under 2 receive antenna conditions with CRS rate matching configured for the serving cell.

5.2.2.2.19_1.2 Test applicability

This test applies to all types of NR UE release 17 and forward that support *CRS-IM-DSS-15kHzSCS-r17*.

5.2.2.2.19_1.3 Test description

5.2.2.2.19_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.2.2.19.0-2 and 5.2.2.2.19.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.19_1.3.3.

5.2.2.2.19_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.19_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.19_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.2.2.19_1.4-2 as appropriate.

5.2.2.2.19_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.19_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.2.19_1.3.3_1-1: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-2			
Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE {			
dmrs-TypeA-Position	pos3		
lte-CRS-ToMatchAround	RateMatchPatternLTE-CRS		
}			

Table 5.2.2.2.19_1.3.3_1-2: RateMatchPatternLTE-CRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-28			
Information Element	Value/remark	Comment	Condition
RateMatchPatternLTE-CRS ::= SEQUENCE {			
carrierFreqDL	Same as NR carrier centre subcarrier location		
carrierBandwidthDL	n100	20MHz	
mbsfn-SubframeConfigList	Not present		

nrofCRS-Ports	n4		
v-Shift	n0		
}			

5.2.2.2.19_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.19_1.3.3_1

5.2.2.2.19_1.4 Test requirement

Tables 5.2.2.2.19_1.4-1 and 5.2.2.2.19_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.19_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.19_1.4-1: Tests parameter for interference cells

Parameter		Unit	Cell 1	Cell 2
Duplex mode			TDD	TDD
TDD UL-DL pattern			DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR (Note 1)		dB	11.25	5.4
LTE Bandwidth		MHz	20	20
Carrier centre subcarrier location			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 2)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
Note 1: Defined in B.6.1				
Note 2: The channel for the LTE interference cells and the serving cell are independent.				

Table 5.2.2.2.19_1.4-2: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-	20 / 15	16QAM,	FR1.15-1	TDLA30-10	4x2, ULA Low	70	14.3

	1.3 TDD		0.48				
--	---------	--	------	--	--	--	--

5.2.2.2.20 2Rx TDD FR1 for PDSCH with inter cell CRS interference

5.2.2.2.20.0 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.2.2.20.0-4 and 5.2.2.2.20.0-6, with the addition of test parameters in Tables 5.2.2.2.20.0-2 and 5.2.2.2.20.0-3 and the downlink physical channel setup according to Annex C.3.1.

The requirements for UE capable of performing CRS-IM with the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.2.2.20.0-4.

The requirements for UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.2.2.20.0-6.

The test purposes are specified in Table 5.2.2.2.20.0-1.

Table 5.2.2.2.20.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions when PDSCH is interfered by inter cell CRS signal	1-1, 1-2, 2-1, 2-2

Table 5.2.2.2.20.0-2: Tests parameters for serving cell PDSCH

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		8
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.2.20.0-3: Tests parameter for interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		TDD	TDD
TDD UL-DL pattern		DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR (Note 5)	dB	10.45	4.6
LTE Bandwidth (Note 6)	MHz	20	20
Carrier centre subcarrier location (Note 7)		Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location

Cyclic Prefix		Normal	Normal
Physical cell ID		1	2
CRS pattern	Number of antenna ports	4	4
	v-shift	1	2
Downlink power allocation	ρ_A	dB	-6
	ρ_B	dB	-6
	σ	dB	0
PDSCH transmission mode		TM4	TM4
PDSCH loading level	%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.
Transmission rank	%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model		As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell	us	3 for test 1-1 1.5 for test 1-2	-1 for test 1-1 -0.5 for test 1-2
Frequency offset to the serving cell	Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)		TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity	PRB	8	8
<p>Note 1: The channel for the LTE interference cells and the serving cell are independent.</p> <p>Note 2: No MBSFN is configured on LTE carrier.</p> <p>Note 3: Network-based CRS interference mitigation is disabled on LTE carrier.</p> <p>Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame</p> <p>Note 5: Defined in B.6.1</p> <p>Note 6: This parameter is informed to UE via network assistance signalling for Test 1-1 and 1-2 in Table 5.2.2.2.20.0-4.</p> <p>Note 7: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases with network signalling assistance</p>			

Table 5.2.2.2.20.0-4: Minimum performance for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-4.1 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x2, ULA Low	70	12.3
1-2	R.PDSCH.2-28.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x2, ULA Low	70	11.7

Table 5.2.2.2.20.0-5: Measurement Gap configurations

Parameter	Unit	Value
Measurement Gap Length (mgl)	ms	6
Measurement Gap Repetition Period (mgrp)	ms	40
Gap offset (gapoffset)	ms	1
Measurement gap timing advance (mgta)	ms	0

Table 5.2.2.2.0-6: Minimum performance for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-4.2 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x2, ULA Low	70	12.3
2-2	R.PDSCH.2-29.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x2, ULA Low	70	11.7

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.20.

5.2.2.2.20_1 2Rx TDD FR1 for PDSCH with inter cell CRS interference scenario – 4x2 MIMO for both NSA and SA

5.2.2.2.20_1.1 Test purpose

To verify PDSCH performance under 2 receive antenna conditions when PDSCH is interfered by inter cell CRS signal.

5.2.2.2.20_1.2 Test applicability

Tests 2-1 and 2-2 apply to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-15kHzSCS-r17* or *crs-IM-nonDSS-30kHzSCS-r17*.

Tests 1-1 and 1-2 apply to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-NWA-15kHzSCS-r17* or *crs-IM-nonDSS-NWA-30kHzSCS-r17*.

5.2.2.2.20_1.3 Test description

5.2.2.2.20_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.2.2.0-2 and 5.2.2.2.0-1.4-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.20_1.3.3.
6. For UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth, ensure the network configures an inter-RAT LTE measurement object of the interfering cells to the tested UE. Inter-RAT measurement is configured at the beginning of the test and applied throughout the test with gap pattern configurations according to Table 5.2.2.2.20.0-5. PDSCH is not scheduled, and throughput is not counted during 4.64s after the beginning of test. PDSCH is not scheduled in the measurement gaps.

5.2.2.2.20_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.20_1.4-2 and 5.2.2.2.20_1.4-3 as appropriate. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.20_1.4-2 and 5.2.2.2.20_1.4-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.2.2.20_1.4-2 and 5.2.2.2.20_1.4-3 as appropriate.

5.2.2.2.20_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.20_1.3.3_1 Message exceptions for SA

As defined in clause 4.6.3 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.2.20_1.3.3_1-1: LTE-NeighCellsCRS-AssistInfoList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-67A			
Information Element	Value/remark	Comment	Condition
LTE-NeighCellsCRS-AssistInfoList-r17 ::= SEQUENCE (SIZE (1..maxNrofCRS-IM-InterfCell-r17)) OF LTE-NeighCellsCRS-AssistInfo-r17 {	1 entry		Tests 1-1 and 1-2
LTE-NeighCellsCRS-AssistInfo-r17[1] SEQUENCE {			
neighCarrierBandwidthDL-r17	n100		
neighNrofCRS-Ports-r17	n4		
}			
}			

Table 5.2.2.2.20_1.3.3_1-2: MeasGapConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-70			
Information Element	Value/remark	Comment	Condition
MeasGapConfig ::= SEQUENCE {			Tests 2-1 and 2-2
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	1		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			
}			

5.2.2.2.20_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.2.20_1.3.3_1

5.2.2.2.20_1.4 Test requirement

Tables 5.2.2.2.20_1.4-1, 5.2.2.2.20_1.4-2 and 5.2.2.2.20_1.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Tables 5.2.2.2.20_1.4-2 and Tables 5.2.2.2.20_1.4-3 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.20_1.4-1: Tests parameter for interference cells

Parameter		Unit	Cell 1	Cell 2
Duplex mode			TDD	TDD
TDD UL-DL pattern			DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR (Note 5)		dB	11.25	5.4
LTE Bandwidth (Note 6)		MHz	20	20
Carrier centre subcarrier location (Note 7)			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3 for test 1-1 1.5 for test 1-2	-1 for test 1-1 -0.5 for test 1-2
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
<p>Note 1: The channel for the LTE interference cells and the serving cell are independent.</p> <p>Note 2: No MBSFN is configured on LTE carrier.</p> <p>Note 3: Network-based CRS interference mitigation is disabled on LTE carrier.</p> <p>Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame</p> <p>Note 5: Defined in B.6.1</p> <p>Note 6: This parameter is informed to UE via network assistance signalling for Test 1-1 and 1-2 in Table 5.2.2.2.20.0-4.</p> <p>Note 7: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases</p>				

with network signalling assistance

Table 5.2.2.2.20_1.4-2: Test requirement for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-4.1 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x2, ULA Low	70	14.1
1-2	R.PDSCH.2-28.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x2, ULA Low	70	13.5

Table 5.2.2.2.20_1.4-3: Test requirement for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-4.2 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x2, ULA Low	70	14.1
2-2	R.PDSCH.2-29.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x2, ULA Low	70	13.5

5.2.2.2.21 2Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA

5.2.2.2.21.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme A scenario.

5.2.2.2.21.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme A for PDCCH scheduling SFN Scheme A PDSCH.

5.2.2.2.21.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.21.3-3, with the addition of test parameters in Table 5.2.2.2.21.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.21.3-1.

Table 5.2.2.2.21.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme A scenario defined in B.3.5	1-1

Table 5.2.2.2.21.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1

PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
	TCI state		Note 1
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 20 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #3
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #4
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots 20 for CSI-RS resource 9,10,11,12.
		CSI-RS offset	Slots 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12
		QCL info	TCI state #5
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
		QCL info	TCI state #0
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
		QCL info	TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 7$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
		QCL info	TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
TCI state #2	Type 1 QCL information	CSI-RS resource	CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A

TCI state #3	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #4	Type 1 QCL information	SSB index		SSB #1
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #5	Type 1 QCL information	SSB index		SSB #2
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
Number of HARQ Processes				8
The number of slots between PDSCH and corresponding HARQ-ACK information				Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
<p>Note 1: SSB # (k mod 3), CSI-RS (for tracking) resource set # ((k mod 3) + 1) and CSI-RS (for CSI acquisition) resource set # ((k mod 3) + 4) are transmitted by kth RRH. Codepoint #0 is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1 with TCI States TCI state #0, TCI State #1. Codepoint #1 is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2 with TCI States TCI state #1, TCI State #2. Codepoint #2 is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3 with TCI States TCI state #2, TCI State #0.</p>				

Table 5.2.2.21.3-3: Minimum performance for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN Scheme A	2x2	70	12.9

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.21.

5.2.2.2.21.4 Test description

5.2.2.2.21.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.2.21.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.3.5.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.21.4.3.

5.2.2.2.21.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.21.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.2.2.21.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.21.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of Table 5.2.2.2.21.3-2 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.21.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.2.2.21.4.3.1 Message exceptions for SA

Table 5.2.2.2.21.4.3.1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	Test 1-1
}			
}			
}			

Table 5.2.2.2.21.4.3.1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1
}			

Table 5.2.2.2.21.4.3.1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8		Test 1-1

}		
---	--	--

Table 5.2.2.2.21.4.3.1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8,9,10,11,12	for test 1-1	
qcl-InfoPeriodicCSI-RS	3 for CSI-RS resource #1, #2, #3, #4 4 for CSI-RS resource #5, #6, #7, #8 5 for CSI-RS resource #9, #10, #11, #12	for test 1-1: TCI-StateId for TCI- State #3 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI- State #4 for CSI-RS resource #5, #6, #7, #8 TCI-StateId for TCI- State #5 for CSI-RS resource #9, #10, #11, #12	
}			

Table 5.2.2.2.21.4.3.1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.2.2.21.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8 4 for CSI-RS resource #9 and #11 8 for CSI-RS resource #10 and #12	for test 1-1: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4 l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8 l ₀ = 4 for CSI-RS resource 9 and 11 l ₀ = 8 for CSI-RS resource 10 and 12	
}			

Table 5.2.2.2.21.4.3.1-6: CSI-ResourcePeriodicityAndOffset for CSI Tracking (Table 5.2.2.2.21.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	1 for CSI-RS resource #1, #2, #5, #6, #9, #10 2 for CSI-RS resource #3 #4, #7, #8, #11, #12	For test 1-1: periodicity: 20 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and	

		12	
}			

Table 5.2.2.2.21.4.3.1-7: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2 2 for Resource set #3	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #1
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource #1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
NZP-CSI-RS-ResourceId[2]	9	entry 2 CSI-RS resource #10	
NZP-CSI-RS-ResourceId[3]	10	entry 3 CSI-RS resource #11	
NZP-CSI-RS-ResourceId[4]	11	entry 4 CSI-RS resource #12	
}			
trs-Info	true		
}			

Table 5.2.2.2.21.4.3.1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14
--

Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	12 for CSI-RS resource #13 13 for CSI-RS resource #14 14 for CSI-RS resource #15	for test 1-1	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #13 1 for CSI-RS resource #14 2 for CSI-RS resource #15	for test 1-1: TCI-State #0 for CSI-RS resource #13 TCI-State #1 for CSI-RS resource #14 TCI-State #2 for CSI-RS resource #15	
}			

Table 5.2.2.2.21.4.3.1-9: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.2.2.21.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #13 13 for CSI-RS resource #14 7 for CSI-RS resource #15	for test 1-1 I0=12 for CSI-RS resource #13 I0=13 for CSI-RS resource #14 I0=7 for CSI-RS resource #15	
}			

Table 5.2.2.2.21.4.3.1-10: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.2.2.21.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots40	0	For test 1-1 periodicity = 40 slots. offset = 0 slots	
}			

Table 5.2.2.2.21.4.3.1-11: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	3 for Resource set #4 4 for Resource set #5 5 for Resource set #6	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #4
NZP-CSI-RS-ResourceId[1]	12	entry 1 CSI-RS resource #13	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #5

NZP-CSI-RS-ResourceId[1]	13	entry 1 CSI-RS resource #14	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #5
NZP-CSI-RS-ResourceId[1]	14	entry 1 CSI-RS resource #15	
}			
}			

Table 5.2.2.2.21.4.3.1-12: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3 4 for TCI state #4 5 for TCI state #5	For test 1-1	
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1, TCI state #2
	Not present		TCI state #3, TCI state #4, TCI state #5
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
	8	CSI-RS resource #9	TCI state #2
ssb	0	SSB #0	TCI state #3
	1	SSB #1	TCI state #4
	2	SSB #2	TCI state #5
}			
qcl-Type	typeA		TCI state #0, TCI state #1, TCI state #2
	typeC		TCI state #3, TCI state #4, TCI state #5
}			
}			

5.2.2.2.21.4.3.2 Message exceptions for NSA

Same as 5.2.2.2.21.4.3.1.

5.2.2.2.21.5 Test Requirement

Tables 5.2.2.2.21.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.21.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.21.5-1: Test Requirements for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN Scheme A	2x2	70	[13.5]

5.2.2.2.22 2Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA

5.2.2.2.22.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme B scenario.

5.2.2.2.22.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme B for PDCCH scheduling SFN Scheme B PDSCH.

5.2.2.2.22.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.22.3-3, with the addition of test parameters in Table 5.2.2.2.22.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.22.3-1.

Table 5.2.2.2.22.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme B scenario defined in B.3.6	1-1

Table 5.2.2.2.22.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	TCI state		Note 1
	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1

CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots	20 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots	1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info		TCI state #3
		Frequency Occupation		Start PRB 0 Number of PRB = 52
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots	20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots	1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info		TCI state #4
		Frequency Occupation		Start PRB 0 Number of PRB = 52
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots	20 for CSI-RS resource 9,10,11,12.
		CSI-RS offset	Slots	1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12
		QCL info		TCI state #5
		Frequency Occupation		Start PRB 0 Number of PRB = 52
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	40
		CSI-RS offset	Slots	0
		QCL info		TCI state #0
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$
		CSI-RS periodicity	Slots	40
		CSI-RS offset	Slots	0
		QCL info		TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 7$
		CSI-RS periodicity	Slots	40
		CSI-RS offset	Slots	0
		QCL info		TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #3	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #4	Type 1 QCL information	SSB index		SSB #1
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #5	Type 1 QCL information	SSB index		SSB #2
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A

Number of HARQ Processes		8
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
<p>Note 1: SSB # (k mod 3), CSI-RS (for tracking) resource set # ((k mod 3) + 1) and CSI-RS (for CSI acquisition) resource set # ((k mod 3) + 4) are transmitted by kth RRH. Codepoint#0 {TCI state #0, TCI State #1} is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1. Codepoint#1 {TCI state #1, TCI State #2} is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2. Codepoint#2 {TCI state #2, TCI State #0} is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3. The second indicated TCI state in each codepoint is not used for quasi co-location parameters {Doppler shift, Doppler spread}.</p>		

Table 5.2.2.22.3-3: Minimum performance for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40/30	16QAM, 0.48	FR1.30-1	HST-SFN-Scheme B	2x2	70	11.8

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.22.

5.2.2.2.22.4 Test description

5.2.2.2.22.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.22.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.6.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.22.4.3.

5.2.2.2.22.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.22.5-1 as appropriate.

2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.2.2.22.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.22.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of table 5.2.2.2.22.5-1 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.2.2.22.4.3 Message contents

Same as message contents in 5.2.2.2.21.4.3.

5.2.2.2.22.5 Test Requirement

Tables 5.2.2.2.22.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.22.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.22.5-1: Test Requirements for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40/30	16QAM, 0.48	FR1.30-1	HST-SFN-Scheme B	2x2	70	12.4

5.2.2.2.23 2Rx TDD FR1 PDSCH ATG performance

5.2.2.2.23.1 Test Purpose

To verify UE PDSCH performance under the ATG scenario.

5.2.2.2.23.2 Test applicability

This test applies to all types of 2Rx NR ATG UE release 18 and forward.

5.2.2.2.23.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.2.2.23.3-3, with the addition of test parameters in Table 5.2.2.2.23.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.23.3-1.

Table 5.2.2.23.3-1: Tests purpose

Purpose	Test index
Verify UE PDSCH performance under the ATG scenario	1-1, 1-2, 1-3, 1-4, 1-5, 1-6, 1-7, 1-8, 1-9

Table 5.2.2.2.23.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
Maximum number of OFDM symbols for DL front loaded DMRS			1
Number of HARQ Processes			Test 1-1, 1-2, 1-3: 8 Test 1-4, 1-5, 1-6, 1-7, 1-8, 1-9: 32
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.2.2.23.3-3: Minimum performance for ATG

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -1	AWGN	500Hz	2x2	70	6.0
1-2	R.PDSCH. 2-3.6 TDD	40 / 30	64QAM, 0.65	FR1.30 -1	AWGN	500Hz	2x2	70	13.5
1-3	R.PDSCH. 2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -1	AWGN	500Hz	2x2	70	22.6
1-4	R.PDSCH. 2-31.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x2	70	6.0
1-5	R.PDSCH. 2-32.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x2	70	13.5
1-6	R.PDSCH. 2-33.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x2	70	22.6
1-7	R.PDSCH. 2-40.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x2	70	6.0
1-8	R.PDSCH. 2-41.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x2	70	13.5
1-9	R.PDSCH. 2-42.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x2	70	22.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.23.

5.2.2.2.23.4 Test description

5.2.2.2.23.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.2.2.23.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.23.4.3.

5.2.2.2.23.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.23.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.2.2.23.3-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.2.2.23.5-1 as appropriate.

5.2.2.2.23.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.2.2.23.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used for test 1-1, test 1-2, 1-3, 1-4, 1-5, 1-6, 1-7, 1-8 and 1-9	
}			
}			
}			

Table 5.2.2.2.23.4.3-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos1	1 additional DMRS symbol for test 1-1, test 1-2,	

		1-3, 1-4, 1-5, 1-6, 1-7, 1-8 and 1-9	
}			

Table 5.2.2.2.23.4.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8 for test 1-1, test 1-2 and 1-3	
	n32	n32 for test 1-4, 1-5, 1-6, 1-7, 1-8 and 1-9	
}			

5.2.2.2.23.5 Test Requirement

Tables 5.2.2.2.23.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.23.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.23.5-1: Test Requirements for ATG

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -1	AWGN	500Hz	2x2	70	6.6
1-2	R.PDSCH. 2-3.6 TDD	40 / 30	64QAM, 0.65	FR1.30 -1	AWGN	500Hz	2x2	70	14.1
1-3	R.PDSCH. 2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -1	AWGN	500Hz	2x2	70	23.2
1-4	R.PDSCH. 2-31.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x2	70	6.6
1-5	R.PDSCH. 2-32.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x2	70	14.1
1-6	R.PDSCH. 2-33.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x2	70	23.2
1-7	R.PDSCH. 2-40.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x2	70	6.6
1-8	R.PDSCH. 2-41.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x2	70	14.1
1-9	R.PDSCH. 2-42.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x2	70	23.2

5.2.2.2.24 2Rx TDD FR1 PDSCH performance for eRedCap

5.2.2.2.24.1 Test Purpose

To verify the PDSCH performance mapping Type A under 2 receive antenna conditions with different channel models and MCSs for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.2.2.24.2 Test applicability

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.2.2.2.24.3 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.2.2.24.3-3 and 5.2.2.2.24.3-4, with the addition of test parameters in Table 5.2.2.2.24.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.2.2.24.3-1.

Table 5.2.2.2.24.3-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs for for eRedCap UE with reduced baseband bandwidth in FR1.	1-1, 1-2, 2-1
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs for for eRedCap UE without reduced baseband bandwidth in FR1.	3-1, 3-2, 4-1

Table 5.2.2.2.24.3-2: Test parameters

Parameter	Unit	Value	
Duplex mode		TDD	
Active DL BWP index		1	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	2	
	Length (L)	Specific to each Reference channel	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	4 for Test 1-1 2 for other tests	
	Resource allocation type	Type 1 for Tests 1-1, 1-2, 2-1, 4-1 Type 0 for Tests 3-1, 3-2	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
VRB-to-PRB mapping interleaver bundle size	N/A		
PDSCH DMRS configuration	DMRS Type	Type 1	
	Number of additional DMRS	2 for Test 1-1, Test 3-1 1 for other tests	
	Maximum number of OFDM symbols for DL front loaded DMRS	1	
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS	Table 5.2-1	
	CSI-RS periodicity	Slots	Table 5.2-1
	CSI-RS offset	Slots	Table 5.2-1
	Frequency Occupation		Table 5.2-1
Number of HARQ Processes		8	
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	

Table 5.2.2.2.24.3-3: Minimum performance for Rank 1 with reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-39.1 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	0.7
1-2	R.PDSCH.2-26.3 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	8.5

Table 5.2.2.2.24.3-4: Minimum performance for Rank 2 with reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-27.3 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	19.1

Table 5.2.2.2.24.3-5: Minimum performance for Rank 1 without reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-39.2 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	0.4
3-2	R.PDSCH.2-26.4 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	8.2

Table 5.2.2.2.24.3-6: Minimum performance for Rank 2 without reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.2-27.3 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	19.1

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.2.2.24.

5.2.2.2.24.4 Test description

5.2.2.2.24.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.2.24.4.3.

5.2.2.2.24.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.2.2.24.5-1 and 5.2.2.2.24.5-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.24.5-1 and 5.2.2.2.24.5-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Tables 5.2.2.2.24.5-1, 5.2.2.2.24.5-2, 5.2.2.2.24.5-3 and 5.2.2.2.24.5-4 as appropriate.

5.2.2.2.24.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.2.2.24.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Tests 1-1, 1-2, 2-1, 4-1
	resourceAllocationType0		Tests 3-1, 3-2
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4, n2 Not present	n4 for test 1-1 n2 will be used by default	test 1-1 test point other than test 1-1
}			
}			
}			

Table 5.2.2.2.24.4.3-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	Not present pos1	pos2 For Test 1-1, Test 3-1 pos1 for other tests than Test 1-	

		1 and Test 3-1	
}			

Table 5.2.2.2.4.3-3: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots40	20 (for CSI-RS resources 1 and 2) 21 (for CSI-RS resources 3 and 4)	CSI-RS offset: 20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 CSI-RS periodicity: 40 slots	
}			

Table 5.2.2.2.4.3-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE { nrofHARQ-ProcessesForPDSCH	n8		
}			

5.2.2.2.24.5 Test Requirement

Tables 5.2.2.2.24.5-1 and 5.2.2.2.24.5-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test shall meet or exceed the specified value in Tables 5.2.2.2.24.5-1, 5.2.2.2.24.5-2 and 5.2.2.2.24.5-3 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.2.2.24.5-1: Test Requirements for Rank 1 with reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-39.1 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	1.6
1-2	R.PDSCH.2-26.3 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	9.4

Table 5.2.2.2.24.5-2: Test Requirements for Rank 2 with reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-27.3 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	20.1

Table 5.2.2.2.24.5-3: Test Requirements for Rank 1 without reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-39.2 TDD	20 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x2, ULA Low	70	1.3
3-2	R.PDSCH.2-26.4 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x2, ULA Low	70	9.1

Table 5.2.2.2.24.5-4: Test Requirements for Rank 2 without reduced baseband bandwidth.

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.2-27.3 TDD	20 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x2, ULA Low	70	20.1

5.2.3 4RX requirements

5.2.3.1 FDD

5.2.3.1.1 4Rx FDD FR1 PDSCH mapping Type A performance

5.2.3.1.1.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.1.0-3, Table 5.2.3.1.1.0-4, Table 5.2.3.1.1.0-5, Table 5.2.3.1.1.0-6 and Table 5.2.3.1.1.0-7, with the addition of test parameters in Table 5.2.3.1.1.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.3.1.1.0-1.

Table 5.2.3.1.1.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 1-2, 1-3, 1-5, 1-6, 1-7, 1-8, 2-1, 2-2, 3-1, 4-1
Verify the PDSCH mapping Type A HARQ soft combining performance under 4 receive antenna conditions.	1-4
Verify the PDSCH mapping Type A performance requirements for Enhanced Receiver Type 1 under 4 receive antenna conditions.	5-1
Verify the PDSCH mapping Type A performance requirements with R18 DMRS	4-2

Table 5.2.3.1.1.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k ₀	0
	Starting symbol (S)	2
	Length (L)	12

Parameter		Unit	Value
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		4 for Test 1-1 WB for Test 3-1 2 for other tests
	Resource allocation type		Test 1-2: Type 1 with start RB = 23, L _{RBS} = 6 Other test: Type 0
	RBG size		Test 1-2: N/A Other tests: Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1 for all but Test 4-2 Enhanced Type 1 for Test 4-2.
	Number of additional DMRS		2 for Test 1-1, 1-5, 1-6, 1-7 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS		1
	Antenna ports indexes		Test 4-2: {1000, 1001, 1008, 1009} Other tests: Table 5.2-1
	Number of PDSCH DMRS CDM group(s) without data		Test 4-2: 1 Other tests: Table 5.2-1
CSI-RS for tracking	CSI-RS periodicity	Slots	Test 1-5, 1-6, 1-7: 10 for CSI-RS resource 1,2,3,4. Other tests: Table 5.2-1.
	CSI-RS offset	Slots	Test 1-5, 1-6, 1-7: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4. Other tests: Table 5.2-1.
Number of HARQ Processes			8 for Test 1-4, 2-1 4 for other tests
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.3.1.1.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x4, ULA Low	70	-3.5
1-2	R.PDSCH.1-1.2 FDD	10 / 15	QPSK, 0.30	TDLC300-100	2x4, ULA Low	70	-2.9
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	TDLA30-10	2x4, ULA Low	70	21.0
1-4	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x4, ULA Low	30	-1.5
1-5	R.PDSCH.1-8.1 FDD	10 / 15	16QAM, 0.48	HST-750	1x4	70	3.3
1-6	R.PDSCH.1-8.2 FDD	10 / 15	64QAM, 0.43	HST-972	1x4	70	[6.8]
1-7	R.PDSCH.1-8.1 FDD	10 / 15	16QAM, 0.48	TDLC300-600	2x4	70	[5.8]
1-8	R.PDSCH.1-17.1 FDD	10 / 15	1024QAM, 0.79	TDLD30-5	2x4, ULA Low	70	26.3

Table 5.2.3.1.1.0-4: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	13.5
2-2	R.PDSCH.2-1.1 FDD	20 / 30	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	13.7

Table 5.2.3.1.1.0-5: Minimum performance for Rank 3

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-2.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	11.0

Table 5.2.3.1.1.0-6: Minimum performance for Rank 4

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.1-2.4 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	15.6
4-2	R.PDSCH.1-12.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	15.2

Table 5.2.3.1.1.0-7: Minimum performance for Rank 3 and Enhanced Receiver Type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.1-2.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Medium A	70	22.3

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.1.1.

5.2.3.1.1_1 4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.1_1.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 1 and Rank 2 scenarios.

5.2.3.1.1_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.2.3.1.1_1.3 Test description

5.2.3.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.3.1.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or (EN-DC, DC bearer *MCG* and *SCG, Connected without release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.1_1.3.3.

5.2.3.1.1_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.1.0-3 and Table 5.2.3.1.1.0-4. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.1_1.4-1 and 5.2.3.1.1_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 4 for each subtest in Tables 5.2.3.1.1_1.4-1 and 5.2.3.1.1_1.4-2 as appropriate.

5.2.3.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.1_1.3.3_1 Message exceptions for SA

Table 5.2.3.1.1_1.3.3_1-1: BWP

Derivation Path: TS 38.508-1 [6], Table 4.6.3-8			
Information Element	Value/remark	Comment	Condition
BWP ::= SEQUENCE { locationAndBandwidth	13750	For Test 2-2 (20MHz BW, SCS 30kHz)	
	14025	For other tests	

		(10MHz BW, SCS 15kHz)	
}			

Table 5.2.3.1.1_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType0	resourceAllocation Type0 for all tests except test 1-2	
	resourceAllocationType1	resourceAllocation Type1 for test 1-2	
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4	n4 for test 1-1	
	wideband	wideband for test 3-1	
	Not present	n2 for other tests	
}			
}			
}			

Table 5.2.3.1.1_1.3.3_1-3: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dms-AdditionalPosition	pos1	pos1 for all tests except test 1-1, 1-5, 1-6, 1-7	
	Not present	pos2 for test 1-1, 1-5, 1-6, 1-7	
}			

Table 5.2.3.1.1_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8 for test 1-4, 2.1	
	n4	n4 for other tests	
}			

Table 5.2.3.1.1_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	1 (for CSI-RS resources 1 and 2) 2 (for CSI-RS resources 3 and 4)	Periodicity 10 slots and offset 1/2 for test 1-5, 1-6, 1-7	
}			

5.2.3.1.1_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.1_1.3.3_1

5.2.3.1.1_1.4 Test requirement

Table 5.2.3.1.1.0-3 and Table 5.2.3.1.1.0-4 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.1_1.4-1 and Table 5.2.3.1.1_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.1_1.4-1: Test Requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 FDD	10 / 15	QPSK, 0.30	TDLB100-400	2x4, ULA Low	70	-2.6
1-2	R.PDSCH.1-1.2 FDD	10 / 15	QPSK, 0.30	TDLC300-100	2x4, ULA Low	70	-2.0
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	TDLA30-10	2x4, ULA Low	70	22.0
1-4	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x4, ULA Low	30	-0.6
1-5	R.PDSCH.1-8.1 FDD	10 / 15	16QAM, 0.48	HST-750	1x4	70	4.2
1-6	R.PDSCH.1-8.2 FDD	10 / 15	64QAM, 0.43	HST-972	1x4	70	7.7
1-7	R.PDSCH.1-8.1 FDD	10 / 15	16QAM, 0.48	TDLC300-600	2x4	70	6.7

Table 5.2.3.1.1_1.4-2: Test Requirement for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	14.5
2-2	R.PDSCH.2-1.1 FDD	20 / 30	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	14.7

5.2.3.1.1_2 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.1_2.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 3 and Rank 4 scenarios.

5.2.3.1.1_2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.2.3.1.1_2.3 Test description

Same test description as in clause 5.2.3.1.1_1.3 with the following exception:

- Step 1 of test procedure to call for Tables 5.2.3.1.1.0-5 and 5.2.3.1.1.0-6 instead of Tables 5.2.3.1.1.0-3 and 5.2.3.1.1.0-4

Table 5.2.3.1.1_2.4-1 instead of 5.2.3.1.1_1.4-1

- Table 5.2.3.1.1_2.4-2 instead of 5.2.3.1.1_1.4-2
- Figure A.3.1.7.5 instead of A.3.1.7.4

5.2.3.1.1_2.4 Test requirement

Table 5.2.3.1.1.0-5 and Table 5.2.3.1.1.0-6 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.1_2.4-1 and Table 5.2.3.1.1_2.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.1_2.4-1: Test Requirement for Rank 3

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-2.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	12.0

Table 5.2.3.1.1_2.4-2: Test Requirement for Rank 4

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.1-2.4 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	16.6

5.2.3.1.1_3 FFS

5.2.3.1.1_4 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA

5.2.3.1.1_4.1 Test purpose

To verify the PDSCH mapping Type A enhanced performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default enhanced receiver type 1 configuration, for Rank 3 scenario.

5.2.3.1.1_4.2 Test applicability

This test applies to all types of NR UE Rel-15 and forward supporting 4 Rx antenna ports and NR enhanced receiver type 1.

This test also applies to all types of EUTRA UE Rel-15 and forward supporting EN-DC, 4 Rx antenna ports and NR enhanced receiver type 1.

5.2.3.1.1_4.3 Test description

Same test description as in clause 5.2.3.1.1_1.3 with the following exception:

- Figure A.3.1.7.5 instead of A.3.1.7.4

Step 1 and 2 of Test procedure as in clause 5.2.3.1.1_1.3.2 are replaced by:

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.1.0-7. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.1_4.4-1 as appropriate.

5.2.3.1.1_4.4 Test requirement

Table 5.2.3.1.1.0-7 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.1_4.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.1_4.4-1: Test Requirement for Rank 3 and Enhanced Receiver Type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.1-2.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Medium A	70	23.3

5.2.3.1.1_5 4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA

Editor's Note: Following aspects needs further investigation

- **DL EVM of $\leq 2.5\%$ for $f > 4.2$ GHz pending further analysis by the TE vendors**

5.2.3.1.1_5.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions with DL1024QAM for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput for Rank 1 scenario.

5.2.3.1.1_5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 4 Rx antenna ports and DL1024QAM.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 4 Rx antenna ports and DL1024QAM.

5.2.3.1.1_5.3 Test description

5.2.3.1.1_5.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.3.1.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or (EN-DC, DC bearer *MCG* and *SCG, Connected without release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.1_5.3.3.

5.2.3.1.1_5.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.1.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.1_5.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.1_5.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.3.1.1_5.3.3_1 Message exceptions for NR/5GC

Same as 5.2.3.1.1_1.3.3_1 with the following exceptions.

Table 5.2.3.1.1_5.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		Test 1-8
}			

5.2.3.1.1_5.3.3_2 Message exceptions for EN-DC

Same as 5.2.3.1.1_5.3.3_1.

5.2.3.1.1_5.4 Test requirement

Table 5.2.3.1.1-5.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.1_5.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.1_5.4-1: Test Requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-8	R.PDSCH.1-	10 / 15	1024QAM,	TDLD30-5	2x4, ULA Low	70	27.2

	17.1 FDD		0.79				
--	----------	--	------	--	--	--	--

5.2.3.1.1_6 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA

5.2.3.1.1_6.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions with enhanced DMRS, for Rank 4 scenario. the PDSCH mapping Type A performance requirements

5.2.3.1.1_6.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting NR/5GC and enhanced DMRS.

This test also applies to all types of UE release 18 and forward supporting EN-DC and enhanced DMRS.

5.2.3.1.1_6.3 Test description

5.2.3.1.1_6.3.1 Initial conditions

Same test description as in clause 5.2.3.1.1_1.3 with the following exception:

- Figure A.3.1.7.5 instead of A.3.1.7.4

5.2.3.1.1_6.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.1_6.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.1_6.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.1_6.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.3.1.1_6.3.3_1 Message exceptions for NR/5GC

Same as in clause 5.2.3.1.1_1.3.3 with the following exception

Table 5.2.3.1.1_6.3.3_1-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-TypeEnh-r18	enabled		
}			

Table 5.2.3.1.1_6.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition

Antenna port(s)	DMRS port 0,1,8,9 as per Table 7.3.1.2.2-7 in TS 38.212 (<i>dmrs-Type</i> = DMRS type 1, <i>dmrs-TypeEnh</i> is configured and <i>maxLength</i> = len1 as per Table 4.6.3-50 in 38.508-1)	"10110"	
-----------------	--	---------	--

5.2.3.1.1_6.3.3_2 Message exceptions for EN-DC

Same as 5.2.3.1.1_6.3.3_1.

5.2.3.1.1_6.4 Test requirement

Table 5.2.3.1.1_6.4-1 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.1_6.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.1_6.4-1: Test Requirement for Rank 4 and enhanced DMRS type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
4-2	R.PDSCH.1-12.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	16.2

5.2.3.1.2 4Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance

5.2.3.1.2.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.2.0-3, with the addition of test parameters in Table 5.2.3.1.2.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.2.0-1.

Table 5.2.3.1.2.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and CSI-RS overlapped with PDSCH	1-1

Table 5.2.3.1.2.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
PRB bundling size	2	

	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
NZP CSI-RS for CSI acquisition	OFDM symbols in the PRB used for CSI-RS		$l_0 = 13$
	CSI-RS periodicity	Slots	5
ZP CSI-RS for CSI acquisition	Subcarrier index in the PRB used for CSI-RS		$(k_0, k_1, k_2, k_3) = (2, 4, 6, 8)$
	Number of CSI-RS ports (X)		8
	CSI-RS periodicity	Slots	5
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.3.1.2.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-5.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	4x4, ULA Low	70	9.1

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.1.2.

5.2.3.1.2_1 4Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 4x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.2_1.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration for CSI-RS overlapped with PDSCH scenario.

5.2.3.1.2_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.2.3.1.2_1.3 Test description

5.2.3.1.2_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.3.1.2.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.3.1.2_1.3.3.

5.2.3.1.2_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.2.0-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.2_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.2_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.2.3.1.2_1.3.3_1 Message exceptions for SA

Table 5.2.3.1.2_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4		
}			

Table 5.2.3.1.2_1.3.3_1-2: NZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row4	001	k ₀ =0	
}			
firstOFDMSymbolInTimeDomain	13	l ₀ = 13	
}			

Table 5.2.3.1.2_1.3.3_1-3: CSI-ResourcePeriodicityAndOffset for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	0	Periodicity 5 slots and offset 0	
}			

Table 5.2.3.1.2_1.3.3_1-4: ZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], clause5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	011110	(k0, k1, k2, k3)=(2, 4, 6, 8)	
}			
nrofPorts	P8	Eight Ports	
firstOFDMSymbolInTimeDomain	12	$l_0 = 12$	
cdm-Type	fd-CDM2		
density CHOICE {			
one	NULL		
}			
freqBand	CSI-FrequencyOccupation		
}			

5.2.3.1.2_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.2_1.3.3_1

5.2.3.1.2_1.4 Test requirement

Table 5.2.3.1.2.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.2_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.2_1.4-1: Test Requirement for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-5.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	4x4, ULA Low	70	10

5.2.3.1.3 4Rx FDD FR1 PDSCH mapping Type B performance

5.2.3.1.3.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.3.0-3, with the addition of test parameters in Table 5.2.3.1.3.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.3.0-1.

Table 5.2.3.1.3.0-1: Tests purpose

Purpose	Test index
PDSCH mapping Type B performance under 4 receive antenna conditions	1-1

Table 5.2.3.1.3.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type B
	k0		0
	Starting symbol (S)		5
	Length (L)		7
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.3.1.3.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x4, ULA Low	70	-3.8

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.1.3.

5.2.3.1.3_1 4Rx FDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.3_1.1 Test purpose

To verify the PDSCH mapping Type B normal performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput with baseline receiver configuration.

5.2.3.1.3_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and PDSCH mapping type B.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports and PDSCH mapping type B.

5.2.3.1.3_1.3 Test description

5.2.3.1.3_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.3.1.3.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.3.1.3_1.3.3.

5.2.3.1.3_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.3.0-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.3_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.3_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.2.3.1.3_1.3.3_1 Message exceptions for SA

Table 5.2.3.1.3_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4		
}			

Table 5.2.3.1.3_1.3.3_1-2: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeB		
startSymbolAndLength	89	Start symbol(S)=5, Length(L)=7	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	TypeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

5.2.3.1.3_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.3_1.3.3_1

5.2.3.1.3_1.4 Test requirement

Table 5.2.3.1.3.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.3_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.3_1.4-1: Test Requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x4, ULA Low	70	-2.8

5.2.3.1.4 4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance

5.2.3.1.4.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.4.0-3, with the addition of test parameters in Table 5.2.3.1.4.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.3.1.4.0-1.

Table 5.2.3.1.4.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions with CRS rate matching configured	1-1, 1-2

Table 5.2.3.1.4.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
NR UL transmission with a 7.5 kHz shift to the LTE raster			true
PDCCH configuration	Symbols with PDCCH		Symbol# 2
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		3
	Length (L)		9 for Test 1-1 11 for Test 1-2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Position of the first DM-RS for downlink		3
	Number of additional DMRS		1
CRS for rate matching (Note 1)	Maximum number of OFDM symbols for DL front loaded DMRS		1
	LTE carrier centre subcarrier location		Same as NR carrier centre subcarrier location
	LTE carrier BW	MHz	10
	Number of antenna ports		4
	v-shift		0
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Note 1: No MBSFN is configured on LTE carrier

Table 5.2.3.1.4.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)

1-1	R.PDSCH.1-7.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x4, ULA Low	70	-4.0
1-2	R.PDSCH.1-7.2 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x4, ULA Low	70	-4.0

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.4.

5.2.3.1.4_1 4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.4_1.1 Test purpose

Same as 5.2.2.1.4_1.1.

5.2.3.1.4_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test1-1 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC supporting 4 Rx antenna ports and capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test 1-2 applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

Test 1-2 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC supporting 4 Rx antenna ports and capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

5.2.3.1.4_1.3 Test description

5.2.3.1.4_1.3.1 Initial conditions

Same as 5.2.2.1.4_1.3.1 with the following exceptions:

- Use Figure A.3.1.7.4 for TE diagram
- Use Figure A.3.2.5 for UE diagram
- Instead of 5.2.2.1.4.x → refer 5.2.2.3.4.x

5.2.3.1.4_1.3.2 Test procedure

Same as 5.2.2.1.4_1.3.2 with the following exceptions:

- Instead of 5.2.2.1.4.x → refer 5.2.2.3.4.x

5.2.3.1.4_1.3.3 Message contents

Same as 5.2.2.1.4_1.3.3.

5.2.3.1.4_1.3.4 Test requirement

Table 5.2.3.1.4.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.4_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.4_1.3.4-1: Test requirement for Rank 1

Test	Reference	Bandwidth	Modulatio	Propagation	Correlation	Reference value
------	-----------	-----------	-----------	-------------	-------------	-----------------

num.	channel	h (MHz) / Subcarrier spacing (kHz)	n format and code rate	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-7.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x4, ULA Low	70	-3.0
1-2	R.PDSCH.1-7.2 FDD	10 / 15	QPSK, 0.30	TDLA30-10	4x4, ULA Low	70	-3.0

5.2.3.1.5 4Rx FDD FR1 PDSCH 0.001% BLER performance

5.2.3.1.5.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.5.0-3, with the addition of test parameters in Table 5.2.3.1.5.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.5.0-1.

Table 5.2.3.1.5.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH 0.001% BLER performance under 4 receive antenna conditions	1-1

Table 5.2.3.1.5.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Maximum number of HARQ transmission			1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.3.1.5.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Antenna configuration	Reference value	
						Target BLER	SNR (dB)

1-1	R.PDSCH.1-1.4 FDD	10 / 15	QPSK, 0.59	AWGN	1x4 with static channel specified in Annex B.1	0.001%	0.7
-----	----------------------	---------	------------	------	---	--------	-----

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.5.

5.2.3.1.5_1 4Rx FDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.5_1.1 Test purpose

To verify the PDSCH 0.001% BLER performance under 4 receive antenna conditions.

5.2.3.1.5_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

Test 1-1 applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

5.2.3.1.5_1.3 Test description

5.2.3.1.5_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.5.0-2 and Table 5.2.3.1.5.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.5_1.3.3.

5.2.3.1.5_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.5.0-3. The SS sends downlink MAC padding bits on the DL RMC.

2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.5_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.4. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.4.3-1 in Annex G.

5.2.3.1.5_1.3.3 Message contents

5.2.3.1.5_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.5_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 5.2.3.1.5_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam64LowSE		
}			

5.2.3.1.5_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.5_1.3.3_1.

5.2.3.1.5_1.3.4 Test requirement

Table 5.2.3.1.5.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.5_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.5_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Antenna configuration	Reference value	
						Target BLER	SNR (dB)
1-1	R.PDSCH.1-1.4 FDD	10 / 15	QPSK, 0.59	AWGN	1x4 with static channel specified in Annex B.1	0.001%	1.8

5.2.3.1.6 4Rx FDD FR1 PDSCH repetitions over multiple slots performance

5.2.3.1.6.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.6.0-3, with the addition of test parameters in Table 5.2.3.1.6.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.6.0-1.

Table 5.2.3.1.6.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH repetitions over multiple slots performance under 4 receive antenna conditions	1-1

Table 5.2.3.1.6.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	2
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between final repetition of PDSCH and corresponding HARQ-ACK information		2

Table 5.2.3.1.6.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Target BLER	SNR (dB)
1-1	R.PDSCH.1-11.1 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x4, ULA Low	1% (Note 1)	-2.3
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.6.

5.2.3.1.6_1 4Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.6_1.1 Test purpose

To Verify the PDSCH repetitions over multiple slots performance under 4 receive antenna conditions.

5.2.3.1.6_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *dl-64QAM-MCS-TableAlt* and *pdsch-RepetitionMultiSlots*.

Test 1-1 also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE *dl-64QAM-MCS-TableAlt* and *pdsch-RepetitionMultiSlots*.

5.2.3.1.6_1.3 Test description

5.2.3.1.6_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.6.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.6_1.3.3.

5.2.3.1.6_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.6.0-3. The SS sends downlink MAC padding bits on the DL RMC. The UE may expect that the TB is repeated with same symbol allocation among each of the *pdsch-AggregationFactor* consecutive slots.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.6_1.3.4-1.
3. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to clause G.1.5 and Table G.1.5-1a in Annex G clause G.1.5.

5.2.3.1.6_1.3.3 Message contents

5.2.3.1.6_1.3.3_1 Message exceptions for SA

Same as 5.2.2.1.6_1.3.3_1.

5.2.3.1.6_1.3.3_2 Message exceptions for SA

Same as 5.2.2.1.6_1.3.3_1.

5.2.3.1s.6_1.3.4 Test requirement

Table 5.2.3.1.6.0-3 defines the primary level settings.

The target BLER for the downlink reference measurement channels specified in Annex A.3.2.1 for each BLER test shall meet or exceed the specified value in Table 5.2.3.1.6_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.6_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Target BLER	SNR (dB)
1-1	R.PDSCH.1-11.1 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x4, ULA Low	1% (Note 1)	-1.4
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.							

5.2.3.1.7 4Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance

5.2.3.1.7.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.7.0-3, with the addition of test parameters in Table 5.2.3.1.7.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.7.0-1.

Table 5.2.3.1.7.0-1: Tests purpose

Purpose	Test index
Verify PDSCH mapping Type B performance and UE processing capability 2 under four receive antenna conditions	1-1

Table 5.2.3.1.7.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	2
	Length (L)	2
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	0

	Maximum number of OFDM symbols for DL front loaded DMRS		1
	Maximum number of HARQ transmission		1
	Number of HARQ Processes		2
	The number of slots between PDSCH and corresponding HARQ-ACK information		0

Table 5.2.3.1.7.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-12.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x4, ULA Low	70	-2.3

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.7.

5.2.3.1.7_1 4Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.7_1.1 Test purpose

To verify PDSCH mapping Type B performance and UE processing capability 2 under four receive antenna conditions.

5.2.3.1.7_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pdsch-ProcessingType2*.

5.2.3.1.7_1.3 Test description

5.2.3.1.7_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.7.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release*

On, Test Mode On, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.7_1.3.3.

5.2.3.1.7_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.7.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.7_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.7_1.3.3 Message contents

5.2.3.1.7_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.7_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entries		FR1
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
k0	Not present		
mappingType	typeB		
startSymbolAndLength	16	Start symbol(S)=2, Length(L)=2	
}			
}			

Table 5.2.3.1.7_1.3.3_1-2: PUCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-112			
Information Element	Value/remark	Comment	Condition
PUCCH-Config ::= SEQUENCE {			FR1
dl-DataToUL-ACK SEQUENCE (SIZE (1)) OF INTEGER {	1 entry		
INTEGER[1]	0	entry 1	
}			
}			

Table 5.2.3.1.7_1.3.3_1-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1=0 as per dl-DataToUL-ACK in Table 5.2.3.1.7_1.3.3_1-3	"000"	

Table 5.2.3.1.7_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			

processingType2Enabled	true		
}			

5.2.3.1.7_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.7_1.3.3_1.

5.2.3.1.7_1.4 Test requirement

Table 5.2.3.1.7.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.7_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.7_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-12.1 FDD	10 / 15	QPSK, 0.30	TDLA30-10	2x4, ULA Low	70	-1.4

5.2.3.1.8 4Rx FDD FR1 PDSCH pre-emption performance

5.2.3.1.8.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.8.0-3, with the addition of test parameters in Table 5.2.3.1.8.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.8.0-1.

Table 5.2.3.1.8.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH pre-emption performance under 4 receive antenna conditions	1-1

Table 5.2.3.1.8.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDCCH configuration (Note 4)	Symbols with PDCCH	0, 1
	DCI format	2_1
	timeFrequencySet	14x1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
VRB-to-PRB mapping type	Non-interleaved	

	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Pre-emption configuration (Note 2)	Starting symbol (S)		3
	Length (L)		2
	Pre-emption periodicity and offset (Note 3)	Slots	10/1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2
Note 1: Void			
Note 2: Interference modelled as random data on pre-empted REs.			
Note 3: Pre-emption is scheduled with a fixed scheduling with 10% probability within 10ms periodicity.			
Note 4: In addition to PDCCH configuration in Table 5.2-1.			

Table 5.2.3.1.8.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.6 FDD	10 / 15	16QAM 0.64	TDLA30-10	2x4, ULA Low	70	6.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.8.

5.2.3.1.8_1 4Rx FDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.8_1.1 Test purpose

To Verify the PDSCH pre-emption performance under 4 receive antenna conditions.

5.2.3.1.8_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pre-EmptIndication-DL-r16*.

5.2.3.1.8_1.3 Test description

5.2.3.1.8_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.8.0-2 and Table 5.2.3.1.8.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.8_1.3.3.

5.2.3.1.8_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.8.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. SS transmits PDCCH DCI format 2_1 for int_RNTI with 10% probability to transmit the DL Preemption indication according to Table 5.2.3.1.8.0-2. In the time and frequency set indicated by PDCCH DCI format 2_1, SS stops transmission of PDSCH.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.8_1.3.4-1.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.8_1.3.3 Message contents

5.2.3.1.8_1.3.3_1 Message exceptions for SA

Same as 5.2.2.1.8_1.3.3_1.

5.2.3.1.8_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.8_1.3.3_1.

5.2.3.1.8_1.3.4 Test requirement

Table 5.2.3.1.8.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.8_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.8_1.3.4-1: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.6 FDD	10 / 15	16QAM 0.64	TDLA30-10	2x4, ULA Low	70	7.6

5.2.3.1.9 4Rx FDD FR1 HST-SFN performance

5.2.3.1.9.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.9.0-3, with the test parameters defined in Table 5.2.3.1.9.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.3.1.9.0-1.

Table 5.2.3.1.9.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 when highSpeedDemodFlag-r16 IE [20] is configured	1-1

Table 5.2.3.1.9.0-2: Test Parameters for Testing

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k ₀		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	CSI-RS periodicity	Slots	10 for CSI-RS resource 1,2,3,4.
	CSI-RS offset	Slots	1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4.
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.3.1.9.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.3 FDD	10 / 15	16QAM, 0.48	HST-SFN	2x4	70	10.4

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.9.

5.2.3.1.9_1 4Rx FDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.9_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 when *highSpeedDemodFlag-r16* IE [20] is configured and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.3.1.9_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

5.2.3.1.9_1.3 Test description

5.2.3.1.9_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.9.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.9_1.3.3.

5.2.3.1.9_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.1.9_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.9_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.1.9_1.4-1 as appropriate.

5.2.3.1.9_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.9_1.3.3_1 Message exceptions for SA

Table 5.2.3.1.9_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 for test 1-1	
}			
}			
}			

Table 5.2.3.1.9_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1	
}			

Table 5.2.3.1.9_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	for test 1-1	
}			

Table 5.2.3.1.9_1.3.3_1-4: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots10	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	For test 1-1: offset = 1 for CSI-RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	
}			

5.2.3.1.9_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.9_1.3.3_1

5.2.3.1.9_1.4 Test requirement

Tables 5.2.3.1.9_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.9_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.9_1.4-1: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.3 FDD	10 / 15	16QAM, 0.48	HST-SFN	2x4	70	11

5.2.3.1.10 4Rx FDD FR1 HST DPS performance

5.2.3.1.10.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.10.0-3, with the test parameters defined in Table 5.2.3.1.10.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.3.1.10.0-1.

Table 5.2.3.1.10.0-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-DPS scenario defined in B.3.3	1-1, 1-2

Table 5.2.3.1.10.0-2: Test Parameters for Testing

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	TCI state		Note 1
	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 10 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #2
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 10 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6

				2 for CSI-RS resource 7 and 8
NZP CSI-RS for CSI acquisition	Resource set #3	QCL info		TCI state #3
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
	Resource set #4	QCL info		TCI state #0
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
TCI state #0	Type 1 QCL information	QCL info		TCI state #1
		CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
	Type 2 QCL information	QCL Type		Type A
		CSI-RS resource		N/A
TCI state #1	Type 1 QCL information	QCL Type		N/A
		CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
	Type 2 QCL information	QCL Type		Type A
		CSI-RS resource		N/A
TCI state #2	Type 1 QCL information	QCL Type		N/A
		SSB index		SSB #0
	Type 2 QCL information	QCL Type		Type C
		SSB index		N/A
TCI state #3	Type 1 QCL information	QCL Type		N/A
		SSB index		SSB #1
	Type 2 QCL information	QCL Type		Type C
		SSB index		N/A
Number of HARQ Processes				4
The number of slots between PDSCH and corresponding HARQ-ACK information				2
<p>Note 1: SSB # $(k \bmod 2)$, CSI-RS (for tracking) resource set # $((k \bmod 2) + 1)$ and CSI-RS (for CSI acquisition) resource set # $((k \bmod 2) + 3)$ are transmitted by k^{th} RRH. For Test 1-1, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 24, NumOfRB 28 is transmitted slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of $2n$. PDCCH and PDSCH associated with TCI # $(k \bmod 2)$ is transmitted by k^{th} RRH from slot# $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstTRS}} + T_{\text{TRS proc}}, 0]$ to slot# $(2k + 1)n$</p> <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 24, NumOfRB 28 is transmitted in slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of $2n$. PDCCH and PDSCH associated with TCI # $(k \bmod 2)$ is transmitted by k^{th} RRH from: slot# $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}}, 0]$ to slot# $(2k + 1)n$,</p> <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p>				

Where $k=0, 1, 2, \dots$ is the RRH number, $n = 2520$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 2$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 3$ is the number of slots for MAC CE processing, $T_{\text{first TRS}} = 6$ is the number of slots to first TRS transmission occasion after MAC CE command is decoded by the UE, $T_{\text{TRS proc}} = 2$ is the number of slots for TRS processing.

Table 5.2.3.1.10.0-3: Minimum performance for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	1	2x4	70	10.6
1-2	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	2	2x4	70	10.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.10.

5.2.3.1.10_1 4Rx FDD FR1 HST-DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.1.10_1.1 Test purpose

To verify UE performance in the HST-DPS scenario defined in B.3.3 and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.3.1.10_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward.

Test 1-1 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

Test 1-2 applies to all types of NR UE release 15 and forward supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

Test 1-2 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

5.2.3.1.10_1.3 Test description

5.2.3.1.10_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.10.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.10_1.3.3.

5.2.3.1.10_1.3.2 Test procedure

Test 1-1:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.10_1.4-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.3.1.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.3.1.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

Test 1-2:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.10_1.4-1 as appropriate.
2. SS activates TCI state 0 and TCI 1 for PDSCH at the same time via MAC CE command “TCI States Activation/Deactivation for UE-specific PDSCH”.
3. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.3.1.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

4. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.3.1.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
5. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.10_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.10_1.3.3_1 Message exceptions for SA

Table 5.2.3.1.10_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	test 1-1, 1-2
}			
}			
}			

Table 5.2.3.1.10_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1, 1-2	
}			

Table 5.2.3.1.10_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	for test 1-1, 1-2	
}			

Table 5.2.3.1.10_1.3.3_1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	2 for CSI-RS resource #1, #2, #3, #4 3 for CSI-RS resource #5, #6, #7, #8	for test 1-1, 1-2: TCI-StateId for TCI- State #2 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI- State #3 for CSI-RS resource #5, #6, #7, #8	
}			

Table 5.2.3.1.10_1.3.3_1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.3.1.10_1.3.3_1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7	for test 1-1, 1-2: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4	

	10 for CSI-RS resource #6 and #8	l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8	
}			

Table 5.2.3.1.10_1.3.3_1-6: CSI-ResourcePeriodicityAndOffset for TRS (Table 5.2.3.1.10_1.3.3_1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots10	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	For test 1-1, 1-2: periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	
}			

Table 5.2.3.1.10_1.3.3_1-7: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE { nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 0	For test 1-1, 1-2 entry 1 CSI-RS resource #1	Resource set #1
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 4	For test 1-1, 1-2 entry 1 CSI-RS resource #5	Resource set #2
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
}			

Table 5.2.3.1.10_1.3.3_1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8 for CSI-RS resource #9 9 for CSI-RS resource #10	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #9 1 for CSI-RS resource #10	for test 1-1, 1-2: TCI-State #0 for CSI-RS resource #9 TCI-State #1 for CSI-RS resource #10	
}			

Table 5.2.3.1.10_1.3.3_1-9: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.3.1.10_1.3.3_1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #9 13 for CSI-RS resource #10	for test 1-1, 1-2 l ₀ =12 for CSI-RS resource #9 l ₀ =13 for CSI-RS resource #10	
}			

Table 5.2.3.1.10_1.3.3_1-10: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.3.1.10_1.3.3_1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	0	For test 1-1, 1-2: periodicity = 20 slots. offset = 0 slots	
}			

Table 5.2.3.1.10_1.3.3_1-11: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	2 for Resource set #3 3 for Resource set #4	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #4

NZP-CSI-RS-ResourceId[1]	9	entry 1 CSI-RS resource #10	
}			
}			

Table 5.2.3.1.10_1.3.3_1-12: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3	For test 1-1, 1-2	
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1
	Not present		TCI state #2, TCI state #3
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
ssb	0	SSB #0	TCI state #2
	1	SSB #1	TCI state #3
}			
qcl-Type	typeA		TCI state #0, TCI state #1
	typeC		TCI state #2, TCI state #3
}			
}			

5.2.3.1.10_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.10_1.3.3_1

5.2.3.1.10_1.4 Test requirement

Tables 5.2.3.1.10_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.10_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.10_1.4-1: Test Requirements for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	1	2x4	70	11.2
1-2	R.PDSCH.1-8.4 FDD	10 / 15	64QAM, 0.43	HST-DPS	2	2x4	70	11.2

5.2.3.1.11 4Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance

5.2.3.1.11.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.11.0-3, with the addition of test parameters in Table 5.2.3.1.11.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.11.0-1.

Table 5.2.3.1.11.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance with Single-DCI based SDM scheme under 4 receive antenna conditions	1-1,1-2

Table 5.2.3.1.11.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
QCL info			TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL	CSI-RS resource	N/A	N/A

	information	QCL Type		N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type A
	Type 2 QCL information	CSI-RS resource		N/A	N/A
		QCL Type		N/A	N/A
Resource allocation				Full-overlapping	
Timing offset of the second TRxP from the first TRxP			us	-0.5 for test 1-1 2 for test 1-2	
Frequency offset of the second TRxP from the first TRxP			Hz	200 for test 1-1 0 for test 1-2	
Number of HARQ Processes				4	
The number of slots between PDSCH and corresponding HARQ-ACK information				2	
Precoding configuration				SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)					

Table 5.2.3.1.11.0-3: Minimum performance

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration(Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	14.6
1-2	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	13.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent							
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2							
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.11.

5.2.3.1.11_1 4Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x4 MIMO for both SA and NSA

5.2.3.1.11_1.1 Test purpose

To verify the PDSCH performance with Single-DCI based SDM scheme under 4 receive antenna conditions.

5.2.3.1.11_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *singleDCI-SDM-scheme-r16*.

5.2.3.1.11_1.3 Test description

5.2.3.1.11_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.11.0-2 and Table 5.2.3.1.11.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.11_1.3.3.

5.2.3.1.11_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.11_1.3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.11_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.3.1.11_1.3.4-1 as appropriate.

5.2.3.1.11_1.3.3 Message contents

5.2.3.1.11_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.11_1.3.3_1-1: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1 = 2	"010"	
Antenna port(s)	DMRS port 0 and 2	"1011"	
Transmission configuration indication	TCI state 1 and 2	"000"	

Table 5.2.3.1.11_1.3.3_1-2: CellGroupConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-19			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
simultaneousTCI-UpdateList1-r16 SEQUENCE {			
ServCellIndex [1]	ServCellIndex		
}			

}		
---	--	--

Table 5.2.3.1.11_1.3.3_1-3: ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.3.1.11_1.3.3_1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1]	TCI-State with condition TCI-state-0		
TCI-State[2]	TCI-State with condition TCI-state-1		
TCI-State[3]	TCI-State with condition TCI-state-2		
}			
rbg-Size	config2		
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present		
}			
}			
}			

Table 5.2.3.1.11_1.3.3_1-5: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0		TCI-state-0
	1		TCI-state-1
	2		TCI-state-2
qcl-Type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		TCI-state-0
csi-rs	1		TCI-state-1
	5		TCI-state-2
}			
qcl-Type	typeA		
}			
qcl-Type2	Not present		
}			

Table 5.2.3.1.11_1.3.3_1-6: NZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-85			
Information Element	Value/remark	Comment	Condition

NZP-CSI-RS-Resource ::= SEQUENCE {			
resourceMapping SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
cdm-Type	noCDM		
density CHOICE {			
three	NULL		
}			
periodicityAndOffset CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			
qcl-InfoPeriodicCSI-RS	0		
}			

5.2.3.1.11_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.11_1.3.3_1.

5.2.3.1.11_1.3.4 Test requirement

Table 5.2.3.1.11.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.11_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.11_1.3.4-1: Test requirement

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration(Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	15.6
1-2	R.PDSCH.1-3.2 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	14.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP							

5.2.3.1.12 4Rx FDD FR1 PDSCH Multi-DCI based transmission scheme performance

5.2.3.1.12.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.12.0-3, with the addition of test parameters in Table 5.2.3.1.12.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.12.0-1.

Table 5.2.3.1.12.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs	1-1

Table 5.2.3.1.12.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	TCI State #2
	CORESETPoolIndex		0,1	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	

	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		{1000,1001}	{1002,1003}
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation			Non-overlapping	
Timing offset of the second TRxP from the first TRxP		us	-0.5	
Frequency offset of the second TRxP from the first TRxP		Hz	200	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
Precoding configuration			SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs. Transmission from TRxP #1 uses CORESETPoolIndex 0 and transmission from TRxP #2 uses CORESETPoolIndex 1				

Table 5.2.3.1.12.0-3: Minimum performance

Test num.	Reference channel		Bandwidth / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
	TRxP #1	TRxP #2						
1-1	R.PDSCH. 1-3.3 FDD	R.PDSCH. 1-3.4 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	14.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent								
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2								
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.12.

5.2.3.1.12_1 4Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x4 MIMO for both SA and NSA

5.2.3.1.12_1.1 Test purpose

To verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs.

5.2.3.1.12_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *multiDCI-MultiTRP-r16*.

5.2.3.1.12_1.3 Test description

5.2.3.1.12_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.9 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.12.0-2 and Table 5.2.3.1.12.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.12_1.3.3.

5.2.3.1.12_1.3.2 Test procedure

1. SS transmits PDSCH in TRxP#1 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetid1 (Table 5.2.3.1.12_1.3.3_1-2), and transmits PDSCH in TRxP#2 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetid2 (Table 5.2.3.1.12_1.3.3_1-3), to transmit the DL RMC according to Table 5.2.3.1.12_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Table 5.2.3.1.12_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.12_1.3.3 Message contents

5.2.3.1.12_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.12_1.3.3_1-1: PDCCH-Config (Preamble)

Derivation Path: TS 38.508-1 [4], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	2 entries		
SEQUENCE(SEQUENCE(SIZE (1..3)) OF ControlResourceSet {			
ControlResourceSet[1]	ControlResourceSetid1	entry 1	
ControlResourceSet[2]	ControlResourceSetid2	entry 2	
}			
}			

Table 5.2.3.1.12_1.3.3_1-2: ControlResourceSetid1 (Table 5.2.3.1.12_1.3.3_1-1: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetid	1		
frequencyDomainResources	11110000 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 24 RBs of the BWP	
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	1		
}			
tci-PresentInDCI	enabled		
coresetPoolIndex-r16	0		
}			

Table 5.2.3.1.12_1.3.3_1-3: ControlResourceSetid2 (Table 5.2.3.1.12_1.3.3_1-1: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetid	2		
frequencyDomainResources	00001111 00000000 00000000 00000000 00000000 00000	CORESET to use the RBs 24~47 of the BWP	
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	2		
}			
tci-PresentInDCI	enabled		
coresetPoolIndex-r16	1		
}			

Table 5.2.3.1.12_1.3.3_1-4: Physical layer parameters for DCI format 1_1 in ControlResourceSetid1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 1	"0111"	
Transmission configuration indication	TCI State #1	"000"	

Table 5.2.3.1.12_1.3.3_1-5: Physical layer parameters for DCI format 1_1 in ControlResourceSetId2

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 2 and 3	"1000"	
Transmission configuration indication	TCI State #2	"001"	

Table 5.2.3.1.12_1.3.3_1-6: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tci-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		
}			
qcl-Type	typeC		
}			
TCI-State[2]		TCI-state-1	
tci-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
TCI-State[3]		TCI-state-2	
tci-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			
}			

Table 5.2.3.1.12_1.3.3_1-7: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	

}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 5.2.3.1.12_1.3.3_1-8: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			

5.2.3.1.12_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.12_1.3.3_1.

5.2.3.1.12_1.4 Test requirement

Table 5.2.3.1.12.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.12_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.12_1.4-1: Test requirement

Test num.	Reference channel		Bandwidth / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(No te 1)	Correlation matrix and antenna configuration(N ote 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)(Not e 3)
	TRxP #1	TRxP #2						
1-1	R.PDSCH. 1-3.3 FDD	R.PDSCH. 1-3.4 FDD	10 / 15	64QAM, 0.50	TDLA30-10	2x4, ULA Low	70	15.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

5.2.3.1.13 4Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance

5.2.3.1.13.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.13.0-3, with the addition of test parameters in Table 5.2.3.1.13.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.13.0-1.

Table 5.2.3.1.13.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions when UE is configured with "FDMSchemeA" in "RepetitionScheme-r16" defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.3.1.13.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
QCL info			TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		Wideband	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000,1001	1000,1001
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL	CSI-RS resource	N/A	N/A

	information	QCL Type		N/A	N/A
Timing offset of the second TRxP from the first TRxP			us	-0.5	
Frequency offset of the second TRxP from the first TRxP			Hz	200	
Number of HARQ Processes				4	
The number of slots between PDSCH and corresponding HARQ-ACK information				2	
Precoding configuration				SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs					

Table 5.2.3.1.13.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.1-2.5 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x4, ULA Low	70	10.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent.							
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2.							
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.13.

5.2.3.1.13_1 4Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x4 MIMO for both SA and NSA

5.2.3.1.13_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions when UE is configured with “FDMSchemeA” in “RepetitionScheme-r16”.

5.2.3.1.13_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportFDM-SchemeA-r16*.

5.2.3.1.13_1.3 Test description

5.2.3.1.13_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.9 for TE diagram and section A.3.2.5 for UE diagram.

2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.13.0-2 and Table 5.2.3.1.13.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, *Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.13_1.3.3.

5.2.3.1.13_1.3.2 Test procedure

1. SS transmits PDSCH in TRxP#1 and TRxP#2 via PDCCH DCI format 1_1 for C_RNTI (Table 5.2.3.1.13_1.3.3_1-2), to transmit the DL RMC according to Table 5.2.3.1.13_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Table 5.2.3.1.13_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.13_1.3.3 Message contents

5.2.3.1.13_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.13_1.3.3_1-1: PDCCH-ControlResourceSet (Preamble)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.3.1.13_1.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 1	"0111"	
Transmission configuration indication	TCI codepoint 0, corresponding to TCI State #1 and #2	"000"	

Table 5.2.3.1.13_1.3.3_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tci-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		

referenceSignal CHOICE {			
ssb	SSB-Index		
}			
qcl-Type	typeC		
}			
TCI-State[2]		TCI-state-1	
tci-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
TCI-State[3]		TCI-state-2	
tci-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			
}			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	wideband		
}			
}			
repetitionSchemeConfig-r16 CHOICE {			
setup SEQUENCE {			
fdm-TDM-r16 CHOICE {			
setup SEQUENCE {			
repetitionScheme-r16	fdmSchemeA		
startingSymbolOffsetK-r16	Not present		
}			
}			
}			
}			

Table 5.2.3.1.13_1.3.3_1-4: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources	

		2,4,6,8	
}			

Table 5.2.3.1.13_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			

5.2.3.1.13_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.13_1.3.3_1.

5.2.3.1.13_1.4 Test requirement

Table 5.2.3.1.13.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.13_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.13_1.4-1: Test requirement for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition(Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.1-2.5 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x2, ULA Low	70	11.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

5.2.3.1.14 4Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance

5.2.3.1.14.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.14.0-3, with the addition of test parameters in Table 5.2.3.1.14.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.14.0-1.

Table 5.2.3.1.14.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.3.1.14.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	Repetition number		2	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000	1000
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	2	
Frequency offset of the second TRxP from the first TRxP		Hz	200	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
Precoding configuration			SP Type I, independent precoding generation is applied for both TRxPs,	

	random per slot with PRB bundling granularity
Note 1: PDSCH transmission is done from both TRxPs	

Table 5.2.3.1.14.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.1-11.2 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x4, ULA Low	1 (Note 3)	-0.4
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block. Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.14.

5.2.3.1.14_1 4Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x4 MIMO for both SA and NSA

5.2.3.1.14_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states.

5.2.3.1.14_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportTDM-SchemeA-r16*.

5.2.3.1.14_1.3 Test description

5.2.3.1.14_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.9 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.1.14.0-2 and Table 5.2.3.1.14.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, *Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.14_1.3.3.

5.2.3.1.14_1.3.2 Test procedure

1. SS transmits PDSCH in TRxP#1 and TRxP#2 via PDCCH DCI format 1_1 for C_RNTI (Table 5.2.3.1.14_1.3.3_1-2), to transmit the DL RMC according to Table 5.2.3.1.14_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Table 5.2.3.1.14_1.4-1.
3. Measure the residual BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to Table G.1.5-1a in Annex G clause G.1.5.

5.2.3.1.14_1.3.3 Message contents

5.2.3.1.14_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.14_1.3.3_1-1: PDCCH-ControlResourceSet (Preamble)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.3.1.14_1.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0	"0000"	
Transmission configuration indication	TCI codepoint 0, corresponding to TCI State #1 and #2	"000"	

Table 5.2.3.1.14_1.3.3_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tci-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		
}			
qcl-Type	typeC		
}			
TCI-State[2]		TCI-state-1	

tcid-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
}			
TCI-State[3]		TCI-state-2	
tcid-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			
}			
}			
pdsch-TimeDomainAllocationList	Not present		
pdsch-TimeDomainAllocationList-r16 CHOICE {			
setup SEQUENCE (SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation-r16 {			
PDSCH-TimeDomainResourceAllocation-r16[1] SEQUENCE {			
k0-r16	Not present		
mappingType-r16	typeA		
startSymbolAndLength-r16	44	Start symbol(S) =2, Length(L)= 4	For Slot i, if mod(i, 10) = 7 for i from {0,...,39}
repetitionNumber-r16	2		
}			
PDSCH-TimeDomainResourceAllocation-r16[2] SEQUENCE {			
k0-r16	Not present		
mappingType-r16	typeA		
startSymbolAndLength-r16	53	Start symbol(S) =2, Length(L)= 12	For Slot i, if mod(i, 10) = {0,1,2,3,4,5,} for i from {1,...,39}
repetitionNumber-r16	2		
}			
}			
}			
}			
}			

Table 5.2.3.1.14_1.3.3_1-4: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	

}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 5.2.3.1.14_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	For CSI-RS resources 1,2,5,6	
slots20	11	For CSI-RS resources 3,4,7,8	
}			

5.2.3.1.14_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.14_1.3.3_1.

5.2.3.1.14_1.4 Test requirement

Table 5.2.3.1.14.0-3 defines the primary level settings.

The residual BLER specified in Note 3 of Table 5.2.3.1.14_1.4-1 test shall meet or be lower than the specified value in Table 5.2.3.1.14_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.14_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
						BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.1-11.2 FDD	10 / 15	16QAM, 0.54	TDLA30-10	2x4, ULA Low	1 (Note 3)	0.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block. Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2							

5.2.3.1.15 4Rx FDD FR1 PDSCH with inter-cell interference

5.2.3.1.15.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.15.0-3, with the addition of test parameters in Table 5.2.3.1.15.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.15.0-1.

Table 5.2.3.1.15.0-1: Tests purpose

Purpose	Test index
---------	------------

Verify the PDSCH performance in 4 receive antenna conditions, when the transmission from the serving cell is interfered by 1 or 2 interfering cells.	1-1, 1-2
--	----------

Table 5.2.3.1.15.0-2: Test parameters

Parameter		Unit	Value		
			Cell 1 Enabled	Cell 2 Enabled	Cell 3 Enabled for Test 1-1 Disabled for Test 1-2
Duplex mode			FDD		
Active DL BWP index			1		
Physical cell ID			0	1	2
Transmission rank			1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell 1		us	N/A	3	-1
Frequency offset to Cell 1		Hz	N/A	300	-100
Interference Model			N/A	As specified in B.6.2	
INR (Note 2)		dB	N/A	7.77 for Test 1-1 7.58 for Test 1-2	2.29 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	1 st SSB in Slot#0 for Test 1-1 2 nd SSB in Slot #0 for Test 1-2	1 st SSB in Slot#0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PDSCH aggregation factor		1		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 0		
	RBG size		Config2		
VRB-to-PRB mapping type		Non-interleaved			
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A		
	DMRS Type		Type 1		
	Number of additional DMRS		1		
	Maximum number of OFDM symbols for DL front loaded DMRS		1		
Number of HARQ Processes			4		
The number of slots between PDSCH and corresponding HARQ-ACK information			2		
Note1: Cell 1 is the serving cell; Cells 2, 3 are interfering cells					
Note 2: INR is defined in Annex B.6.1					

Table 5.2.3.1.15.0-3: Minimum performance for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)

1-1	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x4, ULA Low	70	10.1
1-2	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	7.4
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent. Note 2: Bandwidth/ Sub carrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.15.

5.2.3.1.15_1 4Rx FDD FR1 PDSCH with inter-cell interference performance - 2x4 MIMO for both SA and NSA

5.2.3.1.15_1.1 Test purpose

Verify the PDSCH performance in 4 receive antenna conditions, when the transmission from the serving cell is interfered by 1 or 2 interfering cells.

5.2.3.1.15_1.2 Test applicability

Test 1-1 and test 1-2 applies to all types of release 15 and release 16 NR UEs and E-UTRAN UEs supporting EN-DC and supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

Test 1-1 and test 1-2 applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.3.1.15_1.3 Test description

5.2.3.1.15_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the serving cell and interfering cells are set up according to Table 5.2-1 and Table 5.2.3.1.15.0-2 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.15_1.3.3.

5.2.3.1.15_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.15_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for the serving cell and interfering cells according to Table 5.2.3.1.15_1.4-2.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G.1.5..
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.3.1.15_1.4-2 as appropriate.

5.2.3.1.15_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.15_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.3.1.15_1.3.3_2 Message exceptions for NSA

No message exceptions for NSA

5.2.3.1.15_1.4 Test requirement

Tables 5.2.3.1.15_1.4-1 and 5.2.3.1.15_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.15_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.15_1.4-1: Test parameters

Parameter		Unit	Value		
			Cell 1	Cell 2	Cell 3
			Enabled	Enabled	Enabled for Test 1-1 Disabled for Test 1-2
Duplex mode			FDD		
Active DL BWP index			1		
Physical cell ID			0	1	2
Transmission rank			1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell 1		us	N/A	3	-1
Frequency offset to Cell 1		Hz	N/A	300	-100
Interference Model			N/A		
INR (Note 2)		dB	N/A	As specified in B.6.2	
				7.77+0.8 for Test 1-1 7.58+0.8 for Test 1-2	2.29+0.8 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	1 st SSB in Slot#0 for Test 1-1 2 nd SSB in Slot #0 for Test 1-2	1 st SSB in Slot#0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		

	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2
Note1: Cell 1 is the serving cell; Cells 2, 3 are interfering cells			
Note 2: INR is defined in Annex B.6.1			

Table 5.2.3.1.15_1.4-2: Test Requirement for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLC300-100	2x4, ULA Low	70	11.8
1-2	R.PDSCH. 1-2.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.2
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Sub carrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

5.2.3.1.16 4Rx FDD FR1 for PDSCH with intra-cell inter-user interference

5.2.3.1.16.0 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.3.1.16.0-3 and 5.2.3.1.16.0-4, with the addition of test parameters in Table 5.2.3.1.16.0-2 and the downlink physical channel setup according to Annex C.3.1.

The performance requirements for UE supporting Enhanced receiver Type 2 for intra-cell inter-user interference are specified in Table 5.2.3.1.16.0-6 and Table 5.2.3.1.16.0-7, with the addition of test parameters in Tables 5.2.3.1.16.0-2, 5.2.3.1.16.0-5 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.16.0-1.

Table 5.2.3.1.16.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.	1-1, 2-1
Verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.	3-1, 4-1

Verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.	3-2, 4-2
---	----------

Table 5.2.3.1.16.0-2: Test parameters

Parameter		Unit	Target UE	Co-scheduled UE
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
	PDSCH DMRS configuration (Note 1)	DMRS Type		Type 1
Number of additional DMRS			1	
Maximum number of OFDM symbols for DL front loaded DMRS			1	
Antenna ports indexes			{1000} for test 1-1, 3-1, 3-2 {1000, 1001} for test 2-1, 4-1, 4-2	{1001} for test 1-1, 3-1, 3-2 {1002, 1003} for test 2-1, 4-1, 4-2
	Number of PDSCH DMRS CDM group(s) without data		1 for test 1-1, 3-1, 3-2 2 for test 2-1, 4-1, 4-2	1 for test 1-1, 3-1, 3-2 2 for test 2-1, 4-1, 4-2
PDSCH & PDSCH DMRS Precoding configuration			Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable $i1/i2$ combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12].	Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable $i1/i2$ combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12]. Any column of precoder matrix is not equal to any column of precoder matrix of Target UE for test 1-1 Select the precoder to ensure any column of precoder is orthogonal to any column of precoder for the target PDSCH for test 2-1, 3-1, 3-2, 4-1, 4-2
MU-MIMO Beamforming Model			As specified in B.4.2	
Number of HARQ Processes			4	N/A
The number of slots between PDSCH and corresponding HARQ-ACK information			2	N/A
Note 1: DMRS scrambling ID is the same for both target and co-scheduled UEs.				

Table 5.2.3.1.16.0-3: Minimum performance for target UE with Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.5-1.1 FDD	10 / 15	16QAM, 0.48	Random 16QAM symbols	TDLC300-100	2x4, ULA Low	70	11.5

Table 5.2.3.1.16.0-4: Minimum performance for target UE with Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.5-1.2 FDD	10 / 15	16QAM, 0.48	Random 16QAM symbols	TDLA30-10	4x4, ULA Low	70	15.3

The parameters in Table 5.2.3.1.16.0-5 are configured for requirements with Enhanced receiver Type 2 for intra-cell inter-user interference.

Table 5.2.3.1.16.0-5: Assistance Information parameters for requirements with Enhanced receiver Type 2

Parameter		Value
AdvancedReceiver-MU-MIMO-r18	precodingAndResourceAllocation	True
	pdsch-TimeDomainAllocation	True
	mcs-Table	qam256
	advReceiver-MU-MIMO-DCI-1-1	Enabled
Co-scheduled UE information in DCI (Table 7.3.1.2.2-12 of TS38.212 [10])		1 for Test 3-1 2 for Test 4-1 6 for Test 3-2, 4-2

Table 5.2.3.1.16.0-6: Minimum performance for target UE with Rank 1 with Enhanced receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	Random QPSK symbols	TDLC300-100	2x4, ULA Medium	70	15.5
3-2	R.PDSCH.5-1.3 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLC300-100	2x4, ULA Medium	70	24.2

Table 5.2.3.1.16.0-7: Minimum performance for target UE with Rank 2 with Enhanced receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.5-1.4	10 / 15	64QAM,	Random	TDLA30-10	4x4, ULA Low	70	19.4

	FDD		0.43	16QAM symbols				
4-2	R.PDSCH.5-1.2 FDD	10 / 15	16QAM, 0.48	Random QPSK symbols	TDLA30-10	4x4, ULA Low	70	14.3

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.16.

5.2.3.1.16_1 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 2x4 MIMO for both NSA and SA

5.2.3.1.16_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.3.1.16_1.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.3.1.16_1.3 Test description

5.2.3.1.16_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.16.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.16_1.3.3.

5.2.3.1.16_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.16_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.16_1.4-1.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.16_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.16_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.3.1.16_1.3.3_1 Message exceptions for NSA

No message exceptions for NSA

5.2.3.1.16_1.4 Test requirement

Table 5.2.3.1.16_1.4-1: Test requirement for target UE with Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.5-1.1 FDD	10 / 15	16QAM, 0.48	Random 16QAM symbols	TDLC300-100	2x4, ULA Low	70	12.4

5.2.3.1.16_2 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA

5.2.3.1.16_2.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.3.1.16_2.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.3.1.16_2.3 Test description

5.2.3.1.16_2.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.16.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.16_2.3.3.

5.2.3.1.16_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.16_2.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.16_2.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.16_2.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.16_2.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.3.1.16_2.3.3_1 Message exceptions for NSA

No message exceptions for NSA

5.2.3.1.16_2.4 Test requirement

Table 5.2.3.1.16_2.4-1: Test requirement for target UE with Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH,5-1.2 FDD	10 / 15	16QAM, 0.48	Random 16QAM symbols	TDLA30-10	4x4, ULA Low	70	16.3

5.2.3.1.16_3 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA

5.2.3.1.16_3.1 Test purpose

Test 3-1 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.

Test 3-2 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.

5.2.3.1.16_3.2 Test applicability

Test 3-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18*.

Test 3-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18* and capability ‘*MU-MIMO Interference Mitigation advanced receiver with modulation order detection*’ or ‘*MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh*’ in TS38.306 [14].

5.2.3.1.16_3.3 Test description

5.2.3.1.16_3.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.16.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.16_2.3.3.

5.2.3.1.16_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.1.16_2.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.16_2.4-1 as appropriate.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.1.16_2.4-1 as appropriate.

5.2.3.1.16_2.3.3 Message contents

5.2.3.1.16_2.3.3_1 Message exceptions for SA

Same as 5.2.3.1.16_1.3.3_1 with the following exceptions:

Table 5.2.3.1.16_2.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.1-20			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {	1 entry		
AdvancedReceiver-MU-MIMO-r18 ::= SEQUENCE {			
precodingAndResourceAllocation-r18	true		
pdsch-TimeDomainAllocation-r18	true		
mcs-Table-r18	qam256		
advReceiver-MU-MIMO-DCI-1-1-r18	enabled		
}			
}			

Table 5.2.3.1.16_2.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Co-scheduled UE information	'In all the PRBs allocated to the UE, all the co-scheduled UE(s), if any, which have the same root DMRS sequence as the UE, are scheduled with modulation scheme QPSK' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'001' B	Test 3-1
	'In each individual PRB allocated to the UE, all the co-scheduled UE(s), which have the same root DMRS sequence as the UE, are scheduled with the same modulation scheme, except the cases corresponding to index 0~5' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'110' B	Test 3-2

5.2.3.1.16_2.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.16_2.3.3_1.

5.2.3.1.16_2.4 Test requirement

Table 5.2.3.1.16_2.4-1: Test requirement for PDSCH of target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	Random QPSK symbols	TDLC300-100	2x4, ULA Medium	70	16.4
3-2	R.PDSCH.5-1.3 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLC300-100	2x4, ULA Medium	70	25.1

5.2.3.1.16_4 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA

5.2.3.1.16_4.1 Test purpose

Test 4-1 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.

Test 4-2 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.

5.2.3.1.16_4.2 Test applicability

Test 4-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18*.

Test 4-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18* and capability ‘*MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh*’ in TS38.306 [14].

5.2.3.1.16_4.3 Test description

5.2.3.1.16_4.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.16.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.16_4.3.3.

5.2.3.1.16_4.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.1.16_4.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.16_4.4-1 as appropriate.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.1.16_4.4-1 as appropriate.

5.2.3.1.16_4.3.3 Message contents

5.2.3.1.16_4.3.3_1 Message exceptions for SA

Same as 5.2.3.1.16_1.3.3_1 with the following exceptions:

Table 5.2.3.1.16_4.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.1-20			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {	1 entry		
AdvancedReceiver-MU-MIMO-r18 ::= SEQUENCE {			
precodingAndResourceAllocation-r18	true		
pdsch-TimeDomainAllocation-r18	true		
mcs-Table-r18	qam256		
advReceiver-MU-MIMO-DCI-1-1-r18	enabled		
}			
}			

Table 5.2.3.1.16_4.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Co-scheduled UE information	'In all the PRBs allocated to the UE, all the co-scheduled UE(s), if any, which have the same root DMRS sequence as the UE, are scheduled with modulation scheme 16QAM' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'010' B	Test 4-1
	'In each individual PRB allocated to the UE, all the co-scheduled UE(s), which have the same root DMRS sequence as the UE, are scheduled with the same modulation scheme, except the cases corresponding to index 0~5' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'110' B	Test 4-2

5.2.3.1.16_4.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.16_4.3.3_1.

5.2.3.1.16_4.4 Test requirement

Table 5.2.3.1.16_4.4-1: Test requirement for PDSCH of target UE with Rank 2 with Enhanced receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.5-1.4 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLA30-10	4x4, ULA Low	70	20.4
4-2	R.PDSCH.5-1.2 FDD	10 / 15	16QAM, 0.48	Random QPSK symbols	TDLA30-10	4x4, ULA Low	70	15.3

5.2.3.1.17 4Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario

5.2.3.1.17.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.17.0-4, with the addition of test parameters in Table 5.2.3.1.17.0-2 for the serving cell and Table 5.2.3.1.17.0-3 for the LTE interference cells and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.17.0-1.

Table 5.2.3.1.17.0-1: Tests purpose

Purpose	Test index
Verify PDSCH CRS interference mitigation performance under 4 receive antenna conditions with CRS rate matching configured for the serving cell.	1-1

Table 5.2.3.1.17.0-2: Test parameters for the serving cell

Parameter	Unit	Value	
Duplex mode		FDD	
Active DL BWP index		1	
NR UL transmission with a 7.5 kHz shift to the LTE raster		true	
PDCCH configuration	Symbols with PDCCH	Symbol# 2	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	3	
	Length (L)	9	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	DMRS Type	Type 1	
	Position of the first DM-RS for downlink	3	
	Number of additional DMRS	1	
	Maximum number of OFDM symbols for DL front loaded DMRS	1	
CRS for rate matching (Note 1)	LTE carrier centre subcarrier location	Same as NR carrier centre subcarrier location	
	LTE carrier BW	MHz	10
	Number of antenna ports		2
	v-shift		0
Number of HARQ Processes		4	
The number of slots between PDSCH and corresponding HARQ-ACK information		2	
Note 1: No MBSFN is configured on LTE carrier.			
Note 2: Network-based CRS interference mitigation is disabled on LTE carrier.			

Table 5.2.3.1.17.0-3: Test parameters for the LTE interference cells

Parameter	Unit	Cell 1	Cell 2
Propagation conditions and MIMO configuration (Note 1)		TDLA30-10 ULA Low	TDLA30-10 ULA Low
INR (Note 2)	dB	10.45	4.6
Cell-specific reference signals		Antenna ports 0,1	Antenna ports 0,1

Carrier centre subcarrier location		Same as the serving carrier centre subcarrier location	Same as the serving carrier centre subcarrier location
BW_{Channel}	MHz	10	10
Cyclic Prefix		Normal	Normal
Physical cell ID		1	2
Number of control OFDM symbols		2	2
PDSCH transmission mode		4	4
Interference model		As specified in clause B.7	As specified in clause B.7
Probability of occurrence of PDSCH data	%	20	20
Probability of occurrence of transmission rank	Rank 1	%	80
	Rank 2	%	20
Downlink power allocation	ρ_A	dB	-3
	ρ_B	dB	-3
	σ	dB	0
Precoding granularity	PRB	6	6
Time offset to the serving cell	us	3	-1
Frequency offset to the serving cell	Hz	300	-100
MBSFN		Not configured	Not configured
Network-based CRS interference mitigation		Disabled	Disabled
Note 1: The channel for the LTE interference cells and the serving cell are independent.			
Note 2: Defined in B.6.1.			

Table 5.2.3.1.17.0-4: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-7.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.0

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.17.

5.2.3.1.17_1 4Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x4 MIMO for both NSA and SA

5.2.3.1.17_1.1 Test purpose

To verify PDSCH CRS interference mitigation performance under 4 receive antenna conditions with CRS rate matching configured for the serving cell.

5.2.3.1.17_1.2 Test applicability

This test applies to all types of NR UE release 17 and forward that support *CRS-IM-DSS-15kHzSCS-r17*.

5.2.3.1.17_1.3 Test description

5.2.3.1.17_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.3.1.17.0-2 and 5.2.3.1.17.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.17_1.3.3.

5.2.3.1.17_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.17_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.17_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.3.1.17_1.4-2 as appropriate.

5.2.3.1.17_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.17_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.17_1.3.3_1-1: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 5.4.2-1			
Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE {			
dmrs-TypeA-Position	pos3		
lte-CRS-ToMatchAround	RateMatchPatternLTE-CRS		
}			

Table 5.2.3.1.17_1.3.3_1-2: RateMatchPatternLTE-CRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2-20			
Information Element	Value/remark	Comment	Condition
RateMatchPatternLTE-CRS ::= SEQUENCE {			
carrierFreqDL	Same as NR carrier centre subcarrier location		
carrierBandwidthDL	n50	10MHz	
mbsfn-SubframeConfigList	Not present		

nrofCRS-Ports	n2		
v-Shift	n0		
}			

Table 5.2.3.1.17_1.3.3_1-3: FrequencyInfoUL-SIB

Derivation Path: TS 38.508-1 [6], Table 4.6.3-62			
Information Element	Value/remark	Comment	Condition
FrequencyInfoUL-SIB SEQUENCE {			
frequencyShift7p5khz	true		
}			

5.2.3.1.17_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.17_1.3.3_1

5.2.3.1.17_1.4 Test requirement

Tables 5.2.3.1.17_1.4-1 and 5.2.3.1.17_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.17_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.17_1.4-1: Test parameters for the LTE interference cells

Parameter		Unit	Cell 1	Cell 2
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
INR (Note 2)		dB	11.25	5.4
Cell-specific reference signals			Antenna ports 0,1	Antenna ports 0,1
Carrier centre subcarrier location			Same as the serving carrier centre subcarrier location	Same as the serving carrier centre subcarrier location
BW _{Channel}		MHz	10	10
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
Number of control OFDM symbols			2	2
PDSCH transmission mode			4	4
Interference model			As specified in clause B.7	As specified in clause B.7
Probability of occurrence of PDSCH data		%	20	20
Probability of occurrence of transmission rank	Rank 1	%	80	80
	Rank 2	%	20	20
Downlink power allocation	ρ_A	dB	-3	-3
	ρ_B	dB	-3	-3
	σ	dB	0	0
Precoding granularity		PRB	6	6
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
MBSFN			Not configured	Not configured
Network-based CRS interference mitigation			Disabled	Disabled
Note 1: The channel for the LTE interference cells and the serving cell are independent.				
Note 2: Defined in B.6.1.				

Table 5.2.3.1.17_1.4-2: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier	Modulation format and code rate	Propagation condition	Correlation matrix and antenna	Reference value	
						Fraction of	SNR

		spacing (kHz)			configuration	maximum throughput (%)	(dB)
1-1	R.PDSCH.1-7.3 FDD	10 / 15	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.8

5.2.3.1.18 4Rx FDD FR1 for PDSCH with inter cell CRS interference

5.2.3.1.18.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.18.0-4 and Table 5.2.3.1.18.0-6, with the addition of test parameters in Table 5.2.3.1.18.0-2 and 5.2.3.1.18.0-3 and the downlink physical channel setup according to Annex C.3.1.

The requirements for UE capable of performing CRS-IM with the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.3.1.18.0-4.

The requirements for UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.3.1.18.0-6.

The test purposes are specified in Table 5.2.3.1.18.0-1.

Table 5.2.3.1.18.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions when PDSCH is interfered by inter cell CRS signal	1-1 and 2-1

Table 5.2.3.1.18.0-2: Tests parameter for serving cell PDSCH

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between PDSCH and corresponding HARQ-ACK information		2

Table 5.2.3.1.18.0-3: Tests parameter for interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		FDD	FDD
INR	dB	10.45	4.6
LTE Bandwidth (Note 5)	MHz	20	20

Carrier centre subcarrier location (Note 6)			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
<p>Note 1: The channel for the LTE interference cells and the serving cell are independent.</p> <p>Note 2: No MBSFN is configured on LTE carrier.</p> <p>Note 3: Network-based CRS interference mitigation is disabled on LTE carrier.</p> <p>Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame</p> <p>Note 5: This parameter is informed to UE via network assistance signalling for Test 1-1 in Table 5.2.3.1.18.0-4.</p> <p>Note 6: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases with network signalling assistance</p>				

Table 5.2.3.1.18.0-4: Minimum performance for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-18.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	8.0

Table 5.2.3.1.18.0-5: Measurement Gap configurations

Parameter	Unit	Value
Measurement Gap Length	ms	6
Measurement Gap Repetition Period	ms	40
Gap offset	ms	7
Measurement gap timing advance	ms	0

Table 5.2.3.1.18.0-6: Minimum performance for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput	SNR (dB)

						(%)	
2-1	R.PDSCH.1-17.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	8.0

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.18.

5.2.3.1.18_1 4Rx FDD FR1 for PDSCH with inter cell CRS interference scenario – 4x4 MIMO for both NSA and SA

5.2.3.1.18_1.1 Test purpose

To verify PDSCH performance under 4 receive antenna conditions when PDSCH is interfered by inter cell CRS signal.

5.2.3.1.18_1.2 Test applicability

Test 2-1 applies to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-15kHzSCS-r17*.

Test 1-1 applies to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-NWA-15kHzSCS-r17*.

5.2.3.1.18_1.3 Test description

5.2.3.1.18_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.3.1.18.0-2 and 5.2.3.1.18_1.4-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.18_1.3.3.
6. For UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth, ensure the network configures an inter-RAT LTE measurement object of the interfering cells to the tested UE. Inter-RAT measurement is configured at the beginning of the test and applied throughout the test with gap pattern configurations according to Table 5.2.3.1.18.0-5. PDSCH is not scheduled, and throughput is not counted during 4.64s after the beginning of test. PDSCH is not scheduled in the measurement gaps.

5.2.3.1.18_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.1.18_1.4-2 and 5.2.3.1.18_1.4-3 as appropriate. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.18_1.4-2 and 5.2.3.1.18_1.4-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.1.18_1.4-2 and 5.2.3.1.18_1.4-3 as appropriate.

5.2.3.1.18_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.18_1.3.3_1 Message exceptions for SA

As defined in clause 4.6.3 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.1.18_1.3.3_1-1: LTE-NeighCellsCRS-AssistInfoList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-67A			
Information Element	Value/remark	Comment	Condition
LTE-NeighCellsCRS-AssistInfoList-r17 ::= SEQUENCE (SIZE (1..maxNrofCRS-IM-InterfCell-r17)) OF LTE-NeighCellsCRS-AssistInfo-r17 {	1 entry		Test 1-1
LTE-NeighCellsCRS-AssistInfo-r17[1] SEQUENCE {			
neighCarrierBandwidthDL-r17	n100		
neighNrofCRS-Ports-r17	n4		
}			
}			

Table 5.2.3.1.18_1.3.3_1-2: MeasGapConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-70			
Information Element	Value/remark	Comment	Condition
MeasGapConfig ::= SEQUENCE {			Test 2-1
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	7		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			
}			

5.2.3.1.18_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.1.18_1.3.3_1

5.2.3.1.18_1.4 Test requirement

Tables 5.2.3.1.18_1.4-1, 5.2.3.1.18_1.4-2 and 5.2.3.1.18_1.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Tables 5.2.3.1.18_1.4-2 and Tables 5.2.3.1.18_1.4-3 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.18_1.4-1: Tests parameter for interference cells

Parameter		Unit	Cell 1	Cell 2
Duplex mode			FDD	FDD
INR		dB	11.25	5.4
LTE Bandwidth (Note 5)		MHz	20	20
Carrier centre subcarrier location (Note 6)			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3	-1
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
Note 1: The channel for the LTE interference cells and the serving cell are independent. Note 2: No MBSFN is configured on LTE carrier. Note 3: Network-based CRS interference mitigation is disabled on LTE carrier. Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame Note 5: This parameter is informed to UE via network assistance signalling for Test 1-1 in Table 5.2.3.1.18.0-4. Note 6: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases with network signalling assistance				

Table 5.2.3.1.18_1.4-12 Test requirement for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-18.1 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	9.8

Table 5.2.3.1.18_1.4-3: Test requirement for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum	SNR (dB)

		(kHz)				throughput (%)	
2-1	R.PDSCH.1-17.2 FDD	10 / 15	16QAM, 0.48	TDLA30-10	4x4, ULA Low	70	9.8

5.2.3.1.19 4Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA

5.2.3.1.19.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme A scenario.

5.2.3.1.19.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme A for PDCCH scheduling SFN Scheme A PDSCH.

5.2.3.1.19.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.19.3-3, with the addition of test parameters in Table 5.2.3.1.19.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.19.3-1.

Table 5.2.3.1.19.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme A scenario defined in B.3.5	1-1

Table 5.2.3.1.19.3-2: Test parameters

Parameter		Unit	Value	
Duplex mode			FDD	
Active DL BWP index			1	
PDCCH configuration	TCI state		Note 1	
	Mapping type		Type A	
PDSCH configuration	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
	TCI state		Note 1	
PDSCH DMRS configuration	DMRS Type		Type 1	
	Number of additional DMRS		2	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4	
		CSI-RS periodicity	Slots 10 for CSI-RS resource 1,2,3,4.	
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4	
		QCL info	TCI state #3	
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 10 for CSI-RS resource 5,6,7,8.	

		CSI-RS offset	Slots	1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	
		QCL info		TCI state #4	
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12	
		CSI-RS periodicity	Slots	10 for CSI-RS resource 9,10,11,12.	
		CSI-RS offset	Slots	1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12	
		QCL info		TCI state #5	
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$	
		CSI-RS periodicity	Slots	20	
		CSI-RS offset	Slots	0	
			QCL info		TCI state #0
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$	
		CSI-RS periodicity	Slots	20	
		CSI-RS offset	Slots	0	
			QCL info		TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 7$	
		CSI-RS periodicity	Slots	20	
		CSI-RS offset	Slots	0	
			QCL info		TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #3	Type 1 QCL information	SSB index		SSB #0	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
TCI state #4	Type 1 QCL information	SSB index		SSB #1	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
TCI state #5	Type 1 QCL information	SSB index		SSB #2	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
Number of HARQ Processes				4	
The number of slots between PDSCH and corresponding HARQ-ACK information				2	
<p>Note 1: SSB # ($k \bmod 3$), CSI-RS (for tracking) resource set # ($(k \bmod 3) + 1$) and CSI-RS (for CSI acquisition) resource set # ($(k \bmod 3) + 4$) are transmitted by k^{th} RRH. Codepoint #0 is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1 with TCI States TCI state #0, TCI State #1. Codepoint #1 is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2 with TCI States TCI state #1, TCI State #2. Codepoint #2 is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3 with TCI States TCI state #2, TCI State #0.</p>					

Table 5.2.3.1.19.3-3: Minimum performance for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10 / 15	16QAM, 0.48	HST-SFN Scheme A	2x4	70	9.1

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.19.

5.2.3.1.19.4 Test description

5.2.3.1.19.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.19.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.5.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.19.4.3.

5.2.3.1.19.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.19.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.3.1.19.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.1.19.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of Table 5.2.3.1.19.3-2 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.

4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.19.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.1.19.4.3.1 Message exceptions for SA

Table 5.2.3.1.19.4.3.1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	Test 1-1
}			
}			
}			

Table 5.2.3.1.19.4.3.1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1
}			

Table 5.2.3.1.19.4.3.1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4		Test 1-1
}			

Table 5.2.3.1.19.4.3.1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8,9,10,11,12	for test 1-1	
qcl-InfoPeriodicCSI-RS	3 for CSI-RS resource #1, #2, #3, #4 4 for CSI-RS resource #5, #6, #7, #8 5 for CSI-RS resource #9, #10, #11, #12	for test 1-1: TCI-StateId for TCI-State #3 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI-State #4 for CSI-RS resource #5, #6, #7, #8 TCI-StateId for TCI-State #5 for CSI-RS resource #9, #10, #11, #12	
}			

Table 5.2.3.1.19.4.3.1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.3.1.19.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE { firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8 4 for CSI-RS resource #9 and #11 8 for CSI-RS resource #10 and #12	for test 1-1: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4 l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8 l ₀ = 4 for CSI-RS resource 9 and 11 l ₀ = 8 for CSI-RS resource 10 and 12	
}			

Table 5.2.3.1.19.4.3.1-6: CSI-ResourcePeriodicityAndOffset for CSI Tracking (Table 5.2.3.1.19.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots10	1 for CSI-RS resource #1, #2, #5, #6, #9, #10 2 for CSI-RS resource #3 #4, #7, #8, #11, #12	For test 1-1: periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12	
}			

Table 5.2.3.1.19.4.3.1-7: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE { nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2 2 for Resource set #3	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 0	For test 1-1 entry 1 CSI-RS resource #1	Resource set #1
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	

NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
NZP-CSI-RS-ResourceId[2]	9	entry 2 CSI-RS resource #10	
NZP-CSI-RS-ResourceId[3]	10	entry 3 CSI-RS resource #11	
NZP-CSI-RS-ResourceId[4]	11	entry 4 CSI-RS resource #12	
}			
trs-Info	true		
}			

Table 5.2.3.1.19.4.3.1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	12 for CSI-RS resource #13 13 for CSI-RS resource #14 14 for CSI-RS resource #15	for test 1-1	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #13 1 for CSI-RS resource #14 2 for CSI-RS resource #15	for test 1-1: TCI-State #0 for CSI-RS resource #13 TCI-State #1 for CSI-RS resource #14 TCI-State #2 for CSI-RS resource #15	
}			

Table 5.2.3.1.19.4.3.1-9: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.3.1.19.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition

CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #13 13 for CSI-RS resource #14 7 for CSI-RS resource #15	for test 1-1 l0=12 for CSI-RS resource #13 l0=13 for CSI-RS resource #14 l0=7 for CSI-RS resource #15	
}			

Table 5.2.3.1.19.4.3.1-10: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.3.1.19.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	0	For test 1-1 periodicity = 20 slots. offset = 0 slots	
}			

Table 5.2.3.1.19.4.3.1-11: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	3 for Resource set #4 4 for Resource set #5 5 for Resource set #6	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #4
NZP-CSI-RS-ResourceId[1]	12	entry 1 CSI-RS resource #13	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #5
NZP-CSI-RS-ResourceId[1]	13	entry 1 CSI-RS resource #14	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1	Resource set #5
NZP-CSI-RS-ResourceId[1]	14	entry 1 CSI-RS resource #15	
}			
}			

Table 5.2.3.1.19.4.3.1-12: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3 4 for TCI state #4	For test 1-1	

	5 for TCI state #5		
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1, TCI state #2
	Not present		TCI state #3, TCI state #4, TCI state #5
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
	8	CSI-RS resource #9	TCI state #2
ssb	0	SSB #0	TCI state #3
	1	SSB #1	TCI state #4
	2	SSB #2	TCI state #5
}			
qcl-Type	typeA		TCI state #0, TCI state #1, TCI state #2
	typeC		TCI state #3, TCI state #4, TCI state #5
}			
}			

5.2.3.1.19.4.3.2 Message exceptions for NSA

Same as 5.2.3.1.19.4.3.1.

5.2.3.1.19.5 Test Requirement

Tables 5.2.3.1.19.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.19.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.19.5-1: Test Requirements for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10 / 15	16QAM, 0.48	HST-SFN Scheme A	2x4	70	9.7

5.2.3.1.20 4Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA

5.2.3.1.20.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme B scenario.

5.2.3.1.20.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme B for PDCCH scheduling SFN Scheme B PDSCH.

5.2.3.1.20.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.20.3-3, with the addition of test parameters in Table 5.2.3.1.20.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.20.3-1.

Table 5.2.3.1.20.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme B scenario defined in B.3.6	1-1

Table 5.2.3.1.20.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	TCI state		Note 1
	DMRS Type		Type 1
	Number of additional DMRS		2
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 10 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #3
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 10 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #4
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots 10 for CSI-RS resource 9,10,11,12.
		CSI-RS offset	Slots 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12
		QCL info	TCI state #5
NZIP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$
		CSI-RS periodicity	Slots 20
		CSI-RS offset	Slots 0
		QCL info	TCI state #0
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 20
		CSI-RS offset	Slots 0
		QCL info	TCI state #1

	Resource set #6	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 7$
		CSI-RS periodicity	Slots	20
		CSI-RS offset	Slots	0
		QCL info		TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #3	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #4	Type 1 QCL information	SSB index		SSB #1
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #5	Type 1 QCL information	SSB index		SSB #2
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
Number of HARQ Processes				4
The number of slots between PDSCH and corresponding HARQ-ACK information				2
<p>Note 1: SSB # (k mod 3), CSI-RS (for tracking) resource set # ((k mod 3) + 1) and CSI-RS (for CSI acquisition) resource set # ((k mod 3) + 4) are transmitted by kth RRH. Codepoint#0 {TCI state #0, TCI State #1} is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1. Codepoint#1 {TCI state #1, TCI State #2} is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2. Codepoint#2 {TCI state #2, TCI State #0} is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3. The second indicated TCI state in each codepoint is not used for quasi co-location parameters {Doppler shift, Doppler spread}.</p>				

Table 5.2.3.1.20.3-3: Minimum performance for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10/15	16QAM, 0.48	HST-SFN-Scheme B	2x4	70	8.4

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.20.

5.2.3.1.20.4 Test description

5.2.3.1.20.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.20.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.6.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.20.4.3.

5.2.3.1.20.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.1.20.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.3.1.20.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.1.20.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of Table 5.2.3.1.20.3-2 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.1.20.4.3 Message contents

Same message contents as in 5.2.3.1.19.4.3.

5.2.3.1.20.5 Test Requirement

Table 5.2.3.1.20.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.20.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.20.5-1: Test Requirements for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-8.5 FDD	10/15	16QAM, 0.48	HST-SFN-Scheme B	2x4	70	9.0

5.2.3.1.21 4Rx FDD FR1 PDSCH ATG performance

5.2.3.1.21.1 Test Purpose

To verify UE PDSCH performance under the ATG scenario.

5.2.3.1.21.2 Test applicability

This test applies to all types of 4Rx NR ATG UE release 18 and forward.

5.2.3.1.21.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.1.21.3-3, with the addition of test parameters in Table 5.2.3.1.21.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.1.21.3-1.

Table 5.2.3.1.21.3-1: Tests purpose

Purpose	Test index
Verify UE PDSCH performance under the ATG scenario	1-1, 1-2, 1-3

Table 5.2.3.1.21.3-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between PDSCH and corresponding HARQ-ACK information		2

Table 5.2.3.1.21.3-3: Minimum performance for ATG

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	AWGN	220Hz	2x4	70	3.1
1-2	R.PDSCH.1-3.6 FDD	10 / 15	64QAM, 0.65	AWGN	220Hz	2x4	70	10.6
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	AWGN	220Hz	2x4	70	19.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.1.21.

5.2.3.1.21.4 Test description

5.2.3.1.21.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.1.21.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.1.21.4.3.

5.2.3.1.21.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.1.21.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.1.21.3-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
4. Repeat steps from 1 to 3 for each test points in Table 5.2.3.1.21.5-1 as appropriate.

5.2.3.1.21.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.3.1.21.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used for test 1-1, test 1-2 and 1-3	
}			
}			
}			

Table 5.2.3.1.21.4.3-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos1	1 additional DMRS symbol for test 1-1, test 1-2 and 1-3	
}			

Table 5.2.3.1.21.4.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	n4 is used for test 1-1, test 1-2 and 1-3	
}			

5.2.3.1.21.5 Test Requirement

Tables 5.2.3.1.21.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.1.21.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.1.21.5-1: Test Requirements for ATG

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-2.1 FDD	10 / 15	16QAM, 0.48	AWGN	220Hz	2x4	70	3.7
1-2	R.PDSCH.1-3.6 FDD	10 / 15	64QAM, 0.65	AWGN	220Hz	2x4	70	11.2
1-3	R.PDSCH.1-4.1 FDD	10 / 15	256QAM, 0.82	AWGN	220Hz	2x4	70	20.2

5.2.3.2 TDD

5.2.3.2.1 4Rx TDD FR1 PDSCH mapping Type A performance

5.2.3.2.1.0 Minimum conformance requirements for PDSCH Mapping Type A

The performance requirements are specified in Table 5.2.3.2.1.0-3, Table 5.2.3.2.1.0-4, Table 5.2.3.2.1.0-5 and Table 5.2.3.2.1.0-6, with the test parameters defined in Table 5.2.3.2.1.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.3.2.1.0-1.

Table 5.2.3.2.1.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 1-2, 1-3, 1-5, 1-6, 1-7, 1-8, 1-9, 1-10, 1-11, 1-12, 2-1, 2-2, 3-1, 4-1
Verify the PDSCH mapping Type A HARQ soft combining performance under 4 receive antenna conditions.	1-4
Verify the PDSCH mapping Type A performance requirements for Enhanced Receiver Type 1 under 4 receive antenna conditions.	5-1
Verify the PDSCH mapping Type A performance requirements with R18 DMRS	4-2

Table 5.2.3.2.1.0-2: Test Parameters for Testing

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	Specific to each Reference channel
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	4 for Tests 1-1, 1-8, 1-9 WB for Test 3-1 2 for other tests
	Resource allocation type	Test 1-2: Type 1 with start RB = 50, L _{RBs} = 6 Other tests: Type 0
	RBG size	Test 1-2: N/A Other tests: Config2
	VRB-to-PRB mapping type	Non-interleaved
	VRB-to-PRB mapping interleaver bundle size	N/A
PDSCH DMRS configuration	DMRS Type	Type 1 for all but Test 4-2 Enhanced Type 1 for Test 4-2.
	Number of additional DMRS	2 for Tests 1-1, 1-7, 1-8, 1-9, 1-10, 1-11 1 for other tests
	Maximum number of OFDM symbols for DL front loaded DMRS	1

	Antenna ports indexes		Test 4-2: {1000, 1001, 1008, 1009} Other tests: Table 5.2-1
	Number of PDSCH DMRS CDM group(s) without data		Test 4-2: 1 Other tests: Table 5.2-1
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		Tests 1-8, 1-9: l ₀ = 4 for CSI-RS resource 1 and 3 l ₀ = 8 for CSI-RS resource 2 and 4 Other tests; Table 5.2-1.
	CSI-RS periodicity	Slots	Test 1-7, 1-10, 1-11: 20 for CSI-RS resource 1,2,3,4. Other tests: Table 5.2-1.
	CSI-RS offset	Slots	Test 1-7, 1-10, 1-11: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4. Other tests: Table 5.2-1.
	Frequency Occupation		Test 1-7, 1-10, 1-11: Start PRB 0 Number of PRB = 52 Other tests: Table 5.2-1.
Number of HARQ Processes			16 for Test 1-4 10 for Test 1-9 8 for other tests
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.3.2.1.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-1.1 TDD	40 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x4, ULA Low	70	-4.1
1-2	R.PDSCH.2-1.2 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLC300-100	2x4, ULA Low	70	-2.7
1-3	R.PDSCH.2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30-1	TDLA30-10	2x4, ULA Low	70	21.6
1-4	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x4, ULA Low	30	-1.2

1-5	R.PDSCH.2-5.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x4, ULA Low	70	-3.8
1-6	R.PDSCH.2-6.1 TDD	40 / 30	QPSK, 0.30	FR1.30-3	TDLA30-10	2x4, ULA Low	70	-3.6
1-7	R.PDSCH.2-10.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-1000	1x4	70	3.4
1-8	R.PDSCH.2-11.1 TDD	40 / 30	QPSK, 0.30	FR1.30-5	TDLB100-400	2x4, ULA Low	70	-4.0
1-9	R.PDSCH.2-12.1 TDD	40 / 30	QPSK, 0.30	FR1.30-6	TDLB100-400	2x4, ULA Low	70	-4.0
1-10	R.PDSCH.2-10.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-1200	2x4	70	5.8
1-11	R.PDSCH.2-10.3 TDD	40 / 30	64QAM, 0.43	FR1.30-1	HST-1667	1x4	70	6.8
1-12	R.PDSCH.2-25.1 TDD	40 / 30	1024QAM, 0.79	FR1.30-1	TDLD30-5	2x4, ULA Low	70	26.3

Table 5.2.3.2.1.0-4: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x4, ULA Low	70	13.6
2-2	R.PDSCH.2-9.1 TDD	20 / 30	64QAM, 0.50	FR1.30-4	TDLA30-10	2x4, ULA Low	70	13.7

Table 5.2.3.2.1.0-5: Minimum performance for Rank 3

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-2.3 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	11.1

Table 5.2.3.2.1.0-6: Minimum performance for Rank 4

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.2-2.4 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	15.4
4-2	R.PDSCH.2-26.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	15.5

Table 5.2.3.2.1.0-7: Minimum performance for Rank 3 and EnhancedReceiver Type 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.2-2.3 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Medium A	70	22.9

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.2.1.

5.2.3.2.1_1 4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.1_1.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 1 and Rank 2 scenarios.

5.2.3.2.1_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward, supporting 4Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4Rx antenna ports.

5.2.3.2.1_1.3 Test description

5.2.3.2.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.1_1.4.3.

5.2.3.2.1_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.1.0-3 and Table 5.2.3.2.1.0-4. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.1_1.3.4-1 and 5.2.3.2.1_1.3.4-2 as appropriate.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.1_1.3.4-1 and 5.2.3.2.1_1.3.4-2 as appropriate.

5.2.3.2.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.1_1.3.3_1 Message exceptions for SA

Table 5.2.3.2.1_1.3.3_1-1: BWP

Derivation Path: TS 38.508-1 [6], Table 4.6.3-8			
Information Element	Value/remark	Comment	Condition
BWP ::= SEQUENCE {			
locationAndBandwidth	13750	For Test 2-2 (20MHz BW, SCS 30kHz)	
	28875	For other tests (40MHz BW, SCS 30kHz)	
}			

Table 5.2.3.2.1_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	n4	n4 for tests 1-1, 1-8, 1-9	
	wideband	wideband for test 3-1	
	Not present	n2 for other tests	
}			
}			
}			

Table 5.2.3.2.1_1.3.3_1-3: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos1	pos1 for all tests except tests 1-1, 1-7, 1-8, 1-9	
	Not present	pos2 for tests 1-1, 1-7, 1-8, 1-9, 1-10, 1-11	
}			

Table 5.2.3.2.1_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8 for other tests	
	n16	n16 for test 1-4	

	n10	n10 for test 1-9	
}			

Table 5.2.3.2.1_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	1 (for CSI-RS resources 1 and 2) 2 (for CSI-RS resources 3 and 4)	Periodicity 20 slots and offset 1/2 for test 1-7, 1-10, 1-11	
}			

Table 5.2.3.2.1_1.3.3_1-5A: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	4	For Tests 1-8, 1-9: l ₀ = 4 for CSI-RS resource 1 and 3	TRS
	8	For Tests 1-8, 1-9: l ₀ = 8 for CSI-RS resource 2 and 4	TRS
}			

Table 5.2.3.2.1_1.3.3_1-6: CSI-FrequencyOccupation for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-11			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	52	52 for tests 1-7, 1-10, 1-11, 2-2	TRS
	108	108 for other tests	TRS
}			

Table 5.2.3.2.1_1.3.3_1-7: RACH-ConfigGeneric

Derivation Path: TS 38.508-1 [6], Table 4.6.3-130			
Information Element	Value/remark	Comment	Condition
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	163	Only for test 2-2	
}			

Table 5.2.3.2.1_1.3.3_1-8: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			

sl20	7	For test 1-9	
sl20	5	For test 2-2	
}			
}			

Table 5.2.3.2.1_1.3.3_1-9: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PUCCH resource indicator	<i>PUCCH-ResourceId</i> [1] = 6 in <i>pucch-ResourceSetID</i> [1] or <i>PUCCH-ResourceId</i> [1] = 14 in <i>pucch-ResourceSetID</i> [2] as defined in Table 4.6.3-112 (Mapping as per Table 9.2.3-2 in TS 38.213)	'110'B	Slot S1 for test 1-9

Table 5.2.3.2.1_1.3.3_1-10: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	3 entry		Test 1-5, Test 1-6
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	100	Start symbol(S)=2, Length(L)=8	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[3]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocationList::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		Test 1-8
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	81	Start symbol(S)=2,	

		Length(L)=10	
}			
PDSCH-TimeDomainResourceAllocationList::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	5 entry		Test 1-9
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	100	Start symbol(S)=2, Length(L)=8	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	81	Start symbol(S)=2, Length(L)=10	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[5] SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

5.2.3.2.1_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.1_1.3.3_1

5.2.3.2.1_1.4 Test requirement

Table 5.2.3.2.1.0-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A clause A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.1_1.4-1 and Table 5.2.3.2.1_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.1_1.4-1: Test Requirements for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput	SNR (dB)

		(kHz)					(%)	
1-1	R.PDSCH.2-1.1 TDD	40 / 30	QPSK, 0.30	FR1.30-1A	TDLB100-400	2x4, ULA Low	70	-3.1
1-2	R.PDSCH.2-1.2 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLC300-100	2x4, ULA Low	70	-1.7
1-3	R.PDSCH.2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30-1	TDLA30-10	2x4, ULA Low	70	22.5
1-4	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x4, ULA Low	30	-0.3
1-5	R.PDSCH.2-5.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x4, ULA Low	70	-2.8
1-6	R.PDSCH.2-6.1 TDD	40 / 30	QPSK, 0.30	FR1.30-3	TDLA30-10	2x4, ULA Low	70	-2.6
1-7	R.PDSCH.2-10.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-1000	1x4	70	4.3
1-8	R.PDSCH.2-11.1 TDD	40 / 30	QPSK, 0.30	FR1.30-5	TDLB100-400	2x4, ULA Low	70	-3.1
1-9	R.PDSCH.2-12.1 TDD	40 / 30	QPSK, 0.30	FR1.30-6	TDLB100-400	2x4, ULA Low	70	-3.1
1-10	R.PDSCH.2-10.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-1200	2x4	70	6.7
1-11	R.PDSCH.2-10.3 TDD	40 / 30	64QAM, 0.43	FR1.30-1	HST-1667	1x4	70	7.7

Table 5.2.3.2.1_1.4-2: Test Requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLA30-10	2x4, ULA Low	70	14.6
2-2	R.PDSCH.2-9.1 TDD	20 / 30	64QAM, 0.50	FR1.30-4	TDLA30-10	2x4, ULA Low	70	14.7

5.2.3.2.1_2 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.1_2.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 3 and Rank 4 scenarios.

5.2.3.2.1_2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.2.3.2.1_2.3 Test description

Same test description as in clause 5.2.3.2.1_1.3 with the following exception:

- Figure A.3.1.7.5 instead of A.3.1.7.4
- Step 1 of Test procedure as in clause 5.2.3.2.1_1.3.2 to call for Tables 5.2.3.2.1.0-5 and 5.2.3.2.1.0-6 instead of Table 5.2.3.2.1.0-3 and 5.2.3.2.1.0-4.

- Step 2 and 4 of Test procedure as in clause 5.2.3.2.1_1.3.2 to call for Tables 5.2.3.2.1_2.3.4-1 and 5.2.3.2.1_2.4-2 instead of Tables 5.2.3.2.1_1.4-1 and 5.2.3.2.1_1.4-2.

5.2.3.2.1_2.3.1 Void

5.2.3.2.1_2.3.2 Void

5.2.3.2.1_2.3.3 Void

5.2.3.2.1_2.4 Test requirement

Table 5.2.3.2.1.0-5 and Table 5.2.3.2.1.0-6 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.1_2.4-1 and Table 5.2.3.2.1_2.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.1_2.4-1: Test Requirements for Rank 3

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-2.3 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	12.1

Table 5.2.3.2.1_2.4-2: Test Requirements for Rank 4

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.2-2.4 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	16.4

5.2.3.2.1_3 4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with enhanced receiver type 1 for both SA and NSA

FFS

5.2.3.2.1_4 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA

5.2.3.2.1_4.1 Test purpose

To verify the PDSCH mapping Type A enhanced performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default enhanced receiver type 1 configuration, for Rank 3 scenario.

5.2.3.2.1_4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and NR enhanced receiver type 1.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC, 4 Rx antenna ports and NR enhanced receiver type1.

5.2.3.2.1_4.3 Test description

Same test description as in clause 5.2.3.2.1_2.3 with the following exception:

- Step 1 of Test procedure as in clause 5.2.3.2.1_1.3.2 to call for Table 5.2.3.2.1.0-7 instead of Table 5.2.3.2.1.0-3 and 5.2.3.2.1.0-4.
- Step 2 and 4 of Test procedure as in clause 5.2.3.2.1_1.3.2 to call for Table 5.2.3.2.1_4.4-1 instead of Tables 5.2.3.2.1_1.4-1 and 5.2.3.2.1_1.4-2.

5.2.3.2.1_4.3.1 Void

5.2.3.2.1_4.3.2 Void

5.2.3.2.1_4.3.3 Void

5.2.3.2.1_4.4 Test requirement

Table 5.2.3.2.1.0-7 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.1_4.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.1_4.4-1: Test Requirements for Rank 3 and Enhanced Receiver Type 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.2-2.3 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Medium A	70	23.9

5.2.3.2.1_5 4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA

Editor's Note: Following aspects needs further investigation.

- **DL EVM of $\leq 2.5\%$ for $f > 4.2$ GHz pending further analysis by the TE vendors**

5.2.3.2.1_5.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions with DL1024QAM for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput for Rank 1 scenario.

5.2.3.2.1_5.2 Test applicability

This test applies to all types of UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of UE release 17 and forward supporting EN-DC and DL1024QAM.

5.2.3.2.1_5.3 Test description

5.2.3.2.1_5.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.1_5.3.3.

5.2.3.2.1_5.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.1_5.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.1_5.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.1_5.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.3.2.1_5.3.3_1 Message exceptions for NR/5GC

Same as 5.2.3.2.1_1.3.3_1 with the following exceptions.

Table 5.2.3.2.1_5.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		Test 1-12
}			

5.2.3.2.1_5.3.3_2 Message exceptions for EN-DC

Same as 5.2.3.2.1_5.3.3_1.

5.2.3.2.1_5.4 Test requirement

Table 5.2.3.2.1_5.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A clause A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.1_5.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.1_5.4-1: Test Requirements for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-12	R.PDSCH.2-25.1 TDD	40 / 30	1024QAM, 0.79	FR1.30-1	TDLD30-5	2x4, ULA Low	70	27.2

5.2.3.2.1_6 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA

5.2.3.2.1_6.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions with enhanced DMRS, for Rank 4 scenario. the PDSCH mapping Type A performance requirements.

5.2.3.2.1_6.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting NR/5GC and enhanced DMRS.

This test also applies to all types of UE release 18 and forward supporting EN-DC and enhanced DMRS.

5.2.3.2.1_6.3 Test description

5.2.3.2.1_6.3.1 Initial conditions

Same test description as in clause 5.2.3.2.1_1.3 with the following exception:

- Figure A.3.1.7.5 instead of A.3.1.7.4

5.2.3.2.1_6.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.1_6.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.1_6.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.1_6.3.3 Message contents

Message contents are according to 38.508-1 [6] subclauses 4.6.1 and 5.4.2.

5.2.3.2.1_6.3.3_1 Message exceptions for NR/5GC

Same as in clause 5.2.3.2.1_1.3.3 with the following exception

Table 5.2.3.2.1_6.3.3_1-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			

dmrs-TypeEnh-r18	enabled		
}			

Table 5.2.3.2.1_6.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0,1,8,9 as per Table 7.3.1.2.2-7 in TS 38.212 (<i>dmrs-Type</i> = DMRS type 1, <i>dmrs-TypeEnh</i> is configured and <i>maxLength</i> = len1 as per Table 4.6.3-50 in 38.508-1)	'10110' B	

5.2.3.2.1_6.3.3_2 Message exceptions for EN-DC

Same as 5.2.3.2.1_6.3.3_1.

5.2.3.2.1_6.4 Test requirement

Table 5.2.3.2.1_6.4-1 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.1_6.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.1_6.4-1: Test Requirements for enhanced DMRS with Rank 4

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-2	R.PDSCH.2-26.2 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	16.5

5.2.3.2.2 4Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance

5.2.3.2.2.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.2.0-3, with the addition of test parameters in Table 5.2.3.2.2.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.2.0-1.

Table 5.2.3.2.2.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions and CSI-RS overlapped with PDSCH	1-1

Table 5.2.3.2.2.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD

Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
	VRB-to-PRB mapping interleaver bundle size	N/A
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
NZP CSI-RS for CSI acquisition	OFDM symbols in the PRB used for CSI-RS	$l_0 = 13$
	CSI-RS periodicity	Slots 5
ZP CSI-RS for CSI acquisition	Subcarrier index in the PRB used for CSI-RS	$(k_0, k_1, k_2, k_3) = (2, 4, 6, 8)$
	Number of CSI-RS ports (X)	8
	CSI-RS periodicity	Slots 5
Number of HARQ Processes		8
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.3.2.0-3: Minimum performance for Rank 2

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-7.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x4, ULA Low	70	9.0

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.2.2.

5.2.3.2.2_1 4Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.2_1.1 Test purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration for CSI-RS overlapped with PDSCH scenario.

5.2.3.2.2_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.2.3.2.2_1.3 Test description

5.2.3.2.2_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.3.2.2.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.3.2.2_1.3.3.

5.2.3.2.2_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.2.0-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.2_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.2_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.2.3.2.2_1.3.3_1 Message exceptions for SA

Table 5.2.3.2.2_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present		
}			

Table 5.2.3.2.2_1.3.3_1-2: NZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	13	$l_0 = 13$	
}			

Table 5.2.3.2.2_1.3.3_1-3: CSI-ResourcePeriodicityAndOffset for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	0	Periodicity 5 slots and offset 0	
}			

Table 5.2.3.2.2_1.3.3_1-4: ZP CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], clause5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	011110	(k0, k1, k2, k3)=(2, 4, 6, 8)	
}			
nrofPorts	P8	Eight Ports	
freqBand	CSI-FrequencyOccupation		
}			

Table 5.2.3.2.2_1.3.3_1-4A: ZP CSI-ResourcePeriodicityAndOffset for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	0	Periodicity 5 slots and offset 0	
}			

5.2.3.2.2_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.2_1.3.3_1

5.2.3.2.2_1.4 Test requirement

Table 5.2.3.2.2.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.2_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.2_1.4-1: Test Requirement for Rank 2

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-7.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	TDLC300-100	2x4, ULA Low	70	9.9

5.2.3.2.3 4Rx TDD FR1 PDSCH mapping Type B performance

5.2.3.2.3.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.3.0-3, with the addition of test parameters in Table 5.2.3.2.3.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.3.0-1.

Table 5.2.3.2.3.0-1: Tests purpose

Purpose	Test index
PDSCH mapping Type B performance under 4 receive antenna conditions	1-1

Table 5.2.3.2.3.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	5
	Length (L)	7
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		8
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.3.2.3.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH, 2-1.3 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLA30-10	2x4, ULA Low	70	-3.9

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.2.3.

5.2.3.2.3.1_1 4Rx TDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.3.1.1 Test purpose

To verify the PDSCH mapping Type B normal performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput with baseline receiver configuration.

5.2.3.2.3_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and PDSCH mapping type B.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports and PDSCH mapping type B.

5.2.3.2.3_1.3 Test description

5.2.3.2.3_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.3.2.3.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 5.2.3.2.3_1.3.3.

5.2.3.2.3_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.3.0-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.3_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.3_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.2.3.2.3_1.3.3_1 Message exceptions for SA

Table 5.2.3.2.3_1.3.3_1-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition

PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present		
}			

Table 5.2.3.2.3_1.3.3_1-2: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeB		
startSymbolAndLength	89	Start symbol(S)=5, Length(L)=7	
}			
PDSCH-TimeDomainResourceAllocation[2]			
SEQUENCE {			
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

5.2.3.2.3_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.3_1.3.3_1

5.2.3.2.3_1.4 Test requirement

Table 5.2.3.2.3.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.3_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.3_1.4-1: Test Requirement for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH,2-1.3 TDD	40 / 30	QPSK, 0.30	FR1.30-1	TDLA30-10	2x4, ULA Low	70	-2.9

5.2.3.2.4 4Rx TDD FR1 PDSCH mapping Type A performance

5.2.3.2.4.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.4.0-3, with the addition of test parameters in Table 5.2.3.2.4.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.4.0-1.

Table 5.2.3.2.4.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions with CRS rate matching configured	1-1, 1-2

Table 5.2.3.2.4.0-2: Test parameters

Parameter	Unit	Value	
Duplex mode		TDD	
Active DL BWP index		1	
NR UL transmission with a 7.5 kHz shift to the LTE raster		true	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	3	
	Length (L)	9 for Test 1-1 11 for Test 1-2	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A	
	DMRS Type	Type 1	
	Position of the first DM-RS for downlink	3	
	Number of additional DMRS	1	
CRS for rate matching (Note 1)	Maximum number of OFDM symbols for DL front loaded DMRS	1	
	LTE carrier centre subcarrier location	Same as NR carrier centre subcarrier location	
	LTE carrier BW	MHz	10
	Number of antenna ports		4
	v-shift		0
Number of HARQ Processes		8	
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
Note 1: No MBSFN is configured on LTE carrier			

Table 5.2.3.2.4.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x4, ULA Low	70	-3.6
1-2	R.PDSCH.1-1.2 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x4, ULA Low	70	-3.5

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.2.4.

5.2.3.2.4_1 4Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.4_1.1 Test purpose

To verify the PDSCH mapping Type A coexistence performance under 4 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput with baseline receiver configuration.

5.2.3.2.4_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test 1-1 also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports and capability IE *rateMatchingLTE-CRS* but not supporting capability IE *additionalDMRS-DL-Alt*.

Test 1-2 applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

Test 1-2 also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports and and capability IE *additionalDMRS-DL-Alt* and *rateMatchingLTE-CRS*.

5.2.3.2.4_1.3 Test description

5.2.3.2.4_1.3.1 Initial conditions

Same as 5.2.2.2.4_1.3.1 with the following exceptions:

- Use Figure A.3.1.7.5 for TE diagram
- Use Figure A.3.2.5 for UE diagram
- Instead of 5.2.2.2.4.x → refer 5.2.3.2.4.x

5.2.3.2.4_1.3.2 Test procedure

Same as 5.2.2.2.4_1.3.2 with the following exceptions:

- Instead of 5.2.2.2.4.x → refer 5.2.3.2.4.x

5.2.3.2.4_1.3.3 Message contents

Same as 5.2.2.2.4_1.3.3

5.2.3.2.4_1.4 Test requirement

Table 5.2.3.2.4.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.4_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.4_1.4-1: Test Requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.1 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x4, ULA Low	70	-2.6
1-2	R.PDSCH.1-1.2 TDD	10 / 15	QPSK, 0.30	FR1.15-1	TDLA30-10	4x4, ULA Low	70	-2.5

5.2.3.2.5 4Rx TDD FR1 PDSCH 0.001% BLER performance

5.2.3.2.5.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.5.0-3, with the addition of test parameters in Table 5.2.3.2.5.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.5.0-1.

Table 5.2.3.2.5.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH 0.001% BLER performance under 4 receive antenna conditions	1-1

Table 5.2.3.2.5.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Maximum number of HARQ transmission			1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Defined in Annex A.1.2 for TDD pattern FR1.30-1

Table 5.2.3.2.5.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-1.4 TDD	40 / 30	QPSK, 0.59	FR1.30-1	AWGN	1x4 with static channel specified in Annex B.1	0.001%	0.7

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.5.

5.2.3.2.5_1 4Rx TDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.5_1.1 Test purpose

To verify the PDSCH 0.001% BLER performance under 4 receive antenna conditions.

5.2.3.2.5_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

Test 1-1 applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE *dl-64QAM-MCS-TableAlt* and capability IE *cqi-TableAlt*.

5.2.3.2.5_1.3 Test description

5.2.3.2.5_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.2.5.0-2 and Table 5.2.3.2.5.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.5_1.3.3.

5.2.3.2.5_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.5.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.5_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.4. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.4.3-1 in Annex G.

5.2.3.2.5_1.3.3 Message contents

5.2.3.2.5_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.2.5_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {			
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 5.2.3.2.5_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam64LowSE		
}			

5.2.3.2.5_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.5_1.3.3_1.

5.2.3.2.5_1.3.4 Test requirement

Table 5.2.3.2.5.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.5_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.5_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-1.4 TDD	40 / 30	QPSK, 0.59	FR1.30-1	AWGN	1x4 with static channel specified in Annex B.1	0.001%	1.8

5.2.3.2.6 4Rx TDD FR1 PDSCH repetitions over multiple slots performance

5.2.3.2.6.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.6.0-3, with the addition of test parameters in Table 5.2.3.2.6.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.6.0-1.

Table 5.2.3.2.6.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH repetitions over multiple slots performance under 4 receive antenna conditions	1-1

Table 5.2.3.2.6.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	2
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
	VRB-to-PRB mapping interleaver bundle size	N/A
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		4
The number of slots between final repetition of PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2 (Note 1)
Note 1: ACK/NACK feedback is generated for PDSCH on slot i, where $\text{mod}(i,10) = \{2, 4, 6\}$.		

Table 5.2.3.2.6.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-16.1 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x4, ULA Low	1% (Note 1)	-2.6
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.6.

5.2.3.2.6_1 4Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.6_1.1 Test purpose

To Verify the PDSCH repetitions over multiple slots performance under 4 receive antenna conditions.

5.2.3.2.6_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE dl-64QAM-MCS-TableAlt and *pdsch-RepetitionMultiSlots*.

Test 1-1 also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and capability IE dl-64QAM-MCS-TableAlt and pdsch-RepetitionMultiSlots.

5.2.3.2.6_1.3 Test description

5.2.3.2.6_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.2.3.2.6.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.6_1.3.3.

5.2.3.2.6_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.6.0-3. The SS sends downlink MAC padding bits on the DL RMC. The UE may expect that the TB is repeated with same symbol allocation among each of the *pdsch-AggregationFactor* consecutive slots.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.6_1.3.4-1.
3. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to clause G.1.5 and Table G.1.5-1a in Annex G clause G.1.5.

5.2.3.2.6_1.3.3 Message contents

5.2.3.2.6_1.3.3_1 Message exceptions for SA

Same as 5.2.2.1.6_1.3.3_1.

5.2.2.2.6_1.3.3_2 Message exceptions for SA

Same as 5.2.2.1.6_1.3.3_1.

5.2.3.2.6_1.3.4 Test requirement

Table 5.2.3.2.6.0-3 defines the primary level settings.

The target BLER percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each BLER test shall meet or exceed the specified value in Table 5.2.2.6_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.6_1.3.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH.2-16.1 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x4, ULA Low	1% (Note 1)	-1.7

Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.

5.2.3.2.7 4Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance

5.2.3.2.7.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.7.0-3, with the addition of test parameters in Table 5.2.3.2.7.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.7.0-1.

Table 5.2.3.2.7.0-1: Tests purpose

Purpose	Test index
Verify PDSCH mapping Type B performance and UE processing capability 2 under four receive antenna conditions	1-1

Table 5.2.3.2.7.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type B
	k0		0
	Starting symbol (S)		2
	Length (L)		2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		0
Maximum number of OFDM symbols for DL front loaded DMRS			1
Maximum number of HARQ transmission			1
Number of HARQ Processes			2
The number of slots between PDSCH and corresponding HARQ-			0

ACK information		
-----------------	--	--

Table 5.2.3.2.7.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-17.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x4, ULA Low	70	-2.5

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.7.

5.2.3.2.7_1 4Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.7_1.1 Test purpose

To verify PDSCH mapping Type B performance and UE processing capability 2 under four receive antenna conditions.

5.2.3.2.7_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pdsch-ProcessingType2*.

5.2.3.2.7_1.3 Test description

5.2.3.2.7_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.2.7.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.7_1.3.3.

5.2.3.2.7_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.7.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.7_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.7_1.3.3 Message contents

5.2.3.2.7_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.2.7_1.3.3_1-1: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2-19			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE (SIZE (1..maxNrofDL-Allocations)) OF {	2 entry		FR1
PDSCH-TimeDomainResourceAllocation [1]			
SEQUENCE {			
k0	Not present		
mappingType	typeB		
startSymbolAndLength	16	Start symbol(S)=2, Length(L)=2	
}			
}			

Table 5.2.3.2.7_1.3.3_1-2: PUCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-112			
Information Element	Value/remark	Comment	Condition
PUCCH-Config ::= SEQUENCE {			FR1
dl-DataToUL-ACK SEQUENCE (SIZE (1)) OF	1 entry		
INTEGER {			
INTEGER [1]	0	entry 1	
}			
}			

Table 5.2.3.2.7_1.3.3_1-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1=0 as per dl-DataToUL-ACK in Table 5.2.3.2.7_1.3.3_1-3	"000"	

Table 5.2.3.2.7_1.3.3_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
processingType2Enabled	true		
}			

5.2.3.2.7_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.7_1.3.3_1.

5.2.3.2.7_1.4 Test requirement

Table 5.2.3.2.7.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.7_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.7_1.4-1: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-17.1 TDD	40 / 30	QPSK, 0.30	FR1.30-2	TDLA30-10	2x4, ULA Low	70	-1.5

5.2.3.2.8 4Rx TDD FR1 PDSCH pre-emption performance

5.2.3.2.8.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.8.0-3, with the addition of test parameters in Table 5.2.3.2.8.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.8.0-1.

Table 5.2.3.2.8.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH pre-emption performance under 4 receive antenna conditions	1-1

Table 5.2.3.2.8.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration (Note 4)	Symbols with PDCCH		0, 1
	DCI format		2_1
	timeFrequencySet		14x1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Pre-emption	Starting symbol (S)		3

configuration (Note 2)	Length (L)		2
	Pre-emption periodicity and offset	Slots	40/(1,12,23,34) (Note 3)
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			FR1.30-1
Note 1: Void			
Note 2: Interference modelled as random data on pre-empted REs.			
Note 3: Pre-emption is scheduled with 10% probability within 20ms periodicity.			
Note 4: In addition to PDCCH configuration in Table 5.2-1.			

Table 5.2.3.2.8.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.6 TDD	40 / 30	16QAM 0.64	FR1.30-1	TDLA30-10	2x4, ULA Low	70	8.7

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.8.

5.2.3.2.8_1 4Rx TDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.8_1.1 Test purpose

To Verify the PDSCH pre-emption performance under 4 receive antenna conditions.

5.2.3.2.8_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *pre-EmptIndication-DL-r16*.

5.2.3.2.8_1.3 Test description

5.2.3.2.8_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.2.8.0-2 and Table 5.2.3.2.8.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.8_1.3.3.

5.2.3.2.8_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.8.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. SS transmits PDCCH DCI format 2_1 for int_RNTI with 10% probability to transmit the DL Preemption indication according to Table 5.2.3.2.8.0-2. In the time and frequency set indicated by PDCCH DCI format 2_1, SS stops transmission of PDSCH.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.8_1.3.4-1.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.8_1.3.3 Message contents

5.2.3.2.8_1.3.3_1 Message exceptions for SA

Same as 5.2.2.1.8_1.3.3_1

5.2.3.2.8_1.3.3_2 Message exceptions for NSA

Same as 5.2.2.1.8_1.3.3_1

5.2.3.2.8_1.3.4 Test requirement

Table 5.2.3.2.8.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.8_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.8_1.3.4-1: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.6 TDD	40 / 30	16QAM 0.64	FR1.30-1	TDLA30-10	2x4, ULA Low	70	9.7

5.2.3.2.9 4Rx TDD FR1 HST-SFN performance

5.2.3.2.9.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.9.0-3, with the addition of test parameters in Table 5.2.3.2.9.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.9.0-1.

Table 5.2.3.2.9.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 when <i>highSpeedDemodFlag-r16</i> [17] is configured.	1-1

Table 5.2.3.2.9.0-2: Test parameters

Parameter	Unit	Value	
Duplex mode		TDD	
Active DL BWP index		1	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	2	
	Length (L)	12	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
PDSCH DMRS configuration	VRB-to-PRB mapping interleave bundle size	N/A	
	DMRS Type	Type 1	
	Number of additional DMRS	2	
CSI-RS for tracking	Maximum number of OFDM symbols for DL front loaded DMRS	1	
	CSI-RS periodicity	Slots	20 for CSI-RS resource 1,2,3,4.
	CSI-RS offset	Slots	1 for CSI-RS resource 1 and 22 for CSI-RS resource 3 and 4.
	Frequency Occupation		Start PRB 0 Number of PRB = 52
Number of HARQ Processes		8	
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	

Table 5.2.3.2.9.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.4 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN	2x4	70	11.7

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.3.2.9.

5.2.3.2.9_1 4Rx TDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.9_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 when *highSpeedDemodFlag-r16* IE [20] is configured and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.3.2.9_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC supporting enhanced demodulation processing for HST-SFN joint transmission scheme.

5.2.3.2.9_1.3 Test description

5.2.3.2.9_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.9.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.9_1.3.3.

5.2.3.2.9_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.9_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.9_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.9_1.4-1 as appropriate.

5.2.3.2.9_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.9_1.3.3_1 Message exceptions for SA

Table 5.2.3.2.9_1.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 for test 1-1	
}			
}			
}			

Table 5.2.3.2.9_1.3.3_1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1	
}			

Table 5.2.3.2.9_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8	for test 1-1	
}			

Table 5.2.3.2.9_1.3.3_1-4: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	For test 1-1: offset = 1 for CSI-RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	
}			

5.2.3.2.9_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.9_1.3.3_1

5.2.3.2.9_1.4 Test requirement

Tables 5.2.3.2.9_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.9_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.9_1.4-1: Test Requirements for Rank 2

Test	Reference	Bandwidth	Modulation	TDD UL-	Propagation	Correlation	Reference value
------	-----------	-----------	------------	---------	-------------	-------------	-----------------

num.	channel	(MHz) / Subcarrier spacing (kHz)	format and code rate	DL pattern	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2- 10.4 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN	2x4	70	12.3

5.2.3.2.10 4Rx TDD FR1 HST DPS performance

5.2.3.2.10.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.10.0-3, with the addition of test parameters in Table 5.2.3.2.10.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.10.0-1.

Table 5.2.3.2.10.0-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-DPS scenario defined in B.3.3	1-1, 1-2

Table 5.2.3.2.10.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	TCI state		Note 1
	DMRS Type		Type 1
	Number of additional DMRS		2
CSI-RS for tracking	Resource set #1	Maximum number of OFDM symbols for DL front loaded DMRS	1
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 20 for CSI-RS resource 1,2,3,4
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #2
	Frequency Occupation	Start PRB 0 Number of PRB = 52	
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #3
		Frequency Occupation	Start PRB 0 Number of PRB = 52
NZP CSI-RS for CSI acquisition	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$
		CSI-RS periodicity	Slots 40

		CSI-RS offset	Slots	0	
		QCL info		TCI state #0	
	Resource set #4	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 13$
		CSI-RS periodicity	Slots		40
		CSI-RS offset	Slots		0
		QCL info			TCI state #1
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource			N/A
		QCL Type			N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource			N/A
		QCL Type			N/A
TCI state #2	Type 1 QCL information	SSB index		SSB #0	
		QCL Type		Type C	
	Type 2 QCL information	SSB index			N/A
		QCL Type			N/A
TCI state #3	Type 1 QCL information	SSB index		SSB #1	
		QCL Type		Type C	
	Type 2 QCL information	SSB index			N/A
		QCL Type			N/A
Number of HARQ Processes				8	
The number of slots between PDSCH and corresponding HARQ-ACK information				Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
<p>Note 1: SSB # ($k \bmod 2$), CSI-RS (for tracking) resource set # ($(k \bmod 2) + 1$) and CSI-RS (for CSI acquisition) resource set # ($(k \bmod 2) + 3$) are transmitted by k^{th} RRH.</p> <p>For Test 1-1, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 32, NumOfRB 74 is transmitted slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of $2n$. PDCCH and PDSCH associated with TCI # ($k \bmod 2$) is transmitted by k^{th} RRH from.</p> <p>slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstTRS}} + T_{\text{TRS proc}}, 0]$ <p>to</p> <p>slot#</p> $(2k + 1)n,$ <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, TCI state switching command scheduled by MAC CE with PDSCH configuration - MCS 4, Layer 1, StartRB 32, NumOfRB 74 is transmitted in slot#i in the middle of two consecutive RRHs overlapping with slots with SS/PBCH blocks transmissions and a periodicity of $2n$. PDCCH and PDSCH associated with TCI # ($k \bmod 2$) is transmitted by k^{th} RRH from</p> <p>slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}}, 0]$ <p>to</p> <p>slot#</p> $(2k + 1)n$ <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>Where $k=0, 1, 2, \dots$ is the RRH number, $n = 5040$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 8$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 6$ is the number of slots for MAC CE processing, $T_{\text{firstTRS}} = 7$ is the number of slots to first TRS transmission occasion after MAC CE command is decoded by the UE, $T_{\text{TRS proc}} = 4$ is the number of slots for TRS processing.</p>					

Table 5.2.3.2.10.0-3: Minimum performance for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	1	2x4	70	10.2
1-2	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	2	2x4	70	10.2

5.2.3.2.10_1 4Rx TDD FR1 HST DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA

5.2.3.2.10_1.1 Test purpose

To verify UE performance in the HST-DPS scenario defined in B.3.3 and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with default baseline receiver configuration, for Rank 2 scenarios.

5.2.3.2.10_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 15 and forward.

Test 1-1 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

Test 1-2 applies to all types of NR UE release 15 and forward supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

Test 1-2 also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and supporting *maxNumberActiveTCI-PerBWP* other than n1 and *maxSimultaneousResourceSetsPerCC* atleast 2.

5.2.3.2.10_1.3 Test description

5.2.3.2.10_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.10.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.10_1.3.3.

5.2.3.2.10_1.3.2 Test procedure

Test 1-1:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.10_1.4-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.3.2.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.3.2.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

Test 1-2:

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.10_1.4-1 as appropriate.
2. SS activates TCI state 0 and TCI 1 for PDSCH at the same time via MAC CE command “TCI States Activation/Deactivation for UE-specific PDSCH”.
3. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in table 5.2.3.2.10.0-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.10_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

4. Send MAC CE command “TCI State Indication for UE-specific PDCCH” according to the timing described in Note 1 of table 5.2.3.2.10.0-2 to switch from active TCI state 0 to 1 for PDCCH and vice versa periodically. PDSCH is automatically associated with TCI state 0 or 1 as tci-PresentInDCI is not present. TCI states 3 and 4 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
5. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.10_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.10_1.3.3_1 Message exceptions for SA

Table 5.2.3.2.10_1.3.3_1-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition

DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2	for test 1-1, 1-2	
}			

Table 5.2.3.2.10_1.3.3_1-2: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8	for test 1-1, 1-2	
}			

Table 5.2.3.2.10_1.3.3_1-3: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	2 for CSI-RS resource #1, #2, #3, #4 3 for CSI-RS resource #5, #6, #7, #8	for test 1-1, 1-2: TCI-StateId for TCI- State #2 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI- State #3 for CSI-RS resource #5, #6, #7, #8	
}			

Table 5.2.3.2.10_1.3.3_1-4: CSI-RS-ResourceMapping for TRS (Table 5.2.3.2.10_1.3.3_1-3)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8	for test 1-1, 1-2: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4 l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8	
}			

Table 5.2.3.2.10_1.3.3_1-5: CSI-ResourcePeriodicityAndOffset for TRS (Table 5.2.3.2.10_1.3.3_1-3)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	For test 1-1, 1-2: periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	

}		
---	--	--

Table 5.2.3.2.10_1.3.3_1-6: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1, 1-2	Resource set #1
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource #1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1, 1-2	Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
}			

Table 5.2.3.2.10_1.3.3_1-7: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8 for CSI-RS resource #9 9 for CSI-RS resource #10	for test 1-1, 1-2	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #9 1 for CSI-RS resource #10	for test 1-1, 1-2: TCI-State #0 for CSI-RS resource #9 TCI-State #1 for CSI-RS resource #10	
}			

Table 5.2.3.2.10_1.3.3_1-8: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.3.2.10_1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15
--

Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #9 13 for CSI-RS resource #10	for test 1-1, 1-2 l ₀ =12 for CSI-RS resource #9 l ₀ =13 for CSI-RS resource #10	
}			

Table 5.2.3.2.10_1.3.3_1-9: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.3.2.10_1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots40	0	For test 1-1, 1-2: periodicity = 40 slots. offset = 0 slots	
}			

Table 5.2.3.2.10_1.3.3_1-10: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	2 for Resource set #3 3 for Resource set #4	For test 1-1, 1-2	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry	For test 1-1, 1-2	Resource set #4
NZP-CSI-RS-ResourceId[1]	9	entry 1 CSI-RS resource #10	
}			
}			

Table 5.2.3.2.10_1.3.3_1-11: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3	For test 1-1, 1-2	
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1
	Not present		TCI state #2, TCI state #3
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource	TCI state #0

		#1	
	4	CSI-RS resource #5	TCI state #1
ssb	0	SSB #0	TCI state #2
	1	SSB #1	TCI state #3
}			
qcl-Type	typeA		TCI state #0, TCI state #1
	typeC		TCI state #2, TCI state #3
}			
}			

5.2.3.2.10_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.10_1.3.3_1

5.2.3.2.10_1.4 Test requirement

Tables 5.2.3.2.10_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.10_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.10_1.4-1: Test Requirements for HST-DPS

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	1	2x4	70	10.8
1-2	R.PDSCH.2-10.5 TDD	40 / 30	64QAM, 0.43	HST-DPS	2	2x4	70	10.8

5.2.3.2.11 4Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance

5.2.3.2.11.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.11.0-3, with the addition of test parameters in Table 5.2.3.2.11.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.11.0-1.

Table 5.2.3.2.11.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance with Single-DCI based SDM scheme under 4 receive antenna conditions	1-1,1-2

Table 5.2.3.2.11.0-2: Test parameters

Parameter	Unit	Value	
		TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB		TRxP #1	
PDCCH configuration	TCI state	TCI State #1	
	CORESETPoolIndex	0	
CSI-RS for tracking	First subcarrier index in the	k0=0 for CSI-RS	k0=1 for CSI-RS

	PRB used for CSI-RS		resources 1,2,3,4	resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode		TDD		
Active DL BWP index		1		
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation		Full-overlapping		
Timing offset of the second TRxP from the first TRxP	us	-0.25 for test 1-1 1 for test 1-2		
Frequency offset of the second TRxP from the first TRxP	Hz	300 for test 1-1 0 for test 1-2		
Number of HARQ Processes		8		
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity		
Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)				

Table 5.2.3.2.11.0-3: Minimum performance

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition(No te 1)	Correlation matrix and antenna configuration(No te 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	R.PDSCH. 2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30 -1	TDLA30-10	2x4, ULA Low	70	14.5
1-2	R.PDSCH. 2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30 -1	TDLA30-10	2x4, ULA Low	70	13.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.11.

5.2.3.2.11_1 4Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x4 MIMO for both SA and NSA

5.2.3.2.11_1.1 Test purpose

To verify the PDSCH performance with Single-DCI based SDM scheme under 4 receive antenna conditions.

5.2.3.2.11_1.2 Test applicability

Test applies to all types of NR UE release 16 and forward supporting capability IE *singleDCI-SDM-scheme-r16*.

5.2.3.2.11_1.3 Test description

5.2.3.2.11_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2.3.2.11.0-2 and Table 5.2.3.2.11.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release*

On, Test Mode On, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.11_1.3.3.

5.2.3.2.11_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.11_1.3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.11_1.3.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.3.2.11_1.3.4-1 as appropriate.

5.2.3.2.11_1.3.3 Message contents

5.2.3.2.11_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.2.11_1.3.3_1-1: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 2	"1011"	
Transmission configuration indication	TCI state 1 and 2	"000"	

Table 5.2.3.2.11_1.3.3_1-2: CellGroupConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-19			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
simultaneousTCI-UpdateList1-r16 SEQUENCE {			
ServCellIndex [1]	ServCellIndex		
}			
}			

Table 5.2.3.2.11_1.3.3_1-3: ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

Table 5.2.3.2.11_1.3.3_1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1]	TCI-State with condition TCI-state-0		

TCI-State[2]	TCI-State with condition TCI-state-1		
TCI-State[3]	TCI-State with condition TCI-state-2		
}			
rbg-Size	config2		
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present		
}			
}			
}			
}			

Table 5.2.3.2.11_1.3.3_1-5: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0		TCI-state-0
	1		TCI-state-1
	2		TCI-state-2
qcl-Type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index		TCI-state-0
csi-rs	1		TCI-state-1
	5		TCI-state-2
}			
qcl-Type	typeA		
}			
qcl-Type2	Not present		
}			

Table 5.2.3.2.11_1.3.3_1-6: NZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-85			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
resourceMapping SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
cdm-Type	noCDM		
density CHOICE {			
three	NULL		
}			
}			
periodicityAndOffset CHOICE {			
slots40	20	For CSI-RS	

		resources 1,2,5,6	
slots40	21	For CSI-RS resources 3,4,7,8	
}			
qcl-InfoPeriodicCSI-RS	0		
}			

5.2.3.2.11_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.11_1.3.3_1.

5.2.3.2.11_1.3.4 Test requirement

Table 5.2.3.2.11.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.11_1.3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.11_1.3.4-1: Test requirement

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH. 2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30 -1	TDLA30-10	2x4, ULA Low	70	15.5
1-27	R.PDSCH. 2-3.2 TDD	40 / 30	64QAM, 0.50	FR1.30 -1	TDLA30-10	2x4, ULA Low	70	14.9
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 with scaling factor as 1/sqrt(2) for transmitted signal from each TRxP								

5.2.3.2.12 4Rx TDD FR1 PDSCH Multi-DCI based transmission scheme performance

5.2.3.2.12.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.12.0-3, with the addition of test parameters in Table 5.2.3.2.12.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.12.0-1.

Table 5.2.3.2.12.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs	1-1

Table 5.2.3.2.12.0-2: Test parameters

Parameter	Unit	Value	
		TRxP #1 (Note 1)	TRxP #2 (Note 1)
Transmit TRxP of SSB		TRxP #1	

PDCCH configuration	TCI state		TCI State #1	TCI State #2
	CORESETPoolIndex		0,1	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity		Slots	40
	CSI-RS offset		Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode		TDD		
Active DL BWP index		1		
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		{1000,1001}	{1002,1003}
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation		Non-overlapping		
Timing offset of the second TRxP from the first TRxP		us	-0.25	
Frequency offset of the second TRxP from the first TRxP		Hz	300	
Number of HARQ Processes		8		
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity		
Note 1: PDSCH transmission is done from both TRxPs. Transmission from TRxP #1 uses CORESETPoolIndex 0 and transmission from TRxP #2 uses CORESETPoolIndex 1				

Table 5.2.3.2.12.0-3: Minimum performance

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
								Fraction of maximum throughput (%)	SNR (dB) (Note 3)
	TRxP #1	TRxP #2							
1-1	R.PDSCH .2-3.3 TDD	R.PDSCH .2-3.4 TDD	40 / 30	64QAM, 0.50	FR1.3 0-1	TDLA30-10	2x4, ULA Low	70	14.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2									

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.12.

5.2.3.2.12_1 4Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x4 MIMO for both SA and NSA

5.2.3.2.12_1.1 Test purpose

To verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling PDSCHs.

5.2.3.2.12_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *multiDCI-MultiTRP-r16*.

5.2.3.2.12_1.3 Test description

Same test description as in clause 5.2.3.1.12_1.3 with the following exception:

- Table 5.2.3.2.12_1.4-1 instead of 5.2.3.1.12_1.4-1
- Table 5.2.3.2.12_1.3-1 instead of Table 5.2.3.1.12_1.3.3_1-8

Table 5.2.3.2.12_1.3-1: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	20	For CSI-RS resources 1,2,5,6	
Slots40	21	For CSI-RS resources 3,4,7,8	
}			

5.2.3.2.12_1.4 Test requirement

Table 5.2.3.2.12.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.12_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.12_1.4-1: Test requirement

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
								Fraction of maximum throughput (%)	SNR (dB) (Note 3)
	TRxP #1	TRxP #2							
1-1	R.PDSCH .2-3.3 TDD	R.PDSCH .2-3.4 TDD	40 / 30	64QAM, 0.50	FR1.3 0-1	TDLA30-10	2x4, ULA Low	70	15.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2									

5.2.3.2.13 4Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance

5.2.3.2.13.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.13.0-3, with the addition of test parameters in Table 5.2.3.2.13.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.13.0-1.

Table 5.2.3.2.13.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions when UE is configured with "FDMSchemeA" in "RepetitionScheme-r16" defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.3.2.13.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1 (Note 1)	TRxP #2 (Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			TDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	

	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		Wideband	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000,1001	1000,1001
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	-0.25	
Frequency offset of the second TRxP from the first TRxP		Hz	300	
Number of HARQ Processes		8		
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity		
Note 1: PDSCH transmission is done from both TRxPs				

Table 5.2.3.2.13.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.2-2.5 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x4, ULA Low	70	10.5
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent.								
Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2.								
Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.13.

5.2.3.2.13_1 4Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x4 MIMO for both SA and NSA

5.2.3.2.13_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions when UE is configured with “FDMSchemeA” in “RepetitionScheme-r16”.

5.2.3.2.13_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportFDM-SchemeA-r16*.

5.2.3.2.13_1.3 Test description

Same test description as in clause 5.2.3.1.13_1.3 with the following exception:

- Table 5.2.3.2.13_1.4-1 instead of 5.2.3.1.13_1.4-1
- Table 5.2.3.2.13_1.3-1 instead of Table 5.2.3.1.13_1.3.3_1-5

Table 5.2.3.2.13_1.3-1: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	20	For CSI-RS resources 1,2,5,6	
Slots40	21	For CSI-RS resources 3,4,7,8	
}			

5.2.3.2.13_1.4 Test requirement

Table 5.2.3.2.13.0-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.13_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.13_1.4-1: Test requirement

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum throughput (%)	SNR (dB) (Note 3)
1-1	R.PDSCH.2-2.5 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x4, ULA Low	70	11.5
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

5.2.3.2.14 4Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance

5.2.3.2.14.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.14.0-3, with the addition of test parameters in Table 5.2.3.2.14.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.14.0-1.

Table 5.2.3.2.14.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states defined in clause 5.1 of TS 38.214 [12]	1-1

Table 5.2.3.2.14.0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		Not configured	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			TDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	Repetition number		2	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000	1000
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Timing offset of the second TRxP from the first TRxP		us	1	
Frequency offset of the second TRxP from the first TRxP		Hz	300	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2 (Note 2)	

Precoding configuration	SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity
Note 1: PDSCH transmission is done from both TRxPs Note 2: ACK/NACK feedback is generated for PDSCH on slot i , where $\text{mod}(i,10) = \{2, 4, 6\}$.	

Table 5.2.3.2.14.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							BLER (%)	SNR (dB) (Note 4)
1-1	R.PDSCH.2-16.2 TDD	40 / 30	16QAM, 0.54	FR1.30-1	TDLA30-10	2x4, ULA Low	1 (Note 3)	-0.5
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block. Note 4: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2								

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.14.

5.2.3.2.14_1 4Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x4 MIMO for both SA and NSA

5.2.3.2.14_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions when UE is configured with repetitionNumber-r16 with multiple slot level PDSCH transmission occasions of the same TB with two TCI states.

5.2.3.2.14_1.2 Test applicability

Test 1-1 applies to all types of NR UE release 16 and forward supporting capability IE *supportTDM-SchemeA-r16*.

5.2.3.2.14_1.3 Test description

Same test description as in clause 5.2.3.1.14_1.3 with the following exception:

- Table 5.2.3.2.14_1.4-1 instead of 5.2.3.1.14_1.4-1
- Table 5.2.3.2.14_1.3-1 instead of Table 5.2.3.1.14_1.3.3_1-5

Table 5.2.3.2.14_1.3-1: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	20	For CSI-RS resources 1,2,5,6	
Slots40	21	For CSI-RS resources 3,4,7,8	
}			

5.2.3.2.15 4Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access

5.2.3.2.15.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.15-3, with the addition of test parameters in Table 5.2.3.2.15-2 and the downlink physical channel setup according to Annex C.3.1.

Table 5.2.3.2.15.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance for UE supporting operations in shared spectrum access	1-1, 1-2, 1-3, 1-4

Table 5.2.3.2.15.0-2: Test parameters

Parameter	Unit	Value	
Duplex mode		TDD	
Active DL BWP index		1	
DL transmission model		As specified in B.5	
Downlink Model Parameters	SSB Q factor ^(Note 2)	8	
	Downlink transmission duration values	Slots {2,4,6,7}	
	Occupied OFDM symbols in slot other than the last slot of the downlink duration	Symbols 14	
	Occupied OFDM symbols in the last slot of the downlink duration	Symbols {6,9,12,14} ^(Note 1)	
	Downlink period	ms 5	
LBT failure probability (p_{LBT})		0.25	
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
PDSCH DMRS configuration	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
dmrs-AdditionalPosition		pos1	
Maximum number of OFDM symbols for DL front loaded DMRS		1	
Number of HARQ Processes		8	
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
Note 1: If DL Transmission duration is 2 Slot, the occupied OFDM symbols in the last slot of the downlink duration is 14.			
Note 2: SSB Q Factor indicates the QCL relation between SS/PBCH blocks, and equals N_{SSB}^{QCL} (see 38.213, Section 4.1).			

Table 5.2.3.2.15.0-3: Minimum performance for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-18.1 TDD	20 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	8.7
1-2	R.PDSCH.2-18.2 TDD	40 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	8.7

1-3	R.PDSCH.2-18.3 TDD	60 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	8.9
1-4	R.PDSCH.2-18.4 TDD	80 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	9.1

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.15.

5.2.3.2.15_1 4Rx TDD FR1 PDSCH mapping type A performance on band with shared spectrum access – 2x4 MIMO for both NSA and SA

5.2.3.2.15_1.1 Test purpose

To verify the PDSCH mapping Type A performance under 2 receive antenna conditions on a band with shared spectrum access and with different channel bandwidth, for a specific fading channel model for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

5.2.3.2.15_1.2 Test applicability

This test applies to all types of UE release 16 and forward supporting NR/5GC and NR-U and supporting UL on shared channel access.

This test also applies to all types of UE release 16 and forward supporting EN-DC and NR-U.

5.2.3.2.15_1.3 Test description

5.2.3.2.15_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.15.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for NR/5GC with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.15_1.3.3.

5.2.3.2.15_1.3.2 Test procedure

1. The downlink signal transmission is as per the parameters defined in Table 5.2.3.2.15.0-2 and as referenced in B.5.1

2. SS transmits PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.15_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.15_1.4-1 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause TBD. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table TBD in Annex G clause TBD.
5. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.15_1.4-1 as appropriate.

5.2.3.2.15_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.15_1.3.3_1 Message exceptions for NR/5GC

Same as in Clause 5.2.2.2.15_1.3.3_1

5.2.3.2.15_1.3.3_2 Message exceptions for EN-DC

Same as in Clause 5.2.2.2.15_1.3.3_2

5.2.3.2.15_1.4 Test requirement

Tables 5.2.3.2.15.0-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.15_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.15_1.4-1: Test requirements for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-18.1 TDD	20 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	9.7
1-2	R.PDSCH.2-18.2 TDD	40 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	9.7
1-3	R.PDSCH.2-18.3 TDD	60 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	9.9
1-4	R.PDSCH.2-18.4 TDD	80 / 30	16QAM, 0.48	FR1.30-7	TDLA30-10	2x4, ULA Low	70	10.1

5.2.3.2.16 4Rx TDD FR1 for PDSCH with inter-cell interference performance

5.2.3.2.16.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.16.0-3, with the addition of test parameters in Table 5.2.3.2.16.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.16.0-1.

Table 5.2.3.2.16.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance under 4 receive antenna conditions, when transmission from the serving cell is	1-1, 1-2

interfered by 1 or 2 interfering cells.	
---	--

Table 5.2.3.2.16.0-2: Test parameters

Parameter		Unit	Value		
			Cell 1 Enabled	Cell 2 Enabled	Cell 3 Enabled for test 1-1 Disabled for test 1-2
Duplex mode			TDD		
TDD UL-DL pattern			FR1.30-1		
Active DL BWP index			1		
Physical cell ID			0	1	2
Transmission rank			1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell 1		us	N/A	1.5	-0.5
Frequency shift to Cell 1		Hz	N/A	300	-100
Interference Model			N/A	As specified in B.6.2	
INR (Note 2)		dB	N/A	7.77 for Test 1-1 7.58 for Test 1-2	2.29 for Test 1-1 N/A for Test 1-2
SSB configuration	SSB position in burst		First SSB in Slot #0	First SSB in Slot #0 for Test 1-1 Second SSB in Slot #0 for Test 1-2	First SSB in Slot #0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PDSCH aggregation factor		1		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 0		
	RBG size		Config2		
VRB-to-PRB mapping type		Non-interleaved			
VRB-to-PRB mapping interleaver bundle size		N/A			
PDSCH DMRS configuration	DMRS Type		Type 1		
	Number of additional DMRS		1		
	Maximum number of OFDM symbols for DL front loaded DMRS		1		
Number of HARQ Processes			8		
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Note 1: Cell 1 is the serving cell, Cell 2, 3 are interference cells.					
Note 2: INR is defined in Annex B.6.1					

Table 5.2.3.2.16.0-3: Minimum performance for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Cell1			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLC300-100	2x4, ULA Low	70	10.7
1-2	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	7.6
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Subcarrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.16.

5.2.3.2.16_1 4Rx TDD FR1 for PDSCH with inter-cell interference performance – 2x4 MIMO for both NSA and SA

5.2.3.2.16_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions, when transmission from the serving cell is interfered by 1 or 2 interfering cells.

5.2.3.2.16_1.2 Test applicability

Test 1-1 and test 1-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

Test 1-1 and test 1-2 applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.3.2.16_1.3 Test description

5.2.3.2.16_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the serving cell and interfering cells are set up according to Table 5.2-1 and Table 5.2.3.2.16.0-2 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.16_1.3.3.

5.2.3.2.16_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.16_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for the serving cell and interfering cells according to Table 5.2.3.2.16_1.4-2.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.16_1.4-2 as appropriate.

5.2.3.2.16_1.3.3 Message contents Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.16_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.3.2.16_1.3.3_1 Message exceptions for NSA

No message exceptions for NSA

5.2.3.2.16_1.4 Test requirement

Table 5.2.3.2.16_1.4-1: Test parameters

Parameter	Unit	Value		
		Cell 1 Enabled	Cell 2 Enabled	Cell 3 Enabled for test 1-1 Disabled for test 1-2
Duplex mode		TDD		
TDD UL-DL pattern		FR1.30-1		
Active DL BWP index		1		
Physical cell ID		0	1	2
Transmission rank		1	Random rank with 70% and 30% probability for rank 1 and rank 2	Random rank with 70% and 30% probability for rank 1 and rank 2 for Test 1-1 N/A for Test 1-2
Time offset to Cell 1	us	N/A	1.5	-0.5
Frequency shift to Cell 1	Hz	N/A	300	-100
Interference Model		N/A	As specified in B.6.2	
INR (Note 2)	dB	N/A	7.77+0.8 for Test 1-1 7.58+0.8 for Test 1-2	2.29+0.8 for Test 1-1 N/A for Test 1-2

SSB configuration	SSB position in burst		First SSB in Slot #0	First SSB in Slot #0 for Test 1-1 Second SSB in Slot #0 for Test 1-2	First SSB in Slot #0 for Test 1-1 N/A for Test 1-2
	SSB periodicity	ms	20	20	20
PDSCH configuration	Mapping type		Type A		
	k0		0		
	Starting symbol (S)		2		
	Length (L)		12		
	PDSCH aggregation factor		1		
	PRB bundling type		Static		
	PRB bundling size		2		
	Resource allocation type		Type 0		
	RBG size		Config2		
	VRB-to-PRB mapping type		Non-interleaved		
PDSCH DMRS configuration	DMRS Type		Type 1		
	Number of additional DMRS		1		
	Maximum number of OFDM symbols for DL front loaded DMRS		1		
Number of HARQ Processes			8		
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
Note 1: Cell 1 is the serving cell, Cell 2 , 3 are interference cells.					
Note 2: INR is defined in Annex B.6.1					

Table 5.2.3.2.16_1.4-2: Test requirement for PDSCH with rank 1 and with inter-cell interference

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Cell1			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLC300-100	2x2, ULA Low	70	12.4
1-2	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	9.4
Note 1: The propagation conditions for Cell 1, Cell 2 and Cell 3 are statistically independent.							
Note 2: Bandwidth/ Subcarrier spacing, Propagation Condition, Correlation matrix and antenna configuration parameters apply for each of Cell 1, Cell 2 and Cell 3.							

5.2.3.2.17 4Rx TDD FR1 for PDSCH with intra-cell inter-user interference

5.2.3.2.17.0 Minimum conformance requirements

The performance requirements are specified in Tables 5.2.3.2.17.0-3 and 5.2.3.2.17.0-4, with the addition of test parameters in Table 5.2.3.2.17.0-2 and the downlink physical channel setup according to Annex C.3.1.

The performance requirements for UE supporting Enhanced Receiver Type 2 are specified in Table 5.2.3.2.17.0-6 and Table 5.2.3.2.17.0-7, with the addition of test parameters in Tables 5.2.3.2.17.0-2, 5.2.3.2.17.0-5 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.17.0-1.

Table 5.2.3.2.17.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.	1-1, 2-1
Verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.	3-1, 4-1
Verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.	3-2, 4-2

Table 5.2.3.2.17.0-2: Test parameters

Parameter	Unit	Target UE	Co-scheduled UE
Duplex mode		TDD	
Active DL BWP index		1	
PDSCH configuration	Mapping type	Type A	
	k0	0	
	Starting symbol (S)	2	
	Length (L)	12	
	PDSCH aggregation factor	1	
	PRB bundling type	Static	
	PRB bundling size	2	
	Resource allocation type	Type 0	
	RBG size	Config2	
	VRB-to-PRB mapping type	Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size	N/A	
PDSCH DMRS configuration (Note 1)	DMRS Type	Type 1	
	Number of additional DMRS	1	
	Maximum number of OFDM symbols for DL front loaded DMRS	1	
	Antenna ports indexes	{1000} for test 1-1, 3-1, 3-2 {1000, 1001} for test 2-1, 4-1, 4-2	{1001} for test 1-1, 3-1, 3-2 {1002, 1003} for test 2-1, 4-1, 4-2
	Number of PDSCH DMRS CDM group(s) without data	1 for test 1-1, 3-1, 3-2 2 for test 2-1, 4-1, 4-2	1 for test 1-1, 3-1, 3-2 2 for test 2-1, 4-1, 4-2
PDSCH & PDSCH DMRS Precoding configuration		Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable i1/i2 combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12]. Any column of precoder matrix is not equal to any column of precoder matrix of Target UE for test 1-1 Select the precoder to ensure any column of precoder is orthogonal to any column of	Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable i1/i2 combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12]. Any column of precoder matrix is not equal to any column of precoder matrix of Target UE for test 1-1 Select the precoder to ensure any column of precoder is orthogonal to any column of

			precoder for the target PDSCH for test 2-1, 3-1, 3-2, 4-1, 4-2
MU-MIMO Beamforming Model		As specified in B.4.2	
Number of HARQ Processes		8	N/A
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	N/A
Note 1: DMRS scrambling ID is the same for both target and co-scheduled UEs.			

Table 5.2.3.2.17.0-3: Minimum performance for target UE with Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.7-1.1 TDD	40 / 30	16QAM, 0.48	Random 16QAM symbols	FR1.30-1	TDLC300-100	2x4, ULA Low	70	11.8

Table 5.2.3.2.17.0-4: Minimum performance for target UE with Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.7-1.2 TDD	40 / 30	16QAM, 0.48	Random 16QAM symbols	FR1.30-1	TDLA30-10	4x4, ULA Low	70	15.5

The parameters in Table 5.2.3.2.17.0-5 are configured for requirements with Enhanced Receiver Type 2.

Table 5.2.3.2.17.0-5: Assistance Information parameters for requirements with Enhanced Receiver Type 2

Parameter		Value
AdvancedReceiver-MU-MIMO-r18	precodingAndResourceAllocation	True
	pdsch-TimeDomainAllocation	True
	mcs-Table	qam256
	advReceiver-MU-MIMO-DCI-1-1	Enabled
Co-scheduled UE information in DCI (Table 7.3.1.2.2-12 of TS38.212 [10])		1 for Test 3-1 2 for Test 4-1 6 for Test 3-2, 4-2

Table 5.2.3.2.17.0-6: Minimum performance for target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	Random QPSK symbols	FR1.30-1	TDLC300-100	2x4, ULA Medium	70	16.0
3-2	R.PDSCH.7-1.3 TDD	40 / 30	64QAM, 0.43	Random 16-QAM symbols	FR1.30-1	TDLC300-100	2x4, ULA Medium	70	25.5

Table 5.2.3.2.17.0-7: Minimum performance for target UE with Rank 2 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.7-1.4 TDD	40 / 30	64QAM, 0.43	Random 16QAM symbols	FR1.30-1	TDLA30-10	4x4, ULA Low	70	19.6
4-2	R.PDSCH.7-1.2 TDD	40 / 30	16QAM, 0.48	Random QPSK symbols	FR1.30-1	TDLA30-10	4x4, ULA Low	70	14.9

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.17.

5.2.3.2.17_1 2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA

5.2.3.2.17_1.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.3.2.17_1.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.3.2.17_1.3 Test description

5.2.3.2.17_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.17.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.17_1.3.3.

5.2.3.2.17_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.17_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.17_1.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.17_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.17_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.3.2.17_1.3.3_2 Message exceptions for NSA

No message exceptions for NSA

5.2.3.2.17_1.4 Test requirement

Table 5.2.3.2.17_1.4-1: Test requirement for target UE with Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.7-1.1 TDD	40 / 30	16QAM, 0.48	Random 16QAM symbols	FR1.30-1	TDLC300-100	2x4, ULA Low	70	12.7

5.2.3.2.17_2 4Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA

5.2.3.2.17_2.1 Test purpose

To verify the PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.3.2.17_2.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.2.3.2.17_2.3 Test description

5.2.3.2.17_2.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.17.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.17_2.3.3.

5.2.3.2.17_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.17_2.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.17_2.4-1.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.17_2.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.17_2.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.3.2.17_2.3.3_2 Message exceptions for NSA

No message exceptions for NSA

5.2.3.2.17_2.4 Test requirement

Table 5.2.3.2.17_2.4-1: Test requirement for target UE with Rank 2

Test num.	Reference channel	Bandwidth (MHz) /	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and	Reference value
-----------	-------------------	-------------------	---------------------------------	-------------------	-----------------------	------------------------	-----------------

		Subcarrier spacing (kHz)	Target UE	Co-scheduled UE			antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.7-1.2 TDD	40 / 30	16QAM, 0.48	Random 16QAM symbols	FR1.30-1	TDLA30-10	4x4, ULA Low	70	16.5

5.2.3.2.17_3 4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- TC applicability is FFS in TS38.522
- Measurement Uncertainties and Test Tolerances are FFS
- The minimum test time analysis is pending

5.2.3.2.17_3.1 Test purpose

Test 3-1 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.

Test 3-2 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.

5.2.3.2.17_3.2 Test applicability

Test 3-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18*.

Test 3-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward which declare supporting capability IE *advReceiver-MU-MIMO-r18* and capability 'MU-MIMO Interference Mitigation advanced receiver with modulation order detection' or 'MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh' in TS38.306 [14].

5.2.3.2.17_3.3 Test description

5.2.3.2.17_3.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.17.0-2 as appropriate.

3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.17_3.3.3.

5.2.3.2.17_3.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.17_3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.17_3.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.17_3.4-1 as appropriate.

5.2.3.2.17_3.3.3 Message contents

5.2.3.2.17_3.3.3_1 Message exceptions for SA

Same as 5.2.3.2.17_2.3.3_1 with the following exceptions:

Table 5.2.3.2.17_3.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.1-20			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {	1 entry		
AdvancedReceiver-MU-MIMO-r18 ::= SEQUENCE {			
precodingAndResourceAllocation-r18	true		
pdsch-TimeDomainAllocation-r18	true		
mcs-Table-r18	qam256		
advReceiver-MU-MIMO-DCI-1-1-r18	enabled		
}			
}			

Table 5.2.3.2.17_3.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Co-scheduled UE information	'In all the PRBs allocated to the UE, all the co-scheduled UE(s), if any, which have the same root DMRS sequence as the UE, are scheduled with modulation scheme QPSK' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'001' B	Test 3-1
	'In each individual PRB allocated to the UE, all the co-scheduled UE(s), which have the same root DMRS sequence as the UE, are scheduled with the same modulation scheme, except the cases corresponding to index 0~5' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'110' B	Test 3-2

5.2.3.2.17_3.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.17_2.3.3_2.

5.2.3.2.17_3.4 Test requirement

Table 5.2.3.2.17_3.4-1: Test requirement for PDSCH of target UE with Rank 1 with Enhanced Receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-2.1 TDD	40 / 30	16QAM, 0.48	Random QPSK symbols	FR1.30-1	TDLC300-100	2x4, ULA Medium	70	16.9+TT
3-2	R.PDSCH.7-1.3 TDD	40 / 30	64QAM, 0.43	Random 16-QAM symbols	FR1.30-1	TDLC300-100	2x4, ULA Medium	70	26.4+TT

5.2.3.2.17_4 4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- Measurement Uncertainties and Test Tolerances are FFS
- TC applicability is FFS in TS38.522

5.2.3.2.17_4.1 Test purpose

Test 4-1 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-1 when modulation order for co-scheduled UE is explicitly signaled by DCI.

Test 4-2 is to verify PDSCH performance under 4 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE with Enhanced Receiver Type 2-2a or Enhanced Receiver Type 2-2b when modulation order for co-scheduled UE is detected.

5.2.3.2.17_4.2 Test applicability

Test 4-1 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward supporting capability IE *advReceiver-MU-MIMO-r18*.

Test 4-2 applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC release 18 and forward which declare supporting capability IE *advReceiver-MU-MIMO-r18* and capability '*MU-MIMO Interference Mitigation advanced receiver with modulation order detection Enh*' in TS38.306 [14].

5.2.3.2.17_4.3 Test description

5.2.3.2.17_4.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.17.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG and SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.17_4.3.3.

5.2.3.2.17_4.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.17_4.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.17_4.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.17_4.4-1 as appropriate.

5.2.3.2.17_4.3.3 Message contents

5.2.3.2.17_4.3.3_1 Message exceptions for SA

Same as 5.2.3.2.17_2.3.3_1 with the following exceptions:

Table 5.2.3.2.17_4.3.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.1-20			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {	1 entry		
AdvancedReceiver-MU-MIMO-r18 ::= SEQUENCE {			
precodingAndResourceAllocation-r18	true		
pdsch-TimeDomainAllocation-r18	true		
mcs-Table-r18	qam256		
advReceiver-MU-MIMO-DCI-1-1-r18	enabled		
}			
}			

Table 5.2.3.2.17_4.3.3_1-2: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
Co-scheduled UE information	'In all the PRBs allocated to the UE, all the co-scheduled UE(s), if any, which have the same root DMRS sequence as the UE, are scheduled with modulation scheme 16QAM' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'010' B	Test 4-1
	'In each individual PRB allocated to the UE, all the co-scheduled UE(s), which have the same root DMRS sequence as the UE, are scheduled with the same modulation scheme, except the cases corresponding to index 0~5' as per Table 7.3.1.2.2-12 in TS 38.212 [10]	'110' B	Test 4-2

5.2.3.2.17_4.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.17_2.3.3_2.

5.2.3.2.17_4.4 Test requirement

Table 5.2.3.2.17_4.4-1: Test requirement for PDSCH of target UE with Rank 2 with Enhanced receiver Type 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE				Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.7-1.4 TDD	40 / 30	64QAM, 0.43	Random 16QAM symbols	FR1.30-1	TDLA30-10	4x4, ULA Low	70	20.6+TT
4-2	R.PDSCH.7-1.2 TDD	40 / 30	16QAM, 0.48	Random QPSK symbols	FR1.30-1	TDLA30-10	4x4, ULA Low	70	15.9+TT

5.2.3.2.18 4Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario

5.2.3.2.18.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.18.0-4, with the addition of test parameters in Table 5.2.3.2.18.0-2 for the serving cell and Table 5.2.3.2.18.0-3 for the LTE interference cells and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.18.0-1.

Table 5.2.3.2.18.0-1: Tests purpose

Purpose	Test index
Verify PDSCH CRS interference mitigation performance under 4 receive antenna conditions with CRS rate matching configured for the serving cell.	1-1

Table 5.2.3.2.18.0-2: Test parameters for the serving cell

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	3
	Length (L)	9
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A

PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CRS for rate Matching (Note 1)	LTE carrier centre subcarrier location		Same as NR carrier centre subcarrier location
	LTE carrier BW	Hz	20
Number of HARQ Processes	Number of antenna ports		4
	v-shift		0
The number of slots between PDSCH and corresponding HARQ-ACK information			8
Note 1: No MBSFN is configured on LTE carrier.			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
Note 2: Network-based CRS interference mitigation is disabled on LTE carrier			

Table 5.2.3.2.18.0-3: Test parameters for the LTE interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		TDD	TDD
TDD UL-DL pattern		DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR (Note 1)	dB	10.45	4.6
LTE Bandwidth	MHz	20	20
Carrier centre subcarrier location		Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix		Normal	Normal
Physical cell ID		1	2
CRS pattern	Number of antenna ports	4	4
	v-shift	1	2
Downlink power allocation	ρ_A	dB	-6
	ρ_B	dB	-6
	σ	dB	0
PDSCH transmission mode		TM4	TM4
PDSCH loading level	%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.
Transmission rank	%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model		As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell	us	3	-1
Frequency offset to the serving cell	Hz	300	-100
Propagation conditions and MIMO configuration (Note 2)		TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity	PRB	8	8
Note 1: Defined in B.6.1			
Note 2: The channel for the LTE interference cells and the serving cell are independent.			

Table 5.2.3.2.18.0-4: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x4, ULA Low	70	8.8

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.18.

5.2.3.2.18_1 4Rx TDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x4 MIMO for both NSA and SA

5.2.3.2.18_1.1 Test purpose

To verify PDSCH CRS interference mitigation performance under 4 receive antenna conditions with CRS rate matching configured for the serving cell.

5.2.3.2.18_1.2 Test applicability

This test applies to all types of NR UE release 17 and forward that support *CRS-IM-DSS-15kHzSCS-r17*.

5.2.3.2.18_1.3 Test description

5.2.3.2.18_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.3.2.18.0-2 and 5.2.3.2.18.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state *RRC_CONNECTED* with generic procedure parameters *Connectivity NR for SA with Connected without Release On, Test Mode On* or *EN-DC, DC bearer MCG and SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.18_1.3.3.

5.2.3.2.18_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.18_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.18_1.4-2 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.3.2.18_1.4-2 as appropriate.

5.2.3.2.18_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.18_1.3.3_1 Message exceptions for SA

As defined in clause 5.4.2 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.2.19_1.3.3_1-1: ServingCellConfigCommon

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-2			
Information Element	Value/remark	Comment	Condition
ServingCellConfigCommon ::= SEQUENCE {			
dmrs-TypeA-Position	pos3		
lte-CRS-ToMatchAround	RateMatchPatternLTE-CRS		
}			

Table 5.2.2.19_1.3.3_1-2: RateMatchPatternLTE-CRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-28			
Information Element	Value/remark	Comment	Condition
RateMatchPatternLTE-CRS ::= SEQUENCE {			
carrierFreqDL	Same as NR carrier centre subcarrier location		
carrierBandwidthDL	n100	20MHz	
mbsfn-SubframeConfigList	Not present		
nrofCRS-Ports	n4		
v-Shift	n0		
}			

5.2.3.2.18_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.18_1.3.3_1

5.2.3.2.18_1.4 Test requirement

Tables 5.2.3.2.18_1.4-1 and 5.2.3.2.18_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.18_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.18_1.4-1: Test parameters for the LTE interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		TDD	TDD
TDD UL-DL pattern		DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR (Note 1)	dB	11.25	5.4
LTE Bandwidth	MHz	20	20
Carrier centre subcarrier location		Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix		Normal	Normal
Physical cell ID		1	2
CRS pattern	Number of antenna ports	4	4
	v-shift	1	2
Downlink power allocation	ρ_A	dB	-6
	ρ_B	dB	-6
	σ	dB	0
PDSCH transmission mode		TM4	TM4

PDSCH loading level	%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain.
Transmission rank	%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model		As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell	us	3	-1
Frequency offset to the serving cell	Hz	300	-100
Propagation conditions and MIMO configuration (Note 2)		TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity	PRB	8	8
Note 1: Defined in B.6.1			
Note 2: The channel for the LTE interference cells and the serving cell are independent.			

Table 5.2.3.2.18_1.4-2: Test requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-1.3 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x4, ULA Low	70	10.6

5.2.3.2.19 4Rx TDD FR1 for PDSCH with inter cell CRS interference

5.2.3.2.19.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.19.0-4 and Table 5.2.3.2.19.0-6, with the addition of test parameters in Table 5.2.3.2.19.0-2 for the serving cell and Table 5.2.3.2.19.0-3 for the LTE interference cells and the downlink physical channel setup according to Annex C.3.1.

The requirements for UE capable of performing CRS-IM with the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.3.2.19.0-4.

The requirements for UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth are specified in Table 5.2.3.2.19.0-6.

The test purposes are specified in Table 5.2.3.2.19.0-1.

Table 5.2.3.2.19.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions when PDSCH is interfered by inter cell CRS signal	1-1, 1-2, 2-1 and 2-2

Table 5.2.3.2.19.0-2: Tests parameter for serving cell PDSCH

Parameter	Unit	Value
Duplex mode		TDD
TDD UL-DL pattern		FR1.15-1
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0

	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.3.2.19.0-3: Tests parameter for interference cells

Parameter		Unit	Cell 1	Cell 2
Duplex mode			TDD	TDD
TDD UL-DL pattern			DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR		dB	10.45	4.6
LTE Bandwidth (Note 5)		MHz	20	20
Carrier centre subcarrier location (Note 6)			Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix			Normal	Normal
Physical cell ID			1	2
CRS pattern	Number of antenna ports		4	4
	v-shift		1	2
Downlink power allocation	ρ_A	dB	-6	-6
	ρ_B	dB	-6	-6
	σ	dB	0	0
PDSCH transmission mode			TM4	TM4
PDSCH loading level		%	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.	20% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.
Transmission rank		%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model			As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell		us	3 for test 1-1 1.5 for test 1-2	-1 for test 1-1 -0.5 for test 1-2
Frequency offset to the serving cell		Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)			TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity		PRB	8	8
Note 1: The channel for the LTE interference cells and the serving cell are independent.				
Note 2: No MBSFN is configured on LTE carrier.				
Note 3: Network-based CRS interference mitigation is disabled on LTE carrier.				
Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame				

Note 5: This parameter is informed to UE via network assistance signalling for Test 1-1 and 1-2 in Table 5.2.3.2.19.0-4.

Note 6: Single entry is included in IE *LTE-NeighCellsCRS-AssistInfoList-r17* that applies for both cells for cases with network signalling assistance

Table 5.2.3.2.19.0-4 Minimum performance for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-4.1 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x4, ULA Low	70	8.6
1-2	R.PDSCH.2-28.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	8.2

Table 5.2.3.2.19.0-5: Measurement Gap configurations

Parameter	Unit	Value
Measurement Gap Length (mgl)	ms	6
Measurement Gap Repetition Period (mgrp)	ms	40
Gap offset (gapoffset)	ms	1
Measurement gap timing advance (mgta)	ms	0

Table 5.2.3.2.19.0-6: Minimum performance for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-4.2 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x4, ULA Low	70	8.6
2-2	R.PDSCH.2-29.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	8.2

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.19.

5.2.3.2.19_1 4Rx TDD FR1 for PDSCH with inter cell CRS interference scenario – 4x4 MIMO for both NSA and SA

5.2.3.2.19_1.1 Test purpose

To verify PDSCH performance under 4 receive antenna conditions when PDSCH is interfered by inter cell CRS signal.

5.2.3.2.19_1.2 Test applicability

Tests 2-1 and 2-2 apply to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-15kHzSCS-r17* or *crs-IM-nonDSS-30kHzSCS-r17*.

Tests 1-1 and 1-2 apply to all types of NR UE release 17 and forward that support *CRS-IM-nonDSS-NWA-15kHzSCS-r17* or *crs-IM-nonDSS-NWA-30kHzSCS-r17*.

5.2.3.2.19_1.3 Test description

5.2.3.2.19_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Tables 5.2.3.2.19.0-2 and 5.2.3.2.19_1.4-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.19_1.3.3.
6. For UE capable of performing CRS-IM without the assistance of network signalling on LTE channel bandwidth, ensure the network configures an inter-RAT LTE measurement object of the interfering cells to the tested UE. Inter-RAT measurement is configured at the beginning of the test and applied throughout the test with gap pattern configurations according to Table 5.2.3.2.19.0-5. PDSCH is not scheduled, and throughput is not counted during 4.64s after the beginning of test. PDSCH is not scheduled in the measurement gaps.

5.2.3.2.19_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.19_1.4-2 and 5.2.3.2.19_1.4-3 as appropriate. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.19_1.4-2 and 5.2.3.2.19_1.4-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Tables 5.2.3.2.19_1.4-2 and 5.2.3.2.19_1.4-3 as appropriate.

5.2.3.2.19_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.19_1.3.3_1 Message exceptions for SA

As defined in clause 4.6.3 of TS 38.508-1 [6] with the following exceptions:

Table 5.2.3.2.19_1.3.3_1-1: LTE-NeighCellsCRS-AssistInfoList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-67A			
Information Element	Value/remark	Comment	Condition
LTE-NeighCellsCRS-AssistInfoList-r17 ::= SEQUENCE (SIZE (1..maxNrofCRS-IM-InterfCell-r17)) OF LTE-NeighCellsCRS-AssistInfo-r17 {	1 entry		Tests 1-1 and 1-2
LTE-NeighCellsCRS-AssistInfo-r17[1] SEQUENCE {			
neighCarrierBandwidthDL-r17	n100		
neighNrofCRS-Ports-r17	n4		
}			
}			

Table 5.2.3.2.19_1.3.3_1-2: MeasGapConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-70			
Information Element	Value/remark	Comment	Condition
MeasGapConfig ::= SEQUENCE {			Tests 2-1 and 2-2
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	1		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			
}			

5.2.3.2.19_1.3.3_2 Message exceptions for NSA

Same as 5.2.3.2.19_1.3.3_1

5.2.3.2.19_1.4 Test requirement

Tables 5.2.3.2.19_1.4-1, 5.2.3.2.19_1.4-2 and 5.2.3.2.19_1.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Tables 5.2.3.2.19_1.4-2 and Tables 5.2.3.2.19_1.4-3 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.19_1.4-1: Tests parameter for interference cells

Parameter	Unit	Cell 1	Cell 2
Duplex mode		TDD	TDD
TDD UL-DL pattern		DSUDDDSUDD S = 10D + 2G + 2U	DSUDDDSUDD S = 10D + 2G + 2U
INR	dB	11.25	5.4
LTE Bandwidth (Note 5)	MHz	20	20
Carrier centre subcarrier location (Note 6)		Same as the NR serving carrier centre subcarrier location	Same as the NR serving carrier centre subcarrier location
Cyclic Prefix		Normal	Normal
Physical cell ID		1	2
CRS pattern	Number of antenna ports	4	4
	v-shift	1	2
Downlink power allocation	ρ_A	dB	-6
	ρ_B	dB	-6
	σ	dB	0
PDSCH transmission mode		TM4	TM4
PDSCH loading level	%	20% probability of occurrence	20% probability of

		of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.	occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-1. 10% probability of occurrence of LTE data transmission in time domain, and full bandwidth allocation in frequency domain for test 1-2.
Transmission rank	%	80% and 20% probability for rank 1 and rank 2 respectively	80% and 20% probability for rank 1 and rank 2 respectively
Interference model		As specified in clause B.7	As specified in clause B.7
Time offset to the serving cell	us	3 for test 1-1 1.5 for test 1-2	-1 for test 1-1 -0.5 for test 1-2
Frequency offset to the serving cell	Hz	300	-100
Propagation conditions and MIMO configuration (Note 1)		TDLA30-10 ULA Low	TDLA30-10 ULA Low
Precoding granularity	PRB	8	8
<p>Note 1: The channel for the LTE interference cells and the serving cell are independent.</p> <p>Note 2: No MBSFN is configured on LTE carrier.</p> <p>Note 3: Network-based CRS interference mitigation is disabled on LTE carrier.</p> <p>Note 4: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame</p> <p>Note 5: This parameter is informed to UE via network assistance signalling for Test 1-1 and 1-2 in Table 5.2.3.2.19.0-4.</p> <p>Note 6: Single entry is included in IE <i>LTE-NeighCellsCRS-AssistInfoList-r17</i> that applies for both cells for cases with network signalling assistance</p>			

Table 5.2.3.2.19_1.4-2: Test requirement for Rank 1 with the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-4.1 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x4, ULA Low	70	10.4
1-2	R.PDSCH.2-28.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	10

Table 5.2.3.2.19_1.4-3: Test requirement for Rank 1 without the assistance of network signalling on LTE channel bandwidth

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-4.2 TDD	20 / 15	16QAM, 0.48	FR1.15-1	TDLA30-10	4x4, ULA Low	70	10.4
2-2	R.PDSCH.2-29.1 TDD	20 / 30	16QAM, 0.48	FR1.30-1	TDLA30-10	4x4, ULA Low	70	10

5.2.3.2.20 4Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA

5.2.3.2.20.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme A scenario.

5.2.3.2.20.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme A for PDCCH scheduling SFN Scheme A PDSCH.

5.2.3.2.20.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.20.3-3, with the addition of test parameters in Table 5.2.3.2.20.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.20.3-1.

Table 5.2.3.2.20.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme A scenario defined in B.3.5	1-1

Table 5.2.3.2.20.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	TCI state		Note 1
	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 20 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #3
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #4
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots 20 for CSI-RS resource 9,10,11,12.

		CSI-RS offset	Slots	1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12	
		QCL info		TCI state #5	
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$	
		CSI-RS periodicity	Slots	40	
		CSI-RS offset	Slots	0	
		QCL info		TCI state #0	
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 13$
		CSI-RS periodicity	Slots		40
		CSI-RS offset	Slots		0
		QCL info			TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 7$
		CSI-RS periodicity	Slots		40
		CSI-RS offset	Slots		0
		QCL info			TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		N/A	
		QCL Type		N/A	
TCI state #3	Type 1 QCL information	SSB index		SSB #0	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
TCI state #4	Type 1 QCL information	SSB index		SSB #1	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
TCI state #5	Type 1 QCL information	SSB index		SSB #2	
		QCL Type		Type C	
	Type 2 QCL information	SSB index		N/A	
		QCL Type		N/A	
Number of HARQ Processes				8	
The number of slots between PDSCH and corresponding HARQ-ACK information				Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
<p>Note 1: SSB # ($k \bmod 3$), CSI-RS (for tracking) resource set # $((k \bmod 3) + 1)$ and CSI-RS (for CSI acquisition) resource set # $((k \bmod 3) + 4)$ are transmitted by k^{th} RRH. Codepoint #0 is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1 with TCI States TCI state #0, TCI State #1. Codepoint #1 is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2 with TCI States TCI state #1, TCI State #2. Codepoint #2 is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3 with TCI States TCI state #2, TCI State #0.</p>					

Table 5.2.3.2.20.3-3: Minimum performance for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)

1-1	R.PDSCH.2-30.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN Scheme A	2x4	70	10.3
-----	--------------------	---------	-------------	----------	------------------	-----	----	------

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.20.

5.2.3.2.20.4 Test description

5.2.3.2.20.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.20.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.5.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.20.4.3.

5.2.3.2.20.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.20.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.3.2.20.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.20.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of Table 5.2.3.2.20.3-2 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.20.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.3.2.20.4.3.1 Message exceptions for SA

Table 5.2.3.2.20.4.3.1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	Test 1-1
}			
}			
}			

Table 5.2.3.2.20.4.3.1-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1
}			

Table 5.2.3.2.20.4.3.1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8		Test 1-1
}			

Table 5.2.3.2.20.4.3.1-4: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8,9,10,11,12	for test 1-1	
qcl-InfoPeriodicCSI-RS	3 for CSI-RS resource #1, #2, #3, #4 4 for CSI-RS resource #5, #6, #7, #8 5 for CSI-RS resource #9, #10, #11, #12	for test 1-1: TCI-StateId for TCI- State #3 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI- State #4 for CSI-RS resource #5, #6, #7, #8 TCI-StateId for TCI- State #5 for CSI-RS resource #9, #10, #11, #12	
}			

Table 5.2.3.2.20.4.3.1-5: CSI-RS-ResourceMapping for TRS (Table 5.2.3.2.20.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5	for test 1-1: l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4	

	and #7 10 for CSI-RS resource #6 and #8 4 for CSI-RS resource #9 and #11 8 for CSI-RS resource #10 and #12	l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8 l ₀ = 4 for CSI-RS resource 9 and 11 l ₀ = 8 for CSI-RS resource 10 and 12	
}			

Table 5.2.3.2.20.4.3.1-6: CSI-ResourcePeriodicityAndOffset for CSI Tracking (Table 5.2.3.2.20.4.3.1-4)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots20	1 for CSI-RS resource #1, #2, #5, #6, #9, #10 2 for CSI-RS resource #3 #4, #7, #8, #11, #12	For test 1-1: periodicity: 20 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12	
}			

Table 5.2.3.2.20.4.3.1-7: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE { nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2 2 for Resource set #3	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 0	For test 1-1 entry 1 CSI-RS resource #1	Resource set #1
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	4 entries 4	For test 1-1 entry 1 CSI-RS resource #5	Resource set #2

NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries	For test 1-1	Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
NZP-CSI-RS-ResourceId[2]	9	entry 2 CSI-RS resource #10	
NZP-CSI-RS-ResourceId[3]	10	entry 3 CSI-RS resource #11	
NZP-CSI-RS-ResourceId[4]	11	entry 4 CSI-RS resource #12	
}			
trs-Info	true		
}			

Table 5.2.3.2.20.4.3.1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	12 for CSI-RS resource #13 13 for CSI-RS resource #14 14 for CSI-RS resource #15	for test 1-1	
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #13 1 for CSI-RS resource #14 2 for CSI-RS resource #15	for test 1-1: TCI-State #0 for CSI-RS resource #13 TCI-State #1 for CSI-RS resource #14 TCI-State #2 for CSI-RS resource #15	
}			

Table 5.2.3.2.20.4.3.1-9: CSI-RS-ResourceMapping for CSI Acquisition (Table 5.2.3.2.20.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #13 13 for CSI-RS resource #14 7 for CSI-RS resource #15	for test 1-1 l0=12 for CSI-RS resource #13 l0=13 for CSI-RS resource #14 l0=7 for CSI-RS resource #15	
}			

Table 5.2.3.2.20.4.3.1-10: CSI-ResourcePeriodicityAndOffset for CSI Acquisition (Table 5.2.3.2.20.4.3.1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots40	0	For test 1-1 periodicity = 40 slots. offset = 0 slots	
}			

Table 5.2.3.2.20.4.3.1-11: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE { nzp_CSI_ResourceSetId	3 for Resource set #4 4 for Resource set #5 5 for Resource set #6	For test 1-1	
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	1 entry 12	For test 1-1 entry 1 CSI-RS resource #13	Resource set #4
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	1 entry 13	For test 1-1 entry 1 CSI-RS resource #14	Resource set #5
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId { NZP-CSI-RS-ResourceId[1]	1 entry 14	For test 1-1 entry 1 CSI-RS resource #15	Resource set #5
}			
}			

Table 5.2.3.2.20.4.3.1-12: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE { tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3 4 for TCI state #4 5 for TCI state #5	For test 1-1	
qcl-Type1 SEQUENCE { bwp-Id	BWP-Id of active BWP Not present		TCI state #0, TCI state #1, TCI state #2 TCI state #3, TCI state #4, TCI state #5
referenceSignal CHOICE { csi-rs	0	CSI-RS resource #1	TCI state #0

	4	CSI-RS resource #5	TCI state #1
	8	CSI-RS resource #9	TCI state #2
ssb	0	SSB #0	TCI state #3
	1	SSB #1	TCI state #4
	2	SSB #2	TCI state #5
}			
qcl-Type	typeA		TCI state #0, TCI state #1, TCI state #2
	typeC		TCI state #3, TCI state #4, TCI state #5
}			
}			

5.2.3.2.20.4.3.2 Message exceptions for NSA

Same as 5.2.3.2.20.4.3.1.

5.2.3.2.20.5 Test Requirement

Table 5.2.3.2.20.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.20.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.20.5-1: Test Requirements for HST-SFN Scheme A

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40 / 30	16QAM, 0.48	FR1.30-1	HST-SFN Scheme A	2x4	70	10.9

5.2.3.2.21 4Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA

5.2.3.2.21.1 Test Purpose

To verify the UE performance in the HST-SFN Scheme B scenario.

5.2.3.2.21.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support SFN scheme B for PDCCH scheduling SFN Scheme B PDSCH.

5.2.3.2.21.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.21.3-3, with the addition of test parameters in Table 5.2.3.2.21.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.21.3-1.

Table 5.2.3.2.21.3-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-SFN Scheme B scenario defined in B.3.6	1-1

Table 5.2.3.2.21.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
TCI state			Note 1
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 20 for CSI-RS resource 1,2,3,4.
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #3
		Frequency Occupation	Start PRB 0 Number of PRB = 52
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #4
		Frequency Occupation	Start PRB 0 Number of PRB = 52
	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 4$ for CSI-RS resource 9 and 11 $l_0 = 8$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots 20 for CSI-RS resource 9,10,11,12.
		CSI-RS offset	Slots 1 for CSI-RS resource 9 and 10 2 for CSI-RS resource 11 and 12
		QCL info	TCI state #5
		Frequency Occupation	Start PRB 0 Number of PRB = 52
NZP CSI-RS for CSI acquisition	Resource set #4	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
		QCL info	TCI state #0
	Resource set #5	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 40
		CSI-RS offset	Slots 0
		QCL info	TCI state #1
	Resource set #6	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 7$

		CSI-RS periodicity	Slots	40
		CSI-RS offset	Slots	0
		QCL info		TCI state #2
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
TCI state #3	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #4	Type 1 QCL information	SSB index		SSB #1
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #5	Type 1 QCL information	SSB index		SSB #2
		QCL Type		Type C
	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
Number of HARQ Processes				8
The number of slots between PDSCH and corresponding HARQ-ACK information				Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
<p>Note 1: SSB # (k mod 3), CSI-RS (for tracking) resource set # ((k mod 3) + 1) and CSI-RS (for CSI acquisition) resource set # ((k mod 3) + 4) are transmitted by kth RRH. Codepoint#0 {TCI state #0, TCI State #1} is activated when UE receives PDCCH/PDSCH from RRH#3k and RRH#3k+1. Codepoint#1 {TCI state #1, TCI State #2} is activated when UE receives PDCCH/PDSCH from RRH#3k+1 and RRH#3k+2. Codepoint#2 {TCI state #2, TCI State #0} is activated when UE receives PDCCH/PDSCH from RRH#3k+2 and RRH#3k+3. The second indicated TCI state in each codepoint is not used for quasi co-location parameters {Doppler shift, Doppler spread}.</p>				

Table 5.2.3.2.1.3-3: Minimum performance for HST-SFN Scheme B

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40/30	16QAM, 0.48	FR1.30-1	HST-SFN-SchemeB	2x4	70	9.3

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.21.

5.2.3.2.21.4 Test description

5.2.3.2.21.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.21.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.6.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.21.4.3.

5.2.3.2.21.4.2 Test procedure

1. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.21.5-1 as appropriate.
2. SS is configured to transmit SSB and CSI-RS continuously and schedule PDSCH and PDCCH transmission according to Note 1 in 5.2.3.2.21.3-2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2.3.2.21.5-1. The SS sends downlink MAC padding bits on the DL RMC.

Note: All TCI states are known to the UE through configuration inside RrcReconfiguration. There is no need to configure additional L1-RSRP measurements.

3. Send MAC CE command “Enhanced TCI States Indication for UE-specific PDCCH MAC CE” according to the timing described in Note 1 of table 5.2.3.2.21.5-1 to active TCI state codepoint 0, 1 or 2 for PDCCH periodically. PDSCH is automatically associated with TCI state codepoint 0, 1 or 2 as tci-PresentInDCI is not present. TCI states 3, 4 and 5 for SSBs are automatically activated through relation of QCL-Info in NZP CSI-RS.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.3.2.21.4.3 Message contents

Same message contents as in 5.2.3.2.20.4.3.

5.2.3.2.21.5 Test Requirement

Table 5.2.3.2.21.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.21.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.21.5-1: Test Requirements for HST-SFN Scheme B

Test	Reference	Bandwidth	Modulation	TDD	Propagation	Correlation	Reference value
------	-----------	-----------	------------	-----	-------------	-------------	-----------------

num.	channel	(MHz) / Subcarrier spacing (kHz)	format and code rate	UL-DL pattern	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-30.1 TDD	40/30	16QAM, 0.48	FR1.30-1	HST-SFN-SchemeB	2x4	70	9.9

5.2.3.2.22 4Rx TDD FR1 PDSCH ATG performance

5.2.3.2.22.1 Test Purpose

To verify UE PDSCH performance under the ATG scenario.

5.2.3.2.22.2 Test applicability

This test applies to all types of 4Rx NR ATG UE release 18 and forward.

5.2.3.2.22.3 Minimum conformance requirements

The performance requirements are specified in Table 5.2.3.2.22.3-3, with the addition of test parameters in Table 5.2.3.2.22.3-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.3.2.22.3-1.

Table 5.2.3.2.22.3-1: Tests purpose

Purpose	Test index
Verify UE PDSCH performance under the ATG scenario	1-1, 1-2, 1-3, 1-4, 1-5, 1-6, 1-7, 1-8, 1-9

Table 5.2.3.2.22.3-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			Test 1-1, 1-2, 1-3: 8 Test 1-4, 1-5, 1-6, 1-7, 1-8, 1-9: 32
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.3.2.22.3-3: Minimum performance for ATG

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
								Fraction of maximum	SNR (dB)

								throughput (%))
1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -1	AWGN	500Hz	2x4	70	3.1
1-2	R.PDSCH. 2-3.6 TDD	40 / 30	64QAM, 0.65	FR1.30 -1	AWGN	500Hz	2x4	70	10.6
1-3	R.PDSCH. 2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -1	AWGN	500Hz	2x4	70	19.6
1-4	R.PDSCH. 2-31.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x4	70	3.1
1-5	R.PDSCH. 2-32.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x4	70	10.6
1-6	R.PDSCH. 2-33.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x4	70	19.6
1-7	R.PDSCH. 2-40.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x4	70	3.1
1-8	R.PDSCH. 2-41.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x4	70	10.6
1-9	R.PDSCH. 2-42.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x4	70	19.6

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2.3.2.22.

5.2.3.2.22.4 Test description

5.2.3.2.22.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2.3.2.22.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.3.2.22.4.3.

5.2.3.2.22.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.22.3-2. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.3.2.22.3-3 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.

4. Repeat steps from 1 to 3 for each test points in Table 5.2.3.2.22.5-1 as appropriate.

5.2.3.2.22.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2.3.2.22.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used for test 1-1, test 1-2, 1-3, 1-4, 1-5, 1-6, 1-7, 1-8 and 1-9	
}			
}			
}			

Table 5.2.3.2.22.4.3-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos1	1 additional DMRS symbol for test 1-1, test 1-2, 1-3, 1-4, 1-5, 1-6, 1-7, 1-8 and 1-9	
}			

Table 5.2.3.2.22.4.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8 for test 1-1, test 1-2 and 1-3	
	n32	n32 for test 1-4, 1-5, 1-6, 1-7, 1-8 and 1-9	
}			

5.2.3.2.22.5 Test Requirement

Tables 5.2.3.2.22.3-3 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.22.5-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.3.2.22.5-1: Test Requirements for ATG

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Frequency offset	Correlation matrix and antenna configuration	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)

1-1	R.PDSCH. 2-2.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -1	AWGN	500Hz	2x4	70	3.7
1-2	R.PDSCH. 2-3.6 TDD	40 / 30	64QAM, 0.65	FR1.30 -1	AWGN	500Hz	2x4	70	11. 2
1-3	R.PDSCH. 2-4.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -1	AWGN	500Hz	2x4	70	20. 2
1-4	R.PDSCH. 2-31.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x4	70	3.7
1-5	R.PDSCH. 2-32.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x4	70	11. 2
1-6	R.PDSCH. 2-33.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x4	70	20. 2
1-7	R.PDSCH. 2-40.1 TDD	40 / 30	16QAM, 0.48	FR1.30 -8	AWGN	500Hz	2x4	70	3.7
1-8	R.PDSCH. 2-41.1 TDD	40 / 30	64QAM, 0.65	FR1.30 -8	AWGN	500Hz	2x4	70	11. 2
1-9	R.PDSCH. 2-42.1 TDD	40 / 30	256QAM, 0.82	FR1.30 -8	AWGN	500Hz	2x4	70	20. 2

5.2.4 8RX requirements

5.2.4.1 FDD

5.2.4.1.1 8Rx FDD FR1 PDSCH mapping Type A performance

5.2.4.1.1.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.4.1.1.0-3 - Table 5.2.4.1.1.0-7, with the addition of test parameters in Table 5.2.4.1.1.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.4.1.1.0-1.

Table 5.2.4.1.1.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 2-1, 3-1, 4-1, 5-1

Table 5.2.4.1.1.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	1
Codebook configuration	Maximum number of OFDM symbols for DL front loaded DMRS	1 for rank ≤ 4 2 for rank > 4
	CodebookType	type1-SinglePanel
	CodebookMode	1

	(CodebookConfig-N1,CodebookConfig-N2)		(2,1) for 4Tx (4,1) for 8Tx
	(CodebookConfig-O1,CodebookConfig-O2)		(4,1)
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of HARQ Processes			4
The number of slots between PDSCH and corresponding HARQ-ACK information			2

Table 5.2.4.1.1.0-3: Minimum performance for Rank 2 with Baseline 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLC300-100	2x8, ULA Medium B	70	13.5

Table 5.2.4.1.1.0-4: Minimum performance for Rank 2 with Simplified 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLC300-100	2x8, ULA Medium B	70	15.7

Table 5.2.4.1.1.0-5: Minimum performance for Rank 4 with Baseline 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-3.7 FDD	10 / 15	64QAM, 0.43	TDLA30-10	4x8, ULA Low	70	12.8

Table 5.2.4.1.1.0-6: Minimum performance for Rank 4 with Simplified 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.1-3.7 FDD	10 / 15	64QAM, 0.43	TDLA30-10	4x8, ULA Low	70	15.8

Table 5.2.4.1.1.0-7: Minimum performance for Rank 8

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.1-	10 / 15	64QAM,	TDLA30-10	8x8, ULA Low	70	22.5

	3.8 FDD		0.43				
--	---------	--	------	--	--	--	--

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.4.1.1.

5.2.4.1.1_1 8Rx FDD FR1 PDSCH mapping Type A performance - 2x8 MIMO with baseline 8Rx receiver for both SA and NSA

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The connection diagram is TBD.
- Message content is FFS.
- MU/TT is pending and the final test requirement value is TBD.

5.2.4.1.1_1.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers.

5.2.4.1.1_1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8 Rx antenna ports and supporting baseline 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8 Rx antenna ports and supporting baseline 8Rx receiver.

5.2.4.1.1_1.3 Test description

5.2.4.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure TBD for TE diagram and clause TBD for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.4.1.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or (EN-DC, DC bearer *MCG* and *SCG, Connected without release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.4.1.1_1.3.3.

5.2.4.1.1_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.1.1.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.4.1.1_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.4.1.1_1.3 Message contents

FFS

5.2.4.1.1_1.4 Test requirement

Table 5.2.4.1.1.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.1.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.1.1_1.4-1: Test Requirement for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.1-3.1 FDD	10 / 15	64QAM, 0.50	TDLC300-100	2x8, ULA Medium B	70	TBD

5.2.4.1.1_2 8Rx TDD FR1 PDSCH mapping Type A performance - 4x8 MIMO with baseline receiver for both SA and NSA

Editor's Note: This test case is incomplete in following aspects:

- The connection diagram is TBD.
- Message content is FFS.
- MU and TT are FFS.

5.2.4.1.1_2.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers.

5.2.4.1.1_2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8 Rx antenna ports and supporting baseline 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8 Rx antenna ports and supporting baseline 8Rx receiver.

5.2.4.1.1_2.3 Test description

5.2.4.1.1_2.3.1 Initial conditions

Same as the Initial conditions given in clause 5.2.4.1.1_1.3.1 with following exceptions:

- Figure TBD is replaced by Figure TBD for TE diagram;
- Message contents are defined in clause 5.2.4.1.1_2.3.3 instead.

5.2.4.1.1_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.1.1.0-5. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.4.1.1_2.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.4.1.1_2.3.3 Message contents

FFS

5.2.4.1.1_2.4 Test requirement

Table 5.2.4.1.1.0-5 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.1.1_2.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.1.1_2.4-1: Test Requirement for Rank 4

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.1-3.7 FDD	10 / 15	64QAM, 0.43	TDLA30-10	4x8, ULA Low	70	12.8 + TT

5.2.4.1.1_3

5.2.4.1.1_4

5.2.4.1.1_5 8Rx FDD FR1 PDSCH mapping Type A performance - 8x8 MIMO with baseline receiver for both SA and NSA

Editor’s Note: This test case is incomplete in following aspects

- The connection diagram is TBD.
- Message content is FFS.
- MU and TT are FFS.

5.2.4.1.1_5.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers.

5.2.4.1.1_5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8 Rx antenna ports and supporting baseline 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8 Rx antenna ports and supporting baseline 8Rx receiver.

5.2.4.1.1_5.3 Test description

5.2.4.1.1_5.3.1 Initial conditions

Same as the Initial conditions given in clause 5.2.4.1.1_1.3.1 with following exceptions:

- Figure TBD is replaced by Figure TBD for TE diagram;
- Message contents are defined in clause 5.2.4.1.1_5.3.3 instead.

5.2.4.1.1_5.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.1.1.0-7. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.4.1.1_5.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.4.1.1_5.3.3 Message contents

FFS

5.2.4.1.1_5.4 Test requirement

Table 5.2.4.1.1.0-7 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.1.1_5.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.1.1_5.4-1: Test Requirement for Rank 8

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.1-3.8 FDD	10 / 15	64QAM, 0.43	TDLA30-10	8x8, ULA Low	70	22.5+TT

5.2.4.1.3 8Rx FDD FR1 for PDSCH with intra-cell inter-user interference

5.2.4.1.3.0 Minimum conformance requirements

The performance requirements are specified in Table 5.2.4.1.3.0-3 and 5.2.4.1.3.0-4, with the addition of test parameters in Table 5.2.4.1.3.0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purposes are specified in Table 5.2.4.1.3.0-1.

Table 5.2.4.1.3.0-1: Tests purpose

Purpose	Test index
Verify PDSCH performance under 8 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.	1-1, 2-1

Table 5.2.4.1.3.0-2: Test parameters

Parameter		Unit	Target UE	Co-scheduled UE
Duplex mode			FDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration (Note 1)	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
	Antenna ports indexes		{1000, 1001}	{1002, 1003}
	Number of PDSCH DMRS CDM group(s) without data		2	2
PDSCH & PDSCH DMRS Precoding configuration			Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable i1/i2 combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12].	Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot, with equal probability of each applicable i1/i2 combination or codebook Index, chosen from section 5.2.2.2.1 of TS 38.214 [12]. Select the precoder to ensure any column of precoder is orthogonal to any column of precoder for the target PDSCH.
MU-MIMO Beamforming Model			As specified in B.4.2	
Number of HARQ Processes			4	N/A
The number of slots between PDSCH and corresponding HARQ-ACK information			2	N/A
Note 1: DMRS scrambling ID is the same for both target and co-scheduled UEs.				

Table 5.2.4.1.3.0-3: Minimum performance for target UE with Rank 2 with Baseline 8Rx Receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.5-1.4 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLA30-10	4x8, ULA Low	70	13.3

Table 5.2.4.1.3.0-4: Minimum performance for target UE with Rank 2 with Simplified 8Rx Receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.5-1.4 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLA30-10	4x8, ULA Low	70	16.6

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.4.1.3.

5.2.4.1.3_1 8Rx FDD FR1 for PDSCH with intra-cell inter-user interference – 4x8 MIMO with baseline 8Rx receiver for both SA and NSA

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- TC applicability is incomplete in TS38.522
- MU/TT is TBD
- Minimum test time, annex G.1.5, missing for R.PDSCH.5-1.4 FDD

5.2.4.1.3_1.1 Test purpose

To verify the PDSCH performance under 8 receive antenna conditions, when the PDSCH transmission of target UE is interfered by co-scheduled UE.

5.2.4.1.3_1.2 Test applicability

This test applies to all types of release 15 and release 16 NR UEs and E-UTRAN UEs supporting EN-DC and 8 Rx antenna ports and MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC and 8 Rx antenna ports.

5.2.4.1.3_1.3 Test description

5.2.4.1.3_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure TBD for TE diagram and section A.3.2 for UE diagram.

2. The parameter settings for the serving cell and interfering cells are set up according to Table 5.2-1 and Table 5.2.4.1.3.0-2 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, *Test Mode On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.4.1.3_1.3.3.

5.2.4.1.3_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.1.3_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for the serving cell and interfering cells according to Table 5.2.4.1.3_1.4-1.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Annex G.1.4.

5.2.4.1.3_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.4.1.3_1.3.3_1 Message exceptions for SA

No message exceptions for SA

5.2.4.1.3_1.3.3_2 Message exceptions for NSA

No message exceptions for NSA

5.2.4.1.3_1.4 Test requirement

Tables 5.2.4.1.3_1.4-1 and 5.2.4.1.3_1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A for each throughput test shall meet or exceed the specified value in Table 5.2.4.1.3_1.4-1 and Table 5.2.4.1.3_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.1.3_1.4-1: Minimum performance for target UE with Rank 2 with Baseline 8Rx Receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.5-1.4 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLA30-10	4x8, ULA Low	70	13.3 + TT

Table 5.2.4.1.3_1.4-2: Minimum performance for target UE with Rank 2 with Simplified 8Rx Receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing	Modulation format and code rate		Propagation condition	Correlation matrix and antenna configuration	Reference value	
			Target UE	Co-scheduled UE			Fraction of maximum	SNR (dB)

		(kHz)					throughput (%)	
2-1	R.PDSCH.5-1.4 FDD	10 / 15	64QAM, 0.43	Random 16QAM symbols	TDLA30-10	4x8, ULA Low	70	16.6 + TT

5.2.4.2 TDD

5.2.4.2.1 8Rx TDD FR1 PDSCH mapping Type A performance

5.2.4.2.1.0 Minimum conformance requirements for PDSCH Mapping Type A

The performance requirements are specified in Tables 5.2.4.2.1.0-3, 5.2.4.2.1.0-4, 5.2.4.2.1.0-5, 5.2.4.2.1.0-6 and 5.2.4.2.1.0-7, with the test parameters defined in Table 5.2.4.2.1.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2.4.2.1.0-1.

Table 5.2.4.2.1.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 2-1, 3-1, 4-1, 5-1

Table 5.2.4.2.1.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k ₀		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1 for rank ≤ 4 2 for rank > 4
Codebook configuration	CodebookType		type1-SinglePanel
	CodebookMode		1
	(CodebookConfig-N1,CodebookConfig-N2) (CodebookConfig-O1,CodebookConfig-O2)		(2,1) for 4Tx (4,1) for 8Tx (4,1)
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS		l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

Table 5.2.4.2.1.0-3: Minimum performance for Rank 2 with Baseline SU-MIMO 8Rx receiver

Test	Reference	Bandwidth	Modulation	TDD	Propagation	Correlation	Reference value
------	-----------	-----------	------------	-----	-------------	-------------	-----------------

num.	channel	(MHz) / Subcarrier spacing (kHz)	format and code rate	UL-DL pattern	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLC300-100	2x8, ULA Medium B	70	13.7

Table 5.2.4.2.1.0-4: Minimum performance for Rank 2 with Simplified SU-MIMO 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
2-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLC300-100	2x8, ULA Medium B	70	15.8

Table 5.2.4.2.1.0-5: Minimum performance for Rank 4 with Baseline SU-MIMO 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-3.7 TDD	40 / 30	64QAM, 0.43	FR1.30-1	TDLA30-10	4x8, ULA Low	70	12.9

Table 5.2.4.2.1.0-6: Minimum performance for Rank 4 with Simplified SU-MIMO 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.2-3.7 TDD	40 / 30	64QAM, 0.43	FR1.30-1	TDLA30-10	4x8, ULA Low	70	16.0

Table 5.2.4.2.1.0-7: Minimum performance for Rank 8

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.2-3.8 TDD	40 / 30	64QAM, 0.43	FR1.30-1	TDLA30-10	8x8, ULA Low	70	23.2

The normative reference for this requirement is TS 38.101-4 [5] clause 5.2.4.2.1.

5.2.4.2.1_1 8Rx TDD FR1 PDSCH mapping Type A performance - 2x8 MIMO with baseline receiver for both SA and NSA

Editor's Note: This test case is incomplete in following aspects:

- The connection diagram is TBD.
- Message content is FFS.

- MU and TT are FFS.

5.2.4.2.1_1.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers.

5.2.4.2.1_1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8 Rx antenna ports and supporting baseline 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8 Rx antenna ports and supporting baseline 8Rx receiver.

5.2.4.2.1_1.3 Test description

5.2.4.2.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure TBD for TE diagram and clause TBD for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.4.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or (EN-DC, DC bearer *MCG* and *SCG, Connected without release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.4.2.1_1.3.3.

5.2.4.2.1_1.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.2.1.0-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.4.2.1_1.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.4.2.1_1.3.3 Message contents

FFS

5.2.4.2.1_1.4 Test requirement

Table 5.2.4.2.1.0-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.2.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.2.1_1.4-1: Test Requirement for Rank 2

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLC300-100	2x8, ULA Medium B	70	13.7+TT

5.2.4.2.1_2 8Rx TDD FR1 PDSCH mapping Type A performance - 4x8 MIMO with baseline receiver for both SA and NSA

Editor's Note: This test case is incomplete in following aspects

- The connection diagram is TBD.
- Message content is FFS.
- MU and TT are FFS.

5.2.4.2.1_2.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers.

5.2.4.2.1_2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8 Rx antenna ports and supporting baseline 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8 Rx antenna ports and supporting baseline 8Rx receiver.

5.2.4.2.1_2.3 Test description

5.2.4.2.1_2.3.1 Initial conditions

Same as the Initial conditions given in clause 5.2.4.2.1_1.3.1 with following exceptions:

- Figure TBD is replaced by Figure TBD for TE diagram;
- Message contents are defined in clause 5.2.4.2.1_2.3.3 instead.

5.2.4.2.1_2.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.2.1.0-5. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.4.2.1_2.4-1 as appropriate.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.4.2.1_2.3.3 Message contents

FFS

5.2.4.2.1_2.4 Test requirement

Table 5.2.4.1.1.0-5 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.2.1_2.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.2.1_2.4-1: Test Requirement for Rank 4 Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
3-1	R.PDSCH.2-3.7 TDD	40 / 30	64QAM, 0.43	FR1.30-1	TDLA30-10	4x8, ULA Low	70	12.9 + TT

5.2.4.2.1_3 8Rx TDD FR1 PDSCH mapping Type A performance – 2x8 MIMO with simplified receiver for both SA and NSA

5.2.4.2.1_3.1 Test purpose

To verify the PDSCH mapping Type A performance under 8 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with simplified SU-MIMO 8Rx receiver configuration, for Rank 2 scenario.

5.2.4.2.1_3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8Rx antenna ports and supporting simplified 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8Rx antenna ports and supporting simplified 8Rx receiver.

5.2.4.2.1_3.3 Test description

5.2.4.2.1_3.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with max gap for Intra-band non-contiguous EN-DC, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.12 for TE diagram and clause A.3.2.6.3 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.4.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or (EN-DC, DC bearer *MCG* and *SCG, Connected without release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.4.2.1_3.3.3.

5.2.4.2.1_3.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.2.1_3.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.4.2.1_3.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.4.2.1_3.4-1 as appropriate.

5.2.4.2.1_3.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.4.2.1_3.3.3_1 Message exceptions for SA

Table 5.2.4.2.1_3.3.3_1-1: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5	$l_0 = 5$ for CSI-RS resource 1 and 3	
	9	$l_0 = 9$ for CSI-RS resource 2 and 4	
}			

5.2.4.2.1_3.3.3_2 Message exceptions for NSA

Same as 5.2.4.2.1_3.3.3_1.

5.2.4.2.1_3.4 Test requirement

Table 5.2.4.2.1.0-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A clause A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.2.1_3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.2.1_3.4-1: Test Requirements for Rank 2 with Simplified SU-MIMO 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum	SNR (dB)

		(kHz)					throughput (%)	
2-1	R.PDSCH.2-3.1 TDD	40 / 30	64QAM, 0.50	FR1.30-1	TDLC300-100	2x8, ULA Medium B	70	16.7

5.2.4.2.1_4 8Rx TDD FR1 PDSCH mapping Type A performance – 4x8 MIMO with simplified receiver for both SA and NSA

5.2.4.2.1_4.1 Test purpose

To verify the PDSCH mapping Type A performance under 8 receive antenna conditions for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput and as well verify the HARQ soft combining with simplified SU-MIMO 8Rx receiver configuration, for Rank 4 scenario.

5.2.4.2.1_4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8Rx antenna ports and supporting simplified 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8Rx antenna ports and supporting simplified 8Rx receiver.

5.2.4.2.1_4.3 Test description

5.2.4.2.1_4.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with max gap for Intra-band non-contiguous EN-DC, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.13 for TE diagram and clause A.3.2.6.3 for UE diagram.
2. The parameter settings for the cell are set up according to Tables 5.2-1 and 5.2.4.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or (EN-DC, DC bearer *MCG* and *SCG, Connected without release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.4.2.1_4.3.3.

5.2.4.2.1_4.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.2.1_4.4-1. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2.4.2.1_4.4-1 as appropriate.

3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.
4. Repeat steps from 1 to 3 for each subtest in Table 5.2.4.2.1_4.4-1 as appropriate.

5.2.4.2.1_4.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2.4.2.1_4.3.3_1 Message exceptions for SA

Same as 5.2.4.2.1_3.3.3_1.

5.2.4.2.1_4.3.3_2 Message exceptions for NSA

Same as 5.2.4.2.1_3.3.3_2.

5.2.4.2.1_4.4 Test requirement

Table 5.2.4.2.1.0-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A clause A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.2.1_4.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.2.1_4.4-1: Test Requirements for Rank 4 with Simplified SU-MIMO 8Rx receiver

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
4-1	R.PDSCH.2-3.7 TDD	40 / 30	64QAM, 0.43	FR1.30-1	TDLA30-10	4x8, ULA Low	70	17

5.2.4.2.1_5 8Rx TDD FR1 PDSCH mapping Type A performance - 8x8 MIMO with baseline receiver for both SA and NSA

Editor's Note: This test case is incomplete in following aspects:

- The connection diagram is TBD.
- Message content is FFS.
- MU and TT are FFS.

5.2.4.2.1_5.1 Test purpose

Verify the PDSCH mapping Type A normal performance under 8 receive antenna conditions and with different channel models, MCSs and number of MIMO layers.

5.2.4.2.1_5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 8 Rx antenna ports and supporting baseline 8Rx receiver.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8 Rx antenna ports and supporting baseline 8Rx receiver.

5.2.4.2.1_5.3 Test description

5.2.4.2.1_5.3.1 Initial conditions

Same as the Initial conditions given in clause 5.2.4.2.1_1.3.1 with following exceptions:

- Figure TBD is replaced by Figure TBD for TE diagram;
- Message contents are defined in clause 5.2.4.2.1_5.3.3 instead.

5.2.4.2.1_5.3.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.4.2.1.0-7. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.4.2.1_5.4-1 as appropriate.
3. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G clause G.1.5.

5.2.4.2.1_5.3.3 Message contents

FFS

5.2.4.2.1_5.4 Test requirement

Table 5.2.4.1.1.0-7 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.4.2.1_5.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.2.4.2.1_5.4-1: Test Requirement for Rank 8

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
5-1	R.PDSCH.2-3.8 TDD	40 / 30	64QAM, 0.43	FR1.30-1	TDLA30-10	8x8, ULA Low	70	23.2 + TT

5.2A PDSCH demodulation requirements for CA

The parameters specified in Table 5.2-1 for PDSCH single carrier tests are reused for PDSCH CA tests unless otherwise stated.

Table 5.2A-1: Common test parameters for CA

Parameter		Unit	Value
Duplex mode			FDD and TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		FDD: 12 TDD: Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
PRB bundling size			2

	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
	VRB-to-PRB mapping interleaver bundle size	N/A
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Maximum number of OFDM symbols for DL front loaded DMRS	1
Number of HARQ Processes		As defined in Table 5.2A-2
TDD UL-DL pattern		15kHz SCS: FR1.15-1 30kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information		As defined in Table 5.2A-3
PUCCH format for HARQ-ACK feedback		PUCCH format 1 for cases where the number of ACK/NACK to be transmitted on single PUCCH is 2 or less. PUCCH format 3 for cases where the number of ACK/NACK to be transmitted on single PUCCH is more than 2.

Table 5.2A-2: Test parameters for number of HARQ processes

HARQ process number		CCs with the same duplex mode & SCS with Pcell	CCs with different duplex mode / SCS with Pcell
FDD 15 kHz + TDD 30 kHz CA	FDD PCell	4	8
	TDD PCell	10	8
FDD 15 kHz + TDD 15 kHz CA	FDD PCell	4	4
	TDD PCell	8	8
TDD 15 kHz + TDD 30 kHz CA	15kHz PCell	8	12
	30kHz PCell	8	8
FDD 15 kHz + FDD 15 kHz CA	FDD PCell	4	N/A
TDD 30 kHz + TDD 30 kHz CA	TDD PCell	8	N/A

Table 5.2A-3: Test parameters for K1 values

The number of slots between PDSCH and corresponding HARQ-ACK information		CCs with the same duplex mode and SCS with Pcell	CCs with different duplex mode and/or SCS with Pcell
FDD 15 kHz + TDD 30 kHz CA	FDD PCell	{2}	{3}
	TDD PCell	{8,7,6,5,5,4,3,11}	{7,5,4,11,9}
FDD 15 kHz + TDD 15 kHz CA	FDD PCell	{2}	{2}
	TDD PCell	{4,3,2,6}	{4,3,2,6,5}
TDD 15 kHz + TDD 30 kHz CA	15kHz PCell	{4,3,2,6}	{4,4,3,3,2,2,6,6}
	30kHz PCell	{8,7,6,5,5,4,3,2}	{7,5,4,11}
FDD 15 kHz + FDD 15 kHz CA	FDD PCell	{2}	N/A
TDD 30 kHz + TDD 30 kHz CA	TDD PCell	{8,7,6,5,5,4,3,2}	N/A

5.2A.1 1RX requirements (Void)

5.2A.2 2RX requirements

5.2A.2.1 Requirements for 2RX normal PDSCH

5.2A.2.1.0 Minimum conformance requirements for 2RX normal PDSCH

For CA with different numbers of DL component carriers, the requirements are defined in Table 5.2A.2.1.0-4 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.2.1.0-1 to Table 5.2A.2.1.0-3, with the parameters in Table 5.2A-1 to Table 5.2A-3 and the downlink physical channel setup according to Annex C.2.1. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

Table 5.2A.2.1.0-1: Single carrier performance for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-9.1 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
10	R.PDSCH.1-2.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
15	R.PDSCH.1-9.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
20	R.PDSCH.1-9.3 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.8
25	R.PDSCH.1-9.4 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.0
30	R.PDSCH.1-9.5 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.8
40	R.PDSCH.1-10.1 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.0
50	R.PDSCH.1-10.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.4

Table 5.2A.2.1.0-2: Single carrier performance for TDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-2.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
10	R.PDSCH.1-2.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.8
15	R.PDSCH.1-2.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.8
20	R.PDSCH.1-2.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.9
25	R.PDSCH.1-2.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.0
30	R.PDSCH.1-3.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.9
40	R.PDSCH.1-3.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.2
50	R.PDSCH.1-3.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.5

Table 5.2A.2.1.0-3: Single carrier performance for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-13.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
10	R.PDSCH.2-13.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
15	R.PDSCH.2-13.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.6
20	R.PDSCH.2-13.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.7
25	R.PDSCH.2-13.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.7
30	R.PDSCH.2-14.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.7
40	R.PDSCH.2-2.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	13.9
50	R.PDSCH.2-14.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.1
60	R.PDSCH.2-14.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.0
80	R.PDSCH.2-14.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.5
90	R.PDSCH.2-14.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.3
100	R.PDSCH.2-15.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7

Table 5.2A.2.1.0-4: Minimum performance for multiple CA configurations

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.2.1.0-1
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.2.1.0-3
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.1.0-1 and Table 5.2A.2.1.0-3 per CC
4	FDD 15 kHz + TDD 15 kHz	As defined in Table 5.2A.2.1.0-1 and Table 5.2A.2.1.0-2 per CC
5	TDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.1.0-2 and Table 5.2A.2.1.0-3 per CC

Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.5.

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2A.2.1.

5.2A.2.1.1 2Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA

5.2A.2.1.1.1 Test Purpose

To verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions for multiple CA configurations and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput per CC.

5.2A.2.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL CA.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 2 NR CC.

5.2A.2.1.1.3 Test description

5.2A.2.1.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

Table 5.2A.2.1.1.3.1-1: Test point selection table

Test number	CA duplex mode	Configuration
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.2.1.0-1
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.2.1.0-3
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.1.0-1 and Table 5.2A.2.1.0-3 per CC
4 (note 2)	FDD 15 kHz + TDD 15 kHz	As defined in Table 5.2A.2.1.0-1 and Table 5.2A.2.1.0-2 per CC
5 (note 3)	TDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.1.0-2 and Table 5.2A.2.1.0-3 per CC
Note 1: For each test point, select any one of the CA configurations which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate based on the equation $DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$		
Note 2: Test point 4 can be skipped if test point 3 is verified.		
Note 3: Test point 5 can be skipped if test point 2 is verified.		

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and clause A.3.2.6 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG and SCG, Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.2.1.1.3.3.

5.2A.2.1.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCC as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.2.1.1.3.3.

3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.2.1.0-1 to 5.2A.2.1.0-4 as appropriate on both PCC and SCC. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2A.2.1.0-1 to 5.2A.2.1.0-4 as appropriate on both PCC and SCC.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.2.1.0-4 as appropriate.

5.2A.2.1.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.2.1.1.4 Test Requirement

Tables 5.2A.2.1.1.4-1, 5.2A.2.1.1.4-2 and 5.2A.2.1.1.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Table 5.2A.2.1.1.4-1, 5.2A.2.1.1.4-2 and 5.2A.2.1.1.4-3 for the specified SNR including test tolerances for the test points listed in Table 5.2A.2.1.1.3.1-1.

Table 5.2A.2.1.1.4-1: Test requirements for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-9.1 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
10	R.PDSCH.1-2.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
15	R.PDSCH.1-9.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
20	R.PDSCH.1-9.3 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
25	R.PDSCH.1-9.4 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
30	R.PDSCH.1-9.5 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
40	R.PDSCH.1-10.1 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
50	R.PDSCH.1-10.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.4

Table 5.2A.2.1.1.4-2: Test requirements for TDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-2.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6

10	R.PDSCH.1-2.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
15	R.PDSCH.1-2.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
20	R.PDSCH.1-2.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.9
25	R.PDSCH.1-2.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
30	R.PDSCH.1-3.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.9
40	R.PDSCH.1-3.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.2
50	R.PDSCH.1-3.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.5

Table 5.2A.2.1.1.4-3: Test requirements for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-13.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
10	R.PDSCH.2-13.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
15	R.PDSCH.2-13.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
20	R.PDSCH.2-13.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7
25	R.PDSCH.2-13.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7
30	R.PDSCH.2-14.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7
40	R.PDSCH.2-2.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.9
50	R.PDSCH.2-14.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.1
60	R.PDSCH.2-14.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
80	R.PDSCH.2-14.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.5
90	R.PDSCH.2-14.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.3
100	R.PDSCH.2-15.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.7

5.2A.2.1.2 2Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA

5.2A.2.1.2.1 Test Purpose

Same as 5.2A.2.1.1

5.2A.2.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 3DL CA.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 3 NR CC.

5.2A.2.1.2.3 Test description**5.2A.2.1.2.3.1** Initial conditions

Same as 5.2A.2.1.1.3.1

5.2A.2.1.2.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2 A.2.1.2.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.2.1.0-1 to 5.2A.2.1.0-4 as appropriate on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2A.2.1.0-1 to 5.2A.2.1.0-4 as appropriate on both PCC and SCCs.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.2.1.0-4 as appropriate.

5.2A.2.1.2.3.3 Message contents

Same as 5.2A.2.1.1.3.3.

5.2A.2.1.2.4 Test Requirement

Same as 5.2A.2.1.1.4 evaluated per component carrier.

5.2A.2.1.3 2Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA**5.2A.2.1.3.1** Test Purpose

Same as 5.2A.2.1.1

5.2A.2.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 4DL CA.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 4 NR CC.

5.2A.2.1.3.3 Test description**5.2A.2.1.3.3.1** Initial conditions

Same as 5.2A.2.1.1.3.1

5.2A.2.1.3.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2 A.2.1.3.3.3.

3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.2.1.0-1 to 5.2A.2.1.0-4 as appropriate on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2A.2.1.0-1 to 5.2A.2.1.0-4 as appropriate on both PCC and SCCs.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.2.1.0-4 as appropriate.

5.2A.2.1.3.3.3 Message contents

Same as 5.2A.2.1.1.3.3.

5.2A.2.1.3.4 Test Requirement

Same as 5.2A.2.1.1.4 evaluated per component carrier.

5.2A.2.1.4 2Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA

5.2A.2.1.4.1 Test Purpose

Same as 5.2A.2.1.1

5.2A.2.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 5DL CA.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 5 NR CC.

5.2A.2.1.4.3 Test description

5.2A.2.1.4.3.1 Initial conditions

Same as 5.2A.2.1.1.3.1

5.2A.2.1.4.3.2 Test procedure

Same as 5.2A.2.1.1.3.2

5.2A.2.1.4.3.3 Message contents

Same as 5.2A.2.1.1.3.3.

5.2A.2.1.4.4 Test Requirement

Same as 5.2A.2.1.1.4 evaluated per component carrier.

5.2A.2.1.5 2Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA

5.2A.2.1.5.1 Test Purpose

Same as 5.2A.2.1.1

5.2A.2.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 6DL CA.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 6 NR CC.

5.2A.2.1.5.3 Test description

5.2A.2.1.5.3.1 Initial conditions

Same as 5.2A.2.1.1.3.1

5.2A.2.1.5.3.2 Test procedure

Same as 5.2A.2.1.1.3.2

5.2A.2.1.5.3.3 Message contents

Same as 5.2A.2.1.1.3.3.

5.2A.2.1.5.4 Test Requirement

Same as 5.2A.2.1.1.4 evaluated per component carrier.

5.2A.2.2 Requirements for 2RX PDSCH carrier aggregation with power imbalance

5.2A.2.2.0 Minimum conformance requirements for 2RX PDSCH CA with power imbalance

The performance requirements are specified in Table 5.2A.2.2.0-3 and Table 5.2A.2.2.0-4, with the addition of test parameters in Table 5.2A.2.2.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2A.2.2.0-1.

Table 5.2A.2.2.0-1: Tests purpose

Purpose	Test index
Verify the ability of an intra-band adjacent carrier aggregation UE to demodulate the signal transmitted by the PCell or SCell in the presence of a stronger SCell or PCell signal on an adjacent frequency. Throughput is measured on the PCell or SCell only	

Table 5.2A.2.2.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD and TDD
Active DL BWP index		1
Propagation condition		Static propagation condition No external noise sources are applied
Antenna configuration		1x2
PDSCH configuration	Length (L)	FDD: 12TDD: 12 for DL slot, 4 for special slot
	PRB bundling size	WB
Modulation and code rate		64QAM, MCS 26
Number of HARQ Processes		FDD: 4 TDD: 8
Maximum number of HARQ transmission		1
Redundancy version coding sequence		{0}
TDD UL-DL pattern		30kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information		As defined in Table A.1.2-2 for FR1.30-1 1
PUCCH format for HARQ-ACK feedback		PUCCH format 1

Overhead for TBS determination		0
SSB transmission		Slot#0 with periodicity 20ms
RB assignment		Full applicable test bandwidth as defined in Table 5.3.5-1 of TS 38.101-1 [2]

Table 5.2A.2.2.0-3: Minimum performance for FDD CA with 15 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)	
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]	NA	-112	-106	85	NA

Table 5.2A.2.2.0-4: Minimum performance for TDD CA with 30 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)	
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]	NA	-112	-106	85	NA

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2A.2.2.

5.2A.2.2.1 2Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)

5.2A.2.2.1.1 Test Purpose

To verify the ability of an intra-band adjacent carrier aggregation UE to demodulate the signal transmitted by the PCell or SCell in the presence of a stronger SCell or PCell signal on an adjacent frequency. Throughput is measured on the PCell or SCell only.

5.2A.2.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL intra-band contiguous CA.

5.2A.2.2.1.3 Test description

5.2A.2.2.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Band selection: Supported intra-band contiguous CA configurations covering the lowest and highest operating bands,

Channel BW combination to be tested: Select bandwidth combination with same bandwidth in each carrier. If not supported, select bandwidth combination with smallest bandwidth difference between the two carriers and the carrier with smaller bandwidth will be used for the test.

CA capability to be tested: Either FDD or TDD intra-band contiguous CA

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2A for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.2.2.1.3.3.

5.2A.2.2.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCC as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.2.2.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the MCS according to Table 5.2A.2.2.0-2 on PCC. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix according to Tables 5.2A.2.2.0-2 to 5.2A.2.2.0-4 as appropriate on both PCC and SCC.
6. Measure the average throughput on PCC for at least 300 frames.. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail based on measured throughput > 85% of the maximum scheduled throughput..

5.2A.2.2.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.2.2.1.4 Test Requirement

Table 5.2A.2.2.0-2, Table 5.2A.2.2.1.4-1 and Table 5.2A.2.2.1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the MCS scheduled as specified in Table 5.2A.2.2.0-2 for the throughput test shall meet or exceed the specified value in Table 5.2A.2.2.1.4-1 or Table 5.2A.2.2.1.4-2 as applicable for the specified cell power levels.

Table 5.2A.2.2.1.4-1: Test Requirements for FDD CA with 15 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)	
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell
1	Selected Channel bandwidth as per		Derived as per section	NA	-112	-106	85	NA

	section 5.1.1.6	5.1.3.2 of TS 38.214 [12]					
--	-----------------	---------------------------	--	--	--	--	--

Table 5.2A.2.2.1.4-2: Test Requirements for TDD CA with 30 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)	
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]	NA	-112	-106	85	NA

5.2A.2.2.2 Void

5.2A.2.2.3 Void

5.2A.2.3 2Rx TDD FR1 PDSCH mapping type A performance of SCell on band with shared spectrum access

5.2A.2.3.0 Minimum conformance requirements

The performance requirements for SCell on band with shared spectrum access are specified in Table 5.2.2.2.15.0-3, with the additional test parameters for SCell in Table 5.2.2.2.15.0-2, and the test parameters for PCell are specified in Table 5.2A.2.3.0-2 and the downlink physical channel setup according to Annex C.2.1.

Table 5.2A.2.3.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance of SCell for UE supporting operations in shared spectrum access	1-1, 1-2, 1-3, 1-4

Table 5.2A.2.3.0-2: Test parameters for PCell

Parameter	Unit	Value
Duplex mode		TDD
Bandwidth	MHz	20
Subcarrier spacing	kHz	30
Active DL BWP index		1
TDD pattern		FR1.30-1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle size	N/A	
PDSCH DMRS configuration	DMRS Type	Type 1

	Dmrs-AdditionalPosition		pos1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

5.2A.2.3.1 Test purpose

To verify the PDSCH mapping Type A performance under 2 receive antenna conditions for SCell on a band with shared spectrum access and with different channel bandwidth, for a specific fading channel model for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

During the test, only the PDSCH performance of the SCell should be verified.

5.2A.2.3.2 Test applicability

This test applies to all types of UE release 16 and forward supporting NR/5GC and NR-U 2DLCA and supporting UL on shared channel access.

This test also applies to all types of UE release 16 and forward supporting EN-DC and NR-U 2DLCA and supporting UL on shared channel access.

5.2A.2.3.3 Test description

5.2A.2.3.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2A.2.3.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for NR/5GC with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.2.3.3.3.

5.2A.2.3.3.2 Test procedure

1. Configure SCell according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCell as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.2.1.1.3.3.

3. SS activates SCell by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.2.2.15.0-3 on SCell. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.2.2.15.0-3 on SCell.
6. Measure the average throughput on SCell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test point in Table 5.2.2.2.15.0-3 as appropriate.

5.2A.2.3.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.2.3.3.3_1 Message exceptions for NR/5GC

Same as in Clause 5.2.2.2.15_1.3.3_1

5.2A.2.3.3.3_2 Message exceptions for EN-DC

Same as in Clause 5.2.2.2.15_1.3.3_2

5.2A.2.3.3.4 Test requirement

Table 5.2.2.2.15.3.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.2.2.15.3.4-1 for the specified SNR including test tolerances for all throughput tests.

5.2A.2.4 Requirements for 2RX HST-SFN CA PDSCH

5.2A.2.4.0 Minimum conformance requirements for 2RX HST-SFN CA PDSCH

For HST-SFN CA with different numbers of DL component carriers, the requirements are defined in Table 5.2A.2.4.0-5 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.2.4.0-3 and Table 5.2A.2.4.0-4. Test parameters are specified in Table 5.2A.2.4.0-2, Table 5.2A-2, and Table 5.2A-3 with downlink physical channel setup according to Annex C.2.1. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

The test purpose is specified in Table 5.2A.2.4.0-1.

Table 5.2A.2.4.0-1: Test purpose

Purpose	Test index
Verify PDSCH performance under 2 receive antenna conditions in the HST-SFN scenario defined in B.3.2 with CA	1,2,3

Table 5.2A.2.4.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD and TDD
Active DL BWP index		1
PDSCH	Mapping type	Type A

configuration	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
	PDSCH DMRS configuration	DMRS Type	
Number of additional DMRS			2
Maximum number of OFDM symbols for DL front loaded DMRS			1
CSI-RS for tracking	CSI-RS periodicity	Slots	FDD: 10 for CSI-RS resource 1,2,3,4. TDD: 20 for CSI-RS resource 1,2,3,4.
	CSI-RS offset	Slots	1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4.
	Frequency Occupation		Start PRB = 0 Number of PRB = 52 for TDD with BW 20MHz and higher BW Number of PRB = 52 for FDD with BW 15MHz and higher BW Number of PRB = ceil(BWP size/4)*4 for other case
Number of HARQ Processes			As defined in Table 5.2A-2
TDD UL-DL pattern			15 kHz SCS: FR1.15-1 30 kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information			As defined in Table 5.2A-3
Number of PUCCH ResourceGroups			1
PUCCH format for HARQ-ACK feedback			PUCCH format 1 for cases with no more than 2 DL CCs PUCCH format 3 for cases with more than 2 DL CCs

Table 5.2A.2.4.0-3: Single carrier performance for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-13.1 FDD	16QAM, 0.48	HST-SFN	2x2	70	12.9
10	R.PDSCH.1-8.3 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.1
15	R.PDSCH.1-13.2 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.4
20	R.PDSCH.1-13.3 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.9
25	R.PDSCH.1-13.4 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.0
30	R.PDSCH.1-13.5 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.9
35	R.PDSCH.1-14.3 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.8
40	R.PDSCH.1-14.1 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.0
45	R.PDSCH.1-14.4 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.9
50	R.PDSCH.1-14.2 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.0

Table 5.2A.2.4.0-4: Single carrier performance for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-19.1 TDD	16QAM, 0.48	HST-SFN	2x2	70	13.4
10	R.PDSCH.2-19.2 TDD	16QAM, 0.48	HST-SFN	2x2	70	13.7
15	R.PDSCH.2-19.3 TDD	16QAM, 0.48	HST-SFN	2x2	70	13.8
20	R.PDSCH.2-19.4 TDD	16QAM, 0.48	HST-SFN	2x2	70	13.8
25	R.PDSCH.2-19.5 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.1
30	R.PDSCH.2-20.1 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.4
40	R.PDSCH.2-10.4 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.6
50	R.PDSCH.2-20.2 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.7
60	R.PDSCH.2-20.3 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.4
80	R.PDSCH.2-20.4 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.9
90	R.PDSCH.2-20.5 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.4
100	R.PDSCH.2-21.1 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.8

Table 5.2A.2.4.0-5: Minimum performance for multiple CA configurations

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.2.4.0-3
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.2.4.0-4
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.4.0-3 and Table 5.2A.2.4.0-4 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2A.2.4.

5.2A.2.4.1 2Rx PDSCH Demodulation Performance for HST-SFN CA

5.2A.2.4.1.1 Test Purpose

Verify PDSCH performance under 2 receive antenna conditions in the HST-SFN scenario defined in B.3.2 with multiple CA configurations.

5.2A.2.4.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward that supports enhanced demodulation processing for carrier aggregation for HST-SFN joint transmission scheme.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC that supports enhanced demodulation processing for carrier aggregation for HST-SFN joint transmission scheme.

5.2A.2.4.1.3 Test description

5.2A.2.4.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1

Table 5.2A.2.4.1.3.1-1: Test point selection table

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.2.4.0-3
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.2.4.0-4
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.4.0-3 and Table 5.2A.2.4.0-4 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7		

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.2.4.1.3.3.

5.2A.2.4.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCC as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.2.4.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [18], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[19], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.2.4.0-2 to 5.2A.2.4.0-5 as appropriate on both PCC and SCC. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to 5.2A.2.4.1.3.4-1 and 5.2A.2.4.1.3.4-2 as appropriate on both PCC and SCC.

6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.2.4.1.3.1-1 as appropriate.

5.2A.2.4.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2A.2.4.1.3.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	n2 is used	
}			
}			
}			

Table 5.2A.2.4.1.3.3-2: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	Not present		
}			

Table 5.2A.2.4.1.3.3-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	test 1-1	
	n8	test 1-2 test 1-3 (FDD and TDD)	
	n10	test 1-3 (TDD and FDD)	
}			

Table 5.2A.2.4.1.3.3-4: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots10	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	periodicity: 10 slots for resource 1,2,3,4. offset = 1 for CSI-RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	FDD/ SCS 15 kHz
slots20	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3	periodicity: 20 slots for resource 1,2,3,4. offset = 1 for CSI-	TDD/ SCS 30 kHz

	and #4	RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	
}			

Table 5.2A.2.4.1.3.3-5: CSI-FrequencyOccupation for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-11			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	52	TDD BW 20MHz and higher BW FDD BW 15MHz and higher BW	
	ceil(BWP size/4)*4	Other case	
}			

5.2A.2.4.1.3.4 Test Requirement

Tables 5.2A.2.4.1.3.4-1 and 5.2A.2.4.1.3.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Table 5.2A.2.4.1.3.4-1 and 5.2A.2.4.1.3.4-2 for the specified SNR including test tolerances for the test points listed in Table 5.2A.2.4.1.3.1-1.

Table 5.2A.2.4.1.3.4-1: Single carrier performance for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-13.1 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.5
10	R.PDSCH.1-8.3 FDD	16QAM, 0.48	HST-SFN	2x2	70	13.7
15	R.PDSCH.1-13.2 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.0
20	R.PDSCH.1-13.3 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.5
25	R.PDSCH.1-13.4 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.6
30	R.PDSCH.1-13.5 FDD	16QAM, 0.48	HST-SFN	2x2	70	4.51
35	R.PDSCH.1-14.3 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.4
40	R.PDSCH.1-14.1 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.6
45	R.PDSCH.1-14.4 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.5
50	R.PDSCH.1-14.2 FDD	16QAM, 0.48	HST-SFN	2x2	70	14.6

Table 5.2A.2.4.1.3.4-2: Single carrier performance for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum	SNR (dB)

					throughput (%)	
5	R.PDSCH.2-19.1 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.0
10	R.PDSCH.2-19.2 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.3
15	R.PDSCH.2-19.3 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.4
20	R.PDSCH.2-19.4 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.4
25	R.PDSCH.2-19.5 TDD	16QAM, 0.48	HST-SFN	2x2	70	14.7
30	R.PDSCH.2-20.1 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.0
40	R.PDSCH.2-10.4 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.2
50	R.PDSCH.2-20.2 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.3
60	R.PDSCH.2-20.3 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.0
80	R.PDSCH.2-20.4 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.5
90	R.PDSCH.2-20.5 TDD	16QAM, 0.48	HST-SFN	2x2	70	16.0
100	R.PDSCH.2-21.1 TDD	16QAM, 0.48	HST-SFN	2x2	70	15.4

5.2A.2.5 Requirements for 2RX HST-DPS CA PDSCH

5.2A.2.5.0 Minimum conformance requirements for 2RX HST-DPS CA PDSCH

For HST-DPS CA with different numbers of DL component carriers, the requirements are defined in Table 5.2A.2.5.0-7 and Table 5.2A.2.5.0-8 based on the single carrier requirements for different SCs and different bandwidth specified in Table 5.2A.2.5.0-3 ~ Table 5.2A.2.5.0-6, with the parameters in Table 5.2A.2.5.0-2, Table 5.2A-2 and Table 5.2A-3 and the downlink physical channel setup according to Annex C.2.1. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

The test purpose is specified in Table 5.2A.2.5.0-1.

Table 5.2A.2.5.0-1: Test purpose

Purpose	Test index
Verify UE performance in the HST-DPS scenario defined in B.3.3 with CA with 1 active PDSCH TCI states	1-1, 1-2, 1-3
Verify UE performance in the HST-DPS scenario defined in B.3.3 with CA with 2 active PDSCH TCI states	2-1, 2-2, 2-3

Table 5.2A.2.5.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD and TDD
Active DL BWP index			1
PDCCH configuration	TCI state		Note 1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		FDD: 12 TDD: Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2

	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
	TCI state		Note 1
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
		CSI-RS periodicity	Slots 15kHz SCS: 10 for CSI-RS resource 1,2,3,4. 30kHz SCS: 20 for CSI-RS resource 1,2,3,4
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4
		QCL info	TCI state #2
		Frequency Occupation	Start PRB 0 Number of PRB = $\min(52, \text{ceil}(\text{BWP size}/4)*4)$
	Resource set #2	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots 15kHz SCS: 10 for CSI-RS resource 5,6,7,8. 30kHz SCS: 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info	TCI state #3
		Frequency Occupation	Start PRB 0 Number of PRB = $\min(52, \text{ceil}(\text{BWP size}/4)*4)$
N/ZP CSI-RS for CSI acquisition	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$
		CSI-RS periodicity	Slots 15kHz SCS:20 30kHz SCS: 40
		CSI-RS offset	Slots 0
	Resource set #4	QCL info	TCI state #0
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 15kHz SCS:20 30kHz SCS: 40
		CSI-RS offset	Slots 0
TCI state #0	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration
		QCL Type	Type A
TCI state #1	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
TCI state #2	Type 1 QCL information	QCL Type	N/A
		SSB index	SSB #0
	Type 2 QCL information	QCL Type	Type C
TCI state #2	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
	Type 1 QCL information	SSB index	SSB #1
TCI state #3	Type 1 QCL information	QCL Type	Type C
		Type 2 QCL information	SSB index
	Type 2 QCL information	QCL Type	N/A
Number of HARQ Processes			As defined in Table 5.2A-2

TDD UL-DL pattern		15kHz SCS: FR1.15-1 30kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information		As defined in Table 5.2A-3
Number of PUCCH ResourceGroups		1
PUCCH format for HARQ-ACK feedback		PUCCH format 1 for cases with no more than 2 DL CCs PUCCH format 3 for cases with more than 2 DL CCs
<p>Note 1: SSB # ($k \bmod 2$), CSI-RS (for tracking) resource set # ($(k \bmod 2) + 1$) and CSI-RS (for CSI acquisition) resource set # ($(k \bmod 2) + 3$) are transmitted by k^{th} RRH. For Test 1-1, TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\text{mod}(i, 2n) = n$. PDCCH and PDSCH associated with TCI # ($k \bmod 2$) is transmitted by k^{th} RRH from slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstTRS}} + T_{\text{TRS proc}}, 0]$ <p>to slot# $(2k + 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}$, PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\text{mod}(i, 2n) = n$. PDCCH and PDSCH associated with TCI # ($k \bmod 2$) is transmitted by k^{th} RRH from slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}}, 0]$ <p>to slot# $(2k + 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}$</p> <p>Where $k=0, 1, 2, \dots$ is the RRH number, $n = 2520$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 2$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 3$ is the number of slots for MAC CE processing, $T_{\text{firstTRS}} = 6$ is the number of slots to first TRS transmission occasion after MAC CE command is decoded by the UE, $T_{\text{TRS proc}} = 2$ is the number of slots for TRS processing.</p>		

Table 5.2A.2.5.0-3: Single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.2
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
35	[R.PDSCH.1-16.3]	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
45	[R.PDSCH.1-16.4]	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	1	2x2	70	13.7

Table 5.2A.2.5.0-4: Single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.2
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	2	2x2	70	13.6
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	2	2x2	70	13.6
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	2	2x2	70	13.4
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	2	2x2	70	13.6
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	2	2x2	70	13.6
35	[R.PDSCH.1-16.3]	64QAM, 0.43	HST-DPS	2	2x2	70	13.4
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.6
45	[R.PDSCH.1-16.4]	64QAM, 0.43	HST-DPS	2	2x2	70	13.4
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	2	2x2	70	13.7

Table 5.2A.2.5.0-5: Single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.3
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	1	2x2	70	13.3
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	1	2x2	70	13.2
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	1	2x2	70	13.3
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	1	2x2	70	13.3
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	1	2x2	70	13.5
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	1	2x2	70	13.5
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	1	2x2	70	13.4
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	1	2x2	70	13.6
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.5

Table 5.2A.2.5.0-6: Single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.3
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	2	2x2	70	13.3
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	2	2x2	70	13.2
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	2	2x2	70	13.3
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	2	2x2	70	13.4
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.4
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	2	2x2	70	13.3
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	2	2x2	70	13.5
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	2	2x2	70	13.5
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	2	2x2	70	13.4
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	2	2x2	70	13.6
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.5

Table 5.2A.2.5.0-7: Minimum performance for HST-DPS CA configurations with 1 active PDSCH TCI states

Test number	CA duplex mode	Minimum performance requirements
1-1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.2.5.0-3
1-2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.2.5.0-5
1-3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.5.0-3 and Table 5.2A.2.5.0-5 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7.4.		

Table 5.2A.2.5.0-8: Minimum performance for HST-DPS CA configurations with 2 active PDSCH TCI states

Test number	CA duplex mode	Minimum performance requirements
2-1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.2.5.0-4
2-2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.2.5.0-6
2-3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.2.5.0-4 and Table 5.2A.2.5.0-6 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7.4.		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2A.2.5.

5.2A.2.5.1 2RX PDSCH Demodulation Performance for HST-DPS CA

5.2A.2.5.1.1 Test Purpose

To verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions in the HST-DPS scenario for multiple CA configurations and with different channel models, MCSs and SCS for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput per CC.

5.2A.2.5.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 2DL CA.

5.2A.2.5.1.3 Test description

5.2A.2.5.1.3.1 Initial conditions

Same initial conditions as specified in clause 5.2A.2.1.1.3.1 with the following exception

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1

Table 5.2A.2.5.1.3.1-1: Test point selection table

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.1.0-1
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-3
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-3 per CC
4 (note 2)	FDD 15 kHz + TDD 15 kHz	As defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-2 per CC
5 (note 3)	TDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-2 and Table 5.2A.3.1.0-3 per CC
Note 1:	For each test point, select any one of the CA configurations which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate based on the equation $DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$	
Note 2:	Test point 4 can be skipped if test point 3 is verified.	
Note 3:	Test point 5 can be skipped if test point 3 or 4 is verified.	

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.2.5.1.3.3.

5.2A.2.5.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.2.5.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [18], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[19], clause 9.3).

4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.2.5.0-2 as appropriate on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to 5.2A.2.5.1.3.4-1 to 5.2A.2.5.1.3.4-4 as appropriate on both PCC and SCCs.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.2.5.1.3.1-1 as appropriate.

5.2A.2.5.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2A.2.5.1.3.3-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	Not present		
}			

Table 5.2A.2.5.1.3.3-2: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8		
}			

Table 5.2A.2.5.1.3.3-3: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8		
qcl-InfoPeriodicCSI-RS	2 for CSI-RS resource #1, #2, #3, #4 3 for CSI-RS resource #5, #6, #7, #8	TCI-StateId for TCI- State #2 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI- State #3 for CSI-RS resource #5, #6, #7, #8	
}			

Table 5.2A.2.5.1.3.3-4: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8	l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4 l ₀ = 6 for CSI-RS resource 5 and 7 l ₀ = 10 for CSI-RS resource 6 and 8	

}		
---	--	--

Table 5.2A.2.5.1.3.3-5: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	SCS 15kHz
Slots20	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	periodicity: 20 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	SCS 30kHz
}			

Table 5.2A.2.5.1.3.3-6: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		Resource set #1
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource #1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource	

		#7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
}			

Table 5.2A.2.5.1.3.3-7: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8 for CSI-RS resource #9 9 for CSI-RS resource #10		
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #9 1 for CSI-RS resource #10	TCI-State #0 for CSI-RS resource #9 TCI-State #1 for CSI-RS resource #10	
}			

Table 5.2A.2.5.1.3.3-8: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #9 13 for CSI-RS resource #10	$l_0=12$ for CSI-RS resource #9 $l_0=13$ for CSI-RS resource #10	
}			

Table 5.2A.2.5.1.3.3-9: CSI-ResourcePeriodicityAndOffset for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	0	periodicity = 20slots. offset = 0 slots	SCS 15kHz
Slots40	0	periodicity = 40 slots. offset = 0 slots	SCS 30kHz
}			

Table 5.2A.2.5.1.3.3-10: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	2 for Resource set #3 3 for Resource set #4		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry		Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	

}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry		Resource set #4
NZP-CSI-RS-ResourceId[1]	9	entry 1 CSI-RS resource #10	
}			
}			

Table 5.2A.2.5.1.3.3-11: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3		
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1
	Not present		TCI state #2, TCI state #3
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
ssb	0	SSB #0	TCI state #2
	1	SSB #1	TCI state #3
}			
qcl-Type	typeA		TCI state #0, TCI state #1
	typeC		TCI state #2, TCI state #3
}			
}			
}			

5.2A.2.5.1.3.4 Test Requirement

Tables 5.2A.2.5.1.3.4-1, 5.2A.2.5.1.3.4-2 and 5.2A.2.5.1.3.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Table 5.2A.2.5.1.3.4-1, 5.2A.2.5.1.3.4-2 and 5.2A.2.5.1.3.4-3 for the specified SNR including test tolerances for the combination selected following the test rules outlined in 5.1.1.5.2-2.

Table 5.2A.2.5.1.3.4-1: Test requirements for Single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.8
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	1	2x2	70	14.2
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	1	2x2	70	14.2
20	R.PDSCH.1-	64QAM,	HST-DPS	1	2x2	70	14.0

	15.3	0.43					
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	1	2x2	70	14.2
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	1	2x2	70	14.2
35	[R.PDSCH.1-16.3]	64QAM, 0.43	HST-DPS	1	2x2	70	14.0
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	1	2x2	70	14.2
45	[R.PDSCH.1-16.4]	64QAM, 0.43	HST-DPS	1	2x2	70	14.0
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	1	2x2	70	14.3

Table 5.2A.2.5.1.3.4-2: Test requirements for Single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.8
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	2	2x2	70	14.2
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	2	2x2	70	14.2
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	2	2x2	70	14.0
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	2	2x2	70	14.2
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	2	2x2	70	14.2
35	[R.PDSCH.1-16.3]	64QAM, 0.43	HST-DPS	2	2x2	70	14.0
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	2	2x2	70	14.2
45	[R.PDSCH.1-16.4]	64QAM, 0.43	HST-DPS	2	2x2	70	14.0
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	2	2x2	70	14.3

Table 5.2A.2.5.1.3.4-3: Test requirements for Single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	1	2x2	70	13.9
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	1	2x2	70	13.9
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	1	2x2	70	13.8
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	1	2x2	70	13.9
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	1	2x2	70	14.0
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	1	2x2	70	14.0

40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	1	2x2	70	13.9
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	1	2x2	70	14.1
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	1	2x2	70	14.1
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	1	2x2	70	14.0
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	1	2x2	70	14.2
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	1	2x2	70	14.1

Table 5.2A.2.5.1.3.4-4: Test requirements for Single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	2	2x2	70	13.9
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	2	2x2	70	13.9
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	2	2x2	70	13.8
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	2	2x2	70	13.9
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	2	2x2	70	14.0
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	2	2x2	70	14.0
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	2	2x2	70	13.9
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	2	2x2	70	14.1
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	2	2x2	70	14.1
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	2	2x2	70	14.0
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	2	2x2	70	14.2
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	2	2x2	70	14.1

5.2A.3 4RX requirements

5.2A.3.1 Requirements for 4RX normal PDSCH

5.2A.3.1.0 Minimum conformance requirements for 4RX normal PDSCH

For CA with different numbers of DL component carriers, the requirements are defined in Table 5.2A.3.1.0-4 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.3.1.0-1 to Table 5.2A.3.1.0-3, with the parameters in Table 5.2A-1 to Table 5.2A-3 and the downlink physical channel setup according to Annex C.2.1. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

Table 5.2A.3.1.0-1: Single carrier performance for FDD 15 kHz SCS for CA configurations

Bandwidth	Reference	Modulation	Propagation	Correlation	Reference value
-----------	-----------	------------	-------------	-------------	-----------------

(MHz)	channel	format and code rate	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-9.1 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.5
10	R.PDSCH.1-2.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.5
15	R.PDSCH.1-9.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
20	R.PDSCH.1-9.3 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
25	R.PDSCH.1-9.4 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.7
30	R.PDSCH.1-9.5 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
40	R.PDSCH.1-10.1 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.7
50	R.PDSCH.1-10.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.9

Table 5.2A.3.1.0-2: Single carrier performance for TDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-2.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.5
10	R.PDSCH.1-2.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
15	R.PDSCH.1-2.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.7
20	R.PDSCH.1-2.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
25	R.PDSCH.1-2.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.8
30	R.PDSCH.1-3.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
40	R.PDSCH.1-3.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.8
50	R.PDSCH.1-3.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.0

Table 5.2A.3.1.0-3: Single carrier performance for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-13.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.5
10	R.PDSCH.2-13.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.5
15	R.PDSCH.2-13.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.5
20	R.PDSCH.2-13.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
25	R.PDSCH.2-13.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
30	R.PDSCH.2-14.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.6
40	R.PDSCH.2-2.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.7

50	R.PDSCH.2-14.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.9
60	R.PDSCH.2-14.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	8.8
80	R.PDSCH.2-14.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.1
90	R.PDSCH.2-14.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.0
100	R.PDSCH.2-15.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.3

Table 5.2A.3.1.0-4: Minimum performance for multiple CA configurations

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.1.0-1
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-3
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-3 per CC
4	FDD 15 kHz + TDD 15 kHz	As defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-2 per CC
5	TDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-2 and Table 5.2A.3.1.0-3 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.5.		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2A.3.1.

5.2A.3.1.1 4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA

5.2A.3.1.1.1 Test Purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions for multiple CA configurations and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput per CC.

5.2A.3.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 2DL CA and 4Rx antenna ports on each CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 2 NR CC and 4Rx antenna ports on each CC.

5.2A.3.1.1.3 Test description

5.2A.3.1.1.3.1 Initial conditions

Same initial conditions as specified in clause 5.2A.2.1.1.3.1 with the following exception

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1

Table 5.2A.3.1.1.3.1-1: Test point selection table

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.1.0-1
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-3
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-3 per CC
4 (note 2)	FDD 15 kHz + TDD 15 kHz	As defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-2 per CC

5 (note 3)	TDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.1.0-2 and Table 5.2A.3.1.0-3 per CC
Note 1:	For each test point, select any one of the CA configurations which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate based on the equation $DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$	
Note 2:	Test point 4 can be skipped if test point 3 is verified.	
Note 3:	Test point 5 can be skipped if test point 2 is verified.	

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.7 for TE diagram and clause A.3.2.6 for UE diagram.

5.2A.3.1.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2 A.3.1.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.3.1.0-1 to 5.2A.3.1.0-4 as appropriate on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2A.3.1.0-1 to 5.2A.3.1.0-4 as appropriate on both PCC and SCCs.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.3.1.0-4 as appropriate.

5.2A.3.1.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.3.1.1.4 Test Requirement

Tables 5.2A.3.1.1.4-1, 5.2A.3.1.1.4-2 and 5.2A.3.1.1.4-3 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Table 5.2A.3.1.1.4-1, 5.2A.3.1.1.4-2 and 5.2A.3.1.1.4-3 for the specified SNR including test tolerances for the combination selected following the test rules outlined in 5.1.1.5.2-2.

Table 5.2A.3.1.1.4-1: Test requirements for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-9.1 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
10	R.PDSCH.1-2.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
15	R.PDSCH.1-9.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
20	R.PDSCH.1-9.3 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
25	R.PDSCH.1-9.4 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6

30	R.PDSCH.1-9.5 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
40	R.PDSCH.1-10.1 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
50	R.PDSCH.1-10.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.8

Table 5.2A.3.1.1.4-2: Test requirements for TDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-2.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
10	R.PDSCH.1-2.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
15	R.PDSCH.1-2.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
20	R.PDSCH.1-2.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
25	R.PDSCH.1-2.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.7
30	R.PDSCH.1-3.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
40	R.PDSCH.1-3.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.7
50	R.PDSCH.1-3.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.9

Table 5.2A.3.1.1.4-3: Test requirements for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-13.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
10	R.PDSCH.2-13.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
15	R.PDSCH.2-13.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
20	R.PDSCH.2-13.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
25	R.PDSCH.2-13.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
30	R.PDSCH.2-14.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
40	R.PDSCH.2-2.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
50	R.PDSCH.2-14.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.8
60	R.PDSCH.2-14.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.7
80	R.PDSCH.2-14.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	10.0
90	R.PDSCH.2-14.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.9
100	R.PDSCH.2-15.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	10.2

5.2A.3.1.2 4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA

5.2A.3.1.2.1 Test Purpose

Same as 5.2A.3.1.1.1

5.2A.3.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 3DL CA and 4Rx antenna ports on each CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 3 NR CC and 4Rx antenna ports on each CC.

5.2A.3.1.2.3 Test description

5.2A.3.1.2.3.1 Initial conditions

Same as 5.2A.3.1.1.3.1

5.2A.3.1.2.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2 A.3.1.2.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.3.1.0-1 to 5.2A.3.1.0-4 as appropriate on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2A.3.1.0-1 to 5.2A.3.1.0-4 as appropriate on both PCC and SCCs.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.3.1.0-4 as appropriate.

5.2A.3.1.2.3.3 Message contents

Same as 5.2A.3.1.1.3.3

5.2A.3.1.2.4 Test Requirement

Same as 5.2A.3.1.1.4 evaluated per component carrier.

5.2A.3.1.3 4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA

5.2A.3.1.3.1 Test Purpose

Same as 5.2A.3.1.1.1

5.2A.3.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4DL CA and 4Rx antenna ports on each CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 4 NR CC and 4Rx antenna ports on each CC.

5.2A.3.1.3.3 Test description

5.2A.3.1.3.3.1 Initial conditions

Same as 5.2A.3.1.1.3.1

5.2A.3.1.3.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2 A.3.1.3.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.3.1.0-1 to 5.2A.3.1.0-4 as appropriate on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2A.3.1.0-1 to 5.2A.3.1.0-4 as appropriate on both PCC and SCCs.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.3.1.0-4 as appropriate.

5.2A.3.1.3.3.3 Message contents

Same as 5.2A.3.1.1.3.3

5.2A.3.1.3.4 Test Requirement

Same as 5.2A.3.1.1.3.4 evaluated per component carrier.

5.2A.3.1.4 4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA

5.2A.3.1.4.1 Test Purpose

Same as 5.2A.3.1.1.1

5.2A.3.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5DL CA and 4Rx antenna ports on each CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 5 NR CC and 4Rx antenna ports on each CC.

5.2A.3.1.4.3 Test description

5.2A.3.1.4.3.1 Initial conditions

Same as 5.2A.3.1.1.3.1

5.2A.3.1.4.3.2 Test procedure

Same as 5.2A.3.1.1.3.2

5.2A.3.1.4.3.3 Message contents

Same as 5.2A.3.1.1.3.3

5.2A.3.1.4.4 Test Requirement

Same as 5.2A.3.1.1.3.4 evaluated per component carrier.

5.2A.3.1.5 4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA

5.2A.3.1.5.1 Test Purpose

Same as 5.2A.3.1.1.1

5.2A.3.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 6DL CA and 4Rx antenna ports on each CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 6 NR CC and 4Rx antenna ports on each CC.

5.2A.3.1.5.3 Test description

5.2A.3.1.5.3.1 Initial conditions

Same as 5.2A.3.1.1.3.1

5.2A.3.1.5.3.2 Test procedure

Same as 5.2A.3.1.1.3.2

5.2A.3.1.5.3.3 Message contents

Same as 5.2A.3.1.1.3.3

5.2A.3.1.5.4 Test Requirement

Same as 5.2A.3.1.1.3.4 evaluated per component carrier.

5.2A.3.2 Requirements for 4RX PDSCH carrier aggregation with power imbalance

5.2A.3.2.0 Minimum requirements for carrier aggregation with power imbalance

The performance requirements are specified in Table 5.2A.3.2.0-3 and Table 5.2A.3.2.0-4, with the addition of test parameters in Table 5.2A.3.2.0-2 and the downlink physical channel setup according to Annex C.2.1.

The test purposes are specified in Table 5.2A.3.2.0-1.

Table 5.2A.3.2.0-1: Tests purpose

Purpose	Test index
Verify the ability of an intra-band adjacent carrier aggregation UE to demodulate the signal transmitted by the PCell or SCell in the presence of a stronger SCell or PCell signal on an adjacent frequency. Throughput is measured on the PCell or SCell only	

Table 5.2A.3.2.0-2: Test parameters

Parameter		Unit	Value
Duplex mode			FDD and TDD
Active DL BWP index			1
Propagation condition			Static propagation condition No external noise sources are applied
Antenna configuration			1x4
PDSCH configuration	Length (L)		FDD: 12TDD: 12 for DL slot, 4 for special slot
	PRB bundling size		WB
Modulation and code rate			64QAM, MCS 27
Number of HARQ Processes			FDD: 4 TDD: 8
Maximum number of HARQ transmission			1
Redundancy version coding sequence			{0}
TDD UL-DL pattern			30kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information			As defined in Table A.1.2-2 for FR1.30-1 1
PUCCH format for HARQ-ACK feedback			PUCCH format 1
Overhead for TBS determination			0
SSB transmission			Slot#0 with periodicity 20ms
RB assignment			Full applicable test bandwidth as defined in Table 5.3.5-1 of TS 38.101-1 [2]

Table 5.2A.3.2.0-3: Minimum performance for FDD CA with 15 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)	
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]	NA	-112	-106	85	NA

Table 5.2A.3.2.0-4: Minimum performance for TDD CA with 30 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)	
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]	NA	-112	-106	85	NA

The normative reference for this requirement is TS 38.101-4 [5], clause 5.2A.3.2.

5.2A.3.2.1 4Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)

5.2A.3.2.1.1 Test Purpose

To verify the ability of an intra-band adjacent carrier aggregation UE to demodulate the signal transmitted by the PCell or SCell in the presence of a stronger SCell or PCell signal on an adjacent frequency. Throughput is measured on the PCell or SCell only.

5.2A.3.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL intra-band contiguous CA and 4Rx antenna ports.

5.2A.3.2.1.3 Test description

5.2A.3.2.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 4.3.1.1.

Band selection: Supported intra-band contiguous CA configurations covering the lowest and highest operating bands,

Channel BW combination to be tested: Select bandwidth combination with same bandwidth in each carrier. If not supported, select bandwidth combination with smallest bandwidth difference between the two carriers and the carrier with smaller bandwidth will be used for the test.

CA capability to be tested: Either FDD or TDD intra-band contiguous CA

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2A for TE diagram and clause A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.3.2.1.3.3.

5.2A.3.2.1.3.2 Test procedure

Same test procedure as specified in clause 5.2A.2.2.1.3.2 with the following exception.

Instead of Table 5.2A.2.2.1.3.3 → 5.2A.3.2.1.3.3

Instead of Table 5.2A.2.2.0-2 → 5.2A.3.2.0-2

Instead of Table 5.2A.2.2.0-4 → 5.2A.3.2.0-4

5.2A.3.2.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.3.2.1.4 Test Requirement

Table 5.2A.3.2.0-2, Table 5.2A.3.2.1.4-1 and Table 5.2A.3.2.1.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the MCS scheduled as specified in Table 5.2A.3.2.0-2 for the throughput test shall meet or exceed the specified value in Table 5.2A.3.2.1.4-1 or Table 5.2A.3.2.1.4-2 as applicable for the specified cell power levels.

Table 5.2A.3.2.1.4-1: Test Requirements for FDD CA with 15 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)			
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell		
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]		NA		-112	-106	85	NA

Table 5.2A.3.2.1.4-2: Test Requirements for TDD CA with 30 kHz SCS

Test Number	Bandwidth (MHz)		Reference channel		Power at antenna port (dBm/Hz)		Reference value Fraction of Maximum Throughput (%)			
	PCell	SCell	PCell	SCell	\hat{E}_{s_PCell} for PCell	\hat{E}_{s_SCell} for SCell	PCell	SCell		
1	Selected Channel bandwidth as per section 5.1.1.6		Derived as per section 5.1.3.2 of TS 38.214 [12]		NA		-112	-106	85	NA

5.2A.3.3 4Rx TDD FR1 PDSCH mapping type A performance of SCell on band with shared spectrum access

5.2A.3.3.0 Minimum conformance requirements

The performance requirements for SCell on band with shared spectrum access are specified in Table 5.2.3.2.15.0-3, with the additional test parameters for SCell in Table 5.2.3.2.15.0-2, and the test parameters for PCell are specified in Table 5.2A.3.3.0-2 and the downlink physical channel setup according to Annex C.2.1.

Table 5.2A.3.3.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance of SCell for UE supporting operations in shared spectrum access	1-1, 1-2, 1-3, 1-4

Table 5.2A.3.3.0-2: Test parameters for PCell

Parameter	Unit	Value
Duplex mode		TDD
Bandwidth	MHz	20
Subcarrier spacing	kHz	30
Active DL BWP index		1
TDD pattern		FR1.30-1

PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Dmrs-AdditionalPosition		pos1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2

5.2A.3.3.1 Test purpose

To verify the PDSCH mapping Type A performance under 4 receive antenna conditions for SCell on a band with shared spectrum access and with different channel bandwidth, for a specific fading channel model for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput.

During the test, only the PDSCH performance of the SCell shall be verified.

5.2A.3.3.2 Test applicability

This test applies to all types of UE release 16 and forward supporting NR/5GC and NR-U 2DLCA and supporting UL on shared channel access.

This test also applies to all types of UE release 16 and forward supporting EN-DC and NR-U 2DLCA and supporting UL on shared channel access.

5.2A.3.3.3 Test description

5.2A.3.3.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1 and Table 5.2A.3.3.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for NR/5GC with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for EN-DC according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.3.3.3.3.

5.2A.3.3.3.2 Test procedure

1. Configure SCell according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCell as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.3.1.1.3.3.
3. SS activates SCell by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.2.3.2.15.0-3 on SCell. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 5.2.3.2.15.0-3 on SCell.
6. Measure the average throughput on SCell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test point in Table 5.2.3.2.15.0-3 as appropriate.

5.2A.3.3.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.3.3.3.3_1 Message exceptions for NR/5GC

Same as in Clause 5.2.2.2.15_1.3.3_1

5.2A.3.3.3.3_2 Message exceptions for EN-DC

Same as in Clause 5.2.2.2.15_1.3.3_2

5.2A.3.3.3.4 Test requirement

Table 5.2.3.2.15.3.4-1 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 for each throughput test shall meet or exceed the specified value in Table 5.2.3.2.15.3.4-1 for the specified SNR including test tolerances for all throughput tests.

5.2A.3.4 Requirements for 4RX HST-SFN CA PDSCH

5.2A.3.4.0 Minimum conformance requirements for 4RX HST-SFN CA PDSCH

For HST-SFN CA with different numbers of DL component carriers, the requirements are defined in Table 5.2A.3.4.0-5 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.3.4.0-3 and Table 5.2A.3.4.0-4, with the parameters in Table 5.2A.3.4.0-2, Table 5.2A-2, Table 5.2A-3, and the downlink physical channel setup according to Annex C.2.1. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

The test purpose is specified in Table 5.2A.3.4.0-1.

Table 5.2A.3.4.0-1: Test purpose

Purpose	Test index
Verify PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 with CA	1, 2, 3

Table 5.2A.3.4.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD and TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	12
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle size	N/A	
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	2
	Maximum number of OFDM symbols for DL front loaded DMRS	1
CSI-RS for tracking	CSI-RS periodicity	Slots FDD: 10 for CSI-RS resource 1,2,3,4. TDD: 20 for CSI-RS resource 1,2,3,4.
	CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4.
	Frequency Occupation	Start PRB = 0 Number of PRB = 52 for TDD with BW 20MHz and higher BW Number of PRB = 52 for FDD with BW 15MHz and higher BW Number of PRB = ceil(BWP size/4)*4 for other case
Number of HARQ Processes		As defined in Table 5.2A-2
TDD UL-DL pattern		15 kHz SCS: FR1.15-1 30 kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information		As defined in Table 5.2A-3
Number of PUCCH ResourceGroups		1
PUCCH format for HARQ-ACK feedback		PUCCH format 1 for cases with no more than 2 DL CCs PUCCH format 3 for cases with more than 2 DL CCs

Table 5.2A.3.4.0-3: Single carrier performance for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-13.1 FDD	16QAM, 0.48	HST-SFN	2x4	70	10.5
10	R.PDSCH.1-8.3 FDD	16QAM, 0.48	HST-SFN	2x4	70	10.7
15	R.PDSCH.1-	16QAM, 0.48	HST-SFN	2x4	70	11.1

	13.2 FDD					
20	R.PDSCH.1-13.3 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.5
25	R.PDSCH.1-13.4 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.6
30	R.PDSCH.1-13.5 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.8
35	R.PDSCH.1-14.3 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.7
40	R.PDSCH.1-14.1 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.9
45	R.PDSCH.1-14.4 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.7
50	R.PDSCH.1-14.2 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.9

Table 5.2A.3.4.0-4: Single carrier performance for TDD 30 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-19.1 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.0
10	R.PDSCH.2-19.2 TDD	16QAM, 0.48	HST-SFN	2x4	70	11.8
15	R.PDSCH.2-19.3 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.1
20	R.PDSCH.2-19.4 TDD	16QAM, 0.48	HST-SFN	2x4	70	11.8
25	R.PDSCH.2-19.5 TDD	16QAM, 0.48	HST-SFN	2x4	70	11.9
30	R.PDSCH.2-20.1 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.2
40	R.PDSCH.2-10.4 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.4
50	R.PDSCH.2-20.2 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.6
60	R.PDSCH.2-20.3 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.5
80	R.PDSCH.2-20.4 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.7
90	R.PDSCH.2-20.5 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.7
100	R.PDSCH.2-21.1 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.7

Table 5.2A.3.4.0-5: Minimum performance for multiple CA configurations

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.4.0-3
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.4.0-4
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.4.0-3 and Table 5.2A.3.4.0-4 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in Section 5.1.1.7.		

The normative reference for this requirement is TS38.101-4 [5], clause 5.2A.3.4.

5.2A.3.4.1 4RX PDSCH Demodulation Performance for HST-SFN CA

5.2A.3.4.1.1 Test Purpose

Verify PDSCH performance under 4 receive antenna conditions in the HST-SFN scenario defined in B.3.2 with CA.

5.2A.3.4.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward that supports enhanced demodulation processing for carrier aggregation for HST-SFN joint transmission scheme and 4Rx antenna ports.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC that supports enhanced demodulation processing for carrier aggregation for HST-SFN joint transmission scheme and 4Rx antenna ports.

5.2A.3.4.1.3 Test description

5.2A.3.4.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1

Table 5.2A.3.4.1.3.1-1: Test point selection table

Test number	CA duplex mode	Minimum performance requirements
1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.4.0-3
2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.4.0-4
3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.4.0-3 and Table 5.2A.3.4.0-4 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in Section 5.1.1.7.		

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.3.2.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.3.4.1.3.3.

5.2A.3.4.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.

2. The SS shall configure SCC as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.3.4.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [18], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[19], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.3.4.0-2 to 5.2A.3.4.0-5 as appropriate on both PCC and SCC. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to 5.2A.3.4.1.3.4-1 and 5.2A.3.4.1.3.4-2 as appropriate on both PCC and SCC.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.3.4.1.3.1-1 as appropriate.

5.2A.3.4.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2A.3.4.1.3.3-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	Not present		
}			

Table 5.2A.3.4.1.3.3-2: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n4	test 1-1	
	n8	test 1-2 test 1-3 (FDD and TDD)	
	n10	test 1-3 (TDD and FDD)	
}			

Table 5.2A.3.4.1.3.3-3: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots10	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	periodicity: 10 slots for resource 1,2,3,4. offset = 1 for CSI-RS resource 1 and 2 offset =2 for CSI-RS resource 3 and 4.	SCS 15 kHz
slots20	1 for CSI-RS resource #1 and #2 2 for CSI-RS resource #3 and #4	periodicity: 20 slots for resource 1,2,3,4. offset = 1 for CSI-RS resource 1 and 2	SCS 30 kHz

		offset =2 for CSI-RS resource 3 and 4.	
}			

Table 5.2A.3.4.1.3.3-4: CSI-FrequencyOccupation for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-11			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	52	TDD BW 20MHz and higher BW FDD BW 15MHz and higher BW	
	ceil(BWP size/4)*4	Other case	
}			

5.2A.3.4.1.3.4 Test Requirement

Tables 5.2A.3.4.1.3.4-1 and 5.2A.3.4.1.3.4-2 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Table 5.2A.3.4.1.3.4-1 and 5.2A.3.4.1.3.4-2 for the specified SNR including test tolerances for the test points listed in Table 5.2A.3.4.1.3.1-1.

Table 5.2A.3.4.1.3.4-1: Test requirements for single carrier performance for FDD 15 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-13.1 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.1
10	R.PDSCH.1-8.3 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.3
15	R.PDSCH.1-13.2 FDD	16QAM, 0.48	HST-SFN	2x4	70	11.7
20	R.PDSCH.1-13.3 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.1
25	R.PDSCH.1-13.4 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.2
30	R.PDSCH.1-13.5 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.4
35	R.PDSCH.1-14.3 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.3
40	R.PDSCH.1-14.1 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.5
45	R.PDSCH.1-14.4 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.3
50	R.PDSCH.1-14.2 FDD	16QAM, 0.48	HST-SFN	2x4	70	12.5

Table 5.2A.3.4.1.3.4-2: Test requirements for single carrier performance for TDD 30 kHz SCS for CA configurations

Bandwidth	Reference	Modulation	Propagation	Correlation	Reference value
-----------	-----------	------------	-------------	-------------	-----------------

(MHz)	channel	format and code rate	condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-19.1 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.6
10	R.PDSCH.2-19.2 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.4
15	R.PDSCH.2-19.3 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.7
20	R.PDSCH.2-19.4 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.4
25	R.PDSCH.2-19.5 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.5
30	R.PDSCH.2-20.1 TDD	16QAM, 0.48	HST-SFN	2x4	70	12.8
40	R.PDSCH.2-10.4 TDD	16QAM, 0.48	HST-SFN	2x4	70	13.0
50	R.PDSCH.2-20.2 TDD	16QAM, 0.48	HST-SFN	2x4	70	13.2
60	R.PDSCH.2-20.3 TDD	16QAM, 0.48	HST-SFN	2x4	70	13.1
80	R.PDSCH.2-20.4 TDD	16QAM, 0.48	HST-SFN	2x4	70	13.3
90	R.PDSCH.2-20.5 TDD	16QAM, 0.48	HST-SFN	2x4	70	13.3
100	R.PDSCH.2-21.1 TDD	16QAM, 0.48	HST-SFN	2x4	70	13.3

5.2A.3.5 Requirements for 4RX HST-DPS CA PDSCH

5.2A.3.5.0 Minimum conformance requirements for 4RX HST-DPS CA PDSCH

For HST-DPS CA with different numbers of DL component carriers, the requirements are defined in Table 5.2A.3.5.0-7 and Table 5.2A.3.5.0-8 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.3.5.0-3 to Table 5.2A.3.5.0-6, with the parameters in Table 5.2A.3.5.0-2, Table 5.2A-2 and Table 5.2A-3 and the downlink physical channel setup according to Annex C.2.1. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

The test purpose is specified in Table 5.2A.3.5.0-1.

Table 5.2A.3.5.0-1: Test purpose

Purpose	Test index
Verify PDSCH performance of UE under 4 receive antenna conditions in the HST-DPS scenario defined in B.3.3 with CA with 1 active TCI state	1-1, 1-2, 1-3
Verify PDSCH performance of UE under 4 receive antenna conditions in the HST-DPS scenario defined in B.3.3 with CA with 2 active TCI states	2-1, 2-2, 2-3

Table 5.2A.3.5.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		FDD and TDD
Active DL BWP index		1
PDCCH configuration	TCI state	Note 1
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol (S)	2
	Length (L)	FDD: 12 TDD: Specific to each Reference channel

	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
TCI state		Note 1		
PDSCH DMRS configuration	DMRS Type		Type 1	
	Number of additional DMRS		2	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
CSI-RS for tracking	Resource set #1	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4	
		CSI-RS periodicity	Slots 15kHz SCS: 10 for CSI-RS resource 1,2,3,4. 30kHz SCS: 20 for CSI-RS resource 1,2,3,4	
		CSI-RS offset	Slots 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4	
		QCL info	TCI state #2	
	Resource set #2	Frequency Occupation		Start PRB 0 Number of PRB = $\min(52, \text{ceil}(\text{BWP size}/4)*4)$
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots	15kHz SCS: 10 for CSI-RS resource 5,6,7,8. 30kHz SCS: 20 for CSI-RS resource 5,6,7,8.
		CSI-RS offset	Slots	1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8
		QCL info		TCI state #3
	Resource set #2	Frequency Occupation		Start PRB 0 Number of PRB = $\min(52, \text{ceil}(\text{BWP size}/4)*4)$
N/A				
N/A				
N/A				
N/A				
N/ZP CSI-RS for CSI acquisition	Resource set #3	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 12$	
		CSI-RS periodicity	Slots 15kHz SCS:20 30kHz SCS: 40	
		CSI-RS offset	Slots 0	
		QCL info	TCI state #0	
	Resource set #4	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$
		CSI-RS periodicity	Slots	15kHz SCS:20 30kHz SCS: 40
		CSI-RS offset	Slots	0
		QCL info		TCI state #1
TCI state #0	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	N/A	
		QCL Type	N/A	
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	N/A	
		QCL Type	N/A	
TCI state #2	Type 1 QCL information	SSB index	SSB #0	
		QCL Type	Type C	
	Type 2 QCL information	SSB index	N/A	
		QCL Type	N/A	
TCI state #3	Type 1 QCL information	SSB index	SSB #1	
		QCL Type	Type C	

	Type 2 QCL information	SSB index QCL Type	N/A N/A
Number of HARQ Processes			As defined in Table 5.2A-2
TDD UL-DL pattern			15kHz SCS: FR1.15-1 30kHz SCS: FR1.30-1
The number of slots between PDSCH and corresponding HARQ-ACK information			As defined in Table 5.2A-3
Number of PUCCH ResourceGroups			1
PUCCH format for HARQ-ACK feedback			PUCCH format 1 for cases with no more than 2 DL CCs PUCCH format 3 for cases with more than 2 DL CCs
<p>Note 1: SSB # $(k \bmod 2)$, CSI-RS (for tracking) resource set # $((k \bmod 2) + 1)$ and CSI-RS (for CSI acquisition) resource set # $((k \bmod 2) + 3)$ are transmitted by k^{th} RRH. For Test 1-1, TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\text{mod}(i, 2n) = n$. PDCCH and PDSCH associated with TCI # $(k \bmod 2)$ is transmitted by k^{th} RRH from slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstTRS}} + T_{\text{TRS proc}}, 0]$ <p>to slot#</p> $(2k + 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}$ <p>PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\text{mod}(i, 2n) = n$. PDCCH and PDSCH associated with TCI # $(k \bmod 2)$ is transmitted by k^{th} RRH from slot#</p> $\max[(2k - 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}}, 0]$ <p>to slot#</p> $(2k + 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}$ <p>Where $k=0, 1, 2, \dots$ is the RRH number, $n = 2520$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 2$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 3$ is the number of slots for MAC CE processing, $T_{\text{firstTRS}} = 6$ is the number of slots to first TRS transmission occasion after MAC CE command is decoded by the UE, $T_{\text{TRS proc}} = 2$ is the number of slots for TRS processing.</p>			

Table 5.2A.3.5.0-3: Single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI state

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	1	2x4	70	10.8
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	1	2x4	70	10.7
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	1	2x4	70	10.8
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	1	2x4	70	10.9
35	R.PDSCH.1-16.3	64QAM, 0.43	HST-DPS	1	2x4	70	10.6
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	1	2x4	70	10.7
45	R.PDSCH.1-16.4	64QAM, 0.43	HST-DPS	1	2x4	70	10.6
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	1	2x4	70	11.0

Table 5.2A.3.5.0-4: Single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	2	2x4	70	10.8
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	2	2x4	70	10.7
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	2	2x4	70	10.8
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	2	2x4	70	10.9
35	R.PDSCH.1-16.3	64QAM, 0.43	HST-DPS	2	2x4	70	10.6
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	2	2x4	70	10.7
45	R.PDSCH.1-16.4	64QAM, 0.43	HST-DPS	2	2x4	70	10.6
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	2	2x4	70	11.0

Table 5.2A.3.5.0-5 Single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI state

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	1	2x4	70	10.4
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	1	2x4	70	10.6
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	1	2x4	70	10.7
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	1	2x4	70	10.7
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	1	2x4	70	10.5
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	1	2x4	70	10.7
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	1	2x4	70	10.7

Table 5.2A.3.5.0-6 Single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	2	2x4	70	10.4
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	2	2x4	70	10.6
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	2	2x4	70	10.7
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	2	2x4	70	10.7
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	2	2x4	70	10.5
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	2	2x4	70	10.7
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	2	2x4	70	10.7

Table 5.2A.3.5.0-7: Minimum performance for multiple CA configurations for HST-DPS with 1 active TCI state

Test number	CA duplex mode	Minimum performance requirements
1-1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.5.0-3
1-2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-5
1-3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-3 and Table 5.2A.3.5.0-5 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7.		

Table 5.2A.3.5.0-8: Minimum performance for multiple CA configurations for HST-DPS with 2 active TCI states

Test number	CA duplex mode	Minimum performance requirements
2-1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.5.0-4
2-1	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-6
2-3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-4 and Table 5.2A.3.5.0-6 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7.		

The normative reference for this requirement is TS38.101-4 [5], clause 5.2A.3.5.

5.2A.3.5.1 4RX PDSCH Demodulation Performance for HST-DPS CA

5.2A.3.5.1.1 Test Purpose

To verify the PDSCH mapping Type A normal performance under 4 receive antenna conditions in the HST-DPS scenario for multiple CA configurations and with different channel models, MCSs and SCS for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput per CC.

5.2A.3.5.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL CA and 4Rx antenna ports.

5.2A.3.5.1.3 Test description

5.2A.3.5.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1.

Table 5.2A.3.5.1.3.1-1: Test point selection table for multiple CA configurations for HST-DPS with 1 active TCI state

Test number	CA duplex mode	Minimum performance requirements
1-1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.5.0-3
1-2	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-5
1-3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-3 and Table 5.2A.3.5.0-5 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7.		

Table 5.2A.3.5.1.3.1-2: Test point selection table for multiple CA configurations for HST-DPS with 2 active TCI states

Test number	CA duplex mode	Minimum performance requirements
2-1	FDD 15 kHz + FDD 15 kHz	As defined in Table 5.2A.3.5.0-4
2-1	TDD 30 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-6
2-3	FDD 15 kHz + TDD 30 kHz	As defined in Table 5.2A.3.5.0-4 and Table 5.2A.3.5.0-6 per CC
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 5.1.1.7.		

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and clause A.3.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.2-1, Table 5.2A-1 to Table 5.2A-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.3.3.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2A.3.5.1.3.3.

5.2A.3.5.1.3.2 Test procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCC as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 5.2A.3.5.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [18], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[19], clause 9.3).
4. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 5.2A.3.5.0-2 to 5.2A.3.5.0-8 as appropriate on both PCC and SCC. The SS sends downlink MAC padding bits on the DL RMC.
5. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 5.2A.3.5.1.3.4-1 to 5.2A.3.5.1.3.4-4 as appropriate on both PCC and SCC.
6. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL and decide pass or fail according to Table G.1.5-1 in Annex G.1.5.
7. Repeat steps from 1 to 6 for each test points in Table 5.2A.3.5.1.3.1-1 and Table 5.2A.3.5.1.3.1-2 as appropriate.

5.2A.3.5.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.2A.3.5.1.3.3-1: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	Not present		
}			

Table 5.2A.3.5.1.3.3-2: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	n8		
}			

Table 5.2A.3.5.1.3.3-3: NZP-CSI-RS-Resource for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	i-1 for CSI-RS resource #i, i=1,2,3,4,5,6,7,8		
qcl-InfoPeriodicCSI-RS	2 for CSI-RS resource #1, #2, #3, #4 3 for CSI-RS resource #5, #6, #7, #8	TCI-StateId for TCI-State #2 for CSI-RS resource #1, #2, #3, #4 TCI-StateId for TCI-State #3 for CSI-RS resource #5, #6, #7, #8	
}			

Table 5.2A.3.5.1.3.3-4: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9 with condition TRS			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	5 for CSI-RS resource #1 and #3 9 for CSI-RS resource #2 and #4 6 for CSI-RS resource #5 and #7 10 for CSI-RS resource #6 and #8	$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4 $l_0 = 6$ for CSI-RS resource 5 and 7 $l_0 = 10$ for CSI-RS resource 6 and 8	
}			

Table 5.2A.3.5.1.3.3-5: CSI-ResourcePeriodicityAndOffset for CSI Tracking

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	periodicity: 10 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	SCS 15kHz
Slots20	1 for CSI-RS resource #1, #2, #5, #6 2 for CSI-RS resource #3 #4, #7, #8	periodicity: 20 slots. offset: 1 for CSI-RS resource 1 and 2 2 for CSI-RS resource 3 and 4 1 for CSI-RS resource 5 and 6 2 for CSI-RS resource 7 and 8	SCS 30kHz
}			

Table 5.2A.3.5.1.3.3-6: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 for Resource set #1 1 for Resource set #2		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		Resource set #1
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource #1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource #2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource #3	

NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource #4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		Resource set #2
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource #5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource #6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource #7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource #8	
}			
}			

Table 5.2A.3.5.1.3.3-7: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8 for CSI-RS resource #9 9 for CSI-RS resource #10		
qcl-InfoPeriodicCSI-RS	0 for CSI-RS resource #9 1 for CSI-RS resource #10	TCI-State #0 for CSI-RS resource #9 TCI-State #1 for CSI-RS resource #10	
}			

Table 5.2A.3.5.1.3.3-8: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	12 for CSI-RS resource #9 13 for CSI-RS resource #10	l ₀ =12 for CSI-RS resource #9 l ₀ =13 for CSI-RS resource #10	
}			

Table 5.2A.3.5.1.3.3-9: CSI-ResourcePeriodicityAndOffset for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots20	0	periodicity = 20slots. offset = 0 slots	SCS 15kHz
Slots40	0	periodicity = 40 slots. offset = 0 slots	SCS 30kHz
}			

Table 5.2A.3.5.1.3.3-10: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	2 for Resource set #3 3 for Resource set #4		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry		Resource set #3
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource #9	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry		Resource set #4
NZP-CSI-RS-ResourceId[1]	9	entry 1 CSI-RS resource #10	
}			
}			

Table 5.2A.3.5.1.3.3-11: TCI-State

Derivation Path: TS 38.508-1 [6], Table 4.6.3-190			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0 for TCI state #0 1 for TCI state #1 2 for TCI state #2 3 for TCI state #3		
qcl-Type1 SEQUENCE {			
bwp-Id	BWP-Id of active BWP		TCI state #0, TCI state #1
	Not present		TCI state #2, TCI state #3
referenceSignal CHOICE {			
csi-rs	0	CSI-RS resource #1	TCI state #0
	4	CSI-RS resource #5	TCI state #1
ssb	0	SSB #0	TCI state #2
	1	SSB #1	TCI state #3
}			
qcl-Type	typeA		TCI state #0, TCI state #1
	typeC		TCI state #2, TCI state #3
}			
}			

5.2A.3.5.1.3.4 Test Requirement

Tables 5.2A.3.5.1.3.4-1 to 5.2A.3.5.1.3.4-4 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Tables 5.2A.3.5.1.3.4-1 to 5.2A.3.5.1.3.4-4 for the specified SNR including test tolerances for the test points listed in Table 5.2A.3.5.1.3.1-1 and Table 5.2A.3.5.1.3.1-2.

Table 5.2A.3.5.1.3.4-1: Test requirements for single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI state

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	1	2x4	70	11.4
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	1	2x4	70	11.3
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	1	2x4	70	11.4
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	1	2x4	70	11.5
35	R.PDSCH.1-16.3	64QAM, 0.43	HST-DPS	1	2x4	70	11.2
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	1	2x4	70	11.3
45	R.PDSCH.1-16.4	64QAM, 0.43	HST-DPS	1	2x4	70	11.2
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	1	2x4	70	11.6

Table 5.2A.3.5.1.3.4-2: Test requirements for single carrier performance for FDD 15 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-15.1	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
10	R.PDSCH.1-8.4 FDD	64QAM, 0.43	HST-DPS	2	2x4	70	11.4
15	R.PDSCH.1-15.2	64QAM, 0.43	HST-DPS	2	2x4	70	11.3
20	R.PDSCH.1-15.3	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
25	R.PDSCH.1-15.4	64QAM, 0.43	HST-DPS	2	2x4	70	11.4
30	R.PDSCH.1-15.5	64QAM, 0.43	HST-DPS	2	2x4	70	11.5
35	R.PDSCH.1-16.3	64QAM, 0.43	HST-DPS	2	2x4	70	11.2
40	R.PDSCH.1-16.1	64QAM, 0.43	HST-DPS	2	2x4	70	11.3
45	R.PDSCH.1-16.4	64QAM, 0.43	HST-DPS	2	2x4	70	11.2
50	R.PDSCH.1-16.2	64QAM, 0.43	HST-DPS	2	2x4	70	11.6

Table 5.2A.3.5.1.3.4-3: Test requirements for single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 1 active PDSCH TCI state

Bandwidth	Reference	Modulation	Propagation	Number of	Correlation	Reference value
-----------	-----------	------------	-------------	-----------	-------------	-----------------

(MHz)	channel	format and code rate	condition	active PDSCH TCI states	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	1	2x4	70	11.0
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	1	2x4	70	11.2
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	1	2x4	70	11.3
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	1	2x4	70	11.3
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	1	2x4	70	11.1
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	1	2x4	70	11.3
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	1	2x4	70	11.3

Table 5.2A.3.5.1.3.4-4: Test requirements for single carrier performance for TDD 30 kHz SCS for HST-DPS CA configurations with 2 active PDSCH TCI states

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
						Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-22.1	64QAM, 0.43	HST-DPS	2	2x4	70	11.0
10	R.PDSCH.2-22.2	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
15	R.PDSCH.2-22.3	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
20	R.PDSCH.2-22.4	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
25	R.PDSCH.2-22.5	64QAM, 0.43	HST-DPS	2	2x4	70	11.2
30	R.PDSCH.2-23.1	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
40	R.PDSCH.2-10.5 TDD	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
50	R.PDSCH.2-23.2	64QAM, 0.43	HST-DPS	2	2x4	70	11.3
60	R.PDSCH.2-23.3	64QAM, 0.43	HST-DPS	2	2x4	70	11.3
80	R.PDSCH.2-23.4	64QAM, 0.43	HST-DPS	2	2x4	70	11.1
90	R.PDSCH.2-23.5	64QAM, 0.43	HST-DPS	2	2x4	70	11.3
100	R.PDSCH.2-24.1	64QAM, 0.43	HST-DPS	2	2x4	70	11.3

5.2A.3A 2Rx-4RX requirements

5.2A.3A.1 Requirements for 2Rx-4RX normal PDSCH

5.2A.3A.1.0 Minimum conformance requirements for 2Rx-4RX normal PDSCH

For UE supporting a combination of 2Rx and 4Rx antenna port per component carrier,

The 2Rx requirements are defined in Table 5.2A.2.1.0-4 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.2.1.0-1 to Table 5.2A.2.1.0-3.

The 4Rx requirements are defined in Table 5.2A.3.1.0-4 based on the single carrier requirements for different SCSs and different bandwidth specified in Table 5.2A.3.1.0-1 to Table 5.2A.3.1.0-3.

Parameters are specified in Table 5.2A-1 to Table 5.2A-3 and the downlink physical channel setup according to Annex C.2.1.

5.2A.3A.1.1 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA

5.2A.3A.1.1.1 Test Purpose

To verify the PDSCH mapping Type A normal performance under combination of 2 and 4 receive antenna conditions for multiple CA configurations and with different channel models, MCSs and number of MIMO layers for a specified downlink Reference Measurement Channel (RMC) to achieve a certain throughput per CC.

5.2A.3A.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 2DL CA and 4Rx antenna ports on some of the CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 2 NR CC and 4Rx antenna ports on some of the CC.

5.2A.3A.1.1.3 Test description

5.2A.3A.1.1.3.1 Initial conditions

Same initial conditions as specified in clause 5.2A.2.1.1.3.1 with the following exception

Channel BW to be tested: largest aggregated bandwidth combination as per Table 5.1.1.5.2-2.

CA capability to be tested: As per table 5.1.1.5.2-1

Table 5.2A.3A.1.1.3.1-1: Test point selection table

Test number	CA duplex mode	Configuration
1	FDD 15 kHz + FDD 15 kHz	For 2Rx CC, As defined in Table 5.2A.2.1.0-1 For 4Rx CC, as defined in Table 5.2A.3.1.0-1
2	TDD 30 kHz + TDD 30 kHz	For 2Rx CC, As defined in Table 5.2A.2.1.0-3 For 4Rx CC, as defined in Table 5.2A.3.1.0-3
3	FDD 15 kHz + TDD 30 kHz	For 2Rx CC, As defined in Table 5.2A.2.1.0-1 and Table 5.2A.2.1.0-3 per CC For 4Rx CC, as defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-3 per CC
4 (note 2)	FDD 15 kHz + TDD 15 kHz	For 2Rx CC, As defined in Table 5.2A.2.1.0-1 and Table 5.2A.2.1.0-2 per CC For 4Rx CC, as defined in Table 5.2A.3.1.0-1 and Table 5.2A.3.1.0-2 per CC
5 (note 3)	TDD 15 kHz + TDD 30 kHz	For 2Rx CC, As defined in Table 5.2A.2.1.0-2 and Table 5.2A.2.1.0-3 per CC For 4Rx CC, as defined in Table 5.2A.3.1.0-2 and Table

		5.2A.3.1.0-3 per CC
Note 1:	For each test point, select any one of the CA configurations which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate based on the equation $DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$	
Note 2:	Test point 4 can be skipped if test point 3 is verified.	
Note 3:	Test point 5 can be skipped if test point 2 is verified.	

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 and A.3.1.7.7 for TE diagram for 2Rx and 4Rx CC respectively and clause A.3.2.6 for UE diagram

5.2A.3A.1.1.3.2 Test procedure

Same test procedure as specified in clause 5.2A.2.1.1.3.2 for 2Rx CC and with the following exception for 4Rx CC

Instead of Table 5.2A.2.1.0-1 → 5.2A.3.1.0-1 for 4Rx CC

Instead of Table 5.2A.2.1.0-4 → 5.2A.3.1.0-4 for 4Rx CC

Instead of Table 5.2A.2.1.1.3.3 → 5.2A.3.1.1.3.3 for 4Rx CC

5.2A.3A.1.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.2A.3A.1.1.4 Test Requirement

Tables 5.2A.3A.1.1.4-1, 5.2A.3A.1.1.4-2, 5.2A.3A.1.1.4-3, 5.2A.3A.1.1.4-4, 5.2A.3A.1.1.4-5, 5.2A.3A.1.1.4-6 define the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.1 and A.3.2.2 for each component carrier for throughput test point combination shall meet or exceed the specified value in Table 5.2A.3A.1.1.4-1, 5.2A.3A.1.1.4-2, 5.2A.3A.1.1.4-3, 5.2A.3A.1.1.4-4, 5.2A.3A.1.1.4-5, 5.2A.3A.1.1.4-6 for the specified SNR including test tolerances for the combination selected following the test rules outlined in 5.1.1.5.2-2.

Table 5.2A.3A.1.1.4-1: Test requirements for FDD 15 kHz SCS for CA configurations (2Rx CC)

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-9.1 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
10	R.PDSCH.1-2.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
15	R.PDSCH.1-9.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
20	R.PDSCH.1-9.3 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
25	R.PDSCH.1-9.4 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
30	R.PDSCH.1-9.5 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
40	R.PDSCH.1-10.1 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
50	R.PDSCH.1-10.2 FDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.4

Table 5.2A.3A.1.1.4-2: Test requirements for TDD 15 kHz SCS for CA configurations (2Rx CC)

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-2.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
10	R.PDSCH.1-2.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
15	R.PDSCH.1-2.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.8
20	R.PDSCH.1-2.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.9
25	R.PDSCH.1-2.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
30	R.PDSCH.1-3.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.9
40	R.PDSCH.1-3.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.2
50	R.PDSCH.1-3.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.5

Table 5.2A.3A.1.1.4-3: Test requirements for TDD 30 kHz SCS for CA configurations (2Rx CC)

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-13.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
10	R.PDSCH.2-13.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
15	R.PDSCH.2-13.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.6
20	R.PDSCH.2-13.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7
25	R.PDSCH.2-13.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7
30	R.PDSCH.2-14.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.7
40	R.PDSCH.2-2.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	14.9
50	R.PDSCH.2-14.2 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.1
60	R.PDSCH.2-14.3 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.0
80	R.PDSCH.2-14.4 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.5
90	R.PDSCH.2-14.5 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.3
100	R.PDSCH.2-15.1 TDD	16QAM, 0.48	TDLA30-10	2x2, ULA Low	70	15.7

Table 5.2A.3A.1.1.4-4: Test requirements for FDD 15 kHz SCS for CA configurations (4Rx CC)

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-9.1 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4 [

10	R.PDSCH.1-2.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
15	R.PDSCH.1-9.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
20	R.PDSCH.1-9.3 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
25	R.PDSCH.1-9.4 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
30	R.PDSCH.1-9.5 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
40	R.PDSCH.1-10.1 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
50	R.PDSCH.1-10.2 FDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.8

Table 5.2A.3A.1.1.4-5: Test requirements for TDD 15 kHz SCS for CA configurations (4Rx CC)

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.1-2.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
10	R.PDSCH.1-2.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
15	R.PDSCH.1-2.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
20	R.PDSCH.1-2.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
25	R.PDSCH.1-2.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.7
30	R.PDSCH.1-3.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
40	R.PDSCH.1-3.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.7
50	R.PDSCH.1-3.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.9

Table 5.2A.3A.1.1.4-6: Test requirements for TDD 30 kHz SCS for CA configurations (4Rx CC)

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
5	R.PDSCH.2-13.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
10	R.PDSCH.2-13.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
15	R.PDSCH.2-13.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.4
20	R.PDSCH.2-13.4 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
25	R.PDSCH.2-13.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
30	R.PDSCH.2-14.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.5
40	R.PDSCH.2-2.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.6
50	R.PDSCH.2-14.2 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.8
60	R.PDSCH.2-14.3 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.7
80	R.PDSCH.2-	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	10.0

	14.4 TDD					
90	R.PDSCH.2-14.5 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	9.9
100	R.PDSCH.2-15.1 TDD	16QAM, 0.48	TDLA30-10	2x4, ULA Low	70	10.2

5.2A.3A.1.2 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA

5.2A.3A.1.2.1 Test Purpose

Same as 5.2A.3A.1.1.1

5.2A.3A.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 3DL CA and 4Rx antenna ports on some of the CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 3 NR CC and 4Rx antenna ports on some of the CC.

5.2A.3A.1.2.3 Test description

5.2A.3A.1.2.3.1 Initial conditions

Same as 5.2A.3A.1.1.3.1

5.2A.3A.1.2.3.2 Test procedure

Same as 5.2A.3A.1.1.3.2

5.2A.3A.1.2.3.3 Message contents

Same as 5.2A.3A.1.1.3.3

5.2A.3A.1.2.4 Test Requirement

Same as 5.2A.3A.1.1.4 evaluated per component carrier.

5.2A.3A.1.3 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA

5.2A.3A.1.3.1 Test Purpose

Same as 5.2A.3A.1.1.1

5.2A.3A.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4DL CA and 4Rx antenna ports on some of the CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 4 NR CC and 4Rx antenna ports on some of the CC.

5.2A.3A.1.3.3 Test description

5.2A.3A.1.3.3.1 Initial conditions

Same as 5.2A.3A.1.1.3.1

5.2A.3A.1.3.3.2 Test procedure

Same as 5.2A.3A.1.1.3.2

5.2A.3A.1.3.3.3 Message contents

Same as 5.2A.3A.1.1.3.3

5.2A.3A.1.3.4 Test Requirement

Same as 5.2A.3A.1.1.4 evaluated per component carrier.

5.2A.3A.1.4 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA**5.2A.3A.1.4.1** Test Purpose

Same as 5.2A.3A.1.1.1

5.2A.3A.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5DL CA and 4Rx antenna ports on some of the CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 5 NR CC and 4Rx antenna ports on some of the CC.

5.2A.3A.1.4.3 Test description**5.2A.3A.1.4.3.1** Initial conditions

Same as 5.2A.3A.1.1.3.1

5.2A.3A.1.4.3.2 Test procedure

Same as 5.2A.3A.1.1.3.2

5.2A.3A.1.4.3.3 Message contents

Same as 5.2A.3A.1.1.3.3

5.2A.3A.1.4.4 Test Requirement

Same as 5.2A.3A.1.1.4 evaluated per component carrier.

5.2A.3A.1.5 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA**5.2A.3A.1.5.1** Test Purpose

Same as 5.2A.3A.1.1.1

5.2A.3A.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 6DL CA and 4Rx antenna ports on some of the CC.

This test also applies to all types of UE release 15 and forward supporting EN-DC with 6 NR CC and 4Rx antenna ports on some of the CC.

5.2A.3A.1.5.3 Test description

5.2A.3A.1.5.3.1 Initial conditions

Same as 5.2A.3A.1.1.3.1

5.2A.3A.1.5.3.2 Test procedure

Same as 5.2A.3A.1.1.3.2

5.2A.3A.1.5.3.3 Message contents

Same as 5.2A.3A.1.1.3.3

5.2A.3A.1.5.4 Test Requirement

Same as 5.2A.3A.1.1.4 evaluated per component carrier.

5.3 PDCCH demodulation requirements

The receiver characteristics of the PDCCH are determined by the probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg).

The parameters specified in Table 5.3-1 are valid for all PDCCH tests unless otherwise stated.

Table 5.3-1: Common test Parameters

Parameter		Unit	Value
Carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 1)		0
DL BWP configuration #1	Cyclic prefix		Normal
	RB offset	RBs	0
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		1
	SSB periodicity	ms	20
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Number of PDCCH candidates		1
	Frequency domain resource allocation for CORESET		Start from RB = 0 with contiguous RB allocation
	TCI state		TCI state #1
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)		0
	First OFDM symbol in the PRB used for CSI-RS (l_0)		CSI-RS resource 1: 4 CSI-RS resource 2: 8 CSI-RS resource 3: 4 CSI-RS resource 4: 8
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	CSI-RS periodicity	Slots	15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset	Slots	15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS:

			20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #0
		QCL Type	Type D
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type D
PDCCH & PDCCH DMRS Precoding configuration			For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of each applicable i1/i2 combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12]
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
Symbols for all unused REs			OP.1 FDD as defined in Annex A.5.1.1 OP.1 TDD as defined in Annex A.5.2.1
The number of slots between PDSCH and corresponding HARQ-ACK information			2 for FDD. For TDD, specific to each TDD UL-DL pattern and as defined in Annex A.1.2.
Note 1: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing.			

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.

5.3.1 1RX requirements

5.3.1.1 FDD

The parameters specified in Table 5.3.1.1-1 are valid for all FDD tests unless otherwise stated.

Table 5.3.1.1-1: Test Parameters

Parameter	Unit	
CCE to REG mapping type		nonInterleaved
REG bundle size		6
Shift index		0

5.3.1.1.1 1Rx FDD FR1 PDCCH performance for RedCap

5.3.1.1.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 1 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.1.1.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.1.1.1.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.3.1.1.1.3 Minimum conformance requirements

For the parameters specified in Table 5.3.1.1-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.1.1.1.3-1. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.1.1.1.3-1: Minimum performance for UE supporting full-duplex FDD or half-duplex FDD

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10	48	1	8	R.PDCCH. 1-1.3 FDD	TDLA30-10	2x1 Low	1	5.8

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.1.1.1.

5.3.1.1.1.4 Test description

5.3.1.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.0 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.1.1.1.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.1.1.1.4.3.

5.3.1.1.1.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.1.1.1.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.1.1-1, Table 5.3.1.1.1.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3r. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.1.1.1.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.1.1.1.5-1, pass the UE. Otherwise fail the UE.

5.3.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.3.1.1.1.4.3-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP	
}			

Table 5.3.1.1.1.4.3-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n1	AL8	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.1.1.1.4.3-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType0 resourceAllocationType1		RedCap eRedCap
}			

5.3.1.1.1.5 Test requirement

Table 5.3.1.1.1.5-1 defines the primary level settings.

For the parameters specified in Table 5.3.1.1-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.1.1.1.5-1.

Table 5.3.1.1.1.5-1: Test Requirement for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10	48	1	8	R.PDCCH. 1-1.3 FDD	TDLA30-10	2x1 Low	1	6.8

5.3.1.2 TDD

The parameters specified in Table 5.3.1.2-1 are valid for all TDD tests unless otherwise stated.

Table 5.3.1.2-1: Test Parameters

Parameter	Unit	
TDD UL-DL pattern		FR1.30-1
CCE to REG mapping type		interleaved
Interleaver size		3
REG bundle size		2
Shift Index		0

5.3.1.2.1 1Rx TDD FR1 PDCCH performance for RedCap

5.3.1.2.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 1 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.1.2.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.1.2.1.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.3.1.2.1.3 Minimum conformance requirements

For the parameters specified in Table 5.3.1.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.1.2.1.3-1. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.1.2.1.3-1: Minimum performance for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	20	48	1	4	R.PDCCH. 2-1.5 TDD	TDLC300-100	1x1	1	8.6

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.1.2.1.

5.3.1.2.1.4 Test description

5.3.1.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.0 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.1.2.1.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.1.2.1.4.3.

5.3.1.2.1.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.1.2.1.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.1.2-1, Table 5.3.1.2.1.3-1 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3 for RedCap and Table A.3.3.2.2-3a for eRedCap. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.1.2.1.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.1.2.1.5-1, pass the UE. Otherwise fail the UE.

5.3.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.3.1.2.1.4.3-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP	
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n2		
interleaverSize	n3		
shiftIndex	0		
}			
}			

}		
---	--	--

Table 5.3.1.2.1.4.3-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	AL4	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.1.2.1.4.3-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType0		RedCap
	resourceAllocationType1		eRedCap
}			

5.3.1.2.1.5 Test requirement

Table 5.3.1.2.1.5-1 defines the primary level settings.

For the parameters specified in Table 5.3.1.2-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.1.2.1.5-1.

Table 5.3.1.2.1.5-1: Test Requirement for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	20	48	1	4	R.PDCCH. 2-1.5 TDD	TDLC300-100	1x1	1	9.6

5.3.2 2RX requirements

5.3.2.1 FDD

The parameters specified in Table 5.3.2.1-1 are valid for all FDD tests unless otherwise stated.

Table 5.3.2.1-1: Test Parameters

Parameter	Unit	1 Tx Antenna	2 Tx Antenna
CCE to REG mapping type		nonInterleaved	
REG bundle size		6	
Shift index		0	

5.3.2.1.1 2Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA

5.3.2.1.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.1.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.3.2.1.1.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.1-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.1.1.3-1: Minimum performance for 1 Tx PDCCH with 15 kHz SCS

Test number	Bandwidth	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10 MHz	24	2	2	R.PDCCH.1-2.1 FDD	TDLA30-10	1x2 Low	1	8.1
1-2	10 MHz	24	2	2	R.PDCCH.1-2.3 FDD	TDLC300-100	1x2 Low	1	8.2
1-3	10 MHz	48	2	4	R.PDCCH.1-2.4 FDD	TDLA30-10	1x2 Low	1	5.5
1-4	10 MHz	48	1	4	R.PDCCH.1-1.1 FDD	TDLA30-10	1x2 Low	1	4.4
1-5	10 MHz	48	2	16	R.PDCCH.1-2.6 FDD	TDLA30-10	1x2 Low	1	-2.1

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.

5.3.2.1.1.4 Test description

5.3.2.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.2 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.2.1.1-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.1.4.3.

5.3.2.1.1.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.1.1.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.1-1, Table 5.3.2.1.1.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.1.1.4.4-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.1.1.4.4-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.2.1.1.4.4-1 as appropriate.

5.3.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.1.1.4.3.1 Message exceptions for SA

Table 5.3.2.1.1.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP Test 3, 4, 5	
	11110000 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 24 RBs of the BWP Test 1, 2	
Duration	2	SearchSpace duration of 2 symbols Test 1, 2, 3, 5	
	1	SearchSpace duration of 1 symbol Test 4	
}			

Table 5.3.2.1.1.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1	AL2	Test 1, Test 2
aggregationLevel4	n1	AL4	Test 3, Test 4

aggregationLevel8	n0		
aggregationLevel16	n1	AL16	Test 5
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1 for tests 2 and 3	Long_DCI
	formats0-0-And-1-0	DCI Format 1_0 for tests 1, 4, 5	
}			
}			
}			

Table 5.3.2.1.1.4.3.1-3: Void

Table 5.3.2.1.1.4.3.1-3A: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Test 1, Test 4, Test 5
}			

Table 5.3.2.1.1.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1, Test 1-4, Test 1-5
}			

5.3.2.1.1.4.3.2 Message exceptions for NSA

Same as 5.3.2.1.1.4.3.1

5.3.2.1.1.4.4 Test requirement

Table 5.3.2.1.1.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.1.4.4-1.

Table 5.3.2.1.1.4.4-1: Test Requirement for 1Tx PDCCH with 15 kHz SCS

Test number	Bandwidth	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10 MHz	24	2	2	R.PDCCH.1-2.1 FDD	TDLA30-10	1x2 Low	1	9.0
1-2	10 MHz	24	2	2	R.PDCCH.1-2.3 FDD	TDLC300-100	1x2 Low	1	9.1
1-3	10 MHz	48	2	4	R.PDCCH.1-2.4 FDD	TDLA30-10	1x2 Low	1	6.4
1-4	10 MHz	48	1	4	R.PDCCH.1-1.1 FDD	TDLA30-10	1x2 Low	1	5.3
1-5	10MHz	48	2	16	R.PDCCH.1-2.6 FDD	TDLA30-10	1x2 Low	1	-1.2

5.3.2.1.2 2Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA

5.3.2.1.2.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.1.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.3.2.1.2.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.1-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.1.2.3-1: Minimum performance for 2 Tx PDCCH with 15 kHz SCS

Test number	Bandwidth	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10 MHz	24	2	4	R.PDCCH. 1-2.2 FDD	TDLC300-100	2x2 Low	1	2.0
1-2	10 MHz	48	2	8	R.PDCCH. 1-2.5 FDD	TDLC300-100	2x2 Low	1	-1.3
1-3	10 MHz	48	1	8	R.PDCCH. 1-1.3 FDD	TDLA30-10	2x2 Low	1	-0.2

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.

5.3.2.1.2.4 Test description

5.3.2.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.1-1 and Table 5.3.2.1.2.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.1.2.4.3.

5.3.2.1.2.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.1.2.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.1-1, Table 5.3.2.1.2.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.1.2.4.4-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.1.2.4.4-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.2.1.2.4.4-1 as appropriate.

5.3.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.1.2.4.3.1 Message exceptions for SA

Table 5.3.2.1.2.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP Test 2, 3	
	11110000 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 24 RBs of the BWP Test 1	
Duration	2	SearchSpace duration of 2 symbols Test 1, 2	
	1	SearchSpace duration of 1 symbol Test 3	
}			

Table 5.3.2.1.2.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n1	AL4	Test 1

aggregationLevel8	n1	AL8	Test 2, 3
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1 for tests 2 and 3	Long_DCI
	formats0-0-And-1-0	DCI Format 1_0 for test 1	
}			
}			
}			
}			

Table 5.3.2.1.2.4.3.1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Test 1
}			

Table 5.3.2.1.2.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1
}			

5.3.2.1.2.4.3.2 Message exceptions for NSA

Same as 5.3.2.1.2.4.3.1

5.3.2.1.2.4.4 Test requirement

Table 5.3.2.1.2.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.2.4.4-1.

Table 5.3.2.1.2.4.4-1: Test Requirements for 2 Tx PDCCH with 15 kHz SCS

Test number	Bandwidth	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10 MHz	24	2	4	R.PDCCH. 1-2.2 FDD	TDLC300-100	2x2 Low	1	3.0
1-2	10 MHz	48	2	8	R.PDCCH. 1-2.5 FDD	TDLC300-100	2x2 Low	1	-0.3
1-3	10 MHz	48	1	8	R.PDCCH.1 -1.3 FDD	TDLA30-10	2x2 Low	1	0.8

5.3.2.1.3 2Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving

5.3.2.1.3.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.1.3.3-2. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.1.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Long DRX and DRX adaptation

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Long DRX and DRX adaptation.

5.3.2.1.3.3 Minimum conformance requirements

The parameters specified in Table 5.3.2.1.3.3-1 are valid for FDD test unless otherwise stated.

Table 5.3.2.1.3.3-1: Test Parameters

Parameter		Unit	1 Tx Antenna
CCE to REG mapping type			nonInterleaved
REG bundle size			6
Shift Index			0
DRX cycle		ms	10
ps-WakeUp-r16			absent
Wake-up indication bit in DCI format 2_6			1
PDCCH DCI format 2_6 configuration	PS-offset		$(T_{minimumTimeGap} + 1)/2^{\mu}/0.125$
	Number of PDCCH candidates		1
	Frequency domain resource allocation for CORESET		Start from RB = 0 with contiguous RB allocation
	TCI state		TCI state #1
PDCCH configuration	Slots for PDCCH monitoring		Each slot during DRX-on period
Note: $T_{minimumTimeGap}$ is signalled as a part of <i>drx-Adaptation-r16</i> UE capability.			

For the parameters specified in Table 5.3.2.1.3.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.3.3-2. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.1.3.3-2: Minimum performance for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x2 Low	1	5.5
			2	8	R.PDCCH. 1-2.7 FDD				

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.2.1.3.

5.3.2.1.3.4 Test description

5.3.2.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.1-1, Table 5.3.2.1.3.3-1 and Table 5.3.2.1.3.3-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.1.3.4.3.

5.3.2.1.3.4.2 Test procedure

1. SS transmits PDCCH with DCI format 2_6 as specified in PDCCH Reference Channel for PS_RNTI within DRX off state. The Wake-up indication bit in PDCCH is set to 1.
2. SS transmits PDSCH via PDCCH with DCI format 1_1 as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.1.3.3-2 in DRX on period. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.1-1, Table 5.3.2.1.3.3-1 and Table 5.3.2.1.3.3-2 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC. During the test the UE shall monitor the DCI format 2_6 PDCCH in DRX off state and decide whether to receive the following PDCCH in DRX on period.
3. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.1.3.4.4-1 as appropriate.
4. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.1.3.4.4-1, pass the UE. Otherwise fail the UE.
5. Repeat steps from 2 to 4 for each subtest in Table 5.3.2.1.3.3-2 as appropriate.

5.3.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.1.3.4.3.1 Message exceptions for SA

Table 5.3.2.1.3.4.3.1-1: DRX-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-56			
Information Element	Value/remark	Comment	Condition
DRX-Config ::= SEQUENCE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms5		
}			
drx-InactivityTimer	ms0		
drx-HARQ-RTT-TimerDL	0		
drx-HARQ-RTT-TimerUL	0		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms10	0		
}			
}			

Table 5.3.2.1.3.4.3.1-2: DCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-106			
Information Element	Value/remark	Comment	Condition
dcp-Config-r16 CHOICE {			
setup SEQUENCE {			
ps-Offset-r16	32		Scs-15kHz-r16 = sl3
sizeDCI-2-6-r16	2		
ps-PositionDCI-2-6-r16	0		
}			
}			

Table 5.3.2.1.3.4.3.1-3: PDCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	1 entry		
SEQUENCE(SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet ::= SEQUENCE {			
ControlResourceSet[1]	ControlResourceSet		
}			
searchSpacesToAddModList	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace ::=			
SEQUENCE {			
SearchSpace[1]	SearchSpace1		
SearchSpace[2]	SearchSpace2		
}			
searchSpacesToAddModListExt-r16	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace {			
searchSpaceExt-r16[1]	SearchSpaceExt1		
searchSpaceExt-r16[2]	SearchSpaceExt2		
}			
}			

Table 5.3.2.1.3.4.3.1-4: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition

ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP	
Duration	2	SearchSpace duration of 2 symbol	
cce-REG-MappingType CHOICE {			
nonInterleaved SEQUENCE			
}			
}			

Table 5.3.2.1.3.4.3.1-5: Void

Table 5.3.2.1.3.4.3.1-6: PDCCH Search Space1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	2	SearchSpaceId with condition USS	USS
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
s1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.2.1.3.4.3.1-6A: PDCCH Search Space2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	4		
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
s1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
}			
}			
}			

}		
---	--	--

Table 5.3.2.1.3.4.3.1-7: PDCCH Search Space Ext1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
}			

Table 5.3.2.1.3.4.3.1-7A: PDCCH Search Space Ext2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
searchSpaceType-r16 SEQUENCE {			
common SEQUENCE {			
dci-Format2-6-r16 SEQUENCE {	NULL		
}			
}			
}			

Table 5.3.2.1.3.4.3.1-8: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
TCI-State[1]	TCI-StateId 0		
qcl-type1 {		Type 1 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type C		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type D		
}			
TCI-State[2]	TCI-StateId 1	Type 1 QCL information	
qcl-type1 {			
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	CSI-RS # 0	
Qcl-Type	Type A		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	SSB # 0	
Qcl-Type	Type D		
}			

}			
}			

5.3.2.1.3.4.3.2 Message exceptions for NSA

Same as 5.3.2.1.3.4.3.1

5.3.2.1.3.4.4 Test requirement

Table 5.3.2.1.3.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.3.4.4-1.

Table 5.3.2.1.3.4.4-1: Test Requirements for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x2 Low	1	6.4
			2	8	R.PDCCH. 1-2.7 FDD				

5.3.2.1.4 2Rx FDD FR1 PDCCH performance for RedCap

5.3.2.1.4.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 1 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.1.4.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.1.4.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.3.2.1.4.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.1-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.4.3-1. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.2.1.4.3-1: Minimum performance for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x2 Low	1	5.5
1-2	10	48	1	8	R.PDCCH. 1-1.3 FDD	TDLA30-10	2x2 Low	1	-0.2

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.2.1.4.

5.3.2.1.4.4 Test description

5.3.2.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.2.1.4.5-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.1.4.4.3.

5.3.2.1.4.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.1.4.5-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.1-1, Table 5.3.2.1.4.5-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3 for RedCap and Table A.3.3.1.1-3a for eRedCap. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.1.4.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.1.4.5-1, pass the UE. Otherwise fail the UE.

5.3.2.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.3.2.1.4.4.3-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP	
Duration	2	SearchSpace duration of 2 symbols Test 1	
	1	SearchSpace duration of 1 symbol	

		Test 2	
}			

Table 5.3.2.1.4.4.3-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	AL4	Test 1
aggregationLevel8	n1	AL8	Test 2
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.2.1.4.4.3-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType0		RedCap
	resourceAllocationType1		eRedCap
}			

5.3.2.1.4.5 Test requirement

Table 5.3.2.1.4.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.4.5-1.

Table 5.3.2.1.4.5-1: Test Requirement for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x2 Low	1	6.4
1-2	10	48	1	8	R.PDCCH. 1-1.3 FDD	TDLA30-10	2x2 Low	1	0.8

5.3.2.1.5 2RX FDD Minimum requirements for PDCCH with intra-slot repetition

5.3.2.1.5.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.1.5.3-2. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.1.5.2 Test applicability

This test applies to all types of NR UE release 17 and forward.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC.

5.3.2.1.5.3 Minimum conformance requirements

Table 5.3.2.1.5.3-1: Test Parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	TCI State #2
	CORESETPoolIndex		0,1	
	Repetition transmission schemes		FDM	
	CCE to REG mapping type		nonInterleaved	
	REG bundle size		6	
	Time offset/Frequency offset of the second TxRP from the first TxRP		timing offset = -0.5us, frequency offset = 200Hz	
	Frequency domain resource allocation for CORSET		Frequency non-overlapping	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info			TCI state #0
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A

Note: PDCCH is transmitted from both TRxP #1 and TRxP #2

For the parameters specified in Table 5.3.2.1.5.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.5.3-2. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.1.5.3-2: Minimum performance for PDCCH with 15kHz SCS (Note 2)

Test num	Bandwidth(MHz)	CORESET RB	CORESET	Aggregation level	Reference	Propagation	Antenna configuration	Reference value
----------	----------------	------------	---------	-------------------	-----------	-------------	-----------------------	-----------------

		(Note 4)	duration		Channel	Condition (Note 1)	on and correlation Matrix	Pm - ds g (%)	SNR (dB) (Note 3)
1-1	10	24	2	2	R.PDCC H. 1-2.1 FDD	TDLA30-10	2x2, ULA Low	1	2.7
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped									

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.2.1.5.

5.3.2.1.5.4 Test description

5.3.2.1.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.1-1 and Table 5.3.2.1.5.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.1.5.4.3.

5.3.2.1.5.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.1.5.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.1-1, Table 5.3.2.1.5.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.1.5.3-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-

dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.1.5.4.4-1, pass the UE. Otherwise fail the UE.

5.3.2.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.1.5.4.3.1 Message exceptions for SA

Table 5.3.2.1.5.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11110000 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 24 RBs of the BWP	
Duration	1	SearchSpace duration of 1 symbol	
}			

Table 5.3.2.1.5.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n0		
}			

Table 5.3.2.1.5.4.3.1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		
}			

Table 5.3.2.1.5.4.3.1-4: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	10	For CSI-RS resources 1,2,5,6	
Slots40	11	For CSI-RS resources 3,4,7,8	
}			

5.3.2.1.5.4.3.2 Message exceptions for NSA

Same as 5.3.2.1.5.4.3.1

5.3.2.1.5.4.4 Test requirement

Table 5.3.2.1.5.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.5.4.4-1.

Table 5.3.2.1.5.4.4-1: Test Requirements for PDCCH with 15kHz SCS (Note 2)

Test num.	Bandwidth(MHz)	CORESET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB) (Note 3)
1-1	10	24	2	2	R.PDCCH H. 1-2.1 FDD	TDLA30-10	2x2, ULA Low	1	3.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped									

5.3.2.1.7 2RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth

5.3.2.1.7.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.1.7.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.1.7.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting less than 5 MHz bandwidth.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and supporting less than 5 MHz bandwidth.

5.3.2.1.7.3 Minimum conformance requirements

During the test the UE shall be configured to monitor CORESET#0 with *searchSpaceType=common* using *DCI Format 1-0*.

The parameters specified in Table 5.3.2.1.7.3-1 are valid for FDD test in this clause unless otherwise stated.

Table 5.3.2.1.7.3-1: Test Parameters

Parameter		Unit	1 Tx Antenna
Frequency domain resource allocation for PDCCH	Start	RB Index	8
	Length	RBs	7 (Note 1)
	Allocation		Contiguous
CCE to REG mapping type			nonInterleaved
REG bundle size			6
Shift Index			NA
Note 1: The last PDCCH RB that is out of CORESET0, i.e. RB#15, is punctured and not transmitted.			

For the parameters specified in Table 5.3.2.1.7.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.7.3-2. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.2.1.7.3-2: Minimum performance for 3 MHz CBW

Test number	Band width (MHz)	CORE SET0 RB	CORE SET0 duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	3	15	3	4	R.PDCCH. 1-3.1 FDD	TDLA30-10	1x2 Low	1	7.2

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.2.1.7.

5.3.2.1.7.4 Test description

5.3.2.1.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.2 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.2.1.7-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.1.4.3.

5.3.2.1.7.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.1.7.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.1-1, Table 5.3.2.1.7.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.1.7.4.4-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.1.7.4.4-1, pass the UE. Otherwise fail the UE.

4. Repeat steps from 1 to 3 for each subtest in Table 5.3.2.1.7.4.4-1 as appropriate.

5.3.2.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.1.7.4.3.1 Message exceptions for SA

Table 5.3.2.1.7.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	01100000 00000000 00000000 00000000 00000000 000000		
Duration	3	SearchSpace duration of 3 symbols	
}			

Table 5.3.2.1.7.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel4	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

5.3.2.1.7.4.3.2 Message exceptions for NSA

Same as 5.3.2.1.7.4.3.1

5.3.2.1.7.4.4 Test requirement

Table 5.3.2.1.7.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.1.7.4.4-1.

Table 5.3.2.1.7.4.4-1: Test Requirement for 3 MHz CBW

Test number	Band width (MHz)	CORE SET0 RB	CORES ET0 duratio n	Aggregati on level	Reference Channel	Propagatio n Condition	Antenna configurat ion and correlatio n Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	3	15	3	4	R.PDCCH. 1-3.1 FDD	TDLA30-10	1x2 Low	1	8.1

5.3.2.2 TDD

The parameters specified in Table 5.3.2.2-1 are valid for all TDD tests unless otherwise stated.

Table 5.3.2.2-1: Test Parameters

Parameter	Unit	1 Tx Antenna	2 Tx Antenna
TDD UL-DL pattern		FR1.30-1	
CCE to REG mapping type		Test 3: non-interleaved Other tests: interleaved	interleaved
Interleaver size		3	
REG bundle size		Test 3: 6 Other tests: 2	Test 1 in Table 5.3.2.2.2.3-1: 6 Other tests: 2
Shift Index		0	

5.3.2.2.1 2Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA

5.3.2.2.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.2.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.3.2.2.1.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.2.1.3-1: Minimum performance for PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	40	102	1	2	R.PDCCH. 2-1.1 TDD	TDLA30-10	1x2 Low	1	7.0
1-2	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x2 Low	1	3.0
1-3	40	48	2	16	R.PDCCH. 2-2.1 TDD	TDLC300-100	1x2 Low	1	-3.8

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.2.2.

5.3.2.2.1.4 Test description

5.3.2.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.2.1.4.3.

5.3.2.2.1.4.2 Test procedure

1. SS transmits PDSCH via PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.2.1.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.1.3-1 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.2.1.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.2.1.5-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.2.2.1.5-1 as appropriate.

5.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.3.2.2.1.4.3.1 Message exceptions for SA

Table 5.3.2.2.1.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP Test 3	
	11111111 11111111 10000000 00000000 00000000 000000	CORESET to use the least significant 102 RBs of the BWP Test 1, 2	
Duration	2	SearchSpace duration of 2 symbols Test 3	

	1	SearchSpace duration of 1 symbol Test 1, 2	
cce-REG-MappingType CHOICE { Interleaved SEQUENCE {	Null		Test 1, Test 2
reg-BundleSize	n2		1 Tx
interleaverSize	n3		TDD
}			
nonInterleaved	null		Test 3
}			
}			

Table 5.3.2.2.1.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE { nrofCandidates SEQUENCE {			
aggregationLevel2	n1	AL2	Test 1
aggregationLevel4	n1	AL4	Test 2
aggregationLevel16	n1	AL16	Test 3
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dc Formats	formats0-1-And-1-1	DCI Format 1_1 for test 2	Long_DCI
	formats0-0-And-1-0	DCI Format 1_0 for tests 1 and 3	
}			
}			
}			

Table 5.3.2.2.1.4.3.1-3: Void

Table 5.3.2.2.1.4.3.1-3A: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Test 1, Test 3
}			

Table 5.3.2.2.1.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1, Test 1-3
}			

5.3.2.2.1.4.3.2 Message exceptions for NSA

Same as 5.3.2.2.1.4.3.1.

5.3.2.2.1.5 Test requirement

Table 5.3.2.2.1.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.1.5-1.

Table 5.3.2.2.1.5-1: Test Requirement for 1Tx PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	40	102	1	2	R.PDCCH. 2-1.1 TDD	TDLA30-10	1x2 Low	1	7.9
1-2	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x2 Low	1	3.9
1-3	40	48	2	16	R.PDCCH. 2-2.1 TDD	TDLC300-100	1x2 Low	1	-2.9

5.3.2.2.2 2Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA

5.3.2.2.2.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.2.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

5.3.2.2.2.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.2.2.3-1: Minimum performance for PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	40	90	1	8	R.PDCCH. 2-1.3 TDD	TDLC300-100	2x2 Low	1	-1.2

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.2.2.

5.3.2.2.2.4 Test description

5.3.2.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.2.4.3.

5.3.2.2.4.2 Test procedure

1. SS transmits PDSCH via PDCCH with DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.3.2.2.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.3-1 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.2.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.2.5-1, pass the UE. Otherwise fail the UE.

5.3.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.2.4.3.1 Message exceptions for SA

Table 5.3.2.2.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 11111110 00000000 00000000 00000000 000000	CORESET to use the least significant 90 RBs of the BWP Test 1	
Duration	1	SearchSpace duration of 1 symbols Test 1	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		

reg-BundleSize	n6		2 Tx
interleaverSize	n3		TDD
}			
}			
}			

Table 5.3.2.2.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n1	AL8	Test 1
}			
}			

Table 5.3.2.2.4.3.1-3: Void

5.3.2.2.4.3.2 Message exceptions for NSA

Same as 5.3.2.2.4.3.1.

5.3.2.2.5 Test requirement

Table 5.3.2.2.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.5-1.

Table 5.3.2.2.5-1: Test Requirement for 2Tx PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	40	90	1	8	R.PDCCH. 2-1.3 TDD	TDLC300-100	2x2 Low	1	-0.2

5.3.2.2.3 2Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving

5.3.2.2.3.1 Test Purpose

This test verifies the demodulation performance of *DCI format 2_6* PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.2.3.3-2 after receipt wake-up indication in the *DCI format 2_6* PDCCH in DRX off state. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Long DRX Cycle and DRX adaptation.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Long DRX Cycle and DRX adaptation.

5.3.2.2.3.3 Minimum conformance requirements

During the test the UE shall monitor the *DCI format 2_6* PDCCH in DRX off state and decide whether to receive the following PDCCH in DRX on period.

The parameters specified in Table 5.3.2.2.3.3-1 are valid for all TDD tests for power saving unless otherwise stated.

Table 5.3.2.2.3.3-1: Test Parameters

Parameter		Unit	1 Tx Antenna
TDD UL-DL pattern			FR1.30-1
CCE to REG mapping type			interleaved
Interleaver size			3
REG bundle size			2
Shift Index			0
DRX cycle		ms	10
ps-WakeUp-r16			absent
Wake-up indication bit in DCI format 2_6			1
PDCCH DCI format 2_6 configuration	PS-offset		$(T_{\text{minimumTimeGap}}+1)/2^{\mu}/0.125$
	Number of PDCCH candidates		1
	Frequency domain resource allocation for CORESET		Start from RB = 0 with contiguous RB allocation
	TCI state		TCI state #1
PDCCH configuration	Slots for PDCCH monitoring		Each slot during DRX-on period
Note: $T_{\text{minimumTimeGap}}$ is signalled as a part of <i>drx-Adaptation-r16</i> UE capability.			

For the parameters specified in Table 5.3.2.2.3.3-1, the average probability of a missed downlink scheduling grant ($P_{\text{m-dsg}}$) observed on PDCCH during DRX on shall be below the specified value in Table 5.3.2.2.3.3-2. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.2.2.3.3-2: Minimum performance for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								$P_{\text{m-dsg}}$ (%)	SNR (dB)
1-1	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x2 Low	1	3.0
				8	R.PDCCH. 2-1.4 TDD				

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.2.2.

5.3.2.2.3.4 Test description

5.3.2.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of DRX, DCP, PDSCH and PDCCH before measurement are specified in 5.3.2.2.3.4.3.1 and Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxW_{gap} for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.3.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.2.3.4.3.

5.3.2.2.3.4.2 Test procedure

1. SS transmits PDCCH with DCI format2_6 as specified in PDCCH Reference Channel for PS_RNTI within DRX off state. The Wake-up indication bit in PDCCH is set to 1.
2. SS transmits PDSCH via PDCCH with DCI format1_1 as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.2.3.3-2 in DRX on period. The details of PDCCH are specified in Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.3.3-2 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.2.3.5-1 as appropriate.
4. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.2.3.5-1, pass the UE. Otherwise fail the UE.
5. Repeat steps from 2 to 4 for each subtest in Table 5.3.2.2.3.3-2 as appropriate.

5.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.3.2.2.3.4.3.1 Message exceptions for SA

Table 5.3.2.2.3.4.3.1-1: DRX-Config

Derivation Path: TS 38.508-1 [6],Table 4.6.3-56			
Information Element	Value/remark	Comment	Condition
DRX-Config ::= SEQUENCE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms5		
}			
drx-InactivityTimer	ms0		
drx-HARQ-RTT-TimerDL	0		
drx-HARQ-RTT-TimerUL	0		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms10	0		
}			
}			

Table 5.3.2.2.3.4.3.1-2: DCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-106			
Information Element	Value/remark	Comment	Condition
dcP-Config-r16 CHOICE {			
setup SEQUENCE {			
ps-Offset-r16	28		Scs-30kHz-r16 = sl6
sizeDCI-2-6-r16	2		
ps-PositionDCI-2-6-r16	0		
}			
}			

Table 5.3.2.2.3.4.3.1-3: PDCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	1 entry		
SEQUENCE(SIZE (1..3)) OF ControlResourceSet ::= SEQUENCE {			
ControlResourceSet[1]	ControlResourceSet		
}			
searchSpacesToAddModList	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace ::= SEQUENCE {			
SearchSpace[1]	SearchSpace1		
SearchSpace[2]	SearchSpace2		
}			
searchSpacesToAddModListExt-r16	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace {			
searchSpaceExt-r16[1]	SearchSpaceExt1		
searchSpaceExt-r16[2]	SearchSpaceExt2		
}			
}			

Table 5.3.2.2.3.4.3.1-4: PDCCH-ControlResourceSet1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
frequencyDomainResources	11111111 11111111 10000000 00000000 00000000 000000	CORESET to use the least significant 102 RBs of the BWP	
Duration	1	SearchSpace duration of 1 symbol	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {			
reg-BundleSize	n2		1 Tx
interleaverSize	n3		TDD
}			
}			
}			

Table 5.3.2.2.3.4.3.1-5: Void

Table 5.3.2.2.3.4.3.1-6: PDCCH Search Space1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	2	SearchSpaceId with condition USS	USS
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.2.2.3.4.3.1-6A: PDCCH Search Space2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	4		
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
}			
}			
}			

Table 5.3.2.2.3.4.3.1-7: PDCCH Search Space Ext1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
}			

Table 5.3.2.2.3.4.3.1-7A: PDCCH Search Space Ext2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		

searchSpaceType-r16 SEQUENCE {			
common SEQUENCE {			
dci-Format2-6-r16 SEQUENCE {	NULL		
}			
}			
}			
}			

Table 5.3.2.2.3.4.3.1-8: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
TCI-State[1]	TCI-StateId 0		
qcl-type1 {		Type 1 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type C		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type D		
}			
TCI-State[2]	TCI-StateId 1	Type 1 QCL information	
qcl-type1 {			
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	CSI-RS # 0	
Qcl-Type	Type A		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	SSB # 0	
Qcl-Type	Type D		
}			
}			
}			

5.3.2.2.3.4.3.2 Message exceptions for NSA

Same as 5.3.2.2.3.4.3.1.

5.3.2.2.3.5 Test requirement

Table 5.3.2.2.3.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.3.5-1.

Table 5.3.2.2.3.5-1: Test Requirements for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation	Reference value	
								Pm-dsg (%)	SNR (dB)

							n Matrix		
1-1	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300- 100	1x2 Low	1	3.9
				8	R.PDCCH. 2-1.4 TDD				

5.3.2.2.4 2Rx TDD FR1 PDCCH performance for RedCap

5.3.2.2.4.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 1 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.2.4.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.2.4.2 Test applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.3.2.2.4.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.4.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.2.4.3-1: Minimum performance for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	20	48	1	4	R.PDCCH. 2-1.5 TDD	TDLC300- 100	1x2 Low	1	3.6
1-2	20	48	1	8	R.PDCCH. 2-1.6 TDD	TDLC300- 100	2x2 Low	1	0.0

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.2.2.4.

5.3.2.2.4.4 Test description

5.3.2.2.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.1 for TE diagram and clause A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.2.2.4.5-1 and as appropriate.

3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.2.4.4.3

5.3.2.2.4.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.2.2.4.5-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.1.1-1, Table 5.3.2.2.4.5-1 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3 for RedCap and Table A.3.3.2.2-3a for eRedCap. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.2.4.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.2.4.5-1, pass the UE. Otherwise fail the UE.

5.3.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 5.3.2.2.4.4.3-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP	
Duration	1	SearchSpace duration of 1 symbol	
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n2		1 Tx, 2 Tx
interleaverSize	n3		TDD
shiftIndex	0		
}			
}			
}			

Table 5.3.2.2.4.4.3-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	AL4	Test 1
aggregationLevel8	n1	AL8	Test 2
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.2.2.4.3-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType0		RedCap
	resourceAllocationType1		eRedCap
}			

5.3.2.2.4.5 Test requirement

Table 5.3.2.2.4.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.4.5-1.

Table 5.3.2.2.4.5-1: Test Requirement for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	20	48	1	4	R.PDCCH. 2-1.5 TDD	TDLC300-100	1x2 Low	1	4.4
1-2	20	48	1	8	R.PDCCH. 2-1.6 TDD	TDLC300-100	2x2 Low	1	0.9

5.3.2.2.5 2RX TDD Minimum requirements for PDCCH with intra-slot repetition

5.3.2.2.5.1 Test Purpose

This test verifies the demodulation performance of PDCCH 2RX TDD Minimum requirements for PDCCH with intra-slot repetition under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.2.2.5.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.2.2.5.2 Test applicability

This test applies to all types of NR UE release 17 and forward.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC.

5.3.2.2.5.3 Minimum conformance requirements

For the parameters specified in Table 5.3.2.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.5.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.2.2.5.3-1: Tests parameters

Parameter	Unit	Value	
		TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB		TRxP #1	
PDCCH configuration	TCI state	TCI State #1	TCI State #2
	CORESETPoolIndex	0,1	
	Repetition transmission schemes	FDM	
	CCE to REG mapping type	nonInterleaved	

		REG bundle size		6	
		Time offset/Frequency offset of the second TRxP from the first TRxP		timing offset = -0.25us, frequency offset = 300Hz	
		Frequency domain resource allocation for CORESET		Frequency non-overlapping	
CSI-RS for tracking		First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
		First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
		Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
		CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
		Density		3	
		CSI-RS periodicity	Slots	40	
		CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
		QCL info			TCI state #0
TCI State #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type		Type A	N/A
	Type 2 QCL information	CSI-RS resource		N/A	N/A
		QCL Type		N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type A
	Type 2 QCL information	CSI-RS resource		N/A	N/A
		QCL Type		N/A	N/A

Note: PDCCH is transmitted from both TRxP #1 and TRxP #2

Table 5.3.2.2.5.3-2: Minimum performance for PDCCH with 30kHz SCS (Note 2)

Test num	Bandwidth (MHz)	CORESET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB) (Note 3)
1-1	40	48	2	2	R.PDCCH. 2-2.2 TDD	TDLA30-10	2x2, ULA Low	1	3.5

Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent.
 Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2.
 Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2
 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.2.2.

5.3.2.2.5.4 Test description

5.3.2.2.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.5.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer MCG and SCG, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.2.2.5.4.3.

5.3.2.2.5.4.2 Test procedure

1. SS transmits PDSCH via PDCCH with DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 5.3.2.2.5.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.2.2-1 and Table 5.3.2.2.5.3-1 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.2.2.5.3-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.2.2.5.5-1, pass the UE. Otherwise fail the UE.

5.3.2.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.2.2.5.4.3.1 Message exceptions for SA

Table 5.3.2.2.5.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE { frequencyDomainResources	11111111 11111110 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP	
Duration	1	SearchSpace duration of 1 symbol	
cce-REG-MappingType CHOICE { Interleaved SEQUENCE {	Null		
reg-BundleSize	n2		2 Tx
interleaverSize	n3		TDD

}			
}			
}			

Table 5.3.2.2.5.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n1	AL2	
}			
}			

Table 5.3.2.2.5.4.3.1-3: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	10	For CSI-RS resources 1,2,5,6	
Slots40	11	For CSI-RS resources 3,4,7,8	
}			

5.3.2.2.5.4.3.2 Message exceptions for NSA

Same as 5.3.2.2.5.4.3.1.

5.3.2.2.5.4.4 Test requirement

Table 5.3.2.2.5.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.2.2.5.4.4-1.

Table 5.3.2.2.5.4.4-1: Minimum performance for PDCCH with 30kHz SCS (Note 2)

Test num.	Bandwidth h(MHz)	CORE SET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB) (Note 3)
1-1	40	48	2	2	R.PDCCH. 2-2.2 TDD	TDLA30-10	2x2, ULA Low	1	4.4
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped									

5.3.3 4RX requirements

5.3.3.1 FDD

The parameters specified in Table 5.3.3.1-1 are valid for all FDD tests unless otherwise stated.

Table 5.3.3.1-1: Test Parameters

Parameter	Unit	1 Tx Antenna	2 Tx Antenna
CCE to REG mapping type		nonInterleaved	
REG bundle size		6	
Shift index		0	

5.3.3.1.1 4Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA

5.3.3.1.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.1.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.3.3.1.1.3 Minimum conformance requirements

For the parameters specified in Table 5.3.3.1-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.1.1.3-1: Minimum performance for PDCCH with 15 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	10	24	2	2	R.PDCCH. 1-2.1 FDD	TDLA30-10	1x4 Low	1	2.2
2	10	24	2	2	R.PDCCH. 1-2.3 FDD	TDLC300-100	1x4 Low	1	2.7
3	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x4 Low	1	0.2
4	10	48	1	4	R.PDCCH. 1-1.1 FDD	TDLA30-10	1x4 Low	1	-0.4
5	10	48	2	16	R.PDCCH. 1-2.6 FDD	TDLA30-10	1x4 Medium A	1	-3.2

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.3.1.

5.3.3.1.1.4 Test description

5.3.3.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.1-1 and Table 5.3.3.1.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.1.1.4.3.

5.3.3.1.1.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.1.1.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.3.1-1 and Table 5.3.3.1.1.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.1.1.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.1.1.5-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.3.1.1.5-1 as appropriate.

5.3.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.1.1.4.3.1 Message exceptions for SA

Table 5.3.3.1.1.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE { frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP Test 3, 4, 5	
	11110000 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 24 RBs of the BWP Test 1, 2	
Duration	2	SearchSpace duration of 2 symbols Test 1, 2, 3, 5	
	1	SearchSpace duration of 1	

		symbol Test 4	
}			

Table 5.3.3.1.1.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n1	AL2	Test 1, Test 2
aggregationLevel4	n1	AL4	Test 3, Test 4
aggregationLevel16	n1	AL16	Test 5
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1 for tests 2 and 3	Long_DCI
	formats0-0-And-1-0	DCI Format 1_0 for tests 1, 4, 5	
}			
}			
}			

Table 5.3.3.1.1.4.3.1-3: Void

Table 5.3.3.1.1.4.3.1-3A: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Test 1, Test 4, Test 5
}			

Table 5.3.3.1.1.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1, Test 4, Test 5
}			

5.3.3.1.1.4.3.2 Message exceptions for NSA

Same as 5.3.3.1.1.4.3.1.

5.3.3.1.1.5 Test requirement

Table 5.3.3.1.1.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.1.5-1.

Table 5.3.3.1.1.5-1: Test Requirement for 1Tx PDCCH with 15 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	10	24	2	2	R.PDCCH. 1-2.1 FDD	TDLA30-10	1x4 Low	1	3.1
2	10	24	2	2	R.PDCCH. 1-2.3 FDD	TDLC300-100	1x4 Low	1	3.6
3	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x4 Low	1	1.1
4	10	48	1	4	R.PDCCH. 1-1.1 FDD	TDLA30-10	1x4 Low	1	0.5
5	10	48	2	16	R.PDCCH. 1-2.6 FDD	TDLA30-10	1x4 Medium A	1	-2.3

5.3.3.1.2 4Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA

5.3.3.1.2.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.1.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.3.3.1.2.3 Minimum conformance requirements

For the parameters specified in Table 5.3.3.1-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.1.2.3-1: Minimum performance for PDCCH with 15 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	10	24	2	4	R.PDCCH. 1-2.2 FDD	TDLC300-100	2x4 Low	1	-1.9
2	10	48	2	8	R.PDCCH. 1-2.5 FDD	TDLC300-100	2x4 Low	1	-4.5
3	10	48	1	4	R.PDCCH. 1-1.2 FDD	TDLA30-10	2x4 Low	1	-1.0

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.3.1.

5.3.3.1.2.4 Test description

5.3.3.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.1-1 and Table 5.3.3.1.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.1.2.4.3.

5.3.3.1.2.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.1.2.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.3.1-1 and Table 5.3.3.1.2.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.1.2.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.1.2.5-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.3.1.2.5-1 as appropriate.

5.3.3.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.1.2.4.3.1 Message exceptions for SA

Table 5.3.3.1.2.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000	CORESET to use	

	00000000 00000000 00000000 000000	the least significant 48 RBs of the BWP Test 2, 3	
	11110000 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 24 RBs of the BWP Test 1	
Duration	2	SearchSpace duration of 2 symbols Test 1, 2	
	1	SearchSpace duration of 1 symbol Test3	
}			

Table 5.3.3.1.2.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	AL4	Test 1, Test 3
aggregationLevel8	n1	AL8	Test 2
}			
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1 for tests 2 and 3	Long_DCI
	formats0-0-And-1-0	DCI Format 1_0 for test 1	
}			
}			
}			

Table 5.3.3.1.2.4.3.1-3: Void

Table 5.3.3.1.2.4.3.1-3A: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Test 1
}			

Table 5.3.3.1.2.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1
}			

5.3.3.1.2.4.3.2 Message exceptions for NSA

Same as 5.3.3.1.2.4.3.1.

5.3.3.1.2.5 Test requirement

Table 5.3.3.1.2.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.2.5-1.

Table 5.3.3.1.2.5-1: Test Requirement for 2Tx PDCCH with 15 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	10	24	2	4	R.PDCCH. 1-2.2 FDD	TDLC300-100	2x4 Low	1	-0.9
2	10	48	2	8	R.PDCCH. 1-2.5 FDD	TDLC300-100	2x4 Low	1	-3.5
3	10	48	1	4	R.PDCCH. 1-1.2 FDD	TDLA30-10	2x4 Low	1	0

5.3.3.1.3 4Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving

5.3.3.1.3.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.1.3.3-2. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.1.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward that supporting 4 Rx antenna ports and DRX adaptation.

This test also applies to all types of EUTRA UE release 16 and forward that supporting EN-DC, 4 Rx antenna ports, Long DRX and DRX adaptation.

5.3.3.1.3.3 Minimum conformance requirements

The parameters specified in Table 5.3.3.1.3.3-1 are valid for FDD test unless otherwise stated.

Table 5.3.3.1.3.3-1: Test Parameters

Parameter	Unit	1 Tx Antenna
CCE to REG mapping type		nonInterleaved
REG bundle size		6
Shift Index		0
DRX cycle	ms	10
ps-WakeUp-r16		absent
Wake-up indication bit in DCI format 2_6		1
PDCCH DCI format 2_6 configuration	PS-offset	$(T_{minimumTimeGap} + 1)/2^{\mu}/0.125$
	Number of PDCCH candidates	1
	Frequency domain resource allocation for CORESET	Start from RB = 0 with contiguous RB allocation
	TCI state	TCI state #1
Slots for PDCCH monitoring		Each slot during DRX-on period
Note:	$T_{minimumTimeGap}$ is signalled as a part of <i>drx-Adaptation-r16</i> UE capability.	

For the parameters specified in Table 5.3.3.1.3.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.3.3-2. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.1.3.3-2: Minimum performance for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x4 Low	1	0.2
			2	8	R.PDCCH. 1-2.7 FDD				

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.3.1.3.

5.3.3.1.3.4 Test description

5.3.3.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.1-1, Table 5.3.3.1.3.3-1 and Table 5.3.3.1.3.3-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.1.3.4.3.

5.3.3.1.3.4.2 Test procedure

1. SS transmits PDCCH with DCI format 2_6 as specified in PDCCH Reference Channel for PS_RNTI within DRX off state. The Wake-up indication bit in PDCCH is set to 1.
2. SS transmits PDSCH with PDCCH with DCI format 1_1 as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.1.3.3-2 in DRX on period. The details of PDCCH are specified in Table 5.3.1, Table 5.3.3.1-1, Table 5.3.3.1.3.3-1 and Table 5.3.3.1.3.3-2 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC. During the test the UE shall monitor the DCI format 2_6 PDCCH in DRX off state and decide whether to receive the following PDCCH in DRX on period.

3. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.1.3.4.4-1 as appropriate.
4. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.1.3.4.4-1, pass the UE. Otherwise fail the UE.
5. Repeat steps from 2 to 4 for each subtest in Table 5.3.3.1.3.3-2 as appropriate.

5.3.3.1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.1.3.4.3.1 Message exceptions for SA

Table 5.3.3.1.3.4.3.1-1: DRX-Config

Derivation Path: TS 38.508-1 [4], Table 4.6.3-56			
Information Element	Value/remark	Comment	Condition
DRX-Config ::= SEQUENCE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms5		
}			
drx-InactivityTimer	ms0		
drx-HARQ-RTT-TimerDL	0		
drx-HARQ-RTT-TimerUL	0		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms10	0		
}			
}			

Table 5.3.3.1.3.4.3.1-2: DCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-106			
Information Element	Value/remark	Comment	Condition
dcp-Config-r16 CHOICE {			
setup SEQUENCE {			
ps-Offset-r16	32		Scs-15kHz-r16 = sl3
sizeDCI-2-6-r16	2		
ps-PositionDCI-2-6-r16	0		
}			
}			

Table 5.3.3.1.3.4.3.1-3: PDCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	1 entry		
SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet ::= SEQUENCE {			
ControlResourceSet[1]	ControlResourceSet		
}			
searchSpacesToAddModList	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace ::=			
SEQUENCE {			

SearchSpace[1]	SearchSpace1		
SearchSpace[2]	SearchSpace2		
}			
searchSpacesToAddModListExt-r16	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace {			
searchSpaceExt-r16[1]	SearchSpaceExt1		
searchSpaceExt-r16[2]	SearchSpaceExt2		
}			
}			

Table 5.3.2.1.3.4.3.1-4: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP	
Duration	2	SearchSpace duration of 2 symbol	
cce-REG-MappingType CHOICE {			
nonInterleaved SEQUENCE			
}			
}			

Table 5.3.2.1.3.4.3.1-5: Void

Table 5.3.3.1.3.4.3.1-6: PDCCH Search Space1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	2	SearchSpaceId with condition USS	
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			
ue-Specific SEQUENCE {			
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	
}			
}			
}			

Table 5.3.3.1.3.4.3.1-6A: PDCCH Search Space2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	4		
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
s1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			
}			
}			

Table 5.3.3.1.3.4.3.1-7: PDCCH Search Space Ext1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
}			

Table 5.3.3.1.3.4.3.1-7A: PDCCH Search Space Ext2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
searchSpaceType-r16 SEQUENCE {			
common SEQUENCE {			
dci-Format2-6-r16 SEQUENCE {	NULL		
}			
}			
}			

Table 5.3.3.1.3.4.3.1-8: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
TCI-State[1]	TCI-StateId 0		
qcl-type1 {		Type 1 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type C		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	

referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type D		
}			
TCI-State[2]	TCI-StateId 1	Type 1 QCL information	
qcl-type1 {			
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	CSI-RS # 0	
Qcl-Type	Type A		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	SSB # 0	
Qcl-Type	Type D		
}			
}			
}			

5.3.3.1.3.4.3.2 Message exceptions for NSA

Same as 5.3.3.1.3.4.3.1

5.3.3.1.3.4.4 Test requirement

Table 5.3.3.1.3.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.3.4.4-1.

Table 5.3.3.1.3.4.4-1: Test Requirements for PDCCH with 15 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	10	48	2	4	R.PDCCH. 1-2.4 FDD	TDLA30-10	1x4 Low	1	1.1
			2	8	R.PDCCH. 1-2.7 FDD				

5.3.3.1.4 4RX FDD Minimum requirements for PDCCH with intra-slot repetition

5.3.3.1.4.1 Test Purpose

This test verifies the demodulation performance of PDCCH with intra-slot repetition under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.1.4.3-2. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.1.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC.

5.3.3.1.4.3 Minimum conformance requirements

Table 5.3.3.1.4.3-1: Test Parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	TCI State #2
	CORESETPoolIndex		0,1	
	Repetition transmission schemes		FDM	
	CCE to REG mapping type		nonInterleaved	
	REG bundle size		6	
	Time offset/Frequency offset of the second TxRP from the first TxRP		timing offset = -0.5us, frequency offset = 200Hz	
	Frequency domain resource allocation for CORSET		Frequency non-overlapping	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
QCL info			TCI state #0	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A

Note: PDCCH is transmitted from both TRxP #1 and TRxP #2

For the parameters specified in Table 5.3.3.1.3.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.3.3-2. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.1.4.3-2: Minimum performance for PDCCH with 15kHz SCS (Note 2)

Test num.	Bandwidth(MHz)	CORESET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix	Reference value	
								Pm-ds	SNR (dB) (Not

								g (%)	e 3)
1	10	24	2	2	R.PDCC H. 1-2.1 FDD	TDLA30-10	2x4, ULA Low	1	-1.2
<p>Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent.</p> <p>Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2.</p> <p>Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2</p> <p>Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped</p>									

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.3.1.4.

5.3.3.1.4.4 Test description

5.3.3.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.1-1 and Table 5.3.3.1.4.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.1.4.4.3.

5.3.3.1.4.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.1.4.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.3.1-1, Table 5.3.3.1.4.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.1.4.3-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.1.4.4.4-1, pass the UE. Otherwise fail the UE.

5.3.3.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.1.4.4.3.1 Message exceptions for SA

Table 5.3.3.1.4.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11110000 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 24 RBs of the BWP	
Duration	1	SearchSpace duration of 1 symbol	
}			

Table 5.3.3.1.4.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n1		
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0 for tests 1	Long_DCI
}			
}			
}			

Table 5.3.3.1.4.4.3.1-3: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		
}			

Table 5.3.3.1.4.4.3.1-4: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	10	For CSI-RS resources 1,2,5,6	
Slots40	11	For CSI-RS resources 3,4,7,8	

}		
---	--	--

5.3.3.1.4.4.3.2 Message exceptions for NSA

Same as 5.3.3.1.4.4.3.1

5.3.3.1.4.4.4 Test requirement

Table 5.3.3.1.4.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.4.4.4-1.

Table 5.3.3.1.4.4.4-1: Test Requirements for PDCCH with 15kHz SCS (Note 2)

Test num.	Bandwidth(MHz)	CORESET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB) (Note 3)
1	10	24	2	2	R.PDCCH H. 1-2.1 FDD	TDLA30-10	2x4, ULA Low	1	-0.3
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped									

5.3.3.1.5

5.3.3.1.6 4RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth

5.3.3.1.6.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.1.6.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.1.6.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting less than 5 MHz bandwidth and 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and supporting less than 5 MHz bandwidth and 4Rx antenna ports.

5.3.3.1.6.3 Minimum conformance requirements

During the test the UE shall be configured to monitor CORESET#0 with *searchSpaceType=common* using *DCI Format 1-0*.

The parameters specified in Table 5.3.3.1.6.3-1 are valid for FDD test in this clause unless otherwise stated.

Table 5.3.3.1.6.3-1: Test Parameters

Parameter	Unit	2 Tx
-----------	------	------

		Antennas	
Frequency domain resource allocation for PDCCH	Start	RB Index	8
	Length	RBs	7 (Note 1)
	Allocation		Contiguous
CCE to REG mapping type			nonInterleaved
REG bundle size			6
Shift Index			NA
Note 1: The last PDCCH RB that is out of CORESET0, i.e. RB#15, is punctured and not transmitted.			

For the parameters specified in Table 5.3.3.1.6.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.6.3-2. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.3.1.6.3-2: Minimum performance for 3 MHz CBW

Test number	Bandwidth (MHz)	CORE SET0 RB	CORE SET0 duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	3	15	3	4	R.PDCCH. 1-3.1 FDD	TDLC300-100	2x4 Low	1	-1

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.3.1.6.

5.3.3.1.6.4 Test description

5.3.3.1.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A in Figure A.3.1.7.4 for TE diagram and clause A.3.2.6 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1 and Table 5.3.3.1.6-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.1.4.3.

5.3.3.1.6.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.1.6.3-1. The details of PDCCH are specified in Table 5.3.1, Table 5.3.2.3-1, Table 5.3.3.1.6.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.1.6.4.4-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.1.6.4.4-1, pass the UE. Otherwise fail the UE.

5.3.3.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.1.6.4.3.1 Message exceptions for SA

Table 5.3.3.1.6.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	01100000 00000000 00000000 00000000 00000000 000000		
Duration	3	SearchSpace duration of 3 symbols	
}			

Table 5.3.3.1.6.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel4	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

5.3.3.1.6.4.3.2 Message exceptions for NSA

Same as 5.3.3.1.6.4.3.1

5.3.3.1.6.4.4 Test requirement

Table 5.3.3.1.6.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.1.6.4.4-1.

Table 5.3.3.1.6.4.4-1: Test Requirement for 3 MHz CBW

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1-1	3	15	3	4	R.PDCCH. 1-3.1 FDD	TDLC300-100	2x4 Low	1	0

5.3.3.2 TDD

The parameters specified in Table 5.3.3.2-1 are valid for all TDD tests unless otherwise stated.

Table 5.3.3.2-1: Common Test Parameters

Parameter	Unit	1 Tx Antenna	2 Tx Antenna
TDD UL-DL pattern		FR1.30-1	
CCE to REG mapping type		Test 3: Non-interleaved Other tests: interleaved	interleaved
Interleaver size		3	
REG bundle size		Test 3: 6 Other tests: 2	6
Shift Index		0	

5.3.3.2.1 4Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA

5.3.3.2.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.2.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.3.3.2.1.3 Minimum conformance requirements

For the parameters specified in Table 5.3.3.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.1.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.2.1.3-1: Minimum performance for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	40	102	1	2	R.PDCCH. 2-1.1 TDD	TDLA30-10	1x4 Low	1	2.1
2	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x4 Low	1	-0.9
3	40	48	2	16	R.PDCCH. 2-2.1 TDD	TDLA30-10	1x4 Medium A	1	-3.6

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.3.2.

5.3.3.2.1.4 Test description

5.3.3.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.2-1 and Table 5.3.3.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.2.1.4.3.

5.3.3.2.1.4.2 Test procedure

1. SS transmits PDSCH via PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.2.1.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.3.2-1 and Table 5.3.3.2.1.3-1 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.2.1.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.2.1.5-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.3.2.1.5-1 as appropriate.

5.3.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.2.1.4.3.1 Message exceptions for SA

Table 5.3.3.2.1.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition

ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP Test 3	
	11111111 11111111 10000000 00000000 00000000 00000	CORESET to use the least significant 102 RBs of the BWP Test 1, 2	
Duration	2	SearchSpace duration of 2 symbols Test 3	
	1	SearchSpace duration of 1 symbol Test 1, 2	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		Test 1, Test 2
reg-BundleSize	n2		1 Tx
interleaverSize	n3		TDD
}			
nonInterleaved	null		Test 3
}			
}			

Table 5.3.3.2.1.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n1	AL2	Test 1
aggregationLevel4	n1	AL4	Test 2
aggregationLevel16	n1	AL16	Test 3
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dc-Formats	formats0-1-And-1-1	DCI Format 1_1 for test 2	Long_DCI
	formats0-0-And-1-0	DCI Format 1_0 for test 1 and 3	
}			
}			
}			

Table 5.3.3.2.1.4.3.1-3: Void

Table 5.3.3.2.1.4.3.1-3A: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.2-3			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		Test 1, Test 3
}			

Table 5.3.3.2.1.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1, Test 3
}			

5.3.3.2.1.4.3.2 Message exceptions for NSA

Same as 5.3.3.2.1.4.3.1.

5.3.3.2.1.5 Test requirement

Table 5.3.3.2.1.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.1.5-1.

Table 5.3.3.2.1.5-1: Test Requirement for 1Tx PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	40	102	1	2	R.PDCCH. 2-1.1 TDD	TDLA30-10	1x4 Low	1	3
2	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x4 Low	1	0
3	40	48	2	16	R.PDCCH. 2-2.1 TDD	TDLA30-10	1x4 Medium A	1	-2.7

5.3.3.2.2 4Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA

5.3.3.2.2.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.2.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

5.3.3.2.2.3 Minimum conformance requirements

For the parameters specified in Table 5.3.3.2-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.2.3-1. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.2.2.3-1: Minimum performance for PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)

1	40	90	1	8	R.PDCCH. 2-1.3	TDLC300- 100	2x4 Low	1	-4.3
---	----	----	---	---	-------------------	-----------------	---------	---	------

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.3.2.

5.3.3.2.2.4 Test description

5.3.3.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.2-1 and Table 5.3.3.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.2.2.4.3.

5.3.3.2.2.4.2 Test procedure

1. SS transmits PDSCH via PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.2.2.3-1. The details of PDCCH are specified in Table 5.3-1, Table 5.3.3.2-1 and Table 5.3.3.2.2.3-1. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.2.2.5-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.2.2.5-1, pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 5.3.3.2.2.5-1 as appropriate.

5.3.3.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.3.3.2.2.4.3.1 Message exceptions for SA

Table 5.3.3.2.2.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 11111110 00000000 00000000 00000000 000000	CORESET to use the least significant 90 RBs of the BWP Test 1	
Duration	1	SearchSpace duration of 1 symbols Test 1	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		
reg-BundleSize	n6		2 Tx
interleaverSize	n3		TDD
}			
}			
}			

Table 5.3.3.2.2.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7 with condition USS			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n1	AL8	Test 1
}			
}			

Table 5.3.3.2.2.4.3.1-3: Void

5.3.3.2.2.4.3.2 Message exceptions for NSA

FFS

5.3.3.2.2.5 Test requirement

Table 5.3.3.2.2.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.2.5-1.

Table 5.3.3.2.2.5-1: Test Requirement for 2Tx PDCCH with 30 kHz SCS

Test number	Band width (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	40	90	1	8	R.PDCCH. 2-1.3	TDLC300-100	2x4 Low	1	-3.3

5.3.3.2.3 4Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving

5.3.3.2.3.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 4 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.2.3.3-2 after receipt wake-up indication in the *DCI format 2_6* PDCCH in DRX off state. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting 4 Rx antenna ports and Long DRX Cycle and DRX adaptation.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and 4 Rx antenna ports and Long DRX Cycle and DRX adaptation.

5.3.3.2.3.3 Minimum conformance requirements

During the test the UE shall monitor the *DCI format 2_6* PDCCH in DRX off state and decide whether to receive the following PDCCH in DRX on period.

For the parameters specified in Table 5.3.3.2.3.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) observed on PDCCH during DRX on shall be below the specified value in Table 5.3.3.2.3.3-2. The downlink physical setup is in accordance with Annex C.3.1.

Table 5.3.3.2.3.3-1: Test Parameters

Parameter		Unit	1 Tx Antenna
TDD UL-DL pattern			FR1.30-1
CCE to REG mapping type			interleaved
Interleaver size			3
REG bundle size			2
Shift Index			0
DRX cycle		ms	10
ps-WakeUp-r16			absent
Wake-up indication bit in DCI format 2_6			1
PDCCH DCI format 2_6 configuration	PS-offset		$(T_{\text{minimumTimeGap}}+1)/2^{\mu}/0.125$
	Number of PDCCH candidates		1
	Frequency domain resource allocation for CORESET		Start from RB = 0 with contiguous RB allocation
	TCI state		TCI state #1
Slots for PDCCH monitoring			Each slot during DRX-on period
Note: $T_{\text{minimumTimeGap}}$ is signalled as a part of <i>drx-Adaptation-r16</i> UE capability.			

Table 5.3.3.2.3.3-2: Minimum performance for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x4 Low	1	-0.9
				8	R.PDCCH. 2-1.4 TDD				

The normative reference for this requirement is TS 38.101-4 [5] clause 5.3.3.2.

5.3.3.2.3.4 Test description

5.3.3.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-2 of 38.521-1 [7].

Configurations of DRX, DCP, PDSCH and PDCCH before measurement are specified in 5.3.3.2.3.4.3.1 and Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise sources to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.3.2-1 and Table 5.3.3.2.1.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.2.1.4.3.

5.3.3.2.3.4.2 Test procedure

1. SS transmits PDCCH with DCI format2_6 as specified in PDCCH Reference Channel for PS_RNTI within DRX off state. The Wake-up indication bit in PDCCH is set to 1.
2. SS transmits PDSCH via PDCCH with DCI format1_1 as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.2.3.3-2 in DRX on period. The details of PDCCH are specified in Table 5.3-1, Table 5.3.3.2-1 and Table 5.3.3.2.3.3-2 respectively. The details of PDSCH are specified in Table A.3.3.2.2-3. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.2.3.5-1 as appropriate.
4. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.2.3.5-1, pass the UE. Otherwise fail the UE.
5. Repeat steps from 2 to 4 for each subtest in Table 5.3.3.2.3.3-2 as appropriate.

5.3.3.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1 and 5.4.2.

5.3.3.2.3.4.3.1 Message exceptions for SA

Table 5.3.3.2.3.4.3.1-1: DRX-Config

Derivation Path: TS 38.508-1 [4], Table 4.6.3-56
--

Information Element	Value/remark	Comment	Condition
DRX-Config ::= SEQUENCE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms5		
}			
drx-InactivityTimer	ms0		
drx-HARQ-RTT-TimerDL	0		
drx-HARQ-RTT-TimerUL	0		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms10	0		
}			
}			

Table 5.3.3.2.3.4.3.1-2: DCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-106			
Information Element	Value/remark	Comment	Condition
dcp-Config-r16 CHOICE {			
setup SEQUENCE {			
ps-Offset-r16	28		Scs-30kHz-r16 = sl6
sizeDCI-2-6-r16	2		
ps-PositionDCI-2-6-r16	0		
}			
}			

Table 5.3.3.2.3.4.3.1-3: PDCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	1 entry		
SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet ::= SEQUENCE {			
ControlResourceSet[1]	ControlResourceSet		
}			
searchSpacesToAddModList	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace ::=			
SEQUENCE {			
SearchSpace[1]	SearchSpace1		
SearchSpace[2]	SearchSpace2		
}			
searchSpacesToAddModListExt-r16	2 entries		
SEQUENCE(SIZE (1..10)) OF SearchSpace {			
searchSpaceExt-r16[1]	SearchSpaceExt1		
searchSpaceExt-r16[2]	SearchSpaceExt2		
}			
}			

Table 5.3.3.2.3.4.3.1-4: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
frequencyDomainResources	11111111 11111111 10000000 00000000 00000000 000000	CORESET to use the least significant 102 RBs of the BWP	

Duration	1	SearchSpace duration of 1 symbol	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		
reg-BundleSize	n2		1 Tx
interleaverSize	n3		TDD
}			
}			
}			

Table 5.3.3.2.3.4.3.1-5: Void

Table 5.3.3.2.3.4.3.1-6: PDCCH Search Space1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	2	SearchSpaceId with condition USS	USS
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	n1	Test AL8	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-1-And-1-1	DCI Format 1_1	Long_DCI
}			
}			
}			

Table 5.3.3.2.3.4.3.1-6A: PDCCH Search Space2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	4		
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	Test AL4	
aggregationLevel8	N1	Test AL8	
}			
searchSpaceType CHOICE {			
common SEQUENCE {			CSS, SISS
}			
}			
}			

Table 5.3.3.2.3.4.3.1-7: PDCCH Search Space Ext1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
}			

Table 5.3.3.2.3.4.3.1-7A: PDCCH Search Space Ext2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
searchSpaceType-r16 SEQUENCE {			
common SEQUENCE {			
dci-Format2-6-r16 SEQUENCE {	NULL		
}			
}			
}			

Table 5.3.3.2.3.4.3.1-8: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
TCI-State[1]	TCI-StateId 0		
qcl-type1 {		Type 1 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type C		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	Ssb : 0	SSB # 0	
Qcl-Type	Type D		
}			
TCI-State[2]	TCI-StateId 1	Type 1 QCL information	
qcl-type1 {			
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	CSI-RS # 0	
Qcl-Type	Type A		
}			
qcl-type2 {		Type 2 QCL information	
Cell	ServCellIndex		
Bwp-id	1	BWP ID	
referenceSignal	csi-rs : 0	SSB # 0	
Qcl-Type	Type D		
}			
}			
}			

5.3.3.2.3.4.3.2 Message exceptions for NSA

Same as 5.3.3.2.3.4.3.1.

5.3.3.2.3.5 Test requirement

Table 5.3.3.2.3.5-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.3.5-1.

Table 5.3.3.2.3.5-1: Test Requirements for PDCCH with 30 kHz SCS

Test number	Bandwidth (MHz)	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR (dB)
1	40	102	1	4	R.PDCCH. 2-1.2 TDD	TDLC300-100	1x4 Low	1	0
				8	R.PDCCH. 2-1.4 TDD				

5.3.3.2.4 4RX TDD Minimum requirements for PDCCH with intra-slot repetition

5.3.3.2.4.1 Test Purpose

This test verifies the demodulation performance of PDCCH with intra-slot repetition under 4 receive antenna TDD conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 5.3.3.2.4.3-2. The downlink physical setup is in accordance with Annex C.2.1.

5.3.3.2.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC.

5.3.3.2.4.3 Minimum conformance requirements

Table 5.3.3.2.4.3-1: Test Parameters

Parameter	Unit	Value	
		TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB		TRxP #1	
PDCCH configuration	TCI state	TCI State #1	TCI State #2
	CORESETPoolIndex	0,1	
	Repetition transmission schemes	FDM	
	CCE to REG mapping type	nonInterleaved	
	REG bundle size	6	
	Time offset/Frequency offset of the second TxRP from the first TxRP	timing offset = -0.25us, frequency offset = 300Hz	
	Frequency domain resource allocation for CORSET	Frequency non-overlapping	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS	k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS	l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)	1 for CSI-RS	1 for CSI-RS

			resource 1,2,3,4	resource 5,6,7,8
		CDM Type	'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
		Density	3	
		CSI-RS periodicity	Slots	40
		CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4 20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
		QCL info	TCI state #0	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Note: PDCCH is transmitted from both TRxP #1 and TRxP #2				

For the parameters specified in Table 5.3.3.2.3.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.3.3-2. The downlink physical setup is in accordance with Annex C.2.1.

Table 5.3.3.2.4.3-2: Minimum performance for PDCCH with 15kHz SCS (Note 2)

Test num	Bandwidth h(MHz)	CORE SET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix (Note 2)	Reference value	
								Pm-dsg (%)	SNR (dB) (Note 3)
1	40	48	2	2	R.PDCCH. 2-2.2 TDD	TDLA30-10	2x4, ULA Low	1	-1.0
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped									

The normative reference for this requirement is TS 38.101-4 [2] clause 5.3.3.2.4.

5.3.3.2.4.4 Test description

5.3.3.2.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and clause A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 5.3-1, Table 5.3.2.1-1 and Table 5.3.3.2.4.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* or EN-DC, DC bearer *MCG and SCG, Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.3.3.2.4.4.3.

5.3.3.2.4.4.2 Test procedure

1. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 5.3.3.2.4.3-1. The details of PDCCH are specified in Table 5.3.3, Table 5.3.3.2-1, Table 5.3.3.2.4.3-1 respectively. The details of PDSCH are specified in Table A.3.3.1.1-3. The SS sends downlink MAC padding bits on the DL RMC.
2. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 5.3.3.2.4.3-1 as appropriate.
3. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 5.3.3.2.4.4.4-1, pass the UE. Otherwise fail the UE.

5.3.3.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.3.3.2.4.4.3.1 Message exceptions for SA

Table 5.3.3.2.4.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 11111110 00000000 00000000 00000000 000000	CORESET to use the least significant 48 RBs of the BWP	
Duration	1	SearchSpace duration of 1 symbols	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		
reg-BundleSize	n6		2 Tx
interleaverSize	n3		TDD
}			
}			
}			

Table 5.3.3.2.4.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition

SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n1		
}			

Table 5.3.3.2.4.4.3.1-3: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots40	10	For CSI-RS resources 1,2,5,6	
Slots40	11	For CSI-RS resources 3,4,7,8	
}			

5.3.3.2.4.4.3.2 Message exceptions for NSA

Same as 5.3.3.2.4.4.3.1

5.3.3.2.4.4.4 Test requirement

Table 5.3.3.2.4.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 5.3.3.2.4.4.4-1.

Table 5.3.3.2.4.4.4-1: Test Requirements for PDCCH with 30kHz SCS (Note 2)

Test num.	Bandwidth h(MHz)	CORE SET RB (Note 4)	CORESET duration	Aggregation level	Reference Channel	Propagation Condition (Note 1)	Antenna configuration and correlation Matrix (Note 2)	Reference value	
								Pm-dsg (%)	SNR (dB) (Note 3)
1	40	48	2	2	R.PDCCH. 2-2.2 TDD	TDLA30-10	2x4, ULA Low	1	-0.1
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent. Note 2: Bandwidth, CORESET parameters, reference channel, Correlation matrix and antenna configuration parameters apply to each of TRxP #1 and TRxP #2. Note 3: SNR corresponds to SNR of TRxP #1 and TRxP #2 as defined in 4.4.2 Note 4: CORESETs from TRxP #1 and TRxP #2 should not be overlapped									

5.4 PBCH demodulation requirements

TS 38.101-4 shall specify the PBCH performance requirements and has recommended that these requirements do not need to be tested.

5.5 Sustained downlink data rate provided by lower layers

5.5.1 FR1 Sustained downlink data rate performance for single carrier

5.5.1.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be

verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement

5.5.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

5.5.1.3 Minimum conformance requirements

The requirements in this clause are applicable to the FR1 single carrier case.

The TB success rate shall be higher than 85% when PDSCH is scheduled with MCS defined for the channel bandwidth with the downlink physical channel setup according to Annex C.3.1.

The TB success rate is defined as $100\% * N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retx})$, where N_{DL_newtx} is the number of newly transmitted DL transport blocks, N_{DL_retx} is the number of retransmitted DL transport blocks, and $N_{DL_correct_rx}$ is the number of correctly received DL transport blocks.

The common test parameters are specified in Table 5.5.1.3-1. The parameters specified in Table 5.5.1.3-2 are applicable for tests on FDD bands and parameters specified in Table 5.5.1.3-3 are applicable for tests on TDD bands.

Unless otherwise stated, no user data is scheduled on slot #0, 10 and 11 within 20 ms for SCS 15 kHz.

Unless otherwise stated, no user data is scheduled on slot #0, 20 and 21 within 20 ms for SCS 30 kHz.

Table 5.5.1.3-1: Common test parameters for FDD and TDD bands

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
EPRE ratio of PTRS to PDSCH		dB	N/A
Channel bandwidth		MHz	Select channel bandwidth as per test parameter selection clause 5.5.1.3.1
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
	First DMRS position for Type A PDSCH mapping		2
Cross carrier scheduling			Not configured
Active DL BWP index			1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 2)	RBs	0
	Subcarrier spacing	kHz	15 or 30
DL BWP configuration #1	RB offset	RBs	0
	Number of contiguous PRB		Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing
	Subcarrier spacing	kHz	15 or 30
	Cyclic prefix		Normal
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		Symbols #0
	Number of PRBs in CORESET		Table 5.5.1.3-4
	Number of PDCCH candidates and aggregation levels		2/AL2 for 15 kHz / 5 MHz, 30 kHz / 10 MHz and 30 kHz / 15 MHz 2/AL4 for 15 kHz / 10 MHz, 15 kHz / 15 MHz, 30 kHz / 20 MHz, 30 kHz / 25 MHz, 30 kHz / 30 MHz and 30 kHz / 35 MHz 2/AL8 for other greater combinations
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1_1
	TCI State		TCI state #1
PDCCH & PDCCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx=2: Single Panel Type I, Randomized	

			<p>precoder selection for every REG bundle and updated per slot with equal probability of precoder indices 0 and 2</p> <p>For number of Tx=4: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of $i_{-1,1}$ in {1,2,3,5,6,7} and i_{-2} in {0,2}</p>
PDSCH configuration	Mapping type		Type A
	k_0		0
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		WB
	Resource allocation type		Type 0
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
	Antenna ports indexes		{1000} for 1 Layer CCs {1000, 1001} for 2 Layers CCs {1000 – 1003} for 4 Layers CCs
Number of PDSCH DMRS CDM group(s) without data		1 for 1 layer and 2 layers CCs 2 for 4 Layers CCs	
PTRS configuration			PTRS is not configured
CSI-RS for tracking	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 3$ for CSI-RS resource 1,2,3,4
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 1 and 3 $l_0 = 10$ for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	15 kHz SCS: 20 for CSI-RS resource 1,2,3,4 30 kHz SCS: 40 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS: 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
	NZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS	
OFDM symbols in the PRB used for CSI-RS			$l_0 = 12$
Number of CSI-RS ports (X)			Same as number of transmit antenna
CDM Type			For number of Tx=1: 'No CDM' For number of Tx>1: 'FD-CDM2'
Density (ρ)			1
CSI-RS periodicity			15 kHz SCS: 20 30 kHz SCS: 40
CSI-RS offset			0
Frequency Occupation			Start PRB 0 Number of PRB = BWP size
QCL info		TCI state #1	
ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 0$
	OFDM symbols in the PRB used for CSI-		$l_0 = 12$

	RS		
	Number of CSI-RS ports (X)		4
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
Maximum number of code block groups for ACK/NACK feedback			1
Maximum number of HARQ transmission			4
HARQ ACK/NACK bundling			Multiplexed
Redundancy version coding sequence			{0,2,3,1}
PDSCH & PDSCH DMRS Precoding configuration			For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot with equal probability of each applicable i_1, i_2 combination
Symbols for all unused REs			OCNG Annex A.5
Propagation condition			Static propagation condition No external noise sources are applied
Antenna configuration	1 layer CCs		1x2 or 1x4
	2 layers CCs		2x2 or 2x4
	4 layers CCs		4x4
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
Es	dBm/Hz		-112 for MCS indexes in Table 5.5.1.3-5: -110.5 For 1024QAM MCS indexes in Table 5.5.2.3-1:
Note 1: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission			
Note 2: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing			

Table 5.5.1.3-2: Additional test parameters for FDD band

Parameter		Unit	Value
Duplex mode			FDD
PDSCH configuration	Starting symbol (S)		1
	Length (L)		13
Number of HARQ Processes			4
K1 value			2

Table 5.5.1.3-3: Additional test parameters for TDD band

Parameter		Unit	Value
Duplex mode			TDD
PDSCH configuration	Starting symbol (S)		1
	Length (L)		13
Number of HARQ Processes			8
K1 value			Specific to each UL-DL pattern
TDD UL-DL pattern			15 kHz SCS: FR1.15-1 30 kHz SCS: FR1.30-1

Note 1: PDSCH is scheduled only on full DL slots

Table 5.5.1.3-4: Number of PRBs in CORESET

SCS (kHz)	5MHz	10MHz	15MHz	20 MHz	25 MHz	30 MHz	40 MHz	50MHz	60 MHz	80 MHz	100 MHz
15	24	48	78	102	132	156	216	270	N/A	N/A	N/A
30	6	24	36	48	60	78	102	132	162	216	270

Table 5.5.1.3-5: MCS indexes for indicated UE capabilities

Maximum number of PDSCH MIMO layers	Maximum modulation format	Scaling factor	MCS
1	8	1	26
1	8	0.8	21
1	8	0.75	20
1	8	0.4	11
1	6	1	27
1	6	0.8	23
1	6	0.75	22
1	6	0.4	14
1	4	1	16
1	4	0.8	16
1	4	0.75	16
1	4	0.4	10
1	2	1	9
1	2	0.8	9
1	2	0.75	9
1	2	0.4	4
2	8	1	26
2	8	0.8	21
2	8	0.75	20
2	8	0.4	11
2	6	1	27
2	6	0.8	23
2	6	0.75	22
2	6	0.4	14
2	4	1	16
2	4	0.8	16
2	4	0.75	16
2	4	0.4	10
2	2	1	9
2	2	0.8	9
2	2	0.75	9
2	2	0.4	4
4	8	1	26
4	8	0.8	23
4	8	0.75	22
4	8	0.4	12
4	6	1	27
4	6	0.8	24
4	6	0.75	23
4	6	0.4	14
4	4	1	16
4	4	0.8	16
4	4	0.75	16
4	4	0.4	11
4	2	1	9
4	2	0.8	9
4	2	0.75	9
4	2	0.4	5

Note 1: MCS Index for maximum modulation format 2,4 and 6 is based on MCS index table 1 defined in clause 5.1.3.1 of TS 38.214 [12]

Note 2: MCS Index for maximum modulation format 8 is based on MCS index table 2 defined in clause 5.1.3.1 of TS 38.214 [12]

5.5.1.3.1 Procedure for test parameter selection

Below test parameter selection procedure is from 38.101-4 [5] by replacing CA configuration with operating band, and bandwidth instead of bandwidth combination.

The test parameters are determined by the following procedure:

- Select one operating band among all supported operating bands and set of per band UE capabilities among all supported UE capabilities that provides the largest data rate TS 38.306 [14], Section 4.1.2.
- Set of per band UE capabilities includes channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor TS 38.306 [14], Section 4.1.2.
- When there are multiple sets of bandwidths and UE capabilities (channel bandwidth, subcarrier spacing, number of MIMO layer, modulation format, scaling factor) with same largest data rate, select one among sets with the smallest channel bandwidth.
- For each operating band, use Table 5.5.1.3-5 to determine MCS based on test parameters and indicated UE capabilities

Pasting relevant portion of max data rate equation from TS 38.306 [14] section 4.1

For NR, the approximate data rate for a given number of aggregated carriers in a band or band combination is computed as follows.

$$\text{data rate (in Mbps)} = 10^{-6} \cdot \sum_{j=1}^J \left(v_{\text{Layers}}^{(j)} \cdot Q_m^{(j)} \cdot f^{(j)} \cdot R_{\text{max}} \cdot \frac{N_{\text{PRB}}^{\text{BW}(j),\mu} \cdot 12}{T_s^\mu} \cdot (1 - OH^{(j)}) \right)$$

wherein

J is the number of aggregated component carriers in a band or band combination

$$R_{\text{max}} = 948/1024$$

For the j-th CC,

$v_{\text{Layers}}^{(j)}$ is the maximum number of supported layers given by higher layer parameter *maxNumberMIMO-LayersPDSCH* for downlink and maximum of higher layer parameters *maxNumberMIMO-LayersCB-PUSCH* and *maxNumberMIMO-LayersNonCB-PUSCH* for uplink.

$Q_m^{(j)}$ is the maximum supported modulation order given by higher layer parameter *supportedModulationOrderDL* for downlink and higher layer parameter *supportedModulationOrderUL* for uplink.

$f^{(j)}$ is the scaling factor given by higher layer parameter *scalingFactor* and can take the values 1, 0.8, 0.75, and 0.4.

μ is the numerology (as defined in TS 38.211 [6])

T_s^μ is the average OFDM symbol duration in a subframe for numerology μ , i.e. $T_s^\mu = \frac{10^{-3}}{14 \cdot 2^\mu}$. Note that normal cyclic prefix is assumed.

$N_{PRB}^{BW^{(j)},\mu}$ is the maximum RB allocation in bandwidth $BW^{(j)}$ with numerology μ , as defined in 5.3 TS 38.101-1 [2] and 5.3 TS 38.101-2 [3], where $BW^{(j)}$ is the UE supported maximum bandwidth in the given band or band combination.

$OH^{(j)}$ is the overhead and takes the following values

0.14, for frequency range FR1 for DL

0.18, for frequency range FR2 for DL

0.08, for frequency range FR1 for UL

0.10, for frequency range FR2 for UL

NOTE: Only one of the UL or SUL carriers (the one with the higher data rate) is counted for a cell operating SUL.

The approximate maximum data rate can be computed as the maximum of the approximate data rates computed using the above formula for each of the supported band or band combinations.

The normative reference for this requirement is TS 38.101-4 [5], clause 5.5.1.

5.5.1.4 Test description

5.5.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1, A.3.1.7.4 and A.3.1.7.5 for TE diagram (without fader and AWGN) for 2Rx and 4Rx respectively and clause A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are initially set up according to Table 5.5.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with *Connected without release On, Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0* according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 5.5.1.4.3.
6. SS shall transmit UECapabilityEnquiry message.
7. The UE shall transmit UECapabilityInformation message.
8. Using the UE capabilities advertised in the *UE-CapabilityRAT-Container* of the type *UE-NR-Capability*, and the procedure outlined in 5.5.1.3.1 determine one set of parameters that would provide the largest data rate.
9. Setup up the NR cell using these parameters for the test.
10. Configure the TBsize, DL RMC, UL RMC, PDCP size from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate.

5.5.1.4.2 Test procedure

1. SS configures T-reordering timer to be infinity.
2. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
3. SS sets the counters N_{DL_newtx} N_{DL_retx} to 0.
4. For each new DL HARQ transmission the SS generates sufficient PDCP SDUs (max PDCP SDU size and minimum number of consecutive PDCP SDUs) to fill up the TB in accordance with Annex A.3.2_1. The SS ciphers the PDCP SDUs, concatenates the resultant PDCP PDUs to form an RLC PDU and then a MAC PDU. The SS transmits the MAC PDU. The SS increments then N_{DL_newtx} by one
5. If PHY requests a DL HARQ retransmission, the SS performs a HARQ retransmission and increments N_{DL_retx} by one.
6. Steps 4 to 5 are repeated at every TTI for at least 300 frames and the SS waits for 300ms to let any HARQ retransmissions and RLC retransmissions to finish.
7. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
8. The SS calculates the TB success rate as $A = 100\% * N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retx})$.
10. SS computes the PDCP SDU loss by looking into the FMC and Bitmap field in the PDCP Status Report. PDCP SDU loss $B = COUNT$ reported in the Bitmap field of PDCP Stata Report.
11. The UE passes the test if $A \geq 85\%$ TB success rates and $B = 0$.

Note 1: In case of RLC PDU retransmission, the number of new required PDCP SDUs is as many as to fill the rest of TB.

5.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions

Table 5.5.1.4.3-0: CLOSE UE TEST LOOP (in the preamble)

Derivation Path: 38.509 clause 6.3.1			
Information Element	Value/remark	Comment	Condition
Protocol discriminator	1 1 1 1		
Skip indicator	0 0 0 0		
Message type	1 0 0 0 0 0 0 0		
UE test loop mode	0 0 0 0 0 0 0 0	UE test loop mode A	
UE test loop mode A LB setup			
Length of UE test loop mode A LB setup list in bytes	0 0 0 0 0 0 1 1	Length of one LB setup DRB (3 bytes)	
LB setup DRB	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 Q5 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q5 = 1 (for NR Data Radio Bearers) Q4..Q0 = Data Radio Bearer identity number -1 for the radio bearer. See 38.509 clause 6.3.1	
UE test loop mode B LB setup	Not present		

Table 5.5.1.4.3-1 to -6: Void

Table 5.5.1.4.3-7: RadioBearerConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB))	1 entry		DRB1
OF SEQUENCE {			
cnAssociation CHOICE {			
sdap-Config	SDAP-Config		
}			
drb-Identity	DRB-Identity using condition DRB1		
reestablishPDCP	true		DRB1 AND Re-establish_PDCP
pdcp-Config	PDCP-Config		
}			

Table 5.5.1.4.3-8: PDCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len18bits		
pdcp-SN-Size-DL	len18bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		
statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

5.5.1.5 Test requirement

The PDCP SDU success rate of greater than 85% shall be sustained during at least 300 frames.

5.5.1_1 FR1 Sustained downlink data rate performance for single carrier for 8Rx

5.5.1_1.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement

5.5.1_1.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting 8Rx.

5.5.1_1.3 Minimum conformance requirements

The requirements in this clause are applicable to the FR1 single carrier case.

The TB success rate shall be higher than 85% when PDSCH is scheduled with MCS defined for the channel bandwidth with the downlink physical channel setup according to Annex C.3.1.

The TB success rate is defined as $100\% \cdot N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retx})$, where N_{DL_newtx} is the number of newly transmitted DL transport blocks, N_{DL_retx} is the number of retransmitted DL transport blocks, and $N_{DL_correct_rx}$ is the number of correctly received DL transport blocks.

The common test parameters are specified in Table 5.5.1_1.3-1. The parameters specified in Table 5.5.1.3-2 are applicable for tests on FDD bands and parameters specified in Table 5.5.1.3-3 are applicable for tests on TDD bands.

Unless otherwise stated, no user data is scheduled on slot #0, 10 and 11 within 20 ms for SCS 15 kHz.

Unless otherwise stated, no user data is scheduled on slot #0, 20 and 21 within 20 ms for SCS 30 kHz.

Table 5.5.1_1.3-1: Common test parameters for FDD and TDD bands

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
EPRE ratio of PTRS to PDSCH		dB	N/A
Channel bandwidth		MHz	Select channel bandwidth as per test parameter selection clause 5.5.1.3.1
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
	First DMRS position for Type A PDSCH mapping		2
Cross carrier scheduling			Not configured
Active DL BWP index			1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 2)	RBs	0
	Subcarrier spacing	kHz	15 or 30
DL BWP configuration #1	RB offset	RBs	0
	Number of contiguous PRB		Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing
	Subcarrier spacing	kHz	15 or 30
	Cyclic prefix		Normal
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		Symbols #0
	Number of PRBs in CORESET		Table 5.5.1.3-4
	Number of PDCCH candidates and aggregation levels		2/AL2 for 15 kHz / 5 MHz, 30 kHz / 10 MHz and 30 kHz / 15 MHz 2/AL4 for 15 kHz / 10 MHz, 15 kHz / 15 MHz, 30 kHz / 20 MHz, 30 kHz / 25 MHz, 30 kHz / 30 MHz and 30 kHz / 35 MHz 2/AL8 for other greater combinations
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1_1
	TCI State		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx=2: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of precoder indices 0 and 2 For number of Tx=4: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of $i_{-1,1}$ in {1,2,3,5,6,7} and i_{-2} in {0,2}
	PDSCH	Mapping type	

configuration	k0		0
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		WB
	Resource allocation type		Type 0
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
	Antenna ports indexes		{1000} for 1 Layer CCs {1000, 1001} for 2 Layers CCs {1000 – 1003} for 4 Layers CCs
Number of PDSCH DMRS CDM group(s) without data		1 for 1 layer and 2 layers CCs 2 for 4 Layers CCs	
PTRS configuration			PTRS is not configured
CSI-RS for tracking	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 3$ for CSI-RS resource 1,2,3,4
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 1 and 3 $l_0 = 10$ for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	15 kHz SCS: 20 for CSI-RS resource 1,2,3,4 30 kHz SCS: 40 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS: 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 4$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		Same as number of transmit antenna
	CDM Type		For number of Tx=1: 'No CDM' For number of Tx>1: 'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
QCL info		TCI state #1	
ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 0$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		4
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
Frequency Occupation		Start PRB 0 Number of PRB = BWP size	
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C

	Type 2 QCL information	SSB index		N/A
		QCL Type		N/A
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		N/A
		QCL Type		N/A
Maximum number of code block groups for ACK/NACK feedback				1
Maximum number of HARQ transmission				4
HARQ ACK/NACK bundling				Multiplexed
Redundancy version coding sequence				{0,2,3,1}
PDSCH & PDSCH DMRS Precoding configuration				For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot with equal probability of each applicable i_1, i_2 combination
Symbols for all unused REs				OCNG Annex A.5
Propagation condition				Static propagation condition No external noise sources are applied
Antenna configuration	1 layer CCs			1x8
	2 layers CCs			2x8
	4 layers CCs			4x8
Physical signals, channels mapping and precoding				As specified in Annex B.4.1
Es			dBm/Hz	-112 for MCS indexes in Table 5.5.1.3-5: -110.5 For 1024QAM MCS indexes in Table 5.5.2.3-1:
Note 1: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission				
Note 2: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing				

Normative reference for this requirement is TS 38.101-4 [2] clause 5.5.1

5.5.1_1.3.1 Procedure for test parameter selection

Same as in Clause 5.5.1.3.1.

5.5.1_1.4 Test description

5.5.1_1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.13 for TE diagram (without fader and AWGN) and clause A.3.2.6.3 for UE diagram.
2. The parameter settings for the NR cell are initially set up according to Table 5.5.1_1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with *Connected without release On, Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0* according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 5.5.1_1.4.3.
6. SS shall transmit UECapabilityEnquiry message.
7. The UE shall transmit UECapabilityInformation message.
8. Using the UE capabilities advertised in the *UE-CapabilityRAT-Container* of the type *UE-NR-Capability*, and the procedure outlined in 5.5.1_1.3.1 determine one set of parameters that would provide the largest data rate.
9. Setup up the NR cell using these parameters for the test.
10. Configure the TBSsize, DL RMC, UL RMC, PDCP size from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate.

5.5.1_1.4.2 Test procedure

Same as in Clause 5.5.1.4.2.

5.5.1_1.4.3 Message contents

Same as in Clause 5.5.1.4.3.

5.5.1_1.5 Test requirement

Same as in Clause 5.5.1.5.

5.5.2 FR1 Sustained downlink data rate performance for single carrier with DL1024QAM

Editor's Note: Following aspects needs further investigation.

- **DL EVM of $\leq 2.5\%$ for $f > 4.2$ GHz pending further analysis by the TE vendors**

5.5.2.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE's that support DL1024QAM capability. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

5.5.2.2 Test Applicability

This test applies to all types of NR UE release 17 and forward that support DL1024QAM.

5.5.2.3 Minimum conformance requirements

Same as in Clause 5.5.1.3 with the addition of Table 5.5.2.3-1 for DL1024QAM.

Table 5.5.2.3-1: 1024QAM MCS indexes for indicated UE capabilities

Supported RX antenna ports	Maximum number of PDSCH MIMO layers	Maximum modulation format	Scaling factor	MCS
2RX	1	10	1	23
	1	10	0.8	21
	1	10	0.75	19
	1	10	0.4	9
4RX	1	10	1	24
	1	10	0.8	21
	1	10	0.75	19

	1	10	0.4	9
	2	10	1	23
	2	10	0.8	21
	2	10	0.75	19
	2	10	0.4	9
Note 1: MCS Index for maximum modulation format 10 is based on MCS index Table 4 defined in clause 5.1.3.1 of TS 38.214 [12] Note 2: For the band(s) on which UE supporting "Maximum modulation format" of 10, with 2 RX and 2 MIMO layers, the MCS index is derived from the rows with "Maximum modulation format" of 8 in Table 5.5.1.3-5				

5.5.2.3.1 Procedure for test parameter selection

Below test parameter selection procedure is from 38.101-4 [5] by replacing CA configuration with operating band, and bandwidth instead of bandwidth combination.

The test parameters are determined by the following procedure:

- Select one operating band among all supported operating bands and set of per band UE capabilities supporting 1024QAM (*pdsch-1024QAM-FRI*) among all supported UE capabilities that provides the largest data rate [TS 38.306 [14, Section 4.1.2]].
- Set of per band UE capabilities includes channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor [TS 38.306 [14, Section 4.1.2]].
- When there are multiple sets of bandwidths and UE capabilities (channel bandwidth, subcarrier spacing, number of MIMO layer, modulation format, scaling factor) with same largest data rate, select one among sets with the smallest channel bandwidth.
- For a UE capable of 1024QAM (*pdsch-1024QAM-FRI*), for each operating band, use Table 5.5.2.3-1 to determine MCS based on test parameters and indicated UE capabilities if the maximum modulation format is 10.

5.5.2.4 Test description

5.5.2.4.1 Initial conditions

Same as in Clause 5.5.1.4.1.

5.5.2.4.2 Test procedure

Same as in Clause 5.5.1.4.2.

5.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 5.5.2.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		
}			

5.5.2.5 Test requirement

Same as in Clause 5.5.1.5.

5.5.3 FR1 Sustained downlink data rate performance for RedCap

5.5.3.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

5.5.3.2 Test Applicability

This test applies to all types of NR UE release 17 and forward that support NR RedCap.

5.5.3.3 Minimum conformance requirements

Same as in Clause 5.5.1.3 except that the MIMO layers are configured to 2 for UE supporting 2 MIMO layers and 1 for UE supporting 1 MIMO layers for all operating bands. Antenna configuration is 1x1 for UE supporting 1 layer and 2x2 for UE supporting 2 layers.

For RedCap UE with HD-FDD mode, the additional test parameters are specified in Table 5.5.3.3-1.

Table 5.5.3.3-1: Additional test parameters for HD-FDD single carrier

Parameter		Unit	Value
Duplex mode			HD-FDD
PDSCH configuration	Starting symbol (S)		1
	Length (L)		13
Number of HARQ Processes			4
Full DL slots (Note 1, Note 2)			For slots i , if $\text{mod}(i, 5) = \{0,1,2\}$
K1 value (Note 2)			4 if $\text{mod}(i, 5) = 0$ 3 if $\text{mod}(i, 5) = 1$ 2 if $\text{mod}(i, 5) = 2$
Note 1: PDSCH is scheduled only on full DL slots.			
Note 2: i is the slot index per frame; $i = \{1, 2, \dots, 19\}$.			

5.5.3.3.1 Procedure for test parameter selection

Same as in Clause 5.5.1.3.1.

5.5.3.4 Test description

5.5.3.4.1 Initial conditions

Same as in Clause 5.5.1.4.1.

5.5.3.4.2 Test procedure

Same as in Clause 5.5.1.4.2.

5.5.3.4.3 Message contents

Same as in Clause 5.5.1.4.3 with following exceptions :

- Table 5.5.1.4.3-8 is replaced by Table 5.5.3.4.3-8.

Table 5.5.3.4.3-8: *PDCP-Config*

Derivation Path: TS 38.508-1 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len12bits		
pdcp-SN-Size-DL	len12bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		
statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

5.5.3.5 Test requirement

Same as in Clause 5.5.1.5.

5.5.4 FR1 Sustained downlink data rate performance for eRedCap

5.5.4.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

5.5.4.2 Test Applicability

This test applies to all types of NR UE release 18 and forward that support NR eRedCap.

5.5.4.3 Minimum conformance requirements

Same as in Clause 5.5.1.3 except that the MIMO layers are configured to 2 for UE supporting 2 MIMO layers and 1 for UE supporting 1 MIMO layers for all operating bands. Antenna configuration is 1x1 for UE supporting 1 layer and 2x2 for UE supporting 2 layers.

For eRedCap with reduced peak data rate and reduced baseband bandwidth in FR1, only 25 PRBs for 15kHz SCS and 12RBs for 30kHz SCS are allocated for PDSCH transmission.

For eRedCap UE with HD-FDD mode, the additional test parameters are specified in Table 5.5.4.3-1.

Table 5.5.4.3-1: Additional test parameters for HD-FDD single carrier

Parameter	Unit	Value
Duplex mode		HD-FDD
PDSCH configuration	Starting symbol (S)	1
	Length (L)	13
Number of HARQ Processes		4
Full DL slots (Note 1, Note 2)		For slots i , if $\text{mod}(i, 5) = \{0,1,2\}$
K1 value (Note 2)		4 if $\text{mod}(i, 5) = 0$ 3 if $\text{mod}(i, 5) = 1$ 2 if $\text{mod}(i, 5) = 2$
Note 1: PDSCH is scheduled only on full DL slots.		
Note 2: i is the slot index per frame; $i = \{1, 2, \dots, 19\}$.		

5.5.4.3.1 Procedure for test parameter selection

Same as in Clause 5.5.1.3.1 with the additional condition for bandwidth selection below.

For eRedCap UE with reduced peak data rate and reduced baseband bandwidth in FR1, only 25 PRBs for 15kHz SCS and 12RBs for 30kHz SCS are allocated for PDSCH transmission.

5.5.4.4 Test description

5.5.4.4.1 Initial conditions

Same as in Clause 5.5.1.4.1.

5.5.4.4.2 Test procedure

Same as in Clause 5.5.1.4.2.

5.5.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions

Table 5.5.4.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.3-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType1		
}			

5.5.4.5 Test requirement

Same as in Clause 5.5.1.5.5A.1 FR1 Sustained downlink data rate performance for carrier aggregation

5.5A.1.1 FR1 SDR performance for CA (2DL CA)

5.5A.1.1.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

5.5A.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL CA

5.5A.1.1.3 Minimum conformance requirements

The Sustained Data Rate (SDR) requirements in this clause are applicable to the FR1 CA.

The TB success rate shall be higher than 85% when PDSCH is scheduled with MCS defined for the selected CA bandwidth combination and with the downlink physical channel setup according to Annex C.2.1.

The TB success rate is defined as $100\% * \text{NDL_correct_rx} / (\text{NDL_newtx} + \text{NDL_retx})$, where NDL_newtx is the number of newly transmitted DL transport blocks, NDL_rettx is the number of retransmitted DL transport blocks, and NDL_correct_rx is the number of correctly received DL transport blocks.

The common test parameters are specified in Table 5.5A.1.1.3-1. The parameters specified in Table 5.5A.1.1.3-2 are applicable for tests on FDD CCs and parameters specified in Table 5.5A.1.1.3-3 are applicable for tests on TDD CCs.

Unless otherwise stated, no user data is scheduled on slot #0, 10 and 11 within 20 ms for SCS 15 kHz.

Unless otherwise stated, no user data is scheduled on slot #0, 20 and 21 within 20 ms for SCS 30 kHz.

Table 5.5A.1.1.3-1: Common test parameters for FDD and TDD component carriers

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
EPRE ratio of PTRS to PDSCH		dB	N/A
Channel bandwidth		MHz	Channel bandwidth from selected CA bandwidth combination
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
	First DMRS position for Type A PDSCH mapping		2
Cross carrier scheduling			Not configured
Active DL BWP index			1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 2)	RBs	0
	Subcarrier spacing	kHz	15 or 30
DL BWP configuration #1	RB offset	RBs	0
	Number of contiguous PRB		Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing
	Subcarrier spacing	kHz	15 or 30
	Cyclic prefix		Normal
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		Symbols #0
	Number of PRBs in CORESET		Table 5.5A.1.1.3-4
	Number of PDCCH candidates and aggregation levels		2/AL2 for 15 kHz / 5 MHz, 30 kHz / 10 MHz and 30 kHz / 15 MHz 2/AL4 for 15 kHz / 10 MHz, 15kHz / 15 MHz, 30 kHz / 20 MHz, 30 kHz / 25 MHz, 30 kHz / 30 MHz and 30 kHz / 35 MHz 2/AL8 for other greater combinations
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1_1
	TCI State		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx=2: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of precoder indices 0 and 2 For number of Tx=4: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of $i_{-1,1}$ in {1,2,3,5,6,7} and i_{-2} in {0,2}
PDSCH configuration	Mapping type		Type A
	k0		0
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		wideband
	Resource allocation type		Type 1 for eRedCap Type 0 for others
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle		N/A	

	size		
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
	Antenna ports indexes		{1000} for 1 Layer CCs {1000, 1001} for 2 Layers CCs {1000 – 1003} for 4 Layers CCs
	Number of PDSCH DMRS CDM group(s) without data		1 for 1 layer and 2 layers CCs 2 for 4 Layers CCs
PTRS configuration			PTRS is not configured
CSI-RS for tracking	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 3$ for CSI-RS resource 1,2,3,4
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 1 and 3 $l_0 = 10$ for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	15 kHz SCS: 20 for CSI-RS resource 1,2,3,4 30 kHz SCS: 40 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS: 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size} / 4) * 4$
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 4$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		Same as number of transmit antenna
	CDM Type		For number of Tx=1: 'No CDM' For number of Tx>1: 'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size} / 4) * 4$
	QCL info		TCI state #1
ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 0$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		4
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size} / 4) * 4$
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A

Maximum number of code block groups for ACK/NACK feedback		1
Maximum number of HARQ transmission		4
HARQ ACK/NACK bundling		Multiplexed
Redundancy version coding sequence		{0,2,3,1}
PDSCH & PDSCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every PRB bundle and updated per slot with equal probability of each applicable i1/i2 combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12]
Symbols for all unused REs		OP.1 FDD as defined in Annex A.5.1.1 OP.1 TDD as defined in Annex A.5.2.1
Propagation condition		Static propagation condition No external noise sources are applied
Antenna configuration	1 layer CCs	1x2 or 1x4
	2 layers CCs	2x2 or 2x4
	4 layers CCs	4x4
Physical signals, channels mapping and precoding		As specified in Annex B.4.1
Es	dBm/Hz	-112 for MCS indexes in Table 5.5A.1.1.3-5
Note 1: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission		
Note 2: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing		

Table 5.5A.1.1.3-2: Additional test parameters for FDD CC

Parameter		Unit	Value
Duplex mode			FDD
PDSCH configuration	Starting symbol (S)		1
	Length (L)		13
Number of HARQ Processes			4
K1 value			2

Table 5.5A.1.1.3-3: Additional test parameters for TDD CC

Parameter		Unit	Value
Duplex mode			TDD
PDSCH configuration	Starting symbol (S)		1
	Length (L)		13
Number of HARQ Processes			8
K1 value			Specific to each UL-DL pattern
TDD UL-DL pattern			15 kHz SCS: FR1.15-1 30 kHz SCS: FR1.30-1
Note 1: PDSCH is scheduled only on full DL slots			

Table 5.5A.1.1.3-4: Number of PRBs in CORESET

SCS (kHz)	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	35 MHz	40 MHz	45 MHz	50 MHz	60 MHz	80 MHz	100 MHz
15	24	48	78	102	132	156	186	216	240	270	N/A	N/A	N/A
30	6	24	36	48	60	78	90	102	114	132	162	216	270

Table 5.5A.1.1.3-5: MCS indexes for indicated UE capabilities

Maximum number of	Maximum	Scaling	MCS
-------------------	---------	---------	-----

PDSCH MIMO layers	modulation format	factor	
1	8	1	26
1	8	0.8	21
1	8	0.75	20
1	8	0.4	11
1	6	1	27
1	6	0.8	23
1	6	0.75	22
1	6	0.4	14
1	4	1	16
1	4	0.8	16
1	4	0.75	16
1	4	0.4	10
1	2	1	9
1	2	0.8	9
1	2	0.75	9
1	2	0.4	4
2	8	1	26
2	8	0.8	21
2	8	0.75	20
2	8	0.4	11
2	6	1	27
2	6	0.8	23
2	6	0.75	22
2	6	0.4	14
2	4	1	16
2	4	0.8	16
2	4	0.75	16
2	4	0.4	10
2	2	1	9
2	2	0.8	9
2	2	0.75	9
2	2	0.4	4
4	8	1	26
4	8	0.8	23
4	8	0.75	22
4	8	0.4	12
4	6	1	27
4	6	0.8	24
4	6	0.75	23
4	6	0.4	14
4	4	1	16
4	4	0.8	16
4	4	0.75	16
4	4	0.4	11
4	2	1	9
4	2	0.8	9
4	2	0.75	9
4	2	0.4	5
Note 1:	MCS Index for maximum modulation format 2,4 and 6 is based on MCS index Table 1 defined in clause 5.1.3.1 of TS 38.214 [12]		
Note 2:	MCS Index for maximum modulation format 8 is based on MCS index Table 2 defined in clause 5.1.3.1 of TS 38.214 [12]		

5.5A.1.1.3.1 Procedure for test parameter selection

The test parameters are determined by the following procedure:

- Select one CA bandwidth combination among all supported CA configurations and set of per component carrier (CC) UE capabilities among all supported UE capabilities that provides the largest data rate in accordance with clause 4.1.2 of TS 38.306 [14].
- Set of per CC UE capabilities includes channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor in accordance with clause 4.1.2 of TS 38.306 [14].

- When there are multiple sets of CA bandwidth combinations and UE capabilities (channel bandwidth, subcarrier spacing, number of MIMO layer, modulation format, scaling factor) with same largest data rate, select one among sets with the smallest aggregated channel bandwidth.
- For each CC in CA bandwidth combination, use Table 5.5A.1.1.3-5 to determine MCS based on test parameters and indicated UE capabilities.

The normative reference for this requirement is TS 38.101-4 [5], clause 5.5A.1.

5.5A.1.1.4 Test description

5.5A.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 5.2.2.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 4.3.1.1.

1. Connect the SS to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2A, A.3.1.7.6, and A.3.1.7.7 for TE diagram (without fader and AWGN) for 2Rx and 4Rx CC(s) respectively and clause A.3.2.6 for UE diagram.
2. The parameter settings for the NR cell are initially set up according to Table 5.5.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with *Connected without release On, Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0* according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 5.5 A.1.1.4.3.
6. Configure SCC(s) as applicable according to Annex C.0, C.1 and C.2 for all downlink physical channels.
7. The SS shall configure SCC (s) as applicable as per TS 38.508-1 [6] clause 5.5.1.
8. SS activates SCC(s) as applicable by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
9. SS shall transmit UECapabilityEnquiry message.
10. The UE shall transmit UECapabilityInformation message.
11. Using the UE capabilities advertised in the *UE-CapabilityRAT-Container* of the type *UE-NR-Capability*, and the procedure outlined in 5.5A.1.1.3.1 determine one set of parameters that would provide the largest data rate.
12. Setup up the NR cells using these parameters for the test.
13. Configure the TBSIZE, DL RMC, UL RMC, PDCP size from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate.

5.5A.1.1.4.2 Test procedure

1. SS configures T-reordering timer to be infinity.
2. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
3. SS sets the counters N_{DL_newtx} N_{DL_retx} to 0.

4. For each new DL HARQ transmission the SS generates sufficient PDCP SDUs (max PDCP SDU size and minimum number of consecutive PDCP SDUs) to fill up the TB on both PCC and SCC(s) as applicable in accordance with Annex A.3.2_1. The SS ciphers the PDCP SDUs, concatenates the resultant PDCP PDUs to form an RLC PDU and then a MAC PDU. The SS transmits the MAC PDU. The SS increments then N_{DL_newtx} by one
5. If PHY requests a DL HARQ retransmission, the SS performs a HARQ retransmission and increments N_{DL_retr} by one.
6. Steps 4 to 5 are repeated at every TTI for at least 300 frames and the SS waits for 300ms to let any HARQ retransmissions and RLC retransmissions to finish.
7. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
8. The SS calculates the TB success rate as $A = 100\% * N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retr})$.
9. SS computes the PDCP SDU loss by looking into the FMC and Bitmap field in the PDCP Status Report. PDCP SDU loss $B = COUNT$ reported in the Bitmap field of PDCP Stata Report.
10. The UE passes the test if $A \geq 85\%$ TB success rate on both PCC and SCC and $B = 0$.

Note 1: In case of RLC PDU retransmission, the number of new required PDCP SDUs is as many as to fill the rest of TB.

5.5A.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 5.5A.1.1.4.3-1: CLOSE UE TEST LOOP (in the preamble)

Derivation Path: TS 38.509 [9] clause 6.3.1			
Information Element	Value/remark	Comment	Condition
Protocol discriminator	1 1 1 1		
Skip indicator	0 0 0 0		
Message type	1 0 0 0 0 0 0 0		
UE test loop mode	0 0 0 0 0 0 0 0	UE test loop mode A	
UE test loop mode A LB setup			
Length of UE test loop mode A LB setup list in bytes	0 0 0 0 0 0 1 1	Length of one LB setup DRB (3 bytes)	
LB setup DRB	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 Q5 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q5 = 1 (for NR Data Radio Bearers) Q4..Q0 = Data Radio Bearer identity number -1 for the radio bearer. See 38.509 clause 6.3.1	
UE test loop mode B LB setup	Not present		

Table 5.5A.1.1.4.3-2: RadioBearerConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF SEQUENCE {	1 entry		DRB1
cnAssociation CHOICE {			
sdap-Config	SDAP-Config		
}			
drb-Identity	DRB-Identity using condition DRB1		

reestablishPDCP	true		DRB1 AND Re-establish_PDCP
pdcp-Config	PDCP-Config		
}			

Table 5.5A.1.1.4.3-3: PDCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len18bits		
pdcp-SN-Size-DL	len18bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		
statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

Table 5.5A.1.1.4.3-4: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112 For FDD 15kHz SCell: K1 = 7 if mod(i,5) = 0 K1 = 5 if mod(i,5) = 1 K1 = 4 if mod(i,5) = 2 K1 = 11 if mod(i,5) = 3 K1 = 9 if mod(i,5) = 4 where i is slot index per frame; i = {0,...,19}	-	(For FDD CC if configured as SCell with TDD PCell)
	corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112 For TDD30kHz SCell: K1 = 3		(For TDD CC if configured as SCell with FDD PCell)

Table 5.5A.1.1.4.3-5: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8	(For FDD CC if configured as SCell with TDD PCell)

}			
---	--	--	--

5.5A.1.1.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

5.5A.1.2 FR1 SDR performance for CA (3DL CA)

5.5A.1.2.1 Test Purpose

Same as in clause 5.5A.1.1.1

5.5A.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 3DL CA

5.5A.1.2.3 Minimum conformance requirements

Same as in clause 5.5A.1.1.3

5.5A.1.2.3.1 Procedure for test parameter selection

Same as in clause 5.5A.1.1.3.1

5.5A.1.2.4 Test description

Same as in clause 5.5A.1.1.4

5.5A.1.2.4.3 Message contents

Same as in clause 5.5A.1.1.4.3

5.5A.1.2.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

5.5A.1.3 FR1 SDR performance for CA (4DL CA)

5.5A.1.3.1 Test Purpose

Same as in clause 5.5A.1.1.1

5.5A.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 4DL CA

5.5A.1.3.3 Minimum conformance requirements

Same as in clause 5.5A.1.1.3

5.5A.1.3.3.1 Procedure for test parameter selection

Same as in clause 5.5A.1.1.3.1

5.5A.1.3.4 Test description

Same as in clause 5.5A.1.1.4

5.5A.1.3.4.3 Message contents

Same as in clause 5.5A.1.1.4.3

5.5A.1.3.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

5.5A.1.4 FR1 SDR performance for CA (5DL CA)

5.5A.1.4.1 Test Purpose

Same as in clause 5.5A.1.1.1

5.5A.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 5DL CA

5.5A.1.4.3 Minimum conformance requirements

Same as in clause 5.5A.1.1.3

5.5A.1.4.3.1 Procedure for test parameter selection

Same as in clause 5.5A.1.1.3.1

5.5A.1.4.4 Test description

Same as in clause 5.5A.1.1.4

5.5A.1.4.4.3 Message contents

Same as in clause 5.5A.1.1.4.3

5.5A.1.4.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

5.6 PDSCH absolute physical layer throughput requirements

The common parameters for PDSCH absolute physical layer throughput requirements specified in Table 6.1.2-1 are valid for all absolute physical layer throughput requirements unless otherwise stated.

5.6.1 1RX requirements

Void

5.6.2 2RX requirements

5.6.2.1 FDD

5.6.2.1.1 2Rx FDD FR1 PDSCH absolute physical layer throughput performance with link adaptation

5.6.2.1.1.0 Minimum conformance requirements

The purpose of the requirements is to verify the PDSCH absolute physical layer throughput performance with link adaptation under 2 receive antenna conditions.

The performance requirements are specified in Table 5.6.2.1.1.0-2, with additional test parameters in Table 5.6.2.1.1.0-1 and the downlink physical channel setup according to Annex C.2.1.

Table 5.6.2.1.1.0-1: Test parameters

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			2x2
Correlation configuration			ULA Low
Beamforming Model			As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3 (6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType		Aperiodic	
CQI-table		Table 2	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		not configured	
timeRestrictionForInterferenceMeasurements		not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	Not configured	
Aperiodic Report Slot Offset		5	
CSI request		1 in slots i , where $\text{mod}(i,$	

		5) = 0, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	N/A
	CodebookSubsetRestriction	111111
	RI Restriction	N/A
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	6
Maximum number of HARQ transmission		4
The number of slots between PDSCH and corresponding HARQ-ACK information		2
Measurement channel		As specified in Table A.4-2 Rank 1: TBS.2-1 Rank 2: TBS.2-2
Note1: For retransmission including initial transmission, RV {0,2,3,1} with same MCS and rank as initial transmission; follow the latest UE reported PMI whose rank is same as the initial transmission		

Table 5.6.2.1.1.0-2: Minimum performance requirement

Test num.	Fraction of maximum throughput (%)	SNR (dB)
Test 1	35%	19.3
Note 1: The maximum throughput is defined as with TBS corresponding to CQI index 15 with rank 2.		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.6.2.1.1.

5.6.2.1.1_1 2Rx FDD FR1 PDSCH performance with link adaptation - 2x2 MIMO for both SA and NSA

5.6.2.1.1_1.1 Test purpose

Verify the PDSCH absolute physical layer throughput performance with link adaptation under 2 receive antenna conditions.

5.6.2.1.1_1.2 Test applicability

This test applies to all types of release 17 NR UEs and E-UTRAN UEs supporting EN-DC supporting link adaptation.

This test applies to all types of release 18 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.6.2.1.1_1.3 Test description

5.6.2.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the serving cell are set up according to Table 5.2-1 and Table 5.6.2.1.1.0-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, *Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.6.2.1.1_1.3.3.

5.6.2.1.1_1.3.2 Test procedure

1. Set the parameters of the bandwidth, the propagation channel, the correlation matrix and the SNR for the serving cell according to Tables 5.6.2.1.1_1.4-1.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI with DL RMC according to the UE reported CQI, PMI and RI. The SS sends downlink MAC padding bits. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RB allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0-1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Calculate the fraction of the maximum throughput that has been measured. Decide pass or fail verdict according to the fraction of maximum throughput requirement defined in Table 5.6.2.1.1_1.4-1.

5.6.2.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.6.2.1.1_1.3.3_1 Message exceptions for SA

Table 5.6.2.1.1_1.3.3_1-1: CSI request

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1A			
Parameter	Value	Value in binary	Condition
CSI request	Dependent on test parameters 1 bit		

Table 5.6.2.1.1_1.3.3_1-2: CSI-MeasConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-38			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {			
reportTriggerSize	1		
}			

Table 5.6.2.1.1_1.3.3_1-3: CSI-AperiodicTriggerStateList

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-15			
Information Element	Value/remark	Comment	Condition
CSI-AperiodicTriggerStateList ::= SEQUENCE (SIZE (1..maxNrOfCSI-AperiodicTriggers)) OF CSI-AperiodicTriggerState {	1 entry		
CSI-AperiodicTriggerState[1] SEQUENCE {		entry 1	
associatedReportConfigInfoList SEQUENCE (SIZE(1..maxNrofReportConfigPerAperiodicTrigger)) OF CSI-AssociatedReportConfigInfo {	1 entry		
CSI-AssociatedReportConfigInfo[1] SEQUENCE {		entry 1	
reportConfigId	0		
resourcesForChannel CHOICE {			
nzp-CSI-RS SEQUENCE {			
resourceSet	1		
qcl-info	Not present		
}			
}			
}			
csi-IM-ResourcesforInterference	1		
nzp-CSI-RS-ResourcesforInterference	Not present		
}			
}			
}			
}			

5.6.2.1.1_1.3.3_2 Message exceptions for NSA

Same as 5.6.2.1.1_1.3.3_1

5.6.2.1.1_1.4 Test requirement

The fraction of maximum throughput percentage for the downlink shall meet or exceed the specified value in Table 5.6.2.1.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.6.2.1.1_1.4-1: Test requirements

Test num.	Fraction of maximum throughput (%)	SNR (dB)
Test 1	35%	20.3
Note 1: The maximum throughput is defined as with TBS corresponding to CQI index 15 with rank 2.		

5.6.2.2 TDD

5.6.2.2.1 2Rx TDD FR1 PDSCH absolute physical layer throughput performance with link adaptation

5.6.2.2.1.0 Minimum conformance requirements

The purpose of the requirements is to verify the PDSCH absolute physical layer throughput performance with link adaptation under 2 receive antenna conditions.

The performance requirements are specified in Table 5.6.2.2.1.0-2, with additional test parameters in Table 5.6.2.2.1.0-1 and the downlink physical channel setup according to Annex C.2.1.

Table 5.6.2.2.1.0-1: Test parameters

Parameter	Unit	Test 1
Bandwidth	MHz	40

Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD Slot Configuration			FR1.30-1 Annex A.1.2
Propagation channel			TDLA30-5
Antenna configuration			2x2
Correlation configuration			ULA Low
Beamforming Model			As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3 (6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType			Aperiodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			not configured
timeRestrictionForInterferenceMeasurements			not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	16
csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			9
CSI request			1 in slots i , where $\text{mod}(i, 10) = 0$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A
	CodebookSubsetRestriction		111111
	RI Restriction		N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	5.5
Maximum number of HARQ transmission (Note 1)			4
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
CSI Measurement channel			As specified in Table A.4-2, Rank 1: TBS.2-3 Rank 2: TBS.2-4
Note1: For retransmission including initial transmission, RV {0,2,3,1} with same MCS and rank as initial transmission; follow the latest UE reported PMI whose rank is same as the initial transmission			

Table 5.6.2.2.1.0-2: Minimum performance requirements

	Fraction of maximum	SNR(dB)
--	---------------------	---------

	throughput (Note 1)	
Test 1	35%	20.4
Note 1: The maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.6.2.2.1.

5.6.2.2.1_1 2Rx TDD FR1 PDSCH performance with link adaptation - 2x2 MIMO for both SA and NSA

5.6.2.2.1_1.1 Test purpose

Verify the PDSCH absolute physical layer throughput performance with link adaptation under 2 receive antenna conditions.

5.6.2.2.1_1.2 Test applicability

This test applies to all types of release 17 NR UEs and E-UTRAN UEs supporting EN-DC supporting link adaptation.

This test applies to all types of release 18 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.6.2.2.1_1.3 Test description

5.6.2.2.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the serving cell are set up according to Table 5.2-1 and Table 5.6.2.2.1.0-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.6.2.2.1_1.3.3.

5.6.2.2.1_1.3.2 Test procedure

1. Set the parameters of the bandwidth, the propagation channel, the correlation matrix and the SNR for the serving cell according to Tables 5.6.2.2.1_1.4-1.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI with DL RMC according to the UE reported CQI, PMI and RI. The SS sends downlink MAC padding bits. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RB allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH

CSI feedback via PDCCH DCI format 0-1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback.

3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Calculate the fraction of the maximum throughput that has been measured. Decide pass or fail verdict according to the fraction of maximum throughput requirement defined in Table 5.6.2.2.1_1.4-1.

5.6.2.2.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.6.2.2.1_1.3.3_1 Message exceptions for SA

Same as 5.6.2.1.1_1.3.3_1

5.6.2.2.1_1.3.3_2 Message exceptions for NSA

Same as 5.6.2.1.1_1.3.3_1

5.6.2.2.1_1.4 Test requirement

The fraction of maximum throughput percentage for the downlink shall meet or exceed the specified value in Table 5.6.2.2.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.6.2.2.1_1.4-1: Test requirements

	Fraction of maximum throughput (Note 1)	SNR(dB)
Test 1	35%	21.4
Note 1: The maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

5.6.3 4Rx requirements

5.6.3.1 FDD

5.6.3.1.1 4Rx FDD FR1 PDSCH absolute physical layer throughput performance with link adaptation

5.6.3.1.1.0 Minimum conformance requirements

The purpose of the requirements is to verify the PDSCH absolute physical layer throughput performance with link adaptation under 4 receive antenna conditions.

The performance requirements are specified in Table 5.6.3.1.1.0-2, with additional test parameters in Table 5.6.3.1.1.0-1 and the downlink physical channel setup according to Annex C.2.1.

Table 5.6.3.1.1.0-1: Test parameters

Parameter	Unit	Test 1
Bandwidth	MHz	10
Subcarrier spacing	kHz	15
Duplex Mode		FDD
Propagation channel		TDLA30-5
Antenna configuration		2x4
Correlation configuration		ULA Low
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS	CSI-RS resource Type	Periodic

configuration	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9
	CSI-RS periodicity and offset	slot	5/1
N郑 CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3, (6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
	N郑 CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType		Aperiodic	
CQI-table		Table 2	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	Not configured	
Aperiodic Report Slot Offset		5	
CSI request		1 in slots i , where $\text{mod}(i, 5) = 0$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to N郑 CSI-RS and CSI-IM	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A
	CodebookSubsetRestriction		111111
RI Restriction		N/A	
Physical channel for CSI report		PUSCH	
CQI/RI/PMI delay	ms	6	
Maximum number of HARQ transmission (Note 1)		4	
The number of slots between PDSCH and corresponding HARQ-ACK information		2	
Measurement channel		As specified in Table A.4-2 Rank 1: TBS.2-1 Rank 2: TBS.2-2	
Note 1: For retransmission including initial transmission, RV {0,2,3,1} with same MCS and rank as initial transmission; follow the latest UE reported PMI whose rank is same as the initial transmission.			

Table 5.6.3.1.1.0-2: Minimum requirements

	Fraction of maximum throughput (Note 1)	SNR (dB)
--	---	----------

Test 1	50%	18.0
Note 1: The maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.6.3.1.1.

5.6.3.1.1_1 4Rx FDD FR1 PDSCH performance with link adaptation - 2x4 MIMO for both SA and NSA

5.6.3.1.1_1.1 Test purpose

Verify the PDSCH absolute physical layer throughput performance with link adaptation under 4 receive antenna conditions.

5.6.3.1.1_1.2 Test applicability

This test applies to all types of release 17 NR UEs and E-UTRAN UEs supporting EN-DC supporting link adaptation.

This test applies to all types of release 18 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.6.3.1.1_1.3 Test description

5.6.3.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the serving cell are set up according to Table 5.2-1 and Table 5.6.3.1.1.0-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.6.3.1.1_1.3.3.

5.6.3.1.1_1.3.2 Test procedure

1. Set the parameters of the bandwidth, the propagation channel, the correlation matrix and the SNR for the serving cell according to Tables 5.6.3.1.1_1.4-1.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI with DL RMC according to the UE reported CQI, PMI and RI. The SS sends downlink MAC padding bits. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RB allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0-1 with aperiodic CSI request trigger. No transport block is sent in parallel to the CSI feedback.

3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Calculate the fraction of the maximum throughput that has been measured. Decide pass or fail verdict according to the fraction of the maximum throughput requirement defined in Table 5.6.3.1.1_1.4-1.

5.6.3.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.6.3.1.1_1.3.3_1 Message exceptions for SA

Same as 5.6.2.1.1_1.3.3_1

5.6.3.1.1_1.3.3_2 Message exceptions for NSA

Same as 5.6.2.1.1_1.3.3_1

5.6.3.1.1_1.4 Test requirement

The fraction of maximum throughput percentage for the downlink shall meet or exceed the specified value in Table 5.6.3.1.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.6.3.1.1_1.4-1: Test requirements

	Fraction of maximum throughput (Note 1)	SNR (dB)
Test 1	50%	19
Note 1: The maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

5.6.3.2 TDD

5.6.3.2.1 4Rx TDD FR1 PDSCH absolute physical layer throughput performance with link adaptation

5.6.3.2.1.0 Minimum conformance requirements

The purpose of the requirements is to verify the PDSCH absolute physical layer throughput performance with link adaptation under 4 receive antenna conditions.

The performance requirements are specified in Table 5.6.3.2.1.0-2, with additional test parameters in Table 5.6.3.2.1.0-1 and the downlink physical channel setup according to Annex C.2.1.

Table 5.6.3.2.1.0-1: Test parameters

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD UL-DL pattern			FR1.30-1 Annex A.1.2
Propagation channel			TDLA30-5
Antenna configuration			2x4
Correlation configuration			ULA Low
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5, (4)
First OFDM symbol in the PRB used			9

	for CSI-RS (l_0)		
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3, (6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType		Aperiodic	
CQI-table		Table 2	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	16	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	Not configured	
Aperiodic Report Slot Offset		9	
CSI request		1 in slots i , where $\text{mod}(i, 10) = 0$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		N/A
	RI Restriction		111111
Physical channel for CSI report		PUSCH	
CQI/RI/PMI delay	ms	5.5	
Maximum number of HARQ transmission (Note 1)		4	
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
Measurement channel		As specified in Table A.4-2, Rank 1: TBS.2-3 Rank 2: TBS.2-4	
Note 1: For retransmission including initial transmission, RV {0,2,3,1} with same MCS and rank as initial transmission; follow the latest UE reported PMI whose rank is same as the initial transmission.			

Table 5.6.3.2.1.0-2: Minimum requirements

	Fraction of maximum throughput (Note 1)	SNR (dB)
Test 1	50%	18.2
Note 1: The maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

The normative reference for this requirement is TS 38.101-4 [5], clause 5.6.3.2.1.

5.6.3.2.1_1 4Rx TDD FR1 PDSCH performance with link adaptation - 2x4 MIMO for both SA and NSA

5.6.3.2.1_1.1 Test purpose

Verify the PDSCH absolute physical layer throughput performance with link adaptation under 4 receive antenna conditions.

5.6.3.2.1_1.2 Test applicability

This test applies to all types of release 17 NR UEs and E-UTRAN UEs supporting EN-DC supporting link adaptation.

This test applies to all types of release 18 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

5.6.3.2.1_1.3 Test description

5.6.3.2.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the serving cell are set up according to Table 5.2-1 and Table 5.6.3.2.1.0-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.6.3.2.1_1.3.3.

5.6.3.2.1_1.3.2 Test procedure

1. Set the parameters of the bandwidth, the propagation channel, the correlation matrix and the SNR for the serving cell according to Tables 5.6.3.2.1_1.4-1.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI with DL RMC according to the UE reported CQI, PMI and RI. The SS sends downlink MAC padding bits. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RB allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0-1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback.
3. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Calculate the fraction of the maximum throughput that has been measured. Decide pass or fail verdict according to the fraction of maximum throughput requirement defined in Table 5.6.3.2.1_1.4-1.

5.6.3.2.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

5.6.3.2.1_1.3.3_1 Message exceptions for SA

Same as 5.6.2.1.1_1.3.3_1

5.6.3.2.1_1.3.3_2 Message exceptions for NSA

Same as 5.6.2.1.1_1.3.3_1

5.6.3.2.1_1.4 Test requirement

The fraction of maximum throughput percentage for the downlink shall meet or exceed the specified value in Table 5.6.3.2.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 5.6.3.2.1_1.4-1: Test requirements

	Fraction of maximum throughput (Note 1)	SNR (dB)
Test 1	50%	19.2
Note 1: The maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

6 CSI reporting requirements (Conducted requirements)

6.1 General

This Clause includes conducted requirements for the reporting of channel state information (CSI).

6.1.1 Applicability of requirements

6.1.1.1 General

The minimum performance requirements are applicable to all FR1 operating bands defined in TS 38.101-1 [2] except for test cases listed in Clause 6.2.2.2.1.3, Clause 6.2.3.2.1.3, Clause 6.2A.3.1.2 and Clause 6.2A.4.1.1 which are only applicable for FR1 bands restricted to operation with shared spectrum.

The minimum performance requirements in Clause 6 are mandatory for UE supporting NR operation, except test cases listed in Clause 6.1.1.3, 6.1.1.4, 6.1.1.5, 6.1.1.6.

If same test is listed for different UE features/capabilities in Clauses 6.1.1.3 and 6.1.1.4, then this test shall apply for UEs which support all corresponding UE features/capabilities.

6.1.1.2 Applicability of requirements for different number of RX antenna ports

The number of RX antenna ports for different RF operating bands is up to UE declaration.

The UE shall support 2, 4 or 8RX antenna ports for different RF operating bands. The operating bands, where 4 RX antenna ports shall be the baseline, are defined in Clause 7.2 of TS 38.101-1 [2]. The UE requirements applicability for UEs with different number of RX antenna ports is defined in Table 6.1.1.2-1.

Table 6.1.1.2-1: Requirements applicability

Supported RX antenna ports	Test type	Test list
UE supports only 2RX	CQI	All tests in Clause 6.2.2
	PMI	All tests in Clause 6.3.2
	RI	All tests in Clause 6.4.2
UE supports only 4RX or both 2RX and 4RX	CQI	All tests in Clause 6.2.3
	PMI	All tests in Clause 6.3.3
	RI	All tests in Clause 6.4.3
UE supports 2Rx, 4Rx and 8Rx, or UE supports 4Rx and 8Rx	CQI	Tests in Clause 6.2.3 ^(Note 1) All tests in Clause 6.2.4
	PMI	All tests in Clause 6.3.3 ^(Note 1)
	RI	All tests in Clause 6.4.3 ^(Note 1)
UE supports 2Rx and 8Rx	CQI	Tests in Clause 6.2.2 ^(Note 2) All tests in Clause 6.2.4
	PMI	All tests in Clause 6.3.2 ^(Note 2)
	RI	All tests in Clause 6.4.2 ^(Note 2)
UE supports only 8Rx	CQI	All tests in Clause 6.2.4
	PMI	N/A
	RI	N/A
<p>Note 1: 8Rx capable UEs are tested on any of the 4Rx supported RF bands by connecting 4 out of 8 Rx with data source from system simulator, and the other 4 Rx are connected with zero input, depending on UE's declaration and AP configuration. Requirements specified with 4Rx should be applied.</p> <p>Note 2: 8Rx capable UEs are tested on any of the 2Rx supported RF bands by connecting 2 out of 8 Rx with data source from system simulator, and the other 6 Rx are connected with zero input, depending on UE's declaration and AP configuration. Requirements specified with 2Rx should be applied.</p>		

6.1.1.3 Applicability of requirements for optional UE features

The performance requirements in Table 6.1.1.3-1 shall apply for UEs which support optional UE features with capability signalling only.

Table 6.1.1.3-1: Requirements applicability for optional features with UE capability signalling

UE feature/capability [14]	Test type		Test list	Applicability notes
CQI table with target BLER of 10^{-5} New CQI table (cqi-TableAlt)	FR1 FDD	CQI	Clause 6.2.2.1.1.2 Clause 6.2.3.1.1.2	
	FR1 TDD	CQI	Clause 6.2.2.2.1.2 Clause 6.2.3.2.1.2	
Alternative 64QAM MCS table for PDSCH New 64QAM MCS table for PDSCH (dl-64QAM-MCS-TableAlt)	FR1 FDD	CQI	Clause 6.2.2.1.1.2 Clause 6.2.3.1.1.2	
	FR1 TDD	CQI	Clause 6.2.2.2.1.2 Clause 6.2.3.2.1.2	
Validating P/SP-CSI-RS reception (<i>periodicAndSemi-PersistentCSI-RS-r16</i>)	FR1 TDD	CQI	Clause 6.2.2.2.1.3 Clause 6.2.3.2.1.3	The requirements apply only in case tested UE supporting operations in shared spectrum access and validation of P/SP-CSI-RS reception based on DCI
Supported UL channels for dynamic channel access mode (<i>ul-DynamicChAccess-r16</i>) or UL channel access for semi-static channel access mode (<i>ul-Semi-StaticChAccess-r16</i>) or both	FR1 TDD	CQI	Clause 6.2.2.2.1.3 Clause 6.2.3.2.1.3	The requirements apply only in case tested UE supports one of UL channels for dynamic channel access mode and UL channel access for semi-static channel access mode
Support of Type II codebook with at least 16 ports per CSI-RS resource (<i>CodebookParameters</i> contains <i>type2</i> , <i>supportedCSI-RS-ResourceList</i> , <i>parameterLx</i> , <i>amplitudeScalingType</i> , <i>amplitudeSubsetRestriction</i> , <i>maxNumberTxPortsPerResource</i>)	FR1 FDD	PMI	Clause 6.3.2.1.5 Clause 6.3.3.1.5	
	FR1 TDD	PMI	Clause 6.3.2.2.5 Clause 6.3.3.2.5	
Support of Enhanced Type II codebook with at least 16 ports per CSI-RS resource (<i>codebookParametersAddition-r16</i> contains <i>etype2R1-r16</i> , <i>supportedCSI-RS-ResourceListAdd-r16</i> , <i>maxNumberTxPortsPerResource</i>)	FR1 FDD	PMI	Clause 6.3.2.1.6 Clause 6.3.3.1.6	
	FR1 TDD	PMI	Clause 6.3.2.2.6 Clause 6.3.3.2.6	
Support of Enhanced Type II Codebook (eType-II) based on doppler CSI (<i>codebookParametersetype2DopplerCSI-r18</i> contains <i>eType2Doppler-r18</i> , <i>supportedCSI-RS-ResourceList-r18</i> , <i>maxNumberTxPortsPerResource</i>)	FR1 FDD	PMI	Clause 6.3.2.1.8 Clause 6.3.3.1.8	The requirements apply only in case the number of NZP-CSI-RS ports in the test case satisfies UE capability on maximum number of NZP-CSI-RS ports.
	FR1 TDD	PMI	Clause 6.3.2.2.9 Clause 6.3.3.2.8	

Support of Enhanced Type II Codebook (eType-II) with refinement for multi-TRP CJT (<i>codebookParameterssetType2CJT-r18 contains eType2CJT-r18, supportedCSI-RS-ResourceList-r18, maxNumberTxPortsPerResource</i>)	FR1 FDD	PMI	Clause 6.3.2.1.9 Clause 6.3.3.1.9	The requirements apply only in case the number of NZP-CSI-RS ports in the test case satisfies UE capability on maximum number of NZP-CSI-RS ports.
1024QAM modulation for PDSCH for FR1 (pdsch-1024QAM-FR1-r17)	FR1 FDD	CQI	Clause 6.2.2.1.1.3 (Test 1) Clause 6.2.3.1.1.3 (Test 1)	
	FR1 TDD	CQI	Clause 6.2.2.2.1.4 (Test 1) Clause 6.2.3.2.1.4 (Test 1)	

6.1.1.4 Applicability of requirements for mandatory UE features with capability signalling

The performance requirements in Table 6.1.1.4-1 shall apply for UEs which support mandatory UE features with capability signalling only.

Table 6.1.1.4-1: Requirements applicability for mandatory features with UE capability signalling

UE feature/capability [14]	Test type	Test list	Applicability notes			
PDSCH MIMO layers (<i>maxNumberMIMO-LayersPDSCH</i>)	FR1 FDD	CQI	Clause 6.2.3.1.1.1	The requirements apply only in case the PDSCH MIMO rank in the test case does not exceed UE PDSCH MIMO layers capability		
		PMI	Clause 6.3.3.1.2			
		RI	Clause 6.4.2.1 Clause 6.4.3.1			
	FR1 TDD	CQI	Clause 6.2.3.2.1.1			
		PMI	Clause 6.3.3.2.2			
		RI	Clause 6.4.2.2 Clause 6.4.3.2			
Supported maximum number of ports per CSI-RS resource (<i>maxNumberTxPortsPerResource</i>)	FR1 FDD	PMI	Clause 6.3.2.1.1 Clause 6.3.2.1.2 Clause 6.3.2.1.3 Clause 6.3.2.1.4 Clause 6.3.3.1.1 Clause 6.3.3.1.2 Clause 6.3.3.1.3 Clause 6.3.3.1.4	The requirements apply only in case the number of NZP-CSI-RS ports in the test case satisfies UE capability on maximum number of NZP-CSI-RS ports		
			RI		Clause 6.4.3.1 (Test 4)	
			FR1 TDD		PMI	Clause 6.3.2.2.1 Clause 6.3.2.2.2 Clause 6.3.2.2.3 Clause 6.3.2.2.4 Clause 6.3.3.2.1 Clause 6.3.3.2.2 Clause 6.3.3.2.3 Clause 6.3.3.2.4
						RI

6.1.1.5 Applicability of Channel Quality Indicator (CQI) reporting requirements for CA

6.1.1.5.1 Applicability and test rules for different duplex modes and SCS combinations

The applicability and test rules for different duplex modes and SCS combinations are defined in Table 6.1.1.5.1-1.

Table 6.1.1.5.1-1: Applicability for different duplex modes and SCS combinations

Tests	PCell CC configuration
Test 1 in Clause 6.2A.3.1.1	TDD CC if supported, otherwise FDD CC
Test 2 in Clause 6.2A.3.1.1 (NOTE 2)	Any of CCs
Test 3 in Clause 6.2A.3.1.1	Any of CCs
NOTE 1: The test coverage can be considered fulfilled if UE passes one of the CC as PCell in Test 1.	
NOTE 2: These scenarios are only tested for UEs which are not verified with Test 1 in Clause 6.2A.3.1.1.	

6.1.1.5.2 Applicability and test rules for different CA configurations and bandwidth combination sets

The performance requirement for CA CQI tests in clause 6.2A are defined independent of CA configurations and bandwidth combination sets specified in clause 5.5A in TS 38.101-1 [2].

For UEs supporting multiple CA capabilities, test any one of the supported CA capabilities with largest aggregated CA bandwidth combination. The categorization of CA capability is specified in clause 5.1.1.5.1.

For UEs supporting multiple CA configurations from the selected CA capability, test any one of the supported CA configurations with largest aggregated CA bandwidth combination. For simplicity, the CA configuration refers to combination of CA configuration and bandwidth combination set.

A single uplink CC is configured for all tests.

6.1.1.5.3 Test coverage for different number of component carriers

For CA CQI tests specified in clause 6.2A, among all supported CA capabilities, if corresponding CA tests with the largest number of CCs supported by the UE are tested, the test coverage can be considered fulfilled without executing the CA tests with less than the largest number of CCs supported by the UE.

6.1.1.5.4 Applicability rule and antenna connection for CA tests with 4 RX

All the requirements specified in clause 6.2A for CA with 2 RX are applied for 4 RX capable UEs by connecting all 4 RX with data source from system simulator and reducing the signal power density by 3 dB compared to the signal power density for 2 RX in the test configurations.

6.1.1.6 Applicability of requirements for RedCap

The performance requirements in Table 6.1.1.6-1 shall apply for UEs which support optional feature *supportOfRedCap*.

Other performance requirements mandatory for UE supporting NR operation defined in Section 6 but not included in table 6.1.1.6-1 should not be considered applicable to RedCap UEs.

Table 6.1.1.6-1: Requirements applicability for RedCap

UE capability	Test type	Test list	Applicability notes
RedCap with 1RX	FR1 FDD and HD-FDD (Note 1)	CQI	All tests in Clause 6.2.1.1.1.1 All tests in Clause 6.2.1.1.2.1
		PMI	All tests in Clause 6.3.1.1.1
	FR1 TDD	CQI	All tests in Clause 6.2.1.2.1.1 All tests in Clause 6.2.1.2.2.1
		PMI	All tests in Clause 6.3.1.2.1
RedCap with 2RX	FR1 FDD and HD-FDD (Note 1)	CQI	All tests in Clause 6.2.2.1.1.4 All tests in Clause 6.2.2.1.2.4

		PMI	Clause 6.3.2.1.1_1 (Test 1)
		RI	Clause 6.4.2.1.1 (Test 1)
	FR1 TDD	CQI	All tests in Clause 6.2.2.2.1.5 All tests in Clause 6.2.2.2.2.4
		PMI	Clause 6.3.2.2.7 (Test 1)
		RI	Clause 6.4.2.2.1 (Test 1)
Note 1: If UE support only HD-FDD in a FDD band, this UE is tested with HD-FDD mode otherwise UE is tested with full-duplex FDD mode			

6.1.1.7 Applicability of requirements for eRedCap

The performance requirements in Table 6.1.1.7-1 shall apply for UEs which support optional feature *supportOfERedCap-r18*.

Other performance requirements mandatory for UE supporting NR operation defined in Section 6 but not included in table 6.1.1.7-1 should not be considered applicable to eRedCap UEs.

Table 6.1.1.7-1: Requirements applicability for eRedCap UEs

UE capability	Test type		Test list	Applicability notes
eRedCap with 1RX	FR1 FDD and HD-FDD (Note 1)	CQI	All tests in Clause 6.2.1.1.1.2 All tests in Clause 6.2.1.1.2.2	
		PMI	All tests in Clause 6.3.1.1.2	
	FR1 TDD	CQI	All tests in Clause 6.2.1.2.1.2 All tests in Clause 6.2.1.2.2.2	
		PMI	All tests in Clause 6.3.1.2.2	
eRedCap with 2RX	FR1 FDD and HD-FDD (Note 1)	CQI	All tests in Clause 6.2.2.1.1.5 All tests in Clause 6.2.2.1.2.5	
		PMI	All Tests in Clause 6.3.2.1.10	
	FR1 TDD	CQI	All tests in Clause 6.2.2.2.1.6 All tests in Clause 6.2.2.2.2.5	
		PMI	All tests in Clause 6.3.2.2.10	
		CQI	All tests in Clause 6.2.2.2.1.6 All tests in Clause 6.2.2.2.2.5	
		PMI	All tests in Clause 6.3.2.2.10	
NOTE 1: If UE support only HD-FDD in a FDD band, this UE is tested with HD-FDD mode otherwise UE is tested with full-duplex FDD mode.				

6.1.2 Common test parameters

Parameters specified in Table 6.1.2-1 are applied for all test cases in this section unless otherwise stated.

Table 6.1.2-1: Test parameters for CSI test cases

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 3)	RBs	0
	Subcarrier spacing	kHz	15 or 30
DL BWP configuration #1	Cyclic prefix		Normal
	RB offset	RBs	0
	Number of contiguous PRB	PRBs	Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested

			channel bandwidth and subcarrier spacing
Additional PDCCH Configuration for Aperiodic Reporting (Note 4)	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		0,1
	Number of PDCCH candidates and aggregation levels		1/AL8
	DCI format		0_1
	TCI state		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		Multi-path fading propagation conditions: Single Panel Type I, Random per slot with equal probability of each applicable i1, i2 combination, and with REG bundling granularity for number of Tx larger than 1 Static propagation conditions: Single Panel Type I, Random precoder chosen from precoder index 0 and 2, selection updated per slot
PDCCH & PDCCH DMRS Precoding configuration		Multi-path fading propagation conditions: Single Panel Type I, Random per slot with equal probability of each applicable i1, i2 combination, and with REG bundling granularity for number of Tx larger than 1	
Active DL BWP index			1
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		0,1
	Number of PDCCH candidates and aggregation levels		1/AL8
	DCI format		1_1
	TCI state		TCI state #1
Cross carrier scheduling			Not configured
PDSCH configuration	Mapping type		Type A
	k_0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		type 0
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
	DMRS ports indexes		{1000} for Rank1 {1000,1001} for Rank2 {1000,1001,1002} for Rank3 {1000,1001,1002,1003} for Rank4
	Number of PDSCH DMRS CDM group(s) without data		2
PTRS configuration	Frequency density (K_{PT-RS})		N/A
	Time density (L_{PT-RS})		N/A

CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)		0 for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity		slot 15 kHz SCS: 20 for CSI-RS resource 1,2,3,4 30 kHz SCS: 40 for CSI-RS resource
	CSI-RS offset		slot 15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS: 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #1
ZP CSI-RS for CSI acquisition	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
Number of HARQ Processes		4 For FDD 8 for TDD	
HARQ ACK/NACK bundling		Multiplexed	
Redundancy version coding sequence		{0,2,3,1}	
K1 value (PDSCH-to-HARQ-timing-indicator)		2 for FDD For FR1.30-1: 8 if $\text{mod}(i,10) = 0$ 6 if $\text{mod}(i,10) = 2$ 5 if $\text{mod}(i,10) = 3$ 5 if $\text{mod}(i,10) = 4$ 4 if $\text{mod}(i,10) = 5$ 3 if $\text{mod}(i,10) = 6$ Where i is slot index per radio frame with 0-19 For FR1.30-7: 8 if $\text{mod}(i,10) = 0$ 7 if $\text{mod}(i,10) = 1$ 6 if $\text{mod}(i,10) = 2$ 5 if $\text{mod}(i,10) = 3$ 4 if $\text{mod}(i,10) = 4$ 3 if $\text{mod}(i,10) = 5$ 2 if $\text{mod}(i,10) = 6$ Where i is the slot index of all slots in every 5ms $i = \{0, \dots, 9\}$	
Symbols for unused REs		OP.1 FDD as defined in Annex A.5.1.1 OP.1 TDD as defined in Annex A.5.2.1	
Physical signals, channels mapping and precoding		As specified in Annex B.4.1	

Note 1:	For CQI, RI requirements PDSCH is not scheduled on slots containing CSI-RS or slots which are not full DL. For PMI requirements PDSCH is not scheduled on slots containing CSI-RS for CSI acquisition or slots which are not full DL.
Note 2:	UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission.
Note 3:	Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing.
Note 4:	Additional PDCCH configuration for aperiodic reporting is only for test cases with aperiodic CSI reporting configured.

6.2 Reporting of Channel Quality Indicator (CQI)

6.2.1 1RX requirements

6.2.1.1 FDD

6.2.1.1.1 CQI reporting definition under AWGN conditions

The reporting accuracy of the channel quality indicator (CQI) under frequency non-selective conditions is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median. The purpose is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

6.2.1.1.1.1 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap

6.2.1.1.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.1.1.1.1.2 Test Applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

6.2.1.1.1.1.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.1.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.1.1.1.3-1: CQI reporting definition test

Parameter	Unit	Test 1		Test 2	
Bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Duplex Mode		FDD			
SNR	dB	5	6	11	12
Propagation channel		AWGN			
Antenna configuration		2x1 with static channel specified in Annex B.1			

Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)
	CSI-RS periodicity and offset	slot 10/5
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	2
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot 10/5
CSI-IM configuration	CSI-IM resource Type	Periodic
	CSI-IM RE pattern	0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)	(4, 9)
	CSI-IM timeConfig periodicity and offset	slot 10/5
ReportConfigType		Periodic
CQI-table		Table 1
reportQuantity		cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
Csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
RI Restriction		N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	10
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-1, TBS.1-3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.1.1.1.

6.2.1.1.1.1.4 Test Description

6.2.1.1.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.1.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.1.1.1.4.3.

6.2.1.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) \leq Median CQI \leq (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / (ACK + NACK)) \leq 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK / (ACK + NACK)) $>$ 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK / (ACK + NACK)) \leq 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.1.1.1.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.1.1.4.3-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	5		
}			

Table 6.2.1.1.1.4.3-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-15			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			

Table 6.2.1.1.1.4.3-3: Void

Table 6.2.1.1.1.4.3-4: ZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-22			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	5		
}			

Table 6.2.1.1.1.4.3-5: NZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-2a			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	5		
}			

6.2.1.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.1.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.1.1.2 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap

6.2.1.1.2.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.1.1.1.2.2 Test Applicability

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

6.2.1.1.1.2.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.1.1.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements for the eRedCap UE are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.1.1.1.2.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	5	6	11	12
Propagation channel			AWGN			
Antenna configuration			2x1 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
BWP size		RB	52 (PRB 0 to 51)			
PDSCH BW		RB	15 (PRB 0 to 14)			
PDSCH configuration	Resource allocation type		type 1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	Frequency Occupation	RB	0 to 23			
	CSI-RS periodicity and offset	slot	10/5			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	Frequency Occupation	RB	0 to 23			
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/5			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/5			
ReportConfigType			Periodic			
CQI-table			Table 1			
reportQuantity			cri-RI-PMI-CQI			
timeRestrictionForChannelMeasurements			Not configured			
timeRestrictionForInterferenceMeasurements			Not configured			

cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
Csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	typel-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
RI Restriction		N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	10
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-6, TBS.6-1

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.1.1.2.

6.2.1.1.1.2.4 Test Description

6.2.1.1.1.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.1.1.1.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.1.1.1.2.4.3.

6.2.1.1.1.2.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.

4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.1.1.1.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.1.1.2.4.3-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	5		
}			

Table 6.2.1.1.1.2.4.3-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-15			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			

Table 6.2.1.1.1.2.4.3-3: Void

Table 6.2.1.1.1.2.4.3-4: ZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-22			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	5		
}			

Table 6.2.1.1.1.2.4.3-5: NZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-2a			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	5		
}			

Table 6.2.1.1.1.2.4.3-6: CSI-FrequencyOccupation for CSI Acquisition

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-17			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	24	0 to 23	
}			

Table 6.2.1.1.1.2.4.3-7: ZP CSI-FrequencyOccupation

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-23			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	24	0 to 23	
}			

6.2.1.1.1.2.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.1.1.1.2.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.1.1.2 CQI reporting under fading conditions

6.2.1.1.2.1 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap

6.2.1.1.2.1.1 Test Purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.1.1.2.1.2 Test Applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

6.2.1.1.2.1.3 Minimum conformance requirements

The purpose of the requirements is to verify that the RedCap UE is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to

the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the wideband CQI reporting under frequency selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.1.1.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.1.1.2.1.3-2;
- The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.1.1.2.1.3-2;
- When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.1.1.2.1.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	9	10	15	16
Propagation channel			TDLA30-5			
Antenna configuration			2x1			
Correlation configuration			ULA high			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	10/5			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/5			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/5			
ReportConfigType		Periodic				
CQI-table		Table 1				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Wideband				
pmi-FormatIndicator		Wideband				
Sub-band Size	RB	8				
Csi-ReportingBand		1111111				
CSI-Report periodicity and offset	slot	10/9				
aperiodicTriggeringOffset		Not configured				

Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
	RI Restriction		N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	10
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-1, TBS.1-3

Table 6.2.1.1.2.1.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.1.2.1.

6.2.1.1.2.1.4 Test Description

6.2.1.1.2.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid-Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.2.1.1.2.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.1.1.2.1.4.3.

6.2.1.1.2.1.4.2 Test Procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.1.1.2.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.

4. If Median CQI value is not equal to 1 or 15 and 1200 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median} .

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t .

If the recorded $\text{BLER} \geq 0.02$ and $t / t_{median} \geq \gamma$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.
8. Repeat step 1 to 7, with test conditions according to the table 6.2.1.1.2.1.3-1, for Test2 as appropriate.

6.2.1.1.2.1.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.1.1.2.1.4.3_1 Message exceptions for SA

Table 6.2.1.1.2.1.4.3_1-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.1.1.2.1.4.3_1-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.1.1.2.1.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		

}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.1.1.2.1.4.3_1-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	5		
}			

Table 6.2.1.1.2.1.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.1.1.2.1.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset		
pucch-CSI-ResourceList	PUCCH-CSI-Resource		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

6.2.1.1.2.1.4.3_2 Message exceptions for NSA

Same as in 6.2.1.1.2.1.4.3_1.

6.2.1.1.2.1.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.1.1.2.1.4.2.

Table 6.2.1.1.2.1.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05 -TT	1.05 -TT
Note1 : TT = 0.01		

6.2.1.1.2.2 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap

6.2.1.1.2.2.1 Test Purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.1.1.2.2.2 Test Applicability

This test case applies to all types of NR UE release 18 and forward that support NR eRedCap.

6.2.1.1.2.2.3 Minimum conformance requirements

The purpose of the requirements is to verify that the RedCap UE is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the wideband CQI reporting under frequency selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.1.1.2.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.1.1.2.2.3-2;
- The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.1.1.2.2.3-2;
- When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.1.1.2.2.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	9	10	15	16
Propagation channel			TDLA30-5			
Antenna configuration			2x1			
Correlation configuration			ULA high			
Beamforming Model			As specified in Annex B.4.1			
BWP size		RB	52 (PRB 0 to 51)			
PDSCH BW		RB	15 (PRB 0 to 14)			
PDSCH configuration	Resource allocation type		type 1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	Frequency Occupation	RB	0 to 23			
	CSI-RS periodicity and offset	slot	10/5			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			

	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	Frequency Occupation	RB	0 to 23
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/5
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/5
ReportConfigType		Periodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	10/9	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
RI Restriction		N/A	
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	10	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-6, TBS.6-1	

Table 6.2.1.1.2.2.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.1.2.2.

6.2.1.1.2.2.4 Test Description

6.2.1.1.2.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid-Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.2.1.1.2.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.1.1.2.2.4.3.

6.2.1.1.2.2.4.2 Test Procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.1.1.2.2.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 (α%) or more of the wideband CQI values are outside the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median}

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE’s reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t.

If the recorded BLER ≥ 0.02 and $t / t_{median} \geq \gamma$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.
8. Repeat step 1 to 7, with test conditions according to the table 6.2.1.1.2.2.3-1, for Test2 as appropriate.

6.2.1.1.2.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.1.1.2.2.4.3_1 Message exceptions for SA

Table 6.2.1.1.2.2.4.3_1-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			

other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.1.1.2.2.4.3_1-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.1.1.2.2.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.1.1.2.2.4.3_1-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	5		
}			

Table 6.2.1.1.2.2.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.1.1.2.2.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset		
}			
pucch-CSI-ResourceList	PUCCH-CSI-Resource		

}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

Table 6.2.1.1.2.2.4.3_1-7: CSI-FrequencyOccupation for CSI Acquisition

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-17			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	24	0 to 23	
}			

Table 6.2.1.1.2.2.4.3_1-8: ZP CSI-FrequencyOccupation

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-23			
Information Element	Value/remark	Comment	Condition
CSI-FrequencyOccupation ::= SEQUENCE {			
nrofRBs	24	0 to 23	
}			

6.2.1.1.2.2.4.3_2 Message exceptions for NSA

Same as in 6.2.1.1.2.2.4.3_1.

6.2.1.1.2.2.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.1.1.2.2.4.2.

Table 6.2.1.1.2.2.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05 -TT	1.05 -TT
Note1 : TT = 0.01		

6.2.1.2 TDD

6.2.1.2.1 CQI reporting definition under AWGN conditions

6.2.1.2.1.1 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap

6.2.1.2.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.1.2.1.1.2 Test Applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

6.2.1.2.1.1.3 Minimum requirement for periodic CQI reporting

The purpose of the requirements is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.1.2.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.1.2.1.1.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	20			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	5	6	11	12
Propagation channel			AWGN			
Antenna configuration			2x1 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	10/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
NZP CSI-RS-timeConfig periodicity and offset	slot	10/1				
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/1			
ReportConfigType			Periodic			
CQI-table			Table 1			
reportQuantity			cri-RI-PMI-CQI			
timeRestrictionForChannelMeasurements			Not configured			
timeRestrictionForInterferenceMeasurements			Not configured			
cqi-FormatIndicator			Wideband			
pmi-FormatIndicator			Wideband			
Sub-band Size		RB	8			
Csi-ReportingBand			1111111			

CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
	RI Restriction	N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	9.5
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-1, TBS.1-5

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.2.1.1.

6.2.1.2.1.1.4 Test Description

6.2.1.2.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.1.2.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.1.2.1.1.4.3.

6.2.1.2.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.

5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(NACK / ACK + NACK) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. Repeat step 1 to 8 for Test2.

6.2.1.2.1.1.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.2.1.1.4.3-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		
}			

Table 6.2.1.2.1.1.4.3-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-15			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			

Table 6.2.1.2.1.1.4.3-3: Void

6.2.1.2.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.1.2.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.1.2.1.2 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap

6.2.1.2.1.2.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.1.2.1.2.2 Test Applicability

This test case applies to all types of NR UE release 17 and forward that support NR RedCap.

6.2.1.2.1.2.3 Minimum requirement for periodic CQI reporting

The purpose of the requirements for the eRedCap UE is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.1.2.1.2-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.1.2.1.2.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	20			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	5	6	11	12
Propagation channel			AWGN			
Antenna configuration			2x1 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
BWP size		RB	51 (PRB 0 to 50)			
PDSCH BW		RB	7 (PRB 0 to 6)			
PDSCH configuration	Resource allocation type		type 1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	Frequency Occupation	RB	0 to 23			
CSI-RS periodicity and offset	slot	10/1				
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			

	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	Frequency Occupation	RB	0 to 23
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType		Periodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	10/9	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
	RI Restriction		N/A
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	9.5	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-6, TBS.6-2	

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.2.1.2.

6.2.1.2.1.2.4 Test Description

6.2.1.2.1.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.1.2.1.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.1.2.1.2.4.3.

6.2.1.2.1.2.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / ACK + NACK) ≤ 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) > 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) ≤ 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.1.2.1.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.2.1.2.4.3-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		

}		
---	--	--

Table 6.2.1.2.1.2.4.3-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-15			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			

6.2.1.2.1.2.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.1.2.1.2.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.1.2.2 CQI reporting definition under fading conditions

6.2.1.2.2.1 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap

6.2.1.2.2.1.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.1.2.2.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting RedCap.

6.2.1.2.2.1.3 Minimum conformance requirements

The purpose of the requirements is to verify that the RedCap UE is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.1.2.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.1.2.2.1.3-2;
- b) The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.1.2.2.1.3-2;
- c) When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.1.2.2.1.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter	Unit	Test 1	Test 2
Bandwidth	MHz		20

Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD UL-DL pattern			FR1.30-1
SNR		dB	9 10 15 16
Propagation channel			TDLA30-5
Antenna configuration			2x1
Correlation configuration			ULA high
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	10/9
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001
Physical channel for CSI report			N/A
CQI/RI/PMI delay		ms	PUCCH
Maximum number of HARQ transmission			9.5
Measurement channel			1
			As specified in Table A.4-1, TBS.1-5

Table 6.2.1.2.2.1.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.2.2.1.

6.2.1.2.2.1.4 Test description

6.2.1.2.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and Figure A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.1.2.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.1.1.1.4.3.

6.2.1.2.2.1.4.2 Test procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.1.2.2.1.5-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median} .

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t .

If the recorded BLER ≥ 0.02 and $t / t_{median} \geq \gamma$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.
8. Repeat step 1 to 7, with test conditions according to the table 6.2.1.2.2.1.5 -1, for Test2 as appropriate.

6.2.1.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.2.2.1.4.3-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.1.2.2.1.4.3-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.1.2.2.1.4.3-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.1.2.2.1.4.3-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.2.1.2.2.1.4.3-5: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
cqi-Table	table1		
}			

Table 6.2.1.2.2.1.4.3-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.1.2.2.1.4.3-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset		
pucch-CSI-ResourceList	PUCCH-CSI-Resource		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

6.2.1.2.2.1.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.1.2.2.1.4.2.

Table 6.2.1.2.2.1.5-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	20			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	9	10	15	16
Propagation channel			TDLA30-5			
Antenna configuration			2x1			
Correlation configuration			ULA high			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,4			
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		9			
	CSI-RS periodicity and offset	slot	10/1			
N郑 CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB		Row 3,(6)			

	used for CSI-RS (k_0)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	10/9
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
RI Restriction			N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-1, TBS.1-5

Table 6.2.1.2.2.1.5-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05 -TT	1.05 -TT
Note1 : TT = 0.01		

6.2.1.2.2.2 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap

6.2.1.2.2.2.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.1.2.2.2.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting eRedCap.

6.2.1.2.2.2.3 Minimum conformance requirements

The purpose of the requirements is to verify that the eRedCap is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR

the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.1.2.2.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.1.2.2.2.3-2;
- The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.1.2.2.2.3-2;
- When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.1.2.2.2.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1	Test 2		
Bandwidth		MHz	20			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	9	10	15	16
Propagation channel			TDLA30-5			
Antenna configuration			2x1			
Correlation configuration			ULA high			
Beamforming Model			As specified in Annex B.4.1			
BWP size		RB	51 (PRB 0 to 50)			
PDSCH BW		RB	7 (PRB 0 to 6)			
PDSCH configuration	Resource allocation type		type 1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	Frequency Occupation	RB	0 to 23			
CSI-RS periodicity and offset	slot	10/1				
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	Frequency Occupation	RB	0 to 23			
NZP CSI-RS-timeConfig periodicity and offset	slot	10/1				
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/1			
ReportConfigType		Periodic				
CQI-table		Table 1				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Wideband				

pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
Csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
	RI Restriction	N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	9.5
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-6, TBS.6-2

Table 6.2.1.2.2.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.1.2.2.2.

6.2.1.2.2.2.4 Test description

6.2.1.2.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.0 for TE diagram and Figure A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.1.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with Connected without Release On, Test Mode On according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.1.1.4.3.

6.2.1.2.2.2.4.2 Test procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.1.2.2.5-1.

2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 (a%) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median} .

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t.

If the recorded BLER ≥ 0.02 and $t / t_{median} \geq g$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.
8. Repeat step 1 to 7, with test conditions according to the table 6.2.1.2.2.2.5 -1, for Test2 as appropriate.

6.2.1.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.2.2.2.4.3-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.1.2.2.2.4.3-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.1.2.2.2.4.3-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.1.2.2.2.4.3-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.2.1.2.2.2.4.3-5: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
cqi-Table	table1		
}			

Table 6.2.1.2.2.2.4.3-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.1.2.2.2.4.3-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset		
pucch-CSI-ResourceList	PUCCH-CSI-Resource		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
subbandSize	value2		
}			

6.2.1.2.2.2.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.1.2.2.2.4.2.

Table 6.2.1.2.2.2.5-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1	Test 2
Bandwidth		MHz	20	
Subcarrier spacing		kHz	30	
Duplex Mode			TDD	
TDD UL-DL pattern			FR1.30-1	
SNR		dB	9	10 15 16
Propagation channel			TDLA30-5	
Antenna configuration			2x1	
Correlation configuration			ULA high	
Beamforming Model			As specified in Annex B.4.1	
BWP size		RB	51 (PRB 0 to 50)	
PDSCH BW		RB	7 (PRB 0 to 6)	
PDSCH configuration	Resource allocation type		type 1	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)	
	Frequency Occupation	RB	0 to 23	
CSI-RS periodicity and offset	slot	10/1		
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		2	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)	
	Frequency Occupation	RB	0 to 23	
NZP CSI-RS-timeConfig periodicity and offset	slot	10/1		
CSI-IM configuration	CSI-IM resource Type		Periodic	
	CSI-IM RE pattern		0	
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)	
	CSI-IM timeConfig periodicity and offset	slot	10/1	
ReportConfigType			Periodic	
CQI-table			Table 1	
reportQuantity			cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements			Not configured	
timeRestrictionForInterferenceMeasurements			Not configured	
cqi-FormatIndicator			Wideband	
pmi-FormatIndicator			Wideband	
Sub-band Size		RB	8	
Csi-ReportingBand			1111111	
CSI-Report periodicity and offset		slot	10/9	
aperiodicTriggeringOffset			Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel	
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1	
	CodebookSubsetRestriction		Not configured	
	RI Restriction		000001 N/A	
Physical channel for CSI report			PUCCH	

CQI/RI/PMI delay	ms	9.5
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-6, TBS.6-2

Table 6.2.1.2.2.5-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05 -TT	1.05 -TT
Note1 : TT = 0.01		

6.2.2 2RX requirements

6.2.2.1 FDD

6.2.2.1.1 CQI reporting definition under AWGN conditions

The reporting accuracy of the channel quality indicator (CQI) under frequency non-selective conditions is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median. The purpose is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB

6.2.2.1.1.1 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA

6.2.2.1.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.1.1.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.2.2.1.1.1.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.2.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.1.1.3-1: CQI reporting definition test

Parameter	Unit	Test 1		Test 2	
Bandwidth	MHz	10			
Duplex Mode		FDD			
Subcarrier spacing	kHz	15			
SNR	dB	8	9	14	15
Propagation channel		AWGN			

Antenna configuration			2x2 with static channel specified in Annex B.1
Beamforming Model			As specified in Section Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType			Periodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
CSI-reportingBand			1111111
CSI-Report periodicity and offset		slot	5/0
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		010000
RI Restriction			N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-2

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.1.1.

6.2.2.1.1.1.4 Test Description

6.2.2.1.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.1.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.2.1.1.4.3.

6.2.2.1.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / ACK + NACK) ≤ 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK / ACK + NACK) > 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. Repeat step 1 to 8 for Test2.

6.2.2.1.1.1.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.1.1.1.4.3_1 Message exceptions for SA

Table 6.2.2.1.1.4.3_1-1: Void

Table 6.2.2.1.1.4.3_1-2: Void

6.2.2.1.1.1.4.3_2 Message exceptions for NSA

Same as specified in 6.2.2.1.1.4.3_1.

6.2.2.1.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.1.1.2 2Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA

6.2.2.1.1.2.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10^{-5} falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.1.1.2.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

6.2.2.1.1.2.3 Minimum requirement for periodic CQI reporting with Table 3

For the parameters specified in Table 6.2.2.1.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 10^{-5} , then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 10^{-5} . If the PDSCH BLER using the transport format indicated by the median CQI is greater than 10^{-5} , then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 10^{-5} .

- c) The reported CQI value according to the reference channel shall be ≥ 1 .

Table 6.2.2.1.1.2.3-1: CQI reporting test parameters

Parameter		Unit	Test 1
Bandwidth		MHz	10
Duplex Mode			FDD
Subcarrier spacing		kHz	15
SNR		dB	1 2
Propagation channel			AWGN
Antenna configuration			1x2 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
CSI-RS periodicity and offset	slot		5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 1,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 1,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot		5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	
ReportConfigType			Periodic
CQI-table			Table 3
reportQuantity			cri-RI-PMI-CQI (Note 1)
Codebook configuration			Not configured
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		5/0
aperiodicTriggeringOffset			Not configured
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-4, TBS.4-1
Note 1: The bit width of PMI for UCI on PUCCH in a case 1-port CSI-RS is configured as channel measurement resource is given in TS 38.212 [10], section 6.3.1.1.2.			

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.1.2.

6.2.2.1.1.2.4 Test Description

6.2.2.1.1.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.1.1.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.2.1.1.2.4.3.

6.2.2.1.1.2.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.2.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 5000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 4500 or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

For the filtered ACK and NACK responses if the ratio (NACK / (ACK + NACK)) ≤ 10⁻⁵ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the

ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

If the ratio $(NACK / (ACK + NACK)) > 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

If the ratio $(NACK / (ACK + NACK)) \leq 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.1.1.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.1.1.2.4.3_1 Message exceptions for SA

Table 6.2.2.1.1.2.4.3_1-1: NZP CSI-RS-ResourceMapping

Derivation Path: TS 38.508-1 [6], Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0001	K0=0, row 1,	1Tx test cases
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	13		
CDM Type	noCDM		
density CHOICE {			
three	NULL		
}			
}			

Table 6.2.2.1.1.2.4.4_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-6			
Information Element	Value/remark	Comment	Condition
CSI-IM-Resource ::= SEQUENCE {			
periodicityAndOffset SEQUENCE {			
slot5	1		
}			
}			

Table 6.2.2.1.1.2.4.3_1-2: NZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
slot5	1		
}			
}			

Table 6.2.2.1.1.2.4.4_1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
cqi-Table	table3		
}			

Table 6.2.2.1.1.2.4.4_1-4: VOID**Table 6.2.2.1.1.2.4.4_1-5: PDSCH-Config**

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam64LowSE		
}			

6.2.2.1.1.2.4.3_2 Message exceptions for NSA

Same as specified in 6.2.2.1.1.2.4.3_1.

6.2.2.1.1.2.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.1.1.2.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.1.1.3 2Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA

6.2.2.1.1.3.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1. If UE report median CQI = 15 and fulfil the bler criteria, no need to test with median CQI + 1.

6.2.2.1.1.3.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and DL1024QAM.

6.2.2.1.1.3.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.2.1.1.3.3-1, and using the downlink physical channels specified in Annex C.2.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, and if the reported median CQI is not the highest CQI index, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.1.1.3.3-1: CQI reporting definition test

Parameter		Unit	Test 1
Bandwidth		MHz	10
Duplex Mode			FDD
Subcarrier spacing		kHz	15
SNR		dB	28 29
Propagation channel			AWGN
Antenna configuration			2x2 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType			Periodic
CQI-table			Table 4
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	5/0
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001 N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-5, TBS.5-1

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.1.3.

6.2.2.1.1.3.4 Test Description

6.2.2.1.1.3.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.1.1.3.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.2.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.2.1.1.3.4.3.

6.2.2.1.1.3.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.3.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 and [1800] or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.
 - 5a. For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ and the Median CQI is not equal to 15, then go to step 6.
 - 5b. If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ and the Median CQI is equal to 15 then pass the UE for this test.
 - 5c. Otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) > 0.1$

then pass the UE for this test, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) \leq 0.1$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.1.1.3.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.1.1.3.4.3_1 Message exceptions for SA

Table 6.2.2.1.1.3.4.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		
}			

6.2.2.1.1.3.4.3_2 Message exceptions for NSA

Same as specified in 6.2.2.1.1.3.4.3_1.

6.2.2.1.1.3.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.1.1.3.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.1.1.4 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap

6.2.2.1.1.4.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.1.1.4.2 Test Applicability

This test applies to all types of NR/5GC UE release 17 and forward supporting RedCap.

6.2.2.1.1.4.3 Minimum requirement for periodic CQI reporting for RedCap

For the parameters specified in Table 6.2.2.1.1.4.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.1.1.4.3-1: CQI reporting definition test

Parameter		Unit	Test 1	Test 2		
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	8	9	14	15
Propagation channel			AWGN			
Antenna configuration			2x2 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	10/5			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/5			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/5			
ReportConfigType		Periodic				
CQI-table		Table 1				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Wideband				
pmi-FormatIndicator		Wideband				
Sub-band Size	RB	8				
Csi-ReportingBand		1111111				
CSI-Report periodicity and offset	slot	10/9				
aperiodicTriggeringOffset		Not configured				
Codebook configuration	Codebook Type		type1-SinglePanel			
	Codebook Mode		1			
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured			
	CodebookSubsetRestriction		010000			

	RI Restriction		N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		10
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-1, TBS.1-4

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.1.4.

6.2.2.1.1.4.4 Test Description

6.2.2.1.1.4.4.1 Initial Conditions

Same as specified in clause 6.2.2.1.1.4.1

6.2.2.1.1.4.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.4.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI occasion are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 1800 or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.2.1.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.2.1.1.4.4.3_1 Message exceptions for NR/5GC

Same as specified in clause 6.2.2.1.1.4.3_1

6.2.2.1.1.4.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.1.1.4.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.1.1.5 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap

6.2.2.1.1.5.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.1.1.5.2 Test Applicability

This test applies to all types of NR/5GC UE release 18 and forward supporting eRedCap.

6.2.2.1.1.5.3 Minimum requirement for periodic CQI reporting for eRedCap

For the parameters specified in Table 6.2.2.1.1.5.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.1.1.5.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	8	9	14	15
Propagation channel			AWGN			
Antenna configuration			2x2 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
BWP size		RB	52 (PRB 0 to 51)			
PDSCH BW		RB	15 (PRB 0 to 14)			
PDSCH configuration	Resource allocation type		type 1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			

	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	Frequency Occupation	RB	0 to 23
	CSI-RS periodicity and offset	slot	10/5
NZIP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	Frequency Occupation	RB	0 to 23
	NZIP CSI-RS-timeConfig periodicity and offset	slot	10/5
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/5
ReportConfigType		Periodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	10/9	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		010000
	RI Restriction		N/A
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	10	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-6, TBS.6-1	

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.1.5.

6.2.2.1.1.5.4 Test Description

6.2.2.1.1.5.4.1 Initial Conditions

Same as specified in clause 6.2.2.1.1.1.4.1

6.2.2.1.1.5.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.5.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI occasion are also counted as wideband CQI reports.

3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 1800 or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / ACK + NACK) ≤ 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) > 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) ≤ 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. Repeat step 1 to 8 for Test2.

6.2.2.1.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 6.2.2.1.1.5.4.3-1: NZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2a			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	5		
}			

Table 6.2.2.1.1.5.4.3-2: ZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-4			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots10	5		
}			

Table 6.2.2.1.1.5.4.3-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12
--

Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
cqi-Table	table1		
}			

Table 6.2.2.1.1.5.4.3-4: CSI-ReportPeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportPeriodicityAndOffset ::= CHOICE {			
slots10	9		
}			

6.2.2.1.1.5.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.1.1.5.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.1.2 CQI reporting under fading conditions

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the sub-band CQI reporting under frequency selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of [1] dB.

6.2.2.1.2.1 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA

6.2.2.1.2.1.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.2.1.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.2.1.2.1.3 Minimum conformance requirements

For the parameters specified in Table 6.2.2.1.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.2.1.2.1-2;
- The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.2.1.2.1.3-2;
- When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.1.2.1.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter	Unit	Test 1	Test 2
-----------	------	--------	--------

Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
SNR		dB	6 7 12 13
Propagation channel			TDLA30-5
Antenna configuration			2x2
Correlation configuration			ULA high
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot	5/1	
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType		Periodic	
CQI-table		Table 2	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	5/0	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
RI Restriction		N/A	
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	8	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-2, TBS.2-1	

Table 6.2.2.1.2.1.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.2.1.

6.2.2.1.2.1.4 Test description

6.2.2.1.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and Figure A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.2.1.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with Connected without release On, Test Mode On or EN-DC, DC bearer MCG and SCG, Connected without release On, Test Mode On for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.2.1.2.1.4.3.

6.2.2.1.2.1.4.2 Test procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.2.1.5-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median}

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t .

If the recorded BLER ≥ 0.02 and $t / \hat{t}_{median} \geq \gamma$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.
8. Repeat step 1 to 7, with test conditions according to the table 6.2.2.1.2.1.5 -1, for Test2 as appropriate.

6.2.2.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.2.1.2.1.4.3_1 Message exceptions for SA

Table 6.2.2.1.2.1.4.3_1-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.2.1.2.1.4.3_1-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.2.1.2.1.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.2.1.2.1.4.3_1-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots5	1		
}			

Table 6.2.2.1.2.1.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.2.1.2.1.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset		
pucch-CSI-ResourceList	PUCCH-CSI-Resource		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

6.2.2.1.2.1.4.3_2 Message exceptions for NSA

Same as in 6.2.2.1.2.1.4.3_1.

6.2.2.1.2.1.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.2.1.2.1.4.2.

Table 6.2.2.1.2.1.5-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	6	7	12	13
Propagation channel			TDLA30-5			
Antenna configuration			2x2			
Correlation configuration			ULA high			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,4			
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		9			
	CSI-RS periodicity and offset	slot	5/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			

	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType			Periodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	5/0
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
RI Restriction			N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-1

Table 6.2.2.1.2.1.5-2: Test requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05 -TT	1.05 -TT
Note1 : TT = 0.01		

6.2.2.1.2.2 2Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA

6.2.2.1.2.2.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.2.1.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.2.1.2.2.3 Minimum conformance requirements

The accuracy of sub-band channel CQI reporting under the frequency-selective fading conditions is determined by a double-sided percentile of the reported differential CQI offset level 0 per sub-band, and the relative increase of the throughput obtained when transmitting the transport format indicated by the corresponding reported sub-band CQI on a randomly selected sub-band among the sub-bands with the highest reported differential CQI offset level compared to

the throughput when transmitting a fixed transport format according to the wideband CQI median on a randomly selected sub-band among all the sub-bands.

For the parameters specified in Table 6.2.2.1.2.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A sub-band differential CQI offset level of 0 shall be reported at least $\alpha\%$ of the time but less than $\beta\%$ of the time for each sub-band, where α and β are specified in Table 6.2.2.1.2.2.3-2.
- The ratio of the throughput obtained when transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level and that obtained when transmitting the transport format indicated by the reported wideband CQI median on a randomly selected sub-band among all the sub-bands shall be $\geq \gamma$, where γ is specified in Table 6.2.2.1.2.2.3-2.
- When transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level, the average BLER for the indicated transport format shall be greater than or equal to 0.02.

The requirements only apply for sub-bands of full size and the random scheduling across the sub-bands is done by selecting a new sub-band in each TTI for FDD.

Table 6.2.2.1.2.2.3-1: Sub-band CQI reporting test under frequency-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	8	9	14	15
Propagation channel			Two tap model specified in Annex B.2.4 with $a=1$, $f_D = 5\text{Hz}$, and $\tau_d=0.45\mu\text{s}$			
Antenna configuration			2x2			
Correlation configuration			As per Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	5/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	5/1			
ReportConfigType		Aperiodic				
CQI-table		Table 2				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Subband				

pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
csi-ReportingBand		1111111
CSI-Report interval and offset	slot	Not configured
Aperiodic Report Slot Offset		5
CSI request		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	typel-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
	RI Restriction	N/A
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	8
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-2, TBS.2-5

Table 6.2.2.1.2.2.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.2.2.

6.2.2.1.2.2.4 Test description

6.2.2.1.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.6.1 for TE diagram and Figure A.3.2.3.1 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.2.1.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with Connected without release On, Test Mode On or EN-DC, DC bearer MCG and SCG, Connected without release On, Test Mode On for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.2.1.2.2.4.3.

6.2.2.1.2.2.4.2 Test procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.2.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband and subband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs at RB_{Start}=0 allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CQI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CQI feedback. Continue transmission of the PDSCH until 2000 wideband CQI reports and full-size subband CQI reports for each full-size subband have been gathered. In this process the SS collects sub-band CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as subband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. For each subband, if subband differential CQI offset level of 0 is reported, at least α % but less than β % of 6000 full-size subband CQI report, then continue to step 5, otherwise, go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC in an each available downlink transmission instance randomly selected full-size subband using the transport format according to the wideband median CQI value regardless of UE wideband or subband CQI report. Note that each full-size subband shall be selected in the equal probability. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t_{median} .
6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the highest UE reported full-size subband CQI value in one full-size subband selected among the sub-bands in which UE report the highest full-size subband CQI. Subband differential CQI offset level is selected from {0, 1, 2, -1}. Note that the SS shall send PDSCH in the same full-size subband until next UE report is available. In case when same full-size subbands are reported subsequently as subbands with highest full-size subband CQI, the SS shall select for transmission a different subband with respect to the last selection. The SS sends downlink MAC padding bits on the DL RMC Measure the average throughput and (NACK / (ACK + NACK)) according to Annex G.3.3 and G.3.4. Declare the throughput as $t_{subband}$. If the ratio $(t_{subband} / t_{median}) \geq \gamma$ and (NACK / (ACK + NACK)) ≥ 0.02 , pass the UE and go to step 8. Otherwise, go to step 7.
7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.
8. If both tests have not been done, then repeat the same procedure (steps 1 to 7) with test conditions according to the table 6.2.2.1.2.2.3-1 for the other test as appropriate.

6.2.2.1.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.2.2.1.2.2.4.3_1 Message exceptions for SA

Table 6.2.2.1.2.2.4.3_1-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			

other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.2.1.2.2.4.3_1-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.2.1.2.2.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.2.1.2.2.4.3_1-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots5	1		
}			

Table 6.2.2.1.2.2.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.2.1.2.2.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportFreqConfiguration SEQUENCE {			
cqi-FormatIndicator	subbandCQI		
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			

6.2.2.1.2.2.4.3_2 Message exceptions for NSA

Same as in 6.2.2.1.2.2.4.3_1.

6.2.2.1.2.2.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.2.1.2.2.4.2.

Table: 6.2.2.1.2.2.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.04	1.04

6.2.2.1.2.3 2Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA

6.2.2.1.2.3.1 Test purpose

Verify that the UE is tracking the channel variations and selecting the largest transport format possible based on inter-cell interference mitigation receiver.

6.2.2.1.2.3.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

6.2.2.1.2.3.3 Minimum conformance requirements

For the parameters specified in Table 6.2.2.1.2.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following,

- the ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR and that obtained when transmitting the transport format indicated by each reported wideband CQI index subject to a white Gaussian noise source shall be $\geq \gamma$ where γ is specified in Table 6.2.2.1.2.3.3-2;
- when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.1.2.3.3-1: Wideband CQI reporting test with inter-cell interference

Parameter	Unit	Test1	
		Cell 1	Cell 2
Bandwidth	MHz	10	10
Duplex Mode		FDD	FDD
Subcarrier spacing	kHz	15	15
SINR	dB	-2	-
Beamforming Model		As specified in Annex B.4.1	
Interference Model			As specified in B.6.2
SSB configuration	SSB position in burst	1 st SSB in Slot #0	
	SSB periodicity	ms	20
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)	0 for CSI-RS resource 1,2,3,4	0 for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)	4 for CSI-RS resource 1 and 3	4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4

			8 for CSI-RS resource 2 and 4	
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	slot	20 for CSI-RS resource 1,2,3,4	20 for CSI-RS resource 1,2,3,4
	CSI-RS offset	slot	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP size /4)*4	Start PRB 0 Number of PRB = ceil(BWP size /4)*4
	QCL info		TCI state #0	TCI state #0
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic
	Number of CSI-RS ports (X)		4	4
	CDM Type		FD-CDM2	FD-CDM2
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)	Row 5,(6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 5,(9)	Row 5,(9)
CSI-RS periodicity and offset	slot	5/1	Same as serving cell	
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	Periodic
	Number of CSI-RS ports (X)		2	1
	CDM Type		FD-CDM2	noCDM
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 3,(6)	Row 2,(6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 3,(13)	Row 2,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1	Same as serving cell
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic
	CSI-IM RE pattern		0	0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4, 9)	(6, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1	Same as serving cell
ReportConfigType		Periodic	Not configured	
CQI-table		Table 2	Table 2	
reportQuantity		cri-RI-PMI-CQI	Not configured	
timeRestrictionForChannelMeasurements		Not configured	Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	Not configured	
cqi-FormatIndicator		Wideband	Wideband	
pmi-FormatIndicator		Wideband	Wideband	
Sub-band Size	RB	8	-	
Csi-ReportingBand		1111111	Not configured	
CSI-Report periodicity and offset	slot	5/0	Not configured	
aperiodicTriggeringOffset		Not configured	Not configured	
Codebook configuration	Codebook Type		typel-SinglePanel	typel-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1	1
	CodebookSubsetRestriction		Not configured	Not configured
	RI Restriction		000001	Not configured
Physical channel for CSI report		PUCCH	Not configured	
CQI/RI/PMI delay	ms	8	Not configured	

Maximum number of HARQ transmission		1	Not configured
Measurement channel		As specified in Table A.4-2, TBS.2-1	-
INR (Note 6)	dB	N/A	10.04
Propagation condition		TDLA30-5	AWGN
Antenna configuration		2x2	1x2
Correlation configuration		ULA Low	N/A
Note 1:	The respective received power spectral density of each interfering cell relative to N_{oc} is defined by its associated INR value as specified in clause B.6.1.		
Note 2:	Two cells are considered in which Cell 1 is the serving cell and Cell 2 is the interfering cell. Interfering cell is fully loaded.		
Note 3:	Both cells are time-synchronous.		
Note 4:	Static channel is used for the interference model. In case for white Gaussian noise model Cell 2 is not present.		
Note 5:	SINR corresponds to \widehat{E}_s / N_{oc} of Cell 1 as defined in clause 4.4.5.		
Note 6:	INR is defined in clause B.6.1.		

Table 6.2.2.1.2.3.3-2: Minimum requirements

Parameters	Test 1
γ	1.9

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.2.3.

6.2.2.1.2.3.4 Test description

6.2.2.1.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the serving cell (Cell 1) and interfering cell (Cell 2) are set up according to Table 6.1.2-1 and Table 6.2.2.1.2.3.3-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.15_1.3.3.

6.2.2.1.2.3.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband CQI value reported from UE. The SS sends downlink MAC padding bits on the DL RMC. For any

PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as $t_{\text{wideband_interference}}$.

2. Deactivate i.e., stop transmitting anything from Cell 2 and set the Cell 1 parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.2.2.1.2.3.3-1 as appropriate.
3. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband CQI value reported from UE. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as $t_{\text{wideband_gaussian_noise}}$.

4. If the ratio $(t_{\text{wideband_interference}} / t_{\text{wideband_gaussian_noise}}) \geq \gamma$ specified in Table 6.2.2.1.2.3.3-2 and the BLER (NACK / ACK + NACK) calculated in step 1 is greater or equal to 0.02, then pass the UE for this test. Otherwise fail the UE.

6.2.2.1.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 5.4.2.

6.2.2.1.2.3.5 Test requirement

The Cell1 SINR and Cell2 INR value is updated in Table 6.2.2.1.2.3.5-1 according to the test tolerance in F.1.3.3.

Table 6.2.2.1.2.3.5-1: Test Parameters for FDD FR1 Wideband CQI reporting with inter-cell interference

Parameter	Unit	Test1	
		Cell 1	Cell 2
SINR	dB	-1.97	-
INR (Note 6)	dB	N/A	10.34
Note 5: SINR corresponds to \hat{E}_s / N_{oc} of Cell 1 as defined in clause 4.4.5.			
Note 6: INR is defined in clause B.6.1.			

Table 6.2.2.1.2.3.5-2: Test requirements

Parameters	Test 1
γ	1.89

6.2.2.1.2.4 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap

6.2.2.1.2.4.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.2.1.2.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting RedCap.

6.2.2.1.2.4.3 Minimum requirement for wideband CQI reporting for RedCap

The purpose of the requirements is to verify that the RedCap UE is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the wideband CQI reporting under frequency selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.2.1.2.4.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.2.1.2.4.3-2;
- The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.2.1.2.4.3-2;
- When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.1.2.4.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
SNR		dB	6 7
Propagation channel			TDLA30-5
Antenna configuration			2x2
Correlation configuration			ULA high
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/5
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/5
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/5
ReportConfigType		Periodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	

timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
Csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1,CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
	RI Restriction	N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	10
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-1, TBS.1-3

Table 6.2.2.1.2.4.3-2: Minimum requirements

Parameters	Test 1
α [%]	20
γ	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.2.4.

6.2.2.1.2.4.4 Test description

6.2.2.1.2.4.4.1 Initial conditions

Same as specified in clause 6.2.2.1.1.1.4.1

6.2.2.1.2.4.4.2 Test procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.2.4.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI reporting occasion are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median}

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX

responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t .

If the recorded BLER ≥ 0.02 and $t / \bar{t}_{median} \geq \gamma$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.1.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.2.1.2.4.4.3_1 Message exceptions for NR/5GC

Same as specified in clause 6.2.2.1.1.4.3_1

6.2.2.1.2.4.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.2.1.2.4.4.2.

Table 6.2.2.1.2.4.5-1: Test requirements

Parameters	Test 1
α [%]	20
γ	1.05 - TT
Note: TT = 0.01	

6.2.2.1.2.5 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap

6.2.2.1.2.5.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.2.1.2.5.2 Test applicability

This test applies to all types of 2Rx NR UE release 18 and forward supporting eRedCap.

6.2.2.1.2.5.3 Minimum requirement for wideband CQI reporting for eRedCap

The purpose of the requirements is to verify that the eRedCap is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the wideband CQI reporting under frequency selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.2.1.2.5.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.2.1.2.5.3-2;
- The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.2.1.2.5-2;

- c) When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.1.2.5.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
SNR		dB	6 7
Propagation channel			TDLA30-5
Antenna configuration			2x2
Correlation configuration			ULA high
Beamforming Model			As specified in Annex B.4.1
BWP size		RB	52 (PRB 0 to 51)
PDSCH BW		RB	15 (PRB 0 to 14)
PDSCH configuration	Resource allocation type		type 1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	Frequency Occupation	RB	0 to 23
CSI-RS periodicity and offset	slot	10/5	
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	Frequency Occupation	RB	0 to 23
NZP CSI-RS-timeConfig periodicity and offset	slot	10/5	
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/5
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	10/9
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	10

Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-6, TBS.6-1

Table 6.2.2.1.2.5.3-2: Minimum requirements

Parameters	Test 1
α [%]	20
γ	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.1.2.5.

6.2.2.1.2.5.4 Test description

6.2.2.1.2.5.4.1 Initial conditions

Same as specified in clause 6.2.2.1.1.4.1

6.2.2.1.2.5.4.2 Test procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.2.5.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 (α %) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median} .

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t .

If the recorded $\text{BLER} \geq 0.02$ and $t / t_{median} \geq \gamma$ then pass the UE for this test and go to step 8.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.1.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 6.2.1.1.2.1.4.3_1-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45
--

Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.1.1.2.1.4.3_1-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.1.1.2.1.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.1.1.2.1.4.3_1-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	5		
}			

Table 6.2.1.1.2.1.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
typeI-SinglePanel-ri-Restriction	11111111		

Table 6.2.1.1.2.1.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-		

	ReportPeriodicityAndOffset		
pucch-CSI-ResourceList	PUCCH-CSI-Resource		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

6.2.2.1.2.5.4.3_1 Message exceptions for NR/5GC

Same as specified in clause 6.2.2.1.1.5.4.3.

6.2.2.1.2.5.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.2.1.2.5.4.2.

Table 6.2.2.1.2.5.5-1: Test requirements

Parameters	Test 1
α [%]	20
γ	1.05 - TT
Note1 : TT = 0.01	

6.2.2.2 TDD

6.2.2.2.1 CQI Reporting definition under AWGN conditions

6.2.2.2.1.1 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA

6.2.2.2.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.2.1.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.2.2.2.1.1.3 Minimum requirement for periodic CQI reporting

The purpose of the requirements is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median.

For the parameters specified in Table 6.2.2.2.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH

BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.1.1.3-1: CQI reporting definition test

Parameter		Unit	Test 1	Test 2	
Bandwidth		MHz	40		
Subcarrier spacing		kHz	30		
Duplex Mode			TDD		
TDD UL-DL pattern			FR1.30-1		
SNR		dB	8	9	14 15
Propagation channel			AWGN		
Antenna configuration			2x2 with static channel specified in Annex B.1		
Beamforming Model			As specified in Section Annex B.4.1		
ZP CSI-RS configuration	CSI-RS resource Type		Periodic		
	Number of CSI-RS ports (X)		4		
	CDM Type		FD-CDM2		
	Density (ρ)		1		
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)		
	CSI-RS periodicity and offset	slot	10/1		
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic		
	Number of CSI-RS ports (X)		2		
	CDM Type		FD-CDM2		
	Density (ρ)		1		
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)		
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1		
CSI-IM configuration	CSI-IM resource Type		Periodic		
	CSI-IM RE pattern		0		
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)		
	CSI-IM timeConfig periodicity and offset	slot	10/1		
ReportConfigType		Periodic			
CQI-table		Table 2			
reportQuantity		cri-RI-PMI-CQI			
timeRestrictionForChannelMeasurements		Not configured			
timeRestrictionForInterferenceMeasurements		Not configured			
cqi-FormatIndicator		Wideband			
pmi-FormatIndicator		Wideband			
Sub-band Size	RB	16			
CSI-reportingBand		1111111			
CSI-Report periodicity and offset	slot	10/9			
aperiodicTriggeringOffset		Not configured			
Codebook configuration	Codebook Type		type1-SinglePanel		
	Codebook Mode		1		
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured		
	CodebookSubsetRestriction		010000		
	RI Restriction		N/A		
Physical channel for CSI report			PUCCH		
CQI/RI/PMI delay		ms	9.5		
Maximum number of HARQ transmission			1		
Measurement channel			As specified in Table A.4-2, TBS.2-4		

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.1.

6.2.2.2.1.1.4 Test Description

6.2.2.2.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.2.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.2.2.1.1.4.3.

6.2.2.2.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / ACK + NACK) ≤ 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. Repeat step 1 to 8 for Test2.

6.2.2.2.1.1.4.4 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.2.1.1.4.4_1 Message exceptions for SA

Table 6.2.2.2.1.1.4.4_1-1: Void

Table 6.2.2.2.1.1.4.4_1-2: Void

6.2.2.2.1.1.4.4_2 Message exceptions for NSA

Same as specified in 6.2.2.2.1.1.4.4_1.

6.2.2.2.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.2.1.2 2Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA

6.2.2.2.1.2.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10^{-5} falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.2.1.2.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

6.2.2.2.1.2.3 Minimum requirement for periodic CQI reporting with Table 3

For the parameters specified in Table 6.2.2.2.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 10^{-5} , then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 10^{-5} . If the PDSCH BLER using the transport format indicated by the median CQI is greater than 10^{-5} , then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 10^{-5} .
- c) The reported CQI value according to the reference channel shall be ≥ 1 .

Table 6.2.2.2.1.2.3-1: CQI reporting test parameters

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD UL-DL pattern			FR1.30-1
SNR		dB	1 2
Propagation channel			AWGN
Antenna configuration			1x2 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	First subcarrier index in the PRB used for CSI-RS (k)		Row 1,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 1,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType			Periodic
CQI-table			Table 3
reportQuantity			cri-RI-PMI-CQI (Note 1)
Codebook configuration			Not configured
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	16
Csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	10/9
aperiodicTriggeringOffset			Not configured
Physical channel for CSI report			PUCCH

CQI/RI/PMI delay	ms	9.5
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-4, TBS.4-2
Note 1: The bit width of PMI for UCI on PUCCH in a case 1-port CSI-RS is configured as channel measurement resource is given in TS 38.212 [10], section 6.3.1.1.2.		

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.2.

6.2.2.2.1.2.4 Test Description

6.2.2.2.1.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.2.1.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.2.2.1.2.4.3.

6.2.2.2.1.2.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.2.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 5000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 4500 or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK

and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

For the filtered ACK and NACK responses if the ratio $(NACK / (ACK + NACK)) \leq 10^{-5}$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

If the ratio $(NACK / (ACK + NACK)) > 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

If the ratio $(NACK / (ACK + NACK)) \leq 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.2.1.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.2.1.2.4.3_1 Message exceptions for SA

Table 6.2.2.2.1.2.4.3_1-1: NZP CSI-RS-ResourceMapping

Derivation Path: TS 38.508-1 [6], Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0001	K0=0, row 1,	1Tx test cases
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	13		
CDM Type	noCDM		
density CHOICE {			
three	NULL		
}			
}			

Table 6.2.2.2.1.2.4.3_1-2: NZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
slot10	1		
}			
}			

Table 6.2.2.2.1.2.4.4_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-6			
Information Element	Value/remark	Comment	Condition
CSI-IM-Resource ::= SEQUENCE {			
periodicityAndOffset SEQUENCE {			
slot10	1		
}			
}			

Table 6.2.2.2.1.2.4.4_1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
cqi-Table	table3		
}			

Table 6.2.2.2.1.2.4.4_1-5: Void**Table 6.2.2.2.1.2.4.4_1-6: PDSCH-Config**

Derivation Path: TS 38.508-1 [6], Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam64LowSE		
}			

6.2.2.2.1.2.4.3_2 Message exceptions for NSA

Same as specified in 6.2.2.2.1.2.4.3_1.

6.2.2.2.1.2.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.1.2.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.2.1.3 2Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA

6.2.2.2.1.3.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports for PCell on band with shared spectrum access is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI+1.

6.2.2.2.1.3.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting NR/5GC and NR-U and supporting UL on shared channel access.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and NR-U.

6.2.2.2.1.3.3 Minimum requirement for CQI reporting with shared spectrum access

For each Downlink Transmission Duration, the transmission power offset is randomly chosen between [0, +6] dB and 2 sets of CQI reports are obtained for each transmission power offset. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median for each power offset. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.2.2.1.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) For each transmission power offset the reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) For each transmission power offset, if the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. For each transmission power offset, if the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.
- c) The absolute difference in median CQI value for each of the transmission power offset according to the reference channel shall be ≥ 2 .

Table 6.2.2.2.1.3.3-1: CQI reporting test parameters for PCell on band with shared spectrum access

Parameter		Unit	Test 1	
Bandwidth		MHz	20	
Subcarrier spacing		kHz	30	
Duplex Mode			TDD	
Downlink Transmission Model			As specified in Annex B.5	
Downlink Transmission Model Parameters	Downlink period	ms	5	
	LBT failure probability (p_{LBT})		0.25	
	Downlink transmission duration values set	slot	{4,6,7}	
	Occupied OFDM symbols in slot other than the last slot of the downlink duration	symbol	14	
	Occupied OFDM symbols in the last slot set of the downlink duration	symbol	14	
TDD UL-DL pattern			FR1.30-7	
SNR		dB	8	9
\bar{E}_b for power offset 1		dBm/Hz	-112	
\bar{E}_b for power offset 2		dBm/Hz	-106	
Propagation channel			AWGN	
Antenna configuration			2x2 with static channel specified in Annex B.1	
Beamforming Model			As specified in Annex B.4.1	
ZP CSI-RS configuration	CSI-RS resource Type		Aperiodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,4	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9	
	CSI-RS interval and offset	slot	Not configured	
	ZP CSI-RS trigger		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0	
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic	
	Number of CSI-RS ports (X)		2	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB		Row 3, 6	

	used for CSI-RS (k_0)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		3
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset	slot	0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			configured
timeRestrictionForInterferenceMeasurements			configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			7
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggrrtSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		010000
	RI Restriction		N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.3.

6.2.2.2.1.3.4 Test Description

6.2.2.2.1.3.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.2.1.3.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.2.2.1.3.4.3.

6.2.2.2.1.3.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.3.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / (ACK + NACK)) ≤ 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK / (ACK + NACK)) > 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK / (ACK + NACK)) ≤ 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.2.1.3.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.2.1.3.4.3_1 Message exceptions for SA

Table 6.2.2.2.1.3.4.3_1-1: Void

Table 6.2.2.2.1.3.4.3_1-2: Void

6.2.2.2.1.3.4.3_2 Message exceptions for NSA

Same as specified in 6.2.2.2.1.3.4.3_1.

6.2.2.2.1.3.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.1.3.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.2.1.4 2Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA

6.2.2.2.1.4.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1. If UE report median CQI = 15 and fulfil the bler criteria, no need to test with median CQI + 1.

6.2.2.2.1.4.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and DL1024QAM.

6.2.2.2.1.4.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.2.2.1.4.3-1, and using the downlink physical channels specified in Annex C.2.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, and if the reported median CQI is not the highest CQI index, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.2.1.4.3-1: CQI reporting definition test

Parameter	Unit	Test 1	
Bandwidth	MHz	40	
Subcarrier spacing	kHz	30	
Duplex Mode		TDD	
TDD UL-DL pattern		FR1.30-1	
SNR	dB	28	29

Propagation channel			AWGN
Antenna configuration			2x2 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType		Periodic	
CQI-table		Table 4	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	16	
Csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	10/9	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1- SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
RI Restriction		N/A	
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	9.5	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-5, TBS.5-2	

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.4.

6.2.2.2.1.4.4 Test Description

6.2.2.2.1.4.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.2.1.4.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.2.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.2.2.1.4.4.3.

6.2.2.2.1.4.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.4.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.
 - 5a. For the filtered ACK and NACK responses if the ratio (NACK / ACK + NACK) ≤ 0.1 and the Median CQI is not equal to 15, then go to step 6.
 - 5b. If the ratio (NACK / ACK + NACK) ≤ 0.1 and the Median CQI is equal to 15 then pass the UE for this test.
 - 5c. Otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) > 0.1$

then pass the UE for this test, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) \leq 0.1$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.2.1.4.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.2.2.1.4.4.3_1 Message exceptions for SA

Table 6.2.2.2.1.4.4.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		
}			

6.2.2.2.1.4.4.3_2 Message exceptions for NSA

Same as specified in 6.2.2.2.1.4.4.3_1.

6.2.2.2.1.4.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.1.4.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.2.1.5 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap

6.2.2.2.1.5.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.2.1.5.2 Test Applicability

This test applies to all types of NR/5GC UE release 17 and forward supporting RedCap.

6.2.2.2.1.5.3 Minimum requirement for periodic CQI reporting for RedCap

For the parameters specified in Table 6.2.2.2.1.5.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.2.1.5.3-1: CQI reporting definition test

Parameter		Unit	Test 1	Test 2
Bandwidth		MHz	20	
Subcarrier spacing		kHz	30	
Duplex Mode			TDD	
TDD UL-DL pattern			FR1.30-1	
SNR		dB	8	9 14 15
Propagation channel			AWGN	
Antenna configuration			2x2 with static channel specified in Annex B.1	
Beamforming Model			As specified in Annex B.4.1	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)	
	CSI-RS periodicity and offset	slot	10/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		2	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)	
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1	
CSI-IM configuration	CSI-IM resource Type		Periodic	
	CSI-IM RE pattern		0	
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)	
	CSI-IM timeConfig periodicity and offset	slot	10/1	
ReportConfigType		Periodic		
CQI-table		Table 1		
reportQuantity		cri-RI-PMI-CQI		
timeRestrictionForChannelMeasurements		Not configured		
timeRestrictionForInterferenceMeasurements		Not configured		
cqi-FormatIndicator		Wideband		
pmi-FormatIndicator		Wideband		
Sub-band Size	RB	8		
Csi-ReportingBand		1111111		
CSI-Report periodicity and offset	slot	10/9		
aperiodicTriggeringOffset		Not configured		
Codebook configuration	Codebook Type		type1-SinglePanel	
	Codebook Mode		1	
	(CodebookConfig-		Not configured	

	N1,CodebookConfig-N2)		
	CodebookSubsetRestriction		010000
	RI Restriction		N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-1, TBS.1-6

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.5.

6.2.2.2.1.5.4 Test Description

6.2.2.2.1.5.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.2.1.5-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.2.2.1.5.4.3.

6.2.2.2.1.5.4.2 Test Procedure

Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.5.3-1.

2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI occasion are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 1800 or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(NACK / ACK + NACK) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.2.2.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 6.2.2.2.1.5.4.3-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-16			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		
}			

Table 6.2.2.2.1.5.4.3-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-15			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	010000		
}			
}			

Table 6.2.2.2.1.5.4.3-3: Void

6.2.2.2.1.5.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.1.5.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.2.1.6 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap

6.2.2.2.1.6.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.2.2.1.6.2 Test Applicability

This test applies to all types of NR/5GC UE release 18 and forward supporting eRedCap.

6.2.2.2.1.6.3 Minimum requirement for periodic CQI reporting for eRedCap

The purpose of the requirements for the eRedCap is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.2.2.1.6.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.2.2.1.6.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	20			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	8	9	14	15
Propagation channel			AWGN			
Antenna configuration			2x2 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
BWP size		RB	51 (PRB 0 to 50)			
PDSCH BW		RB	7 (PRB 0 to 6)			
PDSCH configuration	Resource allocation type		type 1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,4			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9			
	Frequency Occupation	RB	0 to 23			
	CSI-RS periodicity and offset	slot	10/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			

	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
	Frequency Occupation	RB	0 to 23
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		10/9
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		010000
Physical channel for CSI report			N/A
CQI/RI/PMI delay	ms		PUCCH
Maximum number of HARQ transmission			9.5
Measurement channel			1
			As specified in Table A.4-6, TBS.6-2

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.6.

6.2.2.2.1.6.4 Test Description

6.2.2.2.1.6.4.1 Initial Conditions

Same as specified in clause 6.2.2.1.1.4.1

6.2.2.2.1.6.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.6.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 10 ms and also cases where UE transmits nothing in its CQI occasion are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 1800 or more of the wideband CQI values are in the range (Median CQI - 1) \leq Median CQI \leq (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink

MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(NACK / ACK + NACK) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.2.2.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exception:

Table 6.2.2.2.1.6.4.3-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
cqi-Table	table1		
}			

6.2.2.2.1.6.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.1.6.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.2.2.2 CQI reporting under fading conditions

- 6.2.2.2.2.1 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA

6.2.2.2.2.1.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.2.2.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.2.2.2.1.3 Minimum conformance requirements

For the parameters specified in Table 6.2.2.2.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.2.2.2.1.3-2;
- b) The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.2.2.2.1.3-2;
- c) When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.2.2.1.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	40			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	6	7	12	13
Propagation channel			TDLA30-5			
Antenna configuration			2x2			
Correlation configuration			ULA high			
Beamforming Model			As specified in AnnexB.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
CSI-RS periodicity and offset	slot	10/1				
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
NZP CSI-RS-timeConfig periodicity and offset	slot	10/1				
CSI-IM configuration	CSI-RS resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/1			
ReportConfigType		Periodic				
CQI-table		Table 2				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Wideband				
pmi-FormatIndicator		Wideband				

Sub-band Size	RB	16
Csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1,CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
RI Restriction		N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	9.5
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-1, TBS.2-3

Table 6.2.2.2.1.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.1.

6.2.2.2.1.4 Test description

6.2.2.2.1.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.1.4.1 with the following exceptions:

Instead of Table 6.2.2.1.2.1.3-1 → use Table 6.2.2.2.1.3-1.

6.2.2.2.1.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.1.4.2 with the following exceptions:

Instead of Table 6.2.2.1.2.1.5-1 → use Table 6.2.2.2.1.3-1.

6.2.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.2.2.1.4.3_1 Message exceptions for SA

Same as 6.2.2.1.2.1.4.3_1 with following exceptions:

Table 6.2.2.2.1.4.3_1-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		
}			

6.2.2.2.1.4.3_2 Message exceptions for NSA

Same as 6.2.2.2.1.4.3_1.

6.2.2.2.2.1.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.2.2.2.1.4.2.

Table 6.2.2.2.2.1.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	20	20
γ	1.04	1.04

6.2.2.2.2.2 2Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA

6.2.2.2.2.2.1 Test purpose

To verify the variance of the subband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2 % for the indicated transport format.

6.2.2.2.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.2.2.2.2.3 Minimum conformance requirements

The purpose of the requirements is to verify that the preferred sub-bands can be used for frequency-selective scheduling under the frequency-selective fading conditions.

The accuracy of sub-band channel CQI reporting under the frequency-selective fading conditions is determined by a double-sided percentile of the reported differential CQI offset level 0 per sub-band, and the relative increase of the throughput obtained when transmitting the transport format indicated by the corresponding reported sub-band CQI on a randomly selected sub-band among the sub-bands with the highest reported differential CQI offset level compared to the throughput when transmitting a fixed transport format according to the wideband CQI median on a randomly selected sub-band among all the sub-bands.

For the parameters specified in Table 6.2.2.2.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A sub-band differential CQI offset level of 0 shall be reported at least α % of the time but less than β % of the time for each sub-band, where α and β are specified in Table 6.2.2.2.2.3-2;
- The ratio of the throughput obtained when transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level and that obtained when transmitting the transport format indicated by the reported wideband CQI median on a randomly selected sub-band among all the sub-bands shall be $\geq \gamma$, where γ is specified in Table 6.2.2.2.2.3-2;
- When transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level, the average BLER for the indicated transport format shall be greater than or equal to 0.02.

The requirements only apply for sub-bands of full size and the random scheduling across the sub-bands is done by selecting a new sub-band in each available downlink transmission instance for TDD.

Table 6.2.2.2.2.3-1: Sub-band CQI reporting test under frequency-selective fading conditions

Parameter	Unit	Test 1		Test 2	
Bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Duplex Mode		TDD			
TDD UL-DL pattern		FR1.30-1			
SNR	dB	8	9	14	15

Propagation channel			Two tap model specified in Annex B.2.4 with $a=1$, $f_b = 5\text{Hz}$, and $\tau_d=0.1125\mu\text{s}$
Antenna configuration			2x2
Correlation configuration			As per Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType		Aperiodic	
CQI-table		Table 2	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Subband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	16	
csi-ReportingBand		1111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001 N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-6

Table 6.2.2.2.2.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.2.2.

6.2.2.2.2.2.4 Test description

6.2.2.2.2.2.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.2.4.1 with the following exceptions:

Instead of Table 6.2.2.1.2.2.3-1 → use Table 6.2.2.2.2.3 -1.

Instead of clause 6.2.2.1.2.2.4.3 → use clause 6.2.2.2.2.4.3.

6.2.2.2.2.2.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.2.4.2 with the following exceptions:

Instead of Table 6.2.2.1.2.2.3-1 → use Table 6.2.2.2.2.3-1.

6.2.2.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.2.2.2.2.4.3_1 Message exceptions for SA

Table 6.2.2.2.2.4.3_1-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.2.2.2.4.3_1-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.2.2.2.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			

subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.2.2.2.4.3_1-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		
}			

Table 6.2.2.2.2.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.2.2.2.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportFreqConfiguration SEQUENCE {			
cqi-FormatIndicator	subbandCQI		
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			

6.2.2.2.2.4.3_2 Message exceptions for NSA

Same as in 6.2.2.2.2.4.3_1.

6.2.2.2.2.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.2.2.2.4.2.

Table 6.2.2.2.2.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.04	1.04

6.2.2.2.2.3 2Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA

6.2.2.2.2.3.1 Test purpose

Verify that the UE is tracking the channel variations and selecting the largest transport format possible based on inter-cell interference mitigation receiver.

6.2.2.2.2.3.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

6.2.2.2.2.3.3 Minimum conformance requirements

For the parameters specified in Table 6.2.2.2.2.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following,

- the ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR and that obtained when transmitting the transport format indicated by each reported wideband CQI index subject to a white Gaussian noise source shall be $\geq \gamma$ where γ is specified in Table 6.2.2.2.2.3.3-2;
- when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.2.2.3.3-1: Wideband CQI reporting test with inter-cell interference (TDD)

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Bandwidth		MHz	40	40
Duplex Mode			TDD	TDD
Subcarrier spacing		kHz	30	30
TDD UL-DL pattern			FR1.30-1	FR1.30-1
SINR		dB	-2	-
Beamforming Model			As specified in Annex B.4.1	
Interference Model				As specified in B.6.2
SSB configuration	SSB position in burst		1 st SSB in Slot #0	2 nd SSB in Slot#0
	SSB periodicity	ms	20	20
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)		0 for CSI-RS resource 1,2,3,4	0 for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4	4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	slot	40 for CSI-RS resource	40 for CSI-RS resource
	CSI-RS offset	slot	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP size /4)*4	Start PRB 0 Number of PRB = ceil(BWP size /4)*4
QCL info			TCI state #0	TCI state #0
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic
	Number of CSI-RS ports (X)		4	4

	CDM Type		FD-CDM2	FD-CDM2
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	Row 5,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)	Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1	Same as serving cell
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	Periodic
	Number of CSI-RS ports (X)		2	1
	CDM Type		FD-CDM2	noCDM
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)	Row 2,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)	Row 2,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1	Same as serving cell
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic
	CSI-IM RE pattern		0	0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)	(6,9)
	CSI-IM timeConfig periodicity and offset	slot	10/1	Same as serving cell
ReportConfigType		Periodic	Not configured	
CQI-table		Table 2	Table 2	
reportQuantity		cri-RI-PMI-CQI	Not configured	
timeRestrictionForChannelMeasurements		Not configured	Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	Not configured	
cqi-FormatIndicator		Wideband	Wideband	
pmi-FormatIndicator		Wideband	Wideband	
Sub-band Size	RB	16		
Csi-ReportingBand		1111111	Not configured	
CSI-Report periodicity and offset	slot	10/9	Not configured	
aperiodicTriggeringOffset		Not configured	Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel	type1-SinglePanel
	Codebook Mode		1	1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured	Not configured
	CodebookSubsetRestriction		000001	Not configured
	RI Restriction		N/A	Not configured
Physical channel for CSI report		PUCCH	Not configured	
CQI/RI/PMI delay	ms	9.5	Not configured	
Maximum number of HARQ transmission		1	Not configured	
Measurement channel		As specified in Table A.4-2, TBS.2-3		
INR	dB	N/A	10.04	
Propagation condition		TDLA30-5	AWGN	
Antenna configuration		2x2	1x2	
Correlation configuration		ULA Low	N/A	
<p>Note 1: The respective received power spectral density of each interfering cell relative to N_{oc} is defined by its associated INR value as specified in clause B.6.1.</p> <p>Note 2: Two cells are considered in which Cell 1 is the serving cell and Cell 2 is the interfering cell. Interfering cell is fully loaded.</p> <p>Note 3: Both cells are time-synchronous.</p> <p>Note 4: Static channel is used for the interference model. In case for white Gaussian noise model Cell 2 is not present.</p> <p>Note 5: SINR corresponds to \widehat{E}_s / N_{oc} of Cell 1 as defined in clause 4.4.5.</p> <p>Note 6: INR corresponds to Cell 2 is defined in clause B.6.1</p>				

Table 6.2.2.2.3.3-2: Minimum requirement (TDD)

Parameters	Test 1
γ	1.9

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.3.

6.2.2.2.3.4 Test description

6.2.2.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the serving cell (Cell 1) and interfering cell (Cell 2) are set up according to Table 6.1.2-1 and Table 6.2.2.2.3.3-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On*, for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 5.2.2.1.15_1.3.3.

6.2.2.2.3.4.2 Test procedure

1. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband CQI value reported from UE. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as $t_{\text{wideband_interference}}$.
2. Deactivate i.e., stop transmitting anything from Cell 2 and set the Cell 1 parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.2.2.2.3.3-1 as appropriate.
3. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband CQI value reported from UE. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as $t_{\text{wideband_gaussian_noise}}$.

4. If the ratio $(t_{\text{wideband_interference}} / t_{\text{wideband_gaussian_noise}}) \geq \gamma$ specified in Table 6.2.2.2.3.3-2 and the BLER (NACK / ACK + NACK) calculated in step 1 is greater or equal to 0.02, then pass the UE for this test. Otherwise fail the UE.

6.2.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 5.4.2.

6.2.2.2.3.5 Test requirement

The Cell1 SINR and Cell2 INR value is updated in Table 6.2.2.2.3.5-1 according to the test tolerance in F.1.3.3.

Table 6.2.2.2.3.5-1: Test Parameters for TDD FR1 Wideband CQI reporting with inter-cell interference

Parameter	Unit	Test1	
		Cell 1	Cell 2
SINR	dB	-1.97	-
INR (Note 6)	dB	N/A	10.34
Note 5: SINR corresponds to \hat{E}_s / N_{oc} of Cell 1 as defined in clause 4.4.5.			
Note 6: INR is defined in clause B.6.1.			

Table 6.2.2.2.3.5-2: Test requirements

Parameters	Test 1
γ	1.89

6.2.2.2.4 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap

6.2.2.2.4.1 Test Purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.2.2.4.2 Test Applicability

This test applies to all types of NR/5GC UE release 17 and forward supporting RedCap.

6.2.2.2.4.3 Minimum requirement for wideband CQI reporting for RedCap

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.2.2.4.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.2.2.4.3-2;
- b) The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.2.2.4.3-2;
- c) When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.2.2.4.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1
Bandwidth		MHz	20
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD UL-DL pattern			FR1.30-1
SNR		dB	6 7
Propagation channel			TDLA30-5
Antenna configuration			2x2
Correlation configuration			ULA high
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
CSI-RS periodicity and offset	slot		10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot		10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		10/9
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001
Physical channel for CSI report			N/A
CQI/RI/PMI delay	ms		PUCCH
Maximum number of HARQ transmission			9.5
Measurement channel			1
			As specified in Table A.4-1, TBS.1-5

Table 6.2.2.2.4.3-2: Minimum requirements

Parameters	Test 1
α [%]	20
γ	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.2.2.4.

6.2.2.2.4.4 Test Description

6.2.2.2.4.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.2.2.4.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On, Test Mode On*. Message contents are defined in clause 6.2.2.2.4.5.

6.2.2.2.4.4.2 Test Procedure

1. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.4.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.
4. If Median CQI value is not equal to 1 or 15 and 1200 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 3 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median} .

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are

then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data, record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t.

If the recorded BLER ≥ 0.02 and $t / t_{median} \geq \gamma$ then pass the UE.

7. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 6) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

Table 6.2.2.2.4.4.3-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.2.2.2.4.4.3-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.2.2.2.4.4.3-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.2.2.2.4.4.3-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.2.2.2.4.4.3-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000001		
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.2.2.2.4.4.3-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset		
pucch-CSI-ResourceList	PUCCH-CSI-Resource		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

6.2.2.2.4.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.2.2.4.4.2.

Table 6.2.2.2.4.5-2: Test requirements

Parameters	Test 1
α [%]	20
γ	1.04
Note1 : TT = 0.01	

6.2.3 4RX requirements

6.2.3.1 FDD

6.2.3.1.1 CQI reporting definition under AWGN conditions

The reporting accuracy of the channel quality indicator (CQI) under frequency non-selective conditions is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median. The purpose is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB

6.2.3.1.1.1 4Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA

6.2.3.1.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.3.1.1.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.2.3.1.1.1.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.3.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.3.1.1.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	5	6	11	12
Propagation channel			AWGN			
Antenna configuration			2x4 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	5/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	5/1			
ReportConfigType			Periodic			

CQI-table		Table 2
reportQuantity		cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	5/0
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	010000
	RI Restriction	N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	8
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-2, TBS.2-2

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.1.1.1.

6.2.3.1.1.1.4 Test Description

6.2.3.1.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.1.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.3.1.1.1.4.3.

6.2.3.1.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.1.1.3-1.

2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.3.1.1.1.4.4 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.3.1.1.1.4.4_1 Message exceptions for SA

Same as specified in clause 6.2.2.1.1.1.4.4_1

6.2.3.1.1.1.4.4_2 Message exceptions for NSA

Same as specified in clause 6.2.3.1.1.1.4.4_1.

6.2.3.1.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.1.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.1.1.2 4Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA

6.2.3.1.1.2.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10^{-5} falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.3.1.1.2.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

6.2.3.1.1.2.3 Minimum requirement for periodic CQI reporting with Table 3

For the parameters specified in Table 6.2.3.1.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 10^{-5} , then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 10^{-5} . If the PDSCH BLER using the transport format indicated by the median CQI is greater than 10^{-5} , then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 10^{-5} .
- c) The reported CQI value according to the reference channel shall be ≥ 1 .

Table 6.2.3.1.1.2.3-1: CQI reporting test parameters

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
SNR		dB	-2 -1
Propagation channel			AWGN
Antenna configuration			1x4 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
CSI-RS periodicity and offset	slot		5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 1,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 1,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot		5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0

	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType			Periodic
CQI-table			Table 3
reportQuantity			cri-RI-PMI-CQI (Note 1)
Codebook configuration			Not configured
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		5/0
aperiodicTriggeringOffset			Not configured
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-4, TBS.4-1
Note 1: The bit width of PMI for UCI on PUCCH in a case 1-port CSI-RS is configured as channel measurement resource is given in TS 38.212 [10], section 6.3.1.1.2.			

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.1.1.2.

6.2.3.1.1.2.4 Test Description

6.2.3.1.1.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.1.1.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.3.1.1.2.4.3.

6.2.3.1.1.2.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.3.1.1.2.3-1.

2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 5000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 4500 or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / (\text{ACK} + \text{NACK})) \leq 10^{-5}$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4.

If the ratio $(\text{NACK} / (\text{ACK} + \text{NACK})) > 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4.

If the ratio $(\text{NACK} / (\text{ACK} + \text{NACK})) \leq 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.3.1.1.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.3.1.1.2.4.3_1 Message exceptions for SA

Same as specified in clause 6.2.2.1.1.2.4.3_1.

6.2.3.1.1.2.4.3_2 Message exceptions for NSA

Same as specified in 6.2.3.1.1.2.4.3_1.

6.2.3.1.1.2.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.1.1.2.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.1.1.3 4Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA

6.2.3.1.1.3.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI + 1. If UE report median CQI = 15 and fulfil the bler criteria, no need to test with median CQI + 1.

6.2.3.1.1.3.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and DL1024QAM.

6.2.3.1.1.3.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.3.1.1.3.3-1, and using the downlink physical channels specified in Annex C.2.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, and if the reported median CQI is not the highest CQI index, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.3.1.1.3.3-1: CQI reporting definition test

Parameter		Unit	Test 1
Bandwidth		MHz	10
Duplex Mode			FDD
Subcarrier spacing		kHz	15
SNR		dB	25 26
Propagation channel			AWGN
Antenna configuration			2x4 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping		(4, 9)

	(kCSI-IM,lCSI-IM)		
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType			Periodic
CQI-table			Table 4
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		5/0
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig- N1,CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
	RI Restriction		N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-5, TBS.5-1

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.1.1.3.

6.2.3.1.1.3.4 Test Description

6.2.3.1.1.3.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.1.1.3.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.2.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.3.1.1.3.4.3.

6.2.3.1.1.3.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.3.1.1.3.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.
 - 5a. For the filtered ACK and NACK responses if the ratio $(NACK / ACK + NACK) \leq 0.1$ and the Median CQI is not equal to 15, then go to step 6.
 - 5b. If the ratio $(NACK / ACK + NACK) \leq 0.1$ and the Median CQI is equal to 15 then pass the UE for this test.
 - 5c. Otherwise go to step 7.
6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) > 0.1$

then pass the UE for this test, otherwise go to step 8.
7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / ACK + NACK) \leq 0.1$

then pass the UE for this test, otherwise go to step 8.
8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.3.1.1.3.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.3.1.1.3.4.3_1 Message exceptions for SA

Table 6.2.3.1.1.3.4.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		

}		
---	--	--

6.2.3.1.1.3.4.3_2 Message exceptions for NSA

Same as specified in 6.2.3.1.1.3.4.3_1.

6.2.3.1.1.3.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.1.1.3.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.1.2 CQI reporting definition under fading conditions

6.2.3.1.2.1 4Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA

6.2.3.1.2.1.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.3.1.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.3.1.2.1.3 Minimum conformance requirements

The purpose of the requirements is to verify that the UE is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI.

For the parameters specified in Table 6.2.3.1.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.3.1.2.1.3-2;
- b) The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.3.1.2.1.3-2;
- c) When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.3.1.2.1.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter	Unit	Test 1		Test 2	
Bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Duplex Mode		FDD			
SNR	dB	3	4	9	10
Propagation channel		TDLA30-5			
Antenna configuration		2x4			
Correlation configuration		XP High			

Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)
CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	2
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 3,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
CSI-IM configuration	CSI-IM resource Type	Periodic
	CSI-IM RE pattern	0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})	(4, 9)
	CSI-IM timeConfig periodicity and offset	slot
ReportConfigType		Periodic
CQI-table		Table 2
reportQuantity		cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	5/0
aperiodicTriggeringOffset		Not configured
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	Not configured
	CodebookSubsetRestriction	000001
RI Restriction		N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	8
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-2, TBS.2-1

Table 6.2.3.1.2.1.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	5	5
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.1.2.1.

6.2.3.1.2.1.4 Test description

6.2.3.1.2.1.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.1.4.1 with the following exceptions:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.

Instead of Table 6.2.2.1.2.1.3-1 → use Table 6.2.3.1.2.1.3-1.

6.2.3.1.2.1.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.1.4.2 with the following exceptions:

4. If Median CQI value is not equal to 1 or 15 and 300 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.

Instead of Table 6.2.2.1.2.1.5-1 → use Table 6.2.3.1.2.1.3-1.

6.2.3.1.2.1.4.3 Message contents

Same message contents as specified in clause 6.2.2.1.2.1.4.3 with the following exceptions:

6.2.3.1.2.1.4.3_1 Message exceptions for SA

Table 6.2.3.1.2.1.4.3_1-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots5	1		
}			

6.2.3.1.2.1.4.3_2 Message exceptions for NSA

Same as in 6.2.3.1.2.1.4.3_1.

6.2.3.1.2.1.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.3.1.2.1.4.2.

Table 6.2.3.1.2.1.3-1: Test requirements

Parameters	Test 1	Test 2
α [%]	5	5
γ	1.04	1.04

6.2.3.1.2.2 4Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA

6.2.3.1.2.2.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.3.1.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.3.1.2.2.3 Minimum conformance requirements

The purpose of the requirements is to verify that the preferred sub-bands can be used for frequency-selective scheduling under the frequency-selective fading conditions.

The accuracy of sub-band channel CQI reporting under the frequency-selective fading conditions is determined by a double-sided percentile of the reported differential CQI offset level 0 per sub-band, and the relative increase of the throughput obtained when transmitting the transport format indicated by the corresponding reported sub-band CQI on a randomly selected sub-band among the sub-bands with the highest reported differential CQI offset level compared to the throughput when transmitting a fixed transport format according to the wideband CQI median on a randomly selected sub-band among all the sub-bands.

For the parameters specified in Table 6.2.3.1.2.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) A sub-band differential CQI offset level of 0 shall be reported at least $\alpha\%$ of the time but less than $\beta\%$ of the time for each sub-band, where α and β are specified in Table 6.2.3.1.2.2.3-2;
- b) The ratio of the throughput obtained when transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level and that obtained when transmitting the transport format indicated by the reported wideband CQI median on a randomly selected sub-band among all the sub-bands shall be $\geq \gamma$, where γ is specified in Table 6.2.3.1.2.2.3-2;
- c) When transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level, the average BLER for the indicated transport format shall be greater than or equal to 0.02.

The requirements only apply for sub-bands of full size and the random scheduling across the sub-bands is done by selecting a new sub-band in each TTI for FDD.

Table 6.2.3.1.2.2.3-1: Sub-band CQI reporting test under frequency-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	10			
Subcarrier spacing		kHz	15			
Duplex Mode			FDD			
SNR		dB	5	6	11	12
Propagation channel			Two tap model specified in Annex B.2.4 with $a=1$, $f_b = 5\text{Hz}$, and $\tau_d=0.45\mu\text{s}$			
Antenna configuration			2x4			
Correlation configuration			As per Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
CSI-RS periodicity and offset	slot	5/1				
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
NZP CSI-RS-timeConfig periodicity and offset	slot	5/1				
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping		(4, 9)			

	(kCSI-IM,lCSI-IM)		
	CSI-IM timeConfig periodicity and offset	slot	5/1
ReportConfigType			Aperiodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Subband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i, where mod(i, 5) = 1, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
aperiodicTriggeringOffset			Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig- N1,CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		000001
	RI Restriction		N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	8
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2- 5

Table 6.2.3.1.2.2.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.1.2.2.

6.2.3.1.2.2.4 Test description

6.2.3.1.2.2.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.2.4.1 with the following exceptions:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.

Instead of Table 6.2.2.1.2.2.3-1 → use Table 6.2.3.1.2.2.3-1.

6.2.3.1.2.2.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.2.4.2 with the following exceptions:

Instead of Table 6.2.2.1.2.2.5-1 → use Table 6.2.3.1.2.2.3-1.

6.2.3.1.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.3.1.2.2.4.3_1 Message exceptions for SA

Same message exceptions as in 6.2.2.1.2.2.4.3_1.

6.2.3.1.2.2.4.3_2 Message exceptions for NSA

Same as in 6.2.3.1.2.2.4.3_1.

6.2.3.1.2.2.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.3.1.2.2.4.2.

Table 6.2.3.1.2.2.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.04	1.04

6.2.3.1.2.3 4Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA

6.2.3.1.2.3.1 Test purpose

Verify that the UE is tracking the channel variations and selecting the largest transport format possible based on inter-cell interference mitigation receiver.

6.2.3.1.2.3.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

6.2.3.1.2.3.3 Minimum conformance requirements

For the parameters specified in Table 6.2.3.1.2.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following,

- the ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR and that obtained when transmitting the transport format indicated by each reported wideband CQI index subject to a white Gaussian noise source shall be $\geq \gamma$ where γ is specified in Table 6.2.3.1.2.3.3-2;
- when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.3.1.2.3.3-1: Wideband CQI reporting test with inter-cell interference

Parameter	Unit	Test1	
		Cell 1	Cell 2
Bandwidth	MHz	10	10
Duplex Mode		FDD	FDD
Subcarrier spacing	kHz	15	15
SINR	dB	-2	-

Beamforming Model		As specified in Annex B.4.1		
Interference Model		As specified in B.6.2		
SSB configuration	SSB position in burst	1 st SSB in Slot #0		
	SSB periodicity	ms	20	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)	0 for CSI-RS resource 1,2,3,4		
	First OFDM symbol in the PRB used for CSI-RS (l_0)	4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4		
	Number of CSI-RS ports (X)	1 for CSI-RS resource 1,2,3,4		
	CDM Type	'No CDM' for CSI-RS resource 1,2,3,4		
	Density (ρ)	3 for CSI-RS resource 1,2,3,4		
	CSI-RS periodicity	slot	20 for CSI-RS resource 1,2,3,4	
	CSI-RS offset	slot	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4	
	Frequency Occupation	Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size} / 4) * 4$		
	QCL info	TCI state #0		
ZP CSI-RS configuration	CSI-RS resource Type	Periodic		
	Number of CSI-RS ports (X)	4		
	CDM Type	FD-CDM2		
	Density (ρ)	1		
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)		
	CSI-RS periodicity and offset	slot	5/1 Same as serving cell	
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Periodic		
	Number of CSI-RS ports (X)	2		
	CDM Type	FD-CDM2		
	Density (ρ)	1		
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 3,(6)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 3,(13)		
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1 Same as serving cell	
CSI-IM configuration	CSI-IM resource Type	Periodic		
	CSI-IM RE pattern	0		
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)	(4, 9) (6, 9)		
	CSI-IM timeConfig periodicity and offset	slot	5/1 Same as serving cell	
ReportConfigType	Periodic		Not configured	
CQI-table	Table 2		Table 2	
reportQuantity	cri-RI-PMI-CQI		Not configured	
timeRestrictionForChannelMeasurements	Not configured		Not configured	
timeRestrictionForInterferenceMeasurements	Not configured		Not configured	
cqi-FormatIndicator	Wideband		Wideband	
pmi-FormatIndicator	Wideband		Wideband	
Sub-band Size	RB	8 -		
Csi-ReportingBand	1111111		Not configured	
CSI-Report periodicity and offset	slot	5/0 Not configured		
aperiodicTriggeringOffset	Not configured		Not configured	
Codebook configuration	Codebook Type	type1-SinglePanel		

	Codebook Mode		1	1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured	Not configured
	CodebookSubsetRestriction		000001	Not configured
	RI Restriction		N/A	Not configured
Physical channel for CSI report			PUCCH	Not configured
CQI/RI/PMI delay	ms		8	Not configured
Maximum number of HARQ transmission			1	Not configured
Measurement channel			As specified in Table A.4-2, TBS.2-1	-
INR (Note 6)	dB		N/A	10.04
Propagation condition			TDLA30-5	AWGN
Antenna configuration			2x4	1x4
Correlation configuration			ULA Low	N/A
<p>Note 1: The respective received power spectral density of each interfering cell relative to N_{oc} is defined by its associated INR value as specified in clause B.6.1.</p> <p>Note 2: Two cells are considered in which Cell 1 is the serving cell and Cell 2 is the interfering cell. Interfering cell is fully loaded.</p> <p>Note 3: Both cells are time-synchronous.</p> <p>Note 4: Static channel is used for the interference model. In case for white Gaussian noise model Cell 2 is not present.</p> <p>Note 5: SINR corresponds to \widehat{E}_s / N_{oc} of Cell 1 as defined in clause 4.4.5.</p> <p>Note 6: INR is defined in clause B.6.1.</p>				

Table 6.2.3.1.2.3.3-2: Minimum requirements

Parameters	Test 1
γ	2.0

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.1.2.3.

6.2.3.1.2.3.4 Test description

6.2.3.1.2.3.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.3.4.1 with the following exceptions:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and section A.3.2.5 for UE diagram.

Instead of Table 6.2.2.1.2.3.3-1 → use Table 6.2.3.1.2.3.3-1.

6.2.3.1.2.3.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.3.4.2 with the following exceptions:

Instead of Table 6.2.2.1.2.3.3-1 → use Table 6.2.3.1.2.3.3-1.

Instead of Table 6.2.2.1.2.3.3-2 → use Table 6.2.3.1.2.3.3-2.

6.2.3.1.2.3.4.3 Message contents

Same test procedure as specified in clause 6.2.2.1.2.3.4.3

6.2.3.1.2.3.5 Test requirement

The Cell1 SINR and Cell2 INR value is updated in Table 6.2.3.1.2.3.5-1 according to the test tolerance in F.1.3.3.

Table 6.2.3.1.2.3.5-1: Test Parameters for FDD FR1 Wideband CQI reporting with inter-cell interference

Parameter	Unit	Test1	
		Cell 1	Cell 2
SINR	dB	-1.97	-
INR (Note 6)	dB	N/A	10.34
Note 5: SINR corresponds to \widehat{E}_s/N_{oc} of Cell 1 as defined in clause 4.4.5.			
Note 6: INR is defined in clause B.6.1.			

Table 6.2.3.1.2.3.5-2: Test requirements

Parameters	Test 1
γ	1.99

6.2.3.2 TDD

6.2.3.2.1 CQI reporting definition under AWGN conditions

The reporting accuracy of the channel quality indicator (CQI) under frequency non-selective conditions is determined by the reporting variance and the BLER performance using the transport format indicated by the reported CQI median. The purpose is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB

6.2.3.2.1.1 4Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA

6.2.3.2.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.3.2.1.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.2.3.2.1.1.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.3.2.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.3.2.1.1.3-1: CQI reporting definition test

Parameter	Unit	Test 1	Test 2
Bandwidth	MHz	40	
Subcarrier spacing	kHz	30	
Duplex Mode		TDD	
TDD UL-DL pattern		FR1.30-1	

SNR	dB	5	6	11	12
Propagation channel		AWGN			
Antenna configuration		2x4 with static channel specified in Annex B.1			
Beamforming Model		As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic		
	Number of CSI-RS ports (X)		4		
	CDM Type		FD-CDM2		
	Density (ρ)		1		
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)		
	CSI-RS periodicity and offset	slot	10/1		
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic		
	Number of CSI-RS ports (X)		2		
	CDM Type		FD-CDM2		
	Density (ρ)		1		
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)		
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1		
CSI-IM configuration	CSI-IM resource Type		Periodic		
	CSI-IM RE pattern		0		
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)		
	CSI-IM timeConfig periodicity and offset	slot	10/1		
ReportConfigType		Periodic			
CQI-table		Table 2			
reportQuantity		cri-RI-PMI-CQI			
timeRestrictionForChannelMeasurements		Not configured			
timeRestrictionForInterferenceMeasurements		Not configured			
cqi-FormatIndicator		Wideband			
pmi-FormatIndicator		Wideband			
Sub-band Size	RB	16			
csi-ReportingBand		1111111			
CSI-Report periodicity and offset	slot	10/9			
aperiodicTriggeringOffset		Not configured			
Codebook configuration	Codebook Type		type1-SinglePanel		
	Codebook Mode		1		
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured		
	CodebookSubsetRestriction		010000		
	RI Restriction		N/A		
Physical channel for CSI report		PUCCH			
CQI/RI/PMI delay	ms	9.5			
Maximum number of HARQ transmission		1			
Measurement channel		As specified in Table A.4-2, TBS.2-4			

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.1.1.

6.2.3.2.1.1.4 Test Description

6.2.3.2.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.5 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.2.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.3.2.1.1.4.3.

6.2.3.2.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.2.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) \leq Median CQI \leq (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / (ACK + NACK)) \leq 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK / (ACK + NACK)) > 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. Repeat step 1 to 8 for Test2.

6.2.3.2.1.1.4.4 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.3.2.1.1.4.4_1 Message exceptions for SA

Same as specified in 6.2.2.2.1.1.4.4_1.

6.2.3.2.1.1.4.4_2 Message exceptions for NSA

Same as specified in 6.2.3.2.1.1.4.4_1.

6.2.3.2.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.2.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.2.1.2 4Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA

6.2.3.2.1.2.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10^{-5} falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.3.2.1.2.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and *cqi-TableAlt* and *dl-64QAM-MCS-TableAlt*.

6.2.3.2.1.2.3 Minimum requirement for periodic CQI reporting with Table 3

For the parameters specified in Table 6.2.3.2.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 10^{-5} , then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 10^{-5} . If the PDSCH BLER using the transport format indicated by the median CQI is greater than 10^{-5} , then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 10^{-5} .
- The reported CQI value according to the reference channel shall be ≥ 1 .

Table 6.2.3.2.1.2.3-1: CQI reporting test parameters

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD UL-DL pattern			FR1.30-1
SNR		dB	-2 -1
Propagation channel			AWGN
Antenna configuration			1x4 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
CSI-RS periodicity and offset	slot		10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 1,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 1,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot		10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	
ReportConfigType			Periodic
CQI-table			Table 3
reportQuantity			cri-RI-PMI-CQI (Note 1)
Codebook configuration			Not configured
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		16
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		10/9
aperiodicTriggeringOffset			Not configured
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-4, TBS.4-2
Note 1: The bit width of PMI for UCI on PUCCH in a case 1-port CSI-RS is configured as channel measurement resource is given in TS 38.212 [10], section 6.3.1.1.2.			

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.1.2.

6.2.3.2.1.2.4 Test Description

6.2.3.2.1.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.3 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.2.1.2.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.3.2.1.2.4.3.

6.2.3.2.1.2.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.3.2.1.2.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 5000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and 4500 or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

For the filtered ACK and NACK responses if the ratio (NACK / (ACK + NACK)) ≤ 10⁻⁵ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the

ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

If the ratio $(\text{NACK} / (\text{ACK} + \text{NACK})) > 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5, and measure the BLER for a duration sufficient to achieve statistical significance according to Annex G.4 and early pass fail decision rules as per Annex G.4.3a.

If the ratio $(\text{NACK} / (\text{ACK} + \text{NACK})) \leq 10^{-5}$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.3.2.1.2.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.3.2.1.2.4.3_1 Message exceptions for SA

Same as specified in clause 6.2.2.2.1.2.4.3_1.

6.2.3.2.1.2.4.3_2 Message exceptions for NSA

Same as specified in 6.2.3.2.1.2.4.3_1.

6.2.3.2.1.2.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.2.1.2.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.2.1.3 4Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA

6.2.3.2.1.3.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI+1.

6.2.3.2.1.3.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting NR/5GC and NR-U and supporting UL on shared channel access.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and NR-U.

6.2.3.2.1.3.3 Minimum requirement for CQI reporting with shared spectrum access

For each Downlink Transmission Duration, the transmission power offset is randomly chosen between [0, +6] dB and 2 sets of CQI reports are obtained for each transmission power offset. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median for each power offset. To account for sensitivity of the input SNR the reporting definition is

considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2.3.2.1.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- For each transmission power offset the reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- For each transmission power offset, if the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. For each transmission power offset, if the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.
- The absolute difference in median CQI value for each of the transmission power offset according to the reference channel shall be ≥ 2 .

Table 6.2.3.2.1.3-1: CQI reporting test parameters for PCell on band with shared spectrum access

Parameter		Unit	Test 1
Bandwidth		MHz	20
Subcarrier spacing		kHz	30
Duplex Mode			TDD
Downlink Transmission Model			As specified in Annex B.5
Downlink Transmission Model Parameters	Downlink period		5
	LBT failure probability (p_{LBT})		0.25
	Downlink transmission duration values set		{4,6,7}
	Occupied OFDM symbols in slot other than the last slot of the downlink duration		14
	Occupied OFDM symbols in the last slot set of the downlink duration		14
TDD UL-DL pattern			FR1.30-7
SNR		dB	5 6
E_{avg} for power offset 1		dBm/Hz	-112
E_{avg} for power offset 2		dBm/Hz	-106
Propagation channel			AWGN
Antenna configuration			2x4 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9
	CSI-RS interval and offset	slot	Not configured
	ZP CSI-RS trigger		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3, 6
	First OFDM symbol in the PRB used for CSI-RS (l_0)		3
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0

CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			configured
timeRestrictionForInterferenceMeasurements			configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
csi-ReportingBand			1111111
CSI-Report interval and offset	slot		Not configured
Aperiodic Report Slot Offset			7
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggrrtSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		010000
	RI Restriction		N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.1.3.

6.2.3.2.1.3.4 Test Description

6.2.3.2.1.3.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.2 for TE diagram and section A.3.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.2.1.3.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.3.2.1.3.4.3.

6.2.3.2.1.3.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.3.2.1.3.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.3.2.1.3.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.3.2.1.3.4.3_1 Message exceptions for SA

Table 6.2.3.2.1.3.4.3_1-1: Void

Table 6.2.3.2.1.3.4.3_1-2: Void

6.2.3.2.1.3.4.3_2 Message exceptions for NSA

Same as specified in 6.2.3.2.1.3.4.3_1.

6.2.3.2.1.3.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.2.1.3.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.2.1.4 4Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA

6.2.3.2.1.4.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI + 1. If UE report median CQI = 15 and fulfil the bler criteria, no need to test with median CQI + 1.

6.2.3.2.1.4.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting NR/5GC and DL1024QAM.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and DL1024QAM.

6.2.3.2.1.4.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.3.2.1.4.3-1, and using the downlink physical channels specified in Annex C.2.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, and if the reported median CQI is not the highest CQI index, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.3.2.1.4.3-1: CQI reporting definition test

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD UL-DL pattern			FR1.30-1
SNR		dB	25 26
Propagation channel			AWGN
Antenna configuration			2x4 with static channel specified in Annex B.1
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2

	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZIP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
	NZIP CSI-RS-timeConfig periodicity and offset	slot	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType		Periodic	
CQI-table		Table 4	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	16	
csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	10/9	
aperiodicTriggeringOffset		Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001 N/A
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	9.5	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-5, TBS.5-2	

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.1.4.

6.2.3.2.1.4.4 Test Description

6.2.3.2.1.4.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.3.2.1.4.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.2.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2.3.2.1.4.4.3.

6.2.3.2.1.4.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.3.2.1.4.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 and [1800] or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.
 - 5a. For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ and the Median CQI is not equal to 15, then go to step 6.
 - 5b. If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ and the Median CQI is equal to 15 then pass the UE for this test.
 - 5c. Otherwise go to step 7.
6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test, otherwise go to step 8.
7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2.3.2.1.4.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2.3.2.1.4.4.3_1 Message exceptions for SA

Table 6.2.3.2.1.4.4.3_1-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		
}			

6.2.3.2.1.4.4.3_2 Message exceptions for NSA

Same as specified in 6.2.3.2.1.4.4.3_1.

6.2.3.2.1.4.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.3.2.1.4.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2.3.2.2 CQI reporting under fading conditions

6.2.3.2.2.1 4Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA

6.2.3.2.2.1.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.3.2.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.3.2.2.1.3 Minimum conformance requirements

The purpose of the requirements is to verify that the UE is tracking the channel variations and selecting the largest transport format possible according to the prevailing channel state for the frequency non-selective scheduling.

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI.

For the parameters specified in Table 6.2.3.2.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) A CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least $\alpha\%$ of the time where $\alpha\%$ is specified in Table 6.2.3.2.2.1.3-2;

- b) The ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 6.2.3.2.2.1.3-2;
- c) When transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.3.2.2.1.3-1: Wideband CQI reporting test under frequency non-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	40			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	3	4	9	10
Propagation channel			TDLA30-5			
Antenna configuration			2x4			
Correlation configuration			XP High			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	10/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)			
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/1			
ReportConfigType		Periodic				
CQI-table		Table 2				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Wideband				
pmi-FormatIndicator		Wideband				
Sub-band Size	RB	16				
csi-ReportingBand		1111111				
CSI-Report periodicity and offset	slot	10/9				
aperiodicTriggeringOffset		Not configured				
Codebook configuration	Codebook Type		type1-SinglePanel			
	Codebook Mode		1			
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured			
	CodebookSubsetRestriction		000001			
	RI Restriction		N/A			
Physical channel for CSI report		PUCCH				
CQI/RI/PMI delay	ms	9.5				
Maximum number of HARQ transmission		1				

Measurement channel		As specified in Table A.4-2, TBS.2-3
---------------------	--	--------------------------------------

Table 6.2.3.2.2.1.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	5	5
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.2.1.

6.2.3.2.2.1.4 Test description

6.2.3.2.2.1.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.1.4.1 with the following exceptions:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.

Instead of Table 6.2.2.1.2.1.3-1 → use Table 6.2.3.2.2.1.3-1.

6.2.3.2.2.1.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.1.4.2 with the following exceptions:

4. If Median CQI value is not equal to 1 or 15 and 300 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 7.

Instead of Table 6.2.2.1.2.1.5-1 → use Table 6.2.3.2.2.1.3-1.

6.2.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.3.2.2.1.4.3_1 Message exceptions for SA

Same as 6.2.2.1.2.1.4.3_1 with following exceptions:

Table 6.2.3.2.2.1.4.3_1-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		
}			

6.2.3.2.2.1.4.3_2 Message exceptions for NSA

Same as 6.2.3.2.2.1.4.3_1.

6.2.3.2.2.1.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.3.2.2.1.4.2.

Table 6.2.3.2.2.1.5-1: Test requirements

Parameters	Test 1	Test 2
α [%]	5	5
γ	1.04	1.04

6.2.3.2.2.2 4Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA

6.2.3.2.2.2.1 Test purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 2% for the indicated transport format.

6.2.3.2.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

6.2.3.2.2.2.3 Minimum conformance requirements

The purpose of the requirements is to verify that the preferred sub-bands can be used for frequency-selective scheduling under the frequency-selective fading conditions.

The accuracy of sub-band channel CQI reporting under the frequency-selective fading conditions is determined by a double-sided percentile of the reported differential CQI offset level 0 per sub-band, and the relative increase of the throughput obtained when transmitting the transport format indicated by the corresponding reported sub-band CQI on a randomly selected sub-band among the sub-bands with the highest reported differential CQI offset level compared to the throughput when transmitting a fixed transport format according to the wideband CQI median on a randomly selected sub-band among all the sub-bands.

For the parameters specified in Table 6.2.3.2.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- A sub-band differential CQI offset level of 0 shall be reported at least $\alpha\%$ of the time but less than $\beta\%$ of the time for each sub-band, where α and β are specified in Table 6.2.3.2.2.3-2;
- The ratio of the throughput obtained when transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level and that obtained when transmitting the transport format indicated by the reported wideband CQI median on a randomly selected sub-band among all the sub-bands shall be $\geq \gamma$, where γ is specified in Table 6.2.3.2.2.3-2;
- When transmitting the corresponding transport format on a randomly selected sub-band among the sub-bands with the highest differential CQI offset level, the average BLER for the indicated transport format shall be greater than or equal to 0.02.

The requirements only apply for sub-bands of full size and the random scheduling across the sub-bands is done by selecting a new sub-band in each available downlink transmission instance for TDD.

Table 6.2.3.2.2.3-1: Sub-band CQI reporting test under frequency-selective fading conditions

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	40			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	5	6	11	12
Propagation channel			Two tap model specified in Annex B.2.4 with $a=1$, $f_D = 5\text{Hz}$, and $\tau_d=0.1125\mu\text{s}$			
Antenna configuration			2x4			
Correlation configuration			As per Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			

	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
CSI-IM configuration	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1
	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType			Aperiodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Subband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		16
csi-ReportingBand			1111111
CSI-Report interval and offset	slot		Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
aperiodicTriggeringOffset			Not Configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1
	CodebookSubsetRestriction		Not configured
	RI Restriction		000001 N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-6

Table 6.2.3.2.2.3-2: Minimum requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.2.2.

6.2.3.2.2.2.4 Test description

6.2.3.2.2.2.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.1.2.2.4.1 with the following exceptions:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 for TE diagram and section A.3.2.5 for UE diagram.

Instead of Table 6.2.2.1.2.2.3-1 → use Table 6.2.3.2.2.2.3-1.

Instead of clause 6.2.2.1.2.2.4.3 → use clause 6.2.3.2.2.2.4.3.

6.2.3.2.2.2.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.1.2.2.4.2 with the following exceptions:

Instead of Table 6.2.2.1.2.2.3-1 → use Table 6.2.3.2.2.2.3-1.

6.2.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.3.2.2.2.4.3_1 Message exceptions for SA

Same as 6.2.2.1.2.2.4.3_1 with following exceptions:

Table 6.2.3.2.2.2.4.3_1-1: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

6.2.3.2.2.2.4.3_2 Message exceptions for NSA

Same as 6.2.3.2.2.2.4.3_1.

6.2.3.2.2.2.5 Test requirement

The pass/fail decision is as specified in the test procedure in clause 6.2.3.2.2.2.4.2.

Table 6.2.3.2.2.2.5-1: Minimum requirements

Parameters	Test 1	Test 2
α [%]	2	2
β [%]	55	55
γ	1.04	1.04
Note 1: TT = 0.01		

6.2.3.2.2.3 4Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA

6.2.3.2.2.3.1 Test purpose

Verify that the UE is tracking the channel variations and selecting the largest transport format possible based on inter-cell interference mitigation receiver.

6.2.3.2.2.3.2 Test applicability

This test applies to all types of NR UEs and E-UTRAN UEs supporting EN-DC for release 15 and release 16 supporting MMSE-IRC processing for scenarios with inter-cell and intra-cell inter-user interference.

This test applies to all types of release 17 and forward NR UEs and E-UTRAN UEs supporting EN-DC.

6.2.3.2.2.3.3 Minimum conformance requirements

For the parameters specified in Table 6.2.3.2.2.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following,

- a) the ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR and that obtained when transmitting the transport format indicated by each reported wideband CQI index subject to a white Gaussian noise source shall be $\geq \gamma$ where γ is specified in Table 6.2.3.2.2.3.3-2;
- b) when transmitting the transport format indicated by each reported wideband CQI index subject to an interference source with specified INR, the average BLER for the indicated transport formats shall be greater than or equal to 0.02.

Table 6.2.3.2.2.3.3-1: Wideband CQI reporting test with inter-cell interference (TDD)

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Bandwidth		MHz	40	40
Duplex Mode			TDD	TDD
Subcarrier spacing		kHz	30	30
TDD UL-DL pattern			FR1.30-1	FR1.30-1
SINR		dB	-2	-
Beamforming Model			As specified in Annex B.4.1	
Interference Model				As specified in B.6.2
SSB configuration	SSB position in burst		1 st SSB in Slot #0	2 nd SSB in Slot#0
	SSB periodicity	ms	20	20
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)		0 for CSI-RS resource 1,2,3,4	0 for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4	4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	slot	40 for CSI-RS resource	40 for CSI-RS resource
	CSI-RS offset	slot	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP size /4)*4	Start PRB 0 Number of PRB = ceil(BWP size /4)*4
QCL info			TCI state #0	TCI state #0
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic
	Number of CSI-RS ports (X)		4	4
	CDM Type		FD-CDM2	FD-CDM2
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	Row 5,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)	Row 5,(9)
CSI-RS periodicity and offset	slot	10/1	Same as serving cell	
NZP CSI-RS for	CSI-RS resource Type		Periodic	Periodic

CSI acquisition	Number of CSI-RS ports (X)		2	1
	CDM Type		FD-CDM2	noCDM
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 3,(6)	Row 2,(6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 3,(13)	Row 2,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1	Same as serving cell
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic
	CSI-IM RE pattern		0	0
	CSI-IM Resource Mapping (k _{CSI-IM} ,l _{CSI-IM})		(4, 9)	(6,9)
	CSI-IM timeConfig periodicity and offset	slot	10/1	Same as serving cell
ReportConfigType		Periodic	Not configured	
CQI-table		Table 2	Table 2	
reportQuantity		cri-RI-PMI-CQI	Not configured	
timeRestrictionForChannelMeasurements		Not configured	Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	Not configured	
cqi-FormatIndicator		Wideband	Wideband	
pmi-FormatIndicator		Wideband	Wideband	
Sub-band Size	RB	16		
Csi-ReportingBand		1111111	Not configured	
CSI-Report periodicity and offset	slot	10/9	Not configured	
aperiodicTriggeringOffset		Not configured	Not configured	
Codebook configuration	Codebook Type		type1-SinglePanel	type1-SinglePanel
	Codebook Mode		1	1
	(CodebookConfig-N1,CodebookConfig-N2)		Not configured	Not configured
	CodebookSubsetRestriction		000001	Not configured
	RI Restriction		N/A	Not configured
Physical channel for CSI report		PUCCH	Not configured	
CQI/RI/PMI delay	ms	9.5	Not configured	
Maximum number of HARQ transmission		1	Not configured	
Measurement channel		As specified in Table A.4-2, TBS.2-3		
INR	dB	N/A	10.04	
Propagation condition		TDLA30-5	AWGN	
Antenna configuration		2x4	1x4	
Correlation configuration		ULA Low	N/A	
<p>Note 1: The respective received power spectral density of each interfering cell relative to N_{oc} is defined by its associated INR value as specified in clause B.6.1.</p> <p>Note 2: Two cells are considered in which Cell 1 is the serving cell and Cell 2 is the interfering cell. Interfering cell is fully loaded.</p> <p>Note 3: Both cells are time-synchronous.</p> <p>Note 4: Static channel is used for the interference model. In case for white Gaussian noise model Cell 2 is not present.</p> <p>Note 5: SINR corresponds to \widehat{E}_s / N_{oc} of Cell 1 as defined in clause 4.4.5.</p> <p>Note 6: INR corresponds to Cell 2 is defined in clause B.6.1.</p>				

Table 6.2.3.2.2.3-2: Minimum requirement (TDD)

Parameters	Test 1
γ	2.0

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.3.2.2.3.

6.2.3.2.2.3.4 Test description

6.2.3.2.2.3.4.1 Initial conditions

Same initial conditions as specified in clause 6.2.2.2.3.4.1 with the following exceptions:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.6 for TE diagram and section A.3.2.5 for UE diagram.

Instead of Table 6.2.2.2.3.3-1 → use Table 6.2.3.2.2.3.3-1.

6.2.3.2.2.3.4.2 Test procedure

Same test procedure as specified in clause 6.2.2.2.3.4.2 with the following exceptions:

Instead of Table 6.2.2.2.3.3-1 → use Table 6.2.3.2.2.3.3-1.

Instead of Table 6.2.2.2.3.3-2 → use Table 6.2.3.2.2.3.3-2.

6.2.3.2.2.3.4.3 Message contents

Same test procedure as specified in clause 6.2.2.2.3.4.3

6.2.3.2.2.3.5 Test requirement

The Cell1 SINR and Cell2 INR value is updated in Table 6.2.3.2.2.3.5-1 according to the test tolerance in F.1.3.3.

Table 6.2.3.2.2.3.5-1: Test Parameters for TDD FR1 Wideband CQI reporting with inter-cell interference

Parameter	Unit	Test1	
		Cell 1	Cell 2
SINR	dB	-1.97	-
INR (Note 6)	dB	N/A	10.34
Note 5: SINR corresponds to \hat{E}_s/N_{oc} of Cell 1 as defined in clause 4.4.5.			
Note 6: INR is defined in clause B.6.1.			

Table 6.2.3.2.2.3.5-2: Test requirements

Parameters	Test 1
γ	1.99

6.2.4 8RX requirements

6.2.4.1 FFS

6.2.4.2 TDD

6.2.4.2.1 CQI reporting definition under AWGN conditions

The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median. The purpose of the requirements is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

6.2.4.2.1.1 8Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA

6.2.4.2.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

6.2.4.2.1.1.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting 8Rx.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and 8Rx.

6.2.4.2.1.1.3 Minimum requirement for periodic CQI reporting

For the parameters specified in Table 6.2.4.2.1.1.3-1, and using the downlink physical channels specified in Annex C.2.1, the minimum requirements are specified by the following:

- a) The reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) If the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.

Table 6.2.4.2.1.1.3-1: CQI reporting definition test

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	40			
Subcarrier spacing		kHz	30			
Duplex Mode			TDD			
TDD UL-DL pattern			FR1.30-1			
SNR		dB	4	5	10	11
Propagation channel			AWGN			
Antenna configuration			4x8 with static channel specified in Annex B.1			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)			
	CSI-RS periodicity and offset	slot	10/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)			
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)			
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1			
CSI-IM configuration	CSI-IM resource Type		Periodic			
	CSI-IM RE pattern		0			
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)			
	CSI-IM timeConfig periodicity and offset	slot	10/1			

ReportConfigType		Periodic
CQI-table		Table 2
reportQuantity		cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	16
csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	10/9
aperiodicTriggeringOffset		Not configured
Codebook configuration (Note 1)	Codebook Type	typel-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,1)
	two-one-Typel-SinglePanel-Restriction	00010001
	RI Restriction	00001000
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay	ms	9.5
Maximum number of HARQ transmission		1
Number of HARQ Processes		8
Measurement channel		As specified in Table A.4-3, TBS.3-4
Note 1: The PMI associated to $i_2 = 0$ is always used as the precoder regardless of the reported i_2 value.		

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2.4.2.1.1.

6.2.4.2.1.1.4 Test Description

6.2.4.2.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.13 for TE diagram and section A.3.2.6.3 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 6.1.2-1 and 6.2.4.2.1.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.2.4.2.1.1.4.3.

6.2.4.2.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2.4.2.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio (NACK / ACK + NACK) ≤ 0.1 then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) > 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE’s wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) ≤ 0.1

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

9. Repeat step 1 to 8 for Test2.

6.2.4.2.1.1.4.4 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

6.2.4.2.1.1.4.4_1 Message exceptions for SA

Table 6.2.4.2.1.1.4.4_1-1: CodebookConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-15			
Information Element	Value/remark	Comment	Condition
CodebookConfig ::= SEQUENCE {			
codebookType CHOICE {			

type1 SEQUENCE {			
subType CHOICE {			
type1-SinglePanel SEQUENCE {			
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			4Tx
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	'00010001'B		
}			
}			
}			
type1-SinglePanel-ri-Restriction	'00001000'B		
}			
}			
codebookMode	1		
}			
}			
}			

6.2.4.2.1.1.4.4_2 Message exceptions for NSA

Same as 6.2.4.2.1.1.4.4_1.

6.2.4.2.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2.4.2.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A Reporting of Channel Quality Indicator (CQI) for CA

6.2A.1 General

This clause includes the requirements for the reporting of channel quality indicator (CQI) with the UE configured for CA. The purpose is to verify that the CQI is correctly reported in accordance with the CQI definition given in TS 38.214 [12] for each CC with multiple cells configured for periodic reporting.

6.2A.2 1RX requirements

(Void)

6.2A.3 2RX and 4RX requirements

6.2A.3.1 CQI reporting definition under AWGN conditions

6.2A.3.1.0 Minimum requirement for periodic CQI reporting

For each CA CQI reporting test defined in Table 6.2A.3.1.0-6, the test requirements and the test parameters are defined as below.

For each CC, the test parameters are specified in Table 6.2A.3.1.0-1. The additional parameters specified in Table 6.2A.3.1.0-2 are applicable for tests on FDD CC. The additional parameters specified in Table 6.2A.3.1.0-3 are applicable for tests on TDD CC.

For CA with 2 DL CC, for the SNR configuration specified in Table 6.2A.3.1.0-4, and using the downlink physical channels specified in Annex C.3.1 on each CC, the difference between the wideband CQI indices of PCell and SCell reported shall be such that

$$\text{wideband CQI}_{\text{PCell}} - \text{wideband CQI}_{\text{SCell}} \geq 2$$

for more than 90% of the time.

For CA with 3 or more DL CC, for the SNR configuration specified in Table 6.2A.3.1.0-5, and using the downlink physical channels specified in Annex C.3.1 on each cell, the difference between the wideband CQI indices of PCell and SCell1 reported, and the difference between the wideband CQI indices of SCell1 and SCell2, 3... reported shall be such that

$$\text{wideband CQI}_{\text{PCell}} - \text{wideband CQI}_{\text{SCell1}} \geq 2$$

$$\text{wideband CQI}_{\text{SCell1}} - \text{wideband CQI}_{\text{SCell2, 3...}} \geq 2$$

for more than 90% of the time.

Table 6.2A.3.1.0-1: CA CQI reporting test parameters for FDD and TDD CC

Parameter		Unit	Value
Propagation channel			AWGN
Antenna configuration			1x2 with static channel specified in Annex B.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 5,(9)
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 2,(6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 2,(13)
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k _{CSI-IM} ,l _{CSI-IM})		(4, 9)
ReportConfigType			Periodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI (Note 1)
Codebook configuration			Not configured
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Csi-ReportingBand			1111111
aperiodicTriggeringOffset			Not configured
Physical channel for CSI report			PUCCH
Maximum number of HARQ transmission			1
Measurement channel			Derived as per section 5.1.3.2 of TS 38.214 [12]
Note 1: The bit width of PMI for UCI on PUCCH in a case 1-port CSI-RS is configured as channel measurement resource is given in TS 38.212 [10], section 6.3.1.1.2.			

Table 6.2A.3.1.0-2: Additional test parameters for FDD CC

Parameter		Unit	Value
Duplex Mode			FDD
Subcarrier spacing		kHz	15
ZP CSI-RS configuration	CSI-RS periodicity and offset	slot	5/1
		slot	5/1
NZP CSI-RS for CSI acquisition	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1
		slot	10/1 if configured as SCell with

			TDD PCell (Test1)
CSI-IM configuration	CSI-IM timeConfig periodicity and offset	slot	5/1
CSI-Report periodicity and offset		slot	5/0 if configured as PCell
			5/1 if configured as SCell with FDD PCell (Test2)
			20/18 if configured as SCell with TDD PCell (Test1)
CQI/RI/PMI delay		ms	8 if configured as PCell
			12 if configured as SCell
Sub-band Size		RB	8 for 5MHz and 10MHz, 16 for 15MHz, 20MHz and 25MHz, 32 for 30MHz, 35MHz, 40MHz, 45MHz and 50MHz
Note 1: NZP CSI-RS periodicity/offset slots are based on the carrier SCS and CSI reporting periodicity/offset slots are based on the PCell SCS.			

Table 6.2A.3.1.0-3: Additional test parameters for TDD CC

Parameter		Unit	Value
Duplex Mode			TDD
Subcarrier spacing		kHz	30
TDD UL-DL pattern			FR1.30-1
ZP CSI-RS configuration	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1 if configured as SCell with FDD PCell (Test1)
			20/1
CSI-IM configuration	CSI-IM timeConfig periodicity and offset	slot	10/1
CSI-Report periodicity and offset		slot	20/19 if configured as PCell
			20/18 if configured as SCell with TDD PCell (Test3)
			5/1 if configured as SCell with FDD PCell (Test1)
CQI/RI/PMI delay		ms	14.5 if configured as PCell
			12.5 if configured as SCell with TDD PCell (Test3)
			9.5 if configured as SCell with FDD PCell (Test1) (Note 2)
Sub-band Size		RB	8 for 10MHz, 15MHz, 20MHz and 25MHz, 16 for 30MHz, 40MHz and 50MHz, 32 for 60MHz, 80MHz, 90MHz and 100MHz
Note 1: NZP CSI-RS periodicity/offset slots are based on the carrier SCS and CSI reporting periodicity/offset slots are based on the PCell SCS.			
Note 2: The minimum delay between the NZP CSI-RS for CSI Acquisition transmission and application of the reported CQI/PMI/RI on PDSCH.			

Table 6.2A.3.1.0-4: SNR configurations for 2 DL CA

Parameter	PCell	SCell
SNR (dB)	10.0	4.0

Table 6.2A.3.1.0-5: SNR configurations for 3 or more DL CA

Parameter	PCell	SCell1	SCell2, 3...
SNR (dB)	12.0	6.0	0.0

Table 6.2A.3.1.0-6: List of CA CQI reporting test

Test number	CA duplex mode and SCS combination
1	FDD 15 kHz + TDD 30 kHz
2	FDD 15 kHz + FDD 15 kHz
3	TDD 30 kHz + TDD 30 kHz
Note 1:	The applicability of requirements for different CA duplex modes, SCSs, is defined in 6.1.1.5.1.
Note 2:	The applicability of requirements for different CA configurations and bandwidth combination sets is defined in 6.1.1.5.2.

All the requirements specified in clause 6.2A for CA with 2 RX are applied for 4 RX capable UEs by connecting all 4 RX with data source from system simulator and reducing the signal power density by 3 dB compared to the signal power density for 2 RX in the test configurations.

The normative reference for this requirement is TS 38.101-4 [5], clause 6.2A.3.1.1.

6.2A.3.1.1 CQI reporting accuracy under AWGN conditions for CA (2DL CA)

Editor's note: EN-DCsetup details are FFS.

6.2A.3.1.1.1 Test Purpose

To verify that the CQI is correctly reported in accordance with the CQI definition given in TS 38.214 [12] for each CC with multiple cells configured for periodic reporting.

6.2A.3.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL CA.

6.2A.3.1.1.3 Test description

6.2A.3.1.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

CA capability to be tested: test any one of the supported CA capabilities with largest aggregated CA bandwidth combination, as specified in 6.1.1.5.2.

CA configuration to be tested: For the selected CA capability, test any one of the supported CA configurations with largest aggregated CA bandwidth combination, as specified in 6.1.1.5.2.

Table 6.2A.3.1.1.3.1-1: Test point selection table

Test number	CA duplex mode	Configuration	PCell CC configuration
1	FDD 15 kHz + TDD 30 kHz	As defined in Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3	TDD CC if supported, otherwise FDD CC
2 (Note 2)	FDD 15 kHz + FDD 15 kHz	As defined in Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-2	Any of CCs

3	TDD 30 kHz + TDD 30 kHz	As defined in Table 6.2A.3.1.0-1 and Table 6.2A.3.1.0-3	Any of CCs
NOTE 1: The test coverage can be considered fulfilled if UE passes one of the CC as PCell in Test 1.			
NOTE 2: These scenarios are only tested for UEs which are not verified with Test 1.			

1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A Figure A.3.1.7.2A for TE diagram, Figure A.3.2.3 for UE supporting only 2Rx RF bands on all CC. Annex A, Figure A.3.2.5 for UE supporting 4Rx on some or all the CCs.
2. The parameter settings for the cell are set up according to Table 6.1.2-1, and Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2A.3.1.1.3.3.

6.2A.3.1.1.3.2 Test Procedure

1. Configure SCC according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCC as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 6.2A.3.1.1.3.3.
3. SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause9.3).
4. Set the parameters of bandwidth, reference channel, propagation condition and antenna configuration according to Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate. Set the SNR according to Table 6.2A.3.1.0-4 as appropriate for PCC and SCC (For UE supporting 4Rx antenna ports on a given CC, the SNR is reduced by 3dB for that CC).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCC. The SS sends downlink MAC padding bits on the DL RMC.
6. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCC. For each CSI report calculate the respective difference $CQI_{P-S} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell}$.
7. If more than 1800 values of CQI_{P-S} are ≥ 2 pass the UE. Otherwise fail the UE.
8. Repeat steps from 1 to 7 for each test point in Table 6.2A.3.1.1.3.1-1 as appropriate.

6.2A.3.1.1.3.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2A.3.1.1.3.3_1 Message exceptions for SA

Table 6.2A.3.1.1.3.3_1-1: CSI-RS-ResourceMapping

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row2	0000 0010 0000	k0=6, row2	
}			
density CHOICE {			

one	NULL		
}			
}			

Table 6.2A.3.1.1.3.3_1-2: NZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2a			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	1		For FDD CC
slot10	1		(For TDD CC if configured as SCell with FDD PCell (Test1)) OR (For FDD CC if configured as SCell with TDD PCell (Test1))
Slot20	1		For TDD CC
}			

Table 6.2A.3.1.1.3.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-6			
Information Element	Value/remark	Comment	Condition
CSI-IM-Resource ::= SEQUENCE {			
periodicityAndOffset SEQUENCE {			
slots5	1		For FDD CC
slots10	1		For TDD CC
}			
}			

Table 6.2A.3.1.1.3.3_1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12		
Information Element	Value/remark	Condition
CSI-ReportConfig ::= SEQUENCE {		
subbandSize	8	For the CC with FDD 15kHz SCS 5MHz and 10MHz CHBW; For the CC with TDD 30kHz SCS 10MHz, 15MHz, 20MHz and 25MHz CHBW.
	16	For the CC with FDD 15kHz SCS 15MHz, 20MHz and 25MHz CHBW; For the CC with TDD 30kHz SCS 30MHz, 40MHz and 50MHz CHBW.
	32	For the CC with FDD 15kHz SCS 30MHz, 35MHz, 40MHz, 45MHz and 50MHz CHBW; For the CC with TDD 30kHz SCS 60MHz, 80MHz, 90MHz and 100MHz CHBW.
}		

Table 6.2A.3.1.1.3.3_1-5: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112 For FDD 15kHz SCell: K1 = 7 if mod(i,5) = 0 K1 = 5 if mod(i,5) = 1 K1 = 4 if mod(i,5) = 2 K1 = 11 if mod(i,5) = 3 K1 = 9 if mod(i,5) = 4 where i is slot index per frame; i = {0,...,19}	-	(For FDD CC if configured as SCell with TDD PCell (Test1))
	corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112 For TDD30kHz SCell: K1 = 3		(For TDD CC if configured as SCell with FDD PCell (Test1))

Table 6.2A.3.1.1.3.3_1-6: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8	(For FDD CC if configured as SCell with TDD PCell (Test1))
}			

Table 6.2A.3.1.1.3.3_1-7: CellGroupConfig-SCell

Derivation Path: TS 38.508-1 [6], Table 5.5.1.2.3-2			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.2A.3.1.1.3.3_1-8	
}			
}			

Table 6.2A.3.1.1.3.3_1-8: ServingCellConfig-SpCell (Table 6.2A.3.1.1.3.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 4.6.3-167			
Information Element	Value/remark	Comment	Condition
ServingCellConfig ::= SEQUENCE {		Current 'Not present' for PCC	

		are already present in RRCSetup during Call Connection	
initialDownlinkBWP	Not present		
firstActiveDownlinkBWP-Id	Not present		
defaultDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
pdccch-ServingCellConfig	Not present		
pdsch-ServingCellConfig	Not present		
csi-MeasConfig	CSI-MeasConfig-SpCell	Table 6.2A.3.1.1.3.3_1-9	
}			

Table 6.2A.3.1.1.3.3_1-9: CSI-MeasConfig-SpCell (Table 6.2A.3.1.1.3.3_1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-11			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {		Current 'Not present' for PCC are already present in RRCSetup during Call Connection	
nzp-CSI-RS-ResourceToAddModList	Not present		
nzp-CSI-RS-ResourceSetToAddModList	Not present		
csi-IM-ResourceToAddModList	Not present		
csi-IM-ResourceSetToAddModList	Not present		
csi-SSB-ResourceSetToAddModList	Not present		
csi-ResourceConfigToAddModList	Not present		
csi-ReportConfigToAddModList	CSI-ReportConfig specified in TS 38.508-1 [6] Table 5.4.2.4-12	Do not set in RRCSetup during Call Connection	
}			

6.2A.3.1.1.3.3_2 Message exceptions for NSA

Same as specified in 6.2A.3.1.1.3.3_2.

6.2A.3.1.1.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.3.1.1.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A.3.1.1_1 2Rx FR1 CQI reporting under AWGN for Scell on band with shared spectrum access for CA (2DLCA)

Editor's note: This test case is incomplete. The following aspect are not yet determined:

- MU and TT is not defined in annex F.

6.2A.3.1.1_1.1 Test Purpose

To verify that the CQI is correctly reported in accordance with the CQI definition given in TS 38.214 [12] for Scell with shared spectrum access, configured for aperiodic reporting.

6.2A.3.1.1_1.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting NR/5GC and NR-U and supporting UL on shared channel access and supporting 2DL CA.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and NR-U and supporting 2DL CA.

6.2A.3.1.1_1.3 Minimum conformance requirements

The purpose of the requirements is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12] for SCell on band with shared spectrum access. For each downlink transmission duration, the transmission power offset is randomly chosen between [0, +6] dB and 2 sets of CQI reports are obtained for each transmission power offset. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median for each power offset. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2A.3.1.2-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) For each transmission power offset the reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) For each transmission power offset, if the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. For each transmission power offset, if the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.
- c) The absolute difference in median CQI for each of transmission power offset shall be ≥ 2 .

The test parameters for configuring the PCell are specified in Table 6.2A.3.1.1_1.3-2, but requirements are only applicable to SCell on band with shared spectrum access. CSI reporting configuration parameters for SCell are configured on PCell and CSI reports are transmitted on PCell.

Table 6.2A.3.1.1_1.3-1: CQI reporting test parameters for SCell on band with shared spectrum access

Parameter		Unit	Test 1	
Bandwidth		MHz	20	
Subcarrier spacing		kHz	30	
Duplex Mode			TDD	
Downlink Transmission Model			As specified in Annex B.5	
Downlink Transmission Model Parameters	Downlink period	ms	5	
	LBT failure probability (p_{LBT})		0.25	
	Downlink transmission duration values set	slot	{4,6,7}	
	Occupied OFDM symbols in slot other than the last slot of the downlink duration	symbols	14	
	Occupied OFDM symbols in the last slot of the downlink duration	symbols	14	
TDD UL-DL pattern			FR1.30-7	
SNR		dB	8	9
\bar{E}_b for power offset 1		dBm/Hz	-112	
\bar{E}_b for power offset 2		dBm/Hz	-106	
Propagation channel			AWGN	
Antenna configuration			2x2 with static channel specified in Annex B.1	
Beamforming Model			As specified in Annex B.4.1	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	

	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9
	CSI-RS periodicity and offset	slot	10/1
NZIP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3,(6,-)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		3
	NZIP CSI-RS-timeConfig periodicity and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		010000
	RI Restriction		N/A
CQI/RI/PMI delay	ms		9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-8

Table 6.2A.3.1.1_1.3-2: Configuration parameters for PCell

Parameter	Unit	Test 1
Bandwidth	MHz	20
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD UL-DL pattern		FR1.30-1
Propagation channel		AWGN
Antenna configuration		2x2 with static channel specified in Annex B.1
Beamforming Model		As specified in Annex B.4.1
ReportConfigType		Aperiodic
CQI-table		Table 2
reportQuantity		cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements		configured
timeRestrictionForInterferenceMeasurements		configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
Csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	Not configured
aperiodicTriggeringOffset		7
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Physical channel for CSI report		PUSCH

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2A.3.1.2.

6.2A.3.1.1_1.4 Test description

6.2A.3.1.1_1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

CA capability to be tested: test any one of the supported CA capabilities with largest aggregated CA bandwidth combination, as specified in 6.1.1.5.2.

CA configuration to be tested: For the selected CA capability, test any one of the supported CA configurations with largest aggregated CA bandwidth combination, as specified in 6.1.1.5.2.

1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A Figure A.3.1.7.9 for TE diagram, Figure A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1, Table 6.2A.3.1.1_1.3-1 and Table 6.2A.3.1.1_1.3-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2A.4.1.1.4.3.

6.2A.3.1.1_1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2A.3.1.1_1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range (Median CQI - 1) ≤ Median CQI ≤ (Median CQI + 1) then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink

MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(NACK / (ACK + NACK)) \leq 0.1$ then go to step 6, otherwise go to step 7.

- The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / (ACK + NACK)) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

- The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(NACK / (ACK + NACK)) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

- If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
- If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2A.3.1.1_1.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2A.3.1.1_1.4.3_1 Message exceptions for SA

Table 6.2A.3.1.1_1.4.3-1: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
aperiodicTriggeringOffset	7		
}			

Table 6.2A.3.1.1_1.4.3-2: CSI-RS-ResourceMapping

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	3		
}			

Table 6.2A.3.1.1_1.4.3-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-6			
Information Element	Value/remark	Comment	Condition
CSI-IM-Resource ::= SEQUENCE {			
periodicityAndOffset	Not present	Aperiodic	
}			

Table 6.2A.3.1.1_1.4.3-4: CSI-MeasConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-38			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {			
reportTriggerSize	1		
}			

Table 6.2A.3.1.1_1.4.3-5: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
periodic SEQUENCE {			
reportSlotConfig	Not present	Aperiodic	
}			
timeRestrictionForChannelMeasurements	configured		
timeRestrictionForInterferenceMeasurements	configured		
}			

Table 6.2A.3.1.1_1.4.3-6: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	<p>corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112</p> <p>8 if mod(i,10) = 0 7 if mod(i,10) = 1 6 if mod(i,10) = 2 5 if mod(i,10) = 3 4 if mod(i,10) = 4 3 if mod(i,10) = 5 2 if mod(i,10) = 6</p> <p>where i is slot index per frame; i = {0,...,19}</p>	-	

Table 6.2A.3.1.1_1.4.3-7: CellGroupConfig-SCell

Derivation Path: TS 38.508-1 [6], Table 5.5.1.2.3-2			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.2A.4.1.1.4.3_1-8	
}			
}			

Table 6.2A.3.1.1_1.4.3-8: ServingCellConfig-SpCell (Table 6.2A.4.1.1.4.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 4.6.3-167			
Information Element	Value/remark	Comment	Condition
ServingCellConfig ::= SEQUENCE {		Current 'Not	

		present' for PCC are already present in RRCSetup during Call Connection	
initialDownlinkBWP	Not present		
firstActiveDownlinkBWP-Id	Not present		
defaultDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
pdccch-ServingCellConfig	Not present		
pdsch-ServingCellConfig	Not present		
csi-MeasConfig	CSI-MeasConfig-SpCell	Table 6.2A.4.1.1.4.3_1-9	
}			

Table 6.2A.3.1.1_1.4.3-9: CSI-MeasConfig-SpCell (Table 6.2A.4.1.1.4.3_1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-11			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig::= SEQUENCE {		Current 'Not present' for PCC are already present in RRCSetup during Call Connection	
nzp-CSI-RS-ResourceToAddModList	Not present		
nzp-CSI-RS-ResourceSetToAddModList	Not present		
csi-IM-ResourceToAddModList	Not present		
csi-IM-ResourceSetToAddModList	Not present		
csi-SSB-ResourceSetToAddModList	Not present		
csi-ResourceConfigToAddModList	Not present		
csi-ReportConfigToAddModList	CSI-ReportConfig specified in TS 38.508-1 [6] Table 5.4.2.4-12	Do not set in RRCSetup during Call Connection	
}			

6.2A.3.1.1_1.4.3_2 Message exceptions for NSA

Same as specified in 6.2A.3.1.1_1.4.3_1.

6.2A.3.1.1_1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.3.1.1_1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A.3.1.2 CQI reporting accuracy under AWGN conditions for CA (3DL CA)

Editor's note: EN-DC applicability of this test case is FFS in TS 38.522.

6.2A.3.1.2.1 Test Purpose

Same with 6.2A.3.1.1.1.

6.2A.3.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 3DL CA.

6.2A.3.1.2.3 Test description

6.2A.3.1.2.3.1 Initial conditions

Same with 6.2A.3.1.1.3.1.

6.2A.3.1.2.3.2 Test Procedure

1. Configure SCCs according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 6.2A.3.1.2.3.3.
3. SS activates SCCs by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. Set the parameters of bandwidth, reference channel, propagation condition and antenna configuration according to Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate. Set the SNR according to Table 6.2A.3.1.0-5 as appropriate for PCC and SCCs (For a UE supporting 4Rx antenna ports on a given CC, the SNR is reduced by 3dB for that CC).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
6. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCCs. For each CSI report calculate the respective difference $CQI_{P-S1} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell1}$ and the respective difference $CQI_{S1-S2} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell2}$.
7. If more than 1800 values of CQI_{P-S1} are ≥ 2 and more than 1800 values of CQI_{S1-S2} are ≥ 2 , pass the UE. Otherwise fail the UE.
8. Repeat steps from 1 to 7 for each test point in Table 6.2A.3.1.0-6 as appropriate.

6.2A.3.1.2.3.3 Message contents

Same with 6.2A.3.1.1.3.3.

6.2A.3.1.2.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.3.1.2.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A.3.1.3 CQI reporting accuracy under AWGN conditions for CA (4DL CA)

Editor's note: EN-DC setup details are FFS.

6.2A.3.1.3.1 Test Purpose

Same with 6.2A.3.1.1.1.

6.2A.3.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 4DL CA.

6.2A.3.1.3.3 Test description

6.2A.3.1.3.3.1 Initial conditions

Same with 6.2A.3.1.1.3.1.

6.2A.3.1.3.3.2 Test Procedure

1. Configure SCCs according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 6.2A.3.1.3.3.3.
3. SS activates SCCs by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. Set the parameters of bandwidth, reference channel, propagation condition and antenna configuration according to Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate. Set the SNR according to Table 6.2A.3.1.0-5 as appropriate for PCC and SCCs (For a UE supporting 4Rx antenna ports on a given CC, the SNR is reduced by 3dB for that CC).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
6. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCCs. For each CSI report calculate the respective difference $CQI_{P-S1} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell1}$, the respective difference $CQI_{S1-S2} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell2}$ and the respective difference $CQI_{S1-S3} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell3}$.
7. If more than 1800 values of CQI_{P-S1} are ≥ 2 , more than 1800 values of CQI_{S1-S2} are ≥ 2 and more than 1800 values of CQI_{S1-S3} are ≥ 2 , pass the UE. Otherwise fail the UE.
8. Repeat steps from 1 to 7 for each test point defined in Table 6.2A.3.1.0-6 as appropriate.

6.2A.3.1.3.3.3 Message contents

Same with 6.2A.3.1.1.3.3.

6.2A.3.1.3.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.3.1.3.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A.3.1.4 CQI reporting accuracy under AWGN conditions for CA (5DL CA)

Editor's note: EN-DC connection details are FFS.

6.2A.3.1.4.1 Test Purpose

Same with 6.2A.3.1.1.1.

6.2A.3.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 5DL CA.

6.2A.3.1.4.3 Test description

6.2A.3.1.4.3.1 Initial conditions

Same with 6.2A.3.1.1.3.1.

6.2A.3.1.4.3.2 Test Procedure

1. Configure SCCs according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 6.2A.3.1.3.3.3.
3. SS activates SCCs by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. Set the parameters of bandwidth, reference channel, propagation condition and antenna configuration according to Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate. Set the SNR according to Table 6.2A.3.1.0-5 as appropriate for PCC and SCCs (For a UE supporting 4Rx antenna ports on a given CC, the SNR is reduced by 3dB for that CC).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
6. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCCs. For each CSI report calculate the respective difference $CQI_{P-S1} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell1}$, the respective difference $CQI_{S1-S2} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell2}$, the respective difference $CQI_{S1-S3} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell3}$ and the respective difference $CQI_{S1-S4} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell4}$.
7. If more than 1800 values of CQI_{P-S1} are ≥ 2 , more than 1800 values of CQI_{S1-S2} are ≥ 2 , more than 1800 values of CQI_{S1-S3} are ≥ 2 and more than 1800 values of CQI_{S1-S4} are ≥ 2 , pass the UE. Otherwise fail the UE.
8. Repeat steps from 1 to 7 for each test point defined in Table 6.2A.3.1.0-6 as appropriate.

6.2A.3.1.4.3.3 Message contents

Same with 6.2A.3.1.1.3.3.

6.2A.3.1.4.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.3.1.4.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A.3.1.5 CQI reporting accuracy under AWGN conditions for CA (6DL CA)

Editor's note: EN-DC connection details are FFS.

6.2A.3.1.5.1 Test Purpose

Same with 6.2A.3.1.1.1.

6.2A.3.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 6DL CA.

6.2A.3.1.5.3 Test description

6.2A.3.1.5.3.1 Initial conditions

Same with 6.2A.3.1.1.3.1.

6.2A.3.1.5.3.2 Test Procedure

1. Configure SCCs according to Annex C.0, C.1 and C.2 for all downlink physical channels.
2. The SS shall configure SCCs as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 6.2A.3.1.3.3.3.
3. SS activates SCCs by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
4. Set the parameters of bandwidth, reference channel, propagation condition and antenna configuration according to Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate. Set the SNR according to Table 6.2A.3.1.0-5 as appropriate for PCC and SCCs (For a UE supporting 4Rx antenna ports on a given CC, the SNR is reduced by 3dB for that CC).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
6. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCCs. For each CSI report calculate the respective difference $CQI_{P-S1} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell1}$, the respective difference $CQI_{S1-S2} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell2}$, the respective difference $CQI_{S1-S3} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell3}$, the respective difference $CQI_{S1-S4} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell4}$ and the respective difference $CQI_{S1-S5} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell5}$.
7. If more than 1800 values of CQI_{P-S1} are ≥ 2 , more than 1800 values of CQI_{S1-S2} are ≥ 2 , more than 1800 values of CQI_{S1-S3} are ≥ 2 , more than 1800 values of CQI_{S1-S4} are ≥ 2 and more than 1800 values of CQI_{S1-S5} are ≥ 2 , pass the UE. Otherwise fail the UE.
8. Repeat steps from 1 to 7 for each test point defined in Table 6.2A.3.1.0-6 as appropriate.

6.2A.3.1.5.3.3 Message contents

Same with 6.2A.3.1.1.3.3.

6.2A.3.1.5.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.3.1.5.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.2A.4 4RX requirements

6.2A.4.1 CQI reporting definition under AWGN conditions

6.2A.4.1.1 4Rx FR1 CQI reporting under AWGN for Scell on band with shared spectrum access for CA (2DLCA)

6.2A.4.1.1.1 Test Purpose

To verify that the CQI is correctly reported in accordance with the CQI definition given in TS 38.214 [12] for Scell with shared spectrum access, configured for aperiodic reporting.

6.2A.4.1.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting NR/5GC and NR-U and supporting UL on shared channel access and supporting 2DL CA.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and NR-U and supporting 2DL CA.

6.2A.4.1.1.3 Minimum requirement for CQI reporting for SCell on band with shared spectrum access

The purpose of the requirements is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12] for SCell on band with shared spectrum access. For each downlink transmission duration the transmission power offset is randomly chosen between [0, +6] dB and 2 sets of CQI reports are obtained for each transmission power offset. The reporting accuracy of CQI under AWGN condition is determined by the reporting variance and BLER performance using the transport format indicated by the reported CQI median for each power offset. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 6.2A.4.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified by the following:

- a) For each transmission power offset the reported CQI value according to the reference channel shall be in the range of ± 1 of the reported median more than 90% of the time.
- b) For each transmission power offset, if the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, then the BLER using the transport format indicated by the (median CQI+1) shall be greater than 0.1. For each transmission power offset, if the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, then the BLER using transport format indicated by (median CQI-1) shall be less than or equal to 0.1.
- c) The absolute difference in median CQI for each of transmission power offset shall be ≥ 2 .

The test parameters for configuring the PCell are specified in Table 6.2A.4.1.1.3-2, but requirements are only applicable to SCell on band with shared spectrum access.

Table 6.2A.4.1.1.3-1: CQI reporting test parameters for SCell on band with shared spectrum access

Parameter		Unit	Test 1	
Bandwidth		MHz	20	
Subcarrier spacing		kHz	30	
Duplex Mode			TDD	
Downlink Transmission Model			As specified in Annex B.5	
Downlink Transmission Model Parameters	Downlink period	ms	5	
	LBT failure probability (p_{LBT})		0.25	
	Downlink transmission duration values set	slot	{4,6,7}	
	Occupied OFDM symbols in slot other than the last slot of the downlink duration	symbols	14	
	Occupied OFDM symbols in the last slot of the downlink duration	symbols	14	
TDD UL-DL pattern			FR1.30-7	
SNR		dB	5	6
\bar{E}_s for power offset 1		dBm/Hz	-112	
\bar{E}_s for power offset 2		dBm/Hz	-106	
Propagation channel			AWGN	
Antenna configuration			2x4 with static channel specified in Annex B.1	
Beamforming Model			As specified in Annex B.4.1	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	

	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		9
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3,(6,-)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		3
	NZP CSI-RS-timeConfig periodicity and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4, 9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		Not configured
	CodebookSubsetRestriction		010000
	RI Restriction		N/A
ReportConfigType			Aperiodic
CQI-table			Table 2
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			configured
timeRestrictionForInterferenceMeasurements			configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
Csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		Not configured
aperiodicTriggeringOffset			7
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		9.5
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-8

Table 6.2A.4.1.1.3-2: Configuration parameters for PCell

Parameter	Unit	Test 1
Bandwidth	MHz	20
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD UL-DL pattern		FR1.30-1
Propagation channel		AWGN
Antenna configuration		2x4 with static channel specified in Annex B.1
Beamforming Model		As specified in Annex B.4.1

The normative reference for this requirement is TS 38.101-4 [5] clause 6.2A.4.1.1.

6.2A.4.1.1.4 Test description

6.2A.4.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

CA capability to be tested: test any one of the supported CA capabilities with largest aggregated CA bandwidth combination, as specified in 6.1.1.5.2.

CA configuration to be tested: For the selected CA capability, test any one of the supported CA configurations with largest aggregated CA bandwidth combination, as specified in 6.1.1.5.2.

1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A Figure A.3.1.7.2A for TE diagram, Figure A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1, and Table 6.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.2A.4.1.1.4.3.

6.2A.4.1.1.4.2 Test Procedure

1. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 6.2A.4.1.1.3-1 and Table 6.2A.4.1.1.3-1.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC on both PCC and SCC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS

sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered for SCC. In this process the SS collects wideband CQI reports every 5 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.

3. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
4. If Median CQI is not equal to 1 or 15 and [1800] or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 5, otherwise go to step 8.
5. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC on both PCC and SCC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses for SCC. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000 for SCC.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ then go to step 6, otherwise go to step 7.

6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered for SCC.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 5 until 1000 filtered ACK+NACK responses are gathered for SCC.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$

then pass the UE for this test and go to step 9, otherwise go to step 8.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 7) for the other SNR point as appropriate. Otherwise fail the UE.

6.2A.4.1.1.4.3 Message contents

Message contents are according to TS 38.508 [6] clause 5.4.2 with the following exceptions:

6.2A.4.1.1.4.3_1 Message exceptions for SA

Table 6.2A.4.1.1.4.3_1-1: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
aperiodicTriggeringOffset	7		
}			

Table 6.2A.4.1.1.4.3_1-2: CSI-RS-ResourceMapping

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2			
Information Element	Value/remark	Comment	Condition

CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	3		
}			

Table 6.2A.4.1.1.4.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-6			
Information Element	Value/remark	Comment	Condition
CSI-IM-Resource ::= SEQUENCE {			
periodicityAndOffset	Not present	Aperiodic	
}			

Table 6.2A.4.1.1.4.3_1-4: CSI-MeasConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-38			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {			
reportTriggerSize	1		
}			

Table 6.2A.4.1.1.4.3_1-5: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
periodic SEQUENCE {			
reportSlotConfig	Not present	Aperiodic	
}			
timeRestrictionForChannelMeasurements	configured		
timeRestrictionForInterferenceMeasurements	configured		
}			

Table 6.2A.4.1.1.4.3_1-6: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	<p>corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112</p> <p>8 if mod(i,10) = 0 7 if mod(i,10) = 1 6 if mod(i,10) = 2 5 if mod(i,10) = 3 4 if mod(i,10) = 4 3 if mod(i,10) = 5 2 if mod(i,10) = 6</p> <p>where i is slot index per frame; i = {0,...,19}</p>	-	

Table 6.2A.4.1.1.4.3_1-7: CellGroupConfig-SCell

Derivation Path: TS 38.508-1 [6], Table 5.5.1.2.3-2			
Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	

reconfigurationWithSync	Not present		
rfl-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.2A.4.1.1.4.3_1-8	
}			
}			

Table 6.2A.4.1.1.4.3_1-8: ServingCellConfig-SpCell (Table 6.2A.4.1.1.4.3_1-7)

Derivation Path: TS 38.508-1 [6], Table 4.6.3-167			
Information Element	Value/remark	Comment	Condition
ServingCellConfig ::= SEQUENCE {		Current 'Not present' for PCC are already present in RRCSetup during Call Connection	
initialDownlinkBWP	Not present		
firstActiveDownlinkBWP-Id	Not present		
defaultDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
pdccch-ServingCellConfig	Not present		
pdsch-ServingCellConfig	Not present		
csi-MeasConfig	CSI-MeasConfig-SpCell	Table 6.2A.4.1.1.4.3_1-9	
}			

Table 6.2A.4.1.1.4.3_1-9: CSI-MeasConfig-SpCell (Table 6.2A.4.1.1.4.3_1-8)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-11			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {		Current 'Not present' for PCC are already present in RRCSetup during Call Connection	
nzp-CSI-RS-ResourceToAddModList	Not present		
nzp-CSI-RS-ResourceSetToAddModList	Not present		
csi-IM-ResourceToAddModList	Not present		
csi-IM-ResourceSetToAddModList	Not present		
csi-SSB-ResourceSetToAddModList	Not present		
csi-ResourceConfigToAddModList	Not present		
csi-ReportConfigToAddModList	CSI-ReportConfig specified in TS 38.508-1 [6] Table 5.4.2.4-12	Do not set in RRCSetup during Call Connection	
}			

6.2A.4.1.1.4.3_2 Message exceptions for NSA

Same as specified in 6.2A.4.1.1.4.3_2.

6.2A.4.1.1.5 Test Requirements

The pass fail decision is as specified in the test procedure in clause 6.2A.4.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

6.3 Reporting of Precoding Matrix Indicator (PMI)

6.3.0 General

The minimum performance requirements of PMI reporting are defined based on the precoding gain, expressed as the relative increase in throughput when the transmitter is configured according to the UE reported PMI compared to the case when the transmitter is using random precoding, respectively. When the transmitter uses random precoding, for each PDSCH allocation a precoder is randomly generated with equal probability of each applicable i_1 and i_2 combination and applied to the PDSCH. A fixed transport format (FRC) is configured for all requirements.

The requirements for transmission scheme 1 with higher layer parameter *codebookType* set to 'typeI-SinglePanel' are specified in terms of the ratio:

$$\gamma = \frac{t_{ue}}{t_{rnd}}$$

In the definition of γ , for 4TX, 8TX, 16TX, and 32TX PMI requirements, t_{ue} is 90 % of the maximum throughput obtained at SNR_{ue} using the precoders configured according to the UE reports, and t_{rnd} is the throughput measured at SNR_{ue} with random precoding.

The requirements for transmission scheme 1 with higher layer parameter *codebookType* set to 'typeII' or 'typeII-r16' or 'typeII-doppler-r18' or 'typeII-CJT-r18' are specified in terms of the ratio:

$$\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$$

In the definition of γ , for 16TX PMI requirements, $t_{ue, follow1, follow2}$ is 90 % of the maximum throughput obtained at $SNR_{follow1, follow2}$ using the precoders configured according to the UE reports, and $t_{md1, md2}$ is the throughput measured at $SNR_{follow1, follow2}$ with random precoding.

6.3.1 1RX requirements

6.3.1.1 FDD

6.3.1.1.1 1Rx FDD Single PMI with 4TX TypeI-SinglePanel Codebook for RedCap

6.3.1.1.1.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.1.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

6.3.1.1.1.3 Minimum conformance requirements

For the parameters specified in Table 6.3.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.1.1.3-2.

Table 6.3.1.1.1.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High ULA 4 x 1
Beamforming Model			As specified in 38.521-4 [7] Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5, (9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	CSI-RS periodicity and offset		Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			3
CSI request			1 in slots i, where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-		(2,1)

	N1,CodebookConfig-N2)		
	(CodebookConfig-O1,CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		11111111
	RI Restriction		00000001
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	6
Maximum number of HARQ transmission			4
Measurement channel (Note 4)			R.PDSCH.1-6.1 FDD R.PDSCH.1-3.1 HD-FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-3), this reported PMI cannot be applied at the gNB downlink before slot#(n+3).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p> <p>Note 4: Applied reference channel depends on the supported operation mode: FDD or HD-FDD</p>			

Table 6.3.1.1.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.1.1.1.

6.3.1.1.1.4 Test description

6.3.1.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid-Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.11 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.1.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.1.1.4.3.

6.3.1.1.1.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.1.1.1.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.1.1.1.5-1, then the test is pass. Otherwise, the test is failed.

6.3.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.1.1.1.4.3.1 Message exceptions

Table 6.3.1.1.1.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.1.1.1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.1.1.1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		

}			
---	--	--	--

Table 6.3.1.1.1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	Not present		

Table 6.3.1.1.1.4.3.1-5: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		
}			

Table 6.3.1.1.1.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.1.1.1.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
subbandSize	8		
}			

6.3.1.1.1.5 Test requirement

Table 6.3.1.1.1.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.1.1.2 1Rx FDD Single PMI with 4TX Type1-SinglePanel Codebook for eRedCap

6.3.1.1.2.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.1.1.2.2 Test applicability

This test applies to all types of NR eRedCap UE with 1Rx from Release 18 onwards.

6.3.1.1.2.3 Minimum conformance requirements

For the parameters specified in Table 6.3.1.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.1.1.2.3-2.

Table 6.3.1.1.2.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High ULA 4 x 1
Beamforming Model			As specified in Annex B.4.1
PDSCH configuration	Resource allocation type		type 1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	Frequency Occupation	RB	0 to 27
NZIP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	Frequency Occupation	RB	0 to 27
	CSI-RS periodicity and offset		Not configured
CSI-IM configuration	aperiodicTriggeringOffset		0
	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
CSI-IM timeConfig periodicity and offset	slot	Not configured	
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	

pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			3
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		11111111
	RI Restriction		00000001
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	6
Maximum number of HARQ transmission			4
Measurement channel (Note 4)			R.PDSCH.1-6.5 FDD R.PDSCH.1-3.2 HD-FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-3)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+3)$.</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p> <p>Note 4: Applied reference channel depends on the supported operation mode: FDD or HD-FDD</p>			

Table 6.3.1.1.2.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.1.1.2.

6.3.1.1.2.4 Test description

6.3.1.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid-Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.11 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.1.1.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.3.1.1.2.4.3.

6.3.1.1.2.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.1.1.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.1.1.2.5-1, then the test is pass. Otherwise, the test is failed.

6.3.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.1.1.2.4.3.1 Message exceptions

Table 6.3.1.1.2.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.1.1.2.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition

CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.1.1.2.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.1.1.2.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	Not present		

Table 6.3.1.1.2.4.3.1-5: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		
}			

Table 6.3.1.1.2.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.1.1.2.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			

reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
subbandSize	8		
}			

6.3.1.1.2.5 Test requirement

Table 6.3.1.1.2.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.1.2 TDD

6.3.1.2.1 1Rx TDD Single PMI with 4TX Type1-SinglePanel Codebook for RedCap

6.3.1.2.1.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.1.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

6.3.1.2.1.3 Minimum conformance requirements

For the parameters specified in Table 6.3.1.2.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.1.2.1.3-2.

Table 6.3.1.2.1.3-1: Test parameters (single layer)

Parameter	Unit	Test 1
Bandwidth	MHz	20
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configuration		FR1.30-1 as specified in Annex A
Propagation channel		TDLA30-5
Antenna configuration		High ULA 4 x 1
Beamforming Model		As specified in 38.101-4 [7] Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k ₀)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)	Row 5,(9)
	CSI-RS periodicity and offset	slot
NZP CSI-RS for CSI	CSI-RS resource Type	Aperiodic
	Number of CSI-RS ports	4

acquisition	(X)		
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	CSI-RS periodicity and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		11111111
RI Restriction		00000001	
Physical channel for CSI report		PUSCH	
CQI/RI/PMI delay	ms	5.5	
Maximum number of HARQ transmission		4	
Measurement channel		R.PDSCH.2-8.4 TDD	
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity	
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot #n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).</p>			

Note 3: Randomization of the principle beam direction shall be used as specified in 38.101-4 [7] Annex B.2.3.2.3.

Table 6.3.1.2.1.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.1.2.1.

6.3.1.2.1.4 Test description

6.3.1.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid-Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.11 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.1.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.1.2.1.4.3.

6.3.1.2.1.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.1.2.1.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{rnd 1, rnd 2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.1.2.1.5-1, then the test is pass.
 Otherwise, the test is failed.

6.3.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.1.2.1.4.3.1 Message exceptions

Table 6.3.1.2.1.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.1.2.1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.1.2.1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.1.2.1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.1.2.1.4.3.1-4a CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.3.1.2.1.4.3.1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.1.2.1.4.3.1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
subbandSize	8		
}			

6.3.1.2.1.5 Test requirement

Table 6.3.1.2.1.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.1.2.2 1Rx TDD Single PMI with 4TX Type1-SinglePanel Codebook for eRedCap

6.3.1.2.2.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.1.2.2.2 Test applicability

This test applies to all types of NR eRedCap UE with 1Rx from Release 18 onwards.

6.3.1.2.2.3 Minimum conformance requirements

For the parameters specified in Table 6.3.1.2.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.1.2.2.3-2.

Table 6.3.1.2.2.3-1: Test parameters (single layer)

Parameter	Unit	Test 1
Bandwidth	MHz	20
Subcarrier spacing	kHz	30
Duplex Mode		TDD

TDD DL-UL configuration			FR1.30-1 as specified in Annex A
Propagation channel			TDLA30-5
Antenna configuration			High ULA 4 x 1
Beamforming Model			As specified in Annex B.4.1
PDSCH configuration	Resource allocation type		type 1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	Frequency Occupation		0 to 23
CSI-RS periodicity and offset	slot		10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	Frequency Occupation		0 to 23
	CSI-RS periodicity and offset	slot	
aperiodicTriggeringOffset			0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-		(4,1)

	O1,CodebookConfig-O2)		
	CodebookSubsetRestriction		11111111
	RI Restriction		00000001
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	6
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.6 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
Note 1:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.		
Note 2:	If the UE reports in an available uplink reporting instance at slot #n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).		
Note 3:	Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.		

Table 6.3.1.2.2.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.1.2.2.

6.3.1.2.2.4 Test description

6.3.1.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid-Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.11 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.1.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.1.2.2.4.3.

6.3.1.2.2.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.1.2.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.1.2.2.5-1, then the test is pass. Otherwise, the test is failed.

6.3.1.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.1.2.2.4.3.1 Message exceptions

Table 6.3.1.2.2.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.1.2.2.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.1.2.2.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		

firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.1.2.2.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.1.2.2.4.3.1-5: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.3.1.2.2.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Types-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.1.2.2.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	8		
}			

6.3.1.2.2.5 Test requirement

Table 6.3.1.2.2.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.2 2RX requirements

6.3.2.1 FDD

6.3.2.1.1 2Rx FDD FR1 Single PMI with 4TX Type1-SinglePanel codebook for both SA and NSA

6.3.2.1.1.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.2.1.1.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.1.3-2.

Table 6.3.2.1.1.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High XP 4 x 2 (N1,N2) = (2,1)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS interval and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB		Row 4,(13)

	used for CSI-RS (l ₀)		
	CSI-RS interval and offset		Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Patten 0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			4
CSI request			1 in slots i, where mod(i, 5) = 1, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubset Restriction		11111111
	RI Restriction		00000001
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	6
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.1 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i ₁ , i ₂ combination, and with Wideband granularity
<p>Note 1: For random precoder selection, the precoder shall be updated in each slot (1 ms granularity).</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-3), this reported PMI cannot be applied at the eNB downlink before slot#(n+3).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.1.1.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.1.

6.3.2.1.1.4 Test description

6.3.2.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.1.4.3.

6.3.2.1.1.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.1.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{rd 1, rd 2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.1.1.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.1.1.4.3.1 Message exceptions for SA

Table 6.3.2.1.1.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.2.1.1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.2.1.1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.1.1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	Not Present		

Table 6.3.2.1.1.4.3.1-5: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		

}		
---	--	--

Table 6.3.2.1.1.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.2.1.1.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
subbandSize	8		
}			

6.3.2.1.1.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.1.4.3.1.

6.3.2.1.1.5 Test requirement

Table 6.3.2.1.1.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.2.1.1_1 2Rx FDD FR1 Single PMI with 4Tx Type1-SinglePanel codebook for RedCap

6.3.2.1.1_1.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.1_1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 onwards.

6.3.2.1.1_1.3 Minimum conformance requirements

Same as the minimum conformance requirements given in clause 6.3.2.1.1.3.

6.3.2.1.1_1.4 Test description

6.3.2.1.1_1.4.1 Initial conditions

Same as the initial conditions given in clause 6.3.2.1.1.4.1 with the following exception:

- Step 5 is replaced by following step:

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.1_1.4.3.

6.3.2.1.1_1.4.2 Test procedure

Same as the test procedure given in clause 6.3.2.1.1.4.2.

6.3.2.1.1_1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.1.1_1.4.3.1 Message exceptions

Same as the message exceptions given in clause 6.3.2.1.1.4.3.1.

6.3.2.1.1_1.5 Test requirement

Table 6.3.2.1.1_1.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.2.1.2 2Rx FDD FR1 Single PMI with 8TX Type1-SinglePanel codebook for both SA and NSA

6.3.2.1.2.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.2.1.2.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.2.3-2.

Table 6.3.2.1.2.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	10
Subcarrier spacing	kHz	15
Duplex Mode		FDD
Propagation channel		TDLA30-5
Antenna configuration		High XP 8 x 2 (N1,N2) = (4,1)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS	CSI-RS resource	Periodic

configuration	Type		
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS interval and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		8
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8,(4,6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 8,(5)
	CSI-RS interval and offset	slot	Not configured
CSI-IM configuration	aperiodicTriggeringOffset		0
	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
CSI-IM timeConfig interval and offset	slot	Not configured	
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
csi-ReportingBand		1111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		5	
CSI request		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,1)

	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubset Restriction		0x FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	8
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.2
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: For random precoder selection, the precoder shall be updated in each slot (1 ms granularity).</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the eNB downlink before slot#(n+4).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.1.2.3-2: Minimum requirement

Parameter	Test 1
γ	1.5

6.3.2.1.2.4 Test description

6.3.2.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.2.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.2.4.3.

6.3.2.1.2.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.2.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.1.2.4.3.1 Message exceptions for SA

Table 6.3.2.1.2.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	aperiodic		
}			

Table 6.3.2.1.2.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100		
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5		
cdm-Type	cdm4-FD2-TD2		
}			

Table 6.3.2.1.2.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		

firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.1.2.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.2.1.2.4.3.1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction	FFFF		
}			
}			
type1-SinglePanel-ri-Restriction	00000010		

Table 6.3.2.1.2.4.3.1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
}			

6.3.2.1.2.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.2.4.3.1.6.3.2.1.2.5Test requirement

Table 6.3.2.1.2.5-1: Test requirement

Parameter	Test 1
γ	1.49

6.3.2.1.3 2Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA

6.3.2.1.3.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type I single panel codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type I single panel codebook with at least 16 ports per CSI-RS resource.

6.3.2.1.3.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.3.3-2.

Table 6.3.2.1.3.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLC300-5
Antenna configuration			High XP 16 x 2 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggerin		0

	gOffset		
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Subband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i, where mod(i, 5) = 1, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i ₁ , i ₂ combination, and with i ₁ wideband granularity and i ₂ subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i₁, i₂ combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.1.3.3-2: Minimum requirement

Parameter	Test 1
γ	2.5

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.3.

6.3.2.1.3.4 Test description

6.3.2.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.3.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.3.4.3.

6.3.2.1.3.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.3.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{rd 1, rd 2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.3.5-1, then the test is pass.
 Otherwise, the test is fail.

6.3.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.2.1.3.4.3.1 Message exceptions for SA

Table 6.3.2.1.3.4.3.1-1: Void

Table 6.3.2.1.3.4.3.1-2: Void

Table 6.3.2.1.3.4.3.1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			

Table 6.3.2.1.3.4.3.1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.2.1.3.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.3.4.3.1.

6.3.2.1.3.5 Test requirement

Table 6.3.2.1.3.5-1: Test requirement

Parameter	Test 1
γ	2.49

6.3.2.1.4 2Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA

6.3.2.1.4.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type I single panel codebook with at least 32 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type I single panel codebook with at least 32 ports per CSI-RS resource.

6.3.2.1.4.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.4.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.4.3-2.

Table 6.3.2.1.4.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High XP 32 x 2 (N1,N2) = (4,4)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		32
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 17,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		Row 17,(5, 12)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggerin gOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig	slot	Not configured

	interval and offset		
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
csi-ReportingBand			1111111
CSI-Report interval and offset	slot		Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i, where mod(i, 5) = 1, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,4)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
RI Restriction		00000010	
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.1.4.3-2: Minimum requirement

Parameter	Test 1
γ	5.0

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.4.

6.3.2.1.4.4 Test description

6.3.2.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.4.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.4.4.3.

6.3.2.1.4.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.4.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.4.5-1, then the test is pass.
Otherwise, the test is fail.

6.3.2.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.2.1.4.4.3.1 Message exceptions for SA

Table 6.3.2.1.4.4.3.1-1: Void

Table 6.3.2.1.4.4.3.1-2: Void

Table 6.3.2.1.4.4.3.1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			
}			

Table 6.3.2.1.4.4.3.1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.2.1.4.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.4.4.3.1.

6.3.2.1.4.5 Test requirement

Table 6.3.2.1.4.5-1: Test requirement

Parameter	Test 1
γ	4.99

6.3.2.1.5 2Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA

6.3.2.1.5.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type II codebook with at least 16 ports per CSI-RS resource.

6.3.2.1.5.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.5.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.5.3-2.

Table 6.3.2.1.5.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			XP Medium 16 x 2 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Subband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i, where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report

		Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	typell
	L (numberOfBeams)	2
	N _{PSK} (phaseAlphabetSize)	8
	subbandAmplitude	True
	(CodebookConfig-N1, CodebookConfig-N2)	(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,4)
	CodebookSubsetRestriction	0x 7FF FFFF FFFF FFFF FFFF
RI Restriction (typell-RI-Restriction)	10	
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	9
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
Note 1:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typeI-SinglePanel' codebook configuration as specified in Table 6.3.2.1.3.3-1.	
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).	
Note 3:	Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.	

Table 6.3.2.1.5.3-2: Minimum requirement

Parameter	Test 1
γ	1.9

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.5.

6.3.2.1.5.4 Test description

6.3.2.1.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.5.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.4.4.3.

6.3.2.1.5.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.5.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish

$t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities, and the random precoder generation shall follow the codebook configuration as specified in Table 6.3.2.1.5.3-1. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.5.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.2.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.2.1.5.4.3.1 Message exceptions for SA

Table 6.3.2.1.5.4.3.1-1: Void

Table 6.3.2.1.5.4.3.1-2: Void

Table 6.3.2.1.5.4.3.1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			

}		
---	--	--

6.3.2.1.5.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.5.4.3.1.

6.3.2.1.5.5 Test requirement

Table 6.3.2.1.5.5-1: Test requirement

Parameter	Test 1
γ	1.89

6.3.2.1.6 2Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for both SA and NSA

6.3.2.1.6.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

6.3.2.1.6.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.6.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.6.3-2.

Table 6.3.2.1.6.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			XP Medium 16 x 2 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (p)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
CSI-RS periodicity and offset	slot		5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS		16

	ports (X)		
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Not configured
Sub-band Size		RB	4
csi-ReportingBand			111111111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell-r16
	paramCombination-r16		6 ($L = 4, p_v = 1/2, \beta = 1/2$)
	$R(\text{numberOfPMISubbandsPerCQISubband-r16})$		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF FFFF FFFF
RI Restriction (typell-RI-Restriction-r16)			0010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2

		combination, and with i_1 wideband granularity and i_2 subband granularity
Note 1:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typel-SinglePanel' codebook configuration as specified in Table 6.3.2.1.3.3-1.	
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).	
Note 3:	Randomization of the dual-cluster beam directions shall be used as specified in AnnexB.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.	

Table 6.3.2.1.6.3-2: Minimum requirement

Parameter	Test 1
γ	2.2

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.2.1.6.

6.3.2.1.6.4 Test description

6.3.2.1.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.6.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.6.4.3.

6.3.2.1.6.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.6.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to

A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.6.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.2.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2.

6.3.2.1.6.4.3.1 Message exceptions for SA

Table 6.3.2.1.6.4.3.1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportFreqConfiguration SEQUENCE {			
pmi-FormatIndicator	Not present		
}			
codebookConfig	Not present		
subbandSize	Value1		
codebookConfig-r16	CodebookConfig-r16		
}			

Table 6.3.2.1.6.4.3.1-2: CodebookConfig-r16 (Table 6.3.2.1.6.4.3.1-1)

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CodebookConfig-r16 ::= SEQUENCE {			
codebookType CHOICE {			
type2 SEQUENCE {			
subType CHOICE {			
typell-r16 SEQUENCE {			
N1-n2-codebookSubsetRestriction-r16			
Four-two	0x 7FF FFFF FFFF FFFF FFFF		
}			
typell-RI-Restriction-r16	0010		
}			
}			
numberOfPMI-SubbandsPerCQI-Subband-r16	1		
paramCombinatin-r16	6	(L =4, p _v =1/2, β=1/2)	
}			
}			
}			

6.3.2.1.6.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.6.4.3.1.

6.3.2.1.6.5 Test requirement

Table 6.3.2.1.6.5-1: Test requirement

Parameter	Test 1
γ	2.19

6.3.2.1.7 2Rx FDD FR1 Single PMI with 8TX Type1-SinglePanel codebook for Single-DCI based transmission scheme for both SA and NSA

6.3.2.1.7.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting Single-DCI based transmission scheme.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and single-DCI based transmission scheme.

6.3.2.1.7.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.2.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.7.3-2.

Table 6.3.2.1.7-1: Test parameters (dual-layer)

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
QCL info			TCI state #0	
Duplex mode			FDD	
Bandwidth		MHz	10	
Subcarrier spacing		kHz	15	
Active DL BWP index			1	
Propagation channel			TDLA30-10	
Antenna configuration per TRxP			High XP 8 x 2 (N1,N2) = (4,1)	

Beamforming Model			As specified in Annex B.4.1 (Note 4)	
PDSCH configuration	Mapping type		Type A	
	k ₀		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation			Full-overlapping	
Timing offset of the second TRxP from the first TRxP		us	0	
Frequency offset of the second TRxP from the first TRxP		Hz	0	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		(9)	
	CSI-RS periodicity and offset	slot	5/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #9	Resource #10
	CSI-RS resource Type		Aperiodic	Aperiodic
	Number of CSI-RS ports (X)		8	8
	CDM Type		CDM4 (FD2, TD2)	CDM4 (FD2, TD2)
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		Row 8, (4,6)	Row 8, (4,6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		(5)	(9)
	CSI-RS periodicity and offset	slot	Not configured	Not configured
aperiodicTriggeringOffset		0	0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic	
	CSI-IM RE pattern		Pattern 0	
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)	
	CSI-IM timeConfig	slot	Not configured	

	periodicity and offset		
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
csi-ReportMode			Mode1
numberOfSingleTRP-CSI-Mode1			$x = 0$
CMR pairing and grouping			CMR group #1: {NZIP CSI-RS resource #9}, with $K_1 = 1$ CMR group #2: {NZIP CSI-RS resource #10}, with $K_2 = 1$ CMR pairing: {NZIP CSI-RS resource #9, NZP CSI-RS resource #10}
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
csi-ReportingBand			1111111
CSI-Report periodicity and offset	slot		Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	CodebookType		type1-SinglePanel
	CodebookMode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		0x FFFF
	RI Restriction		00000001 (1 MIMO layer per TRxP)
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		8
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.4
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)</p> <p>Note 2: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 3: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-4)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+4)$.</p> <p>Note 4: Randomization of the principle beam direction per TRxP shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.1.7.3-2: Minimum requirement

Parameter	Test 1
γ	1.6

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.7.

6.3.2.1.7.4 Test description

6.3.2.1.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.7.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.7.4.3.

6.3.2.1.7.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.7.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.7.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.

6.3.2.1.7.4.3.1 Message exceptions for SA

Table 6.3.2.1.7.4.3.1-1: CSI-MeasConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-12			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {			
nzp-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNzp-CSI-RS-Resources)) OF NZP-CSI-RS-Resource {	n entries	n=10	
NZP-CSI-RS-Resource[1]	NZP-CSI-RS-Resource for TRS (1)	entry 1 CSI-RS resource 1	
NZP-CSI-RS-Resource[2]	NZP-CSI-RS-Resource for TRS (2)	entry 2 CSI-RS resource 2	
NZP-CSI-RS-Resource[3]	NZP-CSI-RS-Resource for TRS (3)	entry 3 CSI-RS resource 3	
NZP-CSI-RS-Resource[4]	NZP-CSI-RS-Resource for TRS (4)	entry 4 CSI-RS resource 4	
NZP-CSI-RS-Resource[5]	NZP-CSI-RS-Resource for TRS (1) with condition SECOND_SET	entry 1 CSI-RS resource 5	
NZP-CSI-RS-Resource[6]	NZP-CSI-RS-Resource for TRS (2) with condition SECOND_SET	entry 2 CSI-RS resource 6	
NZP-CSI-RS-Resource[7]	NZP-CSI-RS-Resource for TRS (3) with condition SECOND_SET	entry 3 CSI-RS resource 7	
NZP-CSI-RS-Resource[8]	NZP-CSI-RS-Resource for TRS (4) with condition SECOND_SET	entry 4 CSI-RS resource 8	
NZP-CSI-RS-Resource[9]	NZP-CSI-RS-Resource for CSI Acquisition	entry 5 CSI-RS resource 9	
NZP-CSI-RS-Resource[10]	NZP-CSI-RS-Resource for CSI Acquisition	entry 6 CSI-RS resource 10	
}			
nzp-CSI-RS-ResourceSetToAddModList SEQUENCE (SIZE (1..maxNrofNzp-CSI-RS-ResourceSets)) OF NZP-CSI-RS-ResourceSet {	n entries	n=3	
NZP-CSI-RS-ResourceSet[1]	NZP-CSI-RS-ResourceSet for TRS	entry 1, Table 6.3.2.1.7.4.3.1-2	
NZP-CSI-RS-ResourceSet[2]	NZP-CSI-RS-ResourceSet for CSI Acquisition	entry 2, Table 6.3.2.1.7.4.3.1-6	
NZP-CSI-RS-ResourceSet[3]	NZP-CSI-RS-ResourceSet for TRS with condition SECOND_SET	entry 3, Table 6.3.2.1.7.4.3.1-2	
}			
csi-ResourceConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ResourceConfigurations)) OF CSI-ResourceConfig {	4 entries		
CSI-ResourceConfig[1]	CSI-ResourceConfig for TRS		
CSI-ResourceConfig[2]	CSI-ResourceConfig for CSI Acquisition		
CSI-ResourceConfig[3]	CSI-IM-ResourceConfig		
CSI-ResourceConfig[4]	CSI-ResourceConfig for TRS with condition SECOND_SET		
}			
csi-ReportConfigToAddModList SEQUENCE (SIZE		1 entry	

(1..maxNrofCSI-ReportConfigurations)) OF CSI-ReportConfig {			
CSI-ReportConfig[1]	CSI-ReportConfig	Table 6.3.2.1.7.4.3.1-14	
}			
}			

Table 6.3.2.1.7.4.3.1-1A: CSI-ResourceConfig for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-13			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
csi-ResourceConfigId	0 3		SECOND_SET
csi-RS-ResourceSetList CHOICE {			
nzp-CSI-RS-SSB SEQUENCE {			
nzp-CSI-RS-ResourceSetList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSetsPerConfig)) OF NZP-CSI-RS-ResourceSetId {	2 entries		
NZP-CSI-RS-ResourceSetId[1]	0	entry 1	
NZP-CSI-RS-ResourceSetId[2]	2	entry 2	SECOND_SET
}			
csi-SSB-ResourceSetList	Not present		
}			
}			
bwp-Id	BWP-Id		
resourceType	periodic		
}			

Table 6.3.2.1.7.4.3.1-2: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 2		SECOND_SET
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource 1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource 2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource 3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource 4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		SECOND_SET
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource 5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource 6	

NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource 7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource 8	
}			
repetition	off		
aperiodicTriggeringOffset	Not present		
trs_Info	true		
}			

Table 6.3.2.1.7.4.3.1-3: NZP-CSI-RS-Resource for TRS(Id)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	0	CSI-RS resource 1	Id=1
	1	CSI-RS resource 2	Id=2
	2	CSI-RS resource 3	Id=3
	3	CSI-RS resource 4	Id=4
	4	CSI-RS resource 5	Id=1, SECOND_S ET
	5	CSI-RS resource 6	Id=2, SECOND_S ET
	6	CSI-RS resource 7	Id=3, SECOND_S ET
	7	CSI-RS resource 8	Id=4, SECOND_S ET
resourceMapping	CSI-RS- ResourceMapping for TRS(Id)	Table 6.3.2.1.7.4.3.1-4	
powerControlOffset	0		
periodicityAndOffset	CSI- ResourcePeriodicityAnd Offset for TRS(Id)	Table 6.3.2.1.7.4.3.1-5	
qcl-InfoPeriodicCSI-RS	TCI-StateId 0		
}			

Table 6.3.2.1.7.4.3.1-4: CSI-RS-ResourceMapping for TRS(Id)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	k ₀ =0 for CSI-RS resource 1,2,3,4	Id=1,2,3,4
	0001	k ₀ =1 for CSI-RS resource 5,6,7,8	Id=1,2,3,4, SECOND_S ET
}			
firstOFDMSymbolInTimeDomain	6	l ₀ = 6 for CSI-RS resource 1,3,5,7	Id=1,2,3,4
	10	l ₀ = 10 for CSI-RS resource 2,4,6,8	Id=1,2,3,4, SECOND_S ET

nrofPorts	p1	1 for CSI-RS resource 1,2,3,4,5,6,7,8	
cdm-Type	noCDM		
density CHOICE{			
three	Null		
}			
freqBand	CSI-FrequencyOccupation		
}			

Table 6.3.2.1.7.4.3.1-5: CSI-ResourcePeriodicityAndOffset for TRS(Id)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots20	10	Periodicity 20 slots and offset 10 for CSI-RS resource 1,2,3,4	Id=1,2,3,4
slots20	11	Periodicity 20 slots and offset 11 for CSI-RS resource 5,6,7,8	Id=1,2,3,4, SECOND_S ET
}			

Table 6.3.2.1.7.4.3.1-6: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	1		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	2 entries		
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource 9	
NZP-CSI-RS-ResourceId[2]	9	entry 2 CSI-RS resource 10	
}			
repetition	off		
aperiodicTriggeringOffset	0		
trs_Info	Not present		
cmrGroupingAndPairing-r17	CMRGroupingAndPairing-r17	Table 6.3.2.1.7.4.3.1-7	
}			

Table 6.3.2.1.7.4.3.1-7: CMRGroupingAndPairing-r17

Derivation Path: TS 38.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CMRGroupingAndPairing-r17 ::= SEQUENCE {			
nrofResourcesGroup1-r17	1		
pair1OfNZP-CSI-RS-r17 ::= SEQUENCE {		2 entries	
nzp-CSI-RS-ResourceId1-r17	1		
nzp-CSI-RS-ResourceId2-r17	1		
}			
pair2OfNZP-CSI-RS-r17	Not present		
}			

Table 6.3.2.1.7.4.3.1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8	CSI-RS resource 9	
	9	CSI-RS resource 10	
resourceMapping	CSI-RS-ResourceMapping for CSI Acquisition	Table 6.3.2.1.7.4.3.1-9	
powerControlOffset	0		
periodicityAndOffset	Not present		
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table 6.3.2.1.7.4.3.1-9: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100	k0 = 4, k1 = 6, row8	
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5	l0 = 5 for CSI-RS resource 9	
	9	l0 = 9 for CSI-RS resource 10	
cdm-Type	cdm4-FD2-TD2		
density CHOICE {			
one	NULL		
}			
}			
}			

Table 6.3.2.1.7.4.3.1-10: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	3 entries		
TCI-State[1] SEQUENCE {		entry 1	
tci-StateId	TCI-StateId 0		
qcl-type1 SEQUENCE {	QCL Type is Type1		
Cell	Not present		
Bwp-id	Not present	BWP ID	
referenceSignal	ssb: 0	SSB # 0	
Qcl-Type	Type C		
}			
}			
TCI-State[2] SEQUENCE {		entry 2	
tci-StateId	TCI-StateId 1		
qcl-type1 {	QCL Type is Type1		
Cell	Not present		
Bwp-id	0	BWP ID	
referenceSignal	csi-rs: 0	CSI-RS # 0	
Qcl-Type	Type A		
}			
}			
TCI-State[3] SEQUENCE {		entry 3	
tci-StateId	TCI-StateId 2		

qcl-type1 {	QCL Type is Type1		
Cell	Not present		
Bwp-id	0	BWP ID	
referenceSignal	csi-rs: 5	CSI-RS # 5	
Qcl-Type	Type A		
}			
}			
resourceAllocation	resourceAllocationType1		
ZP-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNRP-CSI-RS-Resources)) OF NRP-CSI-RS-Resource {	1 entry		
ZP-CSI-RS-Resource[1]	ZP-CSI-RS-Resource	entry 1, Table 6.3.2.1.7.4.3.1-11	
}			
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet	Table 5.4.2.5-5A in TS 38.508-1 [6]	
}			

Table 6.3.2.1.7.4.3.1-11: ZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-204			
Information Element	Value/remark	Comment	Condition
ZP-CSI-RS-Resource ::= SEQUENCE {			
zp-CSI-RS-ResourceId	0		
resourceMapping	CSI-RS-ResourceMapping for ZP CSI-RS	Table 6.3.2.1.7.4.3.1-12	
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset for ZP CSI-RS	Table 6.3.2.1.7.4.3.1-13	
}			

Table 6.3.2.1.7.4.3.1-12: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	k0 = 4, row5	
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.1.7.4.3.1-13: CSI-ResourcePeriodicityAndOffset for ZP CSI-RS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	1		
}			

Table 6.3.2.1.7.4.3.1-14: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
resourcesForChannelMeasurement	1	CSI-ResourceConfigId for CSI Acquisition	

csi-IM-ResourcesForInterference	2	CSI-ResourceConfigId for CSI-IM	
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList SEQUENCE {	2 entries		
reportSlotOffsetList[1]	5	entry 1	
reportSlotOffsetList[2]	5	entry 2	
}			
}			
}			
codebookConfig-r17	CodebookConfig-r17	Table 6.3.2.1.7.4.3.1-15	
csi-ReportMode-r17	mode1		
numberOfSingleTRP-CSI-Mode1-r17	n0		
codebookConfig-v1730 ::= SEQUENCE {			
codebookType CHOICE {			
type1 ::= SEQUENCE {			
codebookMode	1		
}			
}			
}			
}			

Table 6.3.2.1.7.4.3.1-15: CodebookConfig-r17

Derivation Path: TS 38.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CodebookConfig-r17 ::= SEQUENCE {			
codebookType CHOICE {			
type1 ::= SEQUENCE {			
type1-SinglePanel-Group1-r17 SEQUENCE {			
nrOfAntennaPorts CHOICE {			
moreThanTwo ::= SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction1-r17	0x FFFF		
}			
}			
}			
type1-SinglePanel-Group2-r17 SEQUENCE {			
nrOfAntennaPorts CHOICE {			
moreThanTwo ::= SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction2-r17	0x FFFF		
}			
}			
}			
type1-SinglePanel-ri-RestrictionSTRP-r17	Not present		
type1-SinglePanel-ri-RestrictionSDM-r17	'0001'B		
}			
}			
}			

Table 6.3.2.1.7.4.3.1-16: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1 = 2	"010"	
Antenna port(s)	DMRS port 0 and 2	"1011"	

Transmission configuration indication	Value 0 which is mapped to the first TCI codepoint with TCI state ID _{0,1} = TCI state ID#1 and TCI state ID _{0,2} = TCI state ID#2 as defined in TS 38.321 clause 6.1.3.24.	"000"	
---------------------------------------	--	-------	--

Table 6.3.2.1.7.4.3.1-17: ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

6.3.2.1.7.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.7.4.3.1.

6.3.2.1.7.5 Test requirement

Table 6.3.2.1.7.5-1: Test requirement

Parameter	Test 1
γ	1.59

6.3.2.1.8 2Rx FDD FR1 Multiple PMI with 16TX Enhanced Type II codebook for predicted PMI for both SA and NSA

6.3.2.1.8.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.8.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting Enhanced Type II Codebook (eType-II) based on doppler CSI.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and Enhanced Type II Codebook (eType-II) based on doppler CSI.

6.3.2.1.8.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.8.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.8.3-2.

Table 6.3.2.1.8.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	10
Subcarrier spacing	kHz	15
Duplex Mode		FDD
Propagation channel		TDLA30-20
Antenna configuration		XP Medium 16 x 2 (N1,N2) = (4,2)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Aperiodic
	Number of CSI-RS	4

	ports (X)		
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)
	CSI-RS interval and offset	slot	Not configured
	ZP CSI-RS trigger		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	The number of CSI-RS resources (K)		4
	Number of CSI-RS ports (X)		16 for CSI-RS resource 1,2,3,4
	CDM Type		CDM4 (FD2, TD2) for CSI-RS resource 1,2,3,4
	Density (ρ)		1 for CSI-RS resource 1,2,3,4
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12, (2, 4, 6, 8) for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(5) for CSI-RS resource 1,2,3,4
	CSI-RS interval and offset	slot	Not configured for CSI-RS resource 1,2,3,4
	aperiodicTriggeringOffset		0
	Separation between two consecutive CSI-RS resources (m)	slot	2
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Not configured
Sub-band Size		RB	4
csi-ReportingBand			111111111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			10
CSI request			1 in slots i , where $\text{mod}(i, 10) = 0$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell-doppler-r18
	paramCombination-Doppler-r18		7 ($L = 4, p_v = 1/2, \beta = 1/2$)

	R(numberOfPMI-SubbandsPerCQI-Subband-r18)		1
	(CodebookConfig-N1,CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1,CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF
	RI Restriction (typeII-RI-Restriction-r18)		0010
	Doppler/time-domain basis vector length (N4)		1
	Doppler-/time-domain unit duration (d)	slot	1
	Prediction delay (delta)	slot	1
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	15
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-24.1 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i1, i2 combination, and with i1 wideband granularity and i2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i1, i2 combination. The random precoder generation shall follow 'typeI-SinglePanel' codebook configuration as specified in table 6.3.2.1.3.3-1.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation using a CSI-RS resource set in which the last CSI-RS resource is transmitted at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).</p> <p>Note 3: Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.</p>			

Table 6.3.2.1.8.3-2: Minimum requirement

Parameter	Test 1
γ	1.8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.8.

6.3.2.1.8.4 Test description

6.3.2.1.8.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in section A.3.1.7 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.8.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.8.4.3.

6.3.2.1.8.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.8.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.1.8.5-1, then the test is pass. Otherwise, the test is failed.

6.3.2.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.

6.3.2.1.8.4.3.1 Message exceptions for SA

Table 6.3.2.1.8.4.3.1-1: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	1		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource 1	
NZP-CSI-RS-ResourceId[2]	1	entry 2	

		CSI-RS resource 2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource 3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource 4	
}			
repetition	off		
aperiodicTriggeringOffset	0		
trs-Info	Not present		
}			

Table 6.3.2.1.8.4.3.1-2: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	0	CSI-RS resource 0	
	1	CSI-RS resource 1	
	2	CSI-RS resource 2	
	3	CSI-RS resource 3	
resourceMapping	CSI-RS-ResourceMapping for CSI Acquisition	Table 6.3.2.1.8.4.3.1-3	
powerControlOffset	0		
periodicityAndOffset	Not present		
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table 6.3.2.1.8.4.3.1-3: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	011110	k0 = 2, k1 = 4, k2 = 6, k3 = 8, row12	
}			
nrofPorts	p16		
firstOFDMSymbolInTimeDomain	5	l ₀ = 5	
cdm-Type	cdm4-FD2-TD2		
density CHOICE {			
one	NULL		
}			
}			

Table 6.3.2.1.8.4.3.1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	10		
}			
codebookConfig-r18	codebookConfig-r18		
}			

Table 6.3.2.1.8.4.3.1-5: Physical layer parameters for DCI format 0_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.1.2-1			
Parameter	Value	Value in binary	Condition
CSI request	1 in slots i, where		

	mod(i, 10) = 1, otherwise it is equal to 0		
--	--	--	--

6.3.2.1.8.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.8.4.3.1.

6.3.2.1.8.5 Test requirement

Table 6.3.2.1.8.5-1: Test requirement

Parameter	Test 1
γ	1.79

6.3.2.1.9 2Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA

6.3.2.1.9.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.9.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting eType-II codebook with refinement for multi-TRP CJT.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and eType-II codebook with refinement for multi-TRP CJT.

6.3.2.1.9.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.9.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.9.3-2.

Table 6.3.2.1.9.3-1: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	
QCL info			TCI state #0	
Duplex mode			FDD	
Bandwidth		MHz	10	
Subcarrier spacing		kHz	15	
Active DL BWP index			1	
Propagation channel			TDLA30-10	
Antenna configuration per TRxP			High XP 8 x 2 (N1,N2) = (4,1)	
Beamforming Model			As specified in Annex B.4.1 (Note 4)	

PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000,1001	
	TCI state		TCI State #1	
	DMRS Type		Type 1	
	Number of additional DMRS		1	
Maximum number of OFDM symbols for DL front loaded DMRS		1		
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	N/A	
		QCL Type	N/A	
Resource allocation			Full-overlapping	
Timing offset of the second TRxP from the first TRxP		us	0	
Frequency offset of the second TRxP from the first TRxP		Hz	0	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		(9)	
CSI-RS periodicity and offset		slot	5/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #5	Resource #6
	CSI-RS resource Type		Aperiodic	Aperiodic
	Number of CSI-RS ports (X)		8	8
	CDM Type		CDM4 (FD2, TD2)	CDM4 (FD2, TD2)
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		Row 8, (4,6)	Row 8, (4,6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		(5)	(9)
	CSI-RS periodicity and offset		slot	Not configured
aperiodicTriggeringOffset		0	0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic	
	CSI-IM RE pattern		Pattern 0	
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)	
	CSI-IM timeConfig periodicity and offset		slot	Not configured
ReportConfigType			Aperiodic	
CQI-table			Table 1	
reportQuantity			cri-RI-PMI-CQI	
csi-ReportMode			Mode2	
timeRestrictionForChannelMeasurements			Not configured	
timeRestrictionForInterferenceMeasurements			Not configured	
cqi-FormatIndicator			Wideband	
pmi-FormatIndicator			Not Configured	
Sub-band Size		RB	8	
csi-ReportingBand			111111	

CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			7
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	CodebookType		Typell-CJT-r18
	CodebookMode		Mode 2
	(CodebookConfig-N1,CodebookConfig-N2)		(4,1)
	(CodebookConfig-O1,CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		0x FFFF
	paramCombination-CJT-L-r18		7 ({4, 4})
	paramCombination-CJT-r18		4 ($p_v=1/4$ and $1/8$, $\beta=1/2$)
RI Restriction		00000010	
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	14
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: PDSCH transmission is done from both TRxPs, where both TRxPs will send the same PDSCH data</p> <p>Note 2: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination. For each TRP, use random type I SP PMI precoding independently.</p> <p>Note 3: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-7)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+7)$.</p> <p>Note 4: Randomization of the dual-cluster beam directions shall be used as specified in AnnexB.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.</p>			

Table 6.3.2.1.9.3-2: Minimum requirement

Parameter	Test 1
γ	1.8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.9.

6.3.2.1.9.4 Test description

6.3.2.1.9.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in section A.3.1.7 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.9.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.9.4.3.

6.3.2.1.9.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.9.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.1.9.5-1, then the test is pass. Otherwise, the test is failed.

6.3.2.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.

6.3.2.1.9.4.3.1 Message exceptions for SA

Table 6.3.2.1.9.4.3.1-1: CSI-MeasConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-12			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {			
nzp-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-Resources)) OF NZP-CSI-RS-Resource {	n entries	n=7	
NZP-CSI-RS-Resource[1]	NZP-CSI-RS-Resource for TRS (1)	entry 1 CSI-RS resource 1	
NZP-CSI-RS-Resource[2]	NZP-CSI-RS-Resource for TRS (2)	entry 2 CSI-RS resource 2	
NZP-CSI-RS-Resource[3]	NZP-CSI-RS-Resource for TRS (3)	entry 3 CSI-RS resource 3	
NZP-CSI-RS-Resource[4]	NZP-CSI-RS-Resource	entry 4	

	for TRS (4)	CSI-RS resource 4	
NZP-CSI-RS-Resource[5]	NZP-CSI-RS-Resource for CSI Acquisition	entry 5 CSI-RS resource 5	
NZP-CSI-RS-Resource[6]	NZP-CSI-RS-Resource for CSI Acquisition	entry 6 CSI-RS resource 6	
}			
nzp-CSI-RS-ResourceSetToAddModList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSets)) OF NZP-CSI-RS-ResourceSet {	n entries	n=2	
NZP-CSI-RS-ResourceSet[1]	NZP-CSI-RS-ResourceSet for TRS	entry 1, Table 5.4.2.0-12 in TS 38.508-1 [6]	
NZP-CSI-RS-ResourceSet[2]	NZP-CSI-RS-ResourceSet for CSI Acquisition	entry 2, Table 6.3.2.1.9.4.3.1-2	
}			
csi-ReportConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ReportConfigurations)) OF CSI-ReportConfig {		1 entry	
CSI-ReportConfig[1]	CSI-ReportConfig	Table 6.3.2.1.9.4.3.1-9	
}			
}			

Table 6.3.2.1.9.4.3.1-2: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	1		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	2 entries		
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource 5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource 6	
}			
repetition	off		
aperiodicTriggeringOffset	0		
trs-Info	Not present		
}			

Table 6.3.2.1.9.4.3.1-3: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	4 5	CSI-RS resource 5 CSI-RS resource 6	
resourceMapping	CSI-RS-ResourceMapping for CSI Acquisition	Table 6.3.2.1.9.4.3.1-4	
powerControlOffset	0		
periodicityAndOffset	Not present		
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table 6.3.2.1.9.4.3.1-4: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100	k0 = 4, k1 = 6, row8	
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5	l ₀ = 5 for CSI-RS resource 5	
	9	l ₀ = 9 for CSI-RS resource 6	
cdm-Type	cdm4-FD2-TD2		
density CHOICE {			
one	NULL		
}			
}			

Table 6.3.2.1.9.4.3.1-4A: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
---	--	--	--

Table 6.3.2.1.9.4.3.1-5: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
resourceAllocation	resourceAllocationType 1		
ZP-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNRP-CSI-RS-Resources)) OF NRP-CSI-RS-Resource {		1 entry	
ZP-CSI-RS-Resource[1]	ZP-CSI-RS-Resource	Table 6.3.2.1.9.4.3.1-6	
}			
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet	Table 5.4.2.5-5A in TS 38.508-1 [6]	
}			

Table 6.3.2.1.9.4.3.1-6: ZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-204			
Information Element	Value/remark	Comment	Condition
ZP-CSI-RS-Resource ::= SEQUENCE {			
zp-CSI-RS-ResourceId	0		
resourceMapping	CSI-RS-ResourceMapping for ZP CSI-RS	Table 6.3.2.1.9.4.3.1-7	
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset for ZP CSI-RS	Table 6.3.2.1.9.4.3.1-8	
}			

Table 6.3.2.1.9.4.3.1-7: CSI-RS-ResourceMapping for ZP CSI-RS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	k0 = 4, row5	
}			

nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
firstOFDMSymbolInTimeDomain2	Not present		
cdm-Type	fd-CDM2		
density CHOICE {			
one	NULL		
}			
}			

Table 6.3.2.1.9.4.3.1-8: CSI-ResourcePeriodicityAndOffset for ZP CSI-RS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots5	1		
}			

Table 6.3.2.1.9.4.3.1-9: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
resourcesForChannelMeasurement	1	CSI-ResourceConfigId for CSI Acquisition	
csi-IM-ResourcesForInterference	2	CSI-ResourceConfigId for CSI-IM	
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList SEQUENCE {	2 entries		
reportSlotOffsetList[1]	7	entry 1	
reportSlotOffsetList[2]	7	entry 2	
}			
}			
reportFreqConfiguration SEQUENCE {			
pmi-FormatIndicator	Not present		
}			
csi-ReportMode-r17	mode2		
codebookConfig-r18	CodebookConfig-r18	Table 6.3.2.1.9.4.3.1-10	
}			

Table 6.3.2.1.9.4.3.1-10: CodebookConfig-r18

Derivation Path: TS 38.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CodebookConfig-r18 ::= SEQUENCE {			
codebookType CHOICE {			
type2 CHOICE {			
typell-CJT-r18 SEQUENCE {			
n1-n2-codebookSubsetRestrictionList-r18	N1-N2-CBSR-List-r18	Table 6.3.2.1.9.4.3.1-11	
paramCombination-CJT-r18	4		
paramCombination-CJT-L-r18 SEQUENCE {		1 entry	
	7		
}			
restrictedCMR-Selection-r18	enable		
valueOfO3-r18	Not present		
numberOfPMI-SubbandsPerCQI-Subband-r18	1		
typell-RI-Restriction-r18	0010		
}			
}			

codebookMode-r18	2		
}			
}			
}			
}			

Table 6.3.2.1.9.4.3.1-11: N1-N2-CBSR-List-r18

Derivation Path: TS 38.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
N1-N2-CBSR-List-r18 ::= CHOICE {			
four-one-r18 CHOICE {			
cbsr-list-r18 SEQUENCE {		2 entries	
	0x FFFF	entry 1	
	0x FFFF	entry 2	
}			
}			
}			

Table 6.3.2.1.9.4.3.1-12: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-16			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	$K_1 = 2$	"010"	
Antenna port(s)	DMRS port 0 and DMRS port 1 as per Table 7.3.1.2.2-1 in TS 38.212 (<i>dmrs-Type</i> = DMRS type 1 and <i>maxLength</i> = len1 as per Table 4.6.3-50 in 38.508-1)	"0010"	

Table 6.3.2.1.9.4.3.1-13: Physical layer parameters for DCI format 0_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.1.2-1			
Parameter	Value	Value in binary	Condition
CSI request	1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0		

6.3.2.1.9.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.1.9.4.3.1.

6.3.2.1.9.5 Test requirement

Table 6.3.2.1.9.5-1: Test requirement

Parameter	Test 1
γ	1.79

6.3.2.1.10 2Rx FDD FR1 Single PMI with 4TX Type1-SinglePanel codebook for eRedCap

6.3.2.1.10.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.1.10.2 Test applicability

This test applies to all types of NR eRedCap UE with 2Rx from Release 18 and onwards.

6.3.2.1.10.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.1.10.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.1.10.3-2.

Table 6.3.2.1.10.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High XP 4 x 2 (N1,N2) = (2,1)
Beamforming Model			As specified in Annex B.4.1
PDSCH configuration	Resource allocation type		type 1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		Row 5,(9)
	Frequency Occupation	RB	0 to 27
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	Frequency Occupation	RB	0 to 27
	CSI-RS periodicity and offset		Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			4 for FDD

		3 for HD-FDD
CSI request		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(2, 1)
	(CodebookConfig-O1, CodebookConfig-O2)	(4, 1)
	CodebookSubsetRestriction	11111111
RI Restriction		00000001
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay		ms 7
Maximum number of HARQ transmission		4
Measurement channel (Note 4)		R.PDSCH.1-6.5 FDD R.PDSCH.1-3.2 HD-FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-3)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+3)$.</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p> <p>Note 4: Applied reference channel depends on the supported operation mode: FDD or HD-FDD.</p>		

Table 6.3.2.1.10.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.1.10.

6.3.2.1.10.4 Test description

6.3.2.1.10.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.1.10.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.10.4.3.

6.3.2.1.10.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.1.10.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.1.10.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.1.10.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.1.10.4.3.1 Message exceptions

Table 6.3.2.1.10.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.2.1.10.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		

}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.2.1.10.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.1.10.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	Not present		

Table 6.3.2.1.10.4.3.1-5: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		
}			

Table 6.3.2.1.10.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.2.1.10.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		

}			
}			
subbandSize	8		
}			

6.3.2.1.10.5 Test requirement

Table 6.3.2.1.10.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.2.2 TDD

6.3.2.2.1 2Rx TDD FR1 Single PMI with 4TX Type1-SinglePanel codebook for both SA and NSA

6.3.2.2.1.1 Test Purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.2.2.1.3 Minimum Conformance Requirements

For the parameters specified in Table 6.3.2.2.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.1.3-2.

Table 6.3.2.2.1.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configuration			FR1.30-1 as specified in Annex A
DL BWP configuration #1	First PRB		0
	Number of contiguous PRB		106
	Subcarrier spacing	kHz	30
Propagation channel			TDLA30-5
Antenna configuration			High XP 4 x 2 (N1,N2) = (2,1)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for		Row 5,(9)

Parameter		Unit	Test 1
	CSI-RS (l_0)		
	CSI-RS interval and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggering Offset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Patten 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	16	
csi-ReportingBand		1111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		11111111
RI Restriction		00000001	
Physical channel for CSI report		PUSCH	
CQI/RI/PMI delay	ms	5.5	
Maximum number of HARQ transmission		4	
Measurement channel		R.PDSCH.2-8.1 TDD	

Parameter	Unit	Test 1
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
NOTE 1: For random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity).		
NOTE 2: If the UE reports in an available uplink reporting instance at slot #n based on PMI estimation at a downlink slot not later than slot#[(n-4)], this reported PMI cannot be applied at the eNB downlink before slot#[(n+4)].		
NOTE 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.		

Table 6.3.2.2.1.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.2.1.

6.3.2.2.1.4 Test Description

6.3.2.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.1.4.3.

6.3.2.2.1.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.1.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS

schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\mathcal{Y} = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.2.1.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.2.1.4.3_1 Message exceptions for SA

Table 6.3.2.2.1.4.3_1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.2.2.1.4.3_1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.2.2.1.4.3_1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.2.1.4.3_1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
--	--	--	--

Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.2.2.1.4.3.1-4a: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.3.2.2.1.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Typel-SinglePanel-Restriction	11111111		
}			
}			
}			
typel-SinglePanel-ri-Restriction	00000001		

Table 6.3.2.2.1.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
subbandSize	value2		
}			

6.3.2.2.1.4.3_2 Message exceptions for NSA

Same as in clause 6.2.2.1.2.1.4.3_1.

6.3.2.2.1.5 Test Requirements

Table 6.3.2.2.1.5-1: Test requirement (TDD)

Parameter	Test 1
γ	1.29

6.3.2.2.2 2Rx TDD FR1 Single PMI with 8TX Type1-SinglePanel codebook for both SA and NSA

6.3.2.2.2.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.2.2.2.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.2.3-2.

Table 6.3.2.2.2.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configurations			FR1.30-1 as specified in Annex A
DL BWP configuration #1	First PRB		0
	Number of contiguous PRB		106
	Subcarrier spacing	kHz	30
Propagation channel			TDLA30-5
Antenna configuration			High XP 8 x 2 (N1,N2) = (4,1)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS interval and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		8
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8,(4,6)
	First OFDM		Row 8,(5)

	symbol in the PRB used for CSI-RS (l_0)		
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Patten 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	16
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubset Restriction		0x FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	6.5
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.2 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: For random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity).</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#[(n-6)], this reported PMI cannot be applied at the eNB downlink before slot#[(n+6)].</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.2.3-2: Minimum requirement

Parameter	Test 1
γ	1.5

6.3.2.2.2.4 Test description

6.3.2.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.2.4.3.

6.3.2.2.2.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\mathcal{Y} = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.2.2.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.2.2.4.3_1 Message exceptions for SA

Table 6.3.2.2.2.4.3_1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	aperiodic		
}			

Table 6.3.2.2.2.4.3_1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100		
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5		
cdm-Type	cdm4-FD2-TD2		
}			

Table 6.3.2.2.2.4.3_1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.2.2.4.3_1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.2.2.2.4.3_1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction	FFFF		
}			
}			

}			
}			
type1-SinglePanel-ri-Restriction	00000010		

Table 6.3.2.2.4.3_1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	8		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
}			

6.3.2.2.4.3_2 Message exceptions for NSA

Same as in clause 6.3.2.2.4.3_1.

6.3.2.2.5 Test requirement

Table 6.3.2.2.5-1: Test requirement (TDD)

Parameter	Test 1
γ	1.49

6.3.2.2.3 2Rx TDD FR1 Multiple PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA

6.3.2.2.3.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type I single panel codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type I single panel codebook with at least 16 ports per CSI-RS resource.

6.3.2.2.3.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.3.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.3.3-2.

Table 6.3.2.2.3.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD

TDD DL-UL configurations			FR1.30-1 as specified in Annex A
Propagation channel			TDLC300-5
Antenna configuration			High XP 16 x 2 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Subband	
Sub-band Size	RB	16	
csi-ReportingBand		1111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i, where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0	

reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
RI Restriction			00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.2.3.3-2: Minimum requirement

Parameter	Test 1
γ	2.5

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.2.2.3.

6.3.2.2.3.4 Test description

6.3.2.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.3.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.3.4.3.

6.3.2.2.3.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.3.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.2.3.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.2.2.3.4.3_1 Message exceptions for SA

Table 6.3.2.2.3.4.3_1-1: Void

Table 6.3.2.2.3.4.3_1-2: Void

Table 6.3.2.2.3.4.3_1-3: Void

Table 6.3.2.2.3.4.3_1-4: Void

Table 6.3.2.2.3.4.3_1-5: Void

Table 6.3.2.2.3.4.3_1-6: Void

Table 6.3.2.2.3.4.3_1-7: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.2.2.3.4.3_2 Message exceptions for NSA

Same as in clause 6.3.2.2.3.4.3_1.

6.3.2.2.3.5 Test requirement

Table 6.3.2.2.3.5-1: Test requirement (TDD)

Parameter	Test 1
γ	2.49

6.3.2.2.4 2Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA

6.3.2.2.4.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type I single panel codebook with at least 32 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type I single panel codebook with at least 32 ports per CSI-RS resource.

6.3.2.2.4.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.4.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.4.3-2.

Table 6.3.2.2.4.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configurations		FR1.30-1 as specified in Annex A
Propagation channel		TDLA30-5
Antenna configuration		High XP 32 x 2 (N1,N2) = (4,4)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-	4

	RS ports (X)		
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		32
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 17,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		Row 17,(5, 12)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	16
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,4)

	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
Note 1:		When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.	
Note 2:		If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).	
Note 3:		Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.	

Table 6.3.2.2.4.3-2: Minimum requirement

Parameter	Test 1
γ	5.0

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.2.2.4.

6.3.2.2.4.4 Test description

6.3.2.2.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10TBD for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.4.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].

4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.4.4.3.

6.3.2.2.4.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.4.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.2.4.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.2.2.4.4.3_1 Message exceptions for SA

Table 6.3.2.2.4.4.3_1-1: Void

Table 6.3.2.2.4.4.3_1-2: Void

Table 6.3.2.2.4.4.3_1-3: Void

Table 6.3.2.2.4.4.3_1-4: Void

Table 6.3.2.2.4.4.3_1-5: Void

Table 6.3.2.2.4.4.3_1-6: Void

Table 6.3.2.2.4.4.3_1-7: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.2.2.4.4.3_2 Message exceptions for NSA

Same as in clause 6.3.2.2.4.4.3_1.

6.3.2.2.4.5 Test requirement

Table 6.3.2.2.4.5-1: Test requirement (TDD)

Parameter	Test 1
γ	4.99

6.3.2.2.5 2Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA

6.3.2.2.5.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type II codebook with at least 16 ports per CSI-RS resource.

6.3.2.2.5.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.5.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.5.3-2.

Table 6.3.2.2.5.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configurations		FR1.30-1 as specified in Annex A
Propagation channel		TDLA30-5
Antenna configuration		XP Medium 16 x 2 (N1,N2) = (4,2)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)
	CSI-RS periodicity and offset	slot
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Aperiodic
	Number of CSI-RS ports (X)	16
	CDM Type	CDM4 (FD2, TD2)
	Density (ρ)	1
	First subcarrier index in the PRB used for	Row 12,(2, 4, 6, 8)

	CSI-RS (k_0, k_1, k_2, k_3)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Subband
Sub-band Size		RB	16
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell
	L (<i>numberOfBeams</i>)		2
	N_{PSK} (<i>phaseAlphabetSize</i>)		8
	<i>subbandAmplitude</i>		True
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF FFFF FFFF
RI Restriction (typell-RI-Restriction)		10	
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typel-SinglePanel' codebook configuration as			

	specified in Table 6.3.2.2.3.3-1.
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).
Note 3:	Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.

Table 6.3.2.2.5.3-2: Minimum requirement

Parameter	Test 1
γ	1.9

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.2.5.

6.3.2.2.5.4 Test description

6.3.2.2.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.5.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.4.4.3.

6.3.2.2.5.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.5.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish

$t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities, and the random precoder generation shall follow the codebook configuration as specified in Table 6.3.2.2.3.3-1. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.2.5.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.2.2.5.4.3.1 Message exceptions for SA

Table 6.3.2.2.5.4.3.1-1: Void

Table 6.3.2.2.5.4.3.1-2: Void

Table 6.3.2.2.5.4.3.1-3: Void

Table 6.3.2.2.5.4.3.1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.2.2.5.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.2.5.4.3.1.

6.3.2.2.5.5 Test requirement

Table 6.3.2.2.5.5-1: Test requirement

Parameter	Test 1
γ	1.89

6.3.2.2.6 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA

6.3.2.2.6.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

6.3.2.2.6.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.6.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.6.3-2.

Table 6.3.2.2.6.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configurations			FR1.30-1 as specified in Annex A
Propagation channel			TDLA30-5
Antenna configuration			XP Medium 16 x 2 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasur		Not configured	

elements		
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Not configured
Sub-band Size		RB 8
csi-ReportingBand		11111111111111
CSI-Report interval and offset		slot Not configured
Aperiodic Report Slot Offset		8
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	typell-r16
	<i>paramCombination-r16</i>	6 ($L=4, p_v=1/2, \beta=1/2$)
	$R(\text{numberOfPMISubbandsPerCQISubband-r16})$	1
	(CodebookConfig-N1, CodebookConfig-N2)	(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,4)
	CodebookSubsetRestriction	0x 7FF FFFF FFFF FFFF FFFF
	RI Restriction (typell-RI-Restriction-r16)	0010
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay		ms 7
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typeI-SinglePanel' codebook configuration as specified in Table 6.3.2.2.3.3-1.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-6)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+6)$.</p> <p>Note 3: Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.</p>		

Table 6.3.2.2.6.3-2: Minimum requirement

Parameter	Test 1
γ	2.2

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.2.2.6.

6.3.2.2.6.4 Test description

6.3.2.2.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.6.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.6.4.3.

6.3.2.2.6.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.6.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.2.6.5-1, then the test is pass.
Otherwise, the test is fail.

6.3.2.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2.

6.3.2.2.6.4.3.1 Message exceptions for SA

Table 6.3.2.2.6.4.3.1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportFreqConfiguration SEQUENCE {			
pmi-FormatIndicator	Not present		
}			
codebookConfig	Not present		
subbandSize	Value1		
codebookConfig-r16	CodebookConfig-r16		
}			

Table 6.3.2.2.6.4.3.1-2: CodebookConfig-r16 (Table 6.3.2.2.6.4.3.1-1)

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CodebookConfig-r16 ::= SEQUENCE {			
codebookType CHOICE {			
type2 SEQUENCE {			
subType CHOICE {			
typell-r16 SEQUENCE {			
N1-n2-codebookSubsetRestriction-r16			
Four-two	0x 7FF FFFF FFFF FFFF FFFF		
}			
typell-RI-Restriction-r16	0010		
}			
}			
numberOfPMI-SubbandsPerCQI-Subband-r16	1		
paramCombinatin-r16	6	(L =4, p _v =1/2, β=1/2)	
}			
}			
}			

6.3.2.2.6.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.2.6.4.3.1.

6.3.2.2.6.5 Test requirement

Table 6.3.2.2.6.5-1: Test requirement

Parameter	Test 1
γ	2.19

6.3.2.2.7 2Rx TDD Single PMI with 4TX Typel-SinglePanel Codebook for RedCap

6.3.2.2.7.1 Test Purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.7.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

6.3.2.2.7.3 Minimum Conformance Requirements

For the parameters specified in Table 6.3.2.2.7.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.7.3-2.

Table 6.3.2.2.7.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	20
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configuration			FR1.30-1 as specified in Annex A
Propagation channel			TDLA30-5
Antenna configuration			High XP 4 x 2 (N1,N2) = (2,1)
Beamforming Model			As specified in 38.101-4 [5] Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	CSI-RS periodicity and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i, where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook	Codebook Type		type1-SinglePanel

configuration	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		11111111
	RI Restriction		00000001
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	5.5
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.4 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot #n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in 38.101-4 [5] Annex B.2.3.2.3.</p>			

Table 6.3.2.2.7.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.2.7.

6.3.2.2.7.4 Test Description

6.3.2.2.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of TS 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.7.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.7.4.3.

6.3.2.2.7.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.7.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.2.7.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.2.7.4.3.1 Message exceptions

Table 6.3.2.2.7.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.2.2.7.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.2.2.7.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		

firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.2.7.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.2.2.7.4.3.1-4a: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.3.2.2.7.4.3.1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.2.2.7.4.3.1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
subbandSize	value2		
}			

6.3.2.2.7.5 Test Requirements

Table 6.3.2.2.7.5-1: Test requirement (TDD)

Parameter	Test 1
γ	1.29

6.3.2.2.8 2Rx TDD FR1 Single PMI with 8TX Type1-SinglePanel Codebook for Single-DCI based transmission scheme for both SA and NSA

6.3.2.2.8.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.8.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting Single-DCI based transmission scheme.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC and single-DCI based transmission scheme.

6.3.2.2.8.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.8.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.8.3-2.

Table 6.3.2.2.8.3-1: Test parameters (dual-layer)

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
QCL info			TCI state #0	
Duplex mode			TDD	
Bandwidth		MHz	40	
Subcarrier spacing		kHz	30	
TDD DL-UL configurations			FR1.30-1 as specified in Annex A	
Active DL BWP index			1	
Propagation channel			TDLA30-10	
Antenna configuration per TRxP			High XP 8 x 2 (N1,N2) = (4,1)	
Beamforming Model			As specified in Annex B.4.1 (Note 4)	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	

PDSCH DMRS configuration	Antenna port indexes		1000	1002	
	TCI state		TCI State #1	TCI State #2	
	DMRS Type		Type 1		
	Number of additional DMRS		1		
	Maximum number of OFDM symbols for DL front loaded DMRS		1		
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A	
		QCL Type	Type A	N/A	
	Type 2 QCL information	CSI-RS resource	N/A	N/A	
		QCL Type	N/A	N/A	
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration	
		QCL Type	N/A	Type A	
	Type 2 QCL information	CSI-RS resource	N/A	N/A	
		QCL Type	N/A	N/A	
Resource allocation			Full-overlapping		
Timing offset of the second TRxP from the first TRxP			us	0	
Frequency offset of the second TRxP from the first TRxP			Hz	0	
Number of HARQ Processes			8		
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2		
ZP CSI-RS configuration	CSI-RS resource Type		Periodic		
	Number of CSI-RS ports (X)		4		
	CDM Type		FD-CDM2		
	Density (ρ)		1		
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)		
	CSI-RS periodicity and offset		slot	10/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #9	Resource #10	
	CSI-RS resource Type		Aperiodic	Aperiodic	
	Number of CSI-RS ports (X)		8	8	
	CDM Type		CDM4 (FD2, TD2)	CDM4 (FD2, TD2)	
	Density (ρ)		1	1	
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8, (4,6)	Row 8, (4,6)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(5)	(9)	
	CSI-RS periodicity and offset		slot	Not configured	Not configured
	aperiodicTriggeringOffset			0	0
CSI-IM configuration	CSI-IM resource Type		Aperiodic		
	CSI-IM RE pattern		Pattern 0		
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)		
	CSI-IM timeConfig periodicity and offset		slot	Not configured	
ReportConfigType			Aperiodic		
CQI-table			Table 1		
reportQuantity			cri-RI-PMI-CQI		
csi-ReportMode			Mode1		
numberOfSingleTRP-CSI-Mode1			$x - 0$		
CMR pairing and grouping			CMR group #1: {NZP CSI-RS resource #9}, with $K_1 - 1$ CMR group #2: {NZP CSI-RS resource #10}, with $K_2 - 1$ CMR pairing: {NZP CSI-RS resource		

		#9, NZP CSI-RS resource #10}
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	Not configured
Aperiodic Report Slot Offset		5
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	CodebookType	type1-SinglePanel
	CodebookMode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,1)
	CodebookSubsetRestriction	0x FFFF
RI Restriction		00000001 (1 MIMO layer per TRxP)
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	6.5
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.2-8.5 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)</p> <p>Note 2: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 3: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-6)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+6)$.</p> <p>Note 4: Randomization of the principle beam direction per TRxP shall be used as specified in Annex B.2.3.2.3.</p>		

Table 6.3.2.8.3-2: Minimum requirement

Parameter	Test 1
γ	1.6

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.2.8.

6.3.2.2.8.4 Test description

6.3.2.2.8.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.8.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.8.4.3.

6.3.2.2.8.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.8.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{rnd1, rnd2}$ according to Annex G.3.3.

4. Calculate $\mathcal{Y} = \frac{t_{ue, follow1, follow2}}{t_{rnd1, rnd2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.2.8.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.

6.3.2.2.8.4.3_1 Message exceptions for SA

Table 6.3.2.2.8.4.3_1-1: CSI-MeasConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-12			
Information Element	Value/remark	Comment	Condition
CSI-MeasConfig ::= SEQUENCE {			
nzp-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNzp-Csi-Rs-Resources)) OF NZP-CSI-RS-Resource {	n entries	n=10	
Nzp-Csi-Rs-Resource[1]	Nzp-Csi-Rs-Resource for TRS (1)	entry 1 CSI-RS resource 1	
Nzp-Csi-Rs-Resource[2]	Nzp-Csi-Rs-Resource for TRS (2)	entry 2 CSI-RS resource	

		2	
NZP-CSI-RS-Resource[3]	NZP-CSI-RS-Resource for TRS (3)	entry 3 CSI-RS resource 3	
NZP-CSI-RS-Resource[4]	NZP-CSI-RS-Resource for TRS (4)	entry 4 CSI-RS resource 4	
NZP-CSI-RS-Resource[5]	NZP-CSI-RS-Resource for TRS (1) with condition SECOND_SET	entry 1 CSI-RS resource 5	
NZP-CSI-RS-Resource[6]	NZP-CSI-RS-Resource for TRS (2) with condition SECOND_SET	entry 2 CSI-RS resource 6	
NZP-CSI-RS-Resource[7]	NZP-CSI-RS-Resource for TRS (3) with condition SECOND_SET	entry 3 CSI-RS resource 7	
NZP-CSI-RS-Resource[8]	NZP-CSI-RS-Resource for TRS (4) with condition SECOND_SET	entry 4 CSI-RS resource 8	
NZP-CSI-RS-Resource[9]	NZP-CSI-RS-Resource for CSI Acquisition	entry 5 CSI-RS resource 9	
NZP-CSI-RS-Resource[10]	NZP-CSI-RS-Resource for CSI Acquisition	entry 6 CSI-RS resource 10	
}			
nzp-CSI-RS-ResourceSetToAddModList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSets)) OF NZP-CSI-RS-ResourceSet {	n entries	n=3	
NZP-CSI-RS-ResourceSet[1]	NZP-CSI-RS-ResourceSet for TRS	entry 1, Table 6.3.2.2.8.4.3_1-2	
NZP-CSI-RS-ResourceSet[2]	NZP-CSI-RS-ResourceSet for CSI Acquisition	entry 2, Table 6.3.2.2.8.4.3_1-6	
NZP-CSI-RS-ResourceSet[3]	NZP-CSI-RS-ResourceSet for TRS with condition SECOND_SET	entry 3, Table 6.3.2.2.8.4.3_1-2	
}			
csi-ResourceConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ResourceConfigurations)) OF CSI-ResourceConfig {	4 entries		
CSI-ResourceConfig[1]	CSI-ResourceConfig for TRS		
CSI-ResourceConfig[2]	CSI-ResourceConfig for CSI Acquisition		
CSI-ResourceConfig[3]	CSI-IM-ResourceConfig		
CSI-ResourceConfig[4]	CSI-ResourceConfig for TRS with condition SECOND_SET		
}			
csi-ReportConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ReportConfigurations)) OF CSI-ReportConfig {		1 entry	
CSI-ReportConfig[1]	CSI-ReportConfig	Table 6.3.2.2.8.4.3_1-14	
}			
}			

Table 6.3.2.2.8.4.3_1-1A: CSI-ResourceConfig for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-13			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
csi-ResourceConfigId	0		
	3		SECOND_S

			ET
csi-RS-ResourceSetList CHOICE {			
nzp-CSI-RS-SSB SEQUENCE {			
nzp-CSI-RS-ResourceSetList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSetsPerConfig)) OF NZP-CSI-RS-ResourceSetId {	2 entries		
NZP-CSI-RS-ResourceSetId[1]	0	entry 1	
NZP-CSI-RS-ResourceSetId[2]	2	entry 2	SECOND_S ET
}			
csi-SSB-ResourceSetList	Not present		
}			
}			
bwp-Id	BWP-Id		
resourceType	periodic		
}			

Table 6.3.2.2.8.4.3_1-2: NZP-CSI-RS-ResourceSet for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-12			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	0 2		SECOND_S ET
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	8 entries		
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource 1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource 2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource 3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource 4	
}			
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		SECOND_S ET
NZP-CSI-RS-ResourceId[1]	4	entry 1 CSI-RS resource 5	
NZP-CSI-RS-ResourceId[2]	5	entry 2 CSI-RS resource 6	
NZP-CSI-RS-ResourceId[3]	6	entry 3 CSI-RS resource 7	
NZP-CSI-RS-ResourceId[4]	7	entry 4 CSI-RS resource 8	
}			
repetition	off		
aperiodicTriggeringOffset	Not present		
trs_Info	true		
}			

Table 6.3.2.2.8.4.3_1-3: NZP-CSI-RS-Resource for TRS(Id)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-8			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	0 1 2 3 4	CSI-RS resource 1 CSI-RS resource 2 CSI-RS resource 3 CSI-RS resource 4 CSI-RS resource 5	Id=1 Id=2 Id=3 Id=4 Id=1,

			SECOND_S ET
	5	CSI-RS resource 6	Id=2, SECOND_S ET
	6	CSI-RS resource 7	Id=3, SECOND_S ET
	7	CSI-RS resource 8	Id=4, SECOND_S ET
resourceMapping	CSI-RS- ResourceMapping for TRS(Id)	Table 6.3.2.2.8.4.3_1-4	
powerControlOffset	0		
periodicityAndOffset	CSI- ResourcePeriodicityAn dOffset for TRS(Id)	Table 6.3.2.2.8.4.3_1-5	
qcl-InfoPeriodicCSI-RS	TCI-StateId 0		
}			

Table 6.3.2.2.8.4.3_1-4: CSI-RS-ResourceMapping for TRS(Id)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE { frequencyDomainAllocation CHOICE { row1	0000	k ₀ =0 for CSI-RS resource 1,2,3,4	Id=1,2,3,4
	0001	k ₀ =1 for CSI-RS resource 5,6,7,8	Id=1,2,3,4, SECOND_S ET
}			
firstOFDMSymbolInTimeDomain	6	l ₀ = 6 for CSI-RS resource 1,3,5,7	Id=1,2,3,4
	10	l ₀ = 10 for CSI-RS resource 2,4,6,8	Id=1,2,3,4, SECOND_S ET
nrofPorts	p1	1 for CSI-RS resource 1,2,3,4,5,6,7,8	Id=1,2,3,4
cdm-Type	noCDM		
density CHOICE{ three	Null		
}			
freqBand	CSI- FrequencyOccupation		
}			

Table 6.3.2.2.8.4.3_1-5: CSI-ResourcePeriodicityAndOffset for TRS(Id)

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { slots40	20	Periodicity 40 slots and offset 20 for CSI-RS resource 1,2,3,4	Id=1,2,3,4
slots40	21	Periodicity 40 slots and offset 21 for CSI-RS resource 5,6,7,8	Id=1,2,3,4, SECOND_S ET
}			

Table 6.3.2.2.8.4.3_1-6: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	1		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	2 entries		
NZP-CSI-RS-ResourceId[1]	8	entry 1 CSI-RS resource 9	
NZP-CSI-RS-ResourceId[2]	9	entry 2 CSI-RS resource 10	
}			
repetition	off		
aperiodicTriggeringOffset	0		
trs_Info	Not present		
cmrGroupingAndPairing-r17	CMRGroupingAndPairing-r17	Table 6.3.2.2.8.4.3_1-7	
}			

Table 6.3.2.2.8.4.3_1-7: CMRGroupingAndPairing-r17

Derivation Path: TS 38.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CMRGroupingAndPairing-r17 ::= SEQUENCE {			
nrofResourcesGroup1-r17	1		
pair1OfNZP-CSI-RS-r17 ::= SEQUENCE {		2 entries	
nzp-CSI-RS-ResourceId1-r17	1		
nzp-CSI-RS-ResourceId2-r17	1		
}			
pair2OfNZP-CSI-RS-r17	Not present		
}			

Table 6.3.2.2.8.4.3_1-8: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	8	CSI-RS resource 9	
	9	CSI-RS resource 10	
resourceMapping	CSI-RS-ResourceMapping for CSI Acquisition	Table 6.3.2.2.8.4.3_1-9	
powerControlOffset	0		
periodicityAndOffset	Not present		
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table 6.3.2.2.8.4.3_1-9: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100	k0 = 4, k1 = 6, row8	
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5	l ₀ = 5 for CSI-RS resource 9	
	9	l ₀ = 9 for CSI-RS resource 10	

cdm-Type	cdm4-FD2-TD2		
density CHOICE {			
one	NULL		
}			
}			

Table 6.3.2.2.8.4.3_1-10: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1..maxNrofTCI-States)) OF TCI-State {	3 entries		
TCI-State[1] SEQUENCE {		entry 1	
tci-StateId	TCI-StateId 0		
qcl-type1 SEQUENCE {	QCL Type is Type1		
Cell	not present		
Bwp-id	Not present	BWP ID	
referenceSignal	ssb: 0	SSB # 0	
Qcl-Type	Type C		
}			
}			
TCI-State[2] SEQUENCE {		entry 2	
tci-StateId	TCI-StateId 1		
qcl-type1 {	QCL Type is Type1		
Cell	Not present		
Bwp-id	0	BWP ID	
referenceSignal	csi-rs: 0	CSI-RS # 0	
Qcl-Type	Type A		
}			
}			
TCI-State[3] SEQUENCE {		entry 3	
tci-StateId	TCI-StateId 2		
qcl-type1 {	QCL Type is Type1		
Cell	Not present		
Bwp-id	0	BWP ID	
referenceSignal	csi-rs: 5	CSI-RS # 5	
Qcl-Type	Type A		
}			
}			
resourceAllocation	resourceAllocationType 1		
ZP-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNRP-CSI-RS-Resources)) OF NZP-CSI-RS-Resource {	1 entry		
ZP-CSI-RS-Resource[1]	ZP-CSI-RS-Resource	entry 1, Table 6.3.2.2.8.4.3_1-11	
}			
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet	Table 5.4.2.5-5A in TS 38.508-1 [6]	
}			

Table 6.3.2.2.8.4.3_1-11: ZP-CSI-RS-Resource

Derivation Path: TS 38.508-1 [6], Table 4.6.3-204			
Information Element	Value/remark	Comment	Condition
ZP-CSI-RS-Resource ::= SEQUENCE {			
zp-CSI-RS-ResourceId	0		
resourceMapping	CSI-RS-ResourceMapping for ZP CSI-RS	Table 6.3.2.2.8.4.3_1-12	
periodicityAndOffset	CSI-ResourcePeriodicityAn	Table 6.3.2.2.8.4.3_1-13	

	dOffset for ZP CSI-RS		
}			

Table 6.3.2.2.8.4.3_1-12: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	k0 = 4, row5	
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.2.8.4.3_1-13: CSI-ResourcePeriodicityAndOffset for ZP CSI-RS

Derivation Path: TS 38.508-1 [6], Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots10	1		
}			

Table 6.3.2.2.8.4.3_1-14: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
resourcesForChannelMeasurement	1	CSI-ResourceConfigId for CSI Acquisition	
csi-IM-ResourcesForInterference	2	CSI-ResourceConfigId for CSI-IM	
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList SEQUENCE {	2 entries		
reportSlotOffsetList[1]	5	entry 1	
reportSlotOffsetList[2]	5	entry 2	
}			
}			
}			
codebookConfig-r17	CodebookConfig-r17	Table 6.3.2.2.8.4.3_1-15	
csi-ReportMode-r17	mode1		
numberOfSingleTRP-CSI-Mode1-r17	n0		
codebookConfig-v1730 ::= SEQUENCE {			
codebookType CHOICE {			
type1 ::= SEQUENCE {			
codebookMode	1		
}			
}			
}			
}			

Table 6.3.2.2.8.4.3_1-15: CodebookConfig-r17

Derivation Path: TS 38.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CodebookConfig-r17 ::= SEQUENCE {			
codebookType CHOICE {			

type1 ::= SEQUENCE {			
type1-SinglePanel-Group1-r17 SEQUENCE {			
nrOfAntennaPorts CHOICE {			
moreThanTwo ::= SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction1-r17	0x FFFF		
}			
}			
}			
}			
type1-SinglePanel-Group2-r17 SEQUENCE {			
nrOfAntennaPorts CHOICE {			
moreThanTwo ::= SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction2-r17	0x FFFF		
}			
}			
}			
type1-SinglePanel-ri-RestrictionSTRP-r17	Not present		
type1-SinglePanel-ri-RestrictionSDM-r17	'0001'B		
}			
}			
}			
}			

Table 6.3.2.2.8.4.3_1-16: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	K1 = 2	"010"	
Antenna port(s)	DMRS port 0 and 2	"1011"	
Transmission configuration indication	Value 0 which is mapped to the first TCI codepoint with TCI state ID _{0,1} = TCI state ID#1 and TCI state ID _{0,2} = TCI state ID#2 as defined in TS 38.321 clause 6.1.3.24.	"000"	

Table 6.3.2.2.8.4.3_1-17: ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
tci-PresentInDCI	enabled		
}			

6.3.2.2.8.4.3_2 Message exceptions for NSA

Same as in clause 6.3.2.2.8.4.3_1.

6.3.2.2.8.5 Test requirement

Table 6.3.2.2.8.5-1: Test requirement (TDD)

Parameter	Test 1
γ	1.59

6.3.2.2.9 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI

Editor's Note: This test case is incomplete in following aspects:

- Applicability in 38.522 is FFS

6.3.2.2.9.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.9.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting Enhanced Type II Codebook (eType-II) based on doppler CSI.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and Enhanced Type II Codebook (eType-II) based on doppler CSI.

6.3.2.2.9.3 Minimum conformance requirements

For the parameters specified in Table 6.3.2.2.9.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.9.3-2.

Table 6.3.2.2.9.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configurations			FR1.30-1 as specified in Annex A
Propagation channel			TDLA30-20
Antenna configuration			XP Medium 16 x 2 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)
	CSI-RS interval and offset	slot	Not configured
	ZP CSI-RS trigger		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	The number of CSI-RS resources (K)		4
	Number of CSI-RS ports (X)		16 for CSI-RS resource 1,2,3,4
	CDM Type		CDM4 (FD2, TD2) for CSI-RS resource 1,2,3,4
	Density (ρ)		1 for CSI-RS resource 1,2,3,4
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12, (2, 4, 6, 8) for CSI-RS resource 1,2,3,4
First OFDM symbol in the PRB used for CSI-		(5) for CSI-RS resource 1,2,3,4	

	RS (l_0)		
	CSI-RS interval and offset	slot	Not configured for CSI-RS resource 1,2,3,4
	aperiodicTriggeringOffset		0
CSI-IM configuration	Separation between two consecutive CSI-RS resources (m)	slot	1
	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Not configured
Sub-band Size		RB	8
csi-ReportingBand			11111111111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			9
CSI request			1 in slots i , where $\text{mod}(i, 10) = 0$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell-doppler-r18
	<i>paramCombination-Doppler-r18</i>		7 ($L=4, p_v=1/2, \beta=1/2$)
	<i>R(numberOfPMI-SubbandsPerCQI-Subband-r18)</i>		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF
	RI Restriction (<i>typell-RI-Restriction-r18</i>)		0010
	Doppler/time-domain basis vector length (N_4)		1
	Doppler-/time-domain unit duration (d)	slot	1
	Prediction delay (δ)	slot	1
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7.5
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-38.1 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2

		combination, and with i_1 wideband granularity and i_2 subband granularity
Note 1:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'type1-SinglePanel' codebook configuration as specified in table 6.3.2.2.3-1.	
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation using a CSI-RS resource set in which the last CSI-RS resource is transmitted at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).	
Note 3:	Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.	

Table 6.3.2.2.9.3-2: Minimum requirement

Parameter	Test 1
γ	2.5

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.2.9.

6.3.2.2.9.4 Test description

6.3.2.2.9.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in section A.3.1.7 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.9.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.9.4.3.

6.3.2.2.9.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.9.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS

schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, followk, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.2.9.5-1, then the test is pass. Otherwise, the test is failed.

6.3.2.2.9.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.

6.3.2.2.9.4.3.1 Message exceptions for SA

Table 6.3.2.2.9.4.3.1-1: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	1		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource 1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource 2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource 3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource 4	
}			
repetition	off		
aperiodicTriggeringOffset	0		
trs-Info	Not present		
}			

Table 6.3.2.2.9.4.3.1-2: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	0	CSI-RS resource 0	
	1	CSI-RS resource 1	
	2	CSI-RS resource 2	
	3	CSI-RS resource 3	
resourceMapping	CSI-RS-ResourceMapping for CSI Acquisition	Table 6.3.2.1.8.4.3.1-3	
powerControlOffset	0		
periodicityAndOffset	Not present		
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table 6.3.2.2.9.4.3.1-3: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	011110	k0 = 2, k1 = 4, k2 = 6, k3 = 8, row12	
}			
nrofPorts	p16		
firstOFDMSymbolInTimeDomain	5	l ₀ = 5	
cdm-Type	cdm4-FD2-TD2		
density CHOICE {			
one	NULL		
}			
}			

Table 6.3.2.2.9.4.3.1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	9		
}			
}			

Table 6.3.2.2.9.4.3.1-5: Physical layer parameters for DCI format 0_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.1.2-1			
Parameter	Value	Value in binary	Condition
CSI request	1 in slots i, where mod(i, 10) = 1, otherwise it is equal to 0		

6.3.2.2.9.4.3.2 Message exceptions for NSA

Same as in clause 6.3.2.2.9.4.3.1.

6.3.2.2.9.5 Test requirement

Table 6.3.2.2.9.5-1: Test requirement

Parameter	Test 1
γ	2.49

6.3.2.2.10 2Rx TDD Single PMI with 4TX Type1-SinglePanel Codebook for eRedCap

6.3.2.2.10.1 Test Purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.2.2.10.2 Test applicability

This test applies to all types of NR eRedCap UE with 2Rx from Release 18 onwards.

6.3.2.2.10.3 Minimum Conformance Requirements

For the parameters specified in Table 6.3.2.2.10.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.2.2.10.3-2.

Table 6.3.2.2.10.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	20
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configuration			FR1.30-1 as specified in Annex A
Propagation channel			TDLA30-5
Antenna configuration			High XP 4 x 2 (N1,N2) = (2,1)
Beamforming Model			As specified in Annex B.4.1
PDSCH configuration	Resource allocation type		type 1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	Frequency Occupation	RB	0 to 23
CSI-RS periodicity and offset	slot	10/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	Frequency Occupation	RB	0 to 23
	CSI-RS periodicity and offset	slot	Not configured
aperiodicTriggeringOffset		0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	

CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1,CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1,CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		11111111
	RI Restriction		00000001
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	6
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.6 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot #n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.2.2.10.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.2.2.10.

6.3.2.2.10.4 Test Description

6.3.2.2.10.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of TS 38.521-1 [7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.8 for TE diagram and section A.3.2.3 for UE diagram.

2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.2.2.10.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, connected without release *On* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.2.10.4.3.

6.3.2.2.10.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.10.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{rnd1, rnd2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{rnd1, rnd2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.2.2.10.5-1, then the test is pass. Otherwise, the test is fail.

6.3.2.2.10.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.2.2.10.4.3.1 Message exceptions

Table 6.3.2.2.10.4.3.1-1: CSI-ResourceConfig for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.2.2.10.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.2.2.10.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.2.2.10.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.2.1.10.4.3.1-5: CSI-ResourcePeriodicityAndOffset for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.3.2.2.10.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.2.2.10.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
subbandSize	8		
}			

6.3.2.2.10.5 Test Requirements

Table 6.3.2.2.10.5-1: Test requirement (TDD)

Parameter	Test 1
γ	1.29

6.3.3 4RX requirements

6.3.3.1 FDD

6.3.3.1.1 4Rx FDD FR1 Single PMI with 4TX Type1-SinglePanel codebook for both SA and NSA

6.3.3.1.1.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.3.1.1.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.1-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.1-2.

Table 6.3.3.1.1.3-1: Test parameters (single layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High XP 4 x 4 (N1,N2) = (2,1)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS interval and offset	slot	5/1
NZP CSI-RS	CSI-RS resource		Aperiodic

for CSI acquisition	Type		
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 4,(13)
	CSI-RS interval and offset	slot	Not configured
aperiodicTriggeringOffset		0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Wideband	
Sub-band Size	RB	8	
csi-ReportingBand		1111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		4	
CSI request		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubset Restriction		11111111
RI Restriction		00000001	
Physical channel for CSI report		PUSCH	
CQI/RI/PMI delay	ms	6	
Maximum number of HARQ transmission		4	
Measurement channel		R.PDSCH.1-6.1 FDD	
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with	

	Wideband granularity
Note 1:	For random precoder selection, the precoder shall be updated in each slot (1 ms granularity).
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-3), this reported PMI cannot be applied at the eNB downlink before slot#(n+3).
Note 3:	Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.

Table 6.3.3.1.1.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.1.

6.3.3.1.1.4 Test description

6.3.3.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.1_1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.1.4.3.

6.3.3.1.1.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.2.2.1.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic

CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.2.1.1.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.3.1.1.4.3.1 Message exceptions for SA

Table 6.3.3.1.1.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.3.1.1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.3.1.1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.3.1.1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			

pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.3.3.1.1.4.3.1-5: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		
}			

Table 6.3.3.1.1.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.3.1.1.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	[11111111]		
}			
subbandSize	8		
}			

6.3.3.1.1.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.1.4.3.1.

6.3.3.1.1.5 Test requirement

Table 6.3.3.1.1.5-1: Test requirement

Parameter	Test 1
γ	1.29

6.3.3.1.2 4Rx FDD FR1 Single PMI with 8TX Type1-SinglePanel codebook for both SA and NSA

6.3.3.1.2.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.3.1.2.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.2.3-2.

Table 6.3.3.1.2.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High XP 8 x 4 (N1,N2) = (4,1)
Beamforming Model			As specified in Section Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS interval and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		8
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8,(4,6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 8,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggerin		0

	gOffset		
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Patten 0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i, where mod(i, 5) = 1, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubset Restriction		0x FFFF
RI Restriction			00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	8
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.2 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i ₁ , i ₂ combination, and with Wideband granularity
<p>Note 1: For random precoder selection, the precoder shall be updated in each slot (1 ms granularity).</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#[(n-4)], this reported PMI cannot be applied at the eNB downlink before slot#[(n+4)].</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3</p>			

Table 6.3.3.1.2.3-2: Minimum requirement

Parameter	Test 1
γ	1.5

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.2.

6.3.3.1.2.4 Test description

6.3.3.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.2.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.2.4.3.

6.3.3.1.2.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.2.5-1, then the test is pass.
Otherwise, the test is fail.

6.3.3.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.3.1.2.4.3.1 Message exceptions for SA

Table 6.3.3.1.2.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	aperiodic		
}			

Table 6.3.3.1.2.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100		
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5		
cdm-Type	cdm4-FD2-TD2		
}			

Table 6.3.3.1.2.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.3.1.2.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
}			

Table 6.3.3.1.2.4.3.1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction	FFFF		
}			
}			
}			

type1-SinglePanel-ri-Restriction	00000010		
----------------------------------	----------	--	--

Table 6.3.3.1.2.4.3.1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
}			

6.3.3.1.2.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.2.4.3.

6.3.3.1.2.5 Test requirement

Table 6.3.3.1.2.5-1: Test requirement

Parameter	Test 1
γ	1.49

6.3.3.1.3 4Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA

6.3.3.1.3.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type I single panel codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type I single panel codebook with at least 16 ports per CSI-RS resource.

6.3.3.1.3.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.3.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.3.3-2.

Table 6.3.3.1.3.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	10
Subcarrier spacing	kHz	15
Duplex Mode		FDD
Propagation channel		TDLC300-5
Antenna configuration		High XP 16 x 4

		(N1,N2) = (4,2)	
Beamforming Model		As specified in Annex B.4.1	
ZP CSI-RS configuration	CSI-RS resource Type	Periodic	
	Number of CSI-RS ports (X)	4	
	CDM Type	FD-CDM2	
	Density (ρ)	1	
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)	
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Aperiodic	
	Number of CSI-RS ports (X)	16	
	CDM Type	CDM4 (FD2, TD2)	
	Density (ρ)	1	
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)	Row 12,(2, 4, 6, 8)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 12,(5)	
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset	0	
CSI-IM configuration	CSI-IM resource Type	Aperiodic	
	CSI-IM RE pattern	Pattern 0	
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)	(4,9)	
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Subband	
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i, where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM

Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i1, i2 combination, and with i1 wideband granularity and i2 subband granularity
Note 1:		When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i1, i2 combination.	
Note 2:		If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).	
Note 3:		Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.	

Table 6.3.3.1.3.3-2: Minimum requirement

Parameter	Test 1
γ	3.0

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.3.

6.3.3.1.3.4 Test description

6.3.3.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.

2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.3.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.3.4.3.

6.3.3.1.3.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.3.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.3.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.3.1.3.4.3.1 Message exceptions for SA

Table 6.3.3.1.3.4.3.1-1: Void

Table 6.3.3.1.3.4.3.1-2: Void

Table 6.3.3.1.3.4.3.1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			
}			

Table 6.3.3.1.3.4.3.1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.3.1.3.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.3.4.3.1.

6.3.3.1.3.5 Test requirement

Table 6.3.3.1.3.5-1: Test requirement

Parameter	Test 1
γ	2.99

6.3.3.1.4 4Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA

6.3.3.1.4.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type I single panel codebook with at least 32 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type I single panel codebook with at least 32 ports per CSI-RS resource.

6.3.3.1.4.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.4.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.4.3-2.

Table 6.3.3.1.4.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			High XP 32 x 4 (N1,N2) = (4,4)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB		Row 5,(4)

	used for CSI-RS (k_0)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZIP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		32
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 17,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		Row 17,(5, 12)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
csi-ReportingBand			1111111
CSI-Report interval and offset	slot		Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,4)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF

			FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
Note 1:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.		
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).		
Note 3:	Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.		

Table 6.3.3.1.4.3-2: Minimum requirement

Parameter	Test 1
γ	7.0

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.4.

6.3.3.1.4.4 Test description

6.3.3.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.4.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.4.4.3.

6.3.3.1.4.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.4.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.4.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.3.1.4.4.3.1 Message exceptions for SA

Table 6.3.3.1.4.4.3.1-1: Void

Table 6.3.3.1.4.4.3.1-2: Void

Table 6.3.3.1.4.4.3.1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			
}			

Table 6.3.3.1.4.4.3.1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.3.1.4.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.4.4.3.1.

6.3.3.1.4.5 Test requirement

Table 6.3.3.1.4.5-1: Test requirement

Parameter	Test 1
γ	6.99

6.3.3.1.5 4Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA

6.3.3.1.5.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type II codebook with at least 16 ports per CSI-RS resource.

6.3.3.1.5.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.5.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.5.3-2.

Table 6.3.3.1.5.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			XP Medium 16 x 4 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for		Row 12,(2, 4, 6, 8)

	CSI-RS (k_0, k_1, k_2, k_3)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Subband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell
	L (<i>numberOfBeams</i>)		2
	N_{PSK} (<i>phaseAlphabetSize</i>)		8
	<i>subbandAmplitude</i>		True
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF FFFF FFFF
RI Restriction (typell-RI-Restriction)		10	
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder			

	generation shall follow 'typeI-SinglePanel' codebook configuration as specified in Table 6.3.3.1.3.3-1.
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).
Note 3:	Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.

Table 6.3.3.1.5.3-2: Minimum requirement

Parameter	Test 1
γ	1.9

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.5.

6.3.3.1.5.4 Test description

6.3.3.1.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.5.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.4.4.3.

6.3.3.1.5.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.5.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each

precoding matrix shall be selected in equal probabilities, and the random precoder generation shall follow the codebook configuration as specified in Table 6.3.3.1.5.3-1. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Measure

$t_{md1,md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{md 1, md 2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.5.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.3.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.3.1.5.4.3.1 Message exceptions for SA

Table 6.3.3.1.5.4.3.1-1: Void

Table 6.3.3.1.5.4.3.1-2: Void

Table 6.3.3.1.5.4.3.1-3: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	5		
}			
}			

Table 6.3.3.1.5.4.3.1-4: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.3.1.5.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.5.4.3.1.

6.3.3.1.5.5 Test requirement

Table 6.3.3.1.5.5-1: Test requirement

Parameter	Test 1
γ	1.89

6.3.3.1.6 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA

6.3.3.1.6.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

6.3.3.1.6.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.6.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.6.3-2.

Table 6.3.3.1.6.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-5
Antenna configuration			XP Medium 16 x 4 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0

	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Not configured
Sub-band Size		RB	4
csi-ReportingBand			111111111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			5
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell-r16
	<i>paramCombination-r16</i>		6 ($L = 4, p_v = 1/2, \beta = 1/2$)
	<i>R(numberOfPMISubbandsPerCQISubband-r16)</i>		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF FFFF FFFF
	RI Restriction (typell-RI-Restriction-r16)		0010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	9
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-6.3 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typeI-SinglePanel' codebook configuration as specified in Table 6.3.3.1.3.3-1.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-4)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+4)$.</p> <p>Note 3: Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.</p>			

Table 6.3.3.1.6.3-2: Minimum requirement

Parameter	Test 1
γ	2.2

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.3.1.6.

6.3.3.1.6.4 Test description

6.3.3.1.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.6.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.6.4.3.

6.3.3.1.6.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.6.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{rnd 1, rnd 2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.6.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.3.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.3.1.6.4.3.1 Message exceptions for SA

Table 6.3.3.1.6.4.3.1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportFreqConfiguration SEQUENCE {			
pmi-FormatIndicator	Not present		
}			
codebookConfig	Not present		
subbandSize	Value1		
codebookConfig-r16	CodebookConfig-r16		
}			

Table 6.3.3.1.6.4.3.1-2: CodebookConfig-r16 (Table 6.3.3.1.6.4.3.1-1)

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CodebookConfig-r16 ::= SEQUENCE {			
codebookType CHOICE {			
type2 SEQUENCE {			
subType CHOICE {			
type1-r16 SEQUENCE {			
N1-n2-codebookSubsetRestriction-r16			
Four-two	0x 7FF FFFF FFFF FFFF FFFF		
}			
type1-RI-Restriction-r16	0010		
}			
}			
numberOfPMI-SubbandsPerCQI-Subband-r16	1		
paramCombinatin-r16	6	(L =4, p _v =1/2, β=1/2)	
}			
}			
}			

6.3.3.1.6.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.6.4.3.1.

6.3.3.1.6.5 Test requirement

Table 6.3.3.1.6.5-1: Test requirement

Parameter	Test 1
γ	2.19

6.3.3.1.7 4Rx FDD FR1 Single PMI with 8 ports Type1-SinglePanel Codebook for Single-DCI based transmission scheme

6.3.3.1.7.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC.

6.3.3.1.7.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.7.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.7.3-2.

Table 6.3.3.1.7.3-1: Test parameters (dual-layer)

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	10 for CSI-RS resources 5 and 6 11 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			FDD	
Bandwidth		MHz	10	
Subcarrier spacing		kHz	15	
Active DL BWP index			1	
Propagation channel			TDLA30-10	
Antenna configuration per TRxP			High XP 8 x 4 (N1,N2) = (4,1)	
Beamforming Model			As specified in Annex B.4.1 (Note 4)	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #1	TCI State #2

	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation			Full-overlapping	
Timing offset of the second TRxP from the first TRxP		us	0	
Frequency offset of the second TRxP from the first TRxP		Hz	0	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding HARQ-ACK information			2	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		(9)	
	CSI-RS periodicity and offset		slot	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #9	Resource #10
	CSI-RS resource Type		Aperiodic	Aperiodic
	Number of CSI-RS ports (X)		8	8
	CDM Type		CDM4 (FD2, TD2)	CDM4 (FD2, TD2)
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		Row 8, (4,6)	Row 8, (4,6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		(5)	(9)
	CSI-RS periodicity and offset		slot	Not configured
aperiodicTriggeringOffset			0	0
CSI-IM configuration	CSI-IM resource Type		Aperiodic	
	CSI-IM RE pattern		Pattern 0	
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)	
	CSI-IM timeConfig periodicity and offset		slot	Not configured
ReportConfigType			Aperiodic	
CQI-table			Table 1	
reportQuantity			cri-RI-PMI-CQI	
csi-ReportMode			Mode1	
numberOfSingleTRP-CSI-Mode1			X = 0	
CMR pairing and grouping			CMR group #1: {NZP CSI-RS resource #9}, with K ₁ = 1 CMR group #2: {NZP CSI-RS resource #10}, with K ₂ = 1 CMR pairing: {NZP CSI-RS resource #9, NZP CSI-RS resource #10}	
timeRestrictionForChannelMeasurements			Not configured	

timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size		RB
csi-ReportingBand		8
csi-ReportingBand		1111111
CSI-Report periodicity and offset		slot
Aperiodic Report Slot Offset		Not configured
Aperiodic Report Slot Offset		5
CSI request		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	CodebookType	type1-SinglePanel
	CodebookMode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,1)
	CodebookSubsetRestriction	0x FFFF
RI Restriction		00000001 (1 MIMO layer per TRxP)
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay		ms
CQI/RI/PMI delay		8
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.1-6.4
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)		
Note 2: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination.		
Note 3: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).		
Note 4: Randomization of the principle beam direction per TRxP shall be used as specified in Annex B.2.3.2.3.		

Table 6.3.3.1.7.3-2: Minimum requirement

Parameter	Test 1
γ	1.6

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.7.

6.3.3.1.7.4 Test description

6.3.3.1.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.7.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.7.4.3.

6.3.3.1.7.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.7.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.7.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.

6.3.3.1.7.4.3.1 Message exceptions for SA

Same as in clause 6.3.2.1.7.4.3.

6.3.3.1.7.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.7.4.3.1.

6.3.3.1.7.5 Test requirement

Table 6.3.3.1.7.5-1: Test requirement

Parameter	Test 1
γ	1.59

6.3.3.1.8 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI
 Editor's Note: This test case is incomplete in following aspects:

- Applicability in 38.522 is FFS

6.3.3.1.8.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.8.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting Enhanced Type II Codebook (eType-II) based on doppler CSI.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and Enhanced Type II Codebook (eType-II) based on doppler CSI.

6.3.3.1.8.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.8.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.8.3-2.

Table 6.3.3.1.8.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	10
Subcarrier spacing		kHz	15
Duplex Mode			FDD
Propagation channel			TDLA30-20
Antenna configuration			XP Medium 16 x 4 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)
	CSI-RS interval and offset	slot	Not configured
	ZP CSI-RS trigger		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	The number of CSI-RS resources (K)		4
	Number of CSI-RS ports (X)		16 for CSI-RS resource 1,2,3,4
	CDM Type		CDM4 (FD2, TD2) for CSI-RS resource 1,2,3,4
	Density (ρ)		1 for CSI-RS resource 1,2,3,4
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12, (2, 4, 6, 8) for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(5) for CSI-RS resource 1,2,3,4
	CSI-RS	slot	Not configured for CSI-RS

	interval and offset		resource 1,2,3,4
	aperiodicTriggeringOffset		0
	Separation between two consecutive CSI-RS resources (m)	slot	2
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Not configured
Sub-band Size		RB	4
csi-ReportingBand			111111111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			10
CSI request			1 in slots i , where $\text{mod}(i, 10) = 0$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		typell-doppler-r18
	$paramCombination-Doppler-r18$		7 ($L=4, p_v=1/2, \beta=1/2$)
	$R(\text{numberOfPMI-SubbandsPerCQI-Subband-r18})$		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF
	RI Restriction ($typell-RI-Restriction-r18$)		0010
	Doppler/time-domain basis vector length (N_4)		1
	Doppler-/time-domain unit duration (d)	slot	1
	Prediction delay (δ)	slot	1
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	15
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.1-24.1 FDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of

		each applicable i_1 , i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
Note 1:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1 , i_2 combination. The random precoder generation shall follow 'type1-SinglePanel' codebook configuration as specified in table 6.3.3.1.3-1.	
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation using a CSI-RS resource set in which the last CSI-RS resource is transmitted at a downlink slot not later than slot#(n-4), this reported PMI cannot be applied at the gNB downlink before slot#(n+4).	
Note 3:	Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.	

Table 6.3.3.1.8.3-2: Minimum requirement

Parameter	Test 1
γ	1.8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.8.

6.3.3.1.8.4 Test description

6.3.3.1.8.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in section A.3.1.7 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.8.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.8.4.3.

6.3.3.1.8.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.8.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS

schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CQI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.3.1.8.5-1, then the test is pass. Otherwise, the test is failed.

6.3.3.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.

6.3.3.1.8.4.3.1 Message exceptions for SA

Table 6.3.3.1.8.4.3.1-1: NZP-CSI-RS-ResourceSet for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-18			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp_CSI_ResourceSetId	1		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	4 entries		
NZP-CSI-RS-ResourceId[1]	0	entry 1 CSI-RS resource 1	
NZP-CSI-RS-ResourceId[2]	1	entry 2 CSI-RS resource 2	
NZP-CSI-RS-ResourceId[3]	2	entry 3 CSI-RS resource 3	
NZP-CSI-RS-ResourceId[4]	3	entry 4 CSI-RS resource 4	
}			
repetition	off		
aperiodicTriggeringOffset	0		
trs-Info	Not present		
}			

Table 6.3.3.1.8.4.3.1-2: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	0	CSI-RS resource 0	
	1	CSI-RS resource 1	
	2	CSI-RS resource 2	
	3	CSI-RS resource 3	
resourceMapping	CSI-RS-ResourceMapping for CSI Acquisition	Table 6.3.2.1.8.4.3.1-3	
powerControlOffset	0		
periodicityAndOffset	Not present		
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table 6.3.3.1.8.4.3.1-3: CSI-RS-ResourceMapping for CSI Acquisition

Derivation Path: TS 38.508-1 [6], Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	011110	k0 = 2, k1 = 4, k2 = 6, k3 = 8, row12	
}			
nrofPorts	p16		
firstOFDMSymbolInTimeDomain	5	l ₀ = 5	
cdm-Type	cdm4-FD2-TD2		
density CHOICE {			
one	NULL		
}			
}			

Table 6.3.3.1.8.4.3.1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	10		
}			
}			
subbandSize	value1		
}			

Table 6.3.3.1.8.4.3.1-5: Physical layer parameters for DCI format 0_1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.1.2-1			
Parameter	Value	Value in binary	Condition
CSI request	1 in slots i, where mod(i, 10) = 1, otherwise it is equal to 0		

6.3.3.1.8.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.8.4.3.1.

6.3.3.1.8.5 Test requirement

Table 6.3.3.1.8.5-1: Test requirement

Parameter	Test 1
γ	1.79

6.3.3.1.9 4Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA

6.3.3.1.9.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.1.9.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting eType-II codebook with refinement for multi-TRP CJT.

This test also applies to all types of EUTRA UE release 18 and forward supporting EN-DC and eType-II codebook with refinement for multi-TRP CJT.

6.3.3.1.9.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.1.9.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.1.9.3-2.

Table 6.3.3.1.9.3-1: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	
	Density		3	
	CSI-RS periodicity	Slots	20	
	CSI-RS offset	Slots	10 for CSI-RS resources 1 and 2 11 for CSI-RS resources 3 and 4	
QCL info			TCI state #0	
Duplex mode			FDD	
Bandwidth		MHz	10	
Subcarrier spacing		kHz	15	
Active DL BWP index			1	
Propagation channel			TDLA30-10	
Antenna configuration per TRxP			High XP 8 x 4 (N1,N2) = (4,1)	
Beamforming Model			As specified in Annex B.4.1 (Note 4)	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
VRB-to-PRB mapping type		Non-interleaved		
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000,1001	
	TCI state		TCI State #1	
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	N/A	
		QCL Type	N/A	
Resource allocation			Full-overlapping	
Timing offset of the second TRxP from the first TRxP		us	0	
Frequency offset of the second TRxP from the first TRxP		Hz	0	
Number of HARQ Processes			4	
The number of slots between PDSCH and corresponding			2	

HARQ-ACK information			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)
CSI-RS periodicity and offset	slot		5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #5 Resource #6
	CSI-RS resource Type		Aperiodic Aperiodic
	Number of CSI-RS ports (X)		8 8
	CDM Type		CDM4 (FD2, TD2) CDM4 (FD2, TD2)
	Density (ρ)		1 1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8, (4,6) Row 8, (4,6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(5) (9)
	CSI-RS periodicity and offset	slot	Not configured Not configured
aperiodicTriggeringOffset		0 0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
csi-ReportMode		Mode2	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Not Configured	
Sub-band Size	RB	8	
csi-ReportingBand		1111111	
CSI-Report periodicity and offset	slot	Not configured	
Aperiodic Report Slot Offset		7	
CSI request		1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	CodebookType		Type1-CJT-r18
	CodebookMode		Mode 2
	(CodebookConfig-N1, CodebookConfig-N2)		(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubsetRestriction		0x FFFF
	paramCombination-CJT-L-r18		7 ({4, 4})
	paramCombination-CJT-r18		4 ($\rho_v=1/4$ and $1/8$, $\beta=1/2$)
RI Restriction		0000010	
Physical channel for CSI report		PUSCH	
CQI/RI/PMI delay	ms	14	
Maximum number of HARQ transmission		4	
Measurement channel		R.PDSCH.1-6.3	
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type 1, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband	

		granularity and i2 subband granularity
Note 1:	PDSCH transmission is done from both TRxPs, where both TRxPs will send the same PDSCH data	
Note 2:	When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (1 ms granularity) with equal probability of each applicable i_1, i_2 combination. For each TRP, use random type I SP PMI precoding independently.	
Note 3:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-7), this reported PMI cannot be applied at the gNB downlink before slot#(n+7).	
Note 4:	Randomization of the dual-cluster beam directions shall be used as specified in AnnexB.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.	

Table 6.3.3.1.9.3-2: Minimum requirement

Parameter	Test 1
γ	1.8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.1.9.

6.3.3.1.9.4 Test description

6.3.3.1.9.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in section A.3.1.7 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.1.9.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.1.9.4.3.

6.3.3.1.9.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.1.9.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.

3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in Table 6.3.3.1.9.5-1, then the test is pass. Otherwise, the test is failed.

6.3.3.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.

6.3.3.1.9.4.3.1 Message exceptions for SA

Same as in clause 6.3.2.1.9.4.3.1.

6.3.3.1.9.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.1.9.4.3.1.

6.3.3.1.9.5 Test requirement

Table 6.3.3.1.9.5-1: Test requirement

Parameter	Test 1
γ	1.79

6.3.3.2 TDD

6.3.3.2.1 4Rx TDD FR1 Single PMI with 4TX Type1-SinglePanel codebook for both SA and NSA

6.3.3.2.1.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.3.2.1.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.1.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.1.3-2.

Table 6.3.3.2.1.3-1: Test parameters (single layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configuration		FR1.30-1 as specified in Annex

		A
Propagation channel		TDLA30-5
Antenna configuration		High XP 4 x 4 (N1,N2) = (2,1)
Beamforming Model		As specified in Section Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)
	CSI-RS interval and offset	slot
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Aperiodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 4,(0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 4,(13)
	CSI-RS interval and offset	
	aperiodicTriggeringOffset	0
CSI-IM configuration	CSI-IM resource Type	Aperiodic
	CSI-IM RE pattern	Patten 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})	(4,9)
	CSI-IM timeConfig interval and offset	slot
ReportConfigType		Aperiodic
CQI-table		Table 1
reportQuantity		cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	16
csi-ReportingBand		1111111
CSI-Report interval and offset	slot	Not configured
Aperiodic Report Slot Offset		8
CSI request		1 in slots i, where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report

		Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(2,1)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,1)
	CodebookSubset Restriction	11111111
	RI Restriction	00000001
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay		ms 5.5
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.2-8.1 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: For random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity).</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#[(n-4)], this reported PMI cannot be applied at the eNB downlink before slot#[(n+4)].</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3</p>		

Table 6.3.3.2.1.3-2: Minimum requirement

Parameter	Test 1
γ	1.3

6.3.3.2.1.4 Test description

6.3.3.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.2.1.3-1 and as appropriate.

3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On for SA or (EN-DC, DC bearer MCG and SCG, Connected without Release On) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.2.1.4.3.

6.3.3.2.1.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.1.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.1.1.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.3.2.1.4.3.1 Message exceptions for SA

Table 6.3.3.2.1.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.3.2.1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row4	001		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.3.3.2.1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
Row5	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.3.2.1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			

Table 6.3.3.2.1.4.3.1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
two-one-Type1-SinglePanel-Restriction	11111111		
}			
}			
}			
type1-SinglePanel-ri-Restriction	00000001		

Table 6.3.3.2.1.4.3.1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	0		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	[11111111]		
}			
}			
subbandSize	value2		
}			

6.3.3.2.1.4.3.2 Message exception for NSA

Same as in 6.3.3.2.1.4.3.1.

6.3.3.2.1.5 Test requirement

Table 6.3.3.2.1.5-1: Test requirement

Parameter	Test 1
-----------	--------

γ	1.29
----------	------

6.3.3.2.2 4Rx TDD FR1 Single PMI with 8TX Typel-SinglePanel codebook for both SA and NSA

6.3.3.2.2.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.3.3.2.2.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.2.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.2.3-2.

Table 6.3.3.2.2.3-1: Test parameters (dual-layer)

Parameter		Unit	Test 1
Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configurations			FR1.30-1 as specified in Annex A
Propagation channel			TDLA30-5
Antenna configuration			High XP 8 x 4 (N1,N2) = (4,1)
Beamforming Model			As specified in Section Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS interval and offset	slot	10/1
NRP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		8
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8,(4,6)
	First OFDM symbol in the PRB used for CSI-RS		Row 8,(5)

	(lo)		
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Patten 0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		16
csi-ReportingBand			1111111
CSI-Report interval and offset	slot		Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i, where mod(i, 10) = 1, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		(4,1)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,1)
	CodebookSubset Restriction		0x FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		6.5
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.2 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i ₁ , i ₂ combination, and with Wideband granularity
Note 1:	For random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity).		
Note 2:	If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#[(n-6)], this reported PMI cannot be applied at the eNB downlink before slot#[(n+6)].		
Note 3:	Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3		

Table 6.3.3.2.2.3-2: Minimum requirement

Parameter	Test 1
γ	1.5

6.3.3.2.2.4 Test description

6.3.3.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.1-2 and Table 6.3.3.2.2.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.2.2.4.3.

6.3.3.2.2.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.2.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{rnd 1, rnd 2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.2.2.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.3.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

6.3.3.2.2.4.3.1 Message contents for SA

Table 6.3.3.2.2.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		
}			

Table 6.3.3.2.2.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-15			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001100		
}			
nrofPorts	p8		
firstOFDMSymbolInTimeDomain	5		
cdm-Type	cdm4-FD2-TD2		
}			

Table 6.3.3.2.2.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.0-21			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.3.3.2.2.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
}			

Table 6.3.3.2.2.4.3.1-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			

moreThanTwo SEQUENCE {			
n1-n2 CHOICE {			
four-one-Type1-SinglePanel-Restriction	FFFF		
}			
}			
type1-SinglePanel-ri-Restriction	00000010		

Table 6.3.3.2.2.4.3.1-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	8		
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
}			

6.3.3.2.2.4.3.2 Message contents for NSA

Same as in clause 6.3.3.2.2.4.3.1.

6.3.3.2.2.5 Test requirement

Table 6.3.3.2.2.5-1: Test requirement

Parameter	Test 1
γ	1.49

6.3.3.2.3 4Rx TDD FR1 Multiple PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA

6.3.3.2.3.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and Type I single panel codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports and Type I single panel codebook with at least 16 ports per CSI-RS resource.

6.3.3.2.3.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.3.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.3.3-2.

Table 6.3.3.2.3.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
-----------	------	--------

Bandwidth		MHz	40
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD DL-UL configurations			FR1.30-1 as specified in Annex A
Propagation channel			TDLC300-5
Antenna configuration			High XP 16 x 4 (N1,N2) = (4,2)
Beamforming Model			As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Subband	
Sub-band Size	RB	16	
csi-ReportingBand		1111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i, where $\text{mod}(i, 10) =$	

		1, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)	(4,4)
	CodebookSubset Restriction	0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
RI Restriction	00000010	
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	7
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>		

Table 6.3.3.2.3-2: Minimum requirement

Parameter	Test 1
γ	3.0

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.3.2.3.

6.3.3.2.3.4 Test description

6.3.3.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.1-2 and Table 6.3.3.2.3.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.2.3.4.3.

6.3.3.2.3.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.3.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.2.3.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.3.2.3.4.3.1 Message contents for SA

Table 6.3.3.2.3.4.3.1-1: Void

Table 6.3.3.2.3.4.3.1-2: Void

Table 6.3.3.2.3.4.3.1-3: Void

Table 6.3.3.2.3.4.3.1-4: Void

Table 6.3.3.2.3.4.3.1-5: Void

Table 6.3.3.2.3.4.3.1-6: Void

Table 6.3.3.2.3.4.3_1-7: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.3.2.3.4.3.2 Message contents for NSA

Same as in clause 6.3.3.2.3.4.3.1.

6.3.3.2.3.5 Test requirement

Table 6.3.3.2.3.5-1: Test requirement

Parameter	Test 1
γ	2.99

6.3.3.2.4 4Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA

6.3.3.2.4.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports and Type I single panel codebook with at least 32 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports and Type I single panel codebook with at least 32 ports per CSI-RS resource.

6.3.3.2.4.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.4.3-1 and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.4.3-2.

Table 6.3.3.2.4.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configurations		FR1.30-1 as specified in Annex A
Propagation channel		TDLA30-5
Antenna configuration		High XP 32 x 4 (N1,N2) = (4,4)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1

	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
N郑 CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		32
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)		Row 17,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		Row 17,(5, 12)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggerin gOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannnelMeasur ements			Not configured
timeRestrictionForInterferenceMeas urements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	16
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to N郑 CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1,CodebookConfig-N2)		(4,4)
	(CodebookConfig-O1,CodebookCon fig-O2)		(4,4)

	CodebookSubset Restriction		0x FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF FFFF
	RI Restriction		00000010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>			

Table 6.3.3.2.4.3-2: Minimum requirement

Parameter	Test 1
γ	7.0

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.3.2.4.

6.3.3.2.4.4 Test description

6.3.3.2.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 4.3.1.1.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.1-2 and Table 6.3.3.2.4.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.2.4.4.3.

6.3.3.2.4.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.4.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.2.4.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.3.2.4.4.3.1 Message contents for SA

Table 6.3.3.2.4.4.3.1-1: Void

Table 6.3.3.2.4.4.3.1-2: Void

Table 6.3.3.2.4.4.3.1-3: Void

Table 6.3.3.2.4.4.3.1-4: Void

Table 6.3.3.2.4.4.3.1-5: Void

Table 6.3.3.2.4.4.3.1-6: Void

Table 6.3.3.2.4.4.3_1-7: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.3.2.4.4.3.2 Message contents for NSA

Same as in clause 6.3.3.2.4.4.3.1.

6.3.3.2.4.5 Test requirement

Table 6.3.3.2.4.5-1: Test requirement

Parameter	Test 1
γ	6.99

6.3.3.2.5 4Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA

6.3.3.2.5.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and Type II codebook with at least 16 ports per CSI-RS resource.

6.3.3.2.5.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.5.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.5.3-2.

Table 6.3.3.2.5.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configurations		FR1.30-1 as specified in Annex A
Propagation channel		TDLA30-5
Antenna configuration		XP Medium 16 x 4 (N1,N2) = (4,2)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS ports (X)	4
	CDM Type	FD-CDM2
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 5,(9)
	CSI-RS periodicity and offset	slot
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	Aperiodic
	Number of CSI-RS ports (X)	16
	CDM Type	CDM4 (FD2, TD2)
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1, k_2, k_3)	Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)	Row 12,(5)

	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Subband
Sub-band Size		RB	16
csi-ReportingBand			1111111
CSI-Report interval and offset		slot	Not configured
Aperiodic Report Slot Offset			8
CSI request			1 in slots i , where $\text{mod}(i, 10) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1
	L (<i>numberOfBeams</i>)		2
	N_{PSK} (<i>phaseAlphabetSize</i>)		8
	<i>subbandAmplitude</i>		True
	(CodebookConfig-N1, CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1, CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF FFFF FFFF FFFF FFFF
	RI Restriction (type1-RI-Restriction)		10
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typeI-SinglePanel' codebook configuration as specified in Table 6.3.3.2.3.3-1.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-6)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+6)$.</p>			

Note 3: Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.

Table 6.3.3.2.5.3-2: Minimum requirement

Parameter	Test 1
γ	1.8

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.2.5.

6.3.3.2.5.4 Test description

6.3.3.2.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.2.5.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.2.1.4.4.3.

6.3.3.2.5.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.5.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities, and the random precoder generation shall follow the codebook configuration as specified in Table 6.3.3.2.5.3-1. The SS sends downlink MAC padding bits on the DL

RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1,md2}$ according to Annex G.3.3.

4. Calculate $\gamma = \frac{t_{ue, follow 1, follow 2}}{t_{md 1, md 2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.2.5.5-1, then the test is pass.

Otherwise, the test is fail.

6.3.3.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6 and 5.4.2.

6.3.3.2.5.4.3.1 Message exceptions for SA

Table 6.3.3.2.5.4.3.1-1: Void

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	'011110'B		
}			
nrofPorts	P16		
firstOFDMSymbolInTimeDomain	5		
cdm-Type	cdm4-FD2-TD2		
}			

Table 6.3.3.2.5.4.3.1-2: Void

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-14			
Information Element	Value/remark	Comment	Condition
CodebookConfig ::= SEQUENCE {			
codebookType CHOICE {			
type2 SEQUENCE {			
subType CHOICE {			
typeII SEQUENCE {			
n1-n2-codebookSubsetRestriction CHOICE {			
four-two	0x 7FF FFFF FFFF FFFF FFFF		
}			
typeII-RI-Restriction	'10'B		
}			
}			
}			
phaseAlphabetSize	8		
subbandAmplitude	TRUE		
numberOfBeams	2		
}			
}			

Table 6.3.3.2.5.4.3.1-3: Void

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	8		
}			
reportFreqConfiguration SEQUENCE {			
pmi-FormatIndicator	subbandPMI		

}			
}			

Table 6.3.3.2.5.4.3.1-1: PDSCH-Config

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-18			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
aperiodic-ZP-CSI-RS-ResourceSetsToAddModList	Not present		
p-ZP-CSI-RS-ResourceSet	p-ZP-CSI-RS-ResourceSet		
}			

6.3.3.2.5.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.2.5.4.3.1.

6.3.3.2.5.5 Test requirement

Table 6.3.3.2.5.5-1: Test requirement

Parameter	Test 1
γ	1.79

6.3.3.2.6 4Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for both SA and NSA

6.3.3.2.6.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Enhanced Type II codebook with at least 16 ports per CSI-RS resource.

6.3.3.2.6.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.6.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.6.3-2.

Table 6.3.3.2.6.3-1: Test parameters (dual-layer)

Parameter	Unit	Test 1
Bandwidth	MHz	40
Subcarrier spacing	kHz	30
Duplex Mode		TDD
TDD DL-UL configurations		FR1.30-1 as specified in Annex A
Propagation channel		TDLA30-5
Antenna configuration		XP Medium 16 x 4 (N1,N2) = (4,2)
Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	Periodic
	Number of CSI-RS	4

n	ports (X)		
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZIP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		16
	CDM Type		CDM4 (FD2, TD2)
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁ , k ₂ , k ₃)		Row 12,(2, 4, 6, 8)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 12,(5)
	CSI-RS interval and offset	slot	Not configured
	aperiodicTriggeringOffset		0
CSI-IM configuration n	CSI-IM resource Type		Aperiodic
	CSI-IM RE pattern		Pattern 0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)
	CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		Aperiodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	
cqi-FormatIndicator		Wideband	
pmi-FormatIndicator		Not configured	
Sub-band Size	RB	8	
csi-ReportingBand		11111111111111	
CSI-Report interval and offset	slot	Not configured	
Aperiodic Report Slot Offset		8	
CSI request		1 in slots i, where mod(i, 10) = 1, otherwise it is equal to 0	
reportTriggerSize		1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration n	Codebook Type		typell-r16
	paramCombination-r16		6 (L =4, p _v =1/2, β=1/2)
	R(numberOfPMISubbandsPerCQISubband-r16)		1
	(CodebookConfig-N1,CodebookConfig-N2)		(4,2)
	(CodebookConfig-O1,CodebookConfig-O2)		(4,4)
	CodebookSubsetRestriction		0x 7FF

	ction		FFFF FFFF FFFF FFFF
	RI Restriction (typell-RI-Restriction-r16)		0010
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	7
Maximum number of HARQ transmission			4
Measurement channel			R.PDSCH.2-8.3 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with i_1 wideband granularity and i_2 subband granularity
<p>Note 1: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination. The random precoder generation shall follow 'typeI-SinglePanel' codebook configuration as specified in Table 6.3.3.2.3.3-1.</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).</p> <p>Note 3: Randomization of the dual-cluster beam directions shall be used as specified in Annex B.2.3.2.3A. The value of relative power ratio (p) shall be fixed as 1 during the test.</p>			

Table 6.3.3.2.6.3-2: Minimum requirement

Parameter	Test 1
γ	2.2

The normative reference for this requirement is TS 38.101-4 [5], clause 6.3.3.2.6.

6.3.3.2.6.4 Test description

6.3.3.2.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.10 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.3.3.2.6.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.2.6.4.3.

6.3.3.2.6.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.6.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 32 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-6 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.2.6.5-1, then the test is pass. Otherwise, the test is fail.

6.3.3.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2.

6.3.3.2.6.4.3.1 Message exceptions for SA

Table 6.3.3.2.6.4.3.1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 5.4.2.5, Table 5.4.2.5-13			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportFreqConfiguration SEQUENCE {			
pmi-FormatIndicator	Not present		
}			
codebookConfig	Not present		
subbandSize	Value1		
codebookConfig-r16	CodebookConfig-r16		
}			

Table 6.3.3.2.6.4.3.1-2: Void

6.3.3.2.6.4.3.2 Message exceptions for NSA

Same as in clause 6.3.3.2.6.4.3.1.

6.3.3.2.6.5 Test requirement

Table 6.3.3.2.6.5-1: Test requirement

Parameter	Test 1
-----------	--------

γ	2.19
----------	------

6.3.3.2.7 4Rx TDD FR1 Single PMI with 8 ports Type1-SinglePanel Codebook for Single-DCI based transmission scheme

6.3.3.2.7.1 Test purpose

To test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

6.3.3.2.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward.

This test also applies to all types of EUTRA UE release 17 and forward supporting EN-DC.

6.3.3.2.7.3 Minimum conformance requirements

For the parameters specified in Table 6.3.3.2.7.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.3.3.2.7.3-2.

Table 6.3.3.2.7.3-1: Test parameters (dual-layer)

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
Transmit TRxP of SSB			TRxP #1	
PDCCH configuration	TCI state		TCI State #1	
	CORESETPoolIndex		0	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	40	
	CSI-RS offset	Slots	20 for CSI-RS resources 1 and 2 21 for CSI-RS resources 3 and 4	20 for CSI-RS resources 5 and 6 21 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	
Duplex mode			TDD	
Bandwidth		MHz	40	
Subcarrier spacing		kHz	30	
TDD DL-UL configurations			FR1.30-1 as specified in Annex A	
Active DL BWP index			1	
Propagation channel			TDLA30-10	
Antenna configuration per TRxP			High XP 8 x 4 (N1,N2) = (4,1)	
Beamforming Model			As specified in Annex B.4.1 (Note 4)	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	

	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #1	TCI State #2
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
TCI State #2	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	N/A
		QCL Type	N/A	N/A
Resource allocation			Full-overlapping	
Timing offset of the second TRxP from the first TRxP		us	0	
Frequency offset of the second TRxP from the first TRxP		Hz	0	
Number of HARQ Processes			8	
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)	
	CSI-RS periodicity and offset	slot	10/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #9	Resource #10
	CSI-RS resource Type		Aperiodic	Aperiodic
	Number of CSI-RS ports (X)		8	8
	CDM Type		CDM4 (FD2, TD2)	CDM4 (FD2, TD2)
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 8, (4,6)	Row 8, (4,6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(5)	(9)
	CSI-RS periodicity and offset	slot	Not configured	Not configured
	aperiodicTriggeringOffset		0	0
CSI-IM configuration	CSI-IM resource Type		Aperiodic	
	CSI-IM RE pattern		Pattern 0	
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)	
	CSI-IM timeConfig periodicity and offset	slot	Not configured	
ReportConfigType			Aperiodic	
CQI-table			Table 1	
reportQuantity			cri-RI-PMI-CQI	
csi-ReportMode			Mode1	
numberOfSingleTRP-CSI-Mode1			$X - 0$	
CMR pairing and grouping			CMR group #1: {NZP CSI-RS resource #9}, with $K_1 = 1$ CMR group #2: {NZP CSI-RS resource #10}, with $K_2 = 1$	

		CMR paring: {N郑 CSI-RS resource #9, N郑 CSI-RS resource #10}
timeRestrictionForChannelMeasurements		Not configured
timeRestrictionForInterferenceMeasurements		Not configured
cqi-FormatIndicator		Wideband
pmi-FormatIndicator		Wideband
Sub-band Size	RB	8
csi-ReportingBand		1111111
CSI-Report periodicity and offset	slot	Not configured
Aperiodic Report Slot Offset		5
CSI request		1 in slots i, where mod(i, 10) = 1, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to N郑 CSI-RS and CSI-IM
Codebook configuration	CodebookType	type1-SinglePanel
	CodebookMode	1
	(CodebookConfig-N1, CodebookConfig-N2)	(4, 1)
	(CodebookConfig-O1, CodebookConfig-O2)	(4, 1)
	CodebookSubsetRestriction	0x FFFF
RI Restriction		00000001 (1 MIMO layer per TRxP)
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	6.5
Maximum number of HARQ transmission		4
Measurement channel		R.PDSCH.2-8.5 TDD
PDSCH & PDSCH DMRS Precoding configuration for random Precoding		Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity
<p>Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)</p> <p>Note 2: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.5 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 3: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#(n-6), this reported PMI cannot be applied at the gNB downlink before slot#(n+6).</p> <p>Note 4: Randomization of the principle beam direction per TRxP shall be used as specified in Annex B.2.3.2.3.</p>		

Table 6.3.3.2.7.3-2: Minimum requirement

Parameter	Test 1
□	1.6

The normative reference for this requirement is TS 38.101-4 [5] clause 6.3.3.2.7.

6.3.3.2.7.4 Test description

6.3.3.2.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.2.1-2 and Table 6.3.3.2.7.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On*) for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 6.3.3.2.7.4.3.

6.3.3.2.7.4.2 Test procedure

1. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 6.3.3.2.7.3-1 as appropriate.
2. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish $t_{ue, follow1, follow2}$ and $SNR_{follow1, follow2}$ according to Annex G.3.2.
3. Set SNR to $SNR_{follow1, follow2}$. The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-5 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure $t_{md1, md2}$ according to Annex G.3.3.
4. Calculate $\gamma = \frac{t_{ue, follow1, follow2}}{t_{md1, md2}}$. If the ratio $\geq \gamma$ which is specified in table 6.3.3.2.7.5-1, then the test is pass.
Otherwise, the test is fail.

6.3.3.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.

6.3.3.2.7.4.3.1 Message contents for SA

Same as 6.3.2.2.8.4.3.1.

6.3.3.2.7.4.3.2 Message contents for NSA

Same as in clause 6.3.3.2.7.4.3.1.

6.3.3.2.7.5 Test requirement

Table 6.3.3.2.7.5-1: Test requirement

Parameter	Test 1
-----------	--------

γ	1.59
----------	------

6.4 Reporting of Rank Indicator (RI)

6.4.1 1RX requirements (Void)

6.4.2 2RX requirements

6.4.2.1 FDD

6.4.2.1_1 2Rx FDD FR1 RI reporting for both SA and NSA

6.4.2.1_1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

6.4.2.1_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.4.2.1_1.3 Minimum Conformance Requirements

The minimum performance requirement in Table 6.4.2.1_1.3-2 is defined as:

- a) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$;
- b) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 2 shall be $\geq \gamma_2$;

For the parameters specified in Table 6.4.2.1_1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.4.2.1_1.3-2.

Table 6.4.2.1_1.3-1: RI Test (FDD)

Parameter		Unit	Test 1	Test 2	Test 3
Bandwidth		MHz	10	10	10
Subcarrier spacing		kHz	15	15	15
Duplex Mode			FDD	FDD	FDD
SNR		dB	0	20	20
Propagation channel			TDLA30-5	TDLA30-5	TDLA30-5
Antenna configuration			ULA Low 2x2	ULA Low 2x2	ULA High 2x2
Beamforming Model			As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		4	4	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	Row (5,4)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)	Row 5,(9)	Row 5,(9)
	CSI-RS periodicity and offset	slot	5/1	5/1	5/1
NZP CSI-	CSI-RS resource Type		Periodic	Periodic	Periodic

RS for CSI acquisition	Number of CSI-RS ports (X)		2	2	2
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)	Row 3,(6)	Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)	Row 3,(13)	Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1	5/1	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic	Periodic
	CSI-IM RE pattern		Pattern 0	Pattern 0	Pattern 0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)	(4,9)	(4,9)
	CSI-IM timeConfig periodicity and offset	slot	5/1	5/1	5/1
ReportConfigType		Periodic	Periodic	Periodic	
CQI-table		Table 2	Table 2	Table 2	
reportQuantity		cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		not configured	not configured	not configured	
timeRestrictionForInterferenceMeasurements		not configured	not configured	not configured	
cqi-FormatIndicator		Wideband	Wideband	Wideband	
pmi-FormatIndicator		Wideband	Wideband	Wideband	
Sub-band Size	RB	8	8	8	
csi-ReportingBand		1111111	1111111	1111111	
CSI-Report periodicity and offset	slot	5/0	5/0	5/0	
Codebook configuration	Codebook Type		typel-SinglePanel	typel-SinglePanel	typel-SinglePanel
	Codebook Mode		1	1	1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A	N/A	N/A
	CodebookSubsetRestriction		010000 for fixed rank 2, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank
	RI Restriction		N/A	N/A	N/A
Physical channel for CSI report		PUCCH	PUCCH	PUCCH	
CQI/RI/PMI delay	ms	8	8	8	
Maximum number of HARQ transmission		1	1	1	
RI Configuration		Fixed RI = 2 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 1 and follow RI	
Note 1: Measurements channels are specified in Table A.4-2. TBS.2-1 is used for Rank 1 case. TBS.2-2 is used for Rank 2 case.					

Table 6.4.2.1_1.3-2: Minimum requirement (FDD)

	Test 1	Test 2	Test 3
γ_1	N/A	1.05	0.9
γ_2	1.0	N/A	N/A

The normative reference for this requirement is TS 38.101-4 [2] clause 6.4.2.1.

6.4.2.1_1.4 Test Description

6.4.2.1_1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state. The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex D.

Test Environment: Normal as defined in TS 38.508 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.4.2.1_1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On* and Test Mode ON for SA or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On* and Test Mode ON for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.4.2.1_1.4.3.

6.4.2.1_1.4.2 Test procedure

1. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 6.4.2.1_1.3-1 as appropriate.
2. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 6.4.2.1_1.3-1. The SS sends downlink MAC padding bits on the DL RMC. Measure the t_{fix} according to Annex G.3. 3.
3. Propagation conditions are set according to Annex B.2.
4. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 6.4.2.1_1.3-1.
5. The UE shall transmit RRC Connection Reconfiguration Complete message.
6. Propagation conditions are set according to Table 6.4.2.1_1.3-1.
7. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reporte}$ according to Annex G.3.3.

If the ratio ($t_{reporte} / t_{fix}$) satisfies the requirement in Table 6.4.2.1_1.5-1, then pass the UE for this test and go to step 8. Otherwise, declare a FAIL verdict.
8. If all tests have not been done, then repeat the same procedure (steps 1 to 7) with test conditions according to the Table 6. 4.2. 1_1.3-2 for the other Tests as appropriate. Otherwise, declare a PASS verdict.

6.4.2.1_1.4.3 Message Contents

6.4.2.1_1.4.3.1 Message exceptions for SA

Table 6.4.2.1_1.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	periodic		

}		
---	--	--

Table 6.4.2.1_1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000	row3, k0=6	
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.4.2.1_1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	row5, k0=4	
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.4.2.1_1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.4.2.1_1.4.3.1-5: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		
}			

Table 6.4.2.1_1.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	010000	Fixed rank 2	
	000011	Fixed rank 1	
	010011	Following rank	
}			
}			

type1-SinglePanel-ri-Restriction	11111111	Non restriction	
----------------------------------	----------	-----------------	--

Table 6.4.2.1_1.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig CHOICE {	slots5		
slots5	0		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
}			

6.4.2.1_1.4.3.2 Message exceptions for NSA

Same as in clause 6.4.2.1_1.4.3.1.

6.4.2.1_1.5 Test Requirements

Table 6.4.2.1_1.5-1: Test Requirement (FDD)

	Test 1	Test 2	Test 3
γ_1	N/A	1.04	0.89
γ_2	0.99	N/A	N/A

6.4.2.1.1 2Rx FDD FR1 RI reporting for RedCap

6.4.2.1.1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

6.4.2.1.1.2 Test applicability

This test applies to all types of NR/5GC UE release 17 and forward supporting RedCap.

6.4.2.1.1.3 Minimum Conformance Requirements

The minimum performance requirement in Table 6.4.2.1.1.3-2 is defined as the ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$.

For the parameters specified in Table 6.4.2.1.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.4.2.1.1.3-2.

Table 6.4.2.1.1.3-1: RI Test (FDD)

Parameter	Unit	Test 1
Bandwidth	MHz	10
Subcarrier spacing	kHz	15
Duplex Mode		FDD
SNR	dB	20

Propagation channel			TDLA30-5
Antenna configuration			ULA Low 2x2
Beamforming Model			As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (p)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/5
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (p)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l ₀)		Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/5
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k _{CSI-IM} ,l _{CSI-IM})		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	10/5
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			not configured
timeRestrictionForInterferenceMeasurements			not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size		RB	8
csi-ReportingBand			1111111
CSI-Report periodicity and offset		slot	10/9
Codebook configuration	Codebook Type		type1- SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1,CodebookConfig-N2)		N/A
	CodebookSubsetRestriction		000011 for fixed rank 1, 010011 for following rank
RI Restriction			N/A
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay		ms	10
Maximum number of HARQ transmission			1
RI Configuration			Fixed RI = 1 and follow RI
Note 1: Measurement channels are specified in Table A.4-1. TBS.1-3 is used for Rank 1 case. TBS.1-4 is used for Rank 2 case.			

Table 6.4.2.1.1.3-2: Minimum requirement (FDD)

	Test 1
η	1.05

The normative reference for this requirement is TS 38.101-4 [2] clause 6.4.2.1.1.

6.4.2.1.1.4 Test Description

6.4.2.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state. The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex D.

Test Environment: Normal as defined in TS 38.508 [6] clause 4.1.

Frequencies to be tested: Mid Range as defined in TS 38.508 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.4.2.1.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.4.2.1.1.4.3.

6.4.2.1.1.4.2 Test procedure

1. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 6.4.2.1.1.3-1 as appropriate.
2. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 6.4.2.1.1.3-1. The SS sends downlink MAC padding bits on the DL RMC. Measure the t_{fix} according to Annex G.3. 3.
3. Propagation conditions are set according to Annex B.2.
4. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 6.4.2.1.1.3-1.
5. The UE shall transmit RRC Connection Reconfiguration Complete message.
6. Propagation conditions are set according to Table 6.4.2.1.1.3-1.
7. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reporte}$ according to Annex G.3.3.

If the ratio ($t_{reporte} / t_{fix}$) satisfies the requirement in Table 6.4.2.1.1.5-1, then pass the UE. Otherwise, declare a FAIL verdict.

6.4.2.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 6.4.2.1.1.4.3-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	periodic		
}			

Table 6.4.2.1.1.4.3-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000	row3, k0=6	
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.4.2.1.1.4.3-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	row5, k0=4	
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.4.2.1.1.4.3-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.4.2.1.1.4.3-5: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	5		
}			

Table 6.4.2.1.1.4.3-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
}			

twoTX-CodebookSubsetRestriction	000011	Fixed rank 1	
	010011	Following rank	
}			
}			
}			
type1-SinglePanel-ri-Restriction	11111111	Non restriction	

Table 6.4.2.1.1.4.3-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig CHOICE {	slots10		
slots10	9		
}			
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
cqi-Table	table1		
}			

6.4.2.1.1.5 Test Requirements

Table 6.4.2.1.1.5-1: Test Requirement (FDD)

	Test 1
γ_1	1.04

6.4.2.2 TDD

6.4.2.2_1 2Rx TDD FR1 RI reporting for both SA and NSA

6.4.2.2_1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

6.4.2.2_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

6.4.2.2_1.3 Minimum Conformance Requirements

The minimum performance requirement in Table 6.4.2.2_1.3-2 is defined as:

- a) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$;
- b) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 2 shall be $\geq \gamma_2$;

For the parameters specified in Table 6.4.2.2_1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.4.2.2_1.3-2.

Table 6.4.2.2_1.3-1: RI Test (TDD)

Parameter		Unit	Test 1	Test 2	Test 3
Bandwidth		MHz	40	40	40
Subcarrier spacing		kHz	30	30	30
Duplex Mode			TDD	TDD	TDD
TDD Slot Configuration			FR1.30-1	FR1.30-1	FR1.30-1
SNR		dB	0	20	20
Propagation channel			TDLA30-5	TDLA30-5	TDLA30-5
Antenna configuration			ULA Low 2x2	ULA Low 2x2	ULA High 2x2
Beamforming Model			As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		4	4	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)	Row 5,(4)	Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)	Row 5,(9)	Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1	10/1	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		2	2	2
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)	Row 3,(6)	Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)	Row 3,(13)	Row 3,(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1	10/1	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic	Periodic
	CSI-IM RE pattern		Pattern 0	Pattern 0	Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)	(4,9)	(4,9)
	CSI-IM timeConfig periodicity and offset	slot	10/1	10/1	10/1
ReportConfigType			Periodic	Periodic	Periodic
CQI-table			Table 2	Table 2	Table 2
reportQuantity			cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			not configured	not configured	not configured
timeRestrictionForInterferenceMeasurements			not configured	not configured	not configured
cqi-FormatIndicator			Wideband	Wideband	Wideband
pmi-FormatIndicator			Wideband	Wideband	Wideband
Sub-band Size		RB	16	16	16
csi-ReportingBand			1111111	1111111	1111111
CSI-Report periodicity and offset		slot	10/9	10/9	10/9
Codebook configuration	Codebook Type		type1-SinglePanel	type1-SinglePanel	type1-SinglePanel
	Codebook Mode		1	1	1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A	N/A	N/A
	CodebookSubsetRestriction		010000 for fixed rank 2, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank
	RI Restriction		N/A	N/A	N/A

Physical channel for CSI report		PUCCH	PUCCH	PUCCH
CQI/RI/PMI delay	ms	9.5	9.5	9.5
Maximum number of HARQ transmission		1	1	1
RI Configuration		Fixed RI = 2 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 1 and follow RI
Note 1:	Measurements channels are specified in Table A.4-2. TBS.2-3 is used for Rank 1 case. TBS.2-4 is used for Rank 2 case.			

Table 6.4.2.2_1.3-2: Minimum requirement (TDD)

	Test 1	Test 2	Test 3
γ_1	N/A	1.05	0.9
γ_2	1.0	N/A	N/A

The normative reference for this requirement is TS 38.101-4 [2] clause 6.4.2.2.

6.4.2.2_1.4 Test Description

6.4.2.2_1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state. The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex D.

Test Environment: Normal as defined in TS 38.508 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.4.2.2_1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On* and Test Mode ON for SA or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On* and Test Mode ON for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.4.2.2_1.4.3.

6.4.2.2_1.4.2 Test procedure

1. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 6.4.2.2_1.3-1 as appropriate.
2. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 6.4.2.2_1.3-1. The SS sends downlink MAC padding bits on the DL RMC. Measure the t_{fix} according to Annex G.3. 3.
3. Propagation conditions are set according to Annex B.2.

4. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 6.4.2.2_1.3-1.
5. The UE shall transmit RRC Connection Reconfiguration Complete message.
6. Propagation conditions are set according to Table 6.4.2.2_1.3-1.
7. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reported}$ according to Annex G.3.3.
If the ratio ($t_{reported} / t_{fix}$) satisfies the requirement in Table 6.4.2.2_1.5-1, then pass the UE for this test and go to step 8. Otherwise, declare a FAIL verdict.
8. If all tests have not been done, then repeat the same procedure (steps 1 to 7) with test conditions according to the Table 6.4.2.2_1.3-2 for the other Tests as appropriate. Otherwise, declare a PASS verdict.

6.4.2.2_1.4.3 Message Contents

6.4.2.2_1.4.3.1 Message Contents for SA

Table 6.4.2.2_1.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	periodic		
}			

Table 6.4.2.2_1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000	row3, k0=6	
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.4.2.2_1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	row5, k0=4	
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.4.2.2_1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		

}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.4.2.2_1.4.3.1-5: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.2-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.4.2.2_1.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	010000	Fixed rank 2	
	000011	Fixed rank 1	
	010011	Following rank	
}			
}			
type1-SinglePanel-ri-Restriction	11111111	Non restriction	

Table 6.4.2.2_1.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig CHOICE {	slots10		
slots10	9		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
}			

6.4.2.2_1.4.3.2 Message exceptions for NSA

Same as in clause 6.4.2.1.2.1.4.3_1.

6.4.2.2_1.5 Test Requirements

Table 6.4.2.2_1.5-1: Test Requirement (TDD)

	Test 1	Test 2	Test 3
γ ₁	N/A	1.04	0.89
γ ₂	0.99	N/A	N/A

6.4.2.2.1 2Rx TDD FR1 RI reporting for RedCap

6.4.2.2.1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

6.4.2.2.1.2 Test applicability

This test applies to all types of NR/5GC UE release 17 and forward supporting RedCap.

6.4.2.2.1.3 Minimum Conformance Requirements

The minimum performance requirement in Table 6.4.2.2.1.3-2 is defined as the ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$.

For the parameters specified in Table 6.4.2.2.1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.4.2.2.1.3-2.

Table 6.4.2.2.1.3-1: RI Test (TDD)

Parameter		Unit	Test 1
Bandwidth		MHz	20
Subcarrier spacing		kHz	30
Duplex Mode			TDD
TDD Slot Configuration			FR1.30-1
SNR		dB	20
Propagation channel			TDLA30-5
Antenna configuration			ULA Low 2x2
Beamforming Model			As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5,(4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 5,(9)
	CSI-RS periodicity and offset	slot	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3,(6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		Row 3,(13)
NZP CSI-RS-timeConfig periodicity and offset	slot	10/1	
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		0
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(4,9)
	CSI-IM timeConfig periodicity and offset	slot	10/1
ReportConfigType		Periodic	
CQI-table		Table 1	
reportQuantity		cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		not configured	
timeRestrictionForInterferenceMeasurements		not configured	
cqi-FormatIndicator		Wideband	

pmi-FormatIndicator		Wideband
Sub-band Size		RB 8
csi-ReportingBand		1111111
CSI-Report periodicity and offset		slot 10/9
Codebook configuration	Codebook Type	type1-SinglePanel
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	N/A
	CodebookSubsetRestriction	000011 for fixed rank 1, 010011 for following rank
RI Restriction		N/A
Physical channel for CSI report		PUCCH
CQI/RI/PMI delay		ms 9.5
Maximum number of HARQ transmission		1
RI Configuration		Fixed RI = 1 and follow RI
Note 1: Measurement channels are specified in Table A.4-1. TBS.1-5 is used for Rank 1 case. TBS.1-6 is used for Rank 2 case.		

Table 6.4.2.2.1.3-2: Minimum requirement (TDD)

	Test 1
γ	1.05

The normative reference for this requirement is TS 38.101-4 [2] clause 6.4.2.2.1.

6.4.2.2.1.4 Test Description

6.4.2.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state. The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex D.

Test Environment: Normal as defined in TS 38.508 [6] clause 4.1.

Frequencies to be tested: Mid Range as defined in TS 38.508 [6] clause 5.2.2.

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram and section A.3.2.3 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.4.2.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without Release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.4.2.2.1.4.3.

6.4.2.2.1.4.2 Test procedure

1. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 6.4.2.2.1.3-1 as appropriate.
2. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 6.4.2.2.1.3-1. The SS sends downlink MAC padding bits on the DL RMC. Measure the t_{fix} according to Annex G.3. 3.
3. Propagation conditions are set according to Annex B.2.
4. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 6.4.2.2.1.3-1.
5. The UE shall transmit RRC Connection Reconfiguration Complete message.
6. Propagation conditions are set according to Table 6.4.2.2.1.3-1.
7. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reporte}$ according to Annex G.3.3.

If the ratio ($t_{reporte} / t_{fix}$) satisfies the requirement in Table 6.4.2.2.1.5-1, then pass the UE. Otherwise, declare a FAIL verdict.

6.4.2.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

Table 6.4.2.2.1.4.3-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	periodic		
}			

Table 6.4.2.2.1.4.3-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000	row3, k0=6	
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.4.2.2.1.4.3-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	row5, k0=4	
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.4.2.2.1.4.3-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.4.2.2.1.4.3-5: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots10	1		
}			

Table 6.4.2.2.1.4.3-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	000011	Fixed rank 1	
	010011	Following rank	
}			
}			
type1-SinglePanel-ri-Restriction	11111111	Non restriction	

Table 6.4.2.2.1.4.3-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig CHOICE {	slots10		
slots10	9		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
cqi-Table	table1		
}			

6.4.2.2.1.5 Test Requirements

Table 6.4.2.2.1.5-1: Test Requirement (FDD)

	Test 1
<i>n</i>	1.04

6.4.3 4RX requirements

6.4.3.1 FDD

6.4.3.1_1 4Rx FDD FR1 RI reporting for both SA and NSA

6.4.3.1_1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

6.4.3.1_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

6.4.3.1_1.3 Minimum Conformance Requirements

The minimum performance requirement in Table 6.4.3.1_1.3-2 is defined as

- The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$;
- The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 2 shall be $\geq \gamma_2$;

For the parameters specified in Table 6.4.3.1_1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.4.3.1_1.3-2.

Table 6.4.3.1_1.3-1: RI Test (FDD)

Parameter		Unit	Test 1	Test 2	Test 3	Test 4
Bandwidth		MHz	10	10	10	10
Subcarrier spacing		kHz	15	15	15	15
Duplex Mode			FDD	FDD	FDD	FDD
SNR		dB	-2	16	16	22
Propagation channel			TDLA30-5	TDLA30-5	TDLA30-5	TDLA30-5
Antenna configuration			ULA Low 2x4	ULA Low 2x4	ULA High 2x4	ULA Low 4x4
Beamforming Model			As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		4	4	4	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)	Row 5, (4)	Row 5, (4)	Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)	(9)	(9)	(9)
	CSI-RS periodicity and offset	slot	5/1	5/1	5/1	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		2	2	2	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3 (6)	Row 3 (6)	Row 3 (6)	Row 4 (0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(13)	(13)	(13)	(13)

	NZP CSI-RS-timeConfig periodicity and offset	slot	5/1	5/1	5/1	5/1
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic	Periodic	Periodic
	CSI-IM RE pattern		Pattern 0	Pattern 0	Pattern 0	Pattern 0
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(4,9)	(4,9)	(4,9)	(4,9)
	CSI-IM timeConfig periodicity and offset	slot	5/1	5/1	5/1	5/1
ReportConfigType			Periodic	Periodic	Periodic	Periodic
CQI-table			Table 2	Table 2	Table 2	Table 2
reportQuantity			cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			not configured	not configured	not configured	not configured
timeRestrictionForInterferenceMeasurements			not configured	not configured	not configured	not configured
cqi-FormatIndicator			Wideband	Wideband	Wideband	Wideband
pmi-FormatIndicator			Wideband	Wideband	Wideband	Wideband
Sub-band Size	RB		8	8	8	8
csi-ReportingBand			1111111	1111111	1111111	1111111
CSI-Report periodicity and offset	slot		5/0	5/0	5/0	5/0
Codebook configuration	Codebook Type		typel-SinglePanel	typel-SinglePanel	typel-SinglePanel	typel-SinglePanel
	Codebook Mode (CodebookConfig-N1, CodebookConfig-N2)		1	1	1	1
	CodebookSubsetRestriction		N/A	N/A	N/A	(2,1)
	RI Restriction		010000 for fixed rank 2, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	11111111
			N/A	N/A	N/A	00000010 for fixed Rank 2 and 00001111 for follow RI
Physical channel for CSI report			PUCCH	PUCCH	PUCCH	PUCCH
CQI/RI/PMI delay	ms		8	8	8	8
Maximum number of HARQ transmission			1	1	1	1
RI Configuration			Fixed RI = 2 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 2 and follow RI
Note 1: Measurements channels are specified in Table A.4-2 and Table A.4-3. TBS.2-1 is used for Rank 1 case. TBS.2-2 is used for Rank 2 case. TBS.3-1 is used for Rank 3 case. TBS.3-2 is used for Rank 4 case.						

Table 6.4.3.1_1.3-2: Minimum requirement (FDD)

	Test 1	Test 2	Test 3	Test 4
<i>r</i> ₁	N/A	1.05	0.9	N/A
<i>r</i> ₂	0.9	N/A	N/A	0.9

The normative reference for this requirement is TS 38.101-4 [2] clause 6.4.3.1.

6.4.3.1_1.4 Test Description

6.4.3.1_1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal as defined in TS 38.508 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.4 or A.3.1.7.5 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1, Table 6.4.3.1_1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On* and Test Mode ON for SA or (EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On* for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.4.3.1_1.4.3.

6.4.3.1_1.4.2 Test procedure

1. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 6.4.3.1_1.3-1 as appropriate.
2. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 6.4.3.1_1.3-1. The SS sends downlink MAC padding bits on the DL RMC. Measure the t_{fix} according to Annex G.3. 3.
3. Propagation conditions are set according to Annex B.2. 4
4. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 6.4.3.1_1.3-1.
5. The UE shall transmit RRC Connection Reconfiguration Complete message.
6. Propagation conditions are set according to Table 6.4.3.1_1.3-1.
7. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reporte}$ according to Annex G.3.3.

If the ratio ($t_{reporte} / t_{fix}$) satisfies the requirement in Table 6.4.3.1_1.5-1, then pass the UE for this test and go to step 8. Otherwise, declare a FAIL verdict.
8. If all tests have not been done, then repeat the same procedure (steps 1 to 7) with test conditions according to the Table 6.4.3.1_1.3-2 for the other Tests as appropriate. Otherwise, declare a PASS verdict.

6.4.3.1_1.4.3 Message Contents

6.4.3.1_1.4.3.1 Message exceptions for SA

Table 6.4.3.1_1.4.3.1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	periodic		
}			

Table 6.4.3.1_1.4.3.1-2: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000	row3, ko=6 for test 1,2,3	
row 4	001	row4, ko=0 for test 4	
}			
nrofPorts	p2	Test 1,2,3	
	p4	Test 4	
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.4.3.1_1.4.3.1-3: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100	row5, ko=4	
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.4.3.1_1.4.3.1-4: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.4.3.1_1.4.3.1-5: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
Slots5	1		
}			

Table 6.4.3.1_1.4.3.1-6: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-CodebookSubsetRestriction	010000	Fixed rank 2	
	000011	Fixed rank 1	
	010011	Following rank for test 1,2,3	
	11111111	Test 4	

}			
}			
}			
type1-SinglePanel-ri-Restriction	11111111	Non restriction for test 1,2,3	
	00000010	For fixed Rank2 for test 4	
	00001111	For follow RI for test 4	

Table 6.4.3.1_1.4.3.1-7: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig CHOICE {	slots5		
slots5	0		
}			
pucch-CSI-ResourceList	8	PUCCH format Id=8	
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	1111111		
}			
}			
}			

6.4.3.1_1.4.3.2 Message exceptions for NSA

Same as in clause 6.4.3.1_1.4.3.1.

6.4.3.1_1.5 Test Requirements

Table 6.4.3.1_1.5-1: Minimum requirement (FDD)

	Test 1	Test 2	Test 3	Test 4
γ_1	N/A	1.04	0.89	N/A
γ_2	0.89	N/A	N/A	0.89

6.4.3.2 TDD

6.4.3.2_1 4Rx TDD FR1 RI reporting for both SA and NSA

6.4.3.2_1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

6.4.3.2_1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 4 Rx antenna ports.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and 4 Rx antenna ports.

6.4.3.2_1.3 Minimum Conformance Requirements

The minimum performance requirement in Table 6.4.3.2_1.3-2 is defined as

- a) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$;
- b) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 2 shall be $\geq \gamma_2$;

For the parameters specified in Table 6.4.3.2_1.3-1, and using the downlink physical channels specified in Annex C.3.1, the minimum requirements are specified in Table 6.4.3.2_1.3-2.

Table 6.4.3.2_1.3-1: RI Test (TDD)

Parameter		Unit	Test 1	Test 2	Test 3	Test 4
Bandwidth		MHz	40	40	40	40
Subcarrier spacing		kHz	30	30	30	30
Duplex Mode			TDD	TDD	TDD	TDD
TDD Slot Configuration			FR1.30-1	FR1.30-1	FR1.30-1	FR1.30-1
SNR		dB	-2	16	16	22
Propagation channel			TDLA30-5	TDLA30-5	TDLA30-5	TDLA30-5
Antenna configuration			ULA Low 2x4	ULA Low 2x4	ULA High 2x4	ULA Low 4x4
Beamforming Model			As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		4	4	4	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (4)	Row 5, (4)	Row 5, (4)	Row 5, (4)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(9)	(9)	(9)	(9)
	CSI-RS periodicity and offset	slot	10/1	10/1	10/1	10/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic	Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		2	2	2	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3 (6)	Row 3 (6)	Row 3 (6)	Row 4 (0)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(13)	(13)	(13)	(13)
	NZP CSI-RS-timeConfig periodicity and offset	slot	10/1	10/1	10/1	10/1
CSI-IM configuration	CSI-IM resource Type		Periodic	Periodic	Periodic	Periodic
	CSI-IM RE pattern		Pattern 0	Pattern 0	Pattern 0	Pattern 0
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(4,9)	(4,9)	(4,9)	(4,9)
	CSI-IM timeConfig periodicity and offset	slot	10/1	10/1	10/1	10/1
ReportConfigType		Periodic	Periodic	Periodic	Periodic	
CQI-table		Table 2	Table 2	Table 2	Table 2	
reportQuantity		cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		not configured	not configured	not configured	not configured	
timeRestrictionForInterferenceMeasurements		not configured	not configured	not configured	not configured	
cqi-FormatIndicator		Wideband	Wideband	Wideband	Wideband	
pmi-FormatIndicator		Wideband	Wideband	Wideband	Wideband	
Sub-band Size	RB	16	16	16	16	
csi-ReportingBand		1111111	1111111	1111111	1111111	
CSI-Report periodicity and offset	slot	10/9	10/9	10/9	10/9	
Codebook configuration	Codebook Type		type1-SinglePanel	type1-SinglePanel	type1-SinglePanel	type1-SinglePanel

	Codebook Mode		1	1	1	1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A	N/A	N/A	(2,1)
	CodebookSubsetRestriction		010000 for fixed rank 2, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	11111111
	RI Restriction		N/A	N/A	N/A	00000010 for fixed Rank 2 and 00001111 for follow RI
Physical channel for CSI report			PUCCH	PUCCH	PUCCH	PUCCH
CQI/RI/PMI delay		ms	9.5	9.5	9.5	9.5
Maximum number of HARQ transmission			1	1	1	1
RI Configuration			Fixed RI = 2 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 2 and follow RI
Note 1: Measurements channels are specified in Table A.4-2 and Table A.4-3. TBS.2-3 is used for Rank 1 case. TBS.2-4 is used for Rank 2 case. TBS.3-3 is used for Rank 3 case. TBS.3-4 is used for Rank 4 case.						

Table 6.4.3.2_1.3-2: Minimum requirement (TDD)

	Test 1	Test 2	Test 3	Test 4
r_1	N/A	1.05	0.9	N/A
r_2	0.9	N/A	N/A	0.9

The normative reference for this requirement is TS 38.101-4 [2] clause 6.4.3.2.

6.4.3.2_1.4 Test Description

6.4.3.2_1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1[7].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7 for TE diagram and section A.3.2.5 for UE diagram.
2. The parameter settings for the cell are set up according to Table 6.1.2-1 and Table 6.4.3.2_1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, *Connected without release On* and Test Mode ON for SA or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On* and Test Mode ON for NSA according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 6.4.3.2_1.4.3.

6.4.3.2_1.4.2 Test procedure

1. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 6.4.3.2_1.3-1 as appropriate.
2. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 6.4.3.2_1.3-1. The SS sends downlink MAC padding bits on the DL RMC. Measure the t_{fix} according to Annex G.3.3.
3. Propagation conditions are set according to Annex B.2.
4. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 6.4.3.2_1.3-1.
5. The UE shall transmit RRC Connection Reconfiguration Complete message.
6. Propagation conditions are set according to Table 6.4.3.2_1.3-1.
7. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reported}$ according to Annex G.3.3.

If the ratio ($t_{reported} / t_{fix}$) satisfies the requirement in Table 6.4.3.2_1.5-1, then pass the UE for this test and go to step 8. Otherwise, declare a FAIL verdict.

8. If all tests have not been done, then repeat the same procedure (steps 1 to 7) with test conditions according to the Table 6.4.3.2_1.3-2 for the other Tests as appropriate. Otherwise, declare a PASS verdict.

6.4.3.2_1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] clause 4.6 with the following exceptions:

Table 6.4.3.2_1.4.3-1: CSI-RS-ResourceMapping for NZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	001000		Test1, 2, 3
row4	001		Test4
}			
nrofPorts	p2		Test1, 2, 3
	p4		Test4
firstOFDMSymbolInTimeDomain	13		
}			

Table 6.4.3.2_1.4.3-2: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
other	000100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	9		
}			

Table 6.4.3.2_1.4.3-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
--	--	--	--

Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern			
pattern0 SEQUENCE {			
subcarrierLocation-p0	s4		
symbolLocation-p0	9		
}			
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		

Table 6.4.3.2_1.4.3-4: CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset CHOICE {			
slots10	1		
}			

Table 6.4.3.2_1.4.3-5: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE {			
two SEQUENCE {			
twoTX-CodebookSubsetRestriction	010000		Fixed rank 2
	000011		Fixed rank 1
	010011		Following rank
}			
}			
type1-SinglePanel-ri-Restriction	11111111		

Table 6.4.3.2_1.4.3-6: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig CHOICE {	slot10		
slot10	9		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands7	11111111		
}			
}			
}			

6.4.3.2_1.5 Test Requirements

Table 6.4.3.2_1.5-1: Test Requirement (TDD)

	Test 1	Test 2	Test 3	Test 4
1	N/A	1.04	0.89	N/A
2	0.89	N/A	N/A	0.89

7 Demodulation performance requirements (Radiated requirements)

7.1 General

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

7.1.1 Applicability of requirements

7.1.1.1 General

The minimum performance requirements are applicable to the FR2 operating bands defined in TS 38.101-2 [3] with F_{DL_high} not exceeding 40000 MHz.

The minimum performance requirements in Clause 7 are mandatory for UE supporting NR operation, except test cases listed in Clause 7.1.1.3, 7.1.1.4.

7.1.1.2 Applicability of requirements for different number of RX antenna ports

UE shall support 2 RX ports for different RF operating bands. The UE requirements applicability is defined in Table 7.1.1.2-1.

Table 7.1.1.2-1: Requirements applicability

Supported RX antenna ports	Test type	Test list
UE supports 2RX antenna ports	PDSCH	All tests in Clause 7.2.2 All tests in Clause 7.6.2
	PDCCH	All tests in Clause 7.3.2
	PBCH	All tests in Clause 7.4.2

7.1.1.3 Applicability of requirements for optional UE features

The performance requirements in Table 7.1.1.3-1 shall apply for UEs which support optional UE features only.

Table 7.1.1.3-1: Requirements applicability for optional UE features

UE feature/capability [14]	Test type		Test list	Applicability notes
SU-MIMO Interference Mitigation advanced receiver	FR2 TDD	PDSCH	Clause 7.2.2.2.1 (Test 3-1)	
Basic DL NR-NR CA operation (<i>supportedBandCombinationList</i>)	NR CA	SDR	Clause 7.5A.1	1)Up to 16 DL carriers 2)Same numerology across carrier for data/control channel at a given time
PDSCH repetitions over multiple slots (<i>pdsch-RepetitionMultiSlots</i>)	FR2 TDD	PDSCH	Clause 7.2.2.2.2	
Alternative 64QAM MCS table for PDSCH New 64QAM MCS table for PDSCH (<i>dl-64QAM-MCS-TableAlt</i>)	FR2 TDD	PDSCH	Clause 7.2.2.2.2	
256QAM for PDSCH (<i>pdsch-256QAM-FR2</i>)	FR2 TDD	PDSCH	Clause 7.2.2.2.1 (Test 1-4)	
256QAM for PDSCH (<i>pdsch-256QAM-FR2</i>)	FR2 TDD	SDR	Clause 7.5A.1	For UE capable of <i>pdsch-256QAM-FR2</i> for certain band(s), <i>mcs-Table</i> is configured to '64QAM' for SDR test.

Support simultaneous reception with different QCL Type-D RSs (simultaneousReceptionDiffTypeD-r16)	FR2 TDD	PDSCH	Clause 7.2.2.2.5 Clause 7.2.2.2.6 Clause 7.2.2.2.7	
Single DCI based SDM transmission for simultaneous reception support (singleDCI-SDM-scheme-r16)	FR2 TDD	PDSCH	Clause 7.2.2.2.7	
Multi DCI based simultaneous reception non-overlapping support (multiDCI-MultiTRP-r16)	FR2 TDD	PDSCH	Clause 7.2.2.2.5	
Multi DCI based simultaneous reception fully-overlapping support (overlapPDSCHsFullyFreqTime-r16)	FR2 TDD	PDSCH	Clause 7.2.2.2.6	
Support of 2-port DL PTRS (supportTwoPortDL-PTRS-r16)	FR2 TDD	PDSCH	Clause 7.2.2.2.7 Test 1-2	

7.1.1.4 Applicability of requirements for mandatory UE features with capability signaling

The performance requirements in Table 7.1.1.4-1 shall apply for UEs which support mandatory UE features with capability signalling only.

Table 7.1.1.4-1: Requirements applicability for mandatory features with UE capability signalling

UE feature/capability [14]	Test type		Test list	Applicability notes
Supported maximum number of PDSCH MIMO layers (<i>maxNumberMIMO-LayersPDSCH</i>)	FR2 TDD	PDSCH	Clause 7.2.2.2.1 (Tests from 2-1 to 2-6)	The requirements apply only in case the PDSCH MIMO rank in the test case does not exceed UE PDSCH MIMO layers capability
Support of PT-RS with one antenna port for DL reception (<i>onePortsPTRS</i>)	FR2 TDD	PDSCH	Clause 7.2	
		SDR	Clause 7.5.1 Clause 7.5A.1	
PCell operation on FR2 (<i>pCell-FR2</i>)	FR2 TDD	SDR	Clause 7.5A.1	
PDSCH mapping type B (<i>pdsch-MappingTypeB</i>)	FR2 TDD	PDSCH	Clause 7.2.2.2.3	
Support for maximum number of TRS resource sets per CC which the UE can track simultaneously (<i>maxSimultaneousResourceSetsPerCC</i>)	FR2 TDD	PDSCH	Clause 7.2.2.2.5 Clause 7.2.2.2.6 Clause 7.2.2.2.7	The requirements apply only when $\text{maxSimultaneousResourceSetsPerCC} \geq 2$

7.1.1.5 Applicability of CA requirements

7.1.1.5.1 Definition of CA capability

The definition with respect to CA capabilities is given as in Table 7.1.1.5.1-1.

Table 7.1.1.5.1-1: Definition of CA capability

CA Capability	CA Capability Description
CA_C	Intra-band contiguous CA
CA_N	Intra-band non-contiguous CA
CA_AX	Inter-band CA (X bands)
NOTE 1: CA_C corresponds to NR CA configurations and bandwidth combination sets defined in Section 5.5A.1 of TS 38.101-2 [3]. CA_N corresponds to NR CA configurations and bandwidth combination sets defined in Section 5.5A.2 of TS 38.101-2 [3]. CA_AX corresponds to NR CA configurations and bandwidth combination sets defined in Clause 5.5A.3 of TS 38.101-2 [3].	

7.1.1.5.2 Applicability and test rules for different CA configurations and bandwidth combination sets

The performance requirement for CA UE demodulation tests in Clause 7.2A are defined independent of CA configurations and bandwidth combination sets specified in Section 5.5A of TS 38.101-2 [3]. For UEs supporting different CA configurations and bandwidth combination sets, the applicability and test rules are defined in Table 7.1.1.5.2-1 and Table 7.1.1.5.2-2. For simplicity, CA configuration below refers to combination of CA configuration and bandwidth combination set.

Table 7.1.1.5.2-1: Applicability and test rules for CA UE demodulation tests

Tests	CA capability where the tests apply	CA configuration from the selected CA capability where the tests apply	CA Bandwidth combination to be tested in priority order	PCell CC configuration
Test 1 in Section 7.2A.2.1	CA_C, CA_N, CA_AX	Table 7.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs

Table 7.1.1.5.2-2: Selection of CA configurations

CA capability	Step 1	Step 2	Step 3
CA_C or CA_N or CA_AX	Select CA configuration(s), which contain all CA bandwidth combinations requiring SNR below test equipment maximum achievable SNR	Select the CA configurations with the maximum number of CCs, for which the supported maximum number of MIMO layers is not lower than 2, among all the selected CA configurations from Step 1.	Select any one of CA configurations, which contain CA bandwidth combination with the largest aggregated channel bandwidth and supported maximum data rate is not lower than the tested data rate, among all the selected CA configurations from Step 2.
NOTE 1: Maximum supported data rate for Step 3 is calculated based clause 4.1.2 of TS 38.306 [14] NOTE 2: Tested data rate for Step 3 is calculated based on the equation $DataRate = 10^{-3} \sum_{i=1}^N TBS_i 2^{M_i}$ and FRCs used in the test.			

7.1.1.6 FFS

7.1.1.7 Applicability of requirements for RedCap

The performance requirements in Table 7.1.1.7-1 shall apply for UEs which support optional feature *supportOfRedCap*.

Table 7.1.1.7-1: Requirements applicability for RedCap

UE capability	Test type		Test list	Applicability notes
RedCap with 2RX	FR2 TDD	PDSCH	Clause 7.2.2.2.1 (Tests 1-1, 2-2, and 2-6)	
		PDCCH	Clause 7.3.2.2.1 (Test 1-2)	

		Clause 7.3.2.2.2 (Test 2-1)
	PBCH	Clause 7.4.2.2 (Table 7.4.2.2-2 Tests 1 and 2) Clause 7.4.2.2 (Table 7.4.2.2-3 Tests 1 and 2)
	SDR	Clause 7.5.2

7.1.1.9

7.1.1.9 Applicability of different requirements with simultaneous reception

The applicability rules for different requirements with simultaneous reception transmission schemes in section 7 are specified in Table 7.1.1.9-1.

Table 7.1.1.9-1: Applicability of different requirements with simultaneous reception

If UE has passed		UE can skip			Applicability notes	
Test type	Test list	Test type	Test list	Test list		
FR2 TDD	PDSCH	Clause 7.2.2.2.7 (Test 1-1)	FR2 TDD	PDSCH	Clause 7.2.2.2.7 (Test 1-2)	If UE supports one PTRS port per TRxP configuration, UE is not tested for one PTRS port across TRxPs;

7.1.1_1 Applicability of test requirements due to maximum achievable SNR

Table 7.1.1_1-1, Table 7.1.1_1.1-1a, Table 7.1.1_1-1b and Table 7.1.1_1.1-1c specify the current assumption of maximum testable SNR_{BB} for indirect farfield (IFF), PC3 and PC1, Max device size ≤ 30 cm under fading conditions.

Table 7.1.1_1-1: PC3 maximum testable SNR_{BB} under fading conditions for modulations up to 64 QAM

Operating Band / Frequency	Maximum testable SNR _{BB} (dB)		
	CHBW 50 MHz	CHBW 100 MHz	CHBW 200 MHz
n257 mid	30.6	27.5	24.4
n258 mid	30.6	27.5	24.4
n259 mid	20.4	17.2	14.1
n260 mid	24.4	21.2	18.2
n261 mid	30.6	27.5	24.4

Table 7.1.1_1-1a: PC3 maximum testable SNR_{BB} under fading conditions for 256QAM modulation for DEMOD scenarios

Operating Band / Frequency	Maximum testable SNR _{BB} (dB)		
	CHBW 50 MHz	CHBW 100 MHz	CHBW 200 MHz
n257 mid	29.1	25.9	22.9
n258 mid	29.1	25.9	22.9
n259 mid	18.8	15.6	12.5
n260 mid	22.9	19.7	16.6
n261 mid	29.1	25.9	22.9

Table 7.1.1_1-1b: PC1 maximum testable SNR_{BB} under fading conditions for modulations up to 64 QAM

Operating Band / Frequency	Maximum testable SNR _{BB} (dB)		
	CHBW 50 MHz	CHBW 100 MHz	CHBW 200 MHz

n257 mid	40.6	37.4	34.4
n258 mid	40.6	37.4	34.4
n259 mid	FFS	FFS	FFS
n260 mid	34.0	30.8	27.8
n261 mid	40.6	37.4	34.4

Table 7.1.1_1-1c: PC1 maximum testable SNR_{BB} under fading conditions for 256QAM modulation for DEMOD scenarios

Operating Band / Frequency	Maximum testable SNR _{BB} (dB)		
	CHBW 50 MHz	CHBW 100 MHz	CHBW 200 MHz
n257 mid	39.0	35.9	32.9
n258 mid	39.0	35.9	32.9
n259 mid	TBD	TBD	TBD
n260 mid	32.4	29.3	26.3
n261 mid	39.0	35.9	32.9

Based on the current assumption of maximum testable SNR_{BB}, the applicability of test points is defined in Table 7.1.1_1-2 and Table 7.1.1_1-2a for indirect farfield (IFF), PC3 and PC1, Max device size size ≤ 30 cm under fading conditions.

Table 7.1.1_1-2: Testability of test requirements due to maximum achievable SNR per band for PC3 and for intra-band contiguous CA

Editor’s note: n259 and n260 test point applicability for > 200MHz Aggregated ChBW is in []

Test Case	Test point	CHBW / MHz	Fading	SNR test requirement	Test Point Applicability				
					n257	n258	n259	n260	n261
7.2.2.2.1_1	1-1	100	Yes	1.4	x	x	x	x	x
	1-2	100	Yes	3.6	x	x	x	x	x
	1-3	100	Yes	14.2	x	x	x	x	x
	2-1	100	Yes	5.8	x	x	x	x	x
	2-2	100	Yes	16.0	x	x	x	x	x
	2-3	50	Yes	15.7	x	x	x	x	x
	2-4	200	Yes	15.8	x	x	-	x	x
	2-5	50	Yes	16	x	x	x	x	x
7.2.2.2.1_2	3-1	100	Yes	20.7	x	x	-	x	x
7.2.2.2.1_3	1-4	50	Yes	22.0	x	x		x	x
7.2.2.2.2_1	1-1	100	Yes	0.7	x	x	x	x	x
7.2.2.2.3_1	1-1	100	Yes	3.1	x	x	x	x	x
7.2A.2.1	-	BW _{agg} ≤ 300	Yes	12.0	x	x	[x]	[x]	x
	-	300 < BW _{agg} ≤ 400	Yes	12.0	x	x	-	[x]	x
	-	BW _{agg} > 400	Yes	12.0	TBD	TBD	-	TBD	TBD
7.2A.2.2	-	BW _{agg} ≤ 300	Yes	12.0	x	x	[x]	[x]	x
	-	300 < BW _{agg} ≤ 400	Yes	12.0	x	x	-	X	x
	-	BW _{agg} > 400	Yes	12.0	TBD	TBD	-	TBD	TBD
7.2A.2.3	-	BW _{agg} ≤ 300	Yes	12.0	x	x	[x]	[x]	x
	-	300 < BW _{agg} ≤ 400	Yes	12.0	x	x	-	[x]	x
	-	BW _{agg} > 400	Yes	12.0	TBD	TBD	-	TBD	TBD
7.3.2.2.1	1-1	100	Yes	7.7	x	x	x	x	x
	1-2	100	Yes	4.3	x	x	x	x	x
7.3.2.2.2	2-1	100	Yes	3.2	x	x	x	x	x
	2-2	100	Yes	0.2	x	x	x	x	x
7.3.2.2.3	1-1	100	Yes	4.7	x	x	x	x	x

7.5.1	-	100	No	NA	x	x	x	x	x
	-	200	No	NA	x	x	x	x	x
	-	400	No	NA	TBD	TBD	TBD	TBD	TBD
7.5A.1	-	$BW_{agg} \leq 400$	No	NA	x	x	x	x	x
	-	$BW_{agg} > 400$	No	NA	TBD	TBD	TBD	TBD	TBD
7.6.2.2.1_1	1	100	Yes	18.2	x	x	-	x	x

Table 7.1.1_1-2a: Testability of test requirements due to maximum achievable SNR per band for PC1

Test Case	Test point	CHBW / MHz	Fading	SNR test requirement	Test Point Applicability				
					n257	n258	n259	n260	n261
7.2.2.2.1_1	1-1	100	Yes	1.4	x	x	TBD	x	x
	1-2	100	Yes	3.6	x	x	TBD	x	x
	1-3	100	Yes	14.2	x	x	TBD	x	x
	2-1	100	Yes	5.8	x	x	TBD	x	x
	2-2	100	Yes	16.0	x	x	TBD	x	x
	2-3	50	Yes	15.7	x	x	TBD	x	x
	2-4	200	Yes	15.8	x	x	TBD	x	x
	2-5	50	Yes	16	x	x	TBD	x	x
2-6	100	Yes	20.3	x	x	TBD	x	x	
7.2.2.2.1_2	3-1	100	Yes	20.7	x	x	TBD	x	x
7.2.2.2.1_3	1-4	50	Yes	22.0	x	x	TBD	x	x
7.2.2.2.2_1	1-1	100	Yes	TBD	TBD	TBD	TBD	TBD	TBD
7.2.2.2.3_1	1-1	100	Yes	3.1	x	x	TBD	x	x
7.2A.2.1	1,2	$BW_{agg} \leq 200$	Yes	12.0	x	x	TBD	x	x
	3,4	$BW_{agg} > 200$	Yes	12.0	TBD	TBD	TBD	TBD	TBD
7.2A.2.2	1,2	$BW_{agg} \leq 200$	Yes	12.0	x	x	TBD	x	x
	3,4	$BW_{agg} > 200$	Yes	12.0	TBD	TBD	TBD	TBD	TBD
7.3.2.2.1	1-1	100	Yes	7.7	x	x	TBD	x	x
	1-2	100	Yes	4.3	x	x	TBD	x	x
7.3.2.2.2	2-1	100	Yes	3.2	x	x	TBD	x	x
	2-2	100	Yes	0.2	x	x	TBD	x	x
7.3.2.2.3	1-1	100	Yes	4.7	x	x	TBD	x	x
7.5.1	-	100	No	NA	x	x	TBD	x	x
	-	200	No	NA	x	x	TBD	x	x
	-	400	No	NA	TBD	TBD	TBD	TBD	TBD
7.5A.1	-	$BW_{agg} \leq 200$	No	NA	x	x	TBD	x	x
	-	$BW_{agg} > 200$	No	NA	TBD	TBD	TBD	TBD	TBD
7.6.2.2.1_1	1	100	Yes	18.2	x	x	TBD	x	x

7.2 PDSCH demodulation requirements

The parameters specified in Table 7.2-1 are valid for all PDSCH demodulation tests unless otherwise stated.

Table 7.2-1: Common Test Parameters

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
PTRS <i>epre</i> -Ratio			0
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 2)	RBs	0
	Subcarrier spacing	kHz	60 or 120
DL BWP configuration #1	Cyclic prefix		Normal
	RB offset	RBs	0
	Number of contiguous PRB	PRBs	Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-2 [3] for tested channel bandwidth and

			subcarrier spacing
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		1
	SSB periodicity	ms	20
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		0
	Number of PRBs in CORESET		Table 7.2-2 for tested channel bandwidth and subcarrier spacing
	Number of PDCCH candidates and aggregation levels		1/AL8
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1_1
	TCI state		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of each applicable i1/i2 combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12].
Cross carrier scheduling			Not configured
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)		0 for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		6 for CSI-RS resource 1 and 3 10 for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	60 kHz SCS: 80 for CSI-RS resource 1,2,3,4 120 kHz SCS: 160 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	60 kHz SCS: 40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4 120 kHz SCS: 80 for CSI-RS resource 1 and 2 81 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	First subcarrier index in the PRB used for CSI-RS (k_0)		0
	First OFDM symbol in the PRB used for CSI-RS (l_0)		12
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1

	CSI-RS periodicity		Slots	60 kHz SCS: 80 120 kHz SCS: 160
	CSI-RS offset			0
	Frequency Occupation			Start PRB 0 Number of PRB = BWP size
	QCL info			TCI state #1
ZP CSI-RS for CSI acquisition	First subcarrier index in the PRB used for CSI-RS (k_0)			4
	First OFDM symbol in the PRB used for CSI-RS (l_0)			12
	Number of CSI-RS ports (X)			4
	CDM Type			FD-CDM2
	Density (ρ)			1
	CSI-RS periodicity		Slots	60 kHz SCS: 80 120 kHz SCS: 160
	CSI-RS offset			0
Frequency Occupation			Start PRB 0 Number of PRB = BWP size	
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS			$k_0=0$ for CSI-RS resource 1,2
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2
	Number of CSI-RS ports (X)			1 for CSI-RS resource 1,2
	CDM Type			'No CDM' for CSI-RS resource 1,2
	Density (ρ)			3 for CSI-RS resource 1,2
	CSI-RS periodicity		Slots	60 kHz SCS: 80 for CSI-RS resource 1,2 120 kHz SCS: 160 for CSI-RS resource 1,2
	CSI-RS offset		Slots	0 for CSI-RS resource 1,2
	Repetition			ON
	QCL info			TCI state #1
PDSCH DMRS configuration	Antenna ports indexes			{1000} for Rank 1 tests {1000, 1001} for Rank 2 tests
	Position of the first DMRS for PDSCH mapping type A			2
	Number of PDSCH DMRS CDM group(s) without data			1
TCI state #0	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		SSB #0
		QCL Type		Type D
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type		Type D
PTRS configuration	Frequency density (K_{PT-RS})			2
	Time density (L_{PT-RS})			1
	Resource Element Offset			2
Maximum number of code block groups for ACK/NACK feedback				1
Maximum number of HARQ transmission				4
HARQ ACK/NACK bundling				Multiplexed

Redundancy version coding sequence		{0,2,3,1}
PDSCH & PDSCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection with Wideband size and updated per slot with equal probability of each applicable i1/i2 combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12].
Symbols for all unused REs		OCNG in Annex A.5
Physical signals, channels mapping and precoding		As specified in Annex B.4.1
Note 1:	UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission.	
Note 2:	Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-2 [3] for tested channel bandwidth and subcarrier spacing.	

Table 7.2-2: Number of PRBs in CORESET

SCS (kHz)	50 MHz	100 MHz	200 MHz	400 MHz
60	66	132	264	N.A
120	30	66	132	264

7.2.1 1RX requirements (Void)

7.2.2 2RX requirements

7.2.2.1 FDD (Void)

7.2.2.2 TDD

7.2.2.2.1 2Rx TDD FR2 PDSCH mapping Type A performance

7.2.2.2.1_0 Minimum conformance requirements

For PDSCH Type-A scheduling, the requirements are specified in Table 7.2.2.2.1_0-3, 7.2.2.2.1_0-4 and 7.2.2.2.1_0-5, with the addition of the parameters in Table 7.2.2.2.1_0-2 and the downlink physical channel setup according to Annex C.5.1. The purpose is to verify the performance of PDSCH Type-A scheduling.

The test purposes are specified in Table 7.2.2.2.1_0-1.

Table 7.2.2.2.1_0-1: Tests purpose

Purpose	Test index
Verify the PDSCH mapping Type A normal performance under 2 receive antenna conditions and with different channel models, MCSs and number of MIMO layers	1-1, 1-3, 1-4, 2-1, 2-2, 2-3, 2-4, 2-5, 2-6
Verify the PDSCH mapping Type A HARQ soft combining performance under 2 receive antenna conditions.	1-2
Verify the PDSCH mapping Type A enhanced performance requirement Type 1 under 2 receive antenna conditions and with 2 MIMO layers.	3-1

Table 7.2.2.2.1_0-2: Test Parameters

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
CSI-RS for tracking	First OFDM symbol in the PRB used for CSI-RS (l_0)		For Test 1-1 and 1-2: 3 for CSI-RS resource 1 and 3 7 for CSI-RS resource 2 and 4
	CSI-RS offset	Slots	For Test 1-2: 82 for CSI-RS resource 1 and 2 83 for CSI-RS resource 3 and 4
PDCCH configuration	Number of PDCCH candidates and aggregation levels		1/AL4 for Test 1-4 and 2-3 1/AL8 for other tests
PDSCH configuration	Mapping type		Type A
	k_0		0
	Starting symbol (S)		1
	Length (L)		Specific to each Reference channel as defined in A.3.2.2
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		WB for 1-1, 2 for other tests
	Resource allocation type		Test 2-1: Type 1 with start RB = 30, L _{RBs} = 6 Other tests: Type 0
	RBG size		Test 2-1: N/A Other tests: Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			8 for Test 1-1, 1-3, 1-4, 2-2, 2-4 10 for Test 2-1, 2-3, 2-5, 2-6, 3-1 16 for Test 1-2
K1 value (PDSCH-to-HARQ-timing-indicator)			As defined in Annex A.1.3

Table 7.2.2.2.1_0-3: Minimum performance for Rank 1 (FRC)

Test num.	Reference channel	Bandwidth (MHz)/Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR _{BB} (dB)
1-1	R.PDSCH.5-1.1TDD	100/120	QPSK, 0.30	FR2.120-1. A	TDLC60-300	2x2 ULA Low	70	-0.4
1-2	R.PDSCH.5-2.1 TDD	100/120	16QAM, 0.48	FR2.120-1	TDLA30-300	2x2 ULA Low	30	1.7
1-3	R.PDSCH.5-3.1TDD	100/120	64QAM, 0.46	FR2.120-1	TDLA30-300	2x2 XPL Med	70	12.4
1-4	R.PDSCH.5-10.1 TDD	50/120	256QAM 0.67	FR2.120-1	TDLD30-75	2x2 ULA Low	70	20.2

Table 7.2.2.2.1_0-4: Minimum performance for Rank 2 (FRC)

Test	Reference	Bandwidth	Modulatio	TDD	Propagatio	Correlation	Reference value
------	-----------	-----------	-----------	-----	------------	-------------	-----------------

num	channel	(MHz)/Subcarrier spacing (kHz)	n and code rate	UL-DL pattern	n condition	matrix and antenna configuration	Fraction of maximum throughput (%)	SNR _{BB} (dB)
2-1	R.PDSCH.5-4.1 TDD	100/120	QPSK, 0.30	FR2.120-2	TDLA30-75	2x2 ULA Low	70	4.1
2-2	R.PDSCH.5-2.2 TDD	100/120	16QAM, 0.48	FR2.120-1	TDLA30-300	2x2 ULA Low	70	14.4
2-3	R.PDSCH.5-5.2 TDD	50/120	16QAM, 0.48	FR2.120-2	TDLA30-75	2x2 ULA Low	70	14.0
2-4	R.PDSCH.5-2.3 TDD	200/120	16QAM, 0.48	FR2.120-1	TDLA30-300	2x2 ULA Low	70	14.2
2-5	R.PDSCH.4-1.1 TDD	50/60	16QAM, 0.48	FR2.60-1	TDLA30-75	2x2 ULA Low	70	14.3
2-6	R.PDSCH.5-6.1 TDD	100/120	64QAM, 0.43	FR2.120-2	TDLA30-75	2x2 ULA Low	70	18.6

Table 7.2.2.2.1_0-5: Minimum performance for Rank 2 (FRC) for Enhanced Type X Receiver

Test num.	Reference channel	Bandwidth (MHz)/Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR _{BB} (dB)
3-1	R.PDSCH.5-5.1TDD	100/120	16QAM, 0.48	FR2.120-2	TDLA30-75	2x2 ULA Medium	70	19.0

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.1.

7.2.2.2.1_1 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for SA and NSA

7.2.2.2.1_1.1 Test Purpose

Verify the PDSCH mapping Type A normal performance with different channel models, MCSs and number of MIMO layers.

7.2.2.2.1_1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

7.2.2.2.1_1.3 Test Description

7.2.2.2.1_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2.2.1_1.3.3.

7.2.2.2.1_1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 7.2.2.2.1_1.4-1 and 7.2.2.2.1_1.4-2. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 7.2.2.2.1_1.4-1 and 7.2.2.2.1_1.4-2 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Tables G.1.5-1 in Annex G.
5. Repeat steps from 1 to 4 for each subtest in Tables 7.2.2.2.1_1.4-1 and 7.2.2.2.1_1.4-2 as appropriate.

7.2.2.2.1_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

7.2.2.2.1_1.3.3_1 Message exceptions for SA

Table 7.2.2.2.1_1.3.3_1-1: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl80	7	Test point 2-1, 2-3, 2-6	
}			
}			

Table 7.2.2.2.1_1.3.3_1-2: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6] Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
firstOFDMSymbolInTimeDomain	3	$l_0 = 3$ for CSI-RS resource 1 and 3	TRS, Test 1-1, 1-2
	7	$l_0 = 7$ for CSI-RS resource 2 and 4	TRS, Test 1-1, 1-2
nrofPorts	p1	1 for CSI-RS resource 1,2,3,4	TRS
}			

Table 7.2.2.2.1_1.3.3_1-3: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6] Table 5.4.2.3-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
Slots160	82	Periodicity 160 slots and offset 82 for CSI-RS resource 1 and 2	Test 1-2
Slots160	83	Periodicity 160 slots and offset 83 for CSI-RS resource 3 and 4	Test 1-2
}			

Table 7.2.2.2.1_1.3.3_1-4: PDCCH Search Space

Derivation Path: TS 38.508-1 [6] Table 4.6.3-162			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n1		Test 2-3
aggregationLevel8	n1	AL8	Other than test 2-3
aggregationLevel16	n0		
}			
}			

Table 7.2.2.2.1_1.3.3_1-5: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6] Table 4.6.3-50			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-Type	Type 1		
dmrs-AdditionalPosition	pos1		
maxLength	len1		
}			

Table 7.2.2.2.1_1.3.3_1-6: PDSCH-Config

Derivation Path: TS 38.508-1 [6] Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
vrb-ToPRB-Interleaver	Not present		
resourceAllocation	resourceAllocationType0		
pdsch-AggregationFactor	Not present		
prb-BundlingType CHOICE {			
staticBundling SEQUENCE {			
bundleSize	Not present	PRB Bundling size of 2	Other than test 1-1
}	Wideband		Test 1-1
}			
}			

Table 7.2.2.2.1_1.3.3_1-7: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6] Table 4.6.3-102			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE { nrofHARQ-ProcessesForPDSCH	Set according to the test id		8 for Test 1-1, 1-3, 2-2, 2-4 10 for Test 2-1, 2-3, 2-5, 2-6, 3-1 16 for Test 1-2
}			

7.2.2.2.1_1.3.3_2 Message exceptions for NSA

Same as 7.2.2.2.1_1.3.3_1.

7.2.2.2.1_1.4 Test Requirements

Tables 7.2.2.2.1_1.4-1 and 7.2.2.2.1_1.4-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2 for each throughput test shall meet or exceed the specified value in Tables 7.2.2.2.1_1.4-1 and 7.2.2.2.1_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 7.2.2.2.1_1.4-1: Test Requirement for Rank 1 (FRC)

Test num.	Reference channel	Bandwidth (MHz)/Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR _{BB} (dB)
1-1	R.PDSCH.5-1.1TDD	100/120	QPSK, 0.30	FR2.120-1 A	TDLC60-300	2x2 ULA Low	70	1.4
1-2	R.PDSCH.5-2.1TDD	100/120	16QAM, 0.48	FR2.120-1	TDLA30-300	2x2 ULA Low	30	3.6
1-3	R.PDSCH.5-3.1TDD	100/120	64QAM, 0.46	FR2.120-1	TDLA30-300	2x2 XPL Medium	70	14.2

Table 7.2.2.2.1_1.4-2: Test Requirement for Rank 2 (FRC)

Test num.	Reference channel	Bandwidth (MHz)/Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR _{BB} (dB)
2-1	R.PDSCH.5-4.1TDD	100/120	QPSK, 0.30	FR2.120-2	TDLA30-75	2x2 ULA Low	70	5.8
2-2	R.PDSCH.5-2.2TDD	100/120	16QAM, 0.48	FR2.120-1	TDLA30-300	2x2 ULA Low	70	16.0
2-3	R.PDSCH.5-5.2TDD	50/120	16QAM, 0.48	FR2.120-2	TDLA30-75	2x2 ULA Low	70	15.7
2-4	R.PDSCH.5-2.3TDD	200/120	16QAM, 0.48	FR2.120-1	TDLA30-300	2x2 ULA Low	70	15.8
2-5	R.PDSCH.4-1.1TDD	50/60	16QAM, 0.48	FR2.60-1	TDLA30-75	2x2 ULA Low	70	16
2-6	R.PDSCH.5-6.1TDD	100/120	64QAM, 0.43	FR2.120-2	TDLA30-75	2x2 ULA Low	70	20.3

7.2.2.2.1_2 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with enhanced type 1 receiver for SA and NSA

7.2.2.2.1_2.1 Test Purpose

Verify the PDSCH mapping Type A normal performance with different channel models, MCSs and number of MIMO layers.

7.2.2.2.1_2.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting NR enhanced receiver type 1.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC and NR enhanced receiver type 1.

7.2.2.2.1_2.3 Test Description

Same test description as in clause 7.2.2.2.1_1.3 with following exception:

- Table 7.2.2.2.1_2.4-1 instead of Tables 7.2.2.2.1_1.4-1 and 7.2.2.2.1_1.4-2

7.2.2.2.1_2.3.1 Message contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

7.2.2.2.1_2.3.1_1 Message exceptions for SA

Same as 7.2.2.2.1_1.3.3_1 with following exceptions:

Table 7.2.2.2.1_2.3.1_1-1: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
SI80	7		Test 3-1
}			
}			

7.2.2.2.1_2.3.1_2 Message exceptions for NSA

Same as 7.2.2.2.1_2.3.1_1.

7.2.2.2.1_2.4 Test Requirements

Table 7.2.2.2.1_2.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2 for each throughput test shall meet or exceed the specified value in Table 7.2.2.2.1_2.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 7.2.2.2.1_2.4-1: Test Requirement for Rank 2 (FRC) for Enhanced Type 1 Receiver

Test num.	Reference channel	Bandwidth (MHz)/Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR _{BB} (dB)
3-1	R.PDSCH.5-	100/120	16QAM,	FR2.120-	TDLA30-75	2x2 ULA Med	70	20.7

5.1TDD		0.48	2			
--------	--	------	---	--	--	--

7.2.2.2.1_3 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with 256QAM for SA and NSA (Rel-16 and forward)

7.2.2.2.1_3.1 Test Purpose

Verify the PDSCH mapping Type A normal performance with different channel models, MCSs and number of MIMO layers.

7.2.2.2.1_3.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting 256QAM for PDSCH.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and NR 256QAM for PDSCH.

7.2.2.2.1_3.3 Test Description

Same test description as in clause 7.2.2.2.1_1.3 with following exception:

- Table 7.2.2.2.1_3.4-1 instead of Table 7.2.2.2.1_1.4-1

7.2.2.2.1_3.3.1 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions:

7.2.2.2.1_3.3.1_1 Message exceptions for SA

Same as 7.2.2.2.1_1.3.3_1 with following exceptions:

Table 7.2.2.2.1_3.3.1_1-1: Void

Table 7.2.2.2.1_3.3.1_1-2: SearchSpace

Derivation Path: TS 38.508-1 Table 4.6.3-162			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n1	AL4	Test 1-4
aggregationLevel8	n0		
aggregationLevel16	n0		
}			
}			

Table 7.2.2.2.1_3.3.1_1-3: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26 with condition DEMOD_FR2			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table	qam256		Test 1-4
}			

Table 7.2.2.2.1_3.3.1_1-4: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 Table 5.4.2.0-25 with condition DEMOD_FR2
--

Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	8		Test 1-4
}			

7.2.2.2.1_3.3.1_2 Message exceptions for NSA

Same as 7.2.2.2.1_3.3.1_1.

7.2.2.2.1_3.4 Test Requirements

Table 7.2.2.2.1.0-2 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2 for each throughput test shall meet or exceed the specified value in Table 7.2.2.2.1_3.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 7.2.2.2.1_3.4-1: Test Requirement for Rank 1 (FRC) for 256QAM

Test num.	Reference channel	Bandwidth (MHz)/Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR _{BB} (dB)
1-4	R.PDSCH.5-10.1 TDD	50/120	256QAM 0.67	FR2.120-1	TDLD30-75	2x2 ULA Low	70	22.0

7.2.2.2.2 2Rx TDD FR2 PDSCH repetitions over multiple slots

7.2.2.2.2_0 Minimum conformance requirements

For PDSCH with slot aggregation, the requirements are specified in Table 7.2.2.2.2_0-3, additional parameters in Table 7.2.2.2.2_0-2 and the downlink physical channel setup according to Annex C.5.1.

The test purpose is specified in Table 7.2.2.2.2_0-1.

Table 7.2.2.2.2_0-1: Test purpose

Purpose	Test index
Verify the PDSCH repetitions over multiple slots performance under 2 receive antenna conditions	1-1

Table 7.2.2.2.2_0-2: Test Parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDSCH configuration	Mapping type	Type A
	<i>k₀</i>	0
	Starting symbol (S)	1
	Length (L)	13
	PDSCH aggregation factor	2
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS	DMRS Type	Type 1

configuration	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			2
The number of slots between final repetition of PDSCH and corresponding HARQ-ACK information			As defined in Annex A.1.3 (Note 1)
Note 1: ACK/NACK feedback is generated for PDSCH on slot i , where $\text{mod}(i,4) = 1$, where i is the slot index per frame; $i = \{0, \dots, 79\}$			

Table 7.2.2.2.2_0-3: Minimum performance for Rank 1 (FRC)

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH. 5-11.1 TDD	100 / 120	16QAM, 0.37	FR2.120-2	TDLA30-75	2x2 ULA Low	1% (Note 1)	-1.1
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.								

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.2.

7.2.2.2.2_1 2Rx TDD FR2 PDSCH repetitions over multiple slots - 2x2 MIMO with baseline receiver for SA and NSA

7.2.2.2.2_1.1 Test Purpose

Verify the PDSCH repetitions over multiple slots performance under 2 receive antenna conditions.

7.2.2.2.2_1.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting capability IE dl-64QAM-MCS-TableAlt and *pdsch-RepetitionMultiSlots*.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC supporting capability IE dl-64QAM-MCS-TableAlt and *pdsch-RepetitionMultiSlots*.

7.2.2.2.2_1.3 Test Description

7.2.2.2.2_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.

2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.2.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2.2.2.2_1.3.3.

7.2.2.2.2_1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 7.2.2.2.2_1.4-1. The SS sends downlink MAC padding bits on the DL RMC. The UE may expect that the TB is repeated with same symbol allocation among each of the *pdsch-AggregationFactor* consecutive slots.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 7.2.2.2.2_1.4-1 as appropriate.
4. Measure the BLER for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of correctly and incorrectly received transport blocks based on ACK/NACK feedback on the UL during each subtest and decide pass or fail according to Tables G.1.5-1a in Annex G.

7.2.2.2.2_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

7.2.2.2.2_1.3.3_1 Message exceptions for SA

Table 7.2.2.2.2_1.3.3_1-1: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl80	7		
}			
}			

Table 7.2.2.2.2_1.3.3_1-2: PDSCH-Config

Derivation Path: TS 38.508-1 [6] Table 4.6.3-100			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
pdsch-AggregationFactor	2		
}			

Table 7.2.2.2.2_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6] Table 4.6.3-102			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	4		
}			

7.2.2.2.2_1.3.3_2 Message exceptions for NSA

Same as 7.2.2.2.2_1.3.3_1.

7.2.2.2.2_1.4 Test Requirements

Table 7.2.2.2.2_1.4-1 defines the primary level settings.

The target BLER percentage for the downlink reference measurement channels specified in Annex A.3.2.2 for each BLER test shall meet or exceed the specified value in Table 7.2.2.2.2_1.4-1 for the specified SNR including test tolerances for all BLER tests.

Table 7.2.2.2.2_1.4-1: Test Requirement for Rank 1

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Target BLER	SNR (dB)
1-1	R.PDSCH. 5-11.1 TDD	100 / 120	16QAM, 0.37	FR2.120-2	TDLA30-75	2x2 ULA Low	1% (Note 1)	0.7
Note 1: BLER is defined as residual BLER; i.e. ratio of incorrectly received transport blocks / sent transport blocks, independently of the number HARQ transmission(s) for each transport block.								

7.2.2.2.3 2Rx TDD FR2 PDSCH Mapping Type B

7.2.2.2.3_0 Minimum conformance requirements

The performance requirements are specified in Table 7.2.2.2.3.0-3, with the addition of test parameters in Table 7.2.2.2.3.0-2 and the downlink physical channel setup according to Annex C.5.1. The purpose is to verify the performance of PDSCH Type B scheduling.

The test purposes are specified in Table 7.2.2.2.3.0-1.

Table 7.2.2.2.3.0-1: Test purpose

Purpose	Test index
Verify PDSCH mapping Type B performance under 2 receive antenna conditions	1-1

Table 7.2.2.2.3.0-2: Test parameters

Parameter	Unit	Value
Duplex mode		TDD
Active DL BWP index		1
PDCCH configuration	Number of PDCCH candidates and aggregation levels	1/AL8
PDSCH configuration	Mapping type	Type B
	k0	0
	Starting symbol (S)	1
	Length (L)	2
	PDSCH aggregation factor	1
	PRB bundling type	Static
	PRB bundling size	2
	Resource allocation type	Type 0
	RBG size	Config2
	VRB-to-PRB mapping type	Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size	N/A
	DMRS Type	Type 1
	Number of additional DMRS	0

	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.3

Table 7.2.2.2.3.0-3: Minimum performance for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 5-1.2 TDD	100 / 120	QPSK, 0.30	FR2.120-1	TDLA30-75	2x2, ULA Low	70	1.3

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.3.

7.2.2.2.3_1 2Rx TDD FR2 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for SA and NSA

7.2.2.2.3_1.1 Test Purpose

Verify the PDSCH mapping Type B performance under 2 receive antenna conditions.

7.2.2.2.3_1.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting PDSCH mapping type B.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and PDSCH mapping type B.

7.2.2.2.3_1.3 Test Description

7.2.2.2.3_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.2.3.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2.2.2.3_1.3.3.

7.2.2.2.3_1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0.If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 7.2.2.2.3_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 7.2.2.2.3_1.4-1 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Tables G.1.5-1 in Annex G.

7.2.2.2.3_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

7.2.2.2.3_1.3.3_1 Message exceptions for SA

Table 7.2.2.2.3_1.3.3_1-3: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6] Table 4.6.3-102			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	8		
}			

Table 7.2.2.2.3_1.3.3_1-4: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 4.6.3-103			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF {	2 entry		
PDSCH-TimeDomainResourceAllocation[1]			
SEQUENCE {			
K0	Not present		
mappingType	typeB		
startSymbolAndLength	15	Start symbol(S)=1, Length(L)=2	
}			
}			

7.2.2.2.3_1.3.3_2 Message exceptions for NSA

Same as 7.2.2.2.3_1.3.3_1.

7.2.2.2.3_1.4 Test Requirements

Table 7.2.2.2.3_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2 for each throughput test shall meet or exceed the specified value in Table 7.2.2.2.3_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 7.2.2.2.3_1.4-1: Test Requirement for Rank 1

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH. 5-1.2 TDD	100 / 120	QPSK, 0.30	FR2.120-1	TDLA30-75	2x2, ULA Low	70	3.1

7.2.2.2.4 2Rx TDD FR2 PDSCH for HST-DPS

7.2.2.2.4_0 Minimum conformance requirements

Editor's Note: This test case is incomplete due to the following reason:

The TT/ MU analysis for PC6 is missing:

The performance requirements are specified in Table 7.2.2.2.4.0-3, with the addition of test parameters in Table 7.2.2.2.4.0-2 and the downlink physical channel setup according to Annex C.5.1. The purpose is to verify the performance of PDSCH HST-DPS.

The test purposes are specified in Table 7.2.2.2.4.0-1.

Table 7.2.2.2.4.0-1: Tests purpose

Purpose	Test index
Verify UE performance in the HST-DPS scenario defined in B.3.3	1-1, 1-2

Table 7.2.2.2.4.0-2: Test parameters

Parameter		Unit	Value	
Duplex mode			TDD	
Active DL BWP index			1	
PDCCH configuration	TCI state		Note 1	
PDSCH configuration	Mapping type		Type A	
	k_0		0	
	Starting symbol (S)		1	
	Length (L)		Specific to each Reference channel	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	TCI state		Note 1	
	DMRS Type		Type 1	
	Number of additional DMRS		2	
PDSCH DMRS configuration	Maximum number of OFDM symbols for DL front loaded DMRS		1	
	CSI-RS for tracking	Resource set #1	First subcarrier index in the PRB used for CSI-RS (k_0)	0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the PRB used for CSI-RS			$l_0 = 2$ for CSI-RS resource 1 and 3 $l_0 = 6$ for CSI-RS resource 2 and 4	
CSI-RS periodicity			Slots	80 for CSI-RS resource 1,2,3,4
CSI-RS offset			Slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
QCL info				TCI state #4
Frequency Occupation				Start PRB 0

				Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #2	First subcarrier index in the PRB used for CSI-RS (k_0)			0 for CSI-RS resource 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 4$ for CSI-RS resource 5 and 7 $l_0 = 8$ for CSI-RS resource 6 and 8
	CSI-RS periodicity	Slots		80 for CSI-RS resource 5,6,7,8
	CSI-RS offset	Slots		5 for CSI-RS resource 5 and 6 6 for CSI-RS resource 7 and 8
	QCL info			TCI state #5
	Frequency Occupation			Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #3	First subcarrier index in the PRB used for CSI-RS (k_0)			1 for CSI-RS resource 9,10,11,12
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 5$ for CSI-RS resource 9 and 11 $l_0 = 9$ for CSI-RS resource 10 and 12
	CSI-RS periodicity	Slots		80 for CSI-RS resource 9,10,11,12
	CSI-RS offset	Slots		5 for CSI-RS resource 9 and 10 6 for CSI-RS resource 11 and 12
	QCL info			TCI state #6
	Frequency Occupation			Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #4	First subcarrier index in the PRB used for CSI-RS (k_0)			1 for CSI-RS resource 13,14,15,16
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 4$ for CSI-RS resource 13 and 15 $l_0 = 8$ for CSI-RS resource 14 and 16
	CSI-RS periodicity	Slots		80 for CSI-RS resource 13,14,15,16
	CSI-RS offset	Slots		5 for CSI-RS resource 13 and 14 6 for CSI-RS resource 15 and 16
	QCL info			TCI state #7
	Frequency Occupation			Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #13 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			2 for CSI-RS resource 17,18,19,20
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 5$ for CSI-RS resource 17 and 19 $l_0 = 9$ for CSI-RS resource 18 and 20
	CSI-RS periodicity	Slots		80 for CSI-RS resource 17,18,19,20
	CSI-RS offset	Slots		5 for CSI-RS resource 17 and 18 6 for CSI-RS resource 19 and 20
	QCL info			TCI state #12
	Frequency Occupation			Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #14 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			2 for CSI-RS resource 21,22,23,24
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 4$ for CSI-RS resource 21 and 23 $l_0 = 8$ for CSI-RS resource 22 and 24
	CSI-RS periodicity	Slots		80 for CSI-RS resource 21,22,23,24

		CSI-RS offset	Slots	5 for CSI-RS resource 21 and 22 6 for CSI-RS resource 23 and 24		
		QCL info		TCI state #13		
		Frequency Occupation		Start PRB 0 Number of PRB =ceil(BWP size/4)*4		
	Resource set #15 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			3 for CSI-RS resource 25,26,27,28	
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 5$ for CSI-RS resource 25 and 27	
					$l_0 = 9$ for CSI-RS resource 26 and 28	
		CSI-RS periodicity	Slots		80 for CSI-RS resource 25,26,27,28	
		CSI-RS offset	Slots		5 for CSI-RS resource 25 and 26 6 for CSI-RS resource 27 and 28	
		QCL info			TCI state #14	
	Resource set #16 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			3 for CSI-RS resource 29,30,31,32	
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 4$ for CSI-RS resource 29 and 31	
					$l_0 = 8$ for CSI-RS resource 30 and 32	
		CSI-RS periodicity	Slots		80 for CSI-RS resource 29,30,31,32	
		CSI-RS offset	Slots		5 for CSI-RS resource 29 and 30 6 for CSI-RS resource 31 and 32	
		QCL info			TCI state #15	
	Resource set #16 (Note2)	First OFDM symbol in the PRB used for CSI-RS			Start PRB 0 Number of PRB =ceil(BWP size/4)*4	
		Frequency Occupation				
		First subcarrier index in the PRB used for CSI-RS (k_0)			0	
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$	
		CSI-RS periodicity	Slots		160	
		CSI-RS offset	Slots		0	
	Resource set #5	QCL info			TCI state #0	
		Resource set #6	First subcarrier index in the PRB used for CSI-RS (k_0)			2
			First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$
CSI-RS periodicity			Slots		160	
CSI-RS offset			Slots		0	
QCL info			TCI state #1			
Resource set #7	First subcarrier index in the PRB used for CSI-RS (k_0)			4		
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$		
	CSI-RS periodicity	Slots		160		
	CSI-RS offset	Slots		0		
	QCL info			TCI state #2		
Resource set #8	First subcarrier index in the PRB used for CSI-RS (k_0)			6		
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$		
	CSI-RS periodicity	Slots		160		
NZP CSI-RS for CSI acquisition	Resource set #5	First subcarrier index in the PRB used for CSI-RS (k_0)			0	
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$	
		CSI-RS periodicity	Slots		160	
		CSI-RS offset	Slots		0	
		QCL info			TCI state #0	
	Resource set #6	First subcarrier index in the PRB used for CSI-RS (k_0)			2	
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$	
		CSI-RS periodicity	Slots		160	
		CSI-RS offset	Slots		0	
	Resource set #7	First subcarrier index in the PRB used for CSI-RS (k_0)			4	
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$	
		CSI-RS periodicity	Slots		160	
CSI-RS offset		Slots		0		
Resource set #8	First subcarrier index in the PRB used for CSI-RS (k_0)			6		
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 12$		
	CSI-RS periodicity	Slots		160		

		CSI-RS offset	Slots	0	
		QCL info		TCI state #3	
	Resource set #17 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			0
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 13$
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		1
		QCL info			TCI state #8
	Resource set #18 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			2
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 13$
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		1
		QCL info			TCI state #9
	Resource set #19 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			4
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 13$
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		1
		QCL info			TCI state #10
	Resource set #20 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)			6
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 13$
		CSI-RS periodicity	Slots		160
CSI-RS offset		Slots		1	
QCL info				TCI state #11	
CSI-RS for beam refinement	Resource set #9	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2	
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2	
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		0
		QCL info			TCI state #0
	Resource set #10	First subcarrier index in the PRB used for CSI-RS			$k_0=1$ for CSI-RS resource 3,4
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 8$ for CSI-RS resource 3 $l_0 = 9$ for CSI-RS resource 4
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		0
		QCL info			TCI state #1
	Resource set #11	First subcarrier index in the PRB used for CSI-RS			$k_0=2$ for CSI-RS resource 5,6
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 8$ for CSI-RS resource 5 $l_0 = 9$ for CSI-RS resource 6
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		0
		QCL info			TCI state #2
	Resource set #12	First subcarrier index in the PRB used for CSI-RS			$k_0=3$ for CSI-RS resource 7,8
		First OFDM symbol in the PRB used for CSI-RS			$l_0 = 8$ for CSI-RS resource 7 $l_0 = 9$ for CSI-RS resource 8
		CSI-RS periodicity	Slots		160
		CSI-RS offset	Slots		0
		QCL info			TCI state #3
Resource set #21 (Note2)	First subcarrier index in the PRB used for CSI-RS			$k_0=0$ for CSI-RS resource 9,10	
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 10$ for CSI-RS resource 9 $l_0 = 11$ for CSI-RS resource 10	

		CSI-RS periodicity	Slots	160	
		CSI-RS offset	Slots	1	
		QCL info		TCI state #8	
	Resource set #22 (Note2)	First subcarrier index in the PRB used for CSI-RS			k0=1 for CSI-RS resource 11,12
		First OFDM symbol in the PRB used for CSI-RS			l0 = 10 for CSI-RS resource 11 l0 = 11 for CSI-RS resource 12
		CSI-RS periodicity	Slots	160	
		CSI-RS offset	Slots	1	
		QCL info			TCI state #9
	Resource set #23 (Note2)	First subcarrier index in the PRB used for CSI-RS			k0=2 for CSI-RS resource 13,14
		First OFDM symbol in the PRB used for CSI-RS			l0 = 10 for CSI-RS resource 13 l0 = 11 for CSI-RS resource 14
		CSI-RS periodicity	Slots	160	
		CSI-RS offset	Slots	1	
		QCL info			TCI state #10
	Resource set #24 (Note2)	First subcarrier index in the PRB used for CSI-RS			k0=3 for CSI-RS resource 15,16
		First OFDM symbol in the PRB used for CSI-RS			l0 = 10 for CSI-RS resource 15 l0 = 11 for CSI-RS resource 16
CSI-RS periodicity		Slots	160		
CSI-RS offset		Slots	1		
QCL info				TCI state #11	
TCI state #0	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type		Type D	
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type		Type D	
TCI state #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type		Type D	
TCI state #3	Type 1 QCL information	CSI-RS resource		CSI-RS resource 13 from 'CSI-RS for tracking Resource set #4' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 13 from 'CSI-RS for tracking Resource set #4' configuration	
		QCL Type		Type D	
TCI state #8 (Note2)	Type 1 QCL information	CSI-RS resource		CSI-RS resource 17 from 'CSI-RS for tracking Resource set #13' configuration	
		QCL Type		Type A	
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 17 from 'CSI-RS for tracking Resource set #13' configuration	
		QCL Type		Type D	
TCI state #9 (Note2)	Type 1 QCL information	CSI-RS resource		CSI-RS resource 21 from 'CSI-RS for tracking Resource set #14' configuration	

	Type 2 QCL information	QCL Type		Type A
		CSI-RS resource		CSI-RS resource 21 from 'CSI-RS for tracking Resource set #14' configuration
TCI state #10 (Note2)	Type 1 QCL information	QCL Type		Type D
		CSI-RS resource		CSI-RS resource 25 from 'CSI-RS for tracking Resource set #15' configuration
	Type 2 QCL information	QCL Type		Type A
		CSI-RS resource		CSI-RS resource 25 from 'CSI-RS for tracking Resource set #15' configuration
TCI state #11 (Note2)	Type 1 QCL information	QCL Type		Type D
		CSI-RS resource		CSI-RS resource 29 from 'CSI-RS for tracking Resource set #16' configuration
	Type 2 QCL information	QCL Type		Type A
		CSI-RS resource		CSI-RS resource 29 from 'CSI-RS for tracking Resource set #16' configuration
TCI state #4	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #0
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #0
TCI state #5	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #1
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #1
TCI state #6	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #2
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #2
TCI state #7	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #3
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #3
TCI state #12 (Note2)	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #4
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #4
TCI state #13 (Note2)	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #5
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #5
TCI state #14 (Note2)	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #6
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #6
TCI state #15 (Note2)	Type 1 QCL information	QCL Type		Type D
		SSB index		SSB #7
	Type 2 QCL information	QCL Type		Type C
		SSB index		SSB #7
Number of HARQ Processes				8

The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.3
<p>Note 1: For Test 1-1, SSB # $(2k \bmod 8)$, CSI-RS (for tracking) resource set # $((k \bmod 4)+1)$, CSI-RS (for CSI acquisition) resource set # $((k \bmod 4) + 5)$ and CSI-RS (for beam refinement) resource set # $((k \bmod 4) + 9)$ are transmitted by k^{th} RRH; SSB # $((2k \bmod 8)+1)$, CSI-RS (for tracking) resource set # $((k \bmod 4) + 13)$, CSI-RS (for CSI acquisition) resource set # $((k \bmod 4) + 17)$ and CSI-RS (for beam refinement) resource set # $((k \bmod 4) + 21)$ are transmitted by k^{th} RRH. TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\bmod(L,n) = 0$ ($i \neq 0$). PDCCH and PDSCH associated with TCI # $(k \bmod 4)$ is transmitted by k^{th} RRH from slot#</p> $\begin{cases} 0, & k = 1 \\ (2k - 2)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstSSB}} + T_{\text{SSB proc}} + T_{\text{firstTRSafterSSB}} + T_{\text{TRS proc}}, & k = 2,3,4 \dots \end{cases}$ <p>to slot#</p> $[(2k - 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}], k = 1,2,3 \dots,$ <p>PDCCH and PDSCH associated with TCI # $((k \bmod 4)+8)$ is transmitted by k^{th} RRH from slot#</p> $[(2k + 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstSSB}} + T_{\text{SSB proc}} + T_{\text{firstTRSafterSSB}} + T_{\text{TRS proc}}], k = 0,1,2 \dots$ <p>to slot#</p> $[2(k + 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}], k = 0,1,2 \dots,$ <p>where k is the RRH number, $n = 28800$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 4$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 24$ is the number of slots for MAC CE processing, $T_{\text{firstSSB}} = 132$ is the number of slots to first SSB transmission occasion after MAC CE command is decoded by the UE, $T_{\text{SSB proc}} = 16$ is the number of slots for SSB processing, $T_{\text{firstTRSafterSSB}} = 66$ is the number of slots to first TRS transmission occasion after first SSB is processed by the UE, $T_{\text{TRS proc}} = 16$ is the number of slots for TRS processing. PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 1-2, SSB # $(k \bmod 4)$, CSI-RS (for tracking) resource set # $((k \bmod 4)+1)$, CSI-RS (for CSI acquisition) resource set # $((k \bmod 4) + 5)$ and CSI-RS (for beam refinement) resource set # $((k \bmod 4) + 9)$ are transmitted by k^{th} RRH. TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\bmod(L,n) = 0$. PDCCH and PDSCH associated with TCI # $(k \bmod 4)$ is transmitted by k^{th} RRH from slot#</p> $\begin{cases} 0, & k = 1 \\ (k - 1)n + 2 + T_{\text{HARQ}} + T_{\text{MAC proc}}, & k = 2,3,4 \dots \end{cases}$ <p>to slot#</p> $[k * n + T_{\text{HARQ}} + T_{\text{MAC proc}}], k = 1,2,3 \dots,$ <p>where k is the RRH number, $n = 57600$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 4$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 24$ is the number of slots for MAC CE processing. PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>Note 2: Only configured for Test 1-1.</p>		

Table 7.2.2.2.4.0-3: Minimum performance for HST-DPS

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH .5-12.2 TDD	200 / 120	64QAM, 0.43	FR2.12 0-1	HST-DPS-FR2-BI-B	1	2x2	70	13.9
1-2	R.PDSCH .5-12.1 TDD	200 / 120	64QAM, 0.43	FR2.12 0-1	HST-DPS-FR2-UNI-A	2	2x2	70	13.7

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.4.

7.2.2.2.4_1 2Rx TDD FR2 PDSCH for HST-DPS - 2x2 MIMO with baseline receiver for SA and NSA

7.2.2.2.4_1.1 Test Purpose

Verify the PDSCH for HST-DPS performance under 2 receive antenna conditions.

7.2.2.2.4_1.2 Test Applicability

This test applies to all types of NR UE release 17 and forward supporting PDSCH for HST-DPS.

7.2.2.2.4_1.3 Test Description

7.2.2.2.4_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.2.4.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On*, DC bearer MCG and SCG, *Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2.2.2.3_1.3.3.

7.2.2.2.4_1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Tables 7.2.2.2.3_1.4-1. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Tables 7.2.2.2.4_1.4-1 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Tables G.1.5-1 in Annex G.

7.2.2.2.4_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

Table 7.2.2.2.4_1.3.3-1: CSI-RS-ResourceMapping for TRS

Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			TRS FR2
frequencyDomainAllocation CHOICE {			
row1	0001	k ₀ =0 for CSI-RS resource 1,2,3,4 for resource set#1 k ₀ =0 for CSI-RS resource 5,6,7,8 for resource set#2 k ₀ =1 for CSI-RS resource 9,10,11,12 for resource set#3 k ₀ =1 for CSI-RS resource 13,14,15,16 for resource set#4 k ₀ =2 for CSI-RS resource 17,18,19,20 for resource set#13(Note1) k ₀ =2 for CSI-RS resource 21,22,23,24 for resource set#14(Note1) k ₀ =3 for CSI-RS resource 25,26,27,28 for resource set#15(Note1) k ₀ =3 for CSI-RS resource 29,30,31,32 for resource set#16(Note1)	
}			
firstOFDMSymbolInTimeDomain	5	l ₀ = 5 for CSI-RS resource 1,3,9,11	
	9	l ₀ = 9 for CSI-RS resource 2,4,10,12	
	4	l ₀ = 4 for CSI-RS resource 5,7,13,15	
	8	l ₀ = 8 for CSI-RS resource 6,8,14,16	
freqBand	CSI-FrequencyOccupation		
}			
Note 1: The values of this line only configured for Test 1-1.			

Condition	Explanation
TRS	Tracking-Reference Signal is configured.

Table 7.2.2.2.4_1.3.3-2: NZP-CSI-RS-Resource for CSI Acquisition

Derivation Path: Table 5.4.2.0-14			
Information Element	Value/remark	Comment	Condition
NZP-CSI-RS-Resource ::= SEQUENCE {			
frequencyDomainAllocation			
CHOICE {			
row1	0001	k ₀ =0, for Resource set #5 and #17; k ₀ =2, for Resource set #6 and #18; k ₀ =4, for Resource set #7 and #19; (Note1) k ₀ =6, for Resource set #8 and #20(Note1)	
}			
firstOFDMSymbolInTimeDomain	12	l ₀ = 12 for resource set# 5,6,7,8	
	13	l ₀ = 13 for resource set# 17,18,19,20(Note1)	
resourceMapping	CSI-RS-ResourceMapping		
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset		
qcl-InfoPeriodicCSI-RS	TCI-StateId: 0,1,2,3; 8,9,10,11(Note1)	QCL csi-rs: 0,1,2,3; 8,9,10,11(Note1)	
}			
Note 1: The values of this line only configured for Test 1-1.			

Table 7.2.2.2.4_1.3.3-3: TCI-StateId

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	Value/remark	Comment	Condition
TCI-StateId	0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15		

Table 7.2.2.2.4_1.3.3-4: TCI-State

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	0,1,2,3; 8,9,10,11(Note1); 4,5,6,7; 12,13,14,15(Note1)		
qcl-Type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	NZP-CSI-RS-ResourceId: 1,5,9,13; 17,21,25,29(Note1)		
ssb	SSB-Index: 0,1,2,3;		

	4,5,6,7(Note1)		
}			
qcl-Type	typeA, typeA, typeA, typeA; typeA, typeA, typeA, typeA, (Note1) Type C,Type C,Type C,Type C; Type C,Type C,Type C,Type C, (Note1)		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	NZP-CSI-RS- ResourceId: 1,5,9,13; 17,21,25,29(Note1)		
ssb	SSB-Index: 0,1,2,3, 4,5,6,7(Note1)		
}			
qcl-Type	typeD, typeD, typeD, typeD, typeD, typeD, typeD, typed;(Note1) typeD, typeD, typeD, typeD, typeD, typeD, typeD, typeD(Note1)		
}			
}			
Note 1: The values of this line only configured for Test 1-1.			

Table 7.2.2.2.4_1.3.3-5: NZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], clause 5.4.2, Table 5.4.2.4-2a			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE { Slots80	41	Periodicity 80 slots for CSI-RS resource 1,2,3,4 for Resource set #1; 5,6,7,8 for Resource set #2; 9,10,11,12 for Resource set #3; 13,14,15,16 for Resource set #4; 17,18,19,20 for Resource set #13; 21,22,23,24 for Resource set #14; 25,26,27,28 for Resource set #15; 29,30,31,32; for Resource set #16 offset 5 for CSI-RS resource	SCS 60 kHz

		1,2,5,6,9,10,13,14,17,18,21,22,25,26,29,30, offset 6 for CSI-RS resource 3,4,7,8,11,12,15,16,19,20,23,24,27,28,31,32	
Slots160	80	Periodicity 160 slots and offset 0 for CSI-RS resource set#5,6,7,8,17,18,19,20	SCS 120 kHz
}			

Table 7.2.2.4_1.3.3-6: CSI-RS-ResourceMapping for beam refinement

Derivation Path: Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			PDCCH_FR2
frequencyDomainAllocation CHOICE {			
row1	0001	K0 = 0, row1 for resource 1 and 2 for resource-set 9, K0 = 1, row1 for resource 3 and 4 for resource-set 10, K0 = 2, row1 for resource 5 and 6 for resource-set 11, K0 = 3, row1 for resource 7 and 8 for resource-set 12, K0 = 0, row1 for resource 9 and 10 for resource-set 21(Note 2), K0 = 1, row1 for resource 11 and 12 for resource-set 22(Note 2), K0 = 2, row1 for resource 13 and 14 for resource-set 23(Note 2), K0 = 3, row1 for resource 13 and 14 for resource-set 23(Note 2),	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	8	I0 = 8 for resource 1,3,5,7,	
	9	I0 = 9 for resource 2,4,6,8,	
	10	I0 = 10 for resource 9,11,13,15(Note2)	
	11	I0 = 11 for resource 10,12,14,16(Note2)	
}			

7.2.2.4_1.3.3_2 Message exceptions for NSA

Same as 7.2.2.4_1.3.3_1.

7.2.2.4_1.3.4 Test Requirements

Table 7.2.2.1_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A.3.2 for each throughput test shall meet or exceed the specified value in Tables 7.2.2.1_1.4-1 for the specified SNR including test tolerances for all throughput tests.

Table 7.2.2.2.4_1.3.4-1: Test Requirement for HST-DPS

Test num	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH .5-12.2 TDD	200 / 120	64QAM, 0.43	FR2.12 0-1	HST-DPS-FR2-BI-B	1	2x2	70	13.9 +TT
1-2	R.PDSCH .5-12.1 TDD	200 / 120	64QAM, 0.43	FR2.12 0-1	HST-DPS-FR2-UNI-A	2	2x2	70	13.7 +TT

7.2.2.2.5 TDD FR2 PDSCH using Multi-DCI non-overlapping based transmission scheme performance

7.2.2.2.5_0 Minimum conformance requirements

The performance requirements are specified in Table 7.2.2.2.5-3 with the addition of the parameters in Table 7.2.2.2.5-2 and the downlink physical channel setup according to Annex C.5.1.

The test purposes are specified in Table 7.2.2.2.5.0-1.

Table 7.2.2.2.5.0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling non-overlapping PDSCHs	1-1

Table 7.2.2.2.5.0-2: Test Parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
SSB			SSB#0	SSB#1
PDCCH configuration			TCI State #0	TCI State #1
CORESETPoolIndex			0,1	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k ₀ =0 for CSI-RS resources 1,2,3,4	k ₀ =1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l ₀ = 6 for CSI-RS resources 1 and 3 l ₀ = 10 for CSI-RS resources 2 and 4	l ₀ = 6 for CSI-RS resources 5 and 7 l ₀ = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	160	
	CSI-RS offset	Slots	80 for CSI-RS resources 1 and 2 81 for CSI-RS resources 3 and 4	80 for CSI-RS resources 5 and 6 81 for CSI-RS resources 7 and 8
QCL info			TCI state #0	TCI state #1
CSI-RS for beam refinement	First subcarrier index in the		k ₀ =0 for CSI-RS	k ₀ =1 for CSI-RS

	PRB used for CSI-RS			resources 1,2	resources 3,4
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2	$l_0 = 8$ for CSI-RS resource 3 $l_0 = 9$ for CSI-RS resource 4
	Number of CSI-RS ports (X)			1 for CSI-RS resource 1,2	1 for CSI-RS resource 3,4
	CDM Type			'No CDM' for CSI-RS resource 1,2,3,4	
	Density			3	
	CSI-RS periodicity		Slots	160	
	CSI-RS offset		Slots	0 for CSI-RS resources 1,2	0 for CSI-RS resources 3, 4
	QCL info			TCI state #2	TCI state #3
PTRS	Frequency density (K_{PT-RS})			2	2
	Time density (L_{PT-RS})			1	1
	Resource Element Offset			2	2
Duplex mode				TDD	
Active DL BWP index				1	
PDSCH configuration	Mapping type			Type A	
	k0			0	
	Starting symbol (S)			2	
	Length (L)			12	
	PRB bundling type			Static	
	PRB bundling size			2	
	Resource allocation type			Type 1	
	RBG size			Config2	
	VRB-to-PRB mapping type			Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size			N/A	
	Num CDM groups without data			2	2
PDSCH DMRS configuration	Antenna port indexes			{1000, 1001}	{1002, 1003}
	TCI state			TCI State #0	TCI State #1
	DMRS Type			Type 1	
	Number of additional DMRS			1	
	Maximum number of OFDM symbols for DL front loaded DMRS			1	
TCI State #0	Type 1 QCL information	SSB resource		SSB #0	N/A
		QCL Type		Type C	N/A
TCI State #1	Type 2 QCL information	SSB resource		SSB #0	N/A
		QCL Type		Type D	N/A
TCI State #2	Type 1 QCL information	SSB resource		N/A	SSB #1
		QCL Type		N/A	Type C
	Type 2 QCL information	SSB resource		N/A	SSB #1
		QCL Type		N/A	Type D
TCI State #3	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type		Type A	N/A
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type		Type D	N/A
TCI State #3	Type 1 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type A
	Type 2 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type D
Resource allocation				Non-overlapping	
Timing offset of the second TRxP from the first TRxP			us	0.25	

Frequency offset of the second TRxP from the first TRxP	Hz	0
Number of HARQ Processes		8
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
Precoding configuration		SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity
Note 1: PDSCH transmission is done from both TRxPs. Transmission from TRxP #1 uses CORESETPoolIndex 0 and transmission from TRxP #2 uses CORESETPoolIndex 1		

Table 7.2.2.2.5.0-3: Minimum performance

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
								Fraction of maximum throughput (%)	SNR (dB) (Note 3)
	TRxP #1	TRxP #2							
1-1	R.PDSCH .5-2.4 TDD	R.PDSCH .5-2.5 TDD	100 / 120	16QAM, 0.48	FR2.120-1	TDLA30-75	4x4 FR2-mTRxP-mRX $\rho = -12\text{dB}$	70	15.1
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix according to the $R_{FR2-mTRxP-mRX}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows. Note 3: SNR is defined per UE Rx chain. SNR of Rx chain i ($i=1,2$) is derived based on E_s from TRxP# i , as defined in 4.5.2.									

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.5.

7.2.2.2.5_1 TDD FR2 PDSCH using Multi-DCI non-overlapping based transmission scheme performance – MultiRx

Editor’s note: This test case is incomplete. Following aspects are pending

- Device positioning procedure
- MU/TT analysis

7.2.2.2.5_1.1 Test Purpose

Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in controlResourceSet and when UE receives multiple PDCCHs scheduling non-overlapping PDSCHs.

7.2.2.2.5_1.2 Test Applicability

This test applies to all types of NR UE release 18 and forward supporting *simultaneousReceptionDiffTypeD-r16* and *multiDCI-MultiTRP-r16*.

7.2.2.2.5_1.3 Test Description

7.2.2.2.5_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.2.5.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with Connected without release On, Test Mode On according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2.2.2.5_1.3.3.

7.2.2.2.5_1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the UE positioning procedure specified in Annex H clause TBD. If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH in TRxP#1 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetId1 (table 7.2.2.2.5_1.3.3-2), and transmits PDSCH in TRxP#2 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetId2 (table 7.2.2.2.5_1.3.3-2) to transmit the DL RMC according to Tables 7.2.2.2.5_1.4-0. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Tables 7.2.2.2.5_1.4-0 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Tables G.1.5-1 in Annex G.

7.2.2.2.5_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

Table 7.2.2.2.5_1.3.3-1: PDCCH-Config (Preamble)

Derivation Path: TS 38.508-1 [4], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	2 entries		
SEQUENCE(SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet {			
ControlResourceSet[1]	ControlResourceSetId1	entry 1	
ControlResourceSet[2]	ControlResourceSetId2	entry 2	
}			
}			

Table 7.2.2.2.5_1.3.3-2: ControlResourceSetId1 (Table 7.2.2.2.5_1.3.3-1: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
frequencyDomainResources	11110000 00000000 00000000 00000000 00000000 000000	CORESET to use the least significant 24 RBs	

		of the BWP	
tcI-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	1		
}			
tcI-PresentInDCI	enabled		
coresetPoolIndex-r16	0		
}			

Table 7.2.2.2.5_1.3.3-3: ControlResourceSetId2 (Table 7.2.2.2.5_1.3.3-2: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
frequencyDomainResources	00001111 00000000 00000000 00000000 00000000 00000	CORESET to use the RBs 24~47 of the BWP	
tcI-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	2		
}			
tcI-PresentInDCI	enabled		
coresetPoolIndex-r16	1		
}			

Table 7.2.2.2.5_1.3.3-4: Physical layer parameters for DCI format 1_1 in ControlResourceSetId1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0 and 1	"0111"	
Transmission configuration indication	TCI State #1	"000"	

Table 7.2.2.2.5_1.3.3-5: Physical layer parameters for DCI format 1_1 in ControlResourceSetId2

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 2 and 3	"1000"	
Transmission configuration indication	TCI State #2	"001"	

Table 7.2.2.2.5_1.3.3-6: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tcI-StatesToAddModList SEQUENCE(SIZE (1..maxNrofTCI-States)) OF TCI-State {	4 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tcI-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 0		
}			
qcl-Type	typeC		
}			
qcl-type2 SEQUENCE {			

cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 0		
}			
qcl-Type	typeD		
}			
TCI-State[2]		TCI-state-1	
tci-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 1		
}			
qcl-Type	typeC		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 1		
}			
qcl-Type	typeD		
}			
TCI-State[3]		TCI-state-2	
tci-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeD		
}			
TCI-State[4]		TCI-state-3	
tci-StateId	3		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeD		
}			
}			
}			

Table 7.2.2.2.5_1.3.3-7: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 7.2.2.2.5_1.3.3-8: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots160	80	For CSI-RS resources 1,2,5,6	
slots160	81	For CSI-RS resources 3,4,7,8	
}			

7.2.2.2.5_1.4 Test Requirements

Table 7.2.2.2.5_1.4-0: Test requirement

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)(Note 3)
	TRxP #1	TRxP #2							
1-1	R.PDSCH .5-2.4 TDD	R.PDSCH .5-2.5 TDD	100 / 120	16QAM, 0.48	FR2.120-1	TDLA30-75	4x4 FR2-mTRxP-mRX $\rho = -12\text{dB}$	70	15.1 + TT
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix according to the $R_{FR2-mTRxP-mRX}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows. Note 3: SNR is defined per UE Rx chain. SNR of Rx chain i ($i=1,2$) is derived based on E_s from TRxP# i , as defined in 4.5.2.									

7.2.2.2.6 TDD FR2 PDSCH using Multi-DCI fully-overlapping based transmission scheme

7.2.2.2.6_0 Minimum conformance requirements

The performance requirements are specified in Table 7.2.2.2.6_0-3, with the addition of test parameters in Table 7.2.2.2.6_0-2 and the downlink physical channel setup according to Annex C.3.1.

The test purpose is specified in Table 7.2.2.2.6_0-1.

Table 7.2.2.2.6_0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in ControlResourceSet and when UE receives multiple PDCCHs scheduling fully-overlapping PDSCHs with simultaneous reception	1-1

Table 7.2.2.2.6_0-2: Test parameters

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
SSB			SSB#0	SSB#1
PDCCH configuration	TCI state		TCI State #0	TCI State #1
	CORESETPoolIndex		0,1	
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resources 1,2,3,4	$k_0=1$ for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resources 1 and 3 $l_0 = 10$ for CSI-RS resources 2 and 4	$l_0 = 6$ for CSI-RS resources 5 and 7 $l_0 = 10$ for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	160	
	CSI-RS offset	Slots	80 for CSI-RS resources 1 and 2 81 for CSI-RS resources 3 and 4	80 for CSI-RS resources 5 and 6 81 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	TCI state #1
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resources 1,2	$k_0=1$ for CSI-RS resources 3,4
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2	$l_0 = 8$ for CSI-RS resource 3 $l_0 = 9$ for CSI-RS resource 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2	1 for CSI-RS resource 3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	
	Density		3	
	CSI-RS periodicity	Slots	160	
	CSI-RS offset	Slots	0 for CSI-RS resources 1,2	0 for CSI-RS resources 3, 4
QCL info		TCI state #2	TCI state #3	
PTRS	Frequency density (K_{PT-RS})		2	2
	Time density (L_{PT-RS})		1	1
	Resource Element Offset		'offset10'	'offset10'
Duplex mode			TDD	
Active DL BWP index			1	
PDSCH	Mapping type		Type A	

configuration	k0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
	Num CDM groups without data		2	2
PDSCH DMRS configuration	Antenna port indexes		{1000}	{1002}
	TCI state		TCI State #0	TCI State #1
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #0	Type 1 QCL information	SSB resource	SSB #0	N/A
		QCL Type	Type C	N/A
	Type 2 QCL information	SSB resource	SSB #0	N/A
		QCL Type	Type D	N/A
TCI State #1	Type 1 QCL information	SSB resource	N/A	SSB #1
		QCL Type	N/A	Type C
	Type 2 QCL information	SSB resource	N/A	SSB #1
		QCL Type	N/A	Type D
TCI State #2	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type A	N/A
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type	Type D	N/A
TCI State #3	Type 1 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type A
	Type 2 QCL information	CSI-RS resource	N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type	N/A	Type D
Resource allocation			Fully-overlapping	
Timing offset of the second TRxP from the first TRxP		us	-0.0625	
Frequency offset of the second TRxP from the first TRxP		Hz	600	
Number of HARQ Processes			8	
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.2	
Precoding configuration			SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity	
Note 1: PDSCH transmission is done from both TRxPs. Transmission from TRxP #1 uses CORESETPoolIndex 0 and transmission from TRxP #2 uses CORESETPoolIndex 1				

Table 7.2.2.6_0-3: Minimum performance

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing	Modulation format and code	TDD UL-DL pattern	Propagation condition (Note 1)	Correlation matrix and antenna configuration (Note 2)	Reference value	
							Fraction of maximum	SNR (dB) (Note 3)

		(kHz)	rate				m throughput (%)		
1-1	TRxP #1	TRxP #2	100 / 120	64QAM, 0.43	FR2.12 0-1	TDLA30-75	4x4 FR2-mTRxP-mRX $\rho=-12\text{dB}$	70	14.8
	R.PDSCH. 5-3.3 TDD	R.PDSCH. 5-3.3 TDD							
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix according to the $R_{\text{FR2-mTRxP-mRX}}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows. Note 3: SNR is defined per UE Rx chain. SNR of Rx chain i ($i=1,2$) is derived based on E_s from TRxP# i , as defined in 4.5.2.									

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.6.

7.2.2.2.6_1 TDD FR2 PDSCH using Multi-DCI fully-overlapping based transmission scheme performance – MultiRx

Editor's note: This test case is incomplete. Following aspects are pending

- Device positioning procedure
- MU/TT analysis
- minimum test time

7.2.2.2.6_1.1 Test Purpose

Verify the PDSCH performance when UE is configured two different values of CORESETPoolIndex in controlResourceSet and when UE receives multiple PDCCHs scheduling fully-overlapping PDSCHs with simultaneous reception.

7.2.2.2.6_1.2 Test Applicability

This test applies to all types of NR UE release 18 and forward supporting *simultaneousReceptionDiffTypeD-r16* and *multiDCI-MultiTRP-r16* and *overlapPDSCHsFullyFreqTime-r16*.

7.2.2.2.6_1.3 Test Description

7.2.2.2.6_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.2.6.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2.2.2.6_1.3.3.

7.2.2.2.6_1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the UE positioning procedure specified in Annex H clause TBD. If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH in TRxP#1 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetId1 (table 7.2.2.2.6_1.3.3-2), and transmits PDSCH in TRxP#2 via PDCCH DCI format 1_1 for C_RNTI in ControlResourceSetId2 (table 7.2.2.2.6_1.3.3-2) to transmit the DL RMC according to Tables 7.2.2.2.6_1.4-0. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR for TRxP#1 and TRxP#2 according to Tables 7.2.2.2.6_1.4-0 as appropriate.
4. Measure the average throughput for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Tables G.1.5-1 in Annex G.

7.2.2.2.6_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

Table 7.2.2.2.6_1.3.3-1: PDCCH-Config (Preamble)

Derivation Path: TS 38.508-1 [4], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	2 entries		
SEQUENCE(SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet {			
ControlResourceSet[1]	ControlResourceSetId1	entry 1	
ControlResourceSet[2]	ControlResourceSetId2	entry 2	
}			
}			

Table 7.2.2.2.6_1.3.3-2: ControlResourceSetId1 (Table 7.2.2.2.6_1.3.3-1: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	1		
frequencyDomainResources	11110000 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 24 RBs of the BWP	
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId {			
TCI-StateId[1]	1		
}			
tci-PresentInDCI	enabled		
coresetPoolIndex-r16	0		
}			

Table 7.2.2.2.6_1.3.3-3: ControlResourceSetId2 (Table 7.2.2.2.6_1.3.3-2: PDCCH-Config)

Derivation Path: TS 38.508-1 [4], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		

frequencyDomainResources	00001111 00000000 00000000 00000000 00000000 000000	CORESET to use the RBs 24~47 of the BWP	
tcI-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF TCI-StateId { TCI-StateId[1]	2		
}			
tcI-PresentInDCI	enabled		
coresetPoolIndex-r16	1		
}			

Table 7.2.2.2.6_1.3.3-4: Physical layer parameters for DCI format 1_1 in ControlResourceSetId1

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 0	"0011"	
Transmission configuration indication	TCI State #1	"000"	

Table 7.2.2.2.6_1.3.3-5: Physical layer parameters for DCI format 1_1 in ControlResourceSetId2

Derivation Path: TS 38.508-1 [6], Table 4.3.6.1.2.2-1			
Parameter	Value	Value in binary	Condition
Antenna port(s)	DMRS port 2	"0101"	
Transmission configuration indication	TCI State #2	"001"	

Table 7.2.2.2.6_1.3.3-6: PDSCH-Config

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
tcI-StatesToAddModList SEQUENCE(SIZE (1..maxNrofTCI-States)) OF TCI-State {	4 entries		
TCI-State[1] SEQUENCE {		TCI-state-0	
tcI-StateId	0		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 0		
}			
qcl-Type	typeC		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 0		
}			
qcl-Type	typeD		
}			
TCI-State[2]		TCI-state-1	
tcI-StateId	1		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 1		
}			

qcl-Type	typeC		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index 1		
}			
qcl-Type	typeD		
}			
}			
TCI-State[3]		TCI-state-2	
tcI-StateId	2		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeA		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	1		
}			
qcl-Type	typeD		
}			
TCI-State[4]		TCI-state-3	
tcI-StateId	3		
qcl-type1 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeA		
}			
qcl-type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
csi-rs	5		
}			
qcl-Type	typeD		
}			
}			
}			

Table 7.2.2.2.6_1.3.3-7: CSI-RS-ResourceMapping for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-9			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0000	For CSI-RS resources 1, 2, 3, 4	
	0001	For CSI-RS resources 5,6,7,8	
}			
nrofPorts	p1		

firstOFDMSymbolInTimeDomain	6	For CSI-RS resources 1,3,5,7	
	10	For CSI-RS resources 2,4,6,8	
}			

Table 7.2.2.6_1.3.3-8: CSI-ResourcePeriodicityAndOffset for TRS

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-10			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots160	80	For CSI-RS resources 1,2,5,6	
slots160	81	For CSI-RS resources 3,4,7,8	
}			

7.2.2.6_1.4 Test Requirements

Table 7.2.2.6_1.4-1: Test Requirement

Test num.	Reference channel		Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition(Note 1)	Correlation matrix and antenna configuration(Note 2)	Reference value	
								Fraction of maximum throughput (%)	SNR (dB)(Note 3)
1-1	TRxP #1	TRxP #2	100 / 120	64QAM, 0.43	FR2.12 0-1	TDLA30-75	4x4 FR2-mTRxP-mRX $\rho=-12$ dB	70	14.8 + TT
	R.PDSCH. 5-3.3 TDD	R.PDSCH. 5-3.3 TDD							
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent Note 2: Correlation matrix according to the $R_{FR2-mTRxP-mRX}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows. Note 3: SNR is defined per UE Rx chain. SNR of Rx chain i ($i=1,2$) is derived based on E_s from TRxP# i , as defined in 4.5.2.									

7.2.2.2.7 TDD FR2 PDSCH using Single-DCI based SDM scheme performance

7.2.2.2.7_0 Minimum conformance requirements

The performance requirements are specified in Table 7.2.2.2.7-3, with the addition of test parameters in Table 7.2.2.2.7-2 and the downlink physical channel setup according to Annex C.5.1.

The test purposes are specified in Table 7.2.2.2.7-1.

Table 7.2.2.2.7_0-1: Tests purpose

Purpose	Test index
Verify the PDSCH performance with Single-DCI based SDM scheme for multi-Rx simultaneous DL reception	1-1, 1-2

Table 7.2.2.2.7_0-2: Test Parameters

Parameter	Unit	Value
-----------	------	-------

			TRxP #1(Note 1)	TRxP #2(Note 1)
SSB			SSB #0	SSB #1
PDCCH configuration	TCI state		TCI State #2	N/A
	CORESETPoolIndex		0	N/A
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 6 for CSI-RS resources 1 and 3 l0 = 10 for CSI-RS resources 2 and 4	l0 = 6 for CSI-RS resources 5 and 7 l0 = 10 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 5,6,7,8
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
	Density		3	
	CSI-RS periodicity	Slots	160	
	CSI-RS offset	Slots	80 for CSI-RS resources 1 and 2 81 for CSI-RS resources 3 and 4	80 for CSI-RS resources 5 and 6 81 for CSI-RS resources 7 and 8
	QCL info		TCI state #0	TCI state #1
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS (k0)		k0=0 for CSI-RS resource 1,2	k0=1 for CSI-RS resource 3,4
	First OFDM symbol in the PRB used for CSI-RS (l0)		l0 = 8 for CSI-RS resource 1 l0 = 9 for CSI-RS resource 2	l0 = 8 for CSI-RS resource 3 l0 = 9 for CSI-RS resource 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2	1 for CSI-RS resource 3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2	'No CDM' for CSI-RS resource 3,4
	Density (ρ)		3 for CSI-RS resource 1,2	3 for CSI-RS resource 3,4
	CSI-RS periodicity		160 for CSI-RS resource 1,2	160 for CSI-RS resource 3,4
	CSI-RS offset		0 for CSI-RS resource 1,2	0 for CSI-RS resource 3,4
	Repetition		ON	ON
	QCL info		TCI state #2	TCI state #3
Duplex mode			TDD	
Active DL BWP index			1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		1	
	Length (L)		Specific to each Reference channel as defined in A.3.2.2	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #2	TCI State #3
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
TCI State #0	Type 1 QCL information	SSB index	SSB #0	N/A
		QCL Type	Type C	N/A
	Type 2 QCL information	SSB index	SSB #0	N/A
		QCL Type	Type D	N/A
TCI State #1	Type 1 QCL information	SSB index	N/A	SSB #1
		QCL Type	N/A	Type C

	Type 2 QCL information	SSB index		N/A	SSB #1
		QCL Type		N/A	Type D
TCI State #2	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type		Type A	N/A
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type		Type D	N/A
TCI State #3	Type 1 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type A
	Type 2 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type D
PTRS configuration	Frequency density (K_{PT-RS})				2
	Time density (L_{PT-RS})				1
	Resource Element Offset				2
	Max number of ports				n1 for Test 1-1 n2 for Test 1-2
Resource allocation					Full-overlapping
Timing offset of the second TRxP from the first TRxP		us			-0.0625
Frequency offset of the second TRxP from the first TRxP		Hz			600
Number of HARQ Processes					8
The number of slots between PDSCH and corresponding HARQ-ACK information					Specific to each TDD UL-DL pattern and as defined in Annex A.1.2
Precoding configuration					SP Type I, independent precoding generation is applied for both TRxPs, random per slot with PRB bundling granularity.
Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)					

Table 7.2.2.2.7_0-3: Minimum performance

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.5-16.1 TDD	100 / 120	16QAM, 0.48	FR1.120-1	TDLA30-35	4x4, FR2-mTRxP-mRX $\rho = -12\text{dB}$	70	15.9
1-2	R.PDSCH.5-16.2 TDD	100 / 120	16QAM, 0.48	FR1.120-1	TDLA30-35	4x4, FR2-mTRxP-mRX $\rho = -12\text{dB}$	70	15.6
Note 1: The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent								
Note 2: Correlation matrix according to the $R_{FR2-mTRxP-mRX}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows.								
Note 3: SNR is defined per UE Rx chain. SNR of Rx chain i ($i=1,2$) is derived based on E_s from TRxP# i , as defined in 4.5.2.								

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2.2.2.7.

7.2.2.2.7_1 TDD FR2 PDSCH using Single-DCI based SDM scheme performance – MultiRx

Editor’s note: This test case is incomplete. Following aspects are pending

- Initial call setup procedure
- Device positioning procedure
- Test procedure
- message exceptions
- MU/TT analysis
- minimum test time
- applicability spec update

7.2.2.2.7_1.1 Test Purpose

Verify the PDSCH performance when UE is configured with single-DCI based SDM scheme for multi-Rx simultaneous DL reception

7.2.2.2.7_1.2 Test Applicability

This test applies to all types of NR UE release 18 and forward supporting *simultaneousReceptionDiffTypeD-r16* and *singleDCI-SDM-scheme-r16*.

7.2.2.2.7_1.3 Test Description

7.2.2.2.7_1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

FFS

7.2.2.2.7_1.3.2 Test Procedure

FFS

7.2.2.2.7_1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

FFS

7.2.2.2.7_1.4 Test Requirements

Table 7.2.2.7_1.4-0: Test requirement

Test num.	Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
1-1	R.PDSCH.5-16.1 TDD	100 / 120	16QAM, 0.48	FR1.120-1	TDLA30-35	4x4, FR2-mTRxP-mRX ρ = -12dB	70	15.9 + TT

1-2	R.PDSCH.5-16.2 TDD	100 / 120	16QAM, 0.48	FR1.120-1	TDLA30-35	4x4, FR2-mTRxP-mRX $\rho = -12\text{dB}$	70	15.6 + TT
Note 1:	The propagation conditions apply to each of TRxP #1 and TRxP #2 and are statistically independent							
Note 2:	Correlation matrix according to the $R_{\text{FR2-mTRxP-mRX}}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows.							
Note 3:	SNR is defined per UE Rx chain. SNR of Rx chain i ($i=1,2$) is derived based on E_s from TRxP# i , as defined in 4.5.2.							

7.2A PDSCH demodulation requirements for CA

The parameters specified in Table 7.2-1 for PDSCH single carrier tests are reused for PDSCH CA test unless otherwise stated.

7.2A.1 1RX requirements (Void)

7.2A.2 2RX requirements

7.2A.2.0 Minimum conformance requirements

For CA with different numbers of DL component carriers, the requirements are defined in Table 7.2A.2.0-3-3 based on the single carrier requirements for different bandwidth specified in Table 7.2A.2.0-2, with the parameters in Table 7.2A.2.0-1 and the downlink physical channel setup according to Annex C.2.2. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

Table 7.2A.2.0-1: Test parameters for CA

Parameter		Unit	Value
Duplex mode			TDD
Active DL BWP index			1
PDSCH configuration	Mapping type		Type A
	k0		0
	Starting symbol (S)		1
	Length (L)		Specific to each Reference channel
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Maximum number of OFDM symbols for DL front loaded DMRS		1
Number of HARQ Processes			8
TDD UL-DL pattern			120kHz SCS: FR2.120-1
The number of slots between PDSCH and corresponding HARQ-ACK information			As defined in Annex A.1.3

Table 7.2A.2.0-2: Single carrier performance for TDD 120 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
50	R.PDSCH.5-9.1 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	10.4

100	R.PDSCH.5-9.2 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	10.2
200	R.PDSCH.5-9.3 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	10.3
400	R.PDSCH.5-9.4 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	10.3

Table 7.2A.2.0-3: Minimum performance for multiple CA configurations

Test number	CA duplex mode	Minimum performance requirements
1	TDD 120 kHz + TDD 120 kHz	As defined in Table 7.2A.2.1_0-2
Note 1: The applicability of requirements for different CA duplex modes, SCSS, CA configurations and bandwidth combination sets is defined in 7.1.1.5.		

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2A.2.1

7.2A.2.1 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (2DLCA)

7.2A.2.1.1 Test Purpose

Verify the PDSCH mapping Type A normal performance with different channel models, MCSs and number of MIMO layers.

7.2A.2.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward that support NR 2DL CA.

7.2A.2.1.3 Test Description

7.2A.2.1.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

CA capability to be tested: Any one of the supported CA capability as per the selection criteria specified in Table 7.1.1.5.2-2.

CA Bandwidth combination: Largest aggregated bandwidth as per Table 7.2A.2.1.3.1-1

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

Table 7.2A.2.1.3.1-1: Test point selection for CA UE demodulation tests

Tests	CA capability where the tests apply	CA configuration from the selected CA capability where the tests apply	CA Bandwidth combination to be tested in priority order	PCell CC configuration
Test 1 in Section 7.2A.2.0-3	CA_C, CA_N, CA_AX	Table 7.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1, 7.2A.2.0-1 and Table 7.2A.2.0-2 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
6. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2A.2.1.3.3.

7.2A.2.1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Configure SCC(s) according to Annex C.0, C.1 and C.2 for all downlink physical channels.
3. The SS shall configure SCC(s) as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 7.2A.2.1.3.3.
4. SS activates SCC(s) by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause 9.3).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 7.2A.2.1.4-1 on each NR CC. The SS sends downlink MAC padding bits on the DL RMC.
6. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 7.2A.2.1.4-1 on each NR CC
7. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Tables G.1.5-1 in Annex G.

7.2A.2.1.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2

7.2A.2.1.4 Test Requirements

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test per component carrier shall meet or exceed the specified value as per Table 7.2A.2.1.4_1.4-1 for the specified SNR including test tolerances.

Table 7.2A.2.1.4-1: Single carrier performance for TDD 120 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
50	R.PDSCH.5-9.1 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.1
100	R.PDSCH.5-9.2 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	11.9
200	R.PDSCH.5-9.3 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.0
400	R.PDSCH.5-	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.0

	9.4 TDD					
--	---------	--	--	--	--	--

7.2A.2.2 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (3DLCA)

7.2A.2.2.1 Test Purpose

Same as 7.2A.2.1.1

7.2A.2.2.2 Test Applicability

This test applies to all types of NR UE release 15 and forward that support NR 3DL CA.

7.2A.2.2.3 Test Description

Same as 7.2A.2.1.3

7.2A.2.2.3.2 Test Procedure

Same as 7.2A.2.1.3.2

7.2A.2.2.3.3 Message Contents

Same as 7.2A.2.1.3.3

7.2A.2.2.4 Test Requirements

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test per component carrier shall meet or exceed the specified value as per Table 7.2A.2.2.4_1.4-1 for the specified SNR including test tolerances.

Table 7.2A.2.2.4-1: Single carrier performance for TDD 120 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
50	R.PDSCH.5-9.1 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.1
100	R.PDSCH.5-9.2 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	11.9
200	R.PDSCH.5-9.3 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.0
400	R.PDSCH.5-9.4 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.0

7.2A.2.3 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (4DLCA)

7.2A.2.3.1 Test Purpose

Same as 7.2A.2.1.1

7.2A.2.3.2 Test Applicability

This test applies to all types of NR UE release 15 and forward that support NR 4DL CA.

7.2A.2.3.3 Test Description

Same as 7.2A.2.1.3

7.2A.2.3.3.2 Test Procedure

Same as 7.2A.2.1.3.2

7.2A.2.3.3.3 Message Contents

Same as 7.2A.2.1.3.3

7.2A.2.3.4 Test Requirements

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test per component carrier shall meet or exceed the specified value as per Table 7.2A.2.3.4_1.4-1 for the specified SNR including test tolerances.

Table 7.2A.2.3.4-1: Single carrier performance for TDD 120 kHz SCS for CA configurations

Bandwidth (MHz)	Reference channel	Modulation format and code rate	Propagation condition	Correlation matrix and antenna configuration	Reference value	
					Fraction of maximum throughput (%)	SNR (dB)
50	R.PDSCH.5-9.1 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.1
100	R.PDSCH.5-9.2 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	11.9
200	R.PDSCH.5-9.3 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.0
400	R.PDSCH.5-9.4 TDD	16QAM, 0.33	TDLA30-75	2x2, ULA Low	70	12.0

7.2A.2.4 2Rx TDD FR2 CA requirements for HST-FR2-DPS for normal PDSCH Demodulation Performance for both SA and NSA (2DLCA)

7.2A.2.4.0 Minimum conformance requirements

For HST-FR2-DPS with CA, the requirements are defined in Table 7.2A.2.4.0-5 based on the single carrier requirements for 120KHz SCS and different bandwidth specified in Table 7.2A.2.4.0-3 and Table 7.2A.2.4.0-4, with the additional parameters in Table 7.2A.2.4.0-2 and the downlink physical channel setup according to Annex C.2.2. The performance requirements specified in this sub-clause do not apply for UE single carrier test.

The test purpose is specified in Table 7.2A.2.4.0-1.

Table 7.2A.2.4.0-1: Test Purpose

Purpose	Test index
Verify UE performance in the HST-FR2-DPS scenario defined in B.3.4.2 with CA with 1 active PDSCH TCI states	1
Verify UE performance in the HST-FR2-DPS scenario defined in B.3.4.1 with CA with 2 active PDSCH TCI states	2

Table 7.2A.2.4.0-2: Test Parameters

Parameter		Unit	Value	
Duplex mode			TDD	
Active DL BWP index			1	
PDCCH configuration	TCI state		Note 1	
	Number of PDCCH candidates and aggregation levels		120kHz SCS and 50MHz bandwidth: 1/AL2 others: Table 7.2-1	
PDSCH configuration	Mapping type		Type A	
	k0		0	
	Starting symbol (S)		1	
	Length (L)		Specific to each Reference channel	
	PDSCH aggregation factor		1	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 0	
	RBG size		Config2	
	VRB-to-PRB mapping type		Non-interleaved	
	VRB-to-PRB mapping interleaver bundle size		N/A	
PDSCH DMRS configuration	TCI state		Note 1	
	DMRS Type		Type 1	
	Number of additional DMRS		2	
PDSCH DMRS configuration	Maximum number of OFDM symbols for DL front loaded DMRS		1	
	CSI-RS for tracking	Resource set #1	First subcarrier index in the PRB used for CSI-RS (k_0)	0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the PRB used for CSI-RS			$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4	
CSI-RS periodicity			Slots	80 for CSI-RS resource 1,2,3,4
CSI-RS offset			Slots	5 for CSI-RS resource 1 and 2 6 for CSI-RS resource 3 and 4
QCL info				TCI state #4
Frequency Occupation				Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #2		First subcarrier index in the PRB used for CSI-RS (k_0)		0 for CSI-RS resource 5,6,7,8
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 4$ for CSI-RS resource 5 and 7 $l_0 = 8$ for CSI-RS resource 6 and 8
		CSI-RS periodicity	Slots	80 for CSI-RS resource 5,6,7,8
		CSI-RS offset	Slots	5 for CSI-RS resource 5 and 6 6 for CSI-RS resource 7 and 8
		QCL info		TCI state #5
		Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$
Resource set #3		First subcarrier index in the PRB used for CSI-RS (k_0)		1 for CSI-RS resource 9,10,11,12
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 5$ for CSI-RS resource 9 and 11 $l_0 = 9$ for CSI-RS resource 10 and 12
		CSI-RS periodicity	Slots	80 for CSI-RS resource 9,10,11,12
	CSI-RS offset	Slots	5 for CSI-RS resource 9 and 10 6 for CSI-RS resource 11 and 12	
	QCL info		TCI state #6	
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$	

Parameter		Unit	Value	
	Resource set #4	First subcarrier index in the PRB used for CSI-RS (k_0)	1 for CSI-RS resource 13,14,15,16	
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 4$ for CSI-RS resource 13 and 15	
			$l_0 = 8$ for CSI-RS resource 14 and 16	
		CSI-RS periodicity	Slots	80 for CSI-RS resource 13,14,15,16
		CSI-RS offset	Slots	5 for CSI-RS resource 13 and 14 6 for CSI-RS resource 15 and 16
		QCL info		TCI state #7
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$	
	Resource set #13 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)		2 for CSI-RS resource 17,18,19,20
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 17 and 19	
			$l_0 = 9$ for CSI-RS resource 18 and 20	
		CSI-RS periodicity	Slots	80 for CSI-RS resource 17,18,19,20
		CSI-RS offset	Slots	5 for CSI-RS resource 17 and 18 6 for CSI-RS resource 19 and 20
		QCL info		TCI state #12
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$	
	Resource set #14 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)		2 for CSI-RS resource 21,22,23,24
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 4$ for CSI-RS resource 21 and 23	
			$l_0 = 8$ for CSI-RS resource 22 and 24	
		CSI-RS periodicity	Slots	80 for CSI-RS resource 21,22,23,24
		CSI-RS offset	Slots	5 for CSI-RS resource 21 and 22 6 for CSI-RS resource 23 and 24
		QCL info		TCI state #13
	Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$	
Resource set #15 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)		3 for CSI-RS resource 25,26,27,28	
	First OFDM symbol in the PRB used for CSI-RS	$l_0 = 5$ for CSI-RS resource 25 and 27		
		$l_0 = 9$ for CSI-RS resource 26 and 28		
	CSI-RS periodicity	Slots	80 for CSI-RS resource 25,26,27,28	
	CSI-RS offset	Slots	5 for CSI-RS resource 25 and 26 6 for CSI-RS resource 27 and 28	
	QCL info		TCI state #14	
Frequency Occupation		Start PRB 0 Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$		
Resource set #16	First subcarrier index in		3 for CSI-RS resource 29,30,31,32	

Parameter		Unit	Value	
	(Note2)	the PRB used for CSI-RS (k_0)		
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 4$ for CSI-RS resource 29 and 31
				$l_0 = 8$ for CSI-RS resource 30 and 32
		CSI-RS periodicity	Slots	80 for CSI-RS resource 29,30,31,32
		CSI-RS offset	Slots	5 for CSI-RS resource 29 and 30
				6 for CSI-RS resource 31 and 32
		QCL info		TCI state #15
Frequency Occupation		Start PRB 0		
		Number of PRB = $\text{ceil}(\text{BWP size}/4)*4$		
NZP CSI-RS for CSI acquisition	Resource set #5	First subcarrier index in the PRB used for CSI-RS (k_0)	0	
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	160
		CSI-RS offset	Slots	0
	QCL info		TCI state #0	
	Resource set #6	First subcarrier index in the PRB used for CSI-RS (k_0)		2
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	160
		CSI-RS offset	Slots	0
	QCL info		TCI state #1	
	Resource set #7	First subcarrier index in the PRB used for CSI-RS (k_0)		4
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	160
		CSI-RS offset	Slots	0
	QCL info		TCI state #2	
	Resource set #8	First subcarrier index in the PRB used for CSI-RS (k_0)		6
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 12$
		CSI-RS periodicity	Slots	160
		CSI-RS offset	Slots	0
	QCL info		TCI state #3	
	Resource set #17 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)		0
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$
		CSI-RS periodicity	Slots	160
CSI-RS offset		Slots	1	
QCL info		TCI state #8		
Resource set #18 (Note2)	First subcarrier index in the PRB used for CSI-RS (k_0)		2	
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 13$	
	CSI-RS periodicity	Slots	160	
CSI-RS offset	Slots	1		

Parameter		Unit	Value
	Resource set #19 (Note2)	QCL info	TCI state #9
		First subcarrier index in the PRB used for CSI-RS (k_0)	4
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 1
	Resource set #20 (Note2)	QCL info	TCI state #10
		First subcarrier index in the PRB used for CSI-RS (k_0)	6
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 13$
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 1
CSI-RS for beam refinement	Resource set #9	QCL info	TCI state #11
		First subcarrier index in the PRB used for CSI-RS	$k_0=0$ for CSI-RS resource 1,2
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 0
	Resource set #10	QCL info	TCI state #0
		First subcarrier index in the PRB used for CSI-RS	$k_0=1$ for CSI-RS resource 3,4
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 8$ for CSI-RS resource 3 $l_0 = 9$ for CSI-RS resource 4
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 0
	Resource set #11	QCL info	TCI state #1
		First subcarrier index in the PRB used for CSI-RS	$k_0=2$ for CSI-RS resource 5,6
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 8$ for CSI-RS resource 5 $l_0 = 9$ for CSI-RS resource 6
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 0
	Resource set #12	QCL info	TCI state #2
		First subcarrier index in the PRB used for CSI-RS	$k_0=3$ for CSI-RS resource 7,8
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 8$ for CSI-RS resource 7 $l_0 = 9$ for CSI-RS resource 8
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 0
	Resource set #21 (Note2)	QCL info	TCI state #3
		First subcarrier index in the PRB used for CSI-RS	$k_0=0$ for CSI-RS resource 9,10
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 10$ for CSI-RS resource 9 $l_0 = 11$ for CSI-RS resource 10
		CSI-RS periodicity	Slots 160
		CSI-RS offset	Slots 1
	Resource set #22 (Note2)	QCL info	TCI state #8
		First subcarrier index in the PRB used for CSI-RS	$k_0=1$ for CSI-RS resource 11,12
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 10$ for CSI-RS resource 11 $l_0 = 11$ for CSI-RS resource 12
CSI-RS periodicity		Slots 160	
CSI-RS offset		Slots 1	
Resource set #23 (Note2)	QCL info	TCI state #9	
	First subcarrier index in the PRB used for CSI-RS	$k_0=2$ for CSI-RS resource 13,14	

Parameter		Unit	Value	
		First OFDM symbol in the PRB used for CSI-RS	$l_0 = 10$ for CSI-RS resource 13 $l_0 = 11$ for CSI-RS resource 14	
		CSI-RS periodicity	Slots 160	
		CSI-RS offset	Slots 1	
		QCL info		TCI state #10
	Resource set #24 (Note2)	First subcarrier index in the PRB used for CSI-RS		$k_0=3$ for CSI-RS resource 15,16
		First OFDM symbol in the PRB used for CSI-RS		$l_0 = 10$ for CSI-RS resource 15 $l_0 = 11$ for CSI-RS resource 16
		CSI-RS periodicity	Slots 160	
		CSI-RS offset	Slots 1	
		QCL info		TCI state #11
TCI state #0	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking Resource set #1' configuration	
		QCL Type	Type D	
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 5 from 'CSI-RS for tracking Resource set #2' configuration	
		QCL Type	Type D	
TCI state #2	Type 1 QCL information	CSI-RS resource	CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 9 from 'CSI-RS for tracking Resource set #3' configuration	
		QCL Type	Type D	
TCI state #3	Type 1 QCL information	CSI-RS resource	CSI-RS resource 13 from 'CSI-RS for tracking Resource set #4' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 13 from 'CSI-RS for tracking Resource set #4' configuration	
		QCL Type	Type D	
TCI state #8 (Note2)	Type 1 QCL information	CSI-RS resource	CSI-RS resource 17 from 'CSI-RS for tracking Resource set #13' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 17 from 'CSI-RS for tracking Resource set #13' configuration	
		QCL Type	Type D	
TCI state #9 (Note2)	Type 1 QCL information	CSI-RS resource	CSI-RS resource 21 from 'CSI-RS for tracking Resource set #14' configuration	
		QCL Type	Type A	
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 21 from 'CSI-RS for tracking Resource set #14' configuration	
		QCL Type	Type D	
TCI state #10 (Note2)	Type 1 QCL	CSI-RS resource	CSI-RS resource 25 from 'CSI-RS	

Parameter		Unit	Value
	information		for tracking Resource set #15' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 25 from 'CSI-RS for tracking Resource set #15' configuration
		QCL Type	Type D
TCI state #11 (Note2)	Type 1 QCL information	CSI-RS resource	CSI-RS resource 29 from 'CSI-RS for tracking Resource set #16' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 29 from 'CSI-RS for tracking Resource set #16' configuration
		QCL Type	Type D
TCI state #4	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #0
		QCL Type	Type D
TCI state #5	Type 1 QCL information	SSB index	SSB #1
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #1
		QCL Type	Type D
TCI state #6	Type 1 QCL information	SSB index	SSB #2
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #2
		QCL Type	Type D
TCI state #7	Type 1 QCL information	SSB index	SSB #3
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #3
		QCL Type	Type D
TCI state #12 (Note2)	Type 1 QCL information	SSB index	SSB #4
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #4
		QCL Type	Type D
TCI state #13 (Note2)	Type 1 QCL information	SSB index	SSB #5
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #5
		QCL Type	Type D
TCI state #14 (Note2)	Type 1 QCL information	SSB index	SSB #6
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #6
		QCL Type	Type D
TCI state #15 (Note2)	Type 1 QCL information	SSB index	SSB #7
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #7
		QCL Type	Type D
Number of HARQ Processes			8
The number of slots between PDSCH and corresponding HARQ-ACK			Specific to each TDD UL-DL

Parameter	Unit	Value
information		pattern and as defined in Annex A.1.3
<p>Note 1: For Test 1 in Table 7.2A.2.4.0-5, SSB # $(2k \bmod 8)$, CSI-RS (for tracking) resource set # $((k \bmod 4)+1)$, CSI-RS (for CSI acquisition) resource set # $((k \bmod 4) + 5)$ and CSI-RS (for beam refinement) resource set # $((k \bmod 4) + 9)$ are transmitted by k^{th} RRH; SSB # $((2k \bmod 8)+1)$, CSI-RS (for tracking) resource set # $((k \bmod 4) + 13)$, CSI-RS (for CSI acquisition) resource set # $((k \bmod 4) + 17)$ and CSI-RS (for beam refinement) resource set # $((k \bmod 4) + 21)$ are transmitted by k^{th} RRH. TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\text{mod}(i, n) = 0$ ($i \neq 0$). PDCCH and PDSCH associated with TCI # $(k \bmod 4)$ is transmitted by k^{th} RRH from slot#</p> $\begin{cases} 0, & k = 1 \\ (2k - 2)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstSSB}} + T_{\text{SSB proc}} + T_{\text{firstTRSafterSSB}} + T_{\text{TRS proc}}, & k = 2,3,4 \dots \end{cases}$ <p>to slot#</p> $[(2k - 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}], k = 1,2,3 \dots$ <p>PDCCH and PDSCH associated with TCI # $((k \bmod 4)+8)$ is transmitted by k^{th} RRH from slot#</p> $[(2k + 1)n + 1 + T_{\text{HARQ}} + T_{\text{MAC proc}} + T_{\text{firstSSB}} + T_{\text{SSB proc}} + T_{\text{firstTRSafterSSB}} + T_{\text{TRS proc}}], k = 0,1,2 \dots$ <p>to slot#</p> $[2(k + 1)n + T_{\text{HARQ}} + T_{\text{MAC proc}}], k = 0,1,2 \dots,$ <p>where k is the RRH number, $n = 28800$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 4$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 24$ is the number of slots for MAC CE processing, $T_{\text{firstSSB}} = 132$ is the number of slots to first SSB transmission occasion after MAC CE command is decoded by the UE, $T_{\text{SSB proc}} = 16$ is the number of slots for SSB processing, $T_{\text{firstTRSafterSSB}} = 66$ is the number of slots to first TRS transmission occasion after first SSB is processed by the UE, $T_{\text{TRS proc}} = 16$ is the number of slots for TRS processing. PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>For Test 2 in Table 7.2A.2.4.0-5, SSB # $(k \bmod 4)$, CSI-RS (for tracking) resource set # $((k \bmod 4)+1)$, CSI-RS (for CSI acquisition) resource set # $((k \bmod 4) + 5)$ and CSI-RS (for beam refinement) resource set # $((k \bmod 4) + 9)$ are transmitted by k^{th} RRH. TCI state switching command scheduled by MAC CE with MCS 4 is transmitted in slot #i that satisfy $\text{mod}(i, n) = 0$. PDCCH and PDSCH associated with TCI # $(k \bmod 4)$ is transmitted by k^{th} RRH from slot#</p> $\begin{cases} 0, & k = 1 \\ (k - 1)n + 2 + T_{\text{HARQ}} + T_{\text{MAC proc}}, & k = 2,3,4 \dots \end{cases}$ <p>to slot#</p> $[k * n + T_{\text{HARQ}} + T_{\text{MAC proc}}], k = 1,2,3 \dots$ <p>where k is the RRH number, $n = 57600$ is half of the number of slots between two RRH, $T_{\text{HARQ}} = 4$ is the number of slots between PDSCH and corresponding HARQ-ACK information, $T_{\text{MAC proc}} = 24$ is the number of slots for MAC CE processing. PDCCH and PDSCH are DTXed in other slots in which throughput statistics are not considered.</p> <p>Note 2: Only configured for Test 1 in Table 7.2A.2.4.0-5.</p>		

Table 7.2A.2.4.0-3: Single carrier performance for HST-FR2-DPS CA Configurations with 1 Active TCI State

Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
R.PDSCH. 5-16.1 TDD	50 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	13.6
R.PDSCH. 5-16.2 TDD	100 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	13.9
R.PDSCH. 5-12.2 TDD	200 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	14.0
R.PDSCH. 5-16.3 TDD	400 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	13.8

Table 7.2A.2.4.0-4: Single carrier performance for HST-FR2-DPS CA Configurations with 2 Active TCI States

Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
R.PDSCH. 5-17.1 TDD	50 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	13.7
R.PDSCH. 5-17.2 TDD	100 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	13.9
R.PDSCH. 5-12.1 TDD	200 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	14.0
R.PDSCH. 5-17.3 TDD	400 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	13.8

Table 7.2A.2.4.0-5: Minimum performance for HST-FR2-DPS multiple CA configurations

Test number	CA duplex mode	Minimum performance requirements
1	TDD 120 kHz + TDD 120 kHz	As defined in Table 7.2A.2.4.0-3
2	TDD 120 kHz + TDD 120 kHz	As defined in Table 7.2A.2.4.0-4
Note 1: The applicability of requirements for different CA duplex modes, SCSs, CA configurations and bandwidth combination sets is defined in 7.1.1.5.		

The normative reference for this requirement is TS 38.101-4 [5] clause 7.2A.2.2

7.2A.2.4.1 Test Purpose

Verify UE performance in the HST-FR2-DPS scenario defined in B.3.4.2 with CA with 1 active TCI states and B.3.4.1 with CA with 2 active TCI states, MCSs and number of MIMO layers.

7.2A.2.4.2 Test Applicability

This test applies to all types of NR UE release 18 and HST-FR2-DPS and forward that support NR 2DL CA.

7.2A.2.4.3 Test Description

7.2A.2.4.3.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

CA capability to be tested: Any one of the supported CA capability as per the selection criteria specified in Table 7.1.1.5.2-2.

CA Bandwidth combination: Largest aggregated bandwidth as per Table 7.2A.2.4.3.1-1

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

Table 7.2A.2.4.3.1-1: Test point selection for CA UE demodulation tests

Tests	CA capability where the tests apply	CA configuration from the selected CA capability where the tests apply	CA Bandwidth combination to be tested in priority order	PCell CC configuration
Test 1 in Table 7.2A.2.4.0-3	CA_C, CA_N, CA_AX	Table 7.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs
Test 2 in Table 7.2A.2.4.0-4	CA_C, CA_N, CA_AX	Table 7.1.1.5.2-2	Largest aggregated CA bandwidth combination	Any of CCs

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1, 7.2A.2.4.0-2, 7.2A.2.4.0-3 and 7.2A.2.4.0-4 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
6. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.2A.2.4.3.3.

7.2A.2.4.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Configure SCC(s) according to Annex C.0, C.1 and C.2 for all downlink physical channels.
3. The SS shall configure SCC(s) as per TS 38.508-1 [6] clause 5.5.1. Message contents are defined in clause 7.2A.2.4.3.3.
4. SS activates SCC(s) by sending the activation MAC-CE (Refer TS 38.321 [24], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[25], clause9.3).
5. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to Table 7.2A.2.4.4-1 and 7.2A.2.4.4-2 on each NR CC. The SS sends downlink MAC padding bits on the DL RMC.
6. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 7.2A.2.4.4-1 and 7.2A.2.4.4-2 on each NR CC
7. Measure the average throughput on each component carrier simultaneously for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-1 in Annex G.
8. Repeat steps from 1 to 7 for each subtest in Table 7.2A.2.4.4-1 and 7.2A.2.4.4-2 as appropriate.

7.2A.2.4.3.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2

7.2A.2.4.4 Test Requirements

The fraction of maximum throughput percentage for the downlink reference measurement channels specified in Annex A 3.2.2 for each throughput test per component carrier shall meet or exceed the specified value as per Table 7.2A.2.4.4-1 and 7.2A.2.4.4-2 for the specified SNR including test tolerances.

Table 7.2A.2.4.4-1: Single carrier performance for HST-FR2-DPS CA Configurations with 1 Active TCI State

Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
R.PDSCH. 5-16.1 TDD	50 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	15.3
R.PDSCH. 5-16.2 TDD	100 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	15.6
R.PDSCH. 5-12.2 TDD	200 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	15.7
R.PDSCH. 5-16.3 TDD	400 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-BI-B	1	2x2, ULA Low	70	15.5

Table 7.2A.2.4.4-2: Single carrier performance for HST-FR2-DPS CA Configurations with 2 Active TCI States

Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Modulation format and code rate	TDD UL-DL pattern	Propagation condition	Number of active PDSCH TCI states	Correlation matrix and antenna configuration	Reference value	
							Fraction of maximum throughput (%)	SNR (dB)
R.PDSCH. 5-17.1 TDD	50 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	15.4
R.PDSCH. 5-17.2 TDD	100 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	15.6
R.PDSCH. 5-12.1 TDD	200 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	15.7
R.PDSCH. 5-17.3 TDD	400 / 120	64QAM, 0.43	FR2.1 20-1	HST-DPS-FR2-UNI-A	2	2x2, ULA Low	70	15.5

7.3 PDCCH demodulation requirements

The receiver characteristics of the PDCCH are determined by the probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg).

The parameters specified in Table 7.3-1 are valid for all PDCCH tests unless otherwise stated.

Table 7.3-1: Common test Parameters

Parameter	Unit	Value	Parameter
Carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 1)		0
DL BWP configuration #1	Cyclic prefix		Normal
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		1
	SSB periodicity	ms	20
PDCCH	Slots for PDCCH monitoring		Each slot

configuration	Number of PDCCH candidates		1
	Frequency domain resource allocation for CORESET		Start from RB = 0 with contiguous RB allocation
	TCI state		TCI state #1
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k0)		0
	First OFDM symbol in the PRB used for CSI-RS (l0)		CSI-RS resource 1: 4 CSI-RS resource 2: 8 CSI-RS resource 3: 4 CSI-RS resource 4: 8
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	CSI-RS periodicity	Slots	160
	CSI-RS offset	Slots	80 for CSI-RS resource 1 and 2 81 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
QCL info		TCI state #0	
NZP CSI-RS for beam management	First subcarrier index in the PRB used for CSI-RS (k0)		0
	First OFDM symbol in the PRB used for CSI-RS (l0)		CSI-RS resource 1: 8 CSI-RS resource 2: 9
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		3
	CSI-RS periodicity	Slots	120 kHz SCS: 160 for CSI-RS resource 1,2
	CSI-RS offset	Slots	0 for CSI-RS resource 1,2
	Repetition		ON
QCL info		TCI state #1	
PDCCH & PDCCH DMRS Precoding configuration			For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of each applicable ¹ /i2 combination or codebook index, chosen from section 5.2.2.2.1 of TS 38.214 [12]
TCI state #0	Type 1 QCL information	SSB index QCL Type	SSB #0 Type C
	Type 2 QCL information	SSB index QCL Type	SSB #0 Type D
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type D
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
Symbols for all unused REs			OP.1 FDD as defined

		in Annex A.5.1.1 OP.1 TDD as defined in Annex A.5.2.1
The number of slots between PDSCH and corresponding HARQ-ACK information		Specific to each TDD UL-DL pattern and as defined in Annex A.1.3.
Note 1: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-2 [3] for tested channel bandwidth and subcarrier spacing.		

7.3.1 1RX requirements

(Void)

7.3.2 2RX requirements

7.3.2.1 FDD

(Void)

7.3.2.2 TDD

7.3.2.2.1 2Rx TDD FR2 PDCCH 1 Tx antenna performance for both SA and NSA

7.3.2.2.1.1 Test Purpose

This test verifies the demodulation performance of PDCCH for a single-antenna port with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 7.3.2.2.1.3-1.

7.3.2.2.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

7.3.2.2.1.3 Minimum conformance requirements

For the parameters specified in Table 7.3.2.2.1.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 7.3.2.2.1.3-2. The downlink physical setup is in accordance with Annex C.2.2.

Table 7.3.2.2.1.3-1: Test Parameters

Parameter	Unit	1 Tx Antenna	2 Tx Antenna
TDD UL-DL pattern		FR2.120-1	
CCE to REG mapping type		Interleaved	
REG bundle size		2 for test 1-1 6 for test 1-2	2
Interleaver size		3 for test 1-1 2 for test 1-2	3
Shift index		0	

Table 7.3.2.2.1.3-2: Minimum performance requirements with 120 kHz SCS for 1Tx antenna

Test number	Bandwidth	CORE SET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation	Reference value	
								Pm-dsg (%)	SNR _{BB} (dB)

							Matrix		
1-1	100 MHz	60	1	2 CCE	R.PDCCH.5-1.1 TDD	TDLA30-75	1x2 Low	1	6.0
1-2	100 MHz	60	1	4 CCE	R.PDCCH.5-1.2 TDD	TDLA30-300	1x2 Low	1	2.6

The normative reference for this requirement is TS 38.101-4 [5] clause 7.3.2.2.1.

7.3.2.2.1.4 Test Description

7.3.2.2.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 7.3-1 and Table 7.3.2.2.1.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.3.2.2.1.4.3.

7.3.2.2.1.4.2 Test procedure

1. Set the UE in a direction found using one of the test procedures defined in Annex H. If no direction found, mark the test as inconclusive.
2. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 7.3.2.2.1.4.4-1. The details of PDCCH are specified in Table 7.3.2.2.1.3-1 and Table 7.3.2.2.1.3-2. The details of PDSCH are specified in Table A.3.3.2.5-3. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 7.3.2.2.1.4.4-1 as appropriate.
4. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 7.3.2.2.1.4.4-1, pass the UE. Otherwise fail the UE.
5. Repeat steps from 1 to 4 for each subtest in Table 7.3.2.2.1.4.4-1 as appropriate.

7.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

7.3.2.2.1.4.3.1 Message exceptions for SA

Table 7.3.2.2.1.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 11000000 00000000 00000000 00000000 000000	CORESET to use the least significant 60 RBs of the BWP	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		
reg-BundleSize	n2		2 for test 1-1
interleaverSize	n6		6 for test 1-2
interleaverSize	n3		3 for test 1-1
}	n2		2 for test 1-2
}			
}			

Table 7.3.2.2.1.4.3.1-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel2	n1	AL2	Test 1-1
aggregationLevel4	n1	AL4	Test 1-2
}			
}			

Table 7.3.2.2.1.4.3.1-3: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 1-1
}			

7.3.2.2.1.4.3.2 Message exceptions for NSA

Same as 7.3.2.2.1.4.3.1.

7.3.2.2.1.4.4 Test requirement

Table 7.3.2.2.1.4.4-1 defines the primary level settings.

For the parameters specified in Table 7.3.2.2.1.3-1 the average probability of a missed downlink scheduling grant (P_{m-dsg}) shall be below the specified value in Table 7.3.2.2.1.4.4-1.

Table 7.3.2.2.1.4.4-1: Test requirements with 120 kHz SCS for 1Tx antenna

Test number	Bandwidth	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								P _{m-dsg} (%)	SNR _{BB} (dB)
1-1	100 MHz	60	1	2 CCE	R.PDCCH.5-1.1 TDD	TDLA30-75	1x2 Low	1	7.7
1-2	100 MHz	60	1	4 CCE	R.PDCCH.5-1.2 TDD	TDLA30-300	1x2 Low	1	4.3

7.3.2.2.2 2Rx TDD FR2 PDCCH 2 Tx antenna performance for both SA and NSA

7.3.2.2.2.1 Test Purpose

This test verifies the demodulation performance of PDCCH for two-antenna port with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 7.3.2.2.2.3-1.

7.3.2.2.2.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

7.3.2.2.2.3 Minimum conformance requirements

For the parameters specified in Table 7.3.2.2.2.3-1, the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 7.3.2.2.2.3-2. The downlink physical setup is in accordance with Annex C.2.2.

Table 7.3.2.2.2.3-1: Test Parameters

Parameter	Unit	1 Tx Antenna	2 Tx Antenna
TDD UL-DL pattern		FR2.120-1	
CCE to REG mapping type		Interleaved	
REG bundle size		2 for test 1-1 6 for test 1-2	2
Interleaver size		3 for test 1-1 2 for test 1-2	3
Shift index		0	

Table 7.3.2.2.2.3-2: Minimum performance requirements with 120 kHz SCS for 2Tx Antenna

Test number	Bandwidth	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR _{BB} (dB)
2-1	100 MHz	60	1	8 CCE	R.PDCCH.5-1.3 TDD	TDLA30-75	2x2 Low	1	1.4
2-2	100 MHz	60	2	16 CCE	R.PDCCH.5-2.1 TDD	TDLA30-75	2x2 Low	1	-1.6

The normative reference for this requirement is TS 38.101-4 [5] clause 7.3.2.2.2.

7.3.2.2.2.4 Test Description

7.3.2.2.2.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 7.3-1 and Table 7.3.2.2.2.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.3.2.2.1.4.3.

7.3.2.2.2.4.2 Test procedure

1. Set the UE in a direction found using one of the test procedures defined in Annex H If no direction found, mark the test as inconclusive.
2. SS transmits PDCCH with DCI format as specified in PDCCH Reference Channel for C_RNTI to transmit the DL RMC according to Table 7.3.2.2.2.4.4-1. The details of PDCCH are specified in Table 7.3.2.2.2.3-1 and Table 7.3.2.2.2.3-2. The details of PDSCH are specified in Table A.3.3.2.5-3. The SS sends downlink MAC padding bits on the DL RMC.
3. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 7.3.2.2.2.4.4-1 as appropriate.
4. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 7.3.2.2.2.4.4-1, pass the UE. Otherwise fail the UE.
5. Repeat steps from 1 to 4 for each subtest in Table 7.3.2.2.2.4.4-1 as appropriate.

7.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

7.3.2.2.2.4.3.1 Message exceptions for SA

Table 7.3.2.2.2.4.3.1-1: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 11000000 00000000 00000000 00000000 000000	CORESET to use the least significant 60 RBs of the BWP	
Duration	2	SearchSpace Duration of 2 symbols	Test 2-2
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		
reg-BundleSize	n2		
interleaverSize	n3		
}			
}			
}			

Table 7.3.2.2.4.3.1-2: PDSCH-TimeDomainResourceAllocationList

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-27			
Information Element	Value/remark	Comment	Condition
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	2 entries		Test 2-2
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
K0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	Test 2-2
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
K0	Not present		
mappingType	typeA		
startSymbolAndLength	100	Start symbol(S)=2, Length(L)=8	Test 2-2
}			
}			

Table 7.3.2.2.4.3.1-3: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n1	AL8	Test 2-1
aggregationLevel16	n1	AL16	Test 2-2
}			
}			

Table 7.3.2.2.4.3.1-4: DMRS-DownlinkConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-24			
Information Element	Value/remark	Comment	Condition
DMRS-DownlinkConfig ::= SEQUENCE {			
dmrs-AdditionalPosition	pos2		Test 2-2
}			

7.3.2.2.4.3.2 Message exceptions for NSA

Same as 7.3.2.2.4.3.1.

7.3.2.2.4.4 Test requirement

Table 7.3.2.2.4.4-1 defines the primary level settings.

For the parameters specified in Table 7.3.2.2.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 7.3.2.2.4.4-1.

Table 7.3.2.2.4.4-1: Test requirements with 120 kHz SCS

Test number	Bandwidth	CORE SET RB	CORE SET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR _{BB} (dB)

2-1	100 MHz	60	1	8 CCE	R.PDCCH.5-1.3 TDD	TDLA30-75	2x2 Low	1	3.2
2-2	100 MHz	60	2	16 CCE	R.PDCCH.5-2.1 TDD	TDLA30-75	2x2 Low	1	0.2

7.3.2.2.3 2Rx TDD FR2 PDCCH 1 Tx antenna performance for power saving

7.3.2.2.3.1 Test Purpose

This test verifies the demodulation performance of PDCCH under 2 receive antenna conditions and with a given SNR for which the average probability of miss-detection of the Downlink Scheduling Grant (Pm-dsg), shall be below the specified value in Table 7.3.2.2.3.3-2 after receipt wake-up indication in the *DCI format 2_6* PDCCH in DRX off state. The downlink physical setup is in accordance with Annex C.2.1.

7.3.2.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting Long DRX Cycle and DRX adaptation.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and Long DRX Cycle and DRX adaptation.

7.3.2.2.3.3 Minimum conformance requirements

During the test the UE shall monitor the *DCI format 2_6* PDCCH in DRX off state and decide whether to receive the following PDCCH in DRX on period.

The parameters specified in Table 7.3.2.2.3.3-1 are valid for normal PDCCH in DRX on period and PDCCH in DRX off period.

Table 7.3.2.2.3.3-1: Test Parameters

Parameter	Unit	1 Tx Antenna
TDD UL-DL pattern		FR2.120-1
CCE to REG mapping type		Interleaved
REG bundle size		6
Interleaver size		2
Shift index		0
DRX cycle	ms	10
<i>ps-WakeUp-r16</i>		absent
Wake-up indication bit in DCI format 2_6		1
PDCCH DCI format 2_6 configuration	PS-offset	$(T_{\text{minimumTimeGap}}+1)/2^w/0.125$
	Number of PDCCH candidates	1
	Frequency domain resource allocation for CORESET	Start from RB = 0 with contiguous RB allocation
PDCCH configuration	TCI state	TCI state #1
	Slots for PDCCH monitoring	Each slot during DRX-on period
Note: $T_{\text{minimumTimeGap}}$ is signalled as a part of <i>drx-Adaptation-r16</i> UE capability.		

For the parameters specified in Table 7.3.2.2.3.3-2, the average probability of a missed downlink scheduling grant (Pm-dsg) observed on PDCCH during DRX on shall be below the specified value in Table 7.3.2.2.3.3-2. The downlink physical setup is in accordance with Annex C.5.1.

Table 7.3.2.2.3.3-2: Minimum performance requirements with 120 kHz SCS

Test number	Bandwidth (MHz)	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR _{BB} (dB)
3-1	100	60	1	4	R.PDCCH.5-1.2 TDD	TDLA30-300	1x2 Low	1	3.0

				8	R.PDCCH. 5-1.4 TDD				
--	--	--	--	---	-----------------------	--	--	--	--

The normative reference for this requirement is TS 38.101-4 [5] clause 7.3.2.2.3.

7.3.2.2.3.4 Test description

7.3.2.2.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 and Table 5.3.6-1 of 38.521-1 [7].

Configurations of DRX, DCP, PDCCH before measurement are specified in 7.3.2.2.3.4.3.1 and Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR1 operation, setup the LTE link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the cell are set up according to Table 7.3-1 and Table 7.3.2.2.3.3-1 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without Release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 7.3.2.2.3.4.3.

7.3.2.2.3.4.2 Test procedure

1. SS transmits PDCCH with DCI format2_6 as specified in PDCCH Reference Channel for C_RNTI within DRX off state. The Wake-up indication bit in PDCCH is set to 1.
2. Set the UE in a direction found using one of the test procedures defined in Annex H. If no direction found, mark the test as inconclusive.
3. SS transmits PDCCH with DCI format1_1 as specified in PDCCH Reference Channel R.PDCCH. 5-1.2 TDD for C_RNTI to transmit the DL RMC according to Table 7.3.2.2.3.4.4-1. The details of PDCCH are specified in Table 7.3.2.2.3.3-1 and Table 7.3.2.2.3.3-2. The details of PDSCH are specified in Table A.3.3.2.5-3. The SS sends downlink MAC padding bits on the DL RMC.
4. Set the parameters of the propagation condition, antenna configuration, the correlation matrix and the SNR according to Table 7.3.2.2.3.4.4-1 as appropriate.
5. Measure the Pm-dsg for a duration sufficient to achieve statistical significance according to Annex G clause G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL PUCCH during each subtest interval. Pm-dsg is the ratio (statDTX)/(NACK+ACK+statDTX). If Pm-dsg is less than the value specified in table 7.3.2.2.3.4.4-1, pass the UE. Otherwise fail the UE.
6. Repeat steps from 2 to 5 for each subtest in Table 7.3.2.2.3.4.4-1 as appropriate.

7.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 4.6.1.

7.3.2.2.3.4.3.1 Message exceptions for SA

Table 7.3.2.2.3.4.3.1-1: DRX-Config

Derivation Path: TS 38.508-1 [4], Table 4.6.3-56			
Information Element	Value/remark	Comment	Condition
DRX-Config ::= SEQUENCE {			
drx-onDurationTimer CHOICE {			
milliseconds	ms5		
}			
drx-InactivityTimer	ms0		
drx-HARQ-RTT-TimerDL	0		
drx-HARQ-RTT-TimerUL	0		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms10	0		
}			
}			

Table 7.3.2.2.3.4.3.1-2: DCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-106			
Information Element	Value/remark	Comment	Condition
dcp-Config-r16 CHOICE {			
setup SEQUENCE {			
ps-Offset-r16	40		
sizeDCI-2-6-r16	2		
ps-PositionDCI-2-6-r16	0		
}			
}			

Table 7.3.2.2.3.4.3.1-3: PDCCH-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-95			
Information Element	Value/remark	Comment	Condition
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList	1 entry		
SEQUENCE(SIZE (1..3)) OF			
ControlResourceSet ::= SEQUENCE {			
ControlResourceSet[1]	ControlResourceSet		
}			
searchSpacesToAddModList	2 entry		
SEQUENCE(SIZE (1..10)) OF SearchSpace ::=			
SEQUENCE {			
SearchSpace[1]	SearchSpace1		
SearchSpace[2]	SearchSpace2		
}			
searchSpacesToAddModListExt-r16	2 entry		
SEQUENCE(SIZE (1..10)) OF SearchSpace {			
searchSpaceExt-r16[1]	SearchSpaceExt1		
searchSpaceExt-r16[2]	SearchSpaceExt2		
}			
}			

Table 7.3.2.2.3.4.3.1-4: PDCCH-ControlResourceSet

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-6			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			

frequencyDomainResources	11111111 11000000 00000000 00000000 00000000 000000	CORESET to use the least significant 60 RBs of the BWP	
cce-REG-MappingType CHOICE {			
Interleaved SEQUENCE {	Null		
reg-BundleSize	n6		2
interleaverSize	n2		3
}			
}			
}			

Table 7.3.2.2.3.4.3.1-5: Void

Table 7.3.2.2.3.4.3.1-6: PDCCH-SearchSpace1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	2	SearchSpaceId with condition USS	USS
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	AL4	
}			
}			

Table 7.3.2.2.3.4.3.1-6a: PDCCH-SearchSpace2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	SearchSpaceId with condition USS	USS
controlResourceSetId	1	ControlResourceSetId	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
nrofCandidates SEQUENCE {			
aggregationLevel4	n1	AL4	
}			
searchSpaceType	Not present		
}			

Table 7.3.2.2.3.4.3.1-7: PDCCH-SearchSpaceExt1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE {			
controlResourceSetId-r16	1		
}			

Table 7.3.2.2.3.4.3.1-7a: PDCCH-SearchSpaceExt2

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-7a			
Information Element	Value/remark	Comment	Condition
SearchSpaceExt-r16 ::= SEQUENCE { controlResourceSetId-r16	1		
searchSpaceType-r16 SEQUENCE { common SEQUENCE { dci-Format2-6-r16 SEQUENCE {	NULL		
}			
}			
}			
}			

7.3.2.2.3.4.3.2 Message exceptions for NSA

Same as 7.3.2.2.3.4.3.1.

7.3.2.2.3.4.4 Test requirement

Table 7.3.2.2.3.4.4-1 defines the primary level settings.

For the parameters specified in Table 5.3-1 the average probability of a missed downlink scheduling grant (Pm-dsg) shall be below the specified value in Table 7.3.2.2.3.4.4-1.

Table 7.3.2.2.3.4.4-1: Minimum performance with 120 kHz SCS

Test number	Bandwidth (MHz)	CORESET RB	CORESET duration	Aggregation level	Reference Channel	Propagation Condition	Antenna configuration and correlation Matrix	Reference value	
								Pm-dsg (%)	SNR _{BB} (dB)
3-1	100	60	1	4	R.PDCCH. 5-1.2 TDD	TDLA30-300	1x2 Low	1	4.7
				8	R.PDCCH. 5-1.4 TDD				

7.4 PBCH demodulation requirements

TS 38.101-4 shall specify the PBCH performance requirements and has recommended that these requirements do not need to be tested.

7.5 Sustained downlink data rate provided by lower layers

7.5.1 FR2 Sustained downlink data rate performance for single carrier

7.5.1.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

7.5.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

7.5.1.3 Minimum conformance requirements

The requirements in this clause are applicable to the FR2 single carrier case.

The requirements and procedure defined below apply using operating band instead of CA configuration, and bandwidth instead of bandwidth combination.

The test parameters are determined by the following procedure:

- Step 1: Calculate the data rate for all supported CA configurations and set of per component carrier (CC) UE capabilities among all supported UE capabilities:
 - Use Table 7.5.1.3-3 to determine the MCS (=MCS1) achieving the largest data rate [clause 4.1.2 of TS 38.306 [14]] based on UE capabilities.
 - Use Table 7.5.1.3-4 to determine the largest MCS (=MCS2) requiring SNR below test equipment maximum achievable SNR for that CA configuration.
 - Compute the data rate for CA configuration using the $MCS = \min(MCS1, MCS2)$ and the following equation for each CC in CA bandwidth combination.

$$DataRate = 10^{-3} \sum_{j=1}^J TBS_j 2^{\mu_j}$$

where

J is the number of aggregated component carriers in CA bandwidth combination

TBS_j is the total number of DL-SCH transport block bits calculated based on methodology in Clause 5.1.3.2 of TS 38.214 [12] and using parameters from Table 7.5.1.3-1

μ_j is provided in Clause 4.2 of TS 38.211 for different subcarrier spacing values

- Step 2: Choose the CA bandwidth combination among all supported CA configurations that achieves maximum data rate in step 1 among all UE capabilities.
 - Set of per CC UE capabilities includes channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor in accordance with clause 4.1.2 of TS 38.306 [14].
 - When there are multiple sets of CA bandwidth combinations and UE capabilities (channel bandwidth, subcarrier spacing, number of MIMO layer, modulation format, scaling factor) with same data rate, select one among sets with the smallest aggregated channel bandwidth.
- Step 3: For each CC in chosen CA bandwidth combination, use determined MCS for each CC in step 1 for that CA configuration based on test parameters and indicated UE capabilities.

The TB success rate shall be higher than 85% when PDSCH is scheduled with MCS defined for the selected CA bandwidth combination and with the downlink physical channel setup according to Annex C.3.1.

The TB success rate is defined as $100\% * N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retx})$, where N_{DL_newtx} is the number of newly transmitted DL transport blocks, N_{DL_retx} is the number of retransmitted DL transport blocks, and $N_{DL_correct_rx}$ is the number of correctly received DL transport blocks.

The test parameters are specified in Table 7.5.1.3-1.

Unless otherwise stated, no user data is scheduled on slot #0, 40 and 41 within 20 ms for SCS 60 kHz.

Unless otherwise stated, no user data is scheduled on slot #0, 80 and 81 within 20 ms for SCS 120 kHz.

Table 7.5.1.3-1: Test parameters for FR2 TDD

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
PTRS epre-Ratio			0
Channel bandwidth		MHz	Channel bandwidth from selected CA bandwidth combination
Common serving	Physical Cell ID		0

cell parameters	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
	First DMRS position for Type A PDSCH mapping		2
Cross carrier scheduling			Not configured
Active DL BWP index			1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 3)	RBs	0
	Subcarrier spacing	kHz	60 or 120
DL BWP configuration #1	RB Offset		0
	Number of contiguous PRB		Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-2 [7] for tested channel bandwidth and subcarrier spacing
	Subcarrier spacing	kHz	60 or 120
	Cyclic prefix		Normal
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		Symbols #0
	Number of PRBs in CORESET		Table 7.5A.1-2
	Number of PDCCH candidates and aggregation levels		2/AL2 for 120 kHz / 50 MHz 2/AL4 for 60 kHz / 50 MHz, 120 kHz / 100 MHz 2/AL8 for other greater combinations
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1-1
	TCI State		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Randomized precoder selection for every REG bundle and updated per slot with equal probability of precoder index 0 and 2
PDSCH configuration	Mapping type		Type A
	k ₀		0
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		wideband
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
	Starting symbol (S)		1
Length (L)		13	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
	Antenna ports indexes		{1000} for 1 Layer CCs {1000, 1001} for 2 Layers CCs
	Number of PDSCH DMRS CDM group(s) without data		1
PTRS configuration	Frequency density (K_{PT-RS})		2
	Time density (L_{PT-RS})		1
CSI-RS for tracking	Subcarrier indexes in the PRB used for CSI-RS		k ₀ = 3 for CSI-RS resource 1,2,3,4
	OFDM symbols in the PRB used for CSI-RS		l ₀ = 6 for CSI-RS resource 1 and 3 l ₀ = 10 for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	60 kHz SCS: 80 for CSI-RS resource 1,2,3,4 120 kHz SCS: 160 for CSI-RS resource 1,2,3,4

	CSI-RS offset		Slots	60 kHz SCS: 40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4 120 kHz SCS: 80 for CSI-RS resource 1 and 2 81 for CSI-RS resource 3 and 4
	Frequency Occupation			Start PRB 0 Number of PRB = ceil(BWP size/4)*4
	QCL info			TCI state #0
N/ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS			$k_0 = 4$
	OFDM symbols in the PRB used for CSI-RS			$l_0 = 13$
	Number of CSI-RS ports (X)			Same as number of transmit antenna
	CDM Type			'FD-CDM2'
	Density (ρ)			1
	CSI-RS periodicity		Slots	60 kHz SCS: 80 120 kHz SCS: 160
	CSI-RS offset			0
	Frequency Occupation			Start PRB 0 Number of PRB = ceil(BWP size/4)*4
QCL info			TCI state #1	
ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS			$k_0 = 0$
	OFDM symbols in the PRB used for CSI-RS			$l_0 = 12$
	Number of CSI-RS ports (X)			4
	CDM Type			'FD-CDM2'
	Density (ρ)			1
	CSI-RS periodicity		Slots	60 kHz SCS: 80 120 kHz SCS: 160
	CSI-RS offset			0
Frequency Occupation			Start PRB 0 Number of PRB = ceil(BWP size/4)*4	
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS			$k_0=0$ for CSI-RS resource 1,2
	First OFDM symbol in the PRB used for CSI-RS			$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2
	Number of CSI-RS ports (X)			1 for CSI-RS resource 1,2
	CDM Type			'No CDM' for CSI-RS resource 1,2
	Density (ρ)			3 for CSI-RS resource 1,2
	CSI-RS periodicity		Slots	60 kHz SCS: 80 for CSI-RS resource 1,2 120 kHz SCS: 160 for CSI-RS resource 1,2
	CSI-RS offset		Slots	0 for CSI-RS resource 1,2
	Frequency Occupation			Start PRB 0 Number of PRB = ceil(BWP size/4)*4
	Repetition			ON
QCL info			TCI state #1	
TCI state #0	Type 1 QCL information	SSB index		SSB #0
		QCL Type		Type C
	Type 2 QCL information	SSB index		SSB #0
		QCL Type		Type D
TCI state #1	Type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type		Type A
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type		Type D
Maximum number of code block groups for ACK/NACK feedback				1
Number of HARQ Processes				10 for FR2.60-1 and 8 for FR2.120-1
K1 value				Specific to each UL-DL pattern
Maximum number of HARQ transmission				4

HARQ ACK/NACK bundling			Multiplexed
Redundancy version coding sequence			{0,2,3,1}
TDD UL-DL pattern			60 kHz SCS: FR2.60-1 120 kHz SCS: FR2.120-1
PDSCH & PDSCH DMRS Precoding configuration			For number of Tx=1: No precoding; For number of Tx>1: Single Panel Type I, Precoder index 0 with Wideband granularity and updated per slot for Rank 2
Symbols for all unused REs			OP.1 FDD as defined in Annex A.5.1.1 OP.1 TDD as defined in Annex A.5.2.1
Propagation condition			Static propagation condition No external noise sources are applied
Antenna configuration	1 layer CCs		1x2 or 1x4
	2 layers CCs		2x2 or 2x4
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
<p>Note 1: PDSCH is scheduled only on full DL slots not containing SSB or TRS.</p> <p>Note 2: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission.</p> <p>Note 3: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-2 [7] for tested channel bandwidth and subcarrier spacing.</p>			

Table 7.5.1.3-2: Number of PRBs in CORESET

SCS (kHz)	50 MHz	100 MHz	200 MHz	400 MHz
60	66	132	264	N.A
120	30	66	132	264

Table 7.5.1.3-3: MCS indexes for indicated UE capabilities

Maximum number of PDSCH MIMO layers	Maximum modulation format (Note 1)	Scaling factor	MCS (Note 2)
1	6	1	27
1	6	0.8	23
1	6	0.75	22
1	6	0.4	14
1	4	1	16
1	4	0.8	16
1	4	0.75	16
1	4	0.4	10
1	2	1	9
1	2	0.8	9
1	2	0.75	9
1	2	0.4	4
2	6	1	27
2	6	0.8	23
2	6	0.75	22
2	6	0.4	14
2	4	1	16
2	4	0.8	16
2	4	0.75	16
2	4	0.4	10
2	2	1	9
2	2	0.8	9
2	2	0.75	9
2	2	0.4	4

Note 1: For the band(s) on which UE supporting "Maximum modulation format" of 8, the MCS index is derived from the rows with "Maximum modulation format" of 6.

Note 2: MCS Index is based on MCS index Table 1 defined in clause

5.1.3.1 of TS 38.214 [12].

Table 7.5.1.3-4: SNR required to achieve 85% of peak throughput

MCS Index (Note 1)	SNR _{BB} (dB) for maximum number of PDSCH MIMO Layers = 1	SNR _{BB} (dB) for maximum number of PDSCH MIMO Layers = 2
13	6.2	9.0
14	7.2	9.9
15	8.2	10.9
16	8.7	11.6
17	10.1	13.2
18	10.7	13.7
19	11.7	14.7
20	12.7	15.6
21	13.6	16.5
22	14.8	17.6
23	15.6	18.6
24	16.9	19.7
25	18.3	21.2
26	19.3	22.3
27	20.5	23.3
Note 1: MCS Index is based on MCS index Table 1 defined in clause 5.1.3.1 of TS 38.214 [12].		

The normative reference for this requirement is TS 38.101-4 [5], clause 7.5.1.

7.5.1.4 Test description

7.5.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 4.3.1.1.

1. Connect the SS to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram (without fader and AWGN) and clause A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are initially set up according to Table 7.5.1.3-1 as appropriate.
3. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with *Connected without release On, Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0* according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 7.5.1.4.3.
6. SS shall transmit UECapabilityEnquiry message.
7. The UE shall transmit UECapabilityInformation message.
8. Using the UE capabilities advertised in the *UE-CapabilityRAT-Container* of the type *UE-NR-Capability*, and the procedure outlined in 7.5.1.3 determine one set of parameters that would provide the largest data rate.

9. Setup up the NR cell using these parameters for the test.
10. Configure the TBSIZE, DL RMC, UL RMC, PDCP size from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate.

7.5.1.4.2 Test procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. SS configures T-reordering timer to be infinity.
3. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
4. SS sets the counters N_{DL_newtx} N_{DL_retr} to 0.
5. For each new DL HARQ transmission the SS generates sufficient PDCP SDUs (max PDCP SDU size and minimum number of consecutive PDCP SDUs) to fill up the TB in accordance with Annex A.3.2_1. The SS ciphers the PDCP SDUs, concatenates the resultant PDCP PDUs to form an RLC PDU and then a MAC PDU. The SS transmits the MAC PDU. The SS increments then N_{DL_newtx} by one
6. If PHY requests a DL HARQ retransmission, the SS performs a HARQ retransmission and increments N_{DL_retr} by one.
7. Steps 5 to 6 are repeated at every TTI for at least 300 frames and the SS waits for 300ms to let any HARQ retransmissions and RLC retransmissions to finish.
8. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
9. The SS calculates the TB success rate as $A = 100\% * N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retr})$.
10. SS computes the PDCP SDU loss by looking into the FMC and Bitmap field in the PDCP Status Report. PDCP SDU loss $B = COUNT$ reported in the Bitmap field of PDCP Stata Report.
11. The UE passes the test if $A \geq 85\%$ TB success rates and $B = 0$.

Note 1: In case of RLC PDU retransmission, the number of new required PDCP SDUs is as many as to fill the rest of TB.

7.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions

Table 7.5.1.4.3-0: CLOSE UE TEST LOOP (in the preamble)

Derivation Path: 38.509 clause 6.3.1			
Information Element	Value/remark	Comment	Condition
Protocol discriminator	1 1 1 1		
Skip indicator	0 0 0 0		
Message type	1 0 0 0 0 0 0 0		
UE test loop mode	0 0 0 0 0 0 0 0	UE test loop mode A	
UE test loop mode A LB setup			
Length of UE test loop mode A LB setup list in bytes	0 0 0 0 0 0 1 1	Length of one LB setup DRB (3 bytes)	
LB setup DRB	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 Q5 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q5 = 1 (for NR Data Radio Bearers) Q4..Q0 = Data Radio Bearer identity number -1 for the radio bearer. See 38.509 clause 6.3.1	
UE test loop mode B LB setup	Not present		

Table 7.5.1.4.3-1: RadioBearerConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB))	1 entry		DRB1
OF SEQUENCE {			
cnAssociation CHOICE {			
sdap-Config	SDAP-Config		
}			
drb-Identity	DRB-Identity using condition DRB1		
reestablishPDCP	true		DRB1 AND Re-establish_PDCP
pdcp-Config	PDCP-Config		
}			

Table 7.5.1.4.3-2: PDCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len18bits		
pdcp-SN-Size-DL	len18bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		
statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

Table 7.5.1.4.3-3: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.3-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n2	1 for UL, 1 for DL	BW 50 MHz SCS 120 kHz
aggregationLevel4	n2	1 for UL, 1 for DL	(BW 50 MHz SCS 60 kHz) OR (BW 100 MHz SCS 120 kHz)
aggregationLevel8	n2	1 for UL, 1 for DL	(BW 100 MHz SCS 60 kHz) OR (BW 200 MHz SCS 120 kHz) OR (BW 400 MHz SCS

			120 kHz)
aggregationLevel16	n0		
}			
}			

7.5.1.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames.

7.5.2 FR2 Sustained downlink data rate performance for RedCap

7.5.2.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

7.5.2.2 Test Applicability

This test applies to all types of NR UE release 17 and forward that support NR RedCap.

7.5.2.3 Minimum conformance requirements

Same as in Clause 7.5.1.3 except that the MIMO layers are configured to 2 for UE supporting 2 MIMO layers and 1 for UE supporting 1 MIMO layers for all operating bands. Antenna configuration is 1x1 for UE supporting 1 layer and 2x2 for UE supporting 2 layers.

7.5.2.4 Test description

7.5.2.4.1 Initial conditions

Same as in Clause 7.5.1.4.1.

7.5.2.4.2 Test procedure

Same as in Clause 7.5.1.4.2.

7.5.2.4.3 Message contents

Same as in Clause 7.5.1.4.3.

7.5.2.5 Test requirement

Same as in Clause 7.5.1.5.

7.5A.1 FR2 Sustained downlink data rate performance for carrier aggregation

7.5A.1.1 FR2 SDR performance for CA (2DL CA)

7.5A.1.1.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be

verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

7.5A.1.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 2DLCA.

7.5A.1.1.3 Minimum conformance requirements

Same as 7.5.1.3

7.5A.1.1.4 Test description

7.5A.1.1.4.1 Initial conditions

1. Connect the SS to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1 for TE diagram (without fader and AWGN) and clause A.3.2.2 for UE diagram.
2. The parameter settings for the NR cell are initially set up according to Table 7.5.1.3-1 as appropriate.
3. Downlink signals for the NR cell(s) as applicable are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
4. Propagation conditions for the NR cell(s) as applicable are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with *Connected without release On, Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0* according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 7.5.1.4.3.
6. Configure SCC(s) as applicable according to Annex C.0, C.1 and C.2 for all downlink physical channels.
7. The SS shall configure SCC(s) as applicable as per TS 38.508-1 [6] clause 5.5.1.
8. SS activates SCC(s) as applicable by sending the activation MAC-CE (Refer TS 38.321 [18], clauses 5.9, 6.1.3.10). Wait for at least 1 second (Refer TS 38.133[19], clause 9.3).
9. SS shall transmit UECapabilityEnquiry message.
10. The UE shall transmit UECapabilityInformation message.
11. Using the UE capabilities advertised in the *UE-CapabilityRAT-Container* of the type *UE-NR-Capability*, and the procedure outlined in 7.5.1.3 determine one set of parameters that would provide the largest data rate.
12. Setup up the NR cells using these parameters for the test.
13. Configure the TBsize, DL RMC, UL RMC, PDCP size from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate.

7.5A.1.1.4.2 Test procedure

1. SS configures T-reordering timer to be infinity.
2. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
3. SS sets the counters N_{DL_newtx} N_{DL_retx} to 0.
4. For each new DL HARQ transmission the SS generates sufficient PDCP SDUs (max PDCP SDU size and minimum number of consecutive PDCP SDUs) to fill up the TB on both PCC and SCC(s) as applicable in accordance with Annex A.3.2_1. The SS ciphers the PDCP SDUs, concatenates the resultant PDCP PDUs to form an RLC PDU and then a MAC PDU. The SS transmits the MAC PDU. The SS increments then N_{DL_newtx} by one
5. If PHY requests a DL HARQ retransmission, the SS performs a HARQ retransmission and increments N_{DL_retx} by one.

6. Steps 5 to 6 are repeated at every TTI for at least 300 frames and the SS waits for 300ms to let any HARQ retransmissions and RLC retransmissions to finish.
7. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report.
8. The SS calculates the TB success rate as $A = 100\% * N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retx})$.
10. SS computes the PDCP SDU loss by looking into the FMC and Bitmap field in the PDCP Status Report. PDCP SDU loss $B = COUNT$ reported in the Bitmap field of PDCP Stata Report.
11. The UE passes the test if $A \geq 85\%$ TB success rates and $B = 0$.

Note 1: In case of RLC PDU retransmission, the number of new required PDCP SDUs is as many as to fill the rest of TB.

7.5A.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions

Table 7.5A.1.1.4.3-0: CLOSE UE TEST LOOP (in the preamble)

Derivation Path: 38.509 clause 6.3.1			
Information Element	Value/remark	Comment	Condition
Protocol discriminator	1 1 1 1		
Skip indicator	0 0 0 0		
Message type	1 0 0 0 0 0 0 0		
UE test loop mode	0 0 0 0 0 0 0 0	UE test loop mode A	
UE test loop mode A LB setup			
Length of UE test loop mode A LB setup list in bytes	0 0 0 0 0 0 1 1	Length of one LB setup DRB (3 bytes)	
LB setup DRB	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 Q5 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q5 = 1 (for NR Data Radio Bearers) Q4..Q0 = Data Radio Bearer identity number -1 for the radio bearer. See 38.509 clause 6.3.1	
UE test loop mode B LB setup	Not present		

Table 7.5A.1.1.4.3-1: RadioBearerConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF SEQUENCE {	1 entry		DRB1
cnAssociation CHOICE {			
sdap-Config	SDAP-Config		
}			
drb-Identity	DRB-Identity using condition DRB1		
reestablishPDCP	true		DRB1 AND Re-establish_PDCP
pdcp-Config	PDCP-Config		
}			

Table 7.5A.1.1.4.3-2: PDCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len18bits		
pdcp-SN-Size-DL	len18bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		
statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

Table 7.5A.1.1.4.3-3: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.3-7			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n2	1 for UL, 1 for DL	BW 50 MHz SCS 120 kHz
aggregationLevel4	n2	1 for UL, 1 for DL	(BW 50 MHz SCS 60 kHz) OR (BW 100 MHz SCS 120 kHz)
aggregationLevel8	n2	1 for UL, 1 for DL	(BW 100 MHz SCS 60 kHz) OR (BW 200 MHz SCS 120 kHz) OR (BW 400 MHz SCS 120 kHz)
aggregationLevel16	n0		
}			
}			

7.5A.1.1.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.5A.1.2 FR2 SDR performance for CA (3DL CA)

Editor's Note: MU analysis is complete for up to 400MHz Aggregated Channel BW

7.5A.1.2.1 Test Purpose

Same as in clause 7.5A.1.2.1

7.5A.1.2.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 3DLCA.

7.5A.1.2.3 Minimum conformance requirements

Same as in 7.5.1.3

7.5A.1.2.4 Test description

Same as in clause 7.5A.1.1.4

7.5A.1.2.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.5A.1.3 FR2 SDR performance for CA (4DL CA)

Editor's Note: MU analysis is complete for up to 400MHz Aggregated Channel BW

7.5A.1.3.1 Test Purpose

Same as in clause 7.5A.1.3.1

7.5A.1.3.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 4DLCA.

7.5A.1.3.3 Minimum conformance requirements

Same as in 7.5.1.3

7.5A.1.3.4 Test description

Same as in clause 7.5A.1.1.4

7.5A.1.3.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.5A.1.4 FR2 SDR performance for CA (5DL CA)

Editor's Note: MU analysis is complete for up to 400MHz Aggregated Channel BW

7.5A.1.4.1 Test Purpose

Same as in clause 7.5A.1.3.1

7.5A.1.4.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 5DLCA.

7.5A.1.4.3 Minimum conformance requirements

Same as in 7.5.1.3

7.5A.1.4.4 Test description

Same as in clause 7.5A.1.1.4

7.5A.1.4.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.5A.1.5 FR2 SDR performance for CA (6DL CA)

Editor's Note: MU analysis is complete for up to 400MHz Aggregated Channel BW

7.5A.1.5.1 Test Purpose

Same as in clause 7.5A.1.3.1

7.5A.1.5.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 6DLCA.

7.5A.1.5.3 Minimum conformance requirements

Same as in 7.5.1.3

7.5A.1.5.4 Test description

Same as in clause 7.5A.1.1.4

7.5A.1.5.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.5A.1.6 FR2 SDR performance for CA (7DL CA)

Editor's Note: MU analysis is complete for up to 400MHz Aggregated Channel BW

7.5A.1.6.1 Test Purpose

Same as in clause 7.5A.1.3.1

7.5A.1.6.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 7DLCA.

7.5A.1.6.3 Minimum conformance requirements

Same as in 7.5.1.3

7.5A.1.6.4 Test description

Same as in clause 7.5A.1.1.4

7.5A.1.6.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.5A.1.7 FR2 SDR performance for CA (8DL CA)

Editor's Note: MU analysis is complete for up to 400MHz Aggregated Channel BW

7.5A.1.7.1 Test Purpose

Same as in clause 7.5A.1.3.1

7.5A.1.7.2 Test Applicability

This test applies to all types of NR UE release 15 and forward supporting 8DLCA.

7.5A.1.7.3 Minimum conformance requirements

Same as in 7.5.1.3

7.5A.1.7.4 Test description

Same as in clause 7.5A.1.1.4

7.5A.1.7.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

7.6 PDSCH absolute physical layer throughput requirements

The common parameters for PDSCH absolute physical layer throughput requirements specified in Table 8.1.2-1 are valid for all absolute physical layer throughput requirements unless otherwise stated.

7.6.1 1Rx requirements

Void

7.6.2 2Rx requirements

7.6.2.1 FDD

Void

7.6.2.2 TDD

7.6.2.2.1 2Rx TDD FR2 PDSCH absolute physical layer throughput performance with link adaptation

7.6.2.2.1.0 Minimum conformance requirements

The purpose of the requirements is to verify the PDSCH absolute physical layer throughput performance with link adaptation for FR2-1 under 2 receive antenna conditions.

The performance requirements are specified in Table 7.6.2.2.1.0-2, with additional test parameters in Table 7.6.2.2.1.0-1 and the downlink physical channel setup according to Annex C.2.2.

Table 7.6.2.2.1.0-1: Test parameters

Parameter	Unit	Test 1
Bandwidth	MHz	100
Subcarrier spacing	kHz	120
Duplex Mode		TDD

TDD Slot Configuration			FR2.120-2 Annex A.1.3
Propagation channel			TDLA30-35
Antenna configuration			2x2
Correlation configuration			ULA Low
Beamforming Model			As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 5, (8)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
CSI-RS periodicity and offset	slot		8/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic
	Number of CSI-RS ports (X)		2
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 3 (6)
	First OFDM symbol in the PRB used for CSI-RS (l_0)		13
NZP CSI-RS-timeConfig periodicity and offset	slot		Not configured
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		Pattern 1
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(8,13)
	CSI-IM timeConfig periodicity and offset	slot	
ReportConfigType			Aperiodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI
timeRestrictionForChannelMeasurements			not configured
timeRestrictionForInterferenceMeasurements			not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8
csi-ReportingBand			11111111
CSI-Report periodicity and offset	slot		Not configured
Aperiodic Report Slot Offset			7
CSI request			1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A
	CodebookSubsetRestriction		111111
RI Restriction			N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay	ms		1.375
Maximum number of HARQ transmission (Note 1)			4
The number of slots between PDSCH and corresponding HARQ-ACK information			As defined in Annex A.1.3
Measurement channel			As specified in Table A.4-1 Rank 1: TBS.1-1 Rank 2: TBS.1-2
Note1:	For retransmission including initial transmission, RV {0,2,3,1} with same MCS and rank as initial transmission; follow the latest UE reported PMI whose rank is same as the initial transmission		

Table 7.6.2.2.1.0-2: Minimum requirements

	Fraction of maximum	SNR(dB)
--	---------------------	---------

	throughput (Note 1)	
Test 1	35%	16.5
Note 1: Fraction of maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

The normative reference for this requirement is TS 38.101-4 [5], clause 7.6.2.2.1.

7.6.2.2.1_1 2Rx TDD FR2 PDSCH performance with link adaptation - 2x2 MIMO for both SA and NSA

7.6.2.2.1_1.1 Test purpose

Verify the PDSCH absolute physical layer throughput performance with link adaptation for FR2-1 under 2 receive antenna conditions.

7.6.2.2.1_1.2 Test applicability

This test applies to all types of NR UE release 17 supporting link adaptation.

This test also applies to all types of EUTRA UE release 17 supporting link adaptation

This test applies to all types of NR UE release 18 and forward.

This test also applies to all types of EUTRA UE release 18 and forward.

7.6.2.2.1_1.3 Test description

7.6.2.2.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2 and Table 7.1.1_1-2a.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connect the SS, the faders and AWGN noise source to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and section A.3.4.2 for UE diagram.
2. The parameter settings for the serving cell are set up according to Table 7.2-1 and Table 7.6.2.2.1.0-1 as appropriate.
3. Downlink signals for NR serving cell are initially set up according to Annexes C.0, C.1, C.2 and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On*, Test Mode *On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On*, Test Mode *On for NSA* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 7.6.2.2.1_1.3.3.

7.6.2.2.1_1.3.2 Test procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI as per the measurement channel according to Table 7.6.2.2.1_1.4-1. The SS sends downlink MAC padding bits
3. Set the parameters of the bandwidth, the propagation channel, the correlation matrix and the SNR for the serving cell according to Tables 7.6.2.2.1_1.4-1 and 7.6.2.2.1_1.4-2.
4. Measure the average throughput on the serving cell for a duration sufficient to achieve statistical significance according to Annex G.1.5. Count the number of NACKs, ACKs and statDTXs on the UL during each subtest and decide pass or fail according to Table G.1.5-3 in Annex G Clause G.1.5.

7.6.2.2.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2.

7.6.2.2.1_1.3.3_1 Message exceptions for SA

Table 7.6.2.2.1_1.3.3_1-1: SchedulingRequestResourceConfig

Derivation Path: Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
SI80	7		
}			
}			

7.6.2.2.1_1.3.3_2 Message exceptions for NSA

Same as 7.6.2.2.1_1.3.3_1

7.6.2.2.1_1.4 Test requirement

Table 7.6.2.2.1_1.4-1 defines the primary level settings.

The fraction of maximum throughput percentage for the downlink shall meet or exceed the specified value in Table 7.6.2.2.1_1.4-2 for the specified SNR including test tolerances for all throughput tests.

Table 7.6.2.2.1_1.4-2: Test requirements

	Fraction of maximum throughput (Note 1)	SNR(dB)
Test 1	35%	18.3
Note 1: Fraction of maximum throughput is defined as the throughput using the TBS corresponding to CQI index 15 with rank 2.		

8 CSI reporting requirements (Radiated requirements)

8.1 General

This clause includes radiated requirements for the reporting of channel state information (CSI).

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

8.1.1 Applicability of requirements

8.1.1.1 General

The minimum performance requirements are applicable to the FR2 operating bands defined in TS 38.101-2 [3] with F_{DL_high} not exceeding 40000 MHz.

The minimum performance requirements in Clause 8 are mandatory for UE supporting NR operation, except test cases listed in Clause 8.1.1.3, 8.1.1.4.

8.1.1.2 Applicability of requirements for different number of RX antenna ports

UE shall support 2 RX ports for different RF operating bands. The UE requirements applicability is defined in Table 8.1.1.2-1.

Table 8.1.1.2-1: Requirements applicability

Supported RX antenna ports	Test type	Test list
UE supports 2RX antenna	CQI	All tests in Clause 8.2.2
	PMI	All tests in Clause 8.3.2
	RI	All tests in Clause 8.4.2

8.1.1.3 Applicability of requirements for optional UE features

The performance requirements in Table 8.1.1.3-1 shall apply for UEs which support optional UE features only.

Table 8.1.1.3-1: Requirements applicability for optional UE features

UE feature/capability [14]	Test type		Test list	Applicability notes
256QAM modulation scheme for PDSCH for FR2 (<i>pdsch-256QAM-FR2</i>)	FR2 TDD	CQI	Clause 8.2.2.2.1_1 (Tests 3 and 4)	The test coverage can be considered fulfilled without executing of Test 1 and 2 from Clause 8.2.2.2.1 if UE passes Test 3 and 4 from Clause 8.2.2.2.1_1

8.1.1.4 Applicability of requirements for mandatory UE features with capability signalling

The performance requirements in Table 8.1.1.4-1 shall apply for UEs which support mandatory UE features with capability signalling only.

Table 8.1.1.4-1: Requirements applicability for mandatory features with UE capability signalling

UE feature/capability [14]	Test type		Test list	Applicability notes
Supported maximum number of PDSCH MIMO layers (<i>maxNumberMIMO-LayersPDSCH</i>)	FR2 TDD	CQI	Clause 8.2.2.2.1.1	The requirements apply only in case the PDSCH MIMO rank in the test case does not exceed UE PDSCH MIMO layers capability
		RI	Clause 8.4.2.2	
Support of 1 port PTRS (<i>onePortsPTRS</i>)	FR2 TDD	CQI	Clause 8.2	
		PMI	Clause 8.3	
		RI	Clause 8.4	

8.1.1.5 Applicability of Channel Quality Indicator (CQI) reporting requirements for CA

8.1.1.5.1 Applicability and test rules for different CA configurations and bandwidth combination sets

The performance requirement for CA CQI tests in clause 8.2A are defined independent of CA configurations and bandwidth combination sets specified in clause 5.5A in TS 38.101-2 [7].

For UEs supporting multiple CA capabilities, test any one of the supported CA capabilities with largest aggregated CA bandwidth combination. The categorization of CA capability is specified in clause 7.1.1.5.1.

For UEs supporting multiple CA configurations from the selected CA capability, test any one of the supported CA configurations with largest aggregated CA bandwidth combination. For simplicity, the CA configuration refers to combination of CA configuration and bandwidth combination set.

A single uplink CC is configured for all tests.

8.1.1.5.2 Test coverage for different number of component carriers

For CA CQI tests specified in clause 8.2A, among all supported CA capabilities, if corresponding CA tests with the largest number of CCs supported by the UE are tested, the test coverage can be considered fulfilled without executing the CA tests with less than the largest number of CCs supported by the UE.

8.1.1.6 Applicability of requirements for RedCap

The performance requirements in Table 8.1.1.6-1 shall apply for UEs which support optional feature *supportOfRedCap*.

Table 8.1.1.6-1: Requirements applicability for RedCap

UE capability	Test type		Test list	Applicability notes
RedCap with 2RX	FR2 TDD	CQI	Clause 8.2.2.2.1.1 (Tests 1 and 2) Clause 8.2.2.2.2.1 (Test 1)	
		PMI	Clause 8.3.2.2.1 (Tests 2)	
		RI	Clause 8.4.2.2 (Test 2)	

8.1.1_1 Applicability of test requirements due to maximum achievable SNR

The current assumption of maximum testable SNR_{BB} for PC3, Max device size ≤ 30 cm under fading conditions is specified in Tables 7.1.1_1-1 and 7.1.1_1-1a.

The current assumption of maximum testable SNR_{BB} for indirect far field (IFF), PC3, Max device size ≤ 30 cm without fading conditions is specified in Tables 8.1.1_1-0 and 8.1.1_1-1.

Table 8.1.1_1-0: Current assumption of maximum testable SNR_{BB} under fading for modulations up to 256 QAM for CSI scenarios

Operating Band / Frequency	Maximum testable SNR _{BB} (dB)		
	CHBW 50 MHz	CHBW 100 MHz	CHBW 200 MHz
n257 mid	26.3	23.2	20.1
n258 mid	26.3	23.2	20.1
n259 mid	16.0	12.8	9.6
n260 mid	20.1	16.9	13.8
n261 mid	26.3	23.2	20.1

Table 8.1.1_1-1: Current assumption of maximum testable SNR_{BB} without fading for modulations up to 256 QAM

Operating Band	Maximum testable SNR _{BB} (dB)
----------------	---

/ Frequency	CHBW 50 MHz	CHBW 100 MHz	CHBW 200 MHz
n257 mid	28.7	25.5	22.5
n258 mid	28.7	25.5	22.5
n259 mid	18.4	15.2	12.1
n260 mid	22.5	19.3	16.3
n261 mid	28.7	25.5	22.5

Based on the current assumption of maximum testable SNR_{BB} , the applicability of test points is defined in Table 8.1.1_1-2 for indirect far field (IFF), PC3, Max device size ≤ 30 cm under fading conditions.

Table 8.1.1_1-2: Testability of test requirements due to maximum achievable SNR per band

Test Case	Test point	CHBW / MHz	Fading	SNR test requirement	Test Point Applicability				
					n257	n258	n259	n260	n261
8.2.2.2.1.1	1	100	No	9	x	x	x	x	x
	2	100	No	15	x	x	x	x	x
8.2.2.2.2.1	1	100	Yes	7	x	x	x	x	x
	2	100	Yes	13	x	x	x	x	x
8.2.2.2.2.1_1	3	50	Yes	8	x	x	x	x	x
	4	50	Yes	21	x	x	TBD	TBD	x
8.2A.3.1.1	1	$BW_{agg} \leq 200$	No	10	x	x	x	x	x
		$BW_{agg} > 200$	No	10	TBD	TBD	TBD	TBD	TBD
8.2A.3.1.2	1	$BW_{agg} \leq 200$	No	12	x	x	x	x	x
		$BW_{agg} > 200$	No	12	TBD	TBD	TBD	TBD	TBD
8.2A.3.1.3	1	$BW_{agg} \leq 200$	No	12	x	x	x	x	x
		$BW_{agg} > 200$	No	12	TBD	TBD	TBD	TBD	TBD
8.4.2.2.1	1	100	Yes	0	x	x	X	x	x
	2	100	Yes	16	x	x	x	x	x
	3	100	Yes	16	x	x	x	x	x

8.1.2 Common test parameters

Parameters specified in Table 8.1.2-1 are applied for all test cases in this section unless otherwise stated.

Table 8.1.2-1: Test parameters for CSI test cases

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
Duplex Mode			TDD
PTRS <i>epre</i> -Ratio			0
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 3)	RBs	0
	Subcarrier spacing	kHz	120
DL BWP configuration #1	Cyclic prefix		Normal
	RB offset	RBs	0
	Number of contiguous PRB	PRBs	Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-2 [3] for tested channel bandwidth and subcarrier spacing
Active DL BWP index			1
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		0,1
	Number of PDCCH candidates and aggregation levels		1/AL8
	DCI format		1_1
	TCI state		TCI state #1
PDCCH & PDCCH DMRS			Multi-path fading propagation

	Precoding configuration		<p>conditions: Single Panel Type I, Random per slot with equal probability of each applicable i_1, i_2 combination, and with REG bundling granularity for number of Tx larger than 1</p> <p>Static propagation conditions: Single Panel Type I, Random precoder chosen from precoder index 0 and 2, selection updated per slot</p>
Additional PDCCH Configuration for Aperiodic Reporting (Note 4)	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		0,1
	Number of PDCCH candidates and aggregation levels		1/AL8
	DCI format		0_1
	TCI state		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		<p>Multi-path fading propagation conditions: Single Panel Type I, Random per slot with equal probability of each applicable i_1, i_2 combination, and with REG bundling granularity for number of Tx larger than 1</p>
Cross carrier scheduling			Not configured
PDSCH configuration	Mapping type		Type A
	k_0		0
	Starting symbol (S)		2
	Length (L)		12
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		2
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	DMRS ports indexes		{1000} for Rank1 {1000,1001} for Rank2
	Maximum number of OFDM symbols for DL front loaded DMRS		1
	Number of PDSCH DMRS CDM group(s) without data		2
PTRS configuration	Frequency density (K_{PT-RS})		2
	Time density (L_{PT-RS})		1
	Resource Element Offset		2
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS (k_0)		0 for CSI-RS resource 1,2,3,4
	First OFDM symbol in the PRB used for CSI-RS (l_0)		4 for CSI-RS resource 1 and 3 8 for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		No CDM for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	slot	120kHz SCS: 160 for CSI-RS resource 1,2,3,4
	CSI-RS offset	slot	120 kHz SCS: 80 for CSI-RS resource 1 and 2 81 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP

			size /4)*4
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP size/4)*4
	QCL info		TCI state #1
ZP CSI-RS for CSI acquisition	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP size /4)*4
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2
	CDM Type		'No CDM' for CSI-RS resource 1,2
	Density (ρ)		3 for CSI-RS resource 1,2
	CSI-RS periodicity	Slots	120 kHz SCS: 160 for CSI-RS resource 1,2
	CSI-RS offset	Slots	0 for CSI-RS resource 1,2
	Frequency Occupation		Start PRB 0 Number of PRB = ceil(BWP size /4)*4
	Repetition		ON
	QCL info		TCI state #1
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	SSB #0
		QCL Type	Type D
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type D
Number of HARQ Processes			8
PUCCH HARQ ACK spatial bundling			Not configured
Redundancy version coding sequence			{0,2,3,1}
K1 value (PDSCH-to-HARQ-timing-indicator)			For FR2.120-1: 3 if mod(i,5) = 0, 6 if mod(i,5) = 2 For FR2.120-2: 11 if mod(i,8) = 0, 7]if mod(i,8) = 4, 6]if mod(i,8) = 5, where i is slot index per radio frame with values 0-79.
Symbols for unused REs			OP.1 FDD as defined in Annex A.5.1.1 OP.1 TDD as defined in Annex A.5.2.1
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
<p>Note 1: PDSCH is not scheduled on slots containing CSI-RS or slots which are not full DL.</p> <p>Note 2: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission.</p> <p>Note 3: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-2 [3] for tested channel bandwidth and subcarrier spacing.</p> <p>Note 4: Additional PDCCH configuration for aperiodic reporting is only for test cases with aperiodic CSI reporting configured.</p>			

8.2 Reporting of Channel Quality Indicator (CQI)

8.2.1 1RX requirements

TBD

8.2.2 2RX requirements

8.2.2.1 FDD

TBD

8.2.2.2 TDD

8.2.2.2.1 CQI reporting under AWGN conditions

8.2.2.2.1.1 2Rx TDD FR2 periodic wideband CQI reporting under AWGN performance for both SA and NSA

8.2.2.2.1.1.1 Test Purpose

The purpose of this test is to verify the variance of the wideband CQI reports is within the limits defined and a PDSCH BLER of 10% falls between the transport format based median CQI-1 and median CQI or the transport format based median CQI and median CQI +1.

8.2.2.2.1.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

8.2.2.2.1.1.3 Minimum requirement for periodic CQI reporting

The purpose is to verify that the reported CQI values are in accordance with the CQI definition given in TS 38.214 [12]. To account for sensitivity of the input SNR the reporting definition is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 8.2.2.2.1.1.3-1, and using the downlink physical channels specified in Annex C.5.1, the minimum requirements are specified by the following:

- a) the reported CQI value shall be in the range of ± 1 of the reported median more than 90% of the time;
- b) if the PDSCH BLER using the transport format indicated by median CQI is less than or equal to 0.1, the BLER using the transport format indicated by the (median CQI + 1) shall be greater than 0.1. If the PDSCH BLER using the transport format indicated by the median CQI is greater than 0.1, the BLER using transport format indicated by (median CQI – 1) shall be less than or equal to 0.1.

Table 8.2.2.2.1.1.3-1 Test parameters

Parameter		Unit	Test 1				Test 2			
Bandwidth		MHz	100							
Subcarrier spacing		kHz	120							
Duplex Mode			TDD							
TDD Slot Configuration			FR2.120-2 Annex A.1.3							
SNR _{BB}		dB	8	9	14	15				
Propagation channel			AWGN							
Antenna configuration			2x2 with static channel specified in Annex B.1							
Beamforming Model			As specified in Annex B.4.1							
ZP CSI-RS configuration	CSI-RS resource Type		Periodic							
	Number of CSI-RS ports (X)		4							
	CDM Type		FD-CDM2							

	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		8
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		13
	CSI-RS periodicity and offset	slot	8/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		<i>Periodic</i>
	Number of CSI-RS ports (X)		2
	CDM Type		<i>fd-CDM2</i>
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		6
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		13
NZP CSI-RS-timeConfig periodicity and offset	slot	8/1	
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		1
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(8, 13)
	CSI-IM timeConfig periodicity and offset	slot	8/1
ReportConfigType		<i>Periodic</i>	
CQI-table		Table 1	
reportQuantity		<i>cri-RI-PMI-CQI</i>	
timeRestrictionForChannelMeasurements		<i>Not configured</i>	
timeRestrictionForInterferenceMeasurements		<i>Not configured</i>	
cqi-FormatIndicator		<i>Wideband</i>	
pmi-FormatIndicator		<i>Wideband</i>	
Sub-band Size	RB	8	
csi-ReportingBand		11111111	
CSI-Report periodicity and offset	slot	8/3	
aperiodicTriggeringOffset		<i>Not configured</i>	
Codebook configuration	Codebook Type		<i>type1-SinglePanel</i>
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		<i>Not configured</i>
	CodebookSubsetRestriction		010000
RI Restriction		N/A	
Physical channel for CSI report		PUCCH	
CQI/RI/PMI delay	ms	8.375	
Maximum number of HARQ transmission		1	
Measurement channel		As specified in Table A.4-1, TBS.1-2	

The normative reference for this requirement is TS 38.101-4 [5] clause 8.2.2.2.1.1.

8.2.2.2.1.1.4 Test Description

8.2.2.2.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, AWGN noise source and the UE antenna is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 8.1.2-1 and Table 8.2.2.2.1.1.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 8.2.2.2.1.1.4.3.

8.2.2.2.1.1.4.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found mark the test as inconclusive.
2. Set the parameters of bandwidth, SCS, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 8.2.2.2.1.1.3-1.
3. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. Continue transmission of the PDSCH until 2000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 1 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
4. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as wideband Median CQI value.
5. If Median CQI is not equal to 1 or 15 and 1800 or more of the wideband CQI values are in the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 6, otherwise go to step 9.
6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000.

For the filtered ACK and NACK responses if the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) \leq 0.1$ then go to step 7, otherwise go to step 8.

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI+1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 8 until 1000 filtered ACK+NACK responses are gathered.

If the ratio $(\text{NACK} / \text{ACK} + \text{NACK}) > 0.1$

then pass the UE for this test and go to step 10, otherwise go to step 9.

8. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the wideband median-CQI-1 value and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH, transmitted by the SS, record and filter the ACK, NACK and statDTX responses as in step 6 until 1000 filtered ACK+NACK responses are gathered.

If the ratio (NACK /ACK + NACK) ≤ 0.1

then pass the UE for this test and go to step 10, otherwise go to step 9.

9. If both SNR points of the test have not been tested, then repeat the same procedure (steps 1 to 8) for the other SNR point as appropriate. Otherwise fail the UE.

10. Repeat step 1 to 9 for Test2.

8.2.2.2.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

8.2.2.2.1.1.4.3_1 Message exceptions for SA

Table 8.2.2.2.1.1.4.3_1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {		Periodic	
periodic SEQUENCE {			
reportSlotConfig	CSI-ReportPeriodicityAndOffset	8/1	
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE{			
Subbands9	111111111		
}			
}			
}			

Table 8.2.2.2.1.1.4.3_1-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
CodebookConfig ::= SEQUENCE {			
codebookType CHOICE {			
type1 SEQUENCE {			
subType CHOICE {			
type1-SinglePanel SEQUENCE {			
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-codebookSubsetRestriction	010000		
}			
}			
}			
}			
}			
}			
}			

Table 8.2.2.2.1.1.4.3_1-3: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
SI80	7		
}			
}			

8.2.2.2.1.1.4.3_2 Message exceptions for NSA

Same as 8.2.2.2.1.1.4.3_1.

8.2.2.2.1.1.5 Test Requirements

The pass/fail decision is as specified in the test procedure in clause 8.2.2.2.1.1.4.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

8.2.2.2.2 CQI reporting under fading conditions

8.2.2.2.2.1 2Rx TDD FR2 aperiodic wideband CQI reporting under fading performance for both SA and NSA

8.2.2.2.2.1.1 Test Purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 1% for the indicated transport format.

8.2.2.2.2.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

8.2.2.2.2.1.3 Minimum requirement for aperiodic CQI reporting

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the CQI reporting under frequency non-selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 8.2.2.2.1.3-1 and using the downlink physical channels specified in Annex C.5.1, the minimum requirements are specified by the following:

- a CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least α % of the time, where α % is specified in Table 8.2.2.2.1.3-2;
- the ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 8.2.2.2.1.3-2;
- when transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater or equal to 0.01.

Table 8.2.2.2.1.3-1: Test parameters

Parameter	Unit	Test 1		Test 2	
Bandwidth	MHz	100			
Subcarrier spacing	kHz	120			
Duplex Mode		TDD			
TDD Slot Configuration		FR2.120-2 Annex A.1.3			
SNR _{BB}	dB	6	7	12	13
Propagation channel		TDLA30-35			
Antenna configuration		2x2 ULA High			

Beamforming Model		As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type	<i>Periodic</i>
	Number of CSI-RS ports (X)	4
	CDM Type	<i>FD-CDM2</i>
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)	8
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)	13
	CSI-RS interval and offset	slot
NZP CSI-RS for CSI acquisition	CSI-RS resource Type	<i>Aperiodic</i>
	Number of CSI-RS ports (X)	2
	CDM Type	<i>fd-CDM2</i>
	Density (ρ)	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)	6
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)	13
	NZP CSI-RS-timeConfig interval and offset	slot
CSI-IM configuration	aperiodicTriggeringOffset	0
	CSI-IM resource Type	<i>Aperiodic</i>
	CSI-IM RE pattern	1
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)	(8, 13)
CSI-IM timeConfig interval and offset	slot	Not configured
ReportConfigType		<i>Aperiodic</i>
CQI-table		Table 1
reportQuantity		<i>cri-RI-PMI-CQI</i>
timeRestrictionForChannelMeasurements		<i>Not configured</i>
timeRestrictionForInterferenceMeasurements		<i>Not configured</i>
cqi-FormatIndicator		<i>Wideband</i>
pmi-FormatIndicator		<i>Wideband</i>
Sub-band Size	RB	8
csi-ReportingBand		11111111
CSI-Report periodicity and offset	slot	Not configured
Aperiodic Report Slot Offset		6
CSI request		1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0
reportTriggerSize		1
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type	<i>type1-SinglePanel</i>
	Codebook Mode	1
	(CodebookConfig-N1, CodebookConfig-N2)	<i>Not configured</i>
	CodebookSubsetRestriction	000001
RI Restriction		N/A
Physical channel for CSI report		PUSCH
CQI/RI/PMI delay	ms	1.375
Maximum number of HARQ transmission		1
Measurement channel		As specified in Table A.4-1, TBS.1-1

Table 8.2.2.2.1.3-2 Minimum requirements

	Test 1	Test 2
α [%]	2	2
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 8.2.2.2.1.

8.2.2.2.1.4 Test Description

8.2.2.2.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE antenna is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 8.1.2-1 and Table 8.2.2.2.1.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG, Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 8.2.2.2.1.4.3.

8.2.2.2.1.4.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found mark the test as inconclusive.
2. Set the parameters of bandwidth, reference Channel, the propagation condition, antenna configuration and the SNR according to Table 8.2.2.2.1.5-1.
3. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs at $RB_{start}=0$ allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CQI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CQI feedback. Continue transmission of the PDSCH until 6000 wideband CQI reports have been gathered. In this process the SS collects wideband CQI reports every 1 ms and also cases where UE transmits nothing in its CQI timing are also counted as wideband CQI reports.
4. Set up a relative frequency distribution for the reported wideband CQI-values, Calculate the median value (wideband Median CQI is the wideband CQI that is at or crosses 50% distribution from the lower wideband CQI side). This CQI-value is declared as Median CQI value.

5. If Median CQI value is not equal to 1 or 15 and 120 ($\alpha\%$) or more of the wideband CQI values are outside the range $(\text{Median CQI} - 1) \leq \text{Median CQI} \leq (\text{Median CQI} + 1)$ then continue with step 6, otherwise go to step 8.
6. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the Median CQI value from step 4 and shall not react to the UE's wideband CQI reports. The SS sends downlink MAC padding bits on the DL RMC. Measure the average throughput according to Annex G.3.3 and G.3.4.

Declare the throughput as t_{median}

7. The SS shall transmit PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE's reported wideband CQI value. The SS sends downlink MAC padding bits on the DL RMC. For any PDSCH transmitted by the SS, record the associated ACK, NACK and statDTX responses. The responses are then filtered as follows: for the sequence of responses for each HARQ process, discard all the statDTX responses. Continue to gather data until the number of filtered ACK+NACK responses reaches 1000. Record the BLER (NACK / ACK + NACK) and measure the average throughput according to Annex G.3.3 and G.3.4. Declare the throughput as t .

If the recorded $\text{BLER} \geq 0.01$ and $t / t_{median} \geq \gamma$ then pass the UE for this test and go to step 9.

8. If both SNR points of the test have not been tested, then repeat the same procedure (steps 2 to 7) for the other SNR point as appropriate. Otherwise fail the UE.
9. Repeat step 2 to 8, with test conditions according to the table 8.2.2.2.1.5-1, for Test2 as appropriate.

8.2.2.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] subclause 4.6.1 and 5.4.2 with the following exceptions:

8.2.2.2.1.4.3_1 Message exceptions for SA

Table 8.2.2.2.1.4.3_1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {		Aperiodic	
aperiodic SEQUENCE {			
reportSlotOffsetList	6		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE{			
Subbands9	111111111		
}			
}			
}			

Table 8.2.2.2.1.4.3_1-2: CodebookConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
CodebookConfig ::= SEQUENCE {			
codebookType CHOICE {			
type1 SEQUENCE {			
subType CHOICE {			
type1-SinglePanel SEQUENCE {			
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-codebookSubsetRestriction	000001		
}			
}			
}			
}			
}			
}			

}			
}			
}			
}			

Table 8.2.2.2.1.4.3_1-3: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
SI80	7		
}			
}			

8.2.2.2.2.1.4.3_2 Message exceptions for NSA

Same as in 8.2.2.2.2.1.4.3_1.

8.2.2.2.2.1.5 Test Requirements

Table 8.2.2.2.1.5-1 Test parameters

Parameter		Unit	Test 1		Test 2	
Bandwidth		MHz	100			
Subcarrier spacing		kHz	120			
Duplex Mode			TDD			
TDD Slot Configuration			FR2.120-2 Annex A.1.3			
SNR _{BB}		dB	6+ TT	7+ TT	12 +T T	13 +T T
Propagation channel			TDLA30-35			
Antenna configuration			2x2 ULA High			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		8			
	First OFDM symbol in the PRB used for CSI-RS (l ₀ , l ₁)		13			
	CSI-RS interval and offset	slot	8/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		fd-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		6			
	First OFDM symbol in the PRB used for CSI-RS (l ₀ , l ₁)		13			
	NZP CSI-RS-timeConfig interval and offset	slot	Not configured			
aperiodicTriggeringOffset		0				
CSI-IM configuration	CSI-IM resource Type		Aperiodic			
	CSI-IM RE pattern		1			
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(8, 13)			
	CSI-IM timeConfig	slot	Not configured			

	interval and offset		
ReportConfigType			<i>Aperiodic</i>
CQI-table			Table 1
reportQuantity			<i>cri-RI-PMI-CQI</i>
timeRestrictionForChannelMeasurements			<i>Not configured</i>
timeRestrictionForInterferenceMeasurements			<i>Not configured</i>
cqi-FormatIndicator			<i>Wideband</i>
pmi-FormatIndicator			<i>Wideband</i>
Sub-band Size	RB		8
csi-ReportingBand			11111111
CSI-Report periodicity and offset	slot		Not configured
Aperiodic Report Slot Offset			6
CSI request			1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		<i>type1-SinglePanel</i>
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		<i>Not configured</i>
	CodebookSubsetRestriction		000001
	RI Restriction		N/A
Physical channel for CSI report			PUSCH
	CQI/RI/PMI delay	ms	1.375
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-1, TBS.1-1
Note 1:	TT = 0dB		

Table 8.2.2.2.1.5-2 Test requirements

	Test 1	Test 2
α [%]	2	2
γ	1.05 - TT	1.05 - TT
Note 1:	TT = 0.01	

8.2.2.2.1_1 2Rx TDD FR2 aperiodic CQI wideband reporting under fading performance for both SA and NSA – 256QAM (Rel-16 and forward)

8.2.2.2.1_1.1 Test Purpose

To verify the variance of the wideband CQI reports is within the limits defined, that the ratio of the throughput is within the limits defined and that the average PDSCH BLER is greater than or equal to 1% for the indicated transport format.

8.2.2.2.1_1.2 Test Applicability

This test applies to all types of NR UE release 16 and forward supporting DL 256QAM.

This test also applies to all types of EUTRA UE release 16 and forward supporting EN-DC and NR DL 256QAM.

8.2.2.2.1_1.3 Minimum requirement for aperiodic CQI reporting

The reporting accuracy of CQI under frequency non-selective fading conditions is determined by the reporting variance, the relative increase of the throughput obtained when the transport format is indicated by the reported CQI compared to

the throughput obtained when a fixed transport format is configured according to the reported median CQI, and a minimum BLER using the transport formats indicated by the reported CQI. To account for sensitivity of the input SNR the CQI reporting under frequency non-selective fading conditions is considered to be verified if the reporting accuracy is met for at least one of two SNR levels separated by an offset of 1 dB.

For the parameters specified in Table 8.2.2.2.1_1.3-1 and using the downlink physical channels specified in Annex C.5.1, the minimum requirements are specified by the following:

- a CQI index not in the set {median CQI -1, median CQI, median CQI +1} shall be reported at least α % of the time, where α % is specified in Table 8.2.2.2.1_1.3-2;
- the ratio of the throughput obtained when transmitting the transport format indicated by each reported wideband CQI index and that obtained when transmitting a fixed transport format configured according to the wideband CQI median shall be $\geq \gamma$, where γ is specified in Table 8.2.2.2.1_1.3-2;
- when transmitting the transport format indicated by each reported wideband CQI index, the average BLER for the indicated transport formats shall be greater or equal to 0.01.

Table 8.2.2.2.1_1.3-1: Test parameters

Parameter		Unit	Test 3	Test 4
Bandwidth		MHz	50	
Subcarrier spacing		kHz	120	
Duplex Mode			TDD	
TDD Slot Configuration			FR2.120-2 Annex A.1.3	
SNR _{BB}		dB	7	8 20 21
Propagation channel			TDLA30-35	
Antenna configuration			2x2 ULA High	
Beamforming Model			As specified in Annex B.4.1	
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	
	Number of CSI-RS ports (X)		4	
	CDM Type		FD-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		8	
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		13	
	CSI-RS interval and offset	slot	8/1	
NRP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic	
	Number of CSI-RS ports (X)		2	
	CDM Type		fd-CDM2	
	Density (ρ)		1	
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		6	
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		13	
	NRP CSI-RS-timeConfig interval and offset	slot	Not configured	
aperiodicTriggeringOffset		0		
CSI-IM configuration	CSI-IM resource Type		Aperiodic	
	CSI-IM RE pattern		1	
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(8, 13)	
	CSI-IM timeConfig interval and offset	slot	Not configured	
ReportConfigType		Aperiodic		
CQI-table		Table 2		
reportQuantity		cri-RI-PMI-CQI		
timeRestrictionForChannelMeasurements		Not configured		
timeRestrictionForInterferenceMeasurements		Not configured		
cqi-FormatIndicator		Wideband		
pmi-FormatIndicator		Wideband		

Sub-band Size		RB	8
csi-ReportingBand			1111
CSI-Report periodicity and offset		slot	Not configured
Aperiodic Report Slot Offset			6
CSI request			1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0
reportTriggerSize			1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		<i>type1-SinglePanel</i>
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		<i>Not configured</i>
	CodebookSubsetRestriction		000001
RI Restriction			N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	1.375
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-7

Table 8.2.2.2.1_1.3-2 Minimum requirements

	Test 3	Test 4
α [%]	2	2
γ	1.05	1.05

The normative reference for this requirement is TS 38.101-4 [5] clause 8.2.2.2.1.

8.2.2.2.1_1.4 Test Description

Same test description as in clause 8.2.2.2.1.4 with the following exception:

- Table 8.2.2.2.1_1.3-1 instead of 8.2.2.2.1.3-1
- Table 8.2.2.2.1_1.4.1- instead of 8.2.2.2.1.4.3_1-1
- Table 8.2.2.2.1_1.5-1 instead of 8.2.2.2.1.5-1
- In test procedures, Test 3 and Test 4 are configured and tested.

Table 8.2.2.2.1_1.4.1-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {		Aperiodic	
aperiodic SEQUENCE {			
reportSlotOffsetList	6		
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE{			
Subbands4	1111		
}			
}			
cqi-Table	table2		Test 3 and 4

}		
---	--	--

8.2.2.2.1_1.5 Test Requirements

Table 8.2.2.2.1_1.5-1 Test parameters

Parameter		Unit	Test 3		Test 4	
Bandwidth		MHz	50			
Subcarrier spacing		kHz	120			
Duplex Mode			TDD			
TDD Slot Configuration			FR2.120-2 Annex A.1.3			
SNR _{BB}		dB	7+ TT	8+ TT	20 +T T	21 +T T
Propagation channel			TDLA30-35			
Antenna configuration			2x2 ULA High			
Beamforming Model			As specified in Annex B.4.1			
ZP CSI-RS configuration	CSI-RS resource Type		Periodic			
	Number of CSI-RS ports (X)		4			
	CDM Type		FD-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		8			
	First OFDM symbol in the PRB used for CSI-RS (l ₀ , l ₁)		13			
	CSI-RS interval and offset	slot	8/1			
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic			
	Number of CSI-RS ports (X)		2			
	CDM Type		fd-CDM2			
	Density (ρ)		1			
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		6			
	First OFDM symbol in the PRB used for CSI-RS (l ₀ , l ₁)		13			
	NZP CSI-RS-timeConfig interval and offset	slot	Not configured			
	aperiodicTriggeringOffset		0			
CSI-IM configuration	CSI-IM resource Type		Aperiodic			
	CSI-IM RE pattern		1			
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(8, 13)			
	CSI-IM timeConfig interval and offset	slot	Not configured			
ReportConfigType		Aperiodic				
CQI-table		Table 2				
reportQuantity		cri-RI-PMI-CQI				
timeRestrictionForChannelMeasurements		Not configured				
timeRestrictionForInterferenceMeasurements		Not configured				
cqi-FormatIndicator		Wideband				
pmi-FormatIndicator		Wideband				
Sub-band Size	RB	8				
csi-ReportingBand		1111				
CSI-Report periodicity and offset	slot	Not configured				
Aperiodic Report Slot Offset		6				
CSI request		1 in slots i, where mod(i, 8) = 1, otherwise it is equal to 0				
reportTriggerSize		1				
CSI-AperiodicTriggerStateList		One State with one				

			Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		<i>type1-SinglePanel</i>
	Codebook Mode		1
	(CodebookConfig-N1, CodebookConfig-N2)		<i>Not configured</i>
	CodebookSubsetRestriction		000001
	RI Restriction		N/A
Physical channel for CSI report			PUSCH
CQI/RI/PMI delay		ms	1.375
Maximum number of HARQ transmission			1
Measurement channel			As specified in Table A.4-2, TBS.2-7
Note 1: TT = 0dB			

Table 8.2.2.2.1_1.5-2 Test requirements

	Test 3	Test 4
α [%]	2	2
γ	1.05 - TT	1.05 - TT
Note 1: TT = 0.01		

8.2A Reporting of Channel Quality Indicator (CQI) for CA

8.2A.1 General

This clause includes the requirements for the reporting of channel quality indicator (CQI) with the UE configured for CA. The purpose is to verify that the CQI is correctly reported in accordance with the CQI definition given in TS 38.214 [12] for each CC with multiple cells configured for periodic reporting.

8.2A.2 1RX requirements

(Void)

8.2A.3 2RX requirements

8.2A.3.1 CQI reporting definition under AWGN conditions

8.2A.3.1.0 Minimum requirement for periodic CQI reporting

For the CA CQI reporting test defined in Table 8.2A.3.1.0-4, the test requirements and the test parameters are defined as below.

For each CC, the test parameters are specified in Table 8.2A.3.1.0-1.

For CA with 2 DL CC, for the SNR configuration specified in Table 8.2A.3.1.0-2, and using the downlink physical channels specified in Annex C.5.1 on each CC, the difference between the wideband CQI indices of PCell and SCell reported shall be such that

$$\text{wideband CQI}_{\text{PCell}} - \text{wideband CQI}_{\text{SCell}} \geq 2$$

for more than 90% of the time.

For CA with 3 or more DL CC, for the SNR configuration specified in Table 8.2A.3.1.0-3, and using the downlink physical channels specified in Annex C.5.1 on each cell, the difference between the wideband CQI indices of PCell and

SCell1 reported, and the difference between the wideband CQI indices of SCell1 and SCell2, 3... reported shall be such that

$$\text{wideband CQI}_{\text{PCell}} - \text{wideband CQI}_{\text{SCell1}} \geq 2$$

$$\text{wideband CQI}_{\text{SCell1}} - \text{wideband CQI}_{\text{SCell2, 3...}} \geq 2$$

for more than 90% of the time.

Table 8.2A.3.1.0-1: CA CQI reporting test parameters for each CC

Parameter		Unit	Value
Subcarrier spacing		kHz	120
Duplex Mode			TDD
TDD Slot Configuration			FR2.120-2 Annex A.1.3
Propagation channel			AWGN
Antenna configuration			1x2 with static channel specified in Annex B.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		4
	CDM Type		FD-CDM2
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		8
	First OFDM symbol in the PRB used for CSI-RS (l ₀ , l ₁)		13
CSI-RS periodicity and offset	slot		8/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Periodic
	Number of CSI-RS ports (X)		1
	CDM Type		No CDM
	Density (ρ)		1
	First subcarrier index in the PRB used for CSI-RS (k ₀ , k ₁)		6
	First OFDM symbol in the PRB used for CSI-RS (l ₀ , l ₁)		13
NZP CSI-RS-timeConfig periodicity and offset	slot		8/1
CSI-IM configuration	CSI-IM resource Type		Periodic
	CSI-IM RE pattern		1
	CSI-IM Resource Mapping (k _{CSI-IM} , l _{CSI-IM})		(8, 13)
	CSI-IM timeConfig periodicity and offset	slot	
ReportConfigType			Periodic
CQI-table			Table 1
reportQuantity			cri-RI-PMI-CQI (Note 1)
Codebook configuration			Not configured
timeRestrictionForChannelMeasurements			Not configured
timeRestrictionForInterferenceMeasurements			Not configured
cqi-FormatIndicator			Wideband
pmi-FormatIndicator			Wideband
Sub-band Size	RB		8 for 50MHz, 100MHz, 16 for 200MHz, 32 for 400MHz
csi-ReportingBand			11111111
CSI-Report periodicity and offset	slot		8/3
aperiodicTriggeringOffset			Not configured
Physical channel for CSI report			PUCCH
CQI/RI/PMI delay	ms		8.375
Maximum number of HARQ transmission			1
Measurement channel			Derived as per section 5.1.3.2 of TS 38.214 [12]
Note 1: The bit width of PMI for UCI on PUCCH in a case 1-port CSI-RS is configured as channel measurement resource is given in TS 38.212 [10], section 6.3.1.1.2.			

Table 8.2A.3.1.0-2: SNR configurations for 2 DL CA

Parameter	PCell	SCell
SNR (dB)	10.0	4.0

Table 8.2A.3.1.0-3: SNR configurations for 3 or more DL CA

Parameter	PCell	SCell1	SCell2, 3...
SNR (dB)	12.0	6.0	0.0

Table 8.2A.3.1.0-4: List of CA CQI reporting test

Test number	CA duplex mode and SCS combination
1	TDD 120 kHz + TDD 120 kHz
Note 1:	The applicability of requirements for different CA configurations and bandwidth combination sets is defined in 8.1.1.5.1.

The normative reference for this requirement is TS 38.101-4 [5], clause 8.2A.3.1.1.

8.2A.3.1.1 2Rx CQI reporting accuracy under AWGN conditions for CA (2DL CA)

Editor's note: The following aspects are either missing or not yet determined:

- Test point applicability is TBD for all bands and $BW_{agg} > 200$ MHz in Table 8.1.1_1-2.

8.2A.3.1.1.1 Test Purpose

To verify that the CQI is correctly reported in accordance with the CQI definition given in TS 38.214 [12] for each CC with multiple cells configured for periodic reporting.

8.2A.3.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 2DL CA.

8.2A.3.1.1.3 Test description

8.2A.3.1.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR2 operation, setup the LTE link according to Annex D

CA capability to be tested: test any one of the supported CA capabilities with largest aggregated CA bandwidth combination, as specified in 8.1.1.5.1.

CA configuration to be tested: For the selected CA capability, test any one of the supported CA configurations with largest aggregated CA bandwidth combination, as specified in 8.1.1.5.1.

1. Connection between SS, the AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.

2. The parameter settings for the NR cell are set up according to Table 8.1.2-1, and Table 8.2A.3.1.0-1 to Table 6.2A.3.1.0-3 as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions are set according to Annex B.1.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On* for NSA according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 8.2A.3.1.1.3.3.

8.2A.3.1.1.1.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Set the parameters of bandwidth, reference channel, propagation condition, antenna configuration and SNR configuration according to Table 8.2A.3.1.0-1 to Table 8.2A.3.1.0-4 as appropriate.
3. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCC. The SS sends downlink MAC padding bits on the DL RMC.
4. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCC. For each CSI report calculate the respective difference $CQI_{P,S} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell}$.
5. If more than 1800 values of $CQI_{P,S}$ are ≥ 2 pass the UE. Otherwise fail the UE.

8.2A.3.1.1.1.3.3 Message contents

8.2A.2.1.1.1.3.3_1 Message exceptions for SA

Table 8.2A.2.1.1.1.3.3_1-1: CSI-RS-ResourceMapping

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row2	0000 0010 0000	K0= 6, row2	
}			
density CHOICE {			
one	NULL		
}			
}			

Table 8.2A.2.1.1.1.3.3_1-2: NZP CSI-ResourcePeriodicityAndOffset

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-2a			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slot8	3		
}			

Table 8.2A.2.1.1.1.3.3_1-3: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-6			
Information Element	Value/remark	Comment	Condition
CSI-IM-Resource ::= SEQUENCE {			
periodicityAndOffset SEQUENCE {			

slot8	1		
}			
}			

Table 6.2A.2.1.1.1.3.3_1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.4-12		
Information Element	Value/remark	Condition
CSI-ReportConfig ::= SEQUENCE {		
subbandSize	8	For 50MHz and 100MHz CHBW.
	16	For 200MHz CHBW.
	32	For 400MHz CHBW.
}		

8.2A.2.1.1.1.3.3_2 Message exceptions for NSA

Same as specified in 8.2A.2.1.1.1.3.3_2.

8.2A.3.1.1.1.3.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 8.2A.3.1.1.1.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

8.2A.3.1.2 2Rx CQI reporting accuracy under AWGN conditions for CA (3DL CA)

Editor's note: The following aspects are either missing or not yet determined:

- Test point applicability is TBD for all bands and $BW_{agg} > 200$ MHz in Table 8.1.1_1-2.

8.2A.3.1.2.1 Test Purpose

Same with 8.2A.3.1.1.1.

8.2A.3.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 3DL CA.

8.2A.3.1.2.3 Test description**8.2A.3.1.2.3.1 Initial conditions**

Same with 8.2A.3.1.1.3.1.

8.2A.3.1.1.2.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Set the parameters of bandwidth, reference channel, propagation condition, antenna configuration and SNR configuration according to Table 8.2A.3.1.0-1 to Table 8.2A.3.1.0-4 as appropriate.
3. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
4. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCCs. For each CSI report calculate the respective difference

$CQI_{P,S1} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell1}$ and the respective difference $CQI_{S1-S2} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell2}$.

5. If more than 1800 values of $CQI_{P,S1}$ are ≥ 2 and more than 1800 values of CQI_{S1-S2} are ≥ 2 , pass the UE. Otherwise fail the UE.

8.2A.3.1.1.2.3.3 Message contents

Same with 8.2A.3.1.1.1.3.3.

8.2A.3.1.1.2.3.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 8.2A.3.1.1.2.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

8.2A.3.1.3 2Rx CQI reporting accuracy under AWGN conditions for CA (4DL CA)

Editor's note: The following aspects are either missing or not yet determined:

- Test point applicability is TBD for all bands and $BW_{agg} > 200$ MHz in Table 8.1.1_1-2.

8.2A.3.1.3.1 Test Purpose

Same with 8.2A.3.1.1.1.

8.2A.3.1.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward that supports 4DL CA.

8.2A.3.1.3.3 Test description

8.2A.3.1.3.3.1 Initial conditions

Same with 8.2A.3.1.1.3.1.

8.2A.3.1.1.3.3.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Set the parameters of bandwidth, reference channel, propagation condition, antenna configuration and SNR configuration according to Table 8.2A.3.1.0-1 to Table 8.2A.3.1.0-4 as appropriate.
3. SS transmits PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to CQI value 2 and keep it regardless of the wideband CQI value sent by the UE on both PCC and SCCs. The SS sends downlink MAC padding bits on the DL RMC.
4. The SS shall start gathering CQI reports, and will continue gathering CQI reports until 2000 wideband CQI reports have been gathered for each PCC and SCCs. For each CSI report calculate the respective difference $CQI_{P,S1} = \text{wideband } CQI_{PCell} - \text{wideband } CQI_{SCell1}$, the respective difference $CQI_{S1-S2} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell2}$ and the respective difference $CQI_{S1-S3} = \text{wideband } CQI_{SCell1} - \text{wideband } CQI_{SCell3}$.
5. If more than 1800 values of $CQI_{P,S1}$ are ≥ 2 , more than 1800 values of CQI_{S1-S2} are ≥ 2 and more than 1800 values of CQI_{S1-S3} are ≥ 2 , pass the UE. Otherwise fail the UE.

8.2A.3.1.1.3.3.3 Message contents

Same with 8.2A.3.1.1.1.3.3.

8.2A.3.1.1.3.3.4 Test Requirements

The pass fail decision is as specified in the test procedure in clause 8.2A.3.1.1.3.3.2.

There are no parameters in the test setup or measurement process whose variation impacts the results so there are no applicable test tolerances for this test.

8.3 Reporting of Precoding Matrix Indicator (PMI)

8.3.0 General

The minimum performance requirements of PMI reporting are defined based on the precoding gain, expressed as the relative increase in throughput when the transmitter is configured according to the UE reports compared to the case when the transmitter is using random precoding, respectively. When the transmitter uses random precoding, for each PDSCH allocation a precoder is randomly generated and applied to the PDSCH. A fixed transport format (FRC) is configured for all requirements.

The requirements for transmission scheme 1 with 2TX and higher layer parameter *codebookType* set to 'typeI-SinglePanel' are specified in terms of the ratio

$$\gamma = \frac{t_{ue}}{t_{rnd}}$$

In the definition of γ , for 2TX PMI requirements, t_{ue} is 90 % of the maximum throughput obtained at SNR_{ue} using the precoders configured according to the UE reports, and t_{rnd} is the throughput measured at SNR_{ue} with random precoding.

8.3.1 1RX requirements (Void)

8.3.2 2RX requirements

8.3.2.1 FDD

TBD

8.3.2.2 TDD

8.3.2.2.1 2Rx TDD FR2 Single PMI with 2TX TypeI-SinglePanel codebook for both SA and NSA

8.3.2.2.1.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports.

8.3.2.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

8.3.2.2.1.3 Minimum conformance requirements

For the parameters specified in Table 8.3.2.2.1.3-1, and using the downlink physical channels specified in Annex C.5.1, the minimum requirements are specified in Table 8.3.2.2.1.3-2.

Table 8.3.2.2.1.3-1: Test parameters (single layer)

Parameter		Unit	Test 1	Test 2
Bandwidth		MHz	100	100
Subcarrier spacing		kHz	120	120
TDD DL-UL configuration			FR2.120-2 as specified in Annex A.1.3	FR2.120-1 as specified in Annex A.1.3
Propagation channel			TDLA30-35	TDLA30-35
Antenna configuration			2 x 2 ULA Low	2 x 2 ULA Low
Beamforming Model			As specified in Annex B.4.1	As specified in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic
	Number of CSI-RS ports (X)		4	4
	CDM Type		FD-CDM2	FD-CDM2
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 4, (8,-)	Row 4, (8,-)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		(13,-)	(13,-)
	CSI-RS interval and offset	slot	8/1	5/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic	Aperiodic
	Number of CSI-RS ports (X)		2	2
	CDM Type		FD-CDM2	FD-CDM2
	Density (ρ)		1	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3, (6,-)	Row 3, (6,-)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		(13,-)	(13,-)
	CSI-RS interval and offset	slot	Not configured	Not configured
CSI-IM configuration	aperiodicTriggering Offset		0	0
	CSI-IM resource Type		Aperiodic	Aperiodic
	CSI-IM RE pattern		Pattern 1	Pattern 1
	CSI-IM Resource Mapping ($k_{\text{CSI-IM}}, l_{\text{CSI-IM}}$)		(8,13)	(8,13)
CSI-IM timeConfig interval and offset	slot	Not configured	Not configured	
ReportConfigType		Aperiodic	Aperiodic	
CQI-table		Table 1	Table 1	
reportQuantity		cri-RI-PMI-CQI	cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		Not configured	Not configured	
timeRestrictionForInterferenceMeasurements		Not configured	Not configured	
cqi-FormatIndicator		Wideband	Wideband	

pmi-FormatIndicator			Wideband	Wideband
Sub-band Size		RB	8	8
csi-ReportingBand			11111111	11111111
CSI-Report interval and offset		slot	Not configured	Not configured
Aperiodic Report Slot Offset			6	8
CSI request			1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0	1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0
reportTriggerSize			1	1
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM
Codebook configuration	Codebook Type		type1-SinglePanel	type1-SinglePanel
	Codebook Mode		1	1
	(CodebookConfig-N1, CodebookConfig-N2)		N/A	N/A
	CodebookSubsetRestriction		001111	001111
	RI Restriction		N/A	N/A
Physical channel for CSI report			PUSCH	PUSCH
CQI/RI/PMI delay		ms	1.375	1.75
Maximum number of HARQ transmission			4	4
Measurement channel			R.PDSCH.5-8.1 TDD	R.PDSCH.5-7.1 TDD
<p>Note 1: For random precoder selection, the precoder shall be updated in each slot (0.125 ms granularity).</p> <p>Note 2: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-4)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+4)$.</p> <p>Note 3: Randomization of the principle beam direction shall be used as specified in Annex B.2.3.2.3.</p>				

Table 8.3.2.2.1.3-2: Minimum requirement

Parameter	Test 1	Test 2
γ	1.05	1.05

8.3.2.2.1.4 Test description

8.3.2.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE antenna is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 8.1.2-1 and Table 8.3.2.2.1.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 8.3.2.2.1.4.3.

8.3.2.2.1.4.2 Test procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Set the parameters of bandwidth, the propagation condition, antenna configuration and measurement channel according to Table 8.3.2.2.1.3-1 as appropriate.
3. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. No transport block is sent in parallel to the CSI feedback. Establish t_{ue} and SNR_{ue} according to Annex G.3.2.
4. Set SNR to SNR_{ue} . The SS shall transmit PDSCH with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-1 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format [0_1] with aperiodic CSI request triggered. Measure t_{rnd} according to Annex G.3.3.
5. Calculate $\gamma = \frac{t_{ue}}{t_{rnd}}$. If the ratio $\geq \gamma$ which is specified in table 8.3.2.2.1.5-1, then the test is pass. Otherwise, the test is fail.
6. Repeat steps from 3 to 5 for each subtest in Table 8.3.2.2.1.3-1 as appropriate.

8.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

8.3.2.2.1.4.3_1 Message exceptions for SA

Table 8.3.2.2.1.4.3_1-1: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE { resourceType	Aperiodic		CSI-RS for CSI Acquisition

	Periodic		CSI-RS for Tracking or Beam Refinement
}			

Table 8.3.2.2.1.4.3_1-2: CSI-RS-ResourceMapping for NZP-CSI-RS for Tracking

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0001		
}			
nrofPorts	p1	1 for CSI-RS resource 1,2,3,4	
firstOFDMSymbolInTimeDomain	4	l ₀ = 4 for CSI-RS resource 1 and 3	
	8	l ₀ = 8 for CSI-RS resource 2 and 4	
}			

Table 8.3.2.2.1.4.3_1-3: CSI-RS-ResourceMapping for NZP-CSI-RS for Acquisition

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row3	001000		
}			
nrofPorts	p2		
firstOFDMSymbolInTimeDomain	13		
}			

Table 8.3.2.2.1.4.3_1-4: CSI-RS-ResourceMapping for NZP-CSI-RS for Beam Refinement

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0001		
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	8	l ₀ = 8 for CSI-RS resource 1	
	9	l ₀ = 9 for CSI-RS resource 2	
}			

Table 8.3.2.2.1.4.3_1-5: CSI-RS-ResourceMapping for ZP-CSI-RS

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-45			
Information Element	Value/remark	Comment	Condition
CSI-RS-ResourceMapping ::= SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row4	100		
}			
nrofPorts	p4		
firstOFDMSymbolInTimeDomain	13		
}			

Table 8.3.2.2.1.4.3_1-6: ZP CSI-ResourcePeriodicityAndOffset

Derivation Path: Table 4.6.3-43			
Information Element	Value/remark	Comment	Condition
CSI-ResourcePeriodicityAndOffset ::= CHOICE {			
slots8	1		Test 1
slots5	1		Test 2
}			

Table 8.3.2.2.1.4.3_1-7: CSI-IM-Resource

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-34			
Information Element	Value/remark	Comment	Condition
csi-IM-ResourceElementPattern CHOICE {			
pattern1 SEQUENCE {			
subcarrierLocation-p1	s8		
symbolLocation-p1	13		
}			
}			

Table 8.3.2.2.1.4.3_1-8: CodebookConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
CodebookConfig ::= SEQUENCE {			
codebookType CHOICE {			
type1 SEQUENCE {			
subType CHOICE {			
type1-SinglePanel SEQUENCE {			
nrOfAntennaPorts CHOICE {			
Two SEQUENCE {			
twoTX-codebookSubsetRestriction	001111		
}			
Type1-SinglePanel-ri-Restriction	11111111		
}			
}			
}			
}			
}			

Table 8.3.2.2.1.4.3_1-9: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList	6		Test 1
	8		Test 2
}			
}			
reportFreqConfiguration SEQUENCE {			
csi-ReportingBand CHOICE {			
subbands9	111111111		
}			
}			
subbandSize	value2		
}			

8.3.2.2.1.4.3_2 Message exceptions for NSA

Same as 8.3.2.2.1.4.3_1.

8.3.2.2.1.5 Test requirement

Table 8.3.2.2.1.5-1: Test requirement (TDD)

Parameter	Test 1	Test 2
γ	1.04	1.04

8.3.3

8.3.3.1

8.3.3.2

8.3.3.2.1

8.3.3.2.2 4Rx TDD FR2 Single PMI with 2TX Type1-SinglePanel codebook Single-DCI based transmission scheme with simultaneous reception - MultiRx

Editor’s note: This test case is incomplete. Following aspects are pending

- device positioning procedure
- minimum test time
- message exceptions

8.3.3.2.2.1 Test purpose

The purpose of this test is to test the accuracy of the Precoding Matrix Indicator (PMI) reporting such that the system throughput is maximized based on the precoders configured according to the UE reports when PDSCH transmission is done from 2 TRxPs using single DCI based transmission scheme.

8.3.3.2.2.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting *simultaneousReceptionDiffTypeD-r16* and *singleDCI-SDM-scheme-r16*.

8.3.3.2.2.3 Minimum conformance requirements

For the parameters specified in Table 8.3.3.2.2.3-1 and using the downlink physical channels specified in Annex C.5.1, the minimum requirements are specified in Table 8.3.3.2.2.3-2.

Table 8.3.3.2.2.3-1: Test parameters (dual-layer)

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
SSB			SSB#0	SSB#1
PDCCH configuration	TCI state		TCI State #2	N/A
	CORESETPoolIndex		0	N/A
CSI-RS for tracking	First subcarrier index in the PRB used for CSI-RS		k0=0 for CSI-RS resources 1,2,3,4	k0=1 for CSI-RS resources 5,6,7,8
	First OFDM symbol in the PRB used for CSI-RS		l0 = 4 for CSI-RS resources 1 and 3 l0 = 8 for CSI-RS resources 2 and 4	l0 = 4 for CSI-RS resources 5 and 7 l0 = 8 for CSI-RS resources 6 and 8
	Number of CSI-RS ports (X)		1 for CSI-RS	1 for CSI-RS

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
			resource 1,2,3,4	resource 5,6,7,8
CDM Type			'No CDM' for CSI-RS resource 1,2,3,4,5,6,7,8	
Density			3	
CSI-RS periodicity		Slots	160	
CSI-RS offset		Slots	80 for CSI-RS resources 1 and 2 81 for CSI-RS resources 3 and 4	80 for CSI-RS resources 5 and 6 81 for CSI-RS resources 7 and 8
QCL info			TCI state #0	TCI state #1
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resources 1 and 2	$k_0=1$ for CSI-RS resources 3 and 4
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2	$l_0 = 8$ for CSI-RS resource 3 $l_0 = 9$ for CSI-RS resource 4
	Number of CSI-RS ports (X)		1 for CSI-RS resources 1,2,3,4	
	CDM Type		'No CDM' for CSI-RS resources 1,2,3,4	
	Density		3	
	CSI-RS periodicity	Slots	160	
	CSI-RS offset	Slots	0 for CSI-RS resources 1,2,3,4	
QCL info			TCI state #2	TCI state #3
Duplex mode			TDD	
Bandwidth		MHz	100	
Subcarrier spacing		kHz	120	
TDD DL-UL configurations			FR1.120-1 as specified in Annex A.1.3	
Active DL BWP index			1	
Propagation channel			TDLA30-35	
Correlation matrix and antenna configuration (Note 6)			4x4 FR2- mTRxP-mRX $\rho = -12\text{dB}$	
Beamforming Model			As specified in Annex B.4.1 (Note 4)	
PDSCH configuration	Mapping type		Type A	
	k_0		0	
	Starting symbol (S)		2	
	Length (L)		12	
	PRB bundling type		Static	
	PRB bundling size		2	
	Resource allocation type		Type 1	
	RBG size		Config2	
VRB-to-PRB mapping type		Non-interleaved		
VRB-to-PRB mapping interleaver bundle size		N/A		
PDSCH DMRS configuration	Antenna port indexes		1000	1002
	TCI state		TCI State #0	TCI State #1
	DMRS Type		Type 1	
	Number of additional DMRS		1	
	Maximum number of OFDM symbols for DL front loaded DMRS		1	
PTRS configuration (Note 5)	Frequency density (K_{PT-RS})		2	
	Time density (L_{PT-RS})		1	
	Resource Element Offset		'offset10'	
	Max number of ports		n1 for Test 1 n2 for Test 2	
TCI State #0	Type 1 QCL information	SSB index	SSB #0	N/A
		QCL Type	Type C	N/A
	Type 2 QCL information	SSB index	SSB #0	N/A
		QCL Type	Type D	N/A
TCI State #1	Type 1 QCL information	SSB index	N/A	SSB #1
		QCL Type	N/A	Type C
	Type 2 QCL information	SSB index	N/A	SSB #1
		QCL Type	N/A	Type D
TCI State #2	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking'	N/A

Parameter		Unit	Value		
			TRxP #1(Note 1)	TRxP #2(Note 1)	
	QCL Type		configuration		
			Type A	N/A	
	Type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from 'CSI-RS for tracking' configuration	N/A
		QCL Type		Type D	N/A
TCI State #3	Type 1 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type A
	Type 2 QCL information	CSI-RS resource		N/A	CSI-RS resource 5 from 'CSI-RS for tracking' configuration
		QCL Type		N/A	Type D
Resource allocation			Full-overlapping		
Timing offset of the second TRxP from the first TRxP		us	0		
Frequency offset of the second TRxP from the first TRxP		Hz	0		
Number of HARQ Processes			8		
The number of slots between PDSCH and corresponding HARQ-ACK information			Specific to each TDD UL-DL pattern and as defined in Annex A.1.3		
ZP CSI-RS configuration	CSI-RS resource Type		Periodic		
	Number of CSI-RS ports (X)		4		
	CDM Type		FD-CDM2		
	Density (ρ)		1		
	First subcarrier index in the PRB used for CSI-RS (k_0)		Row 4, (8,-)		
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(13)		
	CSI-RS periodicity and offset		slot	5/1	
NZP CSI-RS for CSI acquisition	CSI-RS resource ID		Resource #9	Resource #10	
	CSI-RS resource Type		Aperiodic	Aperiodic	
	Number of CSI-RS ports (X)		2	2	
	CDM Type		FD-CDM2	FD-CDM2	
	Density (ρ)		1	1	
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3, (8,-)	Row 3, (10,-)	
	First OFDM symbol in the PRB used for CSI-RS (l_0)		(12)	(12)	
	CSI-RS periodicity and offset		slot	Not configured	Not configured
aperiodicTriggeringOffset			0	0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic		
	CSI-IM RE pattern		Pattern 1		
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(8,13)		
	CSI-IM timeConfig periodicity and offset		slot	Not configured	
ReportConfigType			Aperiodic		
CQI-table			Table 1		
reportQuantity			cri-RI-PMI-CQI		
csi-ReportMode			Mode1		
numberOfSingleTRP-CSI-Mode1			$X = 0$		
CMR pairing and grouping			CMR group #1: {NZP CSI-RS resource #9}, with $K_1 = 1$ CMR group #2: {NZP CSI-RS resource #10}, with $K_2 = 1$ CMR pairing: {NZP CSI-RS resource #9, NZP CSI-RS resource #10}		
timeRestrictionForChannelMeasurements			Not configured		

Parameter		Unit	Value	
			TRxP #1(Note 1)	TRxP #2(Note 1)
timeRestrictionForInterferenceMeasurements			Not configured	
cgi-FormatIndicator			Wideband	
pmi-FormatIndicator			Wideband	
Sub-band Size		RB	8	
csi-ReportingBand			1111111	
CSI-Report periodicity and offset		slot	Not configured	
Aperiodic Report Slot Offset			8	
CSI request			1 in slots i , where $\text{mod}(i, 5) = 1$, otherwise it is equal to 0	
reportTriggerSize			1	
CSI-AperiodicTriggerStateList			One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	
Codebook configuration	CodebookType		type1-SinglePanel	
	CodebookMode		1	
	(CodebookConfig-N1, CodebookConfig-N2)		(1,1)	
	(CodebookConfig-O1, CodebookConfig-O2)		(1,1)	
	CodebookSubsetRestriction		001111	
	RI Restriction		N/A	
Physical channel for CSI report			PUSCH	
CQI/RI/PMI delay		ms	1.75	
Maximum number of HARQ transmission			4	
Measurement channel			Test 1: R.PDSCH.5-7.2 TDD Test 2: R.PDSCH.5-7.3 TDD	
PDSCH & PDSCH DMRS Precoding configuration for random Precoding			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with Wideband granularity	
<p>Note 1: PDSCH transmission is done from both TRxPs (PDSCH Layer 0 is transmitted from TRxP #1 and PDSCH layer 1 is transmitted from TRxP #2)</p> <p>Note 2: When Throughput is measured using random precoder selection, the precoder shall be updated in each slot (0.125 ms granularity) with equal probability of each applicable i_1, i_2 combination.</p> <p>Note 3: If the UE reports in an available uplink reporting instance at slot#n based on PMI estimation at a downlink slot not later than slot#$(n-4)$, this reported PMI cannot be applied at the gNB downlink before slot#$(n+4)$.</p> <p>Note 4: Randomization of the beam direction per TRxP shall be used as specified in Annex B.2.3.2.3.</p> <p>Note 5: PT-RS configuration in Test 1 uses single port (one TRxP) and Test 2 used dual port (both TRxPs)</p> <p>Note 6: Correlation matrix according to the $R_{FR2-mTRP-mRX}$ in B.2.3.3. TRxP#1 uses TX antenna indices (1,2) and TRxP#2 uses TX antenna indices (3,4) corresponding to the respective antenna configuration matrix rows</p>				

Normative reference in clause 8.3.3.2.2 of TS 38.101-4 [5]

Table 8.3.3.2.3-2: Minimum requirement

Parameter	Test 1	Test 2
γ	1.14	1.14

8.3.3.2.2.4 Test description

8.3.3.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connection between SS, the faders, AWGN noise source and the UE antenna is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 8.1.2-1 and Table 8.3.3.2.2.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* according to TS 38.508-1 [6] clause 4.5. Message contents are defined in clause 8.3.3.2.2.4.3.

8.3.3.2.2.4.2 Test procedure

1. Set the UE in a direction that satisfies the UE positioning procedure specified in Annex H clause TBD. If no direction found, mark the test as inconclusive.
2. Set the parameters of bandwidth, the propagation condition, antenna configuration, measurement channel and SNR for TRxP#1 and TRxP#2 according to Table 8.3.3.2.2.3-1 as appropriate.
3. Set SNR to SNR_{ue} . The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI with randomly selected precoding matrix from codebook (Table 5.2.2.2.1-1 in TS 38.214 [12]) every slot regardless of PMI reports from the UE. Note that each precoding matrix shall be selected in equal probabilities. The precoder shall be updated in each slot (0.125 ms granularity) with equal probability of each applicable i_1, i_2 combination.
4. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CSI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. Measure t_{md} according to Annex G.3.3.
5. The SS shall transmit PDSCH via PDCCH DCI format [1_1] for C_RNTI to transmit the DL RMC with precoding matrix according to PMI report from the UE. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission to carry the PUSCH CQI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CQI feedback. Establish t_{ue} and SNR_{ue} according to Annex G.3.2.
6. Calculate $\gamma = \frac{t_{ue}}{t_{md}}$. If the ratio $\geq \gamma$ which is specified in table 8.3.2.2.1.5-1, then the test is pass. Otherwise, the test is fail.
7. Repeat steps from 2 to 6 for each subtest in Table 8.3.3.2.2.3-1 as appropriate.

8.3.3.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

8.3.3.2.2.4.3_1 Message exceptions

FFS

8.3.3.2.2.5 Test requirement

Table 8.3.3.2.2.5-1: Test requirement (TDD)

Parameter	Test 1	Test 2
γ	1.15	1.15

8.4 Reporting of Rank Indicator (RI)

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

8.4.1 1RX requirements

(Void)

8.4.2 2RX requirements

8.4.2.1 FDD

(Void)

8.4.2.2 TDD

8.4.2.2.1 2Rx TDD FR2 RI reporting for both SA and NSA

-8.4.2.2.1.1 Test Purpose

The purpose of this test is to verify that the reported rank indicator accurately represents the channel rank. The accuracy of RI reporting is determined by the relative increase of the throughput obtained when transmitting based on the reported rank compared to the case for which a fixed rank is used for transmission.

8.4.2.2.1.2 Test Applicability

This test applies to all types of NR UE release 15 and forward.

This test also applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

8.4.2.2.1.3 Minimum requirement

The minimum performance requirement in Table 8.4.2.2.1.3-2 is defined as

- a) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 1 shall be $\geq \gamma_1$;
- b) The ratio of the throughput obtained when transmitting based on UE reported RI and that obtained when transmitting with fixed rank 2 shall be $\geq \gamma_2$;

For the parameters specified in Table 8.4.2.2.1.3-1, and using the downlink physical channels specified in Annex C.2.2, the minimum requirements are specified in Table 8.4.2.2.1.3-2.

Table 8.4.2.2.1.3-1: RI Test (TDD)

Parameter	Unit	Test 1	Test 2	Test 3
Bandwidth	MHz	100	100	100

Subcarrier spacing		kHz	120	120	120
Duplex Mode			TDD	TDD	TDD
TDD Slot Configuration			FR2.120-2	FR2.120-2	FR2.120-2
SNR		dB	0	16	16
Propagation channel			TDLA30-35	TDLA30-35	TDLA30-35
Antenna configuration			ULA Low 2x2	ULA Low 2x2	XP High 2x2
Beamforming Model			As defined in Annex B.4.1	As defined in Annex B.4.1	As defined in Annex B.4.1
ZP CSI-RS configuration	CSI-RS resource Type		Periodic	Periodic	Periodic
	Number of CSI-RS ports (X)		4	4	4
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 4, (8,-)	Row 4, (8,-)	Row 4, (8,-)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		(13,-)	(13,-)	(13,-)
	CSI-RS interval and offset	slot	8/1	8/1	8/1
NZP CSI-RS for CSI acquisition	CSI-RS resource Type		Aperiodic	Aperiodic	Aperiodic
	Number of CSI-RS ports (X)		2	2	2
	CDM Type		FD-CDM2	FD-CDM2	FD-CDM2
	Density (ρ)		1	1	1
	First subcarrier index in the PRB used for CSI-RS (k_0, k_1)		Row 3 (6,-)	Row 3 (6,-)	Row 3 (6,-)
	First OFDM symbol in the PRB used for CSI-RS (l_0, l_1)		(13,-)	(13,-)	(13,-)
	NZP CSI-RS-timeConfig interval and offset	slot	Not configured	Not configured	Not configured
aperiodicTriggeringOffset		0	0	0	
CSI-IM configuration	CSI-IM resource Type		Aperiodic	Aperiodic	Aperiodic
	CSI-IM RE pattern		Pattern 1	Pattern 1	Pattern 1
	CSI-IM Resource Mapping (k_{CSI-IM}, l_{CSI-IM})		(8,13)	(8,13)	(8,13)
	CSI-IM timeConfig interval and offset	slot	Not configured	Not configured	Not configured
ReportConfigType		Aperiodic	Aperiodic	Aperiodic	
CQI-table		Table 1	Table 1	Table 1	
reportQuantity		cri-RI-PMI-CQI	cri-RI-PMI-CQI	cri-RI-PMI-CQI	
timeRestrictionForChannelMeasurements		not configured	not configured	not configured	
timeRestrictionForInterferenceMeasurements		not configured	not configured	not configured	
cqi-FormatIndicator		Wideband	Wideband	Wideband	
pmi-FormatIndicator		Wideband	Wideband	Wideband	
Sub-band Size	RB	8	8	8	
csi-ReportingBand		11111111	11111111]	11111111	
CSI-Report interval and offset	slot	Not configured	Not configured	Not configured	
Aperiodic Report Slot Offset		6	6	6	
CSI request		1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0	1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0	1 in slots i , where $\text{mod}(i, 8) = 1$, otherwise it is equal to 0	
reportTriggerSize		1	1	1	
CSI-AperiodicTriggerStateList		One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS and CSI-IM	One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS	One State with one Associated Report Configuration Associated Report Configuration contains pointers to NZP CSI-RS	

Codebook configuration	Codebook Type		typel- SinglePanel	and CSI-IM typel- SinglePanel	and CSI-IM typel- SinglePanel
	Codebook Mode		1	1	1
	(CodebookConfig- N1,CodebookConfig-N2)		N/A	N/A	N/A
	CodebookSubsetRestriction		010000 for fixed rank 2, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank	000011 for fixed rank 1, 010011 for following rank
	RI Restriction		N/A	N/A	N/A
Physical channel for CSI report			PUSCH	PUSCH	PUSCH
CQI/RI/PMI delay		ms	1.375	1.375	1.375
Maximum number of HARQ transmission			1	1	1
RI Configuration			Fixed RI = 2 and follow RI	Fixed RI = 1 and follow RI	Fixed RI = 1 and follow RI
Note 1: Measurements channels are specified in Table A.4-1. TBS.1-1 is used for Rank 1 case. TBS.1-2 is used for Rank 2 case.					

Table 8.4.2.2.1.3-2: Minimum requirement (TDD)

	Test 1	Test 2	Test 3
γ_1	N/A	1.05	1.05
γ_2	1.0	N/A	N/A

The normative reference for this requirement is TS 38.101-4 [5] clause 8.4.2.2.

8.4.2.2.1.4 Test Description

8.4.2.2.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.2-1 of TS 38.521-2 [8].

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

Only sub tests shall be tested which are testable according to Table 7.1.1_1-2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE antenna is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 8.1.2-1 and Table 8.4.2.2.1.3-1 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR for SA with *Connected without release On, Test Mode On* or EN-DC, DC bearer *MCG* and *SCG*, *Connected without release On, Test Mode On for NSA* according to TS 38.508-1 [6] clause 4.5. Message content are defined in clause 8.4.2.2.1.4.3.

8.4.2.2.1.4.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found mark the test as inconclusive.
2. Set the parameters of bandwidth, reference channel, the propagation condition, antenna configuration, antenna correlation, Codebook configuration, Beamforming Model, RI configuration and SNR according to Table 8.4.2.2.1.3-1 as appropriate. Measure the t_{fix} according to Annex G.3.3.
3. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and fixed RI as defined in Table 8.4.2.2.1.3-1. The SS sends downlink MAC padding bits on the DL RMC. SS schedules the UL transmission with an UL RMC for CP-OFDM QPSK with 5 RBs at $RB_{Start}=0$ allocated according to A.2.2.6 of TS 38.521-1 [21] to carry the PUSCH CQI feedback via PDCCH DCI format 0_1 with aperiodic CSI request triggered. No transport block is sent in parallel to the CQI feedback.
4. Propagation conditions are set according to Annex B.2.
5. The SS shall transmit an RRC Connection Reconfiguration message to set codebookSubsetRestriction as for UE reported RI according to Table 8.4.2.2.1.3-1.
6. The UE shall transmit RRC Connection Reconfiguration Complete message.
7. Propagation conditions are set according to Table 8.4.2.2.1.3-1.
8. The SS shall send PDSCH via PDCCH DCI format 1_1 for C_RNTI to transmit the DL RMC according to the UE reported CQI (wideband CQI), PMI and RI. The SS sends downlink MAC padding bits on the DL RMC. Measure $t_{reporte}$ according to Annex G.3.3.

If the ratio ($t_{reporte} / t_{fix}$) satisfies the requirement in Table 8.4.2.2.1.5-1, then pass the UE for this test and go to step 9. Otherwise, declare a FAIL verdict.
9. If all tests have not been done, then repeat the same procedure (steps 1 to 8) with test conditions according to the Table 8.4.2.2.1.3-2 for the other Tests as appropriate. Otherwise, declare a PASS verdict.

8.4.2.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [6] clauses 4.6.1 and 5.4.2 with the following exceptions:

8.4.2.2.1.4.3_1 Message exceptions for SA

Table 8.4.2.2.1.4.3_1-1: SchedulingRequestResourceConfig

Derivation Path: TS 38.508-1 [6], Table 4.6.3-157			
Information Element	Value/remark	Comment	Condition
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
SI80	7		
}			
}			

Table 8.4.2.2.1.4.3_1-2: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-41			
Information Element	Value/remark	Comment	Condition
CSI-ResourceConfig ::= SEQUENCE {			
resourceType	Aperiodic		CSI-RS for CSI Acquisition, CSI-IM-

	Periodic		Resource CSI-RS for Tracking or Beam Refinement
}			

Table 8.4.2.2.1.4.3_1-3: CodebookConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.2, Table 4.6.3-25			
Information Element	Value/remark	Comment	Condition
nrOfAntennaPorts CHOICE { Two SEQUENCE { twoTX-CodebookSubsetRestriction	010000 000011 010011	Fixed rank 2 Fixed rank 1 Following rank	Test 1 Test 2, Test 3 Test 1, Test 2, Test 3
}			
}			
type1-SinglePanel-ri-Restriction	11111111	Non restriction	

Table 8.4.2.2.1.4.3_1-4: CSI-ReportConfig

Derivation Path: TS 38.508-1 [6], clause 4.6.3, Table 4.6.3-39			
Information Element	Value/remark	Comment	Condition
reportConfigType CHOICE { aperiodic SEQUENCE { reportSlotOffsetList	6		
}			
reportFreqConfiguration SEQUENCE { csi-ReportingBand CHOICE { subbands9	111111111		
}			
}			
subbandSize	value2		
}			

8.4.2.2.1.4.3_2 Message exceptions for NSA

Same as 8.4.2.2.1.4.3_1.

8.4.2.2.1.5 Test Requirements

Table 8.4.2.2.1.5-1: Test Requirement (TDD)

	Test 1	Test 2	Test 3
γ ₁	N/A	1.04	1.04
γ ₂	0.99	N/A	N/A

9 Demodulation performance requirements for interworking

9.1 General

This clause covers the UE demodulation performance requirements for EN-DC, NE-DC, inter-band NR-DC between FR1 and FR2, and inter-band NR CA between FR1 and FR2.

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

9.1.1 Applicability of requirements

The following applicability rules are specified for demodulation performance requirements for interworking:

- For UEs supporting NR/5GC, EN-DC and NE-DC,
 - The performance requirements specified in Clause 5 will be verified only for NR/5GC except for the sustained downlink data rate test specified in Clause 5.5 and 5.5A.
 - The performance requirements specified in Clause 7 will be verified only for NR/5GC except for the sustained downlink data rate test specified in Clause 7.5.
 - The sustained downlink data rate tests specified in Clauses 5.5, 5.5A and 7.5 for NR/5GC and in Clause 9.4B for EN-DC and NE-DC are verified separately.
- The FR1 EN-DC test cases with the NR TDD DL-UL configurations which are not aligned with LTE's can be tested on the corresponding EN-DC band combinations where UE supports simultaneous transmission and reception.
- For UEs supporting NR FR1 CA and/or NR CA including FR1 and FR2, the requirements applicability is specified in Table 9.1.1-1.

Table 9.1.1-1: Requirements applicability for UEs supporting NR FR2 CA and NR CA including FR1 and FR2

Supported scenarios	Requirements
NR FR2 CA	Clause 7.5A
NR CA including FR1 and FR2	Clause 9.4A.1
Both NR FR2 CA and NR CA including FR1 and FR2	Clause 7.5A

- For UEs supporting EN-DC including FR2 and/or EN-DC including FR1 and FR2, the requirements applicability is specified in Table 9.1.1-2.

Table 9.1.1-2: Requirements applicability for UEs supporting EN-DC including FR2 and EN-DC including FR1 and FR2

Supported scenarios	SDR requirements	PD SCH requirements	PD CCH requirements
EN-DC including FR2	Clause 9.4B.1.2	Clause 9.2B.1.2	Clause 9.3B.1.2
EN-DC including FR1 and FR2	Clause 9.4B.1.3	Clause 9.2B.1.3	Clause 9.3B.1.3
Both EN-DC including FR2 and EN-DC including FR1 and FR2	Clause 9.4B.1.2	Clause 9.2B.1.2	Clause 9.3B.1.2

- For UEs supporting NR-DC including FR1 and FR2, if the FR2 requirements in Clause 7.2 and Clause 7.3 are tested, the test coverage can be considered fulfilled without executing requirements in Clause 9.2B.2 and Clause 9.3B.2.
- For UEs supporting NR-DC between FR1 and FR2, if requirements in Clause 9.4A.1 are tested under same or higher data rate as in Clause 9.4B.2, the test coverage can be considered fulfilled without executing the requirements in Clause 9.4B.2.
- For UEs supporting NE-DC and EN-DC, the test coverage of demodulation performance requirements can be considered fulfilled, if the demodulation requirements in Clause 5 and Clause 9.4B.1 are executed for UE under test in the standalone mode.

- For UEs supporting NE-DC and not supporting EN-DC, the test coverage of demodulation performance requirements can be considered fulfilled, if the demodulation requirements in Clause 5 and Clause 9.4B.3 are executed for UE under test.
- For UEs supporting NGEN-DC, the test coverage of demodulation performance requirements can be considered fulfilled, if the demodulation requirements in Clause 5 and Clause 9.4B.1 are executed for UE under test.

9.1.1.1 Applicability of requirements for optional UE features

The applicability rule defined in Clause 5.1.1.3 shall be applied for performance requirements in Clauses 9.2B.1.1 and 9.4B.1.1.

The applicability rule defined in Clause 7.1.1.3 shall be applied for performance requirements in Clauses 9.2B.1.2, 9.4A.1, 9.4B.1.2 and 9.4B.1.3.

9.1.1.2 Applicability of requirements for mandatory UE features with capability signalling

The applicability rule defined in Clause 5.1.1.4 shall be applied for performance requirements in Clauses 9.2B.1.1 and 9.4B.1.1.

The applicability rule defined in Clause 7.1.1.4 shall be applied for performance requirements in Clauses 9.2B.1.2, 9.4A.1, 9.4B.1.2 and 9.4B.1.3.

9.1.2 E-UTRA Cell setup

This subclause provides the parameters for E-UTRA cell during the demodulation performance test for EN-DC unless otherwise stated. For EN-DC with multiple E-UTRA carriers or bands, randomly selected one carrier or band can be used as E-UTRA Pcell for the connection setup unless otherwise stated.

9.1.2.1 FDD

The parameters specified in Table 9.1.2.1-1 and Table 9.1.2.1-2 are used to setup E-UTRA cell. One of test setup in Table 9.1.2.1-2 will be selected for the E-UTRA Cell depending on the maximum bandwidth of an E-UTRA carrier for all the EN-DC band combinations supported by the UE.

The measurement channels in Table 9.1.2.1-2 and OCNG pattern OP.1 FDD are specified in TS 36.521-1 [16]. The physical channel setup with downlink power allocation is according to Annex C.3.2 of TS 36.521-1 [16].

Table 9.1.2.1-1: Common Test Parameters (FDD)

Parameter	Unit	Value
Cyclic prefix		Normal
Physical Cell ID		0
Number of PDCCH symbols	symbols	1
PHICH Ng (Note 1)		1
PHICH duration		Normal
Number of HARQ processes per component carrier	Processes	8
Maximum number of HARQ transmission		4
Redundancy version coding sequence		{0,0,1,2} for 64QAM
Propagation condition		Static propagation condition No external noise sources are applied
Transmission mode		1
Transmission time difference between E-UTRA cell and NR cell(s)	μs	0

Antenna configuration		All NR cells are in FR1: 1x2 Any NR cell is in FR2: 1 Tx ^{Note 1}
Codebook subset restriction		10
Symbols for all unused REs		OCNG in Annex A.5
Note 1:	As the link can be provided over the air, the UE Rx antenna configuration is not relevant for the test configuration and has no impact on the test implementation.	

Table 9.1.2.1-2: Specific Test Parameters (FDD [64QAM])

Test setup	Bandwidth (MHz)	Downlink power allocation (dB)		
		ρ_A	ρ_B	σ
1	5	0	0	0
2	10	0	0	0
3	15	0	0	0
4	20	0	0	0

9.1.2.2 TDD

The parameters specified in Table 9.1.2.2-1 and Table 9.1.2.2-2 are used to setup an E-UTRA cell. One of test setup in Table 9.1.2.2-2 will be selected for the E-UTRA Cell depending on the maximum bandwidth of an E-UTRA carrier for all the EN-DC band combinations supported by the UE.

The measurement channels in Table 9.1.2.2-2 and OCNG pattern OP.1 TDD are specified in TS 36.521-1 [16]. The physical channel setup with downlink power allocation is according to Annex C.3.2 of TS 36.521-1 [16].

Table 9.1.2.2-1: Common Test Parameters (TDD)

Parameter	Unit	Value
UL DL configuration		2 (Note1)
Special subframe configuration		7
Number of PDCCH symbols	symbols	1
PHICH Ng (Note 3)		1
PHICH duration		Normal
Cyclic prefix		Normal
Cell ID		0
Maximum number of HARQ transmission		4
Redundancy version coding sequence		{0,0,1,2} for 64QAM
Propagation condition		Static propagation condition No external noise sources are applied
Transmission mode		1
Transmission time difference between E-UTRA cell and NR cell(s)	μ s	0
Antenna configuration		All NR cells are in FR1: 1x2 Any NR cell is in FR2: 1 Tx ^{Note 2}
Codebook subset restriction		10
Symbols for all unused REs		OCNG in Annex A.5
NOTE 1: The start of transmission of LTE frame is delayed by 2 LTE subframes with respect to the start of transmission of NR frame when TDD-TDD EN-DC configuration is configured during the test.		
NOTE 2: As the link can be provided over the air, the UE Rx antenna configuration is not relevant for the test configuration and has no impact on the test implementation.		

Table 9.1.2.2-2: Specific Test Parameters (FDD 64QAM)

Test setup	Bandwidth (MHz)	Downlink power allocation (dB)		
		ρ_A	ρ_B	σ
1	10	0	0	0
2	15	0	0	0
3	20	0	0	0

9.2 Void

9.2A PDSCH Demodulation for CA

9.2A.1 NR CA between FR1 and FR2

FFS

9.2B PDSCH Demodulation for DC

9.2B.1 EN-DC

9.2B.1.1 EN-DC within FR1

The NR PDSCH demodulation performance requirements and test case details for this test case are specified in Section 5.2.

During the test, only the PDSCH performance on the NR cell(s) shall be verified

9.2B.1.2 EN-DC including FR2 NR carrier only

The NR PDSCH demodulation performance requirements and test case details for this test case are specified in Section 7.2.

During the test, only the PDSCH performance on the NR cell(s) on FR2 carriers shall be verified.

9.2B.1.3 EN-DC including FR1 and FR2 NR carriers

The demodulation performance requirements are verified according to Section 9.2B.1.1 for EN-DC with FR1 NR carrier only and Section 9.2B.1.2 for EN-DC with FR2 NR carrier only.

During the test for EN-DC with FR2 NR carriers, only demodulation performance requirements on the FR2 carriers are verified.

No demodulation requirement for FR1 NR or LTE carriers is specified for EN-DC including FR2 carrier(s).

9.2B.2 NR DC between FR1 and FR2

The test setup for FR1 Pcell is specified in Table 5.5A.1.1.3-1 with antenna configuration 1x2. PDSCH demodulation performance requirements for NR FR2 cell (s) are specified in clause 7.2.

During the test, only the PDSCH performance on the FR2 NR cell (s) shall be verified.

9.3 Void

9.3A PDCCH Demodulation for CA

9.3A.1 NR CA between FR1 and FR2

FFS

9.3B PDCCH Demodulation for DC

9.3B.1 EN-DC

9.3B.1.1 EN-DC within FR1

The NR PDCCH demodulation performance requirements and test case details for this test case are specified in Section 5.3.

During the test, only the PDCCH performance on the single NR cell shall be verified.

9.3B.1.2 EN-DC including FR2 NR carrier only

The NR PDCCH demodulation performance requirements and test case details for this test case are specified in Section 7.3.

During the test, only the PDCCH performance on the single NR cell shall be verified.

9.3B.1.3 EN-DC including FR1 and FR2 NR carriers

The demodulation performance requirements are verified according to Section 9.3B.1.1 for EN-DC with FR1 NR carrier only and Section 9.3B.1.2 for EN-DC with FR2 NR carrier only.

During the test for EN-DC with FR2 NR carriers, only demodulation performance requirements on the FR2 carriers are verified.

No demodulation requirement for FR1 NR or LTE carriers is specified for EN-DC including FR2 carrier(s).

9.3B.2 NR DC between FR1 and FR2

The test setup for FR1 Pcell is specified in Table 5.5A.1.1.3-1 with antenna configuration 1x2. PDCCH demodulation performance requirements for NR FR2 cell (s) are specified in clause 7.3.

During the test, only the PDCCH performance on the FR2 NR cell (s) shall be verified.

9.4 Void

9.4A SDR test for CA

9.4A.1 Sustained downlink data rate performance for NR CA between FR1 and FR2

The test setup for NR FR1 PCell is specified in Clause 5.5A. The NR FR2 SDR tests setup is specified in Clause 7.5A. During the test, only the PDSCH performance on the NR cell(s) on FR2 carriers is verified and only NR FR1 PCell is activated from all FR1 CCs for the tested CA bandwidth combination.

The TB success rate shall be higher than 85% when NR FR2 PDSCH is scheduled with MCS defined for the selected CA bandwidth combination and with the downlink physical channel setup according to Annex C.3.1.

9.4B SDR test for DC

9.4B.1 EN-DC

9.4B.1.1 Sustained downlink data rate performance for EN-DC within FR1

9.4B.1.1.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement

9.4B.1.1.2 Test Applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

9.4B.1.1.3 Minimum conformance requirements

During the test, the PDSCH performance on both the NR cell(s) and LTE cell(s) shall be verified.

The TB success rate shall be higher than 85% when NR PDSCH is scheduled with MCS defined for the selected EN-DC bandwidth combination and with the downlink physical channel setup according to Annex C.3.1 and when E-UTRA PDSCH is scheduled with FRC defined for the selected EN-DC bandwidth combination and with the downlink physical channel setup according to Annex C.3.2 from TS 36.101 [X].

The TB success rate is defined as $100\% * \text{NDL_correct_rx} / (\text{NDL_newtx} + \text{NDL_retx})$, where NDL_newtx is the number of newly transmitted DL transport blocks, NDL_retx is the number of retransmitted DL transport blocks, and NDL_correct_rx is the number of correctly received DL transport blocks.

The common test parameters for NR cell are specified in Table 9.4B.1.1.3-1. The parameters specified in Table 9.4B.1.1.3-2 are applicable for tests on FDD NR cell and parameters specified in Table 9.4B.1.1.3-3 are applicable for tests on TDD NR cell.

Unless otherwise stated, no user data is scheduled on slot #0, 10 and 11 within 20 ms for SCS 15 kHz for NR cell.

Unless otherwise stated, no user data is scheduled on slot #0, 20 and 21 within 20 ms for SCS 30 kHz for NR cell.

Table 9.4B.1.1.3-1: Common test parameters for FDD or TDD NR band

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
EPRE ratio of PTRS to PDSCH		dB	N/A
Channel bandwidth		MHz	Channel bandwidth from selected CA bandwidth combination
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
	First DMRS position for Type A PDSCH mapping		2
Cross carrier scheduling			Not configured
Active DL BWP index			1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 2)	RBs	0
	Subcarrier spacing	kHz	15 or 30
DL BWP configuration #1	RB offset	RBs	0
	Number of contiguous PRB		Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested

			channel bandwidth and subcarrier spacing
	Subcarrier spacing	kHz	15 or 30
	Cyclic prefix		Normal
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		Symbols #0
	Number of PRBs in CORESET		Table 9.4B.1.1.3-4
	Number of PDCCH candidates and aggregation levels		2/AL2 for 15 kHz / 5 MHz, 30 kHz / 10 MHz and 30 kHz / 15 MHz 2/AL4 for 15 kHz / 10 MHz, 15 kHz / 15 MHz, 30 kHz / 20 MHz, 30 kHz / 25 MHz, 30 kHz / 30 MHz and 30 kHz / 35 MHz 2/AL8 for other greater combinations
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1_1
	TCI State		TCI state #1
	PDCCH & PDCCH DMRS Precoding configuration		For 2Tx: Single Panel Type I, Random precoder chosen from precoder index 0 and 2, selection updated per slot For 4Tx: Single Panel Type I, Random precoder chosen from precoders with $i_{-1,1}$ in {1,2,3,5,6,7} and i_{-2} in {0,2}, selection updated per slot
PDSCH configuration	Mapping type		Type A
	k_0		0
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		WB
	Resource allocation type		Type 0
	VRB-to-PRB mapping type		Non-interleaved
PDSCH DMRS configuration	VRB-to-PRB mapping interleaver bundle size		N/A
	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
	Antenna ports indexes		{1000} for 1 Layer CCs {1000, 1001} for 2 Layers CCs {1000 – 1003} for 4 Layers CCs
Number of PDSCH DMRS CDM group(s) without data		1 for 1 layer and 2 layers CCs 2 for 4 Layers CCs	
PTRS configuration			PTRS is not configured
CSI-RS for tracking	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 3$ for CSI-RS resource 1,2,3,4
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 1 and 3 $l_0 = 10$ for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	15 kHz SCS: 20 for CSI-RS resource 1,2,3,4 30 kHz SCS: 40 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	15 kHz SCS: 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 30 kHz SCS: 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0

			Number of PRB = BWP size
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 4$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		Same as number of transmit antenna
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #1
ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 0$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		4
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity		15 kHz SCS: 20 30 kHz SCS: 40
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
TCI state #0	Type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	Type 2 QCL information	SSB index	N/A
		QCL Type	N/A
TCI state #1	Type 1 QCL information	CSI-RS resource	CSI-RS resource 1 from 'CSI-RS for tracking' configuration
		QCL Type	Type A
	Type 2 QCL information	CSI-RS resource	N/A
		QCL Type	N/A
Maximum number of code block groups for ACK/NACK feedback			1
Maximum number of HARQ transmission			4
HARQ ACK/NACK bundling			Multiplexed
Redundancy version coding sequence			{0,2,3,1}
PDSCH & PDSCH DMRS Precoding configuration			Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination with PRB bundling granularity
Symbols for all unused REs			OCNG Annex A.5
Propagation condition			Static propagation condition No external noise sources are applied
Antenna configuration	1 layer CCs		1x2 or 1x4
	2 layers CCs		2x2 or 2x4
	4 layers CCs		4x4
Physical signals, channels mapping and precoding			As specified in Annex B.4.1
Es	dBm/Hz		-112 for MCS indexes in Table 9.4B.1.1.3-5: -110.5 For 1024QAM MCS indexes in Table 9.4B.1.1A.3-1:
Note 1: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission			
Note 2: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing			

Table 9.4B.1.1.3-2: Additional test parameters for NR FDD band

Parameter	Unit	Value
-----------	------	-------

Duplex mode		FDD
PDSCH configuration	Starting symbol (S)	1
	Length (L)	13
Number of HARQ Processes		4
K1 value		2

Table 9.4B.1.1.3-3: Additional test parameters for NR TDD band

Parameter	Unit	Value
Duplex mode		TDD
PDSCH configuration	Starting symbol (S)	1
	Length (L)	13
Number of HARQ Processes		8
K1 value		Specific to each UL-DL pattern
TDD UL-DL pattern		15 kHz SCS: FR1.15-1 30 kHz SCS: FR1.30-1
Note 1: PDSCH is scheduled only on full DL slots		

Table 9.4B.1.1.3-4: Number of PRBs in CORESET for NR cell

SCS (kHz)	5MHz	10MHz	15MHz	20 MHz	25 MHz	30 MHz	40 MHz	50MHz	60 MHz	80 MHz	100 MHz
15	24	48	78	102	132	156	216	270	N/A	N/A	N/A
30	6	24	36	48	60	78	102	132	162	216	270

Table 9.4B.1.1.3-5: MCS indexes for indicated UE capabilities for NR cell

Maximum number of PDSCH MIMO layers	Maximum modulation format	Scaling factor	MCS
1	8	1	26
1	8	0.8	21
1	8	0.75	20
1	8	0.4	11
1	6	1	27
1	6	0.8	23
1	6	0.75	22
1	6	0.4	14
1	4	1	16
1	4	0.8	16
1	4	0.75	16
1	4	0.4	10
1	2	1	9
1	2	0.8	9
1	2	0.75	9
1	2	0.4	4
2	8	1	26
2	8	0.8	21
2	8	0.75	20
2	8	0.4	11
2	6	1	27
2	6	0.8	23
2	6	0.75	22
2	6	0.4	14
2	4	1	16
2	4	0.8	16
2	4	0.75	16
2	4	0.4	10
2	2	1	9
2	2	0.8	9
2	2	0.75	9
2	2	0.4	4
4	8	1	26

4	8	0.8	23
4	8	0.75	22
4	8	0.4	12
4	6	1	27
4	6	0.8	24
4	6	0.75	23
4	6	0.4	14
4	4	1	16
4	4	0.8	16
4	4	0.75	16
4	4	0.4	11
4	2	1	9
4	2	0.8	9
4	2	0.75	9
4	2	0.4	5

Table 9.4B.1.1.3-6: Additional test setup for E-UTRA CC

Parameter	Unit	Value
Inter-TTI Distance		1
Number of OFDM symbols for PDCCH per component carrier	OFDM symbols	1
Cross carrier scheduling		Not configured
Propagation condition		Static propagation condition No external noise sources are applied
\hat{E}_s at antenna port	dBm/15kHz	-85
Antenna configuration	2 layer CC	2x2 or 2x4
	4 layer CC	4x4
Codebook subset restriction	2 layer CC	10
	4 layer CC	1000
Downlink power allocation	2 layer CC	$\rho_A = -3\text{dB}, \rho_B = -3\text{dB}, \sigma = 0\text{dB}$
	4 layer CC	$\rho_A = -6\text{dB}, \rho_B = -6\text{dB}, \sigma = 3\text{dB}$

Table 9.4B.1.1.3-7: E-UTRA FRC for SDR test (FDD)

MIMO layer	Bandwidth	Reference channel		
		64QAM	256QAM	1024QAM
2 layer	5	R.PDSCH.4-1.1 FDD	R.PDSCH.4-3.1 FDD	R.PDSCH.4-5.1 FDD
	10	R.PDSCH.4-1.2 FDD	R.PDSCH.4-3.2 FDD	R.PDSCH.4-5.2 FDD
	15	R.PDSCH.4-1.3 FDD	R.PDSCH.4-3.3 FDD	R.PDSCH.4-5.3 FDD
	20	R.PDSCH.4-1.4 FDD	R.PDSCH.4-3.4 FDD	R.PDSCH.4-5.4 FDD
4 layer	5	R.PDSCH.4-2.1 FDD	R.PDSCH.4-4.1 FDD	R.PDSCH.4-6.1 FDD
	10	R.PDSCH.4-2.2 FDD	R.PDSCH.4-4.2 FDD	R.PDSCH.4-6.2 FDD
	15	R.PDSCH.4-2.3 FDD	R.PDSCH.4-4.3 FDD	R.PDSCH.4-6.3 FDD
	20	R.PDSCH.4-2.4 FDD	R.PDSCH.4-4.4 FDD	R.PDSCH.4-6.4 FDD

Table 9.4B.1.1.3-8: E-UTRA FRC for SDR test (TDD)

MIMO layer	Bandwidth	Reference channel		
		64QAM	256QAM	1024QAM
2 layer	10	R.PDSCH.6-1.1 TDD	R.PDSCH.6-3.1 TDD	R.PDSCH.6-5.1 TDD
	15	R.PDSCH.6-1.2 TDD	R.PDSCH.6-3.2 TDD	R.PDSCH.6-5.2 TDD
	20	R.PDSCH.6-1.3 TDD	R.PDSCH.6-3.3 TDD	R.PDSCH.6-5.3 TDD
4 layer	10	R.PDSCH.6-2.1 TDD	R.PDSCH.6-4.1 TDD	R.PDSCH.6-6.1 TDD
	15	R.PDSCH.6-2.2 TDD	R.PDSCH.6-4.2 TDD	R.PDSCH.6-6.2 TDD
	20	R.PDSCH.6-2.3 TDD	R.PDSCH.6-4.3 TDD	R.PDSCH.6-6.3 TDD

9.4B.1.1.3.1 Procedure for test parameter selection

The test parameters are determined by the following procedure:

- Select one EN-DC bandwidth combination among all supported EN-DC configurations and set of per component carrier (CC) UE capabilities among all supported UE capabilities that provides the largest data rate TS 38.306 [14], Section 4.1.2.
- Set of per NR CC UE capabilities include channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor TS 38.306 [14] Section 4.1.2.
- Set of per E-UTRA CC UE capabilities includes channel bandwidth, number of PDSCH MIMO layers and modulation format TS 38.306 [14] Section 4.1.2.
- When there are multiple sets of EN-DC bandwidth combinations and UE capabilities with same largest data rate, select one among sets with the smallest aggregated channel bandwidth.
- For each NR FR1 CC in EN-DC bandwidth combination, use Table 9.4B.1.1.3-5 to determine MCS based on test parameters and indicated UE capabilities.
- For each E-UTRA CC in EN-DC bandwidth combination, use Table 9.4B.1.1.3-7 and Table 9.4B.1.1.3-8 to determine FRC based on test parameters and indicated UE capabilities.

Pasting relevant portion of max data rate equation from TS 38.306 [14] section 4.1

For NR, the approximate data rate for a given number of aggregated carriers in a band or band combination is computed as follows.

$$\text{data rate (in Mbps)} = 10^{-6} \cdot \sum_{j=1}^J \left(v_{\text{Layers}}^{(j)} \cdot Q_m^{(j)} \cdot f^{(j)} \cdot R_{\text{max}} \cdot \frac{N_{\text{PRB}}^{\text{BW}(j),\mu} \cdot 12}{T_s^\mu} \cdot (1 - OH^{(j)}) \right)$$

wherein

J is the number of aggregated component carriers in a band or band combination

$$R_{\text{max}} = 948/1024$$

For the j-th CC,

$v_{\text{Layers}}^{(j)}$ is the maximum number of supported layers given by higher layer parameter *maxNumberMIMO-LayersPDSCH* for downlink and maximum of higher layer parameters *maxNumberMIMO-LayersCB-PUSCH* and *maxNumberMIMO-LayersNonCB-PUSCH* for uplink.

$Q_m^{(j)}$ is the maximum supported modulation order given by higher layer parameter *supportedModulationOrderDL* for downlink and higher layer parameter *supportedModulationOrderUL* for uplink.

$f^{(j)}$ is the scaling factor given by higher layer parameter *scalingFactor* and can take the values 1, 0.8, 0.75, and 0.4.

μ is the numerology (as defined in TS 38.211 [6])

T_s^μ is the average OFDM symbol duration in a subframe for numerology μ , i.e. $T_s^\mu = \frac{10^{-3}}{14 \cdot 2^\mu}$. Note that normal cyclic prefix is assumed.

$N_{\text{PRB}}^{\text{BW}(j),\mu}$ is the maximum RB allocation in bandwidth $\text{BW}^{(j)}$ with numerology μ , as defined in 5.3 TS 38.101-1 [2] and 5.3 TS 38.101-2 [3], where $\text{BW}^{(j)}$ is the UE supported maximum bandwidth in the given band or band combination.

$OH^{(j)}$ is the overhead and takes the following values

- 0.14, for frequency range FR1 for DL
- 0.18, for frequency range FR2 for DL
- 0.08, for frequency range FR1 for UL
- 0.10, for frequency range FR2 for UL

NOTE: Only one of the UL or SUL carriers (the one with the higher data rate) is counted for a cell operating SUL.

For EUTRA in case of MR-DC, the approximate data rate for a given number of aggregated carriers in a band or band combination is computed as follows.

$$\text{Data rate (in Mbps)} = 10^{-3} \cdot \sum_{j=1}^J TBS_j$$

wherein

J is the number of aggregated EUTRA component carriers in MR-DC band combination

TBS_j is the total maximum number of DL-SCH transport block bits received within a 1ms TTI for j-th CC, as derived from TS36.213 [22] based on the UE supported maximum MIMO layers for the j-th carrier, and based on the modulation order and number of PRBs based on the bandwidth of the j-th carrier.

The approximate maximum data rate can be computed as the maximum of the approximate data rates computed using the above formula for each of the supported band or band combinations.

For MR-DC, the approximate maximum data rate is computed as the sum of the approximate maximum data rates from NR and EUTRA

The normative reference for this requirement is TS 38.101-4 [5], clause 9.4B.1.1.

9.4B.1.1.4 Test description

9.4B.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR and E-UTRA operating bands specified in Table 5.3.5-1 of TS 38.521-1.

Configurations of NR PDSCH and NR PDCCH before measurement are specified in Annex C.

E-UTRA configurations before measurement are specified in at Table 9.4B.1.1.3-6.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: High Range with maxWgap for Intra-band non-contiguous EN-DC as defined in TS 38.508-1 [6] clause 5.2.2.4.3, otherwise, Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

1. Connect the SS to the UE antenna connectors as shown in TS 38.508-1 [6] Annex A, in Figure A.3.1.7.1, A.3.1.7.4 and A.3.1.7.5 for TE diagram (without fader and AWGN) for 2Rx and 4Rx respectively and clause A.3.2.2 for UE diagram.
2. Downlink signals for the NR cell are initially set up according to Annexes C.0, C.1, C.2, C.3.1, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-1 [7].
3. Downlink signals for E-UTRA cell are initially set up according to TS 36.521-1 [16] Annex C.0 and uplink signals according to TS 36.521-1 [16] Annex H
4. Propagation conditions are set according to TS 36.521-1 [16] and TS 38.521-1 [7] Annex B.0 for E-UTRA CG and NR CG respectively.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG(s) and SCG, Connected without release On, Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0 for MCG DRB and SCG DRB according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 5.5.1.4.3.
6. SS sends a RRCConnectionReconfiguration message to change PDCP version of MCG DRB to NR PDCP.
7. SS shall transmit UECapabilityEnquiry message containing UE-CapabilityRAT-Request with rat-Type set to *utra-nr* and *utra*.
8. The UE shall transmit UECapabilityInformation message.
9. Using the UE capabilities advertised in the UE-CapabilityRAT-Container of the type UE-MRDC-Capability and UE-EUTRA-Capability, and the procedure outlined in 9.4B.1.1.3.1 determine one EN-DC bandwidth combination that would provide the largest aggregated data rate.
10. Setup up the NR CG and E-UTRA CG using these parameters for the test.
11. Configure the NR CG TBSIZE, NR CG DL RMC, NR CG UL RMC from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate. Configure the E-UTRA CG TBSIZE, DL RMC and UL RMC from Table 9.4B.1.1.3-7, Table 9.4B.1.1.3-8 as appropriate.

9.4B.1.1.4.2 Test procedure

1. SS configures T-reordering timer to be infinity for both E-UTRA MCG DRB and NR SCG DRB.
2. SS sends a PDCP reestablishment via RRCConnectionReconfigurationmessage requesting for PDCP Status Report for both E-UTRA MCG DRB and NR SCG DRB.
3. SS sets the counters N_{DL_newtx} N_{DL_retx} per NR CG and E-UTRA CG to 0.
4. For each new DL HARQ transmission the SS generates sufficient NR PDCP SDUs (max PDCP SDU size and minimum number of consecutive PDCP SDUs) to fill up the TB in accordance with Annex A.3.2_1 for both E-UTRA MCG DRB and NR SCG DRB. The SS ciphers the PDCP SDUs, concatenates the resultant PDCP PDUs to form an RLC PDU and then a MAC PDU. The SS transmits the MAC PDU per NR CG and E-UTRA CG. The SS increments then N_{DL_newtx} by one per CG.
5. If PHY requests a DL HARQ retransmission, the SS performs a HARQ retransmission and increments N_{DL_retx} by one for that CG accordingly.
6. Steps 5 to 6 are repeated at every TTI for at least 300 frames and the SS waits for 300ms to let any HARQ retransmissions and RLC retransmissions to finish.
7. SS sends a PDCP reestablishment via RRCConnectionReconfigurationmessage requesting for PDCP Status Report for both E-UTRA MCG and NR SCG DRB.
8. The SS calculates the TB success rate per NR CG and E-UTRA CG as $A = 100\% N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retx})$.
9. SS computes the PDCP SDU loss by looking into the FMC and Bitmap field in the PDCP Status Report. PDCP SDU loss $B = COUNT$ reported in the Bitmap field of PDCP Status Report.
10. The UE passes the test if $A \geq 85\%$ TB success rates for both NR CG and E-UTRA CG and $B = 0$.

NOTE 1: In case of RLC PDU retransmission, the number of new required PDCP SDUs is as many as to fill the rest of TB.

9.4B.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions

Table 9.4B.1.1.4.3-0: CLOSE UE TEST LOOP (MCG and SCG DRB in the preamble)

Derivation Path: 38.509 clause 6.3.1			
Information Element	Value/remark	Comment	Condition

Protocol discriminator	1 1 1 1		
Skip indicator	0 0 0 0		
Message type	1 0 0 0 0 0 0 0		
UE test loop mode	0 0 0 0 0 0 0 0	UE test loop mode A	
UE test loop mode A LB setup			
Length of UE test loop mode A LB setup list in bytes	0 0 0 0 1 1 0 0	Length of two LB setup DRB (6 bytes)	
LB setup DRB[1]	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 0 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q4..Q0 = MCG Data Radio Bearer identity number -1 for the radio bearer. See 38.509 clause 6.3.1	
LB setup DRB[2]	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 0 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q4..Q0 = SCG Data Radio Bearer identity number -1 for the radio bearer. See 38.509 clause 6.3.1	
UE test loop mode B LB setup	Not present		

Table 9.4B.1.1.4.3-1 to -7: Void

Table 9.4B.1.1.4.3-8: RadioBearerConfig (Initial Conditions, Step 5)

Derivation Path: TS 38.508-1 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
cnAssociation CHOICE {			
eps-BearerIdentity	Dedicated EPS bearer ID		
}			
drb-Identity	DRB-Identity of the SCG DRB		
reestablishPDCP	Not Present		
pdcp-Config	PDCP-Config	Table 9.4B.1.1.4.3-8A	
}			
}			

Table 9.4B.1.1.4.3-8A: PDCP-Config

Derivation Path: TS 38.508-1 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len18bits		
pdcp-SN-Size-DL	len18bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		

statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

Table 9.4B.1.1.4.3-9: RRCConnectionReconfiguration (Initial conditions, step6)

Derivation Path: TS 36.508 [7], Table 4.6.1-8			
Information Element	Value/remark	Comment	Condition
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE {			
rrcConnectionReconfiguration-r8 SEQUENCE {			
radioResourceConfigDedicated	RadioResourceConfigDe- dicated-MCG-DRB-NR- PDCP	As per Table 9.4B.1.1.4.3-10	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nr-Config-r15	Not present		
nr-RadioBearerConfig1-r15	OCTET STRING containing RadioBearerConfig according to TS 38.508-1 [6], Table 4.6.3-132 with conditions MCG_NR_PDCP		
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			

Table 9.4B.1.1.4.3-10: RadioResourceConfigDedicated-MCG-DRB-NR-PDCP

Derivation Path: TS 36.508 [7], Table 4.6.3-17			
Information Element	Value/remark	Comment	Condition
RadioResourceConfigDedicated-MCG-DRB-NR-PDCP ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1]	DRB-ToAddMod-MCG- DRB-NR-PDCP	entry 1 As per Table 9.4B.1.1.4.3-11	
}			
drb-ToReleaseList SEQUENCE (SIZE (1..maxDRB)) OF DRB-Identity {	1 entry		
DRB-Identity[1]	Same as the DRB identity associated with the default EPS bearer	entry 1	
}			

}			
---	--	--	--

Table 9.4B.1.1.4.3-11: DRB-ToAddMod-MCG-DRB-NR-PDCP

Derivation Path: TS 36.508 [19], Table 4.8.2.1.7-1			
Information Element	Value/remark	Comment	Condition
DRB-ToAddMod ::= SEQUENCE {			
eps-BearerIdentity	Same as the default EPS bearer Identity		
drb-Identity	Same as the DRB identity associated with the default EPS bearer		
pdcpc-Config	Not present		
reestablishPDCP	Not present		
}			

Table 9.4B.1.1.4.3-12: RadioBearerConfig (Test procedure, step 2 and step 7)

Derivation Path: TS 38.508-1 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	2 entries		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
cnAssociation CHOICE {			
eps-BearerIdentity	Default EPS bearer ID		
}			
drb-Identity	DRB-Identity of the MCG DRB		
reestablishPDCP	true		
pdcpc-Config	PDCP-Config		
}			
DRB-ToAddMod[2] SEQUENCE {		entry 2	
cnAssociation CHOICE {			
eps-BearerIdentity	Dedicated EPS bearer ID		
}			
drb-Identity	DRB-Identity of the SCG DRB		
reestablishPDCP	true		
pdcpc-Config	PDCP-Config		
}			

9.4B.1.1.5 Test requirement

The PDCP SDU success rate of greater than 85% shall be sustained during at least 300 frames.

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames.

9.4B.1.1A Sustained downlink data rate performance for EN-DC within FR1 with DL 1024QAM**9.4B.1.1A.1 Test Purpose**

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE that support DL 1024QAM capability. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the RF conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

9.4B.1.1A.2 Test Applicability

This test applies to all types of EUTRA UE release 17 and forward supporting EN-DC and DL 1024QAM.

9.4B.1.1A.3 Minimum conformance requirements

Same as in clause 9.4B.1.1.3 with the addition of Table 9.4B.1.1A.3-1 for DL1024QAM.

Table 9.4B.1.1A.3-1: 1024QAM MCS indexes for indicated UE capabilities

Supported RX antenna ports	Maximum number of PDSCH MIMO layers	Maximum modulation format	Scaling factor	MCS
2RX	1	10	1	23
	1	10	0.8	21
	1	10	0.75	19
	1	10	0.4	9
4RX	1	10	1	24
	1	10	0.8	21
	1	10	0.75	19
	1	10	0.4	9
	2	10	1	23
	2	10	0.8	21
	2	10	0.75	19
	2	10	0.4	9
Note 1: MCS Index for maximum modulation format 10 is based on MCS index Table 4 defined in clause 5.1.3.1 of TS 38.214 [12]				
Note 2: For the band(s) on which UE supporting "Maximum modulation format" of 10, with 2 RX and 2 MIMO layers, the MCS index is derived from the rows with "Maximum modulation format" of 8 in Table 9.4B.1.1.3-5				

9.4B.1.1A.3.1 Procedure for test parameter selection

Below test parameter selection procedure is from 38.101-4 [5] by replacing CA configuration with operating band, and bandwidth instead of bandwidth combination.

The test parameters are determined by the following procedure:

- Select one operating band among all supported operating bands and set of per band UE capabilities supporting 1024QAM (*pdsch-1024QAM-FRI*) among all supported UE capabilities that provides the largest data rate [TS 38.306 [14, Section 4.1.2]].
- Set of per band UE capabilities includes channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor [TS 38.306 [14, Section 4.1.2]].
- When there are multiple sets of bandwidths and UE capabilities (channel bandwidth, subcarrier spacing, number of MIMO layer, modulation format, scaling factor) with same largest data rate, select one among sets with the smallest channel bandwidth.
- For a UE capable of 1024QAM (*pdsch-1024QAM-FRI*), for each operating band, use Table 5.5.2.3-1 to determine MCS based on test parameters and indicated UE capabilities if the maximum modulation format is 10.

9.4B.1.1A.4 Test description

9.4B.1.1A.4.1 Initial conditions

Same as in Clause 9.4B.1.1.4.1.

9.4B.1.1A.4.2 Test procedure

Same as in Clause 9.4B.1.1.4.2.

9.4B.1.1A.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 9.4B.1.1 with the following exceptions:

Table 9.4B.1.1A.4.3-1: PDSCH-Config

Derivation Path: TS 38.508-1 Table 5.4.2.0-26			
Information Element	Value/remark	Comment	Condition
PDSCH-Config ::= SEQUENCE {			
mcs-Table-r17	qam1024		
}			

9.4B.1.1A.5 Test requirement

Same as in Clause 9.4B.1.1.5.

9.4B.1.1_1 Sustained downlink data rate performance for EN-DC within FR1 (2 NR CCs)

9.4B.1.1_1.1 Test Purpose

Same as in clause 9.4B.1.1.1

9.4B.1.1_1.2 Test applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC with 2 NR CCs.

9.4B.1.1_1.3 Minimum conformance requirements

Same as in clause 9.4B.1.1.3

9.4A.1.1_1.3.1 Procedure for test parameter selection

Same as in clause 9.4B.1.1.3.1

9.4B.1.1_1.4 Test description

Same as in clause 5.5A.1.1.4

9.4B.1.1_1.4.3 Message contents

Same as in clause 9.4B.1.1.4.3, with the following exceptions:

Table 9.4B.1.1_1.4.3-1: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-1			
Parameter	Value	Value in binary	Condition
PDSCH-to-HARQ_feedback timing indicator	corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112 For FDD 15kHz SCell: K1 = 7 if mod(i,5) = 0 K1 = 5 if mod(i,5) = 1 K1 = 4 if mod(i,5) = 2 K1 = 11 if mod(i,5) = 3 K1 = 9 if mod(i,5) = 4 where i is slot index per frame; i = {0,...,19}	-	(For FDD CC if configured as SCell with TDD PCell)

	corresponding to K1 slots as per Table 9.2.3-1 in TS 38.213 [22] and dl-DataToUL-ACK in Table 4.6.3-112 For TDD30kHz SCell: K1 = 3		(For TDD CC if configured as SCell with FDD PCell)
--	--	--	--

Table 9.4B.1.1_1.4.3-1: PDSCH-ServingCellConfig

Derivation Path: TS 38.508-1 [6], Table 5.4.2.0-25			
Information Element	Value/remark	Comment	Condition
PDSCH-ServingCellConfig ::= SEQUENCE {			
nrofHARQ-ProcessesForPDSCH	Not present	n8	(For FDD CC if configured as SCell with TDD PCell)
}			

9.4B.1.1_1.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

9.4B.1.1_2 Sustained downlink data rate performance for EN-DC within FR1 (3 NR CCs)

9.4B.1.1_2.1 Test Purpose

Same as in clause 9.4B.1.1.1

9.4B.1.1_2.2 Test applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC with 2 NR CCs.

9.4B.1.1_2.3 Minimum conformance requirements

Same as in clause 9.4B.1.1.3

9.4A.1.1_2.3.1 Procedure for test parameter selection

Same as in clause 9.4B.1.1.3.1

9.4B.1.1_2.4 Test description

Same as in clause 5.5A.1.1.4

9.4B.1.1_2.4.3 Message contents

Same as in clause 9.4B.1.1_1.4.3.

9.4B.1.1_2.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

9.4B.1.1_3 Sustained downlink data rate performance for EN-DC within FR1 (4 NR CCs)

9.4B.1.1_3.1 Test Purpose

Same as in clause 9.4B.1.1.1

9.4B.1.1_3.2 Test applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC with 2 NR CCs.

9.4B.1.1_3.3 Minimum conformance requirements

Same as in clause 9.4B.1.1.3

9.4A.1.1_3.3.1 Procedure for test parameter selection

Same as in clause 9.4B.1.1.3.1

9.4B.1.1_3.4 Test description

Same as in clause 5.5A.1.1.4

9.4B.1.1_3.4.3 Message contents

Same as in clause 9.4B.1.1_1.4.3.

9.4B.1.1_3.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each CC.

9.4B.1.2 Sustained downlink data rate performance for EN-DC including FR2 NR carrier

Editor's Note: MU analysis is complete for up to 400 MHz aggregated ChBW.

9.4B.1.2.1 Test Purpose

The purpose of the test is to verify that the Layer 1 and Layer 2 correctly process in a sustained manner the received packets corresponding to the maximum data rate indicated by UE capabilities. The sustained downlink data rate shall be verified in terms of the success rate of delivered PDCP SDU(s) by Layer 2. The test case below specifies the conditions and the required success rate of delivered TB by Layer 1 to meet the sustained data rate requirement.

9.4B.1.2.2 Test Applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC.

9.4B.1.2.3 Minimum conformance requirements

The test setup for E-UTRA Pcell is specified in Clause 9.1.2 and Table 9.4B.1.1.1-1. During the test, only the PDSCH performance on the NR cell(s) on FR2 carriers is verified.

The TB success rate shall be higher than 85% when NR PDSCH is scheduled with MCS defined for the selected EN-DC bandwidth combination and with the downlink physical channel setup according to Annex C.2.2.

The TB success rate of delivered PDCP SDU(s) by Layer2 is defined as $TB\ success\ rate = 100\% * \frac{NDL_correct_rx}{(NDL_newtx + NDL_retx)}$, where NDL_newtx is the number of newly transmitted DL transport blocks, NDL_retx is the number of retransmitted DL transport blocks, and $DL_correct_rx$ is the number of correctly received DL transport blocks. All the above numbers of transmitted, retransmitted or correctly received DL transport blocks are calculated as the sum of the numbers of DL transport blocks per CG used for DC.

The test parameters are specified in Tables 9.4B.1.2.3-1, 9.4B.1.2.3-2.

Unless otherwise stated, no user data is scheduled on slot #0, 40 and 41 within 20 ms for SCS 60 kHz.

Unless otherwise stated, no user data is scheduled on slot #0, 80 and 81 within 20 ms for SCS 120 kHz.

Table 9.4B.1.2.3-1: Test parameters for FR2 TDD

Parameter		Unit	Value
PDSCH transmission scheme			Transmission scheme 1
PTRS epre-Ratio			0
Channel bandwidth		MHz	Channel bandwidth from selected CA bandwidth combination
Common serving cell parameters	Physical Cell ID		0
	SSB position in burst		First SSB in Slot #0
	SSB periodicity	ms	20
	First DMRS position for Type A PDSCH mapping		2
Cross carrier scheduling			Not configured
Active DL BWP index			1
Actual carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 3)	RBs	0
	Subcarrier spacing	kHz	60 or 120
DL BWP configuration #1	RB Offset		0
	Number of contiguous PRB		Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-2 [3] for tested channel bandwidth and subcarrier spacing
	Subcarrier spacing	kHz	60 or 120
	Cyclic prefix		Normal
PDCCH configuration	Slots for PDCCH monitoring		Each slot
	Symbols with PDCCH		Symbols #0
	Number of PRBs in CORESET		Table 7.5A.1-2
	Number of PDCCH candidates and aggregation levels		2/AL2 for 120 kHz / 50 MHz 2/AL4 for 60 kHz / 50 MHz, 120 kHz / 100 MHz 2/AL8 for other greater combinations
	CCE-to-REG mapping type		Non-interleaved
	DCI format		1-1
	TCI State		TCI state #1
PDSCH configuration	PDCCH & PDCCH DMRS Precoding configuration		Single Panel Type I, Random per slot with equal probability of precoder index 0 and 2, and with REG bundling granularity for number of Tx larger than 1
	Mapping type		Type A
	k0		0
	PDSCH aggregation factor		1
	PRB bundling type		Static
	PRB bundling size		WB
	Resource allocation type		Type 0
	RBG size		Config2
	VRB-to-PRB mapping type		Non-interleaved
	VRB-to-PRB mapping interleaver bundle size		N/A
Starting symbol (S)		1	
Length (L)		13	
PDSCH DMRS configuration	DMRS Type		Type 1
	Number of additional DMRS		1
	Length		1
	Antenna ports indexes		{1000} for 1 Layer CCs {1000, 1001} for 2 Layers CCs
	Number of PDSCH DMRS CDM group(s) without data		1

PTRS configuration	Frequency density (K_{PT-RS})		2
	Time density (L_{PT-RS})		1
CSI-RS for tracking	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 3$ for CSI-RS resource 1,2,3,4
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 6$ for CSI-RS resource 1 and 3 $l_0 = 10$ for CSI-RS resource 2 and 4
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
	CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
	Density (ρ)		3 for CSI-RS resource 1,2,3,4
	CSI-RS periodicity	Slots	60 kHz SCS: 80 for CSI-RS resource 1,2,3,4 120 kHz SCS: 160 for CSI-RS resource 1,2,3,4
	CSI-RS offset	Slots	60 kHz SCS: 40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4 120 kHz SCS: 80 for CSI-RS resource 1 and 2 81 for CSI-RS resource 3 and 4
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #0
NZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 4$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 13$
	Number of CSI-RS ports (X)		Same as number of transmit antenna
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity	Slots	60 kHz SCS: 80 120 kHz SCS: 160
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
	QCL info		TCI state #1
ZP CSI-RS for CSI acquisition	Subcarrier indexes in the PRB used for CSI-RS		$k_0 = 0$
	OFDM symbols in the PRB used for CSI-RS		$l_0 = 12$
	Number of CSI-RS ports (X)		4
	CDM Type		'FD-CDM2'
	Density (ρ)		1
	CSI-RS periodicity	Slots	60 kHz SCS: 80 120 kHz SCS: 160
	CSI-RS offset		0
	Frequency Occupation		Start PRB 0 Number of PRB = BWP size
CSI-RS for beam refinement	First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2
	First OFDM symbol in the PRB used for CSI-RS		$l_0 = 8$ for CSI-RS resource 1 $l_0 = 9$ for CSI-RS resource 2
	Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2
	CDM Type		'No CDM' for CSI-RS resource 1,2
	Density (ρ)		3 for CSI-RS resource 1,2
	CSI-RS periodicity	Slots	60 kHz SCS: 80 for CSI-RS resource 1,2 120 kHz SCS: 160 for CSI-RS resource 1,2
	CSI-RS offset	Slots	0 for CSI-RS resource 1,2
	Repetition		ON
	QCL info		TCI state #1
TCI state #0	1215type 1 QCL information	SSB index	SSB #0
		QCL Type	Type C
	1215type 2 QCL	SSB index	SSB #0

	information	QCL Type		Type D
TCI state #1	1216type 1 QCL information	CSI-RS resource		CSI-RS resource 1 from ‘CSI-RS for tracking’ configuration
		QCL Type		Type A
	1216type 2 QCL information	CSI-RS resource		CSI-RS resource 1 from ‘CSI-RS for tracking’ configuration
		QCL Type		Type D
Maximum number of code block groups for ACK/NACK feedback				1
Number of HARQ Processes				10 for FR2.60-1 and 8 for FR2.120-1
K1 value				Specific to each UL-DL pattern
Maximum number of HARQ transmission				4
HARQ ACK/NACK bundling				Multiplexed
Redundancy version coding sequence				{0,2,3,1}
TDD UL-DL pattern				60 kHz SCS: FR2.60-1 120 kHz SCS: FR2.120-1
PDSCH & PDSCH DMRS Precoding configuration				Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i1, i2 combination, and with Wideband granularity for Rank 2
Symbols for all unused REs				OCNG Annex A.5
Propagation condition				Static propagation condition No external noise sources are applied
Antenna configuration	1 layer CCs			1x2 or 1x4
	2 layers CCs			2x2 or 2x4
Physical signals, channels mapping and precoding				As specified in Annex B.4.1
Note 1: PDSCH is scheduled only on full DL slots not containing SSB or TRS.				
Note 2: UE assumes that the TCI state for the PDSCH is identical to the TCI state applied for the PDCCH transmission.				
Note 3: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-2 [3] for tested channel bandwidth and subcarrier spacing.				

Table 9.4B.1.2.3-2: Number of PRBs in CORESET

SCS (kHz)	50 MHz	100 MHz	200 MHz	400 MHz
60	66	132	264	N.A
120	30	66	132	264

Table 9.4B.1.2.3-3: MCS indexes for indicated UE capabilities

Maximum number of PDSCH MIMO layers	Maximum modulation format	Scaling factor	MCS
1	6	1	27
1	6	0.8	23
1	6	0.75	22
1	6	0.4	14
1	4	1	16
1	4	0.8	16
1	4	0.75	16
1	4	0.4	10
1	2	1	9
1	2	0.8	9
1	2	0.75	9
1	2	0.4	4
2	6	1	27
2	6	0.8	23
2	6	0.75	22
2	6	0.4	14
2	4	1	16
2	4	0.8	16

2	4	0.75	16
2	4	0.4	10
2	2	1	9
2	2	0.8	9
2	2	0.75	9
2	2	0.4	4

Table 9.4B.1.2.3-4: SNR required to achieve 85% of peak throughput under AWGN conditions

MCS Index (Note 1)	SNR _{BB} (dB) for maximum number of PDSCH MIMO Layers = 1	SNR _{BB} (dB) for maximum number of PDSCH MIMO Layers = 2
13	6.2	9.0
14	7.2	9.9
15	8.2	10.9
16	8.7	11.6
17	10.1	13.2
18	10.7	13.7
19	11.7	14.7
20	12.7	15.6
21	13.6	16.5
22	14.8	17.6
23	15.6	18.6
24	16.9	19.7
25	18.3	21.2
26	19.3	22.3
27	20.5	23.3
Note 1: MCS Index is based on MCS Table defined in clause 5.1.3 of TS 38.214 [12] when 256QAM is not enabled.		

The normative reference for this requirement is TS 38.101-4 [5], clause 9.4B.1.2.

9.4B.1.2.3.1 Procedure for test parameter selection

The test parameters are determined by the following procedure:

- Step 1: Calculate the NR FR2 data rate for EN-DC bandwidth combinations, using a procedure from Clause 7.5A, for all supported EN-DC configurations and set of per NR component carrier (CC) UE capabilities among all supported UE capabilities:
 - Set of per NR CC UE capabilities includes a channel bandwidth, subcarrier spacing, number of PDSCH MIMO layers, modulation format and scaling factor as defined in clause 4.1.2 of TS 38.306 [14].
- Step 2: Calculate the E-UTRA data rate for EN-DC bandwidth combinations, using a procedure from clause 4.1.2 of TS 38.306 [14], for all supported EN-DC configurations and set of per E-UTRA component carrier (CC) UE capabilities among all supported UE capabilities:
 - Set of per E-UTRA CC UE capabilities includes a channel bandwidth, number of PDSCH MIMO layers and modulation format as defined in clause 4.1.2 of TS 38.306 [14].
- Step 3: Select the EN-DC bandwidth combination among all supported EN-DC configurations that achieves maximum total data rate in steps 1 and 2 among all UE capabilities:
 - When there are multiple sets of EN-DC bandwidth combinations and UE capabilities with the same largest data rate, select a single set with the smallest aggregated channel bandwidth.
- Step 4: For each NR FR2 CC in the selected EN-DC bandwidth combination, use MCS determined in step 1 for that EN-DC bandwidth combination based on test parameters and indicated UE capabilities.

Pasting relevant portion of max data rate equation from TS 38.306 [14] section 4.1

For NR, the approximate data rate for a given number of aggregated carriers in a band or band combination is computed as follows.

$$\text{data rate (in Mbps)} = 10^{-6} \cdot \sum_{j=1}^J \left(v_{\text{Layers}}^{(j)} \cdot Q_m^{(j)} \cdot f^{(j)} \cdot R_{\text{max}} \cdot \frac{N_{\text{PRB}}^{BW^{(j)},\mu} \cdot 12}{T_s^\mu} \cdot (1 - OH^{(j)}) \right)$$

wherein

J is the number of aggregated component carriers in a band or band combination

$$R_{\text{max}} = 948/1024$$

For the j-th CC,

$v_{\text{Layers}}^{(j)}$ is the maximum number of supported layers given by higher layer parameter *maxNumberMIMO-LayersPDSCH* for downlink and maximum of higher layer parameters *maxNumberMIMO-LayersCB-PUSCH* and *maxNumberMIMO-LayersNonCB-PUSCH* for uplink.

$Q_m^{(j)}$ is the maximum supported modulation order given by higher layer parameter *supportedModulationOrderDL* for downlink and higher layer parameter *supportedModulationOrderUL* for uplink.

$f^{(j)}$ is the scaling factor given by higher layer parameter *scalingFactor* and can take the values 1, 0.8, 0.75, and 0.4.

μ is the numerology (as defined in TS 38.211 [6])

T_s^μ is the average OFDM symbol duration in a subframe for numerology μ , i.e. $T_s^\mu = \frac{10^{-3}}{14 \cdot 2^\mu}$. Note that normal cyclic prefix is assumed.

$N_{\text{PRB}}^{BW^{(j)},\mu}$ is the maximum RB allocation in bandwidth $BW^{(j)}$ with numerology μ , as defined in 5.3 TS 38.101-1 [2] and 5.3 TS 38.101-2 [3], where $BW^{(j)}$ is the UE supported maximum bandwidth in the given band or band combination.

$OH^{(j)}$ is the overhead and takes the following values

0.14, for frequency range FR1 for DL

0.18, for frequency range FR2 for DL

0.08, for frequency range FR1 for UL

0.10, for frequency range FR2 for UL

NOTE: Only one of the UL or SUL carriers (the one with the higher data rate) is counted for a cell operating SUL.

For EUTRA in case of MR-DC, the approximate data rate for a given number of aggregated carriers in a band or band combination is computed as follows.

$$\text{Data rate (in Mbps)} = 10^{-3} \cdot \sum_{j=1}^J TBS_j$$

wherein

J is the number of aggregated EUTRA component carriers in MR-DC band combination

TBS_j is the total maximum number of DL-SCH transport block bits received within a 1ms TTI for j-th CC, as derived from TS36.213 [22] based on the UE supported maximum MIMO layers for the j-th carrier, and based on the modulation order and number of PRBs based on the bandwidth of the j-th carrier.

The approximate maximum data rate can be computed as the maximum of the approximate data rates computed using the above formula for each of the supported band or band combinations.

For MR-DC, the approximate maximum data rate is computed as the sum of the approximate maximum data rates from NR and EUTRA

9.4B.1.2.4 Test description

9.4B.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1.

Configurations of PDSCH and PDCCH before measurement are specified in Annex C.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 5.2.2.

For EN-DC within FR2 operation, setup the LTE radiated link according to Annex D:

1. Connection between SS, the faders, AWGN noise source and the UE is shown in TS 38.508-1 [6] Annex A, Figure A.3.3.2 for TE diagram and Figure A.3.4.2 for UE diagram.
2. The parameter settings for the NR cell are set up according to Table 7.2-1 and Table 7.2.2.2.1.0-2 and as appropriate.
3. Downlink signals for NR cell are initially set up according to Annexes C.0, C.1, C.2, and uplink signals according to Annexes G.0, G.1, G.2, G.3.1 of TS 38.521-2 [8].
4. Propagation conditions for NR cell are set according to Annex B.0.
5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Test Mode On*, (EN-DC, DC bearer *MCG* and *SCG*), *Connected without release On*, *Test Loop Function On with UE Test Loop Mode A with UL_PDCP_SDU_SIZE = 0* according to TS 38.508-1 [6] clause 4.5.4. Message content are defined in clause 9.4B.1.2.4.3.
6. SS shall transmit UECapabilityEnquiry message containing *UE-CapabilityRAT-Request* with *rat-Type* set to *eutra-nr* and *eutra*.
7. The UE shall transmit UECapabilityInformation message.
8. Using the UE capabilities advertised in the *UE-CapabilityRAT-Container* of the type *UE-MRDC-Capability* and *UE-EUTRA-Capability*, and the procedure outlined in 9.4B.1.2.3.1 determine one EN-DC bandwidth combination that would provide the largest aggregated data rate.
9. Setup up the NR CG for these parameters for the test.

9.4B.1.2.4.2 Test Procedure

1. Set the UE in a direction that satisfies the 3 normative criteria specified in Annex H.0. If no direction found, mark the test as inconclusive.
2. Based on the maximum SNR capability of the FR2 chamber, determine the max MCS index from table 9.4B.1.2.3-4 to be configured for this test.
3. Configure the NR CG TBsize, NR CG DL RMC, NR CG UL RMC from Annex A.3.2_1 and Annex A.2.2 for UL as appropriate based on the MCS index chosen in step 2.
4. SS configures T-reordering timer to be infinity for NR SCG DRB.

5. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report for NR SCG DRB.
6. SS sets the counters N_{DL_newtx} N_{DL_retr} per NR CG to 0.
7. For each new DL HARQ transmission the SS generates sufficient NR PDCP SDUs (max PDCP SDU size and minimum number of consecutive PDCP SDUs) to fill up the TB in accordance with Annex A.3.2_1 for NR SCG DRB. The SS ciphers the PDCP SDUs, concatenates the resultant PDCP PDUs to form an RLC PDU and then a MAC PDU. The SS transmits the MAC PDU per NR CG. The SS increments then N_{DL_newtx} by one per CG.
8. If PHY requests a DL HARQ retransmission, the SS performs a HARQ retransmission and increments N_{DL_retr} by one for that CG accordingly.
9. Steps 7 and 8 are repeated at every TTI for at least 300 frames and the SS waits for 300ms to let any HARQ retransmissions and RLC retransmissions to finish.
10. SS sends a PDCP reestablishment via RRC Reconfiguration message requesting for PDCP Status Report for NR SCG DRB.
11. The SS calculates the TB success rate per NR CG as $A = 100\% N_{DL_correct_rx} / (N_{DL_newtx} + N_{DL_retr})$.
12. SS computes the PDCP SDU loss by looking into the FMC and Bitmap field in the PDCP Status Report. PDCP SDU loss $B = \text{COUNT}$ reported in the Bitmap field of PDCP Status Report.
13. The UE passes the test if $A \geq 85\%$ TB success rates for NR CG and $B = 0$.

NOTE 1: In case of RLC PDU retransmission, the number of new required PDCP SDUs is as many as to fill the rest of TB.

9.4B.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.2 with the following exceptions

Table 9.4B.1.2.4.3-0: CLOSE UE TEST LOOP (in the preamble)

Derivation Path: 38.509 clause 6.3.1			
Information Element	Value/remark	Comment	Condition
Protocol discriminator	1 1 1 1		
Skip indicator	0 0 0 0		
Message type	1 0 0 0 0 0 0 0		
UE test loop mode	0 0 0 0 0 0 0 0	UE test loop mode A	
UE test loop mode A LB setup			
Length of UE test loop mode A LB setup list in bytes	0 0 0 0 0 0 1 1	Length of one LB setup DRB (3 bytes)	
LB setup DRB	0 0 0 0 0 0 0 0, 0 0 0 0 0 0 0 0, 0 0 0 Q4 Q3 Q2 Q1 Q0	UL PDCP SDU size = 0 Q4..Q0 = Data Radio Bearer identity number for the default radio bearer. See 38.509 clause 6.3.1	
UE test loop mode B LB setup	Not present		

Table 9.4B.1.2.4.3-1: PDCCH-ControlResourceSet-spCellConfigDedicated

Derivation Path: TS 38.508-1 [6], Table 4.6.3-28			
Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE { frequencyDomainResources	CORESET value according to Table 9.4B.1.2.3-2 as applicable		

}			
}			

Table 9.4B.1.2.4.3-2: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 4.6.3-162			
Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
}			

Table 9.4B.1.2.4.3-3: RadioBearerConfig

Derivation Path: TS 38.508 [6], clause 4.6.3-132			
Information Element	Value/remark	Comment	Condition
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF SEQUENCE {	1 entry		EN-DC_DRB
cnAssociation CHOICE {			
eps-BearerIdentity	6		
}			
drb-Identity	DRB-Identity using condition DRB2		
reestablishPDCP	true		EN-DC_DRB AND Re-establish_PDCP
pdcp-Config	PDCP-Config		
}			

Table 9.4B.1.2.4.3-4: PDCP-Config

Derivation Path: TS 38.508 [6], Table 4.6.3-99			
Information Element	Value/remark	Comment	Condition
PDCP-Config ::= SEQUENCE {			
drb SEQUENCE {			
discardTimer	infinity		
pdcp-SN-Size-UL	len18bits		
pdcp-SN-Size-DL	len18bits		
headerCompression CHOICE {			
notUsed	Null		
}			
integrityProtection	Not present		
statusReportRequired	true		
outOfOrderDelivery	Not present		
}			
t-Reordering	Not present		
}			

Table 9.4B.1.2.4.3-5: PDCCH Search Space

Derivation Path: TS 38.508-1 [6], Table 5.4.2.3-7			
Information Element	Value/remark	Comment	Condition

SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n2	1 for UL, 1 for DL	BW 50 MHz SCS 120 kHz
aggregationLevel4	n2	1 for UL, 1 for DL	(BW 50 MHz SCS 60 kHz) OR (BW 100 MHz SCS 120 kHz)
aggregationLevel8	n2	1 for UL, 1 for DL	(BW 100 MHz SCS 60 kHz) OR (BW 200 MHz SCS 120 kHz) OR (BW 400 MHz SCS 120 kHz)
aggregationLevel16	n0		
}			
}			

9.4B.1.2.5 Test requirement

The TB success rate of greater than 85% and no PDCP SDU loss shall be sustained during at least 300 frames.

9.4B.1.2_1 Sustained downlink data rate performance for EN-DC including FR2 (2 NR CCs)

9.4B.1.2_1.1 Test Purpose

Same as in clause 9.4B.1.2

9.4B.1.2_1.2 Test applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC with 2 NR CCs.

9.4B.1.2_1.3 Minimum conformance requirements

Same as in clause 9.4B.1.2_1.3

9.4A.1.2_1.3.1 Procedure for test parameter selection

Same as in clause 9.4B.1.2_1.3.1

9.4B.1.2_1.4 Test description

Same as in clause 9.4A.1.2_1.4

9.4B.1.2_1.4.3 Message contents

Same as in clause 9.4B.1.2_1.4.3

9.4B.1.2_1.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each NR CC.

9.4B.1.2_2 Sustained downlink data rate performance for EN-DC including FR2 (3 NR CCs)

9.4B.1.2_2.1 Test Purpose

Same as in clause 9.4B.1.2

9.4B.1.2_2.2 Test applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC with 3 NR CCs.

9.4B.1.2_2.3 Minimum conformance requirements

Same as in clause 9.4B.1.2_1.3

9.4A.1.2_2.3.1 Procedure for test parameter selection

Same as in clause 9.4B.1.2_1.3.1

9.4B.1.2_2.4 Test description

Same as in clause 9.4B.1.2_1.4

9.4B.1.2_2.4.3 Message contents

Same as in clause 9.4B.1.2_1.4.3

9.4B.1.2_2.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each NR CC.

9.4B.1.2_3 Sustained downlink data rate performance for EN-DC including FR2 (4 NR CCs)

9.4B.1.2_3.1 Test Purpose

Same as in clause 9.4B.1.2

9.4B.1.2_3.2 Test applicability

This test applies to all types of EUTRA UE release 15 and forward supporting EN-DC with 4 NR CCs.

9.4B.1.2_3.3 Minimum conformance requirements

Same as in clause 9.4B.1.2_1.3

9.4A.1.2_3.3.1 Procedure for test parameter selection

Same as in clause 9.4B.1.2_1.3.1

9.4B.1.2_3.4 Test description

Same as in clause 9.4B.1.2_1.4

9.4B.1.2_3.4.3 Message contents

Same as in clause 9.4B.1.2_1.4.3

9.4B.1.2_3.5 Test requirement

The TB success rate of greater than 85% with no PDCP SDU loss shall be sustained during at least 300 frames on each NR CC.

9.4B.2 NR DC between FR1 and FR2

9.4B.2.1 Sustained downlink data rate performance for NR DC between FR1 and FR2

The methodology for selection of tested NR DC bandwidth combination and the requirements are specified in Clause 9.4A.1.

The test setup for NR FR1 CC is specified in Clause 5.5A. The NR FR2 SDR test setup is specified in Clause 7.5A. During the test, only the PDSCH performance on the NR cell(s) on FR2 carriers is verified.

The TB success rate shall be higher than 85% when NR FR2 PDSCH is scheduled with MCS defined for the selected NR DC bandwidth combination and with the downlink physical channel setup according to Annex C.3.1.

9.4B.3 NE-DC

9.4B.3.1 Sustained downlink data rate performance for NE-DC within FR1

The sustained downlink data rate performance for NR CC and E-UTRA CC along with test case details for this test case are specified in clause 9.4B.1.1.

10 CSI reporting requirements for interworking

10.1 General

This clause specifies CSI performance requirements for EN-DC, NE-DC, inter-band NR-DC between FR1 and FR2, and inter-band NR CA between FR1 and FR2.

The definition of frequency ranges (FR1 and FR2) are specified in table 5.1-1 of TS 38.101-3 [4].

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

10.1.1 Applicability of requirements

The following applicability rules are specified for demodulation performance requirements for interworking:

- For UEs supporting NR/5GC, EN-DC and NE-DC,
 - The performance requirements specified in Clause 6 will be verified only for NR/5GC mode.
 - The performance requirements specified in Clause 8 will be verified only for NR/5GC mode.
- The FR1 EN-DC test cases with the NR TDD DL-UL configurations which are not aligned with LTE's can be tested on the corresponding EN-DC band combinations where UE supports simultaneous transmission and reception.
- For UEs supporting NR-DC including FR1 and FR2, if the FR2 requirements in Clause 8.2, Clause 8.3 and Clause 8.4 are tested, the test coverage can be considered fulfilled without executing requirements in Clause 10.2B.2, Clause 10.3B.2 and Clause 10.4B.2.
- For UEs supporting NE-DC, the test coverage of CSI reporting requirements can be considered fulfilled, if the CSI reporting requirements in Clause 6 are executed for UE under test in the standalone mode.

- For UEs supporting NGEN-DC, the test coverage of CSI reporting requirements can be considered fulfilled, if the CSI reporting requirements in Clause 6 are executed for UE under test.
- For UEs supporting EN-DC including FR2 and/or EN-DC including FR1 and FR2, the requirements applicability is specified in Table 10.1.1-1.

Table 10.1.1-1: Requirements applicability for UEs supporting EN-DC including FR2 and/or EN-DC including FR1 and FR2

Supported scenarios	CQI requirements	PMI requirements	RI requirements
EN-DC including FR2	Clause 10.2B.1.2	Clause 10.3B.1.2	Clause 10.4B.1.2
EN-DC including FR1 and FR2	Clause 10.2B.1.3	Clause 10.3B.1.3	Clause 10.4B.1.3
Both EN-DC including FR2 and EN-DC including FR1 and FR2	Clause 10.2B.1.2	Clause 10.3B.1.2	Clause 10.4B.1.2

10.1.1.1 Applicability of requirements for optional UE features

10.1.1.2 Applicability of requirements for mandatory UE features with capability signalling

The applicability rule defined in Clause 6.1.1.4 shall be applied for performance requirements in Clauses 10.2B.1.1, 10.3B.1.1 and 10.4B.1.1.

The applicability rule defined in Clause 8.1.1.4 shall be applied for performance requirements in Clauses 10.2B.1.2, 10.3B.1.2 and 10.4B.1.2.

10.2 Void

10.2A Reporting of Channel Quality Indicator (CQI) for CA

FFS

10.2B Reporting of Channel Quality Indicator (CQI) for DC

10.2B.1 EN-DC

10.2B.1.1 EN-DC within FR1

The NR CQI requirements and test case details for this test case are specified in Section 6.2.

During the test, only the CQI requirements on the NR cell shall be verified.

10.2B.1.2 EN-DC including FR2 NR carrier

The NR CQI requirements and test case details for this test case are specified in Section 8.2.

During the test, only the CQI performance on the NR cell(s) on FR2 carriers shall be verified.

10.2B.1.3 EN-DC including FR1 and FR2 NR carriers

The CSI performance requirements are verified according to section 10.2B.1.1 for EN-DC with FR1 NR carrier only and section 10.2B.1.2 for EN-DC with FR2 NR carrier only.

During the test for EN-DC with FR2 NR carriers, only the CSI performance requirements on the FR2 carriers are verified.

No CSI requirement for FR1 NR or LTE carriers is specified for EN-DC including FR2 carrier(s).

10.2B.2 NR DC between FR1 and FR2

The test setup for FR1 Pcell is specified in table 5.5A.1.1.3-1 with antenna configuration 1x2.

The test setup for FR2 cell is specified in Clause 8.1.2 and Clause 8.2.

The NR CQI reporting requirements are specified in Clause 8.2.

During the test, only the CQI performance based on NR requirements on the NR cell(s) on FR2 carriers shall be verified.

10.3A Reporting of Precoding Matrix Indicator (PMI) for CA

FFS

10.3B Reporting of Precoding Matrix Indicator (PMI) for DC

10.3B.1 EN-DC

10.3B.1.1 EN-DC within FR1

The NR PMI requirements and test case details for this test case are specified in Section 6.3.

During the test, only the PMI requirements on the NR cell shall be verified.

10.3B.1.2 EN-DC including FR2 NR carrier

The NR PMI requirements and test case details for this test case are specified in Section 8.3.

During the test, only the PMI performance on the NR cell(s) on FR2 carriers shall be verified.

10.3B.1.3 EN-DC including FR1 and FR2 NR carriers

The PMI performance requirements are verified according to section 10.3B.1.1 for EN-DC with FR1 NR carrier only and section 10.3B.1.2 for EN-DC with FR2 NR carrier only.

During the test for EN-DC with FR2 NR carriers, only the PMI performance requirements on the FR2 carriers are verified.

No PMI requirement for FR1 NR or LTE carriers is specified for EN-DC including FR2 carrier(s).

10.3B.2 NR DC between FR1 and FR2

The test setup for FR1 PCell is specified in Table 5.5A.1.1.3-1 with antenna configuration 1x2.

The test setup for FR2 cell is specified in Clause 8.1.2 and Clause 8.3.

The PMI reporting requirements are specified in Clause 8.3.

During the test, only the PMI performance based on NR requirements on the NR cell(s) on FR2 carriers shall be verified.

10.4A Reporting of Rank Indicator (RI) for CA

FFS

10.4B Reporting of Rank Indicator (RI) for DC

10.4B.1 EN-DC

10.4B.1.1 EN-DC within FR1

The NR RI requirements and test case details for this test case are specified in Section 6.4.

During the test, only the RI requirements on the NR cell shall be verified.

10.4B.1.2 EN-DC including FR2 NR carrier

The NR RI requirements and test case details for this test case are specified in Section 8.4.

During the test, only the RI performance on the NR cell(s) on FR2 carriers shall be verified.

10.4B.1.3 EN-DC including FR1 and FR2 NR carriers

The RI performance requirements are verified according to section 10.4B.1.1 for EN-DC with FR1 NR carrier only and section 10.4B.1.2 for EN-DC with FR2 NR carrier only.

During the test for EN-DC with FR2 NR carriers, only the RI performance requirements on the FR2 carriers are verified.

No RI requirement for FR1 NR or LTE carriers is specified for EN-DC including FR2 carrier(s).

10.4B.2 NR DC between FR1 and FR2

The test setup for FR1 PCell is specified in Table 5.5A1.1.3-1 with antenna configuration 1x2.

The test setup for FR2 cell is specified in Clause 8.1.2 and Clause 8.4.

The NR RI reporting requirements for NR FR2 cell are specified in Clause 8.4.

During the test, only the RI performance based on NR requirements on the NR cell(s) on FR2 carriers shall be verified.

11 V2X requirements

This clause contains the performance requirements for the sidelink physical channels specified for V2X Sidelink Communication.

11.1 Demodulation performance requirements (Conducted requirements)

11.1.1 General

11.1.1.1 Applicability of requirements

11.1.1.1.1 General

The minimum performance requirements are applicable to all V2X operating bands defined in TS 38.101-1[2] Clause 5.2E.

The minimum performance requirements in Clause 11.1 are mandatory for UE supporting NR SL operation (*sl-Reception-r16*), except test cases listed in Clause 11.1.1.1.2.

11.1.1.1.2 Applicability of requirements for mandatory UE V2X features with capability signalling

The performance requirements in Table 11.1.1.1.2-1 shall apply for V2X UEs which support mandatory UE features with capability signalling only.

Table 11.1.1.1.2-1: Requirements applicability for mandatory features with UE capability signalling

UE feature/capability [14]	Test type		Test list	Applicability notes
Support of synchronization sources for NR sidelink (<i>sync-Sidelink-r16</i>)	FR1	PSSCH	Clause 11.1.2.1.1 Clause 11.1.6.1.1 Clause 11.1.7.1.1	
		PSCCH	Clause 11.1.3.1.1 Clause 11.1.8.1.1	
		PSBCH	Clause 11.1.4.1.1	
		PSFCH	Clause 11.1.5.1.1 Clause 11.1.9.1.1	
Supports of PSFCH format 0 (<i>psfch-FormatZeroSidelink-r16</i>)	FR1	PSSCH	Clause 11.1.2.1.1 Clause 11.1.6.1.1 Clause 11.1.7.1.1	
		PSCCH	Clause 11.1.3.1.1 Clause 11.1.8.1.1	
		PSFCH	Clause 11.1.5.1.1 Clause 11.1.9.1.1	

11.1.1.2 Common test parameters

Parameters specified in Table 11.1.1.2-1 are applied for all test cases in this clause unless otherwise stated.

Table 11.1.1.2-1: Common test parameters

Parameter		Unit	Value
Carrier configuration	Offset between Point A and the lowest usable subcarrier on this carrier (Note 1)	RBs	0
	Subcarrier spacing	kHz	30
SL BWP configuration #1	Cyclic prefix		Normal
	RB offset	RBs	0
	Number of contiguous PRB	PRBs	Maximum transmission bandwidth configuration as specified in clause 5.3.2 of TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing
PT-RS configuration			PT-RS is not configured
Resource pool configuration	PSCCH Time resource	Symbols	2
	PSCCH Frequency resource	PRBs	10
	PSFCH number of cyclic shift pairs		n1
	PSFCH hopping ID		0
	PSFCH candidate resource type		allocSubCH
	Set of PRBs for PSFCH transmission		ones(1,100) for 40 MHz and ones(1,50) for 20 MHz
	PSSCH RSRP threshold		66 (infinity dBm)
	Synchronization reference		GNSS
	Subchannel size	PRBs	10
	Number of sub-channels		5 for 20 MHz and 10 for 40 MHz
	Start PRB for first sub-channel		0
Time resource bitmap		ones(1, 160)	
Note 1: Point A coincides with minimum guard band as specified in Table 5.3.3-1 from TS 38.101-1 [2] for tested channel bandwidth and subcarrier spacing.			

The normative reference for this requirement is TS 38.101-4 [5] clause 11.1.1.2.

11.1.2 PSSCH demodulation requirements

11.1.2.1 2Rx requirements

11.1.2.1.1 2Rx FR1 PSSCH performance

11.1.2.1.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.2.1.1.0-2 with the test parameters specified in Table 11.1.2.1.1.0-1. In this test scenario, GNSS or GNSS-equivalent synchronization source is used and sidelink UE 1 transmits PSCCH and PSSCH.

Table 11.1.2.1.1.0-1: Test parameters

Parameter		Unit	Value		
			Test 1	Test 2	Test 3
Active cell(s)			None		
Sidelink UE 1	Sidelink transmissions		PSCCH + PSSCH		
	PSSCH DMRS pattern (Note 1)		{3,4}	{2,3}	{2,2}
	Index of sub-channel allocation		[0,1]	[0,1]	[0]
	Timing offset (Note 2)	μs	CP/2-12*64*Tc		
	Frequency offset (Note 3)	Hz	+600		
	Synchronization		GNSS or GNSS-equivalent		
	Antenna configuration		1x2 Low		
PSFCH resource period		Slot	4	4	4
MinTimeGapPSFCH		Slot	3	3	3
Note 1: {x, y}: x and y means the number of DMRS symbols for slot with PSFCH transmission and without PSFCH transmission, respectively.					
Note 2: Time offset of transmitted Sidelink UE signal with respect to GNSS referring timing.					
Note 3: Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency.					

Table 11.1.2.1.1.0-2: Minimum performance

Test num.	Reference channel	Bandwidth (MHz)/ Subcarrier spacing(kHz)	Modulation format and code rate	Propagation condition	Reference value	
					PSSCH BLER (%)	SNR(dB) of PSSCH
1	R.PSSCH.2-1.1	20 / 30	QPSK, 0.30	TDLA30-2700	10%	3.4
2	R.PSSCH.2-1.2	20 / 30	16QAM, 0.37	TDLA30-1400		8.8
3	R.PSSCH.2-1.3	20 / 30	64QAM, 0.43	TDLA30-180		14.8

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.2.1.1.

11.1.2.1.1.1_1 2Rx FR1 PSSCH performance - single active PSSCH link

11.1.2.1.1.1.1 Test purpose

The purpose is to verify the PSSCH for V2X demodulation performance with a single active PSSCH link.

11.1.2.1.1.1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.2.1_1.1.3 Test description

11.1.2.1_1.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1, Table 11.1.2.1.1.0-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Low Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.2.1.1.0-2 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.2.1_1.1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.2.1.1.0-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the receiving UE. Message contents are defined in clause 11.1.2.1.1_1.3.3.
6. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.2.1.1_1.3.2 Test procedure

1. Sidelink UE1 transmits PSCCH/PSSCH RMC according to *SL-PreconfigurationNR* and Table 11.1.2.1.1.0-1. The sidelink UE1 transmits MAC padding bits on the sidelink RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.2.1.4-1 as appropriate.
3. Measure the average PSSCH BLER according to the test method described in Annex G.5 for a duration sufficient to achieve statistical significance. If the measured average PSSCH BLER is less than the reference value in Table 11.1.2.1.4-1 pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 11.1.2.1.1_1.4-1 as appropriate.

11.1.2.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.3 with the following exceptions.

Table 11.1.2.1.1_1.3.3-1: Physical layer parameters for SCI format 1-A

Derivation Path: TS 38.508-1 [6] Table 4.3.6.2.1.1-1			
Parameter	Value	Value in binary	Condition

DMRS pattern	indicates the 2nd entry in sl-PSSCH-DMRS-TimePatternList-r16 if mod (i, 4), else indicates the 3rd entry in sl-PSSCH-DMRS-TimePatternList-r16. where i is the logical slot index belong to resource pool per 1024 radio frame as specified in 38.214 [12] clause 8	"01"B if mod (i, 4) = 0 "10"B if mod (i, 4) ≠ 0	Test 1
	indicates the 1st entry in sl-PSSCH-DMRS-TimePatternList-r16 if mod (i, 4), else indicates the 2nd entry in sl-PSSCH-DMRS-TimePatternList-r16.	"00"B if mod (i, 4) = 0 "01"B if mod (i, 4) ≠ 0	Test 2
	indicates the 1st entry in sl-PSSCH-DMRS-TimePatternList-r16	"00"B	Test 3

Table 11.1.2.1.1_1.3.3-2: SL-ResourcePool

Derivation Path: TS 38.508-1 [6] Table 5.4.3-1			
Information Element	Value/remark	Comment	Condition
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-PSSCH-Config-r16 CHOICE {			
setup SEQUENCE {			
sl-PSSCH-DMRS-TimePatternList-r16	3 entries		
SEQUENCE (SIZE (1..3)) OF INTEGER (2..4) {			
INTEGER[1]	2	entry 1	
INTEGER[2]	3	entry 2	
INTEGER[3]	4	entry 3	
}			
}			

11.1.2.1.4 Test Requirements

For the parameters specified in Table 11.1.2.1.0-1 and SNR specified in Table 11.1.2.1.1_1.4-1, the average PSSCH BLER obtained in step 3 shall be below the reference value specified in Table 11.1.2.1.1_1.4-1. The PSSCH sidelink reference channels are defined in Annex A Table A.6.2.2-1.

Table 11.1.2.1.1_1.4-1: Test performance

Test num.	Reference channel	Bandwidth (MHz)/ Subcarrier spacing(kHz)	Modulation format and code rate	Propagation condition	Reference value	
					PSSCH BLER (%)	SNR(dB) of PSSCH
1	R.PSSCH.2-1.1	20 / 30	QPSK, 0.30	TDLA30-2700	10%	4.2
2	R.PSSCH.2-1.2	20 / 30	16QAM, 0.37	TDLA30-1400		9.6
3	R.PSSCH.2-1.3	20 / 30	64QAM, 0.43	TDLA30-180		15.6

11.1.3 PSCCH demodulation requirements

11.1.3.1 2Rx requirements

11.1.3.1.1 2Rx FR1 PSCCH performance

11.1.3.1.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.3.1.1.0-2 with the test parameters specified in Table 11.1.3.1.1.0-1. In this test scenario, GNSS or GNSS-equivalent synchronization source is used and sidelink UE 1 transmits PSCCH and PSSCH.

Table 11.1.3.1.1.0-1: Test parameters

Parameter		Unit	Test 1
Active cell(s)			None
Sidelink UE 1	Sidelink Transmissions		PSCCH+PSSCH
	Timing offset (Note 1)	μs	CP/2-12*64*Tc
	Frequency offset (Note 2)	Hz	+600
	Synchronization		GNSS or GNSS-equivalent
	Antenna configuration		1x2 Low
PSSCH RMC			R.PSSCH.2-1.1

NOTE 1: Time offset of transmitted Sidelink UE signal with respect to GNSS reference timing.
 NOTE 2: Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency.
 NOTE 3: OCC index i for PSCCH DMRS is randomly selected from {0, 1, 2} for each PSCCH transmission.

Table 11.1.3.1.1.0-2: Minimum performance

Test number	PSCCH Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Propagation condition	Reference value	
				Probability of missed PSCCH (%)	SNR (dB) of PSCCH
1	R.PSCCH.2-1.1	20 / 30	TDLA30-1400	1	4.7

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.3.1.1.

11.1.3.1.1_1 2Rx FR1 PSCCH performance - single active PSSCH link

11.1.3.1.1_1.1 Test purpose

The purpose is to verify the PSCCH for V2X demodulation performance with a single active PSSCH link.

11.1.3.1.1_1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.3.1.1_1.3 Test description

11.1.3.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1, Table 11.1.3.1.1.0-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Low Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.3.1.1.0-2 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.3.1.1_1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.3.1.1.0-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the received UE. Message contents are defined in clause 11.1.3.1.1_1.3.3.
6. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.3.1.1_1.3.2 Test procedure

1. Sidelink UE1 transmits PSCCH/PSSCH RMC according to *SL-PreconfigurationNR* and Table 11.1.3.1.1.0-1. The sidelink UE1 transmits MAC padding bits on the sidelink RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.3.1.1_1.4-1 as appropriate.
3. Measure the probability of PSCCH miss-detection according to the test method described in Annex G.5 for a duration sufficient to achieve statistical significance. If the measured probability of PSCCH miss-detection is less than the reference value in Table 11.1.3.1.1_1.4-1 pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 11.1.3.1.1_1.4-1 as appropriate.

11.1.3.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.3.

11.1.3.1.1_1.4 Test Requirements

For the parameters specified in Table 11.1.3.1.0-1 and SNR specified in Table 11.1.3.1.4-1, the average PSSCH BLER obtained in step 3 shall be below the reference value specified in Table 11.1.3.1.4-1. The PSSCH sidelink reference channels are defined in Annex A Table A.6.2.2-1.

Table 11.1.3.1.4-1: Test performance requirements

Test number	PSCCH Reference channel	Bandwidth (MHz) / Subcarrier spacing (kHz)	Propagation condition	Reference value	
				Probability of missed PSCCH (%)	SNR (dB) of PSCCH
1	R.PSCCH.2-1.1	20 / 30	TDLA30-1400	1	5.5

11.1.4 PSBCH demodulation requirements

11.1.4.1 2Rx requirements

11.1.4.1.1 2Rx FR1 PSBCH performance

11.1.4.1.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.4.1.1.0-2 with the test parameters specified in Table 11.1.4.1.1.0-1. The Sidelink UE 1 transmits PSBCH to UE and the UE is synchronized to SLSS of Sidelink UE 1.

RAN4 has recommended that these requirements do not need to be tested.

Table 11.1.4.1.1.0-1: Test parameters

Parameter		Unit	Test 1
Active cell(s)			None
Sidelink UE 1	Sidelink Transmissions		SLSS+PSBCH (Note 3)
	sssid		0
	Time offset (Note 1)	μs	0
	Frequency offset (Note 2)	Hz	0
	Synchronization source		GNSS
Antenna configuration			1x2 Low
Note 1: Time offset of transmitted Sidelink UE 1 signal with respect to GNSS reference timing.			
Note 2: Frequency offset of transmitted Sidelink UE 1 signal with respect to GNSS reference frequency.			
Note 3: PSBCH transmits together with corresponding SLSS in the same slot.			

Table 11.1.4.1.1.0-2: Minimum performance

Test number	Bandwidth (MHz) / Subcarrier spacing (kHz)	PSBCH Reference channel	Propagation condition	Reference value	
				Probability of missed PSBCH (%)	SNR (dB)
1	20 / 30	R.PSBCH.2-1	TDLA30-180	1	0.1

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.4.1.1.

11.1.5 PSFCH demodulation requirements

11.1.5.1 2Rx requirements

11.1.5.1.1 2Rx FR1 PSFCH performance

11.1.5.1.1.0 Minimum requirements

11.1.5.1.1.0.1 NACK missed detection requirements

The minimum requirements are specified in Table 11.1.5.1.1.0.1-2 with the test parameters specified in Table 11.1.5.1.1.0.1-1. In this test scenario, GNSS or GNSS-equivalent synchronization source is used and sidelink UE 1 receives PSCCH and PSSCH sent by the UE under test and transmits PSFCH.

Table 11.1.5.1.1.0.1-1: Test parameters

Parameter	unit	Test 1
Allocated resource blocks	RB	1
The number of PSFCH symbols (Note 1)	symbol	2
Number of information bits	bit	1
Synchronization source		GNSS

Timing offset (Note 2)	μs	$CP/2-12*64*T_c$
Frequency offset (Note 3)	Hz	600
PSFCH resource period	Slots	1
Antenna configuration		1x2 Low
Note 1	First symbol is included. First symbol is used for AGC and not used for demodulation.	
Note 2	Time offset of transmitted Sidelink UE signal with respect to GNSS referring timing.	
Note 3	Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency.	

Table 11.1.5.1.1.0.1-2: Minimum performance

Test num.	Bandwidth (MHz) / Subcarrier spacing (kHz)	Propagation condition	Reference value	
			NACK missed detection probability (%)	SNR (dB)
1	20 / 30	TDLA30-180	1	9.5

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.5.1.1.1.

11.1.5.1.1.0.2 DTX to NACK requirements

The DTX to NACK probability, i.e. the probability that NACK is detected when nothing was sent:

$$\text{Prob}(\text{PSFCH DTX} \rightarrow \text{NACK bits}) = \frac{\#(\text{false NACK bits})}{\#(\text{PSFCH DTX}) + \#(\text{NACK bits})}$$

where:

- #(false NACK bits) denotes the number of detected NACK bits.
- #(NACK bits) denotes the number of encoded bits per slot
- #(PSFCH DTX) denotes the number of DTX occasions

The DTX to NACK probability shall not exceed 1% with the test parameters are configured in Table 11.1.5.1.1.0.1-1.

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.5.1.1.2.

11.1.5.1.1_1 2Rx FR1 PSCCH performance - single active PSSCH link

11.1.5.1.1_1.1 Test purpose

The purpose is to verify the PSFCH for V2X demodulation performance with a single active PSSCH link.

11.1.5.1.1_1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.5.1.1_1.3 Test description

11.1.5.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Low, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Mid Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.5.1.1.0.1-2 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.5.1.1_1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.5.1.1.0.1-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the transmitting UE and operates in NACK-only HARQ groupcast mode. Message contents are defined in clause 11.1.5.1.1_1.3.3.
6. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.5.1.1_1.3.2 Test procedure

1. The UE under test transmits PSCCH/PSSCH in every PSCCH/PSSCH duration for NR sidelink communication according to *SL-PreconfigurationNR*. The Sidelink UE1 receives the PSSCH sent by the UE under test. For every PSSCH received, the Sidelink UE1 sends NACK on PSFCH if the corresponding PSFCH falls in even slot and sends nothing if the corresponding PSFCH falls in odd slot.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.5.1.1_1.4-1 as appropriate.
3. Measure probability of NACK miss-detection and DTX to NACK probability according to the test method described in Annex G.5 for a duration sufficient to achieve statistical significance. Pass the UE if the measured probability of PSFCH miss-detection is less than the reference value in Table 11.1.5.1.1_1.4-1 and the measured DTX to NACK probability is not exceed the reference value in clause 11.1.5.1.1.0.2. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 11.1.5.1.1_1.4-1 as appropriate.

11.1.5.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.3 with the following exceptions.

Table 11.1.5.1.1_1.3.3-1: SL-ResourcePool

Derivation Path: TS 38.508-1 [6] Table 5.4.3-1			
Information Element	Value/remark	Comment	Condition
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-PSFCH-Config-r16 CHOICE {			
setup SEQUENCE {			
sl-PSFCH-Period-r16	sl1		
}			
}			
}			

11.1.5.1.1_1.4 Test Requirements

For the parameters specified in Table 11.1.5.1.0-1 and SNR specified in Table 11.1.5.1.1_1.4-1, the NACK missed detection probability obtained in step 3 shall be below the reference value specified in Table 11.1.5.1.1_1.4-1.

For the parameters specified in Table 11.1.5.1.1.0.1-1, the DTX to NACK probability shall not exceed 1%.

Table 11.1.5.1.1_1.4-1: Test performance requirements

Test num.	Bandwidth (MHz) / Subcarrier spacing (kHz)	Propagation condition	Reference value	
			NACK missed detection probability (%)	SNR (dB)
1	20 / 30	TDLA30-180	1	10.3

11.1.6 Power imbalance performance with two links

11.1.6.1 2Rx requirements

11.1.6.1.1 2Rx FR1 Power imbalance performance

11.1.6.1.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.6.1.1.0-2 with the test parameters specified in Table 11.1.6.1.1.0-1. In this test scenario, The Sidelink UE 1 and 2 are synchronized to GNSS or GNSS-equivalent synchronization reference.

Table 11.1.6.1.1.0-1: Test parameters

Parameter		Unit	Test 1
Active cell(s)			None
Active Sidelink UE(s)			Sidelink UE 1, Sidelink UE 2
Sidelink UE 1	Sidelink Transmissions		PSSCH + PSSCH
	PSSCH DMRS pattern(Note 1)		{2,3}
	Sub-channel allocation		Sub-channel 0
	Time offset (Note 2)	μs	0
	Frequency offset (Note 3)	Hz	0
	Antenna configuration		1x2 Low
	PSFCH periodicity	Slots	4
MinTimeGapPSFCH	Slots	3	
Sidelink UE 2	Sidelink Transmissions		PSSCH + PSSCH
	PSSCH DMRS pattern(Note 1)		{2,3}
	Sub-channel allocation		Sub-channel 3
	Time offset (Note 2)	μs	0
	Frequency offset (Note 3)	Hz	0
	Antenna configuration		1x2 Low
	PSFCH periodicity	Slots	4
MinTimeGapPSFCH	Slots	3	
Note 1: {x, y}: x and y means the number of DMRS symbols for slot with PSFCH transmission and without PSFCH transmission, respectively.			
Note 2: Time offset of transmitted Sidelink UE signal with respect to GNSS reference timing.			
Note 3: Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency.			

Table 11.1.6.1.1.0-2: Minimum performance

Test number	Bandwidth (MHz)/ Subcarrier spacing(kHz)	Sidelink UE	PSSCH Reference channel	Modulation format and code rate	Propagation condition	Reference value	
						PSSCH BLER (%)	SNR (dB) of PSSCH
1	20 / 30	1	R.PSSCH.2-1.4	QPSK, 0.30	AWGN	(Note 1)	30.35
		2	R.PSSCH.2-1.4	QPSK, 0.30	AWGN	10	4.8
Note 1: There is no BLER requirement for Sidelink UE 1.							

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.6.1.1.

11.1.6.1.1_1 2Rx FR1 Power imbalance performance - two active PSSCH link

11.1.6.1.1_1.1 Test purpose

The purpose is to verify the demodulation performance when receiving PSSCH transmissions from two Sidelink UEs with power imbalance in one slot.

11.1.6.1.1_1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.6.1.1_1.3 Test description

11.1.6.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1, Table 11.1.6.1.1.0-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Low Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.6.1.1.0 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.6.1.1_1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.6.1.1.0-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the receiving UE. Message contents are defined in clause 11.1.6.1.1_1.3.3.
6. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.6.1.1_1.3.2 Test procedure

1. Sidelink UE1 and Sidelink UE2 transmit PSCCH/PSSCH RMC according to *SL-PreconfigurationNR* and Table 11.1.6.1.1.0-1. Both sidelink UE1 and sidelink UE2 transmit MAC padding bits on their sidelink RMC respectively.

2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.6.1.1_1.4-1 as appropriate.
3. Measure the average PSSCH BLER of sidelink UE2 according to the test method described in Annex G.5 for a duration sufficient to achieve statistical significance. If the measured average PSSCH BLER of sidelink UE2 is less than the reference value in Table 11.1.6.1.1_1.4-1 pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 11.1.6.1.1_14-1 as appropriate.

11.1.6.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4 with the following exceptions.

Table 11.1.6.1.1_1.3.3-1: Physical layer parameters for SCI format 1-A

Derivation Path: TS 38.508-1 [6] Table 4.3.6.2.1.1-1			
Parameter	Value	Value in binary	Condition
DMRS pattern	indicates the 1st entry in sl-PSSCH-DMRS-TimePatternList-r16 if mod (i, 4), else indicates the 2nd entry in sl-PSSCH-DMRS-TimePatternList-r16. where i is the logical slot index belong to resource pool per 1024 radio frame as specified in 38.214 [12] clause 8	"0"B if mod (i, 4) = 0 "1"B if mod (i, 4) ≠ 0	

Table 11.1.6.1.1_1.3.3-2: SL-ResourcePool

Derivation Path: TS 38.508-1 [6] Table 5.4.3-1			
Information Element	Value/remark	Comment	Condition
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-PSSCH-Config-r16 CHOICE {			
setup SEQUENCE {			
sl-PSSCH-DMRS-TimePatternList-r16	2 entries		
SEQUENCE (SIZE (1..3)) OF INTEGER (2..4) {			
INTEGER[1]	2	entry 1	
INTEGER[2]	3	entry 2	
}			
}			

11.1.6.1.1_1.4 Test Requirements

For the parameters specified in Table 11.1.6.1.1.0-1 and SNR specified in Table 11.1.6.1.1.4-1, the average PSSCH BLER of sidelink UE2 obtained in step 3 shall be below the reference value specified in Table 11.1.6.1.1_1.4-1. The PSSCH sidelink reference channels are defined in Annex A Table A.6.2.2-1.

Table 11.1.6.1.1_1.4-1: Test performance

Test number	Bandwidth (MHz)/ Subcarrier spacing(kHz)	Sidelink UE	PSSCH Reference channel	Modulation format and code rate	Propagation condition	Reference value	
						PSSCH BLER (%)	SNR (dB) of PSSCH
1	20 / 30	1	R.PSSCH.2-1.4	QPSK, 0.30	AWGN	(Note 1)	30.35
		2	R.PSSCH.2-1.4	QPSK, 0.30	AWGN	10	5.4

Note 1: There is no BLER requirement for Sidelink UE 1.

11.1.7 HARQ buffer soft combining

11.1.7.1 2Rx requirements

11.1.7.1.1 2Rx FR1 HARQ buffer soft combining performance

11.1.7.1.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.7.1.1.0-2 with the test parameters specified in Table 11.1.7.1.1.0-1. In this test scenario, GNSS or GNSS-equivalent synchronization source is used and all sidelink UE i ($0 \leq i \leq n$) transmit PSCCH and PSSCH.

Table 11.1.7.1.1.0-1: Test parameters

Parameter		Unit	Test 1
Active cell(s)			None
Active Sidelink UE(s)			Sidelink UE i , $0 \leq i < n$ (Note 1,2)
Sidelink UE i , $0 \leq i < n$	Sidelink Transmissions		PSCCH + PSSCH
	PSSCH DMRS pattern		{2}
	Time gap between initial transmission and retransmission	Slots	[n (Note 3)]
	Timing offset (Note 4)	μ s	0
	Frequency offset (Note 5)	Hz	0
	Synchronization source		GNSS or GNSS-equivalent
	Antenna configuration		1x2 Low
Redundancy version coding sequence			{0,2}
PSFCH resource period		Slots	1
Note 1: n is the number of HARQ process UE can support (based on IE harq-RxProcessSidelink) Note 2: When $n = 16$ or 24 , sidelink UEs transmit one by one circularly for every slot; When $n=32$, the first 31 UEs transmit signal one by one circularly for every slot and in the first subchannel, and the 32nd UE transmits signal in the first slot but in the second subchannel; When $n=48$, the first 31 UEs transmit signal one by one circularly for every slot and in the first subchannel, the next 17 UEs transmit signal in the same slot as the first 17 UEs but in the second subchannel; When $n=64$, first 31 UEs transmit signal one by one circularly for every slot and in the first subchannel, the next 31 UEs transmit signal one by one circularly for every slot and in the second subchannel, the last 2 UEs transmit signal in the same slot as the first 2 UEs in the third subchannel Note 3: $k = n$ if $n < 32$, otherwise $k = 31$ Note 4: Time offset of transmitted Sidelink UE signal is with respect to GNSS reference timing. Note 5: Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency.			

Table 11.1.7.1.1.0: Minimum performance

Test num.	Bandwidth (MHz) / Subcarrier spacing(kHz)	PSSCH Reference channel	Propagation condition	Reference value	
				PSSCH BLER (%)	SNR (dB) of PSSCH
1	20 / 30	R.PSSCH.2-1.5	AWGN	5	10.9

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.7.1.1

11.1.7.1.1.1_1 2Rx FR1 HARQ buffer soft combining performance - maximum number of HARQ processes

11.1.7.1.1.1_1.1 Test purpose

The purpose is to verify the maximum number of HARQ processes per TTI supported by the V2X UE.

11.1.7.1.1.1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.7.1.1_1.3 Test description

11.1.7.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1, Table 11.1.7.1.1.0-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Low Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.7.1.1.0-2 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.7.1.1_1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.7.1.1.0-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Determine the number of sidelink UEs, i.e. N, as:
 - N = 16 if pc_harq_RxProcessSidelink_n16 = true
 - N = 24 if pc_harq_RxProcessSidelink_n24 = true
 - N = 32 if pc_harq_RxProcessSidelink_n32 = true
 - N = 48 if pc_harq_RxProcessSidelink_n48 = true
 - N = 64 if pc_harq_RxProcessSidelink_n64 = true
6. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the received UE. Message contents are defined in clause 11.1.7.1.1_1.3.3.
7. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.7.1.1_1.3.2 Test procedure

1. Sidelink UE i , $0 \leq i < N$, transmits PSCCH/PSSCH RMC according to *SL-PreconfigurationNR* and Table 11.1.7.1.1.0-1. The sidelink UE i , $0 \leq i < N$ transmits MAC padding bits on the sidelink RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.7.1.1_1.4-1 as appropriate.
3. Measure the average PSSCH BLER according to the test method described in Annex G.5 for a duration sufficient to achieve statistical significance. If the measured average PSSCH BLER is less than the reference value in Table 11.1.7.1.1_1.4-1 pass the UE. Otherwise fail the UE.

4. Repeat steps from 1 to 3 for each subtest in Table 11.1.7.1.1_1.4-1 as appropriate.

11.1.7.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4 with the following exceptions.

Table 11.1.7.1.1_1.3.3-1: Physical layer parameters for SCI format 1-A

Derivation Path: TS 38.508-1 [6] Table 4.3.6.2.1.1-1			
Parameter	Value	Value in binary	Condition
DMRS pattern	Not present	-	

Table 11.1.7.1.1_1.3.3-2: SL-ResourcePool

Derivation Path: TS 38.508-1 [6] Table 5.4.3-1			
Information Element	Value/remark	Comment	Condition
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-PSSCH-Config-r16 CHOICE {			
setup SEQUENCE {			
sl-PSSCH-DMRS-TimePatternList-r16	1 entry		
SEQUENCE (SIZE (1..3)) OF INTEGER (2..4) {			
INTEGER[1]	2	entry 1	
}			
}			
}			
}			

11.1.7.1.1_1.4 Test Requirements

For the parameters specified in Table 11.1.7.1.0-1 and SNR specified in Table 11.1.7.1.1_1.4-1, the average PSSCH BLER obtained in step 3 shall be below the reference value specified in Table 11.1.7.1.1_1.4-1. The PSSCH sidelink reference channels are defined in Annex A Table A.6.2.2-1.

Table 11.1.7.1.1_1.4-1: Test performance

Test num.	Bandwidth (MHz) / Subcarrier spacing(kHz)	PSSCH Reference channel	Propagation condition	Reference value	
				PSSCH BLER (%)	SNR (dB) of PSSCH
1	20 / 30	R.PSSCH.2-1.5	AWGN	5	11.5

11.1.8 PSCCH decoding capability test

11.1.8.1 2Rx requirements

11.1.8.1.1 2Rx FR1 PSCCH decoding capability

11.1.8.1.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.8.1.1.0-2 with the test parameters specified in Table 11.1.8.1.1.0-1. In this test scenario, GNSS or GNSS-equivalent synchronization source is used and sidelink UE 1 transmits PSCCH and PSSCH and the test procedure is specified as follows:

- 10 UEs transmit PSCCHs and corresponding PSSCHs to the tested UE per slot with each UE occupying one subchannel.
- x UEs transmit PSCCHs and corresponding PSSCHs with high priority level on x subchannels that are randomly selected from 10 subchannels per slot and 10-x UEs transmit PSCCHs and corresponding PSSCHs with low priority level on the remaining subchannels. The indication of priority level specified in Clause 5.4.3.3 of TS 23.287 [23] and Clause 5.22.1.3.1 of TS 38.321 [24] is included in PSCCH.

Where x equals to:

- The number of PSFCH(s) resources that the tested UE can transmit in a slot (i.e. IE *psfch-TxNumber* specified in clause 4.2.16.1.6 of TS 38.306 [14]) if the number of PSFCH(s) resources that the tested UE can transmit in a slot is less than 10
- 10, otherwise.

The probability of PSCCH miss detection is calculated as follows:

$$\text{Prob (PSCCH miss detection)} = \frac{\#(\text{missing ACK /NACK})}{\#(\text{Tx high priority PSCCH/PSSCH})}$$

Where:

- #(Tx high priority PSCCH/PSSCH) denotes the total number of transmitted PSCCH/PSSCH with high priority level.
- #(missing ACK/NACK) denotes the total number of missing ACK/NACK with high priority.

Table 11.1.8.1.1.0-1: Test parameters

Parameter		Unit	Value
Member ID (Note 1)			0
Sidelink UE i, 0 ≤ i ≤ 9 (Note 5)	Sidelink Transmissions		PSCCH + PSSCH
	Timing offset (Note 2)	μs	0
	Frequency offset (Note 3)	Hz	0
	Synchronization source		GNSS
	Propagation Channel		Static propagation condition without external noise
	Antenna configuration		1x2 Low
	PSSCH RMC		R.PSSCH.2-1.1
	PSCCH RMC (Note 4)		R.PSCCH.2-1.1
	Source ID		0
	PSFCH periodicity	Slots	1
	MinTimeGapPSFCH	Slots	2
	PSFCH Resource (Note 6)	RB index	
CS pair index			0
Note 1: Member ID is an identifier uniquely identifying a member. Note 2: Time offset of transmitted Sidelink UE signal with respect to GNSS reference timing. Note 3: Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency. Note 4: OCC index for PSCCH DMRS is randomly selected between {0, 1, 2} for each PSCCH transmission as per in Clause 8.4.1.3.2 of TS 38.211 [9]. Note 5: Each UE occupies one sub-channel so that all sub-channels are filled. Note 6: The mapping procedure of PSSCH resource and PSFCH resource is specified in Clause 16.3 of TS 38.213 [11].			

Table 11.1.8.1.1.0-2: Minimum performance

Test Number	Bandwidth (MHz) / Subcarrier spacing(kHz)	PSCCH Reference channel	Propagation Channel	Reference value
				Probability of missed PSCCH (%)
1	40 / 30	R.PSCCH.2-1.1	Static propagation condition without external noise	1

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.8.1.1.

11.1.8.1.1_1 2Rx FR1 PSCCH decoding capability - maximum number of received PSCCHs

11.1.8.1.1_1.1 Test purpose

The purpose is to verify the maximum number of received PSCCHs per TTI supported by the V2X UE.

11.1.8.1.1_1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.8.1.1_1.3 Test description

11.1.8.1.1_1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1, Table 11.1.8.1.1.0-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Low Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.8.1.1.0-2 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.8.1.1_1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.8.1.1.0-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Determine the number of sidelink UE transmitting PSSCH with high priority, i.e. x , as follows:
 - $x = 4$ if $pc_psfch_TxNumber_n4 = true$;
 - $x = 8$ if $pc_psfch_TxNumber_n8 = true$;
 - $x = 10$ if $pc_psfch_TxNumber_n16 = true$.
6. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the received UE. Message contents are defined in clause 11.1.8.1.1_1.3.3.
7. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.8.1.1_1.3.2 Test procedure

1. Sidelink UE 0~9 transmit PSCCH/PSSCH RMC according to *SL-PreconfigurationNR* and Table 11.1.8.1.0-1. The SS randomly chooses x sidelink UEs among sidelink UE 0~9 to transmit PSSCHs with high priority and let the remaining $10-x$ sidelink UEs transmit PSSCH with low priority level. The sidelink UE 0~9 transmit MAC padding bits on the sidelink RMC.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.8.1.1_1.4-1 as appropriate.

3. Measure the probability of missed PSCCH according to clause 11.1.8.1.1.0 for a duration sufficient to achieve statistical significance as given in Annex G.5. If the measured probability of PSCCH miss-detection is less than the reference value in Table 11.1.8.1.1_1.4-1 pass the UE. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 11.1.8.1.1_1.4-1 as appropriate.

11.1.8.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.3 with the following exceptions.

Table 11.1.8.1.1_1.3.3-1: SL-ResourcePool

Derivation Path: TS 38.508-1 [6] Table 5.4.3-1			
Information Element	Value/remark	Comment	Condition
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-PSFCH-Config-r16 CHOICE {			
setup SEQUENCE {			
sl-PSFCH-Period-r16	sl1		
sl-MinTimeGapPSFCH-r16	sl2		
}			
}			
}			

11.1.8.1_1.1.4 Test Requirements

For the parameters specified in Table 11.1.8.1.1.0-1 and SNR specified in Table 11.1.8.1.1_1.4-1, the average PSSCH BLER obtained in step 3 shall be below the reference value specified in Table 11.1.8.1.1_1.4-1. The PSSCH sidelink reference channels are defined in Annex A Table A.6.2.2-1.

Table 11.1.8.1.1_1.4-1: Test performance requirements

Test Number	Bandwidth (MHz) / Subcarrier spacing(kHz)	PSCCH Reference channel	Propagation Channel	Reference value
				Probability of missed PSCCH (%)
1	40 / 30	R.PSCCH.2-1.1	Static propagation condition without external noise	1

11.1.9 PSFCH decoding capability Test

11.1.9.1 2Rx requirements

11.1.9.1.1 2Rx FR1 PSFCH decoding capability

11.1.9.1.0 Minimum requirements

The minimum requirements are specified in Table 11.1.9.1.1.0-2 with the test parameters specified in Table 11.1.9.1.1.0-1. In each slot, a group of UEs transmits PSFCHs to the tested UE.

Table 11.1.9.1.1.0-1: Test parameters

Parameter	Unit	Test 1
HARQ-ACK information		ACK or NACK
Source ID of tested UE		0
Sidelink UE i , $0 \leq i \leq N-1$ (Note 3)	Sidelink transmissions for	PSFCH
	Timing offset (Note 1)	μ s
	Frequency offset (Note 2)	Hz
	Synchronization source	GNSS or GNSS-equivalent
	Propagation Channel	Static propagation condition No external noise sources are applied
Antenna configuration		1x2 Low

	Member ID(Note 4)		i
	PSFCH resource allocation(Note 5)		N UEs transmit PSFCHs one by one on each RB with CS pair index 0. i.e. UE 0 transmits PSFCH on RB 0, UE 1 transmits PSFCH on RB 1,..., UE (N-1) transmits PSFCH on RB N-1
	PSFCH periodicity	Slots	1
<p>Note 1: Time offset of transmitted Sidelink UE signal with respect to GNSS reference timing.</p> <p>Note 2: Frequency offset of transmitted Sidelink UE signal with respect to GNSS reference frequency.</p> <p>Note 3: N equals to the number of PSFCH(s) resources that UE can receive in a slot as specified in Clause 4.2.16.1.6 of TS 38.306[14] (IE <i>psfch-RxNumber</i>) .</p> <p>Note 4: Member ID is an identifier uniquely identifying a member</p> <p>Note 5: All PSFCHs in a slot are corresponding to one PSSCH that occupies all sub channels.</p>			

Table 11.1.9.1.1.0-2: Minimum performance

Test Number	Bandwidth (MHz) / Subcarrier spacing(kHz)	Propagation Channel	Reference value	
			Probability of success detection slot with ACK only	Probability of success detection slot with NACK or DTX
1	40 / 30	Static propagation condition without external noise	99	99
<p>Note 1: The probability of success detection slot with ACK only is the probability that the corresponding PSSCH is not retransmitted when Option A is selected.</p> <p>Note 2: The probability of success detection slot with NACK or DTX is the probability that the corresponding PSSCH is retransmitted when Option B or option C is selected.</p>				

The normative reference for this requirement is TS 38.101-4 [5], clause 11.1.9.1.1.1.

11.1.9.1.1_1 2Rx FR1 PSFCH decoding capability - maximum number of received PSFCHs

11.1.9.1_1.1.1 Test purpose

The purpose is to verify the maximum number of PSFCHs received by UE per slot in group cast scenario by using ACK/NACK feedback mode.

11.1.9.1_1.1.2 Test applicability

This test case applies to all types of NR UE release 16 and forward which support NR sidelink communication, as specified in Table 11.1.1.1.2-1.

11.1.9.1_1.1.3 Test description

11.1.9.1_1.1.3.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in 38.521-1 [7] subclause 5.3E.

PSCCH and PSSCH reference measurement channels are set according to Table 11.1.1.2-1 and Annex A.6 as appropriate.

Configurations of the GNSS simulator are specified in TS 38.508-1 [6] Table 4.11.2-2 and the GNSS simulator is configured for Scenario #1: static in Geographical area #1. Geographical area #1 is also pre-configured in the UE.

Test Environment: Normal, as defined in TS 38.508-1 [6] clause 4.1.

Frequencies to be tested: Low Range, as defined in TS 38.508-1 [6] clause 4.3.1.8.

Channel Bandwidths to be tested: As specified per test number in Table 11.1.9.1.1.0-2 as defined in TS 38.508-1 [6] clause 4.3.1.8.

1. Connect the SS, the faders, and the AWGN noise source to the UE antenna connectors, connect the SS COM port to the UE COM port, and connect the GNSS simulator to the UE GNSS RX antenna connector as shown in TS 38.508-1 [6] Annex A, Figure A.3.1.9.1(TE part) and Figure A.3.2.7.1 (UE part).
2. The parameter settings for the V2X sidelink transmission over PC5 interface are pre-configured according to TS 38.508-1 [6] clause 4.10.1. Message content exceptions are defined in clause 11.1.9.1_1.1.3.3.
3. Sidelink physical channels and signals are initially set up according to Table 11.1.1.2-1, Table 11.1.9.1.1.0-1 and Annex A.6 as appropriate.
4. Propagation conditions are set according to Annex B.0.
5. Determine the number of sidelink UEs, i.e. N, as follows:
 - N = 5 if pc_psfch_RxNumber_n5 = true;
 - N = 15 if pc_psfch_RxNumber_n15 = true;
 - N = 25 if pc_psfch_RxNumber_n25 = true;
 - N = 32 if pc_psfch_RxNumber_n32 = true;
 - N = 35 if pc_psfch_RxNumber_n35 = true;
 - N = 45 if pc_psfch_RxNumber_n45 = true;
 - N = 50 if pc_psfch_RxNumber_n50 = true;
 - N = 64 if pc_psfch_RxNumber_n64 = true;
6. Ensure the UE is in state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the transmitting UE and operates in ACK/NACK HARQ groupcast mode. Message contents are defined in clause 11.1.9.1_1.1.3.3.
7. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1. Wait for the UE to acquire the GNSS signal.

11.1.9.1_1.1.3.2 Test procedure

1. The UE under test transmits PSCCH/PSSCH in every PSCCH/PSSCH duration for NR sidelink communication according to *SL-PreconfigurationNR*. The Sidelink UEs receive the PSSCH sent by the UE under test and send PSFCH. Information transmitted in each PSFCH is randomly selected from Option A, Option B and Option C with probability of 50%, 25% and 25% respectively. Transmitted PSFCHs are related to one PSSCH which is transmitted by tested UE and occupies all the subchannels.
 - Option A: All the UEs in the group transmit ACKs
 - Option B: One UE transmits NACK and the rest of UEs transmit ACKs. The PSFCH resource index with NACK is random per slot
 - Option C: One UE transmits nothing (i.e. DTX) and the rest of UEs transmit ACKs. The PSFCH resource index of the DTX is random per slot.
2. Set the parameters of the bandwidth, MCS, reference channel, the propagation condition, the correlation matrix and the SNR according to Table 11.1.9.1_1.1.4-1 as appropriate.
3. Measure probability of success detection slot with ACK only, and probability of success detection slot with NACK or DTX according to the test method described in Annex G.5 for a duration sufficient to achieve statistical significance. Pass the UE if the measured probability of success detection slot with ACK only, and probability of success detection slot with NACK or DTX are no less than the reference value in Table 11.1.9.1.1_1.1.4-1. Otherwise fail the UE.
4. Repeat steps from 1 to 3 for each subtest in Table 11.1.9.1.1_1.1.4-1 as appropriate.

11.1.9.1.1_1.3.3 Message contents

Message contents are according to TS 38.508-1 [6] clause 5.4.3 with the following exceptions.

Table 11.1.9.1.1_1.3.3-1: SL-ResourcePool

Derivation Path: TS 38.508-1 [6] Table 5.4.3-1			
Information Element	Value/remark	Comment	Condition
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-PSFCH-Config-r16 CHOICE {			
setup SEQUENCE {			
sl-PSFCH-Period-r16	sl1		
}			
}			
}			

11.1.9.1.1_1.4 Test Requirements

For the parameters specified in Table 11.1.9.1.0-1 and SNR specified in Table 11.1.9.1.1_1.4-1, the probability of success detection slot with ACK only, and probability of success detection slot with NACK or DTX obtained in step 3 shall be no less the reference value specified in Table 11.1.9.1.1_1.4-1.

Table 11.1.9.1.1_1.4-1: Test performance requirements

Test Number	Bandwidth (MHz) / Subcarrier spacing(kHz)	Propagation Channel	Reference value	
			Probability of success detection slot with ACK only	Probability of success detection slot with NACK or DTX
1	40 / 30	Static propagation condition without external noise	99	99
Note 1: The probability of success detection slot with ACK only is the probability that the corresponding PSSCH is not retransmitted when Option A is selected. Note 2: The probability of success detection slot with NACK or DTX is the probability that the corresponding PSSCH is retransmitted when Option B or option C is selected.				

Annex A (normative): Measurement channels

A.1 General

A.1.1 Throughput definition

The throughput values defined in the measurement channels specified in Annex A, are calculated and are valid per codeword. For multi-codeword transmissions, the throughput referenced in the minimum requirements is the sum of throughputs of all codewords.

A.1.2 TDD UL-DL configurations for FR1

TDD UL-DL configurations for performance requirements are provided in Tables A.1.2-1, A.1.2-2, and A.1.2-3.

Table A.1.2-1: TDD UL-DL configuration for SCS 15 kHz

Parameter		Unit	UL-DL pattern
			FR1.15-1
TDD Slot Configuration pattern (Note 1)			DDDSU
Special Slot Configuration (Note 2)			10D+2G+2U
<i>referenceSubcarrierSpacing</i>		kHz	15
pattern1	<i>dl-UL-TransmissionPeriodicity</i>	ms	5
	<i>nrofDownlinkSlots</i>		3
	<i>nrofDownlinkSymbols</i>		10
	<i>nrofUplinkSlot</i>		1
	<i>nrofUplinkSymbols</i>		2
The number of slots between PDSCH and corresponding HARQ-ACK information (Note 3)			4 if $\text{mod}(i,5) = 0$ 3 if $\text{mod}(i,5) = 1$ 2 if $\text{mod}(i,5) = 2$ 6 if $\text{mod}(i,5) = 3$
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.			
Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information.			
Note 3: i is the slot index per frame; $i = \{0, \dots, 9\}$.			

Table A.1.2-2: TDD UL-DL configuration for SCS 30 kHz

Parameter		Unit	UL-DL pattern					
			FR1.30-1	FR1.30-2	FR1.30-3	FR1.30-4	FR1.30-5	FR1.30-6
TDD Slot Configuration pattern (Note 1)			7DS2U	DDDSU	DDDSUDDSUU	DDDSUDDDD	DSUU	DS ₁ S ₂ U
Special Slot Configuration (Note 2)			6D+4G+4U	10D+2G+2U	10D+2G+2U	6D+4G+4U	12D+2G	S1: 10D+2G+2U S2: 12D+2G+0U
<i>referenceSubcarrierSpacing</i>		kHz	30	30	30	30	30	30
pattern1	<i>dl-UL-TransmissionPeriodicity</i>	ms	5	2.5	2.5	3	2	1
	<i>nrofDownlinkSlots</i>		7	3	3	3	1	1
	<i>nrofDownlinkSymbols</i>		6	10	10	6	12	10
	<i>nrofUplinkSlot</i>		2	1	1	2	2	0
	<i>nrofUplinkSymbols</i>		4	2	2	4	0	2
pattern2	<i>dl-UL-TransmissionPeriodicity</i>	ms	N/A	N/A	2.5	2	N/A	1
	<i>nrofDownlinkSlots</i>		N/A	N/A	2	4	N/A	0
	<i>nrofDownlinkSymbols</i>		N/A	N/A	10	0	N/A	12
	<i>nrofUplinkSlot</i>		N/A	N/A	2	0	N/A	1
	<i>nrofUplinkSymbols</i>		N/A	N/A	2	0	N/A	0
The number of slots between PDSCH and corresponding HARQ-ACK information (Note 3)			8 if mod(i,10) = 0 7 if mod(i,10) = 1 6 if mod(i,10) = 2 5 if mod(i,10) = 3 5 if mod(i,10) = 4 4 if mod(i,10) = 5 3 if mod(i,10) = 6 2 if	4 if mod(i,5) = 0 3 if mod(i,5) = 1 2 if mod(i,5) = 2 6 if mod(i,5) = 3	4 if mod(i,10) = 0 3 if mod(i,10) = 1 2 if mod(i,10) = 2 5 if mod(i,10) = 3 3 if mod(i,10) = 5 3 if mod(i,10) = 6 2 if mod(i,10) = 7	5 if mod(i,10) = 0 4 if mod(i,10) = 1 3 if mod(i,10) = 2 2 if mod(i,10) = 3 8 if mod(i,10) = 6 7 if mod(i,10) = 7 6 if mod(i,10) = 8 5 if mod(i,10) = 9	3 if mod(i,4) = 0 2 if mod(i,4) = 1	3 if mod(i,4) = 0 2 if mod(i,4) = 1 3 if mod(i,4) = 2

		$\text{mod}(i,10)$ $= 7$					
Note 1:	D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.						
Note 2:	D, G, U denote DL, guard and UL symbols, respectively. The field is for information.						
Note 3:	i is the slot index per frame; $i = \{0, \dots, 19\}$						

Table A.1.2-2a: TDD UL-DL configuration for SCS 30 kHz for DCI-based dynamic UL/DL detection

Parameter		Unit	UL-DL pattern FR1.30-1A
TDD Slot Configuration pattern (Note 1)			7DS2U
Special Slot Configuration (Note 2)			6D+4G+4U
<i>referenceSubcarrierSpacing</i>		kHz	N/A
pattern1 (Note 4)	<i>dl-UL-TransmissionPeriodicity</i>	ms	N/A
	<i>nrofDownlinkSlots</i>		N/A
	<i>nrofDownlinkSymbols</i>		N/A
	<i>nrofUplinkSlot</i>		N/A
	<i>nrofUplinkSymbols</i>		N/A
PDCCH DCI Configuration			
	DCI Format		1-1 for slot indices with $\text{mod}(i,10) = 0,1,2,3,4,5,6,7$
	Scheduled Grant		Symbol 2-13 for slot indices with $\text{mod}(i,10) = 0,1,2,3,4,5,6$ and Symbol 2-5 for slot indices with $\text{mod}(i,10) = 7$
The number of slots between PDSCH and corresponding HARQ-ACK information (Note 3) (PDSCH-to-HARQ-timing-indicator)			8 if $\text{mod}(i,10) = 0$ 7 if $\text{mod}(i,10) = 1$ 6 if $\text{mod}(i,10) = 2$ 5 if $\text{mod}(i,10) = 3$ 5 if $\text{mod}(i,10) = 4$ 4 if $\text{mod}(i,10) = 5$ 3 if $\text{mod}(i,10) = 6$ 2 if $\text{mod}(i,10) = 7$
<p>Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.</p> <p>Note 2: D, G and U denote DL, guard and UL symbols, respectively. The field is for information.</p> <p>Note 3: i is the slot index per frame; $i = \{0, \dots, 19\}$</p> <p>Note 4: Do not configure <i>tdd-UL-DL-ConfigurationCommon</i> using RRC configuration.</p>			

Table A.1.2-2b: TDD UL-DL configuration for SCS 30 kHz for PDSCH on band with shared spectrum access

Parameter		Unit	UL-DL pattern FR1.30-7
TDD Slot Configuration pattern (Note 1)			7DS2U
Special Slot Configuration (Note 2)			6D+4G+4U
<i>referenceSubcarrierSpacing</i>		kHz	30
Pattern 1	<i>dl-UL-TransmissionPeriodicity</i>	ms	5
	<i>nrofDownlinkSlots</i>	slot	7
	<i>nrofDownlinkSymbols</i>	symbol	6
	<i>nrofUplinkSlot</i>	slot	2
	<i>nrofUplinkSymbols</i>	symbol	4
Pattern 2	<i>dl-UL-TransmissionPeriodicity</i>	ms	N/A
	<i>nrofDownlinkSlots</i>		N/A
	<i>nrofDownlinkSymbols</i>		N/A
	<i>nrofUplinkSlot</i>		N/A
	<i>nrofUplinkSymbols</i>		N/A

The number of slots between PDSCH and corresponding HARQ-ACK information (Note 3)		8 if $\text{mod}(i,10) = 0$ 7 if $\text{mod}(i,10) = 1$ 6 if $\text{mod}(i,10) = 2$ 5 if $\text{mod}(i,10) = 3$ 4 if $\text{mod}(i,10) = 4$ 3 if $\text{mod}(i,10) = 5$ 2 if $\text{mod}(i,10) = 6$
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information. Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information. Note 3: i is the slot index of all slots in every 5ms $i = \{0, \dots, 9\}$ Note 4: The slot $i, \text{mod}(i,10)=9$ is idle slot with no UL transmission.		

Table A.1.2-2c: TDD UL-DL configuration for SCS 30 kHz for ATG

Parameter	Unit	UL-DL pattern
		FR1.30-8
TDD Slot Configuration pattern (Note 1)		30D4S6U
Special Slot Configuration (Note 2)		14G
<i>referenceSubcarrierSpacing</i>	kHz	30
Pattern 1	<i>dl-UL-TransmissionPeriodicity</i>	ms
	<i>nrofDownlinkSlots</i>	slot
	<i>nrofDownlinkSymbols</i>	symbol
	<i>nrofUplinkSlot</i>	slot
	<i>nrofUplinkSymbols</i>	symbol
Pattern 2	<i>dl-UL-TransmissionPeriodicity</i>	ms
	<i>nrofDownlinkSlots</i>	
	<i>nrofDownlinkSymbols</i>	
	<i>nrofUplinkSlot</i>	
	<i>nrofUplinkSymbols</i>	
The number of slots between PDSCH and corresponding HARQ-ACK information for UE supporting outOfOrderOperationDL-r16 (Note 3)		34 if $\text{mod}(i,40) = 0, 1, 2, 3, 4, 5$ 28 if $\text{mod}(i,40) = 6, 7, 8, 9, 10, 11$ 22 if $\text{mod}(i,40) = 12, 13, 14, 15, 16, 17$ 16 if $\text{mod}(i,40) = 18, 19, 20, 21, 22, 23$ 10 if $\text{mod}(i,40) = 24, 25, 26, 27, 28, 29$
The number of slots between PDSCH and corresponding HARQ-ACK information for UE not supporting outOfOrderOperationDL-r16 (Note 3)		33 if $\text{mod}(i,40) = 1$ 30 if $\text{mod}(i,40) = 4, 5$ 26 if $\text{mod}(i,40) = 9, 10$ 22 if $\text{mod}(i,40) = 14, 15$ 18 if $\text{mod}(i,40) = 19, 20$ 14 if $\text{mod}(i,40) = 24, 25$ 11 if $\text{mod}(i,40) = 28$ 10 if $\text{mod}(i,40) = 29$
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information. Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information. Note 3: i is the slot index of all slots in every 20ms, $i = \{0, \dots, 39\}$		

A.1.3 TDD UL-DL configurations for FR2

TDD UL-DL configurations for performance requirements are provided in Tables A.1.3-1, A.1.3-2.

Table A.1.3-1: TDD UL-DL configuration for SCS 60 kHz

Parameter	Unit	UL-DL pattern
		FR2.60-1
TDD Slot Configuration pattern (Note 1)		DDSU
Special Slot Configuration (Note 2)		11D+3G+0U
<i>referenceSubcarrierSpacing</i>	kHz	60
pattern1	<i>dl-UL-TransmissionPeriodicity</i>	ms
	<i>nrofDownlinkSlots</i>	
	<i>nrofDownlinkSymbols</i>	

	<i>nrofUplinkSlot</i>		1
	<i>nrofUplinkSymbols</i>		0
The number of slots between PDSCH and corresponding HARQ-ACK information (Note 3)			3 if mod(i,4) = 0 2 if mod(i,4) = 1 5 if mod(i,4) = 2
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.			
Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information.			
Note 3: i is the slot index per frame; i = {0,...,39}			

Table A.1.3-2: TDD UL-DL configuration for SCS 120 kHz

Parameter		Unit	UL-DL pattern	
			FR2.120-1	FR2.120-2
TDD Slot Configuration pattern (Note 1)			DDDSU	DDSU
Special Slot Configuration (Note 2)			10D+2G+2U	11D+3G+0U
<i>referenceSubcarrierSpacing</i>		kHz	120	120
pattern1	<i>dl-UL-TransmissionPeriodicity</i>	ms	0.625	0.5
	<i>nrofDownlinkSlots</i>		3	2
	<i>nrofDownlinkSymbols</i>		10	11
	<i>nrofUplinkSlot</i>		1	1
	<i>nrofUplinkSymbols</i>		2	0
The number of slots between PDSCH and corresponding HARQ-ACK information(Note 3)			4 if mod(i,5) = 0 3 if mod(i,5) = 1 2 if mod(i,5) = 2 6 if mod(i,5) = 3	3 if mod(i,4) = 0 2 if mod(i,4) = 1 5 if mod(i,4) = 2
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.				
Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information.				
Note 3: i is the slot index per frame; i = {0,...,79}				

Table A.1.3-2a: TDD UL-DL configuration for SCS 120 kHz for DCI-based dynamic UL/DL detection

Parameter		Unit	UL-DL pattern
			FR2.120-1A
TDD Slot Configuration pattern (Note 1)			DDDSU
Special Slot Configuration (Note 2)			10D+2G+2U
<i>referenceSubcarrierSpacing</i>		kHz	N/A
pattern1 (Note 4)	<i>dl-UL-TransmissionPeriodicity</i>	ms	N/A
	<i>nrofDownlinkSlots</i>		N/A
	<i>nrofDownlinkSymbols</i>		N/A
	<i>nrofUplinkSlot</i>		N/A
	<i>nrofUplinkSymbols</i>		N/A
PDCCH DCI Configuration			
	DCI Format		1-1 for slot indices with mod(i,5) = 0,1,2,3
	Scheduled Grant		Symbol 1-13 for slot indices with mod(i,5) = 0,1,2 and Symbol 1-9 for slot indices with mod(i,5) = 3
The number of slots between PDSCH and corresponding HARQ-ACK information(Note 3)			4 if mod(i,5) = 0 3 if mod(i,5) = 1

		2 if $\text{mod}(i,5) = 2$ 6 if $\text{mod}(i,5) = 3$
Note 1:	D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.	
Note 2:	D, G and U denote DL, guard and UL symbols, respectively. The field is for information.	
Note 3:	i is the slot index per frame; $i = \{0, \dots, 79\}$	
Note 4:	Do not configure <i>tdd-UL-DL-ConfigurationCommon</i> using RRC configuration.	

A.2 UL Reference measurement channels

A.2.1 General

The measurement channels in the following subclauses are defined to test the performance requirements where PUSCH is required. The measurement channels represent example configurations of physical channels for different data rates.

A.2.2 Reference measurement channels for FDD

A.2.2.1 RMC for Sustained downlink data rate

A.2.2.1.1 CP-OFDM 64QAM

Table A.2.2.1.1-1: Reference Channels for CP-OFDM 64QAM for 15kHz SCS

Parameter	Channel bandwidth	Subcarrier Spacing	Allocated resource blocks	CP-OFDM Symbols per slot (Note 1)	Modulation	MCS Index (Note 2)	Target Coding Rate	Payload size	Transport block CRC	LDPC Base Graph	Number of code blocks per slot (Note 3)	Total number of bits per slot	Total modulated symbols per slot
Unit	MHz	KHz						Bits	Bits			Bits	
	5	15	25	11	64QAM	19	1/2	9992	24	1	2	19800	3300
	10	15	52	11	64QAM	19	1/2	21000	24	1	3	41184	6864
	15	15	79	11	64QAM	19	1/2	31752	24	1	4	62568	10428
	20	15	106	11	64QAM	19	1/2	42016	24	1	5	83952	13992
	25	15	133	11	64QAM	19	1/2	53288	24	1	7	105336	17556
	30	15	160	11	64QAM	19	1/2	63528	24	1	8	126720	21120
	40	15	216	11	64QAM	19	1/2	86040	24	1	11	171072	28512
	50	15	270	11	64QAM	19	1/2	108552	24	1	13	213840	35640

Note 1: PUSCH mapping Type-A and single-symbol DM-RS configuration Type-1 with 2 additional DM-RS symbols, such that the DM-RS positions are set to symbols 2, 7, 11. DMRS is [TDM'ed] with PUSCH data.

Note 2: MCS Index is based on MCS table 5.1.3.1-1 defined in TS 38.214 [12].

Note 3: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

Table A.2.2.1.1-2: Reference Channels for CP-OFDM 64QAM for 30kHz SCS

Parameter	Channel bandwidth	Subcarrier Spacing	Allocated resource blocks	CP-OFDM Symbols per slot (Note 1)	Modulation	MCS Index (Note 2)	Target Coding Rate	Payload size	Transport block CRC	LDPC Base Graph	Number of code blocks per slot (Note 3)	Total number of bits per slot	Total modulated symbols per slot
Unit	MHz	KHz						Bits	Bits			Bits	
	10	30	24	11	64QAM	19	1/2	9480	24	1	2	19008	3168
	15	30	38	11	64QAM	19	1/2	15112	24	1	2	30096	5016
	20	30	51	11	64QAM	19	1/2	20496	24	1	3	40392	6732
	25	30	65	11	64QAM	19	1/2	26120	24	1	4	51480	8580
	30	30	78	11	64QAM	19	1/2	31240	24	1	4	61776	10296

	40	30	106	11	64QAM	19	1/2	42016	24	1	5	83952	13992
	50	30	133	11	64QAM	19	1/2	53288	24	1	7	105336	17556
	60	30	162	11	64QAM	19	1/2	64552	24	1	8	128304	21384
	80	30	217	11	64QAM	19	1/2	86040	24	1	11	171864	28644
	90	30	245	11	64QAM	19	1/2	98376	24	1	12	194040	32340
	100	30	273	11	64QAM	19	1/2	108552	24	1	13	216216	36036

Note 1: PUSCH mapping Type-A and single-symbol DM-RS configuration Type-1 with 2 additional DM-RS symbols, such that the DM-RS positions are set to symbols 2, 7, 11. DMRS is [TDM'ed] with PUSCH data.

Note 2: MCS Index is based on MCS table 5.1.3.1-1 defined in TS 38.214 [12].

Note 3: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

A.2.3 Reference measurement channels for TDD

A.2.3.1 RMC for Sustained downlink data rate

A.2.3.1.1 CP-OFDM 16QAM

Table A.2.3.1.1-1: Reference Channels for CP-OFDM 16QAM for 15kHz SCS

Parameter	Channel bandwidth	Subcarrier Spacing	Allocated resource blocks	CP-OFDM Symbols per slot (Note 1)	Modulation	MCS Index (Note 2)	Target Coding Rate	Payload size for slots 4 and 9	Transport block CRC	LDPC Base Graph	Number of code blocks per slot for slots 4 and 9 (Note 3)	Total number of bits per slot for slots 4 and 9	Total modulated symbols per slot for slots 4 and 9
Unit	MHz	KHz						Bits	Bits			Bits	
	5-50	15	1	11	16QAM	10	1/3	176	16	2	1	528	132
	5	15	13	11	16QAM	10	1/3	2280	16	2	1	6864	1716
	5	15	25	11	16QAM	10	1/3	4352	24	1	1	13200	3300
	10	15	26	11	16QAM	10	1/3	4480	24	1	1	13728	3432
	10	15	52	11	16QAM	10	1/3	9224	24	1	2	27456	6864
	15	15	40	11	16QAM	10	1/3	7040	24	1	1	21120	5280
	15	15	79	11	16QAM	10	1/3	13832	24	1	2	41712	10428
	20	15	53	11	16QAM	10	1/3	9224	24	1	2	27984	6996
	20	15	106	11	16QAM	10	1/3	18432	24	1	3	55968	13992
	25	15	67	11	16QAM	10	1/3	11784	24	1	2	35376	8844
	25	15	133	11	16QAM	10	1/3	23040	24	1	3	70224	17556
	30	15	80	11	16QAM	10	1/3	14088	24	1	2	42240	10560
	30	15	160	11	16QAM	10	1/3	28168	24	1	4	84480	21120

	40	15	108	11	16QAM	10	1/3	18960	24	1	3	57024	14256
	40	15	216	11	16QAM	10	1/3	37896	24	1	5	114048	28512
	50	15	135	11	16QAM	10	1/3	23568	24	1	3	71280	17820
	50	15	270	11	16QAM	10	1/3	47112	24	1	6	142560	35640

Note 1: PUSCH mapping Type-A and single-symbol DM-RS configuration Type-1 with 2 additional DM-RS symbols, such that the DM-RS positions are set to symbols 2, 7, 11. DMRS is [TDM'ed] with PUSCH data.

Note 2: MCS Index is based on MCS table 5.1.3.1-1 defined in TS 38.214 [12].

Note 3: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit)

Table A.2.3.1.1-2: Reference Channels for CP-OFDM 16QAM for 30kHz SCS

Parameter	Channel bandwidth	Subcarrier Spacing	Allocated resource blocks	CP-OFDM Symbols per slot (Note 1)	Modulation	MCS Index (Note 2)	Target Coding Rate	Payload size for slots 8, 9, 18 and 19	Transport block CRC	LDPC Base Graph	Number of code blocks per slot for slots 8, 9, 18 and 19 (Note 3)	Total number of bits per slot for slots 8, 9, 18 and 19	Total modulated symbols per slot for slots 8, 9, 18 and 19
Unit	MHz	KHz						Bits	Bits			Bits	
	10-50	30	1	11	16QAM	10	1/3	176	16	2	1	528	132
	10	30	12	11	16QAM	10	1/3	2088	16	2	1	6336	1584
	10	30	24	11	16QAM	10	1/3	4224	24	1	1	12672	3168
	15	30	19	11	16QAM	10	1/3	3368	16	2	1	10032	2508
	15	30	38	11	16QAM	10	1/3	6656	24	1	1	20064	5016
	20	30	26	11	16QAM	10	1/3	4480	24	1	1	13728	3432
	20	30	51	11	16QAM	10	1/3	8968	24	1	2	26928	6732
	25	30	33	11	16QAM	10	1/3	5760	24	1	1	17424	4356
	25	30	65	11	16QAM	10	1/3	11272	24	1	2	34320	8580
	30	30	39	11	16QAM	10	1/3	6784	24	1	1	20592	5148
	30	30	78	11	16QAM	10	1/3	13576	24	1	2	41184	10296
	40	30	53	11	16QAM	10	1/3	9224	24	1	2	27984	6996
	40	30	106	11	16QAM	10	1/3	18432	24	1	3	55968	13992
	50	30	67	11	16QAM	10	1/3	11784	24	1	2	35376	8844
	50	30	133	11	16QAM	10	1/3	23040	24	1	3	70224	17556
	60	30	81	11	16QAM	10	1/3	14088	24	1	2	42768	10692
	60	30	162	11	16QAM	10	1/3	28168	24	1	4	85536	21384
	80	30	109	11	16QAM	10	1/3	18960	24	1	3	57552	14388
	80	30	217	11	16QAM	10	1/3	37896	24	1	5	114576	28644
	90	30	123	11	16QAM	10	1/3	21504	24	1	3	64944	16236
	90	30	245	11	16QAM	10	1/3	43032	24	1	6	129360	32340
	100	30	137	11	16QAM	10	1/3	24072	24	1	3	72336	18084
	100	30	273	11	16QAM	10	1/3	48168	24	1	6	144144	36036

- Note 1: PUSCH mapping Type-A and single-symbol DM-RS configuration Type-1 with 2 additional DM-RS symbols, such that the DM-RS positions are set to symbols 2, 7, 11. DMRS is [TDM'ed] with PUSCH data.
- Note 2: MCS Index is based on MCS table 5.1.3.1-1 defined in TS 38.214 [12].
- Note 3: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

A.3 DL reference measurement channels

A.3.1 General

The transport block size (TBS) determination procedure is described in clause 5.1.3.2 of TS 38.214 [12].

Unless otherwise stated, no user data is scheduled on slot #0 within 20 ms in order to avoid SSB and PDSCH transmissions in one slot and simplify test configuration.

Unless otherwise stated, SIB1 transmission shall only be scheduled during call setup to avoid SIB1 and PDSCH transmissions in the same slot.

A.3.2 Reference measurement channels for PDSCH performance requirements

For PDSCH reference channels if more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit).

A.3.2.1 FDD

A.3.2.1.1 Reference measurement channels for SCS 15 kHz FR1

Table A.3.2.1.1-1: PDSCH Reference Channel for FDD (QPSK)

Parameter	Unit	Value				
		R.PDSCH.1-1.1 FDD	R.PDSCH.1-1.2 FDD	R.PDSCH.1-1.3 FDD	R.PDSCH.1-1.4 FDD	R.PDSCH.1-1.5 FDD
Reference channel						
Channel bandwidth	MHz	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	6	52	52	25
Number of consecutive PDSCH symbols		12	12	7	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM _{Low SE}	64QAM
MCS index		4	4	4	14	4
Modulation		QPSK	QPSK	QPSK	QPSK	QPSK
Target Coding Rate		0.30	0.30	0.30	0.59	0.30
Number of MIMO layers		1	1	1	1	1
Number of DMRS REs		18	12	12	12	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	3904	480	2280	8064	1928
Transport block CRC per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	24	16	16	24	16
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	CBs	1	1	1	1	1
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 10, 11$	Bits	12480	1512	6864	13104	6000
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	13104	1584	7488	13728	6300
Max. Throughput averaged over 2 frames	Mbps	3.709	0.456	2.166	7.661	1.832
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2:	Slot i is slot index per 2 frames.					

Table A.3.2.1.1-2: PDSCH Reference Channel for FDD (16QAM)

Parameter	Unit	Value					
		R.PDSCH.1-2.1 FDD	R.PDSCH.1-2.2 FDD	R.PDSCH.1-2.3 FDD	R.PDSCH.1-2.4 FDD	R.PDSCH.1-2.5 FDD	R.PDSCH.1-2.6 FDD
Reference channel							
Channel bandwidth	MHz	10	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	52	52	52	52
Number of consecutive PDSCH symbols		12	12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM _{Low SE}	64QAM
MCS index		13	13	13	13	19	16
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.54	0.64
Number of MIMO layers		1	2	3	4	2	1
Number of DMRS REs		12	12	24	24	12	12
Overhead for TBS determination		0	0	0	0	0	0
Information Bit Payload per Slot							
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	13064	26120	35856	48168	29704	17424
Transport block CRC per Slot							
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	24	24	24	24	24	24
Number of Code Blocks per Slot							
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	CBs	2	4	5	6	4	3
Binary Channel Bits Per Slot							
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slots $i = 10, 11$	Bits	26208	52416	71136	94848	49920	26208
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	27456	54912	74880	99840	54912	27456
Max. Throughput averaged over 2 frames	Mbps	12.411	24.814	34.063	45.760	28.219	16.553
NOTE 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.							
NOTE 2: Slot i is slot index per 2 frames.							

Table A.3.2.1.1-3: PDSCH Reference Channel for FDD (64QAM)

Parameter	Unit	Value							
		R.PDSC H.1-3.1 FDD	R.PDSC H.1-3.2 FDD	R.PDSC H.1-3.3 FDD	R.PDSC H.1-3.4 FDD	R.PDSC H.1-3.5 FDD	R.PDSC H.1-3.6 FDD	R.PDSC H.1-3.7 FDD	R.PDSC H.1-3.8 FDD (Note 5)
Reference channel									
Channel bandwidth	MHz	10	10	10	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	26 (Note 3)	26 (Note 4)	52	52	52	52
Number of consecutive PDSCH symbols		12	12	12	12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		19	19	19	19	19	22	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.51	0.51	0.51	0.51	0.51	0.65	0.43	0.43
Number of MIMO layers		2	2	2	2	1	1	4	4
Number of DMRS REs		12	24	24	24	12	12	24	48
Overhead for TBS determination		0	0	0	0	0	0	0	0
Information Bit Payload per Slot									
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	42016	37896	18960	18960	21000	26632	64552	51216
Transport block CRC per Slot									
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A		N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	24	24	24	24	24	24	24	24
Number of Code Blocks per Slot									
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	N/A		N/A	N/A
For Slots $i = 1, \dots, 19$	CBs	5	5	3	3	3	4	8	7
Binary Channel Bits Per Slot									
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A		N/A	N/A
For Slots $i = 10, 11$	Bits	78624	67392	33696	33696	39312	39312	142272	112320
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	82368	74880	37440	37440	41184	41184	149760	119808
Max. Throughput averaged over 2 frames	Mbps	39.915	36.001	18.012	18.012	19.950	25.300	61.32	48.66
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.									
Note 2: Slot i is slot index per 2 frames.									
Note 3: PDSCH is scheduled in PRB numbers from 0 to 25.									
Note 4: PDSCH is scheduled in PRB numbers from 26 to 51.									
Note 5: Two codewords and given per codeword									

Table A.3.2.1.1-4: PDSCH Reference Channel for FDD (256QAM)

Parameter	Unit	Value			
		R.PDSCH.1-4.1 FDD	R.PDSCH.1-4.2 FDD		
Reference channel		R.PDSCH.1-4.1 FDD	R.PDSCH.1-4.2 FDD		
Channel bandwidth	MHz	10	10		
Subcarrier spacing	kHz	15	15		
Number of allocated resource blocks	PRBs	52	52		
Number of consecutive PDSCH symbols		12	12		
Allocated slots per 2 frames	Slots	19	19		
MCS table		256QAM	256QAM		
MCS index		24	20		
Modulation		256QAM	256QAM		
Target Coding Rate		0.82	0.67		
Number of MIMO layers		1	1		
Number of DMRS REs		12	12		
Overhead for TBS determination		0	0		
Information Bit Payload per Slot					
For Slot i = 0	Bits	N/A	N/A		
For Slots i = 1, ..., 19	Bits	45096	36896		
Transport block CRC per Slot					
For Slot i = 0	Bits	N/A	N/A		
For Slots i = 1, ..., 19	Bits	24	24		
Number of Code Blocks per Slot					
For Slot i = 0	CBs	N/A	N/A		
For Slots i = 1, ..., 19	CBs	6	5		
Binary Channel Bits Per Slot					
For Slot i = 0	Bits	N/A	N/A		
For Slots i = 10, 11	Bits	52416	52416		
For Slots i = 1, ..., 9, 12, ..., 19	Bits	54912	54912		
Max. Throughput averaged over 2 frames	Mbps	42.841	35.051		
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.				
Note 2:	Slot i is slot index per 2 frames.				

Table A.3.2.1.1-5: PDSCH Reference Channel for FDD and CSI-RS overlapped with PDSCH

Parameter	Unit	Value			
		R.PDSCH.1-5.1 FDD			
Reference channel		R.PDSCH.1-5.1 FDD			
Channel bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Number of allocated resource blocks	PRBs	52			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames	Slots	19			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		2			
Number of DMRS REs		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot i = 0	Bits	N/A			
For Slots i = 1, ..., 19	Bits	26120			
Transport block CRC per Slot					
For Slot i = 0	Bits	N/A			
For Slots i = 1, ..., 19	Bits	24			
Number of Code Blocks per Slot					
For Slot i = 0	CBs	N/A			

For Slots $i = 1, \dots, 19$	CBs	4				
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A				
For Slots $i = 5, 15$	Bits	50752				
For Slots $i = 10$	Bits	48256				
For Slots $i = 11$	Bits	52416				
For Slots $i = 1, \dots, 4, 6, \dots, 9, 12, \dots, 14, 16, \dots, 19$	Bits	54912				
Max. Throughput averaged over 2 frames	Mbps	24.814				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						

Table A.3.2.1.1-6: PDSCH Reference Channel for FDD PMI reporting requirements

Parameter	Unit	Value				
		R.PDSCH.1 -6.1 FDD	R.PDSCH.1 -6.2 FDD	R.PDSCH.1 -6.3 FDD	R.PDSCH.1 -6.4 FDD	R.PDSCH.1- 6.5 FDD
Reference channel						
Channel bandwidth	MHz	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	52	52	25
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	15	15	15	15	15
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	20	13	13
Modulation		16QAM	16QAM	64QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.55	0.48	0.48
Number of MIMO layer		1	2	2	2	1
Number of DMRS REs (Note 3)		24	24	24	24	24
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i = \{0, \dots, 19\}$		N/A	N/A	N/A	N/A	N/A
For Non CSI-RS Slot i , if $\text{mod}(i,5) = \{0, 2, 3, 4\}$, $i = \{1, \dots, 19\}$	Bits	12040	24072	40976	24072	5760
Transport block CRC per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i = \{0, \dots, 19\}$		N/A	N/A	N/A	N/A	N/A
For Non CSI-RS Slot i , if $\text{mod}(i,5) = \{0, 2, 3, 4\}$, $i = \{1, \dots, 19\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	N/A
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i = \{0, \dots, 19\}$		N/A	N/A	N/A	N/A	N/A
For Non CSI-RS Slot i , if $\text{mod}(i,5) = \{0, 2, 3, 4\}$, $i = \{1, \dots, 19\}$	CBs	2	3	5	3	1
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i = \{0, \dots, 19\}$		N/A	N/A	N/A	N/A	N/A
For Slots $i = 10$	Bits	23712	47424	71136	44928	11400
For Non CSI-RS Slot i , if $\text{mod}(i,5) = \{0, 2, 3, 4\}$, $i = \{1, \dots, 9, 11, \dots, 19\}$	Bits	24960	49920	74880	49920	12000
Max. Throughput averaged over 2 frames	Mbps	9.030	18.054	30.732	18.054	4.320
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						
Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.						
Note 4: PDSCH is not scheduled on slots containing CSI-RS for CSI acquisition. No change to PDSCH scheduling for other type of CSI-RS slots.						

Table A.3.2.1.1-7: PDSCH Reference Channel for FDD LTE-NR coexistence scenario

Parameter	Unit	Value				
		R.PDSCH.1-7.1 FDD	R.PDSCH.1-7.2 FDD	R.PDSCH.1-7.3 FDD		
Reference channel						
Channel bandwidth	MHz	10	10	10		
Subcarrier spacing	kHz	15	15	15		
Number of allocated resource blocks	PRBs	52	52	52		
Number of consecutive PDSCH symbols		9	11	9		
Allocated slots per 2 frames	Slots	16	16	16		
MCS table		64QAM	64QAM	64QAM		
MCS index		4	4	13		
Modulation		QPSK	QPSK	16QAM		
Target Coding Rate		0.30	0.30	0.48		
Number of MIMO layers		1	1	1		
Number of DMRS REs		12	12	12		
Overhead for TBS determination		18	18	12		
Information Bit Payload per Slot						
For Slots $i = 0, 5, 10, 15$	Bits	N/A	N/A	N/A		
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	2472	3240	8456		
Transport block CRC per Slot						
For Slots $i = 0, 5, 10, 15$	Bits	N/A	N/A	N/A		
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	16	16	24		
Number of Code Blocks per Slot						
For Slots $i = 0, 5, 10, 15$	CBs	N/A	N/A	N/A		
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{0, \dots, 19\}$	CBs	1	1	2		
Binary Channel Bits Per Slot						
For Slots $i = 0, 5, 10, 15$	Bits	N/A	N/A	N/A		
For Slots $i = 11$	Bits	7760	10256	16224		
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	8384	10880	17472		
Max. Throughput averaged over 2 frames	Mbps	1.978	2.592	6.764		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						
Note 3: No user data is scheduled on slots with LTE PBCH/PSS/SSS						

Table A.3.2.1.1-8: PDSCH Reference Channel for FDD HST scenario

Parameter	Unit	Value				
		R.PDSCH.1-8.1 FDD	R.PDSCH.1-8.2 FDD	R.PDSCH.1-8.3 FDD	R.PDSCH.1-8.4 FDD	R.PDSCH.1-8.5 FDD
Reference channel						
Channel bandwidth	MHz	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	52	52	52
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	17	13	17	13
Modulation		16QAM	64QAM	16QAM	64QAM	16QAM
Target Coding Rate		0.48	0.43	0.48	0.43	0.48
Number of MIMO layers		1	1	2	2	2
Number of DMRS REs		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	12552	16896	25104	33816	25104

Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	2	3	3	5	5
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,11,12	Bits	24960	37440	49920	74880	47424
For Slots i = 3, ..., 10, 13, ..., 19	Bits	26208	39312	52416	78624	52416
Max. Throughput averaged over 2 frames	Mbps	11.924	16.0512	23.8488	32.1252	23.8488
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.1.1-9: PDSCH Reference Channel for FDD CC and CA scenario

Parameter	Unit	Value				
		R.PDSCH.1-9.1 FDD	R.PDSCH.1-9.2 FDD	R.PDSCH.1-9.3 FDD	R.PDSCH.1-9.4 FDD	R.PDSCH.1-9.5 FDD
Reference channel						
Channel bandwidth	MHz	5	15	20	25	30
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	25	79	106	133	160
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs		12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	12552	39936	53288	67584	79896
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	2	5	7	9	10
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	25200	79632	106848	134064	161280
For Slots i = 1, ..., 9, 12, ..., 19	Bits	26400	83424	111936	140448	168960
Max. Throughput averaged over 2 frames	Mbps	11.924	37.939	50.624	64.205	75.901
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.1.1-10: PDSCH Reference Channel for FDD CC and CA scenario

Parameter	Unit	Value
-----------	------	-------

Reference channel		R.PDSCH.1-10.1 FDD	R.PDSCH.1-10.2 FDD	R.PDSCH.1-10.3 FDD	R.PDSCH.1-10.4 FDD	
Channel bandwidth	MHz	40	50	35	45	
Subcarrier spacing	kHz	15	15	15	15	
Number of allocated resource blocks	PRBs	216	270	188	242	
Number of consecutive PDSCH symbols		12	12	12	12	
Allocated slots per 2 frames	Slots	19	19	19	19	
MCS table		64QAM	64QAM	64QAM	64QAM	
MCS index		13	13	13	13	
Modulation		16QAM	16QAM	16QAM	16QAM	
Target Coding Rate		0.48	0.48	0.48	0.48	
Number of MIMO layers		2	2	2	2	
Number of DMRS REs		12	12	12	12	
Overhead for TBS determination		0	0	0	0	
Information Bit Payload per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	
For Slots i = 1, ..., 19	Bits	108552	135296	94248	122976	
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	
For Slots i = 1, ..., 19	Bits	24	24	24	24	
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	
For Slots i = 1, ..., 19	CBs	13	17	12	15	
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	
For Slots i = 10, 11	Bits	217728	272160	189504	243936	
For Slots i = 1, ..., 9, 12, ..., 19	Bits	228096	285120	198528	255552	
Max. Throughput averaged over 2 frames	Mbps	103.124	128.531	89.536	116.827	
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.1.1-11: PDSCH Reference Channel for FDD

Parameter	Unit	Value			
Reference channel		R.PDSCH.1-11.1 FDD	R.PDSCH.1-11.2 FDD		
Channel bandwidth	MHz	10	10		
Subcarrier spacing	kHz	15	15		
Number of allocated resource blocks	PRBs	52	52		
Number of consecutive PDSCH symbols		12	12		
Allocated slots per 2 frames	Slots	18	18		
MCS table		64QAMLowSE	64QAMLowSE		
MCS index		19	19		
Modulation		16QAM	16QAM		
Target Coding Rate		0.54	0.54		
Number of MIMO layers		1	1		
Number of DMRS REs		12	12		
Overhead for TBS determination		0	0		
Information Bit Payload per Slot					
For Slot i = 0,1	Bits	N/A	N/A		
For Slots i = 2, ..., 19	Bits	14856	14856		
Transport block CRC per Slot					
For Slot i = 0,1	Bits	N/A	N/A		
For Slots i = 2, ..., 19	Bits	24	24		
Number of Code Blocks per Slot					
For Slot i = 0,1	CBs	N/A	N/A		
For Slots i = 2, ..., 19	CBs	2	2		
Binary Channel Bits Per Slot					

For Slot i = 0,1	Bits	N/A	N/A			
For Slots i = 10, 11	Bits	26208	24960			
For Slots i =2,..., 9, 12, ..., 19	Bits	27456	27456			
Max. Throughput averaged over 2 frames	Mbps	6.685 (NOTE 3)	6.685 (NOTE 4)			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						
Note 3: Throughput is calculated under assumption of aggregation factor 2.						
Note 4: Throughput is calculated under assumption of repetition number 2.						

Table A.3.2.1.1-12: PDSCH Reference Channel for FDD

Parameter	Unit	Value				
		R.PDSCH.1-12.1 FDD	R.PDSCH.1-12.2 FDD	R.PDSCH.1-12.3 FDD	R.PDSCH.1-12.4 FDD	R.PDSCH.1-12.5 FDD
Reference channel						
Channel bandwidth	MHz	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	40	25	12
Number of consecutive PDSCH symbols		2	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		4	13	13	19	19
Modulation		QPSK	16QAM	16QAM	64QAM	64QAM
Target Coding Rate		0.3	0.48	0.48	0.51	0.51
Number of MIMO layers		1	4	1	1	2
Number of DMRS REs		6	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						R4
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,..., 19	Bits	576	52224	9992	9992	9480
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,..., 19	Bits	16	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,..., 19	CBs	1	7	2	2	2
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	1872	104832	20160	18900	18144
For Slots i =1,..., 9, 12, ..., 19	Bits	1872	109824	21120	19800	19008
Max. Throughput averaged over 2 frames	Mbps	0.547	49.613	9.492	9.492	9.006
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.1.1-13: PDSCH Reference Channel for FDD HST-SFN with CA scenario

Parameter	Unit	Values				
		R.PDSCH.1-13.1 FDD	R.PDSCH.1-13.2 FDD	R.PDSCH.1-13.3 FDD	R.PDSCH.1-13.4 FDD	R.PDSCH.1-13.5 FDD
Reference channel						
Channel bandwidth	MHz	5	15	20	25	30
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	25	79	106	133	160
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM

Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	12040	37896	51216	64552	77896
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	2	5	7	8	10
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,11,12 (Note 3)	Bits	24000	77136	104352	131568	158784
For Slots i = 3, ..., 10, 13, ..., 19	Bits	25200	79632	106848	134064	161280
Max. Throughput averaged over 2 frames	Mbps	11.438	36.001	48.655	61.324	74.001
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.1.1-14: PDSCH Reference Channel for FDD HST-SFN with CA scenario

Parameter	Unit	Values			
		R.PDSCH.1-14.1 FDD	R.PDSCH.1-14.2 FDD	R.PDSCH.1-14.3 FDD	R.PDSCH.1-14.4 FDD
Reference channel					
Channel bandwidth	MHz	40	50	35	45
Subcarrier spacing	kHz	15	15	15	15
Number of allocated resource blocks	PRBs	216	270	188	242
Number of consecutive PDSCH symbols		12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2
Number of DMRS REs		18	18	18	18
Overhead for TBS determination		0	0	0	0
Information Bit Payload per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	104496	131176	90176	116792
Transport block CRC per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24
Number of Code Blocks per Slot					
For Slot i = 0	CBs	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	13	16	11	14
Binary Channel Bits Per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 1,2,11,12 (Note 3)	Bits	215232	269664	187008	241440
For Slots i = 3, ..., 10, 13, ..., 19	Bits	217728	272160	189504	243936

Max. Throughput averaged over 2 frames	Mbps	99.271	124.617	85.667	110.952	
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2:	Slot i is slot index per 2 frames.					
Note 3:	Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.					

Table A.3.2.1.1-15: PDSCH Reference Channel for FDD HST-DPS with CA scenario

Parameter	Unit	Values				
		R.PDSCH.1-15.1 FDD	R.PDSCH.1-15.2 FDD	R.PDSCH.1-15.3 FDD	R.PDSCH.1-15.4 FDD	R.PDSCH.1-15.5 FDD
Reference channel						
Channel bandwidth	MHz	5	15	20	25	30
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	25	79	106	133	160
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.43	0.43	0.43	0.43	0.43
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	16136	51216	67584	86040	104496
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	2	7	9	11	13
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,11,12 (Note 3)	Bits	36000	115704	156528	197352	238176
For Slots i = 3, ..., 10, 13, ..., 19	Bits	37800	119448	160272	201096	241920
Max. Throughput averaged over 2 frames	Mbps	15.3292	48.655	64.2048	81.738	99.2712
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2:	Slot i is slot index per 2 frames.					
Note 3:	Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.					

Table A.3.2.1.1-16: PDSCH Reference Channel for FDD HST-DPS with CA scenario

Parameter	Unit	Values			
		R.PDSCH.1-16.1 FDD	R.PDSCH.1-16.2 FDD	R.PDSCH.1-16.3 FDD	R.PDSCH.1-16.4 FDD
Reference channel					
Channel bandwidth	MHz	40	50	35	45
Subcarrier spacing	kHz	15	15	15	15
Number of allocated resource blocks	PRBs	216	270	188	242
Number of consecutive PDSCH symbols		12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17

Modulation		64QAM	64QAM	64QAM	64QAM	
Target Coding Rate		0.43	0.43	0.43	0.43	
Number of MIMO layers		2	2	2	2	
Number of DMRS REs		18	18	18	18	
Overhead for TBS determination		0	0	0	0	
Information Bit Payload per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slots $i = 1, \dots, 19$	Bits	139376	176208	120936	155776	
Transport block CRC per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slots $i = 1, \dots, 19$	Bits	24	24	24	24	
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	
For Slots $i = 1, \dots, 19$	CBs	17	21	15	19	
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slots $i = 1, 2, 11, 12$ (Note 3)	Bits	322848	404496	280512	362160	
For Slots $i = 3, \dots, 10, 13, \dots, 19$	Bits	326592	408240	284256	365904	
Max. Throughput averaged over 2 frames	Mbps	132.407	167.3976	114.8892	147.9872	
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						
Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.1.1-17: PDSCH Reference Channel for FDD (1024QAM)

Parameter	Unit	Value			
Reference channel		R.PDSCH.1-17.1 FDD			
Channel bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Number of allocated resource blocks	PRBs	52			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames	Slots	19			
MCS table		1024QAM			
MCS index		23			
Modulation		1024QAM			
Target Coding Rate		0.79			
Number of MIMO layers		1			
Number of DMRS REs		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 1, \dots, 19$	Bits	54296			
Transport block CRC per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 1, \dots, 19$	Bits	24			
Number of Code Blocks per Slot					
For Slot $i = 0$	CBs	N/A			
For Slots $i = 1, \dots, 19$	CBs	7			
Binary Channel Bits Per Slot					
For Slot $i = 0$	Bits	N/A			

For Slots $i = 10, 11$	Bits	65520			
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	68640			
Max. Throughput averaged over 2 frames	Mbps	51.581			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					

Table A.3.2.1.1-18: PDSCH Reference Channel for FDD CRS interference mitigation for NR scenario

Parameter	Unit	Value			
Reference channel		R.PDSCH.1-18.1 FDD			
Channel bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Number of allocated resource blocks	PRBs	52			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames	Slots	16			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots $i = 0, 5, 10, 15$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	13064			
Transport block CRC per Slot					
For Slots $i = 0, 5, 10, 15$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	24			
Number of Code Blocks per Slot					
For Slots $i = 0, 5, 10, 15$	CBs	N/A			
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{0, \dots, 19\}$	CBs	2			
Binary Channel Bits Per Slot					
For Slots $i = 0, 5, 10, 15$	Bits	N/A			
For Slots $i = 11$	Bits	22880			
For Slots i , if $\text{mod}(i, 5) = \{1, 2, 3, 4\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	24128			
Max. Throughput averaged over 2 frames	Mbps	10.4512			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					
Note 3: No user data is scheduled on slots with PBCH/PSS/SSS on the interference LTE cell					

Table A.3.2.1.1-19: PDSCH Reference Channel for FDD CRS interference mitigation for NR scenario for inter-RAT measurement enabled

Parameter	Unit	Value			
Reference channel		R.PDSCH.1-17.2 FDD			
Channel bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Number of allocated resource blocks	PRBs	52			
Number of consecutive PDSCH symbols		12			
Allocated slots per 4 frames	Slots	26			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			

Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs		12			
For Slots $i = 0,5,10,15,20,25,30,35$		N/A			
For Slots in measurement gap $i = 7,8,9,10,11,12$		N/A			
For Slots i , if $\text{mod}(i, 5) = \{1,2,3,4\}$ and $i \neq 7,8,9,11,12$		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots $i = 0,5,10,15,20,25,30,35$	Bits	N/A			
For Slots in measurement gap $i = 7,8,9,10,11,12$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{1,2,3,4\}$ and $i \neq 7,8,9,11,12$	Bits	13064			
Transport block CRC per Slot					
For Slots $i = 0,5,10,15,20,25,30,35$	Bits	N/A			
For Slots in measurement gap $i = 7,8,9,10,11,12$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{1,2,3,4\}$ and $i \neq 7,8,9,11,12$	Bits	24			
Number of Code Blocks per Slot					
For Slots $i = 0,5,10,15,20,25,30,35$	CBs	N/A			
For Slots in measurement gap $i = 7,8,9,10,11,12$	CBs	N/A			
For Slots i , if $\text{mod}(i, 5) = \{1,2,3,4\}$ and $i \neq 7,8,9,11,12$	CBs	2			
Binary Channel Bits Per Slot					
For Slots $i = 0,5,10,15,20,25,30,35$	Bits	N/A			
For Slots in measurement gap $i = 7,8,9,10,11,12$		N/A			
For Slots $i = \{11, 31\}$		22880			
For Slots i , if $\text{mod}(i, 5) = \{1,2,3,4\}$ and $i \neq 7,8,9,11,12,31$	Bits	24128			
Max. Throughput averaged over 4 frames	Mbps	8.4916			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 4 frames					
Note 3: No user data is scheduled on slots with PBCH/PSS/SSS on the interference LTE cell					
Note 4: No user data is scheduled on slots used for measurement					

Table A.3.2.1.1-20: PDSCH Reference Channel for FDD CC and CA scenario

Parameter	Unit	Value			
		R.PDSCH.1-20.1 FDD	R.PDSCH.1-20.2 FDD	R.PDSCH.1-20.3 FDD	R.PDSCH.1-20.4 FDD
Reference channel					
Channel bandwidth	MHz	5	15	20	25
Subcarrier spacing	kHz	15	15	15	15
Number of allocated resource blocks	PRBs	25	79	106	133
Number of consecutive PDSCH symbols		12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.43	0.43	0.43	0.43
Number of MIMO layers		4	4	4	4
Number of DMRS REs		48	48	48	48
Overhead for TBS determination		0	0	0	0
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	24576	77896	104496	131176
Transport block CRC per Slot					

For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24
Number of Code Blocks per Slot					
For Slot i = 0	CBs	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	3	10	13	16
Binary Channel Bits Per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	54144	171072	229248	287424
For Slots i = 1, ..., 9, 12, ..., 19	Bits	57600	182016	244224	306432
Max. Throughput averaged over 2 frames	Mbps	23.347	74.001	99.271	124.617
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					
Note 3: Two codewords and given per codeword					

Table A.3.2.1.1-21: PDSCH Reference Channel for FDD CC and CA scenario

Parameter	Unit	Value				
		R.PDSCH.1-21.1 FDD	R.PDSCH.1-21.2 FDD	R.PDSCH.1-21.3 FDD	R.PDSCH.1-21.4 FDD	R.PDSCH.1-21.5 FDD
Reference channel						
Channel bandwidth	MHz	30	35	40	45	50
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	160	188	216	242	270
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.43	0.43	0.43	0.43	0.43
Number of MIMO layers		4	4	4	4	4
Number of DMRS REs		48	48	48	48	48
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	155776	184424	213176	237776	262376
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	19	22	26	29	32
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	345600	406080	466560	522720	583200
For Slots i = 1, ..., 9, 12, ..., 19	Bits	368640	433152	497664	557568	622080
Max. Throughput averaged over 2 frames	Mbps	147.987	175.203	202.517	225.887	249.257
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						

Note 2: Slot i is slot index per 2 frames
 Note 3: Two codewords and given per codeword

Table A.3.2.1.1-22: PDSCH Reference Channel for FDD CC and CA scenario

Parameter	Unit	Value			
		R.PDSCH.1-22.1 FDD	R.PDSCH.1-22.2 FDD	R.PDSCH.1-22.3 FDD	R.PDSCH.1-22. FDD
Reference channel					
Channel bandwidth	MHz	5	15	20	25
Subcarrier spacing	kHz	15	15	15	15
Number of allocated resource blocks	PRBs	25	79	106	133
Number of consecutive PDSCH symbols		12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		19	19	19	19
Modulation		64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.50	0.50	0.50	0.50
Number of MIMO layers		2	2	2	2
Number of DMRS REs		12	12	12	12
Overhead for TBS determination		0	0	0	0
Information Bit Payload per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	19968	63528	83976	106576
Transport block CRC per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits	24	24	24	24
Number of Code Blocks per Slot					
For Slot i = 0	CBs	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	CBs	3	8	10	13
Binary Channel Bits Per Slot					
For Slot i = 0	Bits	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	37800	119448	160272	201096
For Slots i = 1, ..., 9, 12, ..., 19	Bits	29600	125136	167904	210672
Max. Throughput averaged over 2 frames	Mbps	18.970	60.352	79.777	101.247

Table A.3.2.1.1-23: PDSCH Reference Channel for FDD CC and CA scenario

Parameter	Unit	Value				
		R.PDSCH.1-23.1 FDD	R.PDSCH.1-23.2 FDD	R.PDSCH.1-23.3 FDD	R.PDSCH.1-23.4 FDD	R.PDSCH.1-23.5 FDD
Reference channel						
Channel bandwidth	MHz	30	35	40	45	50
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	160	188	216	242	270
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		19	19	19	19	19
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.51	0.51	0.51	0.51	0.51
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs		12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot		127080	151608	172176	192624	217128
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1, ..., 19	Bits					
Transport block CRC per Slot						

For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	CBs	16	18	21	23	26
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 10, 11$	Bits	241920	284256	326592	366048	408384
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	253440	297792	342144	383328	427680
Max. Throughput averaged over 2 frames	Mbps	120.726	144.027	163.567	182.992	206.271
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.1.1-24: PDSCH Reference Channel for FDD PMI reporting requirements

Parameter	Unit	Value				
Reference channel		R.PDSCH.1-X.1 FDD				
Channel bandwidth	MHz	10				
Subcarrier spacing	kHz	15				
Number of allocated resource blocks	PRBs	52				
Number of consecutive PDSCH symbols		12				
Allocated slots per 2 frames	Slots	12				
MCS table		64QAM				
MCS index		13				
Modulation		16QAM				
Target Coding Rate		0.48				
Number of MIMO layer		2				
Number of DMRS REs (Note 3)		24				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For CSI Slots i , if $\text{mod}(i, 10) = \{0, 2, 4, 6\}$, $i = \{0, \dots, 19\}$		N/A				
For Non CSI-RS Slot i , if $\text{mod}(i, 10) = \{1, 3, 5, 7, 8, 9\}$, $i = \{1, \dots, 19\}$	Bits	24072				
Transport block CRC per Slot						
For CSI Slots i , if $\text{mod}(i, 10) = \{0, 2, 4, 6\}$, $i = \{0, \dots, 19\}$		N/A				
For Non CSI-RS Slot i , if $\text{mod}(i, 10) = \{1, 3, 5, 7, 8, 9\}$, $i = \{1, \dots, 19\}$	Bits	24				
Number of Code Blocks per Slot						
For CSI Slots i , if $\text{mod}(i, 10) = \{0, 2, 4, 6\}$, $i = \{0, \dots, 19\}$		N/A				
For Non CSI-RS Slot i , if $\text{mod}(i, 10) = \{1, 3, 5, 7, 8, 9\}$, $i = \{1, \dots, 19\}$	CBs	3				
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A				
For CSI Slots i , if $\text{mod}(i, 10) = \{0, 2, 4, 6\}$, $i = \{0, \dots, 19\}$		N/A				
For Slots $i = 11$	Bits	47424				
For Non CSI-RS Slot i , if $\text{mod}(i, 10) = \{1, 3, 5, 7, 8, 9\}$, $i = \{0, \dots, 10, 12, \dots, 19\}$	Bits	49920				
Max. Throughput averaged over 2 frames	Mbps	14.443				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						
Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data						

Table A.3.2.1.1-25: PDSCH Reference Channel for FDD

Parameter	Unit	Value			
Reference channel		R.PDSCH.1-25.1 FDD			
Channel bandwidth	MHz	10			
Subcarrier spacing	kHz	15			
Number of allocated resource blocks	PRBs	25			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames	Slots	19			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 1, \dots, 19$	Bits	6272			
Transport block CRC per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 1, \dots, 19$	Bits	24			
Number of Code Blocks per Slot					
For Slot $i = 0$	CBs	N/A			
For Slots $i = 1, \dots, 19$	CBs	1			
Binary Channel Bits Per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 10, 11$	Bits	12600			
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	13200			
Max. Throughput averaged over 2 frames	Mbps	5.958			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					

A.3.2.1.2 Reference measurement channels for SCS 30 kHz FR1

Table A.3.2.1.2-1: PDSCH Reference Channel for FDD (64QAM)

Parameter	Unit	Value			
Reference channel		R.PDSCH.2-1.1 FDD			
Channel bandwidth	MHz	20			
Subcarrier spacing	kHz	30			
Number of allocated resource blocks	PRBs	51			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames	Slots	39			
MCS table		64QAM			
MCS index		19			
Modulation		64QAM			
Target Coding Rate		0.51			
Number of MIMO layers		2			
Number of DMRS REs		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 1, \dots, 39$	Bits	40976			
Transport block CRC per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 1, \dots, 39$	Bits	24			
Number of Code Blocks per Slot					

For Slot $i = 0$	CBs	N/A			
For Slots $i = 1, \dots, 39$	CBs	5			
Binary Channel Bits Per Slot					
For Slot $i = 0$	Bits	N/A			
For Slots $i = 20, 21$	Bits	77112			
For Slots $i = 1, \dots, 19, 22, \dots, 39$	Bits	80784			
Max. Throughput averaged over 2 frames	Mbps	79.903			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2: Slot i is slot index per 2 frames.					

A.3.2.1.3 Reference measurement channels for SCS 60 kHz FR1

A.3.2.1.4 Reference measurement channels for E-UTRA

Table A.3.2.1.4-1: PDSCH Reference Channel for sustained data-rate test (64QAM, 2 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.4-1.1 FDD	R.PDSCH.4-1.2 FDD	R.PDSCH.4-1.3 FDD	R.PDSCH.4-1.4 FDD
Reference channel					
Channel bandwidth	MHz	5	10	15	20
Allocated resource blocks		Note 6	Note 7	Note 8	Note 9
Allocated subframes per Radio Frame		9	10	10	10
Modulation		64QAM	64QAM	64QAM	64QAM
Coding Rate					
For Sub-Frames 1,2,3,4,6,7,8,9,		0.85	0.85	0.85	0.88
For Sub-Frame 5		N/A	0.89	0.91	0.87
For Sub-Frame 0		0.83	0.90	0.88	0.90
Information Bit Payload (Note 3)					
For Sub-Frames 1,2,3,4,6,7,8,9	Bits	18336	36696	55056	75376
For Sub-Frame 5	Bits	N/A	35160	52752	71112
For Sub-Frame 0	Bits	15840	36696	55056	75376
Number of Code Blocks (Notes 3 and 4)					
For Sub-Frames 1,2,3,4,6,7,8,9	CBs	3	6	9	13
For Sub-Frame 5	CBs	N/A	6	9	12
For Sub-Frame 0	CBs	3	6	9	13
Binary Channel Bits (Note 3)					
For Sub-Frames 1,2,3,4,6,7,8,9	Bits	21600	43200	64800	86400
For Sub-Frame 5	Bits	N/A	39744	60480	82080
For Sub-Frame 0	Bits	19152	40752	62352	83952
Number of layers		2	2	2	2
Max. Throughput averaged over 1 frame (Note 3)	Mbps	16.253	36.542	54.826	74.950
Note 1: 1 symbol allocated to PDCCH for all tests. Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17]. Note 3: Given per component carrier per codeword. Note 4: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit). Note 5: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths. Note 6: Resource blocks $n_{PRB} = 0..24$ in sub-frames 0,1,2,3,4,6,7,8,9. Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,1,2,3,4,6,7,8,9. Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,1,2,3,4,6,7,8,9. Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,1,2,3,4,6,7,8,9.					

Table A.3.2.1.4-2: PDSCH Reference Channel for sustained data-rate test (64QAM, 4 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.4-2.1 FDD	R.PDSCH.4-2.2 FDD	R.PDSCH.4-2.3 FDD	R.PDSCH.4-2.4 FDD
Reference channel					

Channel bandwidth	MHz	5	10	15	20
Allocated resource blocks		Note 6	Note 7	Note 8	Note 9
Allocated subframes per Radio Frame		9	10	10	10
Modulation		64QAM	64QAM	64QAM	64QAM
Coding Rate					
For Sub-Frames 1,2,3,4,6,7,8,9,		0.78	0.78	0.77	0.79
For Sub-Frame 5		N/A	0.80	0.79	0.81
For Sub-Frame 0		0.85	0.83	0.8	0.81
Information Bit Payload (Note 3)					
For Sub-Frames 1,2,3,4,6,7,8,9	Bits	31704	63776	93800	128496
For Sub-Frame 5	Bits	N/A	59256	90816	124464
For Sub-Frame 0	Bits	30576	63776	93800	128496
Number of Code Blocks (Notes 3 and 4)					
For Sub-Frames 1,2,3,4,6,7,8,9	CBs	6	11	16	21
For Sub-Frame 5	CBs	N/A	10	15	21
For Sub-Frame 0	CBs	5	11	16	21
Binary Channel Bits (Note 3)					
For Sub-Frames 1,2,3,4,6,7,8,9	Bits	40800	81600	122400	163200
For Sub-Frame 5	Bits	N/A	74976	114144	154944
For Sub-Frame 0	Bits	36192	76992	117792	158592
Number of layers		4	4	4	4
Max. Throughput averaged over 1 frame (Note 3)	Mbps	28.421	63.324	93.502	128.093
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: Given per component carrier per codeword.</p> <p>Note 4: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 5: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 6: Resource blocks $n_{PRB} = 0..24$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,1,2,3,4,6,7,8,9.</p>					

Table A.3.2.1.4-3: PDSCH Reference Channel for sustained data-rate test (256QAM, 2 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.4-3.1 FDD	R.PDSCH.4-3.2 FDD	R.PDSCH.4-3.3 FDD	R.PDSCH.4-3.4 FDD
Reference channel					
Channel bandwidth	MHz	5	10	15	20
Allocated resource blocks		Note 6	Note 7	Note 8	Note 9
Allocated subframes per Radio Frame		10	10	10	10
Modulation		256QAM	256QAM	256QAM	256QAM
Coding Rate					
For Sub-Frames 3,4,8,9		0.85	0.85	0.88	0.85
For Sub-Frames 1,2,6,7		0.77	0.74	0.74	0.74
For Sub-Frame 5		0.79	0.77	0.77	0.75
For Sub-Frame 0		0.84	0.78	0.77	0.76
Information Bit Payload (Note 3)					
For Sub-Frames 3,4,8,9	Bits	24496	48936	75376	97896
For Sub-Frames 1,2,6,7	Bits	21384	42368	63776	84760
For Sub-Frame 5	Bits	19848	40576	61664	81176
For Sub-Frame 0	Bits	21384	42368	63776	84760
Number of Code Blocks (Notes 3 and 4)					
For Sub-Frames 3,4,8,9	CBs	4	8	13	16
For Sub-Frames 1,2,6,7	CBs	4	7	11	14
For Sub-Frame 5	CBs	4	7	11	14
For Sub-Frame 0	CBs	4	7	11	14
Binary Channel Bits (Note 3)					
For Sub-Frames 3,4,8,9	Bits	28800	57600	86400	115200

For Sub-Frames 1,2,6,7	Bits	28800	57600	86400	115200
For Sub-Frame 5	Bits	25344	52992	80640	109440
For Sub-Frame 0	Bits	25536	54336	83136	111936
Number of layers		2	2	2	2
Max. Throughput averaged over 1 frame (Note 3)	Mbps	22.475	44.816	68.205	89.656
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: Given per component carrier per codeword.</p> <p>Note 4: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 5: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 6: Resource blocks $n_{PRB} = 2..24$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..24$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,1,2,3,4,6,7,8,9.</p>					

Table A.3.2.1.4-4: PDSCH Reference Channel for sustained data-rate test (256QAM, 4 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.4-4.1 FDD	R.PDSCH.4-4.2 FDD	R.PDSCH.4-4.3 FDD	R.PDSCH.4-4.4 FDD
Reference channel					
Channel bandwidth	MHz	5	10	15	20
Allocated resource blocks		Note 6	Note 7	Note 8	Note 9
Allocated subframes per Radio Frame		10	10	10	10
Modulation		256QAM	256QAM	256QAM	256QAM
Coding Rate					
For Sub-Frames 3,4,8,9		0.85	0.78	0.79	0.78
For Sub-Frames 1,2,6,7		0.77	0.78	0.79	0.78
For Sub-Frame 5		0.79	0.82	0.82	0.786
For Sub-Frame 0		0.84	0.83	0.82	0.80
Information Bit Payload (Note 3)					
For Sub-Frames 3,4,8,9	Bits	42368	84760	128496	169544
For Sub-Frames 1,2,6,7	Bits	42368	84760	128496	169544
For Sub-Frame 5	Bits	39232	81176	124464	161760
For Sub-Frame 0	Bits	39232	84760	128496	169544
Number of Code Blocks (Notes 3 and 4)					
For Sub-Frames 3,4,8,9	CBs	7	14	21	28
For Sub-Frames 1,2,6,7	CBs	7	14	21	28
For Sub-Frame 5	CBs	7	14	21	27
For Sub-Frame 0	CBs	7	14	21	28
Binary Channel Bits (Note 3)					
For Sub-Frames 3,4,8,9	Bits	54400	108800	163200	217600
For Sub-Frames 1,2,6,7	Bits	54400	108800	163200	217600
For Sub-Frame 5	Bits	47744	99968	152192	206592
For Sub-Frame 0	Bits	48256	102656	157056	211456
Number of layers		4	4	4	4
Max. Throughput averaged over 1 frame (Note 3)	Mbps	41.741	84.4016	128.093	168.766
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: Given per component carrier per codeword.</p> <p>Note 4: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 5: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 6: Resource blocks $n_{PRB} = 2..24$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..24$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,1,2,3,4,6,7,8,9.</p>					

Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,1,2,3,4,6,7,8,9.
 Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,1,2,3,4,6,7,8,9.

Table A.3.2.1.4-5: PDSCH Reference Channel for sustained data-rate test (1024QAM, 2 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.4-5.1 FDD	R.PDSCH.4-5.2 FDD	R.PDSCH.4-5.3 FDD	R.PDSCH.4-5.4 FDD
Reference channel					
Channel bandwidth	MHz	5	10	15	20
Allocated resource blocks		Note 6	Note 7	Note 8	Note 9
Allocated subframes per Radio Frame		10	10	10	10
Modulation		1024QAM	1024QAM	1024QAM	1024QAM
Coding Rate					
For Sub-Frames 3,4,8,9		0.76	0.73	0.75	0.76
For Sub-Frames 1,2,6,7		0.76	0.73	0.75	0.76
For Sub-Frame 5		0.80	0.77	0.78	0.77
For Sub-Frame 0		0.86	0.78	0.78	0.79
Information Bit Payload (Note 3)					
For Sub-Frames 3,4,8,9	Bits	27376	52752	81176	110136
For Sub-Frames 1,2,6,7	Bits	27376	52752	81176	110136
For Sub-Frame 5	Bits	25456	51024	78704	105528
For Sub-Frame 0	Bits	27376	52752	81176	110136
Number of Code Blocks (Notes 3 and 4)					
For Sub-Frames 3,4,8,9	CBs	5	9	14	18
For Sub-Frames 1,2,6,7	CBs	5	9	14	18
For Sub-Frame 5	CBs	5	9	13	18
For Sub-Frame 0	CBs	5	9	14	18
Binary Channel Bits (Note 3)					
For Sub-Frames 3,4,8,9	Bits	36000	72000	108000	144000
For Sub-Frames 1,2,6,7	Bits	36000	72000	108000	144000
For Sub-Frame 5	Bits	31680	66240	100800	136800
For Sub-Frame 0	Bits	31920	67920	103920	139920
Number of layers		2	2	2	2
Max. Throughput averaged over 1 frame (Note 3)	Mbps	27.18	52.58	80.93	109.68
Note 1: 1 symbol allocated to PDCCH for all tests. Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17]. Note 3: Given per component carrier per codeword. Note 4: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit). Note 5: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths. Note 6: Resource blocks $n_{PRB} = 2..24$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..24$ in sub-frames 0,1,2,3,4,6,7,8,9. Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,1,2,3,4,6,7,8,9. Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,1,2,3,4,6,7,8,9. Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,1,2,3,4,6,7,8,9.					

Table A.3.2.1.4-6: PDSCH Reference Channel for sustained data-rate test (1024QAM, 4 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.4-6.1 FDD	R.PDSCH.4-6.2 FDD	R.PDSCH.4-6.3 FDD	R.PDSCH.4-6.4 FDD
Reference channel					
Channel bandwidth	MHz	5	10	15	20
Allocated resource blocks		Note 6	Note 7	Note 8	Note 9
Allocated subframes per Radio Frame		10	10	10	10
Modulation		1024QAM	1024QAM	1024QAM	1024QAM
Coding Rate					
For Sub-Frames 3,4,8,9		0.78	0.81	0.79	0.81

For Sub-Frames 1,2,6,7		0.78	0.81	0.79	0.81
For Sub-Frame 5		0.82	0.81	0.83	0.82
For Sub-Frame 0		0.87	0.86	0.82	0.83
Information Bit Payload (Note 3)					
For Sub-Frames 3,4,8,9	Bits	52752	110136	161760	220296
For Sub-Frames 1,2,6,7	Bits	52752	110136	161760	220296
For Sub-Frame 5	Bits	48936	101840	157432	211936
For Sub-Frame 0	Bits	52752	110136	161760	220296
Number of Code Blocks (Notes 3 and 4)					
For Sub-Frames 3,4,8,9	CBs	9	18	27	36
For Sub-Frames 1,2,6,7	CBs	9	18	27	36
For Sub-Frame 5	CBs	8	17	26	35
For Sub-Frame 0	CBs	9	18	27	36
Binary Channel Bits (Note 3)					
For Sub-Frames 3,4,8,9	Bits	68000	136000	204000	272000
For Sub-Frames 1,2,6,7	Bits	68000	136000	204000	272000
For Sub-Frame 5	Bits	59680	124960	190240	258240
For Sub-Frame 0	Bits	60320	128320	196320	264320
Number of layers		4	4	4	4
Max. Throughput averaged over 1 frame (Note 3)	Mbps	52.37	109.31	161.33	219.46
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: Given per component carrier per codeword.</p> <p>Note 4: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 5: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 6: Resource blocks $n_{PRB} = 2..24$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..24$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,1,2,3,4,6,7,8,9.</p> <p>Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,1,2,3,4,6,7,8,9.</p>					

A.3.2.1.5 Reference measurement channels for Intra-cell Inter-UE interference scenario

Table A.3.2.1.5-1: PDSCH Reference Channel for FDD Intra-cell Inter-UE interference scenario

Parameter	Unit	Value			
		R.PDSCH.5-1.1 FDD	R.PDSCH.5-1.2 FDD	R.PDSCH.5-1.3 FDD	R.PDSCH.5-1.4 FDD
Reference channel					
Channel bandwidth	MHz	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	52	52
Number of consecutive PDSCH symbols		12	12	12	12
Allocated slots per 2 frames	Slots	19	19	19	19
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		13	13	17	17
Modulation		16QAM	16QAM	64QAM	64QAM
Target Coding Rate		0.48	0.48	0.43	0.43
Number of MIMO layers		1	2	1	2
Number of DMRS REs		12	24	12	24
Overhead for TBS determination		0	0	0	0
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A
For Slots $i = 1, \dots, 19$	Bits	13064	24072	17424	32264
Transport block CRC per Slot					
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A

For Slots $i = 1, \dots, 19$	Bits	24	24	24	24	
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	
For Slots $i = 1, \dots, 19$	CBs	2	3	3	4	
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slots $i = 10, 11$	Bits	26208	47424	39312	71136	
For Slots $i = 1, \dots, 9, 12, \dots, 19$	Bits	27456	49920	41184	74880	
Max. Throughput averaged over 2 frames	Mbps	12.411	22.868	16.553	30.651	
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

A.3.2.2 TDD

A.3.2.2.1 Reference measurement channels for SCS 15 kHz FR1

Table A.3.2.2.1-1: PDSCH Reference Channel for TDD UL-DL pattern FR1.15-1 and LTE-NR coexistence scenario

Parameter	Unit	Value				
		R.PDSCH.1-1.1 TDD	R.PDSCH.1-1.2 TDD	R.PDSCH.1-1.3 TDD		
Reference channel						
Channel bandwidth	MHz	10	10	20		
Subcarrier spacing	kHz	15	15	15		
Allocated resource blocks	PRBs	52	52	106		
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i , if $\text{mod}(i, 5) = \{2, 3, 4\}$ for i from $\{0, \dots, 19\}$		N/A	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = \{0, 1\}$ for i from $\{1, \dots, 19\}$		9	11	9		
Allocated slots per 2 frames		7	7	7		
MCS table		64QAM	64QAM	64QAM		
MCS index		4	4	13		
Modulation		QPSK	QPSK	16QAM		
Target Coding Rate		0.30	0.30	0.48		
Number of MIMO layers		1	1	1		
Number of DMRS REs						
For Slots 0 and Slot i , if $\text{mod}(i, 5) = \{2, 3, 4\}$ for i from $\{0, \dots, 19\}$		N/A	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = \{0, 1\}$ for i from $\{1, \dots, 19\}$		12	12	12		
Overhead for TBS determination		18	18	18		
Information Bit Payload per Slot						
For Slot 0 and Slot i , if $\text{mod}(i, 5) = \{2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	N/A	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = \{0, 1\}$ for i from $\{1, \dots, 19\}$	Bits	2472	3240	15880		
Transport block CRC per Slot						
For Slot 0 and Slot i , if $\text{mod}(i, 5) = \{2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	N/A	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = \{0, 1\}$ for i from $\{1, \dots, 19\}$	Bits	16	16	24		
Number of Code Blocks per Slot						
For Slot 0 and Slot i , if $\text{mod}(i, 5) = \{2, 3, 4\}$ for i from $\{0, \dots, 19\}$	CBs	N/A	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = \{0, 1\}$ for i from $\{1, \dots, 19\}$	CBs	1	1	2		
Binary Channel Bits Per Slot						
For Slot 0 and Slot i , if $\text{mod}(i, 5) = \{2, 3, 4\}$ for i from $\{0, \dots, 19\}$	Bits	N/A	N/A	N/A		
For Slots $i = 10, 11$	Bits	7760	10256	32672		

For Slot i , if $\text{mod}(i, 5) = \{0,1\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	8384	10880	33920		
Max. Throughput averaged over 2 frames	Mbps	0.865	1.134	5.558		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						
Note 3: No user data is scheduled on slots with LTE PBCH/PSS/SSS						

Table A.3.2.1-2: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.15-1 and CA scenario

Parameter	Unit	Value				
		R.PDSCH.1-2.1 TDD	R.PDSCH.1-2.2 TDD	R.PDSCH.1-2.3 TDD	R.PDSCH.1-2.4 TDD	R.PDSCH.1-2.5 TDD
Reference channel						
Channel bandwidth	MHz	5	10	15	20	25
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	25	52	79	106	133
Number of consecutive PDSCH symbols						
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		8	8	8	8	8
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$		12	12	12	12	12
Allocated slots per 2 frames	Slots	15	15	15	15	15
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		12	12	12	12	12
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$		12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	8064	16896	25608	33816	43032
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$	Bits	12552	26120	39936	53288	67584
Transport block CRC per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	24	24	24	24	24
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	CBs	1	3	4	5	6
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$	CBs	2	4	5	7	9
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 10, 11$	Bits	25200	52416	79632	106848	134064
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	16800	34944	53088	71232	89376
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	26400	54912	83424	111936	140448
Max. Throughput averaged over 2 frames	Mbps	8.516	17.745	27.086	36.072	45.778

Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms
 Note 2: Slot i is slot index per 2 frames

Table A.3.2.2.1-3: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.15-1 and CA scenario

Parameter	Unit	Value		
		R.PDSCH.1-3.1 TDD	R.PDSCH.1-3.2 TDD	R.PDSCH.1-3.3 TDD
Reference channel				
Channel bandwidth	MHz	30	40	50
Subcarrier spacing	kHz	15	15	15
Number of allocated resource blocks	PRBs	160	216	270
Number of consecutive PDSCH symbols				
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		8	8	8
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$		12	12	12
Allocated slots per 2 frames	Slots	15	15	15
MCS table		64QAM	64QAM	64QAM
MCS index		13	13	13
Modulation		16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48
Number of MIMO layers		2	2	2
Number of DMRS REs				
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		12	12	12
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$		12	12	12
Overhead for TBS determination		0	0	0
Information Bit Payload per Slot				
For Slot i = 0	Bits	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	51216	69672	86040
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$	Bits	79896	108552	135296
Transport block CRC per Slot				
For Slot i = 0	Bits	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	24	24	24
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$	Bits	24	24	24
Number of Code Blocks per Slot				
For Slot i = 0	CBs	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	CBs	7	9	11
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$	CBs	10	13	17
Binary Channel Bits Per Slot				
For Slot i = 0	Bits	N/A	N/A	N/A
For Slots i = 10, 11	Bits	161280	217728	272160
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	107520	145152	181440
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	168960	228096	285120
Max. Throughput averaged over 2 frames	Mbps	54.186	73.638	91.621
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms				
Note 2: Slot i is slot index per 2 frames				

Table A.3.2.2.1-4: PDSCH Reference Channel for TDD CRS interference mitigation for NR scenario

Parameter	Unit	Value			
		R.PDSCH.1-4.1 TDD			
Reference channel		R.PDSCH.1-4.1 TDD			
Channel bandwidth	MHz	20			
Subcarrier spacing	kHz	15			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slot 0 and Slot i, if mod(i, 5) = {2,3,4} for i from {0,...,19}		N/A			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}		12			
Allocated slots per 2 frames		7			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs					
For Slot 0 and Slot i, if mod(i, 5) = {2,3,4} for i from {0,...,19}		N/A			
For Slot i, if mod(i, 5) = {0,1} for i from {1,...,19}		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot 0 and Slot i, if mod(i, 5) = {2,3,4} for i from {0,...,19}	Bits	N/A			
For Slot i, if mod(i, 5) = {0,1} for i from {1,...,19}	Bits	26632			
Transport block CRC per Slot					
For Slot 0 and Slot i, if mod(i, 5) = {2,3,4} for i from {0,...,19}	Bits	N/A			
For Slot i, if mod(i, 5) = {0,1} for i from {1,...,19}	Bits	24			
Number of Code Blocks per Slot					
For Slot 0 and Slot i, if mod(i, 5) = {2,3,4} for i from {0,...,19}	CBs	N/A			
For Slot i, if mod(i, 5) = {0,1} for i from {1,...,19}	CBs	4			
Binary Channel Bits Per Slot					
For Slot 0 and Slot i, if mod(i, 5) = {2,3,4} for i from {0,...,19}	Bits	N/A			
For Slots i = 10, 11	Bits	47936			
For Slot i, if mod(i, 5) = {0,1} for i from {1,...,9,12,...,19}	Bits	49184			
Max. Throughput averaged over 2 frames	Mbps	9.3212			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					
Note 3: No user data is scheduled on slots with PBCH/PSS/SSS on the interference LTE cell					

Table A.3.2.2.1-5: PDSCH Reference Channel for TDD CRS interference mitigation for NR scenario for inter-RAT measurement enabled

Parameter	Unit	Value			
		R.PDSCH.1-4.2 TDD			
Reference channel		R.PDSCH.1-4.2 TDD			
Channel bandwidth	MHz	20			
Subcarrier spacing	kHz	15			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slots i = {2,12,22,32}		N/A			

For Slots $i = \{0,20\}$		N/A			
For Slots in measurement gap $i = \{1,2,3,4,5,6\}$		N/A			
For Slots i , if $\text{mod}(i, 5) = \{3,4\}$		N/A			
For Slots i , if $\text{mod}(i, 5) = \{0,1,2\}$ and $i \neq \{0,1,2,20\}$		12			
Allocated slots per 4 frames		16			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs					
For Slots $i = \{2,12,22,32\}$		N/A			
For Slots $i = \{0,20\}$		N/A			
For Slots in measurement gap $i = \{1,2,3,4,5,6\}$		N/A			
For Slots i , if $\text{mod}(i, 5) = \{3,4\}$		N/A			
For Slots i , if $\text{mod}(i, 5) = \{0,1,2\}$ and $i \neq \{0,1,2,20\}$		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots $i = \{2,12,22,32\}$	Bits	N/A			
For Slots $i = \{0,20\}$	Bits	N/A			
For Slots in measurement gap $i = \{1,2,3,4,5,6\}$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{3,4\}$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{0,1,2\}$ and $i \neq \{0,1,2,20\}$		26632			
Transport block CRC per Slot					
For Slots $i = \{2,12,22,32\}$	Bits	N/A			
For Slots $i = \{0,20\}$	Bits	N/A			
For Slots in measurement gap $i = \{1,2,3,4,5,6\}$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{3,4\}$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{0,1,2\}$ and $i \neq \{0,1,2,20\}$		24			
Number of Code Blocks per Slot					
For Slots $i = \{2,12,22,32\}$	CBs	N/A			
For Slots $i = \{0,20\}$	CBs	N/A			
For Slots in measurement gap $i = \{1,2,3,4,5,6\}$	CBs	N/A			
For Slots i , if $\text{mod}(i, 5) = \{3,4\}$	CBs	N/A			
For Slots i , if $\text{mod}(i, 5) = \{0,1,2\}$ and $i \neq \{0,1,2,20\}$		4			
Binary Channel Bits Per Slot					
For Slots $i = \{2,12,22,32\}$	Bits	N/A			
For Slots $i = \{0,20\}$	Bits	N/A			
For Slots in measurement gap $i = \{1,2,3,4,5,6\}$	Bits	N/A			
For Slots i , if $\text{mod}(i, 5) = \{3,4\}$	Bits	N/A			
For Slots $i = \{10,11,30,31\}$	Bits	47936			
For Slots i , if $\text{mod}(i, 5) = \{0,1,2\}$ and $i \neq \{0,1,2,11,20,31\}$	Bits	49184			
Max. Throughput averaged over 4frames	Mbps	11.9844			
<p>Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms</p> <p>Note 2: Slot i is slot index per 4 frames</p> <p>Note 3: No user data is scheduled on slots with PBCH/PSS/SSS on the interference LTE cell</p> <p>Note 4: No user data is scheduled on slots used for measurement</p>					

A.3.2.2.2 Reference measurement channels for SCS 30 kHz FR1

Table A.3.2.2.2-1: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and FR1.30-1A (QPSK)

Parameter	Unit	Value				
		R.PDSCH. 2-1.1 TDD	R.PDSCH. 2-1.2 TDD	R.PDSCH. 2-1.3 TDD	R.PDSCH. 2-1.4 TDD	R.PDSCH. 2-1.5 TDD
Reference channel						
Channel bandwidth	MHz	40	40	40	40	20
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	106	6	106	106	51
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	N/A	N/A	4
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	7	12	12
Allocated slots per 2 frames		31	31	27	27	31
MCS table		64QAM	64QAM	64QAM	64QAM _{Lo} wSE	64QAM
MCS index		4	4	4	14	4
Modulation		QPSK	QPSK	QPSK	QPSK	QPSK
Target Coding Rate		0.30	0.30	0.30	0.59	0.30
Number of MIMO layers		1	1	1	1	1
Number of DMRS REs						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6	N/A	N/A	6
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		18	12	12	12	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	2664	144	N/A	N/A	1288
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	8064	480	4608	16392	3840
Transport block CRC per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	16	16	N/A	N/A	16
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24	16	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	1	1	N/A	N/A	1
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	1	1	1	2	1
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 20, 21	Bits	25440	1512	13992	26712	12240
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	8904	504	N/A	N/A	4284
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	26712	1584	15264	27984	12852
Max. Throughput averaged over 2 frames	Mbps	11.419	0.677	6.221	22.129	5.442
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2:	Slot i is slot index per 2 frames.					

Table A.3.2.2.2-2: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 (16QAM)

Parameter		Unit		Value			
Reference channel		R.PDSCH.2-2.1 TDD	R.PDSCH.2-2.2 TDD	R.PDSCH.2-2.3 TDD	R.PDSCH.2-2.4 TDD	R.PDSCH.2-2.5 TDD	R.PDSCH.2-2.6 TDD
Channel bandwidth	MHz	40	40	40	40	40	40
Subcarrier spacing	kHz	30	30	30	30	30	30
Allocated resource blocks	PRBs	106	106	106	106	106	106
Number of consecutive PDSCH symbols							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4	4	4	4
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM _{LowSE}	64QAM
MCS index		13	13	13	13	19	16
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.54	0.64
Number of MIMO layers		1	2	3	4	2	1
Number of DMRS REs							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6	12	12	6	6
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	24	24	12	12
Overhead for TBS determination		0	0	0	0	0	0
Information Bit Payload per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	8456	16896	22032	29192	19464	11528
For Slot i, if $\text{mod}(i, 10) =$	Bits	26632	53288	73776	98376	60456	35856

{0,1,2,3,4,5,6} for i from {1,...,39}									
Transport block CRC per Slot									
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	24	24	24	24	24	24	24
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6}for i from {1,...,39}	Bits	24	24	24	24	24	24	24	24
Number of Code Blocks per Slot									
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	2	3	3	4	3	2		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	4	7	9	12	8	5		
Binary Channel Bits Per Slot									
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slots i = 20, 21	Bits	53424	106848	144008	193344	101760	53424		
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	17808	35616	45792	61056	35616	17808		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,3 9}	Bits	55968	111936	152640	203520	111936	55968		
Max. Throughput averaged over 2 frames	Mbps	37.644	75.318	104.004	138.646	85.508	50.711		

NOTE 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.
NOTE 2: Slot i is slot index per 2 frames.

Table A.3.2.2-3: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 (64QAM)

Parameter	Unit	Value							
		R.PDSC H.2-3.1 TDD	R.PDSC H.2-3.2 TDD	R.PDSC H.2-3.3 TDD	R.PDSC H.2-3.4 TDD	R.PDSC H.2-3.5 TDD	R.PDSC H.2-3.6 TDD	R.PDSC H.2-3.7 TDD	R.PDSC H.2-3.8 TDD (Note 5)
Reference channel									
Channel bandwidth	MHz	40	40	40	40	20	40	40	40

Subcarrier spacing	kHz	30	30	30	30	30	30	30	30
Allocated resource blocks	PRBs	106	106	53 (Note 3)	53 (Note 4)	51	106	106	106
Number of consecutive PDSCH symbols									
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4	4	4	4	4	NA
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31	31	31	27
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		19	19	19	19	19	22	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.51	0.51	0.51	0.51	0.51	0.65	0.43	0.43
Number of MIMO layers		2	2	2	2	1	1	4	4
Number of DMRS REs									
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	12	12	12	6	6	12	N/A
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	24	24	24	12	12	24	48
Overhead for TBS determination		0	0	0	0	0	0	0	0
Information Bit Payload per Slot									
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	27144	23040	11528	11528	6528	14856	38936	N/A
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	83976	77896	38936	38936	20496	54296	131176	104496
Transport block CRC per Slot									
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	24	24	24	24	24	24	24	N/A
For Slot i, if $\text{mod}(i, 10) =$	Bits	24	24	24	24	24	24	24	24

{0,1,2,3,4,5,6} for i from {1,...,39}									
Number of Code Blocks per Slot									
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	4	3	2	2	1	2	5	N/A
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	10	10	5	5	3	7	16	13
Binary Channel Bits Per Slot									
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
For Slots i = 20, 21	Bits	160272	137376	68688	68688	38556	83952	290016	228960
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	53424	45792	22896	22896	12852	22896	91584	NA
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	167904	152640	76320	76320	40392	80136	305280	244224
Max. Throughput averaged over 2 frames	Mbps	118.796	109.768	54.869	54.869	28.975	76.271	184.88	141.07
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: PDSCH is scheduled in PRB numbers from 0 to 52. Note 4: PDSCH is scheduled in PRB numbers from 53 to 105. Note 5: Two codewords and given per codeword									

Table A.3.2.2-4: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 (256QAM)

Parameter	Unit	Value		
		R.PDSCH. 2-4.1 TDD	R.PDSCH. 2-4.2 TDD	R.PDSCH. 2-4.3 TDD
Reference channel				
Channel bandwidth	MHz	40	20	20
Subcarrier spacing	kHz	30	30	30
Allocated resource blocks	PRBs	106	51	51
Number of consecutive PDSCH symbols				
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4	4
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12
Allocated slots per 2 frames		31	31	31
MCS table		256QAM	256QAM	256QAM
MCS index		24	24	20
Modulation		256QAM	256QAM	256QAM
Target Coding Rate		0.82	0.82	0.67
Number of MIMO layers		1	1	1
Number of DMRS REs				
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A	N/A

For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	6	6		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12		
Overhead for TBS determination		0	0	0		
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A		
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	29192	14088	11528		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	92200	44040	35856		
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A		
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	24	24		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24		
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A		
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	4	2	2		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	11	6	5		
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A		
For Slots i = 20, 21	Bits	106848	51408	51408		
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	35616	17136	17136		
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	111936	53856	53856		
Max. Throughput averaged over 2 frames	Mbps	130.308	62.272	50.711		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						

Table A.3.2.2.2-5: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-2

Parameter	Unit	Value				
Reference channel		R.PDSCH. 2-5.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slot 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,39}		N/A				
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}		8				
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}		12				
Allocated slots per 2 frames		31				
MCS table		64QAM				
MCS index		4				
Modulation		QPSK				
Target Coding Rate		0.30				
Number of MIMO layers		1				
Number of DMRS REs						
For Slot 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,39}		N/A				
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}		12				

For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 39\}$		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 39\}$	Bits	5376			
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 39\}$	Bits	8456			
Transport block CRC per Slot					
For Slot 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 39\}$	Bits	24			
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 39\}$	Bits	24			
Number of Code Blocks per Slot					
For Slot 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 39\}$	CBs	N/A			
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 39\}$	CBs	1			
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 39\}$	CBs	2			
Binary Channel Bits Per Slot					
For Slot 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i = 20, 21	Bits	26712			
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 39\}$	Bits	17808			
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	27984			
Max. Throughput averaged over 2 frames	Mbps	11.875			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2: Slot i is slot index per 2 frames.					

Table A.3.2.2-6: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-3

Parameter	Unit	Value			
Reference channel		R.PDSCH. 2-6.1 TDD			
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slot 0 and Slot i, if $\text{mod}(i, 10) = \{4,8,9\}$ for i from $\{0, \dots, 39\}$		N/A			
For Slot i, if $\text{mod}(i, 10) = \{3,7\}$ for i from $\{0, \dots, 39\}$		8			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,5,6\}$ for i from $\{1, \dots, 39\}$		12			
Allocated slots per 2 frames		27			
MCS table		64QAM			
MCS index		4			
Modulation		QPSK			
Target Coding Rate		0.30			
Number of MIMO layers		1			
Number of DMRS REs					
For Slot 0 and Slot i, if $\text{mod}(i, 10) = \{4,8,9\}$ for i from $\{0, \dots, 39\}$		N/A			
For Slot i, if $\text{mod}(i, 10) = \{3,7\}$ for i from $\{0, \dots, 39\}$		12			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,5,6\}$ for i from $\{1, \dots, 39\}$		12			
Overhead for TBS determination		0			

Information Bit Payload per Slot					
For Slot 0 and Slot i, if mod(i, 10) = {4,8,9} for i from {0,...,39}	Bits	N/A			
For Slot i, if mod(i, 10) = {3,7} for i from {0,...,39}	Bits	5376			
For Slot i, if mod(i, 10) = {0,1,2,5,6} for i from {1,...,39}	Bits	8456			
Transport block CRC per Slot					
For Slot 0 and Slot i, if mod(i, 10) = {4,8,9} for i from {0,...,39}	Bits	N/A			
For Slot i, if mod(i, 10) = {3,7} for i from {0,...,39}	Bits	24			
For Slot i, if mod(i, 10) = {0,1,2,5,6} for i from {1,...,39}	Bits	24			
Number of Code Blocks per Slot					
For Slot 0 and Slot i, if mod(i, 10) = {4,8,9} for i from {0,...,39}	CBs	N/A			
For Slot i, if mod(i, 10) = {3,7} for i from {0,...,39}	CBs	1			
For Slot i, if mod(i, 10) = {0,1,2,5,6} for i from {1,...,39}	CBs	2			
Binary Channel Bits Per Slot					
For Slot 0 and Slot i, if mod(i, 10) = {4,8,9} for i from {0,...,39}	Bits	N/A			
For Slot i = 20, 21	Bits	26712			
For Slot i, if mod(i, 10) = {3,7} for i from {0,...,39}	Bits	17808			
For Slot i, if mod(i, 10) = {0,1,2,5,6} for i from {1,...,19,22,...,39}	Bits	27984			
Max. Throughput averaged over 2 frames	Mbps	10.184			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2: Slot i is slot index per 2 frames.					

Table A.3.2.2-7: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and CSI-RS overlapped with PDSCH

Parameter	Unit	Value			
Reference channel		R.PDSCH. 2-7.1 TDD			
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12			
Allocated slots per 2 frames		31			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		2			
Number of DMRS REs					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					

For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	16896				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	53288				
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	3				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	7				
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = {0,5} for i from {1,...,19,22,...,39}	Bits	103456				
For Slots i = 20	Bits	98368				
For Slots i = 21	Bits	106848				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	35616				
For Slot i, if mod(i, 10) = {1,2,3,4,6} for i from {1,...,19,22,...,39}	Bits	111936				
Max. Throughput averaged over 2 frames	Mbps	75.318				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						

Table A.3.2.2-8: PDSCH Reference Channel for TDD PMI reporting requirements with UL-DL pattern FR1.30-1 (16QAM)

Parameter	Unit	Value				
		R.PDSCH. 2-8.1 TDD	R.PDSCH. 2-8.2 TDD	R.PDSCH. 2-8.3 TDD	R.PDSCH. 2-8.4 TDD	R.PDSCH. 2-8.5 TDD
Reference channel						
Channel bandwidth	MHz	40	40	40	20	40
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	106	106	106	51	106
Number of consecutive PDSCH symbols		12	12	12	12	12
Allocated slots per 2 frames		23	23	23	23	23
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	20	13	13
Modulation		16QAM	16QAM	64QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.55	0.48	0.48
Number of MIMO layers		1	2	2	1	2
Number of DMRS REs (Note 3)		24	24	24	24	24
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {7,8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For CSI-RS Slot i, if mod(i,10) =1 for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i = 20	Bits	24576	49176	83976	11784	49176
For Slot i, if mod(i, 10) = {0,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	24576	49176	83976	11784	49176
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {7,8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A

For CSI-RS Slot i , if $\text{mod}(i,10) = 1$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot $i = 20$	Bits	24	24	24	24	24
For Slot i , if $\text{mod}(i, 10) = \{0,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{7,8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A
For CSI-RS Slot i , if $\text{mod}(i,10) = 1$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A
For Slot $i = 20$	CBs	3	6	10	2	6
For Slot i , if $\text{mod}(i, 10) = \{0,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	CBs	3	6	10	2	6
Binary Channel Bits Per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{7,8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For CSI-RS Slot i , if $\text{mod}(i,10) = 1$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot $i = 20$	Bits	48336	96672	145008	23256	91584
For Slot i , if $\text{mod}(i, 10) = \{0,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	50880	101760	152640	24480	101760
Max. Throughput averaged over 2 frames	Mbps	28.2624	56.5524	96.5724	13.5516	56.5524
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						
Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.						
Note 4: PDSCH is not scheduled on slots containing CSI-RS for CSI acquisition. No change to PDSCH scheduling for other type of CSI-RS slots.						

Table A.3.2.2-9: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-4 (64QAM)

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-9.1 TDD				
Channel bandwidth	MHz	20				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	51				
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{4,5\}$ for i from $\{0, \dots, 39\}$		N/A				
For Slot i , if $\text{mod}(i, 10) = 3$ for i from $\{0, \dots, 39\}$		4				
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,6,7,8,9\}$ for i from $\{1, \dots, 39\}$		12				
Allocated slots per 2 frames		31				
MCS table		64QAM				
MCS index		19				
Modulation		64QAM				
Target Coding Rate		0.51				
Number of MIMO layers		2				
Number of DMRS REs						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{4,5\}$ for i from $\{0, \dots, 39\}$		N/A				
For Slot i , if $\text{mod}(i, 10) = 3$ for i from $\{0, \dots, 39\}$		6				
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,6,7,8,9\}$ for i from $\{1, \dots, 39\}$		12				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{4,5\}$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slot i , if $\text{mod}(i, 10) = 3$ for i from $\{0, \dots, 39\}$	Bits	13064				
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,6,7,8,9\}$ for i from $\{1, \dots, 39\}$	Bits	40976				

Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {4,5} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = 3 for i from {0,...,39}	Bits	24				
For Slot i, if mod(i, 10) = {0,1,2,6,7,8,9} for i from {1,...,39}	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {4,5} for i from {0,...,39}	CBs	N/A				
For Slot i, if mod(i, 10) = 3 for i from {0,...,39}	CBs	2				
For Slot i, if mod(i, 10) = {0,1,2,6,7,8,9} for i from {1,...,39}	CBs	5				
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {4,5} for i from {0,...,39}	Bits	N/A				
For Slots i = 20, 21	Bits	77112				
For Slot i, if mod(i, 10) = 3 for i from {0,...,39}	Bits	25704				
For Slot i, if mod(i, 10) = {0,1,2,6,7,8,9} for i from {1,...,19,22,...,39}	Bits	80784				
Max. Throughput averaged over 2 frames	Mbps	57.930				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-10: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST scenario

Parameter	Unit	Value				
		R.PDSCH.2-10.1 TDD	R.PDSCH.2-10.2 TDD	R.PDSCH.2-10.3 TDD	R.PDSCH.2-10.4 TDD	R.PDSCH.2-10.5 TDD
Reference channel						
Channel bandwidth	MHz	40	40	40	40	40
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	106	106	106	106	106
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	N/A	4	N/A	4
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12
Allocated slots per 2 frames		31	27	31	27	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	17	13	17
Modulation		16QAM	16QAM	64QAM	16QAM	64QAM
Target Coding Rate		0.48	0.48	0.43	0.48	0.43
Number of MIMO layers		1	1	1	2	2
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	N/A	6	N/A	6
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	8456	N/A	11528	N/A	23040

For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	25608	25608	33816	51216	67584
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	N/A	24	N/A	24
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	2	N/A	2	N/A	3
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	4	4	5	7	9
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,21,22	Bits	52176	52176	78264	104352	156528
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	17808	N/A	26712	N/A	53424
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {3,...,20,23,...,39}	Bits	53424	53424	80136	106848	160272
Max. Throughput averaged over 2 frames	Mbps	36.262	34.5708	47.9572	69.1416	95.8464
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						
Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation.						

Table A.3.2.2-11: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-5

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-11.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slot 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,39}		N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}		12				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}		10				
Allocated slots per 2 frames		31				
MCS table		64QAM				
MCS index		4				
Modulation		QPSK				
Target Coding Rate		0.30				
Number of MIMO layers		1				
Number of DMRS REs						
For Slot 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,39}		N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}		18				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}		18				
Overhead for TBS determination		0				

Information Bit Payload per Slot						
For Slot 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}	Bits	8064				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}	Bits	6528				
Transport block CRC per Slot						
For Slot 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}	Bits	24				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}	Bits	24				
Number of Code Blocks per Slot						
For Slot 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,39}	CBs	N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}	CBs	1				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}	CBs	1				
Binary Channel Bits Per Slot						
For Slot 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,39}	Bits	N/A				
For Slot i = 20	Bits	25440				
For Slot i = 21	Bits	20352				
For Slot i, if mod(i, 4) = 0 for i from {1,...,19,22,...,39}	Bits	26712				
For Slot i, if mod(i, 4) = 1 for i from {0,...,19,22,...,39}	Bits	21624				
Max. Throughput averaged over 2 frames	Mbps	6.893				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-12: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-6

Parameter	Unit	Value				
		R.PDSCH.2-12.1 TDD				
Reference channel		R.PDSCH.2-12.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slot 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,39}		N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}		12				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}		8				
For Slot i, if mod(i, 4) = 2 for i from {0,...,39}		10				
Allocated slots per 2 frames		31				
MCS table		64QAM				
MCS index		4				
Modulation		QPSK				
Target Coding Rate		0.30				
Number of MIMO layers		1				
Number of DMRS REs						
For Slot 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,39}		N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}		18				

For Slot i, if mod(i, 4) = 1 for i from {0,...,39}		18				
For Slot i, if mod(i, 4) = 2 for i from {0,...,39}		18				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slot 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}	Bits	8064				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}	Bits	4992				
For Slot i, if mod(i, 4) = 2 for i from {0,...,39}	Bits	6528				
Transport block CRC per Slot						
For Slot 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}	Bits	24				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}	Bits	24				
For Slot i, if mod(i, 4) = 2 for i from {0,...,39}	Bits	24				
Number of Code Blocks per Slot						
For Slot 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,39}	CBs	N/A				
For Slot i, if mod(i, 4) = 0 for i from {1,...,39}	CBs	1				
For Slot i, if mod(i, 4) = 1 for i from {0,...,39}	CBs	1				
For Slot i, if mod(i, 4) = 2 for i from {0,...,39}	CBs	1				
Binary Channel Bits Per Slot						
For Slot 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,39}	Bits	N/A				
For Slot i = 20	Bits	25440				
For Slot i = 21	Bits	15264				
For Slot i, if mod(i, 4) = 0 for i from {1,...,19,22,...,39}	Bits	26712				
For Slot i, if mod(i, 4) = 1 for i from {1,...,19,22,...,39}	Bits	16536				
For Slot i, if mod(i, 4) = 2 for i from {0,...,39}	Bits	21624				
Max. Throughput averaged over 2 frames	Mbps	9.389				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2.2-13: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-13.1 TDD	R.PDSCH.2-13.2 TDD	R.PDSCH.2-13.3 TDD	R.PDSCH.2-13.4 TDD	R.PDSCH.2-13.5 TDD
Reference channel						
Channel bandwidth	MHz	5	10	15	20	25
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	11	24	38	51	65
Number of consecutive PDSCH symbols						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4	4	4	4
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31

MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	6	6	6	6
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	1800	3840	6144	8192	10504
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	5504	12040	18960	25608	32776
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	16	24	24	24	24
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	1	1	1	1	2
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	1	2	3	4	4
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 20, 21	Bits	11088	24192	38304	51408	65520
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	3696	8064	12768	17136	21840
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	11616	25344	40128	53856	68640
Max. Throughput averaged over 2 frames	Mbps	7.790	17.022	26.825	36.209	46.348
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-14: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-14.1 TDD	R.PDSCH.2-14.2 TDD	R.PDSCH.2-14.3 TDD	R.PDSCH.2-14.4 TDD	R.PDSCH.2-14.5 TDD
Reference channel						
Channel bandwidth	MHz	30	50	60	80	90
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	78	133	162	217	245
Number of consecutive PDSCH symbols						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4	4	4	4

For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	6	6	6	6
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	12552	21504	26120	34816	38936
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	38936	67584	81976	110632	122976
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	24	24	24	24
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	2	3	4	5	5
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	5	9	10	14	15
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 20, 21	Bits	78624	134064	163296	218736	246960
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	26208	44688	54432	72912	82320
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	82368	140448	171072	229152	258720
Max. Throughput averaged over 2 frames	Mbps	55.074	95.539	115.892	156.316	173.805
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2.2-15: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-15.1 TDD				
Channel bandwidth	MHz	100				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	273				

Number of consecutive PDSCH symbols						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12				
Allocated slots per 2 frames		31				
MCS table		64QAM				
MCS index		13				
Modulation		16QAM				
Target Coding Rate		0.48				
Number of MIMO layers		2				
Number of DMRS REs						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	44040				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	139376				
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	6				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	17				
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slots i = 20, 21	Bits	275184				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	91728				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	288288				
Max. Throughput averaged over 2 frames	Mbps	196.966				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-16: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1

Parameter	Unit	Value			
		R.PDSCH.2-16.1 TDD	R.PDSCH.2-16.2 TDD		
Reference channel					

Channel bandwidth	MHz	40	40			
Subcarrier spacing	kHz	30	30			
Allocated resource blocks	PRBs	106	106			
Number of consecutive PDSCH symbols						
For Slot i, if mod(i, 10) = {0, 7} for i from {0,...,39}		N/A	N/A			
For Slot i, if mod(i, 10) = {1,2,3,4,5,6} for i from {1,...,39}		12	12			
Allocated slots per 2 frames		24	24			
MCS table		64QAMLowSE	64QAMLowSE			
MCS index		19	19			
Modulation		16QAM	16QAM			
Target Coding Rate		0.54	0.54			
Number of MIMO layers		1	1			
Number of DMRS REs						
For Slot i, if mod(i, 10) = {0, 7} for i from {0,...,39}		N/A	N/A			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12			
Overhead for TBS determination		0	0			
Information Bit Payload per Slot						
For Slot i, if mod(i, 10) = {0,7,8,9} for i from {0,...,39}	Bits	N/A	N/A			
For Slot i, if mod(i, 10) = {1,2,3,4,5,6} for i from {1,...,39}	Bits	30216	30216			
Transport block CRC per Slot						
For Slot i, if mod(i, 10) = {0,7,8,9} for i from {0,...,39}	Bits	N/A	N/A			
For Slot i, if mod(i, 10) = {1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24			
Number of Code Blocks per Slot						
For Slot i, if mod(i, 10) = {0,7,8,9} for i from {0,...,39}	CBs	N/A	N/A			
For Slot i, if mod(i, 10) = {1,2,3,4,5,6} for i from {1,...,39}	CBs	2	4			
Binary Channel Bits Per Slot						
For Slot i, if mod(i, 10) = {0,7,8,9} for i from {0,...,39}	Bits	N/A	N/A			
For Slot i = 21	Bits	53424	50880			
For Slot i, if mod(i, 10) = {1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	55968	55968			
Max. Throughput averaged over 2 frames	Mbps	18.130 (NOTE 3)	18.130 (NOTE 3)			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms Note 2: Slot i is slot index per 2 frames Note 3: Throughput is calculated under assumption of aggregation factor 2. Note 4: Throughput is calculated under assumption of repetition number 2.						

Table A.3.2.2-17: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-2

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-17.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}		2				
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}		N/A				
Allocated slots per 2 frames		8				

MCS table					
MCS index		4			
Modulation		QPSK			
Target Coding Rate		0.3			
Number of MIMO layers		1			
Number of DMRS REs					
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}		6			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}		N/A			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}	Bits	1160			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}	Bits	N/A			
Transport block CRC per Slot					
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}	Bits	16			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}	Bits	N/A			
Number of Code Blocks per Slot					
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}	CBs	1			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}	CBs	N/A			
Binary Channel Bits Per Slot					
For Slot i, if mod(i, 5) = 3 for i from {0,...,39}	Bits	3816			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,39}	Bits	N/A			
Max. Throughput averaged over 2 frames	Mbps	0.464			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					

Table A.3.2.2-18: PDSCH Reference Channel for PDSCH on band with shared spectrum access with TDD UL-DL pattern FR1.30-7

Parameter	Unit	Value			
		R.PDSCH.2-18.1 TDD	R.PDSCH.2-18.2 TDD	R.PDSCH.2-18.3 TDD	R.PDSCH.2-18.4 TDD
Reference channel					
Channel bandwidth	MHz	20	40	60	80
Subcarrier spacing	kHz	30	30	30	30
Allocated resource blocks	PRBs	51	106	162	217
Number of consecutive PDSCH symbols					
For Slot 0 and slot i, if mod(i, 10) = 7 for i from {0,...,39}		N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = {3, 5, 6} for i from {1,...,39} (Note 3, 5)	symbol	{4,7,10,12}	{4,7,10,12}	{4,7,10,12}	{4,7,10,12}
For Slot i, if mod(i, 10) = {0, 1, 2, 4} for i from {1,...,39} (Note 5)	symbol	12	12	12	12
3 Allocated slots per 2 frames	slot	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2

Number of DMRS REs					
For Slot 0 and slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{3, 5, 6\}$ for i from $\{1, \dots, 39\}$ (Note 3, 5)	symbol	{6, 6,12,12}	{6, 6,12,12}	{6, 6,12,12}	{6, 6,12,12}
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 4\}$ for i from $\{1, \dots, 39\}$ (Note 5)	symbol	12	12	12	12
Overhead for TBS determination		0	0	0	0
Information Bit Payload per Slot					
For Slot 0 and slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{3, 5, 6\}$ for i from $\{1, \dots, 39\}$ (Note 3, 5)	Bits	{8192,14088, 16392,25608}	{16896,29192, 44040,53288}	{26120,45096, 67584,81976,}	{34816,60456, 90176,110632}
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 4\}$ for i from $\{1, \dots, 39\}$ (Note 5)	Bits	25608	53288	81976	110632
Transport block CRC per Slot					
For Slot 0 and slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$ (Note 5)	Bits	24	24	24	24
Number of Code Blocks per Slot					
For Slot 0 and slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{3, 5, 6\}$ for i from $\{1, \dots, 39\}$ (Note 3, 5)	CBs	{1,2,4,4}	{3,4,6,7}	{4,6,9,10}	{5,8,11,14}
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 4\}$ for i from $\{1, \dots, 39\}$ (Note 5)	CBs	4	7	10	14
Binary Channel Bits Per Slot					
For Slot 0 and slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{3, 5, 6\}$ for i from $\{1, \dots, 39\}$ (Note 3, 5)	Bits	{17136,29376, 44064,53865}	{35616,61056, 91854,11193}	{54432,93312, 139968,171072}	{72912,124992, 187488,229152}
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 4\}$ for i from $\{1, \dots, 39\}$ (Note 5)	Bits	53865	111936	171073	229152
<p>Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms</p> <p>Note 2: Slot i is slot index per 2 frames</p> <p>Note 3: For $\{a1,a2,a3,a4\}$, a1, a2, a3 and a4 stand for the setup when the number of OFDM symbols is 6,9,12,14 respectively. It applies only to the last slot within the Downlink Transmission duration (specified in Annex B.5). For all other slots the setup when the number of OFDM symbols is 14 should apply.</p> <p>Note 4: The slot i, $\text{mod}(i,10)=9$ is idle slot with no UL transmission.</p> <p>Note 5: The per Slot value applies only to slots included within the Downlink Transmission duration. For all other slots not included in the Downlink Transmission Duration, N/A should apply</p>					

Table A.3.2.2-19: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST-SFN with CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-19.1 TDD	R.PDSCH.2-19.2 TDD	R.PDSCH.2-19.3 TDD	R.PDSCH.2-19.4 TDD	R.PDSCH.2-19.5 TDD
Reference channel						
Channel bandwidth	MHz	5	10	15	20	25
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	11	24	38	51	65
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12
Allocated slots per 2 frames		27	27	27	27	27
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	5248	11528	18432	24576	31240
Transport block CRC per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	1	2	3	3	4
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,21,22 (Note 3)	Bits	10560	23040	36480	48960	63024
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A

For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{3, \dots, 20, 23, \dots, 39\}$	Bits	11088	24192	38304	51408	65520
Max. Throughput averaged over 2 frames	Mbps	7.0848	15.5628	24.8832	33.1776	42.174
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.2-20: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST-SFN with CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-20.1 TDD	R.PDSCH.2-20.2 TDD	R.PDSCH.2-20.3 TDD	R.PDSCH.2-20.4 TDD	R.PDSCH.2-20.5 TDD
Reference channel						
Channel bandwidth	MHz	30	50	60	80	90
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	78	133	162	217	245
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12
Allocated slots per 2 frames		27	27	27	27	27
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	37896	64552	77896	104496	118896
Transport block CRC per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A

For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	5	8	10	13	15
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,21,22 (Note 3)	Bits	76128	131568	160800	216240	244464
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {3,...,20,23,...,39}	Bits	78624	134064	163296	218736	246960
Max. Throughput averaged over 2 frames	Mbps	51.1596	87.1452	105.1596	141.0696	160.5096
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.2-21: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST-SFN with CA scenario

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-21.1 TDD				
Channel bandwidth	MHz	100				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	273				
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		N/A				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12				
Allocated slots per 2 frames						
MCS table		64QAM				
MCS index		13				
Modulation		16QAM				
Target Coding Rate		0.48				
Number of MIMO layers		2				
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		N/A				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		18				
Overhead for TBS determination						
		0				
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	N/A				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	131176				
Transport block CRC per Slot						

For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	N/A				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	16				
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slots i = 1,2,21,22 (Note 3)	Bits	272688				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{3, \dots, 20, 23, \dots, 39\}$	Bits	275184				
Max. Throughput averaged over 2 frames	Mbps	177.0876				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.2-22: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST-DPS with CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-22.1 TDD	R.PDSCH.2-22.2 TDD	R.PDSCH.2-22.3 TDD	R.PDSCH.2-22.4 TDD	R.PDSCH.2-22.5 TDD
Reference channel						
Channel bandwidth	MHz	5	10	15	20	25
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	11	24	38	51	65
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4	4	4
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.43	0.43	0.43	0.43	0.43
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6	6	6	6
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		18	18	18	18	18

Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	2408	5120	8192	11016	14088
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	7040	15624	24576	32776	42016
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	24	24	24	24
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	1	1	1	2	2
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	1	2	3	4	5
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,21,22 (Note 3)	Bits	15840	34560	54720	73440	94536
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	5544	12096	19152	25704	32760
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {3,...,20,23,...,39}	Bits	16632	36288	57456	77112	98280
Max. Throughput averaged over 2 frames	Mbps	9.9856	22.1164	34.816	46.4508	59.5392
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.2-23: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST-DPS with CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-23.1 TDD	R.PDSCH.2-23.2 TDD	R.PDSCH.2-23.3 TDD	R.PDSCH.2-23.4 TDD	R.PDSCH.2-23.5 TDD
Reference channel						
Channel bandwidth	MHz	30	50	60	80	90
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	78	133	162	217	245
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4	4	4	4
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM

Target Coding Rate		0.43	0.43	0.43	0.43	0.43
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	6	6	6	6
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		18	18	18	18	18
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	16896	28680	34816	47112	53288
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	50184	86040	104496	139376	159880
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	24	24	24	24
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	3	4	5	6	7
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	6	11	13	17	19
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 1,2,21,22 (Note 3)	Bits	114192	197352	241200	324360	366696
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	39312	67032	81648	109368	123480
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {3,...,20,23,...,39}	Bits	117936	201096	244944	328104	370440
Max. Throughput averaged over 2 frames	Mbps	71.1276	121.89	148.0328	197.58	226.4956
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.						

Table A.3.2.2-24: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST-DPS with CA scenario

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-24.1 TDD				
Channel bandwidth	MHz	100				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	273				
Number of consecutive PDSCH symbols						

For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4				
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12				
Allocated slots per 2 frames		31				
MCS table		64QAM				
MCS index		17				
Modulation		64QAM				
Target Coding Rate		0.43				
Number of MIMO layers		2				
Number of DMRS REs						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6				
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		18				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	58384				
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	176208				
Transport block CRC per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	24				
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	7				
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	CBs	21				
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A				
For Slots i = 1, 2, 21, 22 (Note 3)	Bits	409032				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	137592				
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{3, \dots, 20, 23, \dots, 39\}$	Bits	412776				
Max. Throughput averaged over 2 frames	Mbps	249.5576				
<p>Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.</p> <p>Note 2: Slot i is slot index per 2 frames.</p> <p>Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52.</p>						

Table A.3.2.2-25: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 (1024QAM)

Parameter	Unit	Value			
Reference channel		R.PDSCH.2-25.1 TDD			
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12			
Allocated slots per 2 frames		31			
MCS table		1024QAM			
MCS index		23			
Modulation		1024QAM			
Target Coding Rate		0.79			
Number of MIMO layers		1			
Number of DMRS REs					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	34816			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	110632			
Transport block CRC per Slot					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	5			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	14			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A			
For Slots i = 20, 21	Bits	133560			
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	44520			
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	139920			
Max. Throughput averaged over 2 frames	Mbps	156.316			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2: Slot i is slot index per 2 frames.					

Table A.3.2.2-26: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 (16QAM)

Parameter	Unit	Value				
		R.PDSCH.2-26.1 TDD	R.PDSCH.2-26.2 TDD	R.PDSCH.2-26.3 TDD		
Reference channel						
Channel bandwidth	MHz	20	40	20		
Subcarrier spacing	kHz	30	30	30		
Allocated resource blocks	PRBs	51	106	20		
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A		
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4		
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	12		
Allocated slots per 2 frames		31	31	31		
MCS table		64QAM	64QAM	64QAM		
MCS index		13	13	13		
Modulation		16QAM	16QAM	16QAM		
Target Coding Rate		0.48	0.48	0.48		
Number of MIMO layers		1	4	1		
Number of DMRS Res						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A		
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6	6		
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	12		
Overhead for TBS determination		0	0	0		
Information Bit Payload per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A		
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	4096	33816	1608		
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	12808	106576	4992		
Transport block CRC per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A		
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	24	24	16		
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24		
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A		
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	1	5	1		
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	2	13	1		
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A		
For Slots i = 20, 21	Bits	25704	213696	10080		
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	8568	71232	3360		
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	26928	223872	10560		
Max. Throughput averaged over 2 frames	Mbps	18.110	150.641	7.060		
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2:	Slot i is slot index per 2 frames					

Table A.3.2.2.27: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 (64QAM)

Parameter	Unit	Value		
		R.PDSCH.2-27.1 TDD	R.PDSCH.2-27.2 TDD	R.PDSCH.2-27.3 TDD
Reference channel				
Channel bandwidth	MHz	20	20	20
Subcarrier spacing	kHz	30	30	30
Allocated resource blocks	PRBs	51	12	6
Number of consecutive PDSCH symbols				
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	12
Allocated slots per 2 frames		31	31	31
MCS table		64QAM	64QAM	64QAM
MCS index		19	19	19
Modulation		64QAM	64QAM	64QAM
Target Coding Rate		0.51	0.51	0.51
Number of MIMO layers		2	1	2
Number of DMRS REs				
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6	6
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12	12
Overhead for TBS determination		0	0	0
Information Bit Payload per Slot				
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	13064	1544	1544
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	40976	4736	4736
Transport block CRC per Slot				
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	24	16	16
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24
Number of Code Blocks per Slot				
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	2	1	1
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	5	1	1
Binary Channel Bits Per Slot				
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A
For Slots i = 20, 21	Bits	77112	9072	9072
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	25704	3024	3024
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	80784	9504	9504
Max. Throughput averaged over 2 frames	Mbps	57.930	6.702	6.702
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms				
Note 2: Slot i is slot index per 2 frames				
Note 3: PDSCH is scheduled in PRB numbers from 0 to 52.				
Note 4: PDSCH is scheduled in PRB numbers from 53 to 105.				

Table A.3.2.2-28: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 with overlapping spectrum for LTE and NR

Parameter	Unit	Value			
Reference channel		R.PDSCH.2-28.1 TDD			
Channel bandwidth	MHz	20			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	51			
Number of consecutive PDSCH symbols					
For Slot 0 and Slot i, if mod(i, 20) = {4,5,7,8,9,17,18,19} for i from {0,...,39}		N/A			
For Slot i, if mod(i, 20) = {0,1,2,3,6,10,11,12,13,14,15,16} for i from {1,...,39}		12			
Allocated slots per 2 frames		23			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs					
For Slot 0 and Slot i, if mod(i, 20) = {4,5,7,8,9,17,18,19} for i from {0,...,39}		N/A			
For Slot i, if mod(i, 20) = {0,1,2,3,6,10,11,12,13,14,15,16} for i from {1,...,39}		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slot 0 and Slot i, if mod(i, 20) = {4,5,7,8,9,17,18,19} for i from {0,...,39}	Bits	N/A			
For Slot i, if mod(i, 20) = {0,1,2,3,6,10,11,12,13,14,15,16} for i from {1,...,39}	Bits	12808			
Transport block CRC per Slot					
For Slot 0 and Slot i, if mod(i, 20) = {4,5,7,8,9,17,18,19} for i from {0,...,39}	Bits	N/A			
For Slot i, if mod(i, 20) = {0,1,2,3,6,10,11,12,13,14,15,16} for i from {1,...,39}	Bits	24			
Number of Code Blocks per Slot					
For Slot 0 and Slot i, if mod(i, 20) = {4,5,7,8,9,17,18,19} for i from {0,...,39}	CBs	N/A			
For Slot i, if mod(i, 20) = {0,1,2,3,6,10,11,12,13,14,15,16} for i from {1,...,39}	CBs	2			
Binary Channel Bits Per Slot					
For Slot 0 and Slot i, if mod(i, 20) = {4,5,7,8,9,17,18,19} for i from {0,...,39}	Bits	N/A			
For Slots i = 10, 11	Bits	25704			
For Slot i, if mod(i, 20) = {0,1,2,3,6,10,11,12,13,14,15,16} for i from {1,...,9,12,...,39}	Bits	26928			
Max. Throughput averaged over 2 frames	Mbps	14.7292			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 40 ms. Note 2: Slot i is slot index per 2 frames. Note 3: No PDSCH data scheduling on slots with LTE PBCH/PSS/SSS.					

Table A.3.2.2-29: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 with overlapping spectrum for LTE and NR for inter-RAT measurement enabled

Parameter	Unit	Value			
		R.PDSCH.2-29.1 TDD			
Reference channel					
Channel bandwidth	MHz	20			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	51			
Number of consecutive PDSCH symbols					
For Slots $i \in \{5,6,16,25,26,36,45,46,56,65,66,76\}$		N/A			
For Slots $i \in \{0,40\}$		N/A			
For i , if $\text{mod}(i,10) \in \{8,9\}$		N/A			
For Slots in measurement gap $i \in \{2,3,4,5,6,7,8,9,10,11,12,13\}$		N/A			
For i , if $\text{mod}(i,10) = 7$ and $i \neq 7$		4			
For i , if $\text{mod}(i,10) \in \{0,1,2,3,4,5,6\}$ and $i \neq \{0,2,3,4,5,6,10,11,12,13,16,25,26,36,40,45,46,56,65,66,76\}$		12			
Allocated slots per 4 frames		42			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs					
For Slots $i \in \{5,6,16,25,26,36,45,46,56,65,66,76\}$		N/A			
For Slots $i \in \{0,40\}$		N/A			
For i , if $\text{mod}(i,10) \in \{8,9\}$		N/A			
For Slots in measurement gap $i \in \{2,3,4,5,6,7,8,9,10,11,12,13\}$		N/A			
For i , if $\text{mod}(i,10) = 7$ and $i \neq 7$		4			
For i , if $\text{mod}(i,10) \in \{0,1,2,3,4,5,6\}$ and $i \neq \{0,2,3,4,5,6,10,11,12,13,16,25,26,36,40,45,46,56,65,66,76\}$		12			
Information Bit Payload per Slot					
For Slots $i \in \{5,6,16,25,26,36,45,46,56,65,66,76\}$		N/A			
For Slots $i \in \{0,40\}$		N/A			
For i , if $\text{mod}(i,10) \in \{8,9\}$		N/A			
For Slots in measurement gap $i \in \{2,3,4,5,6,7,8,9,10,11,12,13\}$		N/A			
For i , if $\text{mod}(i,10) = 7$ and $i \neq 7$		8456			
For i , if $\text{mod}(i,10) \in \{0,1,2,3,4,5,6\}$ and $i \neq \{0,2,3,4,5,6,10,11,12,13,16,25,26,36,40,45,46,56,65,66,76\}$		12808			
Number of Code Blocks per Slot					
For Slots $i \in \{5,6,16,25,26,36,45,46,56,65,66,76\}$		N/A			
For Slots $i \in \{0,40\}$		N/A			
For i , if $\text{mod}(i,10) \in \{8,9\}$		N/A			
For Slots in measurement gap $i \in \{2,3,4,5,6,7,8,9,10,11,12,13\}$		N/A			
For i , if $\text{mod}(i,10) = 7$ and $i \neq 7$		2			
For i , if $\text{mod}(i,10) \in \{0,1,2,3,4,5,6\}$ and $i \neq \{0,2,3,4,5,6,10,11,12,13,16,25,26,36,40,45,46,56,65,66,76\}$		2			
Binary Channel Bits Per Slot					
For Slots $i \in \{5,6,16,25,26,36,45,46,56,65,66,76\}$		N/A			
For Slots $i \in \{0,40\}$		N/A			
For i , if $\text{mod}(i,10) \in \{8,9\}$		N/A			
		N/A			
For i , if $\text{mod}(i,10) = 7$ and $i \neq 7$		17808			
For $i \in \{20,21,60,61\}$		25776			
For i , if $\text{mod}(i,10) \in \{0,1,2,3,4,5,6\}$ and $i \neq \{0,2,3,4,5,6,10,11,12,13,16,25,26,36,40,45,46,56,65,66,76\}$		26928			
Max. Throughput averaged over 4frames	Mbps	12.6868			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 4 frames					
Note 3: No user data is scheduled on slots with PBCH/PSS/SSS on the interference LTE cell					
Note 4: No user data is scheduled on slots used for measurement					

Table A.3.2.2-30: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and HST scenario

Parameter	Unit	Value			
		R.PDSCH.2-30.1 TDD			
Reference channel					
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A			
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12			
Allocated slots per 2 frames		27			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		2			
Number of DMRS REs					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A			
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		18			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	51216			
Transport block CRC per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A			
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	N/A			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	7			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slots i = 1,2,21,22 (Note 3)	Bits	101856			
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{0,1,2,3,4,5,6\}$	Bits	106848			

{3,...,20,23,...,39}					
Max. Throughput averaged over 2 frames	Mbps	69.1416			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					
Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation.					

Table A.3.2.2-31: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-8 (16QAM)

Parameter	Unit	Value			
Reference channel		R.PDSCH.2-31.1 TDD			
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slots 0 and For Slots i = {30, ..., 39}		N/A			
For Slot i = {1, ..., 29}		12			
Allocated slots per 2 frames		29			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		1			
Number of DMRS REs					
For Slots 0 and For Slots i = {30, ..., 39}		N/A			
For Slot i = {1, ..., 29}		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots 0 and For Slots i = {30, ..., 39}	Bits	N/A			
For Slot i = {1, ..., 29}	Bits	26632			
Transport block CRC per Slot					
For Slots 0 and For Slots i = {30, ..., 39}	Bits	N/A			
For Slot i = {1, ..., 29}	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and For Slots i = {30, ..., 39}	CBs	N/A			
For Slot i = {1, ..., 29}	CBs	4			
Binary Channel Bits Per Slot					
For Slots 0 and For Slots i = {30, ..., 39}	Bits	N/A			
For Slots i = 20, 21	Bits	53424			
For Slot i = {1, ..., 19, 22, ... 29}	Bits	55968			

Max. Throughput averaged over 2 frames	Mbps	38.616				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-32: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-8 (64QAM)

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-32.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slots 0 and For Slots $i = \{30, \dots, 39\}$		N/A				
For Slot $i = \{1, \dots, 29\}$		12				
Allocated slots per 2 frames		29				
MCS table		64QAM				
MCS index		22				
Modulation		64QAM				
Target Coding Rate		0.65				
Number of MIMO layers		1				
Number of DMRS REs						
For Slots 0 and For Slots $i = \{30, \dots, 39\}$		N/A				
For Slot $i = \{1, \dots, 29\}$		12				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slots 0 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slot $i = \{1, \dots, 29\}$	Bits	54296				
Transport block CRC per Slot						
For Slots 0 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slot $i = \{1, \dots, 29\}$	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and For Slots $i = \{30, \dots, 39\}$	CBs	N/A				
For Slot $i = \{1, \dots, 29\}$	CBs	7				
Binary Channel Bits Per Slot						
For Slots 0 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slots $i = 20, 21$	Bits	80136				
For Slot $i = \{1, \dots, 19, 22, \dots, 29\}$	Bits	83952				

Max. Throughput averaged over 2 frames	Mbps	78.729				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-33: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-8 (256QAM)

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-33.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slots 0 and For Slots i = {30, ..., 39}		N/A				
For Slot i = {1, ..., 29}		12				
Allocated slots per 2 frames		29				
MCS table		64QAM				
MCS index		24				
Modulation		256QAM				
Target Coding Rate		0.82				
Number of MIMO layers		1				
Number of DMRS REs						
For Slots 0 and For Slots i = {30, ..., 39}		N/A				
For Slot i = {1, ..., 29}		12				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slots 0 and For Slots i = {30, ..., 39}	Bits	N/A				
For Slot i = {1, ..., 29}	Bits	63528				
Transport block CRC per Slot						
For Slots 0 and For Slots i = {30, ..., 39}	Bits	N/A				
For Slot i = {1, ..., 29}	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and For Slots i = {30, ..., 39}	CBs	N/A				
For Slot i = {1, ..., 29}	CBs	8				
Binary Channel Bits Per Slot						
For Slots 0 and For Slots i = {30, ..., 39}	Bits	N/A				
For Slots i = 20, 21	Bits	80136				
For Slot i = {1, ..., 19, 22, ... 29}	Bits	83952				

Max. Throughput averaged over 2 frames	Mbps	92.116				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-34: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value					
		R.PDSCH.2 -34.1 TDD	R.PDSCH.2 -34.2 TDD	R.PDSCH.2 -34.3 TDD	R.PDSCH.2 -34.4 TDD	R.PDSCH.2 -34.5 TDD	R.PDSCH.2 -34.6 TDD
Reference channel							
Channel bandwidth	MHz	5	10	15	20	25	30
Subcarrier spacing	kHz	30	30	30	30	30	30
Number of allocated resource blocks	PRBs	11	24	38	51	65	78
Number of consecutive PDSCH symbols							
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}		4	4	4	4	4	4
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}		12	12	12	12	12	12
Allocated slots per 2 frames	Slots	31	31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.43	0.43	0.43	0.43	0.43	0.43
Number of MIMO layers		4	4	4	4	4	4
Number of DMRS REs							
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}		12	12	12	12	12	12
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}		24	24	24	24	24	24
Overhead for TBS determination		0	0	0	0	0	0
Information Bit Payload per Slot							
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	Bits	4032	8968	14088	18960	24072	28680
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}	Bits	13576	29704	47112	62504	79896	96264
Transport block CRC per Slot							
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if	Bits	24	24	24	24	24	24

mod(i, 5) = 3 for i from {0,...,19}							
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}	Bits	24	24	24	24	24	24
Number of Code Blocks per Slot							
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	CBs	1	2	2	3	3	4
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}	CBs	2	4	6	8	10	12
Binary Channel Bits Per Slot							
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	30096	65664	103968	139536	177840	213408
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	Bits	9504	69120	32832	44064	56160	67392
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,9,12,...,19}	Bits	31680	20736	109440	146880	187200	224640
Max. Throughput averaged over 2 frames	Mbps	19.134	41.894	66.419	88.172	112.674	135.692
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms Note 2: Slot i is slot index per 2 frames Note 3: Two codewords and given per codeword							

Table A.3.2.2.34-1: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and FR1.30-1A (QPSK)

Parameter	Unit	Value					
		R.PDSCH.2-34.1 TDD	R.PDSCH.2-34.2 TDD				
Reference channel							
Channel bandwidth	MHz	20	20				
Subcarrier spacing	kHz	30	30				
Allocated resource blocks	PRBs	12	25				
Number of consecutive PDSCH symbols							
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}		N/A	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12				
Allocated slots per 2 frames		31	31				
MCS table		64QAM	64QAM				

MCS index		4	4				
Modulation		QPSK	QPSK				
Target Coding Rate		0.30	0.30				
Number of MIMO layers		1	1				
Number of DMRS REs							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		18	18				
Overhead for TBS determination		0	0				
Information Bit Payload per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	304	640				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	928	1928				
Transport block CRC per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	16	16				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	16	16				
Number of Code Blocks per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	1	1				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	1	1				
Binary Channel Bits Per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A				

For Slots $i = 20, 21$	Bits	2880	6000			
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	1008	2100			
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	3024	6300			
Max. Throughput averaged over 2 frames	Mbps	1.314	2.730			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2.2-35: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-35.1 TDD	R.PDSCH.2-35.2 TDD	R.PDSCH.2-35.3 TDD	R.PDSCH.2-35.4 TDD	R.PDSCH.2-35.5 TDD
Reference channel						
Channel bandwidth	MHz	50	60	80	90	100
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	133	162	217	245	273
Number of consecutive PDSCH symbols						
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12
Allocated slots per 2 frames		27	27	27	27	27
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		17	17	17	17	17
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.43	0.43	0.43	0.43	0.43
Number of MIMO layers		4	4	4	4	4
Number of DMRS REs						
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		48	48	48	48	48
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	131176	159880	213176	241720	270576
Transport block CRC per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A

10) = {8,9} for i from {0,...,39}						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	16	19	26	29	33
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 20, 21	Bits	287280	349920	468720	529200	589680
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	306432	373248	499968	564480	628992
Max. Throughput averaged over 2 frames	Mbps	177.088	215.838	287.788	326.322	365.278
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						
Note 3: Two codewords and given per codeword						

Table A.3.2.2.2-36: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value					
		R.PDSCH.2 -36.1 TDD	R.PDSCH.2 -36.2 TDD	R.PDSCH.2 -36.3 TDD	R.PDSCH.2 -36.4 TDD	R.PDSCH.2 -36.5 TDD	R.PDSCH.2 -36.6 TDD
Reference channel							
Channel bandwidth	MHz	5	10	15	20	25	30
Subcarrier spacing	kHz	30	30	30	30	30	30
Allocated resource blocks	PRBs	11	24	38	51	65	78
Number of consecutive PDSCH symbols							
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4	4	4	4	4
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		19	19	19	19	19	19
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.5	0.5	0.5	0.5	0.5	0.5
Number of MIMO layers		2	2	2	2	2	2
Number of DMRS REs							
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	6	6	6	6	6
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0	0
Information Bit Payload per Slot							

For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	2792	6144	9736	13064	16392	19968
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	8712	18960	30216	40976	52224	62504
Transport block CRC per Slot							
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	16	16	16	24	24	24
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24	24	24	24
Number of Code Blocks per Slot							
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	1	1	2	2	2	3
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	2	3	4	5	7	8
Binary Channel Bits Per Slot							
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A	N/A
For Slots $i = 20, 21$	Bits	16632	36288	57456	77112	98280	117936
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	5544	12096	19152	25704	32760	39312
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	17424	38016	60192	80784	102960	123552
Max. Throughput averaged over 2 frames	Mbps	12.320	26.825	42.739	57.930	73.781	88.374
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms							
Note 2: Slot i is slot index per 2 frames							

Table A.3.2.2.2-37: PDSCH Reference Channel for TDD CC with UL-DL pattern FR1.30-1 and CA scenario

Parameter	Unit	Value				
		R.PDSCH.2-37.1 TDD	R.PDSCH.2-37.2 TDD	R.PDSCH.2-37.3 TDD	R.PDSCH.2-37.4 TDD	R.PDSCH.2-37.5 TDD
Reference channel						

Channel bandwidth	MHz	50	60	80	90	100
Subcarrier spacing	kHz	30	30	30	30	30
Allocated resource blocks	PRBs	133	162	217	245	273
Number of consecutive PDSCH symbols						
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4	4	4
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12
Allocated slots per 2 frames		31	31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		19	19	19	19	19
Modulation		64QAM	64QAM	64QAM	64QAM	64QAM
Target Coding Rate		0.5	0.5	0.5	0.5	0.5
Number of MIMO layers		2	2	2	2	2
Number of DMRS REs						
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6	6	6	6
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	33816	40976	55304	62504	69672
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	106576	129128	172176	196776	217128
Transport block CRC per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	24	24	24	24	24
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	5	5	7	8	9
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$	CBs	13	16	21	24	26
Binary Channel Bits Per Slot						
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8, 9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A	N/A	N/A	N/A
For Slots $i = 20, 21$	Bits	201096	244944	328104	370440	412776
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	67032	81648	109368	123480	137592
For Slot i , if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 19, 22, \dots, 39\}$	Bits	210672	256608	343728	388080	432432
Max. Throughput averaged over 2 frames	Mbps	150.641	182.518	243.498	278.148	307.057
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-38: PDSCH Reference Channel for TDD PMI reporting requirements with UL-DL pattern FR1.30-1

Parameter	Unit	Value			
		R.PDSCH.2-Y.1 TDD			
Reference channel					
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames		8			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		2			
Number of DMRS REs (Note 3)		24			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{4,7,8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For CSI-RS Slot i, if $\text{mod}(i, 10) = \{0,1,2,3\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Non CSI-RS Slot i, if $\text{mod}(i, 10) = \{5,6\}$ for i from $\{1, \dots, 39\}$	Bits	49176			
Transport block CRC per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{4,7,8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For CSI-RS Slot i, if $\text{mod}(i, 10) = \{0,1,2,3\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Non CSI-RS Slot i, if $\text{mod}(i, 10) = \{5,6\}$ for i from $\{1, \dots, 39\}$	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{4,7,8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A			
For CSI-RS Slot i, if $\text{mod}(i, 10) = \{0,1,2,3\}$ for i from $\{0, \dots, 39\}$	CBs	N/A			
For Non CSI-RS Slot i, if $\text{mod}(i, 10) = \{5,6\}$ for i from $\{1, \dots, 39\}$	CBs	6			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{4,7,8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For CSI-RS Slot i, if $\text{mod}(i, 10) = \{0,1,2,3\}$ for i from $\{0, \dots, 39\}$	Bits	N/A			
For Non CSI-RS Slot i, if $\text{mod}(i, 10) = \{5,6\}$ for i from $\{1, \dots, 39\}$	Bits	101760			
Max. Throughput averaged over 2 frames	Mbps	19.670			
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms				
Note 2:	Slot i is slot index per 2 frames				
Note 3:	Number of DMRS REs includes the overhead of the DM-RS CDM groups without data				

Table A.3.2.2-39: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-1 and FR1.30-1A (QPSK)

Parameter	Unit	Value					
		R.PDSCH.2-39.1 TDD	R.PDSCH.2-39.2 TDD				
Reference channel							
Channel bandwidth	MHz	20	20				
Subcarrier spacing	kHz	30	30				
Allocated resource blocks	PRBs	12	25				
Number of consecutive PDSCH symbols							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12	12				
Allocated slots per 2 frames		31	31				
MCS table		64QAM	64QAM				
MCS index		4	4				
Modulation		QPSK	QPSK				
Target Coding Rate		0.30	0.30				
Number of MIMO layers		1	1				
Number of DMRS REs							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$		N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6	6				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		18	18				
Overhead for TBS determination		0	0				
Information Bit Payload per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A				
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	304	640				
For Slot i, if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	928	1928				
Transport block CRC per Slot							
For Slots 0 and Slot i, if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A	N/A				

Parameter	Unit	Value					
10) = {8,9} for i from {0,...,39}							
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	16	16				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	16	16				
Number of Code Blocks per Slot							
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	1	1				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	1	1				
Binary Channel Bits Per Slot							
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A				
For Slots i = 20, 21	Bits	2880	6000				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	1008	2100				
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	3024	6300				
Max. Throughput averaged over 2 frames	Mbps	1.314	2.730				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms							
Note 2: Slot i is slot index per 2 frames							

Table A.3.2.2-40: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-8 (16QAM)

Parameter	Unit	Value					
Reference channel		R.PDSCH.2-40.1 TDD					
Channel bandwidth	MHz	40					
Subcarrier spacing	kHz	30					
Allocated resource blocks	PRBs	106					
Number of consecutive PDSCH symbols							
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots i = {30, ..., 39}		N/A					
For Slot i = {1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29}		12					

Allocated slots per 2 frames		13				
MCS table		64QAM				
MCS index		13				
Modulation		16QAM				
Target Coding Rate		0.48				
Number of MIMO layers		1				
Number of DMRS REs						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$		N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$		12				
Overhead for TBS determination		0				
Information Bit Payload per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	Bits	26632				
Transport block CRC per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	Bits	24				
Number of Code Blocks per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	CBs	N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	CBs	4				
Binary Channel Bits Per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slots $i = 20$	Bits	53424				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 24, 25, 28, 29\}$	Bits	55968				
Max. Throughput averaged over 2 frames	Mbps	17.311				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2-41: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-8 (64QAM)

Parameter	Unit	Value			
		R.PDSCH.2-41.1 TDD			
Reference channel		R.PDSCH.2-41.1 TDD			
Channel bandwidth	MHz	40			
Subcarrier spacing	kHz	30			
Allocated resource blocks	PRBs	106			
Number of consecutive PDSCH symbols					
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$		N/A			
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$		12			
Allocated slots per 2 frames		13			
MCS table		64QAM			
MCS index		22			
Modulation		64QAM			
Target Coding Rate		0.65			
Number of MIMO layers		1			
Number of DMRS REs					
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$		N/A			
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$		12			
Overhead for TBS determination		0			
Information Bit Payload per Slot					
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A			
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	Bits	54296			
Transport block CRC per Slot					
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A			
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	Bits	24			
Number of Code Blocks per Slot					
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23,	CBs	N/A			

26, 27 and For Slots $i = \{30, \dots, 39\}$						
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	CBs	7				
Binary Channel Bits Per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slots $i = 20$	Bits	80136				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 24, 25, 28, 29\}$	Bits	83952				
Max. Throughput averaged over 2 frames	Mbps	35.292				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2.2-42: PDSCH Reference Channel for TDD UL-DL pattern FR1.30-8 (256QAM)

Parameter	Unit	Value				
Reference channel		R.PDSCH.2-42.1 TDD				
Channel bandwidth	MHz	40				
Subcarrier spacing	kHz	30				
Allocated resource blocks	PRBs	106				
Number of consecutive PDSCH symbols						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$		N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$		12				
Allocated slots per 2 frames		13				
MCS table		64QAM				
MCS index		24				
Modulation		256QAM				
Target Coding Rate		0.82				
Number of MIMO layers		1				
Number of DMRS REs						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$		N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$		12				
Overhead for TBS determination		0				
Information Bit Payload per Slot						

For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	Bits	63528				
Transport block CRC per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	Bits	24				
Number of Code Blocks per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	CBs	N/A				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 20, 24, 25, 28, 29\}$	CBs	8				
Binary Channel Bits Per Slot						
For Slots 0, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 22, 23, 26, 27 and For Slots $i = \{30, \dots, 39\}$	Bits	N/A				
For Slots $i = 20$	Bits	80136				
For Slot $i = \{1, 4, 5, 9, 10, 14, 15, 19, 24, 25, 28, 29\}$	Bits	83952				
Max. Throughput averaged over 2 frames	Mbps	41.293				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms Note 2: Slot i is slot index per 2 frames						

A.3.2.2.3 Reference measurement channels for SCS 60 kHz FR1

A.3.2.2.4 Reference measurement channels for SCS 60 kHz FR2

Table A.3.2.2.4-1: PDSCH Reference Channel for TDD UL-DL pattern FR2.60-1 (16QAM)

Parameter	Unit	Value				
		R.PDSCH.4-1.1 TDD				
Reference channel						
Channel bandwidth	MHz	50				
Subcarrier spacing	kHz	60				
Allocated resource blocks	PRBs	66				
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i , if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 79\}$		N/A				
For Slot i , if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 79\}$		10				
For Slot i , if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 79\}$		13				

Allocated slots per 2 frames		59			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			
Number of MIMO layers		2			
Number of DMRS REs					
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,79}		N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,79}		12			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,79}		12			
Overhead for TBS determination		6			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,79}	Bits	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,79}	Bits	25608			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,79}	Bits	34816			
Transport block CRC per Slot					
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,79}	Bits	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,79}	Bits	24			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,79}	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,79}	CBs	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,79}	CBs	4			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,79}	CBs	5			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,79}	Bits	N/A			
For Slot i = 40, 41	Bits	69960			
For Slot i, if mod(i, 4) = 2 for i from {4,...,79}	Bits	54912			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,39,42,...,79}	Bits	73128			
Max. Throughput averaged over 2 frames	Mbps	93.499			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2: Slot i is slot index per 2 frames.					

A.3.2.2.5 Reference measurement channels for SCS 120 kHz FR2

Table A.3.2.2.5-1: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-1 and FR2.120-1A (QPSK)

Parameter	Unit	Value			
		R.PDSCH.5-1.1 TDD	R.PDSCH.5-1.2 TDD		
Reference channel					
Channel bandwidth	MHz	100	100		
Subcarrier spacing	kHz	120	120		
Allocated resource blocks	PRBs	66	66		
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A		
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}		9	2		

For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		13	2			
Allocated slots per 2 frames		127	127			
MCS table		64QAM	64QAM			
MCS index		4	4			
Modulation		QPSK	QPSK			
Target Coding Rate		0.30	0.30			
Number of MIMO layers		1	1			
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}		12	6			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		12	6			
Overhead for TBS determination		6	0			
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	Bits	3624	736			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	5504	736			
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	Bits	16	16			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	24	16			
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	CBs	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	CBs	1	1			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	CBs	1	1			
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slots i = 80, 81	Bits	17490	2310			
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	Bits	12210	2310			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,79,82,...,159}	Bits	18282	2310			
Max. Throughput averaged over 2 frames	Mbps	31.942	4.673			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						

Table A.3.2.2.5-2: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-1 (16QAM)

Parameter	Unit	Value				
		R.PDSCH.5-2.1 TDD	R.PDSCH.5-2.2 TDD	R.PDSCH.5-2.3 TDD	R.PDSCH.5-2.4 TDD	R.PDSCH.5-2.5 TDD
Reference channel						
Channel bandwidth	MHz	100	100	200	100	100
Subcarrier spacing	kHz	120	120	120	120	120
Allocated resource blocks	PRBs	66	66	132	33 (Note 3)	33 (Note 4)
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}		9	9	9	8	8
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		13	13	13	12	12

Allocated slots per 2 frames		127	127	127	127	127
MCS table		64QAM	64QAM	64QAM	64QAM	64QAM
MCS index		13	13	13	13	13
Modulation		16QAM	16QAM	16QAM	16QAM	16QAM
Target Coding Rate		0.48	0.48	0.48	0.48	0.48
Number of MIMO layers		1	2	2	2	2
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}		12	12	12	12	12
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		12	12	12	12	12
Overhead for TBS determination		6	6	6	6	6
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	11272	22536	45096	9736	9736
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	17424	34816	69672	15880	15880
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	24	24	24	24	24
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	CBs	2	3	6	2	2
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	CBs	3	5	9	3	3
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 80, 81	Bits	36564	69960	139920	31984	31984
For Slots i = 82	Bits	34980	73128	146256	33568	33568
For Slots i = 83	Bits	22836	48840	97680	21408	21408
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	24420	48840	97680	21408	21408
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,79,84,...,159}	Bits	36564	73128	146256	33568	33568
Max. Throughput averaged over 2 frames	Mbps	100.799	201.434	403.096	91.007	91.007
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms Note 2: Slot i is slot index per 2 frames Note 3: PDSCH is scheduled in PRB numbers from 0 to 32. Note 4: PDSCH is scheduled in PRB numbers from 33 to 65.						

Table A.3.2.2.5-3: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-1 (64QAM)

Parameter	Unit	Value		
		R.PDSCH.5-3.1 TDD	R.PDSCH.5-3.2 TDD	R.PDSCH.5-3.3 TDD
Reference channel				
Channel bandwidth	MHz	100	100	100

Subcarrier spacing	kHz	120	120	120		
Allocated resource blocks	PRBs	66	66	66		
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$		N/A	N/A	N/A		
For Slots i = 80, 81		13	N/A	12		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$		9	9	8		
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 159\}$		13	13	12		
Allocated slots per 2 frames		127	125	127		
MCS table		64QAM	64QAM	64QAM		
MCS index		18	17	17		
Modulation		64QAM	64QAM	64QAM		
Target Coding Rate		0.46	0.43	0.43		
Number of MIMO layers		1	1	1		
Number of DMRS REs						
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$		N/A	N/A	N/A		
For Slots i = 80, 81		12	N/A	24		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$		12	12	24		
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 159\}$		12	12	24		
Overhead for TBS determination		6	6	6		
Information Bit Payload per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A	N/A		
For Slots i = 80, 81	Bits	25104	N/A	19464		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	16136	15112	11272		
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 159\}$	Bits	25104	23568	19464		
Transport block CRC per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A	N/A		
For Slots i = 80, 81	Bits	24	N/A	24		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	24	24	24		
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 159\}$	Bits	24	24	24		
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	CBs	N/A	N/A	N/A		
For Slots i = 80, 81	CBs	3	N/A	3		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	CBs	2	TBA	2		
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 159\}$	CBs	3	TBA	3		
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A	N/A		
For Slots i = 80, 81	Bits	52470	N/A	43164		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	36630	35640	27324		
For Slot i, if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 79, 82, \dots, 159\}$	Bits	54846	54648	45540		
Max. Throughput averaged over 2 frames	Mbps	145.062	136.1272	110.489		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2.5-4: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-2 (QPSK)

Parameter	Unit	Value			
Reference channel		R.PDSCH.5-4.1 TDD			
Channel bandwidth	MHz	100			
Subcarrier spacing	kHz	120			
Allocated resource blocks	PRBs	6			
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$		N/A			
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$		10			
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$		13			
Allocated slots per 2 frames		119			
MCS table		64QAM			
MCS index		4			
Modulation		QPSK			
Target Coding Rate		0.30			
Number of MIMO layers		2			
Number of DMRS REs					
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$		N/A			
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$		12			
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$		12			
Overhead for TBS determination		6			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$	Bits	736			
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$	Bits	1032			
Transport block CRC per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	Bits	N/A			
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$	Bits	16			
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$	Bits	16			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	CBs	N/A			
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$	CBs	1			
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$	CBs	1			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	Bits	N/A			
For Slot i = 80, 81	Bits	3180			
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{4, \dots, 159\}$	Bits	2496			
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 79, 82, \dots, 159\}$	Bits	3324			
Max. Throughput averaged over 2 frames	Mbps	5.548			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.					
Note 2: Slot i is slot index per 2 frames.					

Table A.3.2.2.5-5: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-2 (16QAM)

Parameter	Unit	Value			
-----------	------	-------	--	--	--

Reference channel		R.PDSCH.5-5.1 TDD	R.PDSCH.5-5.2 TDD			
Channel bandwidth	MHz	100	50			
Subcarrier spacing	kHz	120	120			
Allocated resource blocks	PRBs	66	32			
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,159}		N/A	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,159}		10	10			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,159}		13	13			
Allocated slots per 2 frames		119	119			
MCS table		64QAM	64QAM			
MCS index		13	13			
Modulation		16QAM	16QAM			
Target Coding Rate		0.48	0.48			
Number of MIMO layers		2	2			
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,159}		N/A	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,159}		12	12			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,159}		12	12			
Overhead for TBS determination		6	6			
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,159}	Bits	25608	12552			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,159}	Bits	34816	16896			
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,159}	Bits	24	24			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,159}	Bits	24	24			
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,159}	CBs	N/A	N/A			
For Slot i, if mod(i, 4) = 2 for i from {1,...,159}	CBs	4	2			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,159}	CBs	5	3			
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 4) = 3 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i = 80, 81	Bits	69960	33920			
For Slot i, if mod(i, 4) = 2 for i from {4,...,159}	Bits	54912	26624			
For Slot i, if mod(i, 4) = {0,1} for i from {1,...,79,82,...,159}	Bits	73128	35456			
Max. Throughput averaged over 2 frames	Mbps	188.739	91.843			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						

Table A.3.2.2.5-6: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-2 (64QAM)

Parameter	Unit	Value				
Reference channel		R.PDSCH.5-6.1 TDD				
Channel bandwidth	MHz	100				

Subcarrier spacing	kHz	120				
Allocated resource blocks	PRBs	66				
Number of consecutive PDSCH symbols						
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$		N/A				
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$		10				
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$		13				
Allocated slots per 2 frames		119				
MCS table		64QAM				
MCS index		17				
Modulation		64QAM				
Target Coding Rate		0.43				
Number of MIMO layers		2				
Number of DMRS REs						
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$		N/A				
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$		12				
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$		12				
Overhead for TBS determination		6				
Information Bit Payload per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$	Bits	34816				
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$	Bits	47112				
Transport block CRC per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	Bits	N/A				
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$	Bits	24				
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$	Bits	24				
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	CBs	N/A				
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{1, \dots, 159\}$	CBs	5				
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 159\}$	CBs	6				
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if $\text{mod}(i, 4) = 3$ for i from $\{0, \dots, 159\}$	Bits	N/A				
For Slot i = 80, 81	Bits	114940				
For Slot i, if $\text{mod}(i, 4) = 2$ for i from $\{4, \dots, 159\}$	Bits	82368				
For Slot i, if $\text{mod}(i, 4) = \{0, 1\}$ for i from $\{1, \dots, 79, 82, \dots, 159\}$	Bits	109692				
Max. Throughput averaged over 2 frames	Mbps	255.724				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.						
Note 2: Slot i is slot index per 2 frames.						

Table A.3.2.2.5-7: PDSCH Reference Channel for TDD PMI reporting requirements with UL-DL pattern FR2.120-1 (16QAM)

Parameter	Unit	Value		
		R.PDSCH.5-7.1 TDD	R.PDSCH.5-7.2 TDD	R.PDSCH.5-7.3 TDD
Reference channel				
Channel bandwidth	MHz	100	100	100
Subcarrier spacing	kHz	120	120	120
Allocated resource blocks	PRBs	66	66	66

Number of consecutive PDSCH symbols		12	12	12		
Allocated slots per 2 frames		63	63	63		
MCS table		64QAM	64QAM	64QAM		
MCS index		13	13	13		
Modulation		16QAM	16QAM	16QAM		
Target Coding Rate		0.48	0.48	0.48		
Number of MIMO layers		1	2	2		
Number of DMRS REs (Note 3)		24	24	24		
Overhead for TBS determination		6	6	12		
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 5) = {3,4} for i from {0,...,159}	Bits	N/A	N/A	N/A		
For CSI-RS Slot i, if mod(i,5) =1 for i from {0,...,159}	Bits	N/A	N/A	N/A		
For Slot i = 80	Bits	14344	28680	27144		
For Slot i, if mod(i, 5) = {0,2} for i from {1,...,79,82,...,159}	Bits	14344	28680	27144		
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 5) = {3,4} for i from {0,...,159}	Bits	N/A	N/A	N/A		
For CSI-RS Slot i, if mod(i,5) =1 for i from {0,...,159}	Bits	N/A	N/A	N/A		
For Slot i = 80	Bits	24	24	24		
For Slot i, if mod(i, 5) = {0,2} for i from {1,...,79,82,...,159}	Bits	24	24	24		
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 5) = {3,4} for i from {0,...,159}	CBs	N/A	N/A	N/A		
For CSI-RS Slot i, if mod(i,5) =1 for i from {0,...,159}	CBs	N/A	N/A	N/A		
For Slot i = 80	CBs	2	4	4		
For Slot i, if mod(i, 5) = {0,2} for i from {1,...,79,82,...,159}	CBs	2	4	4		
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 5) = {3,4} for i from {0,...,159}	Bits	N/A	N/A	N/A		
For CSI-RS Slot i, if mod(i,5) =1 for i from {0,...,159}	Bits	N/A	N/A	N/A		
For Slot i = 80	Bits	28776	57552	54912		
For Slot i, if mod(i, 5) = {0,2} for i from {1,...,79,82,...,159}	Bits	30360	60720	58080		
Max. Throughput averaged over 2 frames	Mbps	45.1836	90.342	85.504		
<p>Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms</p> <p>Note 2: Slot i is slot index per 2 frames</p> <p>Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data</p> <p>Note 4: PDSCH is not scheduled on slots containing CSI-RS for CSI acquisition. No change to PDSCH scheduling for other type of CSI-RS slots.</p>						

Table A.3.2.2.5-8: PDSCH Reference Channel for TDD PMI reporting requirements with UL-DL pattern FR2.120-2 (16QAM)

Parameter	Unit	Value			
Reference channel		R.PDSCH.5-8.1 TDD			
Channel bandwidth	MHz	100			
Subcarrier spacing	kHz	120			
Allocated resource blocks	PRBs	66			
Number of consecutive PDSCH symbols		12			
Allocated slots per 2 frames		59			
MCS table		64QAM			
MCS index		13			
Modulation		16QAM			
Target Coding Rate		0.48			

Number of MIMO layers		1			
Number of DMRS REs (Note 3)		24			
Overhead for TBS determination		6			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	Bits	N/A			
For CSI-RS Slot i, if mod(i, 8) = 1 for i from {0,...,159}	Bits	N/A			
For Slot i = 80	Bits	14344			
For Slot i, if mod(i, 8) = {0,4,5} for i from {1,...,79,82,...,159}	Bits	14344			
Transport block CRC per Slot					
For Slots 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	Bits	N/A			
For CSI-RS Slot i, if mod(i, 8) = 1 for i from {0,...,159}	Bits	N/A			
For Slot i = 80	Bits	24			
For Slot i, if mod(i, 8) = {0,4,5} for i from {1,...,79,82,...,159}	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	CBs	N/A			
For CSI-RS Slot i, if mod(i, 8) = 1 for i from {0,...,159}	CBs	N/A			
For Slot i = 80	CBs	2			
For Slot i, if mod(i, 8) = {0,4,5} for i from {1,...,79,82,...,159}	CBs	2			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	Bits	N/A			
For CSI-RS Slot i, if mod(i, 8) = 1 for i from {0,...,159}	Bits	N/A			
For Slot i = 80	Bits	28776			
For Slot i, if mod(i, 8) = {0,4,5} for i from {1,...,79,82,...,159}	Bits	30360			
Max. Throughput averaged over 2 frames	Mbps	42.3148			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames. Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data. Note 4: PDSCH is not scheduled on slots containing CSI-RS for CSI acquisition. No change to PDSCH scheduling for other type of CSI-RS slots.					

Table A.3.2.2.5-9: PDSCH Reference Channel for TDD CC with UL-DL pattern FR2.120-1 and CA scenario

FFS

Table A.3.2.2.5-10: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-1 (256QAM)

Parameter	Unit	Value			
Reference channel		R.PDSCH.5-10.1 TDD			
Channel bandwidth	MHz	50			
Subcarrier spacing	kHz	120			
Allocated resource blocks	PRBs	32			
Number of consecutive PDSCH symbols					
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}		9			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		13			
Allocated slots per 2 frames		127			
MCS table		256QAM			
MCS index		20			

Modulation		256QAM			
Target Coding Rate		0.67			
Number of MIMO layers		1			
Number of DMRS REs					
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}		12			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		12			
Overhead for TBS determination		6			
Information Bit Payload per Slot					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	15368			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	23568			
Transport block CRC per Slot					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	24			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	24			
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	CBs	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	CBs	2			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	CBs	3			
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A			
For Slots i = 80, 81	Bits	33920			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	23680			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,79,82,...,159}	Bits	35456			
Max. Throughput averaged over 2 frames	Mbps	136.537			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					

Table A.3.2.2.5-11: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-2

Parameter	Unit	Value			
Reference channel		R.PDSCH.5-11.1 TDD			
Channel bandwidth	MHz	100			
Subcarrier spacing	kHz	120			
Allocated resource blocks	PRBs	66			
Number of consecutive PDSCH symbols					
For Slot i, if mod(i, 4) = {0,1} for i from {2,...,159}		13			
Allocated slots per 2 frames		78			
MCS table		64QAMLowSE			
MCS index		16			
Modulation		16QAM			
Target Coding Rate		0.37			
Number of MIMO layers		1			
Number of DMRS REs					
For Slot i, if mod(i, 4) = {0,1} for i from {2,...,159}		12			
Overhead for TBS determination		6			
Information Bit Payload per Slot					

For Slots 0, 1 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	Bits	N/A				
For Slot i, if mod(i, 4) = {0,1} for i from {2,...,159}	Bits	13320				
Transport block CRC per Slot						
For Slots 0, 1 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	Bits	N/A				
For Slot i, if mod(i, 4) = {0,1} for i from {2,...,159}	Bits	24				
Number of Code Blocks per Slot						
For Slots 0, 1 and Slot i, if mod(i, 4) = {2,3} for i from {0,...,159}	CBs	N/A				
For Slot i, if mod(i, 4) = {0,1} for i from {2,...,159}	CBs	2				
Binary Channel Bits Per Slot						
For Slots 0,1 and Slot i, if mod(i, 4) = {2, 3} for i from {0,...,159}	Bits	N/A				
For Slot i = 80, 81	Bits	34980				
For Slot i, if mod(i, 4) = {0,1} for i from {2,...,159}	Bits	36564				
Max. Throughput averaged over 2 frames	Mbps	25.974 (Note 3)				
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						
Note 3: Throughput is calculated under assumption of aggregation factor 2.						

Table A.3.2.2.5-12: PDSCH Reference Channel for TDD UL-DL pattern FR2.120-1 and HST-DPS scenario

Parameter	Unit	Value			
		R.PDSCH.5-12.1 TDD	R.PDSCH.5-12.2 TDD		
Reference channel					
Channel bandwidth	MHz	200	200		
Subcarrier spacing	kHz	120	120		
Allocated resource blocks	PRBs	132	132		
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A		
For Slot i, if mod(i, 5) = 3 for i from {4,..., 159}		9	9		
For Slot i, if mod(i, 5) = {0,1,2} for i from {5,...,159}		13	13		
For Slot i=1		N/A (Note 1)	N/A (Note 4)		
For Slot i=2		13	N/A (Note 4)		
For Slot i=3		9	N/A (Note 4)		
Allocated slots per 2 frames		126	124		
MCS table		64QAM	64QAM		
MCS index		17	17		
Modulation		64QAM	64QAM		
Target Coding Rate		0.43	0.43		
Number of MIMO layers		2	2		
Number of DMRS REs					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A		
For Slot i, if mod(i, 5) = 3 for i from {4,..., 159}		18	18		
For Slot i, if mod(i, 5) = {0,1,2} for i from {5,...,159}		18	18		
For Slot i = 1		N/A (Note 1)	N/A (Note 4)		
For Slot i=2		18	N/A (Note 4)		
For Slot i=3		18	N/A (Note 4)		
Overhead for TBS determination		6	6		
Information Bit Payload per Slot					

For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {4,..., 159}	Bits	57376	57376			
For Slot i, if mod(i, 5) = {0,1,2} for i from {5,...,159}	Bits	90176	90176			
For Slot i = 1	Bits	N/A (Note 1)	N/A (Note 4)			
For Slot i=2	Bits	90176	N/A (Note 4)			
For Slot i=3	Bits	57376	N/A (Note 4)			
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {4,..., 159}	Bits	24	24			
For Slot i, if mod(i, 5) = {0,1,2} for i from {5,...,159}	Bits	24	24			
For Slot i = 1	Bits	N/A (Note 1)	N/A (Note 4)			
For Slot i = 2	Bits	24	N/A (Note 4)			
For Slot i = 3	Bits	24	N/A (Note 4)			
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	CBs	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {4,..., 159}	CBs	7	7			
For Slot i, if mod(i, 5) = {0,1,2} for i from {5,...,159}	CBs	11	11			
For Slot i = 1	CBs	N/A (Note 1)	N/A (Note 4)			
For Slot i=2	CBs	11	N/A (Note 4)			
For Slot i=3	CBs	7	N/A (Note 4)			
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slots i = 5 and 85 (Note 3)	Bits	195696	181968			
For Slots i = 6 and 86 (Note 3)	Bits	137808	137808			
For Slot i, if mod(i, 5) = 3 for i from {8,...,84, 87,..., 159}	Bits	146520	146520			
For Slot i, if mod(i, 5) = {0,1,2} for i from {7,...,84,87,..., 159}	Bits	210672	210672			
For Slot i = 1	Bits	N/A (Note 1)	N/A (Note 4)			
For Slot i= 2	Bits	210672	N/A (Note 4)			
For Slot i= 3	Bits	137808	N/A (Note 4)			
Max. Throughput averaged over 2 frames	Mbps	515.62	508.25			
Note 1: SS/PBCH block is transmitted in slot #0 and slot #1 with periodicity 20 ms Note 2: Slot i is slot index per 2 frames Note 3: Binary Channel Bits are calculated under assumption of 52 PRBs TRS allocation when the number of allocated resource blocks are more than 52. Note 4: SS/PBCH block is transmitted in slot #0, slot #1, slot #2 and slot #3 with periodicity 20ms						

Table A.3.2.2.5-13: Reference measurement channels for PDSCH Single-DCI based SDM scheme for FR2.120-1 (64QAM)

Parameter	Unit	Value			
		R.PDSCH.5-16.1 TDD	R.PDSCH.5-16.2 TDD		
Reference channel					
Channel bandwidth	MHz	100	100		
Subcarrier spacing	kHz	120	120		
Allocated resource blocks	PRBs	66	66		
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A		
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}		9	9		

For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		13	13			
Allocated slots per 2 frames		127	127			
MCS table		64QAM	64QAM			
MCS index		17	17			
Modulation		64QAM	64QAM			
Target Coding Rate		0.43	0.43			
Number of MIMO layers		2	2			
Number of DMRS REs						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}		24	24			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}		24	24			
Overhead for TBS determination		6	12			
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	26632	24576			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	43032	40976			
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	24	24			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	Bits	24	24			
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	CBs	N/A	N/A			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	CBs	4	3			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,159}	CBs	6	5			
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A			
For Slots i = 80, 81	Bits	95436	91080			
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}	Bits	63756	60984			
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,79,82,...,159}	Bits	100188	95832			
Max. Throughput averaged over 2 frames	Mbps	247.0132	233.9576			
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.2.5-14: Reference measurement channels for PDSCH Single-DCI based SDM scheme for FR2.120-1 (64QAM)

Parameter	Unit	Value			
		R.PDSCH.5-19.1 TDD	R.PDSCH.5-19.2 TDD		
Reference channel					
Channel bandwidth	MHz	100	100		
Subcarrier spacing	kHz	120	120		
Allocated resource blocks	PRBs	66	66		
Number of consecutive PDSCH symbols					
For Slots 0 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}		N/A	N/A		
For Slot i, if mod(i, 5) = 3 for i from {0,..., 159}		9	9		

For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 159\}$		13	13		
Allocated slots per 2 frames		127	127		
MCS table		64QAM	64QAM		
MCS index		17	17		
Modulation		64QAM	64QAM		
Target Coding Rate		0.43	0.43		
Number of MIMO layers		2	2		
Number of DMRS REs					
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$		N/A	N/A		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$		24	24		
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 159\}$		24	24		
Overhead for TBS determination		6	12		
Information Bit Payload per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	26632	24576		
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 159\}$	Bits	43032	40976		
Transport block CRC per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	24	24		
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 159\}$	Bits	24	24		
Number of Code Blocks per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	CBs	N/A	N/A		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	CBs	4	3		
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 159\}$	CBs	6	5		
Binary Channel Bits Per Slot					
For Slots 0 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A		
For Slots i = 80, 81	Bits	95436	91080		
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	63756	60984		
For Slot i, if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 79, 82, \dots, 159\}$	Bits	100188	95832		
Max. Throughput averaged over 2 frames	Mbps	247.0132	233.9576		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					

A.3.2.2.6 Reference measurement channels for E-UTRA

Table A.3.2.2.6-1: PDSCH Reference Channel for sustained data-rate test (64QAM, 2 MIMO layers)

Parameter	Unit	Value		
		R.PDSCH.6-1.1 TDD	R.PDSCH.6-1.2 TDD	R.PDSCH.6-1.3 TDD
Reference channel				
Channel bandwidth	MHz	10	15	20
Allocated resource blocks		Note 7	Note 8	Note 9
Uplink-Downlink Configuration (Note 3)		2	2	2
Number of HARQ Processes per component carrier		10	10	10
Allocated subframes per Radio Frame (D+S)		6	6	6
Modulation		64QAM	64QAM	64QAM

Coding Rate					
For Sub-Frames 1,2,6,7		N/A	N/A	N/A	
For Sub-Frames 3,4,8,9		0.85	0.85	0.88	
For Sub-Frame 5		0.88	0.87	0.87	
For Sub-Frame 0		0.90	0.88	0.90	
Information Bit Payload (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4,8,9	Bits	36696	55056	75376	
For Sub-Frame 5	Bits	35160	52752	71112	
For Sub-Frame 0	Bits	36696	55056	75376	
Number of Code Blocks (Notes 4 and 5)					
For Sub-Frames 1,2,6,7	CBs	N/A	N/A	N/A	
For Sub-Frames 3,4,8,9	CBs	6	9	13	
For Sub-Frame 5	CBs	6	9	12	
For Sub-Frame 0	CBs	6	9	13	
Binary Channel Bits (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4,8,9	Bits	43200	64800	86400	
For Sub-Frame 5	Bits	40176	60912	82512	
For Sub-Frame 0	Bits	41184	62784	84384	
Number of layers		2	2	2	
Max. Throughput averaged over 1 frame (Note 4)	Mbps	21.864	32.803	44.799	
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: As per Table 4.2-2 in TS 36.211 [15].</p> <p>Note 4: Given per component carrier per codeword.</p> <p>Note 5: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 6: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,3,4,8,9.</p> <p>Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,3,4,8,9.</p> <p>Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,3,4,8,9.</p>					

Table A.3.2.2.6-2: PDSCH Reference Channel for sustained data-rate test (64QAM, 4 MIMO layers)

Parameter	Unit	Value		
		R.PDSCH.6-2.1 TDD	R.PDSCH.6-2.2 TDD	R.PDSCH.6-2.3 TDD
Reference channel				
Channel bandwidth	MHz	10	15	20
Allocated resource blocks		Note 7	Note 8	Note 9
Uplink-Downlink Configuration (Note 3)		2	2	2
Number of HARQ Processes per component carrier		10	10	10
Allocated subframes per Radio Frame (D+S)		6	6	6
Modulation		64QAM	64QAM	64QAM
Coding Rate				
For Sub-Frames 1,2,6,7		N/A	N/A	N/A
For Sub-Frames 3,4,8,9		0.78	0.77	0.79
For Sub-Frame 5		0.79	0.79	0.80
For Sub-Frame 0		0.82	0.79	0.81
Information Bit Payload (Note 4)				
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A
For Sub-Frames 3,4,8,9	Bits	63776	93800	128496
For Sub-Frame 5	Bits	59256	90816	124464
For Sub-Frame 0	Bits	63776	93800	128496
Number of Code Blocks (Notes 4 and 5)				
For Sub-Frames 1,2,6,7	CBs	N/A	N/A	N/A
For Sub-Frames 3,4,8,9	CBs	11	16	21
For Sub-Frame 5	CBs	10	15	21
For Sub-Frame 0	CBs	11	16	21

Binary Channel Bits (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4,8,9	Bits	81600	122400	163200	
For Sub-Frame 5	Bits	75840	115008	155808	
For Sub-Frame 0	Bits	77856	118656	159456	
Number of layers		4	4	4	
Max. Throughput averaged over 1 frame (Note 4)	Mbps	37.813	55.981	76.694	
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: As per Table 4.2-2 in TS 36.211 [15].</p> <p>Note 4: Given per component carrier per codeword.</p> <p>Note 5: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 6: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,3,4,8,9.</p> <p>Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,3,4,8,9.</p> <p>Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,3,4,8,9.</p>					

Table A.3.2.2.6-3: PDSCH Reference Channel for sustained data-rate test (256QAM, 2 MIMO layers)

Parameter	Unit	Value			
		R.PDSCH.6-3.1 TDD	R.PDSCH.6-3.2 TDD	R.PDSCH.6-3.3 TDD	
Reference channel					
Channel bandwidth	MHz	10	15	20	
Allocated resource blocks		Note 7	Note 8	Note 9	
Uplink-Downlink Configuration (Note 3)		2	2	2	
Number of HARQ Processes per component carrier		10	10	10	
Allocated subframes per Radio Frame (D+S)		6	6	6	
Modulation		256QAM	256QAM	256QAM	
Coding Rate					
For Sub-Frames 1,2,6,7		N/A	N/A	N/A	
For Sub-Frames 3,4		0.74	0.79	0.74	
For Sub-Frames 8,9		0.85	0.88	0.85	
For Sub-Frame 5		0.76	0.76	0.74	
For Sub-Frame 0		0.78	0.77	0.76	
Information Bit Payload (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4	Bits	42368	63776	84760	
For Sub-Frames 8,9	Bits	48936	75376	97896	
For Sub-Frame 5	Bits	40576	61664	81176	
For Sub-Frame 0	Bits	42368	63776	84760	
Number of Code Blocks (Notes 4 and 5)					
For Sub-Frames 1,2,6,7	CBs	N/A	N/A	N/A	
For Sub-Frames 3,4	CBs	7	11	14	
For Sub-Frames 8,9	CBs	8	13	16	
For Sub-Frame 5	CBs	7	11	14	
For Sub-Frame 0	CBs	7	11	14	
Binary Channel Bits (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4	Bits	57600	86400	115200	
For Sub-Frames 8,9	Bits	57600	86400	115200	
For Sub-Frame 5	Bits	53568	81216	110016	
For Sub-Frame 0	Bits	54912	83712	112512	
Number of layers		2	2	2	
Max. Throughput averaged over 1 frame (Note 4)	Mbps	26.555	40.374	53.125	
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: As per Table 4.2-2 in TS 36.211 [15].</p> <p>Note 4: Given per component carrier per codeword.</p>					

Note 5:	If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).
Note 6:	Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.
Note 7:	Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,3,4,8,9.
Note 8:	Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,3,4,8,9.
Note 9:	Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,3,4,8,9.

Table A.3.2.2.6-4: PDSCH Reference Channel for sustained data-rate test (256QAM, 4 MIMO layers)

Parameter	Unit	Value		
		R.PDSCH.6-4.1 TDD	R.PDSCH.6-4.2 TDD	R.PDSCH.6-4.3 TDD
Reference channel				
Channel bandwidth	MHz	10	15	20
Allocated resource blocks		Note 7	Note 8	Note 9
Uplink-Downlink Configuration (Note 3)		2	2	2
Number of HARQ Processes per component carrier		10	10	10
Allocated subframes per Radio Frame (D+S)		6	6	6
Modulation		256QAM	256QAM	256QAM
Coding Rate				
For Sub-Frames 1,2,6,7		N/A	N/A	N/A
For Sub-Frames 3,4		0.78	0.79	0.78
For Sub-Frames 8,9		0.78	0.79	0.78
For Sub-Frame 5		0.81	0.82	0.78
For Sub-Frame 0		0.82	0.82	0.80
Information Bit Payload (Note 4)				
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A
For Sub-Frames 3,4	Bits	84760	128496	169544
For Sub-Frames 8,9	Bits	84760	128496	169544
For Sub-Frame 5	Bits	81176	124464	161760
For Sub-Frame 0	Bits	84760	128496	169544
Number of Code Blocks (Notes 4 and 5)				
For Sub-Frames 1,2,6,7	CBs	N/A	N/A	N/A
For Sub-Frames 3,4	CBs	14	21	28
For Sub-Frames 8,9	CBs	14	21	28
For Sub-Frame 5	CBs	14	21	27
For Sub-Frame 0	CBs	14	21	28
Binary Channel Bits (Note 4)				
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A
For Sub-Frames 3,4	Bits	108800	163200	217600
For Sub-Frames 8,9	Bits	108800	163200	217600
For Sub-Frame 5	Bits	101120	153344	207744
For Sub-Frame 0	Bits	103808	158208	212608
Number of layers		4	4	4
Max. Throughput averaged over 1 frame (Note 4)	Mbps	50.498	76.694	100.948
Note 1:	1 symbol allocated to PDCCH for all tests.			
Note 2:	Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].			
Note 3:	As per Table 4.2-2 in TS 36.211 [15].			
Note 4:	Given per component carrier per codeword.			
Note 5:	If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).			
Note 6:	Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.			
Note 7:	Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,3,4,8,9.			
Note 8:	Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,3,4,8,9.			
Note 9:	Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,3,4,8,9.			

Table A.3.2.2.6-5: PDSCH Reference Channel for sustained data-rate test (1024QAM, 2 MIMO layers)

Parameter	Unit	Value		
		R.PDSCH.6-5.1 TDD	R.PDSCH.6-5.2 TDD	R.PDSCH.6-5.3 TDD
Reference channel				
Channel bandwidth	MHz	10	15	20
Allocated resource blocks		Note 7	Note 8	Note 9
Uplink-Downlink Configuration (Note 3)		2	2	2
Number of HARQ Processes per component carrier		10	10	10
Allocated subframes per Radio Frame (D+S)		6	6	6
Modulation		1024QAM	1024QAM	1024QAM
Coding Rate				
For Sub-Frames 1,2,6,7		N/A	N/A	N/A
For Sub-Frames 3,4		0.76	0.75	0.76
For Sub-Frames 8,9		0.76	0.75	0.76
For Sub-Frame 5		0.76	0.78	0.77
For Sub-Frame 0		0.80	0.78	0.78
Information Bit Payload (Note 4)				
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A
For Sub-Frames 3,4	Bits	55056	81176	110136
For Sub-Frames 8,9	Bits	55056	81176	110136
For Sub-Frame 5	Bits	51024	78704	105528
For Sub-Frame 0	Bits	55056	81176	110136
Number of Code Blocks (Notes 4 and 5)				
For Sub-Frames 1,2,6,7	CBs	N/A	N/A	N/A
For Sub-Frames 3,4	CBs	9	14	18
For Sub-Frames 8,9	CBs	9	14	18
For Sub-Frame 5	CBs	9	13	18
For Sub-Frame 0	CBs	9	14	18
Binary Channel Bits (Note 4)				
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A
For Sub-Frames 3,4	Bits	72000	108000	144000
For Sub-Frames 8,9	Bits	72000	108000	144000
For Sub-Frame 5	Bits	66960	101520	137520
For Sub-Frame 0	Bits	68640	104640	140640
Number of layers		2	2	2
Max. Throughput averaged over 1 frame (Note 4)	Mbps	32.630	48.458	65.621
Note 1:	1 symbol allocated to PDCCH for all tests.			
Note 2:	Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].			
Note 3:	As per Table 4.2-2 in TS 36.211 [15].			
Note 4:	Given per component carrier per codeword.			
Note 5:	If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).			
Note 6:	Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.			
Note 7:	Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,3,4,8,9.			
Note 8:	Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,3,4,8,9.			
Note 9:	Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,3,4,8,9.			

Table A.3.2.2.6-6: PDSCH Reference Channel for sustained data-rate test (1024QAM, 4 MIMO layers)

Parameter	Unit	Value		
		R.PDSCH.6-6.1 TDD	R.PDSCH.6-6.2 TDD	R.PDSCH.6-6.3 TDD
Reference channel				
Channel bandwidth	MHz	10	15	20
Allocated resource blocks		Note 7	Note 8	Note 9
Uplink-Downlink Configuration (Note 3)		2	2	2
Number of HARQ Processes per component carrier		10	10	10
Allocated subframes per Radio Frame (D+S)		6	6	6
Modulation		1024QAM	1024QAM	1024QAM

Coding Rate					
For Sub-Frames 1,2,6,7		N/A	N/A	N/A	
For Sub-Frames 3,4		0.81	0.79	0.81	
For Sub-Frames 8,9		0.81	0.79	0.81	
For Sub-Frame 5		0.81	0.82	0.82	
For Sub-Frame 0		0.85	0.82	0.83	
Information Bit Payload (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4	Bits	110136	161760	220296	
For Sub-Frames 8,9	Bits	110136	161760	220296	
For Sub-Frame 5	Bits	101840	157432	211936	
For Sub-Frame 0	Bits	110136	161760	220296	
Number of Code Blocks (Notes 4 and 5)					
For Sub-Frames 1,2,6,7	CBs	N/A	N/A	N/A	
For Sub-Frames 3,4	CBs	18	27	36	
For Sub-Frames 8,9	CBs	18	27	36	
For Sub-Frame 5	CBs	17	26	35	
For Sub-Frame 0	CBs	18	27	36	
Binary Channel Bits (Note 4)					
For Sub-Frames 1,2,6,7	Bits	N/A	N/A	N/A	
For Sub-Frames 3,4	Bits	136000	204000	272000	
For Sub-Frames 8,9	Bits	136000	204000	272000	
For Sub-Frame 5	Bits	126400	191680	259680	
For Sub-Frame 0	Bits	129760	197760	265760	
Number of layers		2	2	2	
Max. Throughput averaged over 1 frame (Note 4)	Mbps	65.252	96.623	131.342	
<p>Note 1: 1 symbol allocated to PDCCH for all tests.</p> <p>Note 2: Reference signal, synchronization signals and PBCH allocated as per TS 36.211 [17].</p> <p>Note 3: As per Table 4.2-2 in TS 36.211 [15].</p> <p>Note 4: Given per component carrier per codeword.</p> <p>Note 5: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).</p> <p>Note 6: Resource blocks $n_{PRB} = 0..2$ are allocated for SIB transmissions in sub-frame 5 for all bandwidths.</p> <p>Note 7: Resource blocks $n_{PRB} = 3..49$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..49$ in sub-frames 0,3,4,8,9.</p> <p>Note 8: Resource blocks $n_{PRB} = 4..74$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..74$ in sub-frames 0,3,4,8,9.</p> <p>Note 9: Resource blocks $n_{PRB} = 4..99$ are allocated for the user data in sub-frame 5, and resource blocks $n_{PRB} = 0..99$ in sub-frames 0,3,4,8,9.</p>					

A.3.2.2.7 Reference measurement channels for Intra-cell Inter-UE interference scenario

Table A.3.2.2.7-1: PDSCH Reference Channel for TDD Intra-cell Inter-UE interference scenario

Parameter	Unit	Value			
		R.PDSCH.7-1.1 TDD	R.PDSCH.7-1.2 TDD	R.PDSCH.7-1.3 TDD	R.PDSCH.7-1.4 TDD
Reference channel					
Channel bandwidth	MHz	40	40	40	40
Subcarrier spacing	kHz	30	30	30	30
Allocated resource blocks	PRBs	106	106	106	106
Number of consecutive PDSCH symbols					
For Slot i, if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		4	4	4	4
For Slot i, if $\text{mod}(i, 10) = \{0, 1, 2, 3, 4, 5, 6\}$ for i from $\{1, \dots, 39\}$		12	12	12	12
Allocated slots per 2 frames		31	31	31	31
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		13	13	17	17
Modulation		16QAM	16QAM	64QAM	64QAM
Target Coding Rate		0.48	0.48	0.43	0.43
Number of MIMO layers		1	2	1	2

Number of DMRS REs						
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		6	12	6	12	
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	24	12	24	
Overhead for TBS determination		0	0	0	0	
Information Bit Payload per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	8456	14600	11528	19464	
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	26632	49176	35856	65576	
Transport block CRC per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	24	24	24	24	
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24	24	
Number of Code Blocks per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A	N/A	
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	2	2	2	3	
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	4	6	5	8	
Binary Channel Bits Per Slot						
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A	N/A	
For Slots i = 20, 21	Bits	53424	96672	80136	160272	
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	17808	30528	26712	53424	
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,19,22,...,39}	Bits	55968	101760	83952	167904	
Max. Throughput averaged over 2 frames	Mbps	37.644	69.308	50.711	92.420	
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

A.3.2.3 HD-FDD

A.3.2.3.1 Reference measurement channels for SCS 15 kHz FR1

Table A.3.2.3.1-1: PDSCH Reference Channel for HD-FDD

Parameter	Unit	Value				
		R.PDSCH.1-1.1 HD-FDD	R.PDSCH.1-1.2 HD-FDD	R.PDSCH.1-1.3 HD-FDD	R.PDSCH.1-1.4 HD-FDD	R.PDSCH.1-1.5 HD-FDD
Reference channel						
Channel bandwidth	MHz	10	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15	15
Number of allocated resource blocks	PRBs	52	52	52	52	52
Number of consecutive PDSCH symbols						
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}		8	8	8	8	8
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}		12	12	12	12	12
Allocated slots per 2 frames	Slots	15	15	15	15	15
MCS table		64QAM	64QAM	64QAM	256QAM	256QAM
MCS index		4	13	19	20	24
Modulation		QPSK	16QAM	64QAM	256QAM	256QAM

Target Coding Rate		0.30	0.48	0.51	0.67	0.82
Number of MIMO layers		1	1	1	1	1
Number of DMRS REs						
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}		18	12	12	12	12
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}		18	12	12	12	12
Overhead for TBS determination		0	0	0	0	0
Information Bit Payload per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	Bits	2472	8456	13320	23040	28680
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}	Bits	3904	13064	21000	36896	45096
Transport block CRC per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	Bits	24	24	24	24	24
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}	Bits	24	24	24	24	24
Number of Code Blocks per Slot						
For Slot i = 0	CBs	N/A	N/A	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	CBs	1	2	2	3	4
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}	CBs	1	2	3	5	6
Binary Channel Bits Per Slot						
For Slot i = 0	Bits	N/A	N/A	N/A	N/A	N/A
For Slots i = 10, 11	Bits	12480	26208	39312	52416	TBA
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}	Bits	8112	17472	26208	34944	34944
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,9,12,...,19}	Bits	13104	27456	41184	54912	54912
Max. Throughput averaged over 2 frames	Mbps	2.642	11.489	14.214	24.901	30.539
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.3.1-2: PDSCH Reference Channel for HD-FDD

Parameter	Unit	Value			
		R.PDSCH.1-2.1 HD-FDD	R.PDSCH.1-2.2 HD-FDD	R.PDSCH.1-2.3 HD-FDD	R.PDSCH.1-2.4 HD-FDD
Reference channel					
Channel bandwidth	MHz	10	10	10	10
Subcarrier spacing	kHz	15	15	15	15
Number of allocated resource blocks	PRBs	52	25	25	40
Number of consecutive PDSCH symbols					
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}		8	8	8	8
For Slot i, if mod(i, 5) = {0,1,2} for i from {1,...,19}		12	12	12	12
Allocated slots per 2 frames	Slots	15	15	15	15
MCS table		64QAM	64QAM	64QAM	64QAM
MCS index		19	4	13	13
Modulation		64QAM	QPSK	16QAM	16QAM
Target Coding Rate		0.51	0.30	0.48	0.48
Number of MIMO layers		2	1	1	1
Number of DMRS REs					
For Slot i, if mod(i, 5) = 3 for i from {0,...,19}		12	18	12	12

For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$		12	18	12	12	
Overhead for TBS determination		0	0	0	0	
Information Bit Payload per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	26632	1192	3968	6400	
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$	Bits	42016	1928	6272	9992	
Transport block CRC per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	24	16	24	24	
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$	Bits	24	16	24	24	
Number of Code Blocks per Slot						
For Slot $i = 0$	CBs	N/A	N/A	N/A	N/A	
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	CBs	4	1	1	1	
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 19\}$	CBs	5	1	1	2	
Binary Channel Bits Per Slot						
For Slot $i = 0$	Bits	N/A	N/A	N/A	N/A	
For Slots $i = 10, 11$	Bits	78624	6000	12600	20160	
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	52416	3900	8400	13440	
For Slot i , if $\text{mod}(i, 5) = \{0,1,2\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	82368	6300	13200	21120	
Max. Throughput averaged over 2 frames	Mbps	28.435	1.684	5.498	8.774	
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms						
Note 2: Slot i is slot index per 2 frames						

Table A.3.2.3.1-3: PDSCH Reference Channel for HD-FDD PMI reporting requirements

Parameter	Unit	Value			
		R.PDSCH.1-3.1 HD-FDD	R.PDSCH.1-3.2 HD-FDD		
Reference channel					
Channel bandwidth	MHz	10	10		
Subcarrier spacing	kHz	15	15		
Number of allocated resource blocks	PRBs	52	25		
Number of consecutive PDSCH symbols					
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		8	8		
For Slot i , if $\text{mod}(i, 5) = \{0,2\}$ for i from $\{1, \dots, 19\}$		12	12		
Allocated slots per 2 frames	Slots	11	11		
MCS table		64QAM	64QAM		
MCS index		13	13		
Modulation		16QAM	16QAM		
Target Coding Rate		0.48	0.48		
Number of MIMO layer		1	1		
Number of DMRS REs (Note 3)		24	24		
Overhead for TBS determination		0	0		
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A	N/A		
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i = \{0, \dots, 19\}$		N/A	N/A		
For Non CSI-RS Slot i , if $\text{mod}(i,5) = 3$, $i = \{0, \dots, 19\}$	Bits	7168	3496		
For Non CSI-RS Slot i , if $\text{mod}(i,5) = \{0,2\}$, $i = \{1, \dots, 19\}$	Bits	12040	5760		

Transport block CRC per Slot					
For Slot $i = 0$	Bits	N/A	N/A		
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i \in \{0, \dots, 19\}$		N/A	N/A		
For Non CSI-RS Slot i , if $\text{mod}(i,5) = 3$, $i \in \{0, \dots, 19\}$	Bits	24	24		
For Non CSI-RS Slot i , if $\text{mod}(i,5) \in \{0,2\}$, $i \in \{1, \dots, 19\}$	Bits	24	24		
Number of Code Blocks per Slot					
For Slot $i = 0$	CBs	N/A	N/A		
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i \in \{0, \dots, 19\}$		N/A	N/A		
For Non CSI-RS Slot i , if $\text{mod}(i,5) = 3$, $i \in \{0, \dots, 19\}$	CBs	1	1		
For Non CSI-RS Slot i , if $\text{mod}(i,5) \in \{0,2\}$, $i \in \{1, \dots, 19\}$	CBs	2	1		
Binary Channel Bits Per Slot					
For Slot $i = 0$	Bits	N/A	N/A		
For CSI Slots i , if $\text{mod}(i,5) = 1$, $i \in \{0, \dots, 19\}$		N/A	N/A		
For Slots $i = 10$	Bits	23712	11400		
For Non CSI-RS Slot i , if $\text{mod}(i,5) = 3$, $i \in \{0, \dots, 19\}$	Bits	14976	7200		
For Non CSI-RS Slot i , if $\text{mod}(i,5) \in \{0,2\}$, $i \in \{1, \dots, 9, 11, \dots, 19\}$	Bits	24960	12000		
Max. Throughput averaged over 2 frames	Mbps	5.648	2.715		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					
Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data					

Table A.3.2.3.1-4: PDSCH Reference Channel for HD-FDD

Parameter	Unit	Value			
		R.PDSCH.1-4.1 HD-FDD	R.PDSCH.1-4.2 HD-FDD		
Reference channel					
Channel bandwidth	MHz	10	10		
Subcarrier spacing	kHz	15	15		
Number of allocated resource blocks	PRBs	25	12		
Number of consecutive PDSCH symbols					
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		8	8		
For Slot i , if $\text{mod}(i, 5) \in \{0,1,2\}$ for i from $\{1, \dots, 19\}$		12	12		
Allocated slots per 2 frames	Slots	15	15		
MCS table		64QAM	64QAM		
MCS index		19	19		
Modulation		64QAM	64QAM		
Target Coding Rate		0.51	0.51		
Number of MIMO layers		1	2		
Number of DMRS REs					
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$		12	12		
For Slot i , if $\text{mod}(i, 5) \in \{0,1,2\}$ for i from $\{1, \dots, 19\}$		12	12		
Overhead for TBS determination		0	0		
Information Bit Payload per Slot					
For Slot $i = 0$	Bits	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	6400	6144		
For Slot i , if $\text{mod}(i, 5) \in \{0,1,2\}$ for i from $\{1, \dots, 19\}$	Bits	9992	9480		

Transport block CRC per Slot					
For Slot $i = 0$	Bits	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	24	24		
For Slot i , if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$	Bits	24	24		
Number of Code Blocks per Slot					
For Slot $i = 0$	CBs	N/A	N/A		
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	CBs	1	1		
For Slot i , if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 19\}$	CBs	2	2		
Binary Channel Bits Per Slot					
For Slot $i = 0$	Bits	N/A	N/A		
For Slots $i = 10, 11$	Bits	18900	18144		
For Slot i , if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 19\}$	Bits	12600	12096		
For Slot i , if $\text{mod}(i, 5) = \{0, 1, 2\}$ for i from $\{1, \dots, 9, 12, \dots, 19\}$	Bits	19800	19008		
Max. Throughput averaged over 2 frames	Mbps	8.774	8.339		
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms					
Note 2: Slot i is slot index per 2 frames					

A.3.2_1 Reference measurement channels for Sustained downlink data rate performance requirements

A.3.2_1.1 FDD

A.3.2_1.1.1 Reference measurement channels for SCS 15 kHz FR1

Table A.3.2_1.1.1-1: Sustained Downlink Data Rate Reference Channel for FDD 15kHz SCS FR1 (64QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSCH symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	kHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	5	15	25	13	18	64QAM	0.46	1	1	9736	24	2	21600	8.276
	10	15	52	13	18	64QAM	0.46	1	1	20496	24	3	44928	17.422
	15	15	79	13	18	64QAM	0.46	1	1	31240	24	4	68256	26.554
	20	15	106	13	18	64QAM	0.46	1	1	42016	24	5	91584	35.714

	25	15	133	13	18	64QAM	0.46	1	1	52224	24	7	114912	44.390
	30	15	160	13	18	64QAM	0.46	1	1	62504	24	8	138240	53.128
	35	15	188	13	18	64QAM	0.46	1	1	73776	24	9	162432	62.710
	40	15	216	13	18	64QAM	0.46	1	1	83976	24	10	186624	71.380
	45	15	242	13	18	64QAM	0.46	1	1	94248	24	12	209088	80.111
	50	15	270	13	18	64QAM	0.46	1	1	106576	24	13	233280	90.590
	5	15	25	13	22	64QAM	0.65	1	1	14088	24	2	21600	11.975
	10	15	52	13	22	64QAM	0.65	1	1	29192	24	4	44928	24.813
	15	15	79	13	22	64QAM	0.65	1	1	44040	24	6	68256	37.434
	20	15	106	13	22	64QAM	0.65	1	1	59432	24	8	91584	50.517
	25	15	133	13	22	64QAM	0.65	1	1	73776	24	9	114912	62.710
	30	15	160	13	22	64QAM	0.65	1	1	90176	24	11	138240	76.650
	35	15	188	13	22	64QAM	0.65	1	1	106576	24	13	162432	90.590
	40	15	216	13	22	64QAM	0.65	1	1	120936	24	15	186624	102.796
	45	15	242	13	22	64QAM	0.65	1	1	135296	24	17	209088	115.002
	50	15	270	13	22	64QAM	0.65	1	1	151608	24	18	233280	128.867
	5	15	25	13	23	64QAM	0.70	1	1	15112	24	2	21600	12.845
	10	15	52	13	23	64QAM	0.70	1	1	31752	24	4	44928	26.989
	15	15	79	13	23	64QAM	0.70	1	1	48168	24	6	68256	40.943
	20	15	106	13	23	64QAM	0.70	1	1	64552	24	8	91584	54.869
	25	15	133	13	23	64QAM	0.70	1	1	79896	24	10	114912	67.912
	30	15	160	13	23	64QAM	0.70	1	1	96264	24	12	138240	81.824
	35	15	188	13	23	64QAM	0.70	1	1	114776	24	14	162432	97.560
	40	15	216	13	23	64QAM	0.70	1	1	131176	24	16	186624	111.500
	45	15	242	13	23	64QAM	0.70	1	1	147576	24	18	209088	125.440
	50	15	270	13	23	64QAM	0.70	1	1	163976	24	20	233280	139.380
	5	15	25	13	27	64QAM	0.89	1	1	18960	24	3	21600	16.116
	10	15	52	13	27	64QAM	0.89	1	1	39936	24	5	44928	33.946
	15	15	79	13	27	64QAM	0.89	1	1	60456	24	8	68256	51.388
	20	15	106	13	27	64QAM	0.89	1	1	81976	24	10	91584	69.680
	25	15	133	13	27	64QAM	0.89	1	1	102416	24	13	114912	87.054
	30	15	160	13	27	64QAM	0.89	1	1	122976	24	15	138240	104.530
	35	15	188	13	27	64QAM	0.89	1	1	143400	24	17	162432	121.890
	40	15	216	13	27	64QAM	0.89	1	1	163976	24	20	186624	139.380
	45	15	242	13	27	64QAM	0.89	1	1	184424	24	22	209088	156.760
	50	15	270	13	27	64QAM	0.89	1	1	208976	24	25	233280	177.630
	5	15	25	13	18	64QAM	0.46	2	1	19464	24	3	43200	16.544

	10	15	52	13	18	64QAM	0.46	2	1	40976	24	5	89856	34.830
	15	15	79	13	18	64QAM	0.46	2	1	62504	24	8	136512	53.128
	20	15	106	13	18	64QAM	0.46	2	1	83976	24	10	183168	71.380
	25	15	133	13	18	64QAM	0.46	2	1	104496	24	13	229824	88.822
	30	15	160	13	18	64QAM	0.46	2	1	125016	24	15	276480	106.264
	35	15	188	13	18	64QAM	0.46	2	1	147576	24	18	324864	125.440
	40	15	216	13	18	64QAM	0.46	2	1	167976	24	20	373248	142.780
	45	15	242	13	18	64QAM	0.46	2	1	188576	24	23	418176	160.290
	50	15	270	13	18	64QAM	0.46	2	1	213176	24	26	466560	181.200
	5	15	25	13	22	64QAM	0.65	2	1	28168	24	4	43200	23.943
	10	15	52	13	22	64QAM	0.65	2	1	58384	24	7	89856	49.626
	15	15	79	13	22	64QAM	0.65	2	1	88064	24	11	136512	74.854
	20	15	106	13	22	64QAM	0.65	2	1	118896	24	15	183168	101.062
	25	15	133	13	22	64QAM	0.65	2	1	147576	24	18	229824	125.440
	30	15	160	13	22	64QAM	0.65	2	1	180376	24	22	276480	153.320
	35	15	188	13	22	64QAM	0.65	2	1	213176	24	26	324864	181.200
	40	15	216	13	22	64QAM	0.65	2	1	241720	24	29	373248	205.462
	45	15	242	13	22	64QAM	0.65	2	1	270576	24	33	418176	229.990
	50	15	270	13	22	64QAM	0.65	2	1	303240	24	36	466560	257.754
	5	15	25	13	23	64QAM	0.70	2	1	30216	24	4	43200	25.684
	10	15	52	13	23	64QAM	0.70	2	1	63528	24	8	89856	53.999
	15	15	79	13	23	64QAM	0.70	2	1	96264	24	12	136512	81.824
	20	15	106	13	23	64QAM	0.70	2	1	129128	24	16	183168	109.759
	25	15	133	13	23	64QAM	0.70	2	1	159880	24	19	229824	135.898
	30	15	160	13	23	64QAM	0.70	2	1	192624	24	23	276480	163.730
	35	15	188	13	23	64QAM	0.70	2	1	229576	24	28	324864	195.140
	40	15	216	13	23	64QAM	0.70	2	1	262376	24	32	373248	223.020
	45	15	242	13	23	64QAM	0.70	2	1	295176	24	35	418176	250.900
	50	15	270	13	23	64QAM	0.70	2	1	327888	24	39	466560	278.705
	5	15	25	13	27	64QAM	0.89	2	1	37896	24	5	43200	32.212
	10	15	52	13	27	64QAM	0.89	2	1	79896	24	10	89856	67.912
	15	15	79	13	27	64QAM	0.89	2	1	120936	24	15	136512	102.796
	20	15	106	13	27	64QAM	0.89	2	1	163976	24	20	183168	139.380
	25	15	133	13	27	64QAM	0.89	2	1	204976	24	25	229824	174.230
	30	15	160	13	27	64QAM	0.89	2	1	245976	24	30	276480	209.080

	35	15	188	13	27	64QAM	0.89	2	1	286976	24	34	324864	243.930
	40	15	216	13	27	64QAM	0.89	2	1	327888	24	39	373248	278.705
	45	15	242	13	27	64QAM	0.89	2	1	368872	24	44	418176	313.541
	50	15	270	13	27	64QAM	0.89	2	1	417976	24	50	466560	355.280
	5	15	25	13	19	64QAM	0.50	4	1	39936	24	5	79200	33.946
	10	15	52	13	19	64QAM	0.50	4	1	83976	24	10	164736	71.380
	15	15	79	13	19	64QAM	0.50	4	1	127080	24	16	250272	108.018
	20	15	106	13	19	64QAM	0.50	4	1	167976	24	20	335808	142.780
	25	15	133	13	19	64QAM	0.50	4	1	213176	24	26	421344	181.200
	30	15	160	13	19	64QAM	0.50	4	1	254176	24	31	506880	216.050
	35	15	188	13	19	64QAM	0.50	4	1	303240	24	36	595584	257.754
	40	15	216	13	19	64QAM	0.50	4	1	344376	24	41	684288	292.720
	45	15	242	13	19	64QAM	0.50	4	1	385272	24	46	766656	327.481
	50	15	270	13	19	64QAM	0.50	4	1	434280	24	52	855360	369.138
	5	15	25	13	23	64QAM	0.70	4	1	55304	24	7	79200	47.008
	10	15	52	13	23	64QAM	0.70	4	1	114776	24	14	164736	97.560
	15	15	79	13	23	64QAM	0.70	4	1	176208	24	21	250272	149.777
	20	15	106	13	23	64QAM	0.70	4	1	237776	24	29	335808	202.110
	25	15	133	13	23	64QAM	0.70	4	1	295176	24	35	421344	250.900
	30	15	160	13	23	64QAM	0.70	4	1	352440	24	42	506880	299.574
	35	15	188	13	23	64QAM	0.70	4	1	417976	24	50	595584	355.280
	40	15	216	13	23	64QAM	0.70	4	1	483464	24	58	684288	410.944
	45	15	242	13	23	64QAM	0.70	4	1	540776	24	65	766656	459.660
	50	15	270	13	23	64QAM	0.70	4	1	606504	24	72	855360	515.528
	5	15	25	13	24	64QAM	0.75	4	1	59432	24	8	79200	50.517
	10	15	52	13	24	64QAM	0.75	4	1	125016	24	15	164736	106.264
	15	15	79	13	24	64QAM	0.75	4	1	188576	24	23	250272	160.290
	20	15	106	13	24	64QAM	0.75	4	1	254176	24	31	335808	216.050
	25	15	133	13	24	64QAM	0.75	4	1	319784	24	38	421344	271.816
	30	15	160	13	24	64QAM	0.75	4	1	385272	24	46	506880	327.481
	35	15	188	13	24	64QAM	0.75	4	1	450984	24	54	595584	383.336
	40	15	216	13	24	64QAM	0.75	4	1	516312	24	62	684288	438.865
	45	15	242	13	24	64QAM	0.75	4	1	573504	24	68	766656	487.478
	50	15	270	13	24	64QAM	0.75	4	1	638984	24	76	855360	543.136

	5	15	25	13	27	64QAM	0.89	4	1	69672	24	9	79200	59.221
	10	15	52	13	27	64QAM	0.89	4	1	147576	24	18	164736	125.440
	15	15	79	13	27	64QAM	0.89	4	1	221376	24	27	250272	188.170
	20	15	106	13	27	64QAM	0.89	4	1	295176	24	36	335808	250.900
	25	15	133	13	27	64QAM	0.89	4	1	376896	24	45	421344	320.362
	30	15	160	13	27	64QAM	0.89	4	1	450984	24	54	506880	383.336
	35	15	188	13	27	64QAM	0.89	4	1	524640	24	63	595584	445.944
	40	15	216	13	27	64QAM	0.89	4	1	606504	24	72	684288	515.528
	45	15	242	13	27	64QAM	0.89	4	1	688776	24	82	766656	585.460
	50	15	270	13	27	64QAM	0.89	4	1	753816	24	90	855360	640.744

Note 1: Allocated full DL slots are with slot index i , if i is not in $\{0,10,11\}$ for $i = 0,1,\dots,19$. So total number of allocated slots per 2 frames is 17.

Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is not enabled. MCS 18 and 19 are equivalent to MCS 11 and 12 in 256QAM table, respectively.

Note 3: Number of DMRS REs per RB = 12,12,24,24 for number of MIMO layers = 1,2,3,4, respectively

Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.

Note 5: Overhead parameter for TBS determination is 0.

Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

Table A.3.2_1.1.1-2: Sustained Downlink Data Rate Reference Channel for FDD 15kHz SCS FR1 (256QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSCH symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDPC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	kHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	5	15	25	13	20	256QAM	0.67	1	1	18960	24	3	28800	16.116
	10	15	52	13	20	256QAM	0.67	1	1	39936	24	5	59904	33.946
	15	15	79	13	20	256QAM	0.67	1	1	60456	24	8	91008	51.388
	20	15	106	13	20	256QAM	0.67	1	1	81976	24	10	122112	69.68
	25	15	133	13	20	256QAM	0.67	1	1	102416	24	13	153216	87.054
	30	15	160	13	20	256QAM	0.67	1	1	122976	24	15	184320	104.53
	35	15	188	13	20	256QAM	0.67	1	1	143400	24	17	216576	121.890
	40	15	216	13	20	256QAM	0.67	1	1	163976	24	20	248832	139.38
	45	15	242	13	20	256QAM	0.67	1	1	184424	24	22	278784	156.760
	50	15	270	13	20	256QAM	0.67	1	1	208976	24	25	311040	177.630
	5	15	25	13	21	256QAM	0.69	1	1	19968	24	3	28800	16.973
	10	15	52	13	21	256QAM	0.69	1	1	42016	24	5	59904	35.714
	15	15	79	13	21	256QAM	0.69	1	1	63528	24	8	91008	53.999
	20	15	106	13	21	256QAM	0.69	1	1	83976	24	10	122112	71.38
	25	15	133	13	21	256QAM	0.69	1	1	106576	24	13	153216	90.590
	30	15	160	13	21	256QAM	0.69	1	1	127080	24	16	184320	108.018
	35	15	188	13	21	256QAM	0.69	1	1	151608	24	18	216576	128.867
	40	15	216	13	21	256QAM	0.69	1	1	172176	24	21	248832	146.350
	45	15	242	13	21	256QAM	0.69	1	1	192624	24	23	278784	163.730
	50	15	270	13	21	256QAM	0.69	1	1	217128	24	26	311040	184.559
	5	15	25	13	26	256QAM	0.90	1	1	25608	24	4	28800	21.767

	10	15	52	13	26	256QAM	0.90	1	1	53288	24	7	59904	45.295
	15	15	79	13	26	256QAM	0.90	1	1	81976	24	10	91008	69.680
	20	15	106	13	26	256QAM	0.90	1	1	108552	24	13	122112	92.269
	25	15	133	13	26	256QAM	0.90	1	1	135296	24	17	153216	115.002
	30	15	160	13	26	256QAM	0.90	1	1	163976	24	20	184320	139.38
	35	15	188	13	26	256QAM	0.90	1	1	192624	24	23	216576	163.730
	40	15	216	13	26	256QAM	0.90	1	1	221376	24	27	248832	188.17
	45	15	242	13	26	256QAM	0.90	1	1	250056	24	30	278784	212.548
	50	15	270	13	26	256QAM	0.90	1	1	278776	24	33	311040	236.960
	5	15	25	13	20	256QAM	0.67	2	1	37896	24	5	57600	32.212
	10	15	52	13	20	256QAM	0.67	2	1	79896	24	10	119808	67.912
	15	15	79	13	20	256QAM	0.67	2	1	120936	24	15	182016	102.796
	20	15	106	13	20	256QAM	0.67	2	1	163976	24	20	244224	139.38
	25	15	133	13	20	256QAM	0.67	2	1	204976	24	25	306432	174.230
	30	15	160	13	20	256QAM	0.67	2	1	245976	24	30	368640	209.08
	35	15	188	13	20	256QAM	0.67	2	1	286976	24	34	433152	243.930
	40	15	216	13	20	256QAM	0.67	2	1	327888	24	39	497664	278.705
	45	15	242	13	20	256QAM	0.67	2	1	368872	24	44	557568	313.541
	50	15	270	13	20	256QAM	0.67	2	1	417976	24	50	622080	355.280
	5	15	25	13	21	256QAM	0.69	2	1	39936	24	5	57600	33.946
	10	15	52	13	21	256QAM	0.69	2	1	83976	24	10	119808	71.38
	15	15	79	13	21	256QAM	0.69	2	1	127080	24	16	182016	108.018
	20	15	106	13	21	256QAM	0.69	2	1	167976	24	20	244224	142.78
	25	15	133	13	21	256QAM	0.69	2	1	213176	24	26	306432	181.2
	30	15	160	13	21	256QAM	0.69	2	1	254176	24	31	368640	216.05
	35	15	188	13	21	256QAM	0.69	2	1	303240	24	36	433152	257.754
	40	15	216	13	21	256QAM	0.69	2	1	344376	24	41	497664	292.72
	45	15	242	13	21	256QAM	0.69	2	1	385272	24	46	557568	327.481
	50	15	270	13	21	256QAM	0.69	2	1	434280	24	52	622080	369.138
	5	15	25	13	26	256QAM	0.90	2	1	51216	24	7	57600	43.534
	10	15	52	13	26	256QAM	0.90	2	1	106576	24	13	119808	90.59

3GPP TS 38.521-4 version 18.10.0 Release 18

1368

ETSI TS 138 521-4 V18.10.0 (2026-04)

	15	15	79	13	26	256QAM	0.90	2	1	163976	24	20	182016	139.380
	20	15	106	13	26	256QAM	0.90	2	1	217128	24	26	244224	184.559
	25	15	133	13	26	256QAM	0.90	2	1	270576	24	33	306432	229.990
	30	15	160	13	26	256QAM	0.90	2	1	327888	24	39	368640	278.705
	35	15	188	13	26	256QAM	0.90	2	1	385272	24	46	433152	327.481
	40	15	216	13	26	256QAM	0.90	2	1	442632	24	53	497664	376.237
	45	15	242	13	26	256QAM	0.90	2	1	500136	24	60	557568	425.116
	50	15	270	13	26	256QAM	0.90	2	1	557416	24	66	622080	473.804
	5	15	25	13	22	256QAM	0.74	4	1	77896	24	10	105600	66.212
	10	15	52	13	22	256QAM	0.74	4	1	159880	24	19	219648	135.898
	15	15	79	13	22	256QAM	0.74	4	1	245976	24	30	333696	209.080
	20	15	106	13	22	256QAM	0.74	4	1	327888	24	39	447744	278.705
	25	15	133	13	22	256QAM	0.74	4	1	409616	24	49	561792	348.174
	30	15	160	13	22	256QAM	0.74	4	1	500136	24	60	675840	425.116
	35	15	188	13	22	256QAM	0.74	4	1	590128	24	70	794112	501.609
	40	15	216	13	22	256QAM	0.74	4	1	671976	24	80	912384	571.18
	45	15	242	13	22	256QAM	0.74	4	1	753816	24	90	1022208	640.744
	50	15	270	13	22	256QAM	0.74	4	1	835976	24	99	1140480	710.580
	5	15	25	13	23	256QAM	0.78	4	1	81976	24	10	105600	69.680
	10	15	52	13	23	256QAM	0.78	4	1	172176	24	21	219648	146.35
	15	15	79	13	23	256QAM	0.78	4	1	258144	24	31	333696	219.422
	20	15	106	13	23	256QAM	0.78	4	1	352440	24	42	447744	299.574
	25	15	133	13	23	256QAM	0.78	4	1	434280	24	52	561792	369.138
	30	15	160	13	23	256QAM	0.78	4	1	524640	24	63	675840	445.944
	35	15	188	13	23	256QAM	0.78	4	1	622760	24	74	794112	529.346
	40	15	216	13	23	256QAM	0.78	4	1	704904	24	84	912384	599.168
	45	15	242	13	23	256QAM	0.78	4	1	803304	24	96	1022208	682.808
	50	15	270	13	23	256QAM	0.78	4	1	885288	24	105	1140480	752.495
	5	15	25	13	26	256QAM	0.90	4	1	94248	24	12	105600	80.111
	10	15	52	13	26	256QAM	0.90	4	1	196776	24	24	219648	167.26
	15	15	79	13	26	256QAM	0.90	4	1	295176	24	35	333696	250.900

	20	15	106	13	26	256QAM	0.90	4	1	401640	24	48	447744	341.394
	25	15	133	13	26	256QAM	0.90	4	1	500136	24	60	561792	425.116
	30	15	160	13	26	256QAM	0.90	4	1	606504	24	72	675840	515.528
	35	15	188	13	26	256QAM	0.90	4	1	704904	24	84	794112	599.168
	40	15	216	13	26	256QAM	0.90	4	1	819256	24	98	912384	696.368
	45	15	242	13	26	256QAM	0.90	4	1	918192	24	109	1022208	780.463
	50	15	270	13	26	256QAM	0.90	4	1	1016376	24	121	1140480	863.920

Note 1: Allocated full DL slots are with slot index i , if i is not in $\{0,10,11\}$ for $i = 0,1,\dots,19$. So total number of allocated slots per 2 frames is 17.

Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is enabled.

Note 3: Number of DMRS REs per RB = 12,12,24,24 for number of MIMO layers = 1,2,3,4, respectively

Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.

Note 5: Overhead parameter for TBS determination is 0.

Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

Table A.3.2_1.1.1-3: Sustained Downlink Data Rate Reference Channel for FDD 15kHz SCS FR1 (1024QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSCH symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDPC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	kHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	5	15	25	13	23	1024QAM	0.79	1	1	28168	24	4	36000	23.943
	10	15	52	13	23	1024QAM	0.79	1	1	58384	24	7	74880	49.626
	15	15	79	13	23	1024QAM	0.79	1	1	90176	24	11	113760	76.650
	20	15	106	13	23	1024QAM	0.79	1	1	120936	24	15	152640	102.796
	25	15	133	13	23	1024QAM	0.79	1	1	151608	24	18	191520	128.867
	30	15	160	13	23	1024QAM	0.79	1	1	180376	24	22	230400	153.32
	35	15	188	13	23	1024QAM	0.79	1	1	213176	24	26	270720	181.200
	40	15	216	13	23	1024QAM	0.79	1	1	245976	24	30	311040	209.08

	45	15	242	13	23	1024QAM	0.79	1	1	270576	24	33	348480	229.990
	50	15	270	13	23	1024QAM	0.79	1	1	303240	24	36	388800	257.754
	5	15	25	13	24	1024QAM	0.83	1	1	30216	24	4	36000	25.684
	10	15	52	13	24	1024QAM	0.83	1	1	62504	24	8	74880	53.128
	15	15	79	13	24	1024QAM	0.83	1	1	94248	24	12	113760	80.111
	20	15	106	13	24	1024QAM	0.83	1	1	127080	24	16	152640	108.018
	25	15	133	13	24	1024QAM	0.83	1	1	159880	24	19	191520	135.898
	30	15	160	13	24	1024QAM	0.83	1	1	192624	24	23	230400	163.73
	35	15	188	13	24	1024QAM	0.83	1	1	225480	24	27	270720	191.658
	40	15	216	13	24	1024QAM	0.83	1	1	258144	24	31	311040	219.422
	45	15	242	13	24	1024QAM	0.83	1	1	286976	24	34	348480	243.930
	50	15	270	13	24	1024QAM	0.83	1	1	327888	24	39	388800	278.705
	5	15	25	13	23	1024QAM	0.79	2	1	56368	24	7	72000	47.913
	10	15	52	13	23	1024QAM	0.79	2	1	118896	24	15	149760	101.062
	15	15	79	13	23	1024QAM	0.79	2	1	180376	24	22	227520	153.320
	20	15	106	13	23	1024QAM	0.79	2	1	241720	24	29	305280	205.462
	25	15	133	13	23	1024QAM	0.79	2	1	303240	24	36	383040	257.754
	30	15	160	13	23	1024QAM	0.79	2	1	360488	24	43	460800	306.415
	35	15	188	13	23	1024QAM	0.79	2	1	426336	24	51	541440	362.386
	40	15	216	13	23	1024QAM	0.79	2	1	491800	24	59	622080	418.03
	45	15	242	13	23	1024QAM	0.79	2	1	540776	24	65	696960	459.660
	50	15	270	13	23	1024QAM	0.79	2	1	606504	24	72	777600	515.528

Note 1: Allocated full DL slots are with slot index i , if i is not in $\{0,10,11\}$ for $i = 0,1,\dots,19$. So total number of allocated slots per 2 frames is 17.

Note 2: MCS Index is based on MCS Table defined in TS38.214 when 1024QAM is enabled.

Note 3: Number of DMRS REs per RB = 12,12,24,24 for number of MIMO layers = 1,2,3,4, respectively

Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.

Note 5: Overhead parameter for TBS determination is 0.

Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

A.3.2_1.2 TDD

A.3.2_1.2.1 Reference measurement channels for SCS 30 kHz FR1

Table A.3.2_1.2.1-1: Sustained Downlink Data Rate Reference Channel for TDD 30kHz SCS FR1 (64QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSCH symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDP C Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	kHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	5	30	12	13	18	64QAM	0.46	1	1	4736	24	1	10368	5.92
	10	30	24	13	18	64QAM	0.46	1	1	9480	24	2	20736	11.85
	15	30	38	13	18	64QAM	0.46	1	1	14856	24	2	32832	18.57
	20	30	51	13	18	64QAM	0.46	1	1	19968	24	3	44064	24.96
	25	30	65	13	18	64QAM	0.46	1	1	25608	24	4	56160	32.01
	30	30	78	13	18	64QAM	0.46	1	1	30728	24	4	67392	38.41
	35	30	92	13	18	64QAM	0.46	1	1	35856	24	5	79488	44.82
	40	30	106	13	18	64QAM	0.46	1	1	42016	24	5	91584	52.52
	45	30	119	13	18	64QAM	0.46	1	1	47112	24	6	102816	58.89
	50	30	133	13	18	64QAM	0.46	1	1	52224	24	7	114912	65.28
	60	30	162	13	18	64QAM	0.46	1	1	63528	24	8	139968	79.41
	70	30	189	13	18	64QAM	0.46	1	1	73776	24	9	163296	92.22
	80	30	217	13	18	64QAM	0.46	1	1	86040	24	11	187488	107.55
	90	30	245	13	18	64QAM	0.46	1	1	96264	24	12	211680	120.33
	100	30	273	13	18	64QAM	0.46	1	1	106576	24	13	235872	133.22
	5	30	12	13	22	64QAM	0.65	1	1	6656	24	1	10368	8.32
	10	30	24	13	22	64QAM	0.65	1	1	13576	24	2	20736	16.97
	15	30	38	13	22	64QAM	0.65	1	1	21504	24	3	32832	26.88
	20	30	51	13	22	64QAM	0.65	1	1	28680	24	4	44064	35.85
	25	30	65	13	22	64QAM	0.65	1	1	36896	24	5	56160	46.12
	30	30	78	13	22	64QAM	0.65	1	1	44040	24	6	67392	55.05
	35	30	92	13	22	64QAM	0.65	1	1	51216	24	7	79488	64.02
	40	30	106	13	22	64QAM	0.65	1	1	59432	24	8	91584	74.29
	45	30	119	13	22	64QAM	0.65	1	1	67584	24	9	102816	84.48

	50	30	133	13	22	64QAM	0.65	1	1	73776	24	9	114912	92.22
	60	30	162	13	22	64QAM	0.65	1	1	90176	24	11	139968	112.72
	70	30	189	13	22	64QAM	0.65	1	1	106576	24	13	163296	133.22
	80	30	217	13	22	64QAM	0.65	1	1	122976	24	15	187488	153.72
	90	30	245	13	22	64QAM	0.65	1	1	139376	24	17	211680	174.22
	100	30	273	13	22	64QAM	0.65	1	1	151608	24	18	235872	189.51
	5	30	12	13	23	64QAM	0.70	1	1	7296	24	1	10368	9.12
	10	30	24	13	23	64QAM	0.70	1	1	14600	24	2	20736	18.25
	15	30	38	13	23	64QAM	0.70	1	1	23040	24	3	32832	28.8
	20	30	51	13	23	64QAM	0.70	1	1	30728	24	4	44064	38.41
	25	30	65	13	23	64QAM	0.70	1	1	38936	24	5	56160	48.67
	30	30	78	13	23	64QAM	0.70	1	1	47112	24	6	67392	58.89
	35	30	92	13	23	64QAM	0.70	1	1	55304	24	7	79488	69.13
	40	30	106	13	23	64QAM	0.70	1	1	64552	24	8	91584	80.69
	45	30	119	13	23	64QAM	0.70	1	1	71688	24	9	102816	89.61
	50	30	133	13	23	64QAM	0.70	1	1	79896	24	10	114912	99.87
	60	30	162	13	23	64QAM	0.70	1	1	98376	24	12	139968	122.97
	70	30	189	13	23	64QAM	0.70	1	1	114776	24	14	163296	143.47
	80	30	217	13	23	64QAM	0.70	1	1	131176	24	16	187488	163.97
	90	30	245	13	23	64QAM	0.70	1	1	147576	24	18	211680	184.47
	100	30	273	13	23	64QAM	0.70	1	1	163976	24	20	235872	204.97
	5	30	12	13	27	64QAM	0.89	1	1	9224	24	2	10368	11.53
	10	30	24	13	27	64QAM	0.89	1	1	18432	24	3	20736	23.04
	15	30	38	13	27	64QAM	0.89	1	1	29192	24	4	32832	36.49
	20	30	51	13	27	64QAM	0.89	1	1	38936	24	5	44064	48.67
	25	30	65	13	27	64QAM	0.89	1	1	50184	24	6	56160	62.73
	30	30	78	13	27	64QAM	0.89	1	1	59432	24	8	67392	74.29
	35	30	92	13	27	64QAM	0.89	1	1	69672	24	9	79488	87.09
	40	30	106	13	27	64QAM	0.89	1	1	81976	24	10	91584	102.47
	45	30	119	13	27	64QAM	0.89	1	1	92200	24	11	102816	115.25
	50	30	133	13	27	64QAM	0.89	1	1	102416	24	13	114912	128.02
	60	30	162	13	27	64QAM	0.89	1	1	125016	24	15	139968	156.27
	70	30	189	13	27	64QAM	0.89	1	1	143400	24	18	163296	179.25
	80	30	217	13	27	64QAM	0.89	1	1	167976	24	20	187488	209.97
	90	30	245	13	27	64QAM	0.89	1	1	188576	24	23	211680	235.72
	100	30	273	13	27	64QAM	0.89	1	1	208976	24	25	235872	261.22
	5	30	12	13	18	64QAM	0.46	2	1	9480	24	2	20736	11.85
	10	30	24	13	18	64QAM	0.46	2	1	18960	24	3	41472	23.7

	15	30	38	13	18	64QAM	0.46	2	1	29704	24	4	65664	37.13
	20	30	51	13	18	64QAM	0.46	2	1	39936	24	5	88128	49.92
	25	30	65	13	18	64QAM	0.46	2	1	51216	24	7	112320	64.02
	30	30	78	13	18	64QAM	0.46	2	1	61480	24	8	134784	76.85
	35	30	92	13	18	64QAM	0.46	2	1	71688	24	9	158976	89.61
	40	30	106	13	18	64QAM	0.46	2	1	83976	24	10	183168	104.97
	45	30	119	13	18	64QAM	0.46	2	1	94248	24	12	205632	117.81
	50	30	133	13	18	64QAM	0.46	2	1	104496	24	13	229824	130.62
	60	30	162	13	18	64QAM	0.46	2	1	127080	24	16	279936	158.85
	70	30	189	13	18	64QAM	0.46	2	1	147576	24	18	326592	184.47
	80	30	217	13	18	64QAM	0.46	2	1	172176	24	21	374976	215.22
	90	30	245	13	18	64QAM	0.46	2	1	192624	24	23	423360	240.78
	100	30	273	13	18	64QAM	0.46	2	1	213176	24	26	471744	266.47
	5	30	12	13	22	64QAM	0.65	2	1	13576	24	2	20736	16.97
	10	30	24	13	22	64QAM	0.65	2	1	27144	24	4	41472	33.93
	15	30	38	13	22	64QAM	0.65	2	1	43032	24	6	65664	53.79
	20	30	51	13	22	64QAM	0.65	2	1	57376	24	7	88128	71.72
	25	30	65	13	22	64QAM	0.65	2	1	73776	24	9	112320	92.22
	30	30	78	13	22	64QAM	0.65	2	1	88064	24	11	134784	110.08
	35	30	92	13	22	64QAM	0.65	2	1	102416	24	13	158976	128.02
	40	30	106	13	22	64QAM	0.65	2	1	118896	24	15	183168	148.62
	45	30	119	13	22	64QAM	0.65	2	1	135296	24	17	205632	169.12
	50	30	133	13	22	64QAM	0.65	2	1	147576	24	18	229824	184.47
	60	30	162	13	22	64QAM	0.65	2	1	180376	24	22	279936	225.47
	70	30	189	13	22	64QAM	0.65	2	1	213176	24	26	326592	266.47
	80	30	217	13	22	64QAM	0.65	2	1	245976	24	30	374976	307.47
	90	30	245	13	22	64QAM	0.65	2	1	278776	24	34	423360	348.47
	100	30	273	13	22	64QAM	0.65	2	1	303240	24	36	471744	379.05
	5	30	12	13	23	64QAM	0.70	2	1	14600	24	2	20736	18.25
	10	30	24	13	23	64QAM	0.70	2	1	29192	24	4	41472	36.49
	15	30	38	13	23	64QAM	0.70	2	1	46104	24	6	65664	57.63
	20	30	51	13	23	64QAM	0.70	2	1	61480	24	8	88128	76.85
	25	30	65	13	23	64QAM	0.70	2	1	77896	24	10	112320	97.37
	30	30	78	13	23	64QAM	0.70	2	1	94248	24	12	134784	117.81
	35	30	92	13	23	64QAM	0.70	2	1	110632	24	14	158976	138.29
	40	30	106	13	23	64QAM	0.70	2	1	129128	24	16	183168	161.41

	45	30	119	13	23	64QAM	0.70	2	1	143400	24	18	205632	179.25
	50	30	133	13	23	64QAM	0.70	2	1	159880	24	19	229824	199.85
	60	30	162	13	23	64QAM	0.70	2	1	196776	24	24	279936	245.97
	70	30	189	13	23	64QAM	0.70	2	1	229576	24	28	326592	286.97
	80	30	217	13	23	64QAM	0.70	2	1	262376	24	32	374976	327.97
	90	30	245	13	23	64QAM	0.70	2	1	295176	24	36	423360	368.97
	100	30	273	13	23	64QAM	0.70	2	1	327888	24	39	471744	409.86
	5	30	12	13	27	64QAM	0.89	2	1	18432	24	3	20736	23.04
	10	30	24	13	27	64QAM	0.89	2	1	36896	24	5	41472	46.12
	15	30	38	13	27	64QAM	0.89	2	1	58384	24	7	65664	72.98
	20	30	51	13	27	64QAM	0.89	2	1	77896	24	10	88128	97.37
	25	30	65	13	27	64QAM	0.89	2	1	100392	24	12	112320	125.49
	30	30	78	13	27	64QAM	0.89	2	1	118896	24	15	134784	148.62
	35	30	92	13	27	64QAM	0.89	2	1	139376	24	17	158976	174.22
	40	30	106	13	27	64QAM	0.89	2	1	163976	24	20	183168	204.97
	45	30	119	13	27	64QAM	0.89	2	1	184424	24	22	205632	230.53
	50	30	133	13	27	64QAM	0.89	2	1	204976	24	25	229824	256.22
	60	30	162	13	27	64QAM	0.89	2	1	250056	24	30	279936	312.57
	70	30	189	13	27	64QAM	0.89	2	1	286976	24	35	326592	358.72
	80	30	217	13	27	64QAM	0.89	2	1	335976	24	40	374976	419.97
	90	30	245	13	27	64QAM	0.89	2	1	376896	24	45	423360	471.12
	100	30	273	13	27	64QAM	0.89	2	1	417976	24	50	471744	522.47
	10	30	24	13	19	64QAM	0.50	4	1	37896	24	5	76032	47.37
	15	30	38	13	19	64QAM	0.50	4	1	60456	24	8	120384	75.57
	20	30	51	13	19	64QAM	0.50	4	1	81976	24	10	161568	102.47
	25	30	65	13	19	64QAM	0.50	4	1	104496	24	13	205920	130.62
	30	30	78	13	19	64QAM	0.50	4	1	125016	24	15	247104	156.27
	35	30	92	13	19	64QAM	0.50	4	1	147576	24	18	291456	184.47
	40	30	106	13	19	64QAM	0.50	4	1	167976	24	20	335808	209.97
	45	30	119	13	19	64QAM	0.50	4	1	188576	24	23	376992	235.72
	50	30	133	13	19	64QAM	0.50	4	1	213176	24	26	421344	266.47
	60	30	162	13	19	64QAM	0.50	4	1	258144	24	31	513216	322.68
	70	30	189	13	19	64QAM	0.50	4	1	303240	24	36	598752	379.05
	80	30	217	13	19	64QAM	0.50	4	1	344376	24	41	687456	430.47

	90	30	245	13	19	64QAM	0.50	4	1	393272	24	47	776160	491.59
	100	30	273	13	19	64QAM	0.50	4	1	434280	24	52	864864	542.85
	10	30	24	13	23	64QAM	0.70	4	1	53288	24	7	76032	66.61
	15	30	38	13	23	64QAM	0.70	4	1	83976	24	10	120384	104.97
	20	30	51	13	23	64QAM	0.70	4	1	112648	24	14	161568	140.81
	25	30	65	13	23	64QAM	0.70	4	1	143400	24	18	205920	179.25
	30	30	78	13	23	64QAM	0.70	4	1	172176	24	21	247104	215.22
	35	30	92	13	23	64QAM	0.70	4	1	204976	24	25	291456	256.22
	40	30	106	13	23	64QAM	0.70	4	1	237776	24	29	335808	297.22
	45	30	119	13	23	64QAM	0.70	4	1	262376	24	32	376992	327.97
	50	30	133	13	23	64QAM	0.70	4	1	295176	24	36	421344	368.97
	60	30	162	13	23	64QAM	0.70	4	1	360488	24	43	513216	450.61
	70	30	189	13	23	64QAM	0.70	4	1	417976	24	50	598752	522.47
	80	30	217	13	23	64QAM	0.70	4	1	483464	24	58	687456	604.33
	90	30	245	13	23	64QAM	0.70	4	1	540776	24	65	776160	675.97
	100	30	273	13	23	64QAM	0.70	4	1	606504	24	72	864864	758.13
	10	30	24	13	24	64QAM	0.75	4	1	57376	24	7	76032	71.72
	15	30	38	13	24	64QAM	0.75	4	1	90176	24	11	120384	112.72
	20	30	51	13	24	64QAM	0.75	4	1	120936	24	15	161568	151.17
	25	30	65	13	24	64QAM	0.75	4	1	155776	24	19	205920	194.72
	30	30	78	13	24	64QAM	0.75	4	1	184424	24	22	247104	230.53
	35	30	92	13	24	64QAM	0.75	4	1	221376	24	27	291456	276.72
	40	30	106	13	24	64QAM	0.75	4	1	254176	24	31	335808	317.72
	45	30	119	13	24	64QAM	0.75	4	1	286976	24	35	376992	358.72
	50	30	133	13	24	64QAM	0.75	4	1	319784	24	38	421344	399.73
	60	30	162	13	24	64QAM	0.75	4	1	385272	24	46	513216	481.59
	70	30	189	13	24	64QAM	0.75	4	1	450984	24	54	598752	563.73
	80	30	217	13	24	64QAM	0.75	4	1	516312	24	62	687456	645.39
	90	30	245	13	24	64QAM	0.75	4	1	590128	24	71	776160	737.66
	100	30	273	13	24	64QAM	0.75	4	1	655800	24	78	864864	819.75
	10	30	24	13	27	64QAM	0.89	4	1	67584	24	9	76032	84.48
	15	30	38	13	27	64QAM	0.89	4	1	106576	24	13	120384	133.22
	20	30	51	13	27	64QAM	0.89	4	1	143400	24	18	161568	179.25
	25	30	65	13	27	64QAM	0.89	4	1	184424	24	22	205920	230.53

	30	30	78	13	27	64QAM	0.89	4	1	221376	24	27	247104	276.72
	35	30	92	13	27	64QAM	0.89	4	1	258144	24	31	291456	322.68
	40	30	106	13	27	64QAM	0.89	4	1	295176	24	36	335808	368.97
	45	30	119	13	27	64QAM	0.89	4	1	335976	24	40	376992	419.97
	50	30	133	13	27	64QAM	0.89	4	1	376896	24	45	421344	471.12
	60	30	162	13	27	64QAM	0.89	4	1	458896	24	55	513216	573.62
	70	30	189	13	27	64QAM	0.89	4	1	524640	24	63	598752	655.8
	80	30	217	13	27	64QAM	0.89	4	1	606504	24	72	687456	758.13
	90	30	245	13	27	64QAM	0.89	4	1	688776	24	82	776160	860.97
	100	30	273	13	27	64QAM	0.89	4	1	770568	24	92	864864	963.21

Note 1: Allocated full DL slots are with slot index i , if $\text{mod}(i,10) = 0,1,2,3,4,5,6$ and i is not in $\{0,20,21\}$ for $i = 0,1,\dots,39$. So total number of allocated slots per 2 frames is 25.
 Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is not enabled. MCS 18 and 19 are equivalent to MCS 11 and 12 in 256QAM table, respectively.
 Note 3: Number of DMRS REs per RB = 12,12,24,24 for number of MIMO layers = 1,2,3,4, respectively
 Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.
 Note 5: Overhead parameter for TBS determination is 0.
 Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

Table A.3.2_1.2.1-2: Sustained Downlink Data Rate Reference Channel for TDD 30kHz SCS FR1(256QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSCH symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput average d over 2 frames
	MHz	kHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	10	30	24	13	20	256QAM	0.67	1	1	18432	24	3	27648	23.04
	15	30	38	13	20	256QAM	0.67	1	1	29192	24	4	43776	36.49
	20	30	51	13	20	256QAM	0.67	1	1	38936	24	5	58752	48.67
	25	30	65	13	20	256QAM	0.67	1	1	50184	24	6	74880	62.73
	30	30	78	13	20	256QAM	0.67	1	1	59432	24	8	89856	74.29
	35	30	92	13	20	256QAM	0.67	1	1	69672	24	9	105984	87.09
	40	30	106	13	20	256QAM	0.67	1	1	81976	24	10	122112	102.47

	45	30	119	13	20	256QAM	0.67	1	1	92200	24	11	137088	115.25
	50	30	133	13	20	256QAM	0.67	1	1	102416	24	13	153216	128.02
	60	30	162	13	20	256QAM	0.67	1	1	125016	24	15	186624	156.27
	70	30	189	13	20	256QAM	0.67	1	1	143400	24	18	217728	179.25
	80	30	217	13	20	256QAM	0.67	1	1	167976	24	20	249984	209.97
	90	30	245	13	20	256QAM	0.67	1	1	188576	24	23	282240	235.72
	100	30	273	13	20	256QAM	0.67	1	1	208976	24	25	314496	261.22
	10	30	24	13	21	256QAM	0.69	1	1	18960	24	3	27648	23.7
	15	30	38	13	21	256QAM	0.69	1	1	30216	24	4	43776	37.77
	20	30	51	13	21	256QAM	0.69	1	1	40976	24	5	58752	51.22
	25	30	65	13	21	256QAM	0.69	1	1	52224	24	7	74880	65.28
	30	30	78	13	21	256QAM	0.69	1	1	62504	24	8	89856	78.13
	35	30	92	13	21	256QAM	0.69	1	1	73776	24	9	105984	92.22
	40	30	106	13	21	256QAM	0.69	1	1	83976	24	10	122112	104.97
	45	30	119	13	21	256QAM	0.69	1	1	94248	24	12	137088	117.81
	50	30	133	13	21	256QAM	0.69	1	1	106576	24	13	153216	133.22
	60	30	162	13	21	256QAM	0.69	1	1	129128	24	16	186624	161.41
	70	30	189	13	21	256QAM	0.69	1	1	151608	24	18	217728	189.51
	80	30	217	13	21	256QAM	0.69	1	1	172176	24	21	249984	215.22
	90	30	245	13	21	256QAM	0.69	1	1	196776	24	24	282240	245.97
	100	30	273	13	21	256QAM	0.69	1	1	217128	24	26	314496	271.41
	10	30	24	13	26	256QAM	0.90	1	1	24576	24	3	27648	30.72
	15	30	38	13	26	256QAM	0.90	1	1	38936	24	5	43776	48.67
	20	30	51	13	26	256QAM	0.90	1	1	52224	24	7	58752	65.28
	25	30	65	13	26	256QAM	0.90	1	1	67584	24	9	74880	84.48
	30	30	78	13	26	256QAM	0.90	1	1	79896	24	10	89856	99.87
	35	30	92	13	26	256QAM	0.90	1	1	94248	24	12	105984	117.81
	40	30	106	13	26	256QAM	0.90	1	1	108552	24	13	122112	135.69
	45	30	119	13	26	256QAM	0.90	1	1	122976	24	15	137088	153.72
	50	30	133	13	26	256QAM	0.90	1	1	135296	24	17	153216	169.12
	60	30	162	13	26	256QAM	0.90	1	1	167976	24	20	186624	209.97
	70	30	189	13	26	256QAM	0.90	1	1	196776	24	24	217728	245.97
	80	30	217	13	26	256QAM	0.90	1	1	225480	24	27	249984	281.85

	90	30	245	13	26	256QA M	0.90	1	1	254176	24	31	28224 0	317.72
	100	30	273	13	26	256QA M	0.90	1	1	278776	24	34	31449 6	348.47
	10	30	24	13	20	256QA M	0.67	2	1	36896	24	5	55296	46.12
	15	30	38	13	20	256QA M	0.67	2	1	58384	24	7	87552	72.98
	20	30	51	13	20	256QA M	0.67	2	1	77896	24	10	11750 4	97.37
	25	30	65	13	20	256QA M	0.67	2	1	100392	24	12	14976 0	125.49
	30	30	78	13	20	256QA M	0.67	2	1	118896	24	15	17971 2	148.62
	35	30	92	13	20	256QA M	0.67	2	1	139376	24	17	21196 8	174.22
	40	30	106	13	20	256QA M	0.67	2	1	163976	24	20	24422 4	204.97
	45	30	119	13	20	256QA M	0.67	2	1	184424	24	22	27417 6	230.53
	50	30	133	13	20	256QA M	0.67	2	1	204976	24	25	30643 2	256.22
	60	30	162	13	20	256QA M	0.67	2	1	250056	24	30	37324 8	312.57
	70	30	189	13	20	256QA M	0.67	2	1	286976	24	35	43545 6	358.72
	80	30	217	13	20	256QA M	0.67	2	1	335976	24	40	49996 8	419.97
	90	30	245	13	20	256QA M	0.67	2	1	376896	24	45	56448 0	471.12
	100	30	273	13	20	256QA M	0.67	2	1	417976	24	50	62899 2	522.47
	10	30	24	13	21	256QA M	0.69	2	1	37896	24	5	55296	47.37
	15	30	38	13	21	256QA M	0.69	2	1	60456	24	8	87552	75.57
	20	30	51	13	21	256QA M	0.69	2	1	81976	24	10	11750 4	102.47
	25	30	65	13	21	256QA M	0.69	2	1	104496	24	13	14976 0	130.62
	30	30	78	13	21	256QA M	0.69	2	1	125016	24	15	17971 2	156.27
	35	30	92	13	21	256QA M	0.69	2	1	147576	24	18	21196 8	184.47
	40	30	106	13	21	256QA M	0.69	2	1	167976	24	20	24422 4	209.97
	45	30	119	13	21	256QA M	0.69	2	1	188576	24	23	27417 6	235.72
	50	30	133	13	21	256QA M	0.69	2	1	213176	24	26	30643 2	266.47
	60	30	162	13	21	256QA M	0.69	2	1	258144	24	31	37324 8	322.68
	70	30	189	13	21	256QA M	0.69	2	1	303240	24	36	43545 6	379.05
	80	30	217	13	21	256QA M	0.69	2	1	344376	24	41	49996 8	430.47
	90	30	245	13	21	256QA M	0.69	2	1	393272	24	47	56448 0	491.59
	100	30	273	13	21	256QA M	0.69	2	1	434280	24	52	62899 2	542.85
	10	30	24	13	26	256QA M	0.90	2	1	49176	24	6	55296	61.47
	15	30	38	13	26	256QA M	0.90	2	1	77896	24	10	87552	97.37
	20	30	51	13	26	256QA M	0.90	2	1	104496	24	13	11750 4	130.62

	25	30	65	13	26	256QAM	0.90	2	1	135296	24	17	149760	169.12
	30	30	78	13	26	256QAM	0.90	2	1	159880	24	19	179712	199.85
	35	30	92	13	26	256QAM	0.90	2	1	188576	24	23	211968	235.72
	40	30	106	13	26	256QAM	0.90	2	1	217128	24	26	244224	271.41
	45	30	119	13	26	256QAM	0.90	2	1	245976	24	30	274176	307.47
	50	30	133	13	26	256QAM	0.90	2	1	270576	24	33	306432	338.22
	60	30	162	13	26	256QAM	0.90	2	1	335976	24	40	373248	419.97
	70	30	189	13	26	256QAM	0.90	2	1	393272	24	47	435456	491.59
	80	30	217	13	26	256QAM	0.90	2	1	450984	24	54	499968	563.73
	90	30	245	13	26	256QAM	0.90	2	1	507984	24	61	564480	634.98
	100	30	273	13	26	256QAM	0.90	2	1	557416	24	67	628992	696.77
	10	30	24	13	22	256QAM	0.74	4	1	73776	24	9	101376	92.22
	15	30	38	13	22	256QAM	0.74	4	1	118896	24	15	160512	148.62
	20	30	51	13	22	256QAM	0.74	4	1	159880	24	19	215424	199.85
	25	30	65	13	22	256QAM	0.74	4	1	200808	24	24	274560	251.01
	30	30	78	13	22	256QAM	0.74	4	1	241720	24	29	329472	302.15
	35	30	92	13	22	256QAM	0.74	4	1	286976	24	35	388608	358.72
	40	30	106	13	22	256QAM	0.74	4	1	327888	24	39	447744	409.86
	45	30	119	13	22	256QAM	0.74	4	1	368872	24	44	502656	461.09
	50	30	133	13	22	256QAM	0.74	4	1	409616	24	49	561792	512.02
	60	30	162	13	22	256QAM	0.74	4	1	507984	24	61	684288	634.98
	70	30	189	13	22	256QAM	0.74	4	1	590128	24	71	798336	737.66
	80	30	217	13	22	256QAM	0.74	4	1	671976	24	80	916608	839.97
	90	30	245	13	22	256QAM	0.74	4	1	770568	24	92	1034880	963.21
	100	30	273	13	22	256QAM	0.74	4	1	852696	24	102	1153152	1065.87
	10	30	24	13	23	256QAM	0.78	4	1	79896	24	10	101376	99.87
	15	30	38	13	23	256QAM	0.78	4	1	125016	24	15	160512	156.27
	20	30	51	13	23	256QAM	0.78	4	1	167976	24	20	215424	209.97
	25	30	65	13	23	256QAM	0.78	4	1	213176	24	26	274560	266.47
	30	30	78	13	23	256QAM	0.78	4	1	258144	24	31	329472	322.68
	35	30	92	13	23	256QAM	0.78	4	1	303240	24	36	388608	379.05
	40	30	106	13	23	256QAM	0.78	4	1	352440	24	42	447744	440.55
	45	30	119	13	23	256QAM	0.78	4	1	393272	24	47	502656	491.59

	50	30	133	13	23	256QAM	0.78	4	1	434280	24	52	561792	542.85
	60	30	162	13	23	256QAM	0.78	4	1	540776	24	65	684288	675.97
	70	30	189	13	23	256QAM	0.78	4	1	622760	24	74	798336	778.45
	80	30	217	13	23	256QAM	0.78	4	1	721000	24	86	916608	901.25
	90	30	245	13	23	256QAM	0.78	4	1	803304	24	96	103480	1004.13
	100	30	273	13	23	256QAM	0.78	4	1	901344	24	107	1153152	1126.68
	10	30	24	13	26	256QAM	0.90	4	1	90176	24	11	101376	112.72
	15	30	38	13	26	256QAM	0.90	4	1	143400	24	18	160512	179.25
	20	30	51	13	26	256QAM	0.90	4	1	192624	24	23	215424	240.78
	25	30	65	13	26	256QAM	0.90	4	1	245976	24	30	274560	307.47
	30	30	78	13	26	256QAM	0.90	4	1	295176	24	36	329472	368.97
	35	30	92	13	26	256QAM	0.90	4	1	344376	24	41	388608	430.47
	40	30	106	13	26	256QAM	0.90	4	1	401640	24	48	447744	502.05
	45	30	119	13	26	256QAM	0.90	4	1	450984	24	54	502656	563.73
	50	30	133	13	26	256QAM	0.90	4	1	500136	24	60	561792	625.17
	60	30	162	13	26	256QAM	0.90	4	1	606504	24	72	684288	758.13
	70	30	189	13	26	256QAM	0.90	4	1	721000	24	86	798336	901.25
	80	30	217	13	26	256QAM	0.90	4	1	819256	24	97	916608	1024.07
	90	30	245	13	26	256QAM	0.90	4	1	934152	24	111	103480	1167.69
	100	30	273	13	26	256QAM	0.90	4	1	1032192	24	123	1153152	1290.24

Note 1: Allocated full DL slots are with slot index i , if $\text{mod}(i,10) = 0,1,2,3,4,5,6$ and i is not in $\{0,20,21\}$ for $i = 0,1,\dots,39$. So total number of allocated slots per 2 frames is 25.
 Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is enabled.
 Note 3: Number of DMRS REs per RB = 12,12,24,24 for number of MIMO layers = 1,2,3,4, respectively
 Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.
 Note 5: Overhead parameter for TBS determination is 0.
 Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

Table A.3.2_1.2.1-3: Sustained Downlink Data Rate Reference Channel for TDD 30kHz SCS FR1(1024QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSCH symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDP C Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots	Binary Channel Bits per Slot for allocated full DL slots	Max. Throughput average d over 2 frames
-----------	-------------------	--------------------	---------------------------	--	--------------------	------------	--------------------	-----------------------	------------------	---	---	--	--	---

												(Note 1, 6)	(Note 1)	
	MHz	kHz	PRBs	Symbol s						Bits	Bits	CBs	Bits	Mbps
	10	30	24	13	23	1024QAM	0.79	1	1	27144	24	4	34560	33.93
	15	30	38	13	23	1024QAM	0.79	1	1	43032	24	6	54720	53.79
	20	30	51	13	23	1024QAM	0.79	1	1	57376	24	7	73440	71.72
	25	30	65	13	23	1024QAM	0.79	1	1	73776	24	9	93600	92.22
	30	30	78	13	23	1024QAM	0.79	1	1	88064	24	11	112320	110.08
	35	30	92	13	23	1024QAM	0.79	1	1	104496	24	13	132480	130.62
	40	30	106	13	23	1024QAM	0.79	1	1	120936	24	15	152640	151.17
	45	30	119	13	23	1024QAM	0.79	1	1	135296	24	17	171360	169.12
	50	30	133	13	23	1024QAM	0.79	1	1	151608	24	18	191520	189.51
	60	30	162	13	23	1024QAM	0.79	1	1	184424	24	22	233280	230.53
	70	30	189	13	23	1024QAM	0,79	1	1	213176	24	26	272160	266,47
	80	30	217	13	23	1024QAM	0.79	1	1	245976	24	30	312480	307.47
	90	30	245	13	23	1024QAM	0.79	1	1	278776	24	33	352800	348.47
	100	30	273	13	23	1024QAM	0.79	1	1	311368	24	37	393120	389.21
	10	30	24	13	24	1024QAM	0.83	1	1	28680	24	4	34560	35.85
	15	30	38	13	24	1024QAM	0.83	1	1	45096	24	6	54720	56.37
	20	30	51	13	24	1024QAM	0.83	1	1	61480	24	8	73440	76.85
	25	30	65	13	24	1024QAM	0.83	1	1	77896	24	10	93600	97.37
	30	30	78	13	24	1024QAM	0.83	1	1	94248	24	12	112320	117.81
	35	30	92	13	24	1024QAM	0.83	1	1	110632	24	14	132480	138.29
	40	30	106	13	24	1024QAM	0.83	1	1	127080	24	16	152640	158.85
	45	30	119	13	24	1024QAM	0.83	1	1	143400	24	18	171360	179.25
	50	30	133	13	24	1024QAM	0.83	1	1	159880	24	19	191520	199.85
	60	30	162	13	24	1024QAM	0.83	1	1	192624	24	23	233280	240.78
	70	30	189	13	24	1024QAM	0,83	1	1	225480	24	27	272160	281,85
	80	30	217	13	24	1024QAM	0.83	1	1	262376	24	32	312480	327.97
	90	30	245	13	24	1024QAM	0.83	1	1	295176	24	35	352800	368.97
	100	30	273	13	24	1024QAM	0.83	1	1	327888	24	39	393120	409.86
	10	30	24	13	23	1024QAM	0.79	2	1	54296	24	7	69120	67.87
	15	30	38	13	23	1024QAM	0.79	2	1	86040	24	11	109440	107.55

	20	30	51	13	23	1024QAM	0.79	2	1	114776	24	14	146880	143.47
	25	30	65	13	23	1024QAM	0.79	2	1	147576	24	18	187200	184.47
	30	30	78	13	23	1024QAM	0.79	2	1	176208	24	21	224640	220.26
	35	30	92	13	23	1024QAM	0.79	2	1	208976	24	25	264960	261.22
	40	30	106	13	23	1024QAM	0.79	2	1	241720	24	29	305280	302.15
	45	30	119	13	23	1024QAM	0.79	2	1	270576	24	33	342720	338.22
	50	30	133	13	23	1024QAM	0.79	2	1	303240	24	36	383040	379.05
	60	30	162	13	23	1024QAM	0.79	2	1	368872	24	44	466560	461.09
	70	30	189	13	23	1024QAM	0.79	2	1	426336	24	51	544320	532.92
	80	30	217	13	23	1024QAM	0.79	2	1	491800	24	59	624960	614.75
	90	30	245	13	23	1024QAM	0.79	2	1	557416	24	66	705600	696.77
	100	30	273	13	23	1024QAM	0.79	2	1	622760	24	74	786240	778.45

Note 1: Allocated full DL slots are with slot index i , if $\text{mod}(i,10) = 0,1,2,3,4,5,6$ and i is not in $\{0,20,21\}$ for $i = 0,1,\dots,39$.

So total number of allocated slots per 2 frames is 25.

Note 2: MCS Index is based on MCS Table defined in TS38.214 when 1024QAM is enabled.

Note 3: Number of DMRS REs per RB = 12,12,24,24 for number of MIMO layers = 1,2,3,4, respectively

Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.

Note 5: Overhead parameter for TBS determination is 0.

Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

A.3.2_1.2.2 Reference measurement channels for SCS 120 kHz FR2

Table A.3.2_1.2.2-1: Sustained Downlink Data Rate Reference Channel for TDD 120kHz SCS FR2 (QPSK)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSC H symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDPC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	KHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	50	120	32	13	9	QPSK	0.66	1	1	5888	24	1	8800	27.379
	100	120	66	13	9	QPSK	0.66	1	1	12040	24	2	18150	55.986

	200	120	132	13	9	QPSK	0.66	1	1	24072	24	3	36300	111.935
	50	120	32	13	9	QPSK	0.66	2	1	11784	24	2	17600	54.796
	100	120	66	13	9	QPSK	0.66	2	1	24072	24	3	36300	111.935
	200	120	132	13	9	QPSK	0.66	2	1	48168	24	6	72600	223.981

Note 1: Allocated full DL slots are with slot index i , if $\text{mod}(i,5) = 0,1,2$ and i is not in $\{0,80,81\}$ for $i = 0,1,\dots,159$. So total number of allocated slots per 2 frames is 93.
 Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is not enabled.
 Note 3: Number of DMRS REs per RB is 12.
 Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.
 Note 5: Overhead parameter for TBS determination is 6.
 Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

Table A.3.2_1.2.2-2: Sustained Downlink Data Rate Reference Channel for TDD 120kHz SCS FR2 (16QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSC H symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDPC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	kHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	50	120	32	13	16	16QAM	0.64	1	1	11272	24	2	17600	52.415
	100	120	66	13	16	16QAM	0.64	1	1	23568	24	3	36300	109.591
	200	120	132	13	16	16QAM	0.64	1	1	47112	24	6	72600	219.071
	50	120	32	13	16	16QAM	0.64	2	1	22536	24	3	35200	104.792
	100	120	66	13	16	16QAM	0.64	2	1	47112	24	6	72600	219.071
	200	120	132	13	16	16QAM	0.64	2	1	94248	24	12	145200	438.253

Note 1: Allocated full DL slots are with slot index i , if $\text{mod}(i,5) = 0,1,2$ and i is not in $\{0,80,81\}$ for $i = 0,1,\dots,159$. So total number of allocated slots per 2 frames is 93.
 Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is not enabled.
 Note 3: Number of DMRS REs per RB is 12.
 Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.
 Note 5: Overhead parameter for TBS determination is 6.
 Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

Table A.3.2_1.2.2-3: Sustained Downlink Data Rate Reference Channel for TDD 120kHz SCS FR2 (64QAM)

Parameter	Channel bandwidth	Subcarrier spacing	Allocated resource blocks	Number of consecutive PDSC H symbols for allocated full DL slots (Note 1)	MCS Index (Note 2)	Modulation	Target Coding Rate	Number of MIMO layers	LDPC Base Graph	Information Bit Payload per Slot for allocated full DL slots (Note 1)	Transport block CRC per Slot for allocated full DL slots (Note 1)	Number of Code Blocks per Slot for allocated full DL slots (Note 1, 6)	Binary Channel Bits per Slot for allocated full DL slots (Note 1)	Max. Throughput averaged over 2 frames
	MHz	KHz	PRBs	Symbols						Bits	Bits	CBs	Bits	Mbps
	50	120	32	13	27	64QAM	0.89	1	1	23568	24	3	26400	109.591
	100	120	66	13	27	64QAM	0.89	1	1	48168	24	6	54450	223.981
	200	120	132	13	27	64QAM	0.89	1	1	96264	24	12	108900	447.628
	50	120	32	13	27	64QAM	0.89	2	1	47112	24	6	52800	219.071
	100	120	66	13	27	64QAM	0.89	2	1	96264	24	12	108900	447.628
	200	120	132	13	27	64QAM	0.89	2	1	192624	24	23	217800	895.702

Note 1: Allocated full DL slots are with slot index i , if $\text{mod}(i,5) = 0,1,2$ and i is not in $\{0,80,81\}$ for $i = 0,1,\dots,159$. So total number of allocated slots per 2 frames is 93.
 Note 2: MCS Index is based on MCS Table defined in TS38.214 when 256QAM is not enabled.
 Note 3: Number of DMRS REs per RB is 12.
 Note 4: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.
 Note 5: Overhead parameter for TBS determination is 6.
 Note 6: If more than one Code Block is present, an additional CRC sequence of $L = 24$ Bits is attached to each Code Block (otherwise $L = 0$ Bit)

A.3.3 Reference measurement channels for PDCCH performance requirements

A.3.3.1 FDD

A.3.3.1.1 Reference measurement channels for SCS 15 kHz FR1

Table A.3.3.1.1-1: PDCCH Reference Channels (Time domain allocation 1 symbol)

Parameter	Unit	Value		
		R.PDCCH.1-1.1 FDD	R.PDCCH.1-1.2 FDD	R.PDCCH.1-1.3 FDD
Reference channel				
Subcarrier spacing	kHz	15	15	15

CORESET frequency domain allocation		48	48	48			
CORESET time domain allocation		1	1	1			
Aggregation level		4	4	8			
DCI Format		1_0	1_1	1_1			
Payload (without CRC)	Bits	39	52	52			

Table A.3.3.1.1-2: PDCCH Reference Channel (Time domain allocation 2 symbols)

Parameter	Unit	Value						
		R.PDCCH. 1-2.1 FDD	R.PDCCH. 1-2.2 FDD	R.PDCCH. 1-2.3 FDD	R.PDCCH. 1-2.4 FDD	R.PDCCH. 1-2.5 FDD	R.PDCCH. 1-2.6 FDD	R.PDCCH. 1-2.7 FDD
Reference channel								
Subcarrier spacing	kHz	15	15	15	15	15	15	15
CORESET frequency domain allocation		24	24	24	48	48	48	48
CORESET time domain allocation		2	2	2	2	2	2	2
Aggregation level		2	4	2	4	8	16	8
DCI Format		1_0	1_0	1_1	1_1	1_1	1_0	2_6
Payload (without CRC)	Bits	39	39	52	52	52	39	12

Table A.3.3.1.1-3: PDCCH Reference Channel (Time domain allocation 3 symbols)

Parameter	Unit	Value						
		R.PDCCH.1-3.1 FDD						
Reference channel								
Subcarrier spacing	kHz	15						
CORESET frequency domain allocation		24						
CORESET time domain allocation		3						
Aggregation level		4						
DCI Format		1_0						
Payload (without CRC)	Bits	35 ^{Note1}						

Note1: The payload is corresponding to BWP size of 15RB

Table A.3.3.1.1-4: Additional PDSCH Reference Channel FDD

Parameter	Unit	Value	
DCI Format		1_0	1_1
Channel bandwidth	MHz	10	10
Subcarrier spacing	kHz	15	15

Number of allocated resource blocks	PRBs	52	52
Number of consecutive PDSCH symbols		12	12
Allocated slots per 2 frames	Slots	19	19
MCS table		64QAM	64QAM
MCS index		4	4
Modulation		QPSK	QPSK
Target Coding Rate		0.30	0.30
Number of MIMO layers		1	1
Number of DMRS REs (Note 5)		36	12
Overhead for TBS determination		0	0
Information Bit Payload per Slot			
For Slot i = 0	Bits	N/A	N/A
For Slots i = 1, ..., 19	Bits	3368	4096
Transport block CRC per Slot			
For Slot i = 0	Bits	N/A	N/A
For Slots i = 1, ..., 19	Bits	16	24
Number of Code Blocks per Slot			
For Slot i = 0	CBs	N/A	N/A
For Slots i = 1, ..., 19	CBs	1	1
Binary Channel Bits Per Slot			
For Slot i = 0	Bits	N/A	N/A
For Slots i = 10, 11	Bits	9984	13104
For Slots i = 1, ..., 9, 12, ..., 19	Bits	11232	13728
Max. Throughput averaged over 2 frames	Mbps	3.1996	3.8912
Note 1:	SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.		
Note 2:	Slot i is slot index per 2 frames.		
Note 3:	For PDSCH & PDSCH DMRS precoding the following configuration shall be used: Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i1, i2 combination, and with PRB bundling granularity.		
Note 4:	For tests with DRX configured, PDCCH and PDSCH shall only be scheduled during the DRX on duration of the test.		
Note 5:	Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.		

Table A.3.3.1.1-4a: Additional PDSCH Reference Channel FDD for eRedCap

Parameter	Unit	Value
DCI Format		1_1
Channel bandwidth	MHz	10
Subcarrier spacing	kHz	15
Number of allocated resource blocks	PRBs	25
Number of consecutive PDSCH symbols		12
Allocated slots per 2 frames	Slots	19
MCS table		64QAM
MCS index		4
Modulation		QPSK
Target Coding Rate		0.30
Number of MIMO layers		1
Number of DMRS REs (Note 5)		12
Overhead for TBS determination		0
Information Bit Payload per Slot		
For Slot i = 0	Bits	N/A
For Slots i = 1, ..., 19	Bits	2024
Transport block CRC per Slot		
For Slot i = 0	Bits	N/A
For Slots i = 1, ..., 19	Bits	16
Number of Code Blocks per Slot		
For Slot i = 0	CBs	N/A
For Slots i = 1, ..., 19	CBs	1
Binary Channel Bits Per Slot		
For Slot i = 0	Bits	N/A

For Slots i = 10, 11	Bits	6300
For Slots i = 1, ..., 9, 12, ..., 19	Bits	6600
Max. Throughput averaged over 2 frames	Mbps	1.923
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms.		
Note 2: Slot i is slot index per 2 frames.		
Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.		

A.3.3.1.2 Reference measurement channels for SCS 30 kHz FR1

Table A.3.3.1.2-1: PDCCH Reference Channels (Time domain allocation 1 symbol)

Parameter	Unit	Value		
		R.PDCCH.2-1.1 FDD	R.PDCCH.2-1.2 FDD	R.PDCCH.2-1.3 FDD
Reference channel				
Subcarrier spacing	kHz	30	30	30
CORESET frequency domain allocation		102	102	90
CORESET time domain allocation		1	1	1
Aggregation level		2	4	8
DCI Format		1_0	1_1	1_1
Payload (without CRC)	Bits	41	53	53

Table A.3.3.1.2-2: PDCCH Reference Channel (Time domain allocation 2 symbols)

Parameter	Unit	Value		
		R.PDCCH.2-2.1 FDD		
Reference channel				
Subcarrier spacing	kHz	30		
CORESET frequency domain allocation		48		
CORESET time domain allocation		2		
Aggregation level		16		
DCI Format		1_0		
Payload (without CRC)	Bits	41		

A.3.3.2 TDD

A.3.3.2.1 Reference measurement channels for SCS 15 kHz FR1

Table A.3.3.2.1-1: PDCCH Reference Channels (Time domain allocation 1 symbol)

Parameter	Unit	Value		
		R.PDCCH.1-1.1 TDD	R.PDCCH.1-1.2 TDD	R.PDCCH.1-1.3 TDD
Reference channel				
Subcarrier spacing	kHz	15	15	15
CORESET frequency domain allocation		48	48	48
CORESET time domain allocation		1	1	1
Aggregation level		4	4	8
DCI Format		1_0	1_1	1_1

Payload (without CRC)	Bits	39	52	52			
-----------------------	------	----	----	----	--	--	--

Table A.3.3.2.1-2: PDCCH Reference Channel (Time domain allocation 2 symbols)

Parameter	Unit	Value					
		R.PDCCH.1-2.1 TDD	R.PDCCH.1-2.2 TDD	R.PDCCH.1-2.3 TDD	R.PDCCH.1-2.4 TDD	R.PDCCH.1-2.5 TDD	R.PDCCH.1-2.6 TDD
Reference channel							
Subcarrier spacing	kHz	15	15	15	15	15	15
CORESET frequency domain allocation		24	24	24	48	48	48
CORESET time domain allocation		2	2	2	2	2	2
Aggregation level		2	4	2	4	8	16
DCI Format		1_0	1_0	1_1	1_1	1_1	1_0
Payload (without CRC)	Bits	39	39	52	52	52	39

A.3.3.2.2 Reference measurement channels for SCS 30 kHz FR1

Table A.3.3.2.2-1: PDCCH Reference Channels (Time domain allocation 1 symbol)

Parameter	Unit	Value					
		R.PDCCH.2-1.1 TDD	R.PDCCH.2-1.2 TDD	R.PDCCH.2-1.3 TDD	R.PDCCH.2-1.4 TDD	R.PDCCH.2-1.5 TDD	R.PDCCH.2-1.6 TDD
Reference channel							
Subcarrier spacing	kHz	30	30	30	30	30	30
CORESET frequency domain allocation		102	102	90	102	48	48
CORESET time domain allocation		1	1	1	1	1	1
Aggregation level		2	4	8	8	4	8
DCI Format		1_0	1_1	1_1	2_6	1_1	1_1
Payload (without CRC)	Bits	41	53	53	12	53	53

Table A.3.3.2.2-2: PDCCH Reference Channel (Time domain allocation 2 symbols)

Parameter	Unit	Value					
		R.PDCCH.2-2.1 TDD	R.PDCCH.2-2.2 TDD				
Reference channel							
Subcarrier spacing	kHz	30	30				
CORESET frequency domain allocation		48	48				
CORESET time domain allocation		2	2				
Aggregation level		16	2				
DCI Format		1_0	1_0				
Payload (without CRC)	Bits	41	41				

Table A.3.3.2.2-3: Additional PDSCH Reference Channel TDD

Parameter	Unit	Value		
DCI Format		1-0	1-1	1-1
TDD UL/DL pattern		FR1.30-1	FR1.30-1	FR1.30-1
Channel bandwidth	MHz	40	40	20
Subcarrier spacing	kHz	30	30	30
Allocated resource blocks	PRBs	106	106	51

Number of consecutive PDSCH symbols				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4	4	4
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		12	12	12
Allocated slots per 2 frames		31	31	31
MCS table		64QAM	64QAM	64QAM
MCS index		4	4	4
Modulation		QPSK	QPSK	QPSK
Target Coding Rate		0.30	0.3	0.3
Number of MIMO layers		1	1	1
Number of DMRS rEs (Note 3)				
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		12	6	6
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}		36	12	12
Overhead for TBS determination		0	0	0
Information Bit Payload per Slot				
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	2280	2664	1288
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	6912	8456	4032
Transport block CRC per Slot				
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	16	16	16
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	24	24	24
Number of Code Blocks per Slot				
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	CBs	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	CBs	1	1	1
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	CBs	1	2	1
Binary Channel Bits Per Slot				
For Slots 0 and Slot i, if mod(i, 10) = {8,9} for i from {0,...,39}	Bits	N/A	N/A	N/A
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}	Bits	7488	8904	4284
For Slot i, if mod(i, 10) = {0,1,2,3,4,5,6} for i from {1,...,39}	Bits	22896	27984	13464
Max. Throughput averaged over 2 frames	Mbps	9.78	11.94	5.70
<p>Note 1: For PDSCH & PDSCH DMRS precoding the following configuration shall be used: Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i_1, i_2 combination, and with PRB bundling granularity.</p> <p>Note 2: For tests with DRX configured, PDCCH and PDSCH shall only be scheduled during the DRX on duration of the test.</p> <p>Note 3: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.</p>				

Table A.3.3.2.2-3a: Additional PDSCH Reference Channel TDD for eRedCap

Parameter	Unit	Value
DCI Format		1-1
TDD UL/DL pattern		FR1.30-1
Channel bandwidth	MHz	20
Subcarrier spacing	kHz	30
Allocated resource blocks	PRBs	12
Number of consecutive PDSCH symbols		
For Slot i, if mod(i, 10) = 7 for i from {0,...,39}		4

For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12
Allocated slots per 2 frames		31
MCS table		64QAM
MCS index		4
Modulation		QPSK
Target Coding Rate		0.3
Number of MIMO layers		1
Number of DMRS rEs (Note 3)		
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$		6
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$		12
Overhead for TBS determination		0
Information Bit Payload per Slot		
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	304
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	984
Transport block CRC per Slot		
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	16
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	16
Number of Code Blocks per Slot		
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	CBs	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	CBs	1
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	CBs	1
Binary Channel Bits Per Slot		
For Slots 0 and Slot i , if $\text{mod}(i, 10) = \{8,9\}$ for i from $\{0, \dots, 39\}$	Bits	N/A
For Slot i , if $\text{mod}(i, 10) = 7$ for i from $\{0, \dots, 39\}$	Bits	1008
For Slot i , if $\text{mod}(i, 10) = \{0,1,2,3,4,5,6\}$ for i from $\{1, \dots, 39\}$	Bits	3168
Max. Throughput averaged over 2 frames	Mbps	1.389
Note 1: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.		

A.3.3.2.3 Reference measurement channels for SCS 60 kHz FR1

A.3.3.2.4 Reference measurement channels for SCS 60 kHz FR2

A.3.3.2.5 Reference measurement channels for SCS 120 kHz FR2

Table A.3.3.2.5-1: PDCCH Reference Channels (Time domain allocation 1 symbol)

Parameter	Unit	Value			
		R.PDCCH.5-1.1 TDD	R.PDCCH.5-1.2 TDD	R.PDCCH.5-1.3 TDD	R.PDCCH.5-1.4 TDD
Reference channel					
Subcarrier spacing	kHz	120	120	120	120
CORESET frequency domain allocation		60	60	60	60
CORESET time domain allocation		1	1	1	1

Aggregation level		2	4	8	8		
DCI Format		1_0	1_1	1_1	2_6		
Payload (without CRC)	Bits	40	56	56	12		

Table A.3.3.2.5-2: PDCCH Reference Channel (Time domain allocation 2 symbols)

Parameter	Unit	Value					
Reference channel		R.PDCCH.5-2.1 TDD					
Subcarrier spacing	kHz	120					
CORESET frequency domain allocation		60					
CORESET time domain allocation		2					
Aggregation level		16					
DCI Format		1_0					
Payload (without CRC)	Bits	40					

Table A.3.3.2.5-3: Additional PDSCH Reference Channel TDD

Parameter	Unit	Value		
DCI format		DCI 1_0	DCI 1_1	DCI 1_0 Test 2-2
TDD UL/DL pattern				
Channel bandwidth	MHz	100	100	100
Subcarrier spacing	kHz	120	120	120
Allocated resource blocks	PRBs	66	66	66
Number of consecutive PDSCH symbols				
For Slots 0, 5 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$		N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$		9	9	8
For Slot i, if $\text{mod}(i, 5) = \{1, 2\}$ for i from $\{1, \dots, 159\}$		13	13	12
For Slot i, if $\text{mod}(i, 5) = \{0\}$ for i from $\{6, \dots, 159\}$		13	13	12
Allocated slots per 2 frames		126	126	126
MCS table		64QAM	64QAM	64QAM
MCS index		4	4	4
Modulation		QPSK	QPSK	QPSK
Target Coding Rate		0.30	0.30	0.30
Number of MIMO layers		1	1	1
Number of DMRS REs (Note 4)				
For Slots 0, 5 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$		N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$		36	12	36
For Slot i, if $\text{mod}(i, 5) = \{1, 2\}$ for i from $\{1, \dots, 159\}$		36	12	36
For Slot i, if $\text{mod}(i, 5) = \{0\}$ for i from $\{6, \dots, 159\}$		36	12	36
Overhead for TBS determination		6	6	6
Information Bit Payload per Slot				
For Slots 0, 5 and Slot i, if $\text{mod}(i, 5) = 4$ for i from $\{0, \dots, 159\}$	Bits	N/A	N/A	N/A
For Slot i, if $\text{mod}(i, 5) = 3$ for i from $\{0, \dots, 159\}$	Bits	2600	3624	2152
For Slot i, if $\text{mod}(i, 5) = \{1, 2\}$ for i from $\{1, \dots, 159\}$	Bits	4480	5504	4032
For Slot i, if $\text{mod}(i, 5) = \{0\}$ for i from $\{6, \dots, 159\}$		4480	5504	4032
Transport block CRC per Slot				

For Slots 0, 5 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	Bits	16	16	16
For Slot i, if mod(i, 5) = {1,2} for i from {1,...,159}	Bits	24	24	24
For Slot i, if mod(i, 5) = {0} for i from {6,...,159}		24	24	24
Number of Code Blocks per Slot				
For Slots 0, 5 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	CBs	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	CBs	1	1	1
For Slot i, if mod(i, 5) = {1,2} for i from {1,...,159}	CBs	1	1	1
For Slot i, if mod(i, 5) = {0} for i from {6,...,159}		1	1	1
Binary Channel Bits Per Slot				
For Slots 0, 5 and Slot i, if mod(i, 5) = 4 for i from {0,...,159}	Bits	N/A	N/A	N/A
For Slot i, if mod(i, 5) = 3 for i from {0,...,159}	Bits	8712	11880	7128
For Slot i, if mod(i, 5) = {1,2} for i from {1,...,159}	Bits	15048	18216	13464
For Slot i, if mod(i, 5) = {0} for i from {6,...,159}		15048	18216	13464
Max. Throughput averaged over 2 frames	Mbps	25.216	31.667	22,796
Note 1: SS/PBCH block is transmitted in slot #0 with periodicity 20 ms. Note 2: Slot i is slot index per 2 frames Note 3: For PDSCH & PDSCH DMRS precoding the following configuration shall be used: Single Panel Type I, Random precoder selection updated per slot, with equal probability of each applicable i1, i2 combination, and with Wideband granularity. Note 4: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.				

A.3.4 Reference measurement channels for PBCH demodulation requirements

A.3.4.1 Reference measurement channels for FR1

Table A.3.4.1-1: PBCH Reference Channel

Parameter	Unit	Value	
		R.PBCH.1	R.PBCH.2
Reference channel			
SS/PBCH block subcarrier spacing	kHz	15	30
Modulation		QPSK	QPSK
Target coding rate		56/864	56/864
Payload (without CRC and timing related PBCH payload bits)	bits	24	24

A.3.4.2 Reference measurement channels for FR2

Table A.3.4.2-1: PBCH Reference Channel

Parameter	Unit	Value	
		R.PBCH.5	R.PBCH.6
Reference channels			
SS/PBCH block subcarrier spacing	kHz	120	240
Modulation		QPSK	QPSK
Target coding rate		56/864	56/864

Payload (without CRC and timing related PBCH payload bits)	bits	24	24
--	------	----	----

A.4 CSI reference measurement channels

This section defines the DL signal applicable to the reporting of channel status information (Clauses 6 and 8).

Tables in this section specifies the mapping of CQI index to Information Bit payload, which complies with the CQI definition specified in clause 5.2.2.1 of TS 38.214 [12] and with MCS definition specified in clause 5.1.3 of TS 38.214 [12]

Table A.4-1: Mapping of CQI Index to Information Bit payload (CQI table 1)

TBS Scheme				TBS.1-1	TBS.1-2	TBS.1-3	TBS.1-4	TBS.1-5	TBS.1-6
MCS table				64QAM					
Number of allocated PDSCH resource blocks				66	66	52	52	51	51
Number of consecutive PDSCH symbols				12	12	12	12	12	12
Number of PDSCH MIMO layers				1	2	1	2	1	2
Number of DMRS REs (Note 1)				24	24	24	24	24	24
Overhead for TBS determination				6	6	0	0	0	0
Available RE-s				7590	7590	6240	6240	6120	6120
CQI index	Spectral efficiency	MCS index	Modulation	Information Bit Payload per Slot					
0	OOOR	OOOR	OOOR	N/A	N/A	N/A	N/A	N/A	N/A
1	0.2344	0	QPSK	1800	3624	1480	2976	1480	2856
2	0.2344	0		1800	3624	1480	2976	1480	2856
3	0.3770	2		2856	5640	2408	4744	2408	4616
4	0.6016	4		4480	8968	3752	7424	3752	7296
5	0.8770	6		6528	13064	5504	11016	5376	10760
6	1.1758	8		8712	17928	7296	14600	7168	14344
7	1.4766	11		11016	22032	9224	18432	8968	17928
8	1.9141	13	16QAM	14344	28680	12040	24072	11784	23568
9	2.4063	15		17928	35856	15112	30216	14600	29192
10	2.7305	18	64QAM	20496	40976	16896	33816	16896	33816
11	3.3223	20		25104	50184	20496	40976	20496	40976
12	3.9023	22		29192	58384	24576	49176	24072	48168
13	4.5234	24		33816	67584	28168	56368	27656	55304
14	5.1152	26		38936	77896	31752	63528	31240	62504
15	5.5547	28		42016	83976	34816	69672	33816	67584
Note 1:				Number of DMRS REs includes the overhead of the DM-RS CDM groups without data					
Note 2:				PDSCH is not scheduled on slots containing CSI-RS for tracking, CSI-RS for CSI acquisition and CSI-RS for beam refinement or slots which are not full DL					
Note 3:				PDSCH is not scheduled on slots containing PBCH, i.e. slot#0 per 20ms periodicity					
Note 4:				Spectral efficiency is based on MCS Table defined in Table 5.1.3.1-1 of TS 38.214 [12]					

Table A.4-2: Mapping of CQI Index to Information Bit payload (CQI table 2, Rank 1 and Rank 2)

BS Scheme				TBS.2-1	TBS.2-2	TBS.2-3	TBS.2-4	TBS.2-5	TBS.2-6	TBS.2-7	TBS.2-8
MCS table				256QAM							
Number of allocated PDSCH resource blocks				52	52	106	106	8	16	32	51
Number of consecutive PDSCH symbols				12	12	12	12	12	12	12	12
Number of PDSCH MIMO layers				1	2	1	2	1	1	1	2
Number of DMRS REs (Note 1)				24	24	24	24	24	24	24	24
Overhead for TBS determination				0	0	0	0	0	0	6	0
Available RE-s for PDSCH				6240	6240	12720	12720	960	1920	3680	6120
CQI index	Spectral efficiency	MCS index	Modulation	Information Bit Payload per Slot							
0	OOOR	OOOR	OOOR	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1	0.2344	0	QPSK	1480	2976	2976	5896	224	456	848	2856
2	0.3770	1		2408	4744	4744	9480	368	736	1416	4616
3	0.8770	3		5504	11016	11016	22536	848	1736	3240	10760

4	1.4766	5	16QAM	9224	18432	18960	37896	1416	2856	5376	17928
5	1.9141	7		12040	24072	24576	49176	1864	3752	6912	23568
6	2.4063	9		15112	30216	30728	61480	2408	4608	8712	29192
7	2.7305	11	64QAM	16896	33816	34816	69672	2600	5248	9992	33816
8	3.3223	13		20496	40976	42016	83976	3240	6400	12040	40976
9	3.9023	15		24576	49176	49176	98376	3752	7424	14344	48168
10	4.5234	17		28168	56368	57376	114776	4352	8712	16392	55304
11	5.1152	19	256QAM	31752	63528	65576	131176	4864	9736	18432	62504
12	5.5547	21		34816	69672	69672	139376	5248	10760	20496	67584
13	6.2266	23		38936	77896	79896	159880	6016	12040	22536	75792
14	6.9141	25		43032	86040	88064	176208	6656	13320	25104	83976
15	7.4063	27		46104	92200	94248	188576	7040	14088	27144	90176

- ote 1: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data
- ote 2: PDSCH is not scheduled on slots containing CSI-RS for tracking, CSI-RS for CSI acquisition and CSI-RS for beam refinement or slots which are not full DL
- ote 3: PDSCH is not scheduled on slots containing PBCH, i.e. slot#0 per 20ms periodicity
- ote 4: Spectral efficiency is based on MCS Table defined in Table 5.1.3.1-2 of TS 38.214 [12]

Table A.4-3: Mapping of CQI Index to Information Bit payload (CQI table 2, Rank 3 and Rank 4)

TBS Scheme				TBS.3-1	TBS.3-2	TBS.3-3	TBS.3-4		
MCS table				256QAM					
Number of allocated PDSCH resource blocks				52	52	106	106		
Number of consecutive PDSCH symbols				12	12	12	12		
Number of PDSCH MIMO layers				3	4	3	4		
Number of DMRS REs (Note 1)				24	24	24	24		
Overhead for TBS determination				0	0	0	0		
Available RE-s for PDSCH				6240	6240	12720	12720		
CQI index	Spectral efficiency	MCS index	Modulation	Information Bit Payload per Slot					
0	OOO	OOO	OOO	N/A	N/A	N/A	N/A		
1	0.2344	0	QPSK	4360	5896	8976	11784		
2	0.3770	1		7048	9480	14344	18976		
3	0.8770	3		16392	22032	33816	45096		
4	1.4766	5	16QAM	27656	36896	56368	75792		
5	1.9141	7		35856	48168	73776	98376		
6	2.4063	9		45096	60456	92200	122976		
7	2.7305	11		51216	67584	104496	139376		
8	3.3223	13	64QAM	62504	81976	127080	167976		
9	3.9023	15		73776	98376	147576	196776		
10	4.5234	17		83976	112648	172176	229576		
11	5.1152	19		96264	127080	196776	262376		
12	5.5547	21	256QAM	104496	139376	213176	278776		
13	6.2266	23		116792	155776	237776	319784		
14	6.9141	25		129128	172176	262376	352440		
15	7.4063	27		139376	184424	278776	376896		

- Note 1: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data
- Note 2: PDSCH is not scheduled on slots containing CSI-RS for tracking, CSI-RS for CSI acquisition and CSI-RS for beam refinement or slots which are not full DL
- Note 3: PDSCH is not scheduled on slots containing PBCH, i.e. slot#0 per 20ms periodicity
- Note 4: Spectral efficiency is based on MCS Table defined in Table 5.1.3.1-2 of TS 38.214 [12]

Table A.4-4: Mapping of CQI Index to Information Bit payload (CQI table 3)

TBS Scheme				TBS.4-1	TBS.4-2				
MCS table				64QAMLowSE					
Number of allocated PDSCH resource blocks				52	106				
Number of consecutive PDSCH symbols				12	12				
Number of PDSCH MIMO layers				1	1				
Number of DMRS REs (Note 1)				24	24				
Overhead for TBS determination				0	0				
Available RE-s for PDSCH				6240	12720				

CQI index	Spectral efficiency	MCS index	Modulation	Information Bit Payload per Slot					
0	OOO	OOO	OOO	N/A	N/A				
1	0.0586	0	QPSK	368	768				
2	0.0977	2		608	1256				
3	0.1523	4		984	2024				
4	0.2344	6		1480	2976				
5	0.3770	8		2408	4744				
6	0.6016	10		3752	7680				
7	0.8770	12		5504	11016				
8	1.1758	14		7296	14856				
9	1.4766	16	16QAM	9224	18960				
10	1.9141	18		12040	24576				
11	2.4063	20	64QAM	15112	30728				
12	2.7305	22		16896	34816				
13	3.3223	24		20496	42016				
14	3.9023	26		24576	49176				
15	4.5234	28		28168	57376				

Note 1: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data.
 Note 2: PDSCH is not scheduled on slots containing CSI-RS for tracking and CSI-RS for CSI acquisition or slots which are not full DL.
 Note 3: PDSCH is not scheduled on slots containing PBCH, i.e. slot#0 per 20ms periodicity.

Table A.4-5: Mapping of CQI Index to Information Bit payload (CQI table 4)

TBS Scheme				TBS.5-1	TBS.5-2				
MCS table				1024QAM					
Number of allocated PDSCH resource blocks				52	106				
Number of consecutive PDSCH symbols				12	12				
Number of PDSCH MIMO layers				1	1				
Number of DMRS REs (Note 1)				24	24				
Overhead for TBS determination				0	0				
Available RE-s				6240	12720				
CQI index	Spectral efficiency	MCS index	Modulation	Information Bit Payload per Slot					
0	OOO	OOO	OOO	N/A	N/A				
1	0.2344	0	QPSK	1480	2976				
2	0.377	1		2408	4744				
3	0.877	2		5504	11016				
4	1.4766	3	16QAM	9224	18960				
5	2.4063	5		15112	30728				
6	3.3223	8	64QAM	20496	42016				
7	3.9023	10		24576	49176				
8	4.5234	12		28168	57376				
9	5.1152	14		31752	65576				
10	5.5547	16	256QAM	34816	69672				
11	6.2266	18		38936	79896				
12	6.9141	20		43032	88064				
13	7.4063	22	1024QAM	46104	94248				
14	8.3301	24		52224	106576				
15	9.2578	26		57376	116792				

Note 1: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data
 Note 2: PDSCH is not scheduled on slots containing CSI-RS for tracking, CSI-RS for CSI acquisition and CSI-RS for beam refinement or slots which are not full DL
 Note 3: PDSCH is not scheduled on slots containing PBCH, i.e. slot#0 per 20ms periodicity
 Note 4: Spectral efficiency is based on MCS Table defined in Table 5.1.3.1-4 of TS 38.214 [12]

Table A.4-6: Mapping of CQI Index to Information Bit payload (CQI table 1)

TBS Scheme				TBS.6-1	TBS.6-2				
MCS table				64QAM					
Number of allocated PDSCH resource blocks				15	7				
Number of consecutive PDSCH symbols				12	12				
Number of PDSCH MIMO layers				1	1				

Number of DMRS REs (Note 1)				24	24				
Overhead for TBS determination				0	0				
Available RE-s				1800	840				
CQI index	Spectral efficiency	MCS index	Modulation	Information Bit Payload per Slot					
0	OOR	OOR	OOR	N/A	N/A				
1	0.2344	0	QPSK	432	192				
2	0.2344	0		432	192				
3	0.3770	2		672	320				
4	0.6016	4		1128	504				
5	0.8770	6		1608	736				
6	1.1758	8		2152	984				
7	1.4766	11		2664	1256				
8	1.9141	13	16QAM	3496	1608				
9	2.4063	15		4352	2024				
10	2.7305	18	64QAM	4864	2280				
11	3.3223	20		6016	2792				
12	3.9023	22		7040	3368				
13	4.5234	24		8064	3824				
14	5.1152	26		9224	4224				
15	5.5547	28		9992	4608				

Note 1: Number of DMRS REs includes the overhead of the DM-RS CDM groups without data
 Note 2: PDSCH is not scheduled on slots containing CSI-RS for tracking, CSI-RS for CSI acquisition and CSI-RS for beam refinement or slots which are not full DL
 Note 3: PDSCH is not scheduled on slots containing PBCH, i.e. slot#0 per 20ms periodicity
 Note 4: Spectral efficiency is based on MCS Table defined in Table 5.1.3.1-1 of TS 38.214 [12]

A.5 OFDMA Channel Noise Generator (OCNG)

A.5.1 OCNG Patterns for FDD

A.5.1.1 OCNG FDD pattern 1: Generic OCNG FDD Pattern for all unused REs

Table A.5.1.1-1: OP.1 FDD: Generic OCNG FDD Pattern for all unused REs

OCNG Parameters	OCNG Appliance	Control Region (CORESET)	Data Region
Resources allocated		All unused REs (Note 1)	All unused REs (Note 2)
Structure		PDCCH	PDSCH
Content		Uncorrelated pseudo random QPSK modulated data	Uncorrelated pseudo random QPSK modulated data
Transmission scheme for multiple antennas ports transmission		Single Tx port transmission	Spatial multiplexing using any precoding matrix with dimensions same as the precoding matrix for PDSCH
Subcarrier Spacing		Same as for RMC PDCCH in the active BWP	Same as for RMC PDSCH in the active BWP
Power Level		Same as for RMC PDCCH	Same as for RMC PDSCH
Note 1: All unused REs in the active CORESETS appointed by the search spaces in use. Note 2: Unused available REs refer to REs in PRBs not allocated for any physical channels, CORESETs, synchronization signals or reference signals, and excluding REs in all the available PDSCH DMRS CDM groups, in channel bandwidth.			

A.5.2 OCNG Patterns for TDD

A.5.2.1 OCNG TDD pattern 1: Generic OCNG TDD Pattern for all unused REs

Table A.5.2.1-1: OP.1 TDD: Generic OCNG TDD Pattern for all unused REs

OCNG Parameters \ OCNG Appliance	Control Region (CORESET)	Data Region
Resources allocated	All unused REs (Note 1)	All unused REs (Note 2)
Structure	PDCCH	PDSCH
Content	Uncorrelated pseudo random QPSK modulated data	Uncorrelated pseudo random QPSK modulated data
Transmission scheme for multiple antennas ports transmission	Single Tx port transmission	Spatial multiplexing using any precoding matrix with dimensions same as the precoding matrix for PDSCH
Subcarrier Spacing	Same as for RMC PDCCH in the active BWP	Same as for RMC PDSCH in the active BWP
Power Level	Same as for RMC PDCCH	Same as for RMC PDSCH
Note 1:	All unused REs in the active CORESETS appointed by the search spaces in use.	
Note 2:	Unused available REs refer to REs in PRBs not allocated for any physical channels, CORESETs, synchronization signals or reference signals, and excluding REs in all the available PDSCH DMRS CDM groups, in channel bandwidth.	

A.6 SL reference measurement channels

A.6.1 General

The transport block size (TBS) determination procedure is described in clause 8.1.3 of TS 38.214 [12].

A.6.2 Reference measurement channels for PSSCH performance requirements

A.6.2.1 Reference measurement channels for SCS 15 kHz FR1

FFS

A.6.2.2 Reference measurement channels for SCS 30 kHz FR1

Table A.6.2.2-1: PSSCH Reference Channel

Parameter	Unit	Value				
		R.PSSCH. 2-1.1	R.PSSCH. 2-1.2	R.PSSCH. 2-1.3	R.PSSCH. 2-1.4	R.PSSCH. 2-1.5
Reference channel		20	20	20	20	20
Channel bandwidth	MHz	30	30	30	30	30
Subcarrier spacing	kHz	20	20	10	10	10
Allocated resource blocks	RB	9	9	9	9	9
CP-OFDM symbols for slot with PSFCH(Note 1)		12	12	12	12	-
CP-OFDM symbols for slot without PSFCH		QPSK	16QAM	64QAM	QPSK	64QAM

MCS index		4	11	17	4	27
Number of MIMO layers		1	1	1	1	1
Number of DMRS REs		21	15	12	15	12
Number of REs for SCI format 1-A		240	240	240	240	240
2 nd stage SCI format 2-A configuration	Payloads	Bits	35	35	35	35
	α		1	1	1	1
	β_{offset}		3.5	5	5	3.5
Overhead for TBS determination		0	0	0	0	0
Transport Block Size for slot with PSFCH	Bits	704	1800	984	208	3496
Transport Block Size for slot without PSFCH	Bits	1128	2856	1928	432	-
Transport block CRC	Bits	24	24	24	24	16
Maximum number of HARQ transmissions		1	1	1	1	2
Binary Channel Bits for slots with PSFCH		2304	4848	2232	744	3816
Binary Channel Bits for slots without PSFCH	Bits	3744	7728	4392	1464	-
Note 1: OFDM symbols is for PSCCH/PSSCH transmission not including first symbol (AGC), PSFCH symbols, and guard symbols.						

A.6.3 Reference measurement channels for PSCCH performance requirements

A.6.3.1 Reference measurement channels for SCS 15 kHz FR1

FFS

A.6.3.2 Reference measurement channels for SCS 30 kHz FR1

Table A.6.3.2-1: PSCCH Reference Channel

Parameter	Unit	Value
Reference channel		R.PSCCH.2-1.1
Allocated resource blocks	PRBs	10
OFDM Symbols per slot (Note 2)	Symbols	2
Modulation		QPSK
Payload (without CRC)	Bits	26
CRC	Bits	24
SCI Format		1-A
Binary Channel Bits	Bits	180
NOTE 1: The first OFDM symbol of a PSSCH and its associated PSCCH is duplicated as described in clauses 8.3.1.5 and 8.3.2.3 of TS 38.211 [9]. This symbol is used for AGC and not used for demodulation.		
NOTE 2: First OFDM symbol is not included.		

A.6.4 Reference measurement for PSBCH performance requirements

A.6.4.1 Reference measurement channels for SCS 15 kHz FR1

FFS

A.6.4.2 Reference measurement channels for SCS 30 kHz FR1

Table A.6.4.2-1: PSBCH Reference Channel

Parameter	Unit	Value
Reference channel		R.PSBCH.2-1
Channel bandwidth	MHz	20
Allocated resource blocks	PRBs	11
CP-OFDM Symbols per slot (see Note 1)	Symbols	8
Modulation		QPSK
Transport Block Size (without CRC)	Bits	32
Transport block CRC	Bits	24
Binary Channel Bits	Bits	1782
Note 1: PSBCH transmissions are rate-matched for 9 CP-OFDM symbols per slot. The first symbol is used for AGC and the last symbol is gap and shall not be used for PSBCH transmission as per TS 38.211 [9].		

Annex B (normative): Propagation conditions

B.0 No interference

The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects.

B.1 Static propagation condition

B.1.0 UE Receiver with 1Rx

For 2 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = [1 \ 1]..$$

For 4 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = [1 \ 1 \ j \ j]$$

For 8 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = [1 \ 1 \ 1 \ 1 \ j \ j \ j \ j]$$

B.1.1 UE Receiver with 2Rx

For 1 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{pmatrix} 1 \\ 1 \end{pmatrix}.$$

For 2 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{pmatrix} 1 & j \\ 1 & -j \end{pmatrix}.$$

For 4 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & j & j \\ 1 & 1 & -j & -j \end{bmatrix}$$

For 8 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & 1 & 1 & j & j & j & j \\ 1 & 1 & 1 & 1 & -j & -j & -j & -j \end{bmatrix}$$

B.1.2 UE Receiver with 4Rx

For 1 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{bmatrix} 1 \\ 1 \\ 1 \\ 1 \end{bmatrix}.$$

For 2 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{bmatrix} 1 & j \\ 1 & -j \\ 1 & j \\ 1 & -j \end{bmatrix}.$$

For 4 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & j & j \\ 1 & 1 & -j & -j \\ 1 & -1 & j & -j \\ 1 & -1 & -j & j \end{bmatrix}.$$

For 8 port transmission the channel matrix is defined in the frequency domain by:

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & 1 & 1 & j & j & j & j \\ 1 & 1 & 1 & 1 & -j & -j & -j & -j \\ 1 & 1 & -1 & -1 & j & j & -j & -j \\ 1 & 1 & -1 & -1 & -j & -j & j & j \end{bmatrix}$$

B.1.3 UE Receiver with 8Rx

For 1 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \end{bmatrix}$$

For 2 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 & j \\ 1 & -j \\ 1 & j \\ 1 & -j \\ -1 & j \\ -1 & -j \\ -1 & j \\ -1 & -j \end{bmatrix}$$

For 4 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & j & j \\ 1 & 1 & -j & -j \\ 1 & 1 & j & -j \\ 1 & 1 & -j & j \\ 1 & -1 & j & j \\ 1 & -1 & -j & -j \\ 1 & -1 & j & -j \\ 1 & -1 & -j & j \end{bmatrix}$$

For 8 port transmission the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & 1 & 1 & j & j & j & j \\ 1 & 1 & 1 & 1 & -j & -j & -j & -j \\ 1 & 1 & -1 & -1 & j & j & -j & -j \\ 1 & 1 & -1 & -1 & -j & -j & j & j \\ 1 & -1 & 1 & -1 & j & -j & j & -j \\ 1 & -1 & 1 & -1 & -j & j & -j & j \\ 1 & -1 & -1 & 1 & j & -j & -j & j \\ 1 & -1 & -1 & 1 & -j & j & j & -j \end{bmatrix}$$

B.2 Multi-path fading propagation conditions

The multipath propagation conditions consist of several parts:

- A delay profile in the form of a "tapped delay-lin", characterized by a number of taps at fixed positions on a sampling grid. The profile can be further characterized by the r.m.s. delay spread and the maximum delay spanned by the taps.
- A combination of channel model parameters that include the Delay profile and the Doppler spectrum that is characterized by a classical spectrum shape and a maximum Doppler frequency.
- Different models are used for FR1 and FR2.

Initial channel matrix for LOS component of TDL-D channel model is equal to channel matrix of Static propagation conditions in Clause B.1.

B.2.1 Delay profiles

The delay profiles are simplified from the TR 38.901 [15] TDL models. The simplification steps are shown below for information. These steps are only used when new delay profiles are created. Otherwise, the delay profiles specified in B.2.1.1 and B.2.1.2 can be used as such.

Step 1: Use the original TDL model from TR38.901 [15].

Step 2: Re-order the taps in ascending delays

Step 3: Perform delay scaling according to the procedure described in subclause 7.7.3 in TR 38.901 [15].

Step 4: Apply the quantization to the delay resolution 5 ns. This is done simply by rounding the tap delays to the nearest multiple of the delay resolution.

Step 5: If multiple taps are rounded to the same delay bin, merge them by calculating their linear power sum.

Step 6: If there are more than 12 taps in the quantized model, merge the taps as follows:

- Find the weakest tap from all taps (both merged and unmerged taps are considered)
 - If there are two or more taps having the same value and are the weakest, select the tap with the smallest delay as the weakest tap.
- When the weakest tap is the first delay tap, merge taps as follows:
 - Update the power of the first delay tap as the linear power sum of the weakest tap and the second delay tap.
 - Remove the second delay tap.
- When the weakest tap is the last delay tap, merge taps as follows:
 - Update the power of the last delay tap as the linear power sum of the second-to-last tap and the last tap.
 - Remove the second-to-last tap.
- Otherwise
 - For each side of the weakest tap, identify the neighbour tap that has the smaller delay difference to the weakest tap.
 - When the delay difference between the weakest tap and the identified neighbour tap on one side equals the delay difference between the weakest tap and the identified neighbour tap on the other side.
 - Select the neighbour tap that is weaker in power for merging.
 - Otherwise, select the neighbour tap that has smaller delay difference for merging.
 - To merge, the power of the merged tap is the linear sum of the power of the weakest tap and the selected tap.
 - When the selected tap is the first tap, the location of the merged tap is the location of the first tap. The weakest tap is removed.
 - When the selected tap is the last tap, the location of the merged tap is the location of the last tap. The weakest tap is removed.
 - Otherwise, the location of the merged tap is based on the average delay of the weakest tap and selected tap. If the average delay is on the sampling grid, the location of the merged tap is the average delay. Merge two parallel taps with different delays (average delay, sum power) starting from the weakest ones. Otherwise, the location of the merged tap is rounded towards the direction of the selected tap (e.g. 10 ns

& 20 ns → 15 ns, 10 ns & 25 ns → 20 ns, if 25 ns had higher or equal power; 15 ns, if 10 ns had higher power). The weakest tap and the selected tap are removed.

- Repeat step 6 until the final number of taps is 12.

Step 7: Round the amplitudes of taps to one decimal (e.g. -8.78 dB → -8.8 dB)

Step 8: If the delay spread has slightly changed due to the tap merge, adjust the final delay spread by increasing or decreasing the power of the last tap so that the delay spread is corrected.

Step 9: Re-normalize tap powers such that the strongest tap is at 0dB.

Note 1: Some values of the delay profile created by the simplification steps may differ from the values in tables B.2.1.1-2, B.2.1.1-3, B.2.1.1-4, B.2.1.2-2, and B.2.1.1-3 for the corresponding model.

Note 2: For Step 5 and Step 6, the power values are expressed in the linear domain using 6 digits of precision. The operations are in the linear domain.

Note 3: Delay profile for TDLD30 is generated under assumption that Steps 1-8 are applied for taps with Rayleigh distribution.

B.2.1.1 Delay profiles for FR1

The delay profiles for FR1 are selected to be representative of low, medium and high delay spread environment. The resulting model parameters are specified in B.2.1.1-1 and the tapped delay line models are specified in Tables B.2.1.1-2 ~ Table B.2.1.1-5.

Table B.2.1.1-1: Delay profiles for NR channel models

Model	Number of channel taps	Delay spread (r.m.s.)	Maximum excess tap delay (span)	Delay resolution
TDLA30	12	30 ns	290 ns	5 ns
TDLB100	12	100 ns	480 ns	5 ns
TDLC300	12	300 ns	2595 ns	5 ns
TDLD30	10	30 ns	375 ns	5 ns

Table B.2.1.1-2: TDLA30 (DS = 30 ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	-15.5	Rayleigh
2	10	0	Rayleigh
3	15	-5.1	Rayleigh
4	20	-5.1	Rayleigh
5	25	-9.6	Rayleigh
6	50	-8.2	Rayleigh
7	65	-13.1	Rayleigh
8	75	-11.5	Rayleigh
9	105	-11.0	Rayleigh
10	135	-16.2	Rayleigh
11	150	-16.6	Rayleigh
12	290	-26.2	Rayleigh

Table B.2.1.1-3: TDLB100 (DS = 100ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	0	Rayleigh
2	10	-2.2	Rayleigh
3	20	-0.6	Rayleigh
4	30	-0.6	Rayleigh
5	35	-0.3	Rayleigh
6	45	-1.2	Rayleigh
7	55	-5.9	Rayleigh
8	120	-2.2	Rayleigh

9	170	-0.8	Rayleigh
10	245	-6.3	Rayleigh
11	330	-7.5	Rayleigh
12	480	-7.1	Rayleigh

Table B.2.1.1-4: TDLC300 (DS = 300 ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	-6.9	Rayleigh
2	65	0	Rayleigh
3	70	-7.7	Rayleigh
4	190	-2.5	Rayleigh
5	195	-2.4	Rayleigh
6	200	-9.9	Rayleigh
7	240	-8.0	Rayleigh
8	325	-6.6	Rayleigh
9	520	-7.1	Rayleigh
10	1045	-13.0	Rayleigh
11	1510	-14.2	Rayleigh
12	2595	-16.0	Rayleigh

Table B.2.1.1-5: TDLD30 (DS = 30 ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	-0.2	LOS path
	0	-12.4	Rayleigh
2	20	-21	Rayleigh
3	40	-16.7	Rayleigh
4	55	-18.3	Rayleigh
5	80	-21.9	Rayleigh
6	120	-27.8	Rayleigh
7	240	-23.6	Rayleigh
8	285	-24.8	Rayleigh
9	290	-30.0	Rayleigh
10	375	-27.6	Rayleigh

Note 1: Tap #1 follows a Ricean distribution.

B.2.1.2 Delay profiles for FR2

The delay profiles for FR2 are specified in B.2.1.2-1 and the tapped delay line models are specified in Tables B.2.1.2-2 and B.2.1.2-3.

Table B.2.1.2-1: Delay profiles for NR channel models

Model	Number of channel taps	Delay spread (r.m.s.)	Maximum excess tap delay (span)	Delay resolution
TDLA30	12	30 ns	290 ns	5 ns
TDLC60	12	60 ns	520 ns	5 ns
TDLD30	10	30 ns	375 ns	5 ns

Table B.2.1.2-2: TDLA30 (DS = 30 ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	-15.5	Rayleigh
2	10	0	Rayleigh
3	15	-5.1	Rayleigh
4	20	-5.1	Rayleigh
5	25	-9.6	Rayleigh
6	50	-8.2	Rayleigh
7	65	-13.1	Rayleigh

8	75	-11.5	Rayleigh
9	105	-11.0	Rayleigh
10	135	-16.2	Rayleigh
11	150	-16.6	Rayleigh
12	290	-26.2	Rayleigh

Table B.2.1.2-3: TDLC60 (DS = 60 ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	-7.8	Rayleigh
2	15	-0.3	Rayleigh
3	40	0	Rayleigh
4	50	-8.9	Rayleigh
5	55	-14.5	Rayleigh
6	75	-8.5	Rayleigh
7	80	-10.2	Rayleigh
8	130	-12.1	Rayleigh
9	210	-13.9	Rayleigh
10	300	-15.2	Rayleigh
11	360	-16.9	Rayleigh
12	520	-19.4	Rayleigh

Table B.2.1.2-4: TDLD30 (DS = 30 ns)

Tap #	Delay [ns]	Power [dB]	Fading distribution
1	0	-0.2	LOS path
	0	-12.4	Rayleigh
2	20	-21	Rayleigh
3	40	-16.7	Rayleigh
4	55	-18.3	Rayleigh
5	80	-21.9	Rayleigh
6	120	-27.8	Rayleigh
7	240	-23.6	Rayleigh
8	285	-24.8	Rayleigh
9	290	-30.0	Rayleigh
10	375	-27.6	Rayleigh

Note 1: Tap #1 follows a Ricean distribution.

B.2.2 Combinations of channel model parameters

The propagation conditions used for the performance measurements in multi-path fading environment are indicated as a combination of a channel model name and a maximum Doppler frequency, i.e., TDLA<DS>-<Doppler>, TDLB<DS>-<Doppler>, TDLC<DS>-<Doppler> or TDLD<DS>-<Doppler> where '<DS>' indicates the desired delay spread and '<Doppler>' indicates the maximum Doppler frequency (Hz).

Table B.2.2-1 and Table B.2.2-2 show the propagation conditions that are used for the performance measurements in multi-path fading environment for low, medium and high Doppler frequencies for FR1 and FR2, respectively.

Table B.2.2-1: Channel model parameters for FR1

Combination name	Model	Maximum Doppler frequency
TDLA30-5	TDLA30	5 Hz
TDLA30-10	TDLA30	10 Hz
TDLA30-20	TDLA30	20 Hz
TDLA30-180	TDLA30	180 Hz
TDLA30-1400	TDLA30	1400 Hz
TDLA30-2700	TDLA30	2700 Hz
TDLB100-400	TDLB100	400 Hz
TDLC300-100	TDLC300	100 Hz
TDLC300-600	TDLC300	600 Hz

TDLC300-1200	TDLC300	1200 Hz
TDLD30-5	TDLD30	5 Hz

Table B.2.2-2: Channel model parameters for FR2

Combination name	Model	Maximum Doppler frequency
TDLA30-35	TDLA30	35 Hz
TDLA30-75	TDLA30	75 Hz
TDLA30-300	TDLA30	300 Hz
TDLC60-300	TDLC60	300 Hz
TDLD30-75	TDLD30	75 Hz

B.2.3 MIMO Channel Correlation Matrices

The MIMO channel correlation matrices defined in B.2.3 apply for the antenna configuration using uniform linear arrays at both gNB and UE and for the antenna configuration using cross polarized antennas.

B.2.3.1 MIMO Correlation Matrices using Uniform Linear Array (ULA)

The MIMO channel correlation matrices defined in B.2.3.1 apply for the antenna configuration using uniform linear array (ULA) at both gNB and UE.

B.2.3.1.1 Definition of MIMO Correlation Matrices

Table B.2.3.1.1-1 defines the correlation matrix for the gNB.

Table B.2.3.1.1-1: gNB correlation matrix

	One antenna	Two antennas	Four antennas
gNB Correlation	$R_{gNB} = 1$	$R_{gNB} = \begin{pmatrix} 1 & \alpha \\ \alpha^* & 1 \end{pmatrix}$	$R_{gNB} = \begin{pmatrix} 1 & \alpha^{1/9} & \alpha^{4/9} & \alpha \\ \alpha^{1/9*} & 1 & \alpha^{1/9} & \alpha^{4/9} \\ \alpha^{4/9*} & \alpha^{1/9*} & 1 & \alpha^{1/9} \\ \alpha^* & \alpha^{4/9*} & \alpha^{1/9*} & 1 \end{pmatrix}$

Table B.2.3.1.1-2 defines the correlation matrix for the UE:

Table B.2.3.1.1-2 UE correlation matrix

	One antenna	Two antennas	Four antennas
UE Correlation	$R_{UE} = 1$	$R_{UE} = \begin{pmatrix} 1 & \beta \\ \beta^* & 1 \end{pmatrix}$	$R_{UE} = \begin{pmatrix} 1 & \beta^{1/9} & \beta^{4/9} & \beta \\ \beta^{1/9*} & 1 & \beta^{1/9} & \beta^{4/9} \\ \beta^{4/9*} & \beta^{1/9*} & 1 & \beta^{1/9} \\ \beta^* & \beta^{4/9*} & \beta^{1/9*} & 1 \end{pmatrix}$

Table B.2.3.1.1-3 defines the channel spatial correlation matrix R_{spat} . The parameters, α and β in Table B.2.3.1-3 defines the spatial correlation between the antennas at the gNB and UE.

Table B.2.3.1.1-3: R_{spat} correlation matrices

1x2 case	$R_{spat} = R_{UE} = \begin{bmatrix} 1 & \beta \\ \beta^* & 1 \end{bmatrix}$
1x4 case	$R_{spat} = R_{UE} = \begin{pmatrix} 1 & \beta^{1/9} & \beta^{4/9} & \beta \\ \beta^{1/9*} & 1 & \beta^{1/9} & \beta^{4/9} \\ \beta^{4/9*} & \beta^{1/9*} & 1 & \beta^{1/9} \\ \beta^* & \beta^{4/9*} & \beta^{1/9*} & 1 \end{pmatrix}$
2x1 case	$R_{spat} = R_{gNB} = \begin{bmatrix} 1 & \alpha \\ \alpha^* & 1 \end{bmatrix}$
2x2 case	$R_{spat} = R_{gNB} \otimes R_{UE} = \begin{bmatrix} 1 & \alpha \\ \alpha^* & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & \beta \\ \beta^* & 1 \end{bmatrix} = \begin{bmatrix} 1 & \beta & \alpha & \alpha\beta \\ \beta^* & 1 & \alpha\beta^* & \alpha \\ \alpha^* & \alpha^*\beta & 1 & \beta \\ \alpha^*\beta^* & \alpha^* & \beta^* & 1 \end{bmatrix}$
2x4 case	$R_{spat} = R_{gNB} \otimes R_{UE} = \begin{bmatrix} 1 & \alpha \\ \alpha^* & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & \beta^{1/9} & \beta^{4/9} & \beta \\ \beta^{1/9*} & 1 & \beta^{1/9} & \beta^{4/9} \\ \beta^{4/9*} & \beta^{1/9*} & 1 & \beta^{1/9} \\ \beta^* & \beta^{4/9*} & \beta^{1/9*} & 1 \end{bmatrix}$
4x1 case	$R_{spat} = R_{gNB} = \begin{bmatrix} 1 & \alpha^{1/9} & \alpha^{4/9} & \alpha \\ \alpha^{1/9*} & 1 & \alpha^{1/9} & \alpha^{4/9} \\ \alpha^{4/9*} & \alpha^{1/9*} & 1 & \alpha^{1/9} \\ \alpha^* & \alpha^{4/9*} & \alpha^{1/9*} & 1 \end{bmatrix}$
4x2 case	$R_{spat} = R_{gNB} \otimes R_{UE} = \begin{bmatrix} 1 & \alpha^{1/9} & \alpha^{4/9} & \alpha \\ \alpha^{1/9*} & 1 & \alpha^{1/9} & \alpha^{4/9} \\ \alpha^{4/9*} & \alpha^{1/9*} & 1 & \alpha^{1/9} \\ \alpha^* & \alpha^{4/9*} & \alpha^{1/9*} & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & \beta \\ \beta^* & 1 \end{bmatrix}$
4x4 case	$R_{spat} = R_{gNB} \otimes R_{UE} = \begin{bmatrix} 1 & \alpha^{1/9} & \alpha^{4/9} & \alpha \\ \alpha^{1/9*} & 1 & \alpha^{1/9} & \alpha^{4/9} \\ \alpha^{4/9*} & \alpha^{1/9*} & 1 & \alpha^{1/9} \\ \alpha^* & \alpha^{4/9*} & \alpha^{1/9*} & 1 \end{bmatrix} \otimes \begin{pmatrix} 1 & \beta^{1/9} & \beta^{4/9} & \beta \\ \beta^{1/9*} & 1 & \beta^{1/9} & \beta^{4/9} \\ \beta^{4/9*} & \beta^{1/9*} & 1 & \beta^{1/9} \\ \beta^* & \beta^{4/9*} & \beta^{1/9*} & 1 \end{pmatrix}$

8x8 case	$R_{spat} = R_{gNB} \otimes R_{UE}$ $= \begin{pmatrix} 1 & \frac{1}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{16}{\alpha^{49}} & \frac{25}{\alpha^{49}} & \frac{36}{\alpha^{49}} & \alpha \\ \frac{1}{\alpha^{49}} & 1 & \frac{1}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{16}{\alpha^{49}} & \frac{25}{\alpha^{49}} & \frac{36}{\alpha^{49}} \\ \frac{4}{\alpha^{49}} & \frac{1}{\alpha^{49}} & 1 & \frac{1}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{16}{\alpha^{49}} & \frac{25}{\alpha^{49}} \\ \frac{9}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{1}{\alpha^{49}} & 1 & \frac{1}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{16}{\alpha^{49}} \\ \frac{16}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{1}{\alpha^{49}} & 1 & \frac{1}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{9}{\alpha^{49}} \\ \frac{25}{\alpha^{49}} & \frac{16}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{1}{\alpha^{49}} & 1 & \frac{1}{\alpha^{49}} & \frac{4}{\alpha^{49}} \\ \frac{36}{\alpha^{49}} & \frac{25}{\alpha^{49}} & \frac{16}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{1}{\alpha^{49}} & 1 & \frac{1}{\alpha^{49}} \\ \alpha & \frac{36}{\alpha^{49}} & \frac{25}{\alpha^{49}} & \frac{16}{\alpha^{49}} & \frac{9}{\alpha^{49}} & \frac{4}{\alpha^{49}} & \frac{1}{\alpha^{49}} & 1 \end{pmatrix}$ $\otimes \begin{pmatrix} 1 & \frac{1}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{16}{\beta^{49}} & \frac{25}{\beta^{49}} & \frac{36}{\beta^{49}} & \beta \\ \frac{1}{\beta^{49}} & 1 & \frac{1}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{16}{\beta^{49}} & \frac{25}{\beta^{49}} & \frac{36}{\beta^{49}} \\ \frac{4}{\beta^{49}} & \frac{1}{\beta^{49}} & 1 & \frac{1}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{16}{\beta^{49}} & \frac{25}{\beta^{49}} \\ \frac{9}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{1}{\beta^{49}} & 1 & \frac{1}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{16}{\beta^{49}} \\ \frac{16}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{1}{\beta^{49}} & 1 & \frac{1}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{9}{\beta^{49}} \\ \frac{25}{\beta^{49}} & \frac{16}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{1}{\beta^{49}} & 1 & \frac{1}{\beta^{49}} & \frac{4}{\beta^{49}} \\ \frac{36}{\beta^{49}} & \frac{25}{\beta^{49}} & \frac{16}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{1}{\beta^{49}} & 1 & \frac{1}{\beta^{49}} \\ \beta & \frac{36}{\beta^{49}} & \frac{25}{\beta^{49}} & \frac{16}{\beta^{49}} & \frac{9}{\beta^{49}} & \frac{4}{\beta^{49}} & \frac{1}{\beta^{49}} & 1 \end{pmatrix}$
-----------------	---

For cases with more antennas at either gNB or UE or both, the channel spatial correlation matrix can still be expressed as the Kronecker product of R_{gNB} and R_{UE} according to $R_{spat} = R_{gNB} \otimes R_{UE}$.

B.2.3.1.2 MIMO Correlation Matrices at High, Medium and Low Level

The α and β for different correlation types are given in Table B.2.3.1.2-1.

Table B.2.3.1.2-1: The α and β parameters for ULA MIMO correlation matrices

Correlation Model	α	β
Low correlation	0	0
Medium Correlation	0.3	0.9
Medium Correlation A	0.3	0.3874
Medium Correlation B	0.3	0.00515 4
High Correlation	0.9	0.9

The correlation matrices for high, medium, medium A and low correlation are defined in Tables B.2.3.1.2-2, B.2.3.1.2-3, B.2.3.1.2-4 and B.2.3.1.2-5 as below.

The values in Table B.2.3.1.2-2 have been adjusted for the 4x2 and 4x4 high correlation cases to insure the correlation matrix is positive semi-definite after round-off to 4 digit precision. This is done using the equation:

$$R_{high} = [R_{spat} + aI_n] / (1 + a)$$

Where the value "a" is a scaling factor such that the smallest value is used to obtain a positive semi-definite result. For the 4x2 high correlation case, $a=0.00010$. For the 4x4 high correlation case, $a=0.00012$.

The same method is used to adjust the 2x4 and 4x4 medium correlation matrix in Table B.2.3.1.2-3 to insure the correlation matrix is positive semi-definite after round-off to 4 digit precision with $a = 0.00010$ and $a = 0.00012$.

Table B.2.3.1.2-2: MIMO correlation matrices for high correlation

1x2 case	$R_{high} = \begin{pmatrix} 1 & 0.9 \\ 0.9 & 1 \end{pmatrix}$
2x1 case	$R_{high} = \begin{pmatrix} 1 & 0.9 \\ 0.9 & 1 \end{pmatrix}$
2x2 case	$R_{high} = \begin{pmatrix} 1 & 0.9 & 0.9 & 0.81 \\ 0.9 & 1 & 0.81 & 0.9 \\ 0.9 & 0.81 & 1 & 0.9 \\ 0.81 & 0.9 & 0.9 & 1 \end{pmatrix}$
4x2 case	$R_{high} = \begin{bmatrix} 1.0000 & 0.8999 & 0.9883 & 0.8894 & 0.9542 & 0.8587 & 0.8999 & 0.8099 \\ 0.8999 & 1.0000 & 0.8894 & 0.9883 & 0.8587 & 0.9542 & 0.8099 & 0.8999 \\ 0.9883 & 0.8894 & 1.0000 & 0.8999 & 0.9883 & 0.8894 & 0.9542 & 0.8587 \\ 0.8894 & 0.9883 & 0.8999 & 1.0000 & 0.8894 & 0.9883 & 0.8587 & 0.9542 \\ 0.9542 & 0.8587 & 0.9883 & 0.8894 & 1.0000 & 0.8999 & 0.9883 & 0.8894 \\ 0.8587 & 0.9542 & 0.8894 & 0.9883 & 0.8999 & 1.0000 & 0.8894 & 0.9883 \\ 0.8999 & 0.8099 & 0.9542 & 0.8587 & 0.9883 & 0.8894 & 1.0000 & 0.8999 \\ 0.8099 & 0.8999 & 0.8587 & 0.9542 & 0.8894 & 0.9883 & 0.8999 & 1.0000 \end{bmatrix}$
4x4 case	$R_{high} = \begin{bmatrix} 1.0000 & 0.9882 & 0.9541 & 0.8999 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 0.9541 & 0.9430 & 0.9105 & 0.8587 & 0.8999 & 0.8894 & 0.8587 & 0.8099 \\ 0.9882 & 1.0000 & 0.9882 & 0.9541 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.8894 & 0.8999 & 0.8894 & 0.8587 \\ 0.9541 & 0.9882 & 1.0000 & 0.9882 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9105 & 0.9430 & 0.9541 & 0.9430 & 0.8587 & 0.8894 & 0.8999 & 0.8894 \\ 0.8999 & 0.9541 & 0.9882 & 1.0000 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8587 & 0.9105 & 0.9430 & 0.9541 & 0.8099 & 0.8587 & 0.8894 & 0.8999 \\ 0.9882 & 0.9767 & 0.9430 & 0.8894 & 1.0000 & 0.9882 & 0.9541 & 0.8999 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 0.9541 & 0.9430 & 0.9105 & 0.8587 \\ 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 1.0000 & 0.9882 & 0.9541 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9430 & 0.9541 & 0.9430 & 0.9105 \\ 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9541 & 0.9882 & 1.0000 & 0.9882 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9105 & 0.9430 & 0.9541 & 0.9430 \\ 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8999 & 0.9541 & 0.9882 & 1.0000 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8587 & 0.9105 & 0.9430 & 0.9541 \\ 0.9541 & 0.9430 & 0.9105 & 0.8587 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 1.0000 & 0.9882 & 0.9541 & 0.8999 & 0.9882 & 0.9767 & 0.9430 & 0.8894 \\ 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 1.0000 & 0.9882 & 0.9541 & 0.9767 & 0.9882 & 0.9767 & 0.9430 \\ 0.9105 & 0.9430 & 0.9541 & 0.9430 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9541 & 0.9882 & 1.0000 & 0.9882 & 0.9430 & 0.9767 & 0.9882 & 0.9767 \\ 0.8587 & 0.9105 & 0.9430 & 0.9541 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8999 & 0.9541 & 0.9882 & 1.0000 & 0.8894 & 0.9430 & 0.9767 & 0.9882 \\ 0.8999 & 0.8894 & 0.8587 & 0.8099 & 0.9541 & 0.9430 & 0.9105 & 0.8587 & 0.9882 & 0.9767 & 0.9430 & 0.8894 & 1.0000 & 0.9882 & 0.9541 & 0.8999 \\ 0.8894 & 0.8999 & 0.8894 & 0.8587 & 0.9430 & 0.9541 & 0.9430 & 0.9105 & 0.9767 & 0.9882 & 0.9767 & 0.9430 & 0.9882 & 1.0000 & 0.9882 & 0.9541 \\ 0.8587 & 0.8894 & 0.8999 & 0.8894 & 0.9105 & 0.9430 & 0.9541 & 0.9430 & 0.9430 & 0.9767 & 0.9882 & 0.9767 & 0.9541 & 0.9882 & 1.0000 & 0.9882 \\ 0.8099 & 0.8587 & 0.8894 & 0.8999 & 0.8587 & 0.9105 & 0.9430 & 0.9541 & 0.8894 & 0.9430 & 0.9767 & 0.9882 & 0.8999 & 0.9541 & 0.9882 & 1.0000 \end{bmatrix}$

Table B.2.3.1.2-3: MIMO correlation matrices for medium correlation

1x2 case	N/A
2x1 case	N/A
2x2 case	$R_{medium} = \begin{pmatrix} 1 & 0.9 & 0.3 & 0.27 \\ 0.9 & 1 & 0.27 & 0.3 \\ 0.3 & 0.27 & 1 & 0.9 \\ 0.27 & 0.3 & 0.9 & 1 \end{pmatrix}$

4x4 case	$R_{medium A} =$	1.0000 0.9000 0.6561 0.3874 0.8748 0.7873 0.5739 0.3389 0.5856 0.5270 0.3842 0.2269 0.3000 0.2700 0.1968 0.1162
		0.9000 1.0000 0.9000 0.6561 0.7873 0.8748 0.7873 0.5739 0.5270 0.5856 0.5270 0.3842 0.2700 0.3000 0.2700 0.1968
		0.6561 0.9000 1.0000 0.9000 0.5739 0.7873 0.8748 0.7873 0.3842 0.5270 0.5856 0.5270 0.1968 0.2700 0.3000 0.2700
		0.3874 0.6561 0.9000 1.0000 0.3389 0.5739 0.7873 0.8748 0.2269 0.3842 0.5270 0.5856 0.1162 0.1968 0.2700 0.3000
		0.8748 0.7873 0.5739 0.3389 1.0000 0.9000 0.6561 0.3874 0.8748 0.7873 0.5739 0.3389 0.5856 0.5270 0.3842 0.2269
		0.7873 0.8748 0.7873 0.5739 0.9000 1.0000 0.9000 0.6561 0.7873 0.8748 0.7873 0.5739 0.5270 0.5856 0.5270 0.3842
		0.5739 0.7873 0.8748 0.7873 0.6561 0.9000 1.0000 0.9000 0.5739 0.7873 0.8748 0.7873 0.3842 0.5270 0.5856 0.5270
		0.3389 0.5739 0.7873 0.8748 0.3874 0.6561 0.9000 1.0000 0.3389 0.5739 0.7873 0.8748 0.2269 0.3842 0.5270 0.5856
		0.5856 0.5270 0.3842 0.2269 0.8748 0.7873 0.5739 0.3389 1.0000 0.9000 0.6561 0.3874 0.8748 0.7873 0.5739 0.3389
		0.5270 0.5856 0.5270 0.3842 0.7873 0.8748 0.7873 0.5739 0.9000 1.0000 0.9000 0.6561 0.7873 0.8748 0.7873 0.5739
		0.3842 0.5270 0.5856 0.5270 0.5739 0.7873 0.8748 0.7873 0.6561 0.9000 1.0000 0.9000 0.5739 0.7873 0.8748 0.7873
		0.2269 0.3842 0.5270 0.5856 0.3389 0.5739 0.7873 0.8748 0.3874 0.6561 0.9000 1.0000 0.3389 0.5739 0.7873 0.8748
		0.3000 0.2700 0.1968 0.1162 0.5856 0.5270 0.3842 0.2269 0.8748 0.7873 0.5739 0.3389 1.0000 0.9000 0.6561 0.3874
		0.2700 0.3000 0.2700 0.1968 0.5270 0.5856 0.5270 0.3842 0.7873 0.8748 0.7873 0.5739 0.9000 1.0000 0.9000 0.6561
		0.1968 0.2700 0.3000 0.2700 0.3842 0.5270 0.5856 0.5270 0.5739 0.7873 0.8748 0.7873 0.6561 0.9000 1.0000 0.9000
		0.1162 0.1968 0.2700 0.3000 0.2269 0.3842 0.5270 0.5856 0.3389 0.5739 0.7873 0.8748 0.3874 0.6561 0.9000 1.0000

Table B.2.3.1.2-5: MIMO correlation matrices for low correlation

1x2 case	$R_{low} = I_2$
1x4 case	$R_{low} = I_4$
2x1 case	$R_{low} = I_2$
2x2 case	$R_{low} = I_4$
2x4 case	$R_{low} = I_8$
4x1 case	$R_{low} = I_4$
4x2 case	$R_{low} = I_8$
4x4 case	$R_{low} = I_{16}$
4x8 case	$R_{low} = I_{32}$
8x8 case	$R_{low} = I_{64}$

In Table B.2.3.1.2-5, I_d is the $d \times d$ identity matrix.

Table B.2.3.1.2-6: MIMO correlation matrices for medium correlation B

2x8 case	$R_{medium B} =$	1.0000 0.8981 0.6505 0.3800 0.1790 0.0680 0.0209 0.0052 0.3000 0.2694 0.1951 0.1140 0.3000 0.2965 0.2862 0.2700
		0.8981 1.0000 0.8981 0.9541 0.8645 0.8747 0.8645 0.8347 0.5787 0.5855 0.5787 0.5588 0.2965 0.3000 0.2965 0.2862
		0.6505 0.8981 1.0000 0.9882 0.8347 0.8645 0.8747 0.8645 0.5588 0.5787 0.5855 0.5787 0.2862 0.2965 0.3000 0.2965
		0.3800 0.6505 0.8981 1.0000 0.7872 0.8347 0.8645 0.8747 0.5270 0.5588 0.5787 0.5855 0.2700 0.2862 0.2965 0.3000
		0.1790 0.3800 0.6505 0.7872 1.0000 0.9882 0.9541 0.8999 0.8747 0.8645 0.8347 0.7872 0.5855 0.5787 0.5588 0.5270
		0.0680 0.1790 0.3800 0.8347 0.9882 1.0000 0.9882 0.9541 0.8645 0.8747 0.8645 0.8347 0.5787 0.5855 0.5787 0.5588
		0.0209 0.0680 0.1790 0.8645 0.9541 0.9882 1.0000 0.9882 0.8347 0.8645 0.8747 0.8645 0.5588 0.5787 0.5855 0.5787
		0.0052 0.0209 0.0680 0.8747 0.8999 0.9541 0.9882 1.0000 0.7872 0.8347 0.8645 0.8747 0.5270 0.5588 0.5787 0.5855
		0.3000 0.2694 0.1951 0.5270 0.8747 0.8645 0.8347 0.7872 1.0000 0.9882 0.9541 0.8999 0.8747 0.8645 0.8347 0.7872
		0.2694 0.3000 0.2694 0.5588 0.8645 0.8747 0.8645 0.8347 0.9882 1.0000 0.9882 0.9541 0.8645 0.8747 0.8645 0.8347
		0.1951 0.2694 0.3000 0.5787 0.8347 0.8645 0.8747 0.8645 0.9541 0.9882 1.0000 0.9882 0.8347 0.8645 0.8747 0.8645
		0.1140 0.1951 0.2694 0.5855 0.7872 0.8347 0.8645 0.8747 0.8999 0.9541 0.9882 1.0000 0.7872 0.8347 0.8645 0.8747
		0.0537 0.1140 0.1951 0.2700 0.5855 0.5787 0.5588 0.5270 0.8747 0.8645 0.8347 0.7872 1.0000 0.9882 0.9541 0.8999
		0.0204 0.0537 0.1140 0.2862 0.5787 0.5855 0.5787 0.5588 0.8645 0.8747 0.8645 0.8347 0.9882 1.0000 0.9882 0.9541
		0.0063 0.0204 0.0537 0.2965 0.5588 0.5787 0.5855 0.5787 0.8347 0.8645 0.8747 0.8645 0.9541 0.9882 1.0000 0.9882
		0.0015 0.0063 0.0204 0.3000 0.5270 0.5588 0.5787 0.5855 0.7872 0.8347 0.8645 0.8747 0.8999 0.9541 0.9882 1.0000

B.2.3.2 MIMO Correlation Matrices using Cross Polarized Antennas (X-pol)

The MIMO channel correlation matrices defined in B.2.3.2 apply for the antenna configuration using cross polarized (XP/X-pol) antennas at both gNB and UE. The cross-polarized antenna elements with ± 45 degrees polarization slant angles are deployed at gNB and cross-polarized antenna elements with $\pm 90/0$ degrees polarization slant angles are deployed at UE.

For the 2D cross-polarized antenna array at eNodeB, the N antennas are indexed by (N_1, N_2, P) , and total number of antennas is $N = P \cdot N_1 \cdot N_2$, where

- N_1 is the number of antenna elements in first dimension with same polarization,
- N_2 is the number of antenna elements in second dimension with same polarization, and
- P is the number of polarization groups.

For the 2D cross-polarized antennas at gNB, the N antennas are labelled such that antennas shall be in increasing order of the second dimension firstly, then the first dimension, and finally the polarization group. For a specific antenna element at p -th polarization, n_1 -th row, and n_2 -th column within the 2D antenna array, the following index number is used for antenna labelling:

$$Index(p, n_1, n_2) = p \cdot N_1 \cdot N_2 + n_1 \cdot N_2 + n_2 + 1; \quad p=0; \dots; N_1-1; \quad n_2=0; \dots; N_2-1.$$

where N is the number of transmit antennas, p is the polarization group index, n_1 is the row index, and n_2 is the column index of the antenna element.

For the linear (single dimension, 1D) cross-polarized antenna, the N antennas are labelled following the above equations with $N_2=1$.

B.2.3.2.1 Definition of MIMO Correlation Matrices using cross polarized antennas

For the channel spatial correlation matrix, the following is used:

$$R_{spat} = P (R_{gNB} \otimes \Gamma \otimes R_{UE}) P^T$$

where

- R_{UE} is the spatial correlation matrix at the UE with same polarization,
- R_{gNB} is the spatial correlation matrix at the gNB with same polarization,
- Γ is a polarization correlation matrix, and
- $(\bullet)^T$ denotes transpose.

The matrix Γ is defined as:

$$\Gamma = \begin{bmatrix} 1 & 0 & -\gamma & 0 \\ 0 & 1 & 0 & \gamma \\ -\gamma & 0 & 1 & 0 \\ 0 & \gamma & 0 & 1 \end{bmatrix}$$

A permutation matrix P elements are defined as:

$$P(a,b) = \begin{cases} 1 & \text{for } a = (j-1)Nr+i \text{ and } b = 2(j-1)Nr+i, \quad i=1, \dots, Nr, j=1, \dots, Nt/2 \\ 1 & \text{for } a = (j-1)Nr+i \text{ and } b = 2(j-Nt/2)Nr-Nr+i, \quad i=1, \dots, Nr, j=Nt/2+1, \dots, Nt. \\ 0 & \text{otherwise} \end{cases}$$

where Nt and Nr is the number of transmitter and receiver respectively. This is used to map the spatial correlation coefficients in accordance with the antenna element labelling system described in B.2.3.2.

For the 2D cross-polarized antenna array at gNB, the spatial correlation matrix at the gNB is further expressed as following for 2D cross-polarized antenna array at gNB:

$$R_{gNB} = R_{gNB_Dim,1} \otimes R_{gNB_Dim,2}$$

where

- $R_{gNB_Dim,1}$ is the correlation matrix of antenna elements in first dimension with same polarization, and
- $R_{gNB_Dim,2}$ is the correlation matrix of antenna elements in second dimension with same polarization.

For the 2D cross polarized antenna array at gNB side, the spatial correlation matrices in one direction of antenna array are as follows:

- For 1 antenna element with the same polarization in one direction,

$$R_{gNB_Dim,i} = 1.$$

- For 2 antenna elements with the same polarization in one direction,

$$R_{gNB_Dim,i} = \begin{pmatrix} 1 & \alpha_i \\ \alpha_i^* & 1 \end{pmatrix}.$$

- For 3 antenna elements with the same polarization in one direction,

$$R_{gNB_Dim,i} = \begin{pmatrix} 1 & \alpha_i^{1/4} & \alpha_i \\ \alpha_i^{1/4*} & 1 & \alpha_i^{1/4} \\ \alpha_i^* & \alpha_i^{1/4*} & 1 \end{pmatrix}.$$

- For 4 antenna elements with the same polarization in one direction,

$$R_{gNB_Dim,i} = \begin{pmatrix} 1 & \alpha_i^{1/9} & \alpha_i^{4/9} & \alpha_i \\ \alpha_i^{1/9*} & 1 & \alpha_i^{1/9} & \alpha_i^{4/9} \\ \alpha_i^{4/9*} & \alpha_i^{1/9*} & 1 & \alpha_i^{1/9} \\ \alpha_i^* & \alpha_i^{4/9*} & \alpha_i^{1/9*} & 1 \end{pmatrix}.$$

where the index $i = 1,2$ stands for first dimension and second dimension respectively.

For the 1D cross-polarized antenna array at gNB, the matrix of R_{gNB} is determined by follow the equations for 2D cross-polarized antenna array and letting $R_{gNB_Dim,2} = 1$, i.e.

$$R_{gNB} = R_{gNB_Dim,1}$$

The spatial correlation matrices at UE side are as follows:

- For 1 antenna element with the same polarization,

$$R_{UE} = 1.$$

- For 2 antenna elements with the same polarization,

$$R_{UE} = \begin{pmatrix} 1 & \beta \\ \beta^* & 1 \end{pmatrix}.$$

B.2.3.2.2 MIMO Correlation Matrices using cross polarized antennas

The values for parameters α_1 , α_2 , β and γ for the cross polarized antenna models are given in Table B.2.3.2.2-1.

Table B.2.3.2.2-1: The α and β parameters for cross-polarized MIMO correlation matrices

Correlation Model	α_1	α_2	β	γ
Medium Correlation	0.3	0.3	0.6	0.2
High Correlation	0.9	0.9	0.9	0.3

NOTE 1: Value of α_1 applies when more than one pair of cross-polarized antenna elements in first dimension at gNB side.
 NOTE 2: Value of α_2 applies when more than one pair of cross-polarized antenna elements in second dimension at gNB side.
 NOTE 3: Value of β applies when more than one pair of cross-polarized antenna elements at UE side.

For the 1D cross polarized antenna array at gNB side, the correlation matrices for high spatial correlation and medium correlation are defined in Table B.2.3.2.2-2 and Table B.2.3.2.2-3 as below.

The values in Table B.2.3.2.2-2 have been adjusted to ensure the correlation matrix is positive semi-definite after round-off to 4 digit precision. This is done using the equation:

$$R_{high} = [R_{spat} + aI_n] / (1 + a) \text{ or } R_{medium} = [R_{spat} + aI_n] / (1 + a)$$

Where the value "a" is a scaling factor such that the smallest value is used to obtain a positive semi-definite result. For the 8(4,1,2)x2 high spatial correlation case, $a=0.00010$.

Table B.2.3.2.2-2: MIMO correlation matrices for high spatial correlation

4(2,1,2)x 2 case	$R_{high} =$	$\begin{bmatrix} 1.0000 & 0.0000 & 0.9000 & 0.0000 & -0.3000 & 0.0000 & -0.2700 & 0.0000 \\ 0.0000 & 1.0000 & 0.0000 & 0.9000 & 0.0000 & 0.3000 & 0.0000 & 0.2700 \\ 0.9000 & 0.0000 & 1.0000 & 0.0000 & -0.2700 & 0.0000 & -0.3000 & 0.0000 \\ 0.0000 & 0.9000 & 0.0000 & 1.0000 & 0.0000 & 0.2700 & 0.0000 & 0.3000 \\ -0.3000 & 0.0000 & -0.2700 & 0.0000 & 1.0000 & 0.0000 & 0.9000 & 0.0000 \\ 0.0000 & 0.3000 & 0.0000 & 0.2700 & 0.0000 & 1.0000 & 0.0000 & 0.9000 \\ -0.2700 & 0.0000 & -0.3000 & 0.0000 & 0.9000 & 0.0000 & 1.0000 & 0.0000 \\ 0.0000 & 0.2700 & 0.0000 & 0.3000 & 0.0000 & 0.9000 & 0.0000 & 1.0000 \end{bmatrix}$
2(1,1,2)x 4 case	$R_{high} =$	$\begin{bmatrix} 1.0000 & 0.9000 & 0.0000 & 0.0000 & -0.3000 & -0.2700 & 0.0000 & 0.0000 \\ 0.9000 & 1.0000 & 0.0000 & 0.0000 & -0.2700 & -0.3000 & 0.0000 & 0.0000 \\ 0.0000 & 0.0000 & 1.0000 & 0.9000 & 0.0000 & 0.0000 & 0.3000 & 0.2700 \\ 0.0000 & 0.0000 & 0.9000 & 1.0000 & 0.0000 & 0.0000 & 0.2700 & 0.3000 \\ -0.3000 & -0.2700 & 0.0000 & 0.0000 & 1.0000 & 0.9000 & 0.0000 & 0.0000 \\ -0.2700 & -0.3000 & 0.0000 & 0.0000 & 0.9000 & 1.0000 & 0.0000 & 0.0000 \\ 0.0000 & 0.0000 & 0.3000 & 0.2700 & 0.0000 & 0.0000 & 1.0000 & 0.9000 \\ 0.0000 & 0.0000 & 0.2700 & 0.3000 & 0.0000 & 0.0000 & 0.9000 & 1.0000 \end{bmatrix}$

4(2,1,2)x 4 case	$R_{high} =$	1.0000	0.9000	0.0000	0.0000	0.9000	0.8100	0.0000	0.0000	-0.3000	-0.2700	0.0000	0.0000	-0.2700	-0.2430	0.0000	0.0000
		0.9000	1.0000	0.0000	0.0000	0.8100	0.9000	0.0000	0.0000	-0.2700	-0.3000	0.0000	0.0000	-0.2430	-0.2700	0.0000	0.0000
		0.0000	0.0000	1.0000	0.9000	0.0000	0.0000	0.9000	0.8100	0.0000	0.0000	0.3000	0.2700	0.0000	0.0000	0.2700	0.2430
		0.0000	0.0000	0.9000	1.0000	0.0000	0.0000	0.8100	0.9000	0.0000	0.0000	0.2700	0.3000	0.0000	0.0000	0.2430	0.2700
		0.9000	0.8100	0.0000	0.0000	1.0000	0.9000	0.0000	0.0000	-0.2700	-0.2430	0.0000	0.0000	-0.3000	-0.2700	0.0000	0.0000
		0.8100	0.9000	0.0000	0.0000	0.9000	1.0000	0.0000	0.0000	-0.2430	-0.2700	0.0000	0.0000	-0.2700	-0.3000	0.0000	0.0000
		0.0000	0.0000	0.9000	0.8100	0.0000	0.0000	1.0000	0.9000	0.0000	0.0000	0.2700	0.2430	0.0000	0.0000	0.3000	0.2700
		0.0000	0.0000	0.8100	0.9000	0.0000	0.0000	0.9000	1.0000	0.0000	0.0000	0.2430	0.2700	0.0000	0.0000	0.2700	0.3000
		-0.3000	-0.2700	0.0000	0.0000	-0.2700	-0.2430	0.0000	0.0000	1.0000	0.9000	0.0000	0.0000	0.9000	0.8100	0.0000	0.0000
		-0.2700	-0.3000	0.0000	0.0000	-0.2430	-0.2700	0.0000	0.0000	0.9000	1.0000	0.0000	0.0000	0.8100	0.9000	0.0000	0.0000
		0.0000	0.0000	0.3000	0.2700	0.0000	0.0000	0.2700	0.2430	0.0000	0.0000	1.0000	0.9000	0.0000	0.0000	0.9000	0.8100
		0.0000	0.0000	0.2700	0.3000	0.0000	0.0000	0.2430	0.2700	0.0000	0.0000	0.9000	1.0000	0.0000	0.0000	0.8100	0.9000
		-0.2700	-0.2430	0.0000	0.0000	-0.3000	-0.2700	0.0000	0.0000	0.9000	0.8100	0.0000	0.0000	1.0000	0.9000	0.0000	0.0000
		-0.2430	-0.2700	0.0000	0.0000	-0.2700	-0.3000	0.0000	0.0000	0.8100	0.9000	0.0000	0.0000	0.9000	1.0000	0.0000	0.0000
		0.0000	0.0000	0.2700	0.2430	0.0000	0.0000	0.3000	0.2700	0.0000	0.0000	0.9000	0.8100	0.0000	0.0000	1.0000	0.9000
		0.0000	0.0000	0.2430	0.2700	0.0000	0.0000	0.2700	0.3000	0.0000	0.0000	0.8100	0.9000	0.0000	0.0000	0.9000	1.0000

8(4,1,2)x 2 case	$R_{high} =$	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	0.8999	0.0000	-0.3000	0.0000	-0.2965	0.0000	-0.2862	0.0000	-0.2700	0.0000	
		0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	0.8999	0.0000	0.3000	0.0000	0.2965	0.0000	0.2862	0.0000	0.2700	0.0000
		0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	-0.2965	0.0000	-0.3000	0.0000	-0.2965	0.0000	-0.2862	0.0000	
		0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	0.2965	0.0000	0.3000	0.0000	0.2965	0.0000	0.2862	0.0000
		0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	-0.2862	0.0000	-0.2965	0.0000	-0.3000	0.0000	-0.2965	0.0000	
		0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	0.2862	0.0000	0.2965	0.0000	0.3000	0.0000	0.2965	0.0000
		0.8999	0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	-0.2700	0.0000	-0.2862	0.0000	-0.2965	0.0000	-0.3000	0.0000	
		0.0000	0.8999	0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	0.2700	0.0000	0.2862	0.0000	0.2965	0.0000	0.3000	0.0000
		-0.3000	0.0000	-0.2965	0.0000	-0.2862	0.0000	-0.2700	0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	0.8999	0.0000	
		0.0000	0.3000	0.0000	0.2965	0.0000	0.2862	0.0000	0.2700	0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	0.8999	0.0000
		-0.2965	0.0000	-0.3000	0.0000	-0.2965	0.0000	-0.2862	0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000	
		0.0000	0.2965	0.0000	0.3000	0.0000	0.2965	0.0000	0.2862	0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	0.9542	0.0000
		-0.2862	0.0000	-0.2965	0.0000	-0.3000	0.0000	-0.2965	0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000	
		0.0000	0.2862	0.0000	0.2965	0.0000	0.3000	0.0000	0.2965	0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	0.9883	0.0000
		-0.2700	0.0000	-0.2862	0.0000	-0.2965	0.0000	-0.3000	0.0000	0.8999	0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000	
		0.0000	0.2700	0.0000	0.2862	0.0000	0.2965	0.0000	0.3000	0.0000	0.8999	0.0000	0.9542	0.0000	0.9883	0.0000	1.0000	0.0000

Table B.2.3.2.2-3: MIMO correlation matrices for medium spatial correlation

2(1,1,2)x2 case	$R_{medium} =$	1.0000	0.0000	-0.2000	0.0000
		0.0000	1.0000	0.0000	0.2000
		-0.2000	0.0000	1.0000	0.0000
		0.0000	0.2000	0.0000	1.0000

B.2.3.2.3 Beam steering approach

For the 2D cross-polarized antenna array at gNB, given the channel spatial correlation matrix in B.2.3.2.1 and B.2.3.2.2, the corresponding random channel matrix H can be calculated. The signal model for the k -th slot is denoted as:

$$y = HD_{\theta_{k,1}, \theta_{k,2}} Wx + n$$

And the steering matrix is further expressed as following:

$$D_{\theta_{k,1}, \theta_{k,2}} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \otimes (D_{\theta_{k,1}}(N_1) \otimes D_{\theta_{k,2}}(N_2))$$

Where:

- H is the $N_r \times N_t$ channel matrix per subcarrier.
- $D_{\theta_{k,1}, \theta_{k,2}}$ is the steering matrix,
- $D_{\theta_{k,1}}(N_1)$ is the steering matrix in first dimension with same polarization,
- $D_{\theta_{k,2}}(N_2)$ is the steering matrix in second dimension with same polarization,
- N_1 is the number of antenna elements in first dimension with same polarization,
- N_2 is the number of antenna elements in second dimension with same polarization,

For antenna array with only one direction, number of antenna element in second direction N_2 equals 1.

For 1 antenna element with the same polarization in one direction,

$$D_{\theta_{k,i}}(1) = 1.$$

For 2 antenna elements with the same polarization in one direction,

$$D_{\theta_{k,i}}(2) = \begin{bmatrix} 1 & 0 \\ 0 & e^{j3\theta_{k,i}} \end{bmatrix}.$$

For 3 antenna elements with the same polarization in one direction,

$$D_{\theta_{k,i}}(3) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & e^{j1.5\theta_{k,i}} & 0 \\ 0 & 0 & e^{j3\theta_{k,i}} \end{bmatrix}.$$

For 4 antenna elements with the same polarization in one direction,

$$D_{\theta_{k,i}}(4) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & e^{j\theta_{k,i}} & 0 & 0 \\ 0 & 0 & e^{j2\theta_{k,i}} & 0 \\ 0 & 0 & 0 & e^{j3\theta_{k,i}} \end{bmatrix}.$$

where the index $i=1,2$ stands for first dimension and second dimension respectively.

$\theta_{k,i}$ controls the phase variation in first dimension and second dimension respectively, and the phase for k-th subframe is denoted by $\theta_{k,i} = \theta_{0,i} + \Delta\theta \cdot k$, where $\theta_{0,i}$ is the random start value with the uniform distribution, i.e. $\theta_{0,i} \in [0, 2\pi]$, $\Delta\theta$ is the step of phase variation, which is defined in Table B.2.3.2.3-1, and k is the linear increment of 2^μ for every slot throughout the simulation, the index $i=1,2$ stands for first dimension and second dimension respectively.

- w is the precoding matrix for Nt transmission antennas,
- y is the received signal, x is the transmitted signal, and n is AWGN.
- μ corresponds to subcarrier spacing configuration, $\Delta f = 2^\mu \cdot 15[\text{kHz}]$

For the 1D cross-polarized antenna array at gNB, the corresponding random channel matrix H can be calculated by letting $N_2=1$, i.e.

$$D_{\theta_{k,1}} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \otimes D_{\theta_{k,1}}(N_1)$$

Table B.2.3.2.3-1: The step of phase variation

Variation Step	Value (rad/ms)
$\Delta\theta$	1.2566×10^{-3}

B.2.3.2.3A Beam steering approach with dual cluster beams

For the 2D cross-polarized antenna array at gNB, given the channel spatial correlation matrix in B.2.3.2.1 and B.2.3.2.2, the corresponding random channel matrix H can be calculated. The signal model for the k-th slot is denoted as

$$y = \left[\sqrt{\frac{1}{1+p^2}} H_m D_{\theta_{k,1}, \theta_{k,2}}^{(m)} + \sqrt{\frac{p^2}{1+p^2}} H_s D_{\theta_{k,1}, \theta_{k,2}}^{(s)} \right] Wx + n$$

And the steering matrix is further expressed as following:

$$D_{\theta_{k,1}, \theta_{k,2}} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \otimes (D_{\theta_{k,1}}(N_1) \otimes D_{\theta_{k,2}}(N_2))$$

where

- H_m, H_s are independent channels for the first beam and second beam with the $N_r \times N_t$ channel matrix per subcarrier.
- $D_{\theta_{k,1}, \theta_{k,2}}^{(m)}, D_{\theta_{k,1}, \theta_{k,2}}^{(s)}$ are the steering matrix for first beam and second beam
- $D_{\theta_{k,1}}(N_1)$ is the steering matrix in first dimension with same polarization,
- $D_{\theta_{k,2}}(N_2)$ is the steering matrix in second dimension with same polarization,
- N_1 is the number of antenna elements in first dimension with same polarization,
- N_2 is the number of antenna elements in second dimension with same polarization,
- For antenna array with only one direction, number of antenna element in second direction N_2 equals 1,
- p is the relative power ratio of the second beam to the first beam, the value of p is specific to a test case,

For 1 antenna element of the same polarization in one direction, $D_{\theta_{k,i}}(1) = 1$.

For 2 antenna elements of the same polarization in one direction, $D_{\theta_{k,i}}(2) = \begin{bmatrix} 1 & 0 \\ 0 & e^{j3\theta_{k,i}} \end{bmatrix}$.

For 3 antenna elements of the same polarization in one direction, $D_{\theta_{k,i}}(3) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & e^{j1.5\theta_{k,i}} & 0 \\ 0 & 0 & e^{j3\theta_{k,i}} \end{bmatrix}$.

For 4 antenna elements of the same polarization in one direction, $D_{\theta_{k,i}}(4) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & e^{j\theta_{k,i}} & 0 & 0 \\ 0 & 0 & e^{j2\theta_{k,i}} & 0 \\ 0 & 0 & 0 & e^{j3\theta_{k,i}} \end{bmatrix}$.

where the index $i=1,2$ stands for first dimension and second dimension respectively.

- $\theta_{k,i}$ controls the phase variation in first dimension and second dimension respectively, and the phase for k-th subframe is denoted by $\theta_{k,i} = \theta_{0,i} + \Delta\theta k$, where $\theta_{0,i}$ is the random start value with the uniform distribution, i.e., $\theta_{0,i} \in [0, 2\pi]$, $\Delta\theta$ is the step of phase variation, which is defined in Table B.2.3.2.3A-1, and k is the linear increment of $2^{-\mu}$ for every slot throughout the simulation, the index $i=1,2$ stands for first dimension and second dimension respectively.
- w is the precoding matrix for Nt transmission antennas,
- y is the received signal, x is the transmitted signal, and n is AWGN.
- μ corresponds to subcarrier spacing configuration, $\Delta f = 2^{\mu} \cdot 15[\text{kHz}]$

For the 1D cross-polarized antenna array at gNB, the corresponding random channel matrix H can be calculated by letting $N_2=1$, i.e.,

$$D_{\theta_{k,i}} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \otimes D_{\theta_{k,i}}(N_1)$$

Table B.2.3.2.3A-1: The step of phase variation

Variation Step	Value (rad/subframe)
$\Delta\theta^{(m)}$	1.2566×10^{-3}
$\Delta\theta^{(s)}$	2.5132×10^{-3}

B.2.3.3 MIMO Correlation Matrices for FR2 simultaneous reception

The correlation model for FR2 simultaneous reception in a two TRxP scenario with 1 antenna element with the same polarization in one direction at the gNB and UE side is defined as follows,

$$R_{FR2-mTxRP-mRX} = E[\mathbf{h}_{16 \times 1} \mathbf{h}_{16 \times 1}^H] = \frac{1}{1+\rho} \cdot \text{diag}([1 \ \rho \ \rho \ 1]) \otimes R_{MIMO} = \frac{1}{1+\rho} \begin{bmatrix} R_{MIMO} & 0 & & 0 \\ 0 & \rho R_{MIMO} & & \\ & 0 & \rho R_{MIMO} & 0 \\ & & 0 & R_{MIMO} \end{bmatrix},$$

Where:

$R_{MIMO} = \Gamma$ is a 4×4 correlation matrix for each link between TRPs to receiver modules at the UE side generated with

R_{MIMO} is the 4×4 correlation matrix for each link between TRP to UE RX.

$R_{MIMO} = P(R_{TRP} \otimes \Gamma \otimes R_{UE-RX})P^T$. With 2 RX per TRP and UE-RX, $R_{TRP} = 1$, $R_{UE-RX} = 1$, $R_{MIMO} = P\Gamma P^T$.

Γ is the polarization coefficient matrix as defined in Annex B2.3.2 using parameter $\gamma=0.0625$;

\otimes denotes the Kronecker product,

diag denotes the diagonal matrix,

$\mathbf{h}_{16 \times 1}$ is a vector of re-arranged channel values for 2 antenna elements at each TRP and receiver module, defined as follows:

$$\mathbf{h}_{16 \times 1} = \begin{bmatrix} \text{vec}(H_{RX1,TRP1}) \\ \text{vec}(H_{RX2,TRP1}) \\ \text{vec}(H_{RX1,TRP2}) \\ \text{vec}(H_{RX2,TRP2}) \end{bmatrix}$$

$\text{vec}()$ denotes vectorizing matrix column-by-column.

B.2.4 Two-tap propagation conditions for CQI tests

For Channel Quality Indication (CQI) tests, the following additional multi-path profile is used:

$$h(t, \tau) = \delta(\tau) + a \exp(-i2\pi f_d t) \delta(\tau - \tau_d)$$

in continuous time (t, τ) representation, with τ_d the delay, a constant value of a and f_d the Doppler frequency. The same $h(t, \tau)$ is used to describe the fading channel between every pair of Tx and Rx.

B.3 High Speed Train Scenario

B.3.1 Single Tap Channel Profile

The high speed train condition for the test of the baseband performance is a non-fading propagation channel with one tap. Doppler shift is given by

$$f_s(t) = f_d \cos\theta(t) \quad (\text{B.3.1.1})$$

where $f_s(t)$ is the Doppler shift and f_d is the maximum Doppler frequency. The cosine of angle $\theta(t)$ is given by

$$\cos\theta(t) = \frac{D_s/2 - vt}{\sqrt{D_{\min}^2 + (D_s/2 - vt)^2}}, \quad 0 \leq t \leq D_s/v \quad (\text{B.3.1.2})$$

$$\cos \theta(t) = \frac{-1.5D_s + vt}{\sqrt{D_{\min}^2 + (-1.5D_s + vt)^2}}, \quad D_s/v < t \leq 2D_s/v \quad (\text{B.3.1.3})$$

$$\cos \theta(t) = \cos \theta(t \bmod (2D_s/v)), \quad t > 2D_s/v \quad (\text{B.3.1.4})$$

where $D_s/2$ is the initial distance of the train from gNB, and D_{\min} is gNB Railway track distance, both in meters; v is the velocity of the train in m/s, t is time in seconds.

Doppler shift and cosine angle are given by equation B.3.1.1 and B.3.1.2-B.3.1.4 respectively, where the required input parameters listed in table B.3.1-1 and the resulting Doppler shift shown in Figures B.3.1-1, B.3.1-2, B.3.1-3, B.3.1-4 are applied for all frequency bands.

Table B.3.1-1: High speed train scenario

Parameter	Value			
	HST-750	HST-972	HST-1000	HST-1667
D_s	300 m	300 m	300 m	300 m
D_{\min}	2 m	2 m	2 m	2 m
v	300 km/h	500 km/h	300 km/h	500 km/h
f_d	750 Hz for 15 kHz SCS test	972 Hz for 15 kHz SCS test	1000 Hz for 30 kHz SCS test	1667 Hz for 30 kHz SCS test

Note 1: Parameters for HST conditions in table B.3.1-1 including f_d and Doppler shift trajectories presented on figures B.3.1-1 for 750 Hz and B.3.1-3 for 972 Hz for 15 kHz SCS and figures B.3.1-2 for 1000 Hz and B.3.1-4 for 1667 Hz for 30 kHz SCS are applied for performance verification in all frequency bands.

Note 2: The propagation conditions used for the performance requirements under high speed train condition are indicated as a combination of “HST” and Doppler shift f_d , i.e. HST-<Doppler shift>, where ‘<Doppler shift>’ indicates the maximum Doppler shift (Hz).

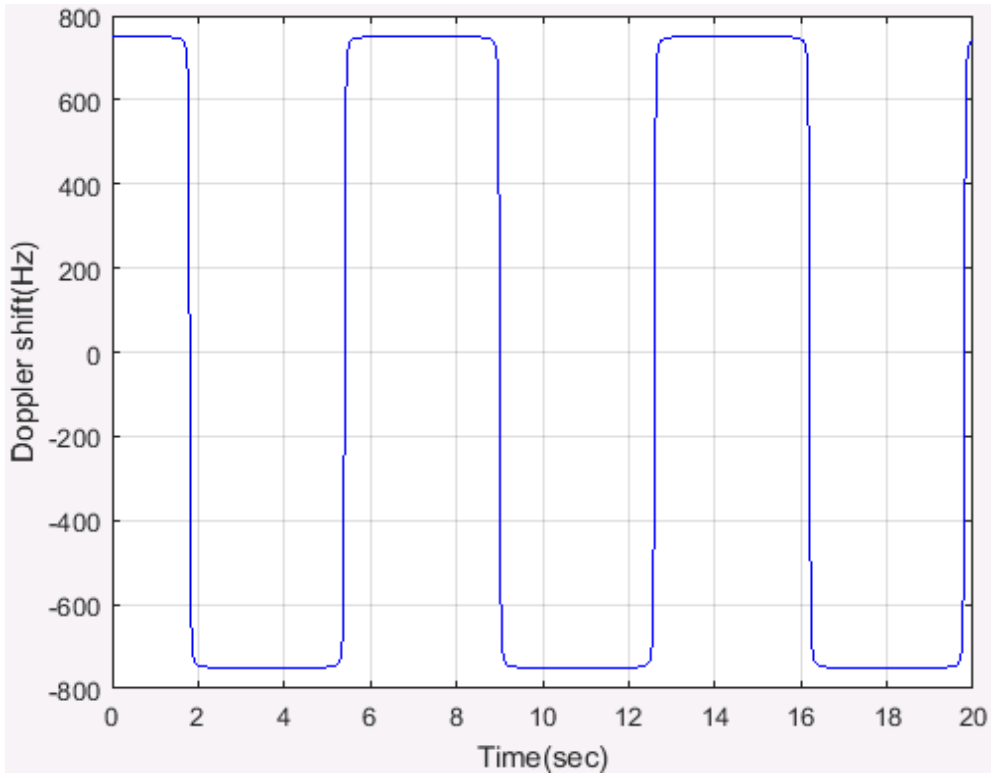


Figure B.3.1-1: Doppler shift trajectory ($f_d = 750$ Hz)

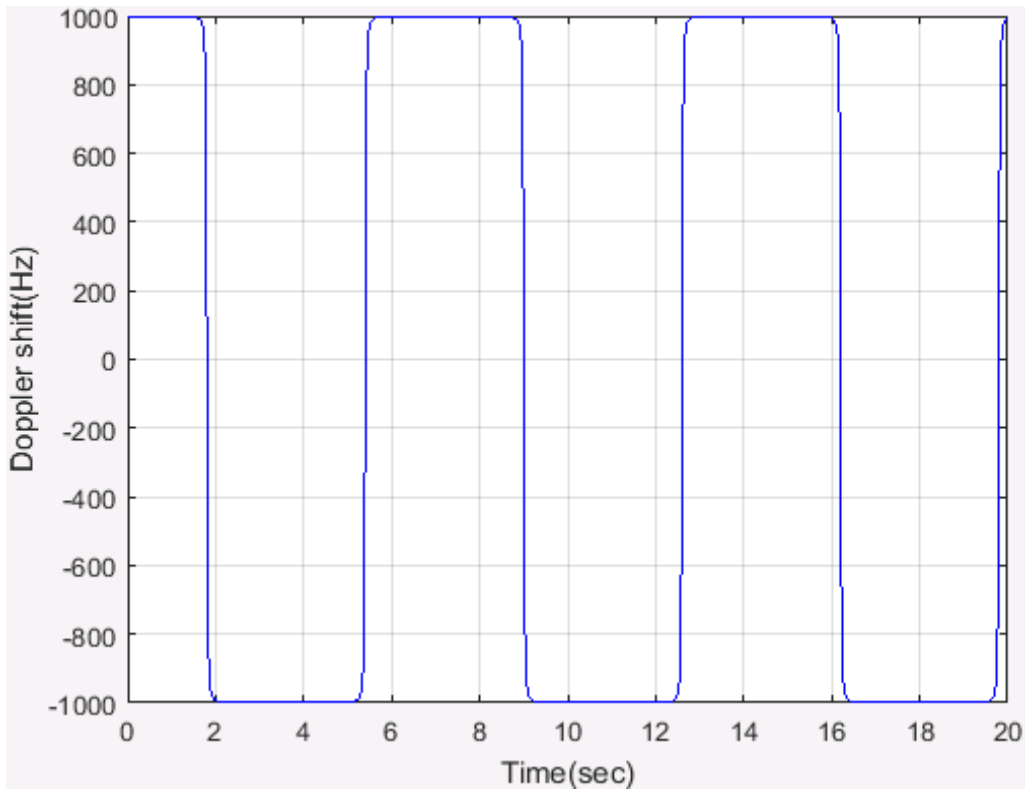


Figure B.3.1-2: Doppler shift trajectory ($f_d = 1000$ Hz)

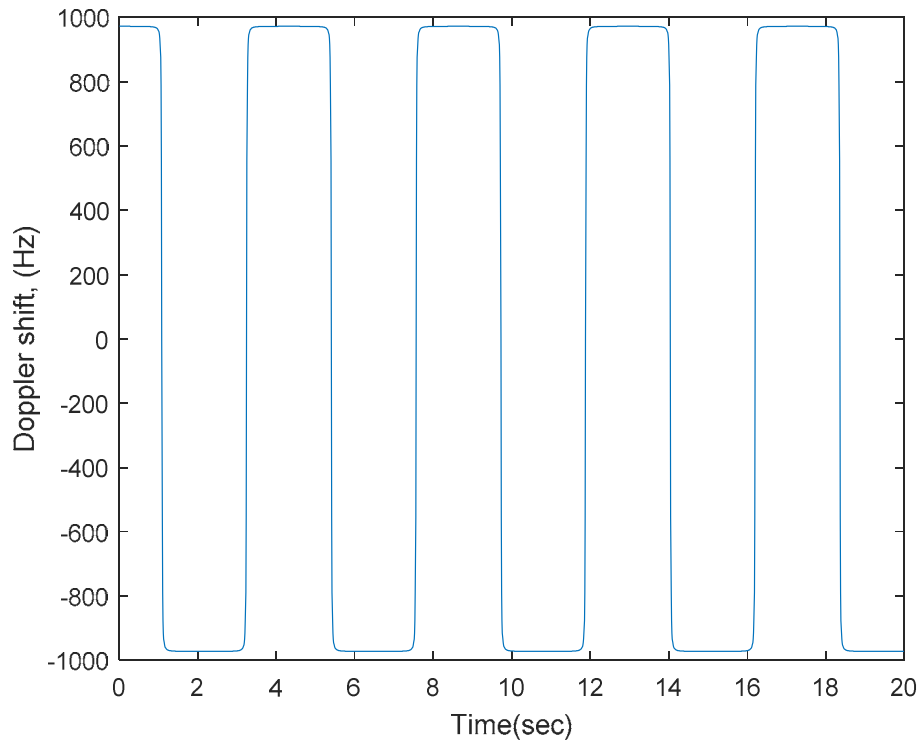


Figure B.3.1-3: Doppler shift trajectory ($f_d = 972$ Hz)

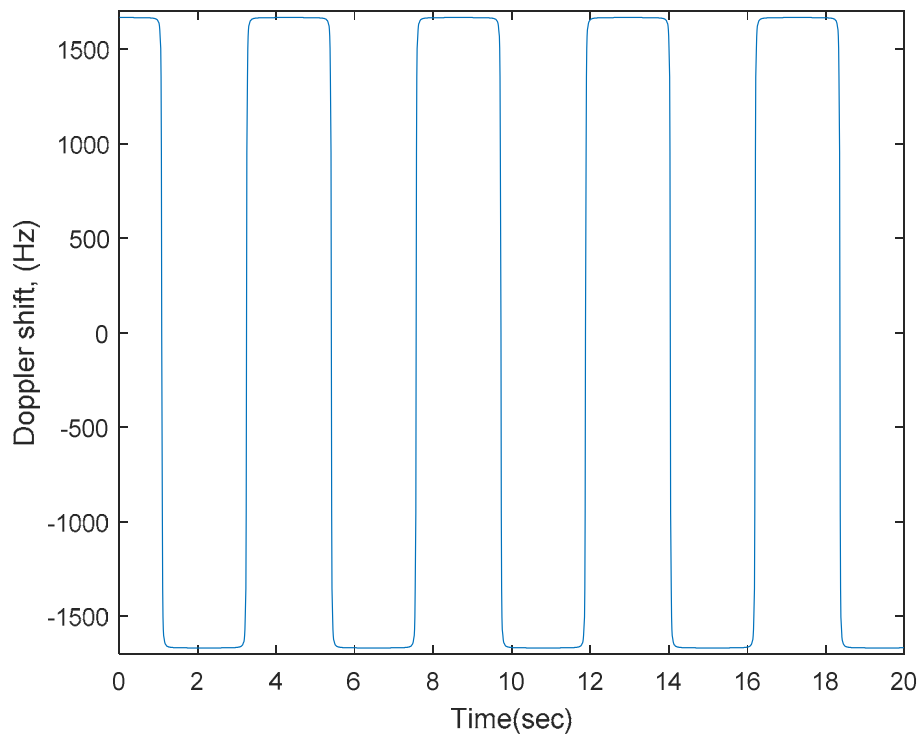


Figure B.3.1-4: Doppler shift trajectory ($f_d = 1667$ Hz)

For 1x2 antenna configuration, the same $h(t,\tau)$ is used to describe the channel between every pair of Tx and Rx.

For 1x4 antenna configuration, the same $h(t,\tau)$ is used to describe the channel between every pair of Tx and Rx.

B.3.2 HST-SFN Channel Profile

There is an infinite number of RRHs distributed equidistantly along the track with the same Cell ID as depicted in figure B.3.2-1.

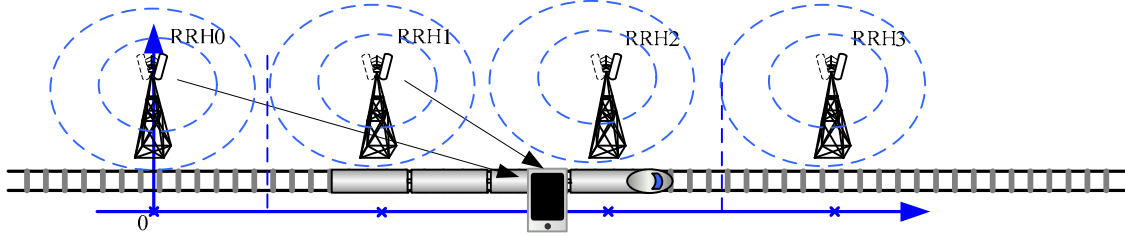


Figure B.3.2-1: Deployment of HST-SFN

The location of RRH k is given as:

$$x_k = k * D_s + j * D_{mi} \quad (\text{B.3.2.1})$$

where: $k \in [-\infty, \infty]$, $j = \text{sqrt}(-1)$ and D_{mi} is the distance between the RRHs and railway track, while D_s is the distance of two RRHs, both in meters.

The train location is denoted as:

$$y = a + j * 0 \quad (\text{B.3.2.2})$$

where: $a \in [0, \infty]$ and a means distance in meters, which means the train is right on the track.

The HST-SFN scenario for the test of the baseband performance is a non-fading propagation channel with four taps, namely the four nearest RRHs. RRH k is visible for the train only in the range:

$$k * D_s - 2 * D_s \leq a < k * D_s + 2 * D_s \quad (\text{B.3.2.3})$$

Power level P_k (dB) for the signal from k^{th} RRH, normalized to the total power received from all visible RRHs, is given by:

$$P_k = -20 \lg(|y - x_k|) - 10 \lg \left(\sum_{i \in \{i | i * D_s - 2 * D_s \leq a < i * D_s + 2 * D_s\}} \frac{1}{|y - x_i|^2} \right) \text{ for } k * D_s - 2 * D_s \leq a < k * D_s + 2 * D_s \quad (\text{B.3.2.4})$$

Doppler shift $F_{D,k}$ (Hz) from k^{th} RRH is given by:

$$F_{D,k} = f_d \times \text{real} \left[-\frac{y - x_k}{|y - x_k|} \right] \text{ for } k * D_s - 2 * D_s \leq a < k * D_s + 2 * D_s \quad (\text{B.3.2.5})$$

The relative delay T_k (s) for the signal from k^{th} RRH can be derived as:

$$T_k = \frac{|y - x_k|}{C} \text{ for } k \cdot D_s - 2 \cdot D_s \leq a < k \cdot D_s + 2 \cdot D_s \tag{B.3.2.6}$$

In the above, f_d (Hz) is the maximum Doppler frequency as given in Table B.3.2-1, and C (m/s) is the velocity of light.

Power level, Doppler shift and relative delay are given by equations B.3.2.4 ~ B.3.2.6 respectively, where the required input parameters listed in table B.3.2-1 and the resulting Doppler shift shown in Figures B.3.2-3 and B.3.2-4 are applied for all frequency bands.

Table B.3.2-1: HST-SFN scenario

Parameter	Value
D_s	700 m
D_{min}	150 m
v	500 km/h
f_d	870 Hz for 15 kHz SCS test; 1667 Hz for 30 kHz SCS test

NOTE 1: The trajectories of relative power, Doppler shifts and absolute delays presented in Figures B.3.2-2, B.3.2-3, B.3.2-4 and B.3.2-5 are derived from the equations B.3.2.4 ~ B.3.2.6 respectively. v is the velocity of the train.

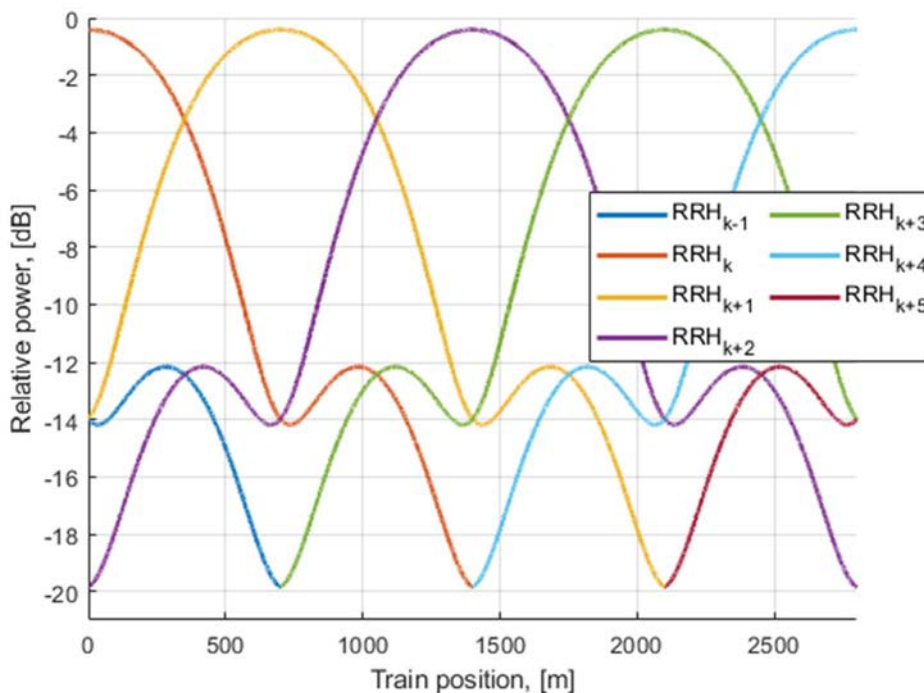


Figure B.3.2-2 Relative power level trajectories

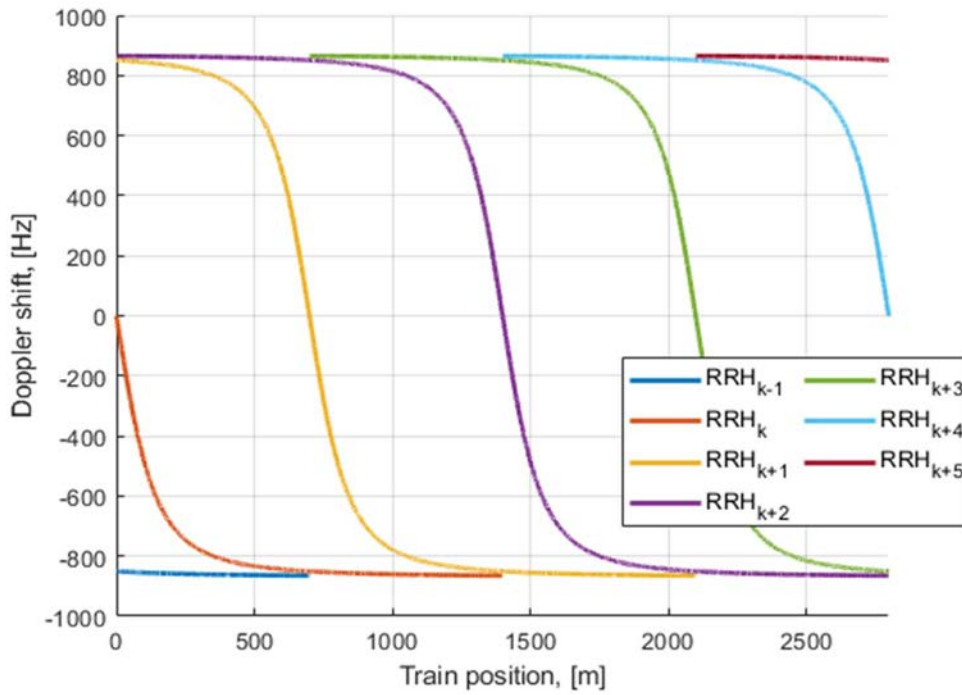


Figure B.3.2-3 Doppler shift trajectories ($f_d = 870$ Hz)

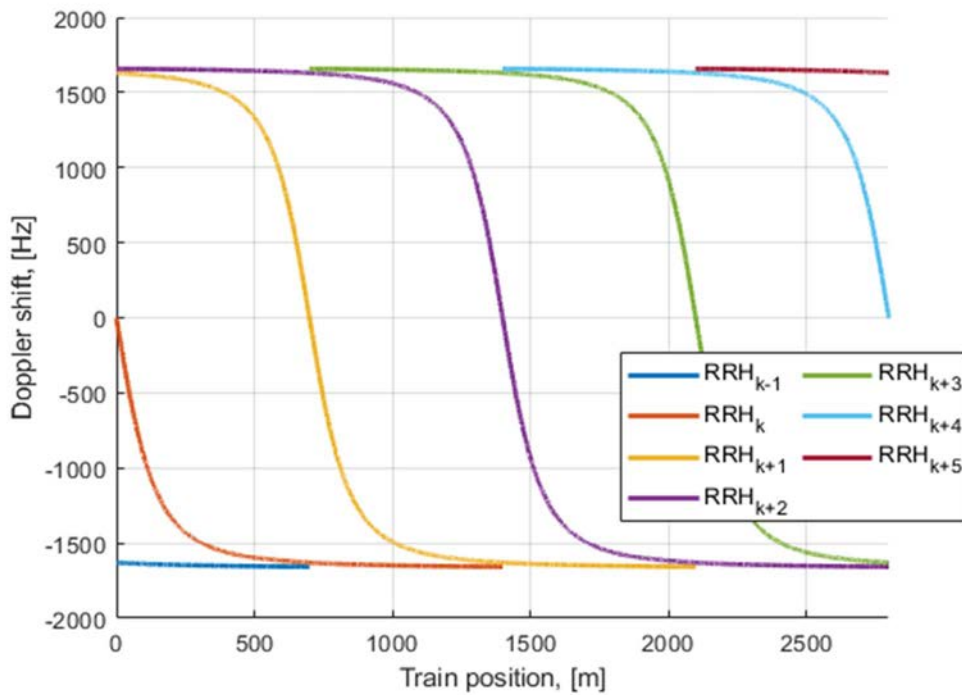


Figure B.3.2-4 Doppler shift trajectories ($f_d = 1667$ Hz)

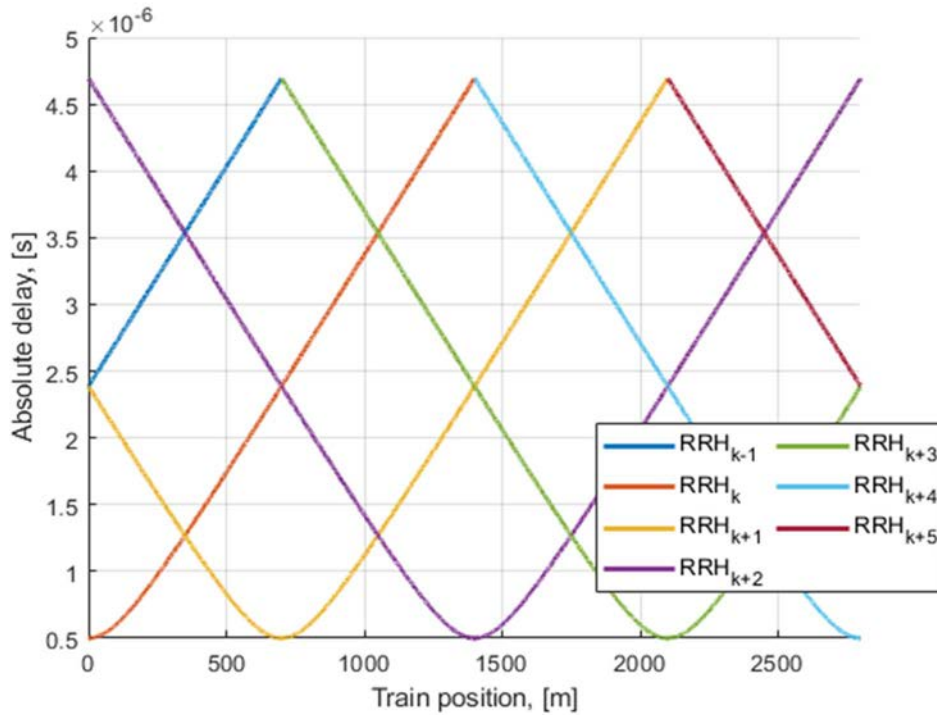


Figure B.3.2-5 Absolute delay trajectories

Static channel matrix will be used as defined in Annex B.1.

B.3.3 HST-DPS Channel Profile

There is an infinite number of RRHs distributed equidistantly along the railway track with the same Cell ID as illustrated in Figure B.3.3-1.

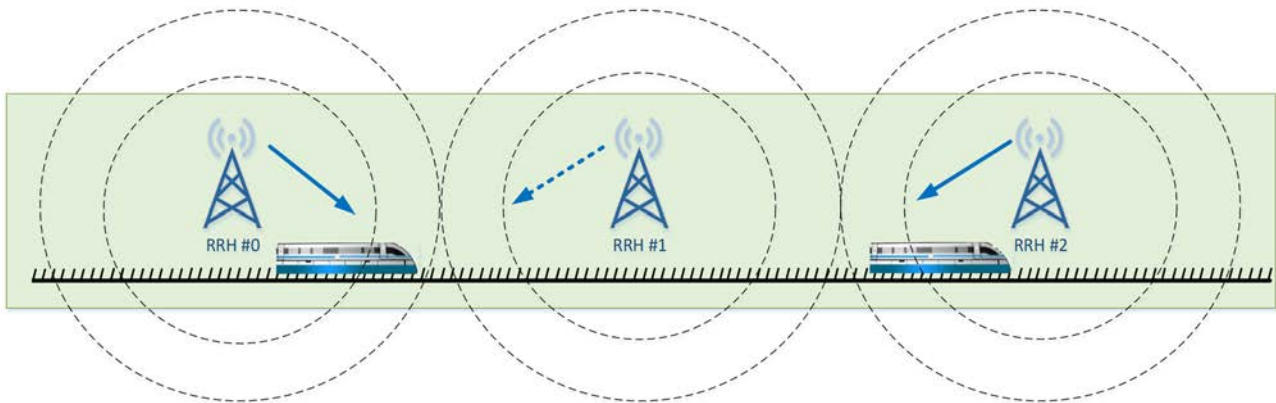


Figure B.3.3-1: Deployment of HST-DPS

The location of RRH k is given as:

$$x_k = k * D_s + j * D_{\min} \tag{B.3.3.1}$$

where: $k \in [-\infty, \infty]$, $j = \sqrt{-1}$ and D_{\min} is the distance between the RRHs and railway track, while D_s is the distance of two RRHs, both in meters.

The train location is denoted as:

$$y=a+j*0 \quad (\text{B.3.3.2})$$

where: $a \in [0, \infty]$ and a means distance in meters, which means the train is right on the track.

The HST DPS multi-RRH scenario for the test of the baseband performance is a single tap propagation channel at each time with switching of transmission point in the middle point between two RRHs. As shown in figures B.3.3-2 and B3.3-4. RRH k is visible for the train only in the range:

$$k * D_s - D_s \leq a < k * D_s + D_s \quad (\text{B.3.3.3})$$

However, as shown in Figures B.3.3-3 and B.3.3-5, RRH k is considered for PDSCH and PDCCH signal transmission only in the range:

$$k * D_s - \frac{D_s}{2} \leq a < k * D_s + \frac{D_s}{2} \quad (\text{B.3.3.4})$$

Propagation delay difference are not considered between signals from different RRHs.

Power level P_k (dB) for the signal from each RRH equals to 0. Doppler shift $F_{D,k}$ (Hz) from k^{th} RRH is given by:

$$F_{D,k} = f_d \times \text{real} \left[-\frac{y-x_k}{|y-x_k|} \right] \text{ for } kD_s - \frac{D_s}{2} \leq a < kD_s + \frac{D_s}{2} \quad (\text{B.3.3.5})$$

In the above, f_d (Hz) is the maximum Doppler frequency as given in Table B.3.3-1, and C (m/s) is the velocity of light.

Doppler shift is given by equation B.3.3.5, where the required input parameters listed in table B.3.3-1 and the resulting Doppler shift shown in Figures B.3.3-2 ~ B.3.3-5 are applied for all frequency bands.

Table B.3.3-1: HST-DPS scenario

Parameter	Value
D_s	700 m
D_{\min}	150 m
v	500 km/h
f_d	870 Hz for 15 kHz SCS test; 1667 Hz for 30 kHz SCS test

NOTE 1: v is the velocity of the train.

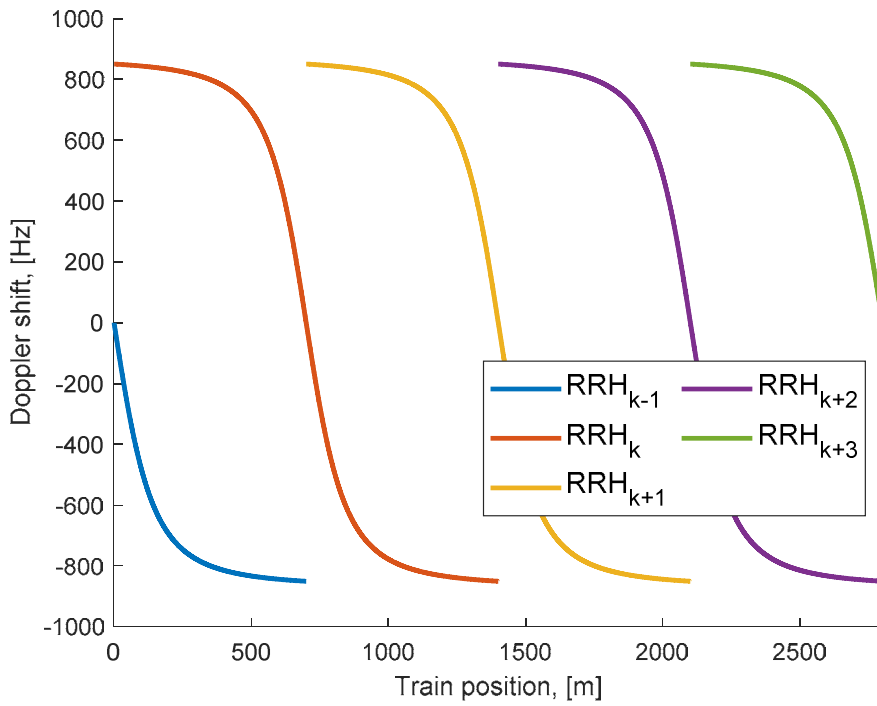


Figure B.3.3-2 Doppler shift trajectory ($f_d = 870$ Hz) showing visibility of each RRH

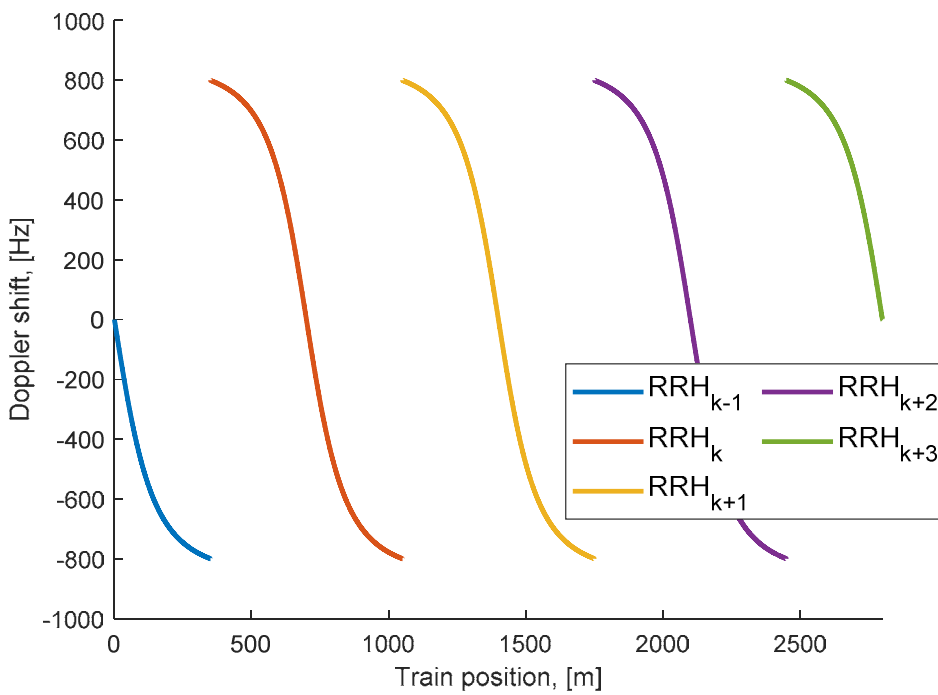


Figure B.3.3-3 Doppler shift trajectory ($f_d = 870$ Hz) as seen by PDCCH and PDSCH for each RRH

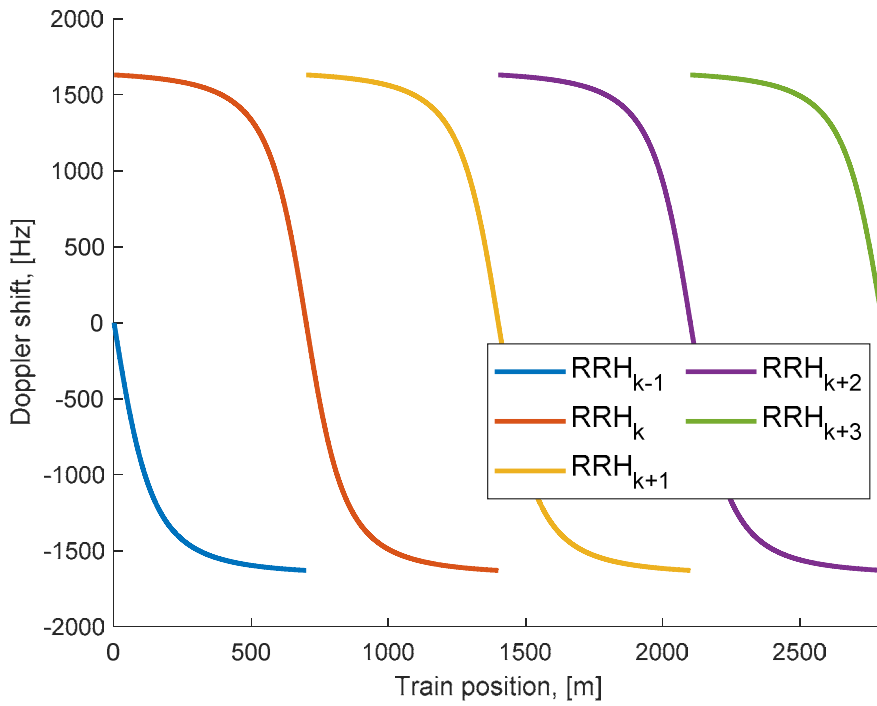


Figure B.3.3-4 Doppler shift trajectory ($f_d = 1667$ Hz) showing visibility of each RRH

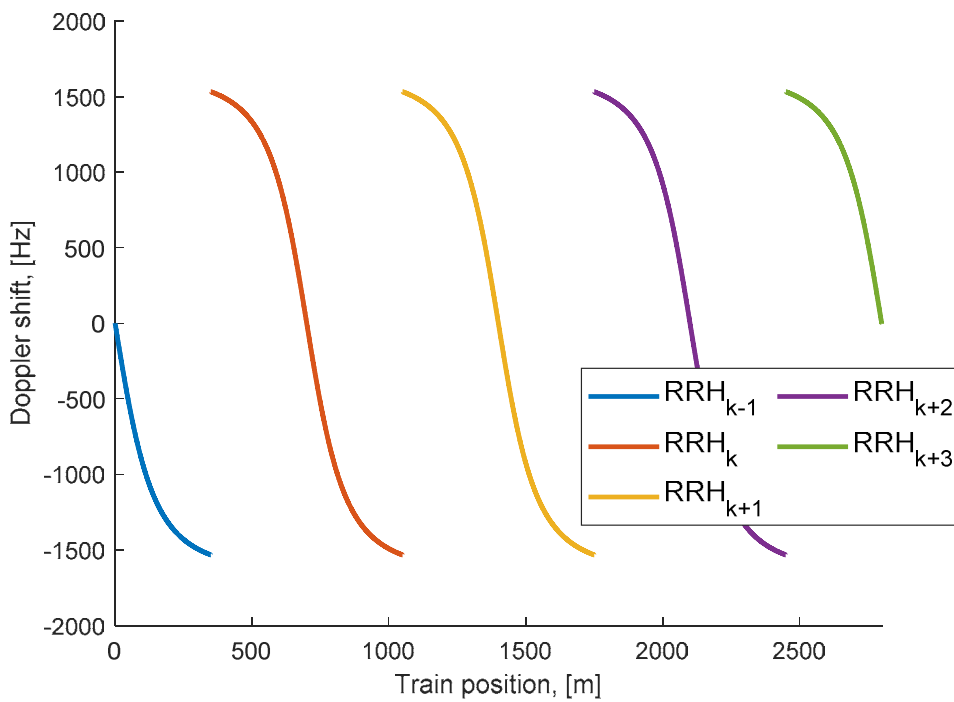


Figure B.3.3-5 Doppler shift trajectory ($f_d = 1667$ Hz) as seen by PDCCH and PDSCH for each RRH

Static channel matrix will be used as defined in Annex B.1.

B.3.4 FR2 HST-DPS Channel Profile

There is an infinite number of RRHs distributed equidistantly along the railway track with the same Cell ID as illustrated in Figure B.3.4.1-1 for Unidirectional and Figure B.3.4.2-1 for Bidirectional.

The location of RRH k is given as:

$$x_k = k * D_s + j * D_{min} \quad (\text{B.3.4.1})$$

where: $k \in [-\infty, \infty]$, $j = \text{sqr}t(-1)$ and D_{min} is the distance between the RRHs and railway track, while D_s is the distance of two RRHs, both in meters.

The train location is denoted as:

$$y = a + j * 0 \quad (\text{B.3.4.2})$$

where: $a \in [0, \infty]$ and a means distance in meters, which means the train is right on the track. $a = vt$ where v (m/s) is the moving speed of the train.

B.3.4.1 Unidirectional Deployment Channel Profile

The FR2 HST DPS Unidirectional Deployment Channel Profile is a single tap propagation channel, switching transmission point between adjacent RRHs when the UE reaches a distance equal to D_{s_offset} from the serving RRH as illustrated in Figure B.3.4.1-1:

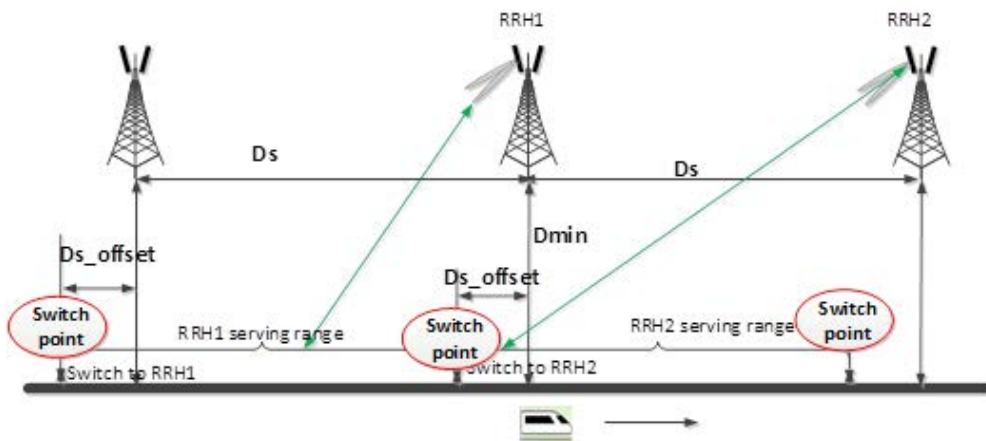


Figure B.3.4.1-1: Unidirectional deployment of FR2 HST-DPS

RRH k is visible for the train only in the range:

$$(k - 2) * D_s - D_{s_offset} \leq a < k * D_s \quad (\text{B.3.4.1.1})$$

However, RRH k is considered for PDSCH and PDCCH signal transmission only in the range:

$$(k - 1) * D_s - D_{s_offset} < a \leq k * D_s - D_{s_offset} \quad (\text{B.3.4.1.2})$$

Propagation delay difference are not considered between signals from different RRHs.

Power level P_k (dB) for the signal from each RRH equals to 0. Doppler shift $f_s(t) = f_a \cos \theta(t)$ (Hz) is given by:

$$\cos \theta(t) = \frac{D_{s_offset} + D_s - vt}{\sqrt{D_{min}^2 + (D_{s_offset} + D_s - vt)^2}}, \quad 0 < t \leq \frac{D_s}{v}$$

$$\cos\theta(t) = \cos\theta\left(t \bmod \left(\frac{D_s}{v}\right)\right), \quad t > D_s/v \tag{B.3.4.1.3}$$

Doppler shift is given by equation B.3.4.1.3, where the required input parameters listed in table B.3.4.1-1 and the resulting Doppler shift shown in Figures B.3.4.1-2 and B.3.4.1-3 are applied for all frequency bands.

Table B.3.4.1-1: FR2 HST-DPS Unidirectional scenario

Parameter	Value
	HST-DPS-FR2-UNI-A
D_s	700 m
D_{s_offset}	10 m
D_{min}	10 m
v	350 km/h
f_d	9722 Hz

Static channel matrix will be used as defined in Annex B.1.

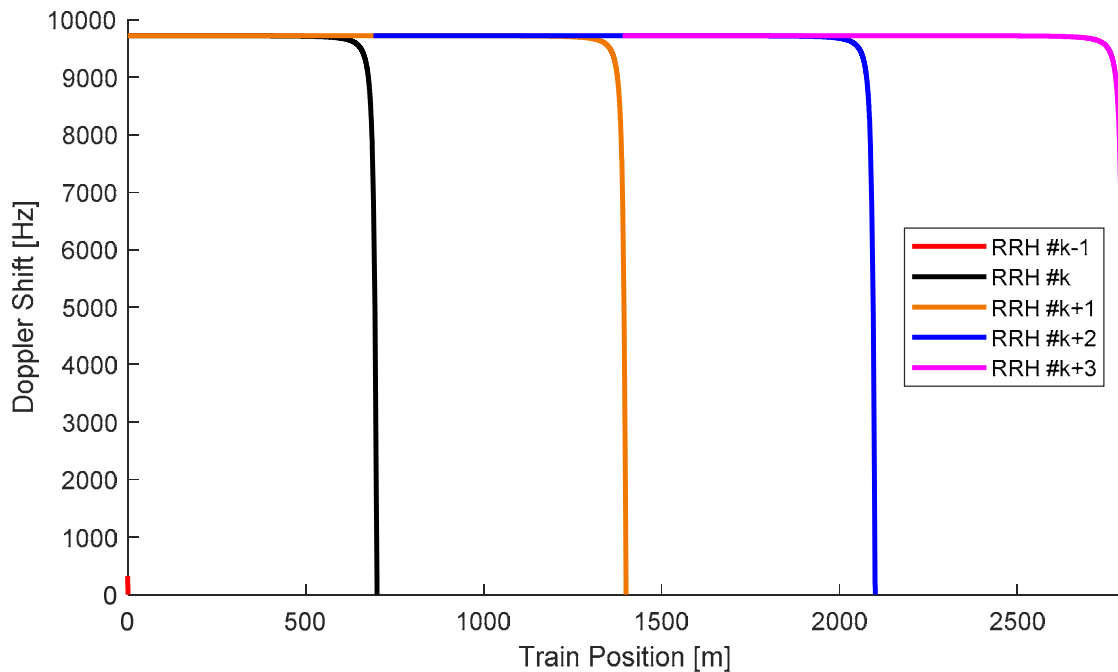


Figure B.3.4.1-2: Doppler shift trajectory ($f_d = 9722$ Hz) showing visibility of each RRH for FR2 HST-DPS Unidirectional scenario

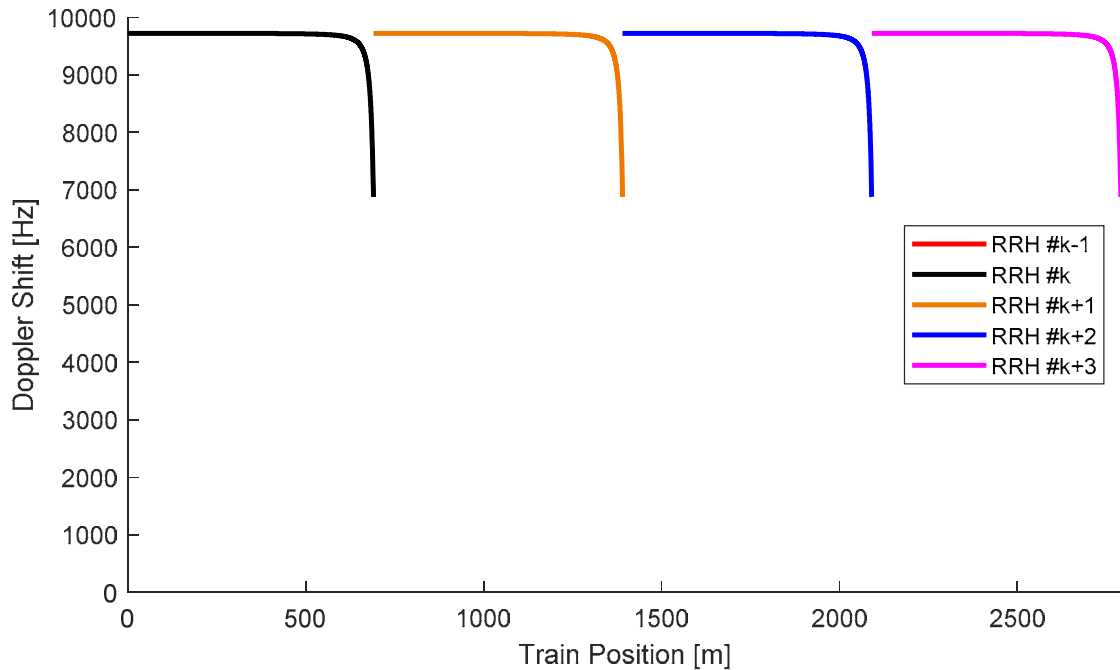


Figure B.3.4.1-3: Doppler shift trajectory ($f_d = 9722$ Hz) as seen by PDCCH and PDSCH for each RRH for FR2 HST-DPS Unidirectional scenario

B.3.4.2 Bidirectional Deployment Channel Profile

The FR2 HST DPS Bidirectional Deployment Channel Profile is a single tap propagation channel, switching transmission point between adjacent RRHs as illustrated in Figure B.3.4.2-1:

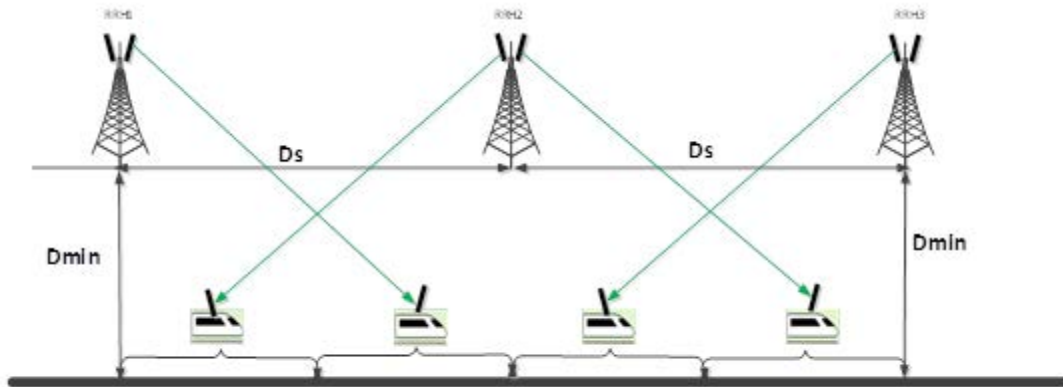


Figure B.3.4.2-1: Bidirectional deployment of FR2 HST-DPS

As shown in Figures B.3.4.2-1, RRH k is visible for the train only in the range:

$$k * D_s - D_s \leq a < k * D_s + D_s \tag{B.3.4.2.1}$$

However, as shown in Figures B.3.3-3 and B.3.3-5, RRH k is considered for PDSCH and PDCCH signal transmission only in the range:

$$(k - 1) * D_s < a \leq k * D_s - \frac{D_s}{2}; k * D_s + \frac{D_s}{2} < a \leq (k + 1) * D_s \tag{B.3.4.2.2}$$

Note that UE is receiving PDSCH and PDCCH from the 2nd-nearest RRH. Propagation delay difference are not considered between signals from different RRHs.

Power level P_k (dB) for the signal from each RRH equals to 0. Doppler shift $f_s(t) = f_d \cos \theta(t)$ (Hz) is given by:

$$\begin{aligned} \cos \theta(t) &= \frac{D_s - vt}{\sqrt{D_{min}^2 + (D_s - vt)^2}}, \quad 0 < t \leq (0.5 * D_s)/v \\ \cos \theta(t) &= -\frac{vt}{\sqrt{D_{min}^2 + (vt)^2}}, \quad (0.5 * D_s)/v < t \leq D_s/v \\ \cos \theta &\left(t \bmod \left(\frac{D_s}{v} \right) \right), \quad t > D_s/v \end{aligned} \tag{B.3.4.2.3}$$

Doppler shift is given by equation B.3.4.2.3, where the required input parameters listed in table B.3.4.2-1 and the resulting Doppler shift shown in Figures B.3.4.2-2 and B.3.4.2-3 are applied for all frequency bands.

Table B.3.4.2-1: FR2 HST-DPS Bidirectional scenario

Parameter	Value
	HST-DPS-FR2-BI-B
D_s	700 m
D_{min}	150 m
v	350 km/h
f_d	9722 Hz

Static channel matrix will be used as defined in Annex B.1.

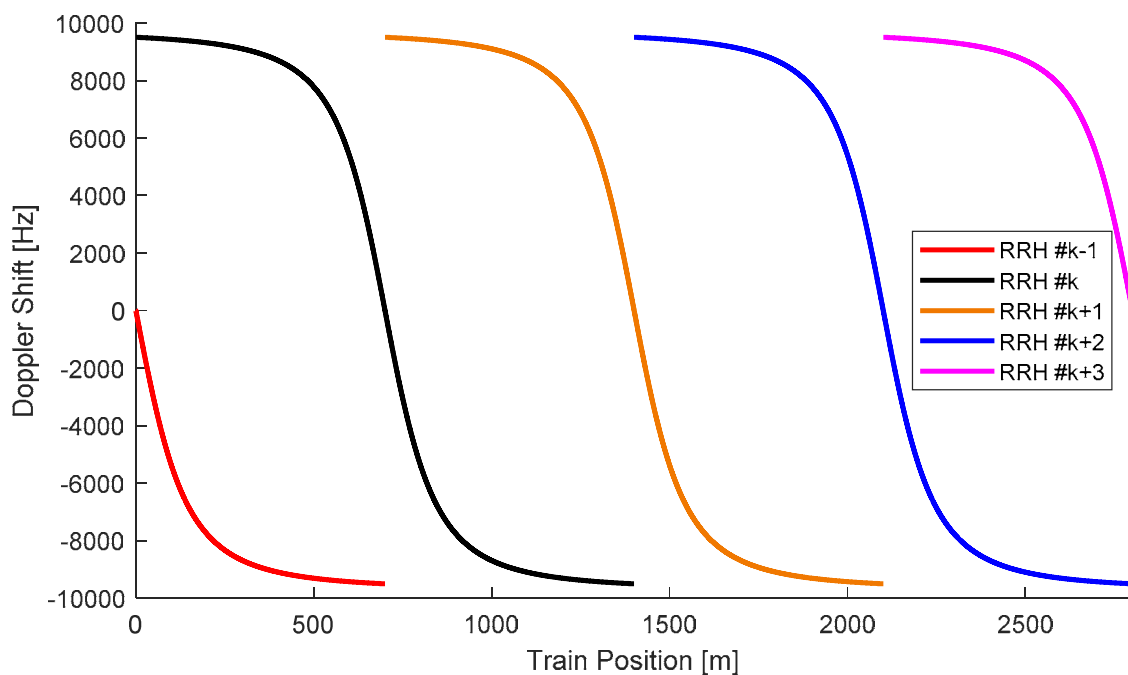


Figure B.3.4.2-2: Doppler shift trajectory ($f_d = 9722$ Hz) showing visibility of each RRH for FR2 HST-DPS Bidirectional scenario

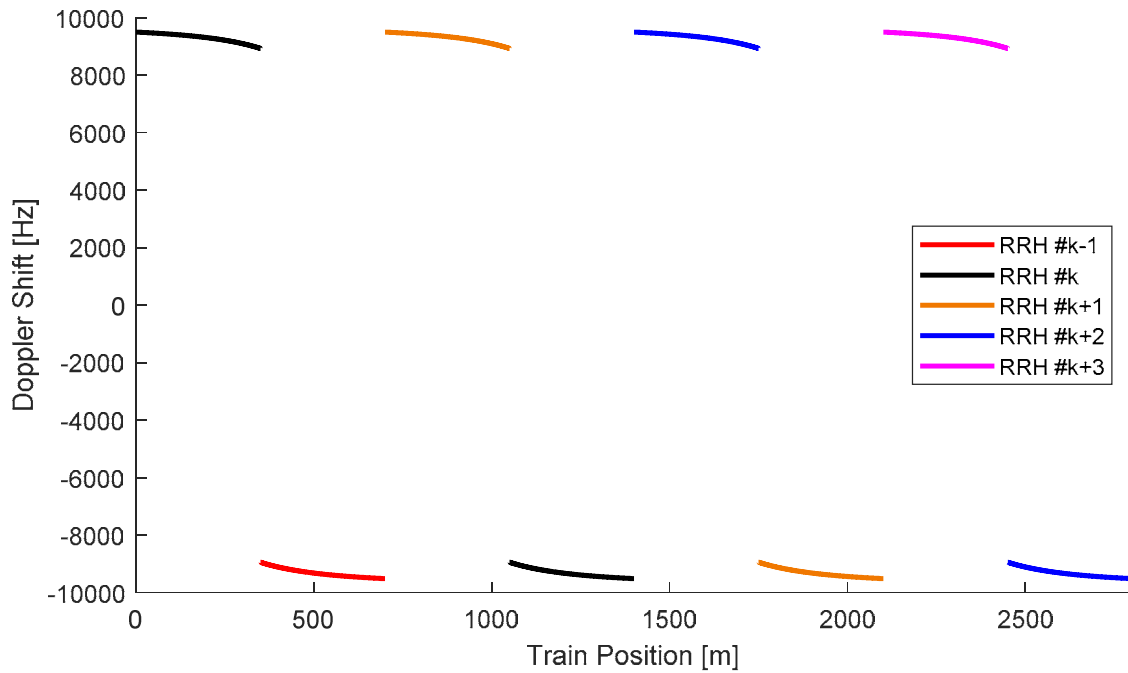


Figure B.3.4.2-3: Doppler shift trajectory ($f_d = 9722$ Hz) as seen by PDCCH and PDSCH for each RRH for FR2 HST-DPS Bidirectional scenario

B.3.5 HST-SFN Scheme A Channel Profile

There is an infinite number of RRHs distributed equidistantly along the railway track with the same Cell ID as illustrated in Figure B.3.5-1. The PDCCH/PDSCH are transmitted in SFN manner and TRS are transmitted in TRP specific manner as illustrated in Figure B.3.5-1.

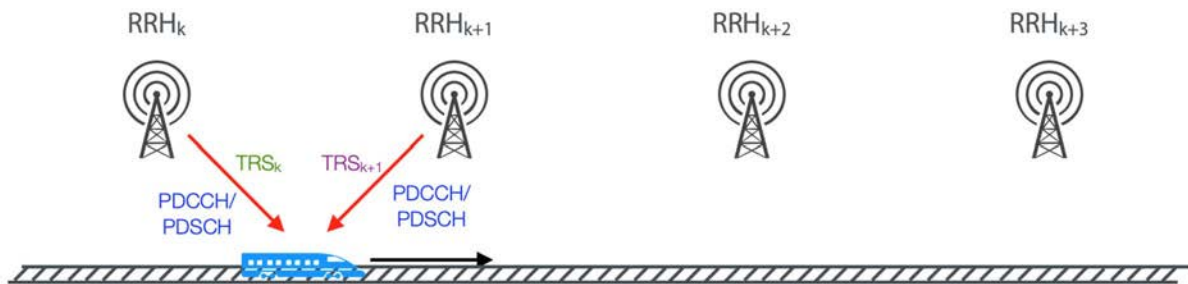


Figure B.3.5-1: Deployment of HST-SFN Scheme A

The location of RRH k is given as:

$$x_k = k * D_s + j * D_{min} \tag{B.3.5.1}$$

where: $k \in [-\infty, \infty]$, $j = \sqrt{-1}$ and D_{min} is the distance between the RRHs and railway track, while D_s is the distance of two RRHs, both in meters.

The train location is denoted as:

$$y = a + j * 0 \tag{B.3.5.2}$$

where: $a \in [0, \infty]$ and a means distance in meters, which means the train is right on the track.

The HST Scheme A scenario for the test of the baseband performance is a non-fading propagation channel with two taps, namely the two nearest RRHs. Thus, RRH k is visible for the train only in the range:

$$k * D_s - D_s \leq a < k * D_s + D_s \quad (\text{B.3.5.3})$$

Power level P_k (dB) for the signal from k^{th} RRH, normalized to the total power received from all visible RRHs, is given by:

$$P_k = -20 \log(|y - x_k|) - 10 \log \left(\sum_{i \in \{i | i * D_s - D_s \leq a < i * D_s + D_s\}} \frac{1}{|y - x_i|^2} \right) \text{ for } k * D_s - D_s \leq a < k * D_s + D_s \quad (\text{B.3.5.4})$$

Doppler shift $F_{D,k}$ (Hz) from k^{th} RRH for TRS_k, PDCCH, PDSCH as shown in figure B.3.5-1 is given by:

$$F_{D,k} = f_c * \text{real} \left(-v * \frac{(y - x_k)}{|y - x_k| * c} \right) \text{ for } k * D_s - D_s \leq a < k * D_s + D_s \quad (\text{B.3.5.5})$$

The relative delay T_k (s) for the signal from k^{th} RRH can be derived as:

$$T_k = \frac{|y - x_k|}{c} \text{ for } k * D_s - D_s \leq a < k * D_s + D_s \quad (\text{B.3.5.6})$$

In the above v (m/s) is the moving speed of the train, f_c (Hz) is the centre frequency, and C (m/s) is the velocity of light.

Power level, Doppler shift and relative delay are given by equations B.3.5.4 ~ B.3.5.6 respectively, where the required input parameters listed in table B.3.5-1 and the resulting Doppler shift shown in Figures B.3.5-3 and B.3.5-4 are applied for all frequency bands.

Table B.3.5-1: HST-SFN scenario

Parameter	Value
D_s	700 m
D_{\min}	150 m
v	500 km/h
f_d	870 Hz for 15 kHz SCS test; 1667 Hz for 30 kHz SCS test

NOTE 1: Equation B.3.5.5 is a general formula for Doppler shift calculation. When defining the requirement for FR1 HST, max Doppler shifts f_d which corresponds to $f_c * v / C$ in equation B.3.5.5 are selected as defined in Table B.3.5-1 for HST-SFN Scheme A scenario.

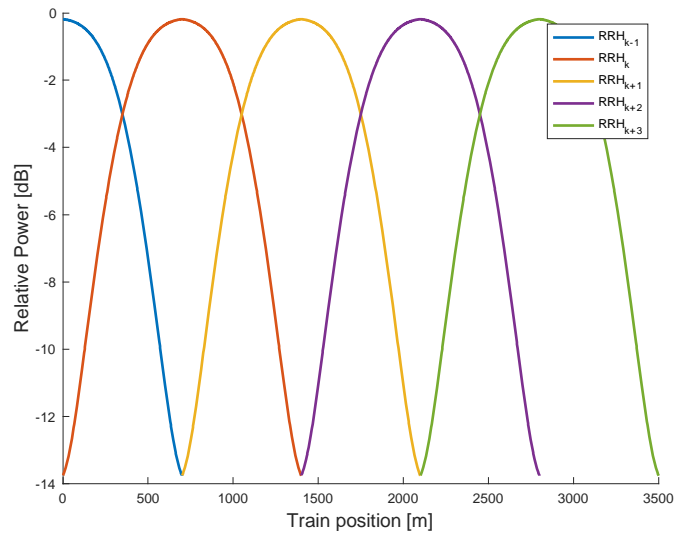


Figure B.3.5-2: Relative power level trajectories

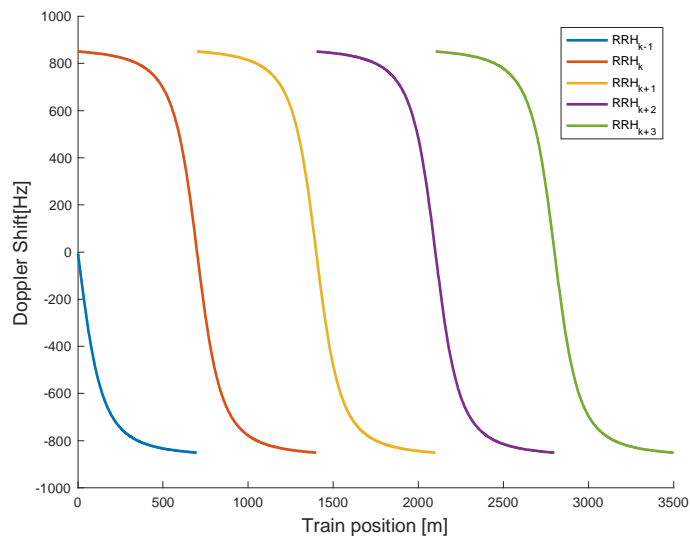


Figure B.3.5-3: Doppler shift trajectory ($f_d = 870$ Hz) showing visibility of each RRH

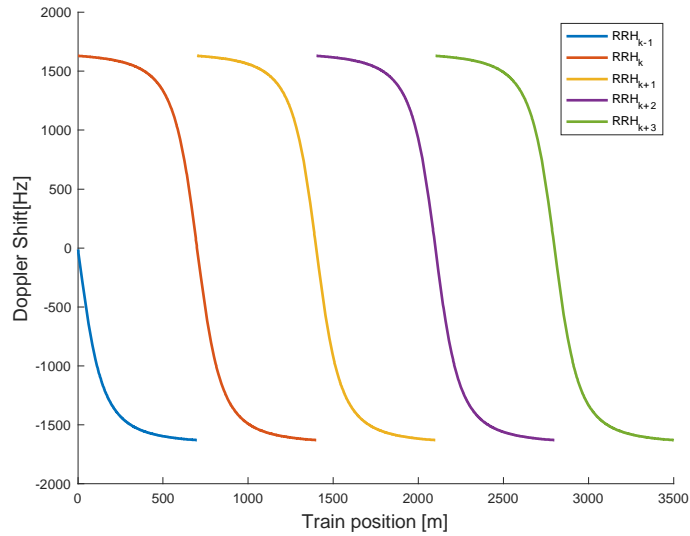


Figure B.3.5-4: Doppler shift trajectory ($f_d = 1667$ Hz) showing visibility of each RRH

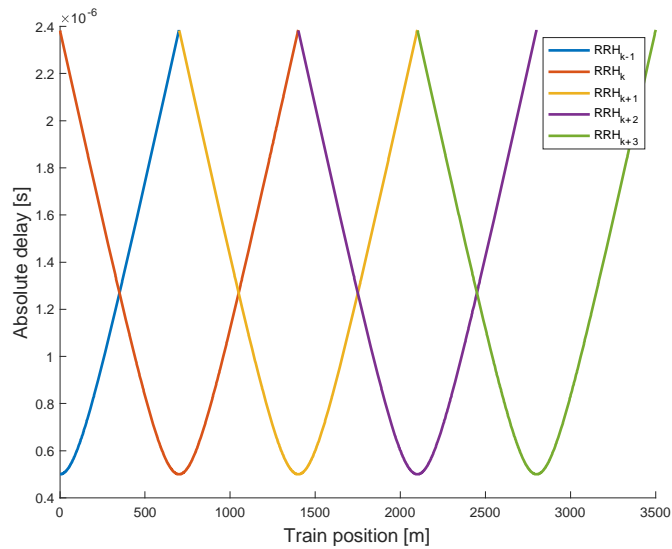


Figure B.3.5-5: Absolute delay trajectories

Static channel matrix will be used as defined in Annex B.1.

B.3.6 HST-SFN Scheme B Channel Profile

There is an infinite number of RRHs distributed equidistantly along the track with the same Cell ID as depicted in figure B.3.6-1. The PDCCH/PDSCH are transmitted in SFN manner from two RRHs and TRS are transmitted in RRH specific manner as illustrated in Figure B.3.6-1.

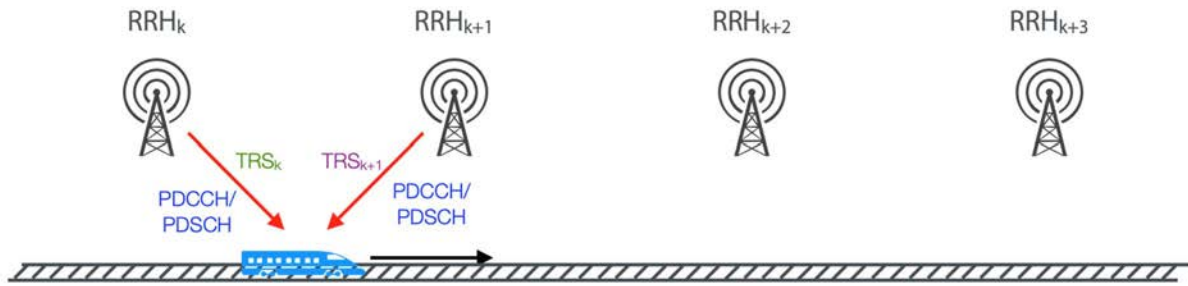


Figure B.3.6-1: Deployment of HST-SFN Scheme B

The location of RRH k is given as:

$$x_k = k * D_s + j * D_{min} \tag{B.3.6.1}$$

where: $k \in [-\infty, +\infty]$, $j = \sqrt{-1}$ and D_{min} is the distance between the RRHs and railway track, while D_s is the distance of two RRHs, both in meters.

The train location is denoted as:

$$y = a + j * 0 \tag{B.3.6.2}$$

where: $a \in [0, +\infty]$ and a means distance in meters, which means the train is right on the track.

The HST-SFN Scheme B scenario for the test of the baseband performance is a non-fading propagation channel with two taps, namely the two nearest RRHs. Thus, RRH k is visible for the train only in the range:

$$k * D_s - D_s \leq a < k * D_s + D_s \tag{B.3.6.3}$$

Power level P_k (dB) for the signal from k^{th} RRH, normalized to the total power received from all visible RRHs, is given by:

$$P_k = -20 \log(|y - x_k|) - 10 \log \left(\sum_{i \in \{i | i * D_s - D_s \leq a < i * D_s + D_s\}} \frac{1}{|y - x_i|^2} \right) \text{ for } k * D_s - D_s \leq a < k * D_s + D_s \tag{B.3.6.4}$$

Doppler shift $F_{D,k}$ (Hz) from k^{th} RRH for TRS _{k} , PDCCH and PDSCH transmission and Doppler shift $F_{D,k+1}$ (Hz) from $(k+1)^{\text{th}}$ RRH for PDCCH and PDSCH transmission as illustrated in Figure B.3.6-1 is given by:

$$\begin{cases} F_{D,k} = f_c \times \text{real} \left[-v \times \frac{y - x_k}{|y - x_k| \times C} \right] \text{ for } k * D_s \leq a < k * D_s + D_s \\ F_{D,k+1} = F_{D,k} \end{cases} \tag{B.3.6.5}$$

The relative delay T_k (s) for the signal from k^{th} RRH can be derived as:

$$T_k = \frac{|y - x_k|}{c} \text{ for } k * D_s - D_s \leq a < k * D_s + D_s \tag{B.3.6.6}$$

In the above v (m/s) is the moving speed of the train, f_c (Hz) is the centre frequency, and C (m/s) is the velocity of light.

Power level, Doppler shift and relative delay are given by equations B.3.6.4 ~ B.3.6.6 respectively, where the required input parameters listed in table B.3.6-1 and the resulting Doppler shift shown in Figures B.3.6-3 and B.3.6-4 are applied for all frequency bands.

Table B.3.6-1: HST-SFN Scheme B scenario

Parameter	Value
	HST-SFN-SchemeB
D_s	700 m
D_{min}	150 m
v	500 km/h

f_d	870 Hz for 15 kHz SCS test; 1667 Hz for 30 kHz SCS test
-------	--

NOTE 1: The trajectories of relative power, Doppler shifts and absolute delays presented in Figures B.3.6-2, B.3.6-3, B.3.6-4 and B.3.6-5 are derived from the equations B.3.6.4 ~ B.3.6.6 respectively.

NOTE 2: Equation B.3.6.5 is a general formula for Doppler shift calculation. When defining the requirement for FR1 HST, max Doppler shifts f_d which corresponds to $f_c \cdot v / C$ in equation B.3.6.5 are selected as defined in Table B.3.6-1 for HST-SFN scenario.

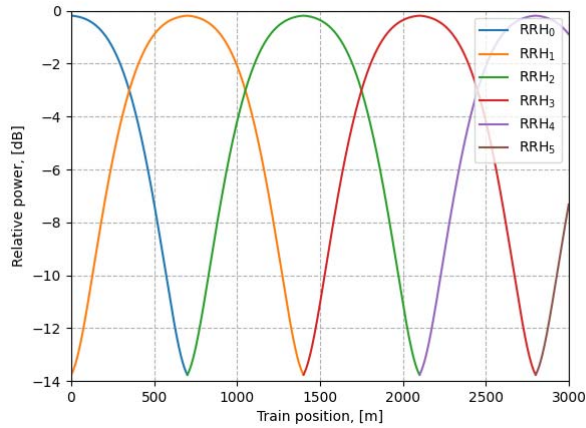


Figure B.3.6-2: Relative power level trajectories

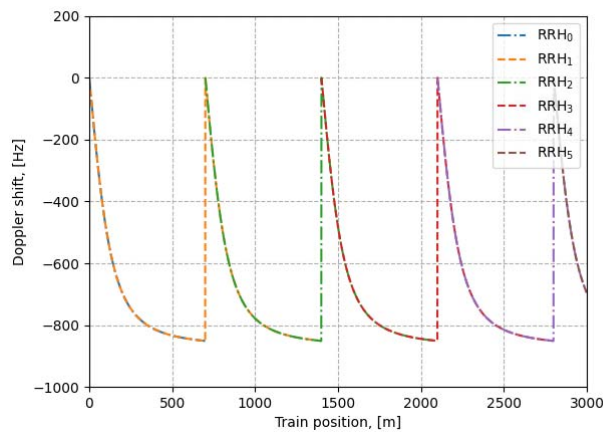


Figure B.3.6-3: Doppler shift trajectories ($f_d = 870$ Hz)

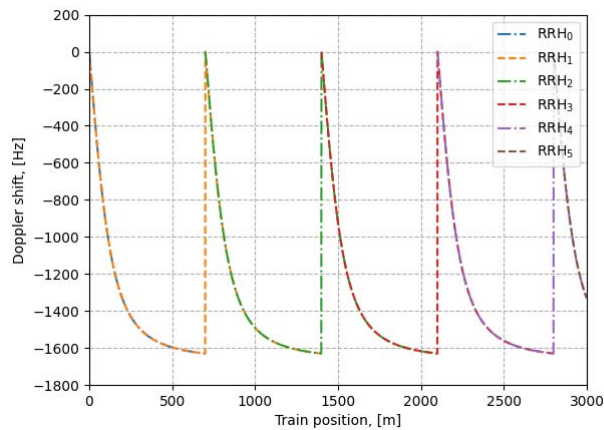


Figure B.3.6-4: Doppler shift trajectories ($f_d = 1667$ Hz)

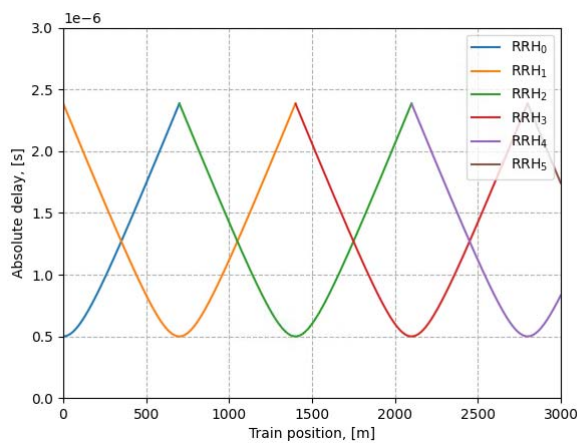


Figure B.3.6-5: Absolute delay trajectories

Static channel matrix will be used as defined in Annex B.1.

B.4 Physical signals, channels mapping and precoding

B.4.1 General

Unless otherwise stated, the transmission on antenna port(s) $p = p_0, p_0 + 1, \dots, p_0 + N_p - 1$ is defined by using a precoder matrix $W(i)$ of size $N_{ANT} \times N_p$, where N_{ANT} is the number of physical transmit antenna elements configured per test, N_p is the number of ports for a reference signal or physical channel configured per test, and p_0 is the first port for that reference signal or physical channel as defined in clauses 7.3 and 7.4 in TS 38.211 [9]. This precoder takes as an input a block of signals for antenna port(s) $p = p_0, p_0 + 1, \dots, p_0 + N_p - 1$, $y^{(p)}(i) =$

$[y^{(p_0)}(i) \ y^{(p_0+1)}(i) \ \dots \ y^{(p_0+N_p-1)}(i)]^T$, $i = 0, 1, \dots, M_{\text{symp}}^{\text{ap}} - 1$, with $M_{\text{symp}}^{\text{ap}}$ being the number of modulation symbols per antenna port including the reference signal symbols, and generates a block of signals $y_{bf}^{(q)}(i) =$

$[y_{bf}^{(0)}(i) \ y_{bf}^{(1)}(i) \ \dots \ y_{bf}^{(N_{ANT}-1)}(i)]^T$ the elements of which are to be mapped onto the frequency-time index pair (k, l) as per the test configuration but transmitted on different physical antenna elements:

$$y_{bf}^{(q)}(i) = W(i)y^{(p)}(i)$$

For Clause 6 and 8, the transmission of PDCCH and PDCCH DMRS on antenna port $p = p_0$ is defined by using a precoder matrix $W(i)$ of size 2×1 . This precoder takes as an input a block of signals for antenna port(s) $p = p_0$, $y^{(p)}(i) = y^{(p_0)}(i)$ and generates a block of signals $y_{bf}^{(q)}(i) = \left[y_{bf}^{(0)}(i) \ y_{bf}^{(\frac{N_{ANT}}{2})}(i) \right]^T$ the elements of which are to be mapped onto the frequency-time index pair (k, l) as per the test configuration but transmitted on different physical antenna elements:

$$y_{bf}^{(q)}(i) = W(i)y^{(p)}(i)$$

The precoder matrix $W(i)$ is specific to the test case configuration $W(i)$ is defined in Clause 5.2.2.2 of TS 38.214 [12].

The transmission on PT-RS antenna port is associated (using same precoder) with the lowest indexed DM-RS antenna port among the DM-RS antenna ports assigned for the PDSCH.

The physical antenna elements are identified by indices $j = 0, 1, \dots, N_{ANT} - 1$, where N_{ANT} is the number of physical antenna elements configured per test.

Modulation symbols $y^{(p)}(i)$ with $p \in \{4000\}$ (i.e. PSS, SSS, PBCH and DM-RS for PBCH) are directly mapped to first physical antenna element.

Modulation symbols $a_{k,l}$ for CSI-RS resources which configured for tracking with one port are directly mapped to first physical antenna element.

Modulation symbols $a_{k,l}$ for CSI-RS resources which configured for beam refinement with one port are directly mapped to first physical antenna element.

Modulation symbols $a_{k,l}^{(p)}$ for NZP CSI-RS which configured for CSI acquisition with

$p \in \{p_0, p_0 + 1, \dots, p_0 + N_{CSI} - 1\}$ are mapped to the physical antenna index $j = p - p_0$ where N_{CSI} is the number of NZP CSI-RS ports configured per test.

B.4.2 Beamforming for MU-MIMO

The transmission on antenna port(s) $p'_n = p_n, p_n + 1, \dots, p_n + N_p^{(n)} - 1$, $n = 0, 1, \dots, N - 1$ with N being the number of co-scheduled UEs allocated for different antenna ports in one RE is defined by using a precoder matrix $W_n(i)$ of size $N_{ANT} \times N_p^{(n)}$, where N_{ANT} is the number of physical transmit antenna elements configured per test, $N_p^{(n)}$ is the number of ports for UE n for a reference signal or physical channel configured per test, $W_n(i)$ is the precoder matrix for UE n which is specific to the test case configuration, and p_n is the first port for UE n for that reference signal or physical channel as defined in clauses 7.3 and 7.4 in TS 38.211 [9]. This precoder takes as an input a block of signals for antenna port(s) $p'_n = p_n, p_n + 1, \dots, p_n + N_p^{(n)} - 1$, $y^{(p'_n)}(i) = \left[y^{(p_n)}(i) \ y^{(p_n+1)}(i) \ \dots \ y^{(p_n+N_p^{(n)}-1)}(i) \right]^T$, $i = 0, 1, \dots, M_{sym}^{ap}$, with M_{sym}^{ap} being the number of modulation symbols per antenna port including the reference signal symbols, and generates a block of signals $y_{bf}^{(q)}(i) = \left[y_{bf}^{(0)}(i) \ y_{bf}^{(1)}(i) \ \dots \ y_{bf}^{(N_{ANT}-1)}(i) \right]^T$ the elements of which are to be mapped onto the frequency-time index pair (k, l) as per the test configuration but transmitted on different physical antenna elements:

$$y_{bf}^{(q)}(i) = \sum_{n=0}^{N-1} W_n(i)y^{(p'_n)}(i)$$

The $W_n(i)$ is specific to test case configuration and defined to maintain the average per UE signal power as $N_p^{(n)} / \sum_{n=1}^{N-1} N_p^{(n)}$

B.5 Downlink Transmission Model for requirements on bands with shared spectrum access

This clause provides a description of the Downlink Transmission Model to be used in PDSCH Demodulation and CQI reporting performance tests on bands with shared spectrum access.

The model as designed in the following applies to both configurations for *channelAccessMode*='semiStatic' or 'dynamic'.

B.5.1 Downlink Transmission Model for bands with shared spectrum access

The Downlink Period for performance tests on bands with shared spectrum access is defined as the duration included in the Test Configuration Parameters.

For tests configured with the RRC Parameter *channelAccessMode*='semiStatic', the duration of the Fixed Frame Period (FFP) equals the duration of the Downlink Period.

For each Downlink Period, the downlink signal to be transmitted is allocated according to the steps listed below:

1. Select the Downlink Transmission Duration in number of slots, randomly and with equally distributed probability, from the set of possible Downlink Transmission Duration values as included in the Test Configuration Parameters;
 - a. This duration includes occupied OFDM symbols and non-occupied OFDM symbols within the Downlink Transmission;
2. Depending on the Downlink Transmission Duration chosen in the previous step:
 - b. If the Downlink Transmission Duration equals 2 slots, all the OFDM symbols in both slots are fully allocated to downlink transmission, else;
 - c. If the Downlink Transmission Duration is larger than 2 slots, the configuration of occupied symbols in the last slot included in the downlink duration is selected in number of symbols, randomly and with equally distributed probability, from the set of possible 'Occupied OFDM symbols in the last slot of the downlink duration' as included in the Test Configuration Parameters;

For each Downlink Period, the last Slot is not scheduled for downlink transmission. This is to comply with the Idle period requirement in case of *channelAccessMode*='semiStatic', and to align the test setup. In the case of *channelAccessMode*='semiStatic', it can be assumed that the Channel Occupancy Time (COT) covers the entire duration of the Downlink Period except for the last slot.

For each Downlink Period, a uniform random variable from [0, 1] is generated. If the random variable is less than the p_{LBT} value included in the Test Configuration Parameters, the entire Downlink Period duration is muted across the entire bandwidth. This applies to all the signals that were scheduled for transmission, including but not limited to PDSCH, PDCCH, SSB, TRS, CSI-RS, etc.

B.6 Interference model for PDSCH requirements with intercell interference

B.6.1 Interference to Noise ratio (INR)

Each interfering cell involved in PDSCH performance requirements with intercell interference is characterized by its associated interferer to noise ratio (INR) value:

$$INR_i = \frac{\sum_{j=1}^{N_{RX}} I_{or(i)}^{(j)}}{\sum_{j=1}^{N_{RX}} N_{oc}^{(j)}}$$

where $I_{or(i)}^{(j)}$ is the average received power spectral density from the i -th strongest interfering cell involved in the requirement scenario on the j -th antenna connector and N_{oc} is the average power spectral density of a white noise source consistent with definition provided in section [4.4.3/4.5.3].

B.6.2 Interference model for PDSCH requirements and CSI Reporting requirements

This subclause provides synchronous network deployment interference model for each explicitly modelled interfering cell in the requirement scenario. In each subframe, each interfering cell shall transmit 16 QAM based randomly modulated data over the entire PDSCH region and over the full transmission bandwidth of the specified reference measurement channel. Transmitted physical channels shall include SSB and TRS/CSI-RS as specified in requirements section.

Transmission rank of the interfering cell shall be randomly determined with probabilities as specified in the requirements. The rank configuration will be independent for each interfering cell

For each slot a single precoding matrix for the number of layers v associated to the selected rank shall be selected randomly from Table 5.2.2.2.1-1 of TS 38.214 [12] with PRB bundling size as given in the requirements.

The generic beamforming model in subclause B.4.1 shall be applied assuming number of antenna ports as specified in the requirement scenario.

Random precoding with selected rank and precoding matrices for each slot shall be applied to 16 QAM randomly modulated layer symbols including the demodulation reference symbols over antenna port 1000 when the rank is one and antenna ports 1000, 1001 when the rank is two. DMRS type 1 with front loaded single symbol and one additional DMRS position with FDM applied between DMRS and data (number of CDM groups without data is 1)

All REs in the control region, random precoding for the number of Tx antenna ports in the requirement scenario shall be applied to QPSK randomly modulated symbols. The EPRE ratio of these REs shall be as defined for PDCCH in Annex C.3.1

B.7 Interference model for PDSCH requirements with LTE-NR spectrum sharing

This clause provides interference modelling for each explicitly modelled LTE interfering cell. Each interfering cell involved in PDSCH performance requirements for LTE-NR spectrum sharing is characterized by its associated interferer to noise ratio (INR) value as defined in B.6.1.

In each subframe, each interfering cell shall transmit 16QAM randomly modulated data over the entire PDSCH region and over the full transmission bandwidth according to the probabilities of occurrence. Transmitted physical channels shall include PSS, SSS and PBCH. Probabilities of occurrence of LTE PDSCH in each subframe are as specified in requirements.

For each subframe, a transmission rank shall be randomly determined independently from interfering cells. Probabilities of occurrence of each possible transmission rank are as specified in requirements.

For each subframe, a precoding matrix for the number of layers v associated to the selected rank shall be selected randomly from Table 6.3.4.2.3-1 of TS 36.211 [15]. Note that codebook index 0 shall be excluded from random precoder selection when the number of layers is $v = 2$.

Precoding for spatial multiplexing with CRS for the number of antenna ports shall be applied to 16QAM randomly modulated layer symbols, as specified in subclause 6.3.4.2.1 of TS 36.211 [15] with the selected precoding matrices for each subframe.

For unallocated REs in the control region, precoding for transmit diversity for the number of antenna ports in the simulation scenario shall be applied to QPSK randomly modulated layer symbols, as specified in subclause 6.3.4.3 of TS 36.211 [15]. The EPRE ratio for these REs shall be as defined for PDCCH in Annex C.3.2 of TS 36.101 [4].

Annex C (normative): Downlink physical channels

C.0 Downlink signal levels

Downlink power settings to be configured for connection setup has been defined in this clause covering both FR1 and FR2.

C.0.1 FR1 Downlink Signal Levels (Conducted)

The downlink power settings in Table C.0.1-1 is used for FR1 conducted unless otherwise specified in a test case.

If the UE has more than one Rx antenna, the downlink signal is applied to each one. All UE Rx antennas shall be connected.

Table C.0.1-1: Default Downlink power levels for NR FR1

SCS (kHz)		Unit	Channel bandwidth											
			5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	80 MHz	90 MHz	100 MHz
15	Number of RBs		25	50	75	100	128	160	215	270	N/A	N/A	N/A	N/A
	Channel BW power	dBm	-60	-57	-55	-54	-53	-52	-51	-50	N/A	N/A	N/A	N/A
30	Number of RBs		10	24	36	50	64	75	100	128	162	216	243	270
	Channel BW power	dBm	-61	-57	-55	-54	-53	-52	-51	-50	-49	-48	-47	-47
60	Number of RBs		N/A	10	18	24	30	36	50	64	75	100	120	135
	Channel BW power	dBm	N/A	-58	-56	-54	-53	-52	-51	-50	-49	-48	-47	-47
	SSS EPRE	dBm/15 kHz	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85
NOTE 1:			The channel bandwidth powers are informative, based on -85dBm/15kHz SS/PBCH SSS EPRE, then scaled according to the number of RBs and rounded to the nearest integer dBm value. Full RE allocation with no boost or deboost is assumed.											
NOTE 2:			The power level is specified at each UE Rx antenna.											
NOTE 3:			DL level is applied for any of the Subcarrier Spacing configuration () with the same power spectrum density of -85 dBm/15 kHz.											

The default signal level uncertainty is [+/-3] dB at each test port, for any level specified. If the uncertainty value is critical for the test purpose, a tighter uncertainty is specified for the related test case in [Annex F]

C.0.2 FR2 Downlink Signal Levels (Radiated)

The downlink power settings in Table C.0.2-1 is used unless otherwise specified in a test case.

Table C.0.2-1: Default Downlink power levels for NR FR2

SCS (kHz)		Unit	Channel Bandwidth			
			50 MHz	100 MHz	200 MHz	400 MHz
60	Number of RBs		66	132	264	N/A
	Channel BW power	dBm	-70	-67	-64	N/A
120	Number of RBs		32	66	132	264

Channel BW power	dBm	-70	-67	-64	-61
SS/PBCH SSS EPRE	dBm/60 kHz	[-99]	[-99]	[-99]	[-99]

NOTE 1: The channel bandwidth powers are informative, based on [-99] dBm/60 kHz SS/PBCH SSS EPRE, then scaled according to the number of RBs and rounded to the nearest integer dBm value. Full RE allocation with no boost or deboost is assumed.

NOTE 2: The power level is specified at the centre of quiet zone.

NOTE 3: DL level is applied for any of the Subcarrier Spacing configuration (μ) with the same power spectrum density of [-99]dBm/60kHz.

The default downlink signal level uncertainty is +/- TBD dB, for any level specified. If the uncertainty value is critical for the test purpose, a tighter uncertainty is specified for the related test case in Annex F.

C.1 Setup

The following clause describes the downlink Physical Channels that are transmitted during connection setup.

C.1.1 FR1 Setup

Table C.1.1-1 describes the downlink Physical Channels that are required for FR1 connection set up.

Table C.1.1-1: Downlink Physical Channels required for FR1 connection setup

Physical Channel
PBCH
SSS
PSS
PDCCH
PDSCH
PBCH DMRS
PDCCH DMRS
PDSCH DMRS
CSI-RS

The following common PDSCH and PDCCH configuration parameters shall be used to bring up the connection setup for FR1 NR cell.

Table C.1.1-2: Common reference channel parameters for FR1

Parameter	Unit	Value
CORESET frequency domain allocation		Full BW, number of RB's to be in multiple of 6
CORESET time domain allocation		2 OFDM symbols at the begin of each slot
PDSCH mapping type		Type A
PDSCH start symbol index (S)		2
Number of consecutive PDSCH symbols (L)		12
PDSCH PRB bundling	PRBs	2
Dynamic PRB bundling		false
Overhead value for TBS determination		0
First DMRS position for Type A PDSCH mapping		2
DMRS type		Type 1
Number of additional DMRS		1
FDM between DMRS and PDSCH		Enable
TRS configuration		2 slots, periodicity 20 ms, offset 10
PTRS configuration		PTRS is not configured
Num of HARQ processes		8 (TDD)
Aggregation level	CCE	4

Table C.1.1-3: Additional reference channels parameters for FDD

Parameter	Unit	Value
Number of HARQ Processes		4
K1 value		2 for all slots

Table C.1.1-4: TDD UL-DL pattern for SCS 15 KHz

Parameter	Unit	UL-DL pattern
		FR1.15-1
TDD Slot Configuration pattern (Note 1)		DDDSU
Special Slot Configuration (Note 2)		10D+2G+2U
UL-DL configuration (<i>tdd-UL-DL-ConfigurationCommon</i>)	<i>referenceSubcarrierSpacing</i>	kHz
	<i>dl-UL-TransmissionPeriodicity</i>	ms
	<i>nrofDownlinkSlots</i>	
	<i>nrofDownlinkSymbols</i>	
	<i>nrofUplinkSlot</i>	
K1 value (PDSCH-to-HARQ-timing-indicator)		[4] if mod(i,5) = 0 [3] if mod(i,5) = 1 [2] if mod(i,5) = 2 [6] if mod(i,5) = 3
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information. Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information. Note 3: i is the slot index per frame; i = {0,...,9}		

Table C.1.1-5: TDD UL-DL pattern for SCS 30 KHz

Parameter	Unit	UL-DL Pattern
TDD Slot Configuration pattern (Note 1)		7DS2U
Special Slot Configuration (Note 2)		6D+4G+4U
UL-DL configuration (<i>tdd-UL-DL-ConfigurationCommon</i>)	<i>referenceSubcarrierSpacing</i>	30
	<i>dl-UL-TransmissionPeriodicity</i>	5
	<i>nrofDownlinkSlots</i>	7
	<i>nrofDownlinkSymbols</i>	6
	<i>nrofUplinkSlot</i>	2
	<i>nrofUplinkSymbols</i>	4
UL-DL configuration2 (<i>tdd-UL-DL-ConfigurationCommon2</i>)	<i>referenceSubcarrierSpacing</i>	N/A
	<i>dl-UL-TransmissionPeriodicity</i>	N/A
	<i>nrofDownlinkSlots</i>	N/A
	<i>nrofDownlinkSymbols</i>	N/A
	<i>nrofUplinkSlot</i>	N/A
K1 value (PDSCH-to-HARQ-timing-indicator)		8 if mod(i,10) = 0 7 if mod(i,10) = 1 6 if mod(i,10) = 2 5 if mod(i,10) = 3 5 if mod(i,10) = 4 4 if mod(i,10) = 5 3 if mod(i,10) = 6 2 if mod(i,10) = 7
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information. Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information. Note 3: i is the slot index per frame; i = {0,...,19}		

Table C.1.1-6: PDCCH Aggregation level for NR-LTE coexistence test cases

Parameter	Unit	Value
Aggregation level	CCE	2

C.1.2 FR2 Setup

Table C.1.2-1 describes the downlink Physical Channels that are required for FR2 connection set up.

Table C.1.2-1: Downlink Physical Channels required for FR2 connection set-up

Physical Channel
PBCH
SSS
PSS
PDCCH
PDSCH
PBCH DMRS
PDCCH DMRS
PDSCH DMRS
CSI-RS
PTRS

The following common PDSCH and PDCCH configuration parameters shall be used to bring up the connection setup for FR2 NR cell.

Table C.1.2-2: Common reference channel parameters for FR2

Parameter	Unit	Value
CORESET frequency domain allocation		Full BW, number of RB's to be in multiple of 6
CORESET time domain allocation		1 OFDM symbols at the begin of each slot
PDSCH mapping type		Type A
PDSCH start symbol index (S)		1
Number of consecutive PDSCH symbols (L)		13
PDSCH PRB bundling	PRBs	2
Dynamic PRB bundling		false
MCS table for TBS determination		64QAM
Overhead value for TBS determination		0
First DMRS position for Type A PDSCH mapping		2
DMRS type		Type 1
Number of additional DMRS		1
FDM between DMRS and PDSCH		Enable
TRS configuration		2 slots, periodicity 20 ms, offset 10
PTRS configuration		Single port, every other RB, every symbol (K=2, L=1)
Num of HARQ processes		8

Table C.1.2-3: Additional test parameters for TDD for SCS 60 KHz

Parameter	Unit	UL-DL pattern	
TDD Slot Configuration pattern (Note 1)		DDSU	
Special Slot Configuration (Note 2)		11D+3G+0U	
UL-DL configuration (<i>tdd-UL-DL-ConfigurationCommon</i>)	<i>referenceSubcarrierSpacing</i>	kHz	60
	<i>dl-UL-TransmissionPeriodicity</i>	ms	1
	<i>nrofDownlinkSlots</i>		2
	<i>nrofDownlinkSymbols</i>		11
	<i>nrofUplinkSlot</i>		1
	<i>nrofUplinkSymbols</i>		0
K1 value (PDSCH-to-HARQ-timing-indicator)		K1 = 3 if mod(i,4) = 0 K1 = 2 if mod(i,4) = 1 K1 = 5 if mod(i,4) = 2	

Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.
 Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information.
 Note 3: i is the slot index per frame; $i = \{0, \dots, 39\}$

Table C.1.2-4: Additional test parameters for TDD for SCS 120 KHz

Parameter	Unit	UL-DL pattern	
TDD Slot Configuration pattern (Note 1)		DDDSU	
Special Slot Configuration (Note 2)		10D+2G+2U	
UL-DL configuration (<i>tdd-UL-DL-ConfigurationCommon</i>)	<i>referenceSubcarrierSpacing</i>	kHz	120
	<i>dl-UL-TransmissionPeriodicity</i>	ms	0.625
	<i>nrofDownlinkSlots</i>		3
	<i>nrofDownlinkSymbols</i>		10
	<i>nrofUplinkSlot</i>		1
	<i>nrofUplinkSymbols</i>		2
K1 value (PDSCH-to-HARQ-timing-indicator)			K1 = [4] if $\text{mod}(i,5) = 0$ K1 = [3] if $\text{mod}(i,5) = 1$ K1 = [2] if $\text{mod}(i,5) = 2$ K1 = [6] if $\text{mod}(i,5) = 3$
Note 1: D denotes a slot with all DL symbols; S denotes a slot with a mix of DL, UL and guard symbols; U denotes a slot with all UL symbols. The field is for information.			
Note 2: D, G, U denote DL, guard and UL symbols, respectively. The field is for information.			
Note 3: i is the slot index per frame; $i = \{0, \dots, 79\}$			

C.2 Connection

C.2.1 FR1 Measurement of Performance Characteristics

Unless otherwise stated, Table C.2.1-1 is applicable for measurements in which uniform RS-to-EPRE boosting for all downlink physical channels is used.

Table C.2.1-1: Downlink Physical Channels transmitted during a connection (FDD and TDD) for FR1

Parameter	Unit	Value (NOTE 2)
SSS transmit power	W	Test specific
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH to SSS	dB	0
EPRE ratio of PBCH to PBCH DMRS	dB	0
EPRE ratio of PDCCH to SSS	dB	0
EPRE ratio of PDCCH to PDCCH DMRS	dB	0
EPRE ratio of PDSCH to SSS	dB	0
EPRE ratio of PDSCH to PDSCH DMRS	dB	Test specific (Note 1)
EPRE ratio of NZP CSI-RS to SSS	dB	$-10 \cdot \log_{10}(L)$ (Note 3)
EPRE ratio of PDSCH OCNG to SSS	dB	0
EPRE ratio of PDCCH OCNG to SSS	dB	0
EPRE ratio of LTE CRS to NR SSS	dB	0 (Note 4)
NOTE 1: Value is derived from Table 4.1-1 in TS 38.214 [X] based on "Number of DM-RS CDM groups without data" and "DMRS Type" parameters specified for each test.		
NOTE 2: The value is the energy of per RE for a single antenna port before pre-coding.		
NOTE 3: $L \in \{1, 2, 4, 8\}$ is the CDM group size of NZP CSI-RS specified for each test.		
NOTE 4: It is only applicable to LTE-NR coexistence tests.		

C.2.2 FR2 Measurement of Performance Characteristics

Unless otherwise stated, Table C.2.2-1 is applicable for measurements on the Performance Characteristics.

Table C.2.2-1: Downlink Physical Channels transmitted during a connection (TDD) for FR2

Parameter	Unit	Value (Note 2)
SSS transmit power	W	Test specific
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH to SSS	dB	0
EPRE ratio of PBCH to PBCH DMRS	dB	0
EPRE ratio of PDCCH to SSS	dB	0
EPRE ratio of PDCCH to PDCCH DMRS	dB	0
EPRE ratio of PDSCH to SSS	dB	0
EPRE ratio of PDSCH to PDSCH DMRS	dB	Test specific (Note 1)
EPRE ratio of NZP CSI-RS to SSS	dB	$-10 \cdot \log_{10}(L)$ (Note 3)
EPRE ratio of PTRS to PDSCH	dB	Test specific (Note 4)
EPRE ratio of PDSCH OCNG to SSS	dB	0
EPRE ratio of PDCCH OCNG to SSS	dB	0

Note 1: Value is derived from Table 4.1-1 in TS 38.214 [12] based on "Number of DM-RS CDM groups without data" and "DMRS Type" parameters specified for each test

Note 2: The value is the energy of per RE for a single antenna port before pre-coding.

Note 3: $L \in \{1, 2, 4, 8\}$ is the CDM group size of NZP CSI-RS specified for each test.

Note 4: Value is derived from Table 4.1-2 in TS 38.214 [12] based on "The number of PDSCH layers" and "epre-Ratio" parameters specified for each test.

Annex D (normative): E-UTRA link setup config for NSA testing

D.0 General

Below clauses define the E-UTRA link setup config for NSA Demodulation and CSI tests cases unless otherwise specified within the main test case.

D.1 E-UTRA test parameters

Below are the common test parameters to be configured for E-UTRA link.

Table D.1-1: Common Test Parameters (FDD)

Parameter	Unit	Value	Comments
Inter-TTI Distance		1	
Number of HARQ processes	Processes	8	For FDD, 8 HARQ processes in the DL, as specified in TS 36.213 [10] clause 7. All 8 HARQ processes are used.
Scheduling of retransmissions			1. Retransmissions use the same Transport Block Size (TBS) as the initial transmission. 2. HARQ processes are scheduled consecutively, independent of the fact, whether retransmissions (for negatively acknowledged HARQ processes) or new transmissions (for positively acknowledged HARQ processes) occur.
Maximum number of HARQ transmission		4	It is always 4 for FDD, as specified in TS 36.213 [10] clause 8
Redundancy version coding sequence		{0,1,2,3} for QPSK	
Number of OFDM symbols for PDCCH	OFDM symbols	3 for 5 MHz bandwidths, 2 for 10 MHz, 20MHz	The PCFICH carries information about the number of OFDM symbols used for transmission of PDCCHs in a subframe, as specified in TS 36.211 [8] clause 6.7
Cyclic Prefix		Normal	CP consist of the following physical resource blocks (RBs) parameters: 12 consecutive subcarriers at a 15 kHz spacing and 7 OFDM symbols, as specified in TS 36.211 [8] clause 6.2.3
Cell ID		0 (Note 1)	The Cell ID is uniquely defined by a number in the range of 0 to 503, representing the physical-layer cell identity, as specified in TS 36.211 [8] clause 6.11.
DCI format for PDSCH	Format 1A		
DCI format for PUSCH	Format 0		

Table D.1-2: Common Test Parameters (TDD)

Parameter	Unit	Value	Comments
Uplink downlink configuration (Note 1)		2	
Special subframe configuration (Note 2)		5	
Inter-TTI Distance		1	

Number of HARQ processes	Processes	7	For TDD, 7 HARQ processes in the DL, as specified in TS 36.213 [10] clause 7. All 7 HARQ processes are used.
Scheduling of retransmissions			1. Retransmissions use the same Transport Block Size (TBS) as the initial transmission. 2. HARQ processes are scheduled consecutively, independent of the fact, whether retransmissions (for negatively acknowledged HARQ processes) or new transmissions (for positively acknowledged HARQ processes) occur. 3. In case when the initial transmission and the retransmissions are scheduled in subframes with a different N_{PRB} (in terms of TS 36.213 [10] subclause 7.1.7) $29 \leq I_{MCS} \leq 31$ according to TS 36.213 [10] subclause 7.1.7.2 and the appropriate modulation is used.
Maximum number of HARQ transmission		4	It is always 4 for TDD, as specified in TS 36.213 [10] clause 8
Redundancy version coding sequence		{0,1,2,3} for QPSK	
Number of OFDM symbols for PDCCH	OFDM symbols	3 for 5 MHz bandwidths, 2 for 10 MHz	The PCFICH carries information about the number of OFDM symbols used for transmission of PDCCHs in a subframe, as specified in TS 36.211 [8] clause 6.7
Cyclic Prefix		Normal	CP consist of the following physical resource blocks (RBs) parameters: 12 consecutive subcarriers at a 15 kHz spacing and 7 OFDM symbols, as specified in TS 36.211 [8] clause 6.2.3
Cell ID		0 (Note 3)	The Cell ID is uniquely defined by a number in the range of 0 to 503, representing the physical-layer cell identity, as specified in TS 36.211 [8] clause 6.11.
DCI format for PDSCH	Format 1A		
DCI format for PUSCH	Format 0		
NOTE 1: as specified in Table 4.2-2 in TS 36.211 [8]. NOTE 2: as specified in Table 4.2-1 in TS 36.211 [8]. NOTE 3: For CA tests, Cell ID = 0 applies only to P-Cell. For (n) th S-Cell, Cell ID = n is used.			

D.2 E-UTRA configuration

This clause defines the E-UTRA link settings for the test cases defined in clauses 5 and 6. The LTE link is supposed to be a functional link. The configuration defined in this clause ensures establishment of LTE link. Unless otherwise stated, ensure the UE is in state 3A-RF on the E-UTRA cell as defined in TS 36.508 [19].

Table D.2-1: E-UTRA configuration for EN-DC tests

Parameter	Value	Comments
-----------	-------	----------

Test Frequency during and after connection setup	Mid	As defined in TS 36.508 [19] for inter band test cases and as defined in TS 38.508-1 [6] clause 4.3.1 for intra band test cases, with NR SCS as per the test case for the LTE band under test
Bandwidth during and after connection setup	5 MHz (Note 1)	Supported by all LTE bands
PDSCH transmission mode and antenna config	TM1 1x2	
OCNG pattern	OP.1 for FDD OP.1 for TDD	These physical resource blocks are assigned to an arbitrary number of virtual UE's with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated.
DL RMC	According to table A.3.2-1 in TS 36.521-1 [16] for FDD According to table A.3.1.1-1 in TS 38.521-3 [21] for TDD	Note 1
DL RB allocation	25	Full RB allocation assuming 5 MHz ChBW. 100 RB for 20 MHz ChBW as applicable
UL Signal levels during connection setup	PUSCH Power	Attained by enabling open loop power control and setting up UL signal levels according to Annexes H.0, H.2 and H.3 of TS 36.521-1 [16]
TA adjustments	<i>TimeAlignmentTimerDedicated</i> IE to be set to infinity	<i>TimeAlignmentTimerDedicated</i> IE to be set to infinity to ensure UE doesn't look for TA adjustments (See Table D.2-4)
CQI reports and SRS after connection setup	Disabled (See Table D.2-2 and D.2-3)	Disable periodic and aperiodic CQI reports to ensure none of these transmissions occur on the LTE uplink.
NOTE 1: If none of the UE supported EN-DC band combos support 5MHz E-UTRA carrier, configure 20 MHz channel BW.		

Table D.2-2: CQI-ReportConfig-DEFAULT: Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-2 CQI-ReportConfig-DEFAULT			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportModeAperiodic	NOT PRESENT		
cqi-ReportPeriodic	NOT PRESENT		
}			

Table D.2-3: PhysicalConfigDedicated-DEFAULT: Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
soundingRS-UL-ConfigDedicated	Not present		RBC
}			

Table D.2-4: MAC-MainConfig-RBC: Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC			
Information Element	Value/remark	Comment	Condition
timeAlignmentTimerDedicated	Infinity		

D.3 E-UTRA link common physical channel setup

Table D.3-1 describes the downlink Physical Channels that are required for E-UTRA connection set up.

Table D.3-1: Downlink Physical Channels required for E-UTRA connection set-up

Physical Channel	EPRE Ratio	Note
PBCH	PBCH_RA = 0 dB	
	PBCH_RB = 0 dB	
PSS	PSS_RA = 0 dB	
SSS	SSS_RA = 0 dB	
PCFICH	PCFICH_RB = 0 dB	
PDCCH	PDCCH_RA = 0 dB	
	PDCCH_RB = 0 dB	
PDSCH	PDSCH_RA = 0 dB	
	PDSCH_RB = 0 dB	
PHICH	PHICH_RA = 0 dB	
	PHICH_RB = 0 dB	
NOTE 1: $P_B = 0$.		
NOTE 2: PHICH group power, i.e. the total power of all active PHICH sequences within a PHICH group.		

D.4 E-UTRA power level

D.4.1 E-UTRA power level (conducted)

Table D.4.1-1: DL power level for E-UTRA (conducted)

Parameter	Value	Comments
DL signal level	RS EPRE -85.0 dBm/15 kHz	The power level is specified at each UE Rx antenna

D.4.2 E-UTRA power level (radiated)

Table D.4.2-1: Downlink power levels for E-UTRA (radiated)

Parameter	Value	Comments
DL signal level	RS EPRE -100 dBm/15 kHz	The power level is specified at each UE Rx antenna

Annex E (normative): Environmental conditions

FFS

Annex F (normative): Measurement uncertainties and test tolerances

The requirements of this clause apply to all tests in the present document.

F.1 Measurement uncertainties and test tolerances for FR1

F.1.1 Acceptable uncertainty of test system (normative)

The maximum acceptable uncertainty of the Test System is specified below for each test, where appropriate. The Test System shall enable the stimulus signals in the test case to be adjusted to within the specified range, and the equipment under test to be measured with an uncertainty not exceeding the specified values. All ranges and uncertainties are absolute values, and are valid for a confidence level of 95 %, unless otherwise stated.

A confidence level of 95 % is the measurement uncertainty tolerance interval for a specific measurement that contains 95 % of the performance of a population of test equipment.

For RF tests it should be noted that the uncertainties in clause F.1 apply to the Test System operating into a nominal 50 ohm load and do not include system effects due to mismatch between the DUT and the Test System.

The downlink signal uncertainties apply at each receiver antenna connector.

F.1.1.1 Measurement of test environments

The measurement accuracy of the UE test environments defined in TS 38.508-1 [5] subclause 4.1, Test environments shall be

- Pressure ± 5 kPa.
- Temperature ± 2 degrees.
- Relative Humidity ± 5 %.
- DC Voltage $\pm 1,0$ %.
- AC Voltage $\pm 1,5$ %.
- Vibration 10 %.
- Vibration frequency 0,1 Hz.

The above values shall apply unless the test environment is otherwise controlled and the specification for the control of the test environment specifies the uncertainty for the parameter.

F.1.1.2 Measurement of Demod Performance requirements

This clause defines the maximum test system uncertainty for Demod Performance requirements. The maximum test system uncertainty allowed for the measurement uncertainty contributors are defined in Table F.1.1.2-1.

Table F.1.1.2-1: Maximum measurement uncertainty values for the test system for FR1 (up to 7.125 GHz) and Channel BW \leq 40 MHz

MU contributor	Unit	Value	Comment
AWGN flatness and signal flatness, max deviation for any Resource Block, relative to average over BW_{config}	dB	± 2.0	Same as in LTE

MU contributor	Unit	Value	Comment
Signal to noise ratio uncertainty	dB	±0.3	Same as in LTE
Signal to noise ratio variation	dB	±0.5	Same as in LTE
Fading profile power uncertainty for 1Tx	dB	±0.5	Same as in LTE
Fading profile power uncertainty for 2Tx	dB	±0.7	Same as in LTE
Fading profile power uncertainty for 4Tx	dB	±0.7	Same as in LTE
NOTE 1: MU and TT for >6GHz are working assumption pending confirmation from TE vendors.			

The maximum test system uncertainty for test cases defined in section 5 is defined in Table F.1.1.2-2.

Table F.1.1.2-2: Maximum test system uncertainty for FR1 demodulation performance test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
5.2.1.1.1 1 Rx FDD FR1 PDSCH performance for RedCap	± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler	Same as 5.2.2.1.1_1
5.2.1.1.2 1 Rx FDD FR1 PDSCH performance for eRedCap	± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler	Same as 5.2.2.1.1_1
5.2.1.2.1 1Rx TDD FR1 PDSCH performance for RedCap	± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler	Same as 5.2.2.1.1_1
5.2.1.2.2 1 Rx FDD FR1 PDSCH performance for eRedCap	± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler	Same as 5.2.2.1.1_1
5.2.2.1.1_1 2Rx FDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA	± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler ± 0.6 dB for test 1-6 ± 0.9 dB for test 1-7	Overall system uncertainty for fading conditions comprises four quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2) + \text{SNR uncertainty due to finite test time}^2$ Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for 2Tx AWGN flatness and signal flatness ±2.0 dB SNR uncertainty due to finite test time ±0.3 dB for 10Hz Doppler, otherwise ±0.0 dB For test point 1-6, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.6 \text{ dB}$ For test point 1-7, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.9 \text{ dB}$
5.2.2.1.1_2 2Rx FDD FR1 PDSCH Mapping Type A performance - 2x2 MIMO with enhanced receiver type X for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1

<p>5.2.2.1.1_3 2Rx FDD FR1 PDSCH Mapping Type A performance – 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA</p>	<p>± 0.9 dB for test 1-8 Downlink EVM ≤ 2.5% for f ≤ 4.2 GHz Downlink EVM ≤ [2.5%] for f > 4.2 GHz</p>	<p>For test point 1-8, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2) = 0.9$ dB 2.5% EVM is equivalent to a Test system downlink SNR of 32.04dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is not limited by the Test system EVM.</p>
<p>5.2.2.1.1_4 2Rx FDD FR1 PDSCH mapping Type A performance – 2x2 MIMO with enhanced DMRS for both SA and NSA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.1.2_1 2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.1.3_1 2Rx FDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.1.4_1 2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.1.5_1 2Rx FDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA</p>	<p>± 0.6 dB</p>	<p>Overall system uncertainty for fading conditions comprises four quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2)$ Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB</p>

<p>5.2.2.1.6_1 2Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA</p>	<p>± 0.9dB</p>	<p>Overall system uncertainty for fading conditions comprises four quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time</p> <p>Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2)$</p> <p>Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for 2Tx AWGN flatness and signal flatness ±2.0 dB SNR uncertainty due to finite test time ±0.25 dB for 1% residual BLER</p> <p>For test point 1-1, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.9 \text{ dB}$</p>
<p>5.2.2.1.7_1 2Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.1.8_1 2Rx FDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.1.9_1 2Rx FDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA</p>	<p>± 0.6 dB</p>	<p>Overall system uncertainty for fading conditions comprises four quantities: 1. Signal-to-noise ratio uncertainty, ±0.3 dB 2. Effect of AWGN flatness and signal flatness, ±2.0 dB 3. SNR uncertainty due to finite test time, ±0.0 dB for >10Hz Doppler.</p> <p>Items 1, 2, 3 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.6 \text{ dB}$</p>

5.2.2.1.10_1 2Rx FDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA	± 0.6 dB	<p>Overall system uncertainty for fading conditions comprises four quantities:</p> <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty, ± 0.3 dB 2. Effect of AWGN flatness and signal flatness, ± 2.0 dB 3. SNR uncertainty due to finite test time, ± 0.0 dB for >10Hz Doppler. <p>Items 1, 2, 3 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.6$ dB</p>
5.2.2.1.11_1 2Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.1.12_1 2Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.1.13_1 2Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.1.14_1 2Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.6_1	Same as 5.2.2.1.6_1
5.2.2.1.15_1 2Rx FDD FR1 PDSCH with inter-cell interference – 2x2 MIMO for both SA and NSA	Es/Noc ± 0.8 dB for interfering cells	<p>Overall system uncertainty for fading conditions comprises two quantities:</p> <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty <p>Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2)$ Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.7 dB for Tx Diversity</p>
5.2.2.1.16_1 2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA	Same as 5.2.2.1.1_1	<p>Same as 5.2.2.1.1_1</p> <p>There is no additional measurement uncertainty introduced due to the co-scheduled UE</p>
5.2.2.1.16_2 2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA	Same as 5.2.2.1.16_1	Same as 5.2.2.1.16_1
5.2.2.1.17 2Rx FDD FR1 PDSCH performance for RedCap	± 0.9 dB for > 10 Hz doppler ± 1 dB for 10Hz doppler	Same as 5.2.2.1.1_1
5.2.2.1.18_1 2Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x2 MIMO for both NSA and SA	Same as 5.2.2.1.15_1	Same as 5.2.2.1.15_1
5.2.2.1.19_1 2Rx FDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x2 MIMO for both NSA and SA	Same as 5.2.2.1.15_1	Same as 5.2.2.1.15_1

5.2.2.1.20 2Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.9_1	Same as 5.2.2.1.9_1
5.2.2.1.21 2Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.9_1	Same as 5.2.2.1.9_1
5.2.2.1.22 2Rx FDD FR1 PDSCH ATG performance	± 0.6 dB	<p>Overall system uncertainty for fading conditions comprises three quantities:</p> <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness 3. SNR uncertainty due to finite test time <p>Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB SNR uncertainty due to finite test time ±0.0 dB for >10Hz Doppler.</p> <p>For test point 1-1, 1-2 and 1-3, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.6 \text{ dB}$</p>
5.2.2.1.23 2Rx FDD FR1 PDSCH performance for eRedCap	± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler	Same as 5.2.2.1.1_1
5.2.2.2.1_1 2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA	± 0.9 dB for test 1-10 ± 0.6 dB for test 1-11 For other TPs, same as 5.2.2.1.1_1	<p>For test point 1-10, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.9 \text{ dB}$</p> <p>For test point 1-11, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.6 \text{ dB}$</p> <p>For other TPs, same as 5.2.2.1.1_1</p>
5.2.2.2.1_2 2Rx TDD FR1 PDSCH Mapping Type A performance - 2x2 MIMO with enhanced receiver type X for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.1_3 2Rx TDD FR1 PDSCH Mapping Type A performance – 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA	± 0.9 dB for test 1-12 Downlink EVM ≤ 2.5% for f ≤ 4.2 GHz Downlink EVM ≤ [2.5%] for f > 4.2 GHz	<p>For test point 1-12, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2) = 0.9 \text{ dB}$</p> <p>2.5% EVM is equivalent to a Test system downlink SNR of 32.04dB.</p> <p>The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is not limited by the Test system EVM.</p>
5.2.2.2.1_4 2Rx TDD FR1 PDSCH Mapping Type A performance – 2x2 MIMO with enhanced DMRS for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1

5.2.2.2.2_1 2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.3_1 2Rx TDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.4_1 2Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.5_1 2Rx TDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.5_1	Same as 5.2.2.1.5_1
5.2.2.2.6_1 2Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.6_1	Same as 5.2.2.1.6_1
5.2.2.2.7_1 2Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.8_1 2Rx TDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.9_1 2Rx TDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.9_1	Same as 5.2.2.1.9_1
5.2.2.2.10_1 2Rx TDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.10_1	Same as 5.2.2.1.10_1
5.2.2.2.11_1 2Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.12_1 2Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.13_1 2Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.2.2.14_1 2Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.2.1.6_1	Same as 5.2.2.1.6_1
5.2.2.2.15_1 2Rx TDD FR1 PDSCH mapping Type A performance on band with shared spectrum access – 2x2 MIMO for both NSA and SA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1

<p>5.2.2.2.16_1 2Rx TDD FR1 for PDSCH with inter-cell interference – 2x2 MIMO for both NSA and SA</p>	<p>Es/Noc ± 0.8 dB for interfering cells</p>	<p>Overall system uncertainty for fading conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty² + Fading profile power uncertainty²) Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for Tx Diversity</p>
<p>5.2.2.2.17_1 2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE</p>
<p>5.2.2.2.17_2 2Rx TDD FR1 for PDSCH with Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA</p>	<p>Same as 5.2.2.1.1_1</p>	<p>Same as 5.2.2.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE</p>
<p>5.2.2.2.18 2Rx TDD FR1 PDSCH performance for RedCap</p>	<p>± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.2.2.19_1 2Rx TDD FR1 PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x2 MIMO for both NSA and SA</p>	<p>Same as 5.2.2.2.16_1</p>	<p>Same as 5.2.2.2.16_1</p>
<p>5.2.2.2.20_1 2Rx TDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x2 MIMO for both NSA and SA</p>	<p>Same as 5.2.2.2.16_1</p>	<p>Same as 5.2.2.2.16_1</p>
<p>5.2.2.2.21 2Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA</p>	<p>Same as 5.2.2.1.9_1</p>	<p>Same as 5.2.2.1.9_1</p>
<p>5.2.2.2.22 2Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA</p>	<p>Same as 5.2.2.1.9_1</p>	<p>Same as 5.2.2.1.9_1</p>
<p>5.2.2.2.23 2Rx TDD FR1 PDSCH ATG performance</p>	<p>Same as 5.2.2.1.22</p>	<p>Same as 5.2.2.1.22</p>
<p>5.2.2.2.24 2Rx TDD FR1 PDSCH performance for eRedCap</p>	<p>± 0.9 dB for > 10Hz doppler ± 1 dB for 10Hz doppler</p>	<p>Same as 5.2.2.1.1_1</p>
<p>5.2.3.1.1_1 4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA</p>	<p>± 0.9 dB for > 10Hz doppler ± 1.0 dB for 10Hz doppler</p>	<p>Overall system uncertainty for fading conditions comprises four quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty² + Fading profile power uncertainty² + (0.25 x AWGN flatness and signal flatness)² + SNR uncertainty due to finite test time²) Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for 2Tx AWGN flatness and signal flatness ±2.0 dB SNR uncertainty due to finite test time ±0.3 dB for 10Hz Doppler, otherwise ±0.0 dB</p>

5.2.3.1.1_2 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.1_4 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.1_5 4Rx FDD FR1 PDSCH Mapping Type A performance – 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA	± 0.9 dB for test 1-8 Downlink EVM ≤ 2.5% for f ≤ 4.2 GHz Downlink EVM ≤ [2.5%] for f > 4.2 GHz	For test point 1-8, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2) = 0.9$ dB 2.5% EVM is equivalent to a Test system downlink SNR of 32.04dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is not limited by the Test system EVM.
5.2.3.1.1_6 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.2_1 4Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 4x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.3_1 4Rx FDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.4_1 4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.5_1 4Rx FDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.5_1	Same as 5.2.2.1.5_1
5.2.3.1.6_1 4Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.6_1	Same as 5.2.2.1.6_1
5.2.3.1.7_1 4Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.8_1 4Rx FDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.9_1 4Rx FDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.9_1	Same as 5.2.2.1.9_1
5.2.3.1.10_1 4Rx FDD FR1 HST-DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.10_1	Same as 5.2.2.1.10_1
5.2.3.1.11_1 4Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1

5.2.3.1.12_1 4Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.13_1 4Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.1.14_1 4Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.1.6_1	Same as 5.2.3.1.6_1
5.2.3.1.15_1 4Rx FDD FR1 PDSCH with inter-cell interference – 2x4 MIMO for both SA and NSA	Es/Noc \pm 0.8 dB for interfering cells	Overall system uncertainty for fading conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ²) Signal-to-noise ratio uncertainty \pm 0.3 dB Fading profile power uncertainty \pm 0.7 dB for Tx Diversity
5.2.3.1.16_1 4Rx FDD FR1 PDSCH with intra-cell inter-user interference for baseline MMSE-IRC receiver – 2x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.1.16_2 4Rx FDD FR1 PDSCH with intra-cell inter-user interference for baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.1.16_3 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.1.16_4 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.1.17_1 4Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x4 MIMO for both NSA and SA	Same as 5.2.3.1.15_1	Same as 5.2.3.1.15_1
5.2.3.1.18_1 4Rx FDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x4 MIMO for both NSA and SA	Same as 5.2.3.1.15_1	Same as 5.2.3.1.15_1
5.2.3.1.19 4Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.1.9_1	Same as 5.2.3.1.9_1
5.2.3.1.20 4Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.1.9_1	Same as 5.2.3.1.9_1

5.2.3.1.21 4Rx FDD FR1 PDSCH ATG performance	± 0.6 dB	<p>Overall system uncertainty for fading conditions comprises three quantities:</p> <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness 3. SNR uncertainty due to finite test time <p>Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Signal-to-noise ratio uncertainty ± 0.3 dB AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time ± 0.0 dB for >10Hz Doppler.</p> <p>For test point 1-1, 1-2 and 1-3, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2 + \text{SNR uncertainty due to finite test time}^2) = 0.6$ dB</p>
5.2.3.2.1_1 4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.1_2 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.1_4 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.1_5 4Rx TDD FR1 PDSCH Mapping Type A performance – 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA	± 0.9 dB for test 1-12 Downlink EVM $\leq 2.5\%$ for $f \leq 4.2$ GHz Downlink EVM $\leq [2.5\%]$ for $f > 4.2$ GHz	<p>For test point 1-12, Test System uncertainty = $\text{SQRT}(\text{Signal-to-noise ratio uncertainty}^2 + \text{Fading profile power uncertainty}^2 + (0.25 \times \text{AWGN flatness and signal flatness})^2) = 0.9$ dB</p> <p>2.5% EVM is equivalent to a Test system downlink SNR of 32.04dB.</p> <p>The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is not limited by the Test system EVM.</p>
5.2.3.2.1_6 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.2_1 4Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.3_1 4Rx TDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.4_1 4Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1

5.2.3.2.5_1 4Rx TDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.5_1	Same as 5.2.2.1.5_1
5.2.3.2.6_1 4Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.2.1.6_1	Same as 5.2.2.1.6_1
5.2.3.2.7_1 4Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.9_1 4Rx TDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.9_1	Same as 5.2.3.1.9_1
5.2.3.2.10_1 4Rx TDD FR1 HST DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA	Same as 5.2.3.1.10_1	5.2.3.1.10_1
5.2.3.2.11_1 4Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.12_1 4Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.13_1 4Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.14_1 4Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA	Same as 5.2.3.1.6_1	Same as 5.2.3.1.6_1
5.2.3.2.15_1 4Rx TDD FR1 PDSCH mapping Type A performance on band with shared spectrum access – 2x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.3.2.16_1 4Rx TDD FR1 for PDSCH with inter-cell interference – 2x4 MIMO for both NSA and SA	Es/Noc \pm 0.8 dB for interfering cells	Overall system uncertainty for fading conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ²) Signal-to-noise ratio uncertainty \pm 0.3 dB Fading profile power uncertainty \pm 0.7 dB for Tx Diversity
5.2.3.2.17_1 2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.2.17_2 4Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.2.17_3 4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE

5.2.3.2.17_4 4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1 There is no additional measurement uncertainty introduced due to the co-scheduled UE
5.2.3.2.18_1 4Rx TDD FR1 PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x4 MIMO for both NSA and SA	Same as 5.2.3.2.16_1	Same as 5.2.3.2.16_1
5.2.3.2.19_1 4Rx TDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x4 MIMO for both NSA and SA	Same as 5.2.3.2.16_1	Same as 5.2.3.2.16_1
5.2.3.2.20 4Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.2.9_1	Same as 5.2.3.2.9_1
5.2.3.2.21 4Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA	Same as 5.2.3.2.9_1	Same as 5.2.3.2.9_1
5.2.3.2.22 4Rx TDD FR1 PDSCH ATG performance	Same as 5.2.3.1.21	Same as 5.2.3.1.21
5.2.4.2.1_3 8Rx TDD FR1 PDSCH mapping Type A performance - 2x8 MIMO with simplified receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.4.2.1_4 8Rx TDD FR1 PDSCH mapping Type A performance - 4x8 MIMO with simplified receiver for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.A.2.1.1 2Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.A.2.1.2 2Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.A.2.1.3 2Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.A.2.1.4 2Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.A.2.1.5 2Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.A.2.2.1 2Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)	± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz ± 1.5 dB, 4.2 GHz $< f \leq 6$ GHz Downlink EVM $\leq 6\%$	6% EVM is equivalent to a Test system downlink SNR of 24.4dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
5.2.A.2.3 2Rx TDD FR1 PDSCH mapping Type A performance of Scell on band with shared spectrum access	Same as 5.2.2.1.1_1	Same as 5.2.2.1.1_1
5.2.A.2.4.1 2Rx PDSCH Demodulation Performance for HST-SFN CA	Same as 5.2.2.1.9_1	Same as 5.2.2.1.9_1
5.2.A.2.5.1 2Rx PDSCH Demodulation Performance for HST-DPS CA	Same as 5.2.2.1.10_1	Same as 5.2.2.1.10_1
5.2.A.3.1.1 4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2.A.3.1.2 4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1

5.2A.3.1.3 4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2A.3.1.4 4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2A.3.1.5 4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2A.3.2.1 4Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2A.3.3 4Rx TDD FR1 PDSCH mapping Type A performance of Scell on band with shared spectrum access	Same as 5.2.3.1.1_1	Same as 5.2.3.1.1_1
5.2A.3.4.1 4Rx PDSCH Demodulation Performance for HST-SFN CA	Same as 5.2.2.1.9_1	Same as 5.2.2.1.9_1
5.2A.3.5.1 4Rx PDSCH Demodulation Performance for HST-DPS CA	Same as 5.2.2.1.10_1	Same as 5.2.2.1.10_1
5.2A.3A.1.1 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC
5.2A.3A.1.2 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC
5.2A.3A.1.3 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC
5.2A.3A.1.4 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC
5.2A.3A.1.5 2Rx-4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC	Same as 5.2.2.1.1_1 for 2Rx CC and 5.2.3.1.1_1 for 4Rx CC
5.3.1.1.1 1Rx FDD FR1 PDCCH performance for RedCap	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.1.2.1 1Rx TDD FR1 PDCCH performance for RedCap	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.2.1.1 2Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	± 0.9 dB	<p>Overall system uncertainty for fading conditions comprises four quantities:</p> <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time <p>Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty² + Fading profile power uncertainty² + (0.25 x AWGN flatness and signal flatness)² + SNR uncertainty due to finite test time²)</p> <p>Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB for 1Tx AWGN flatness and signal flatness ±2.0 dB SNR uncertainty due to finite test time ±0.4 dB</p>

5.3.2.1.2 2Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	± 1.0 dB	<p>Overall system uncertainty for fading conditions comprises four quantities:</p> <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time <p>Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty² + Fading profile power uncertainty² + (0.25 x AWGN flatness and signal flatness)² + SNR uncertainty due to finite test time²)</p> <p>Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.7 dB for 2 Tx AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time ± 0.4 dB</p>
5.3.2.1.3 2Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.2.1.4 2Rx FDD FR1 PDCCH performance for RedCap	± 0.9 dB for Test 1 ± 1.0 dB for Test 2	<p>Same as 5.2.3.1.1_1</p> <p>For Test 1, Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.5 dB for 1 Tx AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time ± 0.4 dB</p> <p>For Test 2, Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.7 dB for 2 Tx AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time ± 0.4 dB</p>
5.3.2.1.5 2RX FDD Minimum requirements for PDCCH with intra-slot repetition	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.2.1.7 2RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.2.2.1 2Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.2.2.2 2Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.2.2.3 2Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving	Same as 5.3.2.1.1	Same as 5.3.2.1.1

5.3.2.2.4 2Rx TDD FR1 PDCCH performance for RedCap	± 0.8 dB for Test 1 ± 0.9 dB for Test 2	Same as 5.2.3.1.1_1 For Test 1, Signal-to-noise ratio uncertainty 0.3 dB Fading profile power uncertainty ± 0.5 dB for 1 Tx AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time 0 dB For Test 2, Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.7 dB for 2 Tx AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time 0 dB
5.3.2.2.5 2RX TDD Minimum requirements for PDCCH with intra-slot repetition	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.3.1.1 4Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.3.1.2 4Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.3.1.3 4Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.3.1.4 4RX FDD Minimum requirements for PDCCH with intra-slot repetition	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.3.1.6 4RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.3.2.1 4Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.3.2.2 4Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.3.3.2.3 4Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving	Same as 5.3.2.1.1	Same as 5.3.2.1.1
5.3.3.2.4 4RX TDD Minimum requirements for PDCCH with intra-slot repetition	Same as 5.3.2.1.2	Same as 5.3.2.1.2
5.5A.1.1 FR1 SDR performance for CA (2DL CA)	Same as 5.5.1	Same as 5.5.1
5.5A.1.2 FR1 SDR performance for CA (3DL CA)	Same as 5.5.1	Same as 5.5.1
5.5A.1.3 FR1 SDR performance for CA (4DL CA)	Same as 5.5.1	Same as 5.5.1
5.5A.1.4 FR1 SDR performance for CA (5DL CA)	Same as 5.5.1	Same as 5.5.1
5.5.1 FR1 Sustained downlink data rate performance for single carrier	± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz ± 1.5 dB, 4.2 GHz $< f \leq 6$ GHz Downlink EVM $\leq 3\%$	3% EVM is equivalent to a Test system downlink SNR of 30.5dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
5.5.1_1 FR1 Sustained downlink data rate performance for single carrier for 8Rx	Same as 5.5.1	Same as 5.5.1

5.5.2 FR1 Sustained downlink data rate performance for single carrier with DL1024QAM	± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz ± 1.5 dB, 4.2 GHz $< f \leq 6$ GHz Downlink EVM $\leq 2.5\%$	2.5% EVM is equivalent to a Test system downlink SNR of 32.04dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
5.5.3 FR1 Sustained downlink data rate performance for RedCap	± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz ± 1.5 dB, 4.2 GHz $< f \leq 6$ GHz Downlink EVM $\leq 3\%$	3% EVM is equivalent to a Test system downlink SNR of 30.5dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
5.5.4 FR1 Sustained downlink data rate performance for eRedCap	± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz ± 1.5 dB, 4.2 GHz $< f \leq 6$ GHz Downlink EVM $\leq 3\%$	3% EVM is equivalent to a Test system downlink SNR of 30.5dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
5.6.2.1.1_1 2Rx FDD FR1 PDSCH performance with link adaptation – 2x2 MIMO for both SA and NSA	± 1 dB	Overall system uncertainty for fading conditions comprises four quantities: <ol style="list-style-type: none"> 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ² + (0.25 x AWGN flatness and signal flatness) ²) + SNR uncertainty due to finite test time ² Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.7 dB for 2Tx AWGN flatness and signal flatness ± 2.0 dB SNR uncertainty due to finite test time ± 0.3 dB for 10Hz Doppler, otherwise ± 0.0 dB
5.6.2.2.1_1 2Rx TDD FR1 PDSCH performance with link adaptation – 2x2 MIMO for both SA and NSA	Same as 5.6.2.1.1_1	Same as 5.6.2.1.1_1
5.6.3.1.1_1 4Rx FDD FR1 PDSCH performance with link adaptation – 2x4 MIMO for both SA and NSA	Same as 5.6.2.1.1_1	Same as 5.6.2.1.1_1
5.6.3.2.1_1 4Rx TDD FR1 PDSCH performance with link adaptation – 2x4 MIMO for both SA and NSA	Same as 5.6.2.1.1_1	Same as 5.6.2.1.1_1
9.4B.1.1 Sustained downlink data rate performance for EN-DC within FR1	E-UTRA CC: ± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz NR CC: Same as 5.5.1	Same as 5.5.1

9.4B.1.1A Sustained downlink data rate performance for EN-DC within FR1 with DI 1024QAM	E-UTRA CC: ± 0.7 dB, $f \leq 3.0$ GHz ± 1.0 dB, 3.0 GHz $< f \leq 4.2$ GHz NR CC: Same as 9.4B.1.1	2.5% EVM is equivalent to a Test system downlink SNR of 32.04dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
9.4B.1.1_1 Sustained downlink data rate performance for EN-DC within FR1 (2 NR CCs)	Same as 9.4B.1.1	Same as 9.4B.1.1
9.4B.1.1_2 Sustained downlink data rate performance for EN-DC within FR1 (3 NR CCs)	Same as 9.4B.1.1	Same as 9.4B.1.1
9.4B.1.1_3 Sustained downlink data rate performance for EN-DC within FR1 (3 NR CCs)	Same as 9.4B.1.1	Same as 9.4B.1.1
11.1.2.1.1_1 2Rx FR1 PSSCH performance - single active PSSCH link	± 0.8 dB	Overall system uncertainty for fading conditions comprises three quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness Items 1, 2 and 3 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty 2 + Fading profile power uncertainty 2 + (0.25 x AWGN flatness and signal flatness) 2) Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.5 dB for single Tx AWGN flatness and signal flatness ± 2.0 dB
11.1.3.1.1_1 2Rx FR1 PSCCH performance - single active PSSCH link	Same as 11.1.2.1.1_1	Same as 11.1.2.1.1_1
11.1.5.1.1_1 2Rx FR1 PSCCH performance - single active PSSCH link	Same as 11.1.2.1.1_1	Same as 11.1.2.1.1_1
11.1.6.1.1_1 2Rx FR1 Power imbalance performance - two active PSSCH link	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1, and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty 2 + (0.25 x AWGN flatness and signal flatness) 2) Signal-to-noise ratio uncertainty ± 0.3 dB AWGN flatness and signal flatness ± 2.0 dB
11.1.7.1.1_1 2Rx FR1 HARQ buffer soft combining performance - maximum number of HARQ processes	Same as 11.1.2.1.1_1	Same as 11.1.2.1.1_1

11.1.8.1.1_1 2Rx FR1 PSCCH decoding capability - maximum number of received PSCCHs	Downlink absolute power uncertainty, averaged over BW _{config} ±1.0 dB Downlink EVM ≤ 3%	3% EVM is equivalent to a Test system downlink SNR of 30.5dB. The noise from the Test system is then sufficiently below that required for the UE to demodulate the signal with the required % success rate. Under these conditions the UE throughput is limited by the Reference measurement channel and the UE capability, and not by the Test system EVM.
11.1.9.1.1_1 2Rx FR1 PSFCH decoding capability - maximum number of received PSFCHs	Same as 11.1.8.1.1_1	Same as 11.1.8.1.1_1

F.1.1.3 Measurement of Channel State Information reporting

This clause defines the maximum test system uncertainty for channel state information reporting requirements. The maximum test system uncertainty allowed for the measurement uncertainty contributors are defined in Table F.1.1.3-1.

Table F.1.1.3-1: Maximum measurement uncertainty values for the test system for FR1 (up to 7.125 GHz) and Channel BW ≤ 40 MHz

MU contributor	Unit	Value	Comment
AWGN flatness and signal flatness, max deviation for any Resource Block, relative to average over BW _{config}	dB	Same as in table F.1.1.2-1	
Signal to noise ratio uncertainty	dB	Same as in table F.1.1.2-1	
Signal to noise ratio variation	dB	Same as in table F.1.1.2-1	
Fading profile power uncertainty for 1Tx	dB	Same as in table F.1.1.2-1	
Fading profile power uncertainty for 2Tx	dB	Same as in table F.1.1.2-1	
Fading profile power uncertainty for 4Tx	dB	Same as in table F.1.1.2-1	

The maximum test system uncertainty for test cases defined in section 6 is defined in Table F.1.1.3-2.

Table F.1.1.3-2: Maximum test system uncertainty for FR1 channel state information reporting test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
6.2.1.1.1.1 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.1.1.1.2 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.1.1.2.1 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.1.1.2.2 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.1.2.1.1 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	Same as 6.2.2.2.1.1	Same as 6.2.2.2.1.1
6.2.1.2.1.2 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	Same as 6.2.2.2.1.1	Same as 6.2.2.2.1.1
6.2.1.2.2.1 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	Same as 6.2.1.1.2.1	Same as 6.2.1.1.2.1

6.2.1.2.2.2 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	Same as 6.2.1.1.2.1	Same as 6.2.1.1.2.1
6.2.2.1.1.1 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	+/- 0.3 dB	Overall system uncertainty for AWGN conditions comprises: Signal-to-noise ratio uncertainty ± 0.3 dB <i>AWGN flatness and signal flatness ± 2.0 dB not expected to have any significant effect</i>
6.2.2.1.1.2 2Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.1.1.3 2Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.1.1.4 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.1.1.5 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.1.2.1 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	+/- 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty ± 0.3 dB 2. Fading profile power uncertainty for 2Tx ± 0.7 dB Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ²) <i>AWGN flatness and signal flatness ± 2.0 dB not expected to have any significant effect</i>
6.2.2.1.2.2 2Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.2.1.2.3 2Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	$\hat{E}_{S1}/N_{oc} \pm 0.8$ dB $\hat{E}_{S2}/N_{oc} \pm 0.3$ dB	Overall system uncertainty for fading conditions on Cell 1 comprises two quantities: 1. Signal-to-noise ratio uncertainty ± 0.3 dB 2. Fading profile power uncertainty ± 0.7 dB for 2Tx Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ²) <i>AWGN flatness and signal flatness ± 2.0 dB not expected to have any significant effect</i>
6.2.2.1.2.4 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.2.1.2.5 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.2.2.1.1 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1

6.2.2.2.1.2 2Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.2.1.3 2Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.2.1.4 2Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.2.1.5 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.2.1.6 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.2.2.2.1 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.2.2.2.2 2Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.2.2.2.3 2Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	Same as 6.2.2.1.2.3	Same as 6.2.2.1.2.3
6.2.2.2.2.4 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.3.1.1.1 4Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.3.1.1.2 4Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.3.1.1.3 4Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.3.1.2.1 4Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.3.1.2.2 4Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.3.1.2.3 4Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	Same as 6.2.2.1.2.3	Same as 6.2.2.1.2.3
6.2.3.2.1.1 4Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.3.2.1.2 4Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.3.2.1.4 4Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2.3.2.1.3 4Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1

6.2.3.2.2.1 4Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.3.2.2.2 4Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.2.3.2.2.3 4Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	Same as 6.2.2.1.2.3	Same as 6.2.2.1.2.3
6.2.4.2.1.1 8Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	Same as 6.2.2.1.1.1	Same as 6.2.2.1.1.1
6.2A.3.1.1 CQI reporting accuracy under AWGN conditions for CA (2DL CA)	Same as 6.2.2.1.1.1 for each CC	Same as 6.2.2.1.1.1
6.2A.3.1.2 CQI reporting accuracy under AWGN conditions for CA (3DL CA)	Same as 6.2.2.1.1.1 for each CC	Same as 6.2.2.1.1.1
6.2A.3.1.3 CQI reporting accuracy under AWGN conditions for CA (4DL CA)	Same as 6.2.2.1.1.1 for each CC	Same as 6.2.2.1.1.1
6.2A.3.1.4 CQI reporting accuracy under AWGN conditions for CA (5DL CA)	Same as 6.2.2.1.1.1 for each CC	Same as 6.2.2.1.1.1
6.2A.3.1.5 CQI reporting accuracy under AWGN conditions for CA (6DL CA)	Same as 6.2.2.1.1.1 for each CC	Same as 6.2.2.1.1.1
6.3.1.1.1 1Rx FDD Single PMI with 4TX TypeI-SinglePanel Codebook for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.1.1.2 1Rx FDD Single PMI with 4TX TypeI-SinglePanel Codebook for eRedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.1.2.1 1Rx TDD Single PMI with 4TX TypeI-SinglePanel Codebook for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.1.2.2 1Rx TDD Single PMI with 4TX TypeI-SinglePanel Codebook for eRedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.1 2Rx FDD FR1 Single PMI with 4Tx Type I- SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.1_1 2Rx FDD FR1 Single PMI with 4Tx TypeI-SinglePanel codebook for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.2 2Rx FDD FR1 Single PMI with 8Tx Type I – SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.3 2Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.4 2Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.5 2Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.6 2Rx FDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.7 2Rx FDD FR1 Single PMI with 8TX TypeI-SinglePanel codebook for Single-DCI based transmission scheme for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1

6.3.2.1.8 2Rx FDD FR1 Multiple PMI with 16TX Enhanced Type II codebook for predicted PMI for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.9 2Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.1.10 2Rx FDD Single PMI with 4TX Typel-SinglePanel Codebook for eRedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.1 2Rx TDD FR1 Single PMI with 4Tx Typel – SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.2 2Rx TDD FR1 Single PMI with 8Tx Typel – SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.3 2Rx TDD FR1 Single PMI with 16Tx Type1 – SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.4 2Rx TDD FR1 Single PMI with 32Tx Type1 – SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.5 2Rx TDD FR1 Multiple PMI with 16Tx Typell codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.6 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Typell codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.7 2Rx TDD Single PMI with 4TX Typel-SinglePanel Codebook for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.8 2Rx TDD FR1 Single PMI with 8TX Typel-SinglePanel Codebook for Single-DCI based transmission scheme for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.9 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.2.2.10 2Rx TDD Single PMI with 4TX Typel-SinglePanel Codebook for eRedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.1 Single PMI with 4TX Typel-SinglePanel Codebook– SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.2 Single PMI with 8TX Typel-SinglePanel Codebook– SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.3 4Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.4 4Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.5 4Rx FDD FR1 Multiple PMI with 16Tx Typell codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.6 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced Typell codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.7 Single PMI with 8 ports Typel-SinglePanel Codebook for Single-DCI based transmission scheme	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1

6.3.3.1.8 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.1.9	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.1 4Rx TDD FR1 Single PMI with 4Tx Type1 - SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.2 4Rx TDD FR1 Single PMI with 8Tx Type1 - SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.3 4Rx TDD FR1 Single PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.4 4Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.5 4Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.6 4Rx TDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.3.3.2.7 Single PMI with 8 ports TypeI-SinglePanel Codebook for Single-DCI based transmission scheme	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.4.2.1_1 2Rx FDD FR1 RI reporting for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.4.2.1.1 2Rx FDD FR1 RI reporting for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.4.2.2_1 2Rx TDD FR1 RI reporting for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.4.2.2.1 2Rx TDD FR1 RI reporting for RedCap	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.4.3.1_1 4Rx FDD FR1 RI reporting for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1
6.4.3.2_1 4Rx TDD FR1 RI reporting for both SA and NSA	Same as 6.2.2.1.2.1	Same as 6.2.2.1.2.1

F.1.2 Interpretation of measurement results (normative)

The measurement results returned by the Test System are compared – without any modification – against the Test Requirements as defined by the shared risk principle.

The Shared Risk principle is defined in ETR 273-1-2 clause 6.5.

The actual measurement uncertainty of the Test System for the measurement of each parameter shall be included in the test report.

The recorded value for the Test System uncertainty shall be, for each measurement, equal to or lower than the appropriate figure in clause F.1 of the present document.

If the Test System for a test is known to have a measurement uncertainty greater than that specified in clause F.1, it is still permitted to use this apparatus provided that an adjustment is made value as follows:

Any additional uncertainty in the Test System over and above that specified in clause F.1 shall be used to tighten the Test Requirement, making the test harder to pass. For some tests, for example receiver tests, this may require modification of stimulus signals. This procedure will ensure that a Test System not compliant with clause F.1 does not increase the chance of passing a device under test where that device would otherwise have failed the test if a Test System compliant with clause F.1 had been used.

F.1.3 Test Tolerance and Derivation of Test Requirements (informative)

The Test Requirements in the present document have been calculated by relaxing the Minimum Requirements of the core specification using the Test Tolerances defined in this clause. When the Test Tolerance is zero, the Test Requirement will be the same as the Minimum Requirement. When the Test Tolerance is non-zero, the Test Requirements will differ from the Minimum Requirements, and the formula used for the relaxation is given in this clause.

The Test Tolerances are derived from Test System uncertainties, regulatory requirements and criticality to system performance. As a result, the Test Tolerances may sometimes be set to zero.

The test tolerances should not be modified for any reason e.g. to take account of commonly known test system errors (such as mismatch, cable loss, etc.).

The downlink Test Tolerances apply at each receiver antenna connector.

F.1.3.1 Measurement of test environments

The UE test environments are set to the values defined in TS 36.508 subclause 4.1, without any relaxation. The applied Test Tolerance is therefore zero.

F.1.3.2 Measurement of Demod Performance requirements

The derivation of the test requirements for the test cases in section 5 is defined in Table F.1.3.2-1.

Table F.1.3.2-1: Derivation of Test Requirements (FR1 demodulation performance tests)

Test	Minimum Requirement in TS 38.101-4	Test Tolerance (TT)	Test Requirement in TS 38.521-4
5.2.1.1.1 1 Rx FDD FR1 PDSCH performance for RedCap	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.1.1.2 1 Rx FDD FR1 PDSCH performance for eRedCap	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.1.2.1 1Rx TDD FR1 PDSCH performance for RedCap	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.1.2.2 1Rx TDD FR1 PDSCH performance for eRedCap	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.1_1 2Rx FDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler 0.6 dB for test 1-6 0.9 dB for test 1-7	Formula: SNR + TT T-put limit unchanged
5.2.2.1.1_2 2Rx FDD FR1 PDSCH Mapping Type A performance - 2x2 MIMO with enhanced receiver type X for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.1_3 2Rx FDD FR1 PDSCH Mapping Type A performance - 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged

5.2.2.1.1_4 2Rx FDD FR1 PDSCH mapping Type A performance – 2x2 MIMO with enhanced DMRS for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.1.2_1 2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.3_1 2Rx FDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.4_1 2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.5_1 2Rx FDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 + 0.5 = 1.1 dB	Additional relaxation of 0.5 dB added to the SNR to ensure early pass for a compliant device within a reasonable test duration Formula: SNR + TT + additional relaxation T-put limit unchanged
5.2.2.1.6_1 2Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT
5.2.2.1.7 2Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.8_1 2Rx FDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.9_1 2Rx FDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.1.10_1 2Rx FDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.1.11_1 2Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.12_1 2Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.13_1 2Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.14_1 2Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	[0.7]	Formula: SNR + TT T-put limit unchanged
5.2.2.1.15_1 2Rx FDD FR1 PDSCH with inter-cell interference – 2x2 MIMO for both SA and NSA	SNRs as specified	1.7 dB for Test 1-1 1.8 dB for Test 1-2	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.2.1.16_1 2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler	Formula: SNR + TT T-put limit unchanged

5.2.2.1.16_2 2Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.17 2Rx FDD FR1 PDSCH performance for RedCap	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.1.18_1 2Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x2 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Test 1-1	Formula: SNR + TT T-put limit unchanged Cell 1 INR: 11.25 dB, Cell 2 INR: 5.4 dB The analysis is recorded in 3GPP TR 38.903 [26]
5.2.2.1.19_1 2Rx FDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x2 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Tests 1-1 and 2-1	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.2.1.20 2Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.1.21 2Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.1.22 2Rx FDD FR1 PDSCH ATG performance	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.1.23 2Rx FDD FR1 PDSCH performance for eRedCap	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.1_1 2Rx TDD FR1 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler 0.9 dB for test 1-10 0.6 dB for test 1-11	Formula: SNR + TT T-put limit unchanged
5.2.2.2.1_2 2Rx TDD FR1 PDSCH Mapping Type A performance - 2x2 MIMO with enhanced receiver type X for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.1_3 2Rx TDD FR1 PDSCH Mapping Type A performance - 2x2 MIMO with baseline receiver for DL1024QAM for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.1_4 2Rx TDD FR1 PDSCH Mapping Type A performance – 2x2 MIMO with enhanced DMRS for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.2_1 2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.3_1 2Rx TDD FR1 PDSCH mapping Type B performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.4_1 2Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged

5.2.2.2.5_1 2Rx FDD FR1 PDSCH 0.001% BLER performance - 1x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 + 0.5 = 1.1 dB	Additional relaxation of 0.5 dB added to the SNR to ensure early pass for a compliant device within a reasonable test duration Formula: SNR + TT + additional relaxation T-put limit unchanged
5.2.2.2.6_1 2Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT
5.2.2.2.7_1 2Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.8_1 2Rx TDD FR1 PDSCH pre-emption performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.9_1 2Rx TDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.10_1 2Rx TDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.11_1 2Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.12_1 2Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.13_1 2Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.14_1 2Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	[0.7dB]	Formula: SNR + TT T-put limit unchanged
5.2.2.2.16_1 2Rx TDD FR1 for PDSCH with inter-cell interference – 2x2 MIMO for both NSA and SA	SNRs as specified	1.7 dB for Test 1-1 1.8 dB for Test 1-2	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.2.2.17_1 2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.17_2 2Rx TDD FR1 for PDSCH with Enhanced Receiver Type 2 – 2x2 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.15_1 2Rx TDD FR1 PDSCH mapping Type A performance on band with shared spectrum access – 2x2 MIMO for both NSA and SA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.18 2Rx TDD FR1 PDSCH performance for RedCap	SNRs as specified	0.9 dB for > 10Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.2.2.19_1 2Rx TDD FR1 PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x2 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Test 1-1	Formula: SNR + TT T-put limit unchanged Cell 1 INR: 11.25 dB, Cell 2 INR: 5.4 dB The analysis is recorded in 3GPP TR 38.903 [26]

5.2.2.2.20_1 2Rx TDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x2 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Tests 1-1, 1-2, 2-1, 2-2	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.2.2.21 2Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x2 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.22 2Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x2 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.23 2Rx TDD FR1 PDSCH ATG performance	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.2.2.24 2Rx TDD FR1 PDSCH performance for eRedCap	SNRs as specified	0.9 dB for > 10Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.1_1 4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.1_2 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.1_4 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced receiver type 1 for both SA and NSA	SNRs as specified	0.9 dB for > 10Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.1_5 4Rx FDD FR1 PDSCH Mapping Type A performance - 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.1_6 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.2_1 4Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 4x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.3_1 4Rx FDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.4_1 4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.5_1 4Rx FDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 + 0.5 = 1.1 dB	Additional relaxation of 0.5 dB added to the SNR to ensure early pass for a compliant device within a reasonable test duration Formula: SNR + TT + additional relaxation T-put limit unchanged
5.2.3.1.6_1 4Rx FDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9dB	Formula: SNR + TT
5.2.3.1.7_1 4Rx FDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged

5.2.3.1.8_1 4Rx FDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.9_1 4Rx FDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.10_1 4Rx FDD FR1 HST-DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.11_1 4Rx FDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x4 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.12_1 4Rx FDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x4 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.13_1 4Rx FDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x4 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.15_1 4Rx FDD FR1 PDSCH with inter-cell interference – 2x4 MIMO for both SA and NSA	SNRs as specified	1.7 dB for Test 1-1 1.8 dB for Test 1-2	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.3.1.16_1 4Rx FDD FR1 PDSCH intra-cell inter-user interference for baseline MMSE-IRC receiver – 2x4 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.16_2 4Rx FDD FR1 PDSCH intra-cell inter-user interference for baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.16_3 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.16_4 4Rx FDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.1.17_1 4Rx FDD FR1 for PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 2x4 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Test 1-1	Formula: SNR + TT T-put limit unchanged Cell 1 INR: 11.25 dB, Cell 2 INR: 5.4 dB The analysis is recorded in 3GPP TR 38.903 [26]
5.2.3.1.18_1 4Rx FDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x4 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Tests 1-1 and 2-1	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.3.1.19 4Rx FDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.20 4Rx FDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.21 4Rx FDD FR1 PDSCH ATG performance	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.1.14_1 4Rx FDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x4 MIMO for both SA and NSA	SNRs as specified	[0.7dB]	Formula: SNR + TT T-put limit unchanged

5.2.3.2.1_5 4Rx TDD FR1 PDSCH Mapping Type A performance – 2x4 MIMO with baseline receiver for DL1024QAM for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.1_6 4Rx TDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with enhanced DMRS for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.2_1 4Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.3_1 4Rx TDD FR1 PDSCH mapping Type B performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.4_1 4Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.5_1 4Rx TDD FR1 PDSCH 0.001% BLER performance - 1x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 + 0.5 = 1.1 dB	Additional relaxation of 0.5 dB added to the SNR to ensure early pass for a compliant device within a reasonable test duration Formula: SNR + TT + additional relaxation T-put limit unchanged
5.2.3.2.6_1 4Rx TDD FR1 PDSCH repetitions over multiple slots performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.9dB	Formula: SNR + TT
5.2.3.2.7_1 4Rx TDD FR1 PDSCH Mapping Type B and UE processing capability 2 performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.8_1 4Rx TDD FR1 PDSCH pre-emption performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.9_1 4Rx TDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.10_1 4Rx TDD FR1 HST DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.11_1 4Rx TDD FR1 PDSCH Single-DCI based SDM scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.12_1 4Rx TDD FR1 PDSCH Multiple-DCI based transmission scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.13_1 4Rx TDD FR1 PDSCH Single-DCI based FDM scheme A performance - 2x2 MIMO for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.14_1 4Rx TDD FR1 PDSCH Single-DCI based Inter-slot TDM scheme performance - 2x2 MIMO for both SA and NSA	SNRs as specified	[0.7dB]	Formula: SNR + TT T-put limit unchanged
5.2.3.2.16_1 4Rx TDD FR1 for PDSCH with inter-cell interference – 2x4 MIMO for both NSA and SA	SNRs as specified	1.7 dB for Test 1-1 1.8 dB for Test 1-2	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]

5.2.3.2.17_1 2Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 2x2 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.17_2 4Rx TDD FR1 for PDSCH with baseline MMSE-IRC receiver – 4x4 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler 1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.17_3 4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 2x4 MIMO for both NSA and SA	SNRs as specified	0.9 dB for > 10 Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.17_4 4Rx TDD FR1 for PDSCH with intra cell inter user interference performance for Enhanced Receiver Type 2 – 4x4 MIMO for both NSA and SA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.18_1 4Rx TDD FR1 PDSCH CRS interference mitigation under NR-LTE coexistence scenario – 4x4 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Test 1-1	Formula: SNR + TT T-put limit unchanged Cell 1 INR: 11.25 dB, Cell 2 INR: 5.4 dB The analysis is recorded in 3GPP TR 38.903 [26]
5.2.3.2.15_1 4Rx TDD FR1 PDSCH mapping Type A performance on band with shared spectrum access – 2x4 MIMO for both NSA and SA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2.3.2.19_1 4Rx TDD FR1 for PDSCH with inter-cell CRS interference scenario – 4x4 MIMO for both NSA and SA	SNRs as specified	1.8 dB for Tests 1-1, 1-2, 2-1, 2-2	Formula: SNR + TT T-put limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
5.2.3.2.20 4Rx TDD FR1 PDSCH HST-SFN Scheme A performance - 2x4 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.21 4Rx TDD FR1 PDSCH HST-SFN Scheme B performance - 2x4 MIMO for both SA and NSA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.3.2.22 4Rx TDD FR1 PDSCH ATG performance	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2.4.2.1_3 8Rx TDD FR1 PDSCH mapping Type A performance - 2x8 MIMO with simplified receiver for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2.4.2.1_3 8Rx TDD FR1 PDSCH mapping Type A performance - 4x8 MIMO with simplified receiver for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.2A.2.1.1 2Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.2.1.2 2Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.2.1.3 2Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.2.1.4 2Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.2.1.5 2Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.2.2.1 2Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)	Power level as specified	No TT added	T-put limit unchanged

5.2A.2.3	2Rx TDD FR1 PDSCH mapping Type A performance of Scell on band with shared spectrum access	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.2.4.1	2RX PDSCH Demodulation Performance for HST-SFN CA	SNR as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2A.2.5.1	2RX PDSCH Demodulation Performance for HST-DPS CA	SNR as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.1.1	4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.1.2	4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.1.3	4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.1.4	4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.1.5	4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.2.1	4Rx PDSCH Demodulation Performance for CA with power imbalance (2DL CA)	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.3	4Rx TDD FR1 PDSCH mapping Type A performance of Scell on band with shared spectrum access	SNRs as specified	1.0 dB for 10Hz doppler	Formula: SNR + TT T-put limit unchanged
5.2A.3.4.1	4Rx PDSCH Demodulation Performance for HST-SFN CA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3.5.1	4Rx PDSCH Demodulation Performance for HST-DPS CA	SNRs as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
5.2A.3A.1.1	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (2DL CA) for both SA and NSA	SNRs as specified	2Rx CC: 1.0 dB for 10Hz doppler 4Rx CC: 0.9dB	Formula: SNR + TT T-put limit unchanged
5.2A.3A.1.2	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (3DL CA) for both SA and NSA	SNRs as specified	2Rx CC: 1.0 dB for 10Hz doppler 4Rx CC: 0.9dB	Formula: SNR + TT T-put limit unchanged
5.2A.3A.1.3	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (4DL CA) for both SA and NSA	SNRs as specified	2Rx CC: 1.0 dB for 10Hz doppler 4Rx CC: 0.9dB	Formula: SNR + TT T-put limit unchanged
5.2A.3A.1.4	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (5DL CA) for both SA and NSA	SNRs as specified	2Rx CC: 1.0 dB for 10Hz doppler 4Rx CC: 0.9dB	Formula: SNR + TT T-put limit unchanged
5.2A.3A.1.5	2Rx-4Rx Normal PDSCH Demodulation Performance for CA (6DL CA) for both SA and NSA	SNRs as specified	2Rx CC: 1.0 dB for 10Hz doppler 4Rx CC: 0.9dB	Formula: SNR + TT T-put limit unchanged
5.3.1.1.1	1Rx FDD FR1 PDCCH performance for RedCap	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged

5.3.1.2.1	1Rx TDD FR1 PDCCH performance for RedCap	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.1.1	2Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.1.2	2Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.1.3	2Rx FDD FR1 PDCCH 1 Tx antenna performance for power saving	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.1.4	2Rx FDD FR1 PDCCH performance for RedCap	SNRs as specified	0.9 dB for Test 1 1.0 dB for Test 2	Formula: SNR + TT T-put limit unchanged
5.3.2.1.5	2RX FDD Minimum requirements for PDCCH with intra-slot repetition	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.1.7	2RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.2.1	2Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.2.2	2Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.2.3	2Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.2.2.4	2Rx TDD FR1 PDCCH performance for RedCap	SNRs as specified	0.8 dB for Test 1 0.9 dB for Test 2	Formula: SNR + TT T-put limit unchanged
5.3.2.2.5	2RX TDD Minimum requirements for PDCCH with intra-slot repetition	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.1.1	4Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.1.2	4Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.1.3	4Rx FDD FR1 PDCCH 1 Tx antenna performance power saving	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.1.4	4RX FDD Minimum requirements for PDCCH with intra-slot repetition	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.1.6	4RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.2.1	4Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.2.2	4Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	SNRs as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.3.3.2.4	4RX TDD Minimum requirements for PDCCH with intra-slot repetition	SNRs as specified	0.9 dB	Formula: SNR + TT T-put limit unchanged
11.1.2.1.1_1	2Rx FR1 PSSCH performance - single active PSSCH link	SNR as specified	0.8 dB	Formula: SNR + TT T-put limit unchanged
11.1.3.1.1_1	2Rx FR1 PSCCH performance - single active PSSCH link	SNR as specified	0.8 dB	Formula: SNR + TT missing detection probability limit unchanged
11.1.5.1.1_1	2Rx FR1 PSCCH performance - single active PSSCH link	SNR as specified	0.8 dB	Formula: SNR + TT missing detection probability limit unchanged

11.1.6.1.1_1 2Rx FR1 Power imbalance performance - two active PSSCH link	SNR as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
11.1.7.1.1_1 2Rx FR1 HARQ buffer soft combining performance - maximum number of HARQ processes	SNR as specified	0.6 dB	Formula: SNR + TT T-put limit unchanged
11.1.8.1.1_1 2Rx FR1 PSCCH decoding capability - maximum number of received PSCCHs	sidelink power	0 dB	sidelink power unchanged missing detection probability limit unchanged
11.1.9.1.1_1 2Rx FR1 PSFCH decoding capability - maximum number of received PSFCHs	sidelink power	0 dB	sidelink power unchanged missing detection probability limit unchanged
5.5.1 FR1 Sustained downlink data rate performance for single carrier	Downlink power -112 dBm/Hz	0 dB	Formula: Downlink power + TT T-put limit unchanged
5.5.1_1 FR1 Sustained downlink data rate performance for single carrier for 8Rx	Same as 5.5.1	Same as 5.5.1	Same as 5.5.1
5.5.2 FR1 Sustained downlink data rate performance for single carrier with DL1024QAM	Downlink power -110.46 dBm/Hz	0 dB	Formula: Downlink power + TT T-put limit unchanged Downlink power calculated by replacing EVM value to 2.5% instead of 3% in the formula mentioned in clause 4.4.4.2.1
5.5.3 FR1 Sustained downlink data rate performance for RedCap	Downlink power -112 dBm/Hz	0 dB	Formula: Downlink power + TT T-put limit unchanged
5.5.4 FR1 Sustained downlink data rate performance for eRedCap	Downlink power -112 dBm/Hz	0 dB	Formula: Downlink power + TT T-put limit unchanged
5.5A.1.1 FR1 SDR performance for CA (2DL CA)	Same as 5.5.1	Same as 5.5.1	Same as 5.5.1
5.5A.1.2 FR1 SDR performance for CA (3DL CA)	Same as 5.5.1	Same as 5.5.1	Same as 5.5.1
5.5A.1.3 FR1 SDR performance for CA (4DL CA)	Same as 5.5.1	Same as 5.5.1	Same as 5.5.1
5.5A.1.4 FR1 SDR performance for CA (5DL CA)	Same as 5.5.1	Same as 5.5.1	Same as 5.5.1
5.6.2.1.1_1 2Rx FDD FR1 PDSCH performance with link adaptation – 2x2 MIMO for both SA and NSA	SNR as specified	1.0 dB	Formula: SNR + TT T-put limit unchanged
5.6.2.2.1_1 2Rx TDD FR1 PDSCH performance with link adaptation – 2x2 MIMO for both SA and NSA	Same as 5.6.2.1.1_1	5.6.2.1.1_1	5.6.2.1.1_1
5.6.3.1.1_1 4Rx FDD FR1 PDSCH performance with link adaptation – 2x4 MIMO for both SA and NSA	5.6.2.1.1_1	5.6.2.1.1_1	5.6.2.1.1_1
5.6.3.2.1_1 4Rx TDD FR1 PDSCH performance with link adaptation – 2x4 MIMO for both SA and NSA	5.6.2.1.1_1	5.6.2.1.1_1	5.6.2.1.1_1
9.4B.1.1 Sustained downlink data rate performance for EN-DC within FR1	Downlink power -112 dBm/Hz	0 dB	Formula: Downlink power + TT T-put limit unchanged
9.4B.1.1A Sustained downlink data rate performance for EN-DC within FR1 with DL 1024QAM	Downlink power -110.5 dBm/Hz	0 dB	Formula: Downlink power + TT T-put limit unchanged
9.4B.1.1_1 Sustained downlink data rate performance for EN-DC within FR1 (2 NR CCs)	Same as 9.4B.1.1	Same as 9.4B.1.1	Same as 9.4B.1.1
9.4B.1.1_2 Sustained downlink data rate performance for EN-DC within FR1 (3 NR CCs)	Same as 9.4B.1.1	Same as 9.4B.1.1	Same as 9.4B.1.1
9.4B.1.1_3 Sustained downlink data rate performance for EN-DC within FR1 (4 NR CCs)	Same as 9.4B.1.1	Same as 9.4B.1.1	Same as 9.4B.1.1

F.1.3.3 Measurement of Channel State Information reporting

The derivation of the test requirements for the test cases in section 6 is defined in Table F.1.3.3-1.

Table F.1.3.3-1: Derivation of Test Requirements (FR1 channel state information reporting tests)

Test	Minimum Requirement in TS 38.101-4	Test Tolerance (TT)	Test Requirement in TS 38.521-4
6.2.1.1.1.1 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.1.1.1.2 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.1.1.2.1 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.1.1.2.2 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	SNRs as specified	6.2.1.1.2.2 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	SNRs as specified
6.2.1.2.1.1 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.1.2.1.2 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.1.2.2.1 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.1.2.2.2 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	SNRs as specified	6.2.1.2.2.2 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	SNRs as specified
6.2.2.1.1.1 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.1.1.2 2Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.1.1.3 2Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.1.1.4 2 Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.1.1.5 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.1.2.1 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged

6.2.2.1.2.2 2Rx FDD FR1 periodic subband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 2% β 55% γ 1.05 BLER 0.02	SNR 0 dB α 0% β 0% γ 0.01 BLER 0	SNR unchanged α limit unchanged β limit unchanged γ 1.04 BLER limit unchanged
6.2.2.1.2.3 2Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	N_{oc} : -92.23dBm/15kHz INR 2: 10.04dB SINR: -2.00dB γ 1.9 BLER 0.02	0dB +0.3dB +0.03dB γ 0.01 BLER 0	N_{oc} : -92.23dBm/15kHz INR 2: 10.34dB SINR: -1.97dB γ 1.89 BLER limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
6.2.2.1.2.4 2 Rx FDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.2.1.2.5 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.2.2.1.1 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.2.1.2 2Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.2.1.4 2Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.2.1.3 2Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.2.1.5 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.2.1.6 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.2.2.2.1 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.2.2.2.2 2Rx TDD FR1 periodic subband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 2% β 55% γ 1.05 BLER 0.02	SNR 0 dB α 0% β 0% γ 0.01 BLER 0	SNR unchanged α limit unchanged β limit unchanged γ 1.04 BLER limit unchanged
6.2.2.2.2.3 2Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	N_{oc} : -89.23dBm/15kHz INR 2: 10.04dB SINR: -2.00dB γ 1.9 BLER 0.02	0dB +0.3dB +0.03dB γ 0.01 BLER 0	N_{oc} : -89.23dBm/15kHz INR 2: 10.34dB SINR: -1.97dB γ 1.89 BLER limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]

6.2.2.2.2.4 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	SNRs as specified α 20% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.3.1.1.1 4Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.1.1.2 4Rx FDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.1.1.3 4Rx FDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.1.2.1 4Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 5% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.3.1.2.2 4Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 2% β 55% γ 1.05 BLER 0.02	SNR 0 dB α 0% β 0% γ 0.01 BLER 0	SNR unchanged α limit unchanged β limit unchanged γ 1.04 BLER limit unchanged
6.2.3.1.2.3 4Rx FDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	N_{oc} : -92.23dBm/15kHz INR 2: 10.04dB SINR: -2.00dB γ 2.0 BLER 0.02	0dB +0.3dB +0.03dB γ 0.01 BLER 0	N_{oc} : -92.23dBm/15kHz INR 2: 10.34dB SINR: -1.97dB γ 1.99 BLER limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
6.2.3.2.1.1 4Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.2.1.2 4Rx TDD FR1 periodic CQI reporting with Table 3 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.2.1.4 4Rx TDD FR1 periodic CQI reporting with Table 4 under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.2.1.3 4Rx TDD FR1 CQI reporting for PCell on band with shared spectrum access under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2.3.2.2.1 4Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 5% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
6.2.3.2.2.2 4Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	SNRs as specified α 2% β 55% γ 1.05 BLER 0.02	SNR 0 dB α 0% β 0% γ 0.01 BLER 0	SNR unchanged α limit unchanged β limit unchanged γ 1.04 BLER limit unchanged

6.2.3.2.2.3 4Rx TDD FR1 Wideband CQI reporting with inter-cell interference for both SA and NSA	N_{oc} : -89.23dBm/15kHz INR 2: 10.04dB SINR: -2.00dB γ 2.0 BLER 0.02	0dB +0.3dB +0.03dB γ 0.01 BLER 0	N_{oc} : -89.23dBm/15kHz INR 2: 10.34dB SINR: -1.97dB γ 1.99 BLER limit unchanged The analysis is recorded in 3GPP TR 38.903 [26]
6.2.4.2.1.1 8Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
6.2A.3.1.1 CQI reporting accuracy under AWGN conditions for CA (2DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
6.2A.3.1.2 CQI reporting accuracy under AWGN conditions for CA (3DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
6.2A.3.1.3 CQI reporting accuracy under AWGN conditions for CA (4DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
6.2A.3.1.4 CQI reporting accuracy under AWGN conditions for CA (5DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
6.2A.3.1.5 CQI reporting accuracy under AWGN conditions for CA (6DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
6.3.1.1.1 1Rx FDD Single PMI with 4TX Type1-SinglePanel Codebook for RedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.1.1.2 1Rx FDD Single PMI with 4TX Type1-SinglePanel Codebook for eRedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.1.2.1 1Rx TDD Single PMI with 4TX Type1-SinglePanel Codebook for RedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.1.2.2 1Rx TDD Single PMI with 4TX Type1-SinglePanel Codebook for eRedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.2.1.1 2Rx FDD FR1 Single PMI with 4Tx Type I- SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.2.1.1_1 2Rx FDD FR1 Single PMI with 4Tx Type1-SinglePanel codebook for RedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.2.1.2 2Rx FDD FR1 Single PMI with 8Tx Type I – SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.50	SNR 0 dB γ 0.01	SNR unchanged γ 1.49
6.3.2.1.3 2Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA	SNRs as specified γ 2.50	SNR 0 dB γ 0.01	SNR unchanged γ 2.49
6.3.2.1.4 2Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 5.0	SNR 0 dB γ 0.01	SNR unchanged γ 4.99

6.3.2.1.5 2Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA	SNRs as specified γ 1.9	SNR 0 dB γ 0.01	SNR unchanged γ 1.89
6.3.2.1.6 2Rx FDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	SNRs as specified γ 2.2	SNR 0 dB γ 0.01	SNR unchanged γ 2.19
6.3.2.1.7 2Rx FDD FR1 Single PMI with 8TX TypeI-SinglePanel Codebook for Single-DCI based transmission scheme for both SA and NSA	SNRs as specified γ 1.6	SNR 0 dB γ 0.01	SNR unchanged γ 1.59
6.3.2.1.8 2Rx FDD FR1 Multiple PMI with 16TX Enhanced Type II codebook for predicted PMI for both SA and NSA	SNRs as specified γ 1.8	SNR 0 dB γ 0.01	SNR unchanged γ 1.79
6.3.2.1.9 2Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA	SNRs as specified γ 1.8	SNR 0 dB γ 0.01	SNR unchanged γ 1.79
6.3.2.1.10 2Rx FDD Single PMI with 4TX TypeI-SinglePanel Codebook for eRedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.2.2.1 2Rx TDD FR1 Single PMI with 4Tx TypeI - SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.2.2.2 2Rx TDD FR1 Single PMI with 8Tx TypeI - SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.50	SNR 0 dB γ 0.01	SNR unchanged γ 1.49
6.3.2.2.3 2Rx TDD FR1 Single PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 2.50	SNR 0 dB γ 0.01	SNR unchanged γ 2.49
6.3.2.2.4 2Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 5.0	SNR 0 dB γ 0.01	SNR unchanged γ 4.99
6.3.2.2.5 2Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA	SNRs as specified γ 1.9	SNR 0 dB γ 0.01	SNR unchanged γ 1.89
6.3.2.2.6 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	SNRs as specified γ 2.2	SNR 0 dB γ 0.01	SNR unchanged γ 2.19
6.3.2.2.7 2Rx TDD Single PMI with 4TX TypeI-SinglePanel Codebook for RedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.2.2.8 2Rx TDD FR1 Single PMI with 8TX TypeI-SinglePanel Codebook for Single-DCI based transmission scheme for both SA and NSA	SNRs as specified γ 1.6	SNR 0 dB γ 0.01	SNR unchanged γ 1.59
6.3.2.2.9 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI	SNRs as specified γ 2.50	SNR 0 dB γ 0.01	SNR unchanged γ 2.49
6.3.2.2.10 2Rx TDD Single PMI with 4TX TypeI-SinglePanel Codebook for eRedCap	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.3.1.1 Single PMI with 4TX TypeI-SinglePanel Codebook– SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29

6.3.3.1.2 Single PMI with 8TX Type1-SinglePanel Codebook– SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.50	SNR 0 dB γ 0.01	SNR unchanged γ 1.49
6.3.3.1.3 4Rx FDD FR1 Multiple PMI with 16Tx Type I – SinglePanel Codebook for both SA and NSA	SNRs as specified γ 3.00	SNR 0 dB γ 0.01	SNR unchanged γ 2.99
6.3.3.1.4 4Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 7.0	SNR 0 dB γ 0.01	SNR unchanged γ 6.99
6.3.3.1.5 4Rx FDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA	SNRs as specified γ 1.9	SNR 0 dB γ 0.01	SNR unchanged γ 1.89
6.3.3.1.6 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	SNRs as specified γ 2.2	SNR 0 dB γ 0.01	SNR unchanged γ 2.19
6.3.3.1.7 Single PMI with 8 ports Type1-SinglePanel Codebook for Single-DCI based transmission scheme	SNRs as specified γ 1.6	SNR 0 dB γ 0.01	SNR unchanged γ 1.59
6.3.3.1.8 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI	SNRs as specified γ 1.8	SNR 0 dB γ 0.01	SNR unchanged γ 1.79
6.3.3.1.9 4Rx FDD FR1 Multiple PMI with 8 ports Enhanced Type II Codebook for CJT for both SA and NSA	SNRs as specified γ 1.8	SNR 0 dB γ 0.01	SNR unchanged γ 1.79
6.3.3.2.1 4Rx TDD FR1 Single PMI with 4Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.30	SNR 0 dB γ 0.01	SNR unchanged γ 1.29
6.3.3.2.2 4Rx TDD FR1 Single PMI with 8Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.50	SNR 0 dB γ 0.01	SNR unchanged γ 1.49
6.3.3.2.3 4Rx TDD FR1 Single PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 3.0	SNR 0 dB γ 0.01	SNR unchanged γ 2.99
6.3.3.2.4 4Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	SNRs as specified γ 7.0	SNR 0 dB γ 0.01	SNR unchanged γ 6.99
6.3.3.2.5 4Rx TDD FR1 Multiple PMI with 16Tx TypeII codebook for both SA and NSA	SNRs as specified γ 1.8	SNR 0 dB γ 0.01	SNR unchanged γ 1.79
6.3.3.2.6 4Rx TDD FR1 Multiple PMI with 16Tx Enhanced TypeII codebook for both SA and NSA	SNRs as specified γ 2.2	SNR 0 dB γ 0.01	SNR unchanged γ 2.19
6.3.3.2.7 Single PMI with 8 ports Type1-SinglePanel Codebook for Single-DCI based transmission scheme	SNRs as specified γ 1.6	SNR 0 dB γ 0.01	SNR unchanged γ 1.59
6.4.2.1_1 2Rx FDD FR1 RI reporting for both SA and NSA	SNRs as specified γ_2 1.00 for Test 1 γ_1 1.05 for Test 2 γ_1 0.90 for Test 3	SNR 0 dB γ_2 0.01 for Test 1 γ_1 0.01 for Test 2 γ_1 0.01 for Test 3	SNR unchanged γ_2 0.99 for Test 1 γ_1 1.04 for Test 2 γ_1 0.89 for Test 3
6.4.2.1.1 2Rx FDD FR1 RI reporting for RedCap	SNRs as specified γ_1 1.05	SNR 0 dB γ_1 0.01	SNR unchanged γ_1 1.04

6.4.2.2_1	2Rx TDD FR1 RI reporting for both SA and NSA	SNRs as specified γ_2 1.00 for Test 1 γ_1 1.05 for Test 2 γ_1 0.90 for Test 3	SNR 0 dB γ_2 0.01 for Test 1 γ_1 0.01 for Test 2 γ_1 0.01 for Test 3	SNR unchanged γ_2 0.99 for Test 1 γ_1 1.04 for Test 2 γ_1 0.89 for Test 3
6.4.2.2.1	2Rx TDD FR1 RI reporting for RedCap	SNRs as specified γ_1 1.05	SNR 0 dB γ_1 0.01	SNR unchanged γ_1 1.04
6.4.3.1_1	4Rx FDD FR1 RI reporting for both SA and NSA	SNRs as specified γ_2 0.90 for Test 1 γ_1 1.05 for Test 2 γ_1 0.90 for Test 3 γ_2 0.90 for Test 4	SNR 0 dB γ_2 0.01 for Test 1 γ_1 0.01 for Test 2 γ_1 0.01 for Test 3 γ_2 0.01 for Test 4	SNR unchanged γ_2 0.89 for Test 1 γ_1 1.04 for Test 2 γ_1 0.89 for Test 3 γ_2 0.89 for Test 4
6.4.3.2_1	4Rx TDD FR1 RI reporting for both SA and NSA	SNRs as specified γ_2 0.90 for Test 1 γ_1 1.05 for Test 2 γ_1 0.90 for Test 3 γ_2 0.90 for Test 4	SNR 0 dB γ_2 0.01 for Test 1 γ_1 0.01 for Test 2 γ_1 0.01 for Test 3 γ_2 0.01 for Test 4	SNR unchanged γ_2 0.89 for Test 1 as per Table G.3.4 γ_1 1.04 for Test 2 as per Table G.3.4 γ_1 0.89 for Test 3 as per Table G.3.4 γ_2 0.89 for Test 4 as per Table G.3.4

F.2 Measurement uncertainties and test tolerances for FR2

F.2.1 Acceptable uncertainty of test system (normative)

The maximum acceptable uncertainty of the Test System is specified below for each test, where appropriate. The Test System shall enable the stimulus signals in the test case to be adjusted to within the specified range, and the equipment under test to be measured with an uncertainty not exceeding the specified values. Care should be taken to ensure that each conformance test implementation including the OTA chamber aspects meets the specified measurement uncertainty for each test case by requiring the test laboratory to maintain a detailed measurement uncertainty test report showing compliance to all the measurement uncertainty requirements. The detailed measurement uncertainty report would contain the justification for each measurement uncertainty component and its value and distribution. The derivation of these values is based on the minimum conformance requirements plus relaxation, i.e., test tolerance is not to be considered. All ranges and uncertainties are absolute values, and are valid for a confidence level of 95 %, unless otherwise stated.

A confidence level of 95 % is the measurement uncertainty tolerance interval for a specific measurement that contains 95 % of the performance of a population of test equipment.

The downlink signal uncertainties apply at the defined quiet zone with the UE properly positioned in the quiet zone. The uplink signal uncertainties apply at the measurement equipment with the UE positioned properly in the quiet zone.

F.2.1.1 Measurement of test environments

TBD

F.2.1.2 Measurement of Demod Performance requirements

This clause defines the maximum test system uncertainty for Demod Performance requirements. The maximum test system uncertainty allowed for the measurement uncertainty contributors are defined in Table F.2.1.2-1.

Table F.2.1.2-1: Maximum measurement uncertainty values for the test system for FR2 (up to 40 GHz) and Channel BW \leq 400 MHz

MU contributor	Unit	Value	Comment
AWGN flatness and signal flatness, max deviation for any Resource Block, relative to average over BW_{config}	dB	± 3.6	

MU contributor		Unit	Value	Comment
gNB emulator Signal to noise ratio uncertainty		dB	±0.3	
Impact on non-ideal isolation between branches for the wireless cable mode	dB	0.60 for Rank1 0.45 for Rank2	Systematic uncertainty	
Fading profile power uncertainty		dB	±0.5 for 1Tx ±0.7 for 2Tx	
SNR uncertainty due to finite test time		dB	±0.3 for PDSCH and doppler < 100Hz 0.0 for PDSCH and doppler ≥ 100Hz ±0.4 for PDCCH	

The maximum test system uncertainty for test cases defined in section 7 is defined in Table F.2.1.2-2.

Table F.2.1.2-2: Maximum test system uncertainty for FR2 demodulation performance test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
7.2.2.2.1_1 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for SA and NSA	2Tx, Rank 1: ± 1.82 dB for Doppler < 100 Hz ± 1.78 dB for Doppler ≥100 Hz 2Tx, Rank 2: ± 1.67 dB for Doppler < 100Hz ± 1.63 dB for Doppler ≥100 Hz	Overall system uncertainty for fading conditions comprises four quantities: 1. gNB emulator Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time 5. Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator SNR Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ² + (0.25 x AWGN flatness and signal flatness) ² + SNR uncertainty due to finite test time ²) + Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB AWGN flatness and signal flatness ±3.6 dB SNR uncertainty due to finite test time ±0.3 dB for doppler < 100Hz, otherwise 0 dB Impact on non-ideal isolation between branches for the wireless cable mode 0.60 dB for Rank1, 0.45 dB for Rank2
7.2.2.2.1_2 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with enhanced type 1 receiver for SA and NSA	2Tx, Rank 2: ± 1.67 dB for Doppler < 100Hz ± 1.63 dB for Doppler ≥ 100Hz	Same as 7.2.2.2.1_1
7.2.2.2.1_3 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with 256QAM for SA and NSA (Rel-16 and forward)	2Tx, Rank 1: ± 1.82 dB for Doppler < 100 Hz	Same as 7.2.2.2.1_1

7.2.2.2.2_1 2Rx TDD FR2 PDSCH repetitions over multiple slots	2Tx, Rank 1: ± 1.81 dB	<p>Overall system uncertainty for fading conditions comprises four quantities:</p> <ol style="list-style-type: none"> 1. gNB emulator Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time 5. Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator SNR <p>Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty² + Fading profile power uncertainty² + (0.25 x AWGN flatness and signal flatness)² + SNR uncertainty due to finite test time²) + Impact on non-ideal isolation between branches for the wireless cable mode</p> <p>gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for 2Tx AWGN flatness and signal flatness ±3.6 dB SNR uncertainty due to finite test time ±0.25 dB for 1% residual BLER Impact on non-ideal isolation between branches for the wireless cable mode 0.60 dB for Rank1</p>
7.2.2.2.3_1 2Rx TDD FR2 PDSCH Mapping Type B	2Tx, Rank 1: ± 1.82 dB for Doppler < 100 Hz	Same as 7.2.2.2.1_1
7.2.2.2.5_1 TDD FR2 PDSCH using Multi-DCI non-overlapping based transmission scheme performance	FFS	FFS
7.2.2.2.6_1 TDD FR2 PDSCH using Multi-DCI fully-overlapping based transmission scheme performance – MultiRx	FFS	FFS
7.2.2.2.7_1 TDD FR2 PDSCH using Single-DCI based SDM scheme performance – MultiRx	FFS	FFS

<p>7.2A.2.1 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (2DLCA)</p>	<p>2Tx, Rank 2: ± 1.67 dB for Doppler < 100Hz</p>	<p>Overall system uncertainty for fading conditions comprises four quantities: 1. gNB emulator Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time 5. Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator SNR</p> <p>Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty² + Fading profile power uncertainty² + (0.25 x AWGN flatness and signal flatness)² + SNR uncertainty due to finite test time²) + Impact on non-ideal isolation between branches for the wireless cable mode</p> <p>gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB AWGN flatness and signal flatness ±3.6 dB SNR uncertainty due to finite test time ±0.3 dB for doppler < 100Hz, otherwise 0 dB Impact on non-ideal isolation between branches for the wireless cable mode 0.45 dB for Rank2</p>
<p>7.2A.2.2 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (3DLCA)</p>	<p>Same as 7.2A.2.1</p>	<p>Same as 7.2A.2.1</p>

7.3.2.2.1 2Rx TDD FR2 PDCCH 1 Tx antenna performance for both SA and NSA	1Tx, rank1: ± 1.74 dB	Overall system uncertainty for fading conditions comprises four quantities: 1. gNB emulator Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time 5. Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator SNR Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ² + (0.25 x AWGN flatness and signal flatness) ² + SNR uncertainty due to finite test time ²) + Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB for 1Tx, ±0.7 dB for 2Tx AWGN flatness and signal flatness ±3.6 dB SNR uncertainty due to finite test time ±0.4 dB Impact on non-ideal isolation between branches for the wireless cable mode 0.6 for Rank1 and 0.45 for rank2
7.3.2.2.2 2Rx TDD FR2 PDCCH 2 Tx antenna performance for both SA and NSA	2Tx, rank1: ± 1.84 dB	Same as 7.3.2.2.1
7.3.2.2.3 2Rx TDD FR2 PDCCH 1 Tx antenna performance for power saving	1Tx, rank1: ± 1.74 dB	Same as 7.3.2.2.1
7.5.1 FR2 Sustained downlink data rate performance for single carrier	Downlink absolute power uncertainty (including beam peak search , averaged over BW _{Config} ± 5.19 dB	Downlink absolute power uncertainty (including beam peak search error) is one of the factors used to determine the max testable SNR for a given Test System as listed in sheet "Mode2 100MHz" in 38.521-4 Spreadsheet - Demod SNR range calculator V3.xlsx of TR 38.903
7.5.2 FR2 Sustained downlink data rate performance for RedCap	Same as 7.5.1	Same as 7.5.1
7.5A.1.1 FR2 SDR performance for CA (2DL CA)	Maximum aggregated BW ≤ 400MHz, same as 7.5.1 Maximum aggregated BW > 400MHz, TBD	Same as 7.5.1
7.5A.1.2 FR2 SDR performance for CA (3DL CA)	Same as 7.5A.1.1	Same as 7.5A.1.1
7.5A.1.3 FR2 SDR performance for CA (4DL CA)	Same as 7.5A.1.1	Same as 7.5A.1.1
7.5A.1.4 FR2 SDR performance for CA (5DL CA)	Same as 7.5A.1.1	Same as 7.5A.1.1
7.5A.1.5 FR2 SDR performance for CA (6DL CA)	Same as 7.5A.1.1	Same as 7.5A.1.1
7.5A.1.6 FR2 SDR performance for CA (7DL CA)	Same as 7.5A.1.1	Same as 7.5A.1.1
7.5A.1.7 FR2 SDR performance for CA (8DL CA)	Same as 7.5A.1.1	Same as 7.5A.1.1

7.6.2.2.1_1 2Rx TDD FR2 PDSCH performance with link adaptation – 2x2 MIMO for both SA and NSA	± 1.82 dB for Doppler < 100Hz	Same as 7.2.2.2.1_1 using 2Tx rank1 MU since that has a higher MU than 2Tx rank2
9.4B.1.2 Sustained downlink data rate performance for EN-DC including FR2 NR carrier	Downlink absolute power uncertainty (including beam peak search , averaged over $BW_{Config} \pm 5.19$ dB	Downlink absolute power uncertainty (including beam peak search error) is one of the factors used to determine the max testable SNR for a given Test System as listed in sheet "Mode2 100MHz" in 38.521-4 Spreadsheet - Demod SNR range calculator V3.xlsx of TR 38.903
9.4B.1.2_1 Sustained downlink data rate performance for EN-DC including FR2 (2 NR CCs)	Same as 9.4B.1.2	Downlink absolute power uncertainty (including beam peak search error) is one of the factors used to determine the max testable SNR for a given Test System as listed in Demod SNR range calculator.xlsx of TR 38.903
9.4B.1.2_2 Sustained downlink data rate performance for EN-DC including FR2 (3 NR CCs)	Same as 9.4B.1.2	Same as 9.4B.1.2
9.4B.1.2_3 Sustained downlink data rate performance for EN-DC including FR2 (4 NR CCs)	Same as 9.4B.1.2	Same as 9.4B.1.2

F.2.1.3 Measurement of Channel State Information reporting

This clause defines the maximum test system uncertainty for channel state information reporting requirements. The maximum test system uncertainty allowed for the measurement uncertainty contributors are defined in Table F.2.1.3-1.

Table F.2.1.3-1: Maximum measurement uncertainty values for the test system for FR2 (up to 40 GHz) and Channel BW ≤ 400 MHz

MU contributor	Unit	Value	Comment
AWGN flatness and signal flatness, max deviation for any Resource Block, relative to average over BW_{config}	dB	Same as in table F.2.1.2-1	
Signal to noise ratio uncertainty	dB	Same as in table F.2.1.2-1	
Impact on non-ideal isolation between branches for the wireless cable mode	dB	Same as in table F.2.1.2-1	
Fading profile power uncertainty	dB	Same as in table F.2.1.2-1	

The maximum test system uncertainty for test cases defined in section 8 is defined in Table F.2.1.3-2.

Table F.2.1.3-2: Maximum test system uncertainty for FR2 channel state information reporting test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
-----------	---------------------------------	---------------------------------------

<p>8.2.2.2.1.12 Rx TDD FR2 periodic wideband CQI reporting under AWGN performance for both SA and NSA</p>	<p>± 1.40 dB</p>	<p>Overall system uncertainty under AWGN conditions comprises three quantities:</p> <ol style="list-style-type: none"> 1. gNB emulator Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness 3. Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator SNR <p>Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x [0.25] effect on the required SNR, so use sensitivity factor of x [0.25] for the uncertainty contribution.</p> <p>Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty² + (0.25 x AWGN flatness and signal flatness)²) + Impact on non-ideal isolation between branches for the wireless cable mode</p> <p>gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±3.6 dB Impact on non-ideal isolation between branches for the wireless cable mode 0.45 dB for Rank2 and 0.6 for Rank1</p>
<p>8.2.2.2.2.12 Rx TDD FR2 aperiodic wideband CQI reporting under fading performance for both SA and NSA</p>	<p>± 1.82 dB for Doppler < 100Hz</p>	<p>Overall system uncertainty for fading conditions comprises five quantities:</p> <ol style="list-style-type: none"> 1. gNB emulator Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty 3. Effect of AWGN flatness and signal flatness 4. SNR uncertainty due to finite test time 5. Impact on non-ideal isolation between branches for the wireless cable mode gNB emulator SNR <p>Items 1, 2, 3 and 4 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution.</p> <p>Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty² + Fading profile power uncertainty² + (0.25 x AWGN flatness and signal flatness)² + SNR uncertainty due to finite test time²) + Impact on non-ideal isolation between branches for the wireless cable mode</p> <p>gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.7 dB for 2Tx AWGN flatness and signal flatness ±3.6 dB SNR uncertainty due to finite test time ±0.3 dB Impact on non-ideal isolation between branches for the wireless cable mode 0.6 for Rank1 and 0.45 for Rank2</p>

8.2.2.2.1_1 2Rx TDD FR2 aperiodic wideband CQI reporting under fading performance for both SA and NSA – 256QAM (Rel-16 and forward)	Same as 8.2.2.2.1	Same as 8.2.2.2.1
8.2A.3.1.1 2Rx CQI reporting accuracy under AWGN conditions for CA (2DL CA)	Same as 8.2.2.2.1.1 on each CC.	Same as 8.2.2.2.1.1
8.2A.3.1.2 2Rx CQI reporting accuracy under AWGN conditions for CA (3DL CA)	Same as 8.2.2.2.1.1 on each CC.	Same as 8.2.2.2.1.1
8.2A.3.1.3 2Rx CQI reporting accuracy under AWGN conditions for CA (4DL CA)	Same as 8.2.2.2.1.1 on each CC.	Same as 8.2.2.2.1.1
8.3.2.2.1 2Rx TDD FR2 Single PMI with 2TX Type1-SinglePanel codebook for both SA and NSA	Same as 8.2.2.2.1	Same as 8.2.2.2.1
8.3.3.2.2 4Rx TDD FR2 Single PMI with 2TX Type1-SinglePanel codebook Single-DCI based transmission scheme with simultaneous reception - MultiRx	Same as 8.2.2.2.1	Same as 8.2.2.2.1
8.4.2.2.1 2Rx TDD FR2 RI reporting for both SA and NSA	Same as 8.2.2.2.1	Same as 8.2.2.2.1

F.2.2 Interpretation of measurement results (normative)

The actual measurement uncertainty of the Test System for the measurement of each parameter shall be included in the test report.

The recorded value for the Test System uncertainty shall be, for each measurement, equal to or lower than the appropriate figure in clause F.1 of the present document.

If the Test System using one of the permitted test methods defined in TR38.903 [20] for a test is known to have a measurement uncertainty greater than that specified in clause F.1, it is still permitted to use this apparatus provided that an adjustment is made value as follows:

Any additional uncertainty in the Test System over and above that specified in clause F.1 shall be used to tighten the Test Requirement, making the test harder to pass. For some tests, for example receiver tests, this may require modification of stimulus signals. This procedure will ensure that a Test System not compliant with clause F.1 does not increase the chance of passing a device under test where that device would otherwise have failed the test if a Test System compliant with clause F.1 had been used.

F.2.3 Test Tolerance and Derivation of Test Requirements (informative)

TBD

F.2.3.1 Measurement of test environments

TBD

F.2.3.2 Measurement of Demod Performance requirements

The derivation of the test requirements for the test cases in section 7 is defined in Table F.2.3.2-1.

Table F.2.3.2-1: Derivation of Test Requirements (FR2 demodulation performance tests)

Test	Minimum Requirement in TS 38.101-4	Test Tolerance (TT)	Test Requirement in TS 38.521-4
------	------------------------------------	---------------------	---------------------------------

7.2.2.2.1_1 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with baseline receiver for SA and NSA	SNRs as specified	2Tx, Rank 1: 1.8 dB 2Tx, Rank 2: 1.7 dB for doppler < 100Hz 1.6 dB otherwise	Formula: SNR + TT T-put limit unchanged
7.2.2.2.1_2 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with enhanced type 1 receiver for SA and NSA	SNRs as specified	2Tx, Rank 2: 1.7 dB for doppler < 100Hz 1.6 dB otherwise	Formula: SNR + TT T-put limit unchanged
7.2.2.2.1_3 2Rx TDD FR2 PDSCH mapping Type A performance - 2x2 MIMO with 256QAM for SA and NSA (Rel-16 and forward)	SNRs as specified	2Tx, Rank 1: 1.8 dB	Formula: SNR + TT T-put limit unchanged
7.2.2.2.5_1 TDD FR2 PDSCH using Multi-DCI non-overlapping based transmission scheme performance – MultiRx	FFS	FFS	FFS
7.2.2.2.6_1 TDD FR2 PDSCH using Multi-DCI fully-overlapping based transmission scheme performance – MultiRx	FFS	FFS	FFS
7.2.2.2.7_1 TDD FR2 PDSCH using Single-DCI based SDM scheme performance – MultiRx	FFS	FFS	FFS
7.2.2.2.2_1 2Rx TDD FR2 PDSCH repetitions over multiple slots	SNRs as specified	2Tx, Rank 1: 1.8 dB	Formula: SNR + TT T-put limit unchanged
7.2.2.2.3_1 2Rx TDD FR2 PDSCH Mapping Type B	SNRs as specified	2Tx, Rank 1: 1.8 dB	T-put limit unchanged
7.2A.2.1 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (2DLCA)	SNRs as specified	2Tx, Rank 2: 1.7 dB	Formula: SNR + TT T-put limit unchanged
7.2A.2.2 2Rx TDD FR2 CA requirements for normal PDSCH Demodulation Performance for both SA and NSA (3DLCA)	Same as 7.2A.2.1	Same as 7.2A.2.1	Same as 7.2A.2.1
7.3.2.2.1 2Rx TDD FR2 PDCCH 1 Tx antenna performance for both SA and NSA	SNRs as specified	1Tx, rank1: 1.7 dB	Formula: SNR + TT T-put limit unchanged
7.3.2.2.2 2Rx TDD FR2 PDCCH 2 Tx antenna performance for both SA and NSA	SNRs as specified	2Tx, rank1: 1.8 dB	Formula: SNR + TT T-put limit unchanged
7.3.2.2.3 2Rx TDD FR2 PDCCH 1 Tx antenna performance for power saving	SNRs as specified	1Tx, rank1: 1.7 dB	Formula: SNR + TT T-put limit unchanged
7.5.1 FR2 Sustained downlink data rate performance for single carrier	Power level as applied in the test procedure	No test tolerance applied	T-put limit unchanged
7.5.2 FR2 Sustained downlink data rate performance for RedCap	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.5A.1.1 FR2 SDR performance for CA (2DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1

7.5A.1.2 FR2 SDR performance for CA (3DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.5A.1.3 FR2 SDR performance for CA (4DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.5A.1.4 FR2 SDR performance for CA (5DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.5A.1.5 FR2 SDR performance for CA (6DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.5A.1.6 FR2 SDR performance for CA (7DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.5A.1.7 FR2 SDR performance for CA (8DL CA)	Same as 7.5.1	Same as 7.5.1	Same as 7.5.1
7.6.2.2.1_1 2Rx TDD FR2 PDSCH performance with link adaptation – 2x2 MIMO for both SA and NSA	SNRs as specified	1.8 dB for doppler < 100Hz	Formula: SNR + TT T-put limit unchanged
9.4B.1.2 Sustained downlink data rate performance for EN-DC including FR2 NR carrier	Indirect far field (IFF) with 30cm QZ, PC3, 100MHz CHBW Downlink power n257, n261: -79.5 dBm/120 kHz n258: -79.2 dBm/120 kHz	No test tolerance applied	T-put limit unchanged

F.2.3.3 Measurement of Channel State Information reporting

The derivation of the test requirements for the test cases in section 8 is defined in Table F.2.3.3-1.

Table F.2.3.3-1: Derivation of Test Requirements (FR2 channel state information reporting tests)

Test	Minimum Requirement in TS 38.101-4	Test Tolerance (TT)	Test Requirement in TS 38.521-4
8.2.2.2.1.12 Rx TDD FR2 periodic wideband CQI reporting under AWGN performance for both SA and NSA	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	SNR unchanged
8.2.2.2.2.12 Rx TDD FR2 aperiodic wideband CQI reporting under fading performance for both SA and NSA	SNRs as specified α 2% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
8.2.2.2.2.1_1 2Rx TDD FR2 aperiodic wideband CQI reporting under fading performance for both SA and NSA	SNRs as specified α 2% γ 1.05 BLER 0.02	SNR 0 dB α 0% γ 0.01 BLER 0	SNR unchanged α unchanged γ 1.04 BLER limit unchanged
8.2A.3.1.1 2Rx CQI reporting accuracy under AWGN conditions for CA (2DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
8.2A.3.1.2 2Rx CQI reporting accuracy under AWGN conditions for CA (3DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged

8.2A.3.1.3 2Rx CQI reporting accuracy under AWGN conditions for CA (4DL CA)	SNRs as specified Limits as in the Test Procedure	No test tolerances applied	Test requirement unchanged
8.3.2.2.1 2Rx TDD FR2 Single PMI with 2TX Type1-SinglePanel codebook for both SA and NSA	SNRs as specified γ 1.05 for Test 1 γ 1.05 for Test 2	SNR 0 dB γ 0.01 for Test 1 γ 0.01 for Test 2	SNR unchanged γ 1.04 for Test 1 γ 1.04 for Test 2
8.3.3.2.2 4Rx TDD FR2 Single PMI with 2TX Type1-SinglePanel codebook Single-DCI based transmission scheme with simultaneous reception - MultiRx	SNRs as specified γ 1.15 for Test 1 γ 1.15 for Test 2	SNR 0 dB γ 0.01 for Test 1 γ 0.01 for Test 2	SNR unchanged γ 1.14 for Test 1 γ 1.14 for Test 2
8.4.2.2.1 2Rx TDD FR2 RI reporting for both SA and NSA	SNRs as specified γ_2 1.00 for Test 1 γ_1 1.05 for Test 2 γ_1 1.05 for Test 3	SNR 0 dB γ_2 0.01 for Test 1 γ_1 0.01 for Test 2 γ_1 0.01 for Test 3	SNR unchanged γ_2 0.99 for Test 1 γ_1 1.04 for Test 2 γ_1 1.04 for Test 3

Annex G (normative): Statistical Testing

G.1 Statistical testing of Performance Requirements with throughput

G.1.1 General

The test of receiver performance characteristics is twofold.

1. A signal or a combination of signals is offered to the RX port(s) of the receiver.
2. The ability of the receiver to demodulate /decode this signal is verified by measuring the throughput.

In (2) is the statistical aspect of the test and is treated here.

The minimum requirement for most receiver performance tests is either 70 % or 30 % of the maximum throughput.

All receiver performance tests are performed in fading conditions. In addition to the statistical considerations, this requires the definition of a minimum test time.

G.1.2 Mapping throughput to error ratio

- a) The measured information bit throughput R is defined as the sum (in kilobits) of the information bit payloads successfully received during the test interval, divided by the duration of the test interval (in seconds).
- b) In measurement practice the UE indicates successfully received information bit payload by signalling an ACK to the SS.
If payload is received, but damaged and cannot be decoded, the UE signals a NACK.
- c) Only the ACK and NACK signals, not the data bits received, are accessible to the SS.
The number of bits is known in the SS from knowledge of what payload was sent.
- d) For the reference measurement channel, applied for testing, the number of bits is different in different slots, however in a radio frame it is fixed during one test.
- e) The time in the measurement interval is composed of successfully received slots (ACK), unsuccessfully received slots (NACK) and no reception at all (DTX-slots).
- f) DTX-slots may occur regularly according the applicable reference measurement channel (regDTX).
In real live networks this is the time when other UEs are served. In TDD these are the UL and special slots.
regDTX vary from test to test but are fixed within the test.
- g) Additional DTX-slots occur statistically when the UE is not responding ACK or NACK where it should.
(statDTX)
This may happen when the UE was not expecting data or decided that the data were not intended for it.

The pass / fail decision is done by observing the:

- number of NACKs
- number of ACKs and
- number of statDTXs (regDTX is implicitly known to the SS)

The ratio $(\text{NACK} + \text{statDTX}) / (\text{NACK} + \text{statDTX} + \text{ACK})$ is the Error Ratio (ER). Taking into account the time consumed by the ACK, NACK, and DTX-TTIs (regular and statistical), ER can be mapped unambiguously to throughput for any single reference measurement channel test.

G.1.3 Design of the test

The test is defined by the following design principles (see clause G.2, Theory):

1. The standard concept is applied. (not the early decision concept)
2. A second limit is introduced: The second limit is different, whether 30 % or 70 % throughput is tested.
3. To decide the test pass:
Supplier risk is applied based on the Bad DUT quality
To decide the test fail:
Customer Risk is applied based on the specified DUT quality

The test is defined by the following parameters:

- 1a) Limit Error Ratio = 0.3 (in case 70 % Throughput is tested) or
- 1b) Limit Throughput = 0.3 (in case 30 % Throughput is tested) or
- 1c) Limit Error Ratio = 0.01 (in case 1% BLER is tested)
- 2a) Bad DUT factor $M=1.378$ (selectivity)
- 2b) Bad DUT factor $m=0.692$ (selectivity)
- 2c) Bad DUT factor $M=1.5$ (selectivity)
justification see: TS 34.121 Clause F.6.3.3
- 3) Confidence level $CL = 95 \%$ (for specified DUT and Bad DUT-quality)

G.1.4 Void

G.1.5 Minimum Test time

The tables below contain the minimum number of slots for FDD and TDD.

By simulations the minimum number of active subframes (carrying DL payload) was derived (MNAS), then adding inactive subframes to the active ones. (for TDD additional subframes contain no DL payload), then rounding up to full thousand.

Simulation method to derive minimum test time:

With a level, corresponding a throughput at the test limit (here 30 % or 35 % or 50 % or 70 % of the max. throughput) the preliminary throughput versus time converges towards the final throughput. The allowance of $\pm 2\%$ throughput variation around the above mentioned level is predefined by RAN5 to find the minimum test time. The allowance of $\pm 2\%$ maps through the function "final throughput versus level" into a throughput corridor. The minimum test time is achieved when the preliminary throughput escapes the corridor the last time. The two functions "final throughput versus level" and "preliminary throughput versus time" are simulation results, which are done individual for each demodulation scenario.

In the case where the throughput does not converge across all the seeds used in the simulation within a reasonable time duration, then the throughput corridor is expanded to $\pm 3.5\%$ of the target throughput to see if the all the seeds converge. In order to account for the additional throughput variation, a SNR uncertainty due to finite test time term is added to the overall MU calculation.

The entire procedure is summarized as below.

G.1.5.0_1 Minimum Test Time procedure for PDSCH scenarios with 30% or 35% or 50% or 70% Throughput requirement

1. Run the PDSCH simulations for an extended period of time at the SNR of interest for multiple seeds.
2. The minimum test time is determined by the time it took the throughput curve to settle within +/- 2% of the target throughput value across all seeds.
3. If the throughput does not settle within the +/- 2% throughput limit within a reasonable amount of time for any seed, expand the threshold to +/- 3.5% of the target throughput value.
4. To account for the additional 1.5% throughput variation, determine from the Throughput vs SNR curve, what is the SNR delta corresponding to this 1.5 % throughput increase.
5. That SNR value is the added SNR uncertainty due to finite test time.

G.1.5.0_2 Minimum Test Time procedure for PDSCH and PDCCH scenarios with 1% BLER requirement

1. Run the PDSCH simulations for an extended period of time at the SNR of interest for multiple seeds.
2. The minimum test time is determined by the time it took the residual BLER curve to converge within +/- 10% of the target 1% residual BLER (i.e within 0.9% and 1.1% BLER) across all seeds.
3. If the residual BLER does not converge within the +/- 10% of the 1% target limit within a reasonable amount of time for any seed, increase SNR in steps of 0.1 dB and rerun the simulations within the same target BLER limit.
4. The additional delta SNR required to meet the residual BLER convergence limit is the added SNR uncertainty due to finite test time.
5. This SNR uncertainty due to finite test time would be one of the MU term in the overall MU calculation

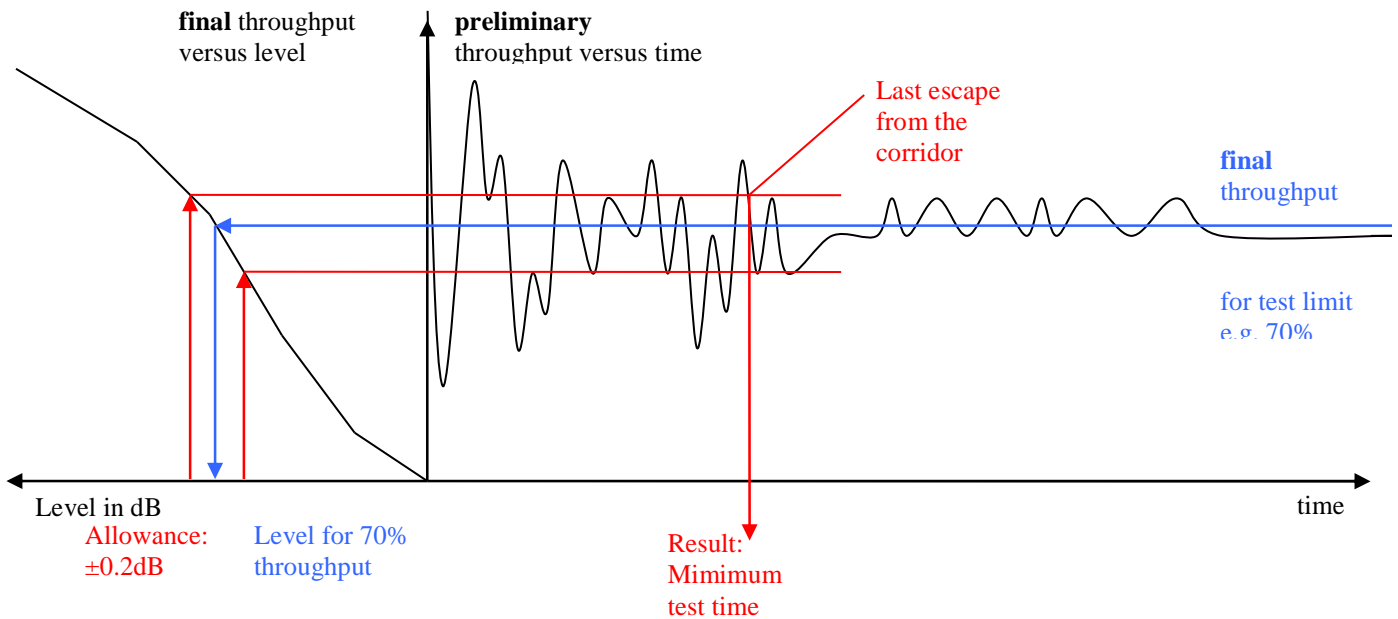


Figure G.1.5-1: Simulation method to derive minimum test time

Table G.1.5-1: Minimum Test time for PDSCH demodulation

TDD UL-DL pattern	Reference Channel	Propagation condition	Demodulation scenario (doppler speed)	Minimum number of active subframes (MNAS)	MNAS to MNS Scaling factor (Note 3)	Minimum Number of Subframes (MNS) after rounding up to nearest thousand MNS= $1000 \lceil \frac{MNAS}{1000} \rceil$
NA	R.PDSCH.1-8.1 FDD	HST-750	750 Hz	6000 (Note 1)	1.0526	6400
NA	R.PDSCH.1-8.2 FDD	HST-972	972 Hz	6000 (Note 1)	1.0526	6400
NA	R.PDSCH.1-8.1 FDD	TDL300-600	600 Hz	8000 (Note 1)	1.0526	9000
NA	R.PDSCH.1-1.1 FDD, R.PDSCH.1-1.5 FDD	TDLB100-400	400 Hz	10000 (Note 1)	1.0526	11000
NA	R.PDSCH.1-1.1 HD-FDD	TDLB100-400	400 Hz	10000 (Note 1)	1.3333	14000
NA	R.PDSCH.1-1.2 FDD, R.PDSCH.1-2.1 FDD, R.PDSCH.1-5.1 FDD, R.PDSCH.1-12.3 FDD, R.PDSCH.1-25.1 FDD, R.PDSCH.5-1.1 FDD	TDLC300-100	100 Hz	20000 (Note 1)	1.0526	22000
NA	R.PDSCH.1-1.2 HD-FDD	TDLC300-100	100 Hz	20000 (Note 1)	1.3333	27000

NA	R.PDSCH.1-1.3 FDD, R.PDSCH.1-2.2 FDD, R.PDSCH.1-2.3 FDD, R.PDSCH.1-2.4 FDD, R.PDSCH.1-2.5 FDD, R.PDSCH.1-3.1 FDD, R.PDSCH.1-3.2 FDD, R.PDSCH.1-3.3 FDD, R.PDSCH.1-3.4 FDD, R.PDSCH.1-3.5 FDD, R.PDSCH.1-4.1 FDD, R.PDSCH.1-4.2 FDD, R.PDSCH.1-12.1 FDD, R.PDSCH.1-12.4 FDD, R.PDSCH.5-1.2 FDD	TDLA30-10	10 Hz	75000 (Note 1)	1.0526	79000
	R.PDSCH.2-1.1 FDD,	TDLA30-10	10 Hz	75000 (Note 1)	1.0256	77000
NA	R.PDSCH.1-1.3 HD-FDD, R.PDSCH.1-1.4 HD-FDD, R.PDSCH.1-1.5 HD-FDD, R.PDSCH.1-2.1 HD-FDD	TDLA30-10	10 Hz	75000 (Note 1)	1.3333	100000
NA	R.PDSCH.1-7.1 FDD, R.PDSCH.1-7.2 FDD, R.PDSCH.1-7.3 FDD, R.PDSCH.1-18.1 FDD	TDLA30-10	10 Hz	75000 (Note 1)	1.25	94000
NA	R.PDSCH.1-17.1 FDD	TDLD30-5	5 Hz	70000 (Note 1)	1.0526	74000
NA	R.PDSCH.1-8.3 FDD, R.PDSCH.1-13.1 FDD, R.PDSCH.1-13.2 FDD, R.PDSCH.1-13.3 FDD, R.PDSCH.1-13.4 FDD, R.PDSCH.1-13.5 FDD, R.PDSCH.1-14.1 FDD, R.PDSCH.1-14.2 FDD, R.PDSCH.1-14.3 FDD,	HST-SFN	870 Hz	30000 (Note 1)	1.0526	32000

	R.PDSCH.1-14.4 FDD					
NA	R.PDSCH.1-8.5 FDD	HST-SFN Scheme A HST-SFN Scheme B	870 Hz	30000 (Note 1)	1.0526	32000
NA	R.PDSCH.1-8.4 FDD, R.PDSCH.1-15.1 FDD, R.PDSCH.1-15.2 FDD, R.PDSCH.1-15.3 FDD, R.PDSCH.1-15.4 FDD, R.PDSCH.1-15.5 FDD, R.PDSCH.1-16.1 FDD, R.PDSCH.1-16.2 FDD, R.PDSCH.1-16.3 FDD, R.PDSCH.1-16.4 FDD	HST-DPS	870 Hz	30000 (Note 1)	1.0526	32000
NA	R.PDSCH.1-9.1 FDD, R.PDSCH.1-9.2 FDD, R.PDSCH.1-9.3 FDD, R.PDSCH.1-9.4 FDD, R.PDSCH.1-9.5 FDD, R.PDSCH.1-10.1 FDD, R.PDSCH.1-10.2 FDD	TDLA30-10	10Hz	75000 (Note 1)	1.0526	79000
NA	R.PDSCH.1-17.2 FDD	TDLA30-10	10Hz	75000 (Note 1)	1.5385	116000
FR1.15-1	R.PDSCH.1-1.1 TDD, R.PDSCH.1-1.2 TDD, R.PDSCH.1-1.3 TDD, R.PDSCH.1-4.1 TDD	TDLA30-10	10Hz	75000 (Note 1)	2.8571	215000
FR1.15-1	R.PDSCH.1-2.1 TDD, R.PDSCH.1-2.2 TDD, R.PDSCH.1-2.3 TDD, R.PDSCH.1-2.4 TDD, R.PDSCH.1-2.5 TDD, R.PDSCH.1-3.1 TDD, R.PDSCH.1-3.2 TDD, R.PDSCH.1-3.3 TDD	TDLA30-10	10Hz	75000 (Note 1)	1.3333	100000
FR1.15-1	R.PDSCH.1-4.2 TDD	TDLA30-10	10Hz	75000 (Note 1)	2.5	188000

FR1.30-1A	R.PDSCH.2-1.1 TDD, R.PDSCH.2-1.5 TDD, R.PDSCH.2-39.1 TDD, R.PDSCH.2-39.2 TDD	TDLB100-400	400 Hz	10000 (Note 1)	1.2903	13000
FR1.30-1	R.PDSCH.2-1.2 TDD, R.PDSCH.2-2.1 TDD, R.PDSCH.2-7.1 TDD, R.PDSCH.2-26.1 TDD, R.PDSCH.2-26.3 TDD, R.PDSCH.7-1.1 TDD	TDLC300-100	100 Hz	20000 (Note 1)	1.2903	26000
FR1.30-1	R.PDSCH.2-10.2 TDD	TDLC300-1200	12000 Hz	20000 (Note 1)	1.2903	26000
FR1.30-1	R.PDSCH.2-2.2 TDD, R.PDSCH.2-2.3 TDD, R.PDSCH.2-2.4 TDD, R.PDSCH.2-2.5 TDD, R.PDSCH.2-27.1 TDD, R.PDSCH.2-3.1 TDD, R.PDSCH.2-3.2 TDD, R.PDSCH.2-3.3 TDD, R.PDSCH.2-3.4 TDD, R.PDSCH.2-3.5 TDD, R.PDSCH.2-4.1 TDD, R.PDSCH.2-4.2 TDD, R.PDSCH.2-4.3 TDD, R.PDSCH.2-26.4 TDD, R.PDSCH.2-27.3 TDD, R.PDSCH.7-1.2 TDD	TDLA30-10	10 Hz	75000 (Note 1)	1.2903	97000
FR1.30-1	R.PDSCH.2-29.1 TDD	TDLA30-10	10Hz	75000 (Note 1)	1.9048	143000
FR1.30-1	R.PDSCH.2-28.1 TDD	TDLA30-10	10Hz	75000 (Note 1)	1.7391	131000
FR1.30-1	R.PDSCH.2-1.3 TDD	TDLA30-10	10 Hz	75000 (Note 1)	1.4815	112000
FR1.30-1	R.PDSCH.2-25.1 TDD	TDLD30-5	5 Hz	70000 (Note 1)	1.2903	91000
FR1.30-2	R.PDSCH.2-5.1 TDD	TDLA30-10	10 Hz	75000 (Note 1)	1.2903	97000
FR1.30-2	R.PDSCH.2-17.1 TDD	TDLA30-10	10 Hz	75000 (Note 1)	5	375000
FR1.30-3	R.PDSCH.2-6.1 TDD	TDLA30-10	10 Hz	75000 (Note 1)	1.4815	112000

FR1.30-4	R.PDSCH.2-9.1 TDD	TDLA30-10	10 Hz	75000 (Note 1)	1.2903	97000
FR1.30-5	R.PDSCH.2-11.1 TDD	TDLB100- 400	400Hz	10000 (Note 1)	1.2903	13000
FR1.30-6	R.PDSCH.2-12.1 TDD	TDLB100- 400	400Hz	10000 (Note 1)	1.2903	13000
FR1.30-1	R.PDSCH.2-10.1 TDD	HST-1000	1000 Hz	15000 (Note 1)	1.4815	23000
FR1.30-1	R.PDSCH.2-10.1 TDD, R.PDSCH.2-10.3 TDD	HST-1667	1667 Hz	15000 (Note 1)	1.4815	23000
FR1.30-1	R.PDSCH.2-10.4 TDD, R.PDSCH.2-19.1 TDD, R.PDSCH.2-19.2 TDD, R.PDSCH.2-19.3 TDD, R.PDSCH.2-19.4 TDD, R.PDSCH.2-19.5 TDD, R.PDSCH.2-20.1 TDD, R.PDSCH.2-20.2 TDD, R.PDSCH.2-20.3 TDD, R.PDSCH.2-20.4 TDD, R.PDSCH.2-20.5 TDD, R.PDSCH.2-21.1 TDD	HST-SFN	1667 Hz	30000 (Note 1)	1.4815	45000
FR1.30-1	R.PDSCH.2-10.5 TDD, R.PDSCH.2-22.1 TDD, R.PDSCH.2-22.2 TDD, R.PDSCH.2-22.3 TDD, R.PDSCH.2-22.4 TDD, R.PDSCH.2-22.5 TDD, R.PDSCH.2-23.1 TDD, R.PDSCH.2-23.2 TDD, R.PDSCH.2-23.3 TDD, R.PDSCH.2-23.4 TDD, R.PDSCH.2-23.5 TDD, R.PDSCH.2-24.1 TDD	HST-DPS	1667 Hz	30000 (Note 1)	1.4815	45000
FR1.30-1	R.PDSCH.2-30.1 TDD	HST-SFN Scheme A HST-SFN Scheme B	1667 Hz	30000 (Note 1)	1.4815	45000
FR1.30-1	R.PDSCH.2-13.1 TDD, R.PDSCH.2-13.2 TDD,	TDLA30-10	10 Hz	75000 (Note 1)	1.2903	97000

	R.PDSCH.2-13.3 TDD, R.PDSCH.2-13.4 TDD, R.PDSCH.2-13.5 TDD, R.PDSCH.2-14.1 TDD, R.PDSCH.2-14.2 TDD, R.PDSCH.2-14.3 TDD, R.PDSCH.2-14.4 TDD, R.PDSCH.2-14.5 TDD, R.PDSCH.2-15.1 TDD					
FR1.30-7	R.PDSCH.2-18.1 TDD, R.PDSCH.2-18.2 TDD, R.PDSCH.2-18.3 TDD, R.PDSCH.2-18.4 TDD	TDLA30-10	10 Hz	75000 (Note 2)	1.6129 (Note 4)	121000
FR2.60-1	R.PDSCH.4-1.1 TDD	TDLA30-75	75 Hz	20000 (Note 2)	1.33	27000
FR2.120-1A	R.PDSCH.5-1.1 TDD	TDLC60-300	300 Hz	10000 (Note 2)	1.25	13000
FR2.120-1	R.PDSCH.5-2.1 TDD, R.PDSCH.5-2.2 TDD, R.PDSCH.5-2.3 TDD, R.PDSCH.5-3.1 TDD	TDLA30-300	300 Hz	10000 (Note 2)	1.25	13000
FR2.120-1	R.PDSCH.5-1.2 TDD	TDLA30-75	75 Hz	20000 (Note 2)	1.25	25000
FR2.120-2	R.PDSCH.5-4.1 TDD, R.PDSCH.5-5.1 TDD, R.PDSCH.5-5.2 TDD, R.PDSCH.5-6.1 TDD	TDLA30-75	75 Hz	20000 (Note 2)	1.33	27000
FR2.120-1	R.PDSCH.5-10.1 TDD	TDLD30-75	75 Hz	20000 (Note 2)	1.26	26000
<p>Note 1: MNAS determined by simulations.</p> <p>Note 2: For cases where MNAS is not determined by simulations, use same MNAS as the similar case simulated (same doppler speed)</p> <p>Note 3: MNS/MNAS ratio decided by scheduling pattern and is ratio of all slots to DL slots.</p> <p>Note 4: To account for the LBT failure probability of 0.25, MNS scaled up by 25%</p>						

Table G.1.5-1a: Minimum Test time for PDSCH demodulation with 1% BLER

TDD UL-DL pattern	Reference Channel	Propagation condition	Demodulation scenario (doppler speed)	Minimum number of active subframes (MNAS)	MNAS to MNS Scaling factor (Note 3)	Minimum Number of Subframes (MNS) after rounding up to nearest thousand
-------------------	-------------------	-----------------------	---------------------------------------	---	-------------------------------------	---

						$MNS = 1000 * \left\lceil \frac{MNS}{1000} \right\rceil$
NA	R.PDSCH.1-11.1 FDD R.PDSCH.1-11.2 FDD	TDLA30-10	10 Hz	70000 (Note 1)	1.1111	78000
FR1.30-1	R.PDSCH.2-16.1 TDD R.PDSCH.2-16.2 TDD	TDLA30-10	10 Hz	70000 (Note 1)	1.6667	117000
FR2.120-2	R.PDSCH.5-11.1 TDD	TDLA30-75	75 Hz	70000 (Note 1)	2.0513	144000
Note 1: MNAS determined by simulations. Note 2: For cases where MNAS is not determined by simulations, use same MNAS as the similar case simulated (same doppler speed). Note 3: MNS/MNAS ratio decided by scheduling pattern (how much time is required to collect required number of active DL SFs).						

Table G.1.5-2: Minimum Test time for PDCCH demodulation

Reference Channel	Demodulation scenario (doppler speed)	Minimum number of active subframes (MNAS)	MNAS to MNS Scaling factor (Note 3)	Minimum Number of Subframes (MNS) after rounding up to nearest thousand $MNS = 1000 * \left\lceil \frac{MNS}{1000} \right\rceil$
R.PDCCH.1-1.1 FDD, R.PDCCH.1-1.2 FDD, R.PDCCH.1-1.3 FDD, R.PDCCH.1-2.1 FDD, R.PDCCH.1-2.2 FDD, R.PDCCH.1-2.3 FDD, R.PDCCH.1-2.4 FDD, R.PDCCH.1-2.5 FDD, R.PDCCH.1-2.6 FDD	10, 100, 400 Hz	100000 (Note 1)	1.0526	106000
R.PDCCH.2-1.1 TDD, R.PDCCH.2-1.2 TDD, R.PDCCH.2-2.1 TDD, R.PDCCH.2-1.3 TDD, R.PDCCH.2-1.5 TDD, R.PDCCH.2-1.6 TDD	10, 100, 400 Hz	100000 (Note 1)	1.2903	130000
R.PDCCH.5-1.1 TDD, R.PDCCH.5-1.2 TDD, R.PDCCH.5-1.3 TDD, R.PDCCH.5-2.1 TDD	75, 300 Hz	100000 (Note 2)	1.25	130000
R.PDCCH.1-2.4 FDD+ R.PDCCH.1-2.7 FDD	10Hz	100000 (Note 1)	2 (Note 4)	200000
R.PDCCH.2-1.2 TDD+ R.PDCCH.2-1.4 TDD	100 Hz	100000 (Note 1)	2.666 (Note 4)	267000
R.PDCCH.5-1.2 TDD, R.PDCCH.5-1.4 TDD	300 Hz	100000 (Note 2)	2.58 (Note 4)	258000
Note 1: MNAS determined by simulations. Note 2: For cases where MNS is not determined by simulations, use same MNAS as the similar case simulated (same doppler speed) Note 3: MNS/MNAS ratio decided by scheduling pattern and is ratio of all slots to DL slots. Note 4: For power saving, MNS/MNAS ratio decided by scheduling pattern and DRX configuration, and is ratio of all slots in both DRX active time and DRX inactive time to DL slots in DRX active time.				

Table G.1.5-3: Minimum Test time for PDSCH absolute physical layer throughput requirements

TDD UL-DL pattern	Clause	Propagation condition	Demodulation scenario (doppler speed)	Minimum number of active subframes (MNAS)	MNAS to MNS Scaling factor (Note 3)	Minimum Number of Subframes (MNS) after rounding up to nearest thousand
-------------------	--------	-----------------------	---------------------------------------	---	-------------------------------------	---

						$MNS = 1000 * \left\lceil \frac{MNS}{1000} \right\rceil$
NA	5.6.2.1.1_1	TDLA30-5	5 Hz	50000 (Note 1)	1.4286	72000
FR1.30-1	5.6.2.2.1_1	TDLA30-5	5 Hz	50000 (Note 1)	1.8182	91000
NA	5.6.3.1.1_1	TDLA30-5	5 Hz	50000 (Note 1)	1.4286	72000
FR1.30-1	5.6.3.2.1_1	TDLA30-5	5 Hz	50000 (Note 1)	1.8182	91000
FR2.120-2	7.6.2.2.1_1	TDLA30-35	35 Hz	10000 (Note 1)	2.7586	28000
Note 1: MNAS determined by simulations. Note 2: For cases where MNAS is not determined by simulations, use same MNAS as the similar case simulated (same doppler speed). Note 3: MNS/MNAS ratio decided by scheduling pattern (how much time is required to collect required number of active DL SFs).						

G.2 Theory to derive the numbers for statistical testing (informative)

Editor's note: This clause of the Annex G is for information only and it described the background theory and information for statistical testing.

G.2.1 Error Ratio (ER)

The Error Ratio (ER) is defined as the ratio of number of errors (ne) to all results, number of samples (ns).

(1-ER is the success ratio).

G.2.2 Test Design

A statistical test is characterized by:

Test-time, Selectivity and Confidence level.

G.2.3 Confidence level

The outcome of a statistical test is a decision. This decision may be correct or in-correct. The Confidence Level CL describes the probability that the decision is a correct one. The complement is the wrong decision probability (risk) $D = 1 - CL$.

G.2.4 Introduction: Supplier Risk versus Customer Risk

There are two targets of decision:

- (a) A measurement on the pass-limit shows, that the DUT has the specified quality or is better with probability CL (CL e.g.95 %). This shall lead to a "pass decision".

The pass-limit is on the good side of the specified DUT-quality. A more stringent CL (CL e.g.99 %) shifts the pass-limit farer into the good direction. Given the quality of the DUTs is distributed, a greater CL passes less and better DUTs.

A measurement on the bad side of the pass-limit is simply "not pass" (undecided or artificial fail).

- (aa) Complementary:

A measurement on the fail-limit shows, that the DUT is worse than the specified quality with probability CL.

The fail-limit is on the bad side of the specified DUT-quality. A more stringent CL shifts the fail-limit farther into the bad direction. Given the quality of the DUTs is distributed, a greater CL fails less and worse DUTs.

A measurement on the good side of the fail-limit is simply "not fail".

(b) A DUT, known to have the specified quality, shall be measured and decided pass with probability CL. This leads to the test limit.

For CL e.g. 95 %, the test limit is on the bad side of the specified DUT-quality. CL e.g. 99 % shifts the pass-limit farther into the bad direction. Given the DUT-quality is distributed, a greater CL passes more and worse DUTs.

(bb) A DUT, known to be an ($\epsilon \rightarrow 0$) beyond the specified quality, shall be measured and decided fail with probability CL.

For CL e.g. 95 %, the test limit is on the good side of the specified DUT-quality.

NOTE 1: The different sense for CL in (a), (aa) versus (b), (bb).

NOTE 2: For constant CL in all 4 bullets (a) is equivalent to (bb) and (aa) is equivalent to (b).

G.2.5 Supplier Risk versus Customer Risk

The table below summarizes the different targets of decision.

Table G.2.5-1: Equivalent statements

	Equivalent statements, using different cause-to-effect-directions, and assuming CL = constant >1/2	
cause-to-effect-directions	Known measurement result → estimation of the DUT's quality	Known DUT's quality → estimation of the measurement's outcome
Supplier Risk	A measurement on the pass-limit shows, that the DUT has the specified quality or is better (a)	A DUT, known to have an ($\epsilon \rightarrow 0$) beyond the specified DUT-quality, shall be measured and decided fail (bb)
Customer Risk	A measurement on the fail-limit shall shows, that the DUT is worse than the specified quality (aa)	A DUT, known to have the specified quality, shall be measured and decided pass (b)

The shaded area shown the direct interpretation of Supplier Risk and Customer Risk.

The same statements can be based on other DUT-quality-definitions.

G.2.6 Introduction: Standard test versus early decision concept

In standard statistical tests, a certain number of results (ns) is predefined in advance to the test. After ns results the number of bad results (ne) is counted and the error ratio (ER) is calculated by ne/ns.

Applying statistical theory, a decision limit can be designed, against which the calculated ER is compared to derive the decision. Such a limit is one decision point and is characterized by:

- D: the wrong decision probability (a predefined parameter)
- ns: the number of results (a fixed predefined parameter)
- ne: the number of bad results (the limit based on just ns)

In the formula for the limit, D and ns can be understood as variable parameter and variable. However the standard test execution requires fixed ns and D. The property of such a test is: It discriminates between two states only, depending on the test design:

- pass (with CL) / undecided (undecided in the sense: finally undecided)

- fail (with CL) / undecided (undecided in the sense: finally undecided)
- pass(with CL) / fail (with CL) (however against two limits).

In contrast to the standard statistical tests, the early decision concept predefines a set of (ne,ns) co-ordinates, representing the limit-curve for decision. After each result a preliminary ER is calculated and compared against the limit-curve. After each result one may make the decision or not (undecided for later decision). The parameters and variables in the limit-curve for the early decision concept have a similar but not equal meaning:

- D: the wrong decision probability (a predefined parameter)
- ns: the number of results (a variable parameter)
- ne: the number of bad results (the limit. It varies together with ns)

To avoid a "final undecided" in the standard test, a second limit shall be introduced and the single decision co-ordinate (ne,ns) needs a high ne, leading to a fixed (high) test time. In the early decision concept, having the same selectivity and the same confidence level an "undecided" need not to be avoided, as it can be decided later. A perfect DUT will hit the decision coordinate (ne,ns) with ne=0. This test time is short.

G.2.7 Standard test versus early decision concept

For Supplier Risk:

The wrong decision probability D in the standard test is the probability, to decide a DUT in-correct in the single decision point. In the early decision concept there is a probability of in-correct decisions d at each point of the limit-curve. The sum of all those wrong decision probabilities accumulate to D. Hence $d < D$.

For Customer Risk:

The correct decision probability CL in the standard test is the probability, to decide a DUT correct in the single decision point. In the early decision concept there is a probability of correct decisions cl at each point of the limit-curve. The sum of all those correct decision probabilities accumulate to CL. Hence $cl < CL$ or $d > D$.

G.2.8 Selectivity

There is no statistical test which can discriminate between a limit DUT and a DUT which is an ($\epsilon \rightarrow 0$) apart from the limit in finite time and high confidence level CL. Either the test discriminates against one limit with the results pass (with CL)/undecided or fail (with CL)/undecided, or the test ends in a result pass (with CL)/fail (with CL) but this requires a second limit.

For $CL > 1/2$, a (measurement-result = specified-DUT-quality), generates undecided in test "supplier risk against pass limit" (a, from above) and also in the test "customer risk against the fail limit" (aa)

For $CL > 1/2$, a DUT, known to be on the limit, will be decided pass for the test "customer risk against pass limit" (b) and also "supplier risk against fail limit" (bb).

This overlap or undecided area is not a fault or a contradiction, however it can be avoided by introducing a Bad or a Good DUT quality according to:

- Bad DUT quality: specified DUT-quality * M ($M > 1$)
- Good DUT quality: specified DUT-quality * m ($m < 1$)

Using e.g. $M > 1$ and $CL = 95\%$ the test for different DUT qualities yield different pass probabilities:

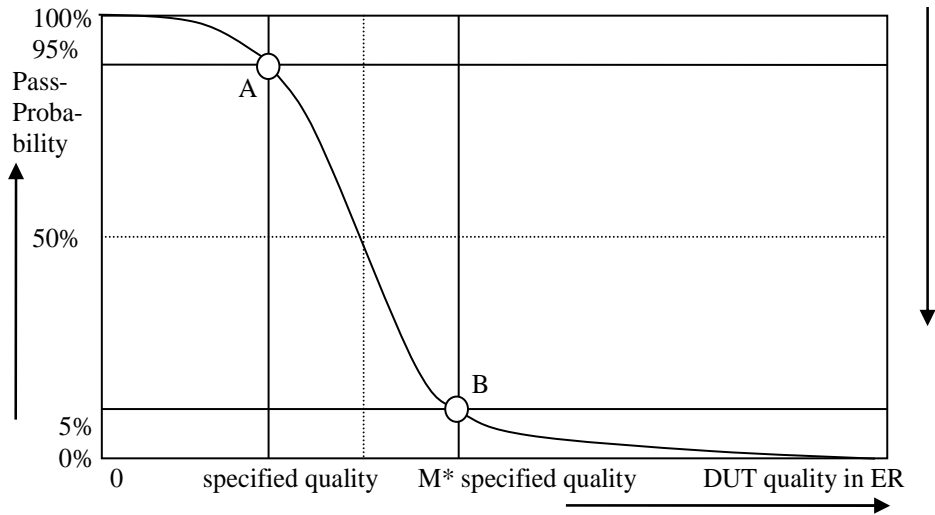


Figure G.2.8-1: Pass probability versus DUT quality

G.2.9 Design of the test

The receiver characteristic test are defined by the following design principles:

1. The early decision concept is applied.
2. A second limit is introduced: Bad DUT factor $M > 1$
3. To decide the test pass:

Supplier risk is applied based on the Bad DUT quality

To decide the test fail

Customer Risk is applied based on the specified DUT quality

The receiver characteristic test are defined by the following parameters:

1. Limit ER = 0.05
2. Bad DUT factor $M = 1.5$ (selectivity)
3. Confidence level CL = 95 % (for specified DUT and Bad DUT-quality)

This has the following consequences:

1. A measurement on the fail limit is connected with 2 equivalent statements:

A measurement on the fail-limit shows, that the DUT is worse than the specified DUT-quality	A DUT, known have the specified quality, shall be measured and decided pass
---	---

2. A measurement on the pass limit is connected with the complementary statements:

A measurement on the pass limit shows, that the DUT is better than the Bad DUT-quality.	A DUT, known to have the Bad DUT quality, shall be measured and decided fail
---	--

The left column is used to decide the measurement.

The right column is used to verify the design of the test by simulation.

The simulation is based on the two fulcrums A and B only in Figure G.2.8-1

3. Test time

The minimum and maximum test time is fixed.

The average test time is a function of the DUT's quality.

The individual test time is not predictable.

4. The number of decision co-ordinates (ne,ns) in the early decision concept is responsible for the selectivity of the test and the maximum test time. Having fixed the number of decision co-ordinates there is still freedom to select the individual decision co-ordinates in many combinations, all leading to the same confidence level.

G.2.10 Simulation to derive the pass fail limits

There is freedom to design the decision co-ordinates (ne,ns).

The binomial distribution and its inverse is used to design the pass and fail limits. Note that this method is not unique and that other methods exist.

$$\text{fail}(ne, d_f) := \frac{ne}{(ne + \text{qnbinom}(d_f, ne, ER))}$$

$$\text{pass}(ne, cl_p, M) := \frac{ne}{(ne + \text{qnbinom}(cl_p, ne, ER \cdot M))}$$

Where

- fail(.) is the error ratio for the fail limit
- pass(.) is the error ratio for the pass limit
- ER is the specified error ratio 0.05
- ne is the number of bad results. This is the variable in both equations
- M is the Bad DUT factor M=1.5
- d_f is the wrong decision probability of a single (ne,ns) co-ordinate for the fail limit.
It is found by simulation to be d_f = 0.004
- cl_p is the confidence level of a single (ne,ns) co-ordinate for the pass limit.
It is found by simulation to be cl_p = 0.9975
- qnbinom(.): The inverse cumulative function of the negative binomial distribution

The simulation works as follows:

- A large population of limit DUTs with true ER = 0.05 is decided against the pass and fail limits.
- cl_p and d_f are tuned such that CL (95 %) of the population passes and D (5 %) of the population fails.
- A population of Bad DUTs with true ER = M*0.05 is decided against the same pass and fail limits.
- cl_p and d_f are tuned such that CL (95 %) of the population fails and D (5 %) of the population passes.

- This procedure and the relationship to the measurement is justified in clause G.2.9. The number of DUTs decrease during the simulation, as the decided DUTs leave the population. That number decreases with an approximately exponential characteristics. After 169 bad results all DUTs of the population are decided.

NOTE: The exponential decrease of the population is an optimal design goal for the decision co-ordinates (ne,ns), which can be achieved with other formulas or methods as well.

G.3 Measuring throughput ratio

G.3.1 General

Annex G.3 is applicable for clauses 6.2, 6.3 and 6.4. Common to those clauses is, that a throughput ratio γ of the form $\gamma = \frac{t_{Numerator}}{t_{Denominator}}$ is measured. These clauses are tested exclusively with “slow” multipath fading profiles. Hence the test time is governed by test time due to fading, and number of samples due to statistical significance is not applicable.

The test requirement in clause 6.3 is a ratio of 2 throughput tests γ . In either numerator or denominator (depending on test case) a target throughput is desired, which is established by an approach resulting in the throughput and the reference SNR that is defined in G.3.2. This SNR is then reused when measuring the throughput of the other factor of the formula. The formulas for calculation of γ are defined directly under sections 6.3.

The test requirements in clauses 6.2 and 6.4 are a ratio of 2 throughput tests γ , where numerator and denominator are ordinary throughput tests. The formulas for calculation of γ are defined in sections 6.2 and 6.4 respectively

G.3.2 Establishing SNR

Adjust SNR such that the measured throughput is within 2% of target value (TBD% depending on test case). The approach, leading to target throughput and reference SNR is not specified.

The resulting SNR is the reference SNR to use when measuring throughput in the other factor (numerator or denominator) of γ .

To achieve statistical significance the final throughput measurement must be done with MNS samples, given table G.3.4-1

G.3.3 Measuring T-put

To achieve statistical significance the final throughput measurement must be done with MNS samples, given in table G.3.4 -1. Number of samples due to statistical significance is not applicable.

For measuring $t_{ue, follow1, follow2}$ and $t_{ue, rnd1, rnd2}$, the SS collects ACK, NACK and statDTX from the UE and records the time, elapsed from the beginning of the test. The payload size, received by the UE and acknowledged towards the SS, is constant. Throughput can be calculated in the SS by multiplying the payload size with the number of ACKs and dividing the accumulated payload in kilobits by the time in seconds, elapsed from the beginning of the test, being associated to the following ratio: ACK/ (ACK+NACK + DTX).

G.3.4 Number of samples for throughput ratios

Table G.3.4-1: Test time for testing throughput ratios

Demodulation scenario (doppler speed)	Minimum number of active subframes (MNAS)	Scheduling pattern	MNAS to MNS Scaling factor (Note 2)	Minimum Number of Subframes (MNS) after rounding up to nearest thousand $MNS = 1000 \lceil \frac{MNAS}{1000} \rceil$
5Hz	100000	FDD	1.0526	106000
5Hz	100000	TDD FR1.30-1	1.2903	130000

35Hz	100000	TDD FR2.120-1	1.2598	126000
35Hz	100000	TDD FR2.120-2	1.3445	135000

Note 1: MNAS determined by theoretical estimations inherited from LTE based on R5-106393. All slots in active subframe is assumed to be DL slots.

Note 2: MNS/MNAS ratio decided by scheduling pattern and is ratio of all slots to DL slots

Note 3: MNS apply for both denominator and numerator measurement

G.4 Statistical testing of Performance Requirements with BLER limit

G.4.1 General

The test of receiver performance characteristics is twofold.

1. A signal or a combination of signals is offered to the RX port(s) of the receiver.
2. The ability of the receiver to demodulate /decode this signal is verified by measuring the throughput.

In (2) is the statistical aspect of the test and is treated here.

The minimum requirement for several receiver performance test cases is specified in regards of BLER: 0.001%.

G.4.2 Design of the test

The test is defined by the following design principles (see clause G.2, Theory):

1. The early decision concept is applied.
2. A second limit is introduced: Bad DUT factor $M > 1$.
3. To decide the test pass:

Supplier risk is applied based on the Bad DUT quality

To decide the test fail:

Customer Risk is applied based on the specified DUT quality

G.4.3 Numerical definition of the pass fail limits for 0.001% BLER

The numerical pass/fail limit is derived by the following parameters:

- 1a) Limit Error Ratio = 0.001%
- 2a) Bad DUT factor $M=1.5$ (selectivity)
justification see: TS 34.121 Clause F.6.3.3
- 3) Confidence level CL = 99.999%

Table G.4.3-1: Pass fail limits

ne	ns _p	ns _f	ne	ns _p	ns _f	ne	ns _p	ns _f
0	1074532	NA	215	20012405	14871394	430	36445712	33298651
1	1074532	NA	216	20090837	14954177	431	36520716	33386452
2	1274645	NA	217	20169241	15036999	432	36595712	33474268

3	1444583	NA	218	20247618	15119861	433	36670697	33562097
4	1599072	NA	219	20325969	15202761	434	36745673	33649940
5	1743641	NA	220	20404294	15285701	435	36820640	33737797
6	1881111	NA	221	20482592	15368679	436	36895596	33825668
7	2013164	NA	222	20560864	15451695	437	36970544	33913553
8	2140902	NA	223	20639110	15534749	438	37045482	34001452
9	2265092	NA	224	20717330	15617841	439	37120411	34089364
10	2386297	NA	225	20795524	15700971	440	37195330	34177291
11	2504945	NA	226	20873694	15784137	441	37270240	34265231
12	2621369	NA	227	20951838	15867341	442	37345140	34353184
13	2735834	NA	228	21029957	15950581	443	37420032	34441151
14	2848557	NA	229	21108051	16033858	444	37494914	34529132
15	2959718	NA	230	21186120	16117172	445	37569787	34617126
16	3069467	NA	231	21264164	16200521	446	37644651	34705134
17	3177931	NA	232	21342185	16283906	447	37719505	34793155
18	3285220	NA	233	21420180	16367326	448	37794350	34881189
19	3391428	NA	234	21498152	16450782	449	37869187	34969237
20	3496637	NA	235	21576100	16534273	450	37944014	35057298
21	3600921	NA	236	21654024	16617799	451	38018832	35145372
22	3704343	NA	237	21731924	16701360	452	38093642	35233459
23	3806960	NA	238	21809801	16784955	453	38168442	35321560
24	3908823	NA	239	21887654	16868585	454	38243233	35409673
25	4009977	NA	240	21965485	16952248	455	38318016	35497800
26	4110465	NA	241	22043292	17035945	456	38392789	35585940
27	4210324	NA	242	22121076	17119676	457	38467554	35674092
28	4309587	NA	243	22198837	17203440	458	38542310	35762258
29	4408285	NA	244	22276576	17287238	459	38617057	35850436
30	4506448	NA	245	22354292	17371068	460	38691795	35938627
31	4604101	NA	246	22431985	17454931	461	38766524	36026831
32	4701268	1100101	247	22509657	17538827	462	38841245	36115048
33	4797972	1156638	248	22587306	17622755	463	38915957	36203278
34	4894232	1213795	249	22664934	17706716	464	38990661	36291520
35	4990069	1271547	250	22742539	17790708	465	39065356	36379774
36	5085500	1329869	251	22820123	17874733	466	39140042	36468042
37	5180542	1388740	252	22897685	17958788	467	39214720	36556322
38	5275209	1448137	253	22975226	18042876	468	39289389	36644614
39	5369517	1508043	254	23052745	18126994	469	39364049	36732919
40	5463478	1568438	255	23130243	18211144	470	39438702	36821236
41	5557107	1629304	256	23207720	18295325	471	39513345	36909566
42	5650414	1690627	257	23285176	18379536	472	39587981	36997908
43	5743410	1752389	258	23362612	18463778	473	39662607	37086263
44	5836108	1814577	259	23440026	18548050	474	39737226	37174629
45	5928516	1877177	260	23517420	18632353	475	39811836	37263008
46	6020643	1940175	261	23594793	18716685	476	39886438	37351399
47	6112500	2003560	262	23672147	18801047	477	39961031	37439803
48	6204094	2067319	263	23749479	18885439	478	40035616	37528218
49	6295434	2131442	264	23826792	18969861	479	40110193	37616645
50	6386526	2195916	265	23904085	19054311	480	40184762	37705085
51	6477380	2260734	266	23981357	19138791	481	40259322	37793536
52	6568000	2325884	267	24058610	19223300	482	40333875	37882000
53	6658395	2391358	268	24135843	19307838	483	40408419	37970475
54	6748569	2457146	269	24213057	19392404	484	40482955	38058963
55	6838530	2523241	270	24290251	19476999	485	40557483	38147462

56	6928283	2589634	271	24367426	19561623	486	40632003	38235973
57	7017834	2656318	272	24444581	19646274	487	40706514	38324496
58	7107187	2723285	273	24521718	19730954	488	40781018	38413030
59	7196348	2790528	274	24598835	19815662	489	40855514	38501576
60	7285321	2858041	275	24675933	19900397	490	40930002	38590134
61	7374112	2925816	276	24753013	19985160	491	41004482	38678704
62	7462724	2993848	277	24830073	20069950	492	41078954	38767285
63	7551162	3062130	278	24907116	20154768	493	41153418	38855878
64	7639430	3130657	279	24984139	20239613	494	41227874	38944482
65	7727532	3199424	280	25061144	20324485	495	41302322	39033098
66	7815471	3268424	281	25138131	20409383	496	41376763	39121725
67	7903252	3337653	282	25215099	20494309	497	41451195	39210363
68	7990878	3407105	283	25292050	20579261	498	41525620	39299014
69	8078352	3476777	284	25368982	20664239	499	41600037	39387675
70	8165677	3546663	285	25445896	20749244	500	41674447	39476348
71	8252857	3616759	286	25522793	20834275	501	41748848	39565032
72	8339894	3687060	287	25599672	20919332	502	41823242	39653727
73	8426792	3757563	288	25676533	21004415	503	41897628	39742434
74	8513553	3828263	289	25753376	21089524	504	41972007	39831151
75	8600181	3899156	290	25830202	21174658	505	42046378	39919880
76	8686677	3970239	291	25907010	21259818	506	42120742	40008620
77	8773044	4041508	292	25983802	21345003	507	42195097	40097371
78	8859286	4112960	293	26060576	21430213	508	42269446	40186133
79	8945403	4184590	294	26137332	21515449	509	42343786	40274907
80	9031399	4256396	295	26214072	21600709	510	42418120	40363691
81	9117276	4328375	296	26290795	21685995	511	42492445	40452486
82	9203035	4400523	297	26367501	21771305	512	42566764	40541292
83	9288680	4472838	298	26444190	21856639	513	42641075	40630109
84	9374212	4545316	299	26520862	21941999	514	42715378	40718937
85	9459633	4617954	300	26597518	22027382	515	42789674	40807776
86	9544944	4690751	301	26674157	22112790	516	42863963	40896625
87	9630149	4763702	302	26750780	22198222	517	42938244	40985485
88	9715249	4836806	303	26827386	22283678	518	43012518	41074356
89	9800245	4910060	304	26903976	22369157	519	43086784	41163238
90	9885139	4983461	305	26980550	22454661	520	43161044	41252131
91	9969933	5057007	306	27057108	22540188	521	43235296	41341034
92	10063961	5130696	307	27133649	22625739	522	43309540	41429947
93	10148504	5204526	308	27210175	22711313	523	43383778	41518872
94	10232951	5278493	309	27286685	22796910	524	43458008	41607806
95	10317307	5352597	310	27363178	22882531	525	43532231	41696752
96	10401570	5426835	311	27439656	22968175	526	43606447	41785708
97	10485744	5501204	312	27516119	23053842	527	43680656	41874674
98	10569829	5575703	313	27592566	23139531	528	43754858	41963651
99	10653826	5650331	314	27668997	23225243	529	43829052	42052638
100	10737738	5725084	315	27745413	23310978	530	43903240	42141636
101	10821565	5799961	316	27821813	23396736	531	43977420	42230643
102	10905308	5874961	317	27898198	23482516	532	44051594	42319662
103	10988969	5950082	318	27974568	23568318	533	44125760	42408690
104	11072549	6025321	319	28050923	23654143	534	44199919	42497729
105	11156049	6100677	320	28127262	23739989	535	44274072	42586778
106	11239470	6176149	321	28203587	23825858	536	44348217	42675837
107	11322813	6251735	322	28279896	23911748	537	44422355	42764907
108	11406080	6327434	323	28356191	23997661	538	44496487	42853986

109	11489271	6403243	324	28432471	24083595	539	44570611	42943076
110	11572387	6479161	325	28508736	24169550	540	44644729	43032176
111	11655430	6555187	326	28584986	24255527	541	44718840	43121286
112	11738400	6631320	327	28661222	24341526	542	44792944	43210405
113	11821298	6707558	328	28737443	24427546	543	44867041	43299535
114	11904126	6783899	329	28813650	24513587	544	44941131	43388675
115	11986884	6860343	330	28889842	24599649	545	45015214	43477825
116	12069573	6936887	331	28966020	24685732	546	45089291	43566985
117	12152194	7013532	332	29042184	24771836	547	45163361	43656155
118	12234747	7090274	333	29118333	24857961	548	45237424	43745334
119	12317235	7167114	334	29194469	24944107	549	45311481	43834523
120	12399657	7244050	335	29270590	25030273	550	45385530	43923723
121	12482014	7321081	336	29346697	25116460	551	45459573	44012932
122	12564307	7398206	337	29422790	25202668	552	45533610	44102150
123	12646537	7475422	338	29498869	25288896	553	45607639	44191379
124	12728705	7552731	339	29574935	25375144	554	45681662	44280617
125	12810811	7630129	340	29650986	25461412	555	45755679	44369865
126	12892856	7707617	341	29727024	25547700	556	45829689	44459123
127	12974841	7785194	342	29803049	25634009	557	45903692	44548390
128	13056766	7862857	343	29879059	25720337	558	45977689	44637667
129	13138633	7940606	344	29955056	25806685	559	46051679	44726953
130	13220441	8018441	345	30031040	25893053	560	46125662	44816249
131	13302192	8096360	346	30107010	25979441	561	46199640	44905555
132	13383887	8174362	347	30182967	26065848	562	46273610	44994870
133	13465525	8252446	348	30258910	26152274	563	46347574	45084194
134	13547107	8330612	349	30334840	26238721	564	46421532	45173528
135	13628634	8408859	350	30410757	26325186	565	46495483	45262871
136	13710108	8487185	351	30486661	26411671	566	46569428	45352224
137	13791527	8565589	352	30562552	26498174	567	46643366	45441586
138	13872893	8644072	353	30638429	26584697	568	46717298	45530958
139	13954207	8722632	354	30714294	26671239	569	46791224	45620339
140	14035469	8801268	355	30790146	26757800	570	46865143	45709729
141	14116679	8879979	356	30865985	26844380	571	46939056	45799128
142	14197838	8958765	357	30941811	26930979	572	47012963	45888537
143	14278947	9037625	358	31017624	27017596	573	47086863	45977955
144	14360006	9116558	359	31093425	27104232	574	47160757	46067382
145	14441015	9195563	360	31169213	27190886	575	47234645	46156818
146	14521976	9274640	361	31244988	27277559	576	47308526	46246264
147	14602888	9353788	362	31320751	27364250	577	47382402	46335719
148	14683752	9433006	363	31396501	27450959	578	47456271	46425182
149	14764569	9512294	364	31472239	27537687	579	47530133	46514655
150	14845339	9591650	365	31547964	27624433	580	47603990	46604137
151	14926063	9671074	366	31623677	27711197	581	47677840	46693628
152	15006740	9750566	367	31699378	27797979	582	47751685	46783128
153	15087372	9830124	368	31775067	27884779	583	47825523	46872637
154	15167959	9909749	369	31850743	27971597	584	47899355	46962155
155	15248501	9989439	370	31926407	28058432	585	47973181	47051682
156	15328999	10069194	371	32002059	28145286	586	48047000	47141218
157	15409453	10149014	372	32077699	28232157	587	48120814	47230762
158	15489864	10228896	373	32153327	28319045	588	48194622	47320316
159	15570231	10308842	374	32228943	28405951	589	48268423	47409879
160	15650556	10388851	375	32304548	28492875	590	48342219	47499450
161	15730839	10468921	376	32380140	28579815	591	48416008	47589030

162	15811080	10549052	377	32455720	28666774	592	48489792	47678619
163	15891280	10629245	378	32531289	28753749	593	48563569	47768217
164	15971438	10709497	379	32606846	28840741	594	48637340	47857823
165	16051556	10789809	380	32682391	28927751	595	48711106	47947438
166	16131633	10870180	381	32757925	29014778	596	48784866	48037062
167	16211670	10950610	382	32833447	29101821	597	48858619	48126695
168	16291668	11031098	383	32908958	29188882	598	48932367	48216336
169	16371627	11111643	384	32984457	29275959	599	49006109	48305986
170	16451546	11192245	385	33059944	29363053	600	49079845	48395644
171	16531427	11272904	386	33135421	29450164	601	49153575	48485312
172	16611270	11353619	387	33210886	29537291	602	49227299	48574987
173	16691075	11434390	388	33286339	29624435	603	49301017	48664671
174	16770842	11515215	389	33361781	29711596	604	49374730	48754364
175	16850572	11596095	390	33437212	29798773	605	49448437	48844065
176	16930265	11677030	391	33512632	29885966	606	49522138	48933775
177	17009921	11758018	392	33588041	29973176	607	49595833	49023493
178	17089541	11839059	393	33663439	30060402	608	49669522	49113220
179	17169125	11920153	394	33738825	30147644	609	49743206	49202955
180	17248674	12001299	395	33814201	30234902	610	49816884	49292699
181	17328187	12082497	396	33889565	30322176	611	49890556	49382451
182	17407664	12163747	397	33964919	30409467	612	49964222	49472211
183	17487107	12245048	398	34040262	30496773	613	50037883	49561980
184	17566515	12326400	399	34115594	30584095	614	50111538	49651757
185	17645889	12407801	400	34190915	30671433	615	50185187	49741542
186	17725229	12489253	401	34266225	30758787	616	50258831	49831335
187	17804535	12570754	402	34341525	30846156	617	50332469	49921137
188	17883808	12652304	403	34416813	30933541	618	50406101	50010947
189	17963047	12733903	404	34492092	31020942	619	50479728	50100765
190	18042254	12815550	405	34567359	31108358	620	50553349	50190592
191	18121428	12897245	406	34642616	31195790	621	50626965	50280427
192	18200569	12978988	407	34717863	31283237	622	50700575	50370269
193	18279678	13060777	408	34793099	31370699	623	50774179	50460120
194	18358755	13142614	409	34868324	31458177	624	50847778	50549980
195	18437801	13224497	410	34943540	31545670	625	50921372	50639847
196	18516815	13306426	411	35018744	31633178	626	50994959	50729722
197	18595798	13388401	412	35093939	31720702	627	51068542	50819605
198	18674750	13470421	413	35169123	31808240	628	51142119	50909497
199	18753671	13552486	414	35244297	31895794	629	51215690	50999396
200	18832561	13634596	415	35319460	31983362	630	51289256	51089304
201	18911422	13716750	416	35394614	32070946	631	51362816	51179219
202	18990252	13798949	417	35469757	32158544	632	51436371	51269143
203	19069052	13881191	418	35544890	32246157	633	51509921	51359074
204	19147823	13963476	419	35620013	32333785	634	51583465	51449013
205	19226564	14045805	420	35695126	32421428	635	51657003	51538961
206	19305276	14128176	421	35770229	32509085	636	51730537	51628916
207	19383960	14210590	422	35845322	32596757	637	51804065	51718879
208	19462614	14293046	423	35920405	32684443	638	51877587	51808850
209	19541240	14375544	424	35995479	32772144	639	51951104	51898828
210	19619837	14458083	425	36070542	32859859	640	52024616	51988815
211	19698406	14540664	426	36145595	32947589	641	52098123	52078809
212	19776948	14623286	427	36220639	33035333	642	52171624	52168811
213	19855461	14705948	428	36295673	33123092			
214	19933947	14788651	429	36370697	33210864			

NOTE 1: The first column is the number of errors (ne = number of NACK).

NOTE 2: The second column is the number of samples for the pass limit (ns_p, ns=Number of Samples= number of NACK + ACK).

NOTE 3: The third column is the number of samples for the fail limit (ns_f).

NOTE 4: An ideal DUT passes after 1074532 samples. The maximum test time is 52171624 samples. A DUT passes, if the maximum number of samples is reached and it did not fail before.

G.4.3a Pass fail decision rules

The pass fail decision rules apply for a single test.

Having observed 0 errors or 1 error, pass the test at 1074532+ samples, otherwise continue

Having observed 2 errors, pass the test at 1274645+ samples, otherwise continue

...

Having observed 31 errors, pass the test at 4604101+ samples, otherwise continue
Having observed 32 errors, pass the test at 4701268+ samples, fail the test at 1100101- samples, otherwise continue

Having observed 33 errors, pass the test at 4797972+ samples, fail the test at 1156638- samples, otherwise continue

...

Having observed 641 errors, pass the test at 52098123+ samples, fail the test at 52078809- samples, otherwise continue

Having observed 642 errors, pass the test at 52171624+ samples, fail the test at 52168811- samples.

Where x+ means: x or more, x- means x or less

G.4.4 Simulation to derive the pass-fail limits for 0.001% BLER

The binomial distribution and its inverse are used to design the pass and fail limits. Note that this method is not unique and that other methods exist.

$$\text{fail}(ne, d_f) := \frac{ne}{ns_f} = \frac{ne}{(ne + qnbinom(d_f, ne, ER))}$$

$$\text{pass}(ne, cl_p, M) := \frac{ne}{ns_p} = \frac{ne}{(ne + qnbinom(cl_p, ne, ER \cdot M))}$$

Where

- fail(..) is the error ratio for the fail limit.
- pass(..) is the error ratio for the pass limit.
- ER is the specified error ratio 1e-5.
- ne is the number of bad results. This is the variable in both equations.
- M is the Bad DUT factor M=1.5.
- d_f is the wrong decision probability of a single (ne, ns) co-ordinate for the fail limit. It is found by simulation to be d_f = 2e-7.
- cl_p is the confidence level of a single (ne, ns) co-ordinate for the pass limit. It is found by simulation to be cl_p = 0.9999999.

- `qnbinom(..)`: The inverse cumulative function of the negative binomial distribution.

The simulation works as follows:

- A large population of limit DUTs with true ER = $1e-5$ is decided against the pass and fail limits.
- cl_p and d_f are tuned such that CL (99.999 %) of the population passes and D (0.001 %) of the population fails.
- A population of Bad DUTs with true ER = $M*1e-5$ is decided against the same pass and fail limits.
- cl_p and d_f are tuned such that CL (99.999 %) of the population fails and D (0.001 %) of the population passes.
- The number of DUTs decrease during the simulation, as the decided DUTs leave the population. That number decreases with an approximately exponential characteristics. After 642 bad results all DUTs of the population are decided.

NOTE: The exponential decrease of the population is an optimal design goal for the decision co-ordinates (ne , ns), which can be achieved with other formulas or methods as well.

G.5 Statistical Testing of NR sidelink Performance Requirements – Non concurrent

G.5.1 General

To test PSCCH or PSSCH performance requirements the UE under test is required to send sidelink HARQ feedback on PSFCH based on corresponding PSSCH reception when PSFCH is configured in resource pool and sidelink HARQ function is enabled. The SS can use the PSFCH sent by the UE under test to determine a Pass or Fail decision. See G.5.2 for more details.

To test PSFCH performance requirements. PSFCH should be configured in resource pool and sidelink HARQ function should be enabled. The UE under test is required to keep sending PSSCH transport blocks when test loop function mode E (transmit mode) is activated as specified in TS 38.509 [22]. The SS shall send appropriate sidelink HARQ feedback on PSFCH corresponds to each PSSCH. The UE shall retransmit PSSCH if it receives NACK on corresponding PSFCH. The SS can use the re-transmission sent by the UE under test to determine a Pass or Fail decision. See G.5.3 for more details.

The system simulator (SS) sends NR sidelink packets or PSFCH to the UE under test. The number of packets or PSFCH sent by the SS is predefined by the test time in G.5.4, G.5.5 and G.5.6 for requirements with PSSCH throughput, PSCCH miss-detection probability, and PSFCH miss-detection probability, respectively.

G.5.2 Test method for PSCCH/PSSCH performance using sidelink HARQ feedback

Test method described in this subclause applies to the UE supporting *psfch-FormatZeroSidelink-r16*.

Figure G.5.2-1 descriptively represents the course of a test based in two metrics: the noise-normalized test SNR and the performance session, represented in terms of fractional throughput. The SS counts the sidelink HARQ feedback samples sent by the UE under test during performance session and calculate the performance metrics based on them. This effectively results on the discard of early sidelink HARQ feedback that might take place between their initialization at State 4-A and the stabilized performance session. The test method is as follows:

- 1) The UE is set on state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the receiving UE.
- 2) Once the UE is operating on state 4-A, the SNR is set to the test SNR level and the scheduling of sidelink packets starts. This takes place during the test procedure stage. The SS receives every sidelink HARQ feedback sent by the UE under test and starts to count the number of ACK/NACK/DTX (for ACK/NACK HARQ) or NACK/DTX (for NACK-only HARQ).

- 3) Once the scheduling of sidelink packets starts, the SS shall wait for a stability window of T=10 seconds before recoding the number of sidelink HARQ feedback sent by the UE under test.
- 4) Upon expiration of the stability window, the SS shall recode the number of ACK/NACK/DTX (for ACK/NACK HARQ) or NACK/DTX (for NACK-only HARQ) sent by the UE under test (Time Point A in Figure G.5.2-1). Then the performance session starts.
- 5) During the performance session the SS shall record the number of transmitted sidelink packets (PSCCH, PSSCH carrying SDAP SDU) starting in Time Point A and ending in Time Point B and keep counting the number of ACK/NACK/DTX (for ACK/NACK HARQ) or NACK/DTX (for NACK-only HARQ) sent by the UE under test. The performance session lasts for the Test Time defined in sections G.5.4 and G.5.5 for throughput and PSCCH miss-detection probability, respectively.
- 6) Once the Test Time is completed the SS shall recode the number of ACK/NACK/DTX (for ACK/NACK HARQ) or NACK/DTX (for NACK-only HARQ) sent by the UE under test (Time Point B in Figure G.5.2-1) and then stop counting. The SS shall use the retrieved counter values at Time Point A and Time Point B, as well as the recorded number of transmitted sidelink packets (PSCCH, PSSCH and/or SDAP SDU) between Time Point A and Time Point B, to calculate the PSCCH probability of miss-detection, the PSSCH BLER and the SDAP SDU loss, respectively.

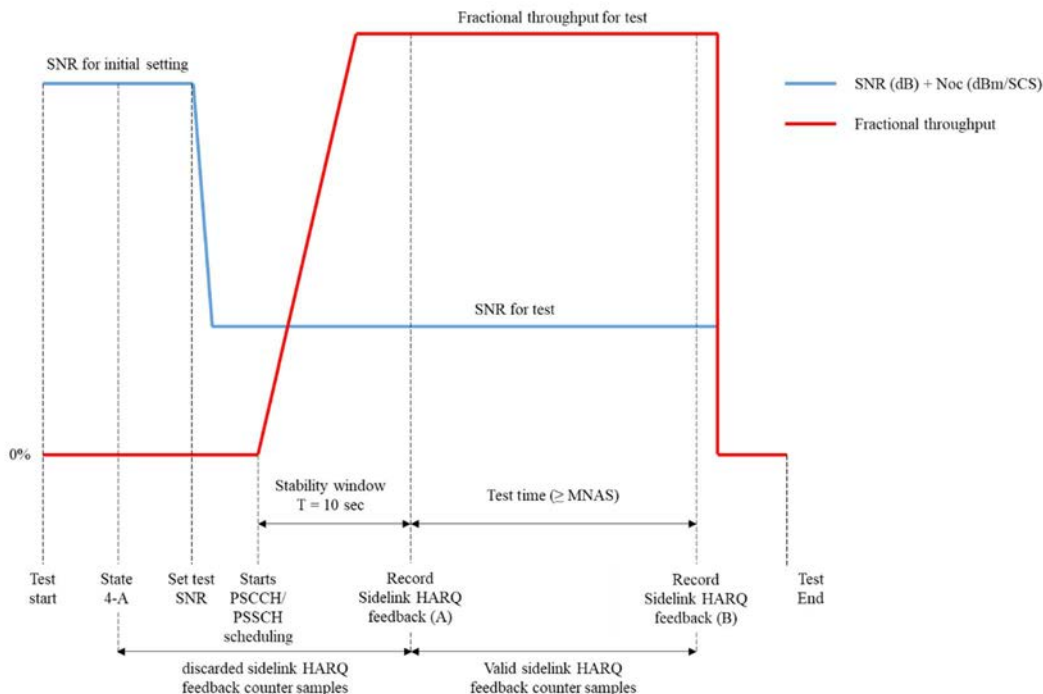


Figure G.5.2-1: Proposed Test Method for PSCCH/PSSCH performance using sidelink HARQ feedback

According to both the test method described in this section and Figure G.5.2-1, the PSCCH probability of miss-detection can be defined as follows when ACK/NACK HARQ or NACK-only HARQ is applied, respectively.

$$P_{PSCCH,ACK-NACK}^{MD} = \frac{NACK_{Counter}(B) + DTX_{Counter}(B) - NACK_{Counter}(A) - DTX_{Counter}(A)}{PSCCH_{Transmitted}}$$

$$P_{PSCCH,NACK-only}^{MD} = \frac{NACK_{Counter}(B) - NACK_{Counter}(A)}{PSCCH_{Transmitted}}$$

Similarly, we can define the PSSCH BLER as follows:

$$BLER_{PSSCH,ACK-NACK} = 1 - \frac{NACK_{Counter}(B) + DTX_{Counter}(B) - NACK_{Counter}(A) - DTX_{Counter}(A)}{PSSCH_{Transmitted}}$$

$$\text{BLER}_{\text{PSSCH,NACK-only}} = 1 - \frac{\text{NACK}_{\text{Counter}}(\text{B}) - \text{NACK}_{\text{Counter}}(\text{A})}{\text{PSSCH}_{\text{Transmitted}}}$$

Finally, we can define the SDAP SDU loss as follows:

$$\text{Loss}_{\text{SDAP_SDU}} = 1 - \left[\frac{\text{SDAP_SDU}_{\text{Counter}}(\text{B}) - \text{SDAP_SDU}_{\text{Counter}}(\text{A})}{\text{SDAP_SDU}_{\text{Transmitted}}} \right]$$

Where:

P^{MD} = Probability of Miss-Detection

BLER = Block Error Rate

$\text{Loss}_{\text{SDAP_SDU}}$ = SDAP SDU Loss rate

$\text{NACK}_{\text{Counter}}$ = number of NACK feedback recorded by the SS

$\text{DTX}_{\text{Counter}}$ = number of DTX observed by the SS

$\text{SDAP_SDU}_{\text{Counter}}$ = number of SDAP SDUs all of whose corresponding PSSCHs are correctly received (i.e. the SS receives positive acknowledgements on all corresponding PSFCHs)

T = 10 seconds stability window

$\text{PSCCH}_{\text{Transmitted}}$ = Transmitted number of PSCCH transport blocks counted by the SS

$\text{PSSCH}_{\text{Transmitted}}$ = Transmitted number of PSSCH transport blocks counted by the SS

$\text{STCH_SDU}_{\text{Transmitted}}$ = Transmitted number of STCH PDCP SDUs counted by the SS

MNAS = Minimum Number of Active Subframes, as per Table G.5.4-1 and Table G.5.5-1 for performance tests with throughput and probability of miss-detection, respectively

G.5.3 Test method for PSFCH performance

Figure G.5.2-1 descriptively represents the course of a test based in two metrics: the noise-normalized test SNR and the performance session, represented in terms of fractional throughput. The SS counts the re-transmissions samples sent by the UE under test during performance session and calculate the performance metrics based on them. This effectively results on the discard of early re-transmission that might take place between their initialization at State 4-A and the stabilized performance session. The test method is as follows:

- 1) The UE is set on state 4-A with generic procedure parameters Test Loop Function = *On* according to TS 38.508-1 [6] clause 4.4A.2. The UE is configured as the transmitting UE.
- 2) Once the UE is operating on state 4-A, the SNR is set to the test SNR level. This takes place during the test procedure stage. The SS receives and counts every PSCCH/PSSCH sent by the UE under test, then send ACK/NACK/DTX on corresponding PSFCH according to setting in test case.
- 3) Once the test SNR level is set, the SS shall wait for a stability window of T=10 seconds before recoding the number of sidelink HARQ feedback sent by the UE under test.
- 4) Upon expiration of the stability window, the SS shall recode the number of re-transmissions sent by the UE under test (Time Point A in Figure G.5.2-1). Then the performance session starts.
- 5) During the performance session the SS shall record the number of transmitted sidelink HARQ feedback (ACK, NACK and DTX) starting in Time Point A and ending in Time Point B and keep counting the number of re-transmission sent by the UE under test. The performance session lasts for the Test Time defined in sections G.5.6 for PSFCH miss-detection probability, respectively.
- 6) Once the Test Time is completed the SS shall recode the number of re-transmissions sent by the UE under test (Time Point B in Figure G.5.2-1) and then stop counting. The SS shall use the retrieved counter values at Time Point A and Time Point B, as well as the recorded number of transmitted sidelink HARQ feedbacks (ACK, NACK and DTX) between Time Point A and Time Point B, to calculate the PSFCH probability of miss-detection.

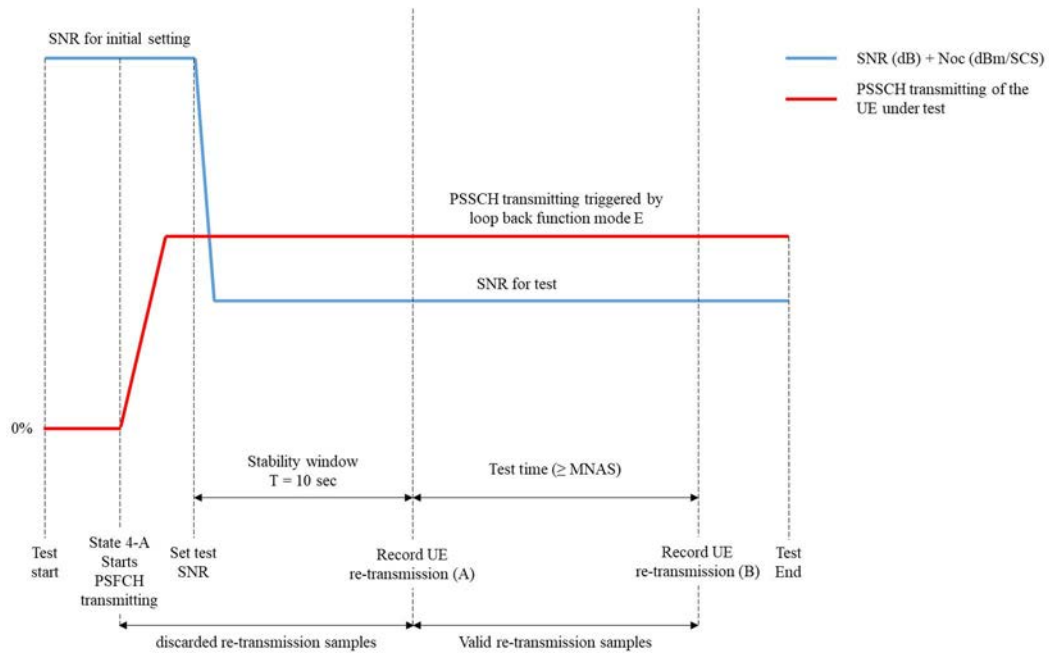


Figure G.5.3-1: Proposed Test Method for PSFCH performance

According to both the test method described in this section and Figure G.5.3-1, the PSFCH probability of miss-detection can be defined as follows when ACK/NACK HARQ or NACK-only HARQ is applied, respectively.

$$P_{\text{PSFCH,ACK-NACK}}^{\text{MD}} = 1 - \frac{\text{ReTx}_{\text{NACK}}(\text{B}) + \text{ReTx}_{\text{DTX}}(\text{B}) - \text{ReTx}_{\text{NACK}}(\text{A}) - \text{ReTx}_{\text{DTX}}(\text{A})}{\text{NACK}_{\text{Counter}} + \text{DTX}_{\text{Counter}}}$$

$$P_{\text{PSFCH,NACK-only}}^{\text{MD}} = 1 - \frac{\text{ReTx}_{\text{NACK}}(\text{B}) - \text{ReTx}_{\text{NACK}}(\text{A})}{\text{NACK}_{\text{Counter}}}$$

When NACK-only HARQ is applied, the DTX to NACK probability defined in TS 38.101-4 [5] clause 11.1.5.1.1.2 can be defined as follows:

$$\text{Prob}(\text{PSFCH DTX} \rightarrow \text{NACK}) = \frac{\text{ReTx}_{\text{DTX}}(\text{B}) - \text{ReTx}_{\text{DTX}}(\text{A})}{\text{DTX}_{\text{Counter}}}$$

When ACK/NACK HARQ is applied, the success detection probability of ACK can be defined as follows:

$$P_{\text{PSFCH ACK}}^{\text{SD}} = 1 - \frac{\text{ReTx}_{\text{ACK}}(\text{B}) - \text{ReTx}_{\text{ACK}}(\text{A})}{\text{ACK}_{\text{Counter}}}$$

And the success detection probability of NACK/DTX can be defined as follows:

$$P_{\text{PSFCH NACK/DTX}}^{\text{SD}} = 1 - P_{\text{PSFCH,ACK-NACK}}^{\text{MD}}$$

Where:

P^{MD} = Probability of Miss-Detection

P^{SD} = Probability of success detection

ReTx_{ACK} = number of re-transmissions corresponding to the ACK sent by the SS.

$\text{ReTx}_{\text{NACK}}$ = number of re-transmissions corresponding to the NACK sent by the SS.

ReTx_{DTX} = number of re-transmissions corresponding to the DTX sent by the SS.

$\text{NACK}_{\text{Counter}}$ = number of ACK feedback sent by the SS

$NACK_{Counter}$ = number of NACK feedback sent by the SS

$DTX_{Counter}$ = number of PSFCH occasions on which SS chooses to send nothing

T = 10 seconds stability window

MNAS = Minimum Number of Active Subframes, as per Table G.5.6-1 for PSFCH probability of miss-detection.

G.5.4 Test time for PSSCH performance requirements with throughput

The throughput requirements are tested in terms of PSSCH BLER. The maximum BLER requirement for all tests is 10%. The tests are performed in a variety of AWGN and fading propagation models. For each test in Table G.5.4-1 the test time (in subframes) is to be applied to the test method described in section G.5.2

Table G.5.4-1: Minimum test time for PSSCH performance requirements with throughput

Test num.	Performance Scenario	Minimum Number of Active Subframes (MNAS)	Minimum Number of Subframes (MNS)(Note 1)	Test Time in Subframes (Note 2)
11.1.2-1	R.PSSCH.2-1.1 1x2 Low TDLA30-2700	15 000 (MNAS not simulated, but conservatively estimated based on existing TDL A fading scenarios with close but smaller Doppler spread)	15 000	30 000
11.1.2-2	R.PSSCH.2-1.2 1x2 Low TDLA30-1400	15 000 (MNAS not simulated, but conservatively estimated based on existing TDL A fading scenarios with close but smaller Doppler spread)	15 000	30 000
11.1.2-3	R.PSSCH.2-1.3 1x2 Low TDLA30-180	20 000 (MNAS not simulated, but conservatively estimated based on existing TDLA fading scenarios with close but smaller Doppler spread)	20 000	20 000
11.1.6-1	R.PSSCH.2-1.4 1x2 Low AWGN 2 PSSCH transmissions	30 000 (MNAS not simulated, but conservatively estimated based on existing scenarios)	30 000	30 000
11.1.7-1	R.PSSCH.2-1.5 1x2 Low AWGN Number of PSSCH transmissions depends on UE capability	30 000 (MNAS not simulated, but conservatively estimated based on existing scenarios)	30 000	30 000

Note 1: The Minimum Number of Subframes is the total minimum number of subframes (active and inactive) required for this demodulation scenario and is derived from the MNAS, according to the resource pool configuration defined for each test case.
 Note 2: The Test Time is based on the Minimum Number of Subframes (MNS) according to the formula:
 Test Time in Subframes = 1000*CEIL(MNS/1000).

G.5.5 Test time for PSCCH performance requirements with miss-detection probability

The probability of miss-detection requirements are tested in terms of Probability of PSCCH miss-detection. The maximum Probability of PSCCH miss-detection for all tests is 1%. The tests are performed in a variety of Static, AWGN and fading propagation models. For each test in Table G.5.5-1 the Test Time in Subframes is to be applied to the test method described in section G.5.2.

Table G.5.5-1: Minimum Test Time for PSCCH Performance Requirements with Probability of Miss-Detection

Test num.	Performance Scenario	Minimum Number of Active Subframes (MNAS)	Minimum Number of Subframes (MNS)(Note 1)	Test Time in Subframes (Note 2)
11.1.3-1	R.PSCCH.2-1.1 20 / 30 1x2 Low TDLA30-1400	15 000 (MNAS not simulated, but conservatively estimated based on existing fading scenarios with close but smaller Doppler spread)	15 000	15 000
11.1.8-1	R.PSCCH.2-1.1 40 / 30 1x2 Low Static	30 000 (MNAS not simulated, but conservatively estimated based on existing fading scenarios)	30 000	30 000
Note 1: The Minimum Number of Subframes is the total minimum number of subframes (active and inactive) required for this demodulation scenario and is derived from the MNAS, according to the resource pool configuration defined for each test case. Note 2: The Test Time is based on the Minimum Number of Subframes (MNS) according to the formula: Test Time in Subframes = 1000*CEIL(MNS/1000).				

G.5.6 Test time for PSFCH performance requirements with miss-detection probability

The probability of miss-detection requirements are tested in terms of Probability of PSFCH miss-detection. The maximum Probability of PSFCH miss-detection for all tests is 1%. The tests are performed in a variety of Static, AWGN and fading propagation models. For each test in Table G.5.6-1 the Test Time in Subframes is to be applied to the test method described in section G.5.3.

Table G.5.6-1: Minimum Test Time for PSFCH Performance Requirements with Probability of Miss-Detection

Test num.	Performance Scenario	Minimum Number of Active Subframes (MNAS)	Minimum Number of Subframes (MNS)(Note 1)	Test Time in Subframes (Note 2)
11.1.5-1	20 / 30 1x2 Low TDLA30-180	15 000 (MNAS not simulated, but conservatively estimated based on existing fading scenarios with close but smaller Doppler spread)	15 000	15 000

11.1.9-1	40 / 30 1x2 Low Static	30 000 (MNAS not simulated, but conservatively estimated based on existing fading scenarios)	30 000	30 000
<p>Note 1: The Minimum Number of Subframes is the total minimum number of subframes (active and inactive) required for this demodulation scenario and is derived from the MNAS, according to the resource pool configuration defined for each test case.</p> <p>Note 2: The Test Time is based on the Minimum Number of Subframes (MNS) according to the formula: Test Time in Subframes = 1000*CEIL(MNS/1000).</p>				

Annex H: Approach for finding UE direction for FR2 Demod and CSI Testing

H.0 Normative criteria for determining UE direction for Demod and CSI

Following 3 criteria shall be satisfied for a given UE direction. Procedure for finding the UE direction is captured in Annex H.1

1. UE shall pass the REFSSENS test as per TC 7.3.2 of TS 38.521-2 [8].
2. Minimum isolation requirement of 12 dB between the 2 TE polarization branches shall be met.
3. UE reported rank shall be higher or same as intended rank for a given test.

H.1 Procedure for finding UE direction

This section provides example approaches for finding the UE direction for Demod and CSI tests. Other approaches satisfying the normative criteria listed in H.0 are not precluded.

Default approach is as defined in H.1.2.

H.1.1 Using Rx beam peak direction search

1. For Rx beam peak direction search, please refer to procedure defined in Annex K.1.2/K.3.2 of TS 38.521-2 [8].
2. Run wireless cable mode isolation procedure as defined in H.2.
3. Ensure UE reported rank is higher or same as intended rank for a given test.

H.1.2 RSRPB based scan with fallback option to Rx beam peak direction search

1. Enable periodic RSRPB reporting from the UE.
2. Set of grid points for the UE scan can be user defined set or entire sphere.
3. For each grid point, record RSRPB first by connecting SS to the DUT through the measurement antenna with $\text{Pol}_{\text{Link}} = \theta$ polarization to form the Rx beam towards the measurement antenna and similarly for $\text{Pol}_{\text{Link}} = \phi$ polarization.
4. Wait for BEAM_SELECT_WAIT_TIME before recording the RSRPB reports.
5. Once the grid points scan is completed, sort the grid points based on the linear sum of 4 RSRPB values (2 each for θ and ϕ polarization).
6. For the top [10] grid points, run the REFSSENS throughput test as per the test condition defined in 38.521-2 clause 7.3.2
7. Grid points that pass the REFSSENS throughput test are the potential UE direction to be used for running the tests.
8. If no grid points found in step 7, fall back to using H.1.1.
9. For running rank1 tests,
 - a. Pick any of the grid points obtained in step 7.

- b. Run the wireless cable isolation procedure defined in H.2.
- c. Exit the procedure.

10. For running rank2 tests,

- a. Pick a grid point obtained in step 7.
- b. Run the wireless cable mode isolation procedure defined in H.2.
- c. If the grid point satisfies the minimum isolation, proceed to RI check.
Enable RI reporting from UE. If the UE reported rank = 2, exit the procedure.
If UE reported rank is not equal to 2, move to the next grid from step 7 and run step 10.
- d. If no grid point meets the criteria in step 7 and step 10c, fallback to using H.1.1.

H.1.3 Isolation based scan with fallback option to Rx beam peak direction search

1. Enable periodic RSRPB reporting from the UE.
2. Set of grid points for the UE scan can be user defined set or entire sphere.
3. For each grid point, record RSRPB first by connecting SS to the DUT through the measurement antenna with $\text{Pol}_{\text{Link}} = \theta$ polarization to form the Rx beam towards the measurement antenna and similarly for $\text{Pol}_{\text{Link}} = \phi$ polarization.
4. Wait for BEAM_SELECT_WAIT_TIME before recording the RSRPB reports.
5. Once the grid points scan is completed, sort the grid points based on the highest $\text{ISO}_{\theta, B1}$ and $\text{ISO}_{\phi, B2}$ or $\text{ISO}_{\theta, B2}$ and $\text{ISO}_{\phi, B1}$ ($\text{ISO}_{\theta, B1}$, $\text{ISO}_{\phi, B2}$, $\text{ISO}_{\theta, B2}$ and $\text{ISO}_{\phi, B1}$ are explained in H.2).
6. For the top [10] grid points, run the REFSENS throughput test as per the test condition defined in 38.521-2 clause 7.3.2
7. Grid points that pass the REFSENS throughput test are the potential UE direction to be used for running the tests.
8. If no grid points found in step 7, fall back to using H.1.1.
9. For running rank1 tests,
 - a. Pick any of the grid points obtained in step 7.
 - b. If the grid point satisfies the minimum isolation, exit the procedure.
10. For running rank2 tests,
 - a. Pick a grid point obtained in step 7.
 - b. If the grid point satisfies the minimum isolation, proceed to RI check.
Enable RI reporting from UE. If the UE reported rank = 2, exit the procedure.
If UE reported rank is not equal to 2, move to the next grid from step 7 and run step 10.
 - d. If no grid point meets the criteria in step 7 and step 10b, fallback to using H.1.1.

H.2 Wireless cable mode isolation procedure

The following procedure shall be used to verify the wireless cable mode has been established and that the minimum isolation has been achieved

1. Select any of the three Alignment Options (1, 2, or 3) to mount the DUT inside the QZ.
2. If the re-positioning concept is applied to demodulation test cases, position the DUT in DUT Orientation 1 if the RX beam peak is within $0^\circ \leq \theta \leq 90^\circ$. Otherwise, position the DUT in DUT Orientation 2 (Option 1 or 2). If the re-positioning concept is not applied to demodulation test cases, position the DUT in DUT Orientation 1
3. Connect the SS (System Simulator) using static propagation conditions with the DUT through the measurement antenna with $\text{Pol}_{\text{Link}} = \theta$ polarization to form the RX beam towards the desired test direction. Allow at least BEAM_SELECT_WAIT_TIME for the UE RX beam selection to complete.
4. Adjust the DL power of the SS to obtain P_{DL} defined in Table C.0.2-1 at the centre of QZ
5. Perform the isolation of the branches to achieve the wireless cable mode. The inverse channel matrix approach in [27] is one suitable approach. Alternate approaches are not precluded.
6. To verify the wireless cable mode and thus the min. isolation between branches
 - a) Query SS-RSRPB($\text{Pol}_{\text{Meas}} = \text{Pol}_{\text{Link}} = \theta$) from the DUT for the θ -polarization and convert the two measurements in dBm, i.e., SS-RSRPB_{B1} and SS-RSRPB_{B2}
 - b) Calculate the isolation from θ -polarization into Branch 1, i.e., $\text{ISO}_{\theta, \text{B1}} = \text{SS-RSRPB}_{\text{B1}} - \text{SS-RSRPB}_{\text{B2}}$ and the isolation into Branch 2, i.e., $\text{ISO}_{\theta, \text{B2}} = \text{SS-RSRPB}_{\text{B2}} - \text{SS-RSRPB}_{\text{B1}}$
 - c) Connect the SS (System Simulator) using static propagation conditions with the DUT through the measurement antenna with $\text{Pol}_{\text{Link}} = \phi$ polarization to form the RX beam towards desired test direction. Allow at least BEAM_SELECT_WAIT_TIME for the UE RX beam selection to complete.
 - d) Adjust the DL power of the SS to obtain P_{DL} defined in Table C.0.2-1 at the centre of QZ
 - e) Query SS-RSRPB($\text{Pol}_{\text{Meas}} = \text{Pol}_{\text{Link}} = \phi$) from the DUT for ϕ -polarization and convert the two measurements in dBm, i.e., SS-RSRPB_{B1} and SS-RSRPB_{B2}
 - f) Calculate the isolation from ϕ -polarization into Branch 2, i.e., $\text{ISO}_{\phi, \text{B2}} = \text{SS-RSRPB}_{\text{B2}} - \text{SS-RSRPB}_{\text{B1}}$ and the isolation into Branch 1, i.e., $\text{ISO}_{\phi, \text{B1}} = \text{SS-RSRPB}_{\text{B1}} - \text{SS-RSRPB}_{\text{B2}}$

If either of the isolations pairs, $\text{ISO}_{\theta, \text{B1}}$ and $\text{ISO}_{\phi, \text{B2}}$ or $\text{ISO}_{\theta, \text{B2}}$ and $\text{ISO}_{\phi, \text{B1}}$ exceed 12dB, the wireless cable mode has been achieved.

Annex I (informative): Change history

Change history							
Date	Meeting	Tdoc	CR	Re v	Cat	Subject/Comment	New version
2018-01		R5-180064				Skeleton for NR Demod spec	0.0.1
2018-04-13		R5-182036				Added the test procedure for FR2 Demod testing in Annex	0.1.0
2018-10-12		R5-185903				Added the demod spec test case section titles to be in line with RAN4 approved skeleton for 38.101-4	0.1.1
2018-11-20	RAN5 #81	R5-188006				new TC for PDSCH FR1 demod	0.2.0
2018-11-20	RAN5 #81	R5-188008				new TC for PDSCH FR2 demod	0.2.0
2018-11-20	RAN5 #81	R5-187573				section 3 of 38.521-4 spec	0.2.0
2018-11-20	RAN5 #81	R5-187845				section 4 of 38.521-4 spec	0.2.0
2018-11-20	RAN5 #81	R5-188009				pCR for new TC addition for FR1 FDD PDSCH Demod	0.2.0
2018-11-20	RAN5 #81	R5-188010				pCR for new TC addition for FR1 FDD PDCCH Demod	0.2.0
2019-01-25	RAN5 5G-NR AH#4	R5-190054				update to 2Rx TDD FR1 PDSCH mapping Type A performance test case	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190926				pCR for new TC addition for FR1 4Rx FDD PDSCH Demodulation performance (2x4)	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190927				pCR for new TC addition for FR1 4Rx FDD PDSCH Demodulation performance (4x4)	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190928				pCR for new TC addition for FR1 4Rx FDD PDSCH Demodulation performance with enhanced receiver type X (4x4)	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190291				Updated to Annex A Measurement Channels for Performance tests	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190292				Updated to Annex B Propagation conditions for Performance tests	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190458				update to 2Rx TDD FR2 PDSCH mapping Type A performance test case	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190461				2Rx TDD FR2 PDCCH performance test case	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190929				LTE link setup details for demod test cases	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190930				Annex for statistical tput calculation for demod test cases	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190931				pCR for TC addition of FR1 TDD 4Rx PDSCH	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190932				pCR for modification of FDD 2Rx FR1 PDSCH Demod	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190933				Annex for DL and UL Signal Setup	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190934				pCR for modification of FDD FR1 PDCCH Demod	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190935				PDSCH and PDCCH Config before measurement	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190986				38.521-4 Common Section updates to clarify leverage across architecture options	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190552				Addition of 2Rx TDD FR1 Single PMI tests for both SA and NSA	0.3.0
2019-01-25	RAN5 5G-NR AH#4	R5-190553				Addition of 2Rx TDD FR1 RI reporting for both SA and NSA	0.3.0
2019-03-01	RAN5 #82	R5-191183				Adding relevant references to 38.521-4	0.4.0
2019-03-01	RAN5 #82	R5-192461				Adding of test case 6.2.2.1.2.1.2, Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192672				Introduction of New test case 5.3.2.2.1 2Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192463				Introduction of New test case 5.3.2.2.2 2Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192462				Introduction of New test case 5.3.3.1.1 4Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192464				Introduction of New test case 5.3.3.1.2 4Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192465				Introduction of New test case 5.3.3.2.1 4Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192465				Introduction of New test case 5.3.3.2.2 4Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192474				Introduction of TS 38.521-4 test case 6.3.2.1.1	0.4.0

2019-03-01	RAN5 #82	R5-192475				Introduction of TS 38.521-4 test case 6.3.2.1.2	0.4.0
2019-03-01	RAN5 #82	R5-192467				Introduction of test case 5.2.2.1.2_1, 2Rx FDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - 2x2 MIMO with baseline receiver for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192840				Demod spec section 4 update	0.4.0
2019-03-01	RAN5 #82	R5-192673				Update to TDD FR1 2Rx PDSCH Type A test case	0.4.0
2019-03-01	RAN5 #82	R5-192103				addition of 2Rx TDD FR1 periodic CQI reporting test case	0.4.0
2019-03-01	RAN5 #82	R5-192468				pCR for addition of 2Rx TDD FR1 TypeA and CSI-RS overlapped TC	0.4.0
2019-03-01	RAN5 #82	R5-192866				pCR for modification of PDSCH and PDCCH Config before measurement	0.4.0
2019-03-01	RAN5 #82	R5-192470				pCR for modification of FDD FR1 PDCCH Demod	0.4.0
2019-03-01	RAN5 #82	R5-192471				pCR for modification of FDD 2Rx FR1 PDSCH Demod	0.4.0
2019-03-01	RAN5 #82	R5-192472				Update to 2Rx TDD FR1 RI reporting for both SA and NSA	0.4.0
2019-03-01	RAN5 #82	R5-192460				Minimum test time update for FR1 Demod test case	0.4.0
2019-03-01	RAN5 #82	R5-192473				Addition of Annex F for Demod spec	0.4.0
2019-03	RAN#83	RP-190222	-	-	-	Presented to the RAN#83 plenary for 1-step approval	1.0.0
2019-03	RAN#83	-	-	-	-	raised to v15.0.0 with editorial changes only	15.0.0
2019-06	RAN5#83	R5-193544	0030	-	F	Updates to test case 6.2.2.1.2.1, 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-193943	0035	-	F	Adding test case 6.2.2.2.2, 2Rx TDD FR1 periodic subband CQI reporting under fading conditions for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194159	0048	-	F	Alignment of Annex C with core specification	15.1.0
2019-06	RAN5#83	R5-194466	0056	-	F	Introduction of FR1 CQI test case 6.2.2.2.1	15.1.0
2019-06	RAN5#83	R5-194622	0057	-	F	Corrections TDD UL-DL configurations	15.1.0
2019-06	RAN5#83	R5-194680	0066	-	F	Demod section 5 general update	15.1.0
2019-06	RAN5#83	R5-194689	0073	-	F	Addition of text for FR1 PBCH demodulation test case	15.1.0
2019-06	RAN5#83	R5-194690	0074	-	F	Update to 2Rx TDD FR2 PDSCH Type A test case	15.1.0
2019-06	RAN5#83	R5-194691	0075	-	F	Update to FR2 PDCCH config param	15.1.0
2019-06	RAN5#83	R5-194692	0076	-	F	Addition of text for FR2 PBCH demodulation test case	15.1.0
2019-06	RAN5#83	R5-194693	0077	-	F	Update to section 8 CSI reporting	15.1.0
2019-06	RAN5#83	R5-194979	0063	1	F	Further updates to 2Rx TDD FR1 PDSCH mapping Type A test case	15.1.0
2019-06	RAN5#83	R5-194980	0032	1	F	Introduction of TC 6.4.3.2_1 4Rx TDD FR1 RI reporting for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194981	0034	1	F	Adding test case 6.2.2.1.2.2, 2Rx FDD FR1 periodic subband CQI reporting under fading conditions for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194982	0053	1	F	Update to 4Rx FDD FR1 PDSCH mapping Type A performance 4x4 MIMO with baseline Rx	15.1.0
2019-06	RAN5#83	R5-194983	0054	1	F	Update to 4Rx FDD FR1 PDSCH mapping Type A performance 4x4 MIMO with enhanced Rx	15.1.0
2019-06	RAN5#83	R5-194984	0037	1	F	Editorial changes to TS 38.521-4 test case 6.3.2.1.2	15.1.0
2019-06	RAN5#83	R5-194985	0038	1	F	Introduction to TS 38.521-4 test case 6.3.3.1.1	15.1.0
2019-06	RAN5#83	R5-194986	0039	1	F	Introduction to TS 38.521-4 test case 6.3.3.1.2	15.1.0
2019-06	RAN5#83	R5-194987	0040	1	F	Introduction to TS 38.521-4 test case 6.3.3.2.1	15.1.0
2019-06	RAN5#83	R5-194988	0041	1	F	Introduction to TS 38.521-4 test case 6.3.3.2.2	15.1.0
2019-06	RAN5#83	R5-194989	0059	1	F	Modification of 2Rx FDD FR1 PDSCH mapping Type A performance - enhanced Rx	15.1.0
2019-06	RAN5#83	R5-194990	0060	1	F	Modification of 2Rx TDD FR1 PDSCH mapping Type A and CSI-RS overlapped with PDSCH performance - baseline Rx	15.1.0
2019-06	RAN5#83	R5-194991	0061	1	F	Modification of 2Rx FDD FR1 PDCCH 1 Tx	15.1.0
2019-06	RAN5#83	R5-194992	0062	1	F	Modification of 2Rx FDD FR1 PDCCH 2 Tx	15.1.0
2019-06	RAN5#83	R5-194993	0042	1	F	Update to test case 5.3.2.2.1 2Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194994	0043	1	F	Update to test case 5.3.2.2.2 2Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194995	0044	1	F	Update to test case 5.3.3.1.1 4Rx FDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194996	0045	1	F	Update to test case 5.3.3.1.2 4Rx FDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194997	0046	1	F	Update to test case 5.3.3.2.1 4Rx TDD FR1 PDCCH 1 Tx antenna performance for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194998	0047	1	F	Update to test case 5.3.3.2.2 4Rx TDD FR1 PDCCH 2 Tx antenna performance for both SA and NSA	15.1.0
2019-06	RAN5#83	R5-194999	0055	1	F	Update to FR1 demod test case 5.2.2.1.2_1	15.1.0
2019-06	RAN5#83	R5-195000	0078	1	F	Update to RI Reporting Accuracy test	15.1.0
2019-06	RAN5#83	R5-195001	0049	1	F	Updated to Annexes for performance tests	15.1.0
2019-06	RAN5#83	R5-195002	0068	1	F	Demod section 2-4 update	15.1.0
2019-06	RAN5#83	R5-195003	0058	1	F	Modification of 2Rx FDD FR1 PDSCH mapping Type A performance - baseline Rx	15.1.0

2019-06	RAN5#83	R5-195088	0029	1	F	Editorial Aligning CSI common test parameters with core specification	15.1.0
2019-06	RAN5#83	R5-195089	0031	1	F	Updating of E-UTRA test frequency for DEMOD test cases	15.1.0
2019-06	RAN5#83	R5-195098	0079	-	F	Performance implementation of FR2 UL demod OTA tests using single pol Rx TE	15.1.0
2019-06	RAN5#83	R5-195170	0052	1	F	Update to 4Rx FDD FR1 PDSCH mapping Type A performance 2x4 MIMO with baseline Rx	15.1.0
2019-06	RAN5#83	R5-195171	0033	1	F	Introducing MU and TT clauses in annex F for Channel State Information reporting test cases	15.1.0
2019-06	RAN5#83	R5-195172	0069	1	F	Annex update for PDSCH PDCCH minimum test time	15.1.0
2019-06	RAN5#83	R5-195413	0067	1	F	Update to section 9 and 10 of Demod spec	15.1.0
2019-06	RAN5#83	R5-195438	0050	2	F	Introducing 5.2.2.1.4_1 2Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance	15.1.0
2019-06	RAN5#83	R5-195439	0051	2	F	Introducing 5.2.3.1.4_1 4Rx FDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance	15.1.0
2019-06	RAN5#83	R5-195440	0064	1	F	Addition of new test case for 2Rx FDD FR1 periodic CQI reporting under AWGN	15.1.0
2019-06	RAN5#83	R5-195441	0065	1	F	Update to 2Rx TDD FR1 periodic CQI reporting under AWGN	15.1.0
2019-06	RAN5#83	R5-195442	0070	1	F	Addition of SDR test case for single carrier in SA mode	15.1.0
2019-06	RAN5#83	R5-195443	0072	1	F	Addition of FR1 SDR test case for CA in NSA mode	15.1.0
2019-06	RAN#84	-	-	-	-	Administrative release upgrade to match the release of 3GPP TS 38.508-1 and TS 38.521-1 which were upgraded at RAN#84 to Rel-16 due to Rel-16 relevant CR(s)	16.0.0
2019-09	RAN#85	R5-195558	0080	-	F	Correction to 5.2.2.1.4_1 2Rx FR1 PDSCH LTE-NR coexistence performance	16.1.0
2019-09	RAN#85	R5-196245	0090	-	F	Correction to 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	16.1.0
2019-09	RAN#85	R5-196247	0092	-	F	Correction to 5.3.2.2.1 and 5.3.3.2.1 TDD FR1 PDCCH 1Tx performance	16.1.0
2019-09	RAN#85	R5-196495	0097	-	F	Updated to Annex A for performance tests	16.1.0
2019-09	RAN#85	R5-196496	0098	-	F	Updated to Annex B for performance tests	16.1.0
2019-09	RAN#85	R5-196498	0100	-	F	Updated to General clauses for Demod and CSI requirements	16.1.0
2019-09	RAN#85	R5-196857	0119	-	F	Corrections to PDSCH demod TCs	16.1.0
2019-09	RAN#85	R5-197370	0086	1	F	Updates to 6.2.2.1.2.1, 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197371	0087	1	F	Updates to 6.2.2.2.1, 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197372	0125	1	F	Modification of 4Rx FDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197373	0084	1	F	Clean up test cases 5.3.3.1.1, 5.3.3.1.2, 5.3.3.2.1 and 5.3.3.2.2 for 4Rx PDCCH	16.1.0
2019-09	RAN#85	R5-197374	0099	1	F	Updated to General clauses for performance tests	16.1.0
2019-09	RAN#85	R5-197375	0123	1	F	Modification of FDD FR1 2Rx TypeA baseline and TypeX Rxvr	16.1.0
2019-09	RAN#85	R5-197376	0083	1	F	Clean up test cases 5.3.2.2.1 and 5.3.2.2.2 for 2Rx PDCCH	16.1.0
2019-09	RAN#85	R5-197377	0093	1	F	Correction to FR1 FDD PDSCH mapping Type A performance test cases	16.1.0
2019-09	RAN#85	R5-197378	0095	1	F	Correction to MU and TT for FR1 demodulation test cases	16.1.0
2019-09	RAN#85	R5-197379	0096	1	F	Update to 4Rx FDD FR1 PDSCH mapping Type A performance	16.1.0
2019-09	RAN#85	R5-197380	0117	1	F	Update of Annex F to add new CSI test cases	16.1.0
2019-09	RAN#85	R5-197512	0101	1	F	Update to SA SDR test case	16.1.0
2019-09	RAN#85	R5-197513	0102	1	F	Update to NSA SDR test case	16.1.0
2019-09	RAN#85	R5-197566	0127	1	F	Modification on 2Rx TDD FR1 Single PMI with 4Tx Type1 - SinglePanel codebook for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197567	0128	1	F	Introduce 2Rx TDD FR1 Single PMI with 8Tx Type1 - SinglePanel codebook for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197572	0126	1	F	Modification of 4Rx FDD FR1 PDSCH mapping Type A performance - 4x4 MIMO with baseline receiver for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197573	0091	1	F	Correction to 2Rx TDD FR1 PDSCH mapping Type A performance	16.1.0
2019-09	RAN#85	R5-197574	0105	1	F	Update to TDD FR1 2Rx TypeA Baseline and Type X receiver Demod test cases	16.1.0
2019-09	RAN#85	R5-197575	0107	1	F	Editorial and updates to TS 38.521-4 test case 6.3.2.1.1	16.1.0
2019-09	RAN#85	R5-197576	0108	1	F	Updates to TS 38.521-4 test case 6.3.2.1.2	16.1.0
2019-09	RAN#85	R5-197577	0109	1	F	Updates to TS 38.521-4 test case 6.3.3.1.1	16.1.0
2019-09	RAN#85	R5-197578	0110	1	F	Update to TS 38.521-4 test case 6.3.3.1.2	16.1.0
2019-09	RAN#85	R5-197579	0111	1	F	Editorial and update to TS 38.521-4 test case 6.3.3.2.1	16.1.0
2019-09	RAN#85	R5-197580	0112	1	F	Editorial and update to TS 38.521-4 test case 6.3.3.2.2	16.1.0
2019-09	RAN#85	R5-197581	0120	1	F	Correction of PRACH-ConfigurationIndex for TC 5.2.2.2.1_1	16.1.0
2019-09	RAN#85	R5-197582	0122	1	F	Update to RI Reporting Accuracy test	16.1.0
2019-09	RAN#85	R5-197615	0088	1	F	Updates to 6.2.2.1.2.2, 2Rx FDD FR1 periodic subband CQI reporting under fading conditions for both SA and NSA	16.1.0

2019-09	RAN#85	R5-197616	0089	1	F	Updates to 6.2.2.2.2.2, 2Rx TDD FR1 periodic subband CQI reporting under fading conditions for both SA and NSA	16.1.0
2019-09	RAN#85	R5-197648	0115	2	F	Update to Annex G to restructure minimum test time tables for Demodulation test cases	16.1.0
2019-09	RAN#85	R5-197649	0116	2	F	Update to Annex G to add minimum test time for CSI test cases	16.1.0
2019-12	RAN#86	R5-198248	0141	-	F	Updates to Annex F	16.2.0
2019-12	RAN#86	R5-198281	0142	-	F	Update to FR1 4Rx FDD PDSCH Type A Demodulation performance	16.2.0
2019-12	RAN#86	R5-198395	0151	-	F	Corrections to E-UTRA configurations for EN-DC test cases	16.2.0
2019-12	RAN#86	R5-198407	0152	-	F	Correction to 2Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	16.2.0
2019-12	RAN#86	R5-198408	0153	-	F	Correction to 2Rx and 4Rx TDD FR1 Single PMI with 4Tx Type1 - SinglePanel codebook for both SA and NSA	16.2.0
2019-12	RAN#86	R5-198409	0154	-	F	Correction to Sections 5.2 and 5.3	16.2.0
2019-12	RAN#86	R5-198560	0157	-	F	Updated to Annex A and B for performance tests	16.2.0
2019-12	RAN#86	R5-198679	0161	-	F	Correction of SchedulingRequestResourceConfig periodicityAndOffset for TC 7.2.2.2.1_1	16.2.0
2019-12	RAN#86	R5-198680	0162	-	F	Include PDSCH RMC for PDCCH demod FR1 test cases	16.2.0
2019-12	RAN#86	R5-199079	0137	2	F	Adding new test case 6.2.3.1.2.1, 4Rx FDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	16.2.0
2019-12	RAN#86	R5-199382	0129	1	F	Addition of 5.2.2.1.3_1 2Rx FDD PDSCH mapping Type B	16.2.0
2019-12	RAN#86	R5-199383	0130	1	F	Addition of NR test case 5.2.3.1.2_1-FDD type A CSI-RS overlap 4x4 MIMO	16.2.0
2019-12	RAN#86	R5-199384	0134	1	F	Addition of NR test case 6.2.3.1.1-FDD periodical CQI	16.2.0
2019-12	RAN#86	R5-199385	0136	1	F	Addition of NR test case 6.4.2.1_1-FDD RI reporting	16.2.0
2019-12	RAN#86	R5-199387	0149	1	F	Update to starting MCS index for CQI reporting test cases	16.2.0
2019-12	RAN#86	R5-199388	0145	1	F	Update to Annex G for minimum test time for FR2 Demod test cases	16.2.0
2019-12	RAN#86	R5-199414	0131	1	F	Addition of NR test case 5.2.3.1.3_1-FDD type B 2x4 MIMO	16.2.0
2019-12	RAN#86	R5-199415	0132	1	F	Addition of NR test case 5.2.3.2.2_1-TDD type A CSI-RS overlap 2x4 MIMO	16.2.0
2019-12	RAN#86	R5-199416	0133	1	F	Addition of NR test case 5.2.3.2.3_1-TDD type B 2x4 MIMO	16.2.0
2019-12	RAN#86	R5-199417	0135	1	F	Addition of NR test case 6.2.3.2.1.1-TDD periodical CQI	16.2.0
2019-12	RAN#86	R5-199418	0138	1	F	Adding new test case 6.2.3.1.2.2, 4Rx FDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	16.2.0
2019-12	RAN#86	R5-199419	0139	1	F	Adding new test case 6.2.3.2.2.1, 4Rx TDD FR1 periodic wideband CQI reporting under fading conditions for both SA and NSA	16.2.0
2019-12	RAN#86	R5-199420	0140	1	F	Adding new test case 6.2.3.2.2.2, 4Rx TDD FR1 aperiodic subband CQI reporting under fading conditions for both SA and NSA	16.2.0
2019-12	RAN#86	R5-199421	0155	1	F	Correction to chapter 5 and 6 to be aligned with core spec	16.2.0
2019-12	RAN#86	R5-199422	0156	1	F	Editorial correction to CSI reporting tests	16.2.0
2019-12	RAN#86	R5-199425	0146	1	F	Update to FR2 2Rx PDSCH Type A enhanced type X receiver test case	16.2.0
2019-12	RAN#86	R5-199516	0160	1	F	Update PrachConfigIndex in 5.2.3.2.1_1 test case	16.2.0
2019-12	RAN#86	R5-199525	0148	1	F	Clarification on PDCP SDU size for SDR SA Demod test case	16.2.0
2019-12	RAN#86	R5-199526	0147	1	F	Clarification on PDCP SDU size for SDR NSA Demod test case	16.2.0
2019-12	RAN#86	R5-199527	0143	1	F	Update to FR2 2Rx PDSCH Type A baseline receiver test case	16.2.0
2019-12	RAN#86	R5-199531	0144	1	F	Annex update for UE positioning procedure for Demod test cases	16.2.0
2019-12	RAN#86	R5-199532	0150	1	F	Update to FR2 PDCCH Demod test case	16.2.0
2019-12	RAN#86	R5-199570	0158	1	F	Introduction of FR2 CQI test cases	16.2.0
2020-03	RAN#87	R5-200271	0165	-	F	Update to Demod TC 5.2.3.2.1_1	16.3.0
2020-03	RAN#87	R5-200322	0166	-	F	CR to 38.521-4 to introduce isolation procedure	16.3.0
2020-03	RAN#87	R5-200450	0168	-	F	Addition of message exceptions for Type2 QCL information	16.3.0
2020-03	RAN#87	R5-201245	0170	1	F	Core alignment to 4Rx PDCCH Demod Test Cases	16.3.0
2020-03	RAN#87	R5-200453	0171	-	F	Correction to FR1 2Rx PDSCH demodulation test cases	16.3.0
2020-03	RAN#87	R5-200454	0172	-	F	Correction to FR1 4Rx PDSCH demodulation test cases	16.3.0
2020-03	RAN#87	R5-200455	0173	-	F	Correction to measurement uncertainty and test tolerance for CQI test cases	16.3.0
2020-03	RAN#87	R5-200456	0174	-	F	Correction to PDCCH demod TCs	16.3.0
2020-03	RAN#87	R5-200660	0175	-	F	Correcting CQI value in test procedure	16.3.0
2020-03	RAN#87	R5-200672	0178	-	F	Updated to Annex A and B for performance tests	16.3.0
2020-03	RAN#87	R5-200682	0179	-	F	Correction to Applicability rules for Performance tests	16.3.0
2020-03	RAN#87	R5-200710	0180	-	F	Update of TC 5.2.2.1.3_1 2Rx FDD PDSCH mapping Type B	16.3.0
2020-03	RAN#87	R5-200711	0181	-	F	Update of TC 5.2.3.1.2_1 4Rx FDD PDSCH mapping Type A and CSI-RS overlapped	16.3.0
2020-03	RAN#87	R5-200712	0182	-	F	Update of TC 5.2.3.1.3_1 4Rx FDD PDSCH mapping Type B	16.3.0
2020-03	RAN#87	R5-200713	0183	-	F	Update of TC 5.2.3.2.2_1 4Rx TDD PDSCH mapping Type A and CSI-RS overlapped	16.3.0

2020-03	RAN#87	R5-200714	0184	-	F	Update of TC 5.2.3.2.3_1 4Rx TDD PDSCH mapping Type B	16.3.0
2020-03	RAN#87	R5-200718	0188	-	F	Update of Test Tolerance in Annex F	16.3.0
2020-03	RAN#87	R5-200729	0189	-	F	Core spec alignment for FR1 4Rx FDD PDSCH Type A Demodulation performance	16.3.0
2020-03	RAN#87	R5-200914	0176	1	F	Correction to test case 8.2.2.2.1.1 2 Rx, TDD FR2 periodic CQI reporting under AWGN performance for both SA and NSA	16.3.0
2020-03	RAN#87	R5-200915	0164	1	F	Update of Clause 4 in TS 38.521-4	16.3.0
2020-03	RAN#87	R5-200985	0169	1	F	Core alignment for FR2 demod test case	16.3.0
2020-03	RAN#87	R5-201068	0187	1	F	Update of TC 6.4.2.1_1 2Rx FDD RI reporting	16.3.0
2020-03	RAN#87	R5-201090	0177	1	F	Replacing derivation paths to 38.331	16.3.0
2020-03	RAN#87	R5-201180	0167	1	F	Addition of FR2 Demod sustained data rate test case	16.3.0
2020-06	RAN#88	R5-201816	0190	-	F	Correction to TC 5.2.3.1.1_4 4Rx FDD FR1 PDSCH mapping Type A performance	16.4.0
2020-06	RAN#88	R5-201945	0191	-	F	Updated to Annex A and B for performance tests	16.4.0
2020-06	RAN#88	R5-202242	0195	-	F	Clarification of propagation condition for Demod test cases during call setup	16.4.0
2020-06	RAN#88	R5-202297	0198	-	F	Correction to 4Rx FDD FR1 periodic CQI reporting under AWGN conditions for both SA and NSA	16.4.0
2020-06	RAN#88	R5-202980	0201	1	F	Correction to CSI reporting test cases missing MIMO correlation matrixes	16.4.0
2020-06	RAN#88	R5-202304	0205	-	F	Correction to FR2 PDCCH demodulation tests	16.4.0
2020-06	RAN#88	R5-202307	0208	-	F	Editorial correction on the table numbers for Minimum Test Time	16.4.0
2020-06	RAN#88	R5-202308	0209	-	F	Editorial correction to 4x4 MIMO PDSCH demodulation tests	16.4.0
2020-06	RAN#88	R5-202736	0197	1	F	Message exception correction for Demod test cases	16.4.0
2020-06	RAN#88	R5-202737	0202	1	F	Correction to FR1 aperiodic subband CQI reporting under fading conditions	16.4.0
2020-06	RAN#88	R5-202738	0203	1	F	Correction to FR1 Single PMI with 8Tx Type1 - SinglePanel codebook for both SA and NSA	16.4.0
2020-06	RAN#88	R5-202739	0207	1	F	Correction to message exception and test description in RI tests	16.4.0
2020-06	RAN#88	R5-202740	0196	1	F	Update to FR2 PDSCH Demod test case	16.4.0
2020-06	RAN#88	R5-202741	0211	1	F	Introduction of 8.4.2.2.1 2Rx TDD FR2 RI reporting for both SA and NSA	16.4.0
2020-06	RAN#88	R5-202742	0210	1	F	Editorial correction to Annex C.2	16.4.0
2020-06	RAN#88	R5-202743	0213	1	F	Update Wireless isolation procedure	16.4.0
2020-06	RAN#88	R5-202766	0212	1	F	Updates of FR2 MU and TT in TS 38.521-4	16.4.0
2020-06	RAN#88	R5-202832	0214	1	F	Addition of message exceptions for PDSCH test cases	16.4.0
2020-06	RAN#88	R5-202908	0193	1	F	Clarification of disabling Tx diversity for FR2 UE for FR2 Demod testing	16.4.0
2020-06	RAN#88	R5-202979	0199	2	F	Correction to 4Rx TDD FR1 RI reporting	16.4.0
2020-06	RAN#88	R5-202981	0204	1	F	Correction to FR2 CQI reporting tests	16.4.0
2020-06	RAN#88	R5-202989	0192	1	F	Updates to 8.2.2.2.1, 2Rx TDD FR2 aperiodic CQI reporting under fading performance for both SA and NSA	16.4.0
2020-09	RAN#89	R5-203298	0215	-	F	Activate Test Mode in NSA Demod Test Cases	16.5.0
2020-09	RAN#89	R5-203670	0217	-	F	message contents correction for TC 5.2.3.1.2_1	16.5.0
2020-09	RAN#89	R5-203717	0219	-	F	Correction to TC 5.2.3.1.1_1 4Rx FDD FR1 PDSCH mapping Type A performance	16.5.0
2020-09	RAN#89	R5-203756	0220	-	F	Removing unnecessary IE rbg-Size from message exceptions	16.5.0
2020-09	RAN#89	R5-203902	0221	-	F	Correction to Annex G minimum test time table	16.5.0
2020-09	RAN#89	R5-204062	0226	-	F	Correction to PDSCH reference channel	16.5.0
2020-09	RAN#89	R5-204063	0227	-	F	Correction to 2Rx FDD FR1 periodic wideband CQI reporting under fading conditions	16.5.0
2020-09	RAN#89	R5-204064	0228	-	F	Correction to LTE-NR coexistence performance	16.5.0
2020-09	RAN#89	R5-204100	0232	-	F	Update to common test parameters and channel mappings	16.5.0
2020-09	RAN#89	R5-204101	0233	-	F	Update E-UTRA cell configuration for NSA	16.5.0
2020-09	RAN#89	R5-204261	0235	-	F	Editorial correction of message exceptions	16.5.0
2020-09	RAN#89	R5-204774	0223	1	F	Test applicability update for all PDSCH mapping type B test cases	16.5.0
2020-09	RAN#89	R5-204870	0222	1	F	Addition of FR1 2Rx TDD PDSCH mapping type B test case	16.5.0
2020-09	RAN#89	R5-204871	0224	1	F	Addition of 4Rx FDD FR1 RI reporting test case	16.5.0
2020-09	RAN#89	R5-204933	0229	1	F	CR to update MU and TT in 38.521-4	16.5.0
2020-09	RAN#89	R5-204934	0225	1	F	Correction to frequencyDomainAllocation	16.5.0
2020-09	RAN#89	R5-204935	0230	1	F	Correction to MU and TT for FR1 PMI and RI tests	16.5.0
2020-09	RAN#89	R5-204936	0218	1	F	Update to FR2 PDSCH test case	16.5.0
2020-09	RAN#89	R5-204937	0216	1	F	Annex F Update of MU and TT for FR2 PDSCH and PDCCH Demodulation scenario	16.5.0
2020-09	RAN#89	R5-204938	0236	1	F	Update of AWGN flatness in TS 38.521-4	16.5.0
2020-12	RAN#90	R5-205920	0243	-	F	Introduction of new test case for FR2 CA PDSCH Demodulation	16.6.0
2020-12	RAN#90	R5-205925	0247	-	F	Update to FDD LTE-NR coexistence test case	16.6.0
2020-12	RAN#90	R5-206090	0248	-	F	Correction to 5.2.2.1.4_1 LTE NR coexistence performance	16.6.0
2020-12	RAN#90	R5-206091	0249	-	F	Correction to 9.4B.1.1 Sustained downlink data rate performance for EN-DC within FR1	16.6.0
2020-12	RAN#90	R5-206092	0250	-	F	Core alignment to FR1 and FR2 CSI test cases	16.6.0

2020-12	RAN#90	R5-206093	0251	-	F	Clean up on FR2 CQI and RI test cases	16.6.0
2020-12	RAN#90	R5-206094	0252	-	F	Clean up on FR1 RI test cases	16.6.0
2020-12	RAN#90	R5-206097	0255	-	F	Correction to incorrect parameter settings for subband CQI tests	16.6.0
2020-12	RAN#90	R5-206098	0256	-	F	Correction to Message contents for Sustained downlink data rate tests	16.6.0
2020-12	RAN#90	R5-206163	0259	-	F	Correction in message content of 5.2.2.2.1_1, 5.2.3.2.1_1 test cases	16.6.0
2020-12	RAN#90	R5-206165	0260	-	F	Update on TB success rate definition in Sustain data rate test cases	16.6.0
2020-12	RAN#90	R5-206208	0262	-	F	Editorial update of uplink signals	16.6.0
2020-12	RAN#90	R5-206666	0237	1	F	Update of LTE-NR coexistence performance test case 5.2.2.1.4	16.6.0
2020-12	RAN#90	R5-206667	0238	1	F	Update of LTE-NR coexistence performance test case 5.2.3.1.4	16.6.0
2020-12	RAN#90	R5-206668	0253	1	F	Correction to number of CQI and HARQ in CQI TCs under fading	16.6.0
2020-12	RAN#90	R5-206669	0254	1	F	Correction to FR1 periodic wideband CQI reporting under fading conditions	16.6.0
2020-12	RAN#90	R5-206670	0258	1	F	Correction of CSI-IM periodicity and offset in 4RX FDD wideband CQI under fading condition	16.6.0
2020-12	RAN#90	R5-206671	0240	1	F	Update to OCNG definition in DEMOD spec	16.6.0
2020-12	RAN#90	R5-206775	0239	1	F	Addition of test case 5.2.2.2.4_1 2Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x2 MIMO with baseline receiver for both SA and NSA	16.6.0
2020-12	RAN#90	R5-206776	0241	1	F	Applicability rules for section 5 CA Demodulation requirements	16.6.0
2020-12	RAN#90	R5-206777	0242	1	F	Applicability rules for section 7 CA Demodulation requirements	16.6.0
2020-12	RAN#90	R5-206829	0263	1	F	Update of Annex F	16.6.0
2020-12	RAN#90	R5-206830	0244	1	F	Update to FR2 PDSCH Demodulation test case	16.6.0
2020-12	RAN#90	R5-206831	0245	1	F	Update to FR2 PDCCH Demodulation test case	16.6.0
2020-12	RAN#90	R5-206832	0246	1	F	Update to FR2 CQI reporting under AWGN test case	16.6.0
2020-12	RAN#90	R5-206833	0261	1	F	CR on MU and testability limit for FR2 demod test case	16.6.0
2021-03	RAN#91	R5-210520	0275	-	F	Correction to SR config for TDD PDSCH Type A performance test cases	16.7.0
2021-03	RAN#91	R5-210521	0276	-	F	Correction to test applicability for LTE-NR coexistence performance test cases	16.7.0
2021-03	RAN#91	R5-210522	0277	-	F	Correction to wideband CQI reporting under fading test cases	16.7.0
2021-03	RAN#91	R5-210523	0278	-	F	Addition of 8.3.2.2.1 2Rx TDD FR2 Single PMI with 2Tx Type1-SinglePanel Codebook	16.7.0
2021-03	RAN#91	R5-210770	0282	-	F	Update message content in test case 7.3.2.2.2	16.7.0
2021-03	RAN#91	R5-210773	0283	-	F	Correction in 6.4.2.1_1 test requirements	16.7.0
2021-03	RAN#91	R5-210868	0284	-	F	Correction to Table F.1.1.2-2 for FR1 test cases	16.7.0
2021-03	RAN#91	R5-210869	0285	-	F	Correction to Test Purpose of PDCCH test cases	16.7.0
2021-03	RAN#91	R5-210993	0288	-	F	Editorial, cleanup of some references in 38.521-4	16.7.0
2021-03	RAN#91	R5-211050	0289	-	F	Updating applicability in test case 5.2.2.2.4_1	16.7.0
2021-03	RAN#91	R5-211081	0293	-	F	Update to downlink physical channel EPRE level for LTE-NR coex scenario	16.7.0
2021-03	RAN#91	R5-211086	0296	-	F	Adding new CSI test cases to annex F	16.7.0
2021-03	RAN#91	R5-211658	0297	1	F	Addition of new test case 6.3.2.1.3 2Rx FDD FR1 Multiple PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	16.7.0
2021-03	RAN#91	R5-211659	0298	1	F	Addition of new test case 6.3.3.1.3 4Rx FDD FR1 Multiple PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	16.7.0
2021-03	RAN#91	R5-211716	0280	1	F	Correction to DCI bit size for PDSCH Type B performance and LTE coexistence tests	16.7.0
2021-03	RAN#91	R5-211717	0281	1	F	Correction to LB setup DRB in CLOSE UE TEST LOOP message	16.7.0
2021-03	RAN#91	R5-211718	0286	1	F	Correction to NR test case 6.2.2.1.2.1	16.7.0
2021-03	RAN#91	R5-211719	0273	1	F	Correction to E-UTRA link setup for NSA testing	16.7.0
2021-03	RAN#91	R5-211813	0290	1	F	Adding new test case 6.3.2.2.3, 2Rx TDD FR1 Single PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	16.7.0
2021-03	RAN#91	R5-211814	0292	1	F	Adding new test case 6.3.3.2.3, 4Rx TDD FR1 Single PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	16.7.0
2021-03	RAN#91	R5-211816	0274	1	F	Update of minimum conformance requirements for 4Rx FDD FR1 PDSCH in TC 5.2.3.1.1_1	16.7.0
2021-03	RAN#91	R5-211817	0265	1	F	Addition of Applicability of different requirements for R16 NR HST in 5.1.1.7	16.7.0
2021-03	RAN#91	R5-211818	0268	1	F	Update of Applicability of requirements for mandatory UE features with capability signalling for R16 NR HST in 5.1.1.4	16.7.0
2021-03	RAN#91	R5-211819	0269	1	F	Update of Applicability of requirements for optional UE features for R16 NR HST in 5.1.1.3	16.7.0
2021-03	RAN#91	R5-211820	0264	1	F	Addition of Abbreviations and References for R16 NR HST in 3.3 and References	16.7.0
2021-03	RAN#91	R5-211821	0266	1	F	Addition of HST-DPS Channel Profile in B.3.3	16.7.0
2021-03	RAN#91	R5-211822	0267	1	F	Addition of HST-SFN Channel Profile in B.3.2	16.7.0
2021-03	RAN#91	R5-211823	0270	1	F	Update of Combinations of channel model parameters for R16 NR HST in B.2.2	16.7.0

2021-03	RAN#91	R5-211824	0271	1	F	Update of Reference measurement channels for PDSCH performance requirements for R16 NR HST in A.3.2	16.7.0
2021-03	RAN#91	R5-211825	0272	1	F	Update of Single Tap Channel Profile for R16 NR HST in B.3.1	16.7.0
2021-03	RAN#91	R5-211916	0291	1	F	Adding new test case 6.3.2.2.4, 2Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	16.7.0
2021-03	RAN#91	R5-211929	0299	1	F	Update of FR2 demod test cases	16.7.0
2021-06	RAN#92	R5-212063	0301	-	F	Addition of test applicability rules for UE supporting FR2 DL 256QAM	16.8.0
2021-06	RAN#92	R5-212064	0302	-	F	Updating on annexes for FR2 DL 256QAM test cases	16.8.0
2021-06	RAN#92	R5-212067	0303	-	F	Addition of new test case 6.3.2.1.4 2Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	16.8.0
2021-06	RAN#92	R5-212068	0304	-	F	Addition of new test case 6.3.3.1.4 4Rx FDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	16.8.0
2021-06	RAN#92	R5-212254	0308	-	F	Update MU and TT for 8.4.2.2.1	16.8.0
2021-06	RAN#92	R5-212632	0311	-	F	Correction of E-UTRA link settings	16.8.0
2021-06	RAN#92	R5-212635	0312	-	F	Correction of DL RMC for TC 5.2.3.1.4_1	16.8.0
2021-06	RAN#92	R5-212743	0314	-	F	Update to Demod test cases title	16.8.0
2021-06	RAN#92	R5-212933	0315	-	F	Addition of eMIMO demod test case 5.2.2.1.11	16.8.0
2021-06	RAN#92	R5-212934	0316	-	F	Addition of eMIMO demod test case 5.2.2.2.11	16.8.0
2021-06	RAN#92	R5-212935	0317	-	F	Addition of eMIMO demod test case 5.2.3.1.11	16.8.0
2021-06	RAN#92	R5-212936	0318	-	F	Addition of eMIMO demod test case 5.2.3.2.11	16.8.0
2021-06	RAN#92	R5-212937	0319	-	F	Adding FRC for eMIMO demod test cases	16.8.0
2021-06	RAN#92	R5-212977	0327	-	F	Updating G.1.2 for performance testing	16.8.0
2021-06	RAN#92	R5-213306	0328	-	F	Introduction of additional PDSCH RMC for FDD	16.8.0
2021-06	RAN#92	R5-213308	0329	-	F	Update of message exceptions in FR2 demod test cases	16.8.0
2021-06	RAN#92	R5-213341	0330	-	F	Message content update in 5.2.2.2.1_1 and 5.2.3.2.1_1 test 1-9	16.8.0
2021-06	RAN#92	R5-213342	0331	-	F	Message content update in SA LTE-NR coexistence test cases	16.8.0
2021-06	RAN#92	R5-213358	0334	-	F	Addition of FR1 PDSCH Demodulation CA with power imbalance test case	16.8.0
2021-06	RAN#92	R5-213919	0313	1	F	Correction of derivation paths to 38.508-1	16.8.0
2021-06	RAN#92	R5-213920	0332	1	F	TT update to FR2 CQI reporting under fading test case	16.8.0
2021-06	RAN#92	R5-214012	0326	1	F	Adding 256QAM into CQI reporting test case	16.8.0
2021-06	RAN#92	R5-214016	0325	1	F	Adding FRC for URLLC demod test cases	16.8.0
2021-06	RAN#92	R5-214058	0300	1	F	Update of FR2 demod test cases	16.8.0
2021-06	RAN#92	R5-214059	0310	1	F	Correction to TC 9.4B.1.1-SDR performance	16.8.0
2021-06	RAN#92	R5-214088	0307	1	F	Update to minimum test time	16.8.0
2021-06	RAN#92	R5-214098	0333	1	F	Addition of FR1 normal PDSCH demodulation CA test case for 2CC	16.8.0
2021-06	RAN#92	R5-214099	0320	1	F	Addition of URLLC demod test case 5.2.2.1.5	16.8.0
2021-06	RAN#92	R5-214100	0321	1	F	Addition of URLLC demod test case 5.2.2.2.5	16.8.0
2021-06	RAN#92	R5-214101	0322	1	F	Addition of URLLC demod test case 5.2.3.1.5	16.8.0
2021-06	RAN#92	R5-214102	0323	1	F	Addition of URLLC demod test case 5.2.3.2.5	16.8.0
2021-06	RAN#92	R5-214103	0324	1	F	Adding MU and TT for URLLC demod test cases	16.8.0
2021-06	RAN#92	R5-214112	0306	1	F	Core alignment of common test parameters for PDCCH demodulation tests	16.8.0
2021-09	RAN#93	R5-214533	0338	-	F	Updates on FRC for FR2 DL 256QAM	16.9.0
2021-09	RAN#93	R5-215065	0353	-	F	Core spec alignment of RMC	16.9.0
2021-09	RAN#93	R5-215084	0357	-	F	Addition of eMIMO demod test case 5.2.2.2.12	16.9.0
2021-09	RAN#93	R5-215085	0358	-	F	Addition of eMIMO demod test case 5.2.2.2.13	16.9.0
2021-09	RAN#93	R5-215090	0363	-	F	Addition of eMIMO demod test case 5.2.3.2.12	16.9.0
2021-09	RAN#93	R5-215091	0364	-	F	Addition of eMIMO demod test case 5.2.3.2.13	16.9.0
2021-09	RAN#93	R5-215092	0365	-	F	Addition of eMIMO demod test case 5.2.3.2.14	16.9.0
2021-09	RAN#93	R5-215093	0366	-	F	Adding FRC for eMIMO demod test cases	16.9.0
2021-09	RAN#93	R5-215094	0367	-	F	Adding MU and TT for eMIMO demod test cases	16.9.0
2021-09	RAN#93	R5-215103	0372	-	F	Addition of URLLC demod test case 5.2.3.2.7	16.9.0
2021-09	RAN#93	R5-215342	0380	-	F	Correction to reporting granularity for single PMI TCs	16.9.0
2021-09	RAN#93	R5-215343	0381	-	F	Correction to test time for measuring CQI in Sub-band CQI TCs	16.9.0
2021-09	RAN#93	R5-215345	0383	-	F	Correction to DCI bitlength for test 1-5 and 1-6 in TC 5.2.2.2.1_1 and 5.2.3.2.1_1	16.9.0
2021-09	RAN#93	R5-215470	0387	-	F	Correction of message exceptions in PDCCH test cases	16.9.0
2021-09	RAN#93	R5-215609	0390	-	F	MTSU and TT mapping related to Max Device Size in TS 38.521-4	16.9.0
2021-09	RAN#93	R5-215610	0391	-	F	Update 9.4B.1.1 message content	16.9.0
2021-09	RAN#93	R5-215663	0394	-	F	Updates to FR1 2DLCA PDSCH demodulation with power imbalance test case	16.9.0
2021-09	RAN#93	R5-215665	0396	-	F	Editorial correction to the section 6.2.2.2.2 title	16.9.0
2021-09	RAN#93	R5-215666	0397	-	F	Update to test coverage across 5G NR architecture options for Demod scenarios	16.9.0
2021-09	RAN#93	R5-215901	0346	1	F	Update FR2 RI test configuration update for TS 38.521-4	16.9.0
2021-09	RAN#93	R5-215902	0382	1	F	Editorial error correction in Section 7 and 8	16.9.0
2021-09	RAN#93	R5-215934	0360	1	F	Addition of eMIMO demod test case 5.2.3.1.12	16.9.0

2021-09	RAN#93	R5-215937	0343	1	F	Update of Annex F for test cases of demodulation for power saving	16.9.0
2021-09	RAN#93	R5-215942	0339	1	F	Updates to PDSCH Demodulation Performance for 2DL CA	16.9.0
2021-09	RAN#93	R5-215944	0345	1	F	Update Applicability of requirement for HST-DPS and multi-TRxP test cases	16.9.0
2021-09	RAN#93	R5-215946	0350	1	F	Addition of NR HST Demod TC 5.2.2.1.9 - HST SFN	16.9.0
2021-09	RAN#93	R5-215947	0351	1	F	Addition of NR HST Demod TC 5.2.2.1.10 - HST DPS	16.9.0
2021-09	RAN#93	R5-215950	0368	1	F	Completing CQI reporting test case with 256QAM	16.9.0
2021-09	RAN#93	R5-215952	0369	1	F	Addition of URLLC demod test case 5.2.2.1.7	16.9.0
2021-09	RAN#93	R5-215953	0370	1	F	Addition of URLLC demod test case 5.2.2.2.7	16.9.0
2021-09	RAN#93	R5-215954	0374	1	F	Addition of 5.2.2.1.6 2Rx FDD FR1 PDSCH repetitions over multiple slots performance	16.9.0
2021-09	RAN#93	R5-215955	0375	1	F	Addition of 5.2.2.1.8 2Rx FDD FR1 PDSCH pre-emption performance	16.9.0
2021-09	RAN#93	R5-215956	0376	1	F	Addition of 5.2.2.2.6 2Rx TDD FR1 PDSCH repetitions over multiple slots performance	16.9.0
2021-09	RAN#93	R5-215957	0377	1	F	Addition of 5.2.2.2.8 2Rx TDD FR1 PDSCH pre-emption performance	16.9.0
2021-09	RAN#93	R5-215958	0378	1	F	Addition of 5.2.3.1.6 4Rx FDD FR1 PDSCH repetitions over multiple slots performance	16.9.0
2021-09	RAN#93	R5-215959	0379	1	F	Addition of 5.2.3.2.6 4Rx TDD FR1 PDSCH repetitions over multiple slots performance	16.9.0
2021-09	RAN#93	R5-216021	0385	1	F	Clean-up of parameter settings and message contents in 8.4.2.2.1	16.9.0
2021-09	RAN#93	R5-216040	0384	1	F	Correction to dedicated CORESET ID setting in PDCCH-Config for Standalone	16.9.0
2021-09	RAN#93	R5-216041	0388	1	F	Update of message exceptions	16.9.0
2021-09	RAN#93	R5-216071	0359	1	F	Addition of eMIMO demod test case 5.2.2.2.14	16.9.0
2021-09	RAN#93	R5-216072	0340	1	F	Addition of 2Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving test case	16.9.0
2021-09	RAN#93	R5-216073	0341	1	F	Addition of 4Rx TDD FR1 PDCCH 1 Tx antenna performance for power saving test case	16.9.0
2021-09	RAN#93	R5-216074	0342	1	F	Addition of 2Rx TDD FR2 PDCCH 1 Tx antenna performance for power saving test case	16.9.0
2021-09	RAN#93	R5-216075	0395	1	F	Updates to FR2 2DLCA PDSCH demodulation test case	16.9.0
2021-09	RAN#93	R5-216076	0337	1	F	Addition of FR2 DL 256QAM demodulation test case	16.9.0
2021-09	RAN#93	R5-216078	0371	1	F	Addition of URLLC demod test case 5.2.3.1.7	16.9.0
2021-09	RAN#93	R5-216096	0336	1	F	Update of FR2 demod test cases	16.9.0
2021-09	RAN#93	R5-216112	0347	1	F	Addition of NR PS Demod TC 5.3.2.1.3-FR1 FDD 2Rx	16.9.0
2021-09	RAN#93	R5-216113	0348	1	F	Addition of NR PS Demod TC 5.3.3.1.3-FR1 FDD 4Rx	16.9.0
2021-09	RAN#93	R5-216118	0392	1	F	Update to FR2 NSA SDR TC 9.4B.1.2	16.9.0
2021-09	RAN#93	R5-216126	0354	1	F	Addition of eMIMO demod test case 5.2.2.1.12	16.9.0
2021-09	RAN#93	R5-216127	0355	1	F	Addition of eMIMO demod test case 5.2.2.1.13	16.9.0
2021-09	RAN#93	R5-216128	0356	1	F	Addition of eMIMO demod test case 5.2.2.1.14	16.9.0
2021-09	RAN#93	R5-216129	0361	1	F	Addition of eMIMO demod test case 5.2.3.1.13	16.9.0
2021-09	RAN#93	R5-216130	0362	1	F	Addition of eMIMO demod test case 5.2.3.1.14	16.9.0
2021-12	RAN#94	R5-216786	0403	-	F	Addition of applicability of different requirements with Multi-TRxP	16.10.0
2021-12	RAN#94	R5-216787	0404	-	F	Update Applicability of requirements for optional UE features	16.10.0
2021-12	RAN#94	R5-216908	0407	-	F	Addition of NR HST Demod TC 5.2.2.1.1_1 - 2Rx FDD type A	16.10.0
2021-12	RAN#94	R5-216909	0408	-	F	Addition of NR HST Demod TC 5.2.2.2.1_1 - 2Rx TDD type A	16.10.0
2021-12	RAN#94	R5-216910	0409	-	F	Correction to NR HST Demod TC 5.2.2.1.9_1 - HST-SFN	16.10.0
2021-12	RAN#94	R5-217059	0412	-	F	Correction to NR TC 5.3.2.1.1-2Rx FDD FR1 PDCCH 1 Tx antenna performance	16.10.0
2021-12	RAN#94	R5-217060	0413	-	F	Correction to NR TC 5.3.3.2.1-PDCCH 1 Tx antenna performance	16.10.0
2021-12	RAN#94	R5-217363	0430	-	F	Addition of RMC in Annex A for eMIMO enhanced typeII CSI reporting	16.10.0
2021-12	RAN#94	R5-217364	0431	-	F	Addition of B.2.3.2.3A Beam steering approach with dual cluster beams	16.10.0
2021-12	RAN#94	R5-217370	0434	-	F	Updating 5.2.x.y.7 PDSCH with UE processing capability 2	16.10.0
2021-12	RAN#94	R5-217375	0439	-	F	Update to Annex F for URLLC test cases	16.10.0
2021-12	RAN#94	R5-217377	0441	-	F	Update to applicability of optional features for URLLC test cases	16.10.0
2021-12	RAN#94	R5-217378	0442	-	F	Update to URLLC RMC for demodulation testing in Annex A	16.10.0
2021-12	RAN#94	R5-217437	0443	-	F	Correction to frequencyDomainResources in PDCCHConfigCommon message exception	16.10.0
2021-12	RAN#94	R5-217522	0446	-	F	Addition of DL and UL RMC for FR2 SDR test case	16.10.0
2021-12	RAN#94	R5-217525	0449	-	F	Updates to FR1 normal PDSCH CA test cases	16.10.0
2021-12	RAN#94	R5-217526	0450	-	F	Updates to FR2 normal PDSCH CA test cases	16.10.0
2021-12	RAN#94	R5-218248	0424	1	F	Updating minimum test time in Annex G	16.10.0
2021-12	RAN#94	R5-218308	0425	1	F	Addition of 6.3.2.1.6 2Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook	16.10.0
2021-12	RAN#94	R5-218309	0426	1	F	Addition of 6.3.2.2.6 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook	16.10.0

2021-12	RAN#94	R5-218310	0427	1	F	Addition of 6.3.3.1.6 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook	16.10.0
2021-12	RAN#94	R5-218311	0428	1	F	Addition of 6.3.3.2.6 4Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook	16.10.0
2021-12	RAN#94	R5-218312	0429	1	F	Addition of applicability of optional features in 6.1.1.3	16.10.0
2021-12	RAN#94	R5-218328	0405	1	F	Correction to PS Demod TC 5.3.2.1.3 - 2Rx	16.10.0
2021-12	RAN#94	R5-218329	0406	1	F	Correction to PS Demod TC 5.3.3.1.3 - 4Rx	16.10.0
2021-12	RAN#94	R5-218339	0420	1	F	Addition of new test case 6.3.2.1.5 2Rx FDD FR1 Multiple PMI with 16Tx Typell codebook for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218340	0421	1	F	Addition of new test case 6.3.2.2.5 2Rx TDD FR1 Multiple PMI with 16Tx Typell codebook for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218341	0422	1	F	Addition of new test case 6.3.3.1.5 4Rx FDD FR1 Multiple PMI with 16Tx Typell codebook for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218342	0423	1	F	Addition of new test case 6.3.3.2.5 4Rx TDD FR1 Multiple PMI with 16Tx Typell codebook for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218343	0444	1	F	Correction to TC 5.2.2.2.4_1 and editorial corrections	16.10.0
2021-12	RAN#94	R5-218344	0447	1	F	Addition of NE-DC SDR test case	16.10.0
2021-12	RAN#94	R5-218345	0399	1	F	Addition of new test case 5.2.3.1.9_1 for NR HST	16.10.0
2021-12	RAN#94	R5-218346	0400	1	F	Addition of new test case 5.2.3.1.10_1 for NR HST	16.10.0
2021-12	RAN#94	R5-218347	0414	1	F	Addition of test case 5.2.2.2.9_1, 2Rx TDD FR1 HST-SFN performance - 2x2 MIMO with baseline receiver for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218348	0415	1	F	Addition of test case 5.2.2.2.10_1, 2Rx TDD FR1 HST-DPS performance - 2x2 MIMO with baseline receiver for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218349	0416	1	F	Addition of test case 5.2.3.2.9_1, 4Rx TDD FR1 HST-SFN performance - 2x4 MIMO with baseline receiver for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218350	0418	1	F	Addition of test cases 5.2.2.2.9_1, 5.2.2.2.10_1, 5.2.3.2.9_1 to annex F	16.10.0
2021-12	RAN#94	R5-218357	0419	1	F	Update of URLLC demodulation Test Cases	16.10.0
2021-12	RAN#94	R5-218358	0433	1	F	Updating 5.2.x.y.5 PDSCH with 1e-5 BLER	16.10.0
2021-12	RAN#94	R5-218359	0435	1	F	Addition of 6.2.2.1.1.2 URLLC 2RX FDD CQI reporting test case	16.10.0
2021-12	RAN#94	R5-218360	0440	1	F	Addition of statistical testing limit for URLLC test cases in Annex G	16.10.0
2021-12	RAN#94	R5-218436	0453	1	F	Update to LTE-NR coex test case message exception	16.10.0
2021-12	RAN#94	R5-218462	0432	1	F	Addition of MU and TT in Annex F for enhanced typell CSI reporting	16.10.0
2021-12	RAN#94	R5-218465	0401	1	F	Addition of PDCCH Search Space Ext configuration for power saving test case	16.10.0
2021-12	RAN#94	R5-218466	0417	1	F	Update of test case 5.2.3.2.1_1, 4Rx TDD FR1 PDSCH mapping Type A performance - 2x4 MIMO with baseline receiver for both SA and NSA	16.10.0
2021-12	RAN#94	R5-218467	0436	1	F	Addition of 6.2.2.2.1.2 URLLC 2RX TDD CQI reporting test case	16.10.0
2021-12	RAN#94	R5-218468	0437	1	F	Addition of 6.2.3.1.1.2 URLLC 4RX FDD CQI reporting test case	16.10.0
2021-12	RAN#94	R5-218469	0438	1	F	Addition of 6.2.3.2.1.2 URLLC 4RX TDD CQI reporting test case	16.10.0
2021-12	RAN#94	R5-218486	0445	1	F	Clarification on cl 4.6 test coverage across 5G NR architecture options for Demod	16.10.0
2022-03	RAN#95	R5-220276	0454	-	F	Clarifications on 5G NR connectivity options for Demod	16.11.0
2022-03	RAN#95	R5-220629	0460	-	F	Correction to demod TC 5.2.2.1.4_1	16.11.0
2022-03	RAN#95	R5-220630	0461	-	F	Correction to demod TC 5.2.3.2.1_1	16.11.0
2022-03	RAN#95	R5-220634	0463	-	F	Updates to HST test case 5.2.3.1.9_1	16.11.0
2022-03	RAN#95	R5-220635	0464	-	F	Updates to HST test case 5.2.3.1.10_1	16.11.0
2022-03	RAN#95	R5-220638	0467	-	F	Addition of fading profile power uncertainty for 4Tx, FR1	16.11.0
2022-03	RAN#95	R5-220651	0468	-	F	Editorial correction for test case title in Annex F	16.11.0
2022-03	RAN#95	R5-220664	0469	-	F	Editorial change for the position of clause 5.2.3.1.9 and 5.2.3.1.10	16.11.0
2022-03	RAN#95	R5-220678	0471	-	F	Correcting applicability part of HST test cases in 38.521-4	16.11.0
2022-03	RAN#95	R5-220684	0473	-	F	Addition of new RMCs to Annex	16.11.0
2022-03	RAN#95	R5-220686	0475	-	F	Correcting test applicability for EN-DC, rel-16 to rel-15	16.11.0
2022-03	RAN#95	R5-220751	0476	-	F	Correction to PS Demod TC 5.3.2.1.3	16.11.0
2022-03	RAN#95	R5-220764	0477	-	F	Updating test case 6.3.2.2.3, 2Rx TDD FR1 Single PMI with 16Tx Type1 - SinglePanel codebook for both SA and NSA	16.11.0
2022-03	RAN#95	R5-220796	0478	-	F	Update to eMIMO demod test cases	16.11.0
2022-03	RAN#95	R5-220820	0487	-	F	Adding testability description of 7.2.2.2.2 and 7.2.2.2.3	16.11.0
2022-03	RAN#95	R5-220936	0493	-	F	Editorial correction to 5.3.3.1.3 and 5.3.3.2.3	16.11.0
2022-03	RAN#95	R5-221153	0494	-	F	Update to FR1 CA normal PDSCH test cases	16.11.0
2022-03	RAN#95	R5-221154	0495	-	F	Update to FR1 CA power imbalance test cases	16.11.0
2022-03	RAN#95	R5-221155	0496	-	F	Update to FR2 CA normal PDSCH test cases	16.11.0
2022-03	RAN#95	R5-221707	0499	1	F	Editorial update to PBCH demod requirements section	16.11.0
2022-03	RAN#95	R5-221708	0500	1	F	Update to testability of test requirements due to achievable SNR improvements	16.11.0
2022-03	RAN#95	R5-221709	0501	1	F	FR1 NSA SDR message contents update	16.11.0

2022-03	RAN#95	R5-221710	0491	1	F	Correction to Annex H.1.2	16.11.0
2022-03	RAN#95	R5-221842	0455	1	F	Correction on Type I PMI test cases	16.11.0
2022-03	RAN#95	R5-221843	0456	1	F	Addition of FR1 CA CQI test cases	16.11.0
2022-03	RAN#95	R5-221844	0457	1	F	Addition of applicability for FR1 CA CQI test requirements	16.11.0
2022-03	RAN#95	R5-221845	0474	1	F	Addition of test case 5.2.3.2.4_1, 4Rx TDD FR1 PDSCH Mapping Type A and LTE-NR coexistence performance - 4x4 MIMO with baseline receiver for both SA and NSA	16.11.0
2022-03	RAN#95	R5-221846	0497	1	F	Introduction of FR1 CA SDR test case	16.11.0
2022-03	RAN#95	R5-221847	0458	1	F	Addition of FR2 CA CQI test cases	16.11.0
2022-03	RAN#95	R5-221848	0459	1	F	Addition of applicability for FR2 CA CQI test requirements	16.11.0
2022-03	RAN#95	R5-221854	0470	1	F	Addition of test case 5.2.3.2.10_1, 4Rx TDD FR1 HST DPS performance - 2x4 MIMO with baseline receiver for both SA and NSA	16.11.0
2022-03	RAN#95	R5-221855	0502	1	F	Update to HST Demod test cases	16.11.0
2022-03	RAN#95	R5-221856	0465	1	F	Addition of HST test case 5.2.3.1.9_1 to annex F	16.11.0
2022-03	RAN#95	R5-221857	0466	1	F	Addition of HST test case 5.2.3.1.10_1 to annex F	16.11.0
2022-03	RAN#95	R5-221860	0480	1	F	Update to 5.2.x.y.5 PDSCH with 1e-5 BLER	16.11.0
2022-03	RAN#95	R5-221861	0481	1	F	Update to 5.2.x.y.6 PDSCH with repetitions over multiple slots	16.11.0
2022-03	RAN#95	R5-221862	0483	1	F	Update to 5.2.2.y.8 PDSCH pre-emption	16.11.0
2022-03	RAN#95	R5-221863	0484	1	F	Addition of 5.2.3.1.8 PDSCH pre-emption 4Rx FDD	16.11.0
2022-03	RAN#95	R5-221864	0485	1	F	Addition of 5.2.3.2.8 PDSCH pre-emption 4Rx TDD	16.11.0
2022-03	RAN#95	R5-221865	0488	1	F	Addition of 7.2.2.2.2 FR2 PDSCH repetition	16.11.0
2022-03	RAN#95	R5-221866	0489	1	F	Addition of 7.2.2.2.3 FR2 PDSCH mapping Type B	16.11.0
2022-03	RAN#95	R5-221867	0479	1	F	Addition of minimum test time for 1% residual BLER	16.11.0
2022-03	RAN#95	R5-221868	0486	1	F	Update to Annex F for URLLC test cases	16.11.0
2022-06	RAN#96	R5-222231	0503	-	F	Update of Demod TC 5.2.2.1.9_1 2Rx FDD FR1 HST-SFN performance	16.12.0
2022-06	RAN#96	R5-222232	0504	-	F	Update of Demod TC 5.2.3.1.1_1 4Rx FDD FR1 PDSCH mapping Type A perf for NR HST	16.12.0
2022-06	RAN#96	R5-222233	0505	-	F	Update of Demod TC 5.2.3.1.9_1 4Rx FDD FR1 HST-SFN performance	16.12.0
2022-06	RAN#96	R5-222234	0506	-	F	Update of Demod TC 5.2.3.1.10_1 4Rx FDD FR1 HST-DPS performance	16.12.0
2022-06	RAN#96	R5-222498	0509	-	F	Correction to k0 value description	16.12.0
2022-06	RAN#96	R5-222499	0510	-	F	Correction to coresets RB in 5.3.2.1.3 and 5.3.3.1.3	16.12.0
2022-06	RAN#96	R5-222585	0519	-	F	Update to FR1 CA SDR test case	16.12.0
2022-06	RAN#96	R5-222595	0524	-	F	Correction to demod test case procedure	16.12.0
2022-06	RAN#96	R5-222619	0525	-	F	Addition of NR SL Demod TC 11.1.2 - PSSCH	16.12.0
2022-06	RAN#96	R5-222620	0526	-	F	Addition of NR SL Demod TC 11.1.3 - PSCCH	16.12.0
2022-06	RAN#96	R5-222621	0527	-	F	Addition of NR SL Demod TC 11.1.4 - PSBCH	16.12.0
2022-06	RAN#96	R5-222622	0528	-	F	Addition of NR SL Demod TC 11.1.5 - PSFCH	16.12.0
2022-06	RAN#96	R5-222623	0529	-	F	Addition of NR SL Demod TC 11.1.6 - imbalance	16.12.0
2022-06	RAN#96	R5-222624	0530	-	F	Addition of NR SL Demod TC 11.1.7 - soft buffer	16.12.0
2022-06	RAN#96	R5-222625	0531	-	F	Addition of NR SL Demod TC 11.1.8 - PSCCH capability	16.12.0
2022-06	RAN#96	R5-222627	0533	-	F	Correction to references for NR SL Demod	16.12.0
2022-06	RAN#96	R5-222628	0534	-	F	Addition of NR SL Demod RMCs in Annex A	16.12.0
2022-06	RAN#96	R5-222629	0535	-	F	Addition of test tolerance for NR SL Demod in Annex F	16.12.0
2022-06	RAN#96	R5-222630	0536	-	F	Addition of test method for NR SL Demod in Annex G	16.12.0
2022-06	RAN#96	R5-222895	0540	-	F	Update to URLLC test cases 5.2.x.y.7	16.12.0
2022-06	RAN#96	R5-222898	0543	-	F	Update to URLLC test case 7.2.2.2.3	16.12.0
2022-06	RAN#96	R5-223024	0547	-	F	Update of FR1 RI reporting test cases	16.12.0
2022-06	RAN#96	R5-223048	0548	-	F	Removal of duplicate clauses from the Demod spec	16.12.0
2022-06	RAN#96	R5-223049	0549	-	F	Addition of test case 6.3.3.2.4, 4Rx TDD FR1 Single PMI with 32Tx Type1 - SinglePanel codebook for both SA and NSA	16.12.0
2022-06	RAN#96	R5-223107	0551	-	F	Correction in performance enhancement test cases 6.3.2.2.3, 6.3.2.2.4 and 6.3.3.2.3	16.12.0
2022-06	RAN#96	R5-223119	0552	-	F	Solving editor notes for Type I PMI test cases	16.12.0
2022-06	RAN#96	R5-223120	0553	-	F	Solving editor notes for Type II PMI test cases	16.12.0
2022-06	RAN#96	R5-223153	0554	-	F	Solve duplicated information in Annex	16.12.0
2022-06	RAN#96	R5-223275	0555	-	F	Update of FR2 CQI CA test cases	16.12.0
2022-06	RAN#96	R5-223704	0532	1	F	Addition of NR SL Demod TC 11.1.9 - PSFCH capability	16.12.0
2022-06	RAN#96	R5-223714	0508	1	F	Correction to PDCCH parameters in 5.2.2.1.4 and 5.2.2.2.4	16.12.0
2022-06	RAN#96	R5-223715	0516	1	F	Update to FR1 CA normal PDSCH test cases	16.12.0
2022-06	RAN#96	R5-223716	0517	1	F	Update to FR1 CA power imbalance test cases	16.12.0
2022-06	RAN#96	R5-223717	0520	1	F	Update to FR1 CA CQI reporting test case	16.12.0
2022-06	RAN#96	R5-223718	0518	1	F	Update to FR2 CA normal PDSCH test cases	16.12.0
2022-06	RAN#96	R5-223719	0521	1	F	Introduction of FR2 CA SDR test case	16.12.0
2022-06	RAN#96	R5-223722	0544	1	F	Editorial, removal of editors note in test case 5.2.2.2.10_1	16.12.0
2022-06	RAN#96	R5-223723	0545	1	F	Adding TT and removal of editors note in test case 5.2.3.2.9_1	16.12.0
2022-06	RAN#96	R5-223724	0546	1	F	Adding TT and removal of editors note in test case 5.2.3.2.10_1	16.12.0
2022-06	RAN#96	R5-223726	0539	1	F	Update to URLLC test cases 5.2.x.y.6	16.12.0
2022-06	RAN#96	R5-223727	0537	1	F	Update to Annex G for minimum test time	16.12.0

2022-06	RAN#96	R5-223728	0538	1	F	Update to Annex F for URLLC test cases	16.12.0
2022-06	RAN#96	R5-223837	0512	1	F	Correction to the reference of test frequency	16.12.0
2022-06	RAN#96	R5-223838	0513	1	F	Clarification of UL RMC in FR1 PMI test cases	16.12.0
2022-06	RAN#96	R5-223839	0515	1	F	Update of LTE-NR coexistence test cases	16.12.0
2022-06	RAN#96	R5-223840	0514	1	F	Update of FR2 test cases	16.12.0
2022-06	RAN#96	R5-223841	0522	1	F	Introduction of FR2 SDR test case	16.12.0
2022-06	RAN#96	R5-223871	0511	1	F	Correction to CSI-Report periodicity and offset in 6.2A.3.1	16.12.0
2022-09	RAN#97	R5-224502	0556	-	F	Re-organization of NR SL Demod test cases	16.13.0
2022-09	RAN#97	R5-224503	0557	-	F	Correction to Annex F for NR SL Demod TCs	16.13.0
2022-09	RAN#97	R5-224633	0559	-	F	Core alignment and editorial corrections for FR1 Demodulation CA test cases	16.13.0
2022-09	RAN#97	R5-224642	0560	-	F	Correction to CQI-RI-PMI delay in 6.2A.3.1	16.13.0
2022-09	RAN#97	R5-224643	0561	-	F	Correction to DCI bit size in 5.2.2.2.4_1	16.13.0
2022-09	RAN#97	R5-224644	0562	-	F	Correction to message exception in 5.2.3.2.10_1	16.13.0
2022-09	RAN#97	R5-224655	0563	-	F	Addition of missing message exceptions for CQI tests	16.13.0
2022-09	RAN#97	R5-224657	0565	-	F	Update of FR2 PDCCH TCs	16.13.0
2022-09	RAN#97	R5-225004	0569	-	F	Editorial correction to sub-clause ID for test requirement to TC5.2.3.2.1_x	16.13.0
2022-09	RAN#97	R5-225110	0573	-	F	Correction of aperiodicTriggeringOffset	16.13.0
2022-09	RAN#97	R5-225118	0575	-	F	Correction of CQI reporting test cases	16.13.0
2022-09	RAN#97	R5-225121	0577	-	F	Update of minimum test time	16.13.0
2022-09	RAN#97	R5-225208	0578	-	F	Update CQI report periodicity for TDD FR1 periodic wideband CQI reporting under fading conditions	16.13.0
2022-09	RAN#97	R5-225670	0566	1	F	FR2 demod testability update	16.13.0
2022-09	RAN#97	R5-225726	0579	1	F	Corrections for FDD Power Saving test cases	16.13.0
2022-09	RAN#97	R5-225727	0580	1	F	Corrections for TDD Power Saving test cases	16.13.0
2022-09	RAN#97	R5-225809	0558	1	F	Core alignment and editorial corrections for FR1 CSI CA test cases	16.13.0
2022-09	RAN#97	R5-225810	0572	1	F	Removal of brackets for DCI format in clause 5	16.13.0
2022-09	RAN#97	R5-225811	0574	1	F	Correction of NR-LTE coexistence test cases	16.13.0
2022-09	RAN#97	R5-225812	0576	1	F	Clarification of UL RMC in FR1 aperiodic CQI reporting tests	16.13.0
2022-09	RAN#97	R5-225813	0564	1	F	Addition of missing RMC for PDCCH tests	16.13.0
2022-09	RAN#97	R5-225024	0570	-	F	Addition of test case 5.2A.2.4.1, 2Rx Normal Demodulation Performance for HST-SFN CA	17.0.0
2022-09	RAN#97	R5-225769	0571	1	F	Addition of test case 5.2A.2.5.1, 2RX PDSCH Demodulation Performance for HST-DPS CA	17.0.0
2022-09	RAN#97	R5-225770	0567	1	F	Minimum test time for new HST enhancement RMCs	17.0.0
2022-12	RAN#98	R5-226356	0585		F	Addition of TT for NR R17 HST enh Demod in Annex F	17.1.0
2022-12	RAN#98	R5-226528	0588		F	Update of PDSCH RMC for PDCCH TCs	17.1.0
2022-12	RAN#98	R5-226662	0593		F	RAN4 alignment of PUCCH format for CA test cases	17.1.0
2022-12	RAN#98	R5-226667	0597		F	correction to 5.2A.x TP selection	17.1.0
2022-12	RAN#98	R5-226682	0605		F	Addition of minimum test time for RedCap demod test cases	17.1.0
2022-12	RAN#98	R5-226687	0607		F	Addition of test case 5.2.1.1.1 1Rx FDD FR1 PDSCH performance for RedCap	17.1.0
2022-12	RAN#98	R5-226688	0608		F	Addition of applicability for csi requirements for RedCap	17.1.0
2022-12	RAN#98	R5-226690	0610		F	Updating clause 3 and Annexes for RedCap	17.1.0
2022-12	RAN#98	R5-227088	0612		F	Correction to dl-DataToUL-ACK for PDSCH demod CA test cases	17.1.0
2022-12	RAN#98	R5-227249	0616		F	Update of test case 7.2.2.2.1_3	17.1.0
2022-12	RAN#98	R5-227250	0617		F	Correction of LTE-NR coexistence test case	17.1.0
2022-12	RAN#98	R5-227330	0618		F	Update on 9.4B.1.1 message content section	17.1.0
2022-12	RAN#98	R5-227332	0619		F	Update test requirement reference in PDCCH test cases	17.1.0
2022-12	RAN#98	R5-227805	0587	1	F	Update of SIB1 scheduling	17.1.0
2022-12	RAN#98	R5-227651	0606	2	F	Addition of applicability for requirements for RedCap	17.1.0
2022-12	RAN#98	R5-227807	0609	1	F	Addition of test case 6.2.1.1.1.1 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	17.1.0
2022-12	RAN#98	R5-227808	0602	1	F	Addition of NR-U PDSCH Demod test case	17.1.0
2022-12	RAN#98	R5-227809	0591	1	F	Addition of test case 6.2.2.1.1.4 for redcap	17.1.0
2022-12	RAN#98	R5-227810	0592	1	F	Addition of test case 6.2.2.1.2.4 for redcap	17.1.0
2022-12	RAN#98	R5-227811	0603	1	F	Addition of DL1024QAM FDD PDSCH test case	17.1.0
2022-12	RAN#98	R5-227812	0604	1	F	Addition of DL1024QAM TDD PDSCH test case	17.1.0
2022-12	RAN#98	R5-227813	0596	1	F	update to CQI CA test case	17.1.0
2022-12	RAN#98	R5-227814	0594	1	F	Extension of SA CA Demod and CSI test cases to NSA	17.1.0
2022-12	RAN#98	R5-227815	0613	1	F	Clarification of UL RMC in FR1 PMI test cases	17.1.0
2022-12	RAN#98	R5-227642	0590	2	F	FR2 PC1 Demod MU update	17.1.0
2022-12	RAN#98	R5-227953	0582	1	F	Update HST test case 5.2A.2.4	17.1.0
2022-12	RAN#98	R5-227954	0583	1	F	Addition of TC 5.2A.3.4.1, 4RX PDSCH Demod Perf for HST-SFN CA	17.1.0
2022-12	RAN#98	R5-227955	0584	1	F	Addition of TC 5.2A.3.5.1, 4RX PDSCH Demod Perf for HST-DPS CA	17.1.0
2022-12	RAN#98	R5-227956	0611	1	F	HST test case 5.2A.2.5.1	17.1.0
2022-12	RAN#98	R5-227957	0595	1	F	Extension of SDR 2CA test case for higher CA	17.1.0

2022-12	RAN#98	R5-227991	0586	1	F	Addition of Minimum Test time for PDCCH demodulation for power saving	17.1.0
2022-12	RAN#98	R5-228035	0614	1	F	Correction to searchSpaces in performance for power saving test cases	17.1.0
2022-12	RAN#98	R5-228036	0620	1	F	Update PowerSaving test cases	17.1.0
2023-03	RAN#99	R5-230048	0621	-	F	Correction to 2Rx TDD FR2 8.3.2.2.1	17.2.0
2023-03	RAN#99	R5-230057	0623	-	F	Correction to the sub-title number of 6.2.2.1.1.4	17.2.0
2023-03	RAN#99	R5-230420	0626	-	F	Editorial correction to 5.2A.2.4 and 5.2A.2.5	17.2.0
2023-03	RAN#99	R5-230682	0627	-	F	Adding missing RMCs for HD-FDD	17.2.0
2023-03	RAN#99	R5-230683	0628	-	F	Minimum test time for HD-FDD RMCs for RedCap test cases	17.2.0
2023-03	RAN#99	R5-230702	0629	-	F	Addition of test case 5.2.2.1.17 2Rx FDD FR1 PDSCH performance for RedCap	17.2.0
2023-03	RAN#99	R5-230703	0630	-	F	Addition of test case 5.2.2.2.18 2Rx TDD FR1 PDSCH performance for RedCap	17.2.0
2023-03	RAN#99	R5-230706	0632	-	F	Addition of test case 5.2.1.2.1 1Rx TDD FR1 PDSCH performance for RedCap	17.2.0
2023-03	RAN#99	R5-230707	0633	-	F	Updates to test case 6.2.2.1.1.4 and 6.2.2.1.2.4 for redcap	17.2.0
2023-03	RAN#99	R5-230717	0638	-	F	Test tolerances for newly introduced RedCap test cases	17.2.0
2023-03	RAN#99	R5-230724	0639	-	F	Updates of applicability of requirements for RedCap	17.2.0
2023-03	RAN#99	R5-230764	0640	-	F	Introduction of PDSCH demodulation performance test cases with shared spectrum access	17.2.0
2023-03	RAN#99	R5-230982	0643	-	F	Correction to K1 settings in 6.2A.3.1.1	17.2.0
2023-03	RAN#99	R5-231220	0646	-	F	Corrections on FR2 256QAM test case 7.2.2.2.1_3	17.2.0
2023-03	RAN#99	R5-231221	0647	-	F	Updates for Power Saving FR1 test cases	17.2.0
2023-03	RAN#99	R5-231298	0649	-	F	Update of FR2 PDSCH mapping type A performance test case	17.2.0
2023-03	RAN#99	R5-231305	0650	-	F	Update of Redcap test case	17.2.0
2023-03	RAN#99	R5-231307	0651	-	F	Correction of missing test applicability for FR2 PC1	17.2.0
2023-03	RAN#99	R5-231696	0636	1	F	Updates to TT for PDSCH repetition test cases	17.2.0
2023-03	RAN#99	R5-231697	0631	1	F	Updates to test case 5.2.1.1.1 1Rx FDD FR1 PDSCH performance for RedCap	17.2.0
2023-03	RAN#99	R5-231698	0645	1	F	Update of HST DPS TCs	17.2.0
2023-03	RAN#99	R5-231699	0648	1	F	Updates for Power Saving FR2 test case	17.2.0
2023-03	RAN#99	R5-231841	0624	1	F	Updates to HST test case 5.2A.3.4.1	17.2.0
2023-03	RAN#99	R5-231842	0625	1	F	Updates to HST test case 5.2A.3.5.1	17.2.0
2023-03	RAN#99	R5-231848	0644	1	F	Correction to test point 1-7 in 5.2.2.1.1_1	17.2.0
2023-03	RAN#99	R5-231877	0622	1	F	Correction to periodic CQI reporting with Table 3 cases 6.2.2.1.1.2, 6.2.2.2.1.2, 6.2.3.1.1.2 and 6.2.3.2.1.2	17.2.0
2023-03	RAN#99	R5-231883	0652	1	F	Update to URLLC CQI test cases	17.2.0
2023-03	RAN#99	R5-231985	0635	2	F	Updates to random precoder configuration for PDSCH/PDCCH requirements	17.2.0
2023-03	RAN#99	R5-231986	0637	2	F	Clarification to Annex B.3 for HST-SFN and HST-DPS models	17.2.0
2023-03	RAN#99	R5-231877	0622	1	F	addition of missing changes of this CR	17.2.1
2023-03	RAN#99	R5-231883	0652	1	F	addition of missing clause G.4.3a and other changes of this CR	17.2.1
2023-06	RAN#100	R5-232384	0653	-	F	Correction of Table F.1.1.3 additional 4Tx uncertainty	17.3.0
2023-06	RAN#100	R5-232570	0659	-	F	Core spec alignment for applicability of requirements	17.3.0
2023-06	RAN#100	R5-232571	0660	-	F	Updates to test case 6.2.1.1.1.1, 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for RedCap	17.3.0
2023-06	RAN#100	R5-232572	0661	-	F	Addition of test case 6.2.1.2.1.1, 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	17.3.0
2023-06	RAN#100	R5-232573	0662	-	F	Addition of test case 6.2.1.2.2.1, 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	17.3.0
2023-06	RAN#100	R5-232577	0665	-	F	Missing minimum test time for reference channel for RedCap	17.3.0
2023-06	RAN#100	R5-232809	0667	-	F	Addition of Applicability of different requirements for HST	17.3.0
2023-06	RAN#100	R5-232810	0668	-	F	Update of Reference measurement channels for SCS 15 kHz FR1	17.3.0
2023-06	RAN#100	R5-232811	0669	-	F	Update of Reference measurement channels for SCS 30 kHz FR1	17.3.0
2023-06	RAN#100	R5-232835	0670	-	F	Add applicability rule for PDSCH with inter cell interference and CRS-IM demodulation requirements	17.3.0
2023-06	RAN#100	R5-232836	0671	-	F	Adding FRC for R17 demodulation enhancement W1	17.3.0
2023-06	RAN#100	R5-232858	0680	-	F	Addition of PDSCH TC's for 3DLCA and 4DLCA with power imbalance	17.3.0
2023-06	RAN#100	R5-232859	0681	-	F	Addition of NR-DC SDR test case	17.3.0
2023-06	RAN#100	R5-232863	0683	-	F	Corrections to clause 5.5 SDR test cases	17.3.0
2023-06	RAN#100	R5-232864	0684	-	F	Corrections to Annex A.3.2_1.2	17.3.0
2023-06	RAN#100	R5-233005	0693	-	F	Correction to Candidate CCEs in 5.5A.1.1	17.3.0
2023-06	RAN#100	R5-233006	0694	-	F	Correction to K1 settings in 5.5A.1.1	17.3.0
2023-06	RAN#100	R5-233007	0695	-	F	Correction to message exception in 6.2A.3.1.1	17.3.0
2023-06	RAN#100	R5-233008	0696	-	F	Correction to K1 settings in 6.2A.3.1.1	17.3.0
2023-06	RAN#100	R5-233041	0699	-	F	Addition of test applicability of HST-SFN Scheme A and B	17.3.0
2023-06	RAN#100	R5-233051	0709	-	F	Addition of propagation information of HST scheme A and B	17.3.0
2023-06	RAN#100	R5-233580	0676	1	F	Addition of Demodulation performance testcases for PDSCH with inter-cell interference	17.3.0

2023-06	RAN#100	R5-233581	0677	1	F	Addition of Demodulation performance testcases for PDSCH with intra-cell inter user interference	17.3.0
2023-06	RAN#100	R5-233582	0678	1	F	Addition of Demodulation performance testcases for PDSCH CRS interference mitigation under NR-LTE coexistence	17.3.0
2023-06	RAN#100	R5-233583	0679	1	F	Addition of Demodulation performance testcases for PDSCH with inter-cell CRS interference	17.3.0
2023-06	RAN#100	R5-233584	0688	1	F	Additional test case 5.3.2.1.5 2RX FDD Minimum requirements for PDCCH with intra-slot repetition	17.3.0
2023-06	RAN#100	R5-233585	0689	1	F	Additional test case 5.3.2.2.5 2RX TDD Minimum requirements for PDCCH with intra-slot repetition	17.3.0
2023-06	RAN#100	R5-233586	0690	1	F	Additional test case 5.3.3.1.4 4RX FDD Minimum requirements for PDCCH with intra-slot repetition	17.3.0
2023-06	RAN#100	R5-233587	0691	1	F	Additional test case 5.3.3.2.4 4RX TDD Minimum requirements for PDCCH with intra-slot repetition	17.3.0
2023-06	RAN#100	R5-233588	0700	1	F	Addition of 5.2.2.1.20 2Rx FDD HST-SFN Scheme A	17.3.0
2023-06	RAN#100	R5-233589	0701	1	F	Addition of 5.2.2.1.21 2Rx FDD HST-SFN Scheme B	17.3.0
2023-06	RAN#100	R5-233590	0702	1	F	Addition of 5.2.2.2.21 2Rx TDD HST-SFN Scheme A	17.3.0
2023-06	RAN#100	R5-233591	0703	1	F	Addition of 5.2.2.2.22 2Rx TDD HST-SFN Scheme B	17.3.0
2023-06	RAN#100	R5-233592	0704	1	F	Addition of 5.2.3.1.19 4Rx FDD HST-SFN Scheme A	17.3.0
2023-06	RAN#100	R5-233593	0705	1	F	Addition of 5.2.3.1.20 4Rx FDD HST-SFN Scheme B	17.3.0
2023-06	RAN#100	R5-233594	0706	1	F	Addition of 5.2.3.2.20 4Rx TDD HST-SFN Scheme A	17.3.0
2023-06	RAN#100	R5-233595	0707	1	F	Addition of 5.2.3.2.21 4Rx TDD HST-SFN Scheme B	17.3.0
2023-06	RAN#100	R5-233596	0708	1	F	Addition of RMC for HST-SFN scheme A and B	17.3.0
2023-06	RAN#100	R5-233597	0710	1	F	Addition of MU and TT for HST scheme A and B	17.3.0
2023-06	RAN#100	R5-233598	0656	1	F	Addition of test case 5.3.2.1.4, 2Rx FDD FR1 PDCCH performance for RedCap	17.3.0
2023-06	RAN#100	R5-233599	0664	1	F	Addition on MU and TT for newly introduced RedCap CQI test cases	17.3.0
2023-06	RAN#100	R5-233600	0685	1	F	Addition of TDD FR1 single carrier CQI reporting test cases on band with shared spectrum access	17.3.0
2023-06	RAN#100	R5-233601	0712	1	F	Corrections on general sections for RF performance requirements	17.3.0
2023-06	RAN#100	R5-233602	0692	1	F	Update of Noc levels for n259 or PC2	17.3.0
2023-06	RAN#100	R5-233603	0713	1	F	Corrections on the applicability of demodulation performance requirements	17.3.0
2023-06	RAN#100	R5-233688	0711	1	F	Addition of minimum test time for HST scheme A and B	17.3.0
2023-06	RAN#100	R5-233707	0672	1	F	Add PDSCH demodulation test case with inter-cell interference 2Rx FDD	17.3.0
2023-06	RAN#100	R5-233708	0673	1	F	Add PDSCH demodulation test case with inter-cell interference 4Rx FDD	17.3.0
2023-06	RAN#100	R5-233714	0663	1	F	Addition on MU and TT for newly introduced RedCap Demod test cases	17.3.0
2023-06	RAN#100	R5-233732	0674	1	F	Updates to 10 ⁻⁵ BLER PDSCH Demodulation test cases	17.3.0
2023-06	RAN#100	R5-233737	0675	1	F	Updates to Power Saving test cases	17.3.0
2023-06	RAN#100	R5-233743	0698	1	F	Editorial correction to chapter 5 with move of 5.2.2.18	17.3.0
2023-06	RAN#100	R5-233745	0657	1	F	Addition of test case 5.3.2.2.4, 2Rx TDD FR1 PDCCH performance for RedCap	17.3.0
2023-06	RAN#100	R5-233746	0658	1	F	Adding SNR value for test 1-4 in test case 5.2.1.1.1	17.3.0
2023-06	RAN#100	R5-233770	0715	1	F	Correction to reportQuantity value for 1Tx URLLC CQI test cases	17.3.0
2023-06	RAN#100	R5-233772	0682	2	F	Updates to PDSCH Performance Test cases for 1024QAM	17.3.0
2023-06	RAN#100	R5-233774	0687	1	F	Correction to reportQuantity value for 1Tx CQI CA test cases	17.3.0
2023-09	RAN#101	R5-234230	0717	-	F	HST FR2 4.5.3.2 Noc for NR operating bands in FR2	17.4.0
2023-09	RAN#101	R5-234276	0720	-	F	Addition of MU/TT analysis for 5.2.2.2.15, 5.2.3.2.15, 5.2A.2.3, 5.2A.3.3	17.4.0
2023-09	RAN#101	R5-234277	0721	-	F	Addition of MU/TT analysis for 6.2.2.2.1.3, 6.2.3.2.1.3	17.4.0
2023-09	RAN#101	R5-234278	0722	-	F	Updates to Clauses 6.2.2.2.1.3.3 and 6.2.3.2.1.3.3	17.4.0
2023-09	RAN#101	R5-234279	0723	-	F	Addition of Redcap applicability clause 7 and 8	17.4.0
2023-09	RAN#101	R5-234280	0724	-	F	Corrections to Annex A.4 Table A.4-1	17.4.0
2023-09	RAN#101	R5-234282	0726	-	F	Addition of 1024QAM CQI tests 6.2.2.1.1.3, 6.2.2.2.1.4, 6.2.3.1.1.3, 6.2.3.2.1.4	17.4.0
2023-09	RAN#101	R5-234286	0729	-	F	Update to PDSCH repetition test cases	17.4.0
2023-09	RAN#101	R5-234291	0732	-	F	Addition of min test time procedure to Annex G	17.4.0
2023-09	RAN#101	R5-234548	0737	-	F	Removing brackets for SNR in test case 5.2.1.2.1	17.4.0
2023-09	RAN#101	R5-234550	0738	-	F	Addition of test case 5.3.1.1.1, 1Rx FDD FR1 PDCCH performance for RedCap	17.4.0
2023-09	RAN#101	R5-234824	0741	-	F	Addition of CQI test case 6.2.2.2.2.4, 2Rx TDD FR1 periodic wideband CQI reporting under fading conditions for RedCap	17.4.0
2023-09	RAN#101	R5-234825	0742	-	F	Addition on MU and TT for newly introduced RedCap Demod and CQI test cases	17.4.0
2023-09	RAN#101	R5-234916	0745	-	F	Correction to 2Rx FR1 Periodic CQI reporting for RedCap	17.4.0
2023-09	RAN#101	R5-235021	0749	-	F	Update PDSCH Reference Channel and mTT for CA scenarios	17.4.0
2023-09	RAN#101	R5-235145	0750	-	F	Editorial correction of HST-SFN Scheme A test cases	17.4.0
2023-09	RAN#101	R5-235252	0752	-	F	Correction to title of 5.2.3.2.11_1	17.4.0

2023-09	RAN#101	R5-235256	0754	-	F	Correction to REG bundle size in 5.3.2.2.5	17.4.0
2023-09	RAN#101	R5-235686	0736	1	F	Updates to existing RedCap Demod and CQI test cases	17.4.0
2023-09	RAN#101	R5-235687	0739	1	F	Addition of test case 5.3.1.2.1, 1Rx TDD FR1 PDCCH performance for RedCap	17.4.0
2023-09	RAN#101	R5-235688	0740	1	F	Addition of CQI test case 6.2.2.2.1.5, 2Rx TDD FR1 periodic CQI reporting under AWGN conditions for RedCap	17.4.0
2023-09	RAN#101	R5-235689	0743	1	F	Correction to 2Rx FR1 PDSCH and PDCCH performance for RedCap	17.4.0
2023-09	RAN#101	R5-235690	0744	1	F	Correction to REG bundle size for PDCCH performance test cases	17.4.0
2023-09	RAN#101	R5-235691	0734	1	F	Addition of missing RMCs for RedCap PDCCH Test Case	17.4.0
2023-09	RAN#101	R5-235692	0728	1	F	Addition of MU/TT analysis for 5.2.2.1.16, 5.2.2.2.17, 5.2.3.1.16, 5.2.3.2.17	17.4.0
2023-09	RAN#101	R5-235693	0746	1	F	Correction to reference of connection diagram for SDR test cases	17.4.0
2023-09	RAN#101	R5-235694	0748	1	F	Alignment to core spec for PDCCH test cases	17.4.0
2023-09	RAN#101	R5-235871	0719	1	F	Update to NR-U demod test cases	17.4.0
2023-09	RAN#101	R5-235872	0718	1	F	Correction to measurement channel table for redcap CQI cases	17.4.0
2023-09	RAN#101	R5-235873	0725	1	F	Addition of 1024QAM SDR single carrier and carrier aggregation tests	17.4.0
2023-09	RAN#101	R5-235874	0727	1	F	Addition of MU/TT analysis for 5.2.2.1.1_3, 5.2.2.2.1_3, 5.2.3.1.1_5, 5.2.3.2.1_5	17.4.0
2023-09	RAN#101	R5-235876	0716	1	F	Correction to Annex B.2 for 1024QAM related TDLD Delay profile	17.4.0
2023-09	RAN#101	R5-235877	0731	1	F	Update to FR2 Demod CA test cases for Agg BW upto 400MHz	17.4.0
2023-09	RAN#101	R5-235878	0733	1	F	Addition of NR-DC Demod and CSI test cases	17.4.0
2023-09	RAN#101	R5-235879	0747	1	F	Correction to Candidate CCEs for SDR test cases	17.4.0
2023-09	RAN#101	R5-235880	0753	1	F	Update to NSA FR1 and FR2 SDR test cases	17.4.0
2023-09	RAN#101	-	-	-	-	Administrative release upgrade to match the release of 3GPP TS 38.522 which was upgraded at RAN#101 to Rel-18 due to Rel-18 relevant CR(s)	18.0.0
2023-12	RAN#102	R5-236247	0756	-	F	Removal of technical content in TS 38.521-4 v17.4.0 and substitution with pointer to the next Release	18.1.0
2023-12	RAN#102	R5-236288	0757	-	F	Addition of MMSE-IRC CQI reporting test case with FDD 2Rx	18.1.0
2023-12	RAN#102	R5-236290	0758	-	F	Correction on the test applicability rules for MMSE-IRC test cases	18.1.0
2023-12	RAN#102	R5-236511	0759	-	F	Addition of test case 6.4.2.1.1, 2Rx FDD FR1 RI reporting for RedCap	18.1.0
2023-12	RAN#102	R5-236512	0760	-	F	Addition of test case 6.4.2.2.1, 2Rx TDD FR1 RI reporting for RedCap	18.1.0
2023-12	RAN#102	R5-236513	0761	-	F	Editorial, incorrect header level in 6.2.2.1.2.4.3	18.1.0
2023-12	RAN#102	R5-236514	0762	-	F	MU ad TT values for newly introduced RedCap test cases	18.1.0
2023-12	RAN#102	R5-236515	0763	-	F	Correction of CQI index table	18.1.0
2023-12	RAN#102	R5-236518	0764	-	F	Correction of K0 in CA CQI reporting test cases	18.1.0
2023-12	RAN#102	R5-236628	0765	-	F	Updating to FR2 PDSCH repetition test case 7.2.2.2.2	18.1.0
2023-12	RAN#102	R5-236629	0766	-	F	Updating to applicability section 7.1.1.3	18.1.0
2023-12	RAN#102	R5-236630	0767	-	F	Updating to FR1 PDSCH repetition test cases	18.1.0
2023-12	RAN#102	R5-237212	0777	-	F	Update on 6.2.2.2.1.5 test case	18.1.0
2023-12	RAN#102	R5-237215	0779	-	F	Update in TDD LTE-NR coexistence test cases	18.1.0
2023-12	RAN#102	R5-237286	0782	-	F	Update test procedure for FR1 CA Demod cases	18.1.0
2023-12	RAN#102	R5-237287	0783	-	F	Add R.PDCCH.1-1.2 FDD and R.PDCCH.2-1.5 to Table G.1.5-2	18.1.0
2023-12	RAN#102	R5-237288	0784	-	F	Add R.PDCCH.2-1.5 and R.PDCCH.2-1.6 to Annex G	18.1.0
2023-12	RAN#102	R5-237291	0787	-	F	Correction to measurement channel table for redcap CQI test 6.2.2.2.4	18.1.0
2023-12	RAN#102	R5-237468	0788	1	F	Correction to reportQuantity for 1Tx CQI tests for URLLC cases	18.1.0
2023-12	RAN#102	R5-237474	0789	1	F	Correction to reportQuantity for 1Tx CQI tests for CA CSI test cases	18.1.0
2023-12	RAN#102	R5-237696	0781	1	F	Update to DL1024QAM PDSCH test cases	18.1.0
2023-12	RAN#102	R5-237699	0771	1	F	Editorial correction to NR Demod enhancement TCs	18.1.0
2023-12	RAN#102	R5-237700	0780	1	F	Editorial correction in test cases 6.3.2.1.5 and 6.3.2.1.6	18.1.0
2023-12	RAN#102	R5-237819	0769	1	F	Editorial correction to 2Rx PDSCH Demod Requirements TCs	18.1.0
2023-12	RAN#102	R5-237820	0770	1	F	Editorial correction to 4Rx PDSCH Demod Requirements TCs	18.1.0
2023-12	RAN#102	R5-237829	0768	1	F	Editorial correction to R17 HST DPS/SFN TCs	18.1.0
2023-12	RAN#102	R5-237832	0772	1	F	Demod additional test case for 6.3.2.1	18.1.0
2023-12	RAN#102	R5-237850	0785	1	F	Addition of SDR test case for RedCap	18.1.0
2023-12	RAN#102	R5-237851	0773	1	F	Demod additional test case for 6.3.2.2	18.1.0
2023-12	RAN#102	R5-237852	0774	1	F	Demod additional test case for 6.3.3.1	18.1.0
2023-12	RAN#102	R5-237853	0775	1	F	Demod additional test case for 6.3.3.2	18.1.0
2023-12	RAN#102	R5-237932	0790	1	F	Update to FR1 PDSCH with inter-cell interference test cases	18.1.0
2023-12	RAN#102	R5-237934	0776	1	F	Update for 38.521-4 Annex	18.1.0
2023-12	RAN#102	R5-237941	0778	1	F	Addition of new PDSCH Reference Channel TDD to cover FR2 PDCCH Test 2-2	18.1.0
2024-03	RAN#103	R5-240218	0791	-	F	Corrections to test parameters for CSI test cases	18.2.0

2024-03	RAN#103	R5-240827	0800	-	F	Correction of TT for RedCap demod test case 5.3.2.1.4 and 5.3.2.2.4	18.2.0
2024-03	RAN#103	R5-240864	0803	-	F	Addition of Measurement uncertainty for Redcap PDSCH demodulation test cases	18.2.0
2024-03	RAN#103	R5-240877	0804	-	F	Update on test case 7.5.1 to add FR2 testing direction	18.2.0
2024-03	RAN#103	R5-241113	0805	-	F	Correction to 1Rx FR1 PDSCH and PDCCH performance for RedCap	18.2.0
2024-03	RAN#103	R5-241141	0809	-	F	Addition of FR2 SDR test for RedCap	18.2.0
2024-03	RAN#103	R5-241142	0810	-	F	Addition of 6.2.1.1.2.1 test for RedCap	18.2.0
2024-03	RAN#103	R5-241143	0811	-	F	Update incorrect reference to SDR test in Table 5.1.1.11-1 for RedCap	18.2.0
2024-03	RAN#103	R5-241145	0813	-	F	Update to power imbalance test cases	18.2.0
2024-03	RAN#103	R5-241146	0814	-	F	Correction to RMC name in Table A.3.2.2.2-29	18.2.0
2024-03	RAN#103	R5-241157	0818	-	F	HST-DPS channel profile clarifications	18.2.0
2024-03	RAN#103	R5-241170	0820	-	F	Correction to FR2 SDR requirements	18.2.0
2024-03	RAN#103	R5-241171	0821	-	F	Correction to FR2 256QAM CQI reporting	18.2.0
2024-03	RAN#103	R5-241175	0823	-	F	Correction RedCap CSI Test Case message exceptions	18.2.0
2024-03	RAN#103	R5-241370	0824	-	F	Editorial correction to 5.2.2.1.1_1 Modulation format	18.2.0
2024-03	RAN#103	R5-241684	0807	1	F	Update Es for 1024QAM scenarios	18.2.0
2024-03	RAN#103	R5-241811	0792	1	F	Addition of MMSE-IRC CQI reporting test case with FDD 4Rx	18.2.0
2024-03	RAN#103	R5-241812	0793	1	F	Addition of MMSE-IRC CQI reporting test case with TDD 2Rx	18.2.0
2024-03	RAN#103	R5-241813	0794	1	F	Addition of MMSE-IRC CQI reporting test case with TDD 4Rx	18.2.0
2024-03	RAN#103	R5-241814	0795	1	F	Completion of MMSE-IRC CQI reporting test case with FDD 2Rx	18.2.0
2024-03	RAN#103	R5-241815	0816	1	F	Update to FR1 PDSCH inter-cell interference test case	18.2.0
2024-03	RAN#103	R5-241816	0817	1	F	Update to FR1 PDSCH intra-cell interference test case	18.2.0
2024-03	RAN#103	R5-241817	0798	1	F	Addition of RedCap demod test case 6.3.1.2.1	18.2.0
2024-03	RAN#103	R5-241818	0819	1	F	Corrections to URLLC Test Cases	18.2.0
2024-03	RAN#103	R5-241819	0806	1	F	Addition of SDR RMC for more FDD channel BW	18.2.0
2024-03	RAN#103	R5-241820	0825	1	F	Correction to max throughput values for PDSCH RMC	18.2.0
2024-03	RAN#103	R5-241821	0808	1	F	Update to NR-U demod test cases	18.2.0
2024-03	RAN#103	R5-241822	0802	1	F	Core spec alignment, addition of RMC and UL-DL configuration for NR-U	18.2.0
2024-03	RAN#103	R5-241959	0796	1	F	Adding measurement uncertainty and test tolerance for Demod PDCCH with intra-slot repetition test cases	18.2.0
2024-03	RAN#103	R5-241960	0797	1	F	Addition of RedCap demod test case 6.3.1.1.1	18.2.0
2024-03	RAN#103	R5-241961	0799	1	F	Addition of RedCap demod test case 6.3.2.2.7	18.2.0
2024-03	RAN#103	R5-242019	0815	1	F	Correction to RMC name in Table A.3.2.1.1-18	18.2.0
2024-03	RAN#103	R5-241818	0819	1	F	addition of the missing Table 5.2.2.1.7_1.3.3_1-4:	18.2.1
2024-06	RAN#104	R5-242492	0829	-	F	Addition of test case 6.2A.4.1.1, 4Rx FR1 CQI reporting under AWGN for Scell on band with shared spectrum access for CA (2DLCA)	18.3.0
2024-06	RAN#104	R5-242668	0831	-	F	Additional annex Channel Profile of FR2 HST-DPS	18.3.0
2024-06	RAN#104	R5-243089	0836	-	F	Correction to PDSCH TDD Test Cases	18.3.0
2024-06	RAN#104	R5-243093	0837	-	F	Correction to URLLC message exceptions	18.3.0
2024-06	RAN#104	R5-243110	0838	-	F	Update of MU and TT for FR1 CSI reporting	18.3.0
2024-06	RAN#104	R5-243111	0839	-	F	Editorial correction of UE capability in PDSCH repetition test cases	18.3.0
2024-06	RAN#104	R5-243150	0840	-	F	Update to HST scheme A and B test cases	18.3.0
2024-06	RAN#104	R5-243151	0841	-	F	Adding RMC for feMIMO test cases	18.3.0
2024-06	RAN#104	R5-243338	0842	-	F	Update for PMI TypeII codebook test cases	18.3.0
2024-06	RAN#104	R5-243434	0845	-	F	Update to inter-cell CRS interference test case	18.3.0
2024-06	RAN#104	R5-243435	0846	-	F	Corrections to the FRC Table A.3.2.2.2-29	18.3.0
2024-06	RAN#104	R5-243691	0826	1	F	Completion of FDD CQI reporting test cases with inter-cell interference	18.3.0
2024-06	RAN#104	R5-243692	0827	1	F	Completion of TDD CQI reporting test cases with inter-cell interference	18.3.0
2024-06	RAN#104	R5-243693	0828	1	F	Addition of MU and TT for CQI reporting test cases with inter-cell interference	18.3.0
2024-06	RAN#104	R5-243694	0830	1	F	Core spec alignment of general clause for CSI reporting requirements	18.3.0
2024-06	RAN#104	R5-243695	0834	1	F	Correction to PUCCH Resource ID in 2Rx FR1 RI reporting	18.3.0
2024-06	RAN#104	R5-243696	0844	1	F	Addition of NSA SDR test case for DL 1024QAM	18.3.0
2024-06	RAN#104	R5-243697	0833	1	F	Correction to PDSCH Reference Channel for FDD HST	18.3.0
2024-06	RAN#104	R5-243698	0843	1	F	Update mTT for missing DL RMC	18.3.0
2024-06	RAN#104	R5-243699	0847	1	F	Corrections to Table G.1.5-1 for entries corresponding to FR1.15-1	18.3.0
2024-06	RAN#104	R5-243881	0832	1	F	Additional demodulation test case for FR2 high speed train	18.3.0
2024-06	RAN#104	R5-243913	0835	1	F	Correction to test parameters in FR1 HST DPS	18.3.0
2024-09	RAN#105	R5-244054	0848	-	F	Correction to HST Demod test case 5.2.3.2.10_1	18.4.0
2024-09	RAN#105	R5-244143	0849	-	F	Addition of applicability rule for Enhanced Receiver Type 2	18.4.0
2024-09	RAN#105	R5-244145	0851	-	F	Correction of definition for Enhanced Receiver Type 1	18.4.0
2024-09	RAN#105	R5-244146	0852	-	F	Addition of definition for Enhanced Receiver Type 2	18.4.0

2024-09	RAN#105	R5-244149	0853	-	F	Addition of RMC for Enhanced Receiver Type 2 test cases	18.4.0
2024-09	RAN#105	R5-244150	0854	-	F	Introduction of enhanced DMRS test case for FDD 2Rx	18.4.0
2024-09	RAN#105	R5-244203	0855	-	F	Introduction of MIMO correlation matrix for 8Rx tests	18.4.0
2024-09	RAN#105	R5-244204	0856	-	F	Introduction of new RMCs for 8Rx tests	18.4.0
2024-09	RAN#105	R5-244205	0857	-	F	Introduction of 8Rx receiver definition	18.4.0
2024-09	RAN#105	R5-244206	0858	-	F	Introduction of test requirement applicability rule for 8Rx tests	18.4.0
2024-09	RAN#105	R5-244346	0859	-	F	Correction to rank restriction of CSI Table 4 test cases	18.4.0
2024-09	RAN#105	R5-244362	0861	-	F	Clarification of UL RMC and CSI report configuration in Rel-15 FR2 aperiodic CSI reporting test cases	18.4.0
2024-09	RAN#105	R5-244829	0863	-	F	Correction to CSI-ResourcePeriodicityAndOffset in 5.2.1.1.1 and 5.2.1.2.1	18.4.0
2024-09	RAN#105	R5-245034	0866	-	F	Correction to test procedure in TC 6.2.1.1.1.1 and 6.2.1.1.2.1	18.4.0
2024-09	RAN#105	R5-245340	0879	-	F	Update on 5.5.2 to align editor note as other 1024QAM test cases	18.4.0
2024-09	RAN#105	R5-245343	0880	-	F	Update reference in test procedure for PDSCH Demod test cases	18.4.0
2024-09	RAN#105	R5-245388	0882	-	F	Update mTT for RMC R.PDSCH.2-1.1 FDD	18.4.0
2024-09	RAN#105	R5-245740	0884	1	F	Update for Additional PDSCH Reference Channel for PDCCH test cases	18.4.0
2024-09	RAN#105	R5-245868	0873	1	F	Core spec alignment, new RMCs for eRedCap	18.4.0
2024-09	RAN#105	R5-245869	0877	1	F	Update Message exceptions for 32Tx PMI tests 6.3.2.1.4, 6.3.2.2.4, 6.3.3.1.4, 6.3.3.2.4 to add firstOFDMSymbolInTimeDomain2 IE	18.4.0
2024-09	RAN#105	R5-245870	0883	1	F	Update for PMI eTypeII codebook test cases	18.4.0
2024-09	RAN#105	R5-245871	0886	1	F	correction of connection diagram references for 2x2 PDSCH Demod test cases	18.4.0
2024-09	RAN#105	R5-245872	0864	1	F	Addition of DL RMC for R.PDSCH.2-3.5 TDD and R.PDSCH.2-4.3 TDD	18.4.0
2024-09	RAN#105	R5-245873	0867	1	F	Addition of test case 5.2.1.1.2, 1Rx FDD FR1 PDSCH performance for eRedCap	18.4.0
2024-09	RAN#105	R5-245874	0868	1	F	Addition of test case 5.2.1.2.2, 1Rx TDD FR1 PDSCH performance for eRedCap	18.4.0
2024-09	RAN#105	R5-245875	0869	1	F	Addition of test case 6.2.1.1.1.2, 1Rx FDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	18.4.0
2024-09	RAN#105	R5-245876	0870	1	F	Core spec alignment, applicability of requirements for eRedCap	18.4.0
2024-09	RAN#105	R5-245877	0871	1	F	Addition of eRedCap to definitions	18.4.0
2024-09	RAN#105	R5-245878	0872	1	F	Addition of MU and TT for new eRedCap test cases	18.4.0
2024-09	RAN#105	R5-245879	0875	1	F	Applicability in test case 6.2A.4.1.1	18.4.0
2024-09	RAN#105	R5-245985	0860	1	F	Update to CQI report test cases with Table 4	18.4.0
2024-09	RAN#105	R5-246006	0850	1	F	Addition of common parts for MIMO evolution demodulation requirements	18.4.0
2024-09	RAN#105	R5-246028	0878	1	F	Updates to PDSCH CRS interference mitigation under NR-LTE coexistence test cases 5.2.2.1.18, 5.2.2.2.19, 5.2.3.1.17, 5.2.3.2.18	18.4.0
2024-09	RAN#105	R5-246044	0865	1	F	Addition of missing RMC for Sustained data rate tests	18.4.0
2024-09	RAN#105	R5-245741	0885	2	F	Correction to RMC for PMI reporting test cases	18.4.0
2024-12	RAN#106	R5-246766	0890	-	F	Core spec alignment, addition of applicability of requirements for eRedCap for CSI test cases	18.5.0
2024-12	RAN#106	R5-246767	0891	-	F	Updates in test case 5.2.1.1.2	18.5.0
2024-12	RAN#106	R5-246773	0893	-	F	Addition of new test case 6.2.1.1.2.2 1Rx FDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	18.5.0
2024-12	RAN#106	R5-246774	0894	-	F	Addition of new test case 6.2.1.2.1.2 1Rx TDD FR1 periodic CQI reporting under AWGN conditions for eRedCap	18.5.0
2024-12	RAN#106	R5-246775	0895	-	F	Addition of MU and TT for newly introduced eRedCap test cases	18.5.0
2024-12	RAN#106	R5-246776	0896	-	F	Introduction of new RMCs for eRedCap	18.5.0
2024-12	RAN#106	R5-246944	0899	-	F	Addition of new test case 2Rx TDD PDSCH demodulation for enhanced DMRS	18.5.0
2024-12	RAN#106	R5-246945	0900	-	F	Addition of new test case 4Rx FDD PDSCH demodulation for enhanced DMRS	18.5.0
2024-12	RAN#106	R5-246969	0901	-	F	Addition of PDSCH Reference Channel for multi-TRP test cases	18.5.0
2024-12	RAN#106	R5-246971	0903	-	F	Correction to 6.3.2.2.8 2Rx TDD PMI reporting for multi-TRP	18.5.0
2024-12	RAN#106	R5-246972	0904	-	F	Correction to 6.3.3.1.7 4Rx FDD PMI reporting for multi-TRP	18.5.0
2024-12	RAN#106	R5-246973	0905	-	F	Correction to 6.3.3.2.7 4Rx TDD PMI reporting for multi-TRP	18.5.0
2024-12	RAN#106	R5-247156	0908	-	F	Addition of common Demod clauses for FR2 Multi-Rx	18.5.0
2024-12	RAN#106	R5-247158	0909	-	F	applicability clause update for CRS-IM and intercell CRS interferencer PDSCH cases	18.5.0
2024-12	RAN#106	R5-247160	0911	-	F	Editorial updates to clause 6 CSI reporting test cases	18.5.0
2024-12	RAN#106	R5-247162	0913	-	F	Clarification to HST-DPS test case applicability	18.5.0
2024-12	RAN#106	R5-247335	0916	-	F	Update of RedCap PMI test cases	18.5.0
2024-12	RAN#106	R5-247354	0918	-	F	Correction in Single PMI with 32Tx Type1 codebook test cases	18.5.0
2024-12	RAN#106	R5-247356	0919	-	F	Correction in message exception for 4Rx FDD PMI eType II codebook test case	18.5.0

2024-12	RAN#106	R5-247683	0922	1	F	Editorial CR to 38.101-4 on PDCCH requirements to unify table numbering format	18.5.0
2024-12	RAN#106	R5-247684	0907	2	F	Clarification to PDSCH RMC for PMI test cases	18.5.0
2024-12	RAN#106	R5-247801	0914	1	F	Addition of physical layer link adaptation test cases	18.5.0
2024-12	RAN#106	R5-247802	0902	1	F	Correction to 6.3.2.1.7 2Rx FDD PMI reporting for multi-TRP	18.5.0
2024-12	RAN#106	R5-247803	0910	1	F	core spec alignment for PMI test cases	18.5.0
2024-12	RAN#106	R5-247804	0917	1	F	Correction in Multiple PMI with 16Tx Type1 codebook test cases	18.5.0
2024-12	RAN#106	R5-247805	0921	1	F	Core alignment in FR1 HST DPS Performance test cases	18.5.0
2024-12	RAN#106	R5-247842	0898	1	F	Addition of new test case 6.3.3.1.9 4Rx PMI reporting for eType II Codebook	18.5.0
2024-12	RAN#106	R5-247843	0897	1	F	Addition of new test case 6.3.2.1.9 2Rx PMI reporting for eType II Codebook	18.5.0
2024-12	RAN#106	R5-247923	0892	1	F	Addition of NR-U test case 2Rx FR1 CQI reporting under AWGN for Scell on band with shared spectrum access for CA (2DLCA)	18.5.0
2024-12	RAN#106	R5-247979	0906	1	F	Correction of Es level for SDR tests	18.5.0
2024-12	RAN#106	R5-248003	0920	1	F	Corrections to CA HST-SFN test cases	18.5.0
2025-03	RAN#107	R5-250037	0923	-	F	Core spec alignments on the expression of CSI-RS configurations for RedCap enhancement TCs	18.6.0
2025-03	RAN#107	R5-250098	0928	-	F	Correction to Wideband CQI reporting with inter-cell interference TCs	18.6.0
2025-03	RAN#107	R5-250411	0929	-	F	Addition of enhanced receiver type 2 test cases for FDD 2Rx	18.6.0
2025-03	RAN#107	R5-250413	0930	-	F	Correction on applicability rules for 8Rx UE requirements	18.6.0
2025-03	RAN#107	R5-250414	0931	-	F	Correction on applicability rules for eDMRS requirements	18.6.0
2025-03	RAN#107	R5-250415	0932	-	F	Correction on applicability rules for eType II PMI requirements	18.6.0
2025-03	RAN#107	R5-250416	0933	-	F	Correction on MIMO correlation matrices for 8Rx UE requirements	18.6.0
2025-03	RAN#107	R5-250417	0934	-	F	Correction on RMC for enhanced receiver type 2 requirements	18.6.0
2025-03	RAN#107	R5-250418	0935	-	F	Update applicability of enhanced receiver type 2 requirements	18.6.0
2025-03	RAN#107	R5-250419	0936	-	F	Update enhanced receiver type 2 definition	18.6.0
2025-03	RAN#107	R5-250550	0937	-	F	correction to RMC reference for link adaptation demod test cases	18.6.0
2025-03	RAN#107	R5-250551	0938	-	F	updates to FR1 link adaptation demod test cases	18.6.0
2025-03	RAN#107	R5-250555	0941	-	F	Updates to applicability statement for CRS inter-cell interference demod test cases	18.6.0
2025-03	RAN#107	R5-250558	0943	-	F	Addition of Single-DCI and Multi-DCI FR2 PDSCH demodulation cases for MultiRx reception	18.6.0
2025-03	RAN#107	R5-250560	0944	-	F	Update to PDSCH demod test cases for NR-U	18.6.0
2025-03	RAN#107	R5-250640	0945	-	F	Addition of new test case 5.3.2.1.7 2RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	18.6.0
2025-03	RAN#107	R5-250643	0946	-	F	Core spec alignment of Applicability of requirements for eRedCap	18.6.0
2025-03	RAN#107	R5-250644	0947	-	F	Addition of eRedCap test case 6.2.1.2.2.2 1Rx TDD FR1 periodic wideband CQI reporting under fading conditions for eRedCap	18.6.0
2025-03	RAN#107	R5-250664	0949	-	F	Core alignment on HST-DPS CA	18.6.0
2025-03	RAN#107	R5-250707	0950	-	F	Addition of 2Rx FDD RedCap PMI reporting test case 6.3.2.1.1_1	18.6.0
2025-03	RAN#107	R5-250813	0951	-	F	Addition of antenna port indication for enhanced PDSCH DMRS	18.6.0
2025-03	RAN#107	R5-250814	0952	-	F	Correction to CSI report configuration for enhanced Type II codebook for CJT	18.6.0
2025-03	RAN#107	R5-250862	0953	-	F	update to HST-DPS test case applicability statement	18.6.0
2025-03	RAN#107	R5-251162	0957	-	F	Update to RedCap SDR test case 5.5.3	18.6.0
2025-03	RAN#107	R5-251439	0942	1	F	Update to RMC table numbering for MultiRx Demod test case	18.6.0
2025-03	RAN#107	R5-251441	0940	1	F	Updates to wideband CQI reporting inter-cell interference test case	18.6.0
2025-03	RAN#107	R5-251442	0954	2	F	Correction to CQI RI PMI delay in 6.2A.3.1.0	18.6.0
2025-03	RAN#107	R5-251576	0924	1	F	Core spec alignments on the expression of CSI-RS configurations for Rel-15 TCs	18.6.0
2025-03	RAN#107	R5-251577	0925	1	F	Core spec alignments on the expression of CSI-RS configurations for Rel-16 TCs	18.6.0
2025-03	RAN#107	R5-251578	0926	1	F	Core spec alignments on the expression of CSI-RS configurations for Rel-17 TCs	18.6.0
2025-03	RAN#107	R5-251579	0948	1	F	Core alignment for section 6.1.1	18.6.0
2025-03	RAN#107	R5-251580	0955	1	F	Correct test case order in Annex F	18.6.0
2025-03	RAN#107	R5-251581	0956	1	F	Update for TDD RMCs for sustained data rate testing	18.6.0
2025-03	RAN#107	R5-251734	0939	1	F	updates to FR2 link adaptation demod test case	18.6.0
2025-03	RAN#107	R5-251442	0954	2	F	Implementation of missing CR "Correction to CQI RI PMI delay in 6.2A.3.1.0"	18.6.1
2025-06	RAN#108	R5-251910	0960	-	F	Add PDSCH Performance requirements of Rel-18 enhanced DMRS for FR1 TDD 4Rx	18.7.0
2025-06	RAN#108	R5-252019	0963	-	F	Update for TDD RMCs for sustained data rate testing	18.7.0
2025-06	RAN#108	R5-252099	0964	-	F	Editorial Correction to FR1 Demod TC 5.2.3.1.1_5	18.7.0
2025-06	RAN#108	R5-252240	0965	-	F	Correction to Applicability of CA test rule description	18.7.0

2025-06	RAN#108	R5-252246	0966	-	F	Correction of Reference for Isolation Procedure	18.7.0
2025-06	RAN#108	R5-252266	0967	-	F	Corrections on configurations for CQI reporting with inter-cell interference	18.7.0
2025-06	RAN#108	R5-252552	0970	-	F	Addition of eRedCap CQI reporting test cases	18.7.0
2025-06	RAN#108	R5-252553	0971	-	F	Core spec alignment, addition of RMCs for eRedCap demod test cases	18.7.0
2025-06	RAN#108	R5-252554	0972	-	F	Addition of MU and TT for new eRedCap test cases	18.7.0
2025-06	RAN#108	R5-252555	0973	-	F	Updates of test case 5.3.2.1.7	18.7.0
2025-06	RAN#108	R5-252556	0974	-	F	Core spec alignment, adding of new RMC for PDCCH performance test cases	18.7.0
2025-06	RAN#108	R5-252687	0976	-	F	Addition of minimum test time for V2X Demod test cases	18.7.0
2025-06	RAN#108	R5-252878	0977	-	F	Alignment for SINR definition with TS 38.101-4	18.7.0
2025-06	RAN#108	R5-252988	0981	-	F	Addition of Multi-DCI FR2 fullyoverlap PDSCH and common updates to all Multi-Rx PDSCH test cases	18.7.0
2025-06	RAN#108	R5-253486	0959	1	F	Add enhanced receiver type 2 test cases for FDD 4Rx	18.7.0
2025-06	RAN#108	R5-253487	0961	1	F	Correction on enhanced receiver type 2 test cases for FDD 2Rx	18.7.0
2025-06	RAN#108	R5-253488	0968	1	F	sub-clause 5.2.2.2.17_1 header to be updated and add clause 5.2.2.2.17_2	18.7.0
2025-06	RAN#108	R5-253489	0962	1	F	Removal of editor note for CQI test case for FR2 256QAM	18.7.0
2025-06	RAN#108	R5-253602	0975	1	F	Update of MU for frequencies up to 7.125 GHz	18.7.0
2025-06	RAN#108	R5-253621	0978	1	F	Core alignment to correct aggregation level and number of candidates for SDR test cases	18.7.0
2025-06	RAN#108	R5-253240	0969	2	F	Correction to test applicability of PMI test cases with 16Tx or 32Tx of CSI-RS	18.7.0
2025-09	RAN#109	R5-253884	0982	-	F	Update to Abbreviations for ATG Demod TCs	18.8.0
2025-09	RAN#109	R5-253885	0983	-	F	Introduction of Applicability of requirements for ATG	18.8.0
2025-09	RAN#109	R5-254211	0991	-	F	Add parameters of enhanced receiver type 2 for TDD 4Rx	18.8.0
2025-09	RAN#109	R5-254213	0992	-	F	Missing mTT for eRedCap	18.8.0
2025-09	RAN#109	R5-254215	0994	-	F	Addition of Es value to the common test parameters in 9.4B.1.1	18.8.0
2025-09	RAN#109	R5-254233	0996	-	F	RMC update in CQI CA test cases	18.8.0
2025-09	RAN#109	R5-254234	0997	-	F	Update references in PMI test cases with codebook typell and eTypell	18.8.0
2025-09	RAN#109	R5-254237	0999	-	F	Updates for CQI reporting with Table 3 test cases	18.8.0
2025-09	RAN#109	R5-254255	1003	-	F	Update to Enhanced Typell codebook CSI Test Cases	18.8.0
2025-09	RAN#109	R5-254256	1004	-	F	Update to Typel and Typell codebook CSI Test Cases	18.8.0
2025-09	RAN#109	R5-254635	1008	-	F	Updating frequency range for MU for CSI reporting test cases	18.8.0
2025-09	RAN#109	R5-254640	1011	-	F	Addition of MU and TT for new eRedCap test cases	18.8.0
2025-09	RAN#109	R5-254739	1013	-	F	Update of test frequencies for intra-band non-contiguous EN-DC in demod test cases	18.8.0
2025-09	RAN#109	R5-254740	1014	-	F	Correction to applicable release of 16Tx or 32Tx PMI reporting	18.8.0
2025-09	RAN#109	R5-254878	1015	-	F	Annex G update for FR1 PDSCH absolute phy layer tput test cases	18.8.0
2025-09	RAN#109	R5-255118	1001	1	F	Core alignment to correct aggregation level and number of candidates for SDR Rel 15 test cases	18.8.0
2025-09	RAN#109	R5-255119	1002	1	F	Core alignment to correct aggregation level and number of candidates for SDR Rel 16 test case	18.8.0
2025-09	RAN#109	R5-255120	1005	1	F	Updates on PDSCH 0.001% BLER correlation matrix and CQI reporting with Table 3	18.8.0
2025-09	RAN#109	R5-255121	1000	1	F	Update on applicability of requirements for PMI 16 and 32 Tx	18.8.0
2025-09	RAN#109	R5-255301	0985	1	F	Introduction of new test case 6.3.1.2.2 1Rx TDD Single PMI with 4TX Typel-SinglePanel Codebook for eRedCap	18.8.0
2025-09	RAN#109	R5-255302	0986	1	F	Introduction of new test case 6.3.2.1.10 2Rx FDD Single PMI with 4TX Typel-SinglePanel Codebook for eRedCap	18.8.0
2025-09	RAN#109	R5-255303	0987	1	F	Introduction of new test case 6.3.2.2.10 2Rx TDD Single PMI with 4TX Typel-SinglePanel Codebook for eRedCap	18.8.0
2025-09	RAN#109	R5-255304	0988	1	F	Introduction of measurement uncertainty and test tolerance for eRedCap PMI test cases	18.8.0
2025-09	RAN#109	R5-255306	1006	1	F	Addition of RMC for eRedCap	18.8.0
2025-09	RAN#109	R5-255307	0989	1	F	Correction of RedCap PMI test cases	18.8.0
2025-09	RAN#109	R5-255308	0990	1	F	Correction of SA and NSA 2Rx PMI with 4TX test cases	18.8.0
2025-09	RAN#109	R5-255309	0993	1	F	Addition of Es value to the common test parameters in 5.5A.1.1	18.8.0
2025-09	RAN#109	R5-255355	1009	1	F	Addition of eRedCap test case 5.2.2.1.23, 2Rx FDD FR1 PDSCH performance for eRedCap	18.8.0
2025-09	RAN#109	R5-255357	1010	1	F	Addition of eRedCap test case 6.2.2.1.2.5	18.8.0
2025-09	RAN#109	R5-255386	0984	1	F	Introduction of new test case 6.3.1.1.2 1Rx FDD Single PMI with 4TX Typel-SinglePanel Codebook for eRedCap	18.8.0
2025-09	RAN#109	R5-255411	1012	1	F	Addition of test case 5.3.3.1.6 4RX FDD FR1 PDCCH antenna performance for 3 MHz channel bandwidth	18.8.0
2025-09	RAN#109	R5-255412	1007	1	F	Update of CSI-RS message for 6.3.2.1.7 and 6.3.2.2.8	18.8.0
2025-09	RAN#109	R5-255415	1016	1	F	Addition of missing aperiodic CQI triggering parameters for PDSCH abs ph layer tput test cases	18.8.0
2025-09	RAN#109	R5-255416	1017	1	F	Update to PDSCH RMC for PDCCH test cases	18.8.0

2025-12	RAN#110	R5-255628	1018	-	F	Correction of A-CSI report configuration in PDSCH absolute physical layer throughput 4RX TCs	18.9.0
2025-12	RAN#110	R5-255654	1021	-	F	Correction on 8Rx receiver definition in Demod requirements	18.9.0
2025-12	RAN#110	R5-255656	1022	-	F	Correction on annex of 8Rx CA Demod requirements	18.9.0
2025-12	RAN#110	R5-256241	1029	-	F	Update to K1 value for CA requirements	18.9.0
2025-12	RAN#110	R5-256265	1030	-	F	Correction to test applicability and message contents of URLLC test cases	18.9.0
2025-12	RAN#110	R5-256275	1031	-	F	Modifications on Annex G.4 Statistical testing of performance requirements	18.9.0
2025-12	RAN#110	R5-256296	1035	-	F	Clarification on HST-DPS test scenarios	18.9.0
2025-12	RAN#110	R5-256866	1027	1	F	Add enhanced receiver type 2 test cases for 4Rx TDD	18.9.0
2025-12	RAN#110	R5-256867	1042	1	F	Addition of 8Rx TDD FR1 PDSCH mapping typeA test cases	18.9.0
2025-12	RAN#110	R5-256868	1043	1	F	Addition of 8Rx TDD FR1 CQI reporting test case	18.9.0
2025-12	RAN#110	R5-256869	1044	1	F	Addition of 8Rx SDR test case	18.9.0
2025-12	RAN#110	R5-256870	1038	1	F	Addition of requirement applicability for support3MHz-ChannelBW-Symmetric-r18	18.9.0
2025-12	RAN#110	R5-256871	1020	1	F	Addition of Multiple PMI test with 16Tx Enhanced Type II codebook for predicted PMI	18.9.0
2025-12	RAN#110	R5-256872	1036	1	F	Addition of PDSCH requirements for FDD 8Rx UE with baseline receiver	18.9.0
2025-12	RAN#110	R5-256873	1040	1	F	Addition of test case 6.3.2.2.9, 2Rx TDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI	18.9.0
2025-12	RAN#110	R5-256874	1037	1	F	Update of applicability for eRedCap in existing test cases	18.9.0
2025-12	RAN#110	R5-256875	1026	1	F	Removal of Editor notes for test cases 6.3.2.1.7 and 6.3.2.2.8	18.9.0
2025-12	RAN#110	R5-256876	1033	1	F	Correction of PDSCH dmrs-AdditionalPosition in PDCCH Demod test cases	18.9.0
2025-12	RAN#110	R5-256877	1039	1	F	Removing redundant message exception in test case 6.3.3.2.6	18.9.0
2025-12	RAN#110	R5-256878	1041	1	F	Addition for CQI reporting under AWGN for 5DLCA	18.9.0
2025-12	RAN#110	R5-256949	1032	1	F	Updates for PDSCH absolute physical layer throughput requirements test cases	18.9.0
2025-12	RAN#110	R5-256974	1045	1	F	Addition of MultiRx CQI test case	18.9.0
2025-12	RAN#110	R5-256981	1023	1	F	Correction of message exception for CSI-RS resource Type	18.9.0
2025-12	RAN#110	R5-256987	1034	1	F	Updates in the PDSCH config for eRedCap test cases	18.9.0
2025-12	RAN#110	R5-256988	1024	1	F	Correction of applicability Table 6.1.1.4-1	18.9.0
2026-03	RAN#111	R5-260369	1049	-	F	Update of Redcap demod test case	18.10.0
2026-03	RAN#111	R5-260370	1050	-	F	Update of eRedcap demod test case	18.10.0
2026-03	RAN#111	R5-260565	1058	-	F	Annex G update for link adaptation test cases	18.10.0
2026-03	RAN#111	R5-260569	1060	-	F	Updates to 8Rx CQI test cases	18.10.0
2026-03	RAN#111	R5-260583	1065	-	F	Correction of UL allocation for eMIMO Type II codebook PMI tests	18.10.0
2026-03	RAN#111	R5-260584	1066	-	F	Correction of UL allocation for Type II codebook predicted PMI tests	18.10.0
2026-03	RAN#111	R5-260585	1067	-	F	Correction of UL allocation for Type II codebook PMI tests	18.10.0
2026-03	RAN#111	R5-260688	1070	-	F	Correction of applicability Table 5.1.1.4-1	18.10.0
2026-03	RAN#111	R5-260742	1073	-	F	Addition of 8Rx demod test case 5.2.4.1.1_2 - FDD 4x8 baseline	18.10.0
2026-03	RAN#111	R5-260743	1074	-	F	Addition of 8Rx demod test case 5.2.4.1.1_5 - FDD 8x8 baseline	18.10.0
2026-03	RAN#111	R5-260744	1075	-	F	Addition of 8Rx demod test case 5.2.4.2.1_1 - TDD 2x8 baseline	18.10.0
2026-03	RAN#111	R5-260745	1076	-	F	Addition of 8Rx demod test case 5.2.4.2.1_2 - TDD 4x8 baseline	18.10.0
2026-03	RAN#111	R5-260746	1077	-	F	Addition of 8Rx demod test case 5.2.4.2.1_5 - TDD 8x8 baseline	18.10.0
2026-03	RAN#111	R5-260867	1081	-	F	Addition of test case 5.2.4.1.3_1 8Rx FDD FR1 for PDSCH with intra-cell inter-user interference - 4x8 MIMO with baseline 8Rx receiver for both SA and NSA	18.10.0
2026-03	RAN#111	R5-260869	1083	-	F	PDSCH RMCs for eRedCap for PDCCH performance test cases	18.10.0
2026-03	RAN#111	R5-260870	1084	-	F	Update of RedCap test cases 5.3.1.1.1, 5.3.1.2.1, 5.3.2.1.4, 5.3.2.2.4	18.10.0
2026-03	RAN#111	R5-260871	1085	-	F	Addition of test case 6.3.3.1.8, 4Rx FDD FR1 Multiple PMI with 16Tx Enhanced Type II codebook for predicted PMI	18.10.0
2026-03	RAN#111	R5-260910	1087	-	F	Cleanup in existing eRedCap test cases	18.10.0
2026-03	RAN#111	R5-260925	1090	-	F	Update Annexes to clarify requirements	18.10.0
2026-03	RAN#111	R5-260941	1091	-	F	Correct table title for 9.4B.1.2	18.10.0
2026-03	RAN#111	R5-260964	1092	-	F	Typo correction in the test procedure for PMI test cases	18.10.0
2026-03	RAN#111	R5-260966	1093	-	F	Update for K1 and HARQ processes for SDR NSA CA FR1 test cases	18.10.0
2026-03	RAN#111	R5-261085	1094	-	F	updates to Multi-Rx Demod test cases	18.10.0
2026-03	RAN#111	R5-261502	1068	1	F	Update of test frequencies for intra-band non-contiguous EN-DC in chapter 5 of demod test cases	18.10.0
2026-03	RAN#111	R5-261503	1069	1	F	Update of test frequencies for intra-band non-contiguous EN-DC in chapter 6 of demod test cases	18.10.0
2026-03	RAN#111	R5-261504	1072	1	F	Adding a new clause 7.2A.2.4 for HST FR2 DPS with CA	18.10.0
2026-03	RAN#111	R5-261505	1071	1	F	Update Abbreviations and Annex F for TDD enhanced receiver type 2	18.10.0
2026-03	RAN#111	R5-261506	1051	1	F	Addition of 2Rx FDD PDSCH ATG Performance TC	18.10.0
2026-03	RAN#111	R5-261507	1052	1	F	Addition of 2Rx TDD PDSCH ATG Performance TC	18.10.0

2026-03	RAN#111	R5-261508	1053	1	F	Addition of 4Rx FDD PDSCH ATG Performance TC	18.10.0
2026-03	RAN#111	R5-261509	1054	1	F	Addition of 4Rx TDD PDSCH ATG Performance TC	18.10.0
2026-03	RAN#111	R5-261510	1055	1	F	Update to Annex F MUTT for ATG Performance TCs	18.10.0
2026-03	RAN#111	R5-261511	1056	1	F	Update TDD UL-DL configs and ref measurement channels for ATG	18.10.0
2026-03	RAN#111	R5-261512	1057	1	F	Editorial correction to NR eRedCap Performance TC 5.2.2.1.23	18.10.0
2026-03	RAN#111	R5-261513	1082	1	F	Addition of test case 5.2.2.2.24	18.10.0
2026-03	RAN#111	R5-261514	1064	1	F	Addition of eRedcap SDR test case	18.10.0
2026-03	RAN#111	R5-261515	1059	1	F	Updates to 8Rx PDSCH Demodulation and SDR test cases	18.10.0
2026-03	RAN#111	R5-261516	1061	1	F	Addition of 6CC SDR test case	18.10.0
2026-03	RAN#111	R5-261517	1062	1	F	Addition of 5CC and 6CC PDSCH Demodulation test case	18.10.0
2026-03	RAN#111	R5-261518	1063	1	F	Addition of 6CC CQI test case	18.10.0
2026-03	RAN#111	R5-261541	1048	1	F	Finalize the FDD Enhanced Receiver Type 2 test cases	18.10.0
2026-03	RAN#111	R5-261610	1088	1	F	Update chapter 5 procedures to clarify requirements	18.10.0

History

Version	Date	Status
V18.2.0	June 2024	Publication
V18.3.0	August 2024	Publication
V18.4.0	November 2024	Publication
V18.5.0	February 2025	Publication
V18.6.1	May 2025	Publication
V18.7.0	August 2025	Publication
V18.8.0	October 2025	Publication
V18.9.0	March 2026	Publication
V18.10.0	April 2026	Publication