

Final draft **ETSI EN 300 707** V1.2.1 (2002-12)

---

*European Standard (Telecommunications series)*

**Electronic Programme Guide (EPG);  
Protocol for a TV Guide using electronic data transmission**

---

European Broadcasting Union



Union Européenne de Radio-Télévision

**EBU·UER**



---

Reference

REN/JTC-TTEXT-EPG-R1

---

Keywords

broadcasting, data, protocol, teletext,  
transmission, TV

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.org](mailto:editor@etsi.org)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.

© European Broadcasting Union 2002.

All rights reserved.

**DECT™**, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.  
**TIPHON™** and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.  
**3GPP™** is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

# Contents

Intellectual Property Rights .....	6
Foreword.....	6
1 Scope .....	7
2 References .....	7
3 Definitions and abbreviations.....	7
3.1 Definitions .....	7
3.2 Abbreviations .....	8
4 Introduction to TV Guide/EPG .....	9
4.1 Structure of the present document .....	9
4.2 How does an EPG benefit a TV/VCR user.....	10
4.3 Types of EPG .....	11
4.4 EPG data transmission.....	11
4.5 Delivery and reception of the EPG.....	12
4.6 Summary of EPG types .....	14
4.6.1 This Channel EPG .....	14
4.6.2 Multiple Channels EPG .....	14
5 Presentation techniques .....	15
5.1 Examples of menus for EPG types .....	15
5.2 OSD menu template .....	19
5.3 OSD menu organization .....	20
5.4 Presentation modes, window owner/area size .....	21
5.5 EPG menu organizational (Full EPG only) .....	21
5.5.1 Example of a tree organization .....	21
5.5.2 Linked menu list description.....	23
5.5.3 Attributes .....	25
6 Installation and consistency in the EPG .....	26
6.1 Version Number .....	26
6.2 TV Guide menu, installation and change .....	26
6.3 Unique identification.....	26
7 Scheduling.....	27
7.1 Update, Version Number.....	28
8 Main data groups in an EPG.....	28
8.1 Data structures used in the EPG .....	28
9 Data representations in electronic info media .....	30
9.1 Syntax for the Overall Data Header .....	30
9.2 Semantics for the Overall Data Header .....	31
10 Bundle Inventory .....	31
11 EPG data structures .....	31
11.1 EPG's general data structure.....	31
11.1.1 Syntax for EPG Data Structures .....	32
11.1.2 Semantics for the EPG Data Structures .....	32
11.1.3 Conditional Access (CA) and copyright .....	32
11.2 Application Information Structure .....	33
11.2.1 Syntax for the Application Information Structure .....	34
11.2.2 Semantics for the Application Information Structure .....	35
11.3 Programme Information Structure.....	37
11.3.1 Syntax for the Programme Information Structure.....	37
11.3.2 Semantics for the Programme Information Structure .....	39
11.4 Language Information Structure.....	41
11.4.1 Syntax for the Language Information Structure.....	41

11.4.2	Semantics for the Language Information Structure .....	41
11.5	(Sub-)Title Information Structure.....	42
11.5.1	Syntax for the (Sub-)Title Information Structure.....	42
11.5.2	Semantics for the (Sub-)Title Information Structure .....	42
11.6	Navigation Information Structure.....	43
11.6.1	Syntax for the Navigation Information Structure.....	43
11.6.2	Semantics for the Navigation Information Structure .....	44
11.7	OSD Information Structure .....	45
11.7.1	Syntax for the OSD Information Structure .....	45
11.7.2	Semantics for the OSD Information Structure .....	46
11.8	Message Information Structure .....	47
11.8.1	Syntax for the Message Information Structure .....	47
11.8.2	Semantics for the Message Information Structure .....	47
11.9	Update Information Structure.....	48
11.9.1	Syntax for the Update Information Structure.....	48
11.9.2	Semantics for the Update Information Structure .....	48
11.10	Helper Information Structure .....	49
11.10.1	Syntax for the Helper Information Structure .....	49
11.10.2	Semantics for the Helper Information Structure .....	49
11.11	Conditional Access (CA) Information Structure .....	50
11.11.1	Syntax for the Conditional Access Information Structure .....	50
11.11.2	Semantics for the Conditional Access Information Structure .....	50
11.12	Additional information .....	51
11.12.1	Strings .....	51
11.12.1.1	String types .....	54
11.12.1.1.1	Transparent Short String.....	54
11.12.1.1.2	Transparent Long String.....	55
11.12.1.1.3	Reference to a (Tele-)text string .....	55
11.12.1.1.4	Reference to a (tele-)text rectangle .....	55
11.12.1.1.5	Reference to an entire Teletext page .....	55
11.12.2	Descriptors .....	56
11.12.3	DATATYPE_ID (EPG only!).....	56
11.12.4	EVENT_ATTRIBUTE .....	56
11.12.4.1	Attribute descriptions .....	57
11.12.4.2	Combining attributes.....	58
11.12.5	NEXT_LINK_TYPE .....	58
11.12.6	MESSAGE_ATTRIBUTE.....	59
11.12.7	Sorting categories .....	59
<b>Annex A (normative):</b>	<b>Transmission and coding.....</b>	<b>62</b>
A.1	Transmission format.....	62
A.1.1	Rules for stream 1 and stream 2 pages .....	62
A.1.2	Page Variants.....	63
A.2	Coding of the Overall Data Header .....	63
A.3	Coding of Control Data .....	63
A.4	Coding of String Data.....	63
<b>Annex B (normative):</b>	<b>Future extensions .....</b>	<b>64</b>
B.1	Rules for the design of future extensions to the EPG application.....	64
<b>Annex C (normative):</b>	<b>The use of OSD information .....</b>	<b>65</b>
C.1	The use of OSD information in simple decoders .....	65
<b>Annex D (normative):</b>	<b>Minimum EPG broadcasts.....</b>	<b>66</b>
D.1	Structures.....	66
<b>Annex E (normative):</b>	<b>Allowed string types.....</b>	<b>67</b>

E.1	Structures.....	67
<b>Annex F (normative): Ratings .....</b>		<b>68</b>
F.1	Purpose, ranges and use of ratings .....	68
<b>Annex G (informative): Display .....</b>		<b>69</b>
G.1	Display of Messages.....	69
G.2	Order of Display for a Full EPG Decoder receiving a Full EPG broadcast .....	69
<b>Annex H (informative): EPG and TV information from normal Teletext service.....</b>		<b>70</b>
H.1	The use of TV information from normal Teletext service within EPGs .....	70
<b>Annex I (informative): Void .....</b>		<b>71</b>
<b>Annex J (informative): Teletext capacity required.....</b>		<b>72</b>
<b>Annex K (informative): Teletext transmission.....</b>		<b>73</b>
K.1	Enumeration of PI blocks by block_no .....	73
K.2	Sequence of transmission of PI blocks.....	73
K.3	Why two streams for EPG.....	73
<b>Annex L (informative): Examples.....</b>		<b>74</b>
L.1	Generation of a PI block.....	74
L.2	String examples .....	77
L.2.1	Encoding "El Niño" as transparent short string.....	77
L.2.2	Teletext references .....	77
L.3	Examples for attributes in a menu organization.....	78
L.4	Model of a coding procedure.....	79
<b>Annex M (informative): Implementation of an EPG prototype.....</b>		<b>80</b>
M.1	General .....	80
M.1.1	The Generator system.....	80
M.1.2	The Transmission system .....	80
M.1.3	The Receiver system .....	80
M.1.4	The Application system.....	80
M.2	Protocol for data communication .....	81
M.3	Example of a Bundle Information Block in the Serial Protocol.....	84
M.4	Example of a Subtitle Information block in the serial protocol .....	85
<b>Annex N (informative): Conversion of PI start_time to local time .....</b>		<b>86</b>
<b>Annex O (informative): Void .....</b>		<b>87</b>
<b>Annex P (informative): Transmission Example for an EPG.....</b>		<b>88</b>
History .....		89

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

All published ETSI deliverables shall include information which directs the reader to the above source of information.

---

## Foreword

This European Standard (Telecommunications series) has been produced by Joint Technical Committee (JTC) Broadcast of the European Broadcasting Union (EBU), Comité Européen de Normalisation ELEctrotechnique (CENELEC) and the European Telecommunications Standards Institute (ETSI), and is now submitted for the ETSI standards One-step Approval Procedure.

**NOTE:** The EBU/ETSI JTC Broadcast was established in 1990 to co-ordinate the drafting of standards in the specific field of broadcasting and related fields. Since 1995 the JTC Broadcast became a tripartite body by including in the Memorandum of Understanding also CENELEC, which is responsible for the standardization of radio and television receivers. The EBU is a professional association of broadcasting organizations whose work includes the co-ordination of its members' activities in the technical, legal, programme-making and programme-exchange domains. The EBU has active members in about 60 countries in the European broadcasting area; its headquarters is in Geneva.

European Broadcasting Union  
 CH-1218 GRAND SACONNEX (Geneva)  
 Switzerland  
 Tel: +41 22 717 21 11  
 Fax: +41 22 717 24 81

<b>Proposed national transposition dates</b>	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

---

# 1 Scope

The present document specifies the data formats for data broadcasting applications in general, and, specifically, for the Electronic Programme Guide (EPG) or TV Guide, also known by some other commercial slogans. The data required for these applications is transmitted by means of a data broadcasting protocol using the Vertical Blanking Interval (VBI) lines of a TV signal. It is also intended to coexist with other data-broadcasting applications running on affordable TV-sets, VCRs, or multi-media PCs. The EPG enables a receiver/decoder to store a programme database (and, if available, a navigation database), which can help the viewer to find the programmes of his preference.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- |     |  |
|-----|--|
| [1] | ETSI EN 300 708: "Television systems; Data transmission within Teletext".  |
| [2] | ETSI EN 300 706: "Enhanced Teletext specification".  |
| [3] | ETSI EN 300 231: "Television systems; Specification of the domestic video Programme Delivery Control system (PDC)".                      |
| [4] | ETSI TR 101 288: "Television systems; Code of practice for an Electronic Programme Guide (EPG)".   |
| [5] | ISO 639.2: "Code for the representation of names and languages; Part 2: Alpha-3 code".   |
| [6] | ETSI TR 101 231: "Television systems; Register of Country and Network Identification (CNI) and of Video Programming System (VPS) codes". |

---

# 3 Definitions and abbreviations

## 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**bundle:** data carrier which comprises a number of streams

NOTE: As provided by EN 300 708 [1].

**composite:** decoder which is able to receive and to decode EPGs from more than one network and to combine them into a single composite EPG

**control data:** combination of data fields in the EPG data structures which undergo a special encoding procedure

**escape sequence:** means of introducing additional, more complex display components into text strings (e.g. national characters, pictures)

**event:** predefined action which may be selected in a product's user interface menu

**far programme:** programme which is not a near programme

**filtered (EPG):** EPG presented to the user which contains less information than the EPG transmission

NOTE: The filter in the decoder disregards unwanted or undesirable items, e.g. networks or programmes of certain types.

**full EPG:** multiple channels EPG which, as a broadcast type includes navigation and sorting information, or as a decoder type makes use of such information if it is available

**Hamming 8/4:** code for error protection as used within Teletext transmission which allows single bit errors to be identified and corrected, and double bit errors to be detected

**header:** banner introducing the menu on the screen

**level 1.5, level 2.5, level 3.5:** Teletext presentation levels

**menu:** arrangement of events displayed via a product's user interface, requiring user interaction

**multiple channel:** EPG broadcast type which comprises information on programmes from more than one network on which the EPG is delivered, or an EPG decoder type which can acquire and display information on programmes from more than one network regardless of the channel to which the receiver is tuned to

**navigation:** user interaction via menus leading to the selection of information

**near programme:** programme that starts during the course of the day or the next day up to at least the end of the evening's programmes

**nibble:** data entity of 4 bits

**page:** space for a Teletext page or 1 kbyte, in the sense of memory capacity

**parity:** code for error detection as used within Teletext transmission

**point-and-click:** easy way to program a TV or VCR from within the EPG by a cursor which is moved over the wished programme and a confirmation of the action is issued

**stream:** data sequence organized in a block structure

NOTE: As described in EN 300 708 [1].

**string:** data type covering text strings and references

**string data:** combination of data fields in the EPG data structures which undergo a special encoding procedure

**structure:** data type

**Teletext:** data delivery system within television transmission

**this channel:** EPG broadcast type which comprises information only on the programmes of the network on which the EPG is delivered, or an EPG decoder type which can only acquire and display information on the programmes of the channel to which the receiver is tuned to

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AI	Application Information (structure)
ATS	Auto Tuning System
BI	(data broadcasting) Bundle Inventory
CA	Conditional Access
CI	Conditional access Information structure
COP	Code Of Practice
DRCS	Dynamically Redefinable Character Sets
DVB	Digital Video Broadcast



EPG	Electronic Programme Guide
NOTE:	Also referred to as TV Guide or TV Info.
HI	Helper Information (structure)
LCD	Liquid Crystal Display
LI	Language Information (structure)
LSB	Least Significant Bit
MI	Message Information (structure)
MIP	Magazine Inventory Page
MSB	Most Significant Bit
NI	Navigation Information (structure)
OI	OSD Information (structure)
OSD	On Screen Display
OSI	Open System Interconnection
PDC	Programme Delivery Control
PI	Programme Information (structure)
PTY	Programme TYpe
TI	Title Information (structure)
TOP/FLOF	Means of navigation within certain Teletext pages
TV	TeleVision (set)
UI	Update Information (structure)
VBI	Vertical Blanking Interval
VCR	Video Cassette Recorder
VPS	Video Programming System
VPT	Video Programming by Teletext
WST	World Standard Teletext

---

## 4 Introduction to TV Guide/EPG

### 4.1 Structure of the present document

#### - **Introduction:**

The introduction clause outlines the relationships between all parties involved in collecting, providing, broadcasting, formatting and presenting a TV Guide. The nature of an EPG as a database stored in a product and accessed by the user via on screen menus is also introduced. To accommodate the wide range of products and broadcasts possible with such a system the idea of "Types of EPG" is introduced.

#### - **Presentation Techniques:**

The image seen by the user is crucial to the success of the EPG. The menus and screen layouts are very far removed from the traditional image of Teletext. In short the product is now responsible for the menus on the screen layout. The user will be able to perform interactively with these menus. It is essential that the information provider be aware of possible screen layouts to ensure that the information is displayed in a pleasing and correct way. Therefore this clause outlines a "code-of-practice" between TV set manufacturer and information provider on "how the information will look".

#### - **Installation and Consistency:**

Care needs to be taken to ensure that products can handle the volume of data efficiently and accurately. Also products will probably be able only to handle one Full EPG; however more than one may be available so how to choose the right one is important.

#### - **Scheduling:**

The parties involved in providing a TV Guide need flexible and efficient means to modify (delete, insert, alter) data already stored in the receiver's EPG database.

- **The Data Groups (clauses 8 to 11):**

Now that the functions and requirements of the TV Guide have been listed the required data is grouped together in functional blocks, and the detailed encoding and numbering of the data takes place.

NOTE: The present document is independent of the transport layer (according to OSI layers). EPG data will be broadcast via a Teletext data channel. The actual transportation system is laid down in EN 300 708 [1].

## 4.2 How does an EPG benefit a TV/VCR user

In the era of cable/satellite TV a user can expect to receive maybe 30 channels offering perhaps more than 1 000 programmes per day. A system to allow the user to quickly and efficiently find the programme of his choice is becoming ever more attractive. While history has shown that paper can be a very useful medium to convey programme information, simply giving information is no longer enough.

The value of an EPG to a user is to be informed of the most interesting programmes that fit his viewing criteria. Now the user can see if a programme of his choice is available within the next few days and on what channel. Or, the user can select to be informed of the best programmes by means of the rating an information provider has associated with the programme data. Similar attributes such as the language of the programme, its subtitles and audio description or the indication of the unsuitability of the programme for viewing by children can be included.

Integration into the products will also support more comfortable ways of interacting with the devices -e.g. VCRs can be programmed (also for VPS/PDC) by "point-and-click" paradigms rather than complicated manipulation of cryptic keys.

It has also been an additional goal to define a protocol that is able to allow a TV or VCR with current analogue signals to have a comparable functionality and those planned with DVB. Future products will strive to minimize the differences between signals coming from an analogue source and those from a digital one when presenting information to the user.

The EPG provides the functionality required by the viewer to select the programmes that are to be viewed and providing an easy route to transfer this information to the TV set or Video recorder by:

- "storing" the data as a database in the TV set or VCR;
- "separating" the way the information is presented or displayed from the way in which the data is transmitted;
- allowing the viewer to selectively sort and store information according to his "preferences";
- using a pre-defined refreshing sequence so that the most critical information is always available;
- using storage in the end-product so that the viewer has instant access to information about future programmes and the network operator can reduce the bandwidth required for an optimal performance.

The EPG also provides the VPS/PDC recording pre-selection codes which can be used by receivers to perform a VPS/PDC controlled recording.

The presentation techniques used in the EPG are very critical to its success. The two extremes are:

- the set collates all the data and decides how to display the information; and
- each TV Guide provider can decide how his information is to be presented.

The main conclusion in the present document is that a common presentation technique is required, i.e. a solution somewhere in the middle. The solution is based on a minimum OSD requirement of Level 1.5 Teletext. Displays that can be enhanced through Level 2.5 and 3.5 Teletext to full bit-mapped image based systems.

However, a general purpose OSD template has to be used. This is the subject of clause 5.

By using a general purpose template it will be possible for:

- TV Guide providers to influence the layout and create their own identity;
- set makers to offer advanced OSD and powerful sorting techniques;
- viewers to obtain a standardized, consistent interface within one product.

## 4.3 Types of EPG

To allow a range of broadcasts and products the notion of "Type of EPG" is introduced.

There are three possible types of EPG available from all these combinations:

- This Channel = The User gets a this channel EPG;
- Multiple Channel = The user gets a multiple channel EPG;
- Full EPG = The user gets a Full EPG (Multiple Channel plus Navigation).

**Table 1: Types of EPG**

	<b>This Channel Service</b>	<b>Multiple Channel Service</b>	<b>Full EPG Service</b>
<b>Sets with small memory</b>	This Channel	This Channel or Multiple Channel	This Channel or Multiple Channel or Full EPG
<b>Sets with sufficient memory</b>	This Channel	Multiple Channel	Full EPG

The type of EPG that a user gets depends on the transmitted database and the receiving equipment. The above table gives a simple presentation of what the user can get. The user can never get more than what the service includes or what the receiver can decode.

NOTE: Refer to annex H and clause 7, for the description and use of TV programme information from normal Teletext service within EPGs.

## 4.4 EPG data transmission

Supplying the information in the form of data rather than the traditional visual text information will allow new powerful sorting and display techniques. These techniques will enable users to find the programmes they want and with the right amount of background information. A database is maintained within the product with specially encoded information. Viewers can access this information for display according to their wishes, guided by the information and style of the received data.

A service will include data for its own network's programmes, or a service will include data about its own and other networks' programmes. In any case, the data in the EPG is always formatted in the same way.

The data is sent invisibly to the viewer e.g. via the Teletext data channel (as hidden pages/packets as described in EN 300 708 [1]). In this case EPG data has to co-exist with other Teletext transmissions.

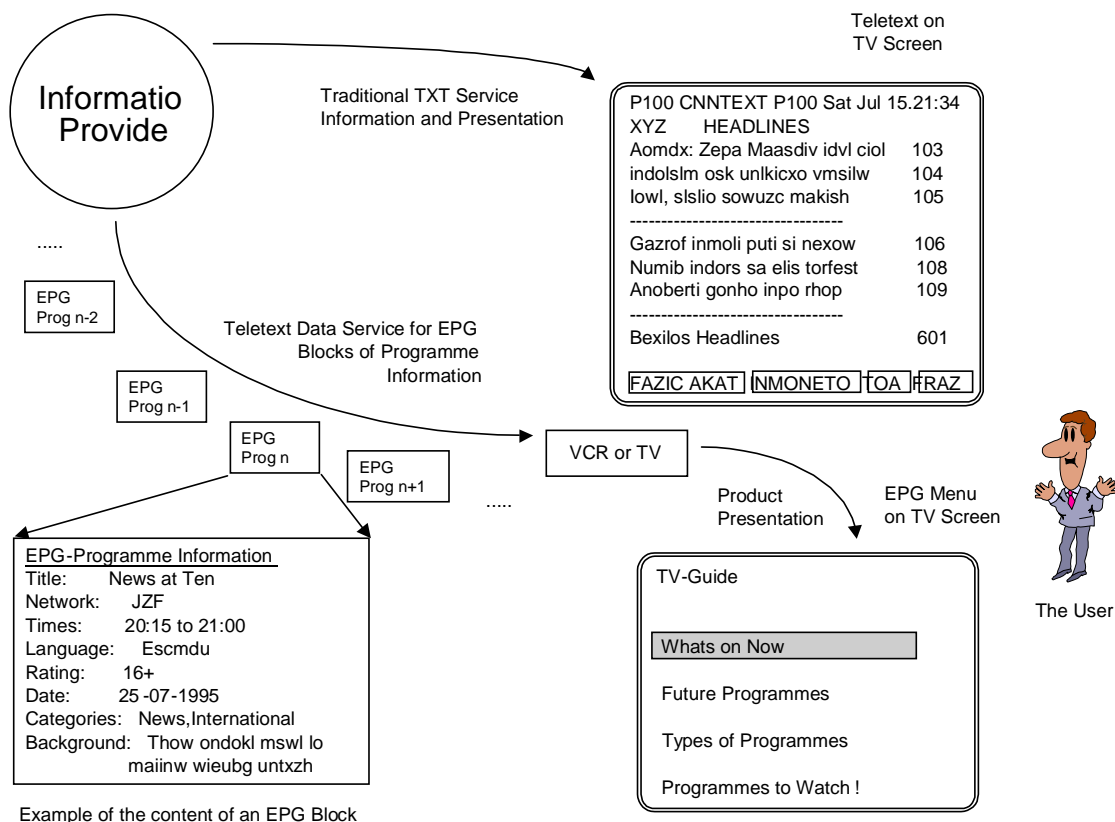


Figure 1: EPG Data Transmission

## 4.5 Delivery and reception of the EPG

For the application of an Electronic Programme Guide the required data protocol shall take the needs of several parties into account. This clause develops simple models for the delivery of EPG data to the decoder by defining the logical functions involved in these processes. It should be noted that the logical functions may all be performed by single or multiple independent entities:


- listing provider:** provides the listing information for multiple TV services;
- TV Guide provider:** assembles this information to form a Multiple Channels EPG;
- network operator:** transmits the television programmes and the EPG data;
- TV service provider:** provides the layout of television programmes for transmission.

Similarly, the EPG engine in the television set or VCR can be split into the following logical functions:

- decoder:** responsible for collecting and decoding the transmitted EPG data;
- EPG database:** database of stored EPG data, on which filtering functions can be performed;
- presentation engine:** responsible for the presentation of EPG data under the control of the viewer.

The relationship of these logical functions differs between This Channel, Multiple Channels and Full EPG data, and is illustrated in the following.


## Relationships between functions in a This Channel EPG

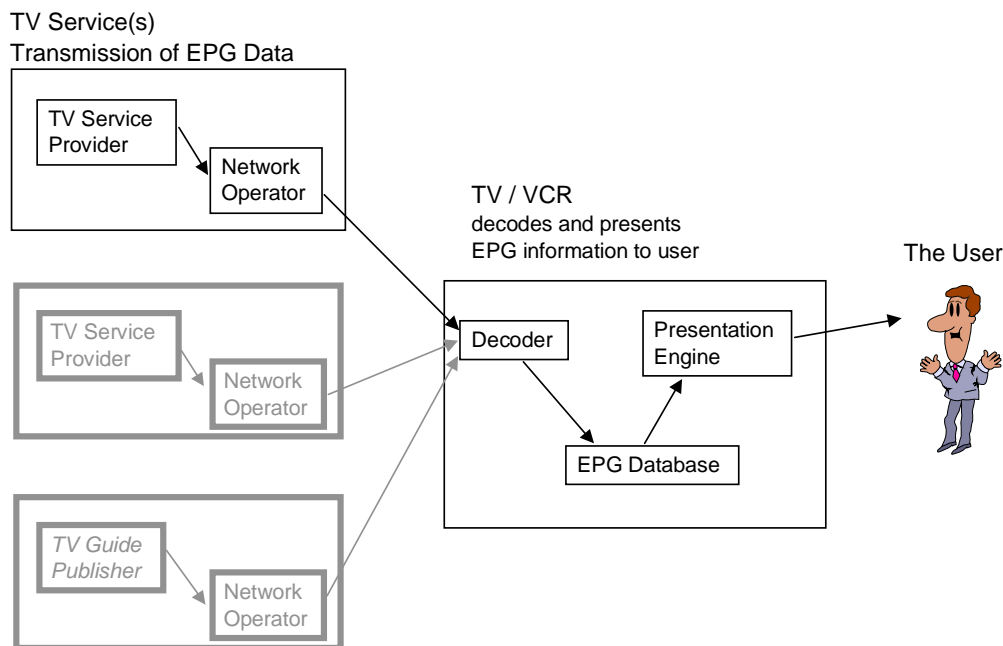

**Figure 2: Functions in a This Channel EPG**

The This Channel EPG data is generated by a TV service provider (or via a TV Guide provider) for his service only. This data is broadcast by a network operator. It is received by the decoder while tuned to that service. It may be stored by the decoder to reduce the response time to the viewer.

The Multiple Channels EPG data is provided by a TV Guide provider from information obtained from one or more TV listing providers. The data from one or more TV Guide providers is broadcast by a network operator. It is received by the decoder while tuned to that service. The data is stored by the decoder as a database, which may then be searched by the viewer using functions provided by the presentation engine.

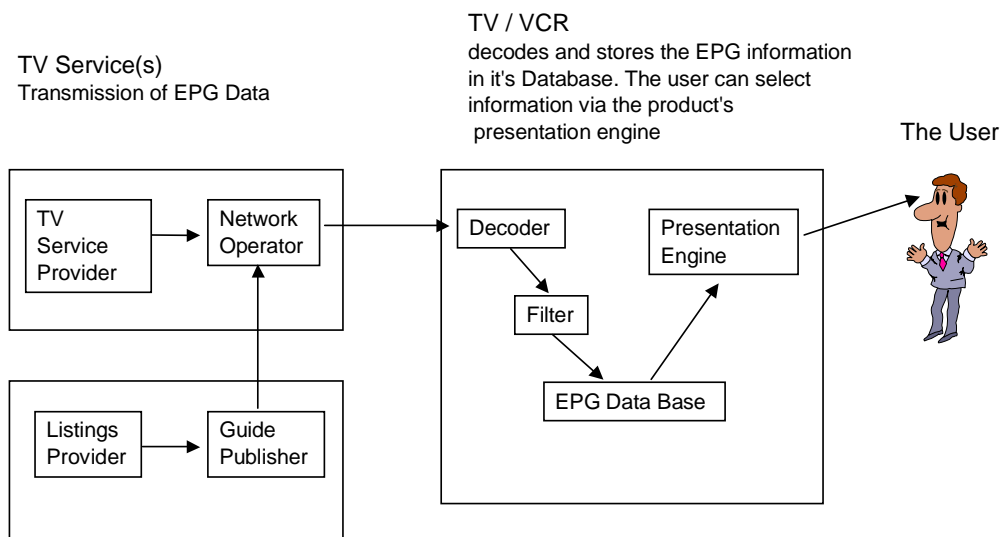

**Figure 3: Relationships between functions in a Multiple Channel EPG**

A decoder may use the broadcast EPG data in a number of ways. For example, by scanning a number of channels for This Channel EPG data, it is possible for a decoder to build a composite EPG database, on which several presentation functions may be performed.

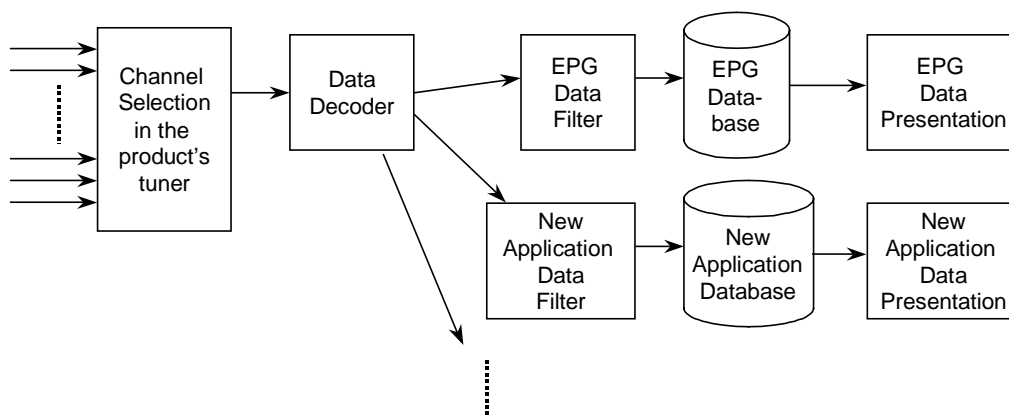


Figure 4: Functional blocks of an EPG decoder

## 4.6 Summary of EPG types

Service providers or network operators can combine any EPG type with any Teletext presentation level. Backwards compatibility of the enhancements shall be ensured by the service provider or network operator. The bit-mapped Full EPG can be enhanced by using the possibilities of Level 3.5 Teletext presentation, such as the bit-mapped DRCS.

### 4.6.1 This Channel EPG

The TV Guide provider is supplying information concerning the current programme and programmes that will come next (up to several days ahead), on his own channel. Some additional information such as advertising or other messages can also be sent in a format compatible with at least Level 1.5.

The minimum requirements are:

- Data:** title, information, themes etc. about the current programme from the channel to which the receiver is tuned to;
- Storage:** a product should have at least 4 kbyte memory to store the information;
- OSD:** the TV shall have at least a Teletext Level 1.5 display;  
the VCR shall have at least a monochrome display of 10 rows by 20 columns.

Displays not organized as 24 rows of 40 columns should be laid out as close as possible to, and in the sense of, clause 5.

The product is obliged to display the TV Guide provider's advertising or other messages and header in specific display areas which are flexible in both size and position. In case the TV Guide provider is not supplying this information, the receiver shall adopt a default layout with at least the current time, the current day and the channel or service identification. Examples are given in clause 5.

### 4.6.2 Multiple Channels EPG

The TV Guide provider is supplying information about the programmes on many networks for several days ahead. A menu (presentation) structure can also be sent to help with the handling of the information. Some presentation enhancements such as advertising/message box and header, can also be sent in a format compatible with Teletext Level 2.5, 3.5, or bit-mapped displays, (with a default to Level 1.5).

The minimum requirements are:

- Data:** title, information, themes etc. about the programmes of multiple TV networks for several days;
- Storage:** a product should have at least 256 kbyte of memory capacity for either composite or Full EPG;
- NOTE:** The product can also selectively store information as the user requires.

**OSD:** The TV and VCR shall have at least a Teletext Level 1.5 display, for TV preferably Level 2.5.

- These products can support the Full EPG including thematic (both according to fixed programme types for EPG (clause 11.12.7) and also to programmable sorting types) and temporal sorting;
- The information has to be acquired in the background (i.e. without any special action from the user). The products shall be able to display the contents of any menu as specified by the service provider. However, the set can also add its own specific items to the menus;
- The receiver may have filtering mechanisms to select only part of the information which is provided by the service provider due to memory restrictions or through user preferences.

## 5 Presentation techniques

The success of an EPG heavily relies on the hardware resources available in the product, such as "storage capacity", "display capabilities", "computing power", etc. To match the different types of EPGs and their corresponding minimum requirements, several categories of menus can be distinguished.

### 5.1 Examples of menus for EPG types

Example of a This Channel  
(Now and Next + Broadcaster Message)

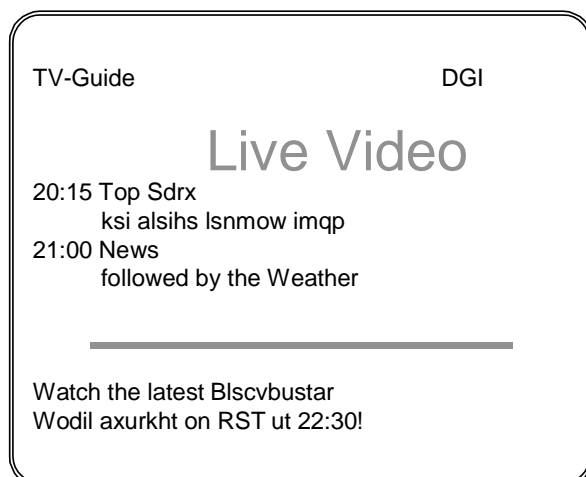


Figure 5: EPG Presentation Example 1

Example of a This Channel EPG  
(Today + Linked Message)

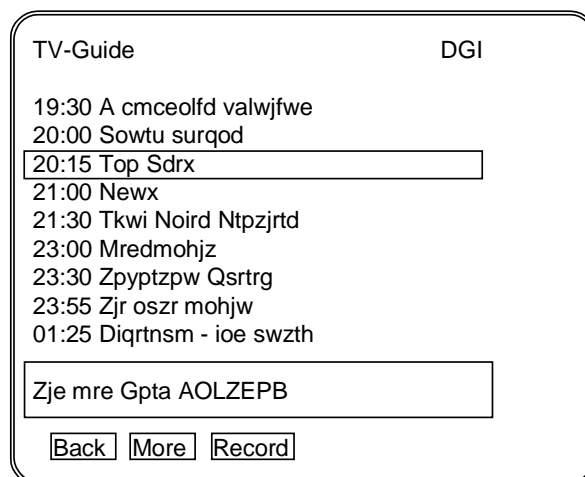


Figure 6: EPG Presentation Example 2

Example of a Multiple Channel EPG

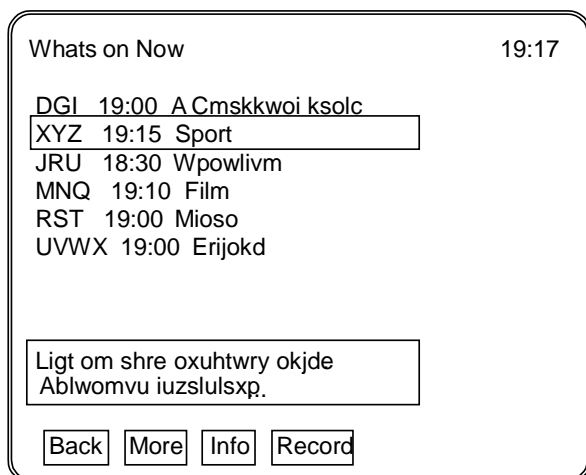


Figure 7: EPG Presentation Example 3

Menu Layout using a Bitmapped display

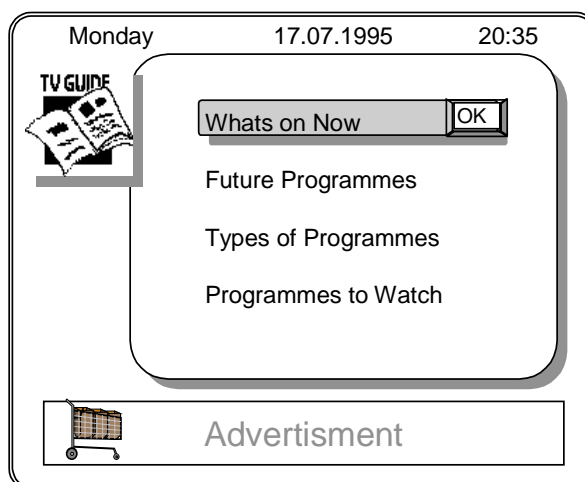


Figure 8: EPG Presentation Example 4

The menus shown above depend on the receiver's capabilities (e.g. record for VCR), the type of hardware (e.g. OSD, memory etc.) fitted and on the information provided by the TV Guide provider.

For a This Channel EPG the product shall provide some means of scrolling through the information. It may be useful to allow typical product specific elements e.g. to allow a VCR to record a programme (as shown in the above example). For a Full EPG the amount of information requires even more advanced menu layouts. Examples are described in more detail in this clause and in clauses 5.2 and 5.5.

A Full EPG TV Guide provider can supply the receiver with a menu structure. The following illustrations indicate the sort of menus that may be created.

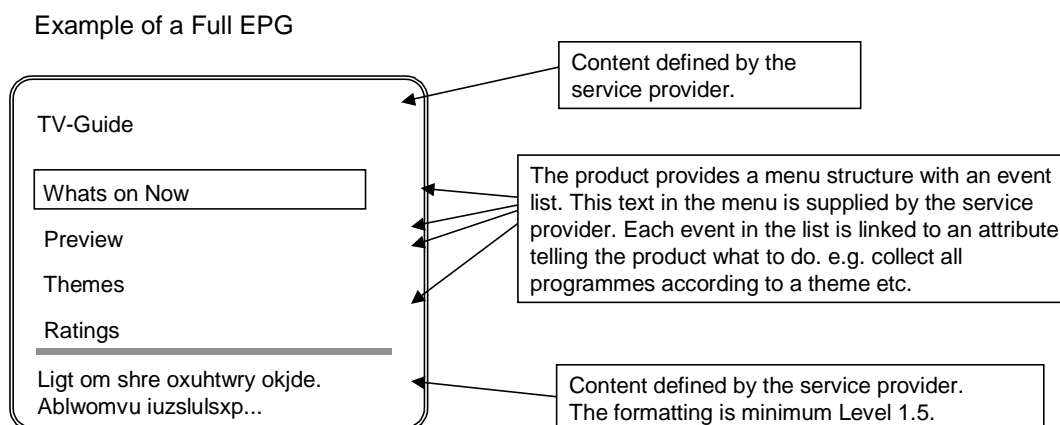


Figure 9: EPG Presentation Example 5

The user has selected the "What's on Now" option. The product now gathers all the relevant information from its database and presents the information to the user as shown in the representation below. The actual presentation will depend on the end product.



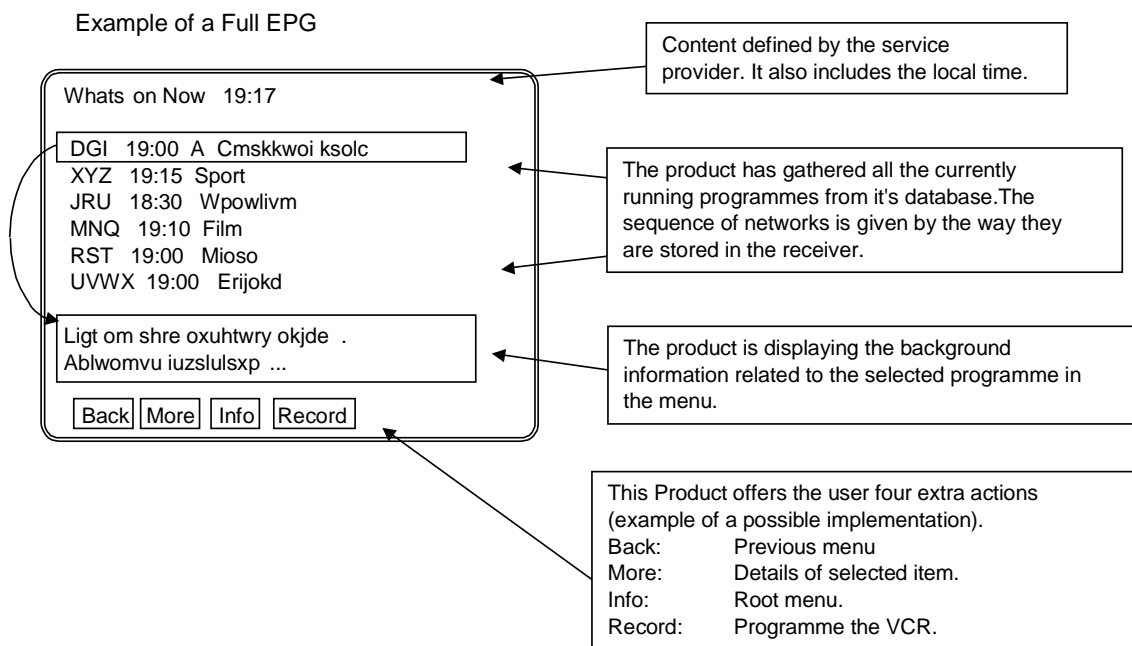


Figure 10: EPG Presentation Example 6

The following menu would occur when the user selects the "Themes" option. Here the product has gathered all the themes used within the current database and presents the results to the user.

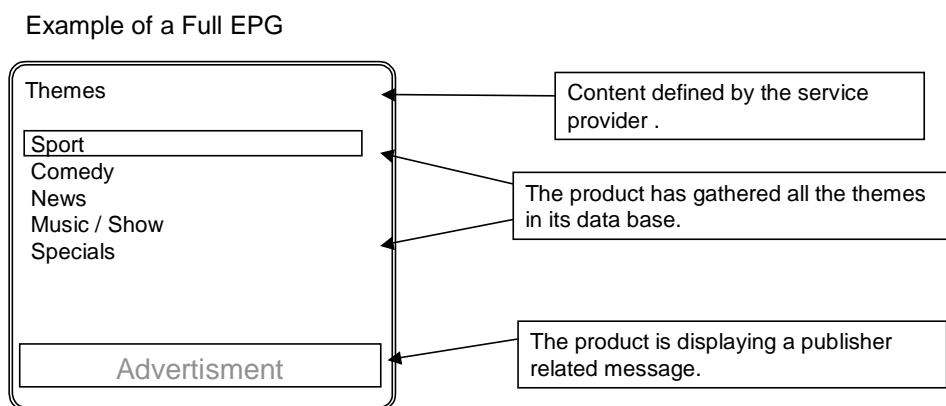


Figure 11: EPG Presentation Example 7

The user now gets an overview of the main themes. However each programme in the database is linked not only to a main theme but also to a sub-theme. After choosing "Sport" the user will be supplied with a list of all the sub-themes related to "Sport".

Example of a Full EPG

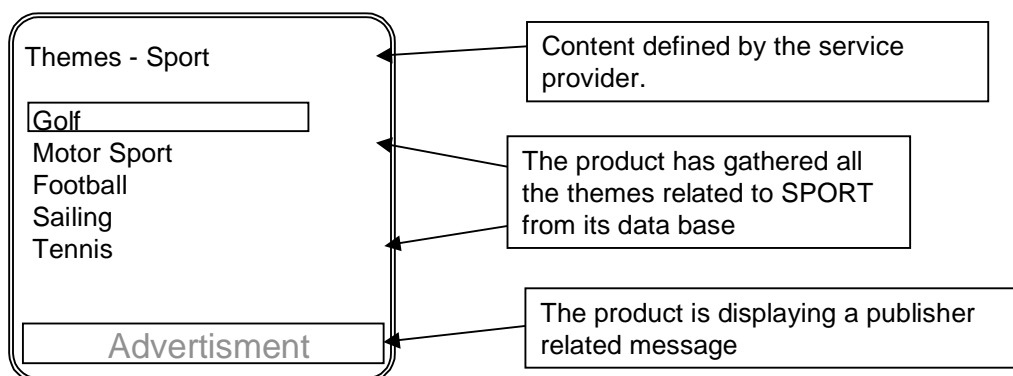


Figure 12: EPG Presentation Example 8

The user can see that his favourite sport of Golf is available. By confirming this choice the product will now produce a list showing all the golf programmes.

Example of a Full EPG

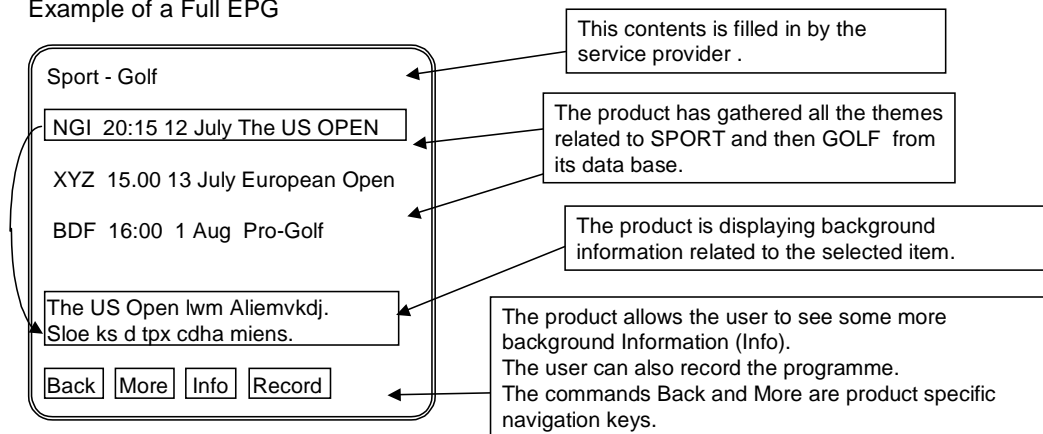


Figure 13: EPG Presentation Example 9

The following is an example of a product which has a new and attractive menu layout. The example below is based on a cursor controlled OSD. The product contains predefined bitmaps. This means that it is not always necessary for a TV Guide provider to download new bitmaps e.g. the Logo for a TV Guide (the open book) comes from the product. The TV Guide provider can still download his own bitmaps when required e.g. the shopping trolley used in the advertising box.

Example of an alternative Menu Layout with a Product using bitmapped display:

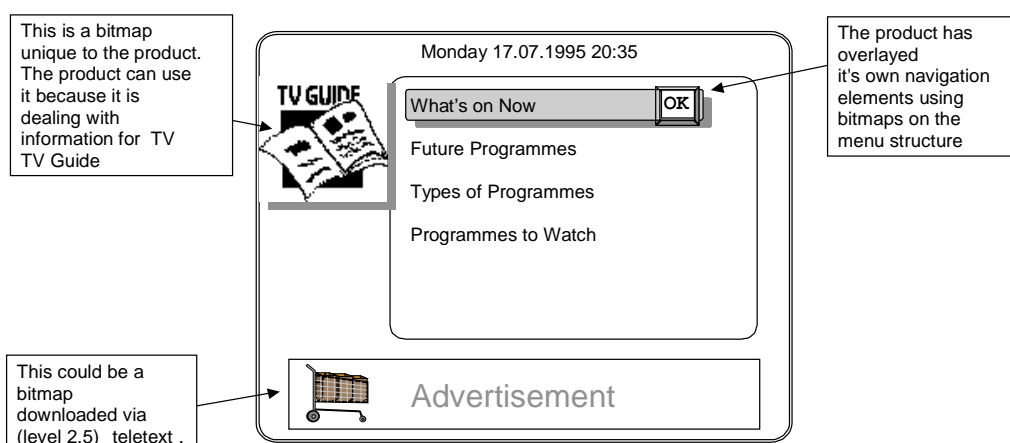


Figure 14: EPG Presentation Example 10

## 5.2 OSD menu template


The display screen is based on Level 1.5 Teletext with a screen aspect ratio of 4:3 implying a default display of 25 rows by 40 columns. The screen is split into four areas:

Table 2: Overview on EPG Display Areas

Area	Comment
Header area	The header content and size is defined by the TV Guide provider. (See note)
Event area	The visual layout and navigation elements are defined by the product. The information is supplied by the TV Guide provider.
Message area	Messages sent by the TV Guide provider and corresponding with the selected event (i.e. programming information in the case of a TV Guide).
Navigation area	This can be used by the product to generate its own navigation system.
NOTE:	In case of a <i>composite</i> decoder the <i>content</i> of the header area is defined by the set. Refer to clauses 3.1, 4.5 and 5.4 for description of the composite decoder.

The Event area is laid out by the product with information from the TV Guide provider. The default content of the event list (This Channel EPG) contains programme information (time and title) starting with the current programme. For a Full EPG different contents may be filled into the event list as dictated by the TV Guide provider navigation system. This is explained in clause 5.5. The Message area is controlled by the service provider via an attribute. The attribute tells the product which TV Guide provider message (if any) is to be displayed. The message may have nothing to do with the EPG, e.g. advertising.

### The OSD Menu Template

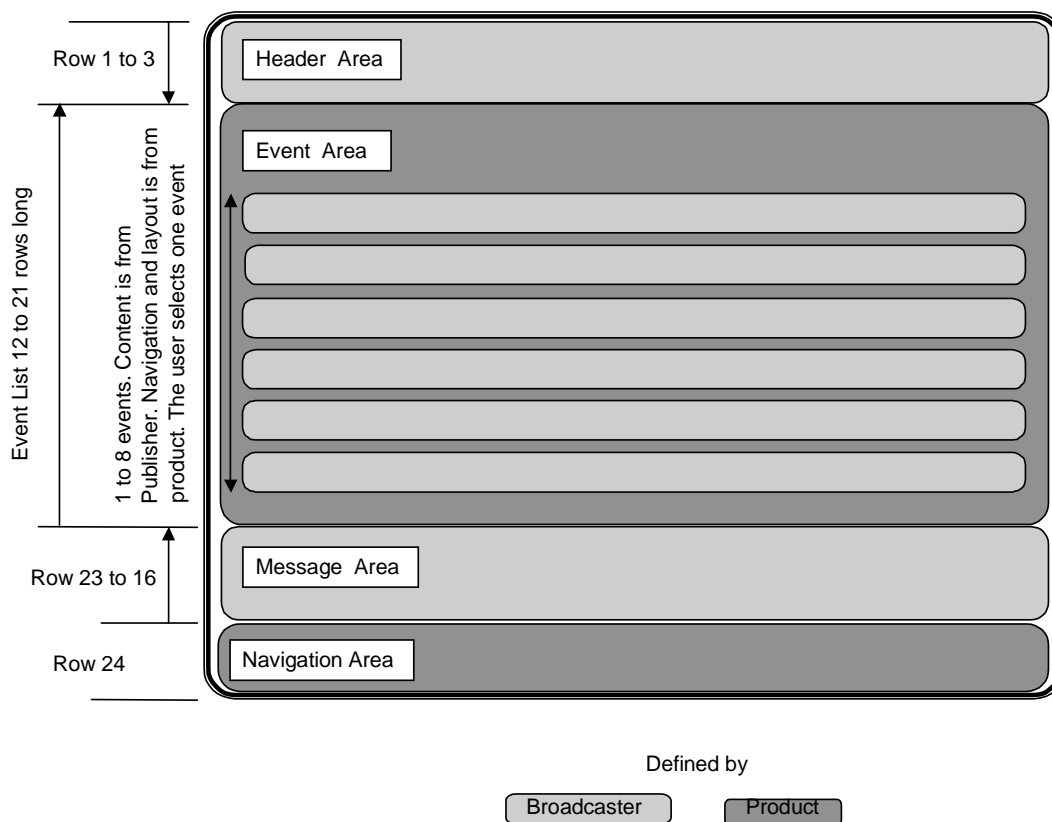


**Figure 15: The OSD Menu Template**

The header area consists of at least one row, maximum three rows. Its size is conveyed within EPG data. Only in case of a "Multiple Channel Composite" decoder (see clause 5.4) its size is defined by the manufacturer.

The event area starts immediately after the Header Area. Its size depends on the OSD size and the sizes of the header and message area.

The message area consists of at least one row, maximum 8 rows. Its size is conveyed within EPG data. Only in case of a "Multiple Channel Composite" decoder (see clause 5.4) its size is defined by the manufacturer.

## 5.3 OSD menu organization

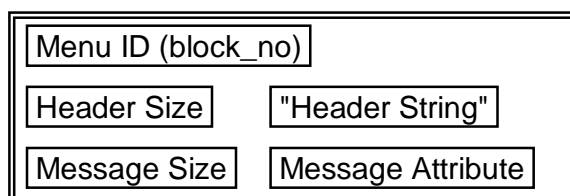

**Figure 16: The OSD Menu Organization**

The TV Guide provider needs to deliver the data outlined in the OSD Menu Structure for all types of EPG. This data is used to fill in the menu template. A Full EPG may need to display alternative headers which will be dependent on the navigation scheme used. The Message attribute tells the product what sort of message to place into the message box. A message may be linked to the selected event, e.g. the TV Guide provider tells the product to display programme specific (background) information, or the messages may be unrelated to the selected event, e.g. advertising.

For a This Channel EPG, the event list will include the current and following programmes. In a Full EPG a completely different event list can be created by means of the linked menu list which is described in clause 5.5.2.

## 5.4 Presentation modes, window owner/area size

**Table 3: EPG Display Areas Owners**

TYPE	This Channel		Multiple Channels		
	This Channel	This Channel (Filtered)	Multiple Channels (Composite)	FULL EPG (filtered)	FULL EPG (Bitmapped filtered)
EPG header	TV Guide provider rows 1 to 3		Manufacturer Size also defined by manufacturer	TV Guide provider rows 1 to 3	The whole screen can have
Event Area (Picture in text allowed)	Manufacturer		Manufacturer Size also defined by manufacturer	Manufacturer	areas by x,y addressing
Message Area (Bitmap allowed)	TV Guide provider - fixed from row 23 upwards to row 16				
Navigation	Reserved for Manufacturer - row 24				
NOTE:	Bitmapped display, as cited with FULL EPG, is an intended future enhancement and is not covered by this edition.				

Explanation of the variations:

- Filtered:** the viewer has the possibility to make the receiving set select specific information according to his personal preference;
- Composite:** this receiver can combine the information from various This Channel EPGs to form a "composite Multiple Channels EPG";
- Bitmapped:** a full EPG decoder with bitmap graphics capability is a possible future extension.

## 5.5 EPG menu organizational (Full EPG only)

With a Full EPG, the TV Guide provider transmits a menu organization which will be followed by the product to provide the user with service specific additional navigation means through the EPG database. This function is only useful for a Full EPG as the information from a This Channel EPG may be too limited. In all EPG types the bottom of the menu organization will be a screen layout conforming to clause 5.2.


### 5.5.1 Example of a tree organization

The EPG menu organization is in the form of a tree. Each node in the tree is a list of text. There is a defined starting point called the root. Each item in a list is, in turn, connected to another list. Eventually each item in the lists will be linked into a menu which is organized according to the standard menu structure described previously, or is the defined end of the branch of the tree (e.g. a leaf).

As the viewer navigates through the menus, the product is collecting the sorting criteria needed to gather the information from its database.

In the following example it can be seen how the product uses the navigation system to display programmes according to a category and not just according to time (which is the normal default sorting system used in This Channel).

Consider the example of a tree organization for a typical EPG using thematic sorting.

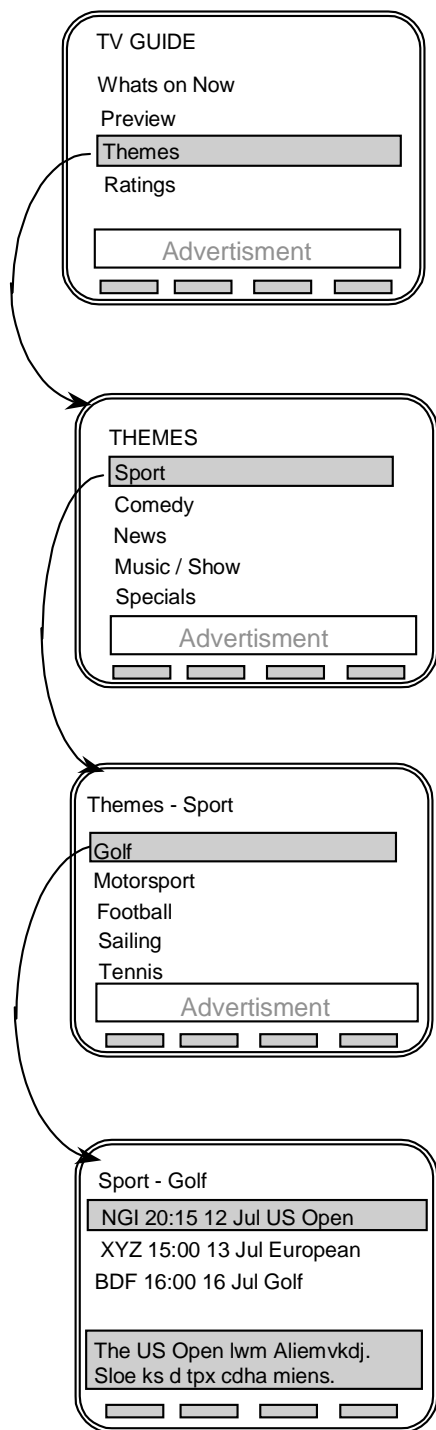

This is the top level menu in the TV Guide. The header has been defined by the service provider. The text for the events comes from the service provider. The attribute for the event "Themes" has been defined as a second level menu.

The product now constructs a second menu according to the wishes of the service provider. The Header has been defined by the service provider. The text for the events comes from the service provider. The attribute for the event sport has been defined as third level broadcaster menu.


The product now constructs a third menu according to the wishes of the service provider. The Header has been defined by the service provider. The text for the events comes from the service provider. The attribute for the event Golf has been defined as a specific sorting category.

The product now constructs the basic Menu. The Header has been defined by the service provider. The text for the events comes from the product. The attribute for the event has been defined as a link to the message box by the product. This is the basic TV-Guide menu as seen also in EPGs that do not support service specific navigation.

Figure 17: Example for an EPG Navigation Sequence

## 5.5.2 Linked menu list description

Each node of the transmitted tree structure is precisely identified with respect to the parent node and the children nodes. Each node contains a List with TV Guide provider defined text strings. Each navigation structure is headed with an ID identifying this list. Each event in the list contains a link ID pointing to the next menu. Each event also contains a sorting attribute which will allow the product at the end of the navigation tree - when it has its leaf menu i.e. the "Generic OSD Template" - to determine the sorting criteria to select the information.

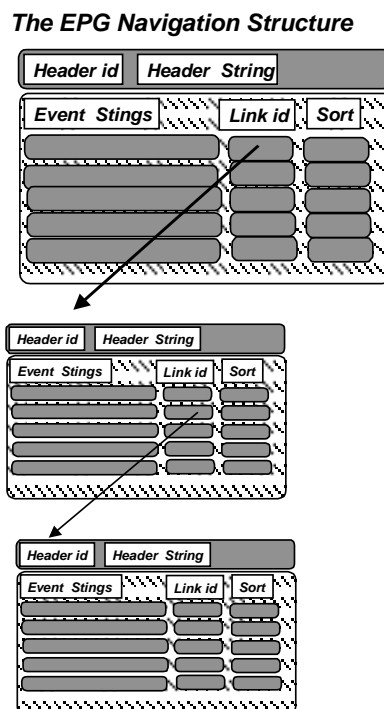

**Figure 18: Elements of the Linked Menu List**

The following data shall be filled into the navigation tables to generate the "Golf" example of clause 5.5.1.

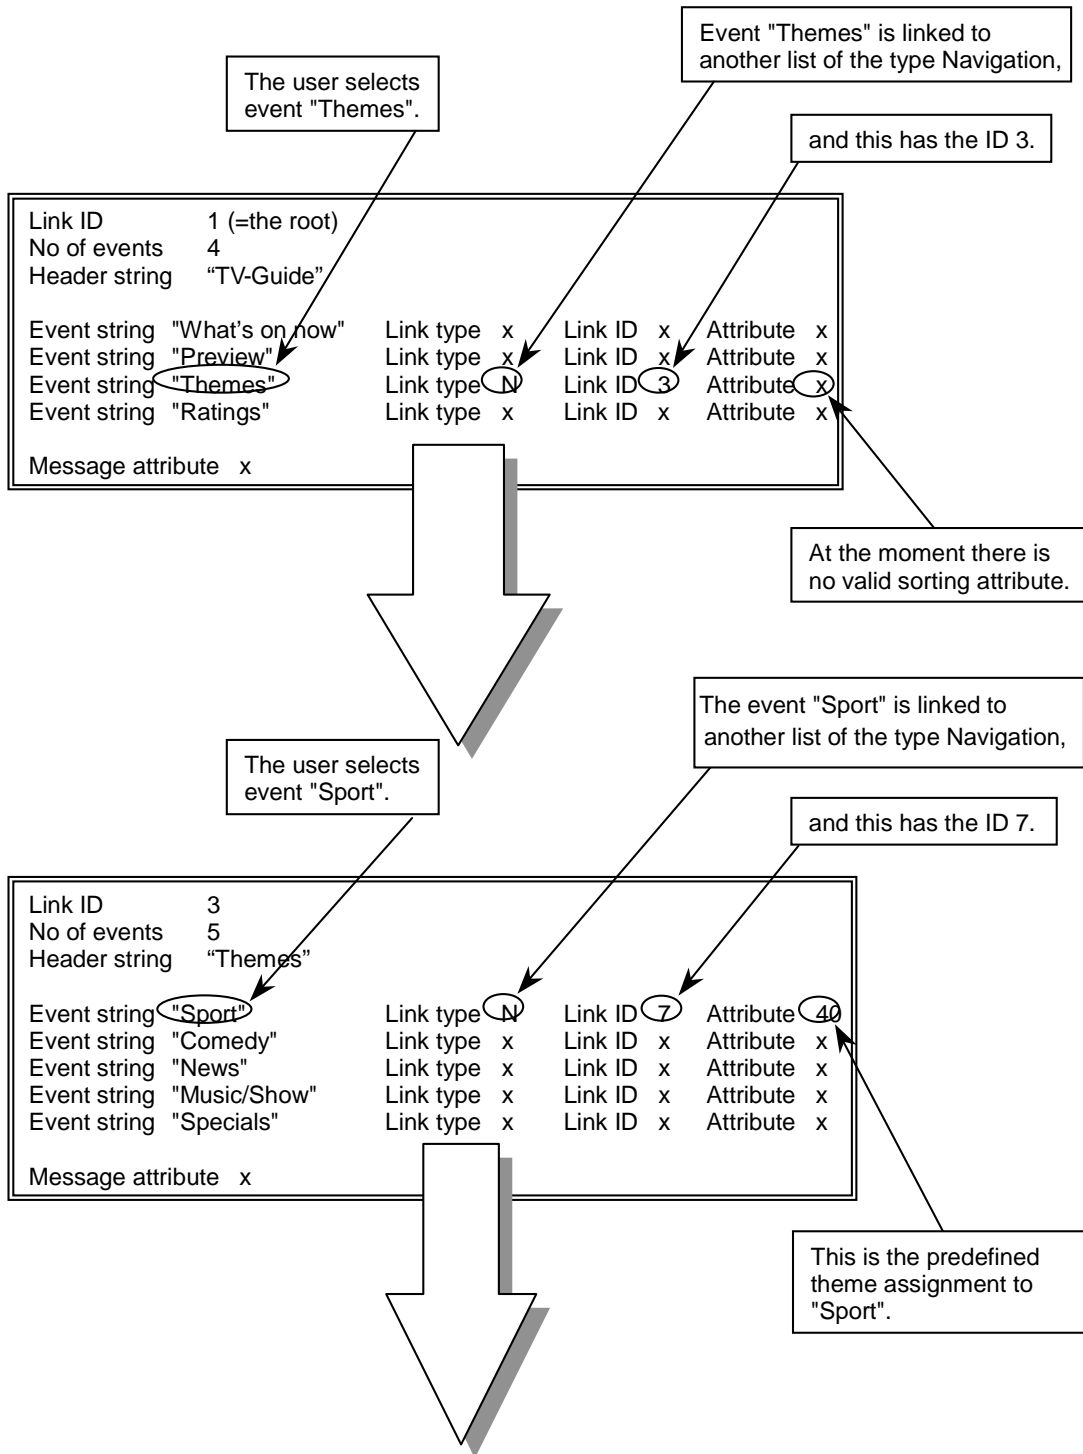


Figure 19: Example for the Linked Menu List



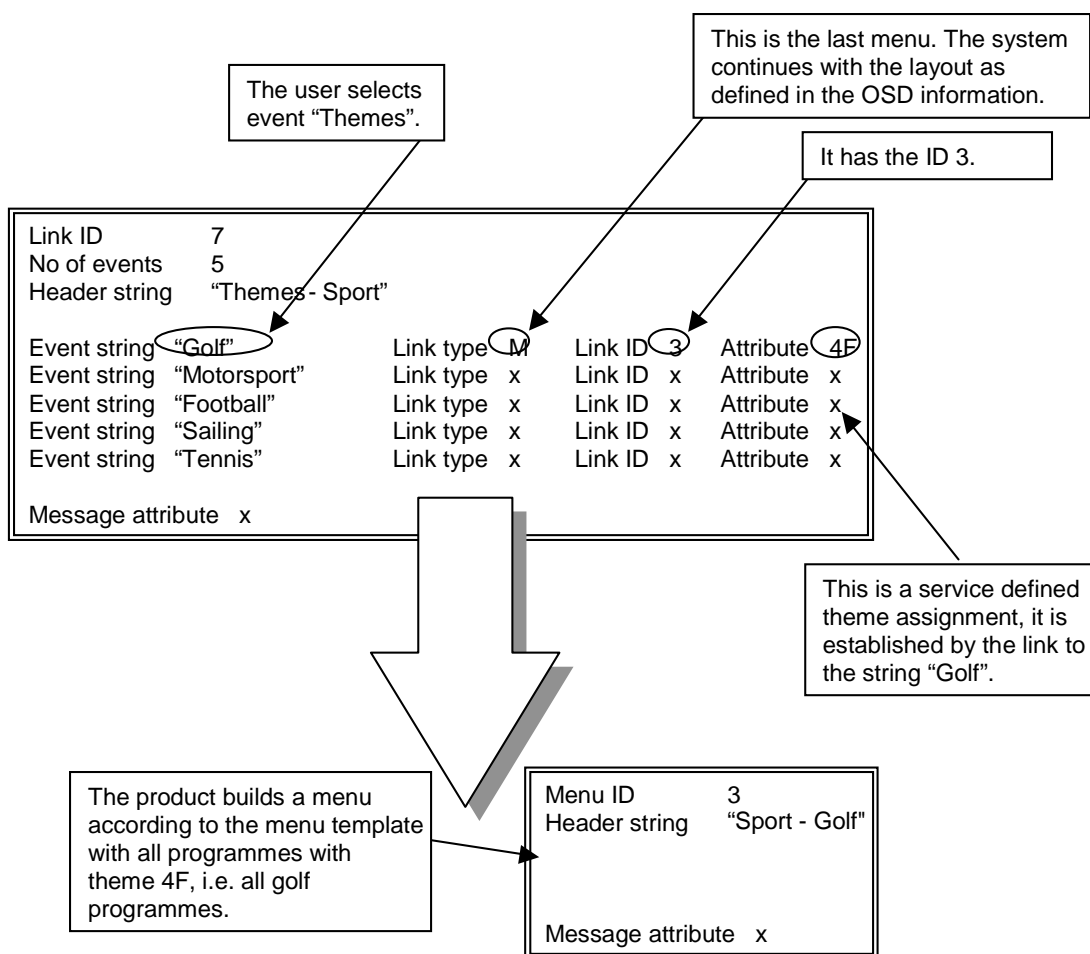


Figure 19 (concluded): Example for the Linked Menu List

### 5.5.3 Attributes

The attributes referred to in the present document are in fact filter criteria. In the absence of attributes, the default behaviour of a TV set is defined by the TV set maker.

Attributes (referred to also as event attributes) provide a powerful means for the EPG to filter programmes according to the user's preference. This preference, e.g. sports, is expressed as a combination of a criterion and a desired value. The criterion refers to one of the fields in the programme information structure.

The criteria that can be used are:

- EPG programme category (theme[: value]);
- Custom category (sortcrit[: value]);
- Editorial rating (editorial\_rating: value);
- Parental rating (parental\_rating: value);
- Language (language: value);
- Start/Stop time;
- Date.

In order to enable more sophisticated filtering, the preference can be expressed as a combination of multiple attributes.

The attributes are attached to the events (programmes), as described earlier in clause 5.5.2. Therefore attributes can occur at various nodes in the navigation tree. The criteria are applied at a leaf node of the navigation tree, where a programme list is shown according to the generic OSD template. For this purpose, the criteria of all the parent nodes are combined to determine which programmes have to be shown at the leaf node.

If more than one criterion is defined, the resulting criteria are combined. If multiple instances of the same criterion type are specified, a logical OR operation is performed. For example, when two attributes define different languages, all the programs that support either language are shown. This operation is not always possible, for example in the case of time-related criteria. If several different criteria are specified, a logical AND operation is performed. For example, when language is specified as 'English' and EPG theme as 'Movie', only the English-language movies are shown.

---

## 6 Installation and consistency in the EPG

### 6.1 Version Number

To enable decoders to deal with incomplete or partially inconsistent EPG databases, a "Version Number" is transmitted.

A new Version Number (incremented by one) indicates that major parts of the database have been changed. Then a decoder shall refresh its database completely. This occurs usually once per 24 hours.

Several events can initialize a new version of the EPG databases:

- if a day's programmes have been completed and the data for a new day is to be sent; or
- if re-scheduling of the programmes occur during the day.

### 6.2 TV Guide menu, installation and change

If more than one EPG is available, the user has to choose which one he wants to use.

To help the user in his choice, the following information has to be displayed in the products own installation system:

- identification name of service provider;
- type of service, i.e. This Channel, Multiple Channels or Full EPG;
- general characteristics, description; and
- the changing of channel and guides shall also be supported.

### 6.3 Unique identification

To allow a product to very rapidly identify the status of the TV Guide, the following information is supplied continuously in the data transmission system (refer also to clause 11):


- If a TV Guide is present and its type;
- Service provider, e.g. the TV Guide provider name;
- TV Guide "Version Number";
- Range of programmes supported.

The identification of the service has to be available via a characteristic of the number of channels and number of days per channel.

## 7 Scheduling

The transmission of the EPG data takes place continuously, preferably 24 hours a day. The complete database is retransmitted at regular intervals.

Within an EPG service it may be necessary to distinguish parts of the database by repetition (or refresh) rates, quantity of data or streams (see annex A).

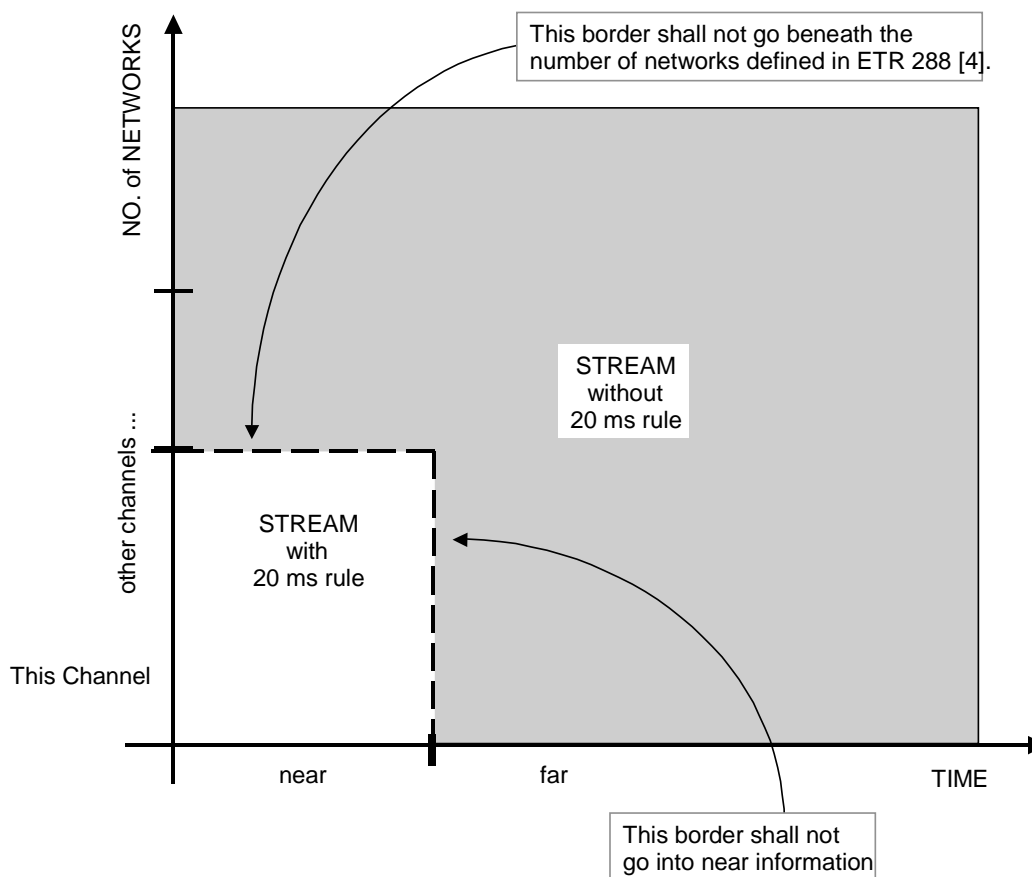

**Figure 20: Transmission of EPG Data**

The broken line separates the part of the EPG information which shall be transmitted in a stream obeying the 20 ms rule from the part which does not need to obey the 20 ms rule. At least all Near Programme Information of at least the number of networks defined in ETR 288 [4], including "This channel", shall be in the stream which obeys the 20 ms rule. Any further information shall go into the stream which does not need to obey the 20 ms rule.

The stream which obeys the 20 ms rule shall carry a complete EPG. The two streams together shall also carry a complete (yet more comprehensive) EPG.

Near information is further divided into "now" and "next" (and the remainder). The "now" information is the current programme or blank. "Next" information comprises up to 4 programmes immediately after the "now" one. The remainder includes the other programmes classified as Near that do not fall into the Now and Next categories. The network operators or service providers are obliged to transmit the This Channel "now" and "next" information with a repetition rate of at least once per every 10 seconds. Minimum repetition rate of This Channel/Near is once per 35 seconds.

The current programme title, perhaps in a simplified form, can also be found in packet 8/30. Any EPG decoder is free to read this packet and display its information in order to guarantee the nearest programme to immediately show up.

## 7.1 Update, Version Number

Service providers are free to make changes to the database being transmitted and put these changes on air whenever they like. However, the decoder does not know when an update has been issued or when it has to look for it. Moreover decoders may be switched off while changes are issued. In a Full EPG it may take up to 20 minutes (depending on the amount of data included) until the set has re-acquired the database. Meanwhile the user may have had a look to the old database and e.g. attempted to programme a timer. Update provides the means by which the user of a Full EPG can be informed quickly which items are subject to changes.

Updates usually are given due to late changes in programmes schedules, e.g. for a current event. They are sent very frequently in order to ensure a quick response by the decoders. Updates affect near or far information. If a near programme has been changed there is no need for any extra indication of that change. Near information is transmitted at a minimum repetition frequency and so it is up-to-date at virtually any time. However, when a far programme is changed, an indication is given in the "Update Block" (see clause 11.9). The update indicates which blocks of a 'complete' but older database have to be replaced. These are the means to enable the decoder to quickly correct its database.

A different situation is being covered at each transition between days. At that moment near and far information are moved one day ahead, part of the far information becomes the near information (and shall be re-allocated accordingly). In this case, or whenever the update mechanism described above is overloaded, a new "Version Number" has to be issued (causing the update table to become empty). See also clause 6.1.

The rules:

- Update Information applies only to Full or Multiple Channels EPGs; it is optional;
- Update Information only contains references to the blocks changed;
- Update Information is to be sent with a repetition rate of once every 10 to 20 seconds. If more than 64 changes are necessary, a new Version Number shall be issued;
- Update Information is linked to a database. Whenever a new version is released, the Update Information is empty.

---

## 8 Main data groups in an EPG

The types of data used in the TV Guide can be clustered into the following data structures. The structures are defined to fit within a proposed Teletext data transmission system. Clause 8.1 gives an overview on how the information in an EPG is structured.

### 8.1 Data structures used in the EPG

The data structures (AI, PI, NI, OI, MI, UI, LI, TI, HI and CI) are all identical regardless of the type of EPG. They vary only in their repetition rate and quantity of data carried.

**Application Information (AI)** is sent most frequently. It informs the product on various characteristics of the EPG (Electronic Programme Guide). It contains:

- a provider identification;
- the number of programmes;
- general information on the networks, whose programmes are conveyed;
- a version number of the EPG;
- the total number of blocks for several data types.

**Programming Information (PI)** conveys parameters of programmes such as: network identification, start time, stop time, VPS/PDC code (if available), themes, language/subtitles descriptions, title and contents descriptions. It contains:

- the network;
- the start date and time, stop time and VPS/PDC label;
- themes, categories, ratings;
- subtitle, language and other information;
- a title;
- short and long textual descriptions.

**Navigation Information (NI)** contains a lists of events used for service specific navigation. The list is headed with a link identification. Each item in the list may contain a pointer to another list allowing menu trees to be built. The event attribute is the sorting criterion to be carried out by the product. It contains:

- a menu identification;
- the header;
- the number of events;
- string and attributes for each event.

**OSD Information (OI)** is used in the menus of a This Channel EPG and in the menus of a Full EPG at the end of a navigation sequence. It contains:

- a menu identification;
- sizes of the several presentation areas;
- a header;
- a message.

**Message Information (MI)** comprises text to allow the service provider or network operator to display non-programme related data. It contains:

- a number of messages.

**Update Information (UI)** applies to Full EPGs only and comprises an inventory of blocks that have been changed since a new version was last issued. It contains:

- a number of references to changed programmes.

**Language Information** and **(Sub-)Title Information** comprise additional programme related information with respect to languages and subtitles of the programmes. They contain:

- a number of sets of languages or languages with associated page numbers, respectively.

**Helper Information** defines pages of the normal Teletext service which are referenced from the EPG. This helps the decoder to acquire data in advance and thus speed up its response time.

Besides the structures listed above there is an extra structure providing information on Conditional Access (CA). Its contents is beyond the scope of the present document.

An instance of any structure is called a "block". Each block of information should be regarded as a distinct entity. The blocks are positioned in the transmission data stream in accordance with the rules laid down in EN 300 708 [1]. On the decoder side the blocks are identified by application\_id and datatype\_id elements (see clauses 9 and 11).

## 9 Data representations in electronic info media

This clause outlines the common elements of the data structures as used in all electronic info media applications including EPG. All applications are obliged to obey this general coding, because:

- it provides the link between application and data transportation EN 300 708 [1]; and
- existing decoders shall be able to ignore unknown application data without impact on the decoding of known applications, thus allowing new applications to be introduced in the future.

Individual data elements, or "fields", are defined and allocated a number of bits in "Syntax" tables. The fields are concatenated to form a "structure". As usual within Teletext, the concatenation starts with the LSB of the first field, which provides the LSB of the concatenated sequence, and continues till the MSB of the last field.


An instance of any structure is called a "block".

EXAMPLE:

**Table 4: An example datatype**

Example_datatype	No. of Bits
field_A	3
field_B	7
field_C	6

is concatenated to:

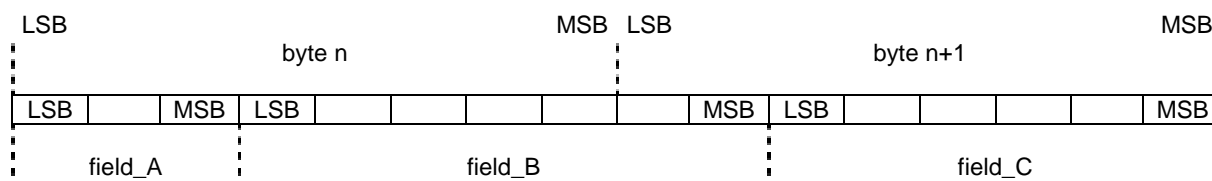

**Figure 21: Bit representation of an Example Datatype**

NOTE: Following concatenation, the field boundaries may not align with byte boundaries.

### 9.1 Syntax for the Overall Data Header

All electronic info media blocks have the format of the Overall Data Header:

**Table 5: Syntax for the Overall Data Header**

Overall Data Header	No. of Bits
application_id	5
block_size	11
data	variable

## 9.2 Semantics for the Overall Data Header

**Table 6: Semantics for the Overall Data Header**

Field	Semantics
application_id	is a number unambiguously linked to one application in a bundle. It is the means by which different applications are distinguished. Care shall be taken that each application within a bundle has a unique application_id. The value 0 is reserved for the Bundle Inventory (see clause 10).
block_size	gives the length of the block in bytes, excluding the predefined elements (i.e. application_id and block_size).
NOTE:	application_id is identical to the Block Type as defined in EN 300 708 [1], block_size is identical to the Block Length as defined in EN 300 708 [1].

---

## 10 Bundle Inventory

The first and compulsory application of any bundle is the Bundle Inventory (BI). It is intended for housekeeping purposes to assist service providers, network operators and decoders, but it does not convey any data for users. For each application (except for itself) it defines an identifier and links it to a code which identifies the application type. Applications (as e.g. EPG; see clause 11) are then referenced by their identifier.

One service provider shall not issue more than one EPG at a time.

The Bundle Inventory (BI) makes use of a single entity called the Bundle Information Structure. This is defined in [1].

---

## 11 EPG data structures

This clause includes the syntax and semantics of the data structures used in the EPG application.

There are a number of EPG Data Structures, valid with all EPG types. The EPG data structures utilize their own general data structure, which, of course, incorporates the Overall Data Header as defined in clause 9.

### 11.1 EPG's general data structure

The EPG's general data structure is based on the general data structure for electronic info media (see clause 9) and conforms to the requirements of the transport mechanism as described in EN 300 708 [1]. See also annex A.

The idea behind the EPG's general data structure is to ease the encoding and decoding of data. Generally the EPG data can be divided into two categories: control and string data. The data in these categories are treated differently before being fed into the transmission path. Control data conveying indices, times, lengths, references, etc. are Hamming 8/4 protected and string data carrying text are supplemented by a parity bit per character. Furthermore the control data fields are arranged so that the structures are easy to process rather than easy to read.

In the following syntax tables every data field is tagged with its category: a 'C' indicates control data, an 'S' string data. Refer to annex A for further details on the encoding of control and string data prior to transmission via Teletext.

### 11.1.1 Syntax for EPG Data Structures

**Table 7: Syntax for EPG data structures**

EPG data structure	No. of bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
copyright	1	C
reserved_for_future_use	1	C
specific_control_data	$(\text{control\_block\_size} \times 8) - 28$	C
specific_string_data	$(\text{block\_size} - \text{control\_block\_size} \times 2) \times 8$	S
NOTE:	There shall be an even number of nibbles in the control data and this is achieved by adding fill-up bits when required.	

### 11.1.2 Semantics for the EPG Data Structures

**Table 8: Semantics for EPG Data Structures**

Field	Semantics
CA_mode	Indicates any access constraints applicable to the whole block. See below for details.
copyright	Indicates whether the contents of the block are subject to copyright. See below for details.
control_block_size	Indicates the quantity of control data, including any fill_up bits, within the block. Unit of measurement is $(\text{no. of control bits})/8$ . Thus a value of N indicates the presence of $8 \times N$ control bits.
checksum	This field allows extra error detection. The sum includes application_id, block_size, and all fields marked as control data except itself. Checksum is calculated as follows: all mentioned data fields are concatenated and divided into nibbles in the same way as when encoding prior to transmission (see EN 300 708 [1] and annex A). The nibbles then are expanded into 8 bit bytes with the most significant bits set to 0. These bytes are summed (modulo 256) and the checksum is $(0 \times 100 - \text{sum of bytes}) \text{ modulo } 256$ .
datatype_id	Is a pre-defined identifier of the current data structure (data type). It allows the different data structures to be distinguished. The values are assigned in the table in clause 11.12.3. Each electronic info media application has its own datatype_id table.
specific_control_data	Is data exclusively used by the designated data type for control purpose and which does not convey textual information.
specific_string_data	Is data exclusively used by the designated a data type for conveying textual information.
NOTE:	After reception and decoding (see annex A) of a block, control data is arranged in nibbles as described. In case of successful decoding (no detectable error in control data) an extra error check can be done by following the rule for calculation of checksum and comparing the result to the checksum received.

### 11.1.3 Conditional Access (CA) and copyright

An entire EPG or parts thereof may be placed under Conditional Access (CA). CA enables service providers or network operators to sell their product exclusively to customers who are prepared to pay for it. There is a data field in every EPG block conveying information about the level of CA to which this block is subject. This data field is called CA\_mode throughout the present document, and its semantics are defined as follows:

**Table 9: Semantics for CA\_mode**

CA_mode	Semantics
00	Access is free to everyone.
01	Access is allowed only if an input code evaluates correctly.
10	Access is allowed only if the decoder's identification code evaluates correctly.
11	Access is allowed only if both an input code and the decoder's identification code evaluate correctly.



Encryption may be applied to those data fields only, which do not belong to a common data structure, i.e. those data fields which are summarized as `specific_control_data` or as `specific_string_data` in clause 11.1.1.

NOTE: The evaluation method, the nature and source of input and decoder identification codes and any applicable encryption of EPG specific data are outside the scope of the present document.

The contents of any block of an EPG may be copyright protected. By doing so service providers or network operators restrict the use of the contents of the block exclusively to their EPG. There is a data field in every EPG block indicating whether its contents are subject to copyright. This data field is called `_copyright` throughout the present document, and its semantics are defined as follows:

**Table 10: Semantics for `_copyright`**

<code>_copyright</code>	Semantics
0	No copyright protection on this block.
1	The entire block is subject to copyright, so that no part of the block may be used in combination with any other application, nor by any other application, nor shall it be copied to a composite EPG. It shall be used exclusively within the application to which the block belongs.

## 11.2 Application Information Structure

This structure provides the header of the application, it is sent very frequently.

There shall be exactly one instance of this data type in any EPG.

This structure provides the name of the EPG provider, a list of networks supported, a Version Number and several items of housekeeping data. For each network listed, a name or identifier is defined together with other network specific information.

## 11.2.1 Syntax for the Application Information Structure

Table 11: Syntax for the Application Information Structure

Application Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
epg_version_number	6	C
epg_version_number_swo	6	C
no_of_navigation_info	16	C
no_of_osd_info	16	C
no_of_message_info	16	C
no_of_navigation_info_swo	16	C
no_of_osd_info_swo	16	C
no_of_message_info_swo	16	C
no_of_networks	8	C
this_operator_network_no	8	C
service_name_length	5	C
no_of_updates	1	C
fill_up_1	2	C
for (i=0;j<no_of_networks;j++) {		
cni[j]	16	C
LTO_magnitude[j]	7	C
LTO_sign[j]	1	C
no_of_days[j]	5	C
netwop_name_len[j]	5	C
default_alphabet[j]	7	C
prog_start_no[j]	16	C
prog_stop_no[j]	16	C
prog_stop_no_swo[j]	16	C
network_version_no[j]	6	C
no_of_LI_structures[j]	1	C
no_of_TI_structures[j]	2	C
network_add_info[j]	2	C
}		
fill_up	0 ... 7	C
for (i=0;i<service_name_length;i++){		
text_char	8	S
}		
for (j=0;j<no_of_networks;j++) {		
for (k=0;k<netwop_name_len[j];k++) {		
text_char	8	S
}		
}		

The character set to be used for any display item which is not a programme or a programme description is defined by the default\_alphabet specified in the network loop for the network carrying this EPG.

The service name string in the AI block is not intended for display as a header and consequently there is no provision for defining escape sequences or level 2.5 enhancements. It allows selection of a service provider when there are more than one. An OI block may be used to supply a service provider's name.

## 11.2.2 Semantics for the Application Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2 and 11.1.3.

**Table 12: Semantics for the Application Information Structure**

Field	Semantics
epg_version_number	The Version Number of that part of the EPG information which is transmitted over a stream that obeys the 20 ms rule (see clauses 6.1 and 7.1).
epg_version_number_swo	The Version Number of that part of the EPG information which is transmitted over a stream not obeying the 20 ms rule (see clauses 6.1 and 7.1).
no_of_navigation_info	The number of Navigation Information blocks in this application which are transmitted in a stream obeying the 20 ms rule.
no_of_osd_info	The number of OSD Information blocks in this application which are transmitted in a stream obeying the 20 ms rule.
no_of_message_info	The number of Message Information blocks in this application which are transmitted in a stream obeying the 20 ms rule.
no_of_navigation_info_swo	The number of Navigation Information blocks in this application which are transmitted in a stream that does not obey the 20 ms rule.
no_of_osd_info_swo	The number of OSD Information blocks in this application which are transmitted in a stream that does not obey the 20 ms rule.
no_of_message_info_swo	The number of Message Information blocks in this application which are transmitted in a stream that does not obey the 20 ms rule.
no_of_networks	defines the number of networks supported.
_this_network_operator_no	defines an extra index to the network loop for the network carrying the current EPG. NOTE This index allows quick identification of the network carrying "This Channel" EPG data.
service_name_length	defines the length of the text name the service provider wants to be called by.
no_of_updates	The number of Update Information blocks comprised in this application. See also clause 7.1.
cni	The Country and Network Identifier (CNI) for the network as defined in TR 101 231 [6]. As all data it is sent LSB first, i.e. in the order LSB of the network number to MSB of the row address of the country code. For networks without an official CNI all bits of cni shall be set to 0. Such networks should be identified by a netwop_name. For proper operation of decoders see ETR 288 [4]. Any channel carrying an EPG shall broadcast its CNI via a packet 8/30 format 2 or VPS. NOTE: A network is referenced by netwop_no which is the index in the cni loop (j).
LTO_magnitude	the size (absolute value) of the local time offset of the network operator relative to UTC in units of 15 minutes.
LTO_sign	the sign of the local time offset of the network operator relative to UTC. 0 = positive offset, i.e. local time is ahead of UTC; 1 = negative offset. I.e. local time is behind UTC.
no_of_days	The number of days programme information is provided for that network operator.
netwop_name_len	Defines the length of the text name of the network operator. The text name is compulsory for all network operators.
default_alphabet	The code for the character set to be used in title and other strings concerning this programme (see EN 300 706 [2]).
prog_start_no	The block_no of the programme information block with the earliest programme on that network in the application which is transmitted in a stream obeying the 20 ms rule.

(continued)

Table 12 (concluded): Semantics for the Application Information Structure

Field	Semantics
prog_stop_no	The block_no of the programme information block with the latest programme on that network in the application which is transmitted in a stream obeying the 20 ms rule. When this stream does not carry any PIs, the value of prog_stop_no shall be set to prog_start_no - 1. The range of block_no allocation in the stream which need not obey the 20 ms rule shall be gapless adjacent to the range of block_no allocated for the stream which obeys the 20 ms rule. So prog_stop_no+1 is the first block_no of PI in the stream that need not obey the 20 ms rule.
prog_stop_no_swo	The block_no of the programme information block with the latest programme on that network in the application which is transmitted in a stream that does not obey the 20 ms rule. If this stream does not carry any PIs, the value of prog_stop_no_swo shall be equal to the value of prog_stop_no.
network_version_no[j]	The version number for all EPG structures associated with this network.
no_of_LI_structures[j]	The number of LI structures for this network.
no_of_TI_structures[j]	The number of TI structures for this network.
network_add_info	reserved for future use.
fill_up	Don't care bits added to the control data group so that the total number of control bits meets the requirements as stated in clause 11.1. To ensure future compatibility, the service provider shall set these bits to 0, and the decoder shall ignore the value of these bits
text_char	This is a 7 bits character set code which is placed into an 8 bits field right adjusted, the MSB is yet undefined (refer to annex A.4). The codes are interpreted as codes in a transparent string as defined in clause 11.12.1.
NOTE:	The number of PIs per network operator in a stream obeying the 20 ms rule is calculated as prog_stop_no - prog_start_no + 1. The number of PIs per network operator in a stream which need not obey the 20 ms rule is calculated as prog_stop_no_swo - prog_start_no. Thus the maximum number of PIs per network operator per stream in any transmission is 65 534.

## 11.3 Programme Information Structure

This structure describes the programmes. Every block contains one programme description including network, scheduled times, ratings, themes, and textual and other descriptions.

The block\_no shall be sorted by start\_time for each network\_no. Besides the block\_no also the netwop\_no is necessary to unambiguously define one programme information block.

### 11.3.1 Syntax for the Programme Information Structure

**Table 13: Syntax for the Programme Information Structure**

<b>Programme Information Structure</b>	<b>No. of Bits</b>	<b>Category</b>
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
feature_flags	12	C
netwop_no	8	C
start_time	32	C
stop_time	16	C
_pil	20	C
parental_rating	4	C
editorial_rating	3	C
no_themes	3	C
no_sortcrit	3	C
descriptor_looplevelength	6	C
background_reuse	1	C
for (k=0;k<no_themes;k++) {		
theme	8	C
}		
for (k=0;k<no_sortcrit;k++) {		
sortcrit	8	C
}		
for (k=0;k<descriptor_looplevelength;k++) {		
descriptor_type	6	C
descriptor_id	6	C
descriptor_eval	8	C
}		
if (descriptor_looplevelength & 1)		
fill_up_1	4	C
title_escape_sequences	See clause 11.12.1	C
title_length	8	C
if (background_reuse)		
background_ref	16	C
else {		
shortinfo_escape_sequences	See clause 11.12.1	C
shortinfo_length	8	C
longinfo_stringtype	3	C
fill_up_2	5	C
if (longinfo_stringtype==0) {		
longinfo_0_escape_sequences	See clause 11.12.1	C
longinfo_length	8	C

(continued)

Table 13 (concluded): Syntax for the Programme Information Structure

Programme Information Structure	No. of Bits	Category
}		
else if (longinfo_stringtype==1) {		
longinfo_1_escape_sequences	See clause 11.12.1	C
longinfo_length	10	C
}		
else if (longinfo_stringtype==2) {		
page_reference	24	C
row_spec	5	C
col_spec	6	C
length	6	C
}		
else if (longinfo_stringtype==3) {		
page_reference	24	C
row_spec	5	C
col_spec	6	C
row_spec	5	C
col_spec	6	C
}		
else if (longinfo_stringtype==4)		
page_reference	24	C
}		
fill_up	0 ... 7	C
for (k=0;k<title_length;k++) {		
text_char	8	S
}		
for (k=0;k<shortinfo_length;k++) {		
text_char	8	S
}		
if (longinfo_stringtype==0    longinfo_stringtype==1)		
for (k=0;k<longinfo_length;k++) {		
text_char	8	S
}		
}		

## 11.3.2 Semantics for the Programme Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3 and 11.2.2.

**Table 14: Semantics for the Programme Information Structure**


Field	Semantics
block_no	This is a number which is unambiguously linked with one instance of a data structure. Blocks are enumerated starting from 0, and every next block_no is by one higher than the last one. An exception of this rule is valid for Programme Information, in this case the start value may be different from 0, and in this case it may wrap around from 65535 to 0 (unless this causes an ambiguity). Other exemptions are valid for OI, see clause 11.7.2, for LI, see clause 11.4.2, and for TI, see clause 11.5.2.
feature_flags	A number of flags indicating ... (from LSB towards MSB): A number of active high flags indicating: Bits 1,0 0 0 Mono 0 1 2 channel sound 1 0 Stereo 1 1 Surround sound Bit 2 Widescreen format Bit 3 PAL+ Bit 4 Digital Bit 5 Encrypted Bit 6 Live programme Bit 7 Repeat programme Bit 8 Subtitles Bit 9 Reserved Bit 10 Reserved Bit 11 Reserved.
netwop_no	The network operator defined by the index to the table of network operators in the Application Information.
start_time	The start time of the event in Universal Time, Co-ordinated (UTC) and Modified Julian Date (MJD) (see also time_date). If the start time is not known, a notional time which positions the event during the day should be transmitted. Example: 93-10-13 12:45 = 0 x C0791245.
stop_time	The stop time of the event in Universal Time, Co-ordinated (UTC). This field is coded as 16 bits coded as 4 digit in 4 bit Binary Coded Decimal (BCD). If undefined all bits shall be set to 1.
_pil	The PDC PIL for the programme. If the network conforms to VPS then this field contains the VPS label for the programme. If neither VPS nor PDC is supported, this field shall contain timer control codes as specified in ETS 300 231 [3].
parental_rating	See clause 11.12.4 and annex F.1.
editorial_rating	See clause 11.12.4 and annex F.1.
no_themes	The number of content identifiers attached to the programme. The content identifiers themselves are found in the for-loop going from 0 to no_themes-1.
no_sortcrit	The number of sorting criteria attached to the programme. The criteria themselves are found in the for-loop going from 0 to no_sortcrit-1.
descriptor_looplevelth	The length of the loop with descriptors. In essence, a descriptor is a pointer to a more or less complex description structure. See clause 11.12.2.
background_reuse	This bit tells whether string and descriptions are taken from another Programme Information Block or defined here for the network operator defined by netwop_no.
theme	The content identifier. See clause 11.12.7.
sortcrit	A sorting criterion free for coding by the service provider or network operator.
descriptor_type	This is the type of the descriptor attached to the programme. See clause 11.12.2.
descriptor_id	This is the identification of the descriptor attached to the programme. See clause 11.12.2.
descriptor_eval	This field is reserved for future use. See clause 11.12.2.

(continued)

**Table 14 (concluded): Semantics for the Programme Information Structure**

Field	Semantics
escape_sequences	This field precedes the length specification of a transparent string. It is used to add special information to strings and it is explained in clause 11.12.1.
title_length	The number of characters in the programme title. The title string itself is given at the end of the structure in a for-loop going from 0 to title_length-1.
background_ref	The block_no of the Programme Information Structure which comprises the shortinfo and longinfo fields for this programme.
shortinfo_length	The number of characters in the short (verbal) description of the programme. The description itself is given at the end of the structure in the for-loop going from 0 to shortinfo_length-1.
longinfo_stringtype	The type which is used to define the long (verbal) description of the programme. See also clause 11.12.1. Only values 0, 1, 2, 3 and 4 are allowed. In case of transparent strings (stringtypes 0 or 1) the description itself is found at the end of the structure in the for-loop going from 0 to longinfo_length-1.
longinfo_length	The number of characters in the long (verbal) description of the programme. See also semantics of longinfo_stringtype.
page_reference	The number of the Teletext page, including subcode, where the long (verbal) description of the programme has to be fetched from. This is a reference to the TV programme information in the normal Teletext service of the network which is also broadcasting EPG. The format of this field is given below. See also clause 11.12.1. In case of stringtype 2 the text has to be fetched beginning at the position indicated by row_spec and col_spec counting the number of characters (length). In case of stringtype 3 the two succeeding pairs of row_spec and col_spec indicate a rectangular area which contains the text to be fetched. In case of stringtype 4 the text is spread all over the Teletext page and the decoder shall display the entire Teletext page as part of the EPG.
row_spec	The number of the row (in a normal Teletext page referenced to by page_reference) in which the long (verbal) description of the starts or ends.
col_spec	The number of the column (in a normal Teletext page referenced to by page_reference) in which the long (verbal) description of the starts or ends.
length	The number of characters of the long (verbal) description of the programme.

Format of the field page\_reference:

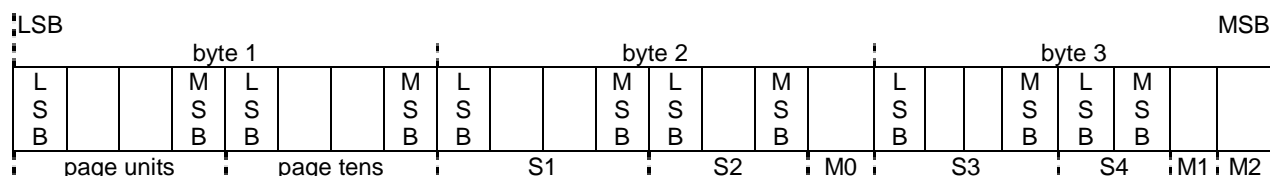**Figure 22: Composition of page\_reference**

Explanation:

The page number is composed of a magazine number, page tens and page units. Page tens and units are 4 bits entities. Magazine number is composed of 3 bits marked M2, M1 and M0 with M0 as Least Significant Bit (LSB).

The subcode is composed of S4, S3, S2 and S1 with S4 as most significant part. S1 and S3 comprise 4 bits each, S2 is a 3 bits and S4 is a 2 bits entity.



## 11.4 Language Information Structure

This structure conveys the definitions of language descriptors. A language descriptor contains a set of languages. Although these sets of languages are transmitted independently, they serve only for attachment to programmes (PIs). The sets are distinguished by means of an identification.

There is not more than one block of Language Information allowed per network operator.

### 11.4.1 Syntax for the Language Information Structure

**Table 15: Syntax for the Language Information Structure**

Language Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
netwop_no	8	C
lang_descr_no	6	C
for (i=0;i<lang_descr_no;i++) {		
descriptor_id	6	C
language_no	4	C
for (j=0;j<language_no;j++) {		
language	24	C
}		
}		
fill_up	0 ... 7	C

### 11.4.2 Semantics for the Language Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2 and 11.3.2.

**Table 16: Semantics for the Language Information Structure**

Field	Semantics
block_no	This is a number which is unambiguously linked with one instance of a data structure. Blocks are enumerated starting from 0, and every next block_no is by one higher than the last one. An exception of this rule is valid for Language Information. When the MSB of block_no of a LI block is set to 1 the block contains Language Information for at least the current programme on this channel, and this block shall be transmitted in the stream which obeys the 20 ms rule. NOTE: A decoder designed to this edition should ignore LI structures with block_no values other than 0 x 0000 and 0 x 8000.
netwop_no	The network operator defined by the index to the table of network operators in the Application Information.
lang_descr_no	The number of language descriptors. The language information is contained in the following loop.
descriptor_id	The identification of the descriptor, which it is referenced by.
language_no	The number of languages within this descriptor.
language	A language code according to the ISO 639.2 [5]. E.g., French has 3-character code "fre" and is coded as 0 x 667265.

## 11.5 (Sub-)Title Information Structure

This structure conveys the definitions of subtitle descriptors. A subtitle descriptor contains a set of languages with a corresponding Teletext page, where the subtitles in that language are allocated. Although these sets of languages and pages are transmitted independently, they serve only for attachment to programmes (PIs). The sets are distinguished by means of an identification.

There is not more than one block of (Sub-)Title Information allowed per network operator, except for this channel (i.e. the network conveying the EPG) a maximum of two blocks of (Sub-)Title Information is allowed.

### 11.5.1 Syntax for the (Sub-)Title Information Structure

**Table 17: Syntax for the (Sub-)Title Information Structure**

(Sub-)Title Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
netwop_no	8	C
subtt_descr_no	6	C
for (i=0;i<subtt_descr_no;i++) {		
descriptor_id	6	C
subtt_no	4	C
for (j=0;j<subtt_no;j++) {		
language	24	C
teletext_page	24	C
}		
}		
fill_up	0 ... 7	C

### 11.5.2 Semantics for the (Sub-)Title Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2 and 11.4.2.

**Table 18: Semantics for the (Sub-)Title Information Structure**

Field	Semantics
block_no	This is a number which is unambiguously linked with one instance of a data structure. Blocks are enumerated starting from 0, and every next block_no is by one higher than the last one. An exception of this rule is valid for (Sub-)Title Information. When the MSB of block_no of a TI block is set to 1 the block contains (Sub-)Title Information for at least the current programme on this channel, and this block shall be transmitted in the stream which obeys the 20 ms rule. NOTE: A decoder designed to this edition should ignore TI structures with block_no values other than 0 x 0000 and 0 x 8000.
subtt_descr_no	The number of subtitle descriptors. The subtitle information is contained in the following loop.
subtt_no	The number of subtitles within this descriptor.
teletext_page	This is the Teletext page where the subtitles in the corresponding language are found. This field is composed in exactly the same way as the fields page_reference.

## 11.6 Navigation Information Structure

The presentation information table provides the description of the menu structure. See also clause 5.5. This structure provides information on the nodes in the navigation tree, defining one node per block. It gives the layout information for the navigation screens, the messages to be displayed, the links to the child nodes in the navigation tree and the attributes (criteria) which characterize the navigation path.

### 11.6.1 Syntax for the Navigation Information Structure

**Table 19: Syntax for the Navigation Information Structure**

Navigation Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
header_size	2	C
event_number	4	C
message_size	3	C
fill_up_1	1	C
descriptor_looplevelength	6	C
for (k=0;k<descriptor_looplevelength;k++) {		
descriptor_type	6	C
descriptor_id	6	C
descriptor_eval	8	C
}		
if ((descriptor_looplevelength & 1)==0)		
fill_up_2	4	C
escape_sequences	See clause 11.12.1	C
header_length	8	C
message_attribute	8	
for (j=0;j<event_number;j++){		
next_link_id	16	C
next_link_type	4	C
event_attribute	See clause 11.12.4	C
escape_sequences	See clause 11.12.1	C
event_length	8	C
}		
fill_up	0 ... 7	C
for (k=0;k<header_length;k++)		
text_char	8	S
for (j=0;j<event_number;j++)		
for (k=0;k<event_length;k++)		
text_char	8	S

## 11.6.2 Semantics for the Navigation Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2, 11.4.2 and 11.5.2.

**Table 20: Semantics for the Navigation Information Structure**

<b>Field</b>	<b>Semantics</b>
header_size	The number of lines for the header is 1+ header_size. The only allowed values for header_size are 0, 1 or 2.
event_number	The number of events to be displayed in the menu.
message_size	The number of lines for the message area is 1+ message_size.
message_attribute	Defines which message is to be displayed in the message area. See clause 11.12.6.
next_link_type	The type of the next menu linked. See clause 11.12.5.
next_link_id	The block_no of the next menu linked. See clause 11.12.5.
event_attribute	The code telling the product what to do. See clause 11.12.4.
header_length	In combination with the preceding escape_sequences and the for-loop going from 0 to header_length-1, this field defines a headline given as transparent string.
event_length	In combination with the preceding escape_sequences and the for-loop going from 0 to event_length-1, this field defines an event as a transparent string.

Refer also to clause 5.2.

## 11.7 OSD Information Structure

This structure, like the Navigation Information Structure, conveys descriptions of the menus used throughout in This Channel EPGs, and in Full EPGs only at the end of the navigation sequence.

### 11.7.1 Syntax for the OSD Information Structure

**Table 21: Syntax for the OSD Information Structure**

OSD Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
message_attribute	8	C
header_size	3	C
message_size	3	C
descriptor_looplevelength	6	C
if (block_no==0) {		
escape_sequences	See clause 11.12.1	C
message_length	10	C
fill_up_2	6	C
}		
escape_sequences	See clause 11.12.1	C
header_length	8	C
for (k=0;k<descriptor_looplevelength;k++) {		
descriptor_type	6	C
descriptor_id	6	C
descriptor_eval	8	C
}		
fill_up	0 ... 7	C
for (k=0;k<header_length;k++)		
text_char	8	S
if (block_no==0)		
for (k=0;k<message_length;k++)		
text_char	8	S

## 11.7.2 Semantics for the OSD Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2, 11.4.2, 11.5.2 and 11.6.2.

**Table 22: Semantics for the OSD Information Structure**

Field	Semantics
block_no	This is a number which is unambiguously linked with one instance of a data structure. Blocks are enumerated starting from 0, and every next block_no is by one higher than the last one. With OIs, block_no == 0 is assigned a special meaning, which is explained in the semantics of message_attribute. Another exception of the above rule for block_no is given when the special meaning is not wished. In this case there may be no OI with block_no == 0.
message_size	The number of lines for the message is 1+ message_size.
message_attribute	Defines which message is to be displayed in the message area. For block_no == 0 the message_attribute does not follow the rule of clause 11.12.6, but it has only two possible values; A value of 0 means use the shortinfo from the selected Programme Information structure, and a value of 1 means use the message carried by this OSD block. NOTE: For OSD block_no == 0, message_attributes values > 1 are reserved for future extensions. To ensure compatibility, decoders designed to this edition should use the message carried by the OSD block with block_no == 0 when message_attribute >= 1.
message_length	In combination with the preceding escape_sequences and the for-loop going from 0 to message_length-1, this field defines a message given as transparent string. This string is in one block of OI only, therefore this block has a special meaning which is described in annex C.

Refer also to clause 5.2.

In a composite receiver the header is defined by the manufacturer (see clause 5.4).

## 11.8 Message Information Structure

This structure provides a publisher defined message that need not relate to a selected event.

### 11.8.1 Syntax for the Message Information Structure

**Table 23: Syntax for the Message Information Structure**

Message Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
descriptor_looplevelength	6	C
for (k=0;k<descriptor_looplevelength;k++) {		
descriptor_type	6	C
descriptor_id	6	C
descriptor_eval	8	C
}		
if (descriptor_looplevelength & 1)		
fill_up_1	2	C
else		
fill_up_1	6	C
escape_sequences	See clause 11.12.1	C
message_length	10	C
fill_up	0 ... 7	C
for (k=0;k<message_length;k++) {		
text_char	8	S
}		

### 11.8.2 Semantics for the Message Information Structure

NOTE: For explanation of fields refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2, 11.4.2, 11.5.2, 11.6.2 and 11.7.2.

## 11.9 Update Information Structure

In a Full EPG this structure provides the block numbers that have been changed since the release of a version. There shall be not more than one block of Update Information. See also clause 7.1.

### 11.9.1 Syntax for the Update Information Structure

**Table 24: Syntax for the Update Information Structure**

Update Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
version_number	6	C
fill_up_1	6	C
number_changes	8	C
for (i=0;i<number_changes;i++){		C
netwop_no	8	C
block_no	16	C
}		C

### 11.9.2 Semantics for the Update Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2, 11.4.2, 11.5.2, 11.6.2, 11.7.2 and 11.8.2.

**Table 25: Semantics for the Update Information Structure**

Field	Semantics
version_number	Links Updates to the epg_version_number_swo of Application Information.
number_changes	The number of block numbers following.
netwop_no	The index to the list of network operators of the Application Information.
block_no	The block_no of the affected block.
NOTE:	Both block_no and netwop_no unambiguously define a Programme Information Block and indicate that it has been changed.



## 11.10 Helper Information Structure

This structure conveys a number of Teletext pages. Any page in the list shall be used in a Teletext reference in the EPG, but the list need not be complete. The purpose is to speed up the acquisition process by allowing complex decoders to acquire the Teletext pages in a background process. The Teletext page numbers shall be sorted by descending priority. These structures may be broadcast relatively infrequently.

### 11.10.1 Syntax for the Helper Information Structure

**Table 26: Syntax for the Helper Information Structure**

Helper Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
no_of_pages[0]	6	C
fill_up_1	2	C
for (i=0;i<no_of_pages[0];i++)		
page_reference	24	C
no_of_pages[1]	6	C
fill_up_2	2	C
for (i=0;i<=no_of_pages[1];i++) {		
page_identifier	4	C
page_reference	24	C
}		
fill_up	0 ... 7	C

### 11.10.2 Semantics for the Helper Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2, 11.4.2, 11.5.2, 11.6.2, 11.7.2, 11.8.2 and 11.9.2.

**Table 27: Semantics for the Helper Information Structure**

Field	Semantics
no_of_pages	The number of Teletext pages in the following loops. The first loop (no_of_pages [0]) defines a set of Level 1 or 1.5 pages from the normal Teletext service, which contribute text, including complete pages, to the EPG. The second loop (no_of_pages[1]) defines a set of pages which contribute text, objects and DRCS data for use within the EPG, when the equipment is capable of a Teletext Level 2.5 display or higher.
page_identifier	This value identifies the function of a page indicated, and the presentation levels at which its use is required. See table below.

**Table 28: Description of the page\_identifier**

Value of page_identifier	Description
0 x 0	Basic Level 1/1.5 text page, required at Level 2.5/3.5.
0 x 1	Reserved for future use.
0 x 2	GPOP, required at Level 2.5/3.5.
0 x 3	POP, required at Level 2.5/3.5.
0 x 4	GDRCS, required at Level 2.5/3.5.
0 x 5	DRCS, required at Level 2.5/3.5.
0 x 6, 0 x 7	Reserved for future use.
0 x 8	Basic Level 1/1.5 text page, required at Level 3.5 only.
0 x 9	Reserved for future use.
0 x A	GPOP, required at Level 3.5 only.
0 x B	POP, required at Level 3.5 only.
0 x C	GDRCS, required at Level 3.5 only.
0 x D	DRCS, required at Level 3.5 only.
0 x E, 0 x F	Reserved for future use.

## 11.11 Conditional Access (CA) Information Structure

This structure delivers information concerning CA. Conditional Access Information shall be given only in applications that incorporate CA.

The semantics of the data part of the structure are outside the scope of the present document. The present document solely lays down a framework for such data.

### 11.11.1 Syntax for the Conditional Access Information Structure

**Table 29: Syntax for the Conditional Access Information Structure**

Conditional Access Information Structure	No. of Bits	Category
application_id	5	
block_size	11	
checksum	8	C
control_block_size	10	C
datatype_id	6	C
CA_mode	2	C
_copyright	1	C
reserved_for_future_use	1	C
block_no	16	C
CA_data		C
fill_up	0 ... 7	C

### 11.11.2 Semantics for the Conditional Access Information Structure

NOTE: For explanation of fields not included in the following list refer to the previous semantics clauses, i.e. clauses 11.1.2, 11.1.3, 11.2.2, 11.3.2, 11.4.2, 11.5.2, 11.6.2, 11.7.2, 11.8.2, 11.9.2 and 11.10.2.

**Table 30: Semantics for the Conditional Access Information Structure**

Field	Semantics
CA_data	This is a commonly agreed data field carrying information on conditional access.

## 11.12 Additional information

### 11.12.1 Strings

Strings usually consist of a number of characters, which are concatenated to form some text which can be read by a person (transparent string). In the EPG strings are defined in a more general way, including the usual one. Here strings are also used as references to Teletext, i.e. as a pointer to part of or an entire Teletext.

String definitions as found in the syntax tables incorporate, in the most general cases, a stringtype, and dependant on this stringtype the syntax (and definition) of the string differs. So the convention of strings is enhanced by a type specifier (in the following called `string_type`), defining whether a transparent string is given (as usual), or if there is a reference and where to the reference is. Transparent strings are further divided into transparent short and transparent long, which distinguish in their maximum length only.

**Table 31: Semantics of string\_type**

string_type	string_data is:
0 x 0	transparent short string
0 x 1	transparent long string
0 x 2	a piece of (tele-) text defined by a long page reference, row, column and length
0 x 3	a piece of (tele-) text in a rectangle with a long page reference
0 x 4	an entire Teletext page with a long page reference
0 x 5 ... 0 x 7	reserved for future expansion

In transparent strings, the transmitted code selects a character or a spacing attribute. Characters are taken from the default alphabet unless there is a valid escape sequence, see below. Codes < 0 x 20 define spacing attributes according to level 1 Teletext, with the exception of codes 0 x 0A, 0 x 0B, 0 x 0E, 0 x 0F, 0 x 18 and 0 x 1B which should not be transmitted. If a decoder receives such a code it should replace it with a space (0 x 20). Generally decoders may ignore codes < 0 x 20 in transparent strings intended for display in the Event Area.

#### Syntax for Spacing attributes

NOTE: Decoders designed to the present document should ignore codes marked as "reserved for future use".

**Table 31a: Spacing attributes**

Code (hex)	Function
	<b>Alpha Colour Codes</b> ("Set-After") The alpha colour codes set the foreground colour of the characters to the appropriate colour and select a G0 set as the current default character set. These conditions persist until changed by a further colour code attribute (either alpha or mosaic), or the start of a new row.
0/0	<b>Alpha Black</b> ("Set-After") NOTE: Care should be taken to ensure that black foreground is not set when the background is also black.
0/1	<b>Alpha Red</b> ("Set-After")
0/2	<b>Alpha Green</b> ("Set-After")
0/3	<b>Alpha Yellow</b> ("Set-After")
0/4	<b>Alpha Blue</b> ("Set-After")
0/5	<b>Alpha Magenta</b> ("Set-After")
0/6	<b>Alpha Cyan</b> ("Set-After")
0/7	<b>Alpha White</b> ("Set-After") - Default condition.
0/8	<b>Flash</b> ("Set-After") This code causes the foreground pixels of the following alphanumeric and mosaics characters to alternate between the foreground and background colours. The flash action is cancelled by a Steady command (0/9) or by the start of a new row.
0/9	<b>Steady</b> ("Set-At") - Default condition. This code cancels the flash action of code 0/8.

Code (hex)	Function
0/A	Reserve for future use.
0/B	Reserved for future use.
0/C	<b>Normal Size</b> ("Set-At") - Default condition. This code cancels the action of the double height spacing attribute and restores the characters to normal, single row height.
0/D	<b>Double Height</b> ("Set-After") The characters and mosaics following a double height code are stretched into the following row. The origin of a character is the upper character position. The whole of an enlarged character is displayed with the attributes that apply to the origin of the character. When double height characters are used on a given row, the row below normal height characters on that row is displayed with the same local background colour and no foreground data. Any transmitted characters and attributes for the lower row are ignored. ("Local background colour" is defined as the background colour for the character cell immediately above as a result of processing the string.) NOTE 1: A double height command should not be used in the bottom of a display area. NOTE 2: The application of one size-related control code (double height, normal size) terminates the action of any other size-related attribute.
0/E	Reserved for future use
0/F	Reserved for future use
	<b>Mosaic Colour Codes</b> ("Set-After") The mosaic colour codes set the foreground colour of the characters to the appropriate colour and select the G1 set as the current default character set. These conditions persist until changed by a further colour code attribute (either alpha or mosaic), or the start of a new row. For subsequent characters in columns 2, 3, 6 & 7 of the G1 set, bits 1, 2, 3, 4, 5 & 7 respectively set the top left, top right, middle left, middle right, lower left and lower right graphic blocks of each character.
1/0	<b>Mosaics Black</b> ("Set-After") NOTE: Care should be taken to ensure that black foreground is not set when the background is also black.
1/1	<b>Mosaics Red</b> ("Set-After")
1/2	<b>Mosaics Green</b> ("Set-After")
1/3	<b>Mosaics Yellow</b> ("Set-After")
1/4	<b>Mosaics Blue</b> ("Set-After")
1/5	<b>Mosaics Magenta</b> ("Set-After")
1/6	<b>Mosaics Cyan</b> ("Set-After")
1/7	<b>Mosaics White</b> ("Set-After")
1/8	Reserved for future use
1/9	<b>Contiguous Mosaic Graphics</b> ("Set-At") - Default condition The blocks of a mosaics character adjoin one another.
1/A	<b>Separated Mosaic Graphics</b> ("Set-At") Each block of a mosaics character is surrounded by a border of the background colour.
1/B	Reserved for future use
1/C	<b>Black Background</b> ("Set-At") - Default condition. This code immediately changes the background colour to the black. The foreground colour is not affected.
1/D	<b>New Background</b> ("Set-At") This code causes a new background colour to be selected immediately. Any following characters and mosaics may be invisible until a different foreground colour attribute is encountered. The foreground colour currently selected is adopted as the background colour.

Code (hex)	Function
1/E	<p><b>Hold Mosaics</b> ("Set-At")</p> <p>Generally, all spacing attributes are displayed as spaces, implying at least one space between characters or mosaics with different colours in the same row. In mosaics mode, the 'Hold Mosaics' option allows a limited range of attribute changes without intervening spaces. A mosaic character from the G1 set (referred to as the 'Held-Mosaic' character) is displayed in place of the character 'SPACE' corresponding to a control character.</p> <p>Substitution only takes place in mosaics mode when Hold Mosaics mode is in force. At a screen location where substitution is permitted, the 'Held-Mosaic' character inserted is the most recent mosaics character with bit 6 = '1' in its code on that row. The 'Held-Mosaic' character is reset to 'SPACE' at the start of each row, on a change of alphanumeric/mosaics mode or on a change of size. It is not reset by reinforcement of the existing size setting. It is not reset by a change in Hold Mosaics mode.</p> <p>The 'Held-Mosaic' character is always displayed in its original contiguous or separated form regardless of the mode prevailing at the time of substitution.</p>
1/F	<p>("Set-After") - Default condition.</p> <p>This code cancels the Hold Mosaics mode.</p>

For string\_type 2 or 3, only the codes selecting characters have to be read from the Teletext page, i.e. the pure characters including any national option characters determined by control bits in its page header. Graphics, colours and other attributes may be ignored. In case of string\_type 0 x 4, however, a complete Teletext page has to be inserted as if Teletext mode was active, which means that the set actually has to do the switch to the Teletext mode for the viewer, and return from Teletext to the EPG as if the Teletext page were "part" of the EPG.

In any case the Teletext text has to be taken from the channel that carries the EPG data.

Only transparent strings (string types 0 and 1) may have "escape sequences" attached. An escape sequence gives additional information to the string, it may affect characters (in order to create language specific letters such as 'ñ' or 'ç') or give a link (include) a picture, video clip, etc. An escape sequence is made up of a pointer - indicating the location of the string to be affected - and a value - defining how to compose a character (like the packet 26s for national characters) or what to include (picture, clip,...) and where to get it from. The method of creating national characters is taken straightforward from Teletext packet 26 mechanism, with extra modes for additional purposes. The order of defined escape sequences is according to the required insertion position from left to right through the string. The escape sequences are located in front of the length specifier.

**Table 32: Syntax for escape\_sequences**

escape_sequences	No. of Bits	Category
no_of_escapes	8	C
for (i=0;i<no_of_escapes;i++) {		
insert_pos	10	C
escape_mode	6	C
escape_data	8	C
}		

**insert\_pos** indicates the affected character position in the string.

**escape\_mode** is a mode indicator defining the use of **escape\_data**.

Table 33: Syntax for escape\_mode

escape_mode	No. of Bits in escape_data	Semantics of escape_data
0 x 00	8	Reserved for future use.
0 x 01	8	Select a mosaic character from the G1 set. The entry is defined by escape_data.
0 x 02, ..., 0 x 07	8	Reserved for future use.
0 x 08	8	Latching shift to the character and national option set selected by escape_data. The escape_data selects an entry in EN 300 706 [2], Table "Function of Second Language Designation and National Option Selection bits in packets X/28/0 format 1, X/28/4, M/29/0 and M/29/4". The shift is valid from the point of invocation up until the end of the string or until cancelled by the selection of another character set. The character codes are taken from the string.
0 x 09	8	Select an alphanumeric character from the current G0 set. The entry is defined by escape_data.
0 x 0A	8	Carriage return. Row address is incremented by 1. Text starting at the insert position shall go to the next line on the screen, with the same column position as the start of the string associated with the escape sequence carrying the instantiation of this mode. The new screen position shall adopt all set attributes applicable to the character before the insert position and will not change any other attributes for the new screen position. Escape_data is reserved for future use.
0 x 0B, ..., 0 x 0E	8	Reserved for future use.
0 x 0F	8	Select an alphanumeric character from the current G2 set. The entry is defined by escape_data.
0 x 10, ..., 0 x 1F	8	Add a diacritical mark to a character from the current G0 set. The diacritical mark is defined by the 4 LSBs of escape_mode referencing an entry in column 4 of the current G2 character set. The G0 character is defined by escape_data.
0 x 20, ..., 0 x 3E	8	Reserved for future use.
0 x 3F	8	Not used.
NOTE 1: Semantics of escape_data are very much alike the mechanisms provided by packet 26 in Teletext (see EN 300 706 [2]).		
NOTE 2: Although escape_data is always 8 bits, the MSB is a filler bit for existing modes, but may be used for future extension.		

If a decoder cannot display a character, it shall display a fallback or default character. The method of replacing characters shall be reasonable and sensible, and in this sense decoder manufacturers are free to provide such methods.

When a carriage return escape sequence applies to a character which is also pointed to by other escape sequences, the carriage return should be the first one.

By means of escape sequences (the carriage return), the number of characters of a string as displayed may be larger than as transmitted. The service provider shall take care that such strings fit into the appropriate display area when the size of that display area can be defined by the service provider (e.g. the header and message area).

### 11.12.1.1 String types

If allowed, the escape sequences as defined above, precede the string's length specified. Escape sequences are allowed with transparent strings only.

#### 11.12.1.1.1 Transparent Short String

Table 34: Syntax for Transparent Short String (string\_type == 0 x 0)

string_data	No. of Bits	Category
_length	8	C
for (j=0;j<_length;j++){		
text_char	8	S
}		

**\_length** is a simple 8 bits number, giving the number of characters comprised in the transparent string.

**text\_char** is explained in clause 11.2.2.

#### 11.12.1.1.2 Transparent Long String

**Table 35: Syntax for Transparent Long String (string\_type == 0 x 1)**

string_data	No. of Bits	Category
_length	10	C
for (j=0;j<_length;j++){		
text_char	8	S
}		

Same as transparent short string except the range of **\_length**.

**text\_char** is explained in clause 11.2.2.

#### 11.12.1.1.3 Reference to a (Tele-)text string

**Table 36: Syntax for Referenced String (string\_type == 0 x 2)**

string_data	No. of Bits
page_reference	24
row_spec	5
col_spec	6
length	6

**col\_spec** is the 6 bits Teletext column number.

**length** is a 6 bits number defining the number of character to be read.

**page\_reference** is defined in clause 11.3.2.

**row\_spec** is the 5 bits Teletext row (packet) number.

#### 11.12.1.1.4 Reference to a (tele-)text rectangle

**Table 37: Syntax for Referenced String (string\_type == 0 x 3)**

string_data	No. of Bits
page_reference	24
row_spec	5
col_spec	6
row_spec	5
col_spec	6

The two pairs of co-ordinates (row\_spec, col\_spec) define a rectangular area where the text has to be read from.

The fields are explained in clause 11.12.1.1.3.

#### 11.12.1.1.5 Reference to an entire Teletext page

**Table 38: Syntax for Referenced String (string\_type == 0 x 4)**

string_data	No. of Bits
page_reference	24

**page\_reference** is defined in clause 11.3.2.

## 11.12.2 Descriptors

Descriptors are a common and efficient means to add zero or more descriptions to a programme. In case of EPG such descriptions are languages, subtitles etc. The descriptions are transmitted in dedicated datatypes (i.e. similar to a table of descriptions), and a programme that needs one of the descriptions points to its description by a) which table (language or title) and b) which entry (index).

A table is addressed by the descriptor\_type. It takes the value of the datatype\_id of the structure carrying the table.

The entry of the so-addressed table is identified by the descriptor\_id. This identification is given in the description loop of the structure, by which it is referenced also.

The field descriptor\_eval is reserved for future use.

## 11.12.3 DATATYPE\_ID (EPG only!)

**Table 39: Values for datatype\_id**

datatype_id	means
0 x 00	reserved
0 x 01	Application Information Structure
0 x 02	Programme Information Structure
0 x 03	Navigation Information Structure
0 x 04	OSD Information Structure
0 x 05	Message Information Structure
0 x 06	Update Information Structure
0 x 07	Language Information Structure
0 x 08	(Sub-)Title Information Structure
0 x 09 ... 0 x 3D	reserved for future expansion
0 x 3E	Conditional Access Information Structure
0 x 3F	Helper Information Structure

## 11.12.4 EVENT\_ATTRIBUTE

As introduced in clause 5.5.3, there are several kinds of attributes, and attributes also may be combined to create a new attribute. So the field event\_attribute is a data structure in itself, it is variable in length. Its length depends on:

- what kind of attribute it is (i.e. how much additional information); and
- how many attributes are joined together.

**Table 40: Syntax for event\_attribute**

event_attribute	No. of Bits
number_unit_attributes	4
for (j=0;j<number_unit_attributes; j++)	
kind_of_attribute	8
attribute_info	see below
}	

**Table 41: Number of bits in attribute\_info**

kind_of_attribute	No. of Bits
0 x 00 ... 0 x 7F	8
0 x 80 ... 0 x BF	16
0 x C0 ... 0 x DF	24
0 x E0 ... 0 x FF	32



Table 42: Semantics for kind\_of\_attribute

kind_of_attribute	Meaning	attribute_info
0 x 02	relative date	date_offset
0 x 10	first program	prog_offset
0 x 11	last program	prog_offset
0 x 18	network operator	netwop_no
0 x 20, ... 0 x 27	theme (kind_of_attribute - 0 x 20)	theme
0 x 30, ... 0 x 37	sorting criterion (kind_of_attribute - 0 x 30)	sortcrit
0 x 40	editorial rating	editorial_rating
0 x 41	parental rating	parental_rating
0 x 80	start time	time_code
0 x 81	stop time	time_code
0 x C0	features	feature_flags
0 x C8	language	language
0 x C9	subtitle language	subtitle_language
others	reserved for future expansion	

NOTE: Theme and sorting criterion are allowed to have multiple instances in order to enable a logical AND to be performed.

Table 43: Syntax and semantics for attribute\_info

attribute_info	No. of Bits	Semantics
time_code	16	Same coding as stop_time in the Programme Information Structure. See description below.
date_offset	8	0 = today, 1 = tomorrow, ... (unsigned value).
prog_offset	8	0 = current program, 1 = next program, ... (unsigned value).
theme	8	Same as in the Programme Information Structure (clause 11.3). See clause 11.12.7.
sortcrit	8	Same as in the Programme Information Structure (clause 11.3).
editorial_rating	8	Same as in the Programme Information Structure (clause 11.3).
parental_rating	8	Same as in the Programme Information Structure (clause 11.3).
feature_flags	24	The 12 LSBs correspond to the feature_flags defined in the Programme Information structure (clause 11.3), the 12 MSBs are feature_flag validation bits in the same order as the feature_flag bits themselves - 0 = corresponding feature_flag is not defined, 1 = corresponding feature_flag is defined.
language	24	ISO 639.2 [5], same as in the Language Information Structure (clause 11.4).
subtitle_language	24	ISO 639.2 [5], same as in the Language Information Structure (clause 11.4).

#### 11.12.4.1 Attribute descriptions

**Start time, stop time:** this attribute is used to specify a time slot in terms of time. The set has to find out the programmes for each network, which run within that time slot. If start time and stop time are valid (00:00 <= time <= 23:59) this refers to an absolute time slot. If no date is specified the timeslot refers to today, unless the timeslot has completely elapsed, in which case the timeslot for the next day is shown. If a relative date is specified the timeslot for that day is shown. If the start time has the value 0 x FFFF the current time is taken as the start time. The end time is taken as a relative time period from the current time. If a date is specified, the schedule for that day at the current time for the specified period is shown. If no start time is specified the current time is taken as the start time and the end time is taken as an absolute time. If a date is specified, the schedule for that day at the current time for the specified period is shown. If no stop time is specified the rest of the day (until 23:59) is selected.

**Relative date:** This attribute is used to specify a time slot in terms of date. The set has to find out those programmes, which run within that time slot of that day.

**First program, last program:** this attribute is used to specify a number of programmes (to be displayed). To do so, for each network the programmes are enumerated, starting with 0 for the current one. If no last program is specified then only one programme is selected, if no first program is specified then the first programme is the current one.

All others are defined in the same way as described in clause 11.3.

### 11.12.4.2 Combining attributes

If more than one criterion is defined, the resulting criteria are combined. If multiple instances of the same criterion with different values occur, the result of the searches shall be merged. For example, when two attributes define different languages all the programs that support either one of the languages are shown. This combination is not always defined, for example in the case of time-related criteria. If several different criteria occur, the result of the combined search shall contain only items which fulfil every criterion specified. For example, when language is specified as "English" and EPG theme as "Movie", only the English-language movies are shown.

No more than one first programme and one last programme attribute is allowed in the combined event attribute.

If there is more than one date\_offset attribute in the combined event attribute, they must be contiguous.

The number of feature-flags attributes in the combined event attribute shall not exceed the maximum available number of feature flag validation bits.

#### Example sortings:

Recommended programs:	editorial_rating
Own channel/set of channels:	netwop_no
German/French/Dutch spoken programs:	language
Category sorting:	theme [1] or theme [2], or own category with sortcrit
Morning/afternoon/evening:	start time and stop time with valid times
Programmes the next hour:	start time = 0 x FFFF and stop time
Current/next program, next 5 programs:	first item and last item

#### Another example: - Live soccer game

Here the service provider uses the sorting criteria in addition to the theme coded 0 x 43. So guide provider will set a code in the sort criteria. This will be passed with the text "Soccer Live" in the header string (see clause 5.5.2) which will be displayed to the viewer to select the live soccer programmes.

### 11.12.5 NEXT\_LINK\_TYPE

**Table 44: Semantics for next\_link\_type**

next_link_type	The event is to be linked to ...
0 x 00	undefined
0 x 01	the Navigation Information Structure which fulfils block_no == next_link_id
0 x 02	the OSD Information Structure which fulfils block_no == next_link_id
0 x 03, ..., 0 x F	reserved for future expansion

## 11.12.6 MESSAGE\_ATTRIBUTE

**Table 45: Semantics for message\_attribute**

<b>message_attribute</b>	<b>In the message area the product has to display ...</b>
0 x 00	the short_info of Programme Information, see also clause 11.7.2
0 x 01, ..., 0 x FF	the message of Message Information block which fulfils block_no == message_attribute
NOTE 1: The value 0 cannot be used by NI blocks (see clauses 5.5.2 and 8.1).	
NOTE 2: Since message_attribute == 0 has a special meaning and message_attribute is linked to MIs' block_no in some cases an idle MI with block_no == 0 shall be transmitted.	

## 11.12.7 Sorting categories

The EPG targets maximum commonality with PDC (ETS 300 231 [3]). PDC equipped video cassette recorders which are already placed in the market employ codes to identify television programmes in the same series both for programming and recording control. These code are defined in the coding space 0 x 80 to 0 x FE.

Table 46: Theme assignments

theme	Description
0 x 00 ... 0 x 0f	undefined content
	<b>Drama and Films</b>
0 x 10	movie (general)
0 x 11	detective/thriller
0 x 12	adventure/western/war
0 x 13	science fiction/fantasy/horror
0 x 14	comedy
0 x 15	soap/melodrama/folklore
0 x 16	romance
0 x 17	serious/classical/religious/historical drama
0 x 18	adult movie
0 x 19 ... 0 x 1E	reserved for future use
0 x 1F	user defined
	<b>News/Current Affairs/Social</b>
0 x 20	news/current affairs (general)
0 x 21	news/weather report
0 x 22	news magazine
0 x 23	documentary
0 x 24	discussion/interview/debate
0 x 25	social/political issues/economics (general)
0 x 26	magazines/reports/documentary
0 x 27	economics/social advisory
0 x 28	remarkable people
0 x 29 - 0 x 2E	reserved for future use
0 x 2F	user defined
	<b>Show/Game Show/Leisure hobbies</b>
0 x 30	show/game show (general)
0 x 31	game/show/quiz/contest
0 x 32	variety show
0 x 33	talk show
0 x 34	leisure hobbies (general)
0 x 35	tourism/travel
0 x 36	handicraft
0 x 37	motoring
0 x 38	fitness and health
0 x 39	cooking
0 x 3A	advertisement/shopping
0 x 3B ... 0 x 3E	reserved for future use
0 x 3F	user defined
	<b>Sports</b>
0 x 40	sports (general)
0 x 41	special events (e.g. Olympic games, World Cup etc.)
0 x 42	sports magazines
0 x 43	football/soccer
0 x 44	tennis/squash
0 x 45	team sports/excluding football
0 x 46	athletics
0 x 47	motor sports

(continued)

Table 46 (concluded): Theme assignments

theme	Description
0 x 48	water sports
0 x 49	winter sports
0 x 4A	equestrian
0 x 4B	martial arts
0 x 4C	local sports
0 x 4D ... 0 x 4E	reserved for future use
0 x 4F	user defined
	<b>Children/Youth/Education/Science</b>
0 x 50	children's youth programmes (general)
0 x 51	pre-school children's programmes
0 x 52	entertainment programmes for 6 to 14
0 x 53	entertainment programmes for 10 to 16
0 x 54	informational/educational/school
0 x 55	cartoons/puppets
0 x 56	educational/science/factual topics (general)
0 x 57	nature/animals/environment
0 x 58	technology/natural sciences
0 x 59	medicine/physiology/psychology
0 x 5A	foreign countries/expeditions
0 x 5B	social/spiritual sciences
0 x 5C	further education
0 x 5D	languages
0 x 5E	reserved for future use
0 x 5F	user defined
	<b>Music/Ballet/Dance</b>
0 x 60	music/ballet/dance (general)
0 x 61	rock/pop
0 x 62	serious music/classical music
0 x 63	folk/traditional music
0 x 64	jazz
0 x 65	musical/opera
0 x 66	ballet
0 x 67 ... 0 x 6E	reserved for future use
0 x 6F	user defined
	<b>Arts/Culture (without music)</b>
0 x 70	Arts/Culture (without music, general)
0 x 71	performing arts
0 x 72	fine arts
0 x 73	religion
0 x 74	popular culture/traditional arts
0 x 75	literature
0 x 76	film/cinema
0 x 77	experimental film/video
0 x 78	broadcasting/press
0 x 79	new media
0 x 7A	arts/culture magazines
0 x 7B	fashion
0 x 7C ... 0 x 7E	reserved for future use
0 x 7F	user defined
0 x 80 ... 0 x FE	Series codes
0 x FF	reserved

## Annex A (normative): Transmission and coding

### A.1 Transmission format

The transmission of an EPG shall use the Page Format - Clear (as defined in EN 300 708 [1]), and it shall use either stream 1 or stream 1 and stream 2. The EPG shall be transmitted using a page header and packets 1 to 23 only.


A MIP (as defined in EN 300 706 [2]) shall be transmitted and it shall define the page number for EPG data transmission. The EPG data transmission page may include a packet 28 coded according to EN 300 706 [2] to define the page as a data broadcasting page.

The EPG should be transmitted on page 1DF wherever possible. If this default page cannot be used it is recommended that EPG uses page numbers mdF or mFd (where m is a magazine number and d is a decimal number), noting that some page numbers are reserved for other uses. Other pages with hexadecimal digits are defined for service related information and so should be avoided.

#### A.1.1 Rules for stream 1 and stream 2 pages

In order to provide sufficient time for data processing in the receiving equipment, minimum time intervals between subsequent pages shall be provided.

- 1) The moment that a page appears is defined as the moment its first header appears. This also covers fragmented pages. The time between pages is measured from the first header of the first page till the first header of the second page.
- 2) In the transmission sequence, pages of stream 1 may be arbitrarily mixed with pages of stream 2. This also holds for page fragments, e.g. the fragments of a stream 2 page may be interspersed with stream 1 pages. Stream 1 and stream 2 are deemed independent and asynchronous feeds of data.
- 3) No time space is required between the last row of a page and the header of the following page.
- 4) The minimum time interval between successive pages, regardless of the stream they belong to, is 200 ms, but
- 5) The minimum time interval between two successive stream 1 pages is 500 ms.
- 6) The maximum throughput for each stream is 10 pages in any period of 5 seconds.

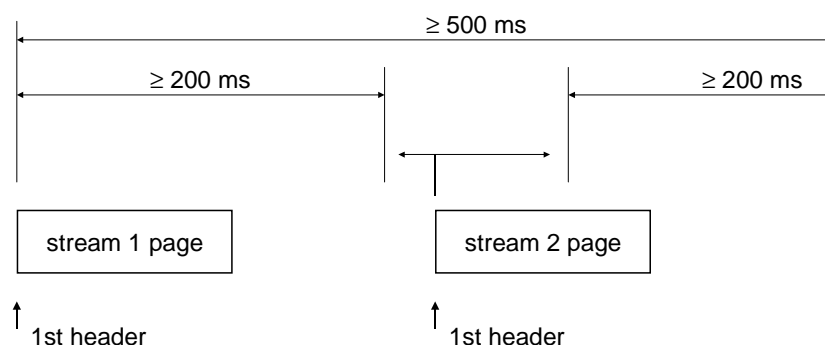

**Figure A.1: Time spacing for EPG data pages**

A transmission example is given in annex P.

## A.1.2 Page Variants

A complete page is transmitted starting from the header (i.e. row 0) to the last row, whose number is signalled in the subcode, without break. It may consist of 1 to 23 data rows.

A complete full page is a complete page with 23 data rows.

An incomplete page is a fragment of a complete page. A fragment consists of a header and a number of consecutive data rows. All packets of a fragment are transmitted without break. All fragments of a page together provide all the packets of that page. All fragments have the same header, but the header of the first fragment of a page may provide the C4 bit (page clear bit) set to 1 in contrast to the headers of the following fragments of the page.

---

## A.2 Coding of the Overall Data Header

The coding method for the Overall Data Header, comprising `application_id` and `block_size`, is defined in EN 300 708 [1]. It is repeated here for completeness only.

`application_id` and `block_size` are merged in a 16 bits wide data entity, to every 4 bits (nibble) of it the Hamming 8/4 code according to EN 300 706 [2] shall be applied.

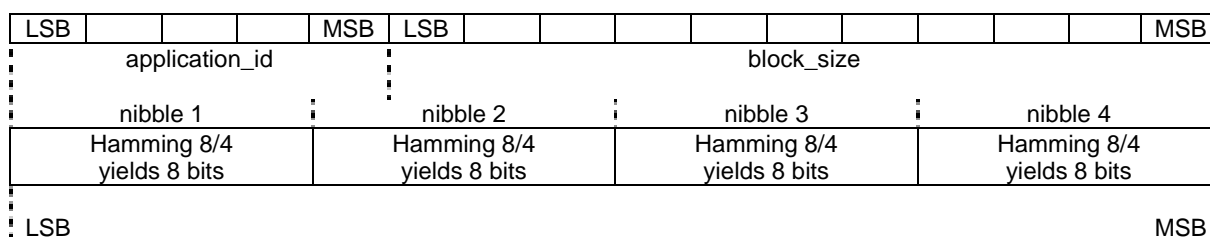


Figure A.2: Structure Header as defined in EN 300 708 [1]

---

## A.3 Coding of Control Data

All control data (marked "C" in the Category column in the syntax tables) shall be arranged analogously with the way described in clause 9 and in clause A.2 to form a large compound, which then shall be sliced into nibbles. (Then the checksum calculation shall take place.) Each of the nibbles shall be encoded with the Hamming 8/4 code according to EN 300 706 [2].

---

## A.4 Coding of String Data

All string data (marked "S" in the Category column in the syntax tables) shall be encoded character-wise. Though the fields `text_char` are defined to be 8-bit character codes  $>0 \times 7F$  are not defined. The Most Significant Bit (MSB) of any character code shall be overwritten with an odd parity bit according to EN 300 706 [2].

---

## Annex B (normative): Future extensions

### B.1 Rules for the design of future extensions to the EPG application

Implementors of applications shall be aware that there is the possibility of additions being made to structures for future extensions to the applications. Extensions shall obey the general rules as described in clause 11, and these extensions shall always be at the end of the control data block and/or at the end of the string data block of existing structures, or new structures may be created.

Decoders not supporting such extensions shall simply discard data which is not recognized (i.e. data not specified at the time of construction of the decoders).



---

## Annex C (normative): The use of OSD information

### C.1 The use of OSD information in simple decoders

As outlined in clause 5.5, OI is used to define the layout etc. for display of programme information, whereas NI does it for pure navigation screens.

As stated earlier, there will be different types of EPG broadcasts, and there will be different types of EPG decoders, and all possible combinations shall work. Compatibility is primarily guaranteed by a common data structure, and decoders which cannot process a special part of the protocol, shall discard it. They are able to do so for there is a `block_size` in every block.

A different compatibility problem is present in the case of a Full EPG broadcast received by a "simple" decoder, i.e. a decoder which cannot handle navigation or which can handle one single layout only (This Channel and Composite decoders). Such decoders shall discard NI and use the OI with `block_no` equal 0 only.

For service providers this means that they shall allocate OI intended for these "simple" decoders to `block_no` 0.

## Annex D (normative): Minimum EPG broadcasts

### D.1 Structures

An EPG application shall comprise the following number of instances of structures (blocks):

**Table D.1: Requirements for EPG Broadcast**

<b>Data type</b>	<b>Required number of blocks</b>
Application Information Structure	exactly 1
Programme Information Structure	any number
Navigation Information Structure	any number
OSD Information Structure	any number
Message Information Structure	maximum 255
Update Information Structure	maximum 1
Language Information Structure	maximum one per network, except for this channel maximum two
(Sub-)Title Information Structure	maximum one per network, except for this channel maximum two
Conditional Access Information Structure	any number
Helper Information Structure	any number
NOTE: If there is no OI a decoder is free to present its own style.	

## Annex E (normative): Allowed string types

### E.1 Structures

The following table enumerates all string types allowed in the structures. Structures not included do not comprise strings.

**Table E.1: String types in EPG Data Structures**

<b>EPG Data Structure</b>	<b>String types allowed</b>
Application Information Structure	transparent with fixed maximum length only
Programme Information Structure	programme title: transparent short only short info: transparent short only long info: all types specified in clause 11.12.1
Navigation Information Structure	header: transparent short only event: transparent short only
OSD Information Structure	header: transparent short only message: transparent long only
Message Information Structure	message: transparent long only



---

## Annex G (informative): Display

### G.1 Display of Messages

If there is a message defined for a screen, the message shall be displayed when that screen is displayed. Subsequent actions by the user may cause the Message Area to be used to display other information.

---

### G.2 Order of Display for a Full EPG Decoder receiving a Full EPG broadcast

When a list of programme information is displayed the order in which the events are displayed shall be the order of network operators in the Application Information whenever possible.

---

## Annex H (informative): EPG and TV information from normal Teletext service

### H.1 The use of TV information from normal Teletext service within EPGs

An EPG decoder may default to display information from a normal Teletext service if none of EPG data is available.

If the Teletext service includes a Magazine Inventory Page (MIP), the page numbers used for the now/next and TV schedule pages can easily be identified.

---

Annex I (informative):  
Void

---

## Annex J (informative): Teletext capacity required

Refer to ETR 288 [4].



---

## Annex K (informative): Teletext transmission

### K.1 Enumeration of PI blocks by block\_no

As stated in clause 11.3, PI blocks are numbered by ascending start\_time. Every network's programmes allocate a continuous range of block\_no. The ranges of different networks are allowed to overlap. So the PIs need not be re-numbered (after finishing a programme and after moving from one day to the next), only the border values in AI change. In case of programme insertion or cancellation the block\_no of programmes later than the last unchanged one have to be adjusted.

---

### K.2 Sequence of transmission of PI blocks

PI blocks should be fed into Teletext transmission in the sequence of ascending block\_no. Exemptions are allowed for single PI blocks to be updated and for sets of PI blocks with different repetition rates.

---

### K.3 Why two streams for EPG

The reason for allowing service providers or network operators to put parts of the EPG information into a stream which obeys the 20 ms rule and other parts into a stream without 20 ms rule is found in the different transmission capacity of these streams. The 20 ms rule places an unpleasant limitation on the frequency a Teletext page can be put into an available number of VBI lines for transmission. A rule for dividing the EPG information is given in clause 7.

## Annex L (informative): Examples

### L.1 Generation of a PI block

Suppose the following programme to be part of an EPG, the EPG itself free of CA and free of copyright protection, the title "Title", starting on January 26, 1996, at 9:00 a.m., end at 9:30 a.m., the short info "Short Info", no long info, one user defined theme, no editorial rating, parental rating for ages 8 and up, one descriptor for a set of languages.

The following table is partly copied from the syntax table. In the rightmost column fields are separated by commas. Read this column from right to left and top down (i.e. from LSB to MSB).

**Table L.1: Coding a sample PI block**

Field	Bits	Value	Nibbles
application_id	5	0x1	0001
block_size	11	0x04F	111,0 1001 0000
checksum	8	0x2E	1110 0010
control_block_size	10	0x40	0000 0100 10,00
datatype_id	6	0x2	0000
CA_mode	2	0x0	0,0,00
_copyright	1	0x0	
reserved_for_future_use	1	0x0	
block_no	16	0x0012	0010 0001 0000 0000
feature_flags	12	0x41	0001 0100 0000
netwop_no	8	0x0B	1011 0000
start_time	32	0x5A930900	0000 0000 1001 0000 0011 1001 1010 0101
stop_time	16	0x0930	0000 0011 1001 0000
_pil	20	0xD0A40	0000 0100 1010 0000 1101
parental_rating	4	0x4	0100
editorial_rating	3	0x0	1,000
no_themes	3	0x1	00,00

(continued)

Table L.1 (continued): Coding a sample PI block

Field	Bits	Value	Nibbles
no_sortcrit	3	0x0	001,0
descriptor_looplevelength	6	0x01	0,000
background_reuse	1	0x0	
for (k=0;k<no_themes;k++) {			
theme	8	0x4F	1111 0100
}			
for (k=0;k<no_sortcrit;k++) {			
sortcrit	8	-	
}			
for (k=0;k<descriptor_looplevelength;k++) {			
descriptor_type	6	0x0D	1101 11,00
descriptor_id	6	0x1F	0111
descriptor_eval	8	0x00	0000 0000
}			
if (descriptor_looplevelength & 1)			
fillerbits_1	4	0x0	0000
title_escape_sequences	See clause 11.12.1	0x00	0000 0000
title_length	8	0x05	0101 0000
if (background_reuse)			
background_ref	16	-	
else {			
shortinfo_escape_sequences	See clause 11.12.1	0x 00	0000 0000
shortinfo_length	8	0x0A	1010 0000
longinfo_stringtype	3	0x0	0,000
fillerbits_2	5	0x00	0000
if (longinfo_stringtype==0) {			
longinfo_0_escape_sequences	See clause 11.12.1	0x00	0000 0000
longinfo_length	8	0x00	0000 0000
}			
else if (longinfo_stringtype==1) {			
longinfo_1_escape_sequences	See clause 11.12.1	-	
longinfo_length	10	-	
}			
else if (longinfo_stringtype==2) {			
page_reference	24	-	
row_spec	5	-	
col_spec	6	-	
length	6	-	
}			
else if (longinfo_stringtype==3) {			
page_reference	24	-	
row_spec	5	-	
col_spec	6	-	
row_spec	5	-	

(continued)

Table L.1 (concluded): Coding a sample PI block

Field	Bits	Value	Nibbles
col_spec	6	-	
}			
else if (longinfo_stringtype==4)			
page_reference	24	-	
}			
fill_up	0 ... 7	-	
for (k=0;k<title_length;k++) {			
text_char	8	0x54 0x69 0x74 0x6C 0x65	
}			
for (k=0;k<shortinfo_length;k++) {			
text_char	8	0x53 0x68 0x6F 0x72 0x74 0x20 0x49 0x6E 0x66 0x6F	
}			
if (longinfo_stringtype==0    longinfo_stringtype==1)			
for (k=0;k<longinfo_length;k++) {			
text_char	8	-	
}			

Adding up all nibbles from control data (4th column of the above table) yields checksum:

$$\text{checksum} = 0 \times 100 - (0001\text{b} + 1110\text{b} + 1001\text{b} + 0000\text{b} + 0000\text{b} + 0100\text{b} + 1000\text{b} + 0000\text{b} + 0000\text{b} + 0010\text{b} + 0001\text{b} + 0000\text{b} + 0000\text{b} + 0001\text{b} + 0100\text{b} + 0000\text{b} + 1011\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 1001\text{b} + 0000\text{b} + 0011\text{b} + 1001\text{b} + 1010\text{b} + 0101\text{b} + 0000\text{b} + 0011\text{b} + 1001\text{b} + 0000\text{b} + 0000\text{b} + 0100\text{b} + 1010\text{b} + 0000\text{b} + 1101\text{b} + 0100\text{b} + 1000\text{b} + 0000\text{b} + 0010\text{b} + 0000\text{b} + 1111\text{b} + 0100\text{b} + 1101\text{b} + 1100\text{b} + 0111\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0101\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 1010\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b} + 0000\text{b}) \% 0 \times 100 = 0 \times 2\text{E}$$

NOTE: In the equation for the checksum the suffix "b" indicates that the preceding number has to be interpreted as a binary value, e.g. 0110b = 0 x 6.

Now encoded data for this block is (all in hexadecimal notation) - already including Block Type and Block Length as defined in EN 300 708 [1] is:

02, FD, C7, 15, 15, 64, D0, 15, 15, 49, 02, 15, 15, 02, 64, 15, 9B, 15, 15, 15, C7, 15, 5E, C7, 8C, 73, 15, 5E, C7, 15, 15, 64, 8C, 15, B6, 64, D0, 15, 49, 15, EA, 64, B6, A1, 2F, 15, 15, 15, 15, 15, 73, 15, 15, 15, 8C, 15, 15, 15, 15, 15, 15, 15, 54, E9, F4, EC, E5, D3, 68, EF, F2, F4, 20, 49, 6E, E6, EF.

## L.2 String examples

### L.2.1 Encoding "El Niño" as transparent short string

This coding example is based on the syntax tables from clause 11.12.1. Merging the concerned tables yields the following syntax table, which is applicable to transparent short strings only:

**Table L.2: Coding a sample string**

string	No. of Bits	Category	Value
string_type	3	C	0x0
no_of_escapes	8	C	0x01
for (i=0;i<no_of_escapes;i++) {			
insert_pos	10	C	0x05
escape_mode	6	C	0x14
escape_data	8	C	0x6E
}			
_length	8	C	0x07
for (j=0;j<_length;j++){			
text_char	8	S	'El Nino'
}			
NOTE: The 'ñ' is defined in the escape sequence, in string data the fallback character is defined 'n'.			

### L.2.2 Teletext references

Suppose a Teletext page:

P123 123 uvwx news 31.01.96 09:54:04
##### TV-PROGRAMME
##### FRIDAY
#####
06:00 NEWS :
News bulletins
Current affairs
International
Economics
Press Review
Weather
09:00 Europa
#####
09:10 Sport
09:30 News
#####
#####

**Figure L.1: Illustration for a Teletext Reference**

The string "Current affairs" may be referenced to as:

- reference to a Teletext string (string type 2):

**Table L.3: Coding a Teletext Reference (string\_type == 2)**

string_data	No. of Bits	Category	Value
string_type	3	C	0x2
page_reference	24	C	0x32F7F3
row_spec	5	C	0x07
col_spec	6	C	0x09
length	6	C	0x0F

- or reference to a Teletext rectangle (string type 3):

**Table L.4: Coding a Teletext Reference (string\_type == 3)**

string_data	No. of Bits	Category	Value
string_type	3	C	0x2
page_reference	24	C	0x32F7F3
row_spec	5	C	0x07
col_spec	6	C	0x09
row_spec	5	C	0x07
col_spec	6	C	0x17
NOTE:	References do not include escape sequences, since text has to be inserted as it would read in Teletext - this does include any applicable packet 26.		

## L.3 Examples for attributes in a menu organization

Consider the menu organization illustrated in clause 5.5.1. It is constructed of three navigation levels, the first level selection is "Themes", then "Sport" and at last "Golf". The fourth level in the example is a list of programmes. As defined, these first three levels are represented by NI blocks, and the fourth one by an OI block.

Attributes appear in the second and third level. The second level introduces a "Sport" attribute, the third level introduces the "Golf" attribute. Only the third level is immediately followed by a programme list (OI). At the end of the navigation path the decoder searches for all programmes, which have a theme attribute equal "Golf".

Supposed the third level includes not only the "Golf", but also a "Cricket" attribute. The corresponding NI block then in the field event\_attribute comprises number\_unit\_attributes=2 and a loop with two kind\_of\_attribute fields with values 0 x 20 and 0 x 21 (if theme is used). Since there are two attributes of the same kind (theme), the decoder responds by finding out all programmes, which have a theme attribute equal "Golf" (logical) OR equal "Cricket". So the programme list at the end of the navigation tree will contain Golf programmes as well as Cricket programmes.

Suppose a different selection in a menu comprising a language attribute "English" and an editorial rating attribute of e.g. 5. Now there are different kinds of attributes, so the decoder will find programmes, which have an editorial rating greater or equal 5 (logically) AND a language attribute equal "English". The programme list in this case shows all programmes with English sound, whose editorial rating is at least 5.

NOTE 1: A language attribute (in NI) refers to any language descriptor including that language. A subtitle\_language attribute (in NI) refers to any (Sub-)Title descriptor including that language.

NOTE 2: Combined attributes, like in the rating and language example, may be established by transmission (the service provider offers that selection), or it may be created by user interaction in the decoder only - although this would require a rather complicated user interface.

---

## L.4 Model of a coding procedure

The following steps show how a data transmission can be constructed from data blocks. A decoder, of course, has to follow the reverse procedure:

- The control bits are concatenated into a single sequence. The LSB of the first field provides the LSB of this sequence, and the MSB of the last field provides the MSB;
- If required, fill\_up bits get added, starting after the MSB of this sequence, to make the total number of bits in the sequence a multiple of 8;
- This control bit sequence is partitioned into 4 bits nibbles from which 8 bits bytes are formed by setting the 4 MSBs to 0;
- The checksum is calculated by summing the control bytes and string bytes (modulo 256) and subtracting the result from 256;
- The 8 checksum bits are inserted within the control bit sequence. This is partitioned into 4 bits nibbles and Hamming 8/4 encoded, yielding 8 bits bytes ready for transmission;
- Each character of a string is odd parity encoded. The parity bit is added as the MSB to form an 8 bits byte ready for transmission;
- The bytes are mapped to Teletext and transmitted as described in EN 300 708 [1].

---

## Annex M (informative): Implementation of an EPG prototype

### M.1 General

A prototype of the Electronic Program Guide implementation may be represented by instances of four separate entities.

#### M.1.1 The Generator system

The generator system which maintains the database of EPG information. This system knows which TV programmes are to be transmitted and when, it knows which type of EPG it is to produce, it knows which data to transmit on a stream obeying the 20 ms rule and which to transmit on a stream without the 20 ms rule, and it incorporates a regular update strategy.

The generator system needs to generate application data according to the present document, and it communicates with the transmission system using a protocol defined later in this annex.

#### M.1.2 The Transmission system

The transmission system receives a bundle of data from the generator system, formats it for transmission, adds error detection/correction and transmits it. The data may be multiplexed with a conventional Teletext service. The transmission system need not have any knowledge of the meaning of the data it is transmitting beyond basic format knowledge (the knowledge of the structure as defined in clause 9.1, annex A, and EN 300 708 [1]).

The transmission system communicates with the generator system using a protocol defined later this annex, and it generates Teletext pages.

#### M.1.3 The Receiver system

The receiver system receives Teletext and decodes a data bundle. It corrects errors if necessary (and if possible) and passes the data on to the next stage. It need not have any knowledge of the meaning or structure of the data beyond basic format knowledge (the knowledge of the structure as defined in clause 9.1, in annex A, and in EN 300 708 [1]).

The receiver system receives Teletext pages and passes data to the application system according to a protocol defined in this annex.

#### M.1.4 The Application system

The application system handles the data received from the receiver system and displays it under control of the viewer. The application shall not expect to receive all data correctly, it shall expect errors in the data and formulate the best display it can.

The application system receives data according to a protocol defined in this annex and processes the contents of the data according to the present document.

**NOTE:** This is an idealized view of the system. Domestic EPG equipment is unlikely to be implemented in this manner because of cost or capability constraints. It is the responsibility of the developers of this equipment to ensure that the receiver application interface (however implemented) permits this view.



## M.2 Protocol for data communication

This clause describes one implementation of a serial communications protocol between a generator system and a transmitter system. It may also be possible to use the same protocol between the generator system and an application system for purposes of demonstration and validation where the application can be simulated on a general purpose computer such as a PC.

Moreover, this clause includes an extension to define the method of creating data files which allow generation of the EPG from within a prototype transmission system to allow testing of the transmission path (transmission system to receiver system and application system).

In the real world there may be more than one of each of the entities described. Transmission systems will be broadcasting to a large number of receivers, receivers may receive data from a number of transmission systems. Generally there will be a one-to-one correspondence between a generator system and a transmission system and a one-to-one correspondence between a receiver system and an application system.

Communications will be via RS-232 into a serial port.

The following parameters can be defined by the transmission system operator:

- Line speed 9 600 or 19 200 bits/s;
- Number of start/stop bits;
- Hardware (RTS/CTS) or software (XON/XOF) flow control from transmission system to receiver system.

The following parameters are fixed:

- Eight bits data - no parity;
- No flow control from receiver system to transmission system (the transmission system is always free to send).

NOTE 1: The RS-232 link is assumed to be local and error-free, in the case of a poor line a different protocol should be used.

Data is transferred from the generator system to the transmission system in blocks. Each block begins with a synchronization DLE (0 x 10) character followed by an input control character. The transmission system will automatically queue pages for transmission when they become full.

- The input control character has the following structure;
- The 7 LSBs of the input control character contain the operation required, the MSB contains a stream indicator - if set to 0 the data is relevant to stream 1, otherwise it is for stream 2.

Any value less than 32 (0 x 20) of the 7 LSBs is an application\_id value, and the data for an EPG block follows. A value of "@" (0 x 40) causes the contents of the current page (if any) to be immediately queued for transmission regardless of the amount of data in the current page.

**Bundle Information Structures** (within this protocol) have a special structure, they begin with a block synchronization DLE character, followed by an application\_id (set to 0), block size 8 LSBs, block size 3 MSBs, bundle block contents.

- Synchronization DLE char. (8 bits);
- Application\_id b + stream no. (set to 0);
- Block\_size (8 LSBs);
- Block\_size (3 MSBs) b + 5 bits set to zero;
- Checksum;
- Bundle Information Structure Data (Variable).

**Application blocks** (within this protocol) begin with a block synchronization DLE character, followed by an application\_id with stream number (5 LSBs b + 1 MSB).

The block length (as defined in EN 300 708 [1]) follows, this is the length (in bytes) of the remainder of the structure. It is sent as two bytes of 8 bits and 3 bits in that order.

The next two bytes are a compound item, the first two bits of the first byte contain the access control bits, the next bit contains the copyright bit, the remaining 5 bits in the first byte contain the 5 LSBs of the control block size, the first 4 bits of the next byte contain the 4 MSBs of the control block size. The 4 MSBs of this byte should be set to the first 4 bits of the control\_block\_data (in the EPG application this will be the 4 LSBs of the datatype\_id).

The next group of bytes contain the remainder of the control block data. This is data which will be coded for transmission as 4/8 bit Hamming, for this protocol they are transmitted as pairs of nibbles within each byte, the first nibble is in the 4 LSBs of the byte. The 4 MSBs of the last byte will always be discarded. Any other unused bits in the last two bytes should be set to 0.

The last group of bytes is the string data which contains the string characters to be transmitted. Each character is sent as the 7 LSBs of a byte, the MSB is set to 0. The transmission software will add odd parity to each character.

### Syntax of block protocol

- Synchronization DLE char. (8 bits);
- Application\_id b + stream no. (5 bits b + 1 bit);
- Protocol\_block\_size (8 LSBs);
- Protocol\_block\_size (3 MSBs of Protocol\_block\_size in 3 LSBs) b + 5 bits set to zero;
- Checksum;
- Control\_block\_size (8 LSBs);
- Control\_block\_size (2 MSBs of Control\_block\_size in LSBs) OR with Datatype\_id (in 6 MSBs);
- Control\_block data beginning with CA mode in 2 LSBs then Copyright in next bit and one bit reserved, 4 MSBs set to first nibble of Control\_data\_block;
- Remainder of Control\_data\_block (8 bits per byte transmitted as 4 LSBs in first nibble) fill up last byte with 4 zero bits;
- String\_data (7 bits b + 1 bit set to 0).

The Control\_block\_size is the number of bytes in the Remainder of Control\_block\_data plus 4 (Checksum, Control\_block\_size, Control\_block\_size/Datatype\_id, CA/Copyright/reserved), rounded up to a whole number to allow for filler bits which will be added by the transmission software and which will be set to 0.

The Protocol\_Block\_size is the number of bytes in the block after Protocol\_block\_size including Checksum, Control\_block and String data. The number of bytes in the String\_data is the Protocol\_Block\_size - (3 + Control\_block\_size).

NOTE 2: The Protocol\_block\_size is not the same as the Block\_size because Block\_size includes Hamming coded data. The first 5 bytes of each data item have identical structure.

The transmitted Block\_size and Control\_block\_size, along with Hamming protection and extra filler bits will be generated by the transmission system as the page is being generated.

The contents and structure of the Control\_block\_data and String\_data are as defined in the main body of the present document and are not material to this protocol.

## Responses

The Generator software should at all times be ready to receive and process the following data:

- XON (for software flow control - if enabled);
- XOF (for software flow control - if enabled);
- BEL - implies that flow control has been ignored - data has been lost (Perhaps the transmission software is not running);
- ACK - a correctly structured block has been received and will be processed for transmission;
- NAK - an incorrectly structured block has been received:
  - DLE not present when expected;
  - Unrecognized input control character;
  - Invalid block\_size;
  - Invalid control\_block\_size.
- ESC - a correctly block has been received, however it was sent to stream 2 and this system is not enabled for stream 2 transmission. It will be sent on stream 1.

Any character received other than those above implies that the transmission software is not running or that the port characteristics are not compatible.

The generator software need not wait for an ACK or NAK character before commencing the send of the next structure. In a correctly running system there will be as many ACK characters as structures sent, however in the case of errors there may be as many as one NAK per character sent as the transmission system attempts to synchronize.

## Data files

For prototyping purposes it will be possible to generate data locally on the transmission system, this will be done by generating ASCII based data files rather than feeding data into an RS-232 port. The files generated by this process should contain only text information which will allow the contents to be edited using a conventional text editor, thus testing can be easily repeated and modified. Non-visible characters such as <LF> or <CR> are ignored and should be used to make the file more readable. Data files may contain comments to allow a description of the test data to be carried with the data itself.

If a character which is not a normal text character is to be inserted into the data then it is input as two hexadecimal digits preceded by a "#" character. Any 8 bit value can be input in this manner for example #00 or #FF.

When the end of the file is encountered, the software implicitly adds a DLE @ block to cause the contents of the current page to be transmitted (if any).

The maximum length of any one line of text is 128 characters, this does not restrict the contents of any output as the <CR><LF> characters will be ignored and processing begins at the start of the next text line. Structures may be split over two or more lines, however input of 8 bit values #dd form cannot.

Any data from an exclamation character "!" to the end of line (including any "!" characters) is considered as a comment and will be discarded.

An exclamation character "!" can be input as #21, a "#" character can be input as #23.

The transmission system protocol will add odd parity to all characters in the string block which are not input using the #dd construct. This applies only to data file input.

## M.3 Example of a Bundle Information Block in the Serial Protocol

**Table M.1: A Sample Bundle Information Block in the Serial Protocol**

<b>Data</b>	<b>Explanation</b>
DLE	Synchronization
0X00	Application 0 - Stream 1
0X0A	Protocol_block_size 8 LSBs = 10
0X00	Block_size 3 MSBs, 5 bits set to 0
0XF5	Checksum
0X03	No of applications
0X00	Application 1 is type0
0X00	Application 1 MS Byte
0X01	Application 2 is type 1 (currently undefined)
0X00	Application 2 MS Byte
0X05	Application 3 is type 5 (Currently undefined)
0X00	Application 3 type MS Byte

### Data file example

#10#00#0A#00#F5#03#00#00#01#00#05#10@

## M.4 Example of a Subtitle Information block in the serial protocol

**Table M.2: A Sample Subtitle Information Block in the Serial Protocol**

Data	Explanation
DLE	Synchronization
0X01	Application 1 - Stream 1
0X17	Protocol_block_size 8 LSBs = 23
0X00	Protocol_block_size 3 MSBs, 5 bits set to 0
0XA6	Checksum
0X15	Control_block_size LS bits = 21
0X90	Control block size MS bits = 0/datatype_id = 36
0X7	CA = 3/Copyright = 1/Reserved = 0
0X0 0X0 0X0 0X0	Block_no 16 bits = 0
0XA 0XA	Netwop_no = AA
0X2	Subtitle Descriptor No LS 4 bits = 2
0XC	Subtitle Descriptor No MS 2 bits = 0
0XF	Descriptor_id 6 bits = 63
0X2	Subtitle_no 4 bits = 2
0X0 0X0 0X0 0X0 0X0 0X0	Language 1 24 bits = 0
0X0 0X0 0X0 0X0 0X0 0X0	Page Reference 1 (Dummy Reference)
0X1 0X0 0X0 0X0 0X0 0X0	Language 2 = 1
0X0 0X0 0X0 0X0 0X0 0X0	Page Reference 2 (Dummy Reference)
0X0	Filler to make even number of nibbles (Value reserved)

NOTE: Second part of table (after Control\_block\_size) is represented in nibbles to clarify byte boundary alignment issues.

### Data File example:

#10#01#17#00#A6#15#90#07#00#A0#2A#FC#02#00#00#00#00#00#10#00#00#00#00#00#10@

---

## Annex N (informative): Conversion of PI start\_time to local time

The time of a programme to start - in terms of a broadcasting station's local time - is calculated by adding the network's LTO (from AI) to start\_time (from PI).

A viewer living in a different time zone than a broadcasting station will like to have programme start times in terms of his local time. An EPG decoder may replace AI's LTO so as to display programme start and stop times in terms of the viewers local time.

If the viewer's local time offset with respect to UTC is known, the EPG decoder may use this time offset instead of LTO.


The LTO replacement can be discovered automatically by investigation of the Teletext service of a network operating in the time zone of the searched broadcasting station and investigation of the Teletext service of a network broadcasting in the receiver's time zone. Both Teletext services are assumed to convey their local time in the Teletext page header. Now the difference of these times shall be added to LTO so as to yield the viewer's time offset with respect to UTC.

---

Annex O (informative):  
Void

## Annex P (informative): Transmission Example for an EPG

In order to provide two stream 2 pages between two stream 1 pages, the following transmission scheme is proposed:

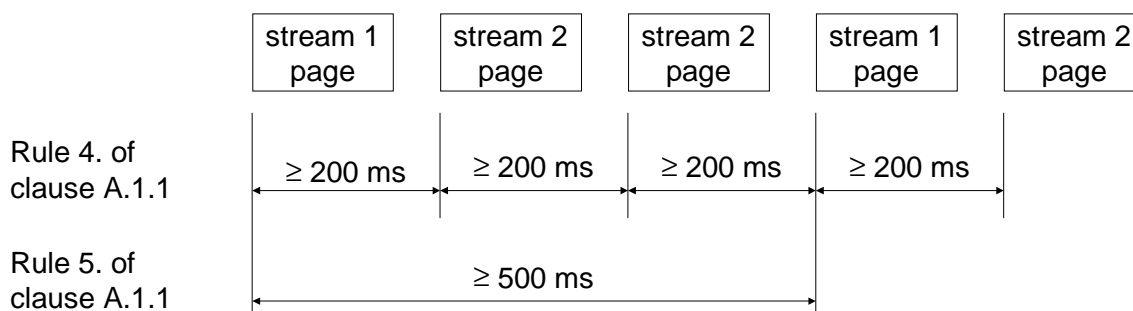

**Figure P.1: Transmission example**

The first stream 1 page transmitted is followed by the first stream 2 page at least 200 ms later. The second stream 2 page can follow after another 200 ms and the second stream 1 page a further 200 ms later. Now there is at least 600 ms between the two stream 1 pages, which is obviously more than the required minimum of 500 ms. This scheme, however, cannot be repeated non-stop, because of rule 6 in clause A.1.1.



---

## History

<b>Document history</b>		
Edition 1	May 1997	Publication as ETS 300 707
V1.2.1	December 2002	One-step Approval Procedure      OAP 20030411: 2002-12-11 to 2003-04-11