

Universal Mobile Telecommunications System (UMTS); Report on Terminal Interfaces - An Overview (3GPP TR 27.901 version 5.0.0 Release 5)



Reference

RTR/TSGT-0227901v500

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under www.etsi.org/key.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	4
1 Scope	5
2 References	5
3 Definitions and abbreviations.....	5
3.1 Abbreviations	5
4 Assumptions of the technical specification work for terminal interfaces	6
4.1 General	6
4.1.1 The 3GPP terminal model.....	6
4.1.2 Requirements	6
4.2 Conclusions	6
4.2.1 AT-commands	7
5 Examples of external interfaces	7
Annex A (informative): Change history	8
History	9

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document discusses external and internal interfaces of a terminal, with the exception of the radio and USIM interfaces. The focus of the study has been on external interfaces, to identify where existing industry standards can be used and whether there would be a need for specifications to be produced within 3GPP.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

No references were identified.

3 Definitions and abbreviations

3.1 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AT Commands	ATtention Commands
EIA	Electronics Industry Association
FCC	Federal Communications Commission
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers
IR	Infrared
IrDA	Infrared Data Association
ISDN	Integrated Services Digital Network
ISO	International Standardisation Organization
ITU-T	International Telecommunications Union – Telecom sector
ME	Mobile Equipment
MT	Mobile Termination
RF	Radio Frequency
TA	Terminal Adaptation
TE	Terminal Equipment
TIA	Telecommunication Industry Association
UART	Universal Asynchronous Receiver and Transmitter
USB	Universal Serial Bus
USIM	Universal Subscriber Identity Module

4 Assumptions of the technical specification work for terminal interfaces

4.1 General

4.1.1 The 3GPP terminal model

The area of external and internal interfaces for 3GPP MEs have been studied and Figure 1 shows the model that has been used. The external interface, other than the radio and USIM interfaces, is the TE-MT/TA interface. An example of an internal interface is the TA-MT interface, as illustrated.

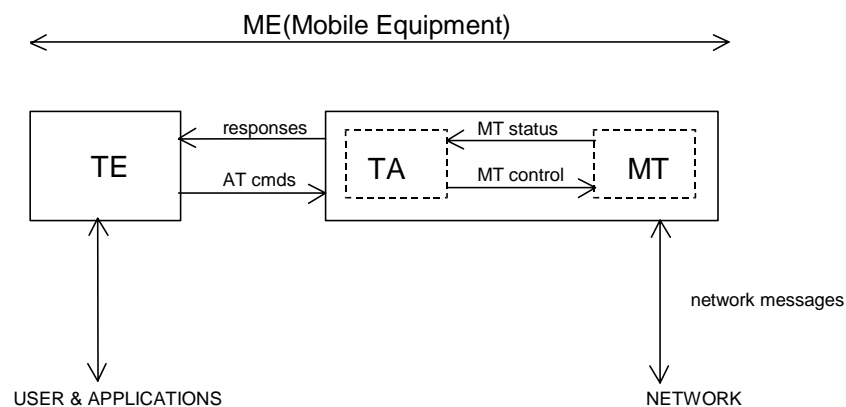


Figure 1: The 3GPP terminal model

4.1.2 Requirements

There is a vast variety of market expectations, depending on end-users' and operators' demands and needs, and the 3GPP terminal design choice must be made under full influence from these market requirements.

The goal is to find a way to minimize the time-to-market of new, evolved interface solutions, at the same time allowing for the widest possible service diversity, that can be provided by a variety of terminal designs.

The success of 3GPP requires that an efficient and flexible approach is found to give a timely and dynamic development of many kinds of terminals, each type optimized relative to its own specific target of market requirements, while at the same time not imposing restrictions on the global circulation of terminals.

4.2 Conclusions

It has been concluded that 3GPP should not produce any technical specifications for terminal interfaces (neither external, i.e. MT/TA-TE, nor internal, e.g. MT-TA) other than the radio interface and the USIM interface. This includes optional as well as mandatory mechanical, electrical and logical specifications for interfaces. As an exception, optional protocols that are necessary for 3GPP terminals and that are *not defined elsewhere* could be standardized. One agreed example is AT commands.

Instead of specifying external interfaces in 3GPP, appropriate open standards should be used for external interfaces for 3GPP terminals. A list of potential examples of such interfaces is shown in Table 1. It should be noted that the list of interfaces in Table 1 is not exhaustive and that new examples are likely to be added in the future as technical development advances. It should also be noted that proprietary external interfaces may be used in the 3GPP terminals. It is then up to the manufacturer to handle the adoption to standard interfaces.

Since the terminal external interfaces (other than the radio interface, the USIM interface and AT commands), are out of scope of 3GPP, the SDOs can develop their own physical connector specification based on their market requirements. Such specifications should be optional to allow for other terminal interface options to exist on those markets.

4.2.1 AT-commands

One important aspect for 3GPP terminals is not being specified in any other specification forum, namely the AT commands. The AT commands are necessary for 3GPP terminals and should therefore be specified in 3GPP. AT commands can be commonly used as a common protocol specification, regardless of whether a wired or wireless connection (IR or RF) is used.

Most of the AT commands will be needed both in GSM and 3GPP. For this reason there is a need to have full access in 3GPP to the GSM defined AT commands.

5 Examples of external interfaces

Below some potential examples of external interface specifications are given.

Table 1: Examples of terminal external interfaces

Interface Standard	Physical Media (connector)	Data Rate	Network Topology	Standard
EIA-232F	Nine wires	Up to 115 kbps	Point to point	TIA/EIA-232-F UART (Intel 8251A Industry Standard)
EPP Enhanced Parallel Port	IEEE 1284 –connector with 25 or 36 wires	Up to 1,5 Mbps	Point to point	IEEE Std 1284-1994
ISDN S-Interface	Eight wires	2X64 kbps + 16 kbps	Point to point	ISO/IEC 8877:1992. ITU-T Recommendation I.430
IEEE 802.3 Ethernet	Four wires	10 Mbps	Multimaster	ISO/IEC 8877:1992. IEEE Std. 802.3 1998 Edition
USB	Four wires (USB Connector)	Up to 12 Mbps	Master to slave devices	USB Specification 1.1
IEEE 1394	Four wires (iLink connector)	100 Mbps – 400 Mbps	Multimaster	IEEE Std. 1394 - 1995
IrDA-SIR	Infra red transceiver (line of sight)	Up to 115 kbps	Point to point(s)	Infrared Data Association Serial Infrared Physical Layer Specification v1.3
IrDA-MIR	Infra red transceiver (line of sight)	Up to 1 Mbps	Point to point(s)	Infrared Data Association Serial Infrared Physical Layer Specification v1.3
IrDA-FIR	Infra red transceiver (line of sight)	Up to 4 Mbps	Point to point(s)	Infrared Data Association Serial Infrared Physical Layer Specification v1.3
802.11 – IR	Infra red transceiver (diffused IR)	Up to 2 Mbps	Multimaster	IEEE Std 802.11-1997
802.11-FHSS	Frequency-Hopping Spread Spectrum RF	Up to 2 Mbps	Multimaster	IEEE Std 802.11-1997
802.11- DSSS	Direct Sequence Spread Spectrum RF	Up to 2 Mbps	Multimaster	IEEE Std 802.11-1997
Bluetooth	Frequency-Hopping Spread Spectrum RF	721 kbs + 57,6 kbs or 2x432,6 kbs	Point to point(s)	Bluetooth Specification 1.0

Annex A (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rel	Subject/Comment	Old	New
2001-03	T#11	-	-	Rel-4	Upgrade to Rel-4	3.0.0	4.0.0
2002-03	T#15	TP-020014	002	Rel-4	Alignment of UE architecture with 23.101	4.0.0	4.1.0
2002-06	T#16	-	-	Rel-5	Upgrade to Rel-5	4.1.0	5.0.0

History

Document history		
V5.0.0	June 2002	Publication