


ETSI TS 101 220 V3.1.0 (2001-01)

Technical Specification

**Integrated Circuits Cards (ICC);
ETSI numbering system for telecommunication;
Application providers (AID)
(Release 1999)**

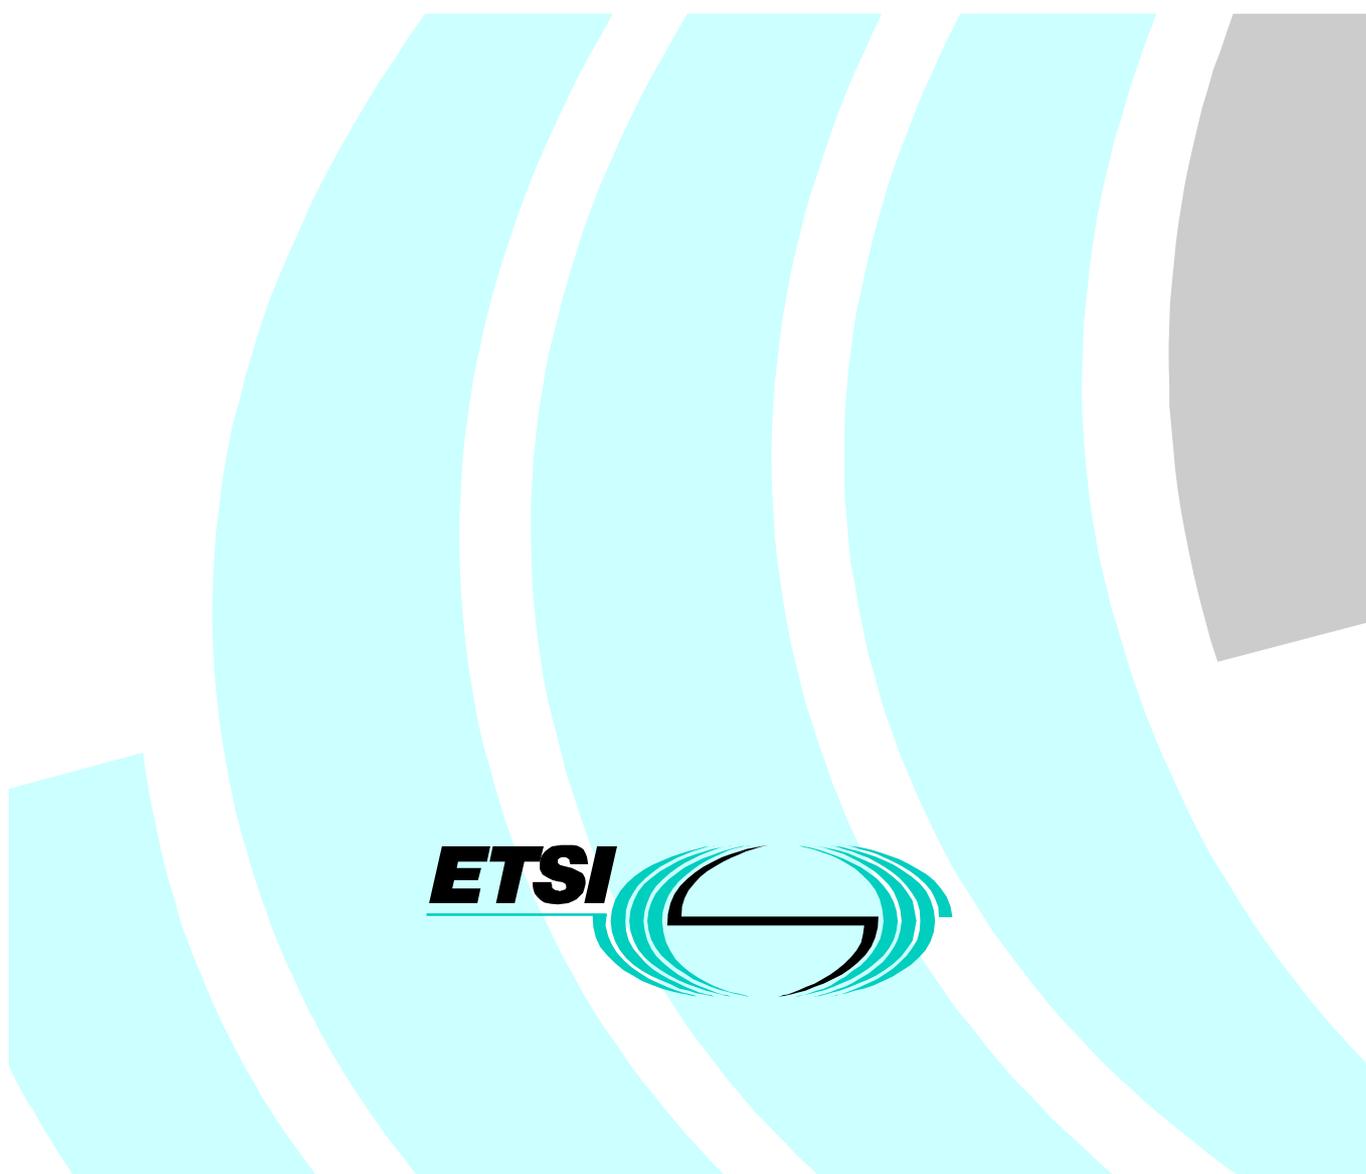

Reference

RTS/SCP-00005

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications
(GSM), Card, ID

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword	4
1 Scope.....	5
2 References	5
3 Definitions and abbreviations.....	6
3.1 Definitions	6
3.2 Abbreviations.....	6
4 Structure of the Application Identifier (AID).....	6
4.1 Registered application provider Identifier (RID).....	6
4.2 Proprietary application Identifier eXtension (PIX).....	7
5 Use of the Application Identifier (AID).....	7
Annex A (informative): Allocated ETSI PIX numbers	8
Annex B (normative): Coding of the PIX for GSM and TETRA Applications	9
Annex C (normative): Coding of the PIX for SIM Toolkit API Packages	10
Annex D (informative): Change history	11
History	12

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Project Smart Card Platform (SCP).

The contents of the present document are subject to continuing work within EP SCP and may change following formal EP SCP approval. If EP SCP modifies the contents of the present document, it will then be republished by ETSI with an identifying change of release date and an increase in version number as follows:

Version 3.x.y

where:

- 3 indicates Release 1999, 4 indicates the subsequent release (called "Release 4")
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated in the specification

NOTE: The present document has been prepared not only by the former ETSI TC ICC, but by ETSI STC TE9 in co-operation with ETSI STC SMG9, ETSI STC RES3/DAM and ETSI STC NA6/UCG.

1 Scope

The present document describes the numbering system for Application IDentifiers (AID) for ETSI telecommunication Integrated Circuits (IC) card applications according to ETSI documents and Application Providers (AP).

The numbering system described in the present document provides a means for an application and related services offered by a provider to identify if a given card contains the elements required by its application and related services.

An AID is used to address an application in the card. It consists of a Registered application provider IDentifier (RID) and a Proprietary application Identifier eXtension (PIX).

The present document describes the coding of the PIX.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] ISO/IEC 7816-5 (1994): "Identification cards - Integrated circuit(s) cards with contacts - Part 5: Numbering system and registration procedure for application identifiers".
- [2] ITU-T Recommendation E.164: "The international public telecommunication numbering plan".
- [3] ISO/IEC 7816-4 (1995): "Information technology - Identification cards - Integrated circuit(s) cards with contacts - Part 4: Interindustry commands for interchange".
- [4] ITU-T Recommendation E.118: "The international telecommunication charge card".
- [5] GSM 03.48: "Digital cellular telecommunications system (Phase 2+); Security Mechanisms for the SIM application toolkit; Stage 2".
- [6] GSM 11.11: "Digital cellular telecommunications system (Phase 2+); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [7] GSM 11.14: "Digital cellular telecommunications system (Phase 2+); Specification of the SIM Application Toolkit for the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [8] GSM 03.19: "Digital cellular telecommunications system (Phase 2+); Subscriber Identify Module Application Programming Interface (SIM API); SIM API for Java Card (TM); Stage 2".
- [9] ETSI ETS 300 812: "Terrestrial Trunked Radio (TETRA); Security aspects; Subscriber Identity Module to Mobile Equipment (SIM - ME) interface".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply (the first two from ISO/IEC 7816-5 [1]):

Application Identifier (AID): data element, which identifies an application in a card. An AID may contain a Registered application provider Identifier (RID). If it contains either a RID or an issuer identification number, then this identification is unambiguous [ISO/IEC 7816-5 [1]]

Application Provider (AP): entity, which provides those components of an application on a card, required to perform the respective application [ISO/IEC 7816-5 [1]]

telecommunication IC card application: application described by an ETSI document


3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AID	Application IDentifier
AP	Application Provider
DECT	Digital Enhanced Cordless Telecommunications
GSM	Global System for Mobile communication
IC	Integrated Circuit(s)
ICC	IC Card
ID	IDentifier
PIX	Proprietary application Identifier eXtension
RID	Registered application provider Identifier
STC	Technical Sub-Committee (in ETSI)
TC	Technical Committee (in ETSI)
TETRA	TErrestrial Trunk RAdio
UPT	Universal Personal Telecommunications

4 Structure of the Application IDentifier (AID)

In accordance with ISO/IEC 7816-5 [1], the AID has the following structure:

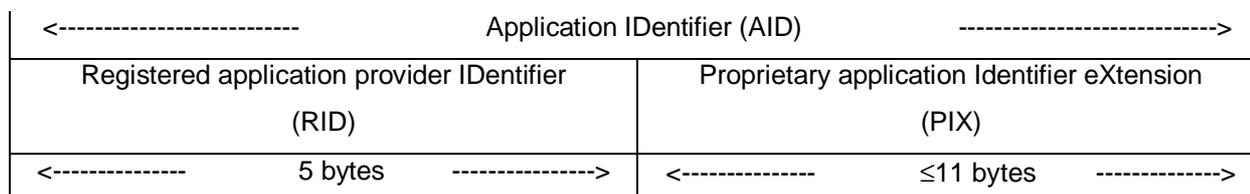

The AID consists of a Registered application provider IDentifier (RID) of 5 bytes and a Proprietary application Identifier eXtension (PIX) of up to 11 bytes.

4.1 Registered application provider IDentifier (RID)

The ETSI RID, as registered by ISO according to ISO/IEC 7816-5 [1], is 'A000000009'.

4.2 Proprietary application Identifier eXtension (PIX)

The PIX is used at the discretion of ETSI and can contain between 7 and 11 bytes of information. The PIX is coded in hexadecimal. Hexadecimal digit 1 is the most significant digit.

Digit 1-4 ETSI application code

Purpose:	To be used for identification of the standardized ETSI card application (e.g. GSM, DECT, UPT, pre-paid application). Different versions of an application may have individual codings.
Management:	Assigned by ETSI on request from the ETSI technical body responsible for the document in question.
Coding:	Hexadecimal. The coding indicates the ETSI document that specifies the standardized ETSI card application and the ETSI PIX number. The correspondence between digits 1-4 and the ETSI document in question can be seen in a list maintained by the ETSI Secretariat (see annex A). Escape value '0000' is reserved for use by the ETSI Secretariat for proprietary ETSI applications.

Digits 5-8 Country code

Purpose:	To indicate the country of the application provider of the ETSI standardized application.
Management:	Assigned by ETSI.
Coding:	According to ITU Recommendation E.164 [2]. The coding is right justified and padded with 'F' on the left.

NOTE: List of actual country codes is published by ITU.

Digits 9-14 Application provider code

Purpose:	Individual code for the application provider of the ETSI standardized application.
Management:	Assigned by ETSI.
Coding:	Hexadecimal. The coding is right justified and padded with 'F' on the left.

Digits 15 up to 22 Application provider field. Optional. Up to 8 digits

Purpose:	The use of this field is entirely up to the application provider. It may, for instance, be used to indicate "local" versions, revisions, etc. of the ETSI standardized application. According to ISO/IEC 7816-5 [1], if the AID is 16 bytes long, then the value 'FF' for the least significant byte (digits 21 and 22) is reserved for future use.
Management:	Application provider.
Coding:	Hexadecimal.

Digits 1 to 14 are assigned and registered by the ETSI Secretariat.

5 Use of the Application Identifier (AID)

The use of the AID is specified in ISO/IEC 7816-4 [3] and ISO/IEC 7816-5 [1].

Annex A (informative): Allocated ETSI PIX numbers

Table A.1: Allocation of ETSI PIX

Application	AID			ETSI document (note 2)
	RID (note 1)	ETSI App Code	PIX	
GSM	'A000000009'	'0001'	See annex B for further coding details	GSM 11.11 [6]
GSM SIM toolkit	'A000000009'	'0002'	See annex B for further coding details	GSM 11.14 [7]
GSM SIM API for Java™ Card	'A000000009'	'0003'	See annex C for further coding details	GSM 03.19 [8]
TETRA	'A000000009'	'0004'	See annex C for further coding details	ETS 300 812 [9]
	'A000000009'			
AID	Application IDentifier			
PIX	Proprietary application IDentifier eXtension			
RID	Registered application provider IDentifier			
NOTE 1:	The ETSI RID, as registered by ISO according to ISO/IEC 7816-5 [1], is 'A000000009'.			
NOTE 2:	It is the responsibility of the ETSI technical body, in charge of the application standardization, to inform the ETSI Secretariat when the respective ETSI document is withdrawn or renumbered.			

Annex B (normative): Coding of the PIX for GSM and TETRA Applications

The following codings apply for the structure of the PIX when the application is either:

- the GSM application (i.e. ETSI application code = '0001' - as shown in annex A); or
- a GSM SIM Toolkit application (i.e. ETSI application code = '0002' as shown in Annex A); or-the TETRA application (i.e. ETSI application code = '0004' as shown in annex A):

Digit 1-4 ETSI application code

Coding: '0001' or '0002' as specified in clause 4.2 of this document

Digits 5-8 Country code

Coding: As specified in clause 4.2 of this document

Digits 9-14 Application provider code

Coding: As defined below.

9	10	11	12	13	14	
					Industry Code '89' for Telecom	
					Card issuer Code. Coded in BCD and right justified. Unused digits to be padded with 'F' on the left.	

Card issuer code and Industry code are coded in line with ITU-T Recommendation E.118.

Digits 15 up to 22 Application provider field. 8 digits

Digits 15 to 22 shall be used only if the ETSI application code is '0002' (i.e. GSM SIM toolkit)

Coding: Hexadecimal. If the application is a SIM Toolkit application (as defined in GSM 11.14 [7]), the coding is as defined below.

15	16	17	18	19	20	21	22	
						Application Provider specific data		
						Toolkit Application Reference (TAR)		

- Toolkit Application Reference as specified in GSM 03.48 [5], is managed by the application provider
- Application Provider specific data: For application administration purposes.

Annex C (normative): Coding of the PIX for SIM Toolkit API Packages

The following coding apply for the structure of the PIX when the application is a SIM Toolkit API package (i.e. ETSI application code = '0003'- as defined in annex A):

Digit 1-4 ETSI application code


Coding: '0003' as specified in clause 4.2 of this document

Digits 5-8 Not used

Coding: set to 'FF FF'


Digits 9-14 Industry code

Coding: As defined below.

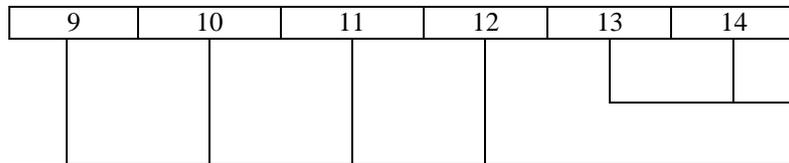

Industry Code
'89' for Telecom
Not used - set to
'FF FF'.

Digits 15 up to 22 Application provider field. 8 digits

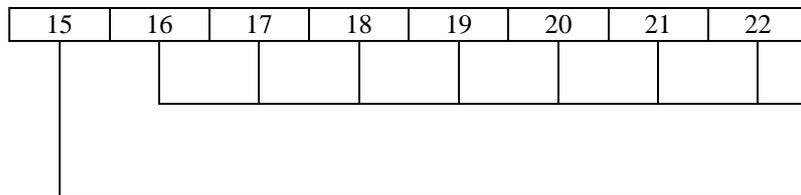

Defined in
03.19 [8]

API Type, '1'
for Java Card

Annex D (informative): Change history

The table below indicates all changes that have been incorporated into the present document since it was placed under change control.

Change history								
Date	Meeting	Plenary Doc.	CR	Rev	Cat	Subject/Comment	Old	New
1997-10						TC ICC published version 1.2.1. The on-going maintenance of this deliverable was transferred from TC ICC to TC SMG due to the closure of TC ICC in early 1998.		1.2.1
1998-10	SMG #27	98-0673			B	Addition of Normative Annex C, introducing AID coding for GSM and Toolkit applications	1.2.1	1.3.0
1999-09	SMG #29	P-99-415			B	Addition of Normative Annex D, introducing AID coding for SIM Toolkit packages	1.3.0	1.4.0
2000-05	SMG# 31	P-00-142			F	Alignment of the AID allocation procedure	1.4.0	3.0.0
		P-00-142			B	Definition of an AID for TETRA		
						<i>NOTE: At SMG #31, it was agreed it would be more appropriate for the present document to be classified as an "ETSI Technical Specification" rather than an "ETSI Guide". This resulted in the deliverable number being changed from EG 201 220 to TS 101 220. Furthermore, to align the specification version numbering system with that of the 3GPP, the new version number became 3.0.0.</i>		
2000-12	SCP-03	9-00-0443			F	Correction of the AID coding for the SIM API packages	3.0.0	3.1.0

History

Document history		
V3.0.0	May 2000	Publication
V3.1.0	January 2001	Publication