



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 196-3**

January 1997

---

Source: ETSI TC-SPS

Reference: DE/SPS-05005-3

ICS: 33.020

**Key words:** ISDN, DSS1, supplementary service, testing, TSS&TP, user

**Integrated Services Digital Network (ISDN);  
Generic functional protocol for the support of  
supplementary services;  
Digital Subscriber Signalling System No. one (DSS1) protocol;  
Part 3: Test Suite Structure and Test Purposes (TSS&TP)  
specification for the user**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.



## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions .....	8
3.1 Definitions related to conformance testing .....	8
3.2 Definitions related to ETS 300 196-1 .....	8
4 Abbreviations .....	9
5 General Test Suite Structure (TSS) .....	9
6 TSS&TP .....	10
6.1 Introduction .....	10
6.1.1 TP naming convention .....	10
6.1.2 Source of TP definition .....	10
6.1.3 TP structure .....	10
6.1.4 Test strategy .....	11
6.1.5 Test of call states .....	11
6.2 User TSS&TP for the generic functional protocol .....	12
6.2.1 TSS&TP for clauses 1 to 6 .....	12
6.2.2 TSS&TP for clause 7 .....	12
6.2.2.1 TSS for clause 7 .....	12
6.2.2.2 TPs for clause 7 .....	12
6.2.2.2.1 Auxiliary states .....	12
6.2.2.2.1.1 Hold Request .....	12
6.2.2.2.1.2 Retrieve Request .....	13
6.2.2.2.1.3 Hold Indication .....	13
6.2.2.2.1.4 Retrieve Indication .....	13
6.2.2.2.1.5 Call Held .....	14
6.2.2.2.2 Hold function .....	14
6.2.2.2.2.1 Initiating entity .....	14
6.2.2.2.2.2 Responding entity .....	16
6.2.2.2.3 Retrieve function .....	19
6.2.2.2.3.1 Initiating entity .....	19
6.2.2.2.3.2 Responding entity .....	20
6.2.2.2.4 Clearing of a held call .....	24
6.2.3 TSS&TP for clause 8 .....	25
6.2.3.1 TSS for clause 8 .....	25
6.2.3.2 TPs for clause 8 .....	26
6.2.3.2.1 Introduction .....	26
6.2.3.2.2 Application of operations (subclause 8.2) .....	26
6.2.3.2.2.1 Invocation (subclause 8.2.2.1) .....	26
6.2.3.2.2.2 Return result (subclause 8.2.2.2) .....	27
6.2.3.2.2.3 Return error (subclause 8.2.2.3) .....	27
6.2.3.2.2.4 Reject (subclause 8.2.2.4) .....	27
6.2.3.2.3 Transport of components (subclause 8.3) .....	28
6.2.3.2.3.1 Bearer related transport (subclause 8.3.1) .....	28
6.2.3.2.3.2 Bearer independent transport (subclause 8.3.2) .....	28
6.2.3.2.3.2.1 Connection-oriented (subclause 8.3.2.1) .....	28

		6.2.3.2.3.2.2	Connectionless (subclauses 8.3.2.2 and 8.3.2.4) .....	31
		6.2.3.2.4	Error procedures (subclause 8.4).....	32
6.2.4	TSS&TP for clause 9 .....			32
	6.2.4.1	TSS for clause 9 .....		32
	6.2.4.2	TPs for clause 9 .....		32
		6.2.4.2.1	Introduction.....	32
		6.2.4.2.2	Bearer-related notifications .....	32
		6.2.4.2.3	Bearer-independent notifications (subclause 9.4).....	34
6.2.5	TSS&TP for clause 10 .....			35
	6.2.5.1	TSS for clause 10 .....		35
	6.2.5.2	TPs for clause 10 .....		35
		6.2.5.2.1	Network-side channel reservation function.....	35
		6.2.5.2.1.1	Implicit reservation .....	35
		6.2.5.2.1.2	Explicit reservation .....	36
		6.2.5.2.1.2.1	Explicit reservation control .....	36
		6.2.5.2.1.2.2	Explicit reservation management.....	36
		6.2.5.2.1.2.3	Explicit reservation cancellation .....	37
		6.2.5.2.2	Generic procedures for supplementary service management.....	37
		6.2.5.2.2.1	Activation.....	37
		6.2.5.2.2.2	Deactivation.....	38
		6.2.5.2.2.3	Interrogation .....	38
		6.2.5.2.3	Generic status request procedure.....	39
6.2.6	TSS&TP for clause 11 .....			40
	6.2.6.1	TSS for clause 11 .....		40
	6.2.6.2	TPs for clause 11 .....		40
		6.2.6.2.1	Facility information element .....	40
		6.2.6.2.2	Extended facility information element ..	40
6.2.7	TSS&TP for annex D .....			41
	6.2.7.1	TSS for annex D .....		41
	6.2.7.2	TPs for annex D .....		41
		6.2.7.2.1	Definition of Q.931 information elements.....	41
7	Compliance.....			41
8	Requirements for a comprehensive testing service .....			41
	History .....			42

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 3 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) generic functional protocol for the support of supplementary services, as described below:

Part 1: "Protocol specification";

Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";

**Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";**

Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";

Part 5: "TSS&TP specification for the network";

Part 6: "ATS and partial PIXIT proforma specification for the network".

Transposition dates	
Date of adoption	8 November 1996
Date of latest announcement of this ETS (doa):	30 April 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 October 1997
Date of withdrawal of any conflicting National Standard (dow):	31 October 1997

Blank page

## 1 Scope

This third part of ETS 300 196 specifies the Test Suite Structure and Test Purposes (TSS&TP) for the User side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [6]) of implementations conforming to the stage three standard for the generic functional protocol for the support of supplementary services for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, ETS 300 196-1 [1].

A further part of this ETS specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma based on this ETS. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the Network side of the T reference point or coincident S and T reference point of implementations conforming to ETS 300 196-1 [1].

## 2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol Specification".
- [2] ETS 300 196-2: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [3] ISO/IEC 9646-1: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 1: General Concepts".
- [4] ISO/IEC 9646-2: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 2: Abstract Test Suite specification".
- [5] ISO/IEC 9646-3: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 3: The Tree and Tabular Combined Notation".
- [6] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
- [7] ETS 300 102-1: "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specifications for basic call control".
- [8] ITU-T Recommendation I.112 (1993): "Vocabulary and terms for ISDNs".
- [9] CCITT Recommendation E.164 (1991): "Numbering plan for the ISDN era".
- [10] ITU-T Recommendation I.210 (1993): "Principles of the telecommunication services supported by an ISDN and the means to describe them".
- [11] I-ETS 300 314: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1); Protocol Implementation Conformance Statement (PICS) proforma specification for signalling network layer protocol for circuit-mode basic call control (basic access, user)".
- [12] CCITT Recommendation X.209 (1988): "Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)".

### 3 Definitions

For the purposes of this ETS, the following definitions apply:

#### 3.1 Definitions related to conformance testing

**abstract test case:** Refer to ISO/IEC 9646-1 [3].

**Abstract Test Suite (ATS):** Refer to ISO/IEC 9646-1 [3].

**active test:** A test case where the IUT is required to send a particular message, but not in reaction to a received message. This would usually involve the use of PIXIT information to see how this message can be generated and quite often is specified in an ATS using an implicit send event.

**Implementation Under Test (IUT):** Refer to ISO/IEC 9646-1 [3].

**implicit send event:** Refer to ISO/IEC 9646-3 [5].

**lower tester:** Refer to ISO/IEC 9646-1 [3].

**passive test:** A test case where the IUT is required to respond to a protocol event (e.g. received message) with another protocol event (sends message) and normally does not require any special operator intervention such as is associated with the implicit send event.

**point of control and observation:** Refer to ISO/IEC 9646-1 [3].

**Protocol Implementation Conformance Statement (PICS):** Refer to ISO/IEC 9646-1 [3].

**PICS proforma:** Refer to ISO/IEC 9646-1 [3].

**Protocol Implementation eXtra Information for Testing (PIXIT):** Refer to ISO/IEC 9646-1 [3].

**PIXIT proforma:** Refer to ISO/IEC 9646-1 [3].

**system under test:** Refer to ISO/IEC 9646-1 [3].

**Test Purpose (TP):** Refer to ISO/IEC 9646-1 [3].

#### 3.2 Definitions related to ETS 300 196-1

**call held auxiliary state:** See ETS 300 196-1 [1], subclause 7.1.2.

**call reference:** See ETS 300 102-1 [7], subclause 4.3.

**called user:** The user at the origination side of the call.

**calling user:** The user at the destination side of the call.

**component:** See ETS 300 196-1 [1], subclause 11.2.2.1.

**hold requested auxiliary state:** See ETS 300 196-1 [1], subclause 7.1.2.

**idle auxiliary state:** See ETS 300 196-1 [1], subclause 7.1.2.

**Integrated Services Digital Network (ISDN):** See ITU-T Recommendation I.112 [8], definition 308.

**ISDN number:** A number conforming to the numbering and structure specified in CCITT Recommendation E.164 [9].

**invoke component:** See ETS 300 196-1 [1], subclause 11.2.2.1.



**retrieve requested auxiliary state:** See ETS 300 196-1 [1], subclause 7.1.2.

**return error component:** See ETS 300 196-1 [1], subclause 11.2.2.1.

**return result component:** See ETS 300 196-1 [1], subclause 11.2.2.1.

**service; telecommunication service:** See ITU-T Recommendation I.112 [8], definition 201.

**supplementary service:** See ITU-T Recommendation I.210 [10], subclause 2.4.

**user:** The DSS1 protocol entity at the User side of the user-network interface where a T reference point or coincident S and T reference point applies.

**user (S/T):** The DSS1 protocol entity at the network side of the user-network interface where a coincident S and T reference point applies.

**user (T):** The DSS1 protocol entity at the User side of the user-network interface where a T reference point applies (User is the Private ISDN).

## 4 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
CR	Call Reference
DSS1	Digital Subscriber Signalling System No. one
GFP	Generic Functional Protocol
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
TP	Test Purpose
TSS	Test Suite Structure
U00	Null call state
U03	Outgoing Call Proceeding call state
U04	Call Delivered call state
U07	Call Received call state
U08	Connect Request call state
U09	Incoming Call Proceeding call state
U10	Active call state
U25	Overlap Receiving call state
UI	Unnumbered Information

## 5 General Test Suite Structure (TSS)

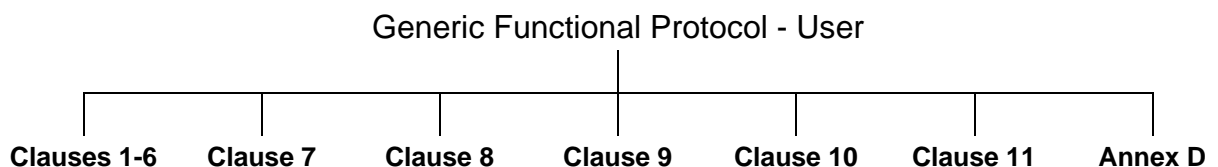


Figure 1: Test suite structure

More detailed TSSs for each group (branch) are contained in separate subclauses.

## 6 TSS&TP

### 6.1 Introduction

For each test requirement a TP is defined.

#### 6.1.1 TP naming convention

TPs are numbered, starting at 001, within each group. Groups are organized according to the TSS. Additional references are added to identify the actual test suite and whether it applies to the network or the user (see table 1).

**Table 1: TP identifier naming convention scheme**

Identifier:	<b>&lt;ss&gt;_&lt;iut&gt;&lt;clause&gt;_&lt;group&gt;_&lt;nnn&gt;</b>		
<ss>	=	supplementary service:	e.g. "GFP"
<iut>	=	type of IUT:	U      User N      Network
<clause>	=	clause	1 or 2 character field representing a clause number from ETS 300 196-1 [1]
<group>	=	group	2 digit field representing group reference according to TSS
<nnn>	=	sequential number	(001-999)

#### 6.1.2 Source of TP definition

The TPs are based on ETS 300 196-1 [1].

#### 6.1.3 TP structure

Each TP has been written in a manner which is consistent with all other TPs. The intention of this is to make the TPs more readable and checkable. A particular structure has been used and this is illustrated in table 2. This table should be read in conjunction with any TP, i.e. use a TP as an example to fully understand the table.

Table 2: Structure of a single TP

TP part	Text	Example
<b>Header</b>	<Identifier> <i>tab</i> <paragraph number in base ETS> <i>tab</i> <type of test> <i>CR</i>	see table 1 <b>subclause 0.0.0</b> <b>valid, invalid, inopportune</b>
<b>Stimulus</b>	Ensure that the IUT in the <basic call state> <trigger> <i>see below for message structure</i> <i>or</i> <goal>	U10, U10, etc. receiving a XXXX message to request a ...
<b>Reaction</b>	<action> <conditions> <i>if the action is sending</i> <i>see below for message structure</i> <next action>, <i>etc.</i> and remains in the same state <i>or</i> and enters state <state>	sends, saves, does, etc. using en-bloc sending, ...
<b>Message structure</b>	<message type> message containing a <i>a)</i> <info element> information element with <i>b)</i> a <field name> encoded as <i>or</i> including <coding of the field> and <i>back to a or b,</i>	SETUP, FACILITY, CONNECT, ...  Bearer capability, Facility, ...
<b>NOTE:</b>	Text in italics will not appear in TPs and text between <> is filled in for each TP and may differ from one TP to the next.	

#### 6.1.4 Test strategy

As the base standard ETS 300 196-1 [1] contains no explicit requirements for testing, the TPs were generated as a result of an analysis of the base standard and the PICS specification ETS 300 196-2 [2]. The criteria applied include the following:

- only the requirements from the point of view of the T or coincident S and T reference point are considered;
- whether or not a test case can be built from the TP is not considered.

#### 6.1.5 Test of call states

Many TPs include a reference to the IUT's final call state after the realization of the TP. In these cases the TP includes the requirement to ensure that the IUT has entered this particular final call state. Ensuring that the IUT is in a particular call state shall be realized by following the procedures described in subclause 5.8.10 of ETS 300 102-1 [7]. According to these procedures, the IUT on receipt of a STATUS ENQUIRY message, shall respond with a STATUS message indicating, in the third octet of the Call state information element, the current call state of the IUT. This exchange of messages is not mentioned explicitly in each TP but is considered to be implicit in the reference to the final call state. This way of phrasing the TPs has been used to avoid over-complicating the text and structure of the TPs and to improve the readability.

6.2 User TSS&TP for the generic functional protocol

6.2.1 TSS&TP for clauses 1 to 6

None identified.

6.2.2 TSS&TP for clause 7

6.2.2.1 TSS for clause 7

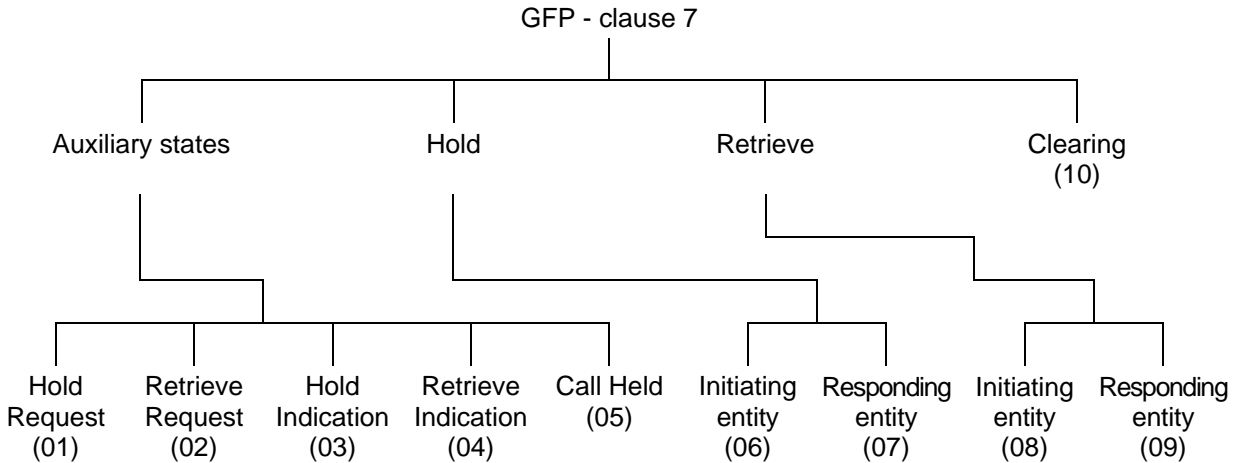


Figure 2: TSS

6.2.2.2 TPs for clause 7

**Selection:** IUT supports the functional protocol for the control of supplementary services.  
 PICS: MCu 1.

6.2.2.2.1 Auxiliary states

6.2.2.2.1.1 Hold Request

**Selection:** IUT supports the functions of an initiating entity. PICS: R 5.1.

**GFP\_U7\_01\_001**      **subclause 7.1.2, 3rd paragraph**      **inopportune**  
 Ensure that IUT, while in the Active call state U10 and Hold Request auxiliary state, entering the Null call state U00,  
 enters the Idle auxiliary state.

**GFP\_U7\_01\_002**      **subclause 7.1.2, 3rd paragraph**      **inopportune**  
 Ensure that IUT, while in the Active call state U10 and Hold Request auxiliary state, entering the Disconnect Request call state U11,  
 enters the Idle auxiliary state.

**GFP\_U7\_01\_003**      **subclause 7.1.2, 4th paragraph**      **inopportune**  
 Ensure that IUT, while in the Active call state U10 and Hold Request auxiliary state, entering the Disconnect Indication call state U12,  
 enters the Idle auxiliary state.

#### 6.2.2.2.1.2 Retrieve Request

**Selection:** IUT supports the functions of an initiating entity. PICS: R 5.1.

**GFP\_U7\_02\_001**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Retrieve Request auxiliary state, entering the Null call state U00,  
enters the Idle auxiliary state.

**GFP\_U7\_02\_002**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Retrieve Request auxiliary state, entering the Disconnect Request call state U11,  
enters the Idle auxiliary state.

**GFP\_U7\_02\_003**            **subclause 7.1.2, 4th paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Retrieve Request auxiliary state, entering the Disconnect Indication call state U12,  
it remains in the same auxiliary state.

#### 6.2.2.2.1.3 Hold Indication

**Selection:** IUT supports the functions of an responding entity. PICS: R 5.2.

**GFP\_U7\_03\_001**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Hold Indication auxiliary state, entering the Null call state U00,  
enters the Idle auxiliary state.

**GFP\_U7\_03\_002**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Hold Indication auxiliary state, entering the Disconnect Request call state U11,  
enters the Idle auxiliary state.

**GFP\_U7\_03\_003**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Hold Indication auxiliary state, entering the Disconnect Indication call state U12,  
enters the Idle auxiliary state.

#### 6.2.2.2.1.4 Retrieve Indication

**Selection:** IUT supports the functions of an responding entity. PICS: R 5.2.

**GFP\_U7\_04\_001**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Retrieve Indication auxiliary state, entering the Null call state U00,  
enters the Idle auxiliary state.

**GFP\_U7\_04\_002**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Retrieve Indication auxiliary state, entering the Disconnect Request call state U11,  
enters the Idle auxiliary state.

**GFP\_U7\_04\_003**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Retrieve Indication auxiliary state, entering the Disconnect Indication call state U12,  
it remains in the same auxiliary state.

**6.2.2.2.1.5 Call Held**

**GFP\_U7\_05\_001**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Call Held auxiliary state, entering the Null call state U00,  
enters the Idle auxiliary state.

**GFP\_U7\_05\_002**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Call Held auxiliary state, entering the Disconnect Request call state U11,  
enters the Idle auxiliary state.

**GFP\_U7\_05\_003**            **subclause 7.1.2, 3rd paragraph**            **inopportune**  
Ensure that IUT, while in the Active call state U10 and Call Held auxiliary state, entering the Disconnect Indication call state U12,  
it remains in the same auxiliary state.

**6.2.2.2.2 Hold function**

**6.2.2.2.2.1 Initiating entity**

**Selection:** IUT supports the functions of an initiating entity. PICS: R 5.1.

**GFP\_U7\_06\_001**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Idle auxiliary state,  
is able to transmit a HOLD message and enters the Hold Request auxiliary state.

**GFP\_U7\_06\_002**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Idle auxiliary state,  
is able to transmit a HOLD message and enters the Hold Request auxiliary state.

**GFP\_U7\_06\_003**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Call Received call state U07 and Idle auxiliary state,  
is able to transmit a HOLD message and enters the Hold Request auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_06\_004**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Connect Request call state U08 and Idle auxiliary state,  
is able to transmit a HOLD message and enters the Hold Request auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_06\_005**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Idle auxiliary state,  
is able to transmit a HOLD message and enters the Hold Request auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_06\_006**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Active call state U10 and Idle auxiliary state,  
is able to transmit a HOLD message and enters the Hold Request auxiliary state.

**GFP\_U7\_06\_007**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Hold Request auxiliary state, on receipt of a HOLD ACKNOWLEDGE message,  
enters the Call Held auxiliary state.

**GFP\_U7\_06\_008**            **subclause 7.2.1.1**            **valid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Hold Request auxiliary state, on receipt of a HOLD ACKNOWLEDGE message,  
enters the Call Held auxiliary state.



**6.2.2.2.2      Responding entity**

**Selection:** IUT supports the functions of an responding entity. PICS: R 5.2.

**GFP\_U7\_07\_001      subclause 7.2.2.1      valid**

Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**GFP\_U7\_07\_002      subclause 7.2.2.1      valid**

Ensure that the IUT, while in the Call Delivered call state U04 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**GFP\_U7\_07\_003      subclause 7.2.2.1      valid**

Ensure that the IUT, while in the Call Received call state U07 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_004      subclause 7.2.2.1      valid**

Ensure that the IUT, while in the Connect Request call state U08 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_005      subclause 7.2.2.1      valid**

Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_006      subclause 7.2.2.1      valid**

Ensure that the IUT, while in the Active call state U10 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**GFP\_U7\_07\_007      subclause 7.2.2.1      valid**

Ensure that the user, while in the Outgoing Call Proceeding call state U03 and Hold Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**GFP\_U7\_07\_008      subclause 7.2.2.1      valid**

Ensure that the user, while in the Call Delivered call state U04 and Hold Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**GFP\_U7\_07\_009      subclause 7.2.2.1      valid**

Ensure that the user, while in the Call Received call state U07 and Hold Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.



**GFP\_U7\_07\_010**      **subclause 7.2.2.1**      **valid**  
Ensure that the user, while in the Connect Request call state U08 and Hold Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_011**      **subclause 7.2.2.1**      **valid**  
Ensure that the user, while in the Incoming Call Proceeding call state U09 and Hold Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_012**      **subclause 7.2.2.1**      **valid**  
Ensure that the user, while in the Active call state U10 and Hold Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD ACKNOWLEDGE message and enters the Call Held auxiliary state.

**GFP\_U7\_07\_013**      **subclause 7.2.2.2, 1st paragraph**      **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Hold Indication auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Hold Indication auxiliary state.

**GFP\_U7\_07\_014**      **subclause 7.2.2.2, 1st paragraph**      **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Call Held auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_07\_015**      **subclause 7.2.2.2, 1st paragraph**      **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Retrieve Indication auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Retrieve Indication auxiliary state.

**GFP\_U7\_07\_016**      **subclause 7.2.2.2, 1st paragraph**      **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Retrieve Request auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Retrieve Request auxiliary state.

**GFP\_U7\_07\_017**      **subclause 7.2.2.2, 2nd paragraph**      **inopportune**  
Ensure that the IUT, while in the Null call state U00 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Idle auxiliary state.

**GFP\_U7\_07\_018**      **subclause 7.2.2.2, 2nd paragraph**      **inopportune**  
Ensure that the IUT, while in the Call Initiated call state U01 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Idle auxiliary state.

**GFP\_U7\_07\_019**      **subclause 7.2.2.2, 2nd paragraph**      **inopportune**  
Ensure that the IUT, while in the Overlap Sending call state U02 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Idle auxiliary state.

**GFP\_U7\_07\_020**      **subclause 7.2.2.2, 2nd paragraph**      **inopportune**  
Ensure that the IUT, while in the Disconnect Request call state U11 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Idle auxiliary state.

**GFP\_U7\_07\_021**            **subclause 7.2.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Overlap Receiving call state U25 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with cause #101 and remains in the Idle auxiliary state.

**GFP\_U7\_07\_022**            **subclause 7.2.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Disconnect Indication call state U12 and Idle auxiliary state, on receipt of a HOLD message,  
ignores it and remains in the Idle auxiliary state.

**GFP\_U7\_07\_023**            **subclause 7.2.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Release Request call state U19 and Idle auxiliary state, on receipt of a HOLD message,  
ignores it and remains in the Idle auxiliary state.

**GFP\_U7\_07\_024**            **subclause 7.2.2.2, 4th paragraph**            **invalid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with an appropriate cause value, if the Hold function is not permitted, and remains in the Idle auxiliary state.

**GFP\_U7\_07\_025**            **subclause 7.2.2.2, 4th paragraph**            **invalid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with an appropriate cause value, if the Hold function is not permitted, and remains in the Idle auxiliary state.

**GFP\_U7\_07\_026**            **subclause 7.2.2.2, 4th paragraph**            **invalid**  
Ensure that the IUT, while in the Call Received call state U07 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with an appropriate cause value, if the Hold function is not permitted, and remains in the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_027**            **subclause 7.2.2.2, 4th paragraph**            **invalid**  
Ensure that the IUT, while in the Connect Request call state U08 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with an appropriate cause value, if the Hold function is not permitted, and remains in the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_028**            **subclause 7.2.2.2, 4th paragraph**            **invalid**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with an appropriate cause value, if the Hold function is not permitted, and remains in the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_07\_029**            **subclause 7.2.2.2, 4th paragraph**            **invalid**  
Ensure that the IUT, while in the Active call state U10 and Idle auxiliary state, on receipt of a HOLD message,  
sends a HOLD REJECT message with an appropriate cause value, if the Hold function is not permitted, and remains in the Idle auxiliary state.

**6.2.2.2.3 Retrieve function**

**6.2.2.2.3.1 Initiating entity**

**Selection:** IUT supports the functions of an initiating entity. PICS: R 5.1.

**GFP\_U7\_08\_001 subclause 7.4.1.1, 1st paragraph valid**

Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Call Held auxiliary state, is able to transmit a RETRIEVE message and enters the Retrieve Request auxiliary state.

**GFP\_U7\_08\_002 subclause 7.4.1.1, 1st paragraph valid**

Ensure that the IUT, while in the Call Delivered call state U04 and Call Held auxiliary state, is able to transmit a RETRIEVE message and enters the Retrieve Request auxiliary state.

**GFP\_U7\_08\_003 subclause 7.4.1.1, 1st paragraph valid**

Ensure that the IUT, while in the Call Received call state U07 and Call Held auxiliary state, is able to transmit a RETRIEVE message and enters the Retrieve Request auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_004 subclause 7.4.1.1, 1st paragraph valid**

Ensure that the IUT, while in the Connect Request call state U08 and Call Held auxiliary state, is able to transmit a RETRIEVE message and enters the Retrieve Request auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_005 subclause 7.4.1.1, 1st paragraph valid**

Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Call Held auxiliary state, is able to transmit a RETRIEVE message and enters the Retrieve Request auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_006 subclause 7.4.1.1, 1st paragraph valid**

Ensure that the IUT, while in the Active call state U10 and Call Held auxiliary state, is able to transmit a RETRIEVE message and enters the Retrieve Request auxiliary state.

**GFP\_U7\_08\_007 subclause 7.4.1.1, 5th paragraph valid**

Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Retrieve Request auxiliary state, is able to accept a RETRIEVE ACKNOWLEDGE message and enter the Idle auxiliary state.

**GFP\_U7\_08\_008 subclause 7.4.1.1, 5th paragraph valid**

Ensure that the IUT, while in the Call Delivered call state U04 and Retrieve Request auxiliary state, is able to accept a RETRIEVE ACKNOWLEDGE message and enter the Idle auxiliary state.

**GFP\_U7\_08\_009 subclause 7.4.1.1, 5th paragraph valid**

Ensure that the IUT, while in the Call Received call state U07 and Retrieve Request auxiliary state, is able to accept a RETRIEVE ACKNOWLEDGE message and enter the Idle auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_010 subclause 7.4.1.1, 5th paragraph valid**

Ensure that the IUT, while in the Connect Request call state U08 and Retrieve Request auxiliary state, is able to accept a RETRIEVE ACKNOWLEDGE message and enter the Idle auxiliary state.

**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_011**      **subclause 7.4.1.1, 5th paragraph**      **valid**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Retrieve Request auxiliary state,  
is able to accept a RETRIEVE ACKNOWLEDGE message and enter the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_012**      **subclause 7.4.1.1, 5th paragraph**      **valid**  
Ensure that the IUT, while in the Active call state U10 and Retrieve Request auxiliary state,  
is able to accept a RETRIEVE ACKNOWLEDGE message and enter the Idle auxiliary state.

**GFP\_U7\_08\_013**      **subclause 7.4.1.2**      **invalid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Retrieve Request auxiliary state, on receipt of a RETRIEVE REJECT message,  
enters the Call Held auxiliary state.

**GFP\_U7\_08\_014**      **subclause 7.4.1.2**      **invalid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Retrieve Request auxiliary state, on receipt of a RETRIEVE REJECT message,  
enters the Call Held auxiliary state.

**GFP\_U7\_08\_015**      **subclause 7.4.1.2**      **invalid**  
Ensure that the IUT, while in the Call Received call state U07 and Retrieve Request auxiliary state, on receipt of a RETRIEVE REJECT message,  
enters the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_016**      **subclause 7.4.1.2**      **invalid**  
Ensure that the IUT, while in the Connect Request call state U08 and Retrieve Request auxiliary state, on receipt of a RETRIEVE REJECT message,  
enters the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_017**      **subclause 7.4.1.2**      **invalid**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Retrieve Request auxiliary state, on receipt of a RETRIEVE REJECT message,  
enters the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_08\_018**      **subclause 7.4.1.2**      **invalid**  
Ensure that the IUT, while in the Active call state U10 and Retrieve Request auxiliary state, on receipt of a RETRIEVE REJECT message,  
enters the Call Held auxiliary state.

**6.2.2.2.3.2**      **Responding entity**

**Selection:** IUT supports the functions of an responding entity. PICS: R 5.2.

**GFP\_U7\_09\_001**      **subclause 7.4.2.1**      **valid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE ACKNOWLEDGE message and enters the Idle auxiliary state.

**GFP\_U7\_09\_002**      **subclause 7.4.2.1**      **valid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE ACKNOWLEDGE message and enters the Idle auxiliary state.



**GFP\_U7\_09\_013**            **subclause 7.4.2.2, 1st paragraph**            **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Idle auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the same auxiliary state.

**GFP\_U7\_09\_014**            **subclause 7.4.2.2, 1st paragraph**            **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Hold Request auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the same auxiliary state.

**GFP\_U7\_09\_015**            **subclause 7.4.2.2, 1st paragraph**            **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Hold Indication auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the same auxiliary state.

**GFP\_U7\_09\_016**            **subclause 7.4.2.2, 1st paragraph**            **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Retrieve Indication auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the same auxiliary state.

**GFP\_U7\_09\_017**            **subclause 7.4.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Null call state U00 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_018**            **subclause 7.4.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Call Initiated call state U01 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_019**            **subclause 7.4.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Overlap Sending call state U02 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_020**            **subclause 7.4.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Disconnect Request call state U11 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_021**            **subclause 7.4.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Disconnect Indication call state U12 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_022**            **subclause 7.4.2.2, 2nd paragraph**            **inopportune**  
Ensure that the IUT, while in the Overlap Receiving call state U25 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
    sends a RETRIEVE REJECT message with cause #101 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_023**            **subclause 7.4.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "B1 channel exclusive" where B1 is not available,  
    sends a RETRIEVE REJECT message with cause #44 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_024**            **subclause 7.4.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Call Delivered call state U04 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "B1 channel exclusive" where B1 is not available,  
sends a RETRIEVE REJECT message with cause #44 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_025**            **subclause 7.4.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Call Received call state U07 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "B1 channel exclusive" where B1 is not available,  
sends a RETRIEVE REJECT message with cause #44 and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_026**            **subclause 7.4.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Connect Request call state U08 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "B1 channel exclusive" where B1 is not available,  
sends a RETRIEVE REJECT message with cause #44 and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_027**            **subclause 7.4.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "B1 channel exclusive" where B1 is not available,  
sends a RETRIEVE REJECT message with cause #44 and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_028**            **subclause 7.4.2.2, 3rd paragraph**            **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "B1 channel exclusive" where B1 is not available,  
sends a RETRIEVE REJECT message with cause #44 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_029**            **subclause 7.4.2.2, 4th paragraph**            **inopportune**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "any channel" where no channel is available,  
sends a RETRIEVE REJECT message with cause #34 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_030**            **subclause 7.4.2.2, 4th paragraph**            **inopportune**  
Ensure that the IUT, while in the Call Delivered call state U04 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "any channel" where no channel is available,  
sends a RETRIEVE REJECT message with cause #34 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_031**            **subclause 7.4.2.2, 4th paragraph**            **inopportune**  
Ensure that the IUT, while in the Call Received call state U07 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "any channel" where no channel is available,  
sends a RETRIEVE REJECT message with cause #34 and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_032**            **subclause 7.4.2.2, 4th paragraph**            **inopportune**  
Ensure that the IUT, while in the Connect Request call state U08 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "any channel" where no channel is available,  
sends a RETRIEVE REJECT message with cause #34 and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_033**            **subclause 7.4.2.2, 4th paragraph**            **inopportune**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "any channel" where no channel is available,  
sends a RETRIEVE REJECT message with cause #34 and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_034**            **subclause 7.4.2.2, 4th paragraph**            **inopportune**  
Ensure that the IUT, while in the Active call state U10 and Call Held auxiliary state on receipt of a RETRIEVE message indicating "any channel" where no channel is available,  
sends a RETRIEVE REJECT message with cause #34 and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_035**            **subclause 7.4.2.2, 5th paragraph**            **invalid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE REJECT message with an appropriate cause value, if the Retrieve function is not permitted, and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_036**            **subclause 7.4.2.2, 5th paragraph**            **invalid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE REJECT message with an appropriate cause value, if the Retrieve function is not permitted, and remains in the Call Held auxiliary state.

**GFP\_U7\_09\_037**            **subclause 7.4.2.2, 5th paragraph**            **invalid**  
Ensure that the IUT, while in the Call Received call state U07 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE REJECT message with an appropriate cause value, if the Retrieve function is not permitted, and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_038**            **subclause 7.4.2.2, 5th paragraph**            **invalid**  
Ensure that the IUT, while in the Connect Request call state U08 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE REJECT message with an appropriate cause value, if the Retrieve function is not permitted, and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_039**            **subclause 7.4.2.2, 5th paragraph**            **invalid**  
Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE REJECT message with an appropriate cause value, if the Retrieve function is not permitted, and remains in the Call Held auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_09\_040**            **subclause 7.4.2.2, 5th paragraph**            **invalid**  
Ensure that the IUT, while in the Active call state U10 and Call Held auxiliary state, on receipt of a RETRIEVE message,  
sends a RETRIEVE REJECT message with an appropriate cause value, if the Retrieve function is not permitted, and remains in the Call Held auxiliary state.

#### **6.2.2.2.4            Clearing of a held call**

**GFP\_U7\_10\_001**            **subclause 7.6**            **valid**  
Ensure that the IUT, while in the Outgoing Call Proceeding call state U03 and Call Held auxiliary state, following basic call clearing, on receipt of a RELEASE COMPLETE,  
enters the Idle auxiliary state.

**GFP\_U7\_10\_002**            **subclause 7.6**            **valid**  
Ensure that the IUT, while in the Call Delivered call state U04 and Call Held auxiliary state, following basic call clearing, on receipt of a RELEASE COMPLETE,  
enters the Idle auxiliary state.



**GFP\_U7\_10\_003**      **subclause 7.6**      **valid**  
 Ensure that the IUT, while in the Call Received call state U07 and Call Held auxiliary state, following basic call clearing, on receipt of a RELEASE COMPLETE, enters the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.


**GFP\_U7\_10\_004**      **subclause 7.6**      **valid**  
 Ensure that the IUT, while in the Connect Request call state U08 and Call Held auxiliary state, following basic call clearing, on receipt of a RELEASE COMPLETE, enters the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_10\_005**      **subclause 7.6**      **valid**  
 Ensure that the IUT, while in the Incoming Call Proceeding call state U09 and Call Held auxiliary state, following basic call clearing, on receipt of a RELEASE COMPLETE, enters the Idle auxiliary state.  
**Selection:** IUT supports basic access, point-to-point configuration? PICS: [11] MC 2.4 OR IUT supports primary rate access.

**GFP\_U7\_10\_006**      **subclause 7.6**      **valid**  
 Ensure that the IUT, while in the Active call state U10 and Call Held auxiliary state, following basic call clearing, on receipt of a RELEASE COMPLETE, enters the Idle auxiliary state.

**6.2.3 TSS&TP for clause 8**

**6.2.3.1 TSS for clause 8**

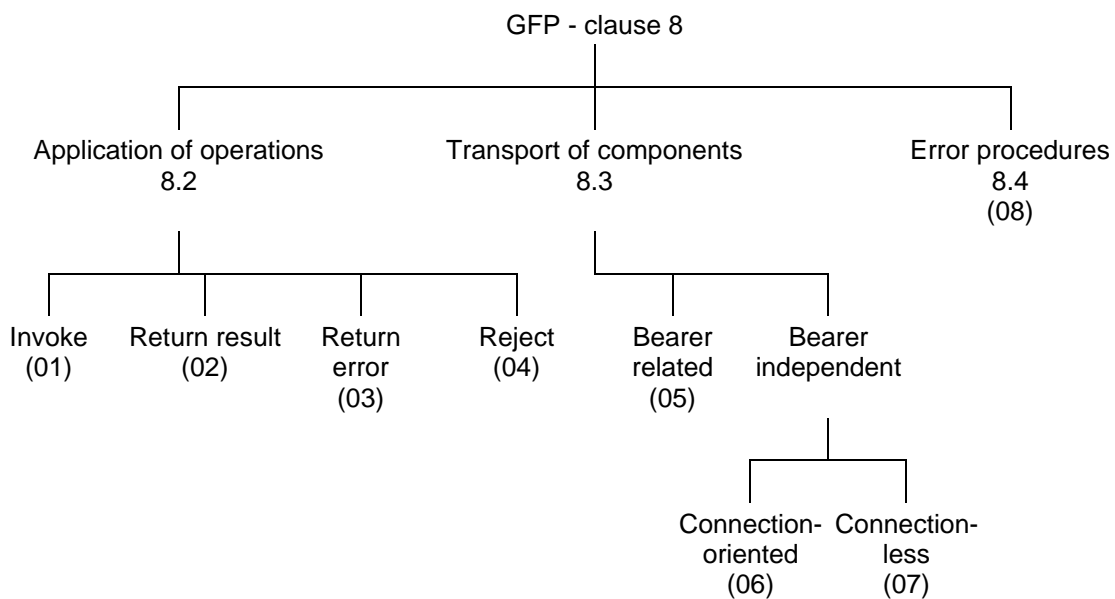

NOTE: Numbers in brackets represent group numbers and are used in TP identifiers.

**Figure 3: TSS**

**6.2.3.2 TPs for clause 8**

**Selection:** IUT supports the functional protocol for the control of supplementary services.  
PICS: MCu 2.

**6.2.3.2.1 Introduction**

How to apply these TPs:

These TPs are generic and so are not useable on their own. They should be parameterized and inserted into the appropriate supplementary service TSS&TP ETS. The following steps should be applied for each supplementary service TSS&TP ETS:

- combine table 1 with TPs from subclause 6.2.3.2.2;
- check supplementary service transport mechanism(s) supported and apply relevant TPs from subclause 6.2.3.2.3;
- apply TP from subclause 6.2.3.2.4.

**6.2.3.2.2 Application of operations (subclause 8.2)**

**Table 3: Cross reference between transport mechanisms, call states, messages, call references and data links**

<b>Transport mechanism</b>	<b>&lt;cstate&gt; call state</b>	<b>&lt;PDU&gt; message</b>	<b>&lt;CR&gt; call reference</b>	<b>&lt;transport&gt; data link</b>
Bearer related	<side> 00, 01, 02, 03, 04, 06, 07, 08, 09, 10, 11, 12, 19, 25	call control message FACILITY	CR of an existing call	
Bearer independent Connection oriented point-to-point	<side> 00, 19, 31	REGISTER FACILITY (call state 31 only) RELEASE RELEASE COMP STATUS (note 1) STATUS ENQ*	CR created	via point-to-point data link
Bearer independent Connectionless point-to-point	<side> any state	FACILITY (I-frame)	dummy CR	via point-to-point data link
Bearer independent Connectionless point-to-multipoint	<side> any state	FACILITY (UI-frame)	dummy CR	via broadcast data link
NOTE 1: STATUS, STATUS ENQUIRY not used for transportation of components.				
NOTE 2: <side>=N,U				

**6.2.3.2.2.1 Invocation (subclause 8.2.2.1)**

**Selection:** IUT supports use of the invocation procedure. PICS: SCu 2.1

**GFP\_U8\_01\_001 subclause 8.2.2.1**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state, to initiate an operation, sends a <PDU> message with <CR> containing a Facility information element with a <service> <component> invoke component (via <transport>) and enters the <service> <sstate> state.

**GFP\_U8\_01\_002 subclause 8.2.2.1**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a <PDU> message with <CR> containing a Facility information element with a <service> <component> invoke component (via <transport>), enters | remains in call state <cstate> and enters the <service> <sstate> state.

#### 6.2.3.2.2 Return result (subclause 8.2.2.2)

**Selection:** IUT supports use of the return result procedure. PICS: SCu 2.2

##### GFP\_U8\_02\_001 subclause 8.2.2.2

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state, to transfer the result of a successfully performed operation,

sends a <PDU> message with <CR> containing a Facility information element with a <service> <component> return result component (via <transport>), enters | remains in call state <cstate> and enters the <service> <sstate> state.

##### GFP\_U8\_02\_002 subclause 8.2.2.2

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a <PDU> message with <CR> containing a Facility information element with a <service> <component> return result component (via <transport>),

enters | remains in call state <cstate> and enters the <service> <sstate> state.

#### 6.2.3.2.3 Return error (subclause 8.2.2.3)

**Selection:** IUT supports use of the return error procedure. PICS: SCu 2.3

##### GFP\_U8\_03\_001 subclause 8.2.2.3

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state, to transfer error information in the case of an unsuccessfully performed operation,

sends a <PDU> message with <CR> containing a Facility information element with a <service> <component> return error component (via <transport>), enters | remains in call state <cstate> and enters the <service> <sstate> state.

##### GFP\_U8\_03\_002 subclause 8.2.2.3

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a <PDU> message with <CR> containing a Facility information element with a <service> <component> return error component (via <transport>),

enters | remains in call state <cstate> and enters the <service> <sstate> state.

#### 6.2.3.2.4 Reject (subclause 8.2.2.4)

**Selection:** IUT supports use of the reject procedure. PICS: SCu 2.4

##### GFP\_U8\_04\_001 subclause 8.2.2.4

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a <PDU> message with <CR> containing a Facility information element with a reject component not including an invoke identifier (via <transport>),

enters | remains in call state <cstate> and enters the <service> <sstate> state.

NOTE 1: The receipt of a reject component is dealt with according to the procedures defined in the individual supplementary service ETSs.

##### GFP\_U8\_04\_002 subclause 8.2.2.4

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a <PDU> message with <CR> containing a Facility information element with a reject component including a valid invoke identifier (via <transport>),

enters | remains in call state <cstate> and enters the <service> <sstate> state.

**GFP\_U8\_04\_003**      **subclause 8.2.2.4**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state detecting an <error> error classified as general-problem/<problem code> in a received <PDU> message with <CR> containing a Facility information element with a <service> <component> component (via <transport>), sends a <PDU> message with <CR> containing a Facility information element with a reject component indicating general-problem/<problem code> and including an invoke identifier or including NULL (via <transport>), enters | remains in call state <cstate> and enters the <service> <sstate> state.

NOTE 2: For a list of problem codes see ETS 300 196-1 [1], table 2 or table D.1..

**GFP\_U8\_04\_004**      **subclause 8.2.2.4**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state detecting an <error> error classified as <problem type>/<problem code> in a received <PDU> message with <CR> containing a Facility information element with a <service> <component> component (via <transport>), sends a <PDU> message with <CR> containing a Facility information element with a reject component indicating <problem type>/<problem code> and including a valid invoke identifier (via <transport>), enters | remains in call state <cstate> and enters the <service> <sstate> state.

NOTE 3: <problem type> = invoke-problem, return-result-problem or return-error-problem. For a list of problem codes see ETS 300 196-1 [1], table 2 or table D.1.

**6.2.3.2.3**      **Transport of components (subclause 8.3)**

NOTE: Most TPs of subclause 6.2.3.2.2 also test the procedures of subclause 8.3 of ETS 300 196-1 [1]. Only additional procedures related to subclause 8.3 of ETS 300 196-1 [1], not already covered, are included below.

**6.2.3.2.3.1**      **Bearer related transport (subclause 8.3.1)**

**Selection:** IUT supports the bearer related supplementary services procedure. PICS: MCu 2.1.

**GFP\_U8\_05\_001**      **subclause 8.3.1.1.2**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state unable to process a <service> <component> invoke component, sends a <PDU1> message with <CR> containing a Facility information element with a <service> <component> <answer> component (via <transport>), enters | remains in call state <cstate> and enters the <service> <sstate> state or ignores the invocation.

NOTE:      <PDU1>      =      DISCONNECT, RELEASE, RELEASE COMPLETE, FACILITY  
             <answer>      =      return error, reject

**6.2.3.2.3.2**      **Bearer independent transport (subclause 8.3.2)**

**Selection:** IUT supports the bearer independent supplementary services procedure. PICS: MCu 2.2.

**6.2.3.2.3.2.1**      **Connection-oriented (subclause 8.3.2.1)**

**Selection:** IUT supports the point-to-point (bearer independent) connection-oriented transport mechanism. PICS: MCu 2.5.

**GFP\_U8\_06\_001**      **subclause 8.3.2.1.1.1**

Ensure that the IUT, in call state <side>00 in order to establish a connection towards the responder, sends a REGISTER message and enters the Bearer independent Transport call state <side>31.

**GFP\_U8\_06\_002**      **subclause 8.3.2.1.1.2**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a REGISTER message with a call reference in use,  
ignores the message and sends a STATUS message with a Cause information element containing the cause value #101, a Call state information element containing the call state and using the call reference value of the received REGISTER message and remains in the same states.

**GFP\_U8\_06\_003**      **subclause 8.3.2.1.1.2**

Ensure that the IUT, in call state <side>00 and in the <service> <sstate> state receiving a REGISTER message containing a Facility information element with an invalid protocol profile,  
sends a RELEASE COMPLETE message containing cause #100 and using the call reference value of the received REGISTER message.

**GFP\_U8\_06\_004**      **subclause 8.3.2.1.1.1 & [7] subclause 5.8.3.2 d**

Ensure that the IUT, in call state <cstate> and in the <service> <sstate> state receiving a REGISTER message with a call reference not recognized as relating to a call and with the call reference flag set to "1",  
ignores the message.

**GFP\_U8\_06\_005**      **subclause 8.3.2.1.2.1**

Ensure that the IUT, in call state <side>31 and in the <service> <sstate> state to transfer data,  
sends a FACILITY message and remains the same call state and enters the <service> <sstate> state.

**GFP\_U8\_06\_006**      **subclause 8.3.2.1.2.2**

Ensure that the IUT, in call state <side>31 and in the <service> <sstate> state receiving a message other than FACILITY, RELEASE, RELEASE COMPLETE, STATUS or STATUS ENQUIRY using the call reference assigned by a REGISTER message,  
ignores the message and sends a STATUS message with a Cause information element containing the cause value #101 and a Call state information element containing the call state value 31.

**GFP\_U8\_06\_007**      **subclause 8.3.2.1.2.2**

Ensure that the IUT, in call state <side>31 and in the <service> <sstate> state receiving a FACILITY message containing a Facility information element with an invalid protocol profile,  
ignores the message and sends a STATUS message with a Cause information element containing the cause value #100.

**GFP\_U8\_06\_008**      **subclause 8.3.2.1.3.1**

Ensure that the IUT, in call state <side>31 to clear the connection,  
sends a RELEASE message and enters the call state <side> 19.

**GFP\_U8\_06\_009**      **subclause [7] 5.8**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message delivered in a DL-UNIT-DATA-INDICATION,  
sends no message or processes the message as valid.

**GFP\_U8\_06\_010**      **subclause [7] 5.8.3.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message using the dummy call reference,  
sends no message.

**GFP\_U8\_06\_011**      **subclause [7] 5.8.3.2 a**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state for CR1, on receipt of a FACILITY message for CR2 which is not recognized as relating to a call,  
sends a STATUS message for CR2 with a Cause information element indicating cause value 81 "invalid call reference value" for CR2 and remains in call state <side>31 and in the <service> <sstate> state for CR1.

**GFP\_U8\_06\_012**      **subclause [7] 5.8.3.2 f**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message using the global call reference,  
sends a STATUS message using the global call reference with a Call state information element indicating the call state associated with the global call reference and a Cause information element indicating cause value 81 "invalid call reference value".

**GFP\_U8\_06\_013**      **subclause [7] 5.8.4**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of an inopportune message (ALERTING),  
sends either a STATUS message with a Cause information element indicating cause value 98 "message type not compatible with call state or message type non-existent or not implemented" or 101 "message not compatible with call state" or a STATUS ENQUIRY message.

**GFP\_U8\_06\_014**      **subclause [7] 5.8.8**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a DL-ESTABLISH-INDICATION,  
sends no message.

**GFP\_U8\_06\_015**      **subclause [7] 5.8.11**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a STATUS message with a Call state information element indicating the Null call state,  
sends no message and enters the Null call state N00.

**GFP\_U8\_06\_016**      **subclause [7] 5.8.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with an erroneous protocol discriminator, coded other than '08'H,  
sends no message.

**GFP\_U8\_06\_017**      **subclause [7] 5.8.2**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a message which is too short,  
sends no message.

**GFP\_U8\_06\_018**      **subclause [7] 5.8.3.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with an invalid call reference format (octet 1, bits 8 - 5 <> '0000'B),  
sends no message.

**GFP\_U8\_06\_019**      **subclause [7] 5.8.3.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with an invalid call reference format (octet 1, bits 4 - 1, length value too high),  
sends no message.

**GFP\_U8\_06\_020**      **subclause [7] 5.8.4**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a message with an unrecognized message type,  
sends either a STATUS message with a Cause information element indicating cause value 98 "message type not compatible with call state or message type non-existent or not implemented" or 97 "message type non-existent or not implemented" or a STATUS ENQUIRY message.

**GFP\_U8\_06\_021**      **subclause [7] 5.8.6.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with a mandatory information element missing,  
sends a STATUS message with a Cause information element indicating cause value 96 "mandatory information element missing".

**GFP\_U8\_06\_022**      **subclause [7] 5.8.6.2**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with a mandatory information element content error,  
sends a STATUS message with a Cause information element indicating cause value 100 "invalid information element contents".

**GFP\_U8\_06\_023**      **subclause [7] 5.8.7.1, 5.8.6.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with an unrecognized information element (coded comprehension required), sends a STATUS message with a Cause information element indicating cause value 96 "mandatory information element missing".

**GFP\_U8\_06\_024**      **subclause [7] 5.8.7.1**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with an unrecognized information element (coded comprehension not required), processes the message as valid and optionally sends a STATUS message with a Cause information element indicating cause value 99 "information element non-existent or not implemented".

**GFP\_U8\_06\_025**      **subclause [7] 5.8.7.2**

Ensure that the IUT in call state <side>31 and in the <service> <sstate> state, on receipt of a FACILITY message with a non-mandatory information element content error, processes the message as valid and optionally sends a STATUS message with a Cause information element indicating cause value 100 "invalid information element contents".

**6.2.3.2.3.2.2**      **Connectionless (subclauses 8.3.2.2 and 8.3.2.4)**

**Selection:** IUT supports the (bearer independent) connectionless transport mechanism.  
PICS: MCu 2.6 OR MCu 2.7.

**GFP\_U8\_07\_001**      **subclause 8.3.2**      **valid**

Ensure that the IUT, in the <service> <sstate> state, on receipt of a FACILITY message with a dummy call reference containing a Facility information element with a <component> and a Called party number information element, accepts the message and its contents as valid and responds appropriately for the supplementary service.

**Selection:** IUT supports MSN supplementary service. PIXIT.

**GFP\_U8\_07\_002**      **subclause 8.3.2**      **valid**

Ensure that the IUT, in the <service> <sstate> state, on receipt of a FACILITY message with a dummy call reference containing a Facility information element with a <component> and a Called party subaddress information element, accepts the message and its contents as valid and responds appropriately for the supplementary service.

**Selection:** IUT supports SUB supplementary service. PIXIT.

**GFP\_U8\_07\_003**      **subclauses 8.3.2.2.2 & 8.3.2.4.2**

Ensure that the IUT, in the <service> <sstate> state, receiving a FACILITY message with a dummy call reference containing a Facility information element with an invalid protocol profile, ignores the message.

**GFP\_U8\_07\_004**      **subclauses 8.3.2.2.2 & 8.3.2.4.2**

Ensure that the IUT, in the <service> <sstate> state, receiving FACILITY message with a dummy call reference but without a Facility information element, ignores the message.

**GFP\_U8\_07\_005**      **subclauses 8.3.2.2.2 & 8.3.2.4.2**

Ensure that the IUT, in the <service> <sstate> state, receiving a message other than FACILITY with a dummy call reference and this message does not apply to some other application of the dummy call reference, ignores the message.

#### 6.2.3.2.4 Error procedures (subclause 8.4)


##### GFP\_U8\_08\_001 subclause 8.4.2

Ensure that the IUT, on receipt of an unknown value (data element) in an <element>, and if all values which are neither optional nor have default values assigned are correctly received, ignores these unknown values and does not reject these components with problem code of "mistyped <element>".

NOTE: <element> = argument, result or parameter.

#### 6.2.4 TSS&TP for clause 9

##### 6.2.4.1 TSS for clause 9

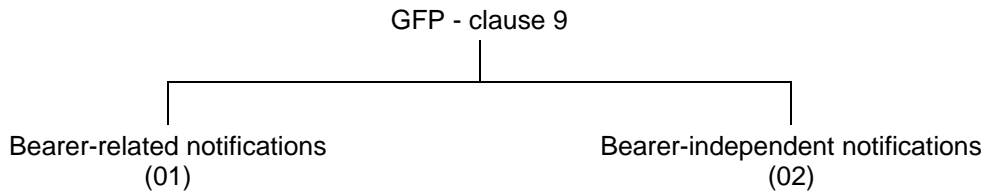

NOTE: Numbers in brackets represent group numbers and are used in TP identifiers.

Figure 4: TSS

##### 6.2.4.2 TPs for clause 9

**Selection:** IUT supports notification category procedures? PICS: MCu 3.

###### 6.2.4.2.1 Introduction

How to apply these TPs:

These TPs are generic and so are not useable on their own. They should be parameterized and inserted into the appropriate supplementary service TSS&TP ETSS. Each occurrence of a word enclosed in "<" and ">" should be replaced by the appropriate expression for the applicable supplementary service.

###### 6.2.4.2.2 Bearer-related notifications

**Selection:** IUT supports the transport of Bearer-related notifications? PICS: MCu 3.1.

##### GFP\_U9\_01\_001 subclause 9.3.1 valid

Ensure that the IUT, in the call state <cstate>, to deliver <service> notification information in the call establishment phase,

sends a call control message (e.g. SETUP) containing a Notification indicator information element.

**Selection:** IUT supports notification indicators. PICS: SCu 3.1.

##### GFP\_U9\_01\_002 subclause 9.3.1 valid

Ensure that the IUT, in the call state <cstate>, to deliver <service> notification information in the call establishment phase,

sends a call control message (e.g. SETUP) containing a <parameter> information element or a Notification indicator information element including Basic Encoding Rules (BER) encoded information.

**Selection:** IUT supports notification parameters. PICS: SCu 3.2.

##### GFP\_U9\_01\_003 subclause 9.3.1 valid

Ensure that the IUT, in the call state <cstate>, to deliver <service> notification information in the call clearing phase,

sends a call control message (e.g. RELEASE) containing a Notification indicator information element.

**Selection:** IUT supports notification indicators. PICS: SCu 3.1.



- GFP\_U9\_01\_004**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the call state <cstate>, to deliver <service> notification information in the call clearing phase,  
sends a call control message (e.g. RELEASE) containing a <parameter> information element or a Notification indicator information element including BER encoded information.  
**Selection:** IUT supports notification parameters. PICS: SCu 3.2.
- GFP\_U9\_01\_005**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the call state <cstate>, to transfer <service> notification information coinciding with the sending of a FACILITY message,  
sends a FACILITY message containing a Notification indicator information element.  
**Selection:** IUT supports notification indicators. PICS: SCu 3.1.
- GFP\_U9\_01\_006**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the call state <cstate>, to transfer <service> notification information coinciding with the sending of a FACILITY message,  
sends a FACILITY message containing a <parameter> information element or a Notification indicator information element including BER encoded information.  
**Selection:** IUT supports notification parameters. PICS: SCu 3.2.
- GFP\_U9\_01\_007**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the Active call state U10, to transfer <service> notification information, not coinciding with the sending of a FACILITY message,  
sends a NOTIFY message containing a Notification indicator information element.  
**Selection:** IUT supports notification indicators. PICS: SCu 3.1.
- GFP\_U9\_01\_008**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the Active call state U10, to transfer <service> notification information, not coinciding with the sending of a FACILITY message,  
sends a NOTIFY message containing a <parameter> information element or a Notification indicator information element including BER encoded information.  
**Selection:** IUT supports notification parameters. PICS: SCu 3.2.
- GFP\_U9\_01\_009**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in call state U06 (having received a SETUP message), to transfer <service> notification information,  
sends, as its first response, a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or a CONNECT message containing notification information.
- GFP\_U9\_01\_010**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in call state U01 (having sent a SETUP message), to transfer <service> notification information,  
does not send, before receiving its first response to the SETUP message, a NOTIFY message.
- GFP\_U9\_01\_011**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in call state U11 (having initiated call clearing), to transfer <service> notification information,  
does not send a NOTIFY message (containing <service> notification information).
- GFP\_U9\_01\_012**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in call state U12 (having received a DISCONNECT message), to transfer <service> notification information,  
sends a RELEASE or a RELEASE COMPLETE message containing notification information.
- GFP\_U9\_01\_013**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the call state <cstate>, having sent a NOTIFY message,  
remains in the same call state.
- GFP\_U9\_01\_014**      **subclause 9.3.1**      **valid**  
Ensure that the IUT, in the call state <cstate>, on receipt of a valid NOTIFY message,  
sends no message and remains in the same call state.



**GFP\_U9\_02\_003**      **subclause 9.4.2**      **invalid**  
Ensure that the IUT on receipt of a NOTIFY message with the dummy call reference, where it does not recognize the information,  
sends no message.

**GFP\_U9\_02\_004**      **subclause 9.4.2**      **invalid**  
Ensure that the IUT on receipt of a message, other than NOTIFY, using the dummy call reference, and which does not apply to some other application of the dummy call reference,  
sends no message.

## 6.2.5      **TSS&TP for clause 10**

### 6.2.5.1      **TSS for clause 10**

Network-side channel reservation function	(Group number)
Implicit reservation	
Explicit reservation	
Explicit reservation control (subclause 10.1.2.1) .....	(01)
Explicit reservation management (subclause 10.1.2.2) .....	(02)
Explicit reservation cancellation (subclause 10.1.2.3) .....	(03)
Generic procedures for supplementary service management	
Activation .....	(04)
Deactivation .....	(05)
Interrogation.....	(06)
Generic status request procedure .....	(07)

NOTE 1:      Numbers in brackets represent group numbers and are used in TP identifiers.

NOTE 2:      The above TSS is hierarchically structured from left to right rather than the more usual top-down approach. This allows the TSS to be consistent with the network TSS for clause 10.

**Figure 5: TSS**

### 6.2.5.2      **TPs for clause 10**

How to apply these TPs:

Some of these TPs are generic and so are not useable on their own. They should be parameterized and inserted into the appropriate supplementary service TSS&TP documents. Each occurrence of a word enclosed in "<" and ">" should be replaced by the appropriate expression for the applicable supplementary service.

TPs not containing words enclosed in "<" and ">" are testable on their own.

#### 6.2.5.2.1      **Network-side channel reservation function**

##### 6.2.5.2.1.1      **Implicit reservation**

NOTE:      There are no user requirements for implicit reservation. Implicit reservation is controlled by the user by use of existing functions which are specified elsewhere along with their related TSS&TP specification (e.g. Hold and Retrieve).

#### 6.2.5.2.1.2 Explicit reservation

**Selection:** IUT supports explicit reservation. PICS: MCu 4.2.

##### 6.2.5.2.1.2.1 Explicit reservation control

**NOTE:** In the following TPs the following messages (with appropriate call states) should be used:

<messages> = FACILITY, HOLD, HOLD ACKNOWLEDGE, HOLD REJECT, RETRIEVE, RETRIEVE ACKNOWLEDGE, RETRIEVE REJECT, INFORMATION, PROGRESS, ALERTING, CALL PROCEEDING, CONNECT, CONNECT ACKNOWLEDGE, DISCONNECT, RELEASE, RELEASE COMPLETE, RESUME, RESUME ACKNOWLEDGE, RESUME REJECT, SETUP, SETUP ACKNOWLEDGE, SUSPEND, SUSPEND ACKNOWLEDGE, SUSPEND REJECT.

#### **GFP\_U10\_01\_001** subclause 10.1.2.1, 1st paragraph **valid**

Ensure that the IUT, while in the <cstate>, to request an explicit reservation of the type "no reservation required",

sends a <PDU1> message containing a Facility information element with an ExplicitReservationCreationControl invoke component including the argument "no reservation required".

#### **GFP\_U10\_01\_002** subclause 10.1.2.1, 1st paragraph **valid**

Ensure that the IUT, while in the <cstate>, to request an explicit reservation of the type "reservation required without reservation indicator",

sends a <PDU1> message containing a Facility information element with an ExplicitReservationCreationControl invoke component including the argument "reservation required without reservation indicator", or including no argument.

#### **GFP\_U10\_01\_003** subclause 10.1.2.1, 1st paragraph **valid**

Ensure that the IUT, while in the <cstate>, to request an explicit reservation of the type "reservation required with reservation indicator",

sends a <PDU1> message containing a Facility information element with an ExplicitReservationCreationControl invoke component including the argument "reservation required with reservation indicator".

##### 6.2.5.2.1.2.2 Explicit reservation management

**NOTE:** In the following TPs the following messages (with appropriate call states) should be used:

<messages> = SETUP, SETUP ACKNOWLEDGE, ALERTING, CALL PROCEEDING, CONNECT, RETRIEVE, RETRIEVE ACKNOWLEDGE.

#### **GFP\_U10\_02\_001** subclause 10.1.2.2 **valid**

Ensure that the IUT, while in the <cstate> <and Call Held auxiliary state (if relevant)> to manage an explicit reservation with reservation indicator,

sends a <PDU1> message containing a Facility information element with an ExplicitReservationManagement invoke component including a reservation indicator.

**Selection:** the IUT is able to handle a reservation with reservation indicator.

#### **GFP\_U10\_02\_002** subclause 10.1.2.2 **valid**

Ensure that the IUT, while in the <cstate> <and Call Held auxiliary state (if relevant)> to manage an explicit reservation without reservation indicator,

sends a <PDU1> message containing a Facility information element with an ExplicitReservationManagement invoke component not including a reservation indicator.

**Selection:** the IUT is able to handle a reservation without reservation indicator.

### 6.2.5.2.1.2.3 Explicit reservation cancellation

NOTE: In the following TPs the following messages (with appropriate call states) should be used:

<messages> = FACILITY, HOLD, HOLD ACKNOWLEDGE, HOLD REJECT, RETRIEVE, RETRIEVE ACKNOWLEDGE, RETRIEVE REJECT, INFORMATION, PROGRESS, ALERTING, CALL PROCEEDING, CONNECT, CONNECT ACKNOWLEDGE, DISCONNECT, RELEASE, RELEASE COMPLETE, RESUME, RESUME ACKNOWLEDGE, RESUME REJECT, SETUP, SETUP ACKNOWLEDGE, SUSPEND, SUSPEND ACKNOWLEDGE, SUSPEND REJECT.

#### **GFP\_U10\_03\_001 subclause 10.1.2.3, 1st paragraph valid**

Ensure that the IUT, in the <cstate>, to cancel an explicit channel reservation, sends a <PDU1> message containing a Facility information element with an ExplicitReservationCancel invoke component.

### 6.2.5.2.2 Generic procedures for supplementary service management

**Selection:** IUT supports the generic procedures for supplementary service management. PICS: MCu 5.

NOTE: The states referred to in the following subclauses, and defined in subclause 10.2.6 of ETS 300 196-1 [1] refer only to the state of a specific supplementary service management request. The state of the service as seen by the user or network is covered by the individual supplementary services referencing these procedures, e.g. the Idle state indicates that no request is in progress, but the service may be activated, or deactivated.

#### 6.2.5.2.2.1 Activation

**Selection:** IUT supports activation. PICS: MCu 5.1.

#### **GFP\_U10\_04\_001 subclause 10.2.2.1, 1st paragraph valid**

Ensure that the IUT, in the Idle state, to activate an instance of a service, sends a FACILITY message with a Facility information element containing a <service> activate invoke component and enters the <service> Activate Request state.

#### **GFP\_U10\_04\_002 subclause 10.2.2.1, 2nd paragraph valid**

Ensure that the IUT, in the <service> Activate Request state, on receipt of a FACILITY message with a Facility information element containing a <service> activate return result component, does not respond and enters the Idle state.

#### **GFP\_U10\_04\_003 subclause 10.2.2.2, 2nd paragraph invalid**

Ensure that the IUT, in the <service> Activate Request state, on receipt of a FACILITY message with a Facility information element containing a <service> activate return error component, does not respond and enters the Idle state.

#### **GFP\_U10\_04\_004 subclause 10.2.2.2, 3rd paragraph valid**

Ensure that the IUT, in the <service> Activate Request state, on expiry of the timer T-ACTIVATE, enters the Idle state.

#### **GFP\_U10\_04\_005 subclause 10.2.2.2, 5th paragraph inopportune**

Ensure that the IUT, in the <service> Activate Request state, on receipt of a DL-RELEASE-INDICATION primitive, aborts the activation and enters the Idle state.

#### **GFP\_U10\_04\_006 subclause 10.2.2.2, 6th paragraph inopportune**

Ensure that the IUT, in the <service> Activate Request state, on receipt of a DL-ESTABLISH-INDICATION primitive, ignores the indication and remains in the current state.

#### 6.2.5.2.2.2 Deactivation

**Selection:** IUT supports deactivation. PICS: MCu 5.2.

**GFP\_U10\_05\_001**      **subclause 10.2.3.1, 1st paragraph**      **valid**

Ensure that the IUT, in the Idle state to deactivate a previously activated service, sends a FACILITY message with a Facility information element containing a <service> deactivate invoke component and enters the <service> Deactivate Request state.

**GFP\_U10\_05\_002**      **subclause 10.2.3.2, 2nd paragraph**      **valid**

Ensure that the IUT, in the <service> Deactivate Request state, on receipt of a FACILITY message with a Facility information element containing a <service> deactivate return result component, does not respond and enters the Idle state.

**GFP\_U10\_05\_003**      **subclause 10.2.3.2, 2nd paragraph**      **invalid**

Ensure that the IUT, in the <service> Deactivate Request state, on receipt of a FACILITY message with a Facility information element containing a <service> deactivate return error component, does not respond and enters the Idle state.

**GFP\_U10\_05\_004**      **subclause 10.2.3.2, 3rd paragraph**      **valid**

Ensure that the IUT, in the <service> Deactivate Request state, on expiry of the timer T-DEACTIVATE, enters the Idle state.

**GFP\_U10\_05\_005**      **subclause 10.2.3.2, 5th paragraph**      **inopportune**

Ensure that the IUT, in the <service> Deactivate Request state, on receipt of a DL-RELEASE-INDICATION primitive, aborts the deactivation and enters the Idle state.

**GFP\_U10\_05\_006**      **subclause 10.2.3.2, 6th paragraph**      **inopportune**

Ensure that the IUT, in the <service> Deactivate Request state, on receipt of a DL-ESTABLISH-INDICATION primitive, ignores the indication and remains in the current state.

#### 6.2.5.2.2.3 Interrogation

**Selection:** IUT supports interrogation. PICS: MCu 5.3.

**GFP\_U10\_06\_001**      **subclause 10.2.4.1, 1st paragraph**      **valid**

Ensure that the IUT, in the Idle state, to interrogate an instance of a supplementary service, sends a FACILITY message with a Facility information element containing a <service> interrogate invoke component and enters the <service> Interrogate Request state.

**GFP\_U10\_06\_002**      **subclause 10.2.4.1, 7th paragraph**      **valid**

Ensure that the IUT, in the <service> Interrogate Request state, on receipt of a FACILITY message with an interrogate return result component, does not respond and returns to the Idle state.

**GFP\_U10\_06\_003**      **subclause 10.2.4.2, 2nd paragraph**      **invalid**

Ensure that the IUT, in the <service> Interrogate Request state, on receipt of a FACILITY message with an interrogate return error component, does not respond and returns to the previous state.

**GFP\_U10\_06\_004**      **subclause 10.2.4.2, 3rd paragraph**      **valid**

Ensure that the IUT, in the <service> Interrogate Request state, on expiry of the timer T-INTERROGATE, enters the Idle state.

**GFP\_U10\_06\_005**      **subclause 10.2.4.2, 5th paragraph**      **inopportune**

Ensure that the IUT, in the <service> Interrogate Request state, on receipt of a DL-RELEASE-INDICATION primitive, aborts the interrogation and enters the Idle state.

**GFP\_U10\_06\_006**      **subclause 10.2.4.2, 6th paragraph**      **inopportune**  
Ensure that the IUT, in the <service> Interrogate Request state, on receipt of a DL-ESTABLISH-INDICATION primitive,  
ignores the indication and remains in the current state.

### 6.2.5.2.3      **Generic status request procedure**

**Selection:** IUT supports generic status request procedure. PICS: MCu 6.

**GFP\_U10\_07\_001**      **subclause 10.3.2.2, 13th paragraph**      **valid**  
Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a <service> StatusRequest invoke component, which contains a compatibilityMode parameter indicating "allBasicServices", and the IUT is compatible with all basic services, and is free to accept a call for all of these basic services,  
responds with a FACILITY message with a Facility information element containing a <service> StatusRequest return result component which contains a StatusResult parameter indicating "compatibleAndFree".

**GFP\_U10\_07\_002**      **subclause 10.3.2.2, 13th paragraph**      **valid**  
Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a <service> StatusRequest invoke component, which contains a compatibilityMode parameter indicating "oneOrMoreBasicServices", and the IUT is compatible with at least one of the indicated basic services, and is free to accept a call for at least one of these basic services,  
responds with a FACILITY message with a Facility information element containing a <service> StatusRequest return result component which contains a StatusResult parameter indicating "compatibleAndFree".

**GFP\_U10\_07\_003**      **subclause 10.3.2.2, 13th paragraph**      **valid**  
Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a <service> StatusRequest invoke component, which contains a compatibilityMode parameter indicating "allBasicServices", and the IUT is compatible with all basic services but is not free to accept calls for all of these basic services,  
responds with a FACILITY message with a Facility information element containing a <service> StatusRequest return result component which contains a StatusResult parameter indicating "compatibleAndBusy".


**GFP\_U10\_07\_004**      **subclause 10.3.2.2, 13th paragraph**      **valid**  
Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a <service> StatusRequest invoke component, which contains a compatibilityMode parameter indicating "oneOrMoreBasicServices", and the IUT is compatible with at least one of the indicated basic services, but is not free to accept a call for any of these basic services,  
responds with a FACILITY message with a Facility information element containing a <service> StatusRequest return result component which contains a StatusResult parameter indicating "compatibleAndBusy".

**GFP\_U10\_07\_005**      **subclause 10.3.2.2, 13th paragraph**      **valid**  
Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a <service> StatusRequest invoke component, which contains a compatibilityMode parameter indicating "allBasicServices", and the IUT is not compatible with all the indicated basic services,  
responds with a FACILITY message with a Facility information element containing a <service> StatusRequest return result component which contains a StatusResult parameter indicating "incompatible".

**GFP\_U10\_07\_006**      **subclause 10.3.2.2, 13th paragraph**      **valid**  
Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a <service> StatusRequest invoke component, which contains a compatibilityMode parameter indicating "oneOrMoreBasicServices", and the IUT is not compatible with any of the indicated basic services,  
responds with a FACILITY message with a Facility information element containing a <service> StatusRequest return result component which contains a StatusResult parameter indicating "incompatible".

**6.2.6 TSS&TP for clause 11**

**6.2.6.1 TSS for clause 11**

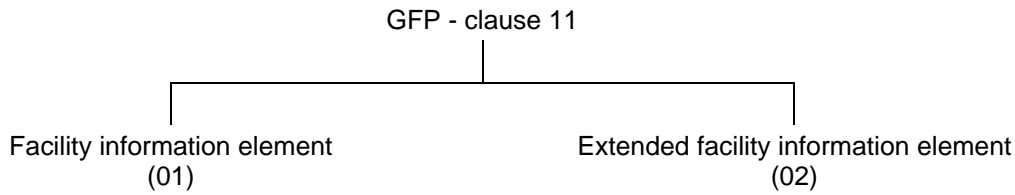

NOTE: Numbers in brackets represent group numbers and are used in TP identifiers.

**Figure 6: TSS**

**6.2.6.2 TPs for clause 11**

**6.2.6.2.1 Facility information element**

**GFP\_U11\_01\_001 subclause 11.2.2.1 valid**

Ensure that the IUT, while in the <cstate>, to send one or more components to control a supplementary service,

sends a <PDU1> message containing a Facility information element with one or more components encoded according to the Basic Encoding Rules (BER) as specified in CCITT Recommendation X.209 [12].

**GFP\_U11\_01\_002 subclause 11.2.2.1 valid**

Ensure that the IUT, while in the <cstate>, on receipt of a <PDU1> message containing a Facility information element with one or more components encoded according to the BER as specified in CCITT Recommendation X.209 [12] and using a combination of the short, long and indefinite length formats,

accepts the message and its contents as valid and responds appropriately for the supplementary service.

**6.2.6.2.2 Extended facility information element**

**GFP\_U11\_02\_001 subclause 11.2.2.1 valid**

Ensure that the IUT, while in the <cstate>, to send one or more components to control a supplementary service where these components would be too long to be included in a Facility information element,

sends a <PDU1> message (possibly segmented) containing an Extended facility information element with one or more components encoded according to the BER as specified in CCITT Recommendation X.209 [12].

**GFP\_U11\_02\_002 subclause 11.2.2.1 valid**


Ensure that the IUT, while in the <cstate>, on receipt of a <PDU1> message (possibly segmented) containing an Extended facility information element with one or more components encoded according to the BER as specified in CCITT Recommendation X.209 [12] and using a combination of the short, long and indefinite length formats,

accepts the message and its contents as valid and responds appropriately for the supplementary service.



## 6.2.7 TSS&TP for annex D

### 6.2.7.1 TSS for annex D



NOTE: Numbers in brackets represent group numbers and are used in TP identifiers.

**Figure 7: TSS**

### 6.2.7.2 TPs for annex D

#### 6.2.7.2.1 Definition of Q.931 information elements

##### **GFP\_UD\_01\_001**                      **clause D.4**    **valid**

Ensure that the IUT, while in the <cstate>, on receipt of a <message> containing a Facility information element with a <component> containing a parameter of type "Q931InformationElement" including two or more Q.931 information elements whose order of appearance is not in ascending order of their information element identifier,

accepts the message and its contents as valid and responds appropriately for the supplementary service.

NOTE: When generating a specific TP from this TP and repeated Bearer capability or High layer compatibility information elements are to be used, the semantic attached to their order of appearance should be taken into account.

## 7 Compliance

An ATS which complies with this TSS&TP specification shall:

- a) consist of a set of test cases corresponding to the set or to a subset of the TPs specified in clause 6;
- b) use a TSS which is an appropriate subset of the whole of the TSS specified in clause 5;
- c) use the same naming conventions for the test groups and test cases;
- d) maintain the relationship specified in clause 6 between the test groups and TPs and the entries in the PICS proforma to be used for test case deselection;
- e) comply with ISO/IEC 9646-2 [4].

In the case of a) or b) above, a subset shall be used only where a particular Abstract Test Method (ATM) makes some TPs untestable. All testable TPs from clause 6 shall be included in a compliant ATS.

## 8 Requirements for a comprehensive testing service

As a minimum the Remote test method, as specified in ISO/IEC 9646-2 [4], shall be used by any organization claiming to provide a comprehensive testing service for user equipment claiming conformance to ETS 300 196-1 [1].

## History

Document history			
March 1996	Public Enquiry	PE 103:	1996-03-04 to 1996-06-28
September 1996	Vote	V 110:	1996-09-09 to 1996-11-01
January 1997	First Edition		