

EUROPEAN
TELECOMMUNICATION
STANDARD

FINAL DRAFT
pr **ETS 300 497-9**

May 1996

Source: ETSI TC-RES

Reference: DE/RES-03026-9

ICS: 33.020, 33.060.50

Key words: Abstract Test Suites, DECT, GAP

**Radio Equipment and Systems (RES);
Digital Enhanced Cordless Telecommunications (DECT);
Common Interface (CI) Test Case Library (TCL);
Part 9: Abstract Test Suite (ATS) for Network (NWK) layer -
Fixed radio Termination (FT)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

*

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Contents

| | |
|---|----|
| Foreword | 5 |
| 1 Scope | 7 |
| 2 Normative references | 7 |
| 3 Definitions, symbols and abbreviations | 10 |
| 3.1 DECT definitions | 10 |
| 3.2 DECT abbreviations | 10 |
| 3.3 ISO 9646 definitions | 11 |
| 3.4 ISO 9646 abbreviations | 11 |
| 4 Abstract Test Method (ATM) | 12 |
| 4.1 ATM | 12 |
| 4.2 DLC primitives | 13 |
| 4.2.1 S-SAP primitives | 13 |
| 4.2.2 B-SAP primitives | 16 |
| 4.3 TC execution sequence | 16 |
| 5 Untestable Test Purposes (TPs) | 17 |
| 5.1 Control protocol | 17 |
| 6 ATS Conventions | 17 |
| 6.1 Naming conventions | 17 |
| 6.1.1 Declarations part | 17 |
| 6.1.1.1 Test suite type, ASP and PDU type definitions | 18 |
| 6.1.1.2 Test Suite Operations (TSO) definitions | 18 |
| 6.1.1.3 Test Suite Parameter (TSP) declarations | 18 |
| 6.1.1.4 Test Case Selection (TCS) expression definitions | 18 |
| 6.1.1.5 Test Suite Constant (TSC) declarations | 18 |
| 6.1.1.6 Test Suite Variable (TSV) declarations | 18 |
| 6.1.1.7 Test Case Variable (TCV) declarations | 19 |
| 6.1.1.8 Point of Control and Observation (PCO) declarations | 19 |
| 6.1.1.9 Timer declarations | 19 |
| 6.1.1.10 ASP type definitions | 19 |
| 6.1.1.11 PDU type definitions | 19 |
| 6.1.1.12 Alias definitions | 20 |
| 6.1.2 Constraints part | 20 |
| 6.1.3 Dynamic part | 21 |
| 6.1.3.1 Test Case (TC) identifier | 21 |
| 6.1.3.2 Test Step (TS) identifier | 22 |
| 6.1.3.3 Default identifier | 22 |
| 6.1.3.4 General aspects | 22 |
| 6.1.3.5 ATS abbreviations | 22 |
| 6.2 Implementation conventions | 23 |
| 6.2.1 Declaration part | 23 |
| 6.2.2 Constraint part | 23 |
| 6.2.3 Dynamic part | 23 |
| 6.2.4 Documentation | 24 |
| Annex A (normative): Abstract test suite for NWK testing | 25 |
| A.1 The machine processable ATS (TTCN.MP) | 25 |
| A.2 The graphical ATS (TTCN.GR) | 25 |

| | | |
|------------------------|---|-----|
| Annex B (normative): | Partial PIXIT proforma | 355 |
| B.1 | Identification summary..... | 355 |
| B.2 | ATS summary..... | 355 |
| B.3 | Test laboratory..... | 355 |
| B.4 | Client identification..... | 355 |
| B.5 | SUT..... | 355 |
| B.6 | Protocol layer information..... | 356 |
| B.6.1 | Protocol identification | 356 |
| B.6.2 | IUT information..... | 356 |
| Annex C (normative): | Protocol Conformance Test Report (PCTR) Proforma for DECT NWK | 361 |
| C.1 | Identification summary..... | 361 |
| C.1.1 | Protocol conformance test report..... | 361 |
| C.1.2 | IUT identification..... | 361 |
| C.1.3 | Testing environment..... | 361 |
| C.1.4 | Limits and reservation | 361 |
| C.1.5 | Comments..... | 362 |
| C.2 | IUT Conformance status..... | 362 |
| C.3 | Static conformance summary | 362 |
| C.4 | Dynamic conformance summary | 362 |
| C.5 | Static conformance review report | 362 |
| C.6 | Test campaign report..... | 363 |
| C.7 | Observations..... | 364 |
| Annex D (informative): | Bibliography | 365 |
| History | | 366 |

Foreword

This final draft European Telecommunication Standard (ETS) has been produced by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Voting phase of the ETSI standards approval procedure.

The DECT Test Specification multipart ETS comprises nine parts, as follows:

- Part 1: "Part 1: Test Suite Structure (TSS) and Test Purposes (TP) for Medium Access Control (MAC) layer".
- Part 2: "Part 2: Abstract Test Suite (ATS) for Medium Access Control (MAC) layer - Portable radio Termination (PT)".
- Part 3: "Part 3: Abstract Test Suite (ATS) for Medium Access Control (MAC) layer - Fixed radio Termination (FT)".
- Part 4: "Part 4: Test Suite Structure (TSS) and Test Purposes (TP) - Data Link Control (DLC) layer".
- Part 5: "Part 5: Abstract Test Suite (ATS) - Data Link Control (DLC) layer".
- Part 6: "Part 6: Test Suite Structure (TSS) and Test Purposes (TP) - Network (NWK) layer - Portable radio Termination (PT)".
- Part 7: "Part 7: Abstract Test Suite (ATS) for Network (NWK) layer - Portable radio Termination (PT)".
- Part 8: "Part 8: Test Suite Structure (TSS) and Test Purposes (TP) - Network (NWK) layer - Fixed radio Termination (FT)".
- Part 9: "Part 9: Abstract Test Suite (ATS) for Network (NWK) layer - Fixed radio Termination (FT)".**

| Proposed transposition dates | |
|---|---------------------------------|
| Date of latest announcement of this ETS (doa): | 3 months after ETSI publication |
| Date of latest publication of new National Standard or endorsement of this ETS (dop/e): | 6 months after doa |
| Date of withdrawal of any conflicting National Standard (dow): | 6 months after doa |

Blank page

1 Scope

This final draft European Telecommunication Standard (ETS) contains the Abstract Test Suite (ATS) to test the Network (NWK) layer, Fixed radio Termination (FT).

The objective of this test specification is to provide a basis for approval tests for DECT equipment giving a high probability of air interface inter-operability between different manufacturer's DECT equipment. Part 9 of this test specification contains the Abstract Test Suite for testing of the NWK layer at the FT.

The ISO standard for the methodology of conformance testing (ISO/IEC 9646) as well as the ETSI rules for conformance testing (protocol and profile conformance testing specifications, standardization methodology ETS 300 406) are used as basis for the test methodology.

Test specifications for the Physical Layer (PHL) are provided in other DECT standards.

Annex B provides the partial PIXIT proforma.

2 Normative references

This ETS incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 175-1 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 1: Overview".
- [2] ETS 300 175-2 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 2: Physical layer".
- [3] ETS 300 175-3 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 3: Medium access control layer".
- [4] ETS 300 175-4 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 4: Data link control layer".
- [5] ETS 300 175-5 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 5: Network layer".
- [6] ETS 300 175-6 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 6: Identities and addressing".
- [7] ETS 300 175-7 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 7: Security features".
- [8] ETS 300 175-8 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 8: Speech coding and transmission".
- [9] ETS 300 175-9 (1992): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Part 9: Public access profile".
- [10] ETS 300 444: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Generic Access Profile (GAP)".

- [11] ETS 300 370: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications/Global System for Mobile communications (DECT/GSM) inter-working profile; Access and mapping (Protocol/procedure description for 3,1 kHz speech service)".
- [12] prETS 300 434: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT) and Integrated Services Digital Network (ISDN) inter-working for end system configuration".
- [13] ETS 300 331: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); DECT Authentication Module (DAM)".
- [14] CCITT Recommendation G.726 (1991): "40, 32, 24, 16 kbit/s adaptive differential pulse code modulation (ADPCM)".
- [15..20] Reserved values
- [21] ISO/IEC 9646-1 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts". (See also CCITT Recommendation X.290 (1991)).
- [22] ISO/IEC 9646-2 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 2: Abstract test suite specification". (See also CCITT Recommendation X.291 (1991)).
- [23] ISO/IEC 9646-3 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The tree and tabular combined notation". (See also CCITT Recommendation X.292 (1992)).
- [24] ISO/IEC 9646-4 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 4: Test realisation". (See also CCITT Recommendation X.292 (1992)).
- [25] ISO/IEC 9646-5 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process". (See also CCITT Recommendation X.292 (1992)).
- [26] ISO/IEC 9646-6 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 6: Protocol profile test specification".
- [27] ISO/IEC 9646-7 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation conformance statement".
- [28] ISO 7498: "Information Processing Systems - Open Systems Interconnection - Basic Reference model".
- [29] ETS 300 406 (1995): "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [30] 91/263/EEC: "Council Directive of 29 April 1991 on the approximation of the laws of the Member states concerning telecommunications terminal equipment, including the mutual recognition of their conformity. (Terminal Directive)".
- [31..40] Reserved values
- [41] I-ETS 300 176: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Approval test specification".

- [42] TBR 6: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); General terminal attachment requirements".
- [43] TBR 10: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); General terminal attachment requirements: Telephony applications".
- [44] TBR 11 (1992): "Radio Equipment and Systems (RES); Attachment requirements for terminal equipment for Digital European Cordless Telecommunications (DECT) Public Access Profile (PAP) applications".
- [45] ETS 300 323 (1994): "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Public Access Profile (PAP) test specification".
- [46] prETS 300 476: "Radio Equipment and Systems (RES); Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma".
- [47] prETS 300 497: "Radio Equipment and Systems (RES); Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI) Test Case Library (TCL)".
- [48] prETS 300 474: "Radio Equipment and Systems (RES); Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma".
- [49] prETS 300 494: "Radio Equipment and Systems (RES); Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile Test Specification (PTS)".
- [50] prTBR 22: "Radio Equipment and Systems (RES); Attachment requirements for terminal equipment for Digital Enhanced Cordless Telecommunications (DECT) Generic Access Profile (GAP) applications".

3 Definitions, symbols and abbreviations

3.1 DECT definitions

For the purposes of this ETS, the definitions given in ISO/IEC 9646-1 [21], ISO/IEC 9646-2 [22], ETS 300 175-1 [1], ETS 300 175-5 [5], ETS 300 175-6 [6] and ETS 300 175-7 [7] apply.

3.2 DECT abbreviations

For the purposes of this ETS the NWK layer abbreviations defined in ETS 300 175-5 [5] and the following abbreviations apply:

| | |
|------|---|
| AC | Authentication Code |
| AR | Access Rights |
| AU | Authentication |
| CA | Capability |
| CC | Call Control |
| CCSM | Call Control State Machine |
| CI | Call Information |
| CH | Ciphering |
| CR | Call Release |
| CTS | Conformance Testing Services |
| DECT | Digital Enhanced Cordless Telecommunication |
| DLC | Data Link Control layer |
| ETSI | European Telecommunications Standards Institute |
| FT | Fixed radio termination |
| GAP | Generic Access Profile |
| IC | Incoming Call |
| ID | Identification |
| IPUI | International Portable User Identity |
| IPEI | International Portable Equipment Identity |
| KA | Key Allocation |
| LC | Link Control entity |
| LE | Connection oriented Link Establishment |
| LL | ConnectionLess Link control |
| LO | Location |
| LR | Connection oriented Link Release |
| LS | Connection oriented Link Suspend and resume |
| MAC | Medium Access Control layer |
| ME | Management Entity |
| ML | Connectionless Message Services |
| MM | Mobility Management |
| MO | Connection Oriented Message Services |
| NWK | Network layer |
| OC | Outgoing Call |
| PAP | Public Access Profile |
| PARK | Portable Access Rights Key |
| PM | Packet Mode |
| PR | Parameter Retrieval |
| PT | Portable radio termination |
| RPN | Radio Fixed Part Number |
| RS | Call Related Supplementary Services |
| SC | Service Change |
| UAK | User Authentication Key |

3.3 ISO 9646 definitions

For the purposes of this ETS the following ISO 9646 definitions apply:

Implementation Under Test (IUT)
System Under Test (SUT)
Abstract Test Suite (ATS)
Point of Control and Observation (PCO)
Protocol Implementation Conformance Statement (PICS)
Protocol Implementation eXtra Information for Testing (PIXIT)
Lower Tester (LT)
Upper Tester (UT)

3.4 ISO 9646 abbreviations

For the purposes of this ETS the following ISO 9649 abbreviations apply:

| | |
|-------|---|
| ATS | Abstract Test Suite |
| ASP | Abstract Service Primitive |
| BI | Invalid Behaviour |
| BO | InOpportune Behaviour |
| BV | Valid Behaviour |
| CA | Capability tests |
| ETS | European Telecommunication Standard |
| ISO | International Organisation for Standardisation |
| IUT | Implementation Under Test |
| IWU | InterWorking Unit |
| LT | Lower Tester |
| PDU | Protocol Data Unit |
| PHL | Physical Layer |
| PICS | Protocol Implementation Conformance Statements |
| PIXIT | Protocol Implementation eXtra Information for Testing |
| SUT | System Under Test |
| TP | Test Purpose |
| TSO | Test Suite Operation |
| TSP | Test Suite Parameter |
| TSS | Test Suite Structure |
| TTCN | Tree and Tabular Combined Notation |
| UT | Upper Tester |

4 Abstract Test Method (ATM)

This clause describes the ATM, the Point of Control and Observation (PCO) used to test the NWK layer of the FT.

4.1 ATM

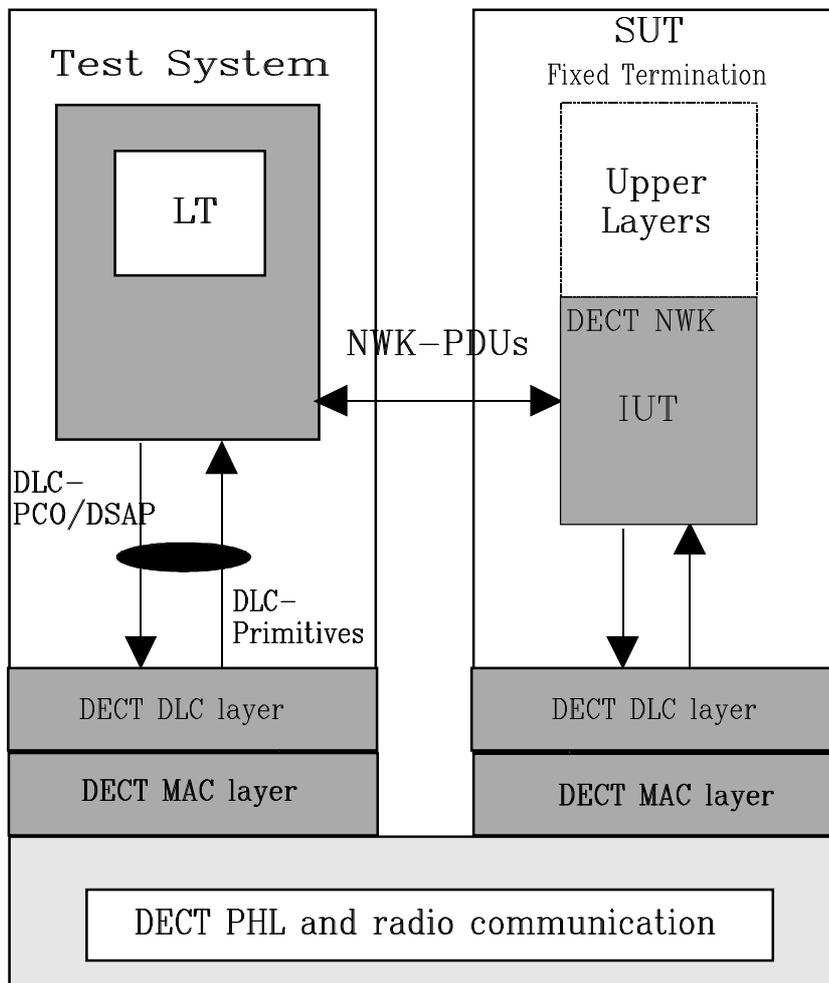


Figure 1: Remote Single Layer Test Method Embedded variant

- LT1:** a lower tester (LT1) is located in a remote DECT test system. It controls and observes the behaviour of the IUT.
- DSAP:** a unique DLC SAP is defined at the DECT interface and used to exchange service data of the NWK protocol.
- PCO:** the PCO for Network Layer testing is located on the DSAP. All test events at the PCO are specified in terms of DLC ASPs and NWK PDUs.
- Upper layers/tester:** no explicit upper tester (UT) exists in the test system. However, the SUT needs to carry out some UL functions to achieve some effects of test co-ordination procedures. Designing ATS, the capability of the IWU, such as PSTN, ISDN or GSM IWUs might be taken into account. An example of such controls could be to provoke restarting of the IUT through the Q interface.

4.2 DLC primitives

In this subclause the DSAP primitives are defined according to ETS 300 175-4 [4], subclause 8.3.2 (S-SAP primitives) and ETS 300 175-4 [4], subclause 8.3.3 (B-SAP primitives).

4.2.1 S-SAP primitives

Table 1: DL_DATA_IND primitive

| ASP Declaration | | |
|-------------------------------|---|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_DATA_IND | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.3 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| message_unit | PDU | ETS 300 175-4 [4], subclause 8.3.1 |

Table 2: DL_DATA_REQ primitive

| ASP Declaration | | |
|-------------------------------|---|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_DATA_REQ | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.3 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| message_unit | PDU | ETS 300 175-4 [4], subclause 8.3.1 |

Table 3: DL_ENCRYPT_CNF primitive

| ASP Declaration | | |
|-------------------------------|---|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_ENCRYPT_CNF | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.8 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| encryption_status | CIPHER_STATUS (INTEGER(0,1)) | ETS 300 175-4 [4], subclause 8.3.1 |

Table 4: DL_ENCRYPT_IND primitive

| ASP Declaration | | |
|-------------------------------|---|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_ENCRYPT_IND | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.8 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| connection_identities | CONNECTION_IDENTITIES (OCTETSTRING) | ETS 300 175-4 [4], subclause 8.3.1 |
| encryption_status | CIPHER_STATUS (INTEGER(0,1)) | ETS 300 175-4 [4], subclause 8.3.1 |

Table 5: DL_ENCRYPT_REQ primitive

| ASP Declaration | | |
|------------------------------|--|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_ENCRYPT_REQ | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.8 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifie | DATA_LINK_ENDPOINT_ID ENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| connection_identities | CONNECTION_IDENTITIE S (OCTETSTRING) | ETS 300 175-4 [4], subclause 8.3.1 |
| encryption_status | CIPHER_STATUS (INTEGER(0,1)) | ETS 300 175-4 [4], subclause 8.3.1 |

Table 6: DL_ENC_KEY_REQ primitive

| ASP Declaration | | |
|------------------------------|--|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_ENC_KEY_REQ | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.7 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifie | DATA_LINK_ENDPOINT_ID ENTIFIER (INTEGER) | ETS 300 175-4 [4], 7.3.6 |
| connection_identities | CONNECTION_IDENTITIE S (OCTETSTRING) | ETS 300 175-4 [4], 8.3.1 |
| encryption_key | ENCRYPTION_KEY (BITSTRING[64]) | ETS 300 175-4 [4], 8.3.1 |

Table 7: DL_ESTABLISH_CNF primitive

| ASP Declaration | | |
|------------------------------|--|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_ESTABLISH_CNF | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.1 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifie | DATA_LINK_ENDPOINT_ID ENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |

Table 8: DL_ESTABLISH_IND primitive

| ASP Declaration | | |
|------------------------------|--|--------------------------------------|
| ASP NAME | PCO TYPE | COMMENTS |
| DL_ESTABLISH_IND | S-SAP | ETS 300 175-4 [4], subclause 8.3.2.1 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifie | DATA_LINK_ENDPOINT_ID ENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| establish_mode | ESTABLISH_MODE (INTEGER(0,1,2)) | ETS 300 175-4 [4], subclause 8.3.1 |
| radio_fixed_part_number | RADIO_FIXED_PART_NUM BER (INTEGER) | ETS 300 175-4 [4], subclause 8.3.1 |
| message_unit | PDU | ETS 300 175-4 [4], subclause 8.3.1 |

Table 9: DL_ESTABLISH_REQ primitive

| ASP Declaration | | |
|-------------------------------|--|--|
| ASP NAME DL_ESTABLISH_REQ | PCO TYPE S-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.2.1 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| establish_mode | ESTABLISH_MODE (INTEGER(0,1,2)) | ETS 300 175-4 [4], subclause 8.3.1 |
| radio_fixed_part_number | RADIO_FIXED_PART_NUMBER (INTEGER) | ETS 300 175-4 [4], subclause 8.3.1 |
| message_unit | PDU | ETS 300 175-4 [4], subclause 8.3.1 |

Table 10: DL_ESTABLISH_RES primitive

| ASP Declaration | | |
|-------------------------------|--|--|
| ASP NAME DL_ESTABLISH_RES | PCO TYPE S-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.2.1 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |

Table 11: DL_RELEASE_CNF primitive

| ASP Declaration | | |
|-------------------------------|--|--|
| ASP NAME DL_RELEASE_CNF | PCO TYPE S-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.2.2 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| release_mode | RELEASE_MODE (INTEGER(0,1)) | ETS 300 175-4 [4], subclause 8.3.1 |

Table 12: DL_RELEASE_IND primitive

| ASP Declaration | | |
|-------------------------------|--|--|
| ASP NAME DL_RELEASE_IND | PCO TYPE S-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.2.2 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| release_mode | RELEASE_MODE (INTEGER(0,1)) | ETS 300 175-4 [4], subclause 8.3.1 |

Table 13: DL_RELEASE_REQ primitive

| ASP Declaration | | |
|-------------------------------|--|--|
| ASP NAME DL_RELEASE_REQ | PCO TYPE S-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.2.2 |
| Service control information | | |
| Parameter name | Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | ETS 300 175-4 [4], subclause 7.3.6 |
| release_mode | RELEASE_MODE (INTEGER(0,1)) | ETS 300 175-4 [4], subclause 8.3.1 |

4.2.2 B-SAP primitives

Table 14: DL_BROADCAST_IND primitive

| ASP Declaration | | |
|------------------------------|---------------------------------------|--|
| ASP NAME DL_BROADCAST_IND | PCO TYPE B-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.3.1 |
| Service control information | | |
| Parameter name | Type | Comments |
| cluster_address_list | CLUSTER_ADDRESS_LIST (OCTETSTRING) | ETS 300 175-4 [4], subclause 8.3.1 |
| message_unit | PDU | ETS 300 175-4 [4], subclause 8.3.1 |
| extended_message_flag | BIT_1 (BITSTRING[1]) | ETS 300 175-4 [4], subclause 8.3.1 |
| error_flag | BIT_1 (BITSTRING[1]) | ETS 300 175-4 [4], subclause 8.3.1 |

Table 15: DL_BROADCAST_REQ primitive

| ASP Declaration | | |
|------------------------------|---------------------------------------|--|
| ASP NAME DL_BROADCAST_REQ | PCO TYPE B-SAP | COMMENTS ETS 300 175-4 [4], subclause 8.3.3.1 |
| Service control information | | |
| Parameter name | Type | Comments |
| cluster_address_list | CLUSTER_ADDRESS_LIST (OCTETSTRING) | ETS 300 175-4 [4], subclause 8.3.1 |
| message_unit | PDU | ETS 300 175-4 [4], subclause 8.3.1 |
| extended_message_flag | BIT_1 (BITSTRING[1]) | ETS 300 175-4 [4], subclause 8.3.1 |

4.3 TC execution sequence

The test cases can be executed in any order, there are no restrictions on this matter.

5 Untestable Test Purposes (TPs)

This clause gives a list of TPs which are not implemented in the ATS (annex A) due to the chosen ATM or other restrictions.

5.1 Control protocol

The following test purposes are not implemented in the ATS due to unknown reaction of the IUT after testing the TPs:

Table 16: Untestable TP's (1)

| Test Purpose | Reference to ETS 300 4497-6 |
|-------------------|-----------------------------|
| TP/FT/CC/BV/OC-06 | |
| TP/FT/CC/BV/CI-11 | |
| TP/FT/CC/BV/CI-12 | |
| TP/FT/CC/BV/CR-12 | |
| TP/FT/CC/BV/RS-01 | |
| TP/FT/LC/TI-01 | |

6 ATS Conventions

The ATS conventions are intended to give a better understanding of the ATS but they describe also the conventions made for the development of the ATS. Thus for any later maintenance purposes or further development of the ATS the conventions described in this clause shall be considered.

The ATS conventions contain two clauses, the naming conventions and the implementation conventions. The naming conventions describe the structure of the naming of all ATS elements. The implementation conventions describe the functional structure of the ATS.

To define the ATS the guidelines of the documents ETS 300 406 [29] and ETR 141 were considered.

6.1 Naming conventions

6.1.1 Declarations part

This subclause describes the naming conventions chosen for the elements of the ATS declarations part. The following general rules apply:

- identifiers shall be written in lowercase;
- type declarations shall be written in uppercase;
- constraints shall be written with the first letter in uppercase, and the rest in lowercase.

Information elements are coded in the order from top to bottom and from right to left, in order to make the encoding and decoding easier.

6.1.1.1 Test suite type, ASP and PDU type definitions

The test suite type-definitions, the ASP type definitions and the PDU type definitions shall be written in uppercase. Identifier names of structured type definitions and of the ASP and PDU type definitions, shall be written in lowercase.

Types related to a certain higher layer entity shall commence with a protocol identifier to define which entity they belong to.

EXAMPLE 1: Call Control: cc e.g. CC_SETUP.

Id names of structured types which are used for invalid tests commence with "bi":

EXAMPLE 2: Bi_cc_setup_rx01.

6.1.1.2 Test Suite Operations (TSO) definitions

The TSO identifiers are composed of a string in uppercase letters starting by the string "TSO_" (e.g. TSO_INTEGER_TO_O_1).

6.1.1.3 Test Suite Parameter (TSP) declarations

The TSP identifiers are composed of a string in uppercase letters starting by the string "TSP_" (e.g. TSP_WINDOW_SIZE).

If the TSP references a PICS item, the letter "C" is added to the standard prefix (e.g. TSPC_PICS_ITEM_S23).

If the TSP references a PIXIT item, the letter "X" is added to the standard prefix (e.g. TSPX_PIXIT_ITEM_2).

Exception: If the TSP represents a system parameter or value, only the name defined in the specifications is used (e.g. V_S = send sequence variable).

Complete names as defined in the specifications are used.

6.1.1.4 Test Case Selection (TCS) expression definitions

The naming conventions for the TCS expression definitions use almost the same rules as the TSPs, except for the prefix that is "TCS_". Also they are logical combinations of the TSP definitions.

6.1.1.5 Test Suite Constant (TSC) declarations

The TSC identifiers are composed of a string in uppercase letters starting by the string "TSC_" (e.g. TSC_retry).

Exception: If the TSC represents a system parameter or value, only the name defined in the specifications is used (e.g. N250).

Complete names as defined in the specifications are used.

6.1.1.6 Test Suite Variable (TSV) declarations

The TSV identifiers are composed of a string in uppercase letters starting by the string "TSV_".

Complete names as defined in the specifications are used.

6.1.1.7 Test Case Variable (TCV) declarations

The TCV identifiers are composed of a string in uppercase letters starting by the string "TCV_".

EXAMPLE: TCV_crvalue.

Complete names as defined in the specifications are used.

6.1.1.8 Point of Control and Observation (PCO) declarations

The PCO identifiers are composed of two or four capital letters, beginning with "L", as there are only LTs.

EXAMPLE: LMAC represents a PCO on MAC interface as LT in the test equipment;
LDLC represents a PCO on DLC interface as LT in the test equipment.

6.1.1.9 Timer declarations

Two types of timers can be identified:

1) standardised:

- those defined in the standard, e.g. T302. They use exactly the same name as in the standard, beginning with a capital "T".
- As there is a tolerance margin accepted for these timers, three values are needed:
 - the maximum value allowed, which will use the suffix "_max";
 - the minimum value allowed, which will use the suffix "_min";
 - the value actually implemented, with no suffix;

EXAMPLE 1: T302_max, T302_min, and T302.

2) not standardised:

- those not defined in the standard, i.e. for execution use, e. g. a timer waiting for a response. These timers begin with the prefix "T_", followed by a string in capital letters.

EXAMPLE 2: T_RESP represents a timer for controlling the response time of the IUT.

6.1.1.10 ASP type definitions

The identifier of an ASP uses exactly the same name as the name defined in the specifications. It is written in uppercases, finishing by an underscore character ("_"), and three capital letters indicating whether it is a request, an indication, a response or a confirmation primitive.

EXAMPLE: DL-RELEASE_REQ for an ASP containing a layer 3 release request passed to layer 2;
MAC-CO_DATA_REQ for an ASP containing a layer 2b PDU passed to layer 2a.

6.1.1.11 PDU type definitions

The identifier of a PDU is given in a string in uppercase letters, representing the layer message.

EXAMPLE 1: rr for the Receive Ready layer 2 message;
disconnect for the DISCONNECT layer 3 message.

Where the message is a composite word, an underscore character ("_") appears in the string.

EXAMPLE 2: release_complete is the RELEASE COMPLETE layer 3 message.

Id names of PDUs commence with a protocol identifier to define which protocol they are belonging to. The following identifiers are used:

- Call Control: cc e.g. CC-SETUP.

Id names of PDUs which are used for invalid tests commence with "bi":

EXAMPLE 3: BI-CC-SETUP.

6.1.1.12 Alias definitions

These are used to make the sending and receiving of PDUs within ASPs more understandable when writing the dynamic part of the test suite. This is done by giving the ASP an alias. The alias name indicates the PDU carried by the ASP and whether it is sent or received by the tester.

The identifier of an alias consists of a string in capital letters indicating the message, followed by two lower case letters "r" or "s" indicating if the message should be sent or received by the tester.

6.1.2 Constraints part

This subclause describes the naming conventions chosen for the elements of the ATS constraints part.

Constraint identifiers commence with uppercase. The remaining part of the Id name is written in lowercase.

Identifier names of elements concerning the same subject have equivalent names in the Declaration and the Constraint part:

| | |
|-------------------|-----------|
| Declaration Part: | cc_setup; |
| Constraint Part: | Cc_setup. |

The name of the modified constraint describes the particularity of the modified constraint:

EXAMPLE: Cc_setup_mand_only (modified Cc_setup with only the mandatory Information Elements).

If formal parameter lists are used, the variable names are written in lowercase. The variable name is the same as the name of the element it is representing.

Structured type constraints declarations are divided into:

- receive constraints:
 - the receive constraints are noted down as "name_rx*". The receive constraints are subdivided into:
 - receive base constraints:

they are noted down as "name_rx_base";
 - receive special constraints:

they are noted down as "name_rx_<extension>", where <extension> is a descriptive name (e.g. "Signal_rx_alerting_on");
- transmit constraints:
 - the transmit constraints are noted down as "name_tx_<extension>", where <extension> is a descriptive name. (e.g. "Signal_tx_alerting_off").

If a certain structured type constraint is valid for both receiving and transmitting, because it contains no wildcards, and the receiving constraint should exactly match, the constraint will be noted down as:

"<structured_type_name>_extention" Example: "Portable_id_ipui".

PDU Constraints Declarations are divided into:

- receive constraints:
 - the receive constraints are noted down as "name_rx*". The receive constraints are subdivided into:
 - receive base constraints:
 - they are noted down as "name_rx_base". They constrain all allowed values, and for the optional fields, the "IF_PRESENT" keyword is added;
 - receive special constraints:
 - they are noted down as "name_rx0n", where n is a sequence number;
- transmit constraints:
 - the transmit constraints are noted down as "name_tx", where n is a sequence number. They can be subdivided into:
 - transmit base constraints:
 - they are noted down as "name_tx_base". They constrain all mandatory fields to all allowed values in the standard, and they constrain all optional fields to "OMIT";
 - transmit special constraints:
 - they are noted down as "name_tx0n" where n is a sequence number. They shall not contain any wildcards.

Derived constraints shall not be more than 1 level deep. They shall only be derived directly from the base constraint.

The test suite is not ready yet to handle PDU's with empty information elements. For every receive constraint, also a information element constraint with an empty parameter list should be added.

6.1.3 Dynamic part

This subclause describes the naming conventions chosen for the elements of the ATS dynamic part.

6.1.3.1 Test Case (TC) identifier

The identifier of the TCs is built in the same way as for the TPs described in ETS 300 324-3 [3], subclause 5.1.1, with the exception that "TP" is replaced by "TC":

- TP identifier: TPCCBI-04;
- TC identifier: TCCCBI-04.

6.1.3.2 Test Step (TS) identifier

The TS identifier is built with two strings of capital letters joined by underscore character. The first string indicates the main function of the TS; e.g. PR for preamble, PO for postamble, CS for check state and STP for general step. The second string indicates the meaning of the step.

In some TCs, test steps as well as local trees can be used. To allow an easy distinguishing of them the following naming applies:

| | |
|-----------------------|-------------|
| LTS_[local_tree_name] | local tree; |
| STP_[test_step_name] | test step. |

6.1.3.3 Default identifier

The default identifiers begin with the prefix "DF_", followed by a string in capital letters.

6.1.3.4 General aspects

All verdict assignments are labelled. To allow an exact identification in which table the verdict was assigned, the following name convention is applied:

| | |
|----|---------------------------|
| B | test Body |
| CS | Check State test steps |
| D | Default |
| E | Error handling test steps |
| PO | POstamble |
| PR | PReamble |
| S | test Step |

Also combinations of labels are possible:

EXAMPLE: DPR --> label which is used in a default for preambles.

6.1.3.5 ATS abbreviations

These abbreviations are used to shorten identifier names:

| | |
|------|-----------------|
| ack | acknowledgement |
| auth | authentication |
| algo | algorithm |
| cc | call control |
| cfm | confirm |
| est | establish |
| ext | extension |
| id | identification |
| ind | indication |
| info | information |
| max | maximum |
| min | minimum |
| prop | proprietary |
| req | request |
| res | response |

The following keywords will NOT be abbreviated in identifier names:

address(es);
 attribute(s);
 identity;
 number(s);
 character(s).

6.2 Implementation conventions

6.2.1 Declaration part

The comment line of single element TTCN tables (e.g. test suite constants) is used to give a reference where the format and content of the element is described in the relevant protocol specifications. Any particularity of the element format or content is described in the comment line.

The comment line in the header of multi element TTCN tables (e.g. ASPs) is used to reference to the protocol specification. The detailed comments are used to describe any particularity of the table.

In the ASP and PDU declarations, the comments column is used to identify if an element is mandatory or optional:

m: mandatory;
o: optional.

In the ASP and PDU declarations the comments column is further used to give information about the element value, in particular if the element contains a fixed spare value.

In tables where structure types are used the information element and the relevant structured type have always the same name, that allows to have the same structure as in the protocol standards is used to document the relation between information elements in a table and their specific description in an other clause of the protocol standard.

The following conventions apply to identifier names in the structured type definitions part:

- bits of bit sequences having a fixed value, meant to fill up the octet, are called fn, where n stands for the octet number;
- extension flags, will be called extn, where n stands for the octet number.

6.2.2 Constraint part

The ASPs and PDUs are defined in a way that all relevant element are parametrized. That improves the transparency of the constraints in the dynamic part, as all values which are relevant for the test are always present.

Generally no modified constraints are used, this allows an easier reuse and adaptation of constraints if they are reused in other DECT profile test specifications.

The Comment line of a constraint contains always the reference to the used specifications.

The detailed comments sector is used to describe any particularity of the table.

6.2.3 Dynamic part

Some TCs need a particular initialisation of the IUT environment conditions to run the actual test, e.g. for testing re-provisioning procedures. Such message sequence can be quite complicated and long. In cases where a Local Test Step (LTS) facilitates the TC structure, the preamble and the condition setting are described in a LTS called LTS_pre_step. All LTS_pre_steps are described in the detailed comment part of the TTCN table.

Some TCs need after the actual test a particular re-initialization of the IUT, e.g. after re-provisioning. Such message sequence can be quite complicated and long. In cases where a Local Test Step (LTS) facilitates the TC structure, the postamble and the re-initialization are described in a LTS called LTS_post_step. All LTS_post_steps are described in the detailed comment part of the TTCN table.

All events which are defined as a conformance requirements by the TP, cause a preliminary verdict PASS if the requirement is met.

All invalid events are handled in the default tree. FAIL verdicts are only assigned in the default tree.

The preamble, the test body and the postamble have different defaults, what allows a specific verdict handling, e.g. only INCONC verdicts are assigned in the preamble.

Test steps do not contain a default. That allows to apply them with no restrictions regarding the error handling.

All verdict assignments are labelled. According to ISO 9646-3 [23], annex E.2, labels should be written to the conformance log. This allows to identify where the test failed. To allow an exact identification in which table the verdict was assigned, the naming convention as described in subclause 6.1.3.3 is applied.

The labels of the same type are numbered sequentially if they are in the same TC, test step or default.

TPs which are listed in the untestable TP list in Clause 5, or which reference to an other TP, e.g. BV TPs which were already defined as CA TPs, are not considered in the ATS, thus these TC identifiers are missing in the ATS and the numbering of the TCs is not always continues.

6.2.4 Documentation

The Comment line of the TC or test step header contains a reference to the relevant protocol specification.

The Comment column of the dynamic behaviour part is used to number the test events which are relevant for the particular test or test operation.

Based on the numbering in the comment column all for the TC relevant events are described in the Detailed Comments part of each TTCN table.

Test procedures which cover a conformance requirement and lead to a preliminary or final verdict assignment are described as follows in the Detailed Comments part:

Expected event: a specific receive event is expected.

Expected behaviour: no event or a timer expiry is expected.

Expected status: the IUT is expected to be in a particular status.

Annex A (normative): Abstract test suite for NWK testing

The ATS is written in TTCN according to ISO/IEC 9646-3 [23].

As the ATS was developed on a separate TTCN tool the TTCN tables are not completely referenced in the contents table. The ATS itself contains a subclause Test Suite Overview which provides additional information and references about the ATS.

NOTE: According to ISO/IEC 9646-3 [23], in case of a conflict in interpretation of the operational semantics of TTCN.GR and TTCN.MP, the operational semantics of the TTCN.GR representation takes precedence.

A.1 The machine processable ATS (TTCN.MP)

The electronic form of the machine processable file (TTCN MP format) corresponding to this ATS is contained in an ASCII text file (DEV04979.MP¹) associated with this ETS.

A.2 The graphical ATS (TTCN.GR)

The graphical ATS is provided in this annex on the following pages.

1) This file is located in a compressed archive file named DEV04979.LZH. Other file formats are available on request.

I

Test Suite Overview

| Test Suite Structure | | | |
|--|---------------------|--|---------|
| Suite Name : NWK_FT Standards Ref : ETS 300 175-5 PICS Ref : ETS 300 476-4 PIXIT Ref : ETS 300 497-9 Annex B Test Method(s) : Remote Single Layer Embedded Comments : This ATS is part of the DECT Common Interface Test Case Library (TCL) ETS 300 497. This ATS is the TTCN part of ETS 300 497 Part 9, TCL NWK layer Fixed radio Termination (FT) ETSI files reference: 497P9V04.MP, 497P9V04.PS (Excluding this Generic comments part, the files of this version are identical to the ITA V04 version files CINFT13.MP, and CINFT13.PS) | | | |
| Test Group Reference | Selection Ref | Test Group Objective | Page Nr |
| FT/ | SENG_ft_testing | To check the behaviour of the NWK layer of the FT(IUT) | 223 |
| FT/CC/ | SENG_cc_support | To check the IUT CC-state machine behaviour | 223 |
| FT/CC/BV/ | SENG_cc_support | To tests the CC entity of the IUT in response to syntactically and contextual correct behaviour of the test system | 223 |
| FT/CC/BV/OC/ | SENG_outgoing_call | To check the IUT's behaviours to setup an outgoing call | 223 |
| FT/CC/BV/IC/ | SENG_incoming_call | To check the IUT's behaviours to setup an incoming call | 231 |
| FT/CC/BV/CI/ | SENG_cc_support | To check the IUT's behaviour in information transfer procedures | 233 |
| FT/CC/BV/CR/ | SENG_cc_support | To check the IUT's behaviours to release an outgoing/incoming call | 241 |
| FT/CC/RS/ | SENG_crss_support | To check the IUT's behaviour during call related supplementary service procedures | 247 |
| FT/CC/BO/ | SENG_cc_support | To check the behaviour of the CC entity of the IUT in response to the messages that are syntactically correct but not allowed to occur in some states of the CC procedures | 248 |
| FT/CC/BI/ | SENG_cc_support | To check the behaviour of the CC entity of the IUT in response to invalid messages | 250 |
| FT/CC/TI/ | SENG_cc_support | To verify that the IUT CC timers are with correct values and the IUT is reacting properly to the expiry of a timer | 254 |
| FT/MM/ | SENG_mm_support | To check the behaviour of the Mobility Management entity of the IUT | 258 |
| FT/MM/BV/ | SENG_mm_support | To tests the MM entity of the IUT in response to syntactically and contextual correct behaviour of the test system | 258 |
| FT/MM/BV/ID/ | SENG_identity_procs | To check the IUT's behaviour concerning identity procedures | 258 |
| FT/MM/BV/AU/ | SENG_auth_procs | To check the IUT's behaviour concerning the authentication procedures | 259 |
| FT/MM/BV/LO/ | SENG_location_procs | To check the IUT's behaviour concerning the location procedures | 265 |

Continued on next page

Continued from previous page

| Test Suite Structure | | | |
|----------------------------|--------------------------|---|---------|
| Test Group Reference | Selection Ref | Test Group Objective | Page Nr |
| FT/MM/BV/AR/ | SENG_access_rights_procs | To check the IUT's behaviour concerning the access rights procedures | 270 |
| FT/MM/BV/KA/ | SENG_key_allocat_proc | To check the IUT's behaviour concerning the key allocation procedure | 275 |
| FT/MM/BV/CH/ | SENG_cipherring_procs | To check the IUT's behaviour concerning the cipherring related procedures | 279 |
| FT/MM/BO/ | SENG_mm_support | To check the IUT behaviour in response to the messages that are syntactically correct but not allowed to occur in some phase of the MM procedures | 284 |
| FT/MM/BI/ | SENG_mm_support | To check the IUT in response to invalid MM messages | 285 |
| FT/MM/TI/ | SENG_mm_support | To verify that the IUT MM timers are with correct values and the IUT is reacting properly to the expiry of a timer | 288 |
| FT/ME/ | SENG_mgt_support | To check the behaviour of the LLME of the IUT | 295 |
| FT/ME/BV/ | SENG_mgt_support | To tests the LLME of the IUT in response to syntactically and contextual correct behaviour of the test system | 295 |
| FT/ME/BO/ | SENG_mgt_support | To check the IUT behaviour in response to the messages that are syntactically correct but not allowed to occur in some phase of the LLME managed procedures | 299 |
| FT/LC/ | SENG_ice_support | To check the behaviour of the LCE of the IUT | 300 |
| FT/LC/BV/ | SENG_ice_support | To tests the LCE of the IUT in response to syntactically and contextual correct behaviour of the test system | 300 |
| FT/LC/BV/LE/ | SENG_ice_co | To check the IUT's behaviour concerning the connection oriented link establishment procedures | 300 |
| FT/LC/BV/LR/ | SENG_ice_co | To check the IUT's behaviour concerning the connection oriented link release procedures | 301 |
| FT/LC/BI/ | SENG_ice_support | To check the IUT in response to invalid LCE messages | 305 |
| FT/LC/TI/ | SENG_ice_support | To verify that the IUT LCE timers are with correct values and the IUT is reacting properly to the expiry of a timer | 309 |
| Detailed Comments : | | | |

| Test Case Index | | | | |
|----------------------|-------------------|----------------------------|---|---------|
| Test Group Reference | Test Case Id | Selection Ref | Description | Page Nr |
| FT/CC/BV/OC/ | TC_FT_CC_BV_OC_01 | SENC_piecewise | Outgoing normal call; F-00 to F-10; piece-wise dialling | 223 |
| FT/CC/BV/OC/ | TC_FT_CC_BV_OC_02 | SENC_enblock | Outgoing call; F-00->F-10; en-block dialling in {CC-SETUP} | 225 |
| FT/CC/BV/OC/ | TC_FT_CC_BV_OC_03 | SENC_emerg_call | Prior to subscription; F-00->F-10; en-block dialling in {CC-SETUP} | 226 |
| FT/CC/BV/OC/ | TC_FT_CC_BV_OC_04 | SENC_emerg_call | Emergency call ; with subscription; F-00, F-00->F-10; en-block dialling in {CC-SETUP} | 227 |
| FT/CC/BV/OC/ | TC_FT_CC_BV_OC_05 | SENC_emerg_call_piece wise | Outgoing call; F-00, F-01, F-02, F-10; piecewise dialling in F-02 | 229 |
| FT/CC/BV/IC/ | TC_FT_CC_BV_IC_01 | SENC_normal_in_call | Incoming call; F-00, F-06, F-07 to F-10 | 231 |
| FT/CC/BV/IC/ | TC_FT_CC_BV_IC_02 | SENC_normal_in_call | Incoming call; F-06 directly to the state F-10. | 232 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_01 | SENC_normal_in_call | Incoming call; <<Signal>> either in {CC-SETUP} or in {CC-INFO} | 233 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_02 | SENC_go_pulse | Outgoing normal call; F-02; {CC-INFO}, <<Multi keypad>>, "Go to pulse" handling | 234 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_04 | SENC_dialling_pause | Outgoing normal call; F-02; {CC-INFO}, <<Multi keypad>>, "dialling pause" handling | 235 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_05 | SENC_dialling_pause | Outgoing normal call; F-10; {CC-INFO}, <<Multi keypad>>, "Dialling pause" handling | 236 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_06 | SENC_go_dtmf_dl | Outgoing normal call; F-02; {CC-INFO}, <<Multi keypad>>, "Go to DTMF defined tone length" handling | 237 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_07 | SENC_go_dtmf_dl | Outgoing normal call; F-10; {CC-INFO}, <<Multi keypad>>, "Go to DTMF defined tone length" handling | 238 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_08 | SENC_go_dtmf_il | Outgoing normal call; F-02; {CC-INFO}, <<Multi keypad>>, "Go to DTMF infinite tone length" handling | 239 |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_09 | SENC_go_dtmf_il | Outgoing normal call; F-10; {CC-INFO}, <<Multi keypad>>, "Go to DTMF infinite tone length" handling | 240 |

Continued on next page

Continued from previous page

| Test Case Index | | | | |
|----------------------|-------------------|-----------------------------------|--|---------|
| Test Group Reference | Test Case Id | Selection Ref | Description | Page Nr |
| FT/CC/BV/CI/ | TC_FT_CC_BV_CI_10 | SENC_basic_digits | Outgoing normal call; F-10; {CC-INFO}, <<Multi keypad>>, "0-9, star, hash mark" handling | 241 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_01 | SENC_normal_out_call | Outgoing normal call; F-02; IUT initiated normal release | 241 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_02 | SENC_normal_out_call | F-10; IUT initiated normal release | 242 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_03 | SENC_normal_in_call | Incoming call; F-07; IUT initiated normal release | 242 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_04 | SENC_piecewise | Outgoing call; F-02; PT initiated normal release | 243 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_05 | SENC_normal_out_call | F-10; PT initiated normal release | 243 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_06 | SENC_normal_in_call | Incoming call; F-07; PT initiated normal release | 244 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_07 | SENC_normal_in_call | Incoming call; F-07; PT initiated abnormal release | 244 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_08 | SENC_normal_out_call | F-10; PT initiated abnormal release | 245 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_09 | SENC_normal_in_call | Incomming normal call; F-06; PT initiated abnormal release | 245 |
| FT/CC/BV/CR/ | TC_FT_CC_BV_CR_10 | SENC_partial_release | F-10; PT initiated partial release | 246 |
| FT/CC/RS/ | TC_FT_CC_BV_RS_07 | SENC_clip | Incoming call; T-00; {CC-SETUP}, <<Calling party number>> provision (CLIP support) | 247 |
| FT/CC/BO/ | TC_FT_CC_BO_01 | SENC_out_piecewise_dt mf_dl_pulse | F-10; unexpected {CC-ALERTING} | 248 |
| FT/CC/BO/ | TC_FT_CC_BO_02 | SENC_normal_out_call | F-19; receipt of {CC-RELEASE}; release collisions handling | 249 |
| FT/CC/BI/ | TC_FT_CC_BI_01 | SENC_normal_out_call | F-00; {CC-SETUP} mandatory I.E. missing; answer upon with {CC-RELEASE-COM} | 250 |
| FT/CC/BI/ | TC_FT_CC_BI_02 | SENC_normal_out_call | F-00; {CC-SETUP} wrong mandatory I.E.; answer upon with {CC-RELEASE-COM} | 251 |
| FT/CC/BI/ | TC_FT_CC_BI_03 | SENC_normal_out_call | F-00; {CC-SETUP}-like message, non {CC-SETUP} unrecognised message type; ignore | 252 |
| FT/CC/BI/ | TC_FT_CC_BI_04 | SENC_normal_out_call | F-00; to short message to contain the complete <<Message type>>; ignore | 253 |
| FT/CC/TI/ | TC_FT_CC_TI_01 | SENC_normal_out_call | Outgoing call; F-02; timer F-<CC.01> expiry (\pm 5% margin); IUT sends {CC-RELEASE} | 254 |

Continued on next page

Continued from previous page

| Test Case Index | | | | |
|----------------------|-------------------|--------------------------|--|---------|
| Test Group Reference | Test Case Id | Selection Ref | Description | Page Nr |
| FT/CC/TI/ | TC_FT_CC_TI_02 | SENC_normal_out_call | Outgoing call; F-02; restart of timer F-<CC.01> on receipt of {CC-INFO} | 255 |
| FT/CC/TI/ | TC_FT_CC_TI_03 | SENC_normal_out_call | Outgoing call; F-19; timer F-<CC.02> expiry (\pm 5% margin); IUT sends {CC-RELEASE-COM} of IUT-Timer T_F_CC_02 in state F_19. | 256 |
| FT/CC/TI/ | TC_FT_CC_TI_04 | SENC_normal_in_call | Outgoing call; F-06; timer F-<CC.03> expiry (\pm 5% margin); IUT sends {CC-RELEASE-COM} | 257 |
| FT/MM/BV/ID/ | TC_FT_MM_BV_ID_01 | SENC_identification | Identity request procedure; IUT initiated | 258 |
| FT/MM/BV/AU/ | TC_FT_MM_BV_AU_01 | SENC_pt_auth | Authentication of PT; PT has no stored ZAP value and service class info | 259 |
| FT/MM/BV/AU/ | TC_FT_MM_BV_AU_02 | SENC_zap_ft_auth | Authentication of PT; ZAP increment; PT has stored ZAP value and service class info; PT authenticates FT before answering | 260 |
| FT/MM/BV/AU/ | TC_FT_MM_BV_AU_03 | SENC_user_auth | Authentication of user; PT has no stored ZAP value and service class info | 261 |
| FT/MM/BV/AU/ | TC_FT_MM_BV_AU_04 | SENC_ft_auth | Authentication of FT | 262 |
| FT/MM/BV/AU/ | TC_FT_MM_BV_AU_05 | SENC_ft_auth | Authentication of FT; Unsupported key requested; IUT rejects | 263 |
| FT/MM/BV/AU/ | TC_FT_MM_BV_AU_06 | SENC_ft_and_pt_cipher_on | Authentication of PT; store DCK ; PT has no stored ZAP value and service class info | 264 |
| FT/MM/BV/LO/ | TC_FT_MM_BV_LO_01 | SENC_location_reg | Location registration; a38=1 at locking and at the beginning of the procedure; request with IPU | 265 |
| FT/MM/BV/LO/ | TC_FT_MM_BV_LO_02 | SENC_location_reg | Location registration; a38=1 at locking and at the beginning of the procedure; request with unknown IPU; reject | 266 |
| FT/MM/BV/LO/ | TC_FT_MM_BV_LO_03 | SENC_location_reg | Location registration; a38=1 at locking and at the beginning of the procedure; request with IPU; IUT assigns TPUI | 267 |
| FT/MM/BV/LO/ | TC_FT_MM_BV_LO_05 | SENC_location_update | Location update; a38=1 at locking; {MM-INFO-SUGGEST}; | 268 |

Continued on next page

Continued from previous page

| Test Case Index | | | | |
|----------------------|-------------------|------------------------------|--|---------|
| Test Group Reference | Test Case Id | Selection Ref | Description | Page Nr |
| FT/MM/BV/LO/ | TC_FT_MM_BV_LO_06 | SENC_location_reg | Location registration; a38=1 at locking; a38=0 at the beginning of the procedure; request with IPU | 269 |
| FT/MM/BV/AR/ | TC_FT_MM_BV_AR_01 | SENC_access_rights | Obtain access rights; both sides use AC; IUT sends the whole PARK | 270 |
| FT/MM/BV/AR/ | TC_FT_MM_BV_AR_02 | SENC_service_class | Obtain access rights; service class assign | 271 |
| FT/MM/BV/AR/ | TC_FT_MM_BV_AR_03 | SENC_ft_terminate_ar | Terminate access rights; IUT(FT) initiated; PT authenticates FT | 272 |
| FT/MM/BV/AR/ | TC_FT_MM_BV_AR_06 | SENC_access_rights_uak | Obtain access rights; both sides use UAK; IUT sends the whole PARK | 273 |
| FT/MM/BV/AR/ | TC_FT_MM_BV_AR_07 | SENC_zap | Obtain access rights; ZAP value assign | 274 |
| FT/MM/BV/KA/ | TC_FT_MM_BV_KA_01 | SENC_key_allocate | Key allocate; IUT initiated | 275 |
| FT/MM/BV/KA/ | TC_FT_MM_BV_KA_02 | SENC_key_allocate | Key allocate; IUT initiated; "implicit PT authentication" failure; IUT rejects | 277 |
| FT/MM/BV/KA/ | TC_FT_MM_BV_KA_03 | SENC_key_allocate | Key allocate; IUT initiated; PT rejects; IUT keeps AC | 278 |
| FT/MM/BV/CH/ | TC_FT_MM_BV_CH_01 | SENC_pt_cipher_on | Cipher switching; PT initiated; "cipher-off" to "cipher-on" | 279 |
| FT/MM/BV/CH/ | TC_FT_MM_BV_CH_02 | SENC_pt_cipher_off | Cipher switching; PT initiated; "cipher-on" to "cipher-off" | 280 |
| FT/MM/BV/CH/ | TC_FT_MM_BV_CH_03 | SENC_ft_cipher_on | Cipher switching; IUT(FT) initiated; "cipher-off" to "cipher-on" | 281 |
| FT/MM/BV/CH/ | TC_FT_MM_BV_CH_04 | SENC_ft_cipher_off | Cipher switching; IUT(FT) initiated; "cipher-on" to "cipher-off" | 282 |
| FT/MM/BV/CH/ | TC_FT_MM_BV_CH_05 | SENC_pt_cipher_on | Cipher switching; PT initiated with "unsupported cipher key"; IUT rejects | 283 |
| FT/MM/BO/ | TC_FT_MM_BO_01 | SENC_pt_cipher_on_iden nt | Cipher switching; IUT(FT) initiated; ignoring unexpected {IDENTITY-REPLY} | 284 |
| FT/MM/BI/ | TC_FT_MM_BI_01 | SENC_identification | Authentication request; PT sends unrecognised message; IUT ignores | 285 |
| FT/MM/BI/ | TC_FT_MM_BI_02 | SENC_access_rights | Obtain access rights; {ACCESS-RIGHTS-REQUEST} missing <<Auth type>>; IUT sends {ACCESS-RIGHTS-REQUEST} | 286 |

Continued on next page

Continued from previous page

| Test Case Index | | | | |
|-----------------------------|---------------------|------------------------|--|----------------|
| Test Group Reference | Test Case Id | Selection Ref | Description | Page Nr |
| FT/MM/BI/ | TC_FT_MM_BI_03 | SENC_access_rights | Obtain access rights; {ACCESS-RIGHTS-REQUEST} contains <AUTH_TYPE>> exceeding max. length. Reject | 287 |
| FT/MM/TI/ | TC_FT_MM_TI_01 | SENC_loc_reg_identif | Identity request; just before timer F-<MM_ident.2> expiry (- 10% margin) | 288 |
| FT/MM/TI/ | TC_FT_MM_TI_02 | SENC_pt_auth_loc | Authentication of PT; just before timer F-<MM_auth.1> expiry (- 10% margin) | 289 |
| FT/MM/TI/ | TC_FT_MM_TI_03 | SENC_user_auth_loc | Authentication of user; just before timer F-<MM_auth.2> expiry (- 10% margin) | 290 |
| FT/MM/TI/ | TC_FT_MM_TI_04 | SENC_ft_term_ar_loc | Terminate access rights; IUT(FT) initiated; just before timer F-<MM_access.2> expiry (- 10% margin) | 291 |
| FT/MM/TI/ | TC_FT_MM_TI_05 | SENC_key_alloc_loc | Key allocation; just before timer F-<MM_key.1> expiry (- 10% margin) | 292 |
| FT/MM/TI/ | TC_FT_MM_TI_06 | SENC_ft_cipher_on_loc | Cipher switching; IUT(FT) initiated; just before timer F-<MM_cipher.1> expiry (- 10% margin) | 293 |
| FT/MM/TI/ | TC_FT_MM_TI_07 | SENC_location_reg | Location registration with TPUI assignment; timer F-<MM_ident.1> expiry (+ 5% margin) | 294 |
| FT/ME/BV/ | TC_FT_ME_BV_01 | SENC_in_call_ft_auth | Incoming call and authentication of FT handled in parallel | 295 |
| FT/ME/BV/ | TC_FT_ME_BV_02 | SENC_user_auth_ft_auth | Authentication of user interrupted by Authentication of FT | 297 |
| FT/ME/BV/ | TC_FT_ME_BV_03 | SENC_out_call_loc_reg | CC call and location registration in parallel | 298 |
| FT/ME/BO/ | TC_FT_ME_B0_01 | SENC_pt_auth_loc | Authentication of PT; Ignorance of {LOCATE-REQUEST} (lower priority) | 299 |
| FT/LC/BV/LE/ | TC_FT_LC_BV_LE_01 | SENC_link_co_ft_indir | Indirect IUT(FT) link establishment procedure; correct PT answer | 300 |
| FT/LC/BV/LE/ | TC_FT_LC_BV_LE_02 | SENC_link_co_ft_indir | Indirect IUT(FT) link establishment procedure; {LCE-PAGE-RESPONSE} with mismatching IPU; IUT rejects and release the link. | 300 |
| FT/LC/BV/LE/ | TC_FT_LC_BV_LE_03 | SENC_link_co_pt | Direct PT initiated link establishment procedure | 301 |

Continued on next page

Continued from previous page

| Test Case Index | | | | |
|----------------------------|-------------------|---------------------------|--|---------|
| Test Group Reference | Test Case Id | Selection Ref | Description | Page Nr |
| FT/LC/BV/LR/ | TC_FT_LC_BV_LR_01 | SENC_link_co_pt | Link exists; PT initiated "normal" link release | 301 |
| FT/LC/BV/LR/ | TC_FT_LC_BV_LR_02 | SENC_link_rel_maintain_mm | Link exists; MM entity ceases to use the link; no other entity uses the link; IUT maintains the link <LCE.02> time | 302 |
| FT/LC/BV/LR/ | TC_FT_LC_BV_LR_03 | SENC_link_co_pt_cc | Link exists; CC call is terminated; FT initiated link release | 303 |
| FT/LC/BV/LR/ | TC_FT_LC_BV_LR_04 | SENC_link_rel_maintain_cc | Link exists; CC entity ceases to use the link partial release agreed; no other entity uses the link; IUT maintains the link <LCE.02> time. | 304 |
| FT/LC/BI/ | TC_FT_LC_BI_01 | SENC_pd_ti | Protocol discriminator value error – unsupported service; IUT ignores | 305 |
| FT/LC/BI/ | TC_FT_LC_BI_04 | SENC_ft_auth | {AUTH-REQUEST} with illegal transaction id.; ignore | 306 |
| FT/LC/BI/ | TC_FT_LC_BI_05 | SENC_identification | Identity request procedure; {IDENTITY-REPLY} with transaction id. flag='0'; ignore | 307 |
| FT/LC/BI/ | TC_FT_LC_BI_07 | SENC_link_co_pt_cc | F-10; link fails; IUT clears the call | 308 |
| FT/LC/TI/ | TC_FT_LC_TI_02 | SENC_link_rel_maintain_mm | MM ceases to use the link; no other entity uses the link; timer <LCE.02> expiry (± 5% margin) | 309 |
| FT/LC/TI/ | TC_FT_LC_TI_03 | SENC_link_co_ft_indir | Indirect IUT(FT) initiated link establishment; no answer; timer <LCE.03> expiry (± 5% margin) | 310 |
| Detailed Comments : | | | | |

| Test Step Index | | | |
|----------------------------------|------------------------------------|--------------------|----------------|
| Test Step Group Reference | Test Step Id | Description | Page Nr |
| Preambles/ | PR_f00_no_acrgh | | 311 |
| Preambles/ | PR_goto_f00 | | 311 |
| Preambles/ | PR_goto_f01 | | 312 |
| Preambles/ | PR_goto_f02 | | 312 |
| Preambles/ | PR_goto_f06 | | 313 |
| Preambles/ | PR_goto_f07 | | 313 |
| Preambles/ | PR_goto_f10 | | 314 |
| Preambles/ | PR_goto_f19 | | 315 |
| Preambles/ | PR_select_state | | 316 |
| Preambles/ | PR_stable_state | | 317 |
| Teststeps/CC/ | STP_cc_release_abnormal | | 317 |
| Teststeps/CC/ | STP_cc_release_normal | | 318 |
| Teststeps/CC/ | STP_cc_release_partial | | 319 |
| Teststeps/CC/ | STP_check_u_plane | | 320 |
| Teststeps/CC/ | STP_invoke_cc_connect | | 320 |
| Teststeps/CC/ | STP_invoke_incoming_call | | 320 |
| Teststeps/CC/ | STP_invoke_normal_release | | 321 |
| Teststeps/CC/ | STP_invoke_partial_release | | 321 |
| Teststeps/CC/ | STP_check_dtmf_defined | | 321 |
| Teststeps/CC/ | STP_check_dtmf_infinite | | 322 |
| Teststeps/CC/ | STP_check_basic_digits | | 322 |
| Teststeps/CC/ | STP_check_pause | | 322 |
| Teststeps/CC/ | STP_check_pulse | | 323 |
| Teststeps/CC/ | STP_send_called_party_number | | 323 |
| Teststeps/MM/ | STP_assign_tpui | | 324 |
| Teststeps/MM/ | STP_check_accessrights | | 325 |
| Teststeps/MM/ | STP_delete_tpui | | 326 |
| Teststeps/MM/ | STP_handle_identity_request | | 327 |
| Teststeps/MM/ | STP_invoke_access_term_req | | 328 |
| Teststeps/MM/ | STP_invoke_pt_authentication | | 329 |
| Teststeps/MM/ | STP_invoke_pt_auth_with_zap | | 329 |
| Teststeps/MM/ | STP_invoke_user_authentication | | 330 |
| Teststeps/MM/ | STP_invoke_ft_init_cipherring_off | | 331 |
| Teststeps/MM/ | STP_invoke_ft_init_cipherring_on | | 332 |
| Teststeps/MM/ | STP_invoke_identity_req | | 332 |
| Teststeps/MM/ | STP_invoke_key_allocate | | 333 |
| Teststeps/MM/ | STP_invoke_location_update | | 334 |
| Teststeps/MM/ | STP_perform_accessrights_request | | 334 |
| Teststeps/MM/ | STP_perform_ft_authentication | | 335 |
| Teststeps/MM/ | STP_perform_locate_request | | 336 |
| Teststeps/MM/ | STP_perform_pt_init_cipherring_off | | 337 |
| Teststeps/MM/ | STP_perform_pt_init_cipherring_on | | 338 |
| Teststeps/MM/ | STP_revoke_accessrights_of_pt | | 338 |
| Teststeps/MM/ | STP_set_bit_a38 | | 339 |
| Teststeps/LC/ | STP_check_link_present | | 339 |
| Teststeps/LC/ | STP_direct_link_establishment | | 339 |

Continued on next page

Continued from previous page

| Test Step Index | | | |
|----------------------------------|------------------------------|--------------------|----------------|
| Test Step Group Reference | Test Step Id | Description | Page Nr |
| Teststeps/LC/ | STP_handle_indirect_link_est | | 340 |
| Teststeps/LC/ | STP_initialise_tf | | 340 |
| Teststeps/LC/ | STP_release_link | | 341 |
| Postambles/ | PO_normal_release | | 341 |
| Postambles/ | PO_release_link | | 342 |
| Postambles/ | PO_terminate | | 342 |
| Detailed Comments : | | | |

| Default Index | | | |
|--------------------------------|-----------------------------|--|----------------|
| Default Group Reference | Default Id | Description | Page Nr |
| | DF_handle_any_timeout | | 343 |
| | DF_handle_cc_events | | 344 |
| | DF_handle_cc_timeout | | 345 |
| | DF_handle_mm_events | | 347 |
| | DF_handle_mm_invokation | | 351 |
| | DF_handle_mm_timeout | | 352 |
| | DF_handle_paging | To handle any paging message re-transmission during paging procedures. | 353 |
| | DF_handle_unexpected_events | | 354 |
| Detailed Comments : | | | |

II

Declarations Part

| Simple Type Definitions | | |
|-------------------------|---|---|
| Type Name | Type Definition | Comments |
| BIT_1 | BITSTRING[1] | GENERAL SIMPLE TYPE DEFINITIONS: |
| BIT_2 | BITSTRING[2] | |
| BIT_3 | BITSTRING[3] | |
| BIT_4 | BITSTRING[4] | |
| BIT_5 | BITSTRING[5] | |
| BIT_6 | BITSTRING[6] | |
| BIT_7 | BITSTRING[7] | |
| BIT_8 | BITSTRING[8] | |
| BIT_16 | BITSTRING[16] | |
| BIT_24 | BITSTRING[24] | |
| BIT_32 | BITSTRING[32] | |
| BIT_40 | BITSTRING[40] | |
| BIT_64 | BITSTRING[64] | |
| BIT_128 | BITSTRING[128] | |
| DECTCHAR_4 | HEXSTRING('0'H,'1'H,'2'H,'3'H,'4'H,'5'H,'6'H,'7'H,'8'H,'9'H,'B'H) | |
| DECTCHAR_8 | OCTETSTRING[1] | This refers to the standard 8 bit DECT charcter set. Some DECT characters have a special meaning. Refer to ETS 300 175-5 [5], subclause D.2 |
| DECT_1 | OCTETSTRING[1] | |
| DECT_2 | OCTETSTRING[2] | |
| DECT_3 | OCTETSTRING[3] | |
| DECT_1_253 | OCTETSTRING[1 .. 253] | |
| DECT_1_254 | OCTETSTRING[1 .. 254] | |
| DECT_1_255 | OCTETSTRING[1 .. 255] | |
| INT_8 | INTEGER(0 .. 255) | |
| INT_16 | INTEGER(0 .. 65535) | |
| HEX_1 | HEXSTRING[1] | Hexstrings shall only be used when the length of the string is odd. |
| HEX_3 | HEXSTRING[3] | |
| HEX_5 | HEXSTRING[5] | |
| HEX_7 | HEXSTRING[7] | |
| OCT_1 | OCTETSTRING[1] | |
| OCT_2 | OCTETSTRING[2] | |
| OCT_4 | OCTETSTRING[4] | |
| OCT_7 | OCTETSTRING[7] | |
| OCT_8 | OCTETSTRING[8] | |
| OCT_12 | OCTETSTRING[12] | |
| OCT_14 | OCTETSTRING[14] | |
| OCT_1_13 | OCTETSTRING[1 .. 13] | |
| OCT_1_14 | OCTETSTRING[1 .. 14] | |
| OCT_1_16 | OCTETSTRING[1 .. 16] | |
| OCT_1_20 | OCTETSTRING[1 .. 20] | |
| OCT_1_254 | OCTETSTRING[1 .. 254] | |

Continued on next page

Continued from previous page

| Simple Type Definitions | | |
|-------------------------------|--------------------------------------|---|
| Type Name | Type Definition | Comments |
| OCT_1_255 | OCTETSTRING[1 .. 255] | SPECIFIC SIMPLE TYPE DEFINITIONS: |
| CCSTATE_TYPE | INTEGER(0, 1, 2, 3, 4, 6, 7, 10, 19) | Used in PR_select_state |
| CIPHER_STATUS | INTEGER(0, 1) | Used in DL_ENCRYPT primitive |
| CLUSTER_ADDRESS_LIST | OCTETSTRING | Used in DL_BROADCAST primitive |
| CONNECTION_IDENTITY | OCTETSTRING | Used in DL_ENCRYPT primitive |
| CPN_LENGTH_TYPE | INTEGER(1 .. 14) | Type for length of called party number |
| DATA_LINK_ENDPOINT_IDENTIFIER | INTEGER | Nr of bits to be specified by test system manufacturer. |
| ENCRYPTION_KEY | BITSTRING[64] | Used in DL_ENC_KEY primitive |
| ESTABLISH_MODE | INTEGER(0, 1, 2) | Used in DL_ESTABLISH primitive |
| FIXED_ID_VALUE_TYPE | BITSTRING[32..40] | The FIXED_ID_VALUE_TYPE is a type for the value of the PARK. The length of the PARK value shall be 4 or 5 octets |
| MESSAGE_TYPE | OCT_1 | ETS 300 175-5 [5], subclause 7.4 |
| MESSAGE_TYPE_SHORT | BITSTRING[4] | Used in TC_PT_CC_BI_04, where a too short, message type ie is sent. |
| MMPROC_TYPE | INTEGER(0 .. 10) | Used in PR_select_state |
| LCE_HEADER | HEX_1 | ETS 300 175-5 [5], subclause 8.2 |
| PARK_LENGTH_TYPE | INTEGER(0 .. 36) | For the number of significant bits in PARK |
| PORT_ID_VALUE_TYPE | BITSTRING[8 .. 104] | The PORT_ID_VALUE_TYPE is a type for the value of the portable_id. It is NOT the portable_id type. The value of the portable_id can lie between 1 and 13 octets |
| RADIO_FIXED_PART_NUMBER | INTEGER | Used in DL_ESTABLISH primitive |
| RELEASE_MODE | INTEGER(0, 1) | Used in DL_RELEASE primitive |
| TRANS_FLAG | INTEGER(0, 1) | Used n transaction flag definition |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : ALLOCATION_TYPE | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.2 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| auth_algo_id | OCT_1 | |
| ac_number | BIT_4 | |
| uak_number | BIT_4 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : ALPHANUMERIC | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.3 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| character_set | BIT_3 | |
| odd_even | BIT_1 | |
| character_type | BIT_3 | |
| f3 | BIT_1 | '0' |
| list_of_characters | DECT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : AUTH_TYPE | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.4 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| auth_algo_id | OCT_1 | |
| prop_algo_id | OCT_1 | |
| auth_key_number | BIT_4 | |
| auth_key_type | BIT_4 | |
| cipher_key_number | BIT_4 | |
| upc | BIT_1 | |
| txc | BIT_1 | |
| f5 | BIT_1 | '0' |
| inc | BIT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : BASIC_SERVICE | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.4 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| basic_service | BIT_4 | |
| call_class | BIT_4 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : CALL_ATTRIBUTES | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.5 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| network_layer_attributes | BIT_5 | |
| coding_standard | BIT_2 | |
| f3 | BIT_1 | '1'B |
| c_plane_routing | BIT_4 | |
| c_plane_class | BIT_3 | |
| f4 | BIT_1 | '1'B |
| lu_id | BIT_5 | |
| u_plane_symmetry | BIT_2 | |
| ext5 | BIT_1 | |
| lu_id_f_p | BIT_5 | |
| f5a | BIT_3 | '100' |
| u_plane_frame_type | BIT_4 | |
| u_plane_class | BIT_3 | |
| ext6 | BIT_1 | |
| u_plane_frame_type_f_p | BIT_4 | |
| u_plane_class_f_p | BIT_3 | |
| f6a | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : CALL_ID | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.6 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| pd | BIT_4 | |
| tv | BIT_3 | |
| tf | BIT_1 | |
| extended_transaction_value | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : CALLED_PARTY_NUMBER | | |
| Comments : ETS 300 175 [5], subclause 7.7.7 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| numbering_plan_id | BIT_4 | |
| number_type | BIT_3 | |
| f3 | BIT_1 | '1' |
| called_party_address | DECT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : CALLED_PARTY_SUBADDRESS | | |
| Comments : ETS 300 175 [5], subclause 7.7.8 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| spare | BIT_3 | '000' |
| o_e | BIT_1 | |
| subaddress_type | BIT_3 | |
| f3 | BIT_1 | '1' |
| subaddress_info | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : CALLING_PARTY_NUMBER | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.9 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| numbering_plan_id | BIT_4 | |
| number_type | BIT_3 | |
| ext3 | BIT_1 | |
| screening_indicator | BIT_2 | |
| spare | BIT_3 | '000' |
| presentation_indicator | BIT_2 | |
| f3a | BIT_1 | '1' |
| calling_party_address | DECT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : CIPHER_INFO | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.10 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| cipher_algo_id | BIT_7 | |
| y_n | BIT_1 | |
| prop_algo_id | OCT_1 | |
| cipher_key_number | BIT_4 | |
| cipher_key_type | BIT_4 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : CONNECTION_ATTRIBUTES | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.11 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| connection_id | BIT_4 | |
| symmetry | BIT_3 | |
| f3 | BIT_1 | '1'B |
| target_bearers_p_f | BIT_5 | |
| f4 | BIT_2 | '00' |
| ext4 | BIT_1 | |
| min_bearers_p_f | BIT_5 | |
| f4a | BIT_2 | '01' |
| ext4a | BIT_1 | |
| target_bearers_f_p | BIT_5 | |
| f4b | BIT_2 | '10' |
| ext4b | BIT_1 | |
| min_bearers_f_p | BIT_5 | |
| f4c | BIT_3 | '111' |
| mac_service | BIT_4 | |
| slot_size | BIT_3 | |
| ext5 | BIT_1 | |
| mac_service_f_p | BIT_4 | |
| f5a | BIT_4 | '1000' |
| mac_packet_lifetime | BIT_4 | |
| cf_channel_attributes | BIT_3 | |
| ext6 | BIT_1 | |
| mac_packet_lifetime_f_p | BIT_4 | |
| cf_channel_attributes_f_p | BIT_3 | |
| f6a | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|---------------------------|
| Type Name : CONNECTION_ID | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.12 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| u_and_c_id | OCT_1_255 | max number of connections |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|------------|
| Type Name : DELIMITER_REQUEST | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.2 | | |
| Element Name | Type Definition | Comments |
| delimiter_request | OCT_1 | '10100010' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : DURATION | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.13 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| time_limits | BIT_4 | |
| lock_limits | BIT_3 | |
| ext3 | BIT_1 | |
| time_duration | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : END_TO_END_COMPATIBILITY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.14 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| user_rate | BIT_5 | |
| negotiation | BIT_1 | |
| s_a | BIT_1 | |
| ext3 | BIT_1 | |
| v110_x30_service | BIT_7 | |
| ext3a | BIT_1 | |
| parity | BIT_3 | |
| data_bits | BIT_2 | |
| stop_bits | BIT_2 | |
| ext3b | BIT_1 | |
| modem_type | BIT_6 | |
| duplex | BIT_1 | |
| f3c | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : ESCAPE_FOR_EXTENSION | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.1 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| info_element_id | BIT_7 | |
| f3 | BIT_1 | '1' |
| content_info_element | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : ESCAPE_TO_PROPRIETARY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.1 (second edition: 7.7.45) | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| discriminator_type | BIT_7 | |
| f3 | BIT_1 | '1' |
| discriminator | OCT_2 | |
| contents | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : FACILITY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.15 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | '100' |
| length | OCT_1 | |
| service_discriminator | BIT_5 | |
| f3 | BIT_3 | |
| component | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : FEATURE_ACTIVATE | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.16 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | '1' |
| length | OCT_1 | |
| feature | BIT_7 | |
| ext3 | BIT_1 | |
| parameter | BIT_7 | |
| f3a | BIT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : FEATURE_INDICATE | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.17 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | '1' |
| length | OCT_1 | |
| feature | BIT_7 | |
| ext3 | BIT_1 | |
| parameter | BIT_7 | |
| f3a | BIT_1 | |
| status_indicator | OCT_1 | |
| component | DECT_1_253 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|---------------------|----------|
| Type Name : FIXED_ID | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.18 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| type | BIT_7 | |
| f3 | BIT_1 | '1' |
| length_of_id_value | BIT_7 | |
| f4 | BIT_1 | '1' |
| id_value | FIXED_ID_VALUE_TYPE | 1) |
| Detailed Comments : 1) The FIXED_ID_VALUE_TYPE refers to the type of the id_value The id_value can consist of: - ARI (ARC + ARD) - ARI (ARC + ARD) + RPN - PARK | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : IDENTITY_TYPE | | |
| Comments : ETSI 300 175-5 [5], subclause 7.7.19 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| id_group | BIT_4 | |
| space | BIT_3 | '000' |
| f3 | BIT_1 | '1' |
| type | BIT_7 | |
| f4 | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : INFO_TYPE | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.20 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| info_parameter | OCT_1_13 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : IWU_ATTRIBUTES | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.21 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| info_transfer_capability | BIT_5 | |
| coding_standard | BIT_2 | |
| f3 | BIT_1 | '1'B |
| external_connection_type | BIT_4 | |
| negotiation_indicator | BIT_3 | |
| f4 | BIT_1 | '1'B |
| info_transfer_rate | BIT_5 | |
| trans_mode | BIT_2 | |
| ext5 | BIT_1 | |
| rate_multiplier | BIT_5 | |
| unit_rate | BIT_2 | |
| ext5a | BIT_1 | |
| establishment | BIT_2 | |
| configuration | BIT_2 | |
| structure | BIT_3 | |
| ext5b | BIT_1 | |
| info_transfer_rate_d_o | BIT_5 | |
| symmetry | BIT_2 | |
| ext5c | BIT_1 | |
| rate_multiplier_d_o | BIT_5 | |
| unit_rate_d_o | BIT_2 | |
| f5d | BIT_1 | '1' |
| user_protocol_id | BIT_5 | |
| f6 | BIT_2 | '00' |
| ext6 | BIT_1 | |
| l3_protocol_id | BIT_5 | |
| f7 | BIT_2 | '11' |
| ext7 | BIT_1 | |
| l2_protocol_id | BIT_5 | |
| f8 | BIT_2 | '10' |
| ext8 | BIT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : IWU_PACKET | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.22 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| l2_protocol_id | BIT_5 | |
| f3 | BIT_1 | '0' |
| s_r | BIT_1 | |
| ext3 | BIT_1 | |
| l3_protocol_id | BIT_5 | |
| f3a | BIT_3 | '111' |
| info | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : IWU_TO_IWU | | |
| Comments : ETS 300 175-5 [5] (second edition), subclause 7.7.23 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| protocol_discriminator | BIT_6 | |
| s_r | BIT_1 | |
| f3 | BIT_1 | '1' |
| contents | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : KEY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.24 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| key_type | OCT_1 | |
| key_data | OCT_1_254 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|---|
| Type Name : LOCATION_AREA | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.25 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | '1111' if GSM loc. info is not included |
| length | OCT_1 | |
| location_area_level | BIT_6 | |
| li_type | BIT_2 | |
| spare | BIT_4 | |
| eli_type | BIT_4 | |
| extended_location_information | OCT_7 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : MULTI_DISPLAY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.26 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| display_info | DECT_1_255 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : MULTI_KEYPAD | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.27 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| keypad_info | DECT_1_255 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|--------------------------------------|
| Type Name : NETWORK_ASSIGNED_ID | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.28 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| type | BIT_7 | |
| f3 | BIT_1 | '1' |
| id_length | BIT_7 | |
| f4 | BIT_1 | '1' |
| value | OCT_1_16 | 4 octet GSM TMSI has to be supported |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : NETWORK_HEADER | | |
| Comments : ETS 300 175-5 [5], subclause 7.1, 7.2, 7.3 | | |
| Element Name | Type Definition | Comments |
| protocol_discriminator | BIT_4 | |
| transaction_value | BIT_3 | |
| transaction_flag | BIT_1 | |
| ext_transaction_flag | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|--------------------------------|
| Type Name : NETWORK_PARAMETER | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.29 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| discriminator | BIT_8 | |
| data_field | OCT_1_254 | for GSM handover ref.- 1 octet |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|--------------------|----------|
| Type Name : PORTABLE_ID | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.30 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| type | BIT_7 | |
| f3 | BIT_1 | '1' |
| length_of_id_value | BIT_7 | |
| f4 | BIT_1 | '1' |
| id_value | PORT_ID_VALUE_TYPE | 1) |
| Detailed Comments : 1) The PORT_ID_VALUE_TYPE refers to the type of the id_value The id_value can consist of: - IPUI (S, O, T, P, Q, U, R), - IPEI, - TPUI | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : PROGRESS_INDICATOR | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.31 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| location | BIT_4 | |
| coding_standard | BIT_3 | |
| f3 | BIT_1 | '1' |
| progress_description | BIT_7 | |
| f4 | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|---------------------------|
| Type Name : RAND | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.31 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| field | BIT_64 | for DSAA : BITSTRING [64] |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : RATE_PARAMETERS | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.33 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| class_of_service | BIT_4 | |
| interleaving | BIT_1 | |
| symmetry | BIT_2 | |
| f3 | BIT_1 | '1' |
| channel1_arrangement_ptof | BIT_4 | |
| channel1_rate_ptof | BIT_3 | |
| ext4 | BIT_1 | |
| channel1_arrangement_ftop | BIT_4 | |
| channel1_rate_ftop | BIT_3 | |
| f4a | BIT_1 | '1' |
| channel2_arrangement_ptof | BIT_4 | |
| channel2_rate_ptof | BIT_3 | |
| ext5 | BIT_1 | |
| channel2_arrangement_ftop | BIT_4 | |
| channel2_rate_ftop | BIT_3 | |
| f5a | BIT_1 | '1' |
| channel3_arrangement_ptof | BIT_4 | |
| channel3_rate_ptof | BIT_3 | |
| ext6 | BIT_1 | |
| channel3_arrangement_ftop | BIT_4 | |
| channel3_rate_ftop | BIT_3 | |
| f6a | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : REJECT_REASON | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.34 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| reason | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : RELEASE_REASON | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.7 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| reason | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : REPEAT_INDICATOR | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.3 | | |
| Element Name | Type Definition | Comments |
| repeat_indicator | HEX_1 | |
| f1 | BIT_4 | '1101' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------------------------|
| Type Name : RES | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.35 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| field | BIT_32 | for DSAA: BITSTRING [32] |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|-----------------------------|
| Type Name : RS | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.36 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| field | BIT_64 | for DSAA : BITSTRING [64] |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : SEGMENTED_INFO | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.37 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| number_of_segments_remaining | BIT_7 | |
| f_bit | BIT_1 | |
| segmented_element_type | BIT_7 | |
| f4 | BIT_1 | '0' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|------------|
| Type Name : SENDING_COMPLETE | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.2 | | |
| Element Name | Type Definition | Comments |
| sending_complete | OCT_1 | '10100001' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : SERVICE_CHANGE_INFO | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.38 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| change_mode | BIT_4 | |
| master_coding | BIT_1 | |
| coding_standard | BIT_2 | |
| ext3 | BIT_1 | |
| extended_change_mode | BIT_7 | |
| f3a | BIT_1 | '1' |
| b_attributes | BIT_3 | |
| reset_coding | BIT_1 | |
| a_attributes | BIT_3 | |
| f4 | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : SERVICE_CLASS | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.39 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| service_class_field | BIT_8 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : SETUP_CAPABILITY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.40 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| page | BIT_2 | |
| setup | BIT_2 | |
| f3 | BIT_3 | '000' |
| ext3 | BIT_1 | |
| profile_indicator | BIT_3 | |
| f3a | BIT_5 | '10000' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : SHORT_FORMAT_ADDRESS | | |
| Comments : ETS 300 175-5 [5], subclause 8.2.1 | | |
| Element Name | Type Definition | Comments |
| w | BIT_1 | |
| f1 | HEX_1 | xxxx |
| tpui_address | BIT_16 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : SIGNAL | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.8 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| signal_value | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : SINGLE_DISPLAY | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.5 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| display_info | DECT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : SINGLE_KEYPAD | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.6 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| keypad_info | DECT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : TERMINAL_CAPABILITY | | |
| Comments : ETS 300 175-5 [5], (second edition), subclause 7.7.41 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| display_capability | BIT_4 | |
| tone_capability | BIT_3 | |
| ext3 | BIT_1 | |
| a_vol | BIT_2 | |
| n_rej | BIT_2 | |
| echo_param | BIT_3 | |
| ext3b | BIT_1 | |
| slot_type_capability | BIT_7 | |
| ext3c | BIT_1 | |
| number_of_stored_display_chars_ms | BIT_7 | |
| ext3d | BIT_1 | |
| number_of_stored_display_chars_ls | BIT_7 | |
| ext3e | BIT_1 | |
| number_of_lines_in_display | BIT_7 | |
| ext3f | BIT_1 | |
| number_of_characters_per_line | BIT_7 | |
| ext3g | BIT_1 | |
| scrolling_behaviour_field | BIT_7 | |
| ext3h | BIT_1 | |
| profile_indicator_1 | BIT_7 | |
| ext4 | BIT_1 | |
| profile_indicator_2 | BIT_7 | |
| ext4a | BIT_1 | |
| control_codes | BIT_3 | |
| spare | BIT_4 | '0000' |
| ext5 | BIT_1 | |
| esc_to_8_bit_cs | BIT_7 | |
| ext5a | BIT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : TEST_HOOK_CONTROL | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.10 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| hook_value | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|--|-----------------|----------|
| Type Name : TIMER_RESTART | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.9 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| restart_value | OCT_1 | |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : TRANSIT_DELAY | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.42 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| forward_delay | BIT_6 | |
| f3 | BIT_2 | '10' |
| backward_delay | BIT_6 | |
| f4 | BIT_2 | '10' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : WINDOW_SIZE | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.43 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| forward_value | BIT_7 | |
| f3 | BIT_1 | '1' |
| backward_value | BIT_7 | |
| f4 | BIT_1 | '1' |
| Detailed Comments : | | |

| Structured Type Definition | | |
|---|-----------------|----------|
| Type Name : ZAP_FIELD | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.44 | | |
| Element Name | Type Definition | Comments |
| iei | OCT_1 | |
| length | OCT_1 | |
| contents | BIT_4 | |
| f3 | BIT_4 | '0000' |
| Detailed Comments : | | |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_algosb1_a1(rand,rs : BIT_64; uak_ac : BIT_128) |
| Result Type | : BITSTRING |
| Comments | : Authentication key selection algorithm B1 followed by authentication algorithms A1 for FP Authentication processes. |
| Description | |
| k,ks:INTEGER128BIT (k:=algoB1(uak_ac)) (ks:=algoA11(rs,k)) algoA12(ks,rand) | |
| Detailed Comments | : algoB1() as per ETS 300 175-7.[7] algoA11() and algoA12() as per DECT Standard Authentication Algorithm – DSSA. See Annex H of ETS 300 175-7 |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_cinft_algosb2_a1(rand, rs : BIT_64; uak : BIT_128; upi : BIT_32) |
| Result Type | : BITSTRING |
| Comments | : authentication key selection algorithm B2 followed by authentication algorithms A1 for PP user authentication processes. |
| Description | |
| k,ks:INTEGER128BIT (k:=algoB2(uak,upi)) (ks:=algoA11(rs,k)) algoA12(ks,rand) | |
| Detailed Comments | : algoB2() as per ETS 300 175-7.[7] algoA11() and algoA12() as per DECT Standard Authentication Algorithm – DSSA. See Annex H of ETS 300 175-7 |

| Test Suite Operation Definition | |
|--|---|
| Operation Name | : TSO_cinft_algosb1_a2(rand, rs : BIT_64; uak_ac : BIT_128) |
| Result Type | : BITSTRING |
| Comments | : Authentication key selection algorithm B1 followed by authentication algorithms A2 for FP Authentication processes. |
| Description | |
| k,ks':INTEGER128BIT | |
| (k:=algoB1(uak_ac)) | |
| (ks':=algoA21(rs,k)) | |
| algoA22(ks',rand) | |
| Detailed Comments | : algoB1() as per ETS 300 175-7 [7]. algoA21() and algoA22() as per DECT Standard Authentication Algorithm – DSSA. See Annex H of ETS 300 175-7 |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_algosb1_a21(rs : BIT_64; ac : BITSTRING) |
| Result Type | : BITSTRING |
| Comments | : Authentication key selection algorithm B1 followed by authentication algorithm A21 of FP Authentication processes. Used to generate ks' which is the allocated key– UAK. |
| Description | |
| k :INTEGER128BIT | |
| (k:=algoB1(ac)) | |
| algoA21(rs,k) | |
| Detailed Comments | : algoB1() as per ETS 300 175-7 [7] algoA21() as per DECT Standard Authentication Algorithm – DSSA. See Annex H of ETS 300 175-7 |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_algos_dck_b1_a1(rand,rs:BIT_64; uak_ac:BIT_128) |
| Result Type | : BIT_64 |
| Comments | : Authentication key selection algorithm B1 followed by authentication algorithms A1. Used to calculate the derived ciphering key. |
| Description | |
| k,ks:INTEGER128BIT | |
| (k:=algoB1(uak_ac)) | |
| (ks:=algoA11(rs,k)) | |
| dck_algoA12(ks,rand) | |
| Detailed Comments | : algoB1() as per ETS 300 175-7.[7] algoA11() and dck_algoA12() as per DECT Standard Authentication Algorithm – DSSA. See Annex H of ETS 300 175-7 |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_assign_tpui(tpui : PORT_ID_VALUE_TYPE; length : OCT_1) |
| Result Type | : BOOLEAN |
| Comments | : To pass an assigned TPUI to the testsystem, and consequently also to the PMID. In successive communication, an assigned PMID will be used. SBH 95.06.08 |
| Description | |
| Pass the assigned TPUI with the specified length to the testsystem. Use an assigned PMID in successive communication. The result type indicates success or failure. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_bitstr_dec(bitstr : BITSTRING) |
| Result Type | : BITSTRING |
| Comments | : Returns a modified variable based on the valid variable in the bitstring bitstr. |
| Description | |
| L, bitstr_int:INTEGER (L := LENGTH_OF(bitstr)) (bitstr_int := BIT_TO_INT(bitstr)) (bitstr_int := bitstr_int - 1) (bitstr := INT_TO_BIT(bitstr_int, L)) | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_bitstr_inc(bitstr : BITSTRING) |
| Result Type | : BITSTRING |
| Comments | : Returns a modified variable based on the valid variable in the bitstring bitstr. |
| Description | |
| L, bitstr_int:INTEGER (L := LENGTH_OF(bitstr)) (bitstr_int := BIT_TO_INT(bitstr)) (bitstr_int := bitstr_int + 1) (bitstr := INT_TO_BIT(bitstr_int, L)) | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_cinft_calculate_w_from_TPUI(tpui: BIT_16) |
| Result Type | : BIT_1 |
| Comments | : To calculate the value of IE 'w' for short format messages acc. to ETS 300 175-5, clause 8.2.1, depending on the TPUI address. |
| Description | |
| If the TPUI address is derived from an assigned TPUI the result is '1'B, if the TPUI address is derived from a default TPUI the result is '0'B. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_check_basic_digits |
| Result Type | : BOOLEAN |
| Comments | : To check if Network simulator(analyser) has received the basic dialled digit(s). |
| Description | |
| TSO_nw_check_basic_digits is a test suite operation which return a BOOLEAN value to the calling tree. The test personnel has to check the network simulator (analyser) if the digit(s) coming from the FT is/are the same as the one(s) which has/have been sent by the LT (PT). If it is the same digit(s) then TSO_nw_check_basic_digits shall be equal to TRUE, Otherwise it shall be assigned to FALSE. | |
| TSO_nw_check_basic_digits = TRUE , when the network analyser receives the same digit(s) as the LT has sent TSO_nw_check_basic_digits = FALSE , when the network analyser receives the same digit(s) as the LT has sent | |
| The digits that are sent by the LT, are the digits *, #, 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|---|
| Operation Name | : TSO_check_dtmf_defined |
| Result Type | : BOOLEAN |
| Comments | : To check if FT sends DTMF, defined tone length. |
| Description | |
| TSO_check_dtmf_defined is a test suite operation which return a BOOLEAN value to the calling tree. The test personnel has to check the network simulator, if the digit(s) coming from the FT is DTMF, defined tone length or pulse. If it is DTMF then TSO_check_dtmf_defined shall be equal to TRUE, Otherwise it shall be assigned to FALSE. | |
| TSO_check_dtmf_defined = TRUE , when FT sends DTMF, defined tone length TSO_check_dtmf_defined = FALSE , when FT does not send DTMF, defined tone length | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|---|
| Operation Name | : TSO_check_dtmf_infinite |
| Result Type | : BOOLEAN |
| Comments | : To check if FT sends DTMF, infinite tone length |
| Description | |
| <p>TSO_check_dtmf_defined is a test suite operation which return a BOOLEAN value to the calling tree. The test personnel has to check the network simulator, if the digit(s) coming from the FT is DTMF, infinite tone length or pulse. If it is DTMF then TSO_check_dtmf_defined shall be equal to TRUE, Otherwise it shall be assigned to FALSE.</p> <p>TSO_nw_check_dtmf_inifinite = TRUE , when FT sends DTMF, infinite tone length. TSO_nw_check_dtmf_inifinite = FALSE , when FT does not send DTMF, infinite tone length.</p> | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|---|
| Operation Name | : TSO_cinft_check_link_present |
| Result Type | : BOOLEAN |
| Comments | : To check if a link between the IUT and the LT is present. |
| Description | |
| <p>TSO_cinft_check_link_present is an operation to detect if a layer 2 link is still present. The result of the operation is a boolean value which indicates the condition of the link.</p> <p>TSO_cinft_check_link_present = TRUE, when a link between the LT and the IUT is present. TSO_cinft_check_link_present = FALSE, when NO link between the LT and the IUT is present.</p> | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|---------------------------------|
| Operation Name | : TSO_check_pause |
| Result Type | : BOOLEAN |
| Comments | : To check if FT sends a pause. |
| Description | |
| <p>TSO_check_pause is a test suite operation which return a BOOLEAN value to the calling tree. The test personnel has to check the network simulator (analyser) if its possible to see a pause between the 4rd and the 5th digit. If it is a pause then TSO_check_pause shall be equal to TRUE, Otherwise it shall be assigned to FALSE.</p> <p>TSO_check_pause = TRUE , when FT sends a pause (between the 4rd and the 5th digit) TSO_check_pause = FALSE , when FT sends a pause (between the 4rd and the 5th digit)</p> | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|---|
| Operation Name | : TSO_check_pulse |
| Result Type | : BOOLEAN |
| Comments | : To check, if FT has switched to pulse dialling. |
| Description | |
| <p>TSO_check_pulse is a test suite operation which return a BOOLEAN value to the calling tree. The test personnel has to check the network simulator (analyser) if the digit(s) coming from the FT is DTMF or pulse. If it is pulse then TSO_check_pulse shall be equal to TRUE, otherwise it shall be assigned to FALSE.</p> <p>TSO_check_pulse = TRUE , when FT sends pulse TSO_check_pulse = FALSE , when FT sends DTMF</p> | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|---|
| Operation Name | : TSO_cinft_check_u_plane(dlei : DATA_LINK_ENDPOINT_IDENTIFIER) |
| Result Type | : BOOLEAN |
| Comments | : To check if U-plane is present. |
| Description | |
| <p>TSO_cinft_check_u_plane is an operation to detect the U-plane connection of the specified dlei. The acoustical path will be checked in both directions by two tone generators. The result of the operation is a boolean value which indicates the condition of the U-plane.</p> <p>TSO_cinft_check_u_plane = TRUE, when U_plane is connected. TSO_cinft_check_u_plane = FALSE, when U_plane is not connected.</p> | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|---|
| Operation Name | : TSO_cinft_convert_ac_to_bitstring(param : OCT_4) |
| Result Type | : BIT_32 |
| Comments | : To convert the value of the AC, into a bitstring, exactly as specified in ETS 300 444, subclause 14.2 |
| Description | |
| Convert the decimal AC value (max 8 digits) into a 32 bit bitstring, as specified in ETS 300 444, subclause 14.2. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_convert_upi_to_bitstring(param : OCT_4) |
| Result Type | : BIT_32 |
| Comments | : To convert the value of the UPI, into a bitstring, exactly as specified in ETS 300 444, subclause 8.25 |
| Description | |
| Convert the decimal UPI value (max 8 digits) into a 32 bit bitstring, as specified in ETS 300 444, subclause 8.25. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|---|
| Operation Name | : TSO_delete_tpui |
| Result Type | : BOOLEAN |
| Comments | : To delete the assigned TPUI from the test system, and consequently also the PMID. In successive communication, a default PMID will be used. |
| Description | |
| Delete the assigned TPUI from the test system. Use default PMID in successive communication. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|---|
| Operation Name | : TSO_fill_cinft_fixed_id_length(param : BIT_7) |
| Result Type | : OCT_1 |
| Comments | : Compute the real length of the Fixed Identity ie. |
| Description | |
| IF param = 31 THEN return (4 + 2) /* PARK B,C,D 31 bits long */ ELSE return (5 + 2) /* PARK A 36 bits long */ | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_fill_cinft_fixed_id_park(value : FIXED_ID_VALUE_TYPE; length : BIT_7) |
| Result Type | : FIXED_ID_VALUE_TYPE |
| Comments | : To fill the id_value field of a FIXED_ID information element according to the parametrised PARK. |
| Description | |
| IF ((length = 31) THEN /* the PARK is PARK B,C, or D 31 bits long */ return ('0'B followed by value) /* 32 bits adjust */ ELSE /* the PARK is PARK A 36 bits long */ return ('0'B followed by value followed by '000'B) /* 40 bits adjust */ | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|---|
| Operation Name | : TSO_fill_cinft_portable_id_ipui(value : PORT_ID_VALUE_TYPE; length : BIT_7) |
| Result Type | : PORT_ID_VALUE_TYPE |
| Comments | : To fill the id_value field of a PORTABLE_ID information element according to the parametrised IPUI. |
| Description | |
| <pre> IF ((length MOD 8) # 0) THEN extract the four fist bits of value into IPUI type IF (IPUI type is O ('0001'B) or P ('0010'B)) THEN /* the IPUI is binary coded */ return (value followed by '0000'B) ELSE /* IPUI type is S, T, Q, U R – the IPUI is BCD coded */ return (value followed by '1111'B) ELSE return (value) </pre> | |
| Detailed Comments | : |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_fill_cinft_portable_id_length(param : BIT_7) |
| Result Type | : OCT_1 |
| Comments | : Compute the real length of the Portable Identity ie. |
| Description | |
| <pre> IF param MOD 8 # 0 THEN return ((param / 8) + 3) ELSE return ((param / 8) + 2) </pre> | |
| Detailed Comments | : |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_get_one_digit(digit_string : OCT_1_14; n : INTEGER) |
| Result Type | : DECT_1 |
| Comments | : To get the n'th digit from a character string. |
| Description | |
| <p>TSO_get_one_digit(digit_string, n)</p> <p>Returns the n'th character value from a character digit_string. The digit_string can be e.g. called_party_number.</p> <p>e.g.:</p> <pre> TSPX_called_nr:= 514411; n := 0; => TSO_get_one_digit(TSPX_called_nr, 0) = 5 </pre> | |
| Detailed Comments | : As the definition of an array is not possible in TTCN, this operator simulates an array. |

| Test Suite Operation Definition | |
|--|---|
| Operation Name | : TSO_cinft_int_to_oct_1(param : INT_8) |
| Result Type | : OCT_1 |
| Comments | : This operator will convert an integer value, not higher than 255 (8 bits) into an octetstring of 1. The coding will be the natural binary value, unsigned. |
| Description | |
| Convert an integer value, not higher than 255 (8 bits) into an octetstring of 1. The coding will be the natural binary value, unsigned. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_cinft_lowest(nb:INTEGER;string:BITSTRING) |
| Result Type | : BITSTRING |
| Comments | : Extracting of the "nb" lowest bits of the string "string". |
| Description | |
| This test suite operation extracts the "nb" lowest bits of the bitstring passed in parameter. ex: TSO_cinft_lowest(4,'0101010101011100'B) return '1100'B | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|---|--|
| Operation Name | : TSO_revoke_accessrights_of_pt |
| Result Type | : BOOLEAN |
| Comments | : To revoke the accessrights of the PT (LT), by means of a proprietary management command. |
| Description | |
| The testpersonnel will perform an action on the FT, or on a related management application, in order to revoke the accessrights of the PT (LT). This will be done without using the terminate accessrights procedure. The result of the operation will be TRUE, assuming that the operation has been completed successfully. | |
| Detailed Comments : | |

| Test Suite Operation Definition | |
|--|--|
| Operation Name | : TSO_cinft_set_bit_a38(param : INT_8) |
| Result Type | : BOOLEAN |
| Comments | : The set the value of the broadcasted "higher layer capabilities" bit a 38. The parameter indicates the value that the bit shall get. |
| Description | |
| The value of bit a38 will be given the value indicated in the parameter. The result of the operation will be TRUE, assuming that the operation has been completed successfully. | |
| Detailed Comments : | |

| Test Suite Parameter Declarations | | | |
|-----------------------------------|---------|-------------------|--|
| Parameter Name | Type | PICS/PIXIT Ref | Comments |
| TSPC_cc_support | BOOLEAN | PICS Item A.12/1 | Is CC entity supported ? |
| TSPC_ciss_support | BOOLEAN | PICS Item A.12/2 | Is CISS entity supported ? |
| TSPC_coms_support | BOOLEAN | PICS Item A.12/3 | Is COMS entity supported ? |
| TSPC_clms_support | BOOLEAN | PICS Item A.12/4 | Is CLMS entity supported ? |
| TSPC_mm_support | BOOLEAN | PICS Item A.12/5 | Is MM entity supported ? |
| TSPC_lce_support | BOOLEAN | PICS Item A.12/6 | Is LCE entity supported ? |
| TSPC_basic_digits | BOOLEAN | PICS Item A.13/5 | Is CC feature Dialed basic digits supported ? |
| TSPC_emerg_call | BOOLEAN | PICS Item A.13/10 | Is CC feature Emergency service access request supported ? |
| TSPC_go_dtmf_il | BOOLEAN | PICS Item A.13/13 | Is CC feature Go to DTMF (infinite tone length) supported ? |
| TSPC_go_dtmf_dl | BOOLEAN | PICS Item A.13/14 | Is CC feature Go to DTMF (defined tone length) supported ? |
| TSPC_go_pulse | BOOLEAN | PICS Item A.13/15 | Is CC feature Go to Pulse supported ? |
| TSPC_incoming_call | BOOLEAN | PICS Item A.13/17 | Is CC feature Incoming call supported ? |
| TSPC_outgoing_call | BOOLEAN | PICS Item A.13/21 | Is CC feature Outgoing Call supported ? |
| TSPC_partial_release | BOOLEAN | PICS Item A.13/23 | Is CC feature Partial release supported ? |
| TSPC_dialling_pause | BOOLEAN | PICS Item A.13/24 | Is CC feature Dialling pause supported ? |
| TSPC_ft_cipher_on | BOOLEAN | PICS Item A.14/4 | Is MM feature Encryption activation FT initiated supported ? |
| TSPC_pt_cipher_on | BOOLEAN | PICS Item A.14/5 | Is MM feature Encryption activation PT initiated supported ? |
| TSPC_ft_cipher_off | BOOLEAN | PICS Item A.14/6 | Is MM feature Encryption deactivation FT initiated supported ? |
| TSPC_pt_cipher_off | BOOLEAN | PICS Item A.14/7 | Is MM feature Encryption deactivation PT initiated supported ? |
| TSPC_identification | BOOLEAN | PICS Item A.14/8 | Is MM feature Identification of PP supported ? |
| TSPC_location_registr | BOOLEAN | PICS Item A.14/10 | Is MM feature Location registration supported ? |
| TSPC_location_deregistr | BOOLEAN | PICS Item A.14/11 | Is MM feature Location deregistration supported ? |
| TSPC_key_allocat_proc | BOOLEAN | PICS Item A.14/13 | Is MM feature On air key allocation supported ? |
| TSPC_access_rights | BOOLEAN | PICS Item A.14/16 | Is MM feature On air subscription registration supported ? |
| TSPC_link_rel_maintain_mm | BOOLEAN | PICS Item A.14/22 | Is MM feature Partial release supported ? |
| TSPC_clip | BOOLEAN | PICS Item A.15/8 | Is SS feature CLIP supported ? |

Continued on next page

Continued from previous page

| Test Suite Parameter Declarations | | | |
|--|-------------|-----------------------|---|
| Parameter Name | Type | PICS/PIXIT Ref | Comments |
| TSPC_fkm_prot_cost_info | BOOLEAN | PICS Item A.15/17 | Is SS feature Cost information supported ? |
| TSPC_fkm_prot_queue_mgt | BOOLEAN | PICS Item A.15/32 | Is SS feature Queue management supported ? |
| TSPC_lce_co | BOOLEAN | PICS Item A.16/1 | Is LCE feature: Connection oriented link control supported? |
| TSPC_lce_cl | BOOLEAN | PICS Item A.16/2 | Is LCE feature: Connectionless link control supported ? |
| TSPC_identity_procs | BOOLEAN | PICS Item A.19/1 | Is MM procedure: Identification of PP supported ? |
| TSPC_temp_id_assign | BOOLEAN | PICS Item A.19/2 | Is MM procedure: Temporary identity assignment supported ? |
| TSPC_pt_auth | BOOLEAN | PICS Item A.19/3 | Is MM procedure: Authentication of PT supported ? |
| TSPC_user_auth | BOOLEAN | PICS Item A.19/4 | Is MM procedure: Authentication of user supported ? |
| TSPC_ft_auth | BOOLEAN | PICS Item A.19/5 | Is MM procedure: Authentication of FT supported ? |
| TSPC_location_reg | BOOLEAN | PICS Item A.19/6 | Is MM procedure: Location registration supported ? |
| TSPC_location_update | BOOLEAN | PICS Item A.19/8 | Is MM procedure: Location update supported ? |
| TSPC_access_rights_procs | BOOLEAN | PICS Item A.19/9 | Is MM procedure: Obtain access rights supported ? |
| TSPC_pt_terminate_ar | BOOLEAN | PICS Item A.19/10 | Is MM procedure: PT terminate access rights supported ? |
| TSPC_ft_terminate_ar | BOOLEAN | PICS Item A.19/11 | Is MM procedure: FT terminate access rights supported ? |
| TSPC_para_retr_pt | BOOLEAN | PICS Item A.19/13 | Is MM procedure: PT init parameter retrieval supported ? |
| TSPC_zap | BOOLEAN | PICS Item A.19/17 | Is MM procedure: ZAP increment supported ? |
| TSPC_store_dck | BOOLEAN | PICS Item A.19/18 | Is MM procedure: DCK storing supported ? |
| TSPC_service_class | BOOLEAN | PICS Item A.19/20 | Is MM procedure: Service class management supported ? |
| TSPC_clms_fixed | BOOLEAN | PICS Item A.22/1 | Is CLMS fixed procedure supported ? |
| TSPC_clms_variable | BOOLEAN | PICS Item A.22/2 | Is CLMS variable procedure supported ? |
| TSPC_link_estab_co_pt | BOOLEAN | PICS Item A.23/1 | Is LCE procedure: PT direct link establishment supported ? |

Continued on next page

Continued from previous page

| Test Suite Parameter Declarations | | | |
|--|-----------------------------------|-----------------------|---|
| Parameter Name | Type | PICS/PIXIT Ref | Comments |
| TSPC_link_estab_co_ft_indi r | BOOLEAN | PICS Item A.23/2 | Is LCE procedure: FT indirect link establishment supported ? |
| TSPC_link_release | BOOLEAN | PICS Item A.23/7 | Is LCE procedure: link release supported ? |
| TSPC_link_rel_maintain_cc | BOOLEAN | PICS Item A.23/8 | Is LCE procedure: link partial release supported ? |
| TSPC_mm_priority_mgt | BOOLEAN | PICS Item A.24/5 | Is MGT procedure: MM priority scheme supported ? |
| TSPC_mm_cc_interl_mgt | BOOLEAN | PICS Item A.24/6 | Is MGT procedure: MM and CC coexistence supported ? |
| TSPC_enblock | BOOLEAN | PICS Item A.27/30 | Is the called party number ie of the CC-SETUP message supported ? |
| TSPX_access_rights_uak | BOOLEAN | PIXIT Question B.7.16 | Is the authentication key UAK supported ? |
| TSPX_dlei_value | DATA_LINK_ENDPOINT_I DENTIFIER | PIXIT Question B.8.4 | Value of data link endpoint identifier to be used in the testsystem (local testsystem matter) |
| TSPX_ipei_value | PORT_ID_VALUE_TYPE | PIXIT Question B.8.5 | Value of IPEI (IPUI-N) to be sent to the FT (IUT) (before subscription). 36 bits value is required. |
| TSPX_complete_fixed_id_ari _value | FIXED_ID_VALUE_TYPE | PIXIT Question B.8.2 | Value of fixed_id to be used in case of ARI. |
| TSPX_ari_length_indicator | INTEGER | PIXIT Question B.8.12 | Number of significant bits of the ARI value. |
| TSPX_complete_fixed_id_ari _rpn_value | FIXED_ID_VALUE_TYPE | PIXIT Question B.8.3 | Value of fixed_id to be used in case of ARI + RPN |
| TSPX_called_party_number | OCT_1_14 | PIXIT Question B.8.13 | The called party number to be dialled by the PT (LT) in order to get connection to the network. For practical reasons, the number is limited to 14 digits, |
| TSPX_calling_party_number | OCT_1_14 | PIXIT Question B.8.15 | The calling party number to be provided by the IUT. For practical reasons, the number is limited to 14 digits, |
| TSPX_emergency_cpn | OCT_1_14 | PIXIT Question B.8.14 | The emergency called party number to be dialled by the PT (LT) in order to get connection to the network. For practical reasons, the number is limited to 14 digits, |
| TSPX_decimal_ac_value | OCT_4 | PIXIT Question B.8.1 | Value of AC to be used. The AC will be entered as maximal 8 decimal digits. The AC to bitstring mapping will be done with operator TSO_cinft_convert_ac_to_bitstring. |

Continued on next page

Continued from previous page

| Test Suite Parameter Declarations | | | |
|-----------------------------------|--------------------|-----------------------|--|
| Parameter Name | Type | PICS/PIXIT Ref | Comments |
| TSPX_decimal_upi_value | OCT_4 | PIXIT Question B.8.10 | Value of UPI to be used. The UPI will be entered as maximal 8 decimal digits. The UPI to bitstring mapping will be done with operator TSO_cinft_convert_upi_to_bitstring. |
| TSPX_ipui_value | PORT_ID_VALUE_TYPE | PIXIT Question B.8.6 | Value of IPUI to be used by the PT (LT) (after subscription). the four first bits represent the type of IPUI. The following bits are the IPUI coded in BCD or in Binary depending on the type. |
| TSPX_location_area_level | BIT_6 | PIXIT Question B.8.7 | The location area level that is going to be used. |
| TSPX_mmproc_arte_ccstate | CCSTATE_TYPE | PIXIT Question B.7.1 | Indicates the FT cc state, the accessrights terminate request testcases shall be tested in. |
| TSPX_mmproc_aupt_ccstate | CCSTATE_TYPE | PIXIT Question B.7.2 | Indicates the FT cc state, the authentication of PT testcases shall be tested in. |
| TSPX_mmproc_auus_ccstate | CCSTATE_TYPE | PIXIT Question B.7.3 | Indicates the FT cc state, the authentication of user testcases shall be tested in. |
| TSPX_mmproc_cift_ccstate | CCSTATE_TYPE | PIXIT Question B.7.4 | Indicates the FT cc state, the FT init. ciphering testcases shall be tested in. |
| TSPX_mmproc_idpt_ccstate | CCSTATE_TYPE | PIXIT Question B.7.5 | Indicates the FT cc state, the id. of PT testcases shall be tested in. |
| TSPX_mmproc_keal_ccstate | CCSTATE_TYPE | PIXIT Question B.7.7 | Indicates the FT cc state, the key allocation testcases shall be tested in. |
| TSPX_nr_of_digits_in_cpn | CPN_LENGTH_TYPE | PIXIT Question B.7.15 | This parameter is related to parameter TSPX_called_party_number. It specifies the actual number of digits present in the cpn. |
| TSPX_mmproc_loup_ccstate | CCSTATE_TYPE | PIXIT Question B.7.6 | Indicates the FT cc state, the location update testcases shall be tested in. |
| TSPX_mmproc_arte_invoke | MMPROC_TYPE | PIXIT Question B.7.8 | Indicates the way of invoking the accessrights terminate request procedure. |
| TSPX_mmproc_aupt_invoke | MMPROC_TYPE | PIXIT Question B.7.9 | Indicates the way of invoking the authentication of PT proc. |
| TSPX_mmproc_auus_invoke | MMPROC_TYPE | PIXIT Question B.7.10 | Indicates the way of invoking the authentication of user proc. |
| TSPX_mmproc_cift_invoke | MMPROC_TYPE | PIXIT Question B.7.11 | Indicates the way of invoking the FT init. ciphering procedure. |

Continued on next page

Continued from previous page

| Test Suite Parameter Declarations | | | |
|---|---------------------|-----------------------|--|
| Parameter Name | Type | PICS/PIXIT Ref | Comments |
| TSPX_mmproc_idpt_invoke | MMPROC_TYPE | PIXIT Question B.7.12 | Indicates the way of invoking the id. of PT procedure. |
| TSPX_mmproc_keal_invoke | MMPROC_TYPE | PIXIT Question B.7.14 | Indicates the way of invoking the key allocation procedure. |
| TSPX_mmproc_loup_invoke | MMPROC_TYPE | PIXIT Question B.7.13 | Indicates the way of invoking the location update request procedure. |
| TSPX_complete_fixed_id_park_value | FIXED_ID_VALUE_TYPE | PIXIT Question B.8.8 | Value of fixed_id to be used in case of PARK. |
| TSPX_park_length_indicator | INTEGER | PIXIT Question B.8.11 | Number of significant bits of the PARK value. (PLI) |
| TSPX_complete_fixed_id_park_value_2 | FIXED_ID_VALUE_TYPE | PIXIT Question B.8.16 | Value of fixed_id to be used in case of a second PARK |
| TSPX_park_length_indicator_2 | INTEGER | PIXIT Question B.8.17 | Number of significant bits of the PARK value 2. (PLI) |
| TSPX_tpui_value | PORT_ID_VALUE_TYPE | PIXIT Question B.8.9 | Value of TPUI to be used by the PT (LT). 20 bits value is required. |
| <p>Detailed Comments : The PIXIT parameters TSPX_mmproc_xxxx_ccstate can be used to specify the CC state, the IUT shall be in, when a certain MM procedure is tested.</p> <p>The PIXIT parameters TSPX_mmproc_xxxx_invoke can be used to specify the means of invocation of a certain MM procedure. If the parameter is 0, a standard implicit send statement is used. In other cases, a manufacturer specific protocol invocation can be specified.</p> | | | |

| Test Case Selection Expression Definitions | | |
|--|---|---|
| Expression Name | Selection Expression | Comments |
| SENG_access_rights_procs | TSPC_mm_support AND TSPC_access_rights_procs | SELECTION EXPRESSION NAMES FOR TESTGROUPS: Are access rights procedures supported. |
| SENG_auth_procs | TSPC_mm_support AND TSPC_pt_auth AND TSPC_user_auth AND TSPC_ft_auth | Are authentication procedures supported. |
| SENG_cc_support | TSPC_cc_support | Is Call Control supported. |
| SENG_cipherng_procs | TSPC_mm_support AND (TSPC_pt_cipher_on OR TSPC_pt_cipher_off) | Are ciphering related procedures supported. |
| SENG_ciss_support | TSPC_ciss_support | Are Call Independent Supplementary Services supported. |
| SENG_clms_support | TSPC_ciss_support | Is ConnectionLess Message Service supported. |
| SENG_crss_support | TSPC_cc_support AND TSPC_incoming_call AND TSPC_clip | Are Call Related Supplementary Services supported. |
| SENG_ft_testing | TRUE | Are we testing the FT |
| SENG_identity_procs | TSPC_mm_support AND TSPC_identity_procs | Are identity procedures supported. |
| SENG_incoming_call | TSPC_cc_support AND TSPC_incoming_call | Is incoming call establishment, maintenance and release supported. |
| SENG_key_allocat_proc | TSPC_mm_support AND TSPC_key_allocat_proc | TSPC_mm_support AND TSPC_key_allocat_proc. |
| SENG_ice_co | TSPC_ice_support AND TSPC_ice_co | Are connection oriented link establishment, maintenance and release supported. |
| SENG_ice_support | TSPC_ice_support | Is Link Control Entity supported. |
| SENG_location_procs | TSPC_mm_support AND TSPC_location_registr AND TSPC_location_deregistr | Are location procedures supported. |
| SENG_mgt_support | TSPC_cc_support AND TSPC_mm_support AND TSPC_mm_cc_interl_mgt AND TSPC_mm_priority_mgt | Are management of MM procedures and coexistence of MM and CC procedures supported. |
| SENG_mm_support | TSPC_mm_support | Is Mobility Management supported. |
| SENG_outgoing_call | TSPC_cc_support AND TSPC_outgoing_call | Is outgoing call establishment, maintenance and release supported. |
| SENC_access_rights | TSPC_mm_support AND TSPC_access_rights | Is obtain access rights procedure supported. |
| SENC_access_rights_uak | TSPC_mm_support AND TSPC_access_rights AND TSPX_access_rights_uak | Is obtain access rights procedure containing UAK supported. |
| SENC_basic_digits | TSPC_cc_support AND (TSPC_outgoing_call OR TSPC_incoming_call) AND TSPC_basic_digits | Is sending/receiving basic digits supported. |
| SENC_clip | TSPC_cc_support AND TSPC_incoming_call AND TSPC_clip | Is CLIP call related supplementary service supported. |
| SENC_clms_fixed | TSPC_clms_support AND TSPC_clms_fixed | Is CLMS fixed message exchange supported. |
| SENC_clms_variable | TSPC_clms_support AND TSPC_clms_variable | Is CLMS variable message exchange supported. |

Continued on next page

Continued from previous page

| Test Case Selection Expression Definitions | | |
|--|---|---|
| Expression Name | Selection Expression | Comments |
| SENC_dialling_pause | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_dialling_pause | Is sending/receiving "Dialling pause" supported. |
| SENC_emerg_call | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_emerg_call | Is emergence outgoing call establishment, maintenance and release supported. |
| SENC_emerg_call_piecewise | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_emerg_call AND NOT TSPC_enblock | Is emergence outgoing call establishment, maintenance and release supported with piecewise (overlap sending optional states). |
| SENC_enblock | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_enblock | Is sending the called party number in enblock way (in a <<Called-party-number>> I.E.) supported |
| SENC_fkm_prot_cost_info_crss | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_fkm_prot_cost_info | Is cost information call related supplementary service supported. |
| SENC_fkm_prot_queue_mgt_crss | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_fkm_prot_queue_mgt | Is queue management call related supplementary service supported. |
| SENC_ft_auth | TSPC_mm_support AND TSPC_ft_auth | Is authentication of FT procedure supported. |
| SENC_ft_cipher_off | TSPC_mm_support AND TSPC_ft_cipher_off | Is FT initiated cipher off procedure supported. |
| SENC_ft_cipher_on | TSPC_mm_support AND (TSPC_pt_auth OR TSPC_user_auth) AND TSPC_store_dck AND TSPC_ft_cipher_on | Is FT initiated cipher on procedure supported. |
| SENC_ft_and_pt_cipher_on | TSPC_mm_support AND (TSPC_pt_auth OR TSPC_user_auth) AND TSPC_store_dck AND TSPC_ft_cipher_on AND TSPC_pt_cipher_on | Are PT and FT initiated cipher on procedures supported. |
| SENC_ft_cipher_on_loc | TSPC_mm_support AND TSPC_ft_cipher_on AND TSPC_location_reg | Are FT cipher on and location registration procedure supported. |
| SENC_ft_term_ar_ft_auth | TSPC_mm_support AND TSPC_ft_terminate_ar AND TSPC_ft_auth | Is authentication during FT initiated terminate access rights procedure supported. |
| SENC_ft_terminate_ar | TSPC_mm_support AND TSPC_ft_terminate_ar | Is FT initiated terminate access rights procedure supported. |
| SENC_ft_term_ar_loc | TSPC_mm_support AND TSPC_ft_terminate_ar AND TSPC_location_reg | Are FT terminate access rights and location registration procedure supported. |
| SENC_go_dtmf_dl | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_go_dtmf_dl | Is sending/receiving "Go to DTMF – defined tone length" supported. |
| SENC_go_dtmf_il | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_go_dtmf_il | Is sending/receiving "Go to DTMF – indefinite tone length" supported. |
| SENC_go_pulse | TSPC_cc_support AND TSPC_outgoing_call AND TSPC_go_pulse | Is sending/receiving "Go to pulse" supported. |
| SENC_identification | TSPC_mm_support AND TSPC_identification | Is identification of PT procedure supported. |

Continued on next page

Continued from previous page

| Test Case Selection Expression Definitions | | |
|--|---|--|
| Expression Name | Selection Expression | Comments |
| SENC_in_call_ft_auth | TSPC_mm_support AND TSPC_cc_support AND TSPC_incoming_call AND TSPC_ft_auth | Is handling coexistence of CC (incoming call) and MM (FT authentication) procedures supported. |
| SENC_key_allocate | TSPC_mm_support AND TSPC_key_allocat_proc | Is key allocation procedure supported. |
| SENC_key_alloc_loc | TSPC_mm_support AND TSPC_key_allocat_proc AND TSPC_location_reg | Are key allocation and location registration procedure supported. |
| SENC_link_co_ft_indir | TSPC_lce_support AND TSPC_link_estab_co_ft_indir AND TSPC_link_release | Are connection oriented indirect FT initiated link establishment and link release procedures supported. |
| SENC_link_co_pt | TSPC_lce_support AND TSPC_link_estab_co_pt AND TSPC_link_release | Are connection oriented direct PT initiated link establishment and link release procedures supported. |
| SENC_link_co_pt_cc | TSPC_lce_support AND TSPC_cc_support AND TSPC_link_estab_co_pt AND TSPC_link_release | Are connection oriented direct PT initiated link establishment, outgoing call establishment and link release procedures supported. |
| SENC_link_rel_maintain_cc | TSPC_lce_support AND TSPC_link_rel_maintain_cc AND TSPC_partial_release | Is maintenance of link and partial release procedures supported. |
| SENC_link_rel_maintain_mm | TSPC_lce_support AND TSPC_link_rel_maintain_mm | Is maintenance of link supported after accomplishing of a MM transaction. |
| SENC_loc_reg_identif | TSPC_mm_support AND TSPC_location_reg AND TSPC_identification | Are location registration and identification procedures supported. |
| SENC_location_reg | TSPC_mm_support AND TSPC_location_reg | Is location registration procedure supported. |
| SENC_location_update | TSPC_mm_support AND TSPC_location_reg AND TSPC_location_update | Is location update procedure supported. |
| SENC_mm_general | TSPC_mm_support | Is any MM procedure supported. |
| SENC_normal_in_call | TSPC_cc_support AND TSPC_incoming_call | Is normal incoming call establishment, maintenance and release supported. |
| SENC_normal_out_call | TSPC_cc_support AND TSPC_outgoing_call | Is normal outgoing call establishment, maintenance and release supported. |
| SENC_out_call_loc_reg | TSPC_mm_support AND TSPC_cc_support AND TSPC_outgoing_call AND TSPC_location_reg | Is handling coexistence of CC (outgoing call) and MM (location registration) procedures supported. |
| SENC_out_pieewise_dtmf_dl_pulse | TSPC_cc_support AND TSPC_outgoing_call AND NOT TSPC_enblock AND TSPC_go_dtmf_dl AND TSPC_go_pulse | Are sending/receiving "Go to DTMF – defined tone length" and "Go to pulse" supported for outgoing call in overlap sending optional states. |
| SENC_para_retr_pt | TSPC_mm_support AND TSPC_para_retr_pt | Is PT initiated parameter retrieval procedure supported. |
| SENC_partial_release | TSPC_cc_support AND (TSPC_outgoing_call OR TSPC_incoming_call) AND TSPC_link_rel_maintain_cc AND TSPC_partial_release | Is partial release requested by the CC entity supported. |
| SENC_pd_ti | TSPC_lce_support | Is management of protocol discriminator and transaction identifier supported. |

Continued on next page

Continued from previous page

| Test Case Selection Expression Definitions | | |
|--|--|--|
| Expression Name | Selection Expression | Comments |
| SENC_pieewise | TSPC_cc_support AND TSPC_outgoing_call AND NOT TSPC_enblock | Is sending the called party number in pieewise way (in a <<Keypad>> I.E.) supported |
| SENC_pt_auth | TSPC_mm_support AND TSPC_pt_auth | Is authentication of PT procedure supported. |
| SENC_pt_auth_loc | TSPC_mm_support AND TSPC_pt_auth AND TSPC_location_reg | Are PT authentication and location registration procedure supported. |
| SENC_pt_cipher_off | TSPC_mm_support AND TSPC_pt_cipher_off | Is PT initiated cipher off procedure supported. |
| SENC_pt_cipher_on | TSPC_mm_support AND (TSPC_pt_auth OR TSPC_user_auth) AND TSPC_store_dck AND TSPC_pt_cipher_on | Is PT initiated cipher on procedure supported. |
| SENC_pt_cipher_on_ident | TSPC_mm_support AND TSPC_pt_cipher_on AND TSPC_identification | Are PT cipher on and identification of PT procedures supported. |
| SENC_pt_terminate_ar | TSPC_mm_support AND TSPC_pt_terminate_ar | Is PT initiated terminate access rights procedure supported. |
| SENC_service_class | TSPC_mm_support AND TSPC_access_rights AND (TSPC_pt_auth OR TSPC_user_auth) AND TSPC_service_class | Is assigning and indicating service class supported. |
| SENC_temp_id_assign | TSPC_mm_support AND TSPC_temp_id_assign | Is temporary identity assign procedure supported. |
| SENC_temp_id_loc | TSPC_mm_support AND TSPC_temp_id_assign AND TSPC_location_reg | Are temporary identity assign and location registration procedure supported. |
| SENC_user_auth | TSPC_mm_support AND TSPC_user_auth | Is user authentication procedure supported. |
| SENC_user_auth_ft_auth | TSPC_mm_support AND TSPC_user_auth AND TSPC_ft_auth | Is priority scheme for handling interrupting MM procedures (user authentication and FT authentication) supported. |
| SENC_user_auth_loc | TSPC_mm_support AND TSPC_user_auth AND TSPC_location_reg | Are user authentication and location registration procedure supported. |
| SENC_zap | TSPC_mm_support AND TSPC_access_rights AND (TSPC_pt_auth OR TSPC_user_auth) AND TSPC_zap | Is assigning and incrementing ZAP field supported. |
| SENC_zap_ft_auth | TSPC_mm_support AND TSPC_access_rights AND (TSPC_pt_auth OR TSPC_user_auth) AND TSPC_zap AND TSPC_ft_auth | Is authentication of FT during incrementing ZAP field supported. |
| Detailed Comments : | | |

| Test Suite Constant Declarations | | | |
|----------------------------------|-------|-------|---|
| Constant Name | Type | Value | Comments |
| TSC_iei_allocation_type | OCT_1 | '0B'O | ETS 300 175-5 [5] , subclause 7.6.1 and 7.7.1 Information element identifier coding: |
| TSC_iei_alphanumeric | OCT_1 | '76'O | |
| TSC_iei_auth_type | OCT_1 | '0A'O | |
| TSC_iei_basic_service | OCT_1 | 'E0'O | |
| TSC_iei_call_attributes | OCT_1 | '13'O | |
| TSC_iei_call_id | OCT_1 | '1A'O | |
| TSC_iei_called_party_number | OCT_1 | '70'O | |
| TSC_iei_called_party_subaddress | OCT_1 | '71'O | |
| TSC_iei_calling_party_number | OCT_1 | '6C'O | |
| TSC_iei_cipher_info | OCT_1 | '19'O | |
| TSC_iei_connection_attributes | OCT_1 | '17'O | |
| TSC_iei_connection_id | OCT_1 | '1B'O | |
| TSC_iei_delimiter_request | OCT_1 | 'A2'O | |
| TSC_iei_duration | OCT_1 | '72'O | |
| TSC_iei_end_to_end_compatibility | OCT_1 | '64'O | |
| TSC_iei_error_flag_on | BIT_1 | '1'B | |
| TSC_iei_error_flag_off | BIT_1 | '0'B | |
| TSC_iei_escape_to_extension | OCT_1 | '7F'O | |
| TSC_iei_escape_to_proprietary | OCT_1 | '7B'O | |
| TSC_iei_facility | OCT_1 | '1C'O | |
| TSC_iei_feature_activate | OCT_1 | '38'O | |
| TSC_iei_feature_indicate | OCT_1 | '39'O | |
| TSC_iei_fixed_id | OCT_1 | '06'O | |
| TSC_iei_identity_type | OCT_1 | '02'O | |
| TSC_iei_info_type | OCT_1 | '01'O | |
| TSC_iei_iwu_attributes | OCT_1 | '12'O | |
| TSC_iei_iwu_to_iwu | OCT_1 | '77'O | |
| TSC_iei_iwu_packet | OCT_1 | '7A'O | |
| TSC_iei_key | OCT_1 | '56'O | |
| TSC_iei_location_area | OCT_1 | '07'O | |
| TSC_iei_multi_display | OCT_1 | '28'O | |
| TSC_iei_multi_keypad | OCT_1 | '2C'O | |
| TSC_iei_network_assigned_id | OCT_1 | '09'O | |
| TSC_iei_network_parameter | OCT_1 | '41'O | |
| TSC_iei_portable_id | OCT_1 | '05'O | |
| TSC_iei_progress_indicator | OCT_1 | '1E'O | |
| TSC_iei_rand | OCT_1 | '0C'O | |
| TSC_iei_rate_parameters | OCT_1 | '65'O | |
| TSC_iei_reject_reason | OCT_1 | '60'O | |

Continued on next page

Continued from previous page

| Test Suite Constant Declarations | | | |
|--|--------------------|---------|---|
| Constant Name | Type | Value | Comments |
| TSC_iei_release_reason | OCT_1 | 'E2'O | |
| TSC_iei_repeat_indicator_n on_prioritised | HEX_1 | '1'H | |
| TSC_iei_repeat_indicator_pr ioritised | HEX_1 | '2'H | |
| TSC_iei_res | OCT_1 | '0D'O | |
| TSC_iei_rs | OCT_1 | '0E'O | |
| TSC_iei_sending_complete | OCT_1 | 'A1'O | |
| TSC_iei_segmented_info | OCT_1 | '75'O | |
| TSC_iei_service_change_inf o | OCT_1 | '16'O | |
| TSC_iei_service_class | OCT_1 | '54'O | |
| TSC_iei_setup_capability | OCT_1 | '62'O | |
| TSC_iei_single_display | OCT_1 | 'E8'O | |
| TSC_iei_single_keypad | OCT_1 | 'E9'O | |
| TSC_iei_signal | OCT_1 | 'E4'O | |
| TSC_iei_terminal_capability | OCT_1 | '63'O | |
| TSC_iei_test_hook_control | OCT_1 | 'E6'O | |
| TSC_iei_timer_restart | OCT_1 | 'E5'O | |
| TSC_iei_transit_delay | OCT_1 | '66'O | |
| TSC_iei_window_size | OCT_1 | '67'O | |
| TSC_iei_zap_field | OCT_1 | '52'O | |
| TSC_mt_cc_alerting | MESSAGE_TYPE | '01'O | ETS 300 175-5 [5], subclause 7.4 Message type coding: |
| TSC_mt_cc_call_proc | MESSAGE_TYPE | '02'O | |
| TSC_mt_cc_setup | MESSAGE_TYPE | '05'O | |
| TSC_mt_cc_connect | MESSAGE_TYPE | '07'O | |
| TSC_mt_cc_setup_ack | MESSAGE_TYPE | '0D'O | |
| TSC_mt_cc_connect_ack | MESSAGE_TYPE | '0F'O | |
| TSC_mt_cc_service_change | MESSAGE_TYPE | '20'O | |
| TSC_mt_cc_service_accept | MESSAGE_TYPE | '21'O | |
| TSC_mt_cc_service_reject | MESSAGE_TYPE | '23'O | |
| TSC_mt_cc_release | MESSAGE_TYPE | '4D'O | |
| TSC_mt_cc_release_com | MESSAGE_TYPE | '5A'O | |
| TSC_mt_iwu_info | MESSAGE_TYPE | '60'O | |
| TSC_mt_cc_notify | MESSAGE_TYPE | '6E'O | |
| TSC_mt_cc_info | MESSAGE_TYPE | '7B'O | |
| TSC_mt_cc_short | MESSAGE_TYPE_SHORT | '0101'B | |
| TSC_mt_lce_page_response | MESSAGE_TYPE | '71'O | |
| TSC_mt_lce_page_reject | MESSAGE_TYPE | '72'O | |
| TSC_mt_hold | MESSAGE_TYPE | '24'O | |
| TSC_mt_hold_ack | MESSAGE_TYPE | '28'O | |
| TSC_mt_hold_reject | MESSAGE_TYPE | '30'O | |
| TSC_mt_retrieve | MESSAGE_TYPE | '31'O | |
| TSC_mt_retrieve_ack | MESSAGE_TYPE | '33'O | |

Continued on next page

Continued from previous page

| Test Suite Constant Declarations | | | |
|---------------------------------------|----------------|---------|--|
| Constant Name | Type | Value | Comments |
| TSC_mt_retrieve_reject | MESSAGE_TYPE | '37'O | |
| TSC_mt_facility | MESSAGE_TYPE | '52'O | |
| TSC_mt_auth_request | MESSAGE_TYPE | '40'O | |
| TSC_mt_auth_reply | MESSAGE_TYPE | '41'O | |
| TSC_mt_key_allocate | MESSAGE_TYPE | '42'O | |
| TSC_mt_auth_reject | MESSAGE_TYPE | '43'O | |
| TSC_mt_access_rights_request | MESSAGE_TYPE | '44'O | |
| TSC_mt_access_rights_accept | MESSAGE_TYPE | '45'O | |
| TSC_mt_access_rights_reject | MESSAGE_TYPE | '47'O | |
| TSC_mt_access_rights_term_request | MESSAGE_TYPE | '48'O | |
| TSC_mt_access_rights_term_accept | MESSAGE_TYPE | '49'O | |
| TSC_mt_access_rights_term_reject | MESSAGE_TYPE | '4B'O | |
| TSC_mt_cipher_request | MESSAGE_TYPE | '4C'O | |
| TSC_mt_cipher_suggest | MESSAGE_TYPE | '4E'O | |
| TSC_mt_cipher_reject | MESSAGE_TYPE | '4F'O | |
| TSC_mt_mm_info_request | MESSAGE_TYPE | '50'O | |
| TSC_mt_mm_info_accept | MESSAGE_TYPE | '51'O | |
| TSC_mt_mm_info_suggest | MESSAGE_TYPE | '52'O | |
| TSC_mt_mm_info_reject | MESSAGE_TYPE | '53'O | |
| TSC_mt_locate_request | MESSAGE_TYPE | '54'O | |
| TSC_mt_locate_accept | MESSAGE_TYPE | '55'O | |
| TSC_mt_detach | MESSAGE_TYPE | '56'O | |
| TSC_mt_locate_reject | MESSAGE_TYPE | '57'O | |
| TSC_mt_identity_request | MESSAGE_TYPE | '58'O | |
| TSC_mt_identity_reply | MESSAGE_TYPE | '59'O | |
| TSC_mt_temporary_id_assignment | MESSAGE_TYPE | '5C'O | |
| TSC_mt_temporary_id_assignment_ack | MESSAGE_TYPE | '5D'O | |
| TSC_mt_temporary_id_assignment_reject | MESSAGE_TYPE | '5F'O | |
| TSC_mt_unrec | MESSAGE_TYPE | '04'O | unrecognised message type used for CC and MM |
| TSC_pd_ice | BIT_4 | '0000'B | |
| TSC_pd_cc | BIT_4 | '0011'B | |
| TSC_pd_ciss | BIT_4 | '0100'B | |
| TSC_pd_mm | BIT_4 | '0101'B | |
| TSC_pd_coms | BIT_4 | '0111'B | |
| TSC_em_class_a | ESTABLISH_MODE | 0 | Establish mode coding: |

Continued on next page

Continued from previous page

| Test Suite Constant Declarations | | | |
|----------------------------------|----------------|--|--|
| Constant Name | Type | Value | Comments |
| TSC_em_class_b | ESTABLISH_MODE | 1 | |
| TSC_em_class_u | ESTABLISH_MODE | 2 | |
| TSC_rm_normal | RELEASE_MODE | 0 | Release mode coding: |
| TSC_rm_abnormal | RELEASE_MODE | 1 | |
| TSC_cs_disabled | CIPHER_STATUS | 0 | Cipher status coding: |
| TSC_cs_enabled | CIPHER_STATUS | 1 | |
| TSC_lce_hdr_cc | LCE_HEADER | '4'H | Lce_header coding: ETS 300 444, subclause 8.35 This LCE header is used when MAC U-plane services are required |
| TSC_lce_hdr_mm | LCE_HEADER | '0'H | This LCE header is used when only C-plane is required: |
| TSC_id_group_portable | BIT_4 | '0000'B | OTHER CONSTANTS: id_group: portable |
| TSC_iut_originated | TRANS_FLAG | 0 | |
| TSC_it_originated | TRANS_FLAG | 1 | |
| TSC_string_1234 | OCT_4 | '31323334'O | Standard characters used for display on the PT. |
| TSC_string_basic_digits | OCT_12 | '232A30313233343536373 839'O | basic dialled digits: *, #, 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 |
| TSC_rand | BIT_64 | '00000000000000000000 00000000000000000000 0000000000000000111' B | Value of 64 bit rand used |
| TSC_rs | BIT_64 | '00000000000000000000 00000000000000000000 0000000000000000111' B | Value of 64 bit rs used |
| TSC_fixed_id_length_ari | OCT_1 | TSO_fill_cinft_fixed_id_leng th(TSC_ari_length) | Fixed_id ie: ----- ie length: ----- in case of ARI type. |
| TSC_fixed_id_length_ari_rpn | OCT_1 | '07'O | in case of ARI + RPN type. |
| TSC_fixed_id_length_park | OCT_1 | TSO_fill_cinft_fixed_id_leng th(TSC_park_length) | for the first PARK |
| TSC_fixed_id_length_park2 | OCT_1 | TSO_fill_cinft_fixed_id_leng th(TSC_park2_length) | for the second PARK |
| TSC_ari_length | BIT_7 | INT_TO_BIT(LENGTH_OF(TSPX_complete_fixed_id_ari _value),7) | id_value length: ----- in case of ARI. |
| TSC_ari_rpn_length | BIT_7 | '0101000'B | in case of ARI + RPN |

Continued on next page

Continued from previous page

| Test Suite Constant Declarations | | | |
|----------------------------------|---------------------|--|---|
| Constant Name | Type | Value | Comments |
| TSC_park_length | BIT_7 | INT_TO_BIT(LENGTH_OF(TSPX_complete_fixed_id_park_value),7) | for the first PARK (31 or 36 bits long) |
| TSC_park2_length | BIT_7 | INT_TO_BIT(LENGTH_OF(TSPX_complete_fixed_id_park_value_2),7) | for the second PARK (31 or 36 bits long) |
| TSC_ari_complete_value | FIXED_ID_VALUE_TYPE | TSO_fill_cinft_fixed_id_park(TSPX_complete_fixed_id_ari_value,TSC_ari_length) | Identity value: ----- in case of ARI |
| TSC_arirpn_complete_value | FIXED_ID_VALUE_TYPE | INT_TO_BIT(BIT_TO_INT(TSPX_complete_fixed_id_arirpn_value), 40) | in case of ARI + RPN |
| TSC_park_complete_value | FIXED_ID_VALUE_TYPE | TSO_fill_cinft_fixed_id_park(TSPX_complete_fixed_id_park_value,TSC_park_length) | in case of PARK 1 |
| TSC_park2_complete_value | FIXED_ID_VALUE_TYPE | TSO_fill_cinft_fixed_id_park(TSPX_complete_fixed_id_park_value_2,TSC_park2_length) | in case of PARK 2 |
| TSC_port_id_length_ipei | OCT_1 | '07'O | Portable_id ie: ----- ie length: ----- in case of IPEI type |
| TSC_port_id_length_ipui | OCT_1 | TSO_fill_cinft_portable_id_length(TSC_ipui_length) | in case of IPUI type |
| TSC_port_id_length_tpui | OCT_1 | '05'O | in case of TPUI type |
| TSC_ipei_length | BIT_7 | '0101000'B | id_value length: ----- in case of IPEI (always 40 bits) |
| TSC_ipui_length | BIT_7 | INT_TO_BIT(LENGTH_OF(TSPX_ipui_value),7) | in case of IPUI |
| TSC_tpui_length | BIT_7 | '0010100'B | in case of TPUI (always 20 bits) |
| TSC_ipei_complete_value | PORT_ID_VALUE_TYPE | INT_TO_BIT(BIT_TO_INT(TSPX_ipei_value), 40) | Identity value: ----- in case of IPEI or IPUI-N (36 bits IPEI leading by '0000'B) |
| TSC_ipui_complete_value | PORT_ID_VALUE_TYPE | TSO_fill_cinft_portable_id_ipui(TSPX_ipui_value,TSC_ipui_length) | in case of IPUI |
| TSC_tpui_complete_value | PORT_ID_VALUE_TYPE | INT_TO_BIT(BIT_TO_INT(TSPX_tpui_value), 24) | in case of TPUI (20 bits TPUI leading by '0000'B) |
| Detailed Comments : | | | |

| Test Suite Variable Declarations | | | |
|---|-------------|--------------------|---|
| Variable Name | Type | Value | Comments |
| TSV_dck_value | BIT_64 | INT_TO_BIT(0, 64) | Derived cipher key to be used by the LT. |
| TSV_uak | BIT_128 | INT_TO_BIT(0, 128) | UAK value. Used for all testcases. |
| TSV_ft_authentication_pending | BOOLEAN | FALSE | TRUE in case of FT authentication pending |
| Detailed Comments : | | | |

| Test Case Variable Declarations | | | |
|---------------------------------|-----------------------|---------|---|
| Variable Name | Type | Value | Comments |
| TCV_pdu_acrgh_t_accept | ACCESS_RIGHTS_ACCEPT | | PDU VARIABLES: Used to temporarily store a received ACRGH_T_ACCEPT PDU |
| TCV_pdu_acrgh_t_request | ACCESS_RIGHTS_REQUEST | | Used to temporarily store a received ACRGH_T_REQUEST PDU |
| TCV_pdu_auth_reply | AUTH_REPLY | | Used to temporarily store a received AUTH_REPLY PDU |
| TCV_pdu_auth_request | AUTH_REQUEST | | Used to temporarily store a received AUTH_REQUEST PDU |
| TCV_pdu_cc_info | CC_INFO | | Used to temporarily store a received CC_INFO PDU |
| TCV_pdu_cc_setup | CC_SETUP | | Used to temporarily store a received CC_SETUP PDU |
| TCV_pdu_identity_request | IDENTITY_REQUEST | | Used to temporarily store a received IDENTITY_REQUEST PDU |
| TCV_pdu_key_allocate | KEY_ALLOCATE | | Used to temporarily store a received KEY_ALLOCATE PDU |
| TCV_pdu_locate_accept | LOCATE_ACCEPT | | Used to temporarily store a received LOCATE_ACCEPT PDU |
| TCV_pdu_locate_req | LOCATE_REQUEST | | INFORMATION ELEMENT VARIABLES: Used to temporarily store a received LOCATE_REQUEST PDU |
| TCV_ie_auth_type | AUTH_TYPE | | INFORMATION ELEMENT VARIABLES: Used to temporarily store the AUTH_TYPE ie |
| TCV_cc_iut_tf | BIT_1 | '0'B | OTHER VARIABLES: Transaction flag for cc messages received from IUT |
| TCV_cc_it_tf | BIT_1 | '1'B | Transaction flag for cc messages sent to IUT |
| TCV_cc_state | CCSTATE_TYPE | 0 | Used in PR_select_state |
| TCV_cc_tv | BIT_3 | '000'B | Transaction value for CC |
| TCV_count | INT_8 | 0 | General counter |
| TCV_id_group | BIT_4 | '0000'B | Id_group used in Identity request procedure. |
| TCV_id_type | BIT_7 | '0000'B | Id_type used in Identity request procedure. |
| TCV_port_id_length_tpu | OCT_1 | '00'O | Length of the portable_id in case of TPU, when received in a locate accept msg. |

Continued on next page

Continued from previous page

| Test Case Variable Declarations | | | |
|---------------------------------|---------|-------------------|---|
| Variable Name | Type | Value | Comments |
| TCV_rand | BIT_64 | INT_TO_BIT(0, 64) | value of rand |
| TCV_result | BOOLEAN | FALSE | General BOOLEAN variable |
| TCV_res_rx | BIT_32 | INT_TO_BIT(0, 32) | value of received res |
| TCV_res_rx_u | BIT_32 | INT_TO_BIT(0, 32) | value of received res during the user authentication |
| TCV_res_tx | BIT_32 | INT_TO_BIT(0, 32) | value of transmitted res |
| TCV_res_tx_u | BIT_32 | INT_TO_BIT(0, 32) | value of transmitted res during the user authentication |
| TCV_rs | BIT_64 | INT_TO_BIT(0, 64) | value of rs |
| TCV_xres | BIT_32 | INT_TO_BIT(0, 32) | value calculated res |
| Detailed Comments : | | | |

| PCO Declarations | | | |
|---|----------|------|----------|
| PCO Name | PCO Type | Role | Comments |
| DLB | B_SAP | LT | 1) |
| DLS | S_SAP | LT | 2) |
| Detailed Comments : 1) SAP for Broadcast services 2) SAP for connection oriented services | | | |

| Timer Declarations | | | |
|--------------------|-------------------|------|--|
| Timer Name | Duration | Unit | Comments |
| T_P_CC_01 | 20 * (1000 + 0) | ms | PROTOCOL TIMERS RUNNING IN THE PT (LT): |
| T_P_CC_02 | 36 * (1000 + 0) | ms | Overlap sending timer. CC release timer (changed to 36 seconds in version 2 of ETS 300 175-5 [5]) |
| T_P_CC_03 | 20 * (1000 + 0) | ms | CC setup timer. |
| T_P_CC_04 | 100 * (1000 + 0) | ms | CC completion timer |
| T_P_CC_05 | 10 * (1000 + 0) | ms | CC connect timer |
| T_P_MM_access_1 | 60 * (1000 + 0) | ms | Access rights request timer |
| T_P_MM_access_2 | 10 * (1000 + 0) | ms | Access rights terminate timer |
| T_P_MM_auth_1 | 10 * (1000 + 0) | ms | FT initiated PT authentication timer |
| T_P_MM_cipher_2 | 10 * (1000 + 0) | ms | PT cipher-switching timer |
| T_P_MM_locate_1 | 20 * (1000 + 0) | ms | Location timer |
| T_P_LCE_01 | 5 * (1000 + 0) | ms | Link release timer |
| T_P_LCE_02 | 10 * (1000 + 0) | ms | Link maintain timer |
| T_P_LCE_04 | 5 * (1000 + 0) | ms | Link suspend and resume timer |
| | | | TIMERS USED FOR TESTING PROTOCOL TIMERS RUNNING IN THE FT (IUT): |
| T_F_CC_01_max | 20 * (1000 + 50) | ms | For testing CC release timer. 5% bigger than T_P_CC_01. |
| T_F_CC_01_min | 20 * (1000 - 100) | ms | For testing CC release timer. 10% smaller than T_P_CC_01. |
| T_F_CC_01_half | 20 * (1000 - 500) | ms | 50 % of T_F_CC_01. For testing restart of T_F_CC_01. |
| T_F_CC_02_max | 36 * (1000 + 50) | ms | For testing CC release timer. 5% bigger than T_P_CC_02. |
| T_F_CC_02_min | 36 * (1000 - 100) | ms | For testing CC release timer. 10% smaller than T_P_CC_02. |
| T_F_CC_03_max | 20 * (1000 + 50) | ms | For testing CC setup timer. 5% bigger than T_P_CC_03. |
| T_F_CC_03_min | 20 * (1000 - 100) | ms | For testing CC setup timer. 10% smaller than T_P_CC_03. |
| T_F_LCE_02_max | 10 * (1000 + 50) | ms | For testing link maintain timer in the FT. 5% bigger than T_P_LCE_02 |
| T_F_LCE_02_min | 10 * (1000 - 100) | ms | For testing link maintain timer in the FT. 10% smaller than T_P_LCE_02 |

Continued on next page

Continued from previous page

| Timer Declarations | | | |
|---------------------|--------------------|------|---|
| Timer Name | Duration | Unit | Comments |
| T_F_LCE_03_max | 3 * (1000 + 50) | ms | For testing link maintain timer in the FT. 5% bigger than T_P_LCE_03 |
| T_F_LCE_03_min | 3 * (1000 - 100) | ms | For testing link maintain timer in the FT. 10% smaller than T_P_LCE_03 |
| T_F_MM_access_2_min | 10 * (1000 - 100) | ms | For testing access rights timer. 10% smaller than T_P_MM_access_2 |
| T_F_MM_access_2_max | 10 * (1000 + 50) | ms | For testing access rights timer. 5% bigger than T_P_MM_access_2 |
| T_F_MM_auth_1_min | 10 * (1000 - 100) | ms | For testing auth 1 timer. 10% smaller than T_P_MM_auth_1 |
| T_F_MM_auth_1_max | 10 * (1000 + 50) | ms | For testing auth 1 timer. 5% smaller than T_P_MM_auth_1 |
| T_F_MM_auth_2_min | 100 * (1000 - 100) | ms | For testing auth 2 timer. 10% bigger than T_P_MM_auth_2 |
| T_F_MM_auth_2_max | 100 * (1000 + 50) | ms | For testing auth 2 timer. 5% bigger than T_P_MM_auth_2 |
| T_F_MM_cipher_1_min | 10 * (1000 - 100) | ms | For testing cipher timer. 10% smaller than T_P_MM_cipher_1 |
| T_F_MM_cipher_1_max | 10 * (1000 + 50) | ms | For testing cipher timer. 5% bigger than T_P_MM_cipher_1 |
| T_F_MM_ident_1_max | 10 * (1000 + 50) | ms | For testing ident 1 timer. 5% bigger than T_P_MM_ident_1 |
| T_F_MM_ident_2_min | 10 * (1000 - 100) | ms | For testing ident 2 timer. 10% smaller than T_P_MM_ident_1 |
| T_F_MM_ident_2_max | 10 * (1000 + 50) | ms | For testing ident 2 timer. 5% bigger than T_P_MM_ident_1 |
| T_F_MM_key_1_min | 10 * (1000 - 100) | ms | For testing key 1 timer. 10% smaller than T_P_MM_key_1 |
| T_F_MM_key_1_max | 10 * (1000 + 50) | ms | For testing key 1 timer. 5% bigger than T_P_MM_key_1 |
| T_CIPHER_SWITCH | 20000 | ms | OTHER TIMERS RUNNING IN THE PT (LT): Ciphering switching time. It is to start with sending of DL_ENCRYPT_REQ and to stop with receiving of DL_ENCRYPT_IND. |
| T_DLC_RESPONSE | 4000 | ms | Guards the time between a direct link establish request, and the confirm from the DLC layer, or between a link release request and the confirm from the DLC |

Continued on next page

Continued from previous page

| Timer Declarations | | | |
|--------------------|----------|------|--|
| Timer Name | Duration | Unit | Comments |
| T_USER_INVOKE | 30000 | ms | Guards the user invocation time of an operation requested by an implicit send statement. |
| T_RELEASE_DELAY | 4000 | ms | Before terminating the testcase with a normal release or a release_link, this timer is started, in order to catch any strange behaviour of the IUT |

Detailed Comments : All protocol timers are defined 5 % higher than their standard value, in order to deal with delays caused by the testequipment.

| ASP Type Definition | | |
|---|----------------------|--|
| ASP Name : DL_BROADCAST_IND | | |
| PCO Type : B_SAP | | |
| Comments : ETS 300 175-4 [5], 8.3.3.1 | | |
| Parameter Name | Parameter Type | Comments |
| cluster_address_list | CLUSTER_ADDRESS_LIST | |
| message_unit | PDU | |
| extended_message_flag | BIT_1 | '1'B means extended frame format shall be used, see ETS 300 175-4 [4], subclause 6.2.2 |
| error_flag | BIT_1 | '1'B means CRC error occurred in MAC-PAGE-ind primitive |
| Detailed Comments : This primitive is not used in PT testing. The message unit length information element is not used in this primitive | | |

| ASP Type Definition | | |
|--|----------------------|--|
| ASP Name : DL_BROADCAST_REQ | | |
| PCO Type : B_SAP | | |
| Comments : ETS 300 175-4 [5], 8.3.3.1 | | |
| Parameter Name | Parameter Type | Comments |
| cluster_address_list | CLUSTER_ADDRESS_LIST | |
| message_unit | PDU | |
| extended_message_flag | BIT_1 | '1'B means extended frame format shall be used, see ETS 300 175-4 [4], subclause 6.2.2 |
| Detailed Comments : The message unit length information element is not used in this primitive | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_DATA_IND | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.3 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| message_unit | PDU | |
| Detailed Comments : The message unit length information element is not used in this primitive | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_DATA_REQ | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.3 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| message_unit | PDU | |
| Detailed Comments : The message unit length information element is not used in this primitive | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_ENCRYPT_CFM | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.8 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| encryption_status | CIPHER_STATUS | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_ENCRYPT_IND | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.8 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| connection_identities | CONNECTION_IDENTITIES | |
| encryption_status | CIPHER_STATUS | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_ENCRYPT_REQ | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.8 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| connection_identities | CONNECTION_IDENTITIES | |
| encryption_command | CIPHER_STATUS | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|---|-------------------------------|----------|
| ASP Name : DL_ENC_KEY_REQ PCO Type : S_SAP Comments : ETS 300 175-4 [5], subclause 8.3.2.7 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| connection_identities | CONNECTION_IDENTITIES | |
| encryption_key | ENCRYPTION_KEY | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|---|-------------------------------|----------|
| ASP Name : DL_ESTABLISH_CFM PCO Type : S_SAP Comments : ETS 300 175-4 [5], subclause 8.3.2.1 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| Detailed Comments : This primitive is not used in PT testing, because only the indirect link establishment method is used. | | |

| ASP Type Definition | | |
|---|-------------------------------|----------|
| ASP Name : DL_ESTABLISH_IND PCO Type : S_SAP Comments : ETS 300 175-4 [5], subclause 8.3.2.1 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| establish_mode | ESTABLISH_MODE | |
| radio_fixed_part_number | RADIO_FIXED_PART_NUMBER | |
| message_unit | PDU | |
| Detailed Comments : The message unit length information element is not used in this primitive | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_ESTABLISH_REQ PCO Type : S_SAP Comments : ETS 300 175-4 [4], subclause 8.3.2.1 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| establish_mode | ESTABLISH_MODE | |
| radio_fixed_part_number | RADIO_FIXED_PART_NUMBER | |
| message_unit | PDU | |
| Detailed Comments : For now this primitive is not used in PT testing, because only the indirect link establishment method is used. The message unit length information element is not used in this primitive | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_ESTABLISH_RES | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.1 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_RELEASE_CFM | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], 8.3.2.2 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| release_mode | RELEASE_MODE | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_RELEASE_IND | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.2 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| release_mode | RELEASE_MODE | |
| Detailed Comments : | | |

| ASP Type Definition | | |
|--|-------------------------------|----------|
| ASP Name : DL_RELEASE_REQ | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-4 [5], subclause 8.3.2.2 | | |
| Parameter Name | Parameter Type | Comments |
| data_link_endpoint_identifier | DATA_LINK_ENDPOINT_IDENTIFIER | |
| release_mode | RELEASE_MODE | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|------------------|----------|
| PDU Name : ACCESS_RIGHTS_ACCEPT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.1 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| repeat_indicator | REPEAT_INDICATOR | |
| fixed_id | FIXED_ID | |
| location_area | LOCATION_AREA | |
| auth_type | AUTH_TYPE | |
| cipher_info | CIPHER_INFO | |
| zap_field | ZAP_FIELD | |
| service_class | SERVICE_CLASS | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : ACCESS_RIGHTS_REJECT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.2 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| reject_reason | REJECT_REASON | |
| duration | DURATION | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|---------------------|----------|
| PDU Name : ACCESS_RIGHTS_REQUEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.3 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| auth_type | AUTH_TYPE | |
| cipher_info | CIPHER_INFO | |
| setup_capability | SETUP_CAPABILITY | |
| terminal_capability | TERMINAL_CAPABILITY | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : ACCESS_RIGHTS_TERM_ACCEPT | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.4 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : ACCESS_RIGHTS_TERM_REJECT | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.5 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| reject_reason | REJECT_REASON | |
| duration | DURATION | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|------------------|----------|
| PDU Name : ACCESS_RIGHTS_TERM_REQUEST | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.6 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| repeat_indicator | REPEAT_INDICATOR | |
| fixed_id | FIXED_ID | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|------------------|----------|
| PDU Name : AUTH_REJECT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.7 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| repeat_indicator | REPEAT_INDICATOR | |
| auth_type | AUTH_TYPE | |
| reject_reason | REJECT_REASON | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : AUTH_REPLY PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.8 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| res | RES | |
| rs | RS | |
| zap_field | ZAP_FIELD | |
| service_class | SERVICE_CLASS | |
| key | KEY | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : AUTH_REQUEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.9 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| auth_type | AUTH_TYPE | |
| rand | RAND | |
| res | RES | |
| rs | RS | |
| cipher_info | CIPHER_INFO | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|--------------------|----------|
| PDU Name : BI_CC_SHORT_MESSAGE | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 17.2 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type_short | MESSAGE_TYPE_SHORT | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|---------------------|----------|
| PDU Name : CC_ALERTING | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.2.5 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| call_attributes | CALL_ATTRIBUTES | |
| connection_id | CONNECTION_ID | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| signal | SIGNAL | |
| feature_indicate | FEATURE_INDICATE | |
| terminal_capability | TERMINAL_CAPABILITY | |
| transit_delay | TRANSIT_DELAY | |
| window_size | WINDOW_SIZE | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|--------------------|----------|
| PDU Name : CC_CALL_PROC PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.2.4 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| call_attributes | CALL_ATTRIBUTES | |
| connection_id | CONNECTION_ID | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| signal | SIGNAL | |
| feature_indicate | FEATURE_INDICATE | |
| transit_delay | TRANSIT_DELAY | |
| window_size | WINDOW_SIZE | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : CC_CONNECT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.2.6 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| call_attributes | CALL_ATTRIBUTES | |
| connection_id | CONNECTION_ID | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| signal | SIGNAL | |
| feature_indicate | FEATURE_INDICATE | |
| terminal_capability | TERMINAL_CAPABILITY | |
| transit_delay | TRANSIT_DELAY | |
| window_size | WINDOW_SIZE | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|------------------|----------|
| PDU Name : CC_CONNECT_ACK | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.2.7 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| feature_indicate | FEATURE_INDICATE | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|-------------------------|----------|
| PDU Name : CC_INFO | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.2.2 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| location_area | LOCATION_AREA | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| multi_keypad | MULTI_KEYPAD | |
| single_keypad | SINGLE_KEYPAD | |
| signal | SIGNAL | |
| feature_activate | FEATURE_ACTIVATE | |
| feature_indicate | FEATURE_INDICATE | |
| network_parameter | NETWORK_PARAMETER | |
| called_party_number | CALLED_PARTY_NUMBER | |
| called_party_subaddress | CALLED_PARTY_SUBADDRESS | |
| sending_complete | SENDING_COMPLETE | |
| test_hook_control | TEST_HOOK_CONTROL | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : CC_NOTIFY | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5],subclause 6.3.2.13 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| timer_restart | TIMER_RESTART | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : CC_OUT_OF_SCOPE | | |
| PCO Type : S_SAP | | |
| Comments : For any CC PDU which is out of scope acc. to ETS 300 444 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| contents | OCT_1_255 | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|--------------------|----------|
| PDU Name : CC_RELEASE | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5],subclause 6.3.2.8 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| release_reason | RELEASE_REASON | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| feature_indicate | FEATURE_INDICATE | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|-------------------|----------|
| PDU Name : CC_RELEASE_COM | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5],subclause 6.3.2.9 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| release_reason | RELEASE_REASON | |
| identity_type | IDENTITY_TYPE | |
| location_area | LOCATION_AREA | |
| iwu_attributes | IWU_ATTRIBUTES | |
| facility | FACILITY | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| feature_indicate | FEATURE_INDICATE | |
| network_parameter | NETWORK_PARAMETER | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|-----------------------|----------|
| PDU Name : CC_SERVICE_CHANGE | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5],subclause 6.3.2.10 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| service_change_info | SERVICE_CHANGE_INFO | |
| repeat_indicator | REPEAT_INDICATOR | |
| connection_attributes | CONNECTION_ATTRIBUTES | |
| connection_id | CONNECTION_ID | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|--------------------------|----------|
| PDU Name : CC_SETUP PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.2.1 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| fixed_id | FIXED_ID | |
| basic_service | BASIC_SERVICE | |
| iwu_attributes | IWU_ATTRIBUTES | |
| repeat_indicator_1 | REPEAT_INDICATOR | |
| call_attributes | CALL_ATTRIBUTES | |
| repeat_indicator_2 | REPEAT_INDICATOR | |
| connection_attributes | CONNECTION_ATTRIBUTES | |
| cipher_info | CIPHER_INFO | |
| connection_id | CONNECTION_ID | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| multi_keypad | MULTI_KEYPAD | |
| single_keypad | SINGLE_KEYPAD | |
| signal | SIGNAL | |
| feature_activate | FEATURE_ACTIVATE | |
| feature_indicate | FEATURE_INDICATE | |
| network_parameter | NETWORK_PARAMETER | |
| terminal_capability | TERMINAL_CAPABILITY | |
| end_to_end_compatibility | END_TO_END_COMPATIBILITY | |
| rate_parameters | RATE_PARAMETERS | |
| transit_delay | TRANSIT_DELAY | |
| window_size | WINDOW_SIZE | |
| calling_party_number | CALLING_PARTY_NUMBER | |
| called_party_number | CALLED_PARTY_NUMBER | |
| called_party_subaddress | CALLED_PARTY_SUBADDRESS | |
| sending_complete | SENDING_COMPLETE | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|--------------------|----------|
| PDU Name : CC_SETUP_ACK PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.2.3 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| info_type | INFO_TYPE | |
| portable_id | PORTABLE_ID | |
| fixed_id | FIXED_ID | |
| location_area | LOCATION_AREA | |
| call_attributes | CALL_ATTRIBUTES | |
| connection_id | CONNECTION_ID | |
| facility | FACILITY | |
| progress_indicator | PROGRESS_INDICATOR | |
| multi_display | MULTI_DISPLAY | |
| single_display | SINGLE_DISPLAY | |
| signal | SIGNAL | |
| feature_indicate | FEATURE_INDICATE | |
| transit_delay | TRANSIT_DELAY | |
| window_size | WINDOW_SIZE | |
| delimiter_request | DELIMITER_REQUEST | |
| iwu_to_iwu | IWU_TO_IWU | |
| iwu_packet | IWU_PACKET | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|------------------|----------|
| PDU Name : CIPHER_REJECT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.10 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| repeat_indicator | REPEAT_INDICATOR | |
| cipher_info | CIPHER_INFO | |
| reject_reason | REJECT_REASON | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : CIPHER_REQUEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.11 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| cipher_info | CIPHER_INFO | |
| call_identity | CALL_ID | |
| connection_identity | CONNECTION_ID | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : CIPHER_SUGGEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.12 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| cipher_info | CIPHER_INFO | |
| call_identity | CALL_ID | |
| connection_identity | CONNECTION_ID | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : CISS_ANY_PDU PCO Type : S_SAP Comments : For any CISS PDU, which is out of scope acc. to ETS 300 444 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| contents | OCT_1_255 | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : COMS_ANY_PDU | | |
| PCO Type : S_SAP | | |
| Comments : For any COMS PDU, which is out of scope acc. to ETS 300 444 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| contents | OCT_1_255 | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : DETACH | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.13 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : IDENTITY_REPLY | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.14 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| repeat_indicator_1 | REPEAT_INDICATOR | |
| portable_id | PORTABLE_ID | |
| repeat_indicator_2 | REPEAT_INDICATOR | |
| fixed_id | FIXED_ID | |
| repeat_indicator_3 | REPEAT_INDICATOR | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|------------------|----------|
| PDU Name : IDENTITY_REQUEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.15 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| repeat_indicator | REPEAT_INDICATOR | |
| identity_type | IDENTITY_TYPE | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|-----------------|----------|
| PDU Name : KEY_ALLOCATE PCO Type : B_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.16 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| allocation_type | ALLOCATION_TYPE | |
| rand | RAND | |
| rs | RS | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : LOCATE_ACCEPT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.17 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| location_area | LOCATION_AREA | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| duration | DURATION | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : LOCATE_REJECT | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.18 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| reject_reason | REJECT_REASON | |
| duration | DURATION | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : LOCATE_REQUEST | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.19 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| fixed_id | FIXED_ID | |
| location_area | LOCATION_AREA | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| cipher_info | CIPHER_INFO | |
| setup_capability | SETUP_CAPABILITY | |
| terminal_capability | TERMINAL_CAPABILITY | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : MM_INFO_ACCEPT | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.20 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| info_type | INFO_TYPE | |
| fixed_id | FIXED_ID | |
| location_area | LOCATION_AREA | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| network_parameter | NETWORK_PARAMETER | |
| duration | DURATION | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : MM_INFO_REJECT PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.21 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| reject_reason | REJECT_REASON | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : MM_INFO_REQUEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.22 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| info_type | INFO_TYPE | |
| portable_id | PORTABLE_ID | |
| fixed_id | FIXED_ID | |
| location_area | LOCATION_AREA | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| network_parameter | NETWORK_PARAMETER | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : MM_INFO_SUGGEST PCO Type : S_SAP Comments : ETS 300 175-5 [5], subclause 6.3.6.23 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| info_type | INFO_TYPE | |
| fixed_id | FIXED_ID | |
| location_area | LOCATION_AREA | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| network_parameter | NETWORK_PARAMETER | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : MM_OUT_OF_SCOPE | | |
| PCO Type : S_SAP | | |
| Comments : For any MM PDU which is out of scope acc. to ETS 300 444 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| contents | OCT_1_255 | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|---------------------|----------|
| PDU Name : TEMPORARY_ID_ASSIGN | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.24 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| duration | DURATION | |
| iwu_to_iwu | IWU_TO_IWU | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : TEMPORARY_ID_ASSIGN_ACK | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.25 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------|----------|
| PDU Name : TEMPORARY_ID_ASSIGN_REJECT | | |
| PCO Type : S_SAP | | |
| Comments : ETS 300 175-5 [5], subclause 6.3.6.26 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| reject_reason | REJECT_REASON | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|---------------------|----------|
| PDU Name : LCE_PAGE_RESPONSE PCO Type : B_SAP Comments : ETS 300 175-5 [5], subclause 6.3.7.1 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| fixed_id | FIXED_ID | |
| network_assigned_id | NETWORK_ASSIGNED_ID | |
| cipher_info | CIPHER_INFO | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|--|----------------|----------|
| PDU Name : LCE_PAGE_REJECT PCO Type : B_SAP Comments : ETS 300 175-5 [5], subclause 6.3.7.2 | | |
| Field Name | Field Type | Comments |
| network_header | NETWORK_HEADER | |
| message_type | MESSAGE_TYPE | |
| portable_id | PORTABLE_ID | |
| fixed_id | FIXED_ID | |
| reject_reason | REJECT_REASON | |
| Detailed Comments : | | |

| PDU Type Definition | | |
|---|----------------------|----------|
| PDU Name : LCE_REQUEST_PAGE PCO Type : B_SAP Comments : ETS 300 175-5 [5], subclause 6.4.2 | | |
| Field Name | Field Type | Comments |
| lce_header | LCE_HEADER | |
| short_format_address | SHORT_FORMAT_ADDRESS | |
| Detailed Comments : Long format messages not supported in ETS 300 444 | | |

III

Constraints Part

| Structured Type Constraint Declaration | | |
|--|-------------------------|----------|
| Constraint Name : Allocation_type_rx_base Structured Type : ALLOCATION_TYPE Derivation Path : Comments : The basic receive constraint for the ALLOCATION_TYPE ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_allocation_type | |
| length | '02'O | |
| auth_algo_id | ? | |
| ac_number | ? | |
| uak_number | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------------------------------|
| Constraint Name : Allocation_type_rx_dsaa Structured Type : ALLOCATION_TYPE Derivation Path : Allocation_type_rx_base. Comments : A receive constraint for the allocation type ie, specifying the DECT standard Authentication Algorithm to be used. | | |
| Element Name | Element Value | Comments |
| auth_algo_id | '01'O | DECT standard auth. algorithm 1 |
| ac_number | '1000'B | related to active IPUI/PARK pair |
| uak_number | '1000'B | related to active IPUI/PARK pair |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------------|----------|
| Constraint Name : Allocation_type_rx_empty Structured Type : ALLOCATION_TYPE Derivation Path : Comments : The basic receive constraint for the ALLOCATION_TYPE ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_allocation_type | |
| length | '00'O | |
| auth_algo_id | OMIT | |
| ac_number | OMIT | |
| uak_number | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------------|------------------|
| Constraint Name : Auth_type_rx_base | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the AUTH_TYPE ie. DSAA is mandated. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '03'O | |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | ? | |
| auth_key_type | ('0001'B, '0011'B, '0100'B) | UAK UPI AC |
| cipher_key_number | ? | |
| upc | ? | |
| txc | ? | |
| f5 | '0'B | |
| inc | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|---------------------------|
| Constraint Name : Auth_type_rx_dck_no_zap | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : Auth_type_rx_base. | | |
| Comments : This constraint implies DCK storage and no ZAP increment. Standard DSAA is used, and authentication is based on UAK. | | |
| Element Name | Element Value | Comments |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0001'B | UAK |
| cipher_key_number | '1000'B | |
| upc | '1'B | DCK stored |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|---------------------------|
| Constraint Name : Auth_type_rx_ac | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : Auth_type_rx_base. | | |
| Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used. AC | | |
| Element Name | Element Value | Comments |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0100'B | AC |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|---------------------------|
| Constraint Name : Auth_type_rx_no_dck_no_zap | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : Auth_type_rx_base. | | |
| Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used | | |
| Element Name | Element Value | Comments |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0001'B | UAK |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|---------------------------|
| Constraint Name : Auth_type_rx_no_dck_zap | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : Auth_type_rx_base. | | |
| Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used | | |
| Element Name | Element Value | Comments |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0001'B | UAK |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| inc | '1'B | ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------|----------|
| Constraint Name : Auth_type_rx_empty | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the AUTH_TYPE ie. DSAA is mandated. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '00'O | |
| auth_algo_id | OMIT | |
| prop_algo_id | OMIT | |
| auth_key_number | OMIT | |
| auth_key_type | OMIT | |
| cipher_key_number | OMIT | |
| upc | OMIT | |
| txc | OMIT | |
| f5 | OMIT | |
| inc | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------|---------------------------|
| Constraint Name : Auth_type_tx_ac | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : | | |
| Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used. Authentication key type specifies AC. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '03'O | |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | '1000'B | related to IPU1/PARK pair |
| auth_key_type | '0100'B | AC |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| txc | '0'B | |
| f5 | '0'B | |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|---------------------------|
| Constraint Name : Auth_type_tx_no_dck_zap Structured Type : AUTH_TYPE Derivation Path : Comments : This constraint implies no DCK storage and ZAP incremented by one. Standard DSAA is used, and authentication is based on UAK. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '03'O | |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0001'B | UAK |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| txc | '0'B | |
| f5 | '0'B | |
| inc | '1'B | ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------|---------------------------|
| Constraint Name : Auth_type_tx_no_dck_no_zap Structured Type : AUTH_TYPE Derivation Path : Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used. Authentication key type specifies UAK | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '03'O | |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0001'B | UAK |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| txc | '0'B | |
| f5 | '0'B | |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------|-------------------------------------|
| Constraint Name : Auth_type_tx_auth_key_not_supp | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : | | |
| Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '03'O | |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '1111'B | reserved (not supported by the IUT) |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| txc | '0'B | |
| f5 | '0'B | |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|---------------------------|
| Constraint Name : Auth_type_rx_upi | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : | | |
| Comments : A receive constraint for the auth_type ie, specifying no DCK storage and no ZAP increment. Standard DSAA is used, and authentication is based on UPI. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | '03'O | |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0011'B | UPI |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| txc | '0'B | |
| f5 | '0'B | |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|---------------------------------------|
| Constraint Name : Basic_service_rx_base | | |
| Structured Type : BASIC_SERVICE | | |
| Derivation Path : | | |
| Comments : ETS 300 444, subclause 8.2, subclause 8.20. Basic speech default setup attributes are used | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_basic_service | |
| basic_service | '0000'B | basic speech default setup attributes |
| call_class | ('1000'B, '1001'B) | normal or internal call setup |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|--------------------------|
| Constraint Name : Basic_service_tx_default | | |
| Structured Type : BASIC_SERVICE | | |
| Derivation Path : | | |
| Comments : ETS 300 444, subclause 8.2, subclause 8.20 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_basic_service | |
| basic_service | '0000'B | default setup attributes |
| call_class | '1000'B | normal call setup |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------|--------------------------|
| Constraint Name : Basic_service_tx_emergency | | |
| Structured Type : BASIC_SERVICE | | |
| Derivation Path : | | |
| Comments : ETS 300 125[5], subclause 7.6.4 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_basic_service | |
| basic_service | '0000'B | default setup attributes |
| call_class | '1010'B | emergency call setup |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|--------------------------|
| Constraint Name : Basic_service_tx_invalid | | |
| Structured Type : BASIC_SERVICE | | |
| Derivation Path : | | |
| Comments : ETS 300 444, subclause 8.2, subclause 8.20 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_basic_service | |
| basic_service | '0000'B | default setup attributes |
| call_class | '1111'B | reserved value |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|---------------------------|
| Constraint Name : Bi_auth_type_tx_length_exceed | | |
| Structured Type : AUTH_TYPE | | |
| Derivation Path : | | |
| Comments : This constraint implies no DCK storage and no ZAP increment. Standard DSAA is used. Authentication key type contains the value for AC. Length exceeding the maximum allowed size. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_auth_type | |
| length | 'FF'O | Length too long |
| auth_algo_id | '01'O | DSAA |
| prop_algo_id | OMIT | |
| auth_key_number | '1000'B | related to IPUI/PARK pair |
| auth_key_type | '0100'B | AC |
| cipher_key_number | '0000'B | |
| upc | '0'B | No DCK stored |
| txc | '0'B | |
| f5 | '0'B | |
| inc | '0'B | No ZAP increment |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------------------|
| Constraint Name : Bi_network_header_mm_ori | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of mm messages sent from originating side, containing an illegal transaction value. | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_mm | Illegal value for MM |
| transaction_value | '001'B | |
| transaction_flag | '0'B | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | | |
|--|-------------------------|----------------------|-------|
| Constraint Name : Call_attributes_rx_base | | | |
| Structured Type : CALL_ATTRIBUTES | | | |
| Derivation Path : | | | |
| Comments : ETS 300 175-5, subclause 7.7.5 | | | |
| Element Name | Element Value | Comments | |
| iei | TSC_iei_call_attributes | DECT standard coding | |
| length | ? | | |
| network_layer_attributes | ? | | |
| coding_standard | '00'B | | |
| f3 | '1'B | | |
| c_plane_routing | ? | | |
| c_plane_class | ? | | |
| f4 | '1'B | | |
| lu_id | ? | | |
| u_plane_symmetry | ? | | |
| ext5 | ? | | |
| lu_id_f_p | ? | | |
| f5a | '100'B | | '100' |
| u_plane_frame_type | ? | | |
| u_plane_class | ? | | |
| ext6 | ? | | |
| u_plane_frame_type_f_p | ? | | |
| u_plane_class_f_p | ? | | |
| f6a | '1'B | | '1' |
| Detailed Comments : | | | |

| Structured Type Constraint Declaration | | |
|---|-------------------------|----------|
| Constraint Name : Call_attributes_rx_empty | | |
| Structured Type : CALL_ATTRIBUTES | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5, subclause 7.7.5 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_call_attributes | |
| length | '00'O | |
| network_layer_attributes | OMIT | |
| coding_standard | OMIT | |
| f3 | OMIT | |
| c_plane_routing | OMIT | |
| c_plane_class | OMIT | |
| f4 | OMIT | |
| lu_id | OMIT | |
| u_plane_symmetry | OMIT | |
| ext5 | OMIT | |
| lu_id_f_p | OMIT | |
| f5a | OMIT | |
| u_plane_frame_type | OMIT | |
| u_plane_class | OMIT | |
| ext6 | OMIT | |
| u_plane_frame_type_f_p | OMIT | |
| u_plane_class_f_p | OMIT | |
| f6a | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------|----------|
| Constraint Name : Call_id_rx_base | | |
| Structured Type : CALL_ID | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the CALL_ID ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_call_id | |
| length | ('01'O, '02'O) | |
| pd | ? | |
| tv | ? | |
| tf | ? | |
| extended_transaction_value | ? IF_PRESENT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------|----------|
| Constraint Name : Call_id_rx_empty | | |
| Structured Type : CALL_ID | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the CALL_ID ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_call_id | |
| length | '00'O | |
| pd | OMIT | |
| tv | OMIT | |
| tf | OMIT | |
| extended_transaction_value | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------|----------|
| Constraint Name : Called_party_number_rx_base | | |
| Structured Type : CALLED_PARTY_NUMBER | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_called_party_number | |
| length | COMPLEMENT('00'O) | |
| numbering_plan_id | '0000'B | Unknown |
| number_type | '000'B | Unknown |
| f3 | '1'B | |
| called_party_address | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------------|----------|
| Constraint Name : Called_party_number_rx_empty | | |
| Structured Type : CALLED_PARTY_NUMBER | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_called_party_number | |
| length | '00'O | |
| numbering_plan_id | OMIT | |
| number_type | OMIT | |
| f3 | OMIT | |
| called_party_address | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------------------------|----------|
| Constraint Name : Called_party_subaddress_rx_base | | |
| Structured Type : CALLED_PARTY_SUBADDRESS | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_called_party_subaddress | |
| length | COMPLEMENT('00'O) | |
| spare | '000'B | |
| o_e | ? | |
| subaddress_type | '0?0'B | |
| f3 | '1'B | |
| subaddress_info | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------------------|----------|
| Constraint Name : Called_party_subaddress_rx_empty | | |
| Structured Type : CALLED_PARTY_SUBADDRESS | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_called_party_subaddress | |
| length | '00'O | |
| spare | OMIT | |
| o_e | OMIT | |
| subaddress_type | OMIT | |
| f3 | OMIT | |
| subaddress_info | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|------------------------------|----------|
| Constraint Name : Calling_party_number_rx_base Structured Type : CALLING_PARTY_NUMBER Derivation Path : Comments : The basic receive constraint for the CALLING_PARTY_NUMBER ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_calling_party_number | |
| length | COMPLEMENT('00'O) | |
| numbering_plan_id | ('?00?'B, '0011'B) | |
| number_type | COMPLEMENT('1?1'B) | |
| ext3 | ? | |
| screening_indicator | ? IF_PRESENT | |
| spare | '000'B | |
| presentation_indicator | COMPLEMENT('11'B) IF_PRESENT | |
| f3a | '1'B IF_PRESENT | |
| calling_party_address | TSPX_calling_party_number | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|------------------------------|----------|
| Constraint Name : Calling_party_number_rx_empty Structured Type : CALLING_PARTY_NUMBER Derivation Path : Comments : The basic receive constraint for the CALLING_PARTY_NUMBER ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_calling_party_number | |
| length | '00'O | |
| numbering_plan_id | OMIT | |
| number_type | OMIT | |
| ext3 | OMIT | |
| screening_indicator | OMIT | |
| spare | OMIT | |
| presentation_indicator | OMIT | |
| f3a | OMIT | |
| calling_party_address | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--|-----------------|
| Constraint Name : Called_party_number_tx_pixit | | |
| Structured Type : CALLED_PARTY_NUMBER | | |
| Derivation Path : | | |
| Comments : A send constraint for the called party number, specifying the actual number, as it is specified in the PIXIT. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_called_party_number | |
| length | TSO_cinft_int_to_oct_1(TSPX_nr_of_digits_in_cpn) | |
| numbering_plan_id | '0000'B | Unknown |
| number_type | '000'B | Unknown |
| f3 | '1'B | |
| called_party_address | TSPX_called_party_number | PIXIT parameter |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--|-----------------|
| Constraint Name : Called_party_number_tx_emergency | | |
| Structured Type : CALLED_PARTY_NUMBER | | |
| Derivation Path : | | |
| Comments : A send constraint for the called party number, specifying the actual emergency number, as it is specified in the PIXIT. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_called_party_number | |
| length | TSO_cinft_int_to_oct_1(TSPX_nr_of_digits_in_cpn) | |
| numbering_plan_id | '0000'B | Unknown |
| number_type | '000'B | Unknown |
| f3 | '1'B | |
| called_party_address | TSPX_emergency_cpn | PIXIT parameter |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--------------------------|---|
| Constraint Name : Cipher_info_rx_base Structured Type : CIPHER_INFO Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_cipher_info | DECT standard cipher algorithm OR Escape to proprietary algorithm id |
| length | ('02'O, '03'O) | |
| cipher_algo_id | ('0000001'B, '1111111'B) | |
| y_n | ? | |
| prop_algo_id | ? IF_PRESENT | |
| cipher_key_number | ? | |
| cipher_key_type | ('1001'B, '1010'B) | |
| | | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------------|---|
| Constraint Name : Cipher_info_dsca_disable Structured Type : CIPHER_INFO Derivation Path : Cipher_info_rx_base. Comments : A receive/send constraint for the cipher info ie, specifying DECT standard cipher algorithm, ciphering disable, cipher key type DCK. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_cipher_info | DECT standard cipher algorithm disable ciphering |
| length | '02'O | |
| cipher_algo_id | '0000001'B | |
| y_n | '0'B | |
| prop_algo_id | OMIT | |
| cipher_key_number | '1000'B | |
| cipher_key_type | '1001'B | |
| | | DCK |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------|--------------------------------|
| Constraint Name : Cipher_info_dsca_enable | | |
| Structured Type : CIPHER_INFO | | |
| Derivation Path : Cipher_info_rx_base. | | |
| Comments : A receive/send constraint for the cipher info ie, specifying DECT standard cipher algorithm, ciphering enable, cipher key type DCK. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_cipher_info | |
| length | '02'O | |
| cipher_algo_id | '0000001'B | DECT standard cipher algorithm |
| y_n | '1'B | enable ciphering |
| prop_algo_id | OMIT | |
| cipher_key_number | '1000'B | |
| cipher_key_type | '1001'B | DCK |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------|----------|
| Constraint Name : Cipher_info_rx_empty | | |
| Structured Type : CIPHER_INFO | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_cipher_info | |
| length | '00'O | |
| cipher_algo_id | OMIT | |
| y_n | OMIT | |
| prop_algo_id | OMIT | |
| cipher_key_number | OMIT | |
| cipher_key_type | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------|--------------------------------|
| Constraint Name : Cipher_info_key_false Structured Type : CIPHER_INFO Derivation Path : Cipher_info_rx_base. Comments : A receive/send constraint for the cipher info ie, specifying DECT standard cipher algorithm, ciphering enable, cipher key type is not supported. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_cipher_info | |
| length | '02'O | |
| cipher_algo_id | '0000001'B | DECT standard cipher algorithm |
| y_n | '1'B | enable ciphering |
| prop_algo_id | OMIT | |
| cipher_key_number | '1000'B | |
| cipher_key_type | '1111'B | Not supported key |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------|--------------------|
| Constraint Name : Cipher_info_unacceptable Structured Type : CIPHER_INFO Derivation Path : Cipher_info_rx_base. Comments : A receive/send constraint for the cipher info ie, specifying an unacceptable ciphering algorithm. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_cipher_info | |
| length | '02'O | |
| cipher_algo_id | '0101011'B | Unacceptable value |
| y_n | '1'B | enable ciphering |
| prop_algo_id | OMIT | |
| cipher_key_number | '1000'B | |
| cipher_key_type | '1001'B | DCK |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Connection_id_rx_base Structured Type : CONNECTION_ID Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_connection_id | |
| length | COMPLEMENT('00'O) | |
| u_and_c_id | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|----------|
| Constraint Name : Connection_id_rx_empty Structured Type : CONNECTION_ID Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_connection_id | |
| length | '00'O | |
| u_and_c_id | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Delimiter_request_rx_base Structured Type : DELIMITER_REQUEST Derivation Path : Comments : The basic receive constraint for the DELIMITER_REQUEST ie. | | |
| Element Name | Element Value | Comments |
| delimiter_request | 'A2'O | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|------------------|----------|
| Constraint Name : Duration_rx_base | | |
| Structured Type : DURATION | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5, subclause 7.7.13 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_duration | |
| length | ('01'O, '02'O) | |
| time_limits | ? | |
| lock_limits | ? | |
| ext3 | ? | |
| time_duration | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|------------------|----------|
| Constraint Name : Duration_rx_empty | | |
| Structured Type : DURATION | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5, subclause 7.7.13 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_duration | |
| length | '00'O | |
| time_limits | OMIT | |
| lock_limits | OMIT | |
| ext3 | OMIT | |
| time_duration | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|--|
| Constraint Name : Facility_rx_base | | |
| Structured Type : FACILITY | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_facility | |
| length | COMPLEMENT('00'O) | |
| service_discriminator | '10001'B | Discriminator for supplementary service applications |
| f3 component | '100'B ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|------------------|----------|
| Constraint Name : Facility_rx_empty | | |
| Structured Type : FACILITY | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_facility | |
| length | '00'O | |
| service_discriminator | OMIT | |
| f3 | OMIT | |
| component | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--------------------------|------------|
| Constraint Name : Feature_indicate_rx_base | | |
| Structured Type : FEATURE_INDICATE | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.17 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_feature_indicate | |
| length | ? | |
| feature | ? | |
| ext3 | '1'B | |
| parameter | ? | |
| f3a | '1'B | |
| status_indicator | ? | |
| component | ? | DECT_1_253 |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--------------------------|----------|
| Constraint Name : Feature_indicate_rx_empty Structured Type : FEATURE_INDICATE Derivation Path : Comments : ETS 300 175-5 [5], subclause 7.7.17 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_feature_indicate | |
| length | '00'O | |
| feature | OMIT | |
| ext3 | OMIT | |
| parameter | OMIT | |
| status_indicator | OMIT | |
| component | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Fixed_id_rx_base Structured Type : FIXED_ID Derivation Path : Comments : The basic constraint for the Fixed_id iei | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_fixed_id | |
| length | ('03'O, '04'O, '05'O, '06'O, '07'O, '08'O, '09'O, '0A'O, '0B'O) | |
| type | ? | |
| f3 | '1'B | |
| length_of_id_value | ? | |
| f4 | '1'B | |
| id_value | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|------------------|----------|
| Constraint Name : Fixed_id_rx_empty | | |
| Structured Type : FIXED_ID | | |
| Derivation Path : | | |
| Comments : The basic constraint for the Fixed_id iei | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_fixed_id | |
| length | '00'O | |
| type | OMIT | |
| f3 | OMIT | |
| length_of_id_value | OMIT | |
| f4 | OMIT | |
| id_value | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Fixed_id_ari | | |
| Structured Type : FIXED_ID | | |
| Derivation Path : | | |
| Comments : A constraint for the fixed_id with an ARI + RPN. The actual value of the ARI+RPN is given as a PIXIT parameter. This constraint can be used for rx and tx. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_fixed_id | |
| length | TSC_fixed_id_length_ari | |
| type | '0000000'B | ARI |
| f3 | '1'B | |
| length_of_id_value | INT_TO_BIT((TSPX_ari_length_indicat or+1), 7) | |
| f4 | '1'B | |
| id_value | TSC_ari_complete_value | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------|-----------|
| Constraint Name : Fixed_id_ari_rpn Structured Type : FIXED_ID Derivation Path : Comments : A constraint for the fixed_id with an ARI + RPN. The actual value of the ARI+RPN is given as a PIXIT parameter. This constraint can be used for rx and tx. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_fixed_id | ARI + RPN |
| length | TSC_fixed_id_length_ari_rpn | |
| type | '0000001'B | |
| f3 | '1'B | |
| length_of_id_value | TSC_ari_rpn_length | |
| f4 | '1'B | |
| id_value | TSC_arirpn_complete_value | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---|----------|
| Constraint Name : Fixed_id_park Structured Type : FIXED_ID Derivation Path : Comments : A constraint for the fixed_id with a PARK. The actual value of the PARK is given as a PIXIT parameter. This constraint can be used for rx and tx. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_fixed_id | PARK |
| length | TSC_fixed_id_length_park | |
| type | '0100000'B | |
| f3 | '1'B | |
| length_of_id_value | INT_TO_BIT((TSPX_park_length_indicator+1), 7) | |
| f4 | '1'B | |
| id_value | TSC_park_complete_value | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|----------|
| Constraint Name : Identity_type_rx_base | | |
| Structured Type : IDENTITY_TYPE | | |
| Derivation Path : | | |
| Comments : ETSI 300 175-5 [5], subclause 7.7.19 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_identity_type | |
| length | '02'O | |
| id_group | ? | |
| space | '000'B | |
| f3 | '1'B | |
| type | ? | |
| f4 | '1'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|----------|
| Constraint Name : Identity_type_rx_empty | | |
| Structured Type : IDENTITY_TYPE | | |
| Derivation Path : | | |
| Comments : ETSI 300 175-5 [5], subclause 7.7.19 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_identity_type | |
| length | '00'O | |
| id_group | OMIT | |
| space | OMIT | |
| f3 | OMIT | |
| type | OMIT | |
| f4 | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|-------------|
| Constraint Name : Identity_type_ipui | | |
| Structured Type : IDENTITY_TYPE | | |
| Derivation Path : Identity_type_rx_base. | | |
| Comments : A derived receive constraint for the IDENTITY_TYPE ie, specifying the portable id with the IPUI | | |
| Element Name | Element Value | Comments |
| id_group | '0000'B | portable id |
| type | '0000000'B | IPUI |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|----------|
| Constraint Name : Info_type_rx_base | | |
| Structured Type : INFO_TYPE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the INFO_TYPE PDU. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_info_type | |
| length | '01'O | |
| info_parameter | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|----------|
| Constraint Name : Info_type_rx_empty | | |
| Structured Type : INFO_TYPE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the INFO_TYPE PDU. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_info_type | |
| length | '00'O | |
| info_parameter | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|----------|
| Constraint Name : Info_type_rx_locate_suggest | | |
| Structured Type : INFO_TYPE | | |
| Derivation Path : | | |
| Comments : A receive constraint for the info type ie, specifying info-parameter 'locate_suggest' | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_info_type | |
| length | '01'O | |
| info_parameter | '00'O | 1) |
| Detailed Comments : 1) specifies 'locate suggest', and 'ext' as 0 | | |

| Structured Type Constraint Declaration | | |
|---|---|----------|
| Constraint Name : lwu_packet_rx_base | | |
| Structured Type : IWU_PACKET | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_iwu_packet | |
| length | COMPLEMENT('00'O) | |
| I2_protocol_id | ('0000?'B, '00?10'B, '00111'B, '01?00'B, '10001'B, '10?10'B) | |
| f3 | '0'B | |
| s_r | ? | |
| ext3 | ? | |
| I3_protocol_id | ('000?0'B , '0011?'B, '0100?'B, '01010'B , '10010'B) IF_PRESENT | |
| f3a | '111'B IF_PRESENT | |
| info | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--------------------|----------|
| Constraint Name : lwu_packet_rx_empty | | |
| Structured Type : IWU_PACKET | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_iwu_packet | |
| length | '00'O | |
| I2_protocol_id | OMIT | |
| f3 | OMIT | |
| s_r | OMIT | |
| ext3 | OMIT | |
| I3_protocol_id | OMIT | |
| f3a | OMIT | |
| info | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---|----------|
| Constraint Name : lwu_attributes_rx_base Structured Type : IWU_ATTRIBUTES Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_iwu_attributes | |
| length | COMPLEMENT('00'O) | |
| info_transfer_capability | ('00000'B, '01000'B, '01001'B, '10000'B, '10001'B, '10100'B, '11000'B) | |
| coding_standard | '00'B | |
| f3 | '1'B | |
| external_connection_type | ('0000'B, '0001'B, '0010'B, '0011'B, '0100'B, '1000'B) | |
| negotiation_indicator | ('000'B, '100'B) | |
| f4 | '1'B | |
| info_transfer_rate | ('00000'B, '0101?'B, '1000?'B, '10011'B , '1111?'B) IF_PRESENT | |
| trans_mode | COMPLEMENT('01'B) | |
| ext5 | ? IF_PRESENT | |
| rate_multiplier | '0????'B IF_PRESENT | |
| unit_rate | COMPLEMENT('00'B) IF_PRESENT | |
| ext5a | ? IF_PRESENT | |
| establishment | '00'B IF_PRESENT | |
| configuration | '00'B IF_PRESENT | |
| structure | ('00?'B, '100'B, '111'B) IF_PRESENT | |
| ext5b | ? IF_PRESENT | |
| info_transfer_rate_d_o | ('00000'B, '0101?'B, '1000?'B, '10011'B , '1111?'B) IF_PRESENT | |
| symmetry | COMPLEMENT('01'B) IF_PRESENT | |
| ext5c | ? IF_PRESENT | |
| rate_multiplier_d_o | '0????'B IF_PRESENT | |
| unit_rate_d_o | COMPLEMENT('00'B) IF_PRESENT | |
| f5d | '1'B IF_PRESENT | |
| user_protocol_id | ('00???'B , '0100?'B, '1000?'B, '11000'B) IF_PRESENT | |

Continued on next page

Continued from previous page

| Structured Type Constraint Declaration | | |
|--|---|----------|
| Element Name | Element Value | Comments |
| f6 ext6 l3_protocol_id | '00'B IF_PRESENT ? IF_PRESENT ('000?'B , '0011?'B , '0100?'B , '01010'B , '10010'B) IF_PRESENT | |
| f7 ext7 l2_protocol_id | '11'B IF_PRESENT ? IF_PRESENT ('0000?'B, '00?10'B, '00111'B, '01?00'B, '10001'B, '10?10'B) IF_PRESENT | |
| f8 ext8 | '11'B IF_PRESENT ? IF_PRESENT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|------------------------|----------|
| Constraint Name : lwu_attributes_rx_empty Structured Type : IWU_ATTRIBUTES Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_iwu_attributes | |
| length | '00'O | |
| info_transfer_capability | OMIT | |
| coding_standard | OMIT | |
| f3 | OMIT | |
| external_connection_type | OMIT | |
| negotiation_indicator | OMIT | |
| f4 | OMIT | |
| info_transfer_rate | OMIT | |
| trans_mode | OMIT | |
| ext5 | OMIT | |
| rate_multiplier | OMIT | |
| unit_rate | OMIT | |
| ext5a | OMIT | |
| establishment | OMIT | |
| configuration | OMIT | |
| structure | OMIT | |
| ext5b | OMIT | |
| info_transfer_rate_d_o | OMIT | |
| symmetry | OMIT | |
| ext5c | OMIT | |
| rate_multiplier_d_o | OMIT | |
| unit_rate_d_o | OMIT | |
| f5d | OMIT | |
| user_protocol_id | OMIT | |
| f6 | OMIT | |
| ext6 | OMIT | |
| l3_protocol_id | OMIT | |
| f7 | OMIT | |
| ext7 | OMIT | |
| l2_protocol_id | OMIT | |
| f8 | OMIT | |
| ext8 | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---|--------------------------------------|
| Constraint Name : lwu_to_iwu_rx_base | | |
| Structured Type : IWU_TO_IWU | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], second edition, subclause 7.7.23 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_iwu_to_iwu | CCITT Q.931 (I.451), partial message |
| length | COMPLEMENT('00'O) | |
| protocol_discriminator | ('00000?'B, '000010'B, '000100'B, '000101'B, '000111'B, '00100?'B, '01000?'B, '111111'B) | |
| s_r | ? | |
| f3 | '1'B | |
| contents | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--------------------|----------|
| Constraint Name : lwu_to_iwu_rx_empty | | |
| Structured Type : IWU_TO_IWU | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], second edition, subclause 7.7.23 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_iwu_to_iwu | |
| length | '00'O | |
| protocol_discriminator | OMIT | |
| s_r | OMIT | |
| f3 | OMIT | |
| contents | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|----------------------------------|----------------------------------|
| Constraint Name : Location_area_rx_base Structured Type : LOCATION_AREA Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_location_area | LAL to be specified in PIXIT. |
| length | ('01'O, '02'O, '08'O) | |
| location_area_level | TSPX_location_area_level | |
| li_type | ('01'B, '10'B, '11'B) | if GSM loc. info is not included |
| spare | '1111'B IF_PRESENT | |
| eli_type | ('0111'B, '1111'B) IF_PRESENT | |
| extended_location_information | ? IF_PRESENT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|----------|
| Constraint Name : Location_area_rx_empty Structured Type : LOCATION_AREA Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_location_area | |
| length | '00'O | |
| location_area_level | OMIT | |
| li_type | OMIT | |
| spare | OMIT | |
| eli_type | OMIT | |
| extended_location_information | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--------------------------|--|
| Constraint Name : Location_area_tx_lal_only | | |
| Structured Type : LOCATION_AREA | | |
| Derivation Path : | | |
| Comments : ETSI 300 175-5 [5], subclause 7.7.25 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_location_area | LAL to be specified in PIXIT. only LAL included |
| length | '01'O | |
| location_area_level | TSPX_location_area_level | |
| li_type | '01'B | |
| spare | OMIT | |
| eli_type | OMIT | |
| extended_location_information | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Multi_display_rx_base | | |
| Structured Type : MULTI_DISPLAY | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.26 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_display | |
| length | COMPLEMENT('00'O) | |
| display_info | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Multi_display_rx_empty | | |
| Structured Type : MULTI_DISPLAY | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.26 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_display | |
| length | '00'O | |
| display_info | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------------|---|
| Constraint Name : Multi_keypad_tx_basic | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, specifying the basic dialled digits. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '12'O | |
| keypad_info | TSC_string_basic_digits | Contains the basic dialled digits: *, #, 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|----------------------|----------|
| Constraint Name : Multi_keypad_tx_dtmf_defined | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, specifying dtmf with defined tone length. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '01'O | |
| keypad_info | '14'O | 1) |
| Detailed Comments : 1) goto DTMF, defined tone length | | |

| Structured Type Constraint Declaration | | |
|---|----------------------|----------|
| Constraint Name : Multi_keypad_tx_dtmf_infinite | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, containing 'goto DTMF, infinite tone length' | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '01'O | |
| keypad_info | '16'O | 1) |
| Detailed Comments : 1) goto DTMF, infinite tone length | | |

| Structured Type Constraint Declaration | | |
|--|----------------------|----------|
| Constraint Name : Multi_keypad_tx_internal | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, specifying internal call. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '01'O | |
| keypad_info | '17'O | 1) |
| Detailed Comments : 1) contains keypad-info '17H' (internal call) | | |

| Structured Type Constraint Declaration | | |
|---|----------------------|----------|
| Constraint Name : Multi_keypad_tx_param(param : DECT_1) | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, with a parameterized digit in the keypad-info. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '01'O | |
| keypad_info | param | 1) |
| Detailed Comments : 1) The actual keypad info is transferred with a parameter. | | |

| Structured Type Constraint Declaration | | |
|---|----------------------|----------|
| Constraint Name : Multi_keypad_tx_pause | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, specifying 'dialling pause'. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '01'O | |
| keypad_info | '05'O | 1) |
| Detailed Comments : 1) contains keypad-info '05H' (dialling pause) | | |

| Structured Type Constraint Declaration | | |
|--|----------------------|----------|
| Constraint Name : Multi_keypad_tx_pulse | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, specifying 'goto pulse' | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '01'O | |
| keypad_info | '12'O | 1) |
| Detailed Comments : 1) contains keypad-info '12H' (goto pulse) | | |

| Structured Type Constraint Declaration | | |
|--|----------------------|----------|
| Constraint Name : Multi_keypad_tx_1234 | | |
| Structured Type : MULTI_KEYPAD | | |
| Derivation Path : | | |
| Comments : A send constraint for the MULTI_KEYPAD ie, specifying a character string containing the digits 1 to 4. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_multi_keypad | |
| length | '04'O | |
| keypad_info | TSC_string_1234 | 1) |
| Detailed Comments : 1) A string containing the digits 1 to 4 | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------|----------|
| Constraint Name : Network_assigned_id_rx_base | | |
| Structured Type : NETWORK_ASSIGNED_ID | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_network_assigned_id | |
| length | COMPLEMENT('00'O) | |
| type | ('1110100'B, '1111111'B) | |
| f3 | '1'B | |
| id_length | ? | |
| f4 | '1'B | |
| value | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------------|----------|
| Constraint Name : Network_assigned_id_rx_empty | | |
| Structured Type : NETWORK_ASSIGNED_ID | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_network_assigned_id | |
| length | '00'O | |
| type | OMIT | |
| f3 | OMIT | |
| id_length | OMIT | |
| f4 | OMIT | |
| value | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Network_header_cc_iut(tv_ : BIT_3; tf_ : BIT_1) | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of cc messages sent by the IUT | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_cc | |
| transaction_value | tv_ | |
| transaction_flag | tf_ | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Network_header_cc_iut_any_tv(tf_ : BIT_1) | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of cc messages sent by the IUT. This constraint is used to receive CC-SETUP messages. It does not put a constraint on the transaction value. This TV will be assigned after receiving the CC-SETUP message. | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_cc | |
| transaction_value | * | |
| transaction_flag | tf_ | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Network_header_cc_lt(tv_ : BIT_3; tf_ : BIT_1) Structured Type : NETWORK_HEADER Derivation Path : Comments : The constraint for the network header in case of cc messages sent by the LT | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_cc | |
| transaction_value | tv_ | |
| transaction_flag | tf_ | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Network_header_ciss_any_tf Structured Type : NETWORK_HEADER Derivation Path : Comments : The constraint for the network header in case of coms messages sent by the IUT | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_ciss | |
| transaction_value | ? | |
| transaction_flag | ? | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Network_header_coms_any_tf Structured Type : NETWORK_HEADER Derivation Path : Comments : The constraint for the network header in case of coms messages sent by the IUT | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_coms | |
| transaction_value | ? | |
| transaction_flag | ? | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Network_header_Ice_ori | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of Ice messages from initiating party | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_Ice | |
| transaction_value | '000'B | |
| transaction_flag | '0'B | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Network_header_Ice_dest | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of Ice messages from non initiating party | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_Ice | |
| transaction_value | '000'B | |
| transaction_flag | '1'B | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Network_header_mm_ori | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of mm messages from initiating party | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_mm | |
| transaction_value | '000'B | |
| transaction_flag | '0'B | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Network_header_mm_dest | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of mm messages from non initiating party | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | TSC_pd_mm | |
| transaction_value | '000'B | |
| transaction_flag | '1'B | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|-------------------|
| Constraint Name : Network_header_unsupported(tv_ : BIT_3; tf_ : BIT_1) | | |
| Structured Type : NETWORK_HEADER | | |
| Derivation Path : | | |
| Comments : The constraint for the network header in case of cc messages sent by the LT. The protocol discriminator contains the value '1000'B, which will not be supported by the IUT. | | |
| Element Name | Element Value | Comments |
| protocol_discriminator | '1000'B | Unsupported value |
| transaction_value | tv_ | |
| transaction_flag | tf_ | |
| ext_transaction_flag | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------------|--------------------------------|
| Constraint Name : Network_parameter_rx_base | | |
| Structured Type : NETWORK_PARAMETER | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.29 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_network_parameter | |
| length | ? | |
| discriminator | ? | |
| data_field | ? | for GSM handover ref.- 1 octet |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------------|----------|
| Constraint Name : Network_parameter_rx_empty | | |
| Structured Type : NETWORK_PARAMETER | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.7.29 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_network_parameter | |
| length | '00'O | |
| discriminator | OMIT | |
| data_field | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---|----------|
| Constraint Name : Portable_id_rx_base | | |
| Structured Type : PORTABLE_ID | | |
| Derivation Path : | | |
| Comments : The basic receive constraint of the PORTABLE_ID ie. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_portable_id | |
| length | ('03'O, '04'O, '05'O, '06'O, '07'O, '08'O, '09'O, '0A'O, '0B'O, '0C'O, '0D'O, '0E'O, '0F'O) | |
| type | ? | |
| f3 | '1'B | |
| length_of_id_value | ? | |
| f4 | '1'B | |
| id_value | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Portable_id_empty Structured Type : PORTABLE_ID Derivation Path : Portable_id_rx_base. Comments : A derived constraint for the portable id ie, containing and empty id value, used when in the locate accept message, no TPUI is to be assigned. | | |
| Element Name | Element Value | Comments |
| length | '00'O | |
| type | OMIT | |
| f3 | OMIT | |
| length_of_id_value | OMIT | |
| f4 | OMIT | |
| id_value | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------------|-----------|
| Constraint Name : Portable_id_ipui Structured Type : PORTABLE_ID Derivation Path : Portable_id_rx_base. Comments : The actual value of the IPUI (to be used after subscription) is given as a PIXIT parameter. This constraint can be used for rx and tx. | | |
| Element Name | Element Value | Comments |
| length | TSC_port_id_length_ipui | |
| type | '0000000'B | IPUI type |
| length_of_id_value | TSC_ipui_length | |
| id_value | TSC_ipui_complete_value | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---|-----------|
| Constraint Name : Portable_id_ipui_unknown | | |
| Structured Type : PORTABLE_ID | | |
| Derivation Path : Portable_id_rx_base. | | |
| Comments : The value of the portable id for 'unknown IPUI', specifying '0' as the IPUI value. This constraint can be used for rx and tx. | | |
| Element Name | Element Value | Comments |
| length | TSC_port_id_length_ipui | IPUI type |
| type | '0000000'B | |
| length_of_id_value | TSC_ipui_length | |
| id_value | INT_TO_BIT(0, BIT_TO_INT(TSC_ipui_length)) | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------------|-----------|
| Constraint Name : Portable_id_tpui | | |
| Structured Type : PORTABLE_ID | | |
| Derivation Path : Portable_id_rx_base. | | |
| Comments : A derived send/receive constraint for the portable_id, containing a the TPUI, as specified in the PIXIT | | |
| Element Name | Element Value | Comments |
| length | TSC_port_id_length_tpui | TPUI type |
| type | '0100000'B | |
| length_of_id_value | TSC_tpui_length | |
| id_value | TSC_tpui_complete_value | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------------|-----------|
| Constraint Name : Portable_id_ipei | | |
| Structured Type : PORTABLE_ID | | |
| Derivation Path : Portable_id_rx_base. | | |
| Comments : A derived send constraint of the PORTABLE_ID ie. | | |
| Element Name | Element Value | Comments |
| length | TSC_port_id_length_ipei | IPEI type |
| type | '0010000'B | |
| length_of_id_value | TSC_ipei_length | |
| id_value | TSC_ipei_complete_value | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---|----------|
| Constraint Name : Progress_indicator_rx_base Structured Type : PROGRESS_INDICATOR Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_progress_indicator | |
| length | '02'O | |
| location | ('0000'B, '0001'B, '0010'B, '0100'B, '0101'B, '1010'B, '1111'B) | |
| coding_standard | '??0'B | |
| f3 | '1'B | |
| progress_description | ('0000001'B, '0000010'B, '0000011'B, '0000100'B, '0001000'B, '0001001'B) | |
| f4 | '1'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|----------------------------|----------|
| Constraint Name : Progress_indicator_rx_empty Structured Type : PROGRESS_INDICATOR Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_progress_indicator | |
| length | '00'O | |
| location | OMIT | |
| coding_standard | OMIT | |
| f3 | OMIT | |
| progress_description | OMIT | |
| f4 | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|--|
| Constraint Name : Progress_indicator_rx_patt_avail | | |
| Structured Type : PROGRESS_INDICATOR | | |
| Derivation Path : Progress_indicator_rx_base. | | |
| Comments : A receive constraint for the progress_indicator i.e, saying: inband information or appropriate pattern now available. | | |
| Element Name | Element Value | Comments |
| progress_description | '0001000'B | inband information or appropriate pattern now available. |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Rand_rx_base | | |
| Structured Type : RAND | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the RAND ie | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_rand | |
| length | ? | |
| field | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Rand_rx_empty | | |
| Structured Type : RAND | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the RAND ie | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_rand | |
| length | '00'O | |
| field | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------------|---|
| Constraint Name : Rand_tx_64_bit Structured Type : RAND Derivation Path : Comments : A send constraint for the RAND structured type | | |
| Element Name | Element Value | Comments |
| iei length field | TSC_iei_rand '08'O TSC_rand | 64 bits Use a 64 bit rand, defined as a constant |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------------------------|----------|
| Constraint Name : Reject_reason_rx_base Structured Type : REJECT_REASON Derivation Path : Comments : The basic receive constraint for reject reason | | |
| Element Name | Element Value | Comments |
| iei length reason | TSC_iei_reject_reason '01'O ? | |
| Detailed Comments : See subclause 7.7.34. | | |

| Structured Type Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Reject_reason_rx_empty Structured Type : REJECT_REASON Derivation Path : Comments : The basic receive constraint for reject reason | | |
| Element Name | Element Value | Comments |
| iei length reason | TSC_iei_reject_reason '00'O OMIT | |
| Detailed Comments : See subclause 7.7.34. | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------------|----------|
| Constraint Name : Release_reason_rx_base | | |
| Structured Type : RELEASE_REASON | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei reason | TSC_iei_release_reason ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------------------------|-----------------|
| Constraint Name : Release_reason_partial_release | | |
| Structured Type : RELEASE_REASON | | |
| Derivation Path : | | |
| Comments : A send constraint for the release reason constraint, containing reason '15'O (partial release) | | |
| Element Name | Element Value | Comments |
| iei reason | TSC_iei_release_reason '15'O | partial release |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Repeat_indicator_rx_base | | |
| Structured Type : REPEAT_INDICATOR | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the REPEAT_INDICATOR ie, non prioritised list or prioritised list | | |
| Element Name | Element Value | Comments |
| repeat_indicator f1 | (TSC_iei_repeat_indicator_non_prioriti sed, TSC_iei_repeat_indicator_prioritised) '1101'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Res_rx_base | | |
| Structured Type : RES | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the RES ie | | |
| Element Name | Element Value | Comments |
| iei length field | TSC_iei_res ? ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Res_rx_empty | | |
| Structured Type : RES | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the RES ie | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_res | |
| length | '00'O | |
| field | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Res_tx(res_field : BIT_32) | | |
| Structured Type : RES | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the RES ie. This actual value for the field will be passed through a param. constraint. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_res | |
| length | '04'O | 32 bits |
| field | res_field | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Rs_rx_base | | |
| Structured Type : RS | | |
| Derivation Path : | | |
| Comments : A basic receive constraint for the RS structured type | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_rs | |
| length | ? | |
| field | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|----------|
| Constraint Name : Rs_rx_empty Structured Type : RS Derivation Path : Comments : A basic receive constraint for the RS structured type | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_rs | |
| length | '00'O | |
| field | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Sending_complete Structured Type : SENDING_COMPLETE Derivation Path : Comments : The constraint for the SENDING COMPLETE ie. | | |
| Element Name | Element Value | Comments |
| sending_complete | 'A1'O | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---|----------|
| Constraint Name : Service_change_info_rx_base Structured Type : SERVICE_CHANGE_INFO Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_service_change_info | |
| length | ('02'O, '03'O) | |
| change_mode | ('000?'B, '0010'B, '01?0'B, '100?'B, '1111'B) | |
| master_coding | ? | |
| coding_standard | '00'B | |
| ext3 | ? | |
| extended_change_mode | ? IF_PRESENT | |
| f3a | '1'B IF_PRESENT | |
| b_attributes | ('000'B, '010'B, '011'B) | |
| reset_coding | ? | |
| a_attributes | ('000'B, '010'B, '011'B) | |
| f4 | '1'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------|----------|
| Constraint Name : Service_change_info_rx_empty Structured Type : SERVICE_CHANGE_INFO Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_service_change_info | |
| length | '00'O | |
| change_mode | OMIT | |
| master_coding | OMIT | |
| coding_standard | OMIT | |
| ext3 | OMIT | |
| extended_change_mode | OMIT | |
| f3a | OMIT | |
| b_attributes | OMIT | |
| reset_coding | OMIT | |
| a_attributes | OMIT | |
| f4 | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---|----------|
| Constraint Name : Service_class_base | | |
| Structured Type : SERVICE_CLASS | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for SERVICE_CLASS | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_service_class | |
| length | '01'O | |
| service_class_field | ('00000001'B, '00000010'B, '00000011'B, '00000100'B, '00000101'B, '00000110'B) | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------|----------|
| Constraint Name : Service_class_empty | | |
| Structured Type : SERVICE_CLASS | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for SERVICE_CLASS | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_service_class | |
| length | '00'O | |
| service_class_field | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------|------------------------------|
| Constraint Name : Service_class_international | | |
| Structured Type : SERVICE_CLASS | | |
| Derivation Path : Service_class_base. | | |
| Comments : A send/receive constraint for the service class ie, specifying that international calls are allowed. | | |
| Element Name | Element Value | Comments |
| service_class_field | '00000101'B | International calls allowed. |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Short_frm_addr Structured Type : SHORT_FORMAT_ADDRESS Derivation Path : Comments : | | |
| Element Name | Element Value | Comments |
| w | TSO_cinft_calculate_w_from_TPUI(TSPX_tpui_value) | |
| f1 | '0'H | |
| tpui_address | TSO_cinft_lowest(16, TSPX_tpui_value) | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|----------------|----------|
| Constraint Name : Signal_rx_base Structured Type : SIGNAL Derivation Path : Comments : ETS 300 175-5 [5], subclause 7.6.8. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_signal | |
| signal_value | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|----------------|-------------|
| Constraint Name : Signal_rx_alerting Structured Type : SIGNAL Derivation Path : Comments : ETS 300 175-5 [5], subclause 7.6.8. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_signal | |
| signal_value | '40'O | Alerting on |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-----------------------------|--------------------------------|
| Constraint Name : Single_display_rx_base | | |
| Structured Type : SINGLE_DISPLAY | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.5. Only in FT to PT. | | |
| Element Name | Element Value | Comments |
| iei display_info | TSC_iei_single_display ? | Only DECT character 1 Octet |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|----------------------------|--------------------------------|
| Constraint Name : Single_keypad_rx_base | | |
| Structured Type : SINGLE_KEYPAD | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.6 | | |
| Element Name | Element Value | Comments |
| iei keypad_info | TSC_iei_single_keypad ? | Only DECT character 1 Octet |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-----------------------------|-------------------------------|
| Constraint Name : Terminal_capability_tx_gap | | |
| Structured Type : TERMINAL_CAPABILITY | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the terminal capability ie. SBH 95.06.08 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_terminal_capability | |
| length | '03'O | |
| display_capability | '0100'B | Alphanumeric display |
| tone_capability | '100'B | Complete DECT tones supported |
| ext3 | '1'B | |
| a_vol | OMIT | |
| n_rej | OMIT | |
| echo_param | OMIT | |
| ext3b | OMIT | |
| slot_type_capability | OMIT | |
| ext3c | OMIT | |
| number_of_stored_display_chars_ms | OMIT | |
| ext3d | OMIT | |
| number_of_stored_display_chars_ls | OMIT | |
| ext3e | OMIT | |
| number_of_lines_in_display | OMIT | |
| ext3f | OMIT | |
| number_of_characters_per_line | OMIT | |
| ext3g | OMIT | |
| scrolling_behaviour_field | OMIT | |
| ext3h | OMIT | |
| profile_indicator_1 | '0000010'B | GAP/PAP supported |
| ext4 | '1'B | |
| profile_indicator_2 | OMIT | |
| ext4a | OMIT | |
| control_codes | '100'B | All control codes |
| spare | '000'B | |
| ext5 | '1'B | |
| esc_to_8_bit_cs | OMIT | |
| ext5a | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------------|----------|
| Constraint Name : Test_hook_contr_rx_base | | |
| Structured Type : TEST_HOOK_CONTROL | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.10 | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_test_hook_control | |
| hook_value | ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|----------------------------|----------|
| Constraint Name : Timer_restart_rx_base | | |
| Structured Type : TIMER_RESTART | | |
| Derivation Path : | | |
| Comments : ETS 300 175-5 [5], subclause 7.6.9 | | |
| Element Name | Element Value | Comments |
| iei restart_value | TSC_iei_timer_restart ? | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Transit_delay_rx_base | | |
| Structured Type : TRANSIT_DELAY | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei length forward_delay f3 backward_delay f4 | TSC_iei_transit_delay '02'O ? '10'B ? '10'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Transit_delay_rx_empty | | |
| Structured Type : TRANSIT_DELAY | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei length forward_delay f3 backward_delay f4 | TSC_iei_transit_delay '00'O OMIT OMIT OMIT OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|---------------------|----------|
| Constraint Name : Window_size_rx_base | | |
| Structured Type : WINDOW_SIZE | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_window_size | |
| length | '02'O | |
| forward_value | ? | |
| f3 | '1'B | |
| backward_value | ? | |
| f4 | '1'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|---------------------|----------|
| Constraint Name : Window_size_rx_empty | | |
| Structured Type : WINDOW_SIZE | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_window_size | |
| length | '00'O | |
| forward_value | OMIT | |
| f3 | OMIT | |
| backward_value | OMIT | |
| f4 | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------|----------|
| Constraint Name : Zap_field_rx_base | | |
| Structured Type : ZAP_FIELD | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_zap_field | |
| length | '01'O | |
| contents | ? | |
| f3 | '0000'B | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|---|-------------------|----------|
| Constraint Name : Zap_field_rx_empty | | |
| Structured Type : ZAP_FIELD | | |
| Derivation Path : | | |
| Comments : | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_zap_field | |
| length | '00'O | |
| contents | OMIT | |
| f3 | OMIT | |
| Detailed Comments : | | |

| Structured Type Constraint Declaration | | |
|--|-------------------|-------------|
| Constraint Name : Zap_field_zap_one | | |
| Structured Type : ZAP_FIELD | | |
| Derivation Path : | | |
| Comments : A send constraint for the zap field ie, specifying a zap value of 1. | | |
| Element Name | Element Value | Comments |
| iei | TSC_iei_zap_field | |
| length | '01'O | |
| contents | '0001'B | zap value 1 |
| f3 | '0000'B | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|--|---|--|
| Constraint Name : DI_brc_ind(nwk_pdu : PDU) ASP Type : DL_BROADCAST_IND Derivation Path : Comments : This constraint contains a PDU | | |
| Parameter Name | Parameter Value | Comments |
| cluster_address_list message_unit extended_message_flag error_flag | OMIT nwk_pdu '0'B (TSC_iei_error_flag_on, TSC_iei_error_flag_off) | Short paging '1'B means CRC error occurred in MAC-PAGE-ind primitive |
| Detailed Comments : This primitive is not used in PT testing. The message unit length information element is not used in this primitive | | |

| ASP Constraint Declaration | | |
|--|----------------------------|----------|
| Constraint Name : DI_data_ind(nwk_pdu : PDU) ASP Type : DL_DATA_IND Derivation Path : Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier message_unit | TSPX_dlei_value nwk_pdu | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|---|----------------------------|----------|
| Constraint Name : DI_data_req(nwk_pdu : PDU) ASP Type : DL_DATA_REQ Derivation Path : Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier message_unit | TSPX_dlei_value nwk_pdu | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|--|--------------------------|----------|
| Constraint Name : DI_enc_cfm(param : CIPHER_STATUS) | | |
| ASP Type : DL_ENCRYPT_CFM | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier encryption_status | TSPX_dlei_value param | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|---|--|----------|
| Constraint Name : DI_enc_ind(param : CIPHER_STATUS) | | |
| ASP Type : DL_ENCRYPT_IND | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier connection_identities encryption_status | TSPX_dlei_value ? IF_PRESENT param | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|--|----------------------------------|----------|
| Constraint Name : DI_enc_req(param : CIPHER_STATUS) | | |
| ASP Type : DL_ENCRYPT_REQ | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier connection_identities encryption_command | TSPX_dlei_value OMIT param | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|---|-----------------|----------|
| Constraint Name : DI_enc_key_req(param : ENCRYPTION_KEY) | | |
| ASP Type : DL_ENC_KEY_REQ | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| connection_identities | OMIT | |
| encryption_key | param | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|-------------------------------------|-----------------|----------|
| Constraint Name : DI_est_cfm | | |
| ASP Type : DL_ESTABLISH_CFM | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|--|-----------------|----------|
| Constraint Name : DI_est_req_no_pdu | | |
| ASP Type : DL_ESTABLISH_REQ | | |
| Derivation Path : | | |
| Comments : This constraint does not contain a PDU. The dlei value will be specified in the PIXIT. | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| establish_mode | TSC_em_class_a | |
| radio_fixed_part_number | OMIT | |
| message_unit | OMIT | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|--|-----------------|----------|
| Constraint Name : DI_est_req_pdu(nwk_pdu : PDU) | | |
| ASP Type : DL_ESTABLISH_REQ | | |
| Derivation Path : | | |
| Comments : This constraint for the DL_ESTABLISH_REQ contains a PDU. | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| establish_mode | TSC_em_class_a | |
| radio_fixed_part_number | OMIT | |
| message_unit | nwk_pdu | |
| Detailed Comments : For now this primitive is used in FT testing only. The message unit length information element is not used in this primitive | | |

| ASP Constraint Declaration | | |
|-------------------------------------|----------------------------------|----------|
| Constraint Name : DI_rel_cfm | | |
| ASP Type : DL_RELEASE_CFM | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| release_mode | (TSC_rm_normal, TSC_rm_abnormal) | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|---|----------------------------------|----------|
| Constraint Name : DI_rel_ind | | |
| ASP Type : DL_RELEASE_IND | | |
| Derivation Path : | | |
| Comments : The constraint for the DL_RELEASE_IND ASP | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| release_mode | (TSC_rm_normal, TSC_rm_abnormal) | |
| Detailed Comments : | | |

| ASP Constraint Declaration | | |
|---|-----------------|----------|
| Constraint Name : DI_rel_req(param : RELEASE_MODE) | | |
| ASP Type : DL_RELEASE_REQ | | |
| Derivation Path : | | |
| Comments : | | |
| Parameter Name | Parameter Value | Comments |
| data_link_endpoint_identifier | TSPX_dlei_value | |
| release_mode | param | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------------------------------|
| Constraint Name : Access_rights_accept_rx_base PDU Type : ACCESS_RIGHTS_ACCEPT Derivation Path : Comments : The basic receive constraint for the access rights_accept message. Only one fixed_id will be included. No ZAP field and Service class are stored | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_access_rights_accept | M |
| portable_id | Portable_id_rx_base | M (t.b.s. in derived constraint) |
| repeat_indicator | OMIT | N |
| fixed_id | Fixed_id_rx_base | M (t.b.s. in derived constraint) |
| location_area | (Location_area_rx_base, Location_area_rx_empty) IF_PRESENT | O |
| auth_type | (Auth_type_rx_base, Auth_type_rx_empty) IF_PRESENT | O |
| cipher_info | (Cipher_info_rx_base, Cipher_info_rx_empty) IF_PRESENT | O |
| zap_field | (Zap_field_rx_base, Zap_field_rx_empty) IF_PRESENT | O |
| service_class | (Service_class_base, Service_class_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|------------------|----------|
| Constraint Name : Access_rights_accept_rx01 PDU Type : ACCESS_RIGHTS_ACCEPT Derivation Path : Access_rights_accept_rx_base. Comments : A derived receive constraint for the access rights_accept message, specifying the fixed_id as type PARK. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------|----------|
| Constraint Name : Access_rights_accept_rx02 | | |
| PDU Type : ACCESS_RIGHTS_ACCEPT | | |
| Derivation Path : Access_rights_accept_rx_base. | | |
| Comments : A derived receive constraint for the access rights_accept message, specifying the fixed_id as type PARK and the <<service class>>ie with any value. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| service_class | Service_class_base | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-------------------|----------|
| Constraint Name : Access_rights_accept_rx03 | | |
| PDU Type : ACCESS_RIGHTS_ACCEPT | | |
| Derivation Path : Access_rights_accept_rx_base. | | |
| Comments : A derived receive constraint for the access rights_accept message, specifying the fixed_id as type PARK and the <<zap filed>>ie with any value. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| zap_field | Zap_field_rx_base | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Access_rights_reject_rx_base | | |
| PDU Type : ACCESS_RIGHTS_REJECT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the access rights_reject message. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_access_rights_request | M |
| reject_reason | (Reject_reason_rx_base, Reject_reason_rx_empty) IF_PRESENT | O |
| duration | (Duration_rx_base, Duration_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|------------------------------|--|
| Constraint Name : Access_rights_request_tx_base | | |
| PDU Type : ACCESS_RIGHTS_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the access rights_request message. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_access_rights_request | M |
| portable_id | OMIT | M (t.b.s. in derived constraint) |
| auth_type | OMIT | M (t.b.s. in derived constraint) (O in version 2 of ETS 300 175) |
| cipher_info | OMIT | O |
| setup_capability | OMIT | O (new in version 2 of ETS 300 175) |
| terminal_capability | OMIT | M (t.b.s. in derived constraint) (O in version 2 of ETS 300 175) |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------|-------------------|
| Constraint Name : Access_rights_request_tx01 | | |
| PDU Type : ACCESS_RIGHTS_REQUEST | | |
| Derivation Path : Access_rights_request_tx_base. | | |
| Comments : A derived send constraint, with auth_key_type referring to UAK and portable is referring to the IPUI-N | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | IPUI-N |
| auth_type | Auth_type_tx_no_dck_no_zap | related UAK, IPUI |
| terminal_capability | Terminal_capability_tx_gap | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------|--------------------------|
| Constraint Name : Access_rights_request_tx02 | | |
| PDU Type : ACCESS_RIGHTS_REQUEST | | |
| Derivation Path : Access_rights_request_tx_base. | | |
| Comments : A derived send constraint, with auth_key_type referring to AC and portable is referring to the IPUI-N. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | IPUI-N |
| auth_type | Auth_type_tx_ac | AC, No ZAP, No DCK, DSAA |
| terminal_capability | Terminal_capability_tx_gap | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------|----------|
| Constraint Name : Access_rights_request_tx03 | | |
| PDU Type : ACCESS_RIGHTS_REQUEST | | |
| Derivation Path : Access_rights_request_tx_base. | | |
| Comments : A derived send constraint, with auth_key_type referring to UAK and portable is referring to the IPUI-N | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | IPUI-N |
| auth_type | OMIT | missing |
| terminal_capability | Terminal_capability_tx_gap | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-------------------------------|--|
| Constraint Name : Access_rights_request_tx04 | | |
| PDU Type : ACCESS_RIGHTS_REQUEST | | |
| Derivation Path : Access_rights_request_tx_base. | | |
| Comments : A derived send constraint, with an auth_key of which the length exceeds the maximum value. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | IPUI-N |
| auth_type | Bi_auth_type_tx_length_exceed | length exceeding the maximum allowed size. |
| terminal_capability | Terminal_capability_tx_gap | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------------|----------|
| Constraint Name : Access_rights_term_accept_rx_base | | |
| PDU Type : ACCESS_RIGHTS_TERM_ACCEPT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the ACCESS_RIGHTS_TERM_ACCEPT PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_access_rights_term_accept | M |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------------|----------|
| Constraint Name : Access_rights_term_acc_tx_base | | |
| PDU Type : ACCESS_RIGHTS_TERM_ACCEPT | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the ACCESS_RIGHTS_TERM_ACCEPT PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_access_rights_term_accept | M |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Access_rights_term_req_rx_base | | |
| PDU Type : ACCESS_RIGHTS_TERM_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the ACCESS_RIGHTS_TERM_REQUEST PDU. Only one fixed id will be included. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_access_rights_term_request | M |
| portable_id | Portable_id_rx_base | M |
| repeat_indicator | Repeat_indicator_rx_base IF_PRESENT | O |
| fixed_id | Fixed_id_rx_base | M |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------------------|----------------------------------|
| Constraint Name : Access_rights_term_request_tx_base | | |
| PDU Type : ACCESS_RIGHTS_TERM_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the ACCESS_RIGHTS_TERM_REQUEST PDU. Only one fixed id will be included. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_access_rights_term_request | M |
| portable_id | OMIT | M (t.b.s. in derived constraint) |
| repeat_indicator | OMIT | O |
| fixed_id | OMIT | M (t.b.s. in derived constraint) |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Auth_reject_rx_base | | |
| PDU Type : AUTH_REJECT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the authenticate reject PDU, for PT initiated FT authentication. Only one auth_type will be used. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_auth_reject | M |
| repeat_indicator | Repeat_indicator_rx_base IF_PRESENT | O |
| auth_type | (Auth_type_rx_base, Auth_type_rx_empty) IF_PRESENT | O |
| reject_reason | (Reject_reason_rx_base, Reject_reason_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|------------------------|----------|
| Constraint Name : Auth_reject_tx_base | | |
| PDU Type : AUTH_REJECT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the authenticate reject PDU, for FT initiated PT authentication. Only one auth_type will be used. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_auth_reject | M |
| repeat_indicator | OMIT | O |
| auth_type | OMIT | O |
| reject_reason | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---|----------|
| Constraint Name : Auth_reply_rx_base PDU Type : AUTH_REPLY Derivation Path : Comments : The basic receive constraint for the AUTH_REPLY message (FT->PT) | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_auth_reply | M |
| res | Res_rx_base | M |
| rs | (Rs_rx_base, Rs_rx_empty) | M |
| zap_field | OMIT | N |
| service_class | OMIT | N |
| key | OMIT | N |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---|----------|
| Constraint Name : Auth_reply_rx01 PDU Type : AUTH_REPLY Derivation Path : Auth_reply_rx_base. Comments : The basic receive constraint for the AUTH_REPLY message (FT->PT), in case it is received during the key allocation procedure. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | |
| rs | (Rs_rx_base, Rs_rx_empty) IF_PRESENT | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|------------------------|----------|
| Constraint Name : Auth_reply_tx_base(res_field : BIT_32) PDU Type : AUTH_REPLY Derivation Path : Comments : The basic send constraint for the AUTH_REPLY message (PT->FT) | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_auth_reply | M |
| res | Res_tx(res_field) | M |
| rs | OMIT | N |
| zap_field | OMIT | O |
| service_class | OMIT | O |
| key | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-------------------|----------|
| Constraint Name : Auth_reply_tx01(res_field : BIT_32) | | |
| PDU Type : AUTH_REPLY | | |
| Derivation Path : Auth_reply_tx_base. | | |
| Comments : The derived send constraint for the AUTH_REPLY message(PT->FT) | | |
| Field Name | Field Value | Comments |
| res | Res_tx(res_field) | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------------|----------|
| Constraint Name : Auth_reply_tx02(res_field : BIT_32) | | |
| PDU Type : AUTH_REPLY | | |
| Derivation Path : Auth_reply_tx_base. | | |
| Comments : A derived receive constraint for the AUTH_REPLY message, specifying the presence of zap field and service class. The zap field should have the value 1. | | |
| Field Name | Field Value | Comments |
| res | Res_tx(res_field) | |
| zap_field | Zap_field_zap_one | |
| service_class | Service_class_international | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-----------------------|----------------------------------|
| Constraint Name : Auth_request_ka_tx_base(res_field : BIT_32) | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic constraint for the authenticate request PDU, used in case of key allocation. (It has a parameterised res constraint). | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_auth_request | M |
| auth_type | OMIT | M (t.b.s. in derived constraint) |
| rand | OMIT | M (t.b.s. in derived constraint) |
| res | Res_tx(res_field) | O (used in case of Key allocate) |
| rs | OMIT | N |
| cipher_info | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------|----------|
| Constraint Name : Auth_request_ka_tx01(res_field : BIT_32) | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_ka_tx_base. | | |
| Comments : The derived constraint for the authenticate request PDU, for PT initiated FT authentication, during the key allocation procedure. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | |
| auth_type | Auth_type_tx_no_dck_no_zap | |
| rand | Rand_tx_64_bit | |
| res | Res_tx(res_field) | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Auth_request_rx_base | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the authenticate request PDU, for FT initiated PT authentication | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_auth_request | M |
| auth_type | Auth_type_rx_base | M |
| rand | Rand_rx_base | M |
| res | OMIT | N |
| rs | (Rs_rx_base, Rs_rx_empty) IF_PRESENT | O |
| cipher_info | (Cipher_info_rx_base, Cipher_info_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------|----------|
| Constraint Name : Auth_request_rx01 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_rx_base. | | |
| Comments : The derived receive constraint for the authenticate request PDU, for FT initiated PT authentication, based on the UAK. | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_rx_no_dck_no_zap | 1) |
| rand | Rand_rx_base | |
| rs | Rs_rx_base | 2) |
| Detailed Comments : 1) auth_type specifies no dck to be stored, zap value not increased. UAK 2) The <<rs>>ie is mandatory, when a DECT standard authentication algorithm is used. | | |

| PDU Constraint Declaration | | |
|--|-------------------------|----------|
| Constraint Name : Auth_request_rx02 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_rx_base. | | |
| Comments : The derived receive constraint for the authenticate request PDU, for FT initiated PT authentication | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_rx_no_dck_zap | 1) |
| rand | Rand_rx_base | |
| rs | Rs_rx_base | 2) |
| Detailed Comments : 1) auth_type specifies no dck to be stored, zap value shall be increased. 2) The <<rs>>ie is mandatory, when a DECT standard authentication algorithm is used. | | |

| PDU Constraint Declaration | | |
|--|------------------|----------|
| Constraint Name : Auth_request_rx03 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_rx_base. | | |
| Comments : The derived receive constraint for the authenticate request PDU, for FT initiated user authentication | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_rx_upi | 1) |
| rand | Rand_rx_base | |
| rs | Rs_rx_base | 2) |
| Detailed Comments : 1) auth_type specifies DCK storage and no ZAP increment. Standard DSAA is used, and authentication is based on UPI. 2) The <<rs>>ie is mandatory, when a DECT standard authentication algorithm is used. | | |

| PDU Constraint Declaration | | |
|--|-------------------------|----------|
| Constraint Name : Auth_request_rx04 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_rx_base. | | |
| Comments : The derived receive constraint for the authenticate request PDU, for FT initiated PT authentication | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_rx_dck_no_zap | 1) |
| rand | Rand_rx_base | |
| rs | Rs_rx_base | 2) |
| Detailed Comments : 1) auth_type specifies dck to be stored, zap value not increased. 2) The <<rs>>ie is mandatory, when a DECT standard authentication algorithm is used. | | |

| PDU Constraint Declaration | | |
|--|-----------------|----------|
| Constraint Name : Auth_request_rx05 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_rx_base. | | |
| Comments : The derived receive constraint for the authenticate request PDU, for FT initiated PT authentication, based on the AC | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_rx_ac | 1) |
| rand | Rand_rx_base | |
| rs | Rs_rx_base | 2) |
| Detailed Comments : 1) auth_type specifies AC type, dck not to be stored and zap value not increased. 2) The <<rs>>ie is mandatory, when a DECT standard authentication algorithm is used. | | |

| PDU Constraint Declaration | | |
|---|-----------------------|----------------------------------|
| Constraint Name : Auth_request_tx_base | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic constraint for the authenticate request PDU, for PT initiated FT authentication | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_auth_request | M |
| auth_type | OMIT | M (t.b.s. in derived constraint) |
| rand | OMIT | M (t.b.s. in derived constraint) |
| res | OMIT | O |
| rs | OMIT | N |
| cipher_info | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------|----------|
| Constraint Name : Auth_request_tx01 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_tx_base. | | |
| Comments : The derived constraint for the authenticate request PDU, for PT initiated FT authentication | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_tx_no_dck_no_zap | |
| rand | Rand_tx_64_bit | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------|
| Constraint Name : Auth_request_tx02 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_tx_base. | | |
| Comments : The derived constraint for the authenticate request PDU, for PT initiated FT authentication, with an authentication key which is not supported by the FT. | | |
| Field Name | Field Value | Comments |
| auth_type | Auth_type_tx_auth_key_not_supp | 1) |
| rand | Rand_tx_64_bit | |
| Detailed Comments : 1) Authentication key is not supported | | |

| PDU Constraint Declaration | | |
|---|------------------------|----------|
| Constraint Name : Auth_request_tx03 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_tx_base. | | |
| Comments : The derived constraint for the authenticate request PDU, for PT initiated FT authentication, during the key allocation procedure. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | |
| auth_type | Auth_type_tx_ac | |
| rand | Rand_tx_64_bit | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------|---------------------|
| Constraint Name : Auth_request_tx04 | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : Auth_request_tx_base. | | |
| Comments : A derived constraint for the authenticate request PDU, for PT initiated FT authentication, but with an illegal transaction identifier value. | | |
| Field Name | Field Value | Comments |
| network_header | Bi_network_header_mm_ori | Contains illegal TV |
| auth_type | Auth_type_tx_no_dck_no_zap | |
| rand | Rand_tx_64_bit | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|------------------------|----------|
| Constraint Name : Auth_request_tx05 (res_field:BIT_32) | | |
| PDU Type : AUTH_REQUEST | | |
| Derivation Path : | | |
| Comments : The constraint for the authenticate request PDU, for PT initiated FT authentication, during the key allocation procedure. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_auth_request | M |
| auth_type | Auth_type_tx_ac | M |
| rand | Rand_tx_64_bit | M |
| res | Res_tx (res_field) | O |
| rs | OMIT | N |
| cipher_info | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-------------------|----------------------------|
| Constraint Name : Bi_auth_reply_tx(res_field : BIT_32) | | |
| PDU Type : AUTH_REPLY | | |
| Derivation Path : Auth_reply_tx_base. | | |
| Comments : The derived send constraint for the AUTH_REPLY message (PT->FT), containing an unrecognizable message type. | | |
| Field Name | Field Value | Comments |
| message_type | TSC_mt_unrec | unreconizable message type |
| res | Res_tx(res_field) | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------|
| Constraint Name : Bi_cc_short_tx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : BI_CC_SHORT_MESSAGE | | |
| Derivation Path : | | |
| Comments : This constraint for the CC_SETUP PDU contains a too short <<message type>>ie. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type_short | TSC_mt_cc_short | 1) |
| Detailed Comments : 1) too short message type | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|---------------------|
| Constraint Name : Bi_cc_unrec_tx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : This constraint for the CC_SETUP PDU contains in <<message type>>ie wrong value. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_unrec | Unrecognised value. |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_default | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------|----------------------------------|
| Constraint Name : Bi_mm_unrec_tx_base | | |
| PDU Type : IDENTITY_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic send constraint for testing the behaviour of the IUT, if an unrecognised message is sent. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_unrec | M (unrecognised message type) |
| repeat_indicator | OMIT | N |
| identity_type | OMIT | M (t.b.s. in derived constraint) |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Cipher_reject_rx_base | | |
| PDU Type : CIPHER_REJECT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the CIPHER_REJECT PDU. Only one cipher info ie is assumed to be present. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_cipher_reject | M |
| repeat_indicator | OMIT | O |
| cipher_info | (Cipher_info_rx_base, Cipher_info_rx_empty) | O |
| reject_reason | (Reject_reason_rx_base, Reject_reason_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------------------------------|
| Constraint Name : Cipher_request_rx_base | | |
| PDU Type : CIPHER_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the CIPHER_REQUEST PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_cipher_request | M |
| cipher_info | Cipher_info_rx_base | M (t.b.s. in derived constraint) |
| call_identity | (Call_id_rx_base, Call_id_rx_empty) IF_PRESENT | O |
| connection_identity | (Connection_id_rx_base, Connection_id_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-------------------------|----------|
| Constraint Name : Cipher_request_rx01 | | |
| PDU Type : CIPHER_REQUEST | | |
| Derivation Path : Cipher_request_rx_base. | | |
| Comments : A derived receive constraint for the CIPHER_REQUEST PDU., specifying ciphering on with DECT standard ciphering algorithm. | | |
| Field Name | Field Value | Comments |
| cipher_info | Cipher_info_dsca_enable | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------|----------|
| Constraint Name : Cipher_request_rx02 | | |
| PDU Type : CIPHER_REQUEST | | |
| Derivation Path : Cipher_request_rx_base. | | |
| Comments : A derived receive constraint for the CIPHER_REQUEST PDU., specifying ciphering off with DECT standard ciphering algorithm. | | |
| Field Name | Field Value | Comments |
| cipher_info | Cipher_info_dsca_disable | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Cipher_suggest_tx_base | | |
| PDU Type : CIPHER_SUGGEST | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the CIPHER_SUGGEST PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_cipher_suggest | M |
| cipher_info | OMIT | M |
| call_identity | OMIT | O |
| connection_identity | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-------------------------|----------|
| Constraint Name : Cipher_suggest_tx01 | | |
| PDU Type : CIPHER_SUGGEST | | |
| Derivation Path : Cipher_suggest_tx_base. | | |
| Comments : A derived send constraint for the CIPHER_SUGGEST PDU, specifying the cipher-info ie with ciphering enable. | | |
| Field Name | Field Value | Comments |
| cipher_info | Cipher_info_dsca_enable | 1) |
| Detailed Comments : 1) Cipher_info_dsca_enable specifies: DECT standard cipher algorithm, ciphering enable, cipher key type DCK. | | |

| PDU Constraint Declaration | | |
|---|--------------------------|----------|
| Constraint Name : Cipher_suggest_tx02 | | |
| PDU Type : CIPHER_SUGGEST | | |
| Derivation Path : Cipher_suggest_tx_base. | | |
| Comments : A derived send constraint for the CIPHER_SUGGEST PDU, specifying the cipher-info ie with ciphering disable. | | |
| Field Name | Field Value | Comments |
| cipher_info | Cipher_info_dsca_disable | 1) |
| Detailed Comments : 1) Cipher_info_dsca_disable specifies: DECT standard cipher algorithm, ciphering disable, cipher key type DCK. | | |

| PDU Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Cipher_suggest_tx03 | | |
| PDU Type : CIPHER_SUGGEST | | |
| Derivation Path : Cipher_suggest_tx_base. | | |
| Comments : A derived send constraint for the CIPHER_SUGGEST PDU, specifying the cipher-info ie with a not supported key. | | |
| Field Name | Field Value | Comments |
| cipher_info | Cipher_info_key_false | 1) |
| Detailed Comments : 1) Cipher_info_key_false specifies cipher info with a not supported key. | | |

| PDU Constraint Declaration | | |
|---|---|------------------------------------|
| Constraint Name : Cc_alerting_rx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_ALERTING | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the cc_alerting PDU, for outgoing call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_alerting | M |
| call_attributes | (Call_attributes_rx_base, Call_attributes_rx_empty) IF_PRESENT | O |
| connection_id | (Connection_id_rx_base, Connection_id_rx_empty) IF_PRESENT | O |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O (version 2 of ETS 300 175-5 [5]) |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| signal | Signal_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| terminal_capability | OMIT | N |
| transit_delay | (Transit_delay_rx_base, Transit_delay_rx_empty) IF_PRESENT | O |
| window_size | (Window_size_rx_base, Window_size_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|------------------------------------|
| Constraint Name : Cc_alerting_tx_base(tv_ : BIT_3; ff_ : BIT_1) | | |
| PDU Type : CC_ALERTING | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the cc_alerting PDU, for incoming call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, ff_) | M |
| message_type | TSC_mt_cc_alerting | M |
| call_attributes | OMIT | O |
| connection_id | OMIT | O |
| facility | OMIT | O (version 2 of ETS 300 175-5 [5]) |
| progress_indicator | OMIT | N |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| signal | OMIT | N |
| feature_indicate | OMIT | N |
| terminal_capability | OMIT | O |
| transit_delay | OMIT | O |
| window_size | OMIT | O |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Cc_call_proc_rx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_CALL_PROC Derivation Path : Comments : A basic receive constraint for the cc_call_proceeding PDU, for outgoing call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_call_proc | M |
| call_attributes | (Call_attributes_rx_base, Call_attributes_rx_empty) IF_PRESENT | O |
| connection_id | (Connection_id_rx_base, Connection_id_rx_empty) IF_PRESENT | O |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| signal | Signal_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| transit_delay | (Transit_delay_rx_base, Transit_delay_rx_empty) IF_PRESENT | O |
| window_size | (Window_size_rx_base, Window_size_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

PDU Constraint Declaration

Constraint Name : Cc_connect_rx_base(tv_ : BIT_3; tf_ : BIT_1)
PDU Type : CC_CONNECT
Derivation Path :
Comments : The basic receive constraint for the cc_connect PDU, for outgoing call.

| Field Name | Field Value | Comments |
|---------------------|--|----------|
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_connect | M |
| call_attributes | (Call_attributes_rx_base, Call_attributes_rx_empty) IF_PRESENT | O |
| connection_id | (Connection_id_rx_base, Connection_id_rx_empty) IF_PRESENT | O |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| signal | Signal_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| terminal_capability | OMIT | N |
| transit_delay | (Transit_delay_rx_base, Transit_delay_rx_empty) IF_PRESENT | O |
| window_size | (Window_size_rx_base, Window_size_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |

Detailed Comments :

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Cc_connect_tx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_CONNECT Derivation Path : Comments : The basic send constraint for the cc_connect PDU, for incoming call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_cc_connect | M |
| call_attributes | OMIT | O |
| connection_id | OMIT | O |
| facility | OMIT | O |
| progress_indicator | OMIT | N |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| signal | OMIT | N |
| feature_indicate | OMIT | N |
| terminal_capability | OMIT | O |
| transit_delay | OMIT | O |
| window_size | OMIT | O |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Cc_connect_ack_rx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_CONNECT_ACK Derivation Path : Comments : A basic receive constraint for the cc_connect_ack PDU, for incoming call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_connect_ack | M |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_base) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | | |
|--|--|---|----------|
| Constraint Name : Cc_info_rx_base(tv_ : BIT_3; tf_ : BIT_1) | | | |
| PDU Type : CC_INFO | | | |
| Derivation Path : | | | |
| Comments : The basic receive constraint for the cc_info PDU, for either outgoing or incoming call | | | |
| Field Name | Field Value | | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M | |
| message_type | TSC_mt_cc_info | M | |
| location_area | OMIT | N | |
| network_assigned_id | OMIT | N | |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O | |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O | |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O | |
| single_display | Single_display_rx_base IF_PRESENT | O | |
| multi_keypad | OMIT | N | |
| single_keypad | OMIT | N | |
| signal | Signal_rx_base IF_PRESENT | O | |
| feature_activate | OMIT | N | |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O | |
| network_parameter | OMIT | N | |
| called_party_number | (Called_party_number_rx_base, Called_party_number_rx_empty) IF_PRESENT | O | |
| called_party_subaddress | (Called_party_subaddress_rx_base, Called_party_subaddress_rx_empty) IF_PRESENT | O | |
| sending_complete | Sending_complete IF_PRESENT | O | |
| test_hook_control | Test_hook_contr_rx_base IF_PRESENT | O | |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O | |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O | |
| Detailed Comments : | | | |

| PDU Constraint Declaration | | |
|---|---|-------------------------------------|
| Constraint Name : Cc_info_rx01(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_INFO Derivation Path : Cc_info_rx_base. Comments : The derived receive constraint for the cc_info PDU, for either outgoing or incoming call containing the <<signal>>ie. The parameter indicates whether the CC_INFO is sent by the originating or the destination party. | | |
| Field Name | Field Value | Comments |
| network_header signal | Network_header_cc_iut(tv_, tf_) Signal_rx_base | M values:= { 40H-47H, 48H, 4FH } |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Cc_info_tx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_INFO Derivation Path : Comments : The basic send constraint for the cc_info PDU, for either outgoing or incoming call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_cc_info | M |
| location_area | OMIT | O |
| network_assigned_id | OMIT | O |
| facility | OMIT | O |
| progress_indicator | OMIT | N |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| multi_keypad | OMIT | O |
| single_keypad | OMIT | O |
| signal | OMIT | N |
| feature_activate | OMIT | O |
| feature_indicate | OMIT | N |
| network_parameter | OMIT | N |
| called_party_number | OMIT | O |
| called_party_subaddress | OMIT | O |
| sending_complete | OMIT | O |
| test_hook_control | OMIT | N |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------|
| Constraint Name : Cc_info_tx01(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : Cc_info_tx_base. | | |
| Comments : A derived send constraint for the cc_info PDU, for outgoing call , specifying a multi-keypad ie, containing the basic dialled digits. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| multi_keypad | Multi_keypad_tx_basic | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|------------|
| Constraint Name : Cc_info_tx02(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : Cc_info_tx_base. | | |
| Comments : A derived send constraint for the cc_info PDU, for outgoing call with the 'keypad'ie containing goto pulse. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| multi_keypad | Multi_keypad_tx_pulse | Goto pulse |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------------|
| Constraint Name : Cc_info_tx03(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : Cc_info_tx_base. | | |
| Comments : A derived send constraint for the cc_info PDU, for outgoing call with the 'keypad'ie containing dialling pause | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| multi_keypad | Multi_keypad_tx_pause | Dialling pause |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|--------------------------------|
| Constraint Name : Cc_info_tx04(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : Cc_info_tx_base. | | |
| Comments : A derived send constraint for the cc_info PDU, for outgoing call with the 'keypad'ie containing goto DTMF, defined tone length. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| multi_keypad | Multi_keypad_tx_dtmf_defined | goto DTMF, defined tone length |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|---------------------------------|
| Constraint Name : Cc_info_tx05(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : Cc_info_tx_base. | | |
| Comments : A derived send constraint for the cc_info PDU, for outgoing call with the 'keypad'ie containing goto DTMF, infinite tone length. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| multi_keypad | Multi_keypad_tx_dtmf_infinite | goto DTMF, infinite tone length |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Cc_info_tx06(tv_ : BIT_3; tf_ : BIT_1; param : DECT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : | | |
| Comments : A second base constraint for the CC_INFO PDU, for either outgoing or incoming call, specifying a parameterized digit in the multi-keypad ie. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_cc_info | M |
| location_area | OMIT | O |
| network_assigned_id | OMIT | O |
| facility | OMIT | O |
| progress_indicator | OMIT | N |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| multi_keypad | Multi_keypad_tx_param(param) | O |
| single_keypad | OMIT | O |
| signal | OMIT | N |
| feature_activate | OMIT | O |
| feature_indicate | OMIT | N |
| network_parameter | OMIT | N |
| called_party_number | OMIT | O |
| called_party_subaddress | OMIT | O |
| sending_complete | OMIT | O |
| test_hook_control | OMIT | N |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Cc_info_tx07(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_INFO | | |
| Derivation Path : Cc_info_tx_base. | | |
| Comments : A derived send constraint for the cc_info PDU, for outgoing call , specifying a multi-keypad ie, containing the digits 1 to 4. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| multi_keypad | Multi_keypad_tx_1234 | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-------------------------------------|----------|
| Constraint Name : Cc_notify_rx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_NOTIFY Derivation Path : Comments : The base receive constraint for the cc_notify PDU | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_notify | M |
| timer_restart | Timer_restart_rx_base IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|---|----------|
| Constraint Name : Cc_out_of_scope_pdu_rx(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_OUT_OF_SCOPE Derivation Path : Comments : For any CC PDU which is out of scope acc. to ETS 300 444 | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | |
| message_type | (TSC_mt_iwu_info, TSC_mt_cc_service_change, TSC_mt_cc_service_accept, TSC_mt_cc_service_reject, TSC_mt_facility, TSC_mt_hold, TSC_mt_hold_ack, TSC_mt_hold_reject, TSC_mt_retrieve, TSC_mt_retrieve_ack, TSC_mt_retrieve_reject) | |
| contents | * | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|------------------------------------|
| Constraint Name : Cc_release_rx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_RELEASE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the cc_release PDU, for either outgoing or incoming call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_release | M |
| release_reason | Release_reason_rx_base IF_PRESENT | O |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O (version 2 of ETS 300 175-5 [5]) |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|------------------------------------|
| Constraint Name : Cc_release_tx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_RELEASE | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the cc_release PDU, for either outgoing or incoming call. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_cc_release | M |
| release_reason | OMIT | O |
| facility | OMIT | N |
| progress_indicator | OMIT | O (version 2 of ETS 300 175-5 [5]) |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| feature_indicate | OMIT | N |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|-----------------|
| Constraint Name : Cc_release_tx01(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_RELEASE | | |
| Derivation Path : Cc_release_tx_base. | | |
| Comments : The derived send constraint for the cc_release PDU, for either outgoing or incoming call with <<release reason>>ie containing partial release. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| release_reason | Release_reason_partial_release | Partial release |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--|------------------------------------|
| Constraint Name : Cc_release_com_rx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_RELEASE_COM | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the cc_release_com PDU, for either outgoing or incoming call NOT COMPLETED | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_release_com | M |
| release_reason | Release_reason_rx_base IF_PRESENT | O |
| identity_type | (Identity_type_rx_base, Identity_type_rx_empty) IF_PRESENT | O |
| location_area | (Location_area_rx_base, Location_area_rx_empty) IF_PRESENT | O |
| iwu_attributes | (Iwu_attributes_rx_base, Iwu_attributes_rx_empty) IF_PRESENT | O |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O (version 2 of ETS 300 175-5 [5]) |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| network_parameter | (Network_parameter_rx_base, Network_parameter_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|------------------------------------|
| Constraint Name : Cc_release_com_tx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_RELEASE_COM | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the cc_release_com PDU, for either outgoing or incoming call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_cc_release_com | M |
| release_reason | OMIT | O |
| identity_type | OMIT | N |
| location_area | OMIT | N |
| iwu_attributes | OMIT | O |
| facility | OMIT | O (version 2 of ETS 300 175-5 [5]) |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| feature_indicate | OMIT | N |
| network_parameter | OMIT | N |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---------------------------------|----------|
| Constraint Name : Cc_service_change_rx_base(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SERVICE_CHANGE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the cc_service_change PDU, for either incoming call or outgoing call | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_service_change | M |
| portable_id | Portable_id_rx_base | M |
| service_change_info | Service_change_info_rx_base | M |
| repeat_indicator | * | O |
| connection_attributes | * | O |
| connection_id | * | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Cc_service_change_tx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_SERVICE_CHANGE Derivation Path : Comments : The basic send constraint for the cc_service_change PDU, for either incoming call or outgoing call (to be completed) | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | |
| message_type | TSC_mt_cc_service_change | |
| portable_id | OMIT | |
| service_change_info | OMIT | |
| repeat_indicator | OMIT | |
| connection_attributes | OMIT | |
| connection_id | OMIT | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|---|---|
| Constraint Name : Cc_setup_rx_base(tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the cc_setup PDU, for incoming call. Note that the Network header constraint allows any TV to occur. The TV value will be assigned in the testcase. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut_any_tv(tf_) | M |
| message_type | TSC_mt_cc_setup | M |
| portable_id | Portable_id_rx_base | M |
| fixed_id | Fixed_id_rx_base | M |
| basic_service | Basic_service_rx_base | M |
| | | The Basic_service_rx_base constraint will specify 'default attributes', so lwu_attributes and call attributes and end_to_end_compatibility are not allowed. |
| iwu_attributes | OMIT | O (default attributes) |
| repeat_indicator_1 | OMIT | O (default attributes) |
| call_attributes | OMIT | O (default attributes) |
| repeat_indicator_2 | OMIT | O (default attributes) |
| connection_attributes | OMIT | O (only in advanced MAC connections) |
| cipher_info | (Cipher_info_rx_base, Cipher_info_rx_empty) IF_PRESENT | O |
| connection_id | OMIT | O (only in advanced MAC connections) |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| multi_keypad | OMIT | N |
| single_keypad | OMIT | N |
| signal | Signal_rx_base IF_PRESENT | O |
| feature_activate | OMIT | N |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| network_parameter | OMIT | N |
| terminal_capability | OMIT | N |
| end_to_end_compatibility | OMIT | O (default attributes) |
| rate_parameters | OMIT | O (data services only) |
| transit_delay | OMIT | O (data services only) |
| window_size | OMIT | O (data services only) |
| calling_party_number | (Calling_party_number_rx_base, Calling_party_number_rx_empty) IF_PRESENT | O |

Continued on next page

Continued from previous page

| PDU Constraint Declaration | | |
|----------------------------|--|----------|
| Field Name | Field Value | Comments |
| called_party_number | (Called_party_number_rx_base, Called_party_number_rx_empty) IF_PRESENT | O |
| called_party_subaddress | (Called_party_subaddress_rx_base, Called_party_subaddress_rx_empty) IF_PRESENT | O |
| sending_complete | Sending_complete IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------------------|----------|
| Constraint Name : Cc_setup_rx01(tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_rx_base. | | |
| Comments : A receive constraint for the cc_setup PDU, for incoming call. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut_any_tv(tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_rx_base | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-----------------------------------|----------|
| Constraint Name : Cc_setup_rx03(tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_rx_base. | | |
| Comments : A derived constraint for the cc_setup PDU, for incoming call with <<signal>>ie containing alerting. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut_any_tv(tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_rx_base | 1) |
| signal | Signal_rx_alerting | |
| Detailed Comments : 1) The Basic_service_rx_base constraint will specify 'default attributes', so Iwu_attributes and call attributes are not allowed. | | |

| PDU Constraint Declaration | | |
|---|-----------------------------------|----------|
| Constraint Name : Cc_setup_rx04(tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_rx_base. | | |
| Comments : A receive constraint for the cc_setup PDU, for incoming call, specifying a calling party number ie to be present. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut_any_tv(tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| calling_party_number | Calling_party_number_rx_base | |
| sending_complete | Sending_complete | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------------------|----------|
| Constraint Name : Cc_setup_rx05(tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_rx_base. | | |
| Comments : A receive constraint for the cc_setup PDU, for incoming call. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut_any_tv(tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| signal | OMIT | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------------------------------|
| Constraint Name : Cc_setup_tx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_SETUP Derivation Path : Comments : The basic send constraint for the cc_setup PDU, for outgoing call. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| message_type | TSC_mt_cc_setup | M |
| portable_id | OMIT | M (t.b.s. in derived constraint) |
| fixed_id | OMIT | M (t.b.s. in derived constraint) |
| basic_service | OMIT | M (t.b.s. in derived constraint) |
| iwu_attributes | OMIT | O |
| repeat_indicator_1 | OMIT | O |
| call_attributes | OMIT | O |
| repeat_indicator_2 | OMIT | O |
| connection_attributes | OMIT | O |
| cipher_info | OMIT | O |
| connection_id | OMIT | O |
| facility | OMIT | O |
| progress_indicator | OMIT | N |
| multi_display | OMIT | N |
| single_display | OMIT | N |
| multi_keypad | OMIT | O |
| single_keypad | OMIT | O |
| signal | OMIT | N |
| feature_activate | OMIT | O |
| feature_indicate | OMIT | N |
| network_parameter | OMIT | O |
| terminal_capability | OMIT | O |
| end_to_end_compatibility | OMIT | O |
| rate_parameters | OMIT | O |
| transit_delay | OMIT | O |
| window_size | OMIT | O |
| calling_party_number | OMIT | O |
| called_party_number | OMIT | O |
| called_party_subaddress | OMIT | O |
| sending_complete | OMIT | O |
| iwu_to_iwu | OMIT | O |
| iwu_packet | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------|
| Constraint Name : Cc_setup_tx01(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for outgoing call. No called party number included. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_default | 1) |
| Detailed Comments : 1) The Basic_service_tx_default constraint specifies 'basic speech default attributes', so lwu_attributes, call attributes and end_to_end_compatibility are not allowed. | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------|
| Constraint Name : Cc_setup_tx02(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for outgoing call with a called party number. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_default | 1) |
| called_party_number | Called_party_number_tx_pixit | |
| sending_complete | Sending_complete | |
| Detailed Comments : 1) The Basic_service_tx_default constraint specifies 'basic speech default attributes', so lwu_attributes, call attributes and end_to_end_compatibility are not allowed. | | |

| PDU Constraint Declaration | | |
|--|----------------------------------|----------------|
| Constraint Name : Cc_setup_tx03(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for outgoing call with a called party number and the <<basic_service'>>ie containing emergency call. Portable type is IPEI | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipei | IPEI type |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_emergency | emergency call |
| called_party_number | Called_party_number_tx_emergency | |
| sending_complete | Sending_complete | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------------|----------------|
| Constraint Name : Cc_setup_tx04(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for outgoing call with a called party number and the <<basic_service>>ie containing emergency call. Portable type is IPUI | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipui | IPUI type |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_emergency | emergency call |
| called_party_number | Called_party_number_tx_emergency | |
| sending_complete | Sending_complete | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|----------------|
| Constraint Name : Cc_setup_tx05(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for outgoing call with the <<basic_service>>ie containing emergency call. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipei | IPEI type |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_emergency | emergency call |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|------------|
| Constraint Name : Cc_setup_tx06(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for outgoing call, specifying a <<multi-keypad>> ie with 'goto-pulse' | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_default | |
| multi_keypad | Multi_keypad_tx_pulse | Goto pulse |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Cc_setup_tx08(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint used for testing the behaviour of the IUT in case of an invalid message send. This constraint for the CC_SETUP PDU, has the mandatory information element 'basic_service' missing. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | OMIT | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------------------------|-----------------------------------|
| Constraint Name : Cc_setup_tx09(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint used for testing the behaviour of the IUT in case of an invalid message send. This constraint for the CC_SETUP PDU contains a mandatory <<basic_service>> with invalid value. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_lt(tv_, tf_) | M |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_invalid | call class = 111 (reserved value) |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------------|----------|
| Constraint Name : Cc_setup_tx11(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP | | |
| Derivation Path : Cc_setup_tx_base. | | |
| Comments : A derived send constraint for the cc_setup PDU, for incoming call, specifying a protocol discriminator value that is not supported by the IUT. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_unsupported(tv_, tf_) | |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_park | |
| basic_service | Basic_service_tx_default | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---|----------|
| Constraint Name : Cc_setup_ack_rx_base(tv_ : BIT_3; tf_ : BIT_1) PDU Type : CC_SETUP_ACK Derivation Path : Comments : The basic receive constraint for the cc_setup_ack PDU, for outgoing call. No progress indicator included | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| message_type | TSC_mt_cc_setup_ack | M |
| info_type | (Info_type_rx_base, Info_type_rx_empty) IF_PRESENT | O |
| portable_id | (Portable_id_ipui , Portable_id_empty) IF_PRESENT | O |
| fixed_id | (Fixed_id_rx_base, Fixed_id_rx_empty) IF_PRESENT | O |
| location_area | (Location_area_rx_base, Location_area_rx_empty) IF_PRESENT | O |
| call_attributes | (Call_attributes_rx_base, Call_attributes_rx_empty) IF_PRESENT | O |
| connection_id | (Connection_id_rx_base, Connection_id_rx_empty) IF_PRESENT | O |
| facility | (Facility_rx_base, Facility_rx_empty) IF_PRESENT | O |
| progress_indicator | (Progress_indicator_rx_base, Progress_indicator_rx_empty) IF_PRESENT | O |
| multi_display | (Multi_display_rx_base, Multi_display_rx_empty) IF_PRESENT | O |
| single_display | Single_display_rx_base IF_PRESENT | O |
| signal | Signal_rx_base IF_PRESENT | O |
| feature_indicate | (Feature_indicate_rx_base, Feature_indicate_rx_empty) IF_PRESENT | O |
| transit_delay | (Transit_delay_rx_base, Transit_delay_rx_empty) IF_PRESENT | O |
| window_size | (Window_size_rx_base, Window_size_rx_empty) IF_PRESENT | O |
| delimiter_request | Delimiter_request_rx_base IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| iwu_packet | (Iwu_packet_rx_base, Iwu_packet_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------------|--|
| Constraint Name : Cc_setup_ack_rx01(tv_ : BIT_3; tf_ : BIT_1) | | |
| PDU Type : CC_SETUP_ACK | | |
| Derivation Path : Cc_setup_ack_rx_base. | | |
| Comments : A derived receive constraint for the cc_setup_ack PDU, for outgoing call with the "progress indicator"ie containing inband information or appropriate pattern now available. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_cc_iut(tv_, tf_) | M |
| progress_indicator | Progress_indicator_rx_patt_avail | inband information or appropriate pattern now available. |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------|----------|
| Constraint Name : Ciss_any_pdu_rx | | |
| PDU Type : CISS_ANY_PDU | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for any CISS PDU | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_ciss_any_tf | |
| contents | * | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|----------------------------|----------|
| Constraint Name : Coms_any_pdu_rx | | |
| PDU Type : COMS_ANY_PDU | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for any COMS PDU | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_coms_any_tf | |
| contents | * | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|------------------------|----------|
| Constraint Name : Identity_reply_tx_base | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the IDENTITY_REPLY PDU | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_identity_reply | M |
| repeat_indicator_1 | OMIT | O |
| portable_id | OMIT | O |
| repeat_indicator_2 | OMIT | O |
| fixed_id | OMIT | O |
| repeat_indicator_3 | OMIT | O |
| network_assigned_id | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|------------------|----------|
| Constraint Name : Identity_reply_tx01 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : The derived send constraint for the IDENTITY_REPLY PDU | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|------------------|----------|
| Constraint Name : Identity_reply_tx02 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : The derived send constraint for the IDENTITY_REPLY PDU | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipei | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|------------------|----------|
| Constraint Name : Identity_reply_tx03 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : The derived send constraint for the IDENTITY_REPLY PDU, specifying a TPUI | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_tpui | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---------------|----------|
| Constraint Name : Identity_reply_tx04 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : The derived send constraint for the IDENTITY_REPLY PDU, specifying a PARK | | |
| Field Name | Field Value | Comments |
| fixed_id | Fixed_id_park | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|--------------|----------|
| Constraint Name : Identity_reply_tx05 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : A derived send constraint for the IDENTITY_REPLY PDU, specifying a fixed id with an ARI | | |
| Field Name | Field Value | Comments |
| fixed_id | Fixed_id_ari | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|------------------|----------|
| Constraint Name : Identity_reply_tx06 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : The derived send constraint for the IDENTITY_REPLY PDU, specifying a fixed id ARI + RPN | | |
| Field Name | Field Value | Comments |
| fixed_id | Fixed_id_ari_rpn | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|-----------------------|----------|
| Constraint Name : Identity_reply_tx07 | | |
| PDU Type : IDENTITY_REPLY | | |
| Derivation Path : Identity_reply_tx_base. | | |
| Comments : The derived send constraint for the IDENTITY_REPLY PDU, specifying the portable id IPUI, but with the Transaction Identifier flag set illegally to '0', | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | 1) |
| portable_id | Portable_id_ipui | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------------------------------|
| Constraint Name : Identity_request_rx_base | | |
| PDU Type : IDENTITY_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the IDENTITY_REQUEST PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_identity_request | M |
| repeat_indicator | OMIT | O |
| identity_type | Identity_type_rx_base | M (t.b.s. in derived constraint) |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------|----------|
| Constraint Name : Identity_request_rx01 | | |
| PDU Type : IDENTITY_REQUEST | | |
| Derivation Path : Identity_request_rx_base. | | |
| Comments : A derived receive constraint for the IDENTITY_REQUEST PDU, specifying a portable id, IPUI request. | | |
| Field Name | Field Value | Comments |
| identity_type | Identity_type_ipui | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-------------------------|----------------------------------|
| Constraint Name : Key_allocate_rx_base | | |
| PDU Type : KEY_ALLOCATE | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the KEY_ALLOCATE PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_key_allocate | M |
| allocation_type | Allocation_type_rx_base | M (t.b.s. in derived constraint) |
| rand | Rand_rx_base | M (t.b.s. in derived constraint) |
| rs | Rs_rx_base | M (t.b.s. in derived constraint) |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|-------------------------|----------|
| Constraint Name : Key_allocate_rx01 | | |
| PDU Type : KEY_ALLOCATE | | |
| Derivation Path : Key_allocate_rx_base. | | |
| Comments : A derived receive constraint for the KEY_ALLOCATE PDU, specifying DSAA in the allocation type. | | |
| Field Name | Field Value | Comments |
| allocation_type | Allocation_type_rx_dsaa | |
| rand | Rand_rx_base | |
| rs | Rs_rx_base | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------|----------------------------------|
| Constraint Name : Lce_page_response_tx_base | | |
| PDU Type : LCE_PAGE_RESPONSE | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the Lce_page_response PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_lce_dest | M |
| message_type | TSC_mt_lce_page_response | M |
| portable_id | OMIT | M (t.b.s. in derived constraint) |
| fixed_id | OMIT | O |
| network_assigned_id | OMIT | O |
| cipher_info | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------|----------|
| Constraint Name : Lce_page_response_tx01 | | |
| PDU Type : LCE_PAGE_RESPONSE | | |
| Derivation Path : Lce_page_response_tx_base. | | |
| Comments : The basic send constraint for the lce_page_response PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_lce_dest | |
| message_type | TSC_mt_lce_page_response | |
| portable_id | Portable_id_ipui | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------|----------|
| Constraint Name : Lce_page_response_tx02 | | |
| PDU Type : LCE_PAGE_RESPONSE | | |
| Derivation Path : Lce_page_response_tx_base. | | |
| Comments : A derived send constraint for the lce_page_response PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_lce_dest | |
| message_type | TSC_mt_lce_page_response | |
| portable_id | Portable_id_ipui_unknown | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|----------------------------------|----------|
| Constraint Name : Lce_page_reject_rx_base | | |
| PDU Type : LCE_PAGE_REJECT | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the lce_page_response PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_lce_ori | M |
| message_type | TSC_mt_lce_page_reject | M |
| portable_id | Portable_id_ipui | M |
| fixed_id | Fixed_id_rx_base IF_PRESENT | O |
| reject_reason | Reject_reason_rx_base IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|---------------------------|----------|
| Constraint Name : Lce_request_page_rx_base(param : LCE_HEADER) | | |
| PDU Type : LCE_REQUEST_PAGE | | |
| Derivation Path : | | |
| Comments : The basic constraint for the LCE_REQUEST_PAGE message The parameter indicates paging for CC services (with U-plane) or MM services (only C-plane) | | |
| Field Name | Field Value | Comments |
| lce_header | param | M |
| short_format_address | Short_frm_addr IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------------------------------|
| Constraint Name : Locate_accept_rx_base | | |
| PDU Type : LOCATE_ACCEPT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the LOCATE_ACCEPT PDU. An empty Portable id is present, no TPUI assignment is done. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_locate_accept | M |
| portable_id | Portable_id_rx_base | M (t.b.s. in derived constraint) |
| location_area | Location_area_rx_base | M (t.b.s. in derived constraint) |
| network_assigned_id | (Network_assigned_id_rx_base, Network_assigned_id_rx_empty) IF_PRESENT | O |
| duration | (Duration_rx_base, Duration_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------|
| Constraint Name : Locate_accept_rx01 | | |
| PDU Type : LOCATE_ACCEPT | | |
| Derivation Path : Locate_accept_rx_base. | | |
| Comments : A derived receive constraint for the LOCATE_ACCEPT PDU. It can be with or without TPUI assignment. (empty portable_id) | | |
| Field Name | Field Value | Comments |
| portable_id | (Portable_id_empty, Portable_id_tpui) | 1) |
| location_area | Location_area_tx_lal_only | |
| Detailed Comments : 1) Either with or without TPUI assignment | | |

| PDU Constraint Declaration | | |
|---|--|----------|
| Constraint Name : Locate_reject_rx_base | | |
| PDU Type : LOCATE_REJECT | | |
| Derivation Path : | | |
| Comments : The basic receive constraint for the LOCATE_REJECT PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_dest | M |
| message_type | TSC_mt_locate_reject | M |
| reject_reason | (Reject_reason_rx_base, Reject_reason_rx_empty) IF_PRESENT | O |
| duration | (Duration_rx_base, Duration_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|---------------------------|----------|
| Constraint Name : Locate_request_tx_base | | |
| PDU Type : LOCATE_REQUEST | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the locate_request PDU | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_locate_request | M |
| portable_id | Portable_id_ipui | M |
| fixed_id | Fixed_id_ari_rpn | M |
| location_area | Location_area_tx_lal_only | M |
| network_assigned_id | OMIT | O |
| cipher_info | OMIT | O |
| setup_capability | OMIT | O |
| terminal_capability | OMIT | O |
| iwu_to_iwu | OMIT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---------------------------|----------|
| Constraint Name : Locate_request_tx01 | | |
| PDU Type : LOCATE_REQUEST | | |
| Derivation Path : Locate_request_tx_base. | | |
| Comments : A derived send constraint for the locate_request PDU. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui | |
| fixed_id | Fixed_id_ari_rpn | |
| location_area | Location_area_tx_lal_only | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|---|---------------------------|----------|
| Constraint Name : Locate_request_tx02 | | |
| PDU Type : LOCATE_REQUEST | | |
| Derivation Path : Locate_request_tx_base. | | |
| Comments : A derived send constraint for the locate_request PDU with the <<portable id>>ie containig unknown IPUI. | | |
| Field Name | Field Value | Comments |
| portable_id | Portable_id_ipui_unknown | |
| fixed_id | Fixed_id_ari_rpn | |
| location_area | Location_area_tx_lal_only | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--|----------------------------------|
| Constraint Name : Mm_info_suggest_rx_base | | |
| PDU Type : MM_INFO_SUGGEST | | |
| Derivation Path : | | |
| Comments : The basic send constraint for the MM_INFO_SUGGEST PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_mm_info_suggest | M |
| info_type | Info_type_rx_locate_suggest | M (t.b.s. in derived constraint) |
| fixed_id | (Fixed_id_rx_base, Fixed_id_rx_empty) IF_PRESENT | O |
| location_area | (Location_area_rx_base, Location_area_rx_empty) IF_PRESENT | O |
| network_assigned_id | (Network_assigned_id_rx_base, Network_assigned_id_rx_empty) IF_PRESENT | O |
| network_parameter | (Network_parameter_rx_base, Network_parameter_rx_empty) IF_PRESENT | O |
| iwu_to_iwu | (Iwu_to_iwu_rx_base, Iwu_to_iwu_rx_empty) IF_PRESENT | O |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|---|----------|
| Constraint Name : Mm_out_of_scope_pdu_rx PDU Type : MM_OUT_OF_SCOPE Derivation Path : Comments : For any MM PDU which is out of scope acc. to ETS 300 444 | | |
| Field Name | Field Value | Comments |
| network_header | (Network_header_mm_dest, Network_header_mm_ori) | |
| message_type | (TSC_mt_mm_info_request, TSC_mt_mm_info_accept, TSC_mt_mm_info_reject, TSC_mt_detach, TSC_mt_temporary_id_assign) | |
| contents | * | |
| Detailed Comments : | | |

| PDU Constraint Declaration | | |
|--|--------------------------------|----------|
| Constraint Name : Temporary_id_assign_ack_tx_base PDU Type : TEMPORARY_ID_ASSIGN_ACK Derivation Path : Comments : The basic constraint for the TEMPORARY_ID_ASSIGN_ACK PDU. | | |
| Field Name | Field Value | Comments |
| network_header | Network_header_mm_ori | M |
| message_type | TSC_mt_temporary_id_assign_ack | M |
| Detailed Comments : | | |

IV

Dynamic Part

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|---|---------|----------|
| Test Case Name : TC_FT_CC_BV_OC_01 Group : FT/CC/BV/OC/ Purpose : Verify that the IUT is able to perform a CC-state transition from state F-00 to state F-10 for an outgoing normal call, using the piece-wise method to transfer dialling information. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 The CC-SETUP message does not contain a called party number. The called party number information is saved in TSPX_called_party_number ETS 300 175-5 [5], subclauses 9.3.1.4 and 9.3.1.6 – ETS 300 444 [10], subclause 8.1 figure 1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | 1) |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_originated) | | | 3) |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx01(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind (Cc_setup_ack_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 4) |
| 7 | | START T_P_CC_04 | | | |
| 8 | | +STP_send_called_party_number(TSPX_nr_of_digits_in_cpn) | | | 5) |
| 9 | B2 | DLS ? DL_DATA_IND | DI_data_ind (Cc_call_proc_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 6) |
| 10 | B3 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 7) |
| 11 | | +STP_invoke_cc_connect | | | |
| 12 | B4 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 8) |
| 13 | | +STP_check_u_plane(TS PX_dlei_value) | | | 9) |
| 14 | | +PO_normal_release | | | |
| 15 | B5 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 8) |
| 16 | | +STP_check_u_plane(TSPX_ dlei_value) | | | 9) |
| 17 | | +PO_normal_release | | | |

Continued on next page

Continued from previous page

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|---|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 18 | B6 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 7) |
| 19 | | +STP_invoke_cc_connect | | | |
| 20 | B7 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 8) |
| 21 | | +STP_check_u_plane(TSP X_dlei_value) | | | 9) |
| 22 | | +PO_normal_release | | | |
| 23 | B8 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 10) |
| 24 | | +STP_check_u_plane(TSPX_d ei_value) | | | |
| 25 | | +PO_normal_release | | | |
| 26 | B9 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 10) |
| 27 | | +STP_check_u_plane(TSPX_dlei_v alue) | | | |
| 28 | | +PO_normal_release | | | |
| <p>Detailed Comments :</p> <ol style="list-style-type: none"> 1) Start a PT initiated direct link establishment. 2) Send CC-SETUP, without called party number. 3) Initialise the transaction flag to 'LT originated' 4) Wait for the CC-SETUP-ACK to arrive. 5) This teststep sends the called party number to the IUT, in successive CC-INFO's, containing a multi-keypad uie with one digit. The actual called party number is specified in the PIXIT. 6) Send CC-CALL-PROC. 7) Send CC-ALERTING. 8) Send CC-CONNECT. 9) Check U-plane connection 10) The FT can also send back CC-CONNECT right away. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_OC_02
Group : FT/CC/BV/OC/
Purpose : Verify that the IUT is able to perform a CC-state transition from state F-00 to state F-10 for an outgoing normal call set-up with en-block dialling in {CC-SETUP} message.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclauses 9.3.1.4 and 9.3.1.6
NO GAP!

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|---|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_terminated) | | | |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx02(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind (Cc_call_proc_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 7 | | START T_P_CC_04 | | | |
| 8 | B2 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 9 | | +STP_invoke_cc_connect | | | |
| 10 | B3 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 11 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 12 | | +PO_normal_release | | | |
| 13 | B4 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 14 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 15 | | +PO_normal_release | | | |
| 16 | B5 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 17 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 18 | | +PO_normal_release | | | |

Detailed Comments : 1) Cc_Setup with 'calling_party_number"ie

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_OC_03
Group : FT/CC/BV/OC/
Purpose : Verify that the IUT is able, prior to subscription, to perform a CC-state transition from state F-00 to state F-10 for an outgoing emergency call set-up with en-block dialling in {CC-SETUP} message.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclauses 9.3.1
NO GAP!

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|---|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_terminated) | | | |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx03(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind (Cc_call_proc_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 7 | | START T_P_CC_04 | | | |
| 8 | B2 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 9 | | +STP_invoke_cc_connect | | | |
| 10 | B3 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 11 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 12 | | +PO_normal_release | | | |
| 13 | B4 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 14 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 15 | | +PO_normal_release | | | |
| 16 | B5 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 17 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 18 | | +PO_normal_release | | | |

Detailed Comments : 1) Cc_Setup with a <<calling_party_number>>ie, a portable_id>>ie containing ipei-type and an <<basic_service'>>ie containing emergency call.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|---|---------|----------|
| Test Case Name : TC_FT_CC_BV_OC_04 Group : FT/CC/BV/OC/ Purpose : Verify that the IUT is able, when it has a subscription record for the requesting PT, to perform a CC-state transition from the F-00 state to F-10 state for an outgoing emergency call set-up with en-block dialling in {CC-SETUP} message. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 ETS 300 175-5 [5], subclauses 9.3.1 NO GAP! | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_originated) | | | |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx04(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind (Cc_call_proc_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 7 | | START T_P_CC_04 | | | |
| 8 | B2 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 9 | | +STP_invoke_cc_connect | | | |
| 10 | B3 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 11 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 12 | | +PO_normal_release | | | |
| 13 | B4 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 14 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 15 | | +PO_normal_release | | | |
| 16 | B5 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 17 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 18 | | +PO_normal_release | | | |
| 19 | | START T_P_CC_04 | | | |

Continued on next page

Continued from previous page

| |
|------------------------------------|
| Test Case Dynamic Behaviour |
|------------------------------------|

| |
|---|
| Detailed Comments : 1) Cc_Setup with a <<calling_party_number>>ie, a portable_id>>ie containing ipui-type and an <<basic_service'>>ie containing emergency call. |
|---|

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|---|---------|----------|
| Test Case Name : TC_FT_CC_BV_OC_05 Group : FT/CC/BV/OC/ Purpose : Verify that the IUT is able, prior to subscription, to perform a CC-state transition from state F-00 to state F-10 for an outgoing emergency call set-up with piece-wise dialling. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 NO GAP! The cc_setup message contains emergency call but doesn't contain a called party number. The TSPX_nr_of_digits_in_cpn parameter really defines the number of cc_info messages containing multi-keypad information elements that are going to be send. The keypad information are to be saved in TSPX_multi_keypad_value_n[max=14]. ETS 300 175-5 [5], subclauses 9.3.1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_originated) | | | |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx05(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind (Cc_setup_ack_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 7 | | START T_P_CC_04 | | | |
| 8 | | +STP_send_called_party_number(TSPX_nr_of_digits_in_cpn) | | | 2) |
| 9 | B2 | DLS ? DL_DATA_IND | DI_data_ind (Cc_call_proc_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 10 | B3 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 11 | | +STP_invoke_cc_connect | | | |
| 12 | B4 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 13 | | +STP_check_u_plane(TS PX_dlei_value) | | | |
| 14 | | +PO_normal_release | | | |
| 15 | B5 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 16 | | +STP_check_u_plane(TSPX_ dlei_value) | | | |
| 17 | | +PO_normal_release | | | |

Continued on next page

Continued from previous page

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|---|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 18 | B6 | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 19 | | +STP_invoke_cc_connect | | | |
| 20 | B7 | DLS ? DL_DATA_IND CANCEL T_P_CC_04, CANCEL T_USER_INVOKE | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 21 | | +STP_check_u_plane(TSP X_dlei_value) | | | |
| 22 | | +PO_normal_release | | | |
| 23 | B8 | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 24 | | +STP_check_u_plane(TSPX_d ei_value) | | | |
| 25 | | +PO_normal_release | | | |
| 26 | B9 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 27 | | +STP_check_u_plane(TSPX_dlei_v alue) | | | |
| 28 | | +PO_normal_release | | | |
| Detailed Comments : 1) CC-SETUP PDU contains Basic service for emergency call. 2) This teststep sends the called party number to the IUT, in successive CC-INFO's, containing a multi-keypad uie with one digit. The actual called party number is specified in the PIXIT. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| Test Case Name : TC_FT_CC_BV_IC_01 Group : FT/CC/BV/IC/ Purpose : Verify that the IUT is able to perform an incoming call via the states F-06 and F-07 to the state F-10. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: T-00 ETS 300 175-5 [5], subclause 9.3.2 – ETS 300 444 [10], subclause 8.11 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | | +STP_initialise_tf(TSC_iut_terminated) | | | |
| 5 | B1 | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.transaction_value) CANCEL T_USER_INVOKE | DI_data_ind(Cc_setup_rx05(TCV_cc_iut_tf)) | (PASS) | 1) |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_alerting_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 7 | B2 | DLS ? DL_DATA_IND | DI_data_ind(Cc_info_rx01(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 2) |
| 8 | | DLS ! DL_DATA_REQ START T_P_CC_05 | DI_data_req(Cc_connect_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 9 | B3 | DLS ? DL_DATA_IND CANCEL T_P_CC_05 | DI_data_ind(Cc_connect_ack_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 10 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 11 | | +PO_normal_release | | | |
| 12 | B4 | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.transaction_value) CANCEL T_USER_INVOKE | DI_data_ind(Cc_setup_rx03(TCV_cc_iut_tf)) | (PASS) | 3) |
| 13 | | +STP_initialise_tf(TSC_iut_terminated) | | | |
| 14 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_alerting_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |

Continued on next page

Continued from previous page

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---------------------------------------|---|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 15 | | DLS ! DL_DATA_REQ START T_P_CC_05 | DI_data_req(Cc_connect_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 16 | B5 | DLS ? DL_DATA_IND CANCEL T_P_CC_05 | DI_data_ind(Cc_connect_ack_rx_base (TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 17 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 18 | | +PO_normal_release | | | |
| Detailed Comments : 1) Cc_Setup without <<signal>>ie can be received. 2) Cc_Info with <<signal>>ie is expected. 3) Cc_Setup with <<signal>>ie can be received. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---------------------------------------|---|---------|----------|
| Test Case Name : TC_FT_CC_BV_IC_02 | | | | | |
| Group : FT/CC/BV/IC/ | | | | | |
| Purpose : Verify that the IUT is able to perform an incoming call via state F-06 directly to the state F-10. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: F-00 ETS 300 175-5 [5], subclause 9.3.2 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f06 | | | 1) |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_05 | DI_data_req(Cc_connect_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_05 | DI_data_ind(Cc_connect_ack_rx_base (TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 2) |
| 4 | | +STP_check_u_plane(TSPX_dlei_value) | | | |
| 5 | | +PO_normal_release | | | |
| Detailed Comments : 1) Cc_Setup with <<signal>>ie. 2) The behaviour is valid according to ETS 300 175[5], but NOT according to the interworking in ETS 300 444[10] figure 29. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_01
Group : FT/CC/BV/CI/
Purpose : Verify that the IUT is able to send the <<signal>> information element in case of incoming call to the PT. This information element can either be in the {CC-SETUP} or in successive {CC-INFO} message.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclause 9.3.1 – ETS 300 444 [10], subclause 8.14

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|---|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | | +STP_initialise_tf(TSC_iut_terminated) | | | |
| 5 | B1 | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.transaction_value) | DI_data_ind(Cc_setup_rx03(TCV_cc_iut_tf)) | (PASS) | 1) |
| 6 | | +PO_normal_release | | | 2) |
| 7 | B2 | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.transaction_value) | DI_data_ind(Cc_setup_rx05(TCV_cc_iut_tf)) | (PASS) | 3) |
| 8 | B3 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind (Cc_setup_ack_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 9 | | START T_P_CC_04 | | | |
| 10 | | DLS ? DL_DATA_IND CANCEL T_P_CC_01 | DI_data_ind(Cc_info_rx0 1(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 4) |
| 11 | | +PO_normal_release | | | 5) |

Detailed Comments : 1) CC-SETUP with <<signal>> ie is received.
2) Test passes. Release call
3) CC-SETUP without <<signal>> ie is received.
4) CC-INFO with <<signal>> ie is received
5) Test passes. Release call

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_02
Group : FT/CC/BV/CI/
Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '12'H (goto pulse), the IUT from that moment on transfers dialling information to the network simulator, using pulse (decadic) dialling (feature N.23 in ETS 300 444).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---------------------------------------|--|---------|----------|
| 1 | | +PR_goto_f02 | | | |
| 2 | | DLS ! DL_DATA_REQ CANCEL T_P_CC_04 | DI_data_req(Cc_info_tx0 2(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_check_pulse | | | |
| 5 | | +PO_normal_release | | | 3) |

Detailed Comments : 1) Cc_info with <<multi_keypad>>ie containing goto pulse is to send.
2) Now send the digits 1 to 4, in order to check if the network has correctly switched to pulse dialling.
3) Perform a normal release.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---------------------------------------|--|---------|----------|
| Test Case Name : TC_FT_CC_BV_CI_04 Group : FT/CC/BV/CI/ Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '05H' (dialling pause), it sends a dialling pause to the network simulator (feature N.7 in ETS 300 444). Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-02 ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f02 | | | |
| 2 | | DLS ! DL_DATA_REQ CANCEL T_P_CC_04 | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 3(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 3) |
| 5 | | +STP_check_pause | | | 4) |
| 6 | | +PO_normal_release | | | |
| Detailed Comments : 1) Send the digits 1 to 4 to the IUT 2) Send a pause digit 3) Again, send the digits 1 to 4 to the IUT. 4) Check that the pause digit is received by the network simulator. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_05
Group : FT/CC/BV/CI/
Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '05H' (dialling pause), it sends a dialling pause to the network simulator (feature N.7 in ETS 300 444).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-10
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|-----------------------|--|---------|----------|
| 1 | | +PR_goto_f10 | | | |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 3(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 3) |
| 5 | | +STP_check_pause | | | 4) |
| 6 | | +PO_normal_release | | | |

Detailed Comments : 1) Send the digits 1 to 4 to the IUT
2) Send a pause digit
3) Again, send the digits 1 to 4 to the IUT.
4) Check the network simulator of the pause digits is received.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_06
Group : FT/CC/BV/CI/
Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '14H' (goto DTMF, defined tone length), the IUT from that moment on transfers dialling information to the network simulator, using DTMF with defined tone length (feature N.6 in ETS 300 444).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---------------------------------------|--|---------|----------|
| 1 | | +PR_goto_f02 | | | |
| 2 | | DLS ! DL_DATA_REQ CANCEL T_P_CC_04 | DI_data_req(Cc_info_tx0 4(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_check_dtmf_defined | | | |
| 5 | | +PO_normal_release | | | 3) |

Detailed Comments : 1) Cc_info with <<multi_keypad>>ie containing dtmf defined tone length.
2) Now send the digits 1 to 4, in order to check if the network has correctly switched to dtmf dialling.
3) Perform a normal release.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_07
Group : FT/CC/BV/CI/
Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '14H' (goto DTMF, defined tone length), the IUT from that moment on transfers dialling information to the network simulator, using DTMF with defined tone length (feature N.6 in ETS 300 444).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-10
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|-------------------------|--|---------|----------|
| 1 | | +PR_goto_f10 | | | |
| 2 | B1 | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 4(TCV_cc_tv, TCV_cc_lt_tf)) | (PASS) | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_check_dtmf_defined | | | |
| 5 | | +PO_normal_release | | | 3) |

Detailed Comments : 1) Cc_info with <<multi_keypad>>ie containing dtmf defined tone length.
2) Now send the digits 1 to 4, in order to check if the network has correctly switched to dtmf dialling.
3) Perform a normal release.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_08
Group : FT/CC/BV/CI/
Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '16H' (goto DTMF, infinite tone length), the IUT from that moment on transfers dialling information to the network simulator, using DTMF with infinite tone length (feature N.22 in ETS 300 444).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---------------------------------------|--|---------|----------|
| 1 | | +PR_goto_f02 | | | |
| 2 | | DLS ! DL_DATA_REQ CANCEL T_P_CC_04 | DI_data_req(Cc_info_tx0 5(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_check_dtmf_infinite | | | |
| 5 | | +PO_normal_release | | | 3) |

Detailed Comments : 1) Cc_info with <<multi_keypad>>ie containing dtmf infinite tone length.
2) Now send the digits 1 to 4, in order to check if the network has correctly switched to dtmf dialling.
3) Perform a normal release.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CI_09
Group : FT/CC/BV/CI/
Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing keypad-info '16H' (goto DTMF, infinite tone length), the IUT from that moment on transfers dialling information to the network simulator, using DTMF with infinite tone length (feature N.22 in ETS 300 444).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-10
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--------------------------|--|---------|----------|
| 1 | | +PR_goto_f10 | | | |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 5(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 7(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_check_dtmf_infinite | | | |
| 5 | | +PO_normal_release | | | 3) |

Detailed Comments : 1) Cc_info with <<multi_keypad>>ie containing dtmf infinite tone length.
2) Now send the digits 1 to 4, in order to check if the network has correctly switched to dtmf dialling.
3) Perform a normal release.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|-------------------------|--|---------|----------|
| Test Case Name : TC_FT_CC_BV_CI_10 Group : FT/CC/BV/CI/ Purpose : Verify that when the IUT receives a {CC-INFO} message with a <<MULTI-KEYPAD>> information element containing the basic digits (0-9, star, hash mark), it transfers this information correctly to the network simulator (feature N.4 in ETS 300 444). Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-10 ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.10, table 20 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f10 | | | |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 4(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx0 1(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_check_basic_digits | | | 3) |
| 5 | | +PO_normal_release | | | |
| Detailed Comments : 1) Go To DTMF 2) Cc_info_tx01 specifies a multi-keypad ie, containing the basic digits. 3) Check if the baisc dialled digits are transferred correctly to the network simulator | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_01 Group : FT/CC/BV/CR/ Purpose : Verify that the IUT is able to perform an IUT initiated normal release. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-02 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.7 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f02 | | | |
| 2 | | CANCEL T_P_CC_04 | | | |
| 3 | | +STP_cc_release_normal (TSC_iut_originated) | | | 1) |
| 4 | | +PO_release_link | | | |
| Detailed Comments : 1) Call_Release is required by the IUT | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_02 | | | | | |
| Group : FT/CC/BV/CR/ | | | | | |
| Purpose : Verify that the IUT is able to perform an IUT initiated normal release. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: F-10 ETS 300 175[5], subclause 9.5.1 ETS 300 444[10], subclause 8.7 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f10 | | | |
| 2 | B1 | +STP_cc_release_normal(TSC_iut_originate d) | | | 1) |
| 3 | | +PO_release_link | | | |
| Detailed Comments : 1) Call is established by PT and Call_Release is required by the FT. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_03 | | | | | |
| Group : FT/CC/BV/CR/ | | | | | |
| Purpose : Verify that the IUT is able to perform an IUT initiated normal release. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: F-07 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.7 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f07 | | | |
| 2 | | +STP_cc_release_normal (TSC_iut_Originated) | | | 1) |
| 3 | | +PO_release_link | | | |
| Detailed Comments : 1) Call is established by the IUT and Call Release is required by the IUT also. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_04 Group : FT/CC/BV/CR/ Purpose : Verify that the IUT, after part of dialling information is sent, is able to perform a PT initiated normal release. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-02 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.7 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f02 | | | |
| 2 | | CANCEL T_P_CC_04 | | | |
| 3 | | +STP_send_called_party_number(TSPX_nr_of_digits_in_cpn - 1) | | | |
| 4 | | +STP_cc_release_normal (TSC_lt_terminated) | | | 1) |
| 5 | | +PO_release_link | | | |
| Detailed Comments : 1) Call is established by PT and Call_Release is required by the PT, also. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_05 Group : FT/CC/BV/CR/ Purpose : Verify that the IUT is able to perform a PT initiated normal release. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-10 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.7 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f10 | | | |
| 2 | B1 | +STP_cc_release_normal(TSC_lt_terminated) | | | |
| 3 | | +PO_release_link | | | |
| Detailed Comments : 1) Call is established by PT and Call_Release is required by the PT also. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_06 | | | | | |
| Group : FT/CC/BV/CR/ | | | | | |
| Purpose : Verify that the IUT is able to perform a PT initiated normal release. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: F-07 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.7 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f07 | | | |
| 2 | | +STP_cc_release_normal (TSC_lt_originated) | | | 1) |
| 3 | | +PO_release_link | | | |
| Detailed Comments : 1) Call is established by the IUT and Call_Release is required by the PT. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--------------------------|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_07 | | | | | |
| Group : FT/CC/BV/CR/ | | | | | |
| Purpose : Verify that the IUT is able to perform a PT initiated abnormal release. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: F-07 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.8 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f07 | | | |
| 2 | | CANCEL T_P_CC_01 | | | |
| 3 | | +STP_cc_release_abnormal | | | 1) |
| 4 | | +PO_release_link | | | |
| Detailed Comments : 1) Call is established by IUT and call release is required by the LT. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--------------------------|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_08 Group : FT/CC/BV/CR/ Purpose : Verify that the IUT is able to perform an PT initiated abnormal release. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-10 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.8 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f10 | | | |
| 2 | B1 | +STP_cc_release_abnormal | | | |
| 3 | | +PO_release_link | | | |
| Detailed Comments : 1) Call release is required by the LT | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--------------------------|-----------------|---------|----------|
| Test Case Name : TC_FT_CC_BV_CR_09 Group : FT/CC/BV/CR/ Purpose : Verify that the IUT is able to perform an PT initiated abnormal release. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-06 ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.8 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f06 | | | |
| 2 | | CANCEL T_P_CC_03 | | | |
| 3 | | +STP_cc_release_abnormal | | | 1) |
| 4 | | +PO_release_link | | | |
| Detailed Comments : 1) Call release is initiated by the LT. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BV_CR_10
Group : FT/CC/BV/CR/
Purpose : Verify that the IUT is able to perform a PT initiated partial release.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-10
ETS 300 175-5 [5], subclause 14.2.7 – ETS 300 444 [10], subclaus 8.9

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|-----------------|---------|----------|
| 1 | | +PR_goto_f10 | | | |
| 2 | | +STP_cc_release_partial (TSC_lt_originated) | | | 1) |
| 3 | | +STP_check_link_present | | | 2) |
| 4 | B1 | [TCV_result = TRUE] | | (PASS) | |
| 5 | | +PO_release_link | | | |
| 6 | B2 | [TCV_result = FALSE] | | (FAIL) | |
| 7 | | +PO_release_link | | | |

Detailed Comments : 1) CC-RELEASE containing RELEASE-REASON with release reason code '15'H (partial release) shall be sent.
2) After a partial release, the link should remain in place. This is tested with STP_check_link_present.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|---|---------|----------|
| <p>Test Case Name : TC_FT_CC_BV_RS_07</p> <p>Group : FT/CC/RS/</p> <p>Purpose : To verify the IUT is able to transmit the <<calling party number>> informatin element in the {{CC-SETUP} message providing the PP with the calling party number information before accepting the call (feature N.30).</p> <p>Configuration :</p> <p>Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : Initial state: F-00 ETS 300 175-5 [5], subclause 10.3 – ETS 300 323-1[44], subclause 6.3.3.4</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | B1 | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.transaction_value) | DI_data_ind(Cc_setup_rx04(TCV_cc_iut_tf)) | (PASS) | 1) |
| 5 | | +STP_cc_release_normal (TSC_iut_originated) | | | 2) |
| <p>Detailed Comments : 1) cc_setup with <<calling_party_number>> ie is expected. 2) Call is established by PT and Call_Release is required by the FT.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BO_01
Group : FT/CC/BO/
Purpose : Verify that the IUT ignores the unexpected message {CC-SETUP).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
After receiving of the Cc_Info_tx04 message the IUT shall to switch to dtmf, defined tone length.
The IUT may not change this mode after receiving an unexpected message Cc_setup with
<<keypad>>ie containing go to pulse. This requirement shall be tested in STP_check_dtmf_defined.
ETS 300 175-5 [5], subclause 17.4.1 – ETS 300 444 [10], subclause 6.9.4

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_goto_f02 | | | |
| 2 | | DLS ! DL_DATA_REQ CANCEL T_P_CC_04 | DI_data_req(Cc_info_tx04(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req(Cc_setup_tx06(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 4 | | +STP_send_called_party_number(TSPX_ nr_of_digits_in_cpn) | | | |
| 5 | | +STP_check_dtmf_defined | | | 3) |
| 6 | | +PO_normal_release | | | 4) |

Detailed Comments : 1) CC-INFO with <<multi_keypad>>ie containing defined tone length.
2) CC-SETUP with <<keypad>>ie containing go to pulse. The TI-Value in this CC-SETUP shall contain the same value as in the CC-SETUP used in PR_goto_f02.
3) The influence of the unexpected CC-SETUP is checked.
4) Release the call

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BO_02
Group : FT/CC/BO/
Purpose : Verify that the IUT is able to react correctly on a release collision, in the sense that upon reception of a {CC-RELEASE} message in state F-19, no {CC-RELEASE-COM} message is sent back, and the call is cleared.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: T-19
ETS 300 175-5 [5], subclause 9.5.3 – ETS 300 444 [10], subclause 8.7.2.1

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_goto_f19 | | | |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_02, CANCEL T_P_CC_04 | DI_data_req(Cc_release_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_02 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (FAIL) | 2) |
| 4 | | +PO_release_link | | | |
| 5 | B2 | ? TIMEOUT T_P_CC_02 | | (PASS) | 3) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) Release Collision
2) IUT sent back a CC_RELEASE_COM. Test fails.
3) No CC_RELEASE-COM message received from IUT, test ok

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BI_01
Group : FT/CC/BI/
Purpose : Verify that the IUT sends a {CC-RELEASE-COM} message.on receipt of a {CC-SETUP} message without a mandatory information element.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
The mandatory information element that is missing, is 'basic service'.
ETS 300 175-5 [5], subclause 17.6.1 – ETS 300 444 [10], subclause 6.9.4

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | +STP_initialise_tf(TSC_lt_terminated) | | | |
| 4 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx08(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 5 | | START T_P_CC_03 | | | |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 7 | | +PO_release_link | | | |

Detailed Comments : 1) In Cc_setup_tx08, there is the mandatory ie <<basic service>> missing.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| <p>Test Case Name : TC_FT_CC_BI_02 Group : FT/CC/BI/ Purpose : Verify that the IUT sends a {CC-RELEASE-COM} message.on receipt of a {CC-SETUP} message containing a mandatory information element with invalid contents. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 The mandatory ie <<basic service>> of Cc_Setup contains an invalid value. ETS 300 175-5 [5], subclause 17.6.2 – ETS 300 444 [10], subclause 6.9.4</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | +STP_initialise_tf(TSC_lt_terminated) | | | |
| 4 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx09(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 5 | | START T_P_CC_03 | | | |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 7 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Cc_setup_tx09 with mandatory ie <<basic service>> containing invalid value.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_BI_03
Group : FT/CC/BI/
Purpose : Verify that the IUT ignores an unrecognised message, constructed and a {CC-SETUP} but with one bit different in the <message type>.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclause 17.4.1 – ETS 300 444 [10], subclause 6.9.4
Cc_Setup contains wrong message type.

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Bi_cc_unrec_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 4 | | START T_P_CC_03 | | | |
| 5 | B1 | ? TIMEOUT T_P_CC_03 | | (PASS) | 2) |
| 6 | PO1 | +PR_goto_f10 | | | |
| 7 | | +STP_cc_release_normal(TSC_lt_o riginated) | | | |
| 8 | | +PO_release_link | | | |

Detailed Comments : 1) LT sends a {CC-SETUP} message with wrong <<message type>>
2) There is no answer from IUT expected.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|---|---------|----------|
| Test Case Name : TC_FT_CC_BI_04 Group : FT/CC/BI/ Purpose : Verify that the IUT ignores a message that is too short to contain a complete message type info element. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 ETS 300 175-5 [5], subclause 17.2 – ETS 300 444 [10], subclause 6.9.4 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Bi_cc_short_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 4 | | START T_P_CC_03 | | | |
| 5 | B1 | ? TIMEOUT T_P_CC_03 | | (PASS) | 2) |
| 6 | PO1 | +PR_goto_f10 | | | |
| 7 | | +STP_cc_release_normal(TSC_lt_o riginated) | | | |
| 8 | | +PO_release_link | | | |
| Detailed Comments : 1) LT sends a {CC-SETUP} message with too short <<message type>>ie. 2) There is no answer from IUT expected. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_TI_01
Group : FT/CC/TI/
Purpose : Verify that the IUT, after having started timer F-<CC.01>, sends a {CC-RELEASE} message when the timer expires after the defined time. The {CC-RELEASE} message should arrive within the allowed margin time of +- 5%.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.3.2.3

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f02 | | | |
| 2 | | START T_F_CC_01_min, START T_F_CC_01_max, CANCEL T_P_CC_04 | | | |
| 3 | B1 | ? TIMEOUT T_F_CC_01_min | | (PASS) | 1) |
| 4 | B2 | DLS ? DL_DATA_IND CANCEL T_F_CC_01_max | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 5 | | +PO_release_link | | | |
| 6 | B3 | ? TIMEOUT T_F_CC_01_max | | (FAIL) | 2) |
| 7 | | +STP_cc_release_abnormal | | | 3) |
| 8 | | +PO_release_link | | | |

Detailed Comments : 1) There is no Cc_release expected, before the Timer CC_01 has been expired.
2) The IUT shall send a Cc_release immediately after expiring of T_F_CC_01. The different between T_FF_CC_01_min and T_FF_CC_1_max is for the transmission time.
3) Abnormal Call_Release is required by the PT.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|--|---------|----------|
| Test Case Name : TC_FT_CC_TI_02 Group : FT/CC/TI/ Purpose : Verify that the IUT is able to restart the timer F-<CC.01>, on receipt of a {CC-INFO} message. Configuration : Default : DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-02 ETS 300 175-5 [5], subclause 9.3.1.5 – ETS 300 444 [10], subclause 8.3.2.3, figure 12 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f02 | | | |
| 2 | | START T_F_CC_01_half, CANCEL T_P_CC_04 | | | |
| 3 | B1 | ? TIMEOUT T_F_CC_01_half | | (PASS) | 1) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_info_tx07(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 5 | | START T_F_CC_01_min, START T_F_CC_01_max | | | |
| 6 | B3 | ? TIMEOUT T_F_CC_01_min | | (PASS) | 3) |
| 7 | B4 | DLS ? DL_DATA_IND CANCEL T_F_CC_01_max | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 8 | | +PO_release_link | | | |
| 9 | B5 | ? TIMEOUT T_F_CC_01_max | | (FAIL) | 4) |
| 10 | | +STP_cc_release_abnormal | | | 5) |
| 11 | | +PO_release_link | | | |
| Detailed Comments : 1) Wait 50 % of T_F_CC_01 in the state F_02. 2) Cc_info with <<multi_keypad>>ie containing 4 digits, in order to restart the IUT timer T_F_CC_01. 3) There is no Cc_release expected, before the Timer CC_01 has been expired. 4) The IUT shall send a Cc_release immediately after expiring of T_F_CC_01. The different between T_FF_CC_01_min and T_FF_CC_1_max is for the transmission time. 5) Abnormal Call_Release is required by the PT. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_CC_TI_03
Group : FT/CC/TI/
Purpose : Verify that the IUT, after having started timer F-<CC_02>, sends a {CC-RELEASE-COM} message when the timer expires after the defined time. The {CC-RELEASE-COM} message should arrive within the allowed margin time of +- 5%.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-19
ETS 300 175-5 [5], subclause 9.5.1 – ETS 300 444 [10], subclause 8.7.1.2

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f19 | | | |
| 2 | | CANCEL T_P_CC_04, START T_F_CC_02_min, START T_F_CC_02_max | | | |
| 3 | B1 | ? TIMEOUT T_F_CC_02_min | | (PASS) | 1) |
| 4 | B2 | DLS ? DL_DATA_IND CANCEL T_F_CC_02_max | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 5 | | +PO_release_link | | | |
| 6 | B3 | ? TIMEOUT T_F_CC_02_max | | (FAIL) | 2) |
| 7 | | +STP_cc_release_abnormal | | | 3) |
| 8 | | +PO_release_link | | | |

Detailed Comments : 1) There is no Cc_release expected, before the Timer CC_02 has been expired.
2) The IUT shall send a Cc_release immediately after expiring of T_F_CC_02. The different between T_FF_CC_02_min and T_FF_CC_2_max is for the transmission time.
3) Abnormal Call_Release is required by the PT.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|--|---------|----------|
| Test Case Name : TC_FT_CC_TI_04 Group : FT/CC/TI/ Purpose : Verify that the IUT, after having started timer F-<CC.03>, sends a {CC-RELEASE-COM} message when the timer expires after the defined time. The {CC-RELEASE-COM} message should arrive within the allowed margin time of +- 5%. Configuration : Default : DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-06 ETS 300 175-5 [5], subclause 9.3.2 – ETS 300 444 [10], subclause 8.12.1.1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f06 | | | |
| 2 | | START T_F_CC_03_min, START T_F_CC_03_max | | | |
| 3 | B1 | ? TIMEOUT T_F_CC_03_min | | (PASS) | 1) |
| 4 | B2 | DLS ? DL_DATA_IND CANCEL T_F_CC_03_max | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 5 | | +PO_release_link | | | |
| 6 | B3 | ? TIMEOUT T_F_CC_03_max | | (FAIL) | 2) |
| 7 | | +STP_cc_release_abnormal | | | 3) |
| 8 | | +PO_release_link | | | |
| Detailed Comments : 1) There is no Cc_release_com expected, before the Timer CC_03 has been expired. 2) The IUT shall send a Cc_release immediately after expiring of T_F_CC_03. The different between T_FF_CC_03_min and T_FF_CC_3_max is for the transmission time. 3) Abnormal Call_Release is required by the PT. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_ID_01
Group : FT/MM/BV/ID/
Purpose : Verify that when the basic IUT initiated identity request procedure is invoked on the IUT, the IUT is able to perform this procedure correctly.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Selected in PIXIT
ETS 300 175-5 [5], subclause 13.2.1 – ETS 300 444 [10], subclause 8.22

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_idpt_ccstate) | | | |
| 2 | | +STP_invoke_identity_req | | | 1) |
| 3 | B1 | DLS ? DL_DATA_IND(TCV_pdu_identy_request := DL_DATA_IND.message_unit, TCV_id_group := TCV_pdu_identy_request. identity_type.id_group, TCV_id_type := TCV_pdu_identy_request. identity_type.type) CANCEL T_USER_INVOKE | DI_data_ind(Identity_request_rx_base) | (PASS) | 2) |
| 4 | | +STP_handle_identity_request | | | 3) |
| 5 | | +PO_release_link | | | |

Detailed Comments : 1) Invoke Identity request message.
2) Receive Identity Request message and save the values of the relevant ies.
3) Send the correct Identity Reply message.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|--|---------|----------|
| <p>Test Case Name : TC_FT_MM_BV_AU_01</p> <p>Group : FT/MM/BV/AU/</p> <p>Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of the authentication of PT procedure (PT has not stored ZAP value and service class information).</p> <p>Configuration :</p> <p>Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : Initial state: Selected in PIXIT Note that the result of the PT authentication is not tested in this testcase. ETS 300 175-5 [5], subclause 13.3.1 – ETS 300 444 [10], subclause 8.24</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_aupt_ccstate) | | | 1) |
| 2 | | +STP_invoke_pt_authentication | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx01) | (PASS) | 2) |
| 4 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak)) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | 3) |
| 6 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established. 2) Authentication on UAK mandated, so UAK has to be present beforehand. 3) Copy calculated res field into reply message.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_AU_02
Group : FT/MM/BV/AU/
Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of the procedure incrementing the ZAP value, during the authentication of PT procedure (PT has stored ZAP value and service class information). PT will authenticate IUT before answering.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Selected in PIXIT
Note that the result of the PT authentication is not tested in this testcase.
ETS 300 175-5 [5], subclause 13.3.1 – ETS 300 444 [10], subclause 8.24

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_aupt_ccstate) | | | 1) |
| 2 | | +STP_invoke_pt_auth_with_zap | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx02) | (PASS) | 2) |
| 4 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak), TSV_dck_value := TSO_cinft_algos_dck_b1_a1(TCV_rand, TCV_rs, TSV_uak)) | | | |
| 5 | | +STP_perform_ft_authentication(Auth _request_tx01,Auth_reply_rx_base) | | | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx02(TCV_res_tx)) | | 3) |
| 7 | | +PO_release_link | | | |

Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established.
2) ZAP increment bit shall be set to 1.
3) Copy calculated res field into reply message. The Auth_reply message contains the incremented ZAP value.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| <p>Test Case Name : TC_FT_MM_BV_AU_03</p> <p>Group : FT/MM/BV/AU/</p> <p>Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of the authentication of user procedure (PT has not stored ZAP value and service class information).</p> <p>Configuration :</p> <p>Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : Initial state: Selected in PIXIT Note that the result of the user authentication is not tested in this testcase. ETS 300 175-5 [5], subclause 13.3.2 – ETS 300 444 [10], subclause 8.25</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_auus_ccstate) | | | 1) |
| 2 | | +STP_invoke_user_authentication | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx03) | (PASS) | 2) |
| 4 | | (TCV_res_tx_u := TSO_cinft_algosb2_a1(TCV_rand, TCV_rs, TSV_uak, TSO_cinft_convert_upi_to_bitstring(TS PX_decimal_upi_value)) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | 3) |
| 6 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established. 2) Authentication is based on UPI. ZAP increment bit shall not be set to 1. 3) Copy calculated upi_res field into reply message.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_AU_04

Group : FT/MM/BV/AU/

Purpose : Verify that the IUT is able to perform the basic operation of the authentication of FT procedure.

Configuration :

Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events

Comments : ETS 300 175-5 [5], subclause 13.3.3 – ETS 300 444 [10], subclause 8.23

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|-------------------------------------|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_auth_1 | | | 1) |
| 4 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx01) | | |
| 6 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_unit, TCV_res_rx := TCV_pdu_auth_reply.res.field) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx_base) | (PASS) | 2) |
| 7 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 8 | | (TCV_xres := TSO_cinft_algosb1_a2(TSC_rand , TSC_rs, TSV_uak)) | | | 3) |
| 9 | B2 | [TCV_xres = TCV_res_rx] | | (PASS) | |
| 10 | | +PO_release_link | | | |
| 11 | B3 | [TCV_xres <> TCV_res_rx] | | (FAIL) | |
| 12 | | +PO_release_link | | | |

Detailed Comments : 1) Start timer and initiated FT authentication.
2) Receive reply message
4) Calculate and check the received res value.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|--------------------------------------|---------|----------|
| Test Case Name : TC_FT_MM_BV_AU_05 Group : FT/MM/BV/AU/ Purpose : Verify that the IUT rejects authentication of FT procedure if an authentication key is specified which is not supported by the FT. Configuration : Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial State: F-00 ETS 300 175-5 [5], subclause 13.3.3 – ETS 300 444 [10], subclause 8.23.2.1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_auth_1 | | | 1) |
| 4 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx02) | | |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reject_rx_base) | (PASS) | 2) |
| 7 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 8 | | +PO_release_link | | | |
| 9 | B2 | DLS ? DL_DATA_IND CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx_base) | (FAIL) | 3) |
| 10 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 11 | | +PO_release_link | | | |
| Detailed Comments : 1) Start timer and initiate FT authentication. Authentication key will not be supported by FT. 2) Receive the authenticate reject message 3) Authenticate reply message received: testcase fails. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_AU_06
Group : FT/MM/BV/AU/
Purpose : Verify that the IUT is capable to request storage of the DCK and successively use the stored DCK value for ciphering, when it is accepted by the PT.(PT has not stored ZAP value and service class information).
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Selected in PIXIT
ETS 300 175-5 [5], subclause 13.3.3 – ETS 300 444 [10], subclause 8.23.2.1

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_aupt_ccstate) | | | 1) |
| 2 | | +STP_invoke_pt_authentication | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx04) | (PASS) | 2) |
| 4 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak), TSV_dck_value := TSO_cinft_algos_dck_b1_a1(TSC_rand, TSC_rs, TSV_uak)) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | 3) |
| 6 | | +STP_perform_pt_init_ciphering_on | | | 4) |
| 7 | | +PO_release_link | | | |

Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established.
2) Auth_type specifies dck to be stored, zap value not increased.
3) The IUT shall use the saved DCK for ciphering.
4) Switch on ciphering

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_LO_01
Group : FT/MM/BV/LO/
Purpose : Verify that the IUT is able to perform the basic operation of the location registration procedure, requested with an IPUI , when broadcast attributes bit a38 was set to 1, and still is 1.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclause 13.4.1 – ETS 300 444 [10], subclause 8.28

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_locate_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (PASS) | 2) |
| 6 | B2 | [TCV_port_id_length_tpui = '00'O] | | (PASS) | 3) |
| 7 | | +PO_release_link | | | |
| 8 | B3 | [TCV_port_id_length_tpui <> '00'O] | | (PASS) | 4) |
| 9 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_id_assign_ack_tx_base) | | |
| 10 | | +PO_release_link | | | |

Detailed Comments : 1) Send a LOCATE-REQUEST message
2) Receive the LOCATE-ACCEPT message. A possible interrupting PT authentication is handled in DF_handle_mm_events. Store length of received portable id.
3) If length = 0, no TPUI assignment is done
4) If length <> 0, TPUI assignment is done, send back TPUI assign acknowledge.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_LO_02
Group : FT/MM/BV/LO/
Purpose : Verify that the IUT sends back a {LOCATE_REJECT} message, after receiving a {LOCATE_REQUEST} message containing a portable identity on which it does not have a subscription record (IPUI is unknown), when broadcast attributes bit a38 was set to 1, and still is 1.
Configuration :
Default : DF_handle_mm_timeout,
 DF_handle_mm_events,
 DF_handle_any_timeout,
 DF_handle_unexpected_events
Comments : Initial state: F-00
 ETS 300 175-5 [5], subclause 13.4.1 – ETS 300 444 [10], subclause 8.28.2.1

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_locate_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx02) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_reject_rx_base) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |
| 7 | B2 | DLS ? DL_DATA_IND CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (FAIL) | 3) |
| 8 | | +PO_release_link | | | |

Detailed Comments : 1) Send a location update req message with the <<portable id>>ie containing unknown IPUI.
 2) Receive the LOCATE-REJECT message
 3) If a LOCATE-ACCEPT follows, test fails.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| <p>Test Case Name : TC_FT_MM_BV_LO_03</p> <p>Group : FT/MM/BV/LO/</p> <p>Purpose : Verify that the IUT is able to perform the basic operation of the location registration procedure, requested with an IPUI, while the IUT performs a TPUI assignment in the {LOCATE_ACCEPT} message, when broadcast attributes bit a38 =was set to 1, and still is 1.</p> <p>Configuration :</p> <p>Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : Initial state: F-00 This Testcase can be executed, if the IUT supports TPUI assignment, and actually does perform TPUI assignment in this case. ETS 300 175-5 [5], subclause 13.4.1 – ETS 300 444 [10], subclause 8.28</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_locate_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.le ngth) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (PASS) | 2) |
| 6 | B2 | [TCV_port_id_length_tpui = '00'O] | | (FAIL) | 3) |
| 7 | | +PO_release_link | | | |
| 8 | B3 | [TCV_port_id_length_tpui <> '00'O] | | (PASS) | 4) |
| 9 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_i d_assign_ack_tx_base) | | |
| 10 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Send a LOCATE-REQUEST message 2) Receive the LOCATE-ACCEPT message. A possible interrupting PT authentication is handled in DF_handle_mm_events. Store length of received portable id. 3) If length = 0, no TPUI assignment is done. Test fails 4) If length <> 0, TPUI assignment is done, send back TPUI assign acknowledge. Test passes</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_LO_05
Group : FT/MM/BV/LO/
Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of the FT initiated parameter retrieval procedure as part of the location update procedure, when broadcast attributes bit a38 was set to 1, and still is 1. The portable id will contain an IPUI.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Specified in PIXIT
Broadcast attribute a38 is set to 1.
ETS 300 175-5 [5], subclause 13.7 – ETS 300 444 [10], subclause 8.29

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_loup_ccstate) | | | |
| 2 | | +STP_invoke_location_update | | | 1) |
| 3 | | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Mm_info_suggest_rx_base) | | |
| 4 | | START T_P_MM_locate_1 | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 2) |
| 6 | B1 | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (PASS) | 3) |
| 7 | B2 | [TCV_port_id_length_tpui = '00'O] | | (PASS) | 4) |
| 8 | | +PO_release_link | | | |
| 9 | B3 | [TCV_port_id_length_tpui <> '00'O] | | (PASS) | 5) |
| 10 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_id_assign_ack_tx_base) | | |
| 11 | | +PO_release_link | | | |

Detailed Comments : 1) Mm_info_suggest message is expected.
2) Send a location update req message with an IPUI.
3) Receive Locate_Update_Accept message with <<portable_id>>ie containing tpui or not.
4) In case of empty tpui, LT shall not send a temporary_id_assign_ack.
5) In case of tpui, LT shall send a temporary_id_assign_ack.

| Test Case Dynamic Behaviour | | | | | | |
|---|-------|--|--|---------|----------|----|
| <p>Test Case Name : TC_FT_MM_BV_LO_06</p> <p>Group : FT/MM/BV/LO/</p> <p>Purpose : Verify that the IUT is able to perform the basic operation of the location registration procedure, requested with an IPUI , when broadcast attributes bit aV38 was set to 1 during the locking of the IUT, and when it was changed to 0 afterward. NOTE: The phrase 'bit a38 was set to 1' means: The bit a38 had the value of 1 during the time the PT locked to the IUT.</p> <p>Configuration :</p> <p>Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : Initial state: F-00 Broadcast attribute a38 is set to 1. ETS 300 175-5 [5], subclause 13.7 – ETS 300 444 [10], subclause 8.29</p> | | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments | |
| 1 | B1 | +PR_goto_f00 | | | | |
| 2 | | +STP_set_bit_a38(1) | | | 1) | |
| 3 | | +STP_direct_link_establishment | | | | |
| 4 | | +STP_set_bit_a38(0) | | | | 2) |
| 5 | | START T_P_MM_locate_1 | | | | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | | 3) |
| 7 | | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length) | DI_data_ind(Locate_accept_rx01) | | (PASS) | 4) |
| 8 | | CANCEL T_P_MM_locate_1 [TCV_port_id_length_tpui = '00'O] | | | | 5) |
| 9 | | +PO_release_link | | | | |
| 10 | | [TCV_port_id_length_tpui <> '00'O] | | | | 6) |
| 11 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_id_assign_ack_tx_base) | | | |
| 12 | | +PO_release_link | | | | |
| <p>Detailed Comments : 1) Set the bit_a38 to 1 according to ETS 300 444 [10], subclauses 13.2-13.5 2) Set the bit_a38 to 0 according to ETS 300 444 [10], subclauses 13.2-13.5 3) Send a location update req message with an IPUI. 4) Receive Locate_Update_Accept message with <<portable_id>>ie containing tpui or not. 5) In case of empty tpui, LT shall not send a temporary_id_assign_ack. 6) In case of tpui, LT shall send a temporary_id_assign_ack.</p> | | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_AR_01
Group : FT/MM/BV/AR/
Purpose : Verify that the IUT is able to perform the basic operation of the obtain access rights procedure, when the LT sends in the <<AUTH_TYPE>> information element the auth_key_type 'AC', and the IUT uses AC for authentication. The IUT shall include the whole PARK.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: No accessrights
A possible intermediate key allocation is handled in DF_handle_mm_events
ETS 300 175-5 [5], subclause 13.5.1 – ETS 300 444 [10], subclause 8.30

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_f00_no_acrght | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_access_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx 02) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_accept_rx 01) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) LT sends a Access rigths req message with the <<authentication type>>ie containing AC-value.
2) IUT shall use Access rigths accept message with the <<fixed_id>>ie containing whole park.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|---|---------|----------|
| <p>Test Case Name : TC_FT_MM_BV_AR_02 Group : FT/MM/BV/AR/ Purpose : Verify that the IUT is able to assign service class information as part of the basic obtaining accessrights procedure. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: No accessrights IUT must support the feature N.14 for this test. A possible intermediate key allocation is handled in DF_handle_mm_events. ETS 300 175-5 [5], subclause 13.5.1 – ETS 300 444 [10], subclause 8.30</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_f00_no_acrght | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_access_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx 02) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_accept_rx 02) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) LT sends a Access rigths req message with the <<authentication type>>ie containing AC-value. 2) IUT shall use Access rigths accept message with the <<fixed_id>>ie containing whole park and service_class information.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_AR_03
Group : FT/MM/BV/AR/
Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of the FT initiated terminate access rights procedure, when the LT successfully authenticates the IUT.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Specified in PIXIT
ETS 300 175-5 [5], 13.5.2 – ETS 300 444 [10], subclause 8.31

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|---|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_arte_ccstate) | | | 1) |
| 2 | | +STP_invoke_access_term_req | | | |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Access_rights_term_req_ rx_base) | (PASS) | 2) |
| 4 | | +STP_perform_ft_authentication(Auth_r equest_tx01,Auth_reply_rx_base) | | | 3) |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_term_acc_ tx_base) | | 4) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established.
2) Invoke and receive the access terminate request.
3) Perform FT authentication.
4) If this succeeds, send accessrights terminate accept

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| Test Case Name : TC_FT_MM_BV_AR_06 Group : FT/MM/BV/AR/ Purpose : Verify that the IUT is able to perform the basic operation of the obtain access rights procedure, when the LT sends in the <<AUTH_TYPE>> information element the auth_key_type 'UAK', and the IUT uses UAK for authentication. The IUT shall include the whole PARK. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: No accessrights ETS 300 175-5 [5], subclause 13.5.1 – ETS 300 444 [10], subclause 8.30 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_f00_no_acrght | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_access_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx 01) | | 1) |
| 5 | S1 | DLS ? DL_DATA_IND (TCV_result := TRUE) CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_accept_rx 01) | (PASS) | 2) |
| 6 | | +STP_invoke_pt_authentication | | | |
| 7 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx01) | (PASS) | 3) |
| 8 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak), TSV_dck_value := TSO_cinft_algos_dck_b1_a1(TSC_rand, TSC_rs, TSV_uak)) | | | |
| 9 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx02(TCV_res_tx)) | | |
| 10 | | +PO_release_link | | | |
| Detailed Comments : 1) Access_rights_request contains request for portable_id with IPUI and the <<authentication type>>ie containing auth_key_type UAK. 2) Access_rights_accept contains requested portable id, implying IUT has still accessrights. 3) Receive Authentication Request with the <<auth_type>>ie containing no dck to be stored, zap value not increased and UAK. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_AR_07
Group : FT/MM/BV/AR/
Purpose : Verify that the IUT is able to assign zap field as part of the basic obtaining accessrights procedure.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: No accessrights
IUT shall support the feature N.16.
A possible intermediate key allocation is handled in DF_handle_mm_events
ETS 300 175-5 [5], subclause 13.5.1 – ETS 300 444 [10], subclause 8.30

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_f00_no_acrght | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_access_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx 02) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND (TCV_result := TRUE) CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_accept_rx 03) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) LT sends a Access rigths req message with the <<authentication type>>ie containing AC-value.
2) IUT shall use Access rigths accept message with the <<fixed_id>>ie containing whole park and zap field information.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| Test Case Name : TC_FT_MM_BV_KA_01 Group : FT/MM/BV/KA/ Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of the key allocation procedure. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT ETS 300 175-5 [5], subclause 13.6 – ETS 300 444 [10], subclause 8.32 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmmproc_keal_ccstate) | | | |
| 2 | | +STP_invoke_key_allocate | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_key_allocate := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_key_allocate.rand.field, TCV_rs := TCV_pdu_key_allocate.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Key_allocate_rx01) | (PASS) | 1) |
| 4 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSO_cinft_convert_ac_to_bitstring(TSP X_decimal_ac_value))) | | | |
| 5 | | START T_P_MM_auth_1 | | | |
| 6 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 7 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx05(TCV_res_tx)) | | 2) |
| 8 | B2 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_unit, TCV_res_rx := TCV_pdu_auth_reply.res.field) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx01) | (PASS) | 3) |
| 9 | | (TSV_ft_authentication_pendin g := FALSE) | | | |
| 10 | | (TCV_xres := TSO_cinft_algosb1_a2(TSC_r and, TSC_rs, TSO_cinft_convert_ac_to_bit string(TSPX_decimal_ac_value)), TSV_uak := TSO_cinft_algosb1_a21(TSC_ rs, TSO_cinft_convert_ac_to_bit string(TSPX_decimal_ac_value))) | | | |
| 11 | B3 | [TCV_xres = TCV_res_rx] | | (PASS) | 4) |
| 12 | | +PO_release_link | | | |
| 13 | B4 | [TCV_xres <> TCV_res_rx] | | (FAIL) | |
| 14 | | +PO_release_link | | | |

Continued on next page

Continued from previous page

| Test Case Dynamic Behaviour |
|-----------------------------|
|-----------------------------|

- | |
|---|
| <p>Detailed Comments : 1) Key allocate message with the <<allocation type>>ie, specifying the DECT standard Authentication Algorithm to be used.</p> <p>2) Send Authentication Request message with the calculated res and <<authentication type>>ie containing AC.</p> <p>3) Receive Authentication Reply message with the <<res>>ie, which to be calculated by <<rand>>ie and <<res>>ie.</p> <p>4) Check received res with calculated res.</p> |
|---|

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|---|---------|----------|
| Test Case Name : TC_FT_MM_BV_KA_02 Group : FT/MM/BV/KA/ Purpose : Verify that the IUT, after invocation of the key allocation procedure, if the authentication of PT as part of this procedure fails, returns an {AUTH-REJECT} message. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT ETS 300 175-5 [5], subclause 13.6 – ETS 300 444 [10], subclause 8.32 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmmproc_keal_ccstate) | | | |
| 2 | | +STP_invoke_key_allocate | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_key_allocate := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_key_allocate.rand.field, TCV_rs := TCV_pdu_key_allocate.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Key_allocate_rx01) | (PASS) | 1) |
| 4 | | (TCV_res_tx := TSO_cinft_bitstr_inc(TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSO_cinft_convert_ac_to_bitstring(TSP X_decimal_ac_value)))) | | | 2) |
| 5 | | START T_P_MM_auth_1 | | | |
| 6 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 7 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_ka_tx01(TCV_res_tx)) | | 3) |
| 8 | B2 | DLS ? DL_DATA_IND CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reject_rx_base) | (PASS) | 4) |
| 9 | | (TSV_ft_authentication_pendin g := FALSE) | | | |
| 10 | | +PO_release_link | | | |
| 11 | B3 | DLS ? DL_DATA_IND CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx01) | (FAIL) | 5) |
| 12 | | (TSV_ft_authentication_pendin g := FALSE) | | | |
| 13 | | +PO_release_link | | | |
| Detailed Comments : 1) Key allocate message with the <<allocation type>>ie, specifying the DECT standard Authentication Algorithm to be used. 2) Calculate an auth_reply with a wrong res value. 3) Send Authentication Request message with not the calculated res to initiate an authentication reject. 4) Receive Authentication Reject. Test passes 5) If a reply is received, test fails. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_KA_03
Group : FT/MM/BV/KA/
Purpose : Verify that the IUT retains the AC, if the PT rejects the key allocation procedure. A successive PT initiated FT authentication based on the AC, shall then succeed.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclause 13.6 – ETS 300 444 [10], subclause 8.32.2.3

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--------------------------------------|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_keal_ccstate) | | | |
| 2 | | +STP_invoke_key_allocate | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_key_allocate := DL_DATA_IND.message_unit) CANCEL T_USER_INVOKE | DI_data_ind(Key_allocate_rx01) | (PASS) | 1) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reject_tx_base) | | 2) |
| 5 | | +STP_perform_ft_authentication(Auth _request_tx03, Auth_reply_rx_base) | | | 3) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) Key allocate message with the <<allocation type>>ie, specifying the DECT standard Authentication Algorithm to be used.
2) Send Authentication Reject message to reject the key allocation procedure.
3) A PT initiated FT authentication based on the AC is attempted.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| Test Case Name : TC_FT_MM_BV_CH_01 Group : FT/MM/BV/CH/ Purpose : Verify that the IUT is able to correctly perform the basic cipher switching procedure after the PT initiated cipher switching procedure requesting "cipher-on", while no ciphering is active. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 ETS 300 175-5 [5], subclause 13.8 – ETS 300 444 [10], subclause 8.34 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx01) | | 1) |
| 4 | | START T_P_MM_cipher_2 | | | |
| 5 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_cipher_2 | DI_data_ind(Cipher_request_rx01) | (PASS) | 2) |
| 6 | | DLS ! DL_ENC_KEY_REQ | DI_enc_key_req(TSV_dck_value) | | 3) |
| 7 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_enabled) | | 4) |
| 8 | B2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_enabled) | (PASS) | 5) |
| 9 | | +PO_release_link | | | |
| 10 | B3 | DLS ? DL_DATA_IND | DI_data_ind(Cipher_reject_rx_base) | (FAIL) | 6) |
| 11 | | +PO_release_link | | | |
| Detailed Comments : 1) Send message with request to switch ciphering on. 2) Wait for Cipher Request 3) Pass dck value to DLC. 4) Start ciphering in LT 5) Wait for the DL_ENCRYPT_IND with ciphering status 'enabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout. 6) The ciphering request was rejected by the IUT. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_CH_02

Group : FT/MM/BV/CH/

Purpose : Verify that the IUT is able to correctly perform the basic cipher request procedure after the PT initiated cipher switching procedure requesting "cipher-off", while ciphering is active.

Configuration :

Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events

Comments : Initial state: F-00
ETS 300 175-5 [5], subclause 13.8 – ETS 300 444 [10], subclause 8.34

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | +STP_perform_pt_init_ciphering_on | | | 1) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx02) | | 2) |
| 5 | | START T_P_MM_cipher_2 | | | |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_cipher_2 | DI_data_ind(Cipher_request_rx02) | (PASS) | 3) |
| 7 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_disabled) | | 4) |
| 8 | B2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_disabled) | (PASS) | 5) |
| 9 | | +PO_release_link | | | |
| 10 | B3 | DLS ? DL_DATA_IND | DI_data_ind(Cipher_reject_rx_base) | (FAIL) | 6) |
| 11 | | +PO_release_link | | | |

Detailed Comments : 1) First switch ciphering on.
2) Send message with request to switch ciphering off.
3) Wait for Cipher Request
4) Stop ciphering in LT
5) Wait for the DL_ENCRYPT_IND with ciphering status 'disabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout.
6) The ciphering request was rejected by the IUT.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|--------------------------------------|---------|----------|
| Test Case Name : TC_FT_MM_BV_CH_03 Group : FT/MM/BV/CH/ Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of FT initiated cipher switching procedure requesting "cipher-on", while no ciphering is active. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT ETS 300 175-5 [5], subclause 13.8 – ETS 300 444 [10], subclause 8.33 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_cift_ccstate) | | | 1) |
| 2 | | +STP_invoke_ft_init_ciphering_on | | | 2) |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cipher_request_rx01) | (PASS) | 2) |
| 4 | | DLS ! DL_ENC_KEY_REQ | DI_enc_key_req(TSV_dck _value) | | 3) |
| 5 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_enabled) | | 4) |
| 6 | B2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_enabled) | (PASS) | 5) |
| 7 | | +PO_release_link | | | |
| Detailed Comments : 1) To invoke the FT to initiate ciphering on. 2) Wait for Cipher Request with <<cipher_info>>ie containing ciphering on. 3) Pass dck value to DLC. 4) Start ciphering in LT 5) Wait for the DL_ENCRYPT_IND with ciphering status 'enabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BV_CH_04

Group : FT/MM/BV/CH/

Purpose : Verify that the IUT, after invocation, is able to perform the basic operation of FT initiated cipher switching procedure requesting "cipher-off", while ciphering is active.

Configuration :

Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events

Comments : Initial state: Specified in PIXIT
ETS 300 175-5 [5], subclause 13.8 – ETS 300 444 [10], subclause 8.33

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--------------------------------------|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_cift_ccstate) | | | 1) |
| 2 | | +STP_perform_pt_init_ciphering_on | | | 2) |
| 3 | | +STP_invoke_ft_init_ciphering_off | | | 3) |
| 4 | B1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cipher_request_rx02) | (PASS) | 2) |
| 5 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_disabled) | | 3) |
| 6 | B2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_disabled) | (PASS) | |
| 7 | | +PO_release_link | | | |

Detailed Comments : 1) Select the state appropriate for testing of ft initiated ciphering.
2) To execute the PT initiated ciphering procedure, in order to switch on ciphering.
3) To invoke the FT initiated ciphering procedure, in order to switch off ciphering.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|--|---------|----------|
| Test Case Name : TC_FT_MM_BV_CH_05 Group : FT/MM/BV/CH/ Purpose : Verify that the IUT rejects a cipher switching request from the PT when a {CIPHER-SUGGEST} message has been received, containing a not supported cipher key. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 ETS 300 175-5 [5], subclause 13.8 – ETS 300 444 [10], subclause 8.34.2.1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx03) | | 1) |
| 4 | | START T_P_MM_cipher_2 | | | |
| 5 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_cipher_2 | DI_data_ind(Cipher_reject_rx_base) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |
| 7 | B2 | DLS ? DL_DATA_IND CANCEL T_P_MM_cipher_2 | DI_data_ind(Cipher_request_rx01) | (FAIL) | 3) |
| 8 | | +PO_release_link | | | |
| Detailed Comments : 1) Send CIPHER-SUGGEST message with a not supported cipher key. 2) CIPHER-REJECT received. Test passes. 3) CIPHER REQUEST received. Test fails. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_B0_01
Group : FT/MM/BO/
Purpose : Verify that the IUT ignores the unexpected message {IDENTITY-REPLY} as an answer to the FT initiated {CIPHER-REQUEST}.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Specified in PIXIT
ETS 300 175-5 [5], subclause 17.4.4 – ETS 300 444 [10], subclause 13.1

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--------------------------------------|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_cift_ccstate) | | | |
| 2 | | +STP_invoke_ft_init_cipherng_off | | | 1) |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cipher_request_rx01) | (PASS) | 2) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx01) | | 3) |
| 5 | | DLS ! DL_ENC_KEY_REQ | DI_enc_key_req(TSV_dck_value) | | 4) |
| 6 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_enabled) | | 5) |
| 7 | B2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_enabled) | (PASS) | 6) |

Detailed Comments : 1) To invoke the FT to initiate cipherng on.
2) Wait for Cipher Request with <<cipher_info>>ie containing cipherng on.
3) Send a unexpected message.
4) Continue the cipherng procedure with passing of dck value to DLC.
5) Start cipherng in LT
6) Wait for the DL_ENCRYPT_IND with cipherng status 'enabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BI_01
Group : FT/MM/BI/
Purpose : Verify that the IUT ignores a message with an unrecognized message type, if the message was received during a FT initiated authentication of PT procedure.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Selected in PIXIT
The way it shall be tested if the reply message is ignored or not, is to start the PT initiated location registration procedure. If an answer is received on the locate request, we know that the IUT is no longer waiting for the response of the authentication request, and has thus accepted the false reply message. Test fails.
ETS 300 175-5 [5], subclause 17.4.4 – ETS 300 444 [10], subclause 6.9.4

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_aupt_ccstate) | | | 1) |
| 2 | | +STP_invoke_pt_authentication | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx01) | (PASS) | |
| 4 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak), TSV_dck_value := TSO_cinft_algos_dck_b1_a1(TSC_rand, TSC_rs, TSV_uak)) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Bi_auth_reply_tx(TCV_res_tx)) | | 2) |
| 6 | | START T_P_MM_locate_1 | | | |
| 7 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 3) |
| 8 | B2 | DLS ? DL_DATA_IND CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (FAIL) | 4) |
| 9 | | +PO_release_link | | | |
| 10 | B3 | ? TIMEOUT T_P_MM_locate_1 | | (PASS) | 5) |
| 11 | | +PO_release_link | | | |

Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established.
2) Send a reply with an unrecognizable message type.
3) Now start a location registration procedure.
4) If IUT reacts to that: test fails, because it should still be waiting for a correct identity reply.
5) If IUT does not react: test passes.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BI_02
Group : FT/MM/BI/
Purpose : Verify that the IUT, during the obtain accessrights procedure, returns an {ACCESS-RIGHTS-REJECT} message, on receipt of an {ACCESS-RIGHTS-REQUEST} message missing the information element <<AUTH-TYPE>>.
Configuration :
Default : DF_handle_mm_timeout,
 DF_handle_mm_events,
 DF_handle_cc_events,
 DF_handle_any_timeout,
 DF_handle_unexpected_events
Comments : Initial state: No accessrights
 ETS 300 175-5 [5], subclause 17.6.4 – ETS 300 444 [10], subclause 6.9.4

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_f00_no_acrght | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_access_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx 03) | | 1) |
| 5 | S1 | DLS ? DL_DATA_IND (TCV_result := TRUE) CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_reject_rx_ base) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) Send Access rights request message with missing <<auth type>>ie.
 2) Execute successful access rights procedure.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_BI_03
Group : FT/MM/BI/
Purpose : Verify that the IUT, during the obtain accessrights procedure, returns an {ACCESS-RIGHTS-REJECT} message, on receipt of an {ACCESS-RIGHTS-REQUEST} message containing the information element <<AUTH-TYPE>> with a length exceeding the maximum allowed length.
Configuration :
Default : DF_handle_mm_timeout,
 DF_handle_mm_events,
 DF_handle_cc_events,
 DF_handle_any_timeout,
 DF_handle_unexpected_events
Comments : ETS 300 175-5 [5], subclause 17.6.4 – ETS 300 444 [10], subclause 6.9.4

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | +PR_f00_no_acrght | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_access_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx 04) | | 1) |
| 5 | S1 | DLS ? DL_DATA_IND (TCV_result := TRUE) CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_reject_rx_ base) | (PASS) | 2) |
| 6 | | +PO_release_link | | | |

Detailed Comments : 1) Send Access rights request message with containing the information element <<AUTH-TYPE>> with a length exceeding the maximum allowed length.
 2) Execute successful access rights procedure.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_TI_01
Group : FT/MM/TI/
Purpose : Verify that the IUT is capable of completing the Identification of PT procedure at a point in time 10% before expiry of the timer F-<MM_ident.2>.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Specified in PIXIT.
A minimal timer is started, and it is checked if the procedure can still proceed.
ETS 300 175-5 [5], subclause 13.2.1 – ETS 300 444 [10], subclause 8.22

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|---|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_idpt_ccstate) | | | |
| 2 | | +STP_invoke_identity_req | | | 1) |
| 3 | | DLS ? DL_DATA_IND(TCV_pdu_identity_request := DL_DATA_IND.message_unit, TCV_id_group := TCV_pdu_identity_request. identity_type.id_group, TCV_id_type := TCV_pdu_identity_request. identity_type.type) CANCEL T_USER_INVOKE, START T_F_MM_ident_2_min | DI_data_ind(Identity_request_rx_base) | (PASS) | 2) |
| 4 | | ? TIMEOUT T_F_MM_ident_2_min | | (PASS) | |
| 5 | | +STP_handle_identity_request | | | 3) |
| 6 | | +STP_perform_locate_request(Locate_request_tx01, Locate_accept_rx01) | | | 4) |
| 7 | | +PO_release_link | | | |

Detailed Comments : 1) Invoke Identity request message.
2) Receive Identity Request message and save the values of the relevant ies.
3) Send the correct Identity Reply message.
4) Execute successful location registration procedure.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|--|---------|----------|
| <p>Test Case Name : TC_FT_MM_TI_02</p> <p>Group : FT/MM/TI/</p> <p>Purpose : Verify that the IUT is capable of completing the Authentication of PT procedure at a point in time 10% before expiry of the timer F-<MM_auth.1>.</p> <p>Configuration :</p> <p>Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : A minimal timer is started, and it is checked if the procedure can still proceed. ETS 300 175-5 [5], subclause 13.3.1 – ETS 300 444 [10], subclause 8.24</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_aupt_ccstate) | | | 1) |
| 2 | | +STP_invoke_pt_authentication | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE, START T_F_MM_auth_1_min | DI_data_ind(Auth_request_rx01) | (PASS) | 2) |
| 4 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak)) | | | |
| 5 | | ? TIMEOUT T_F_MM_auth_1_min | | (PASS) | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | 3) |
| 7 | | +STP_perform_locate_request (Locate_request_tx01, Locate_accept_rx01) | | | |
| 8 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established.</p> <p>2) Authentication on UAK mandated, so UAK has to be present beforehand.</p> <p>3) Copy calculated res field into reply message.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_TI_03
Group : FT/MM/TI/
Purpose : Verify that the IUT is capable of completing the Authentication of User procedure at a point in time 10% before expiry of the timer F-<MM_auth.2>.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : A minimal timer is started, and it is checked if the procedure can still proceed.
ETS 300 175-5 [5], subclause 13.3.2 – ETS 300 444 [10], subclause 8.25

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_auus_ccstate) | | | 1) |
| 2 | | +STP_invoke_user_authentication | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE, START T_F_MM_auth_2_min | DI_data_ind(Auth_request_rx03) | (PASS) | 2) |
| 4 | | (TCV_res_tx_u := TSO_cinft_algosb2_a1(TCV_rand, TCV_rs, TSV_uak, TSO_cinft_convert_upi_to_bitstring(TS PX_decimal_upi_value))) | | | |
| 5 | | ? TIMEOUT T_F_MM_auth_2_min | | (PASS) | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | 3) |
| 7 | | +STP_perform_locate_request (Locate_request_tx01, Locate_accept_rx01) | | | 4) |
| 8 | | +PO_release_link | | | |

Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established.
2) Waiting for user authentication, based on UPI.
3) Auth reply message for the user authentication.
4) Try to execute the location request procedure successfully.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_TI_04
Group : FT/MM/TI/
Purpose : Verify that the IUT is capable of completing the FT Termination of access rights procedure at a point in time 10% before expiry of the timer F-<MM_access.2>.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : A minimal timer is started, and it is checked if the procedure can still proceed.
ETS 300 175-5 [5], subclause 13.5.2 – ETS 300 444 [10], subclause 8.31

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | B1 | +PR_select_state (TSPX_mmproc_arte_ccstate) | DI_data_ind(Access_rights_term_req_ rx_base) | (PASS) | |
| 2 | | +STP_invoke_access_term_req | | | |
| 3 | | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE, START T_F_MM_access_2_min | DI_data_req(Access_rights_term_acc_ tx_base) | (PASS) | |
| 4 | | +STP_perform_ft_authentication(Auth_r equest_tx01,Auth_reply_rx_base) | | | |
| 5 | | ? TIMEOUT T_F_MM_access_2_min | | | |
| 6 | | DLS ! DL_DATA_REQ | | | |
| 7 | | +STP_perform_locate_request (Locate_request_tx01, Locate_accept_rx01) | | | |
| 8 | | +PO_release_link | | | |

Detailed Comments :

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_TI_05
Group : FT/MM/TI/
Purpose : Verify that the IUT is capable of completing the Key allocation procedure at a point in time 10% before expiry of the timer F-<MM_key.1>.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_mm_invokation,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: Specified in PIXIT
A minimal timer is started, and it is checked if the procedure can still proceed.
ETS 300 175-5 [5], subclause 13.6 – ETS 300 444 [10], subclause 8.32

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_select_state (TSPX_mmproc_keal_ccstate) | | | |
| 2 | | +STP_invoke_key_allocate | | | |
| 3 | B1 | DLS ? DL_DATA_IND (TCV_pdu_key_allocate := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_key_allocate.rand.field, TCV_rs := TCV_pdu_key_allocate.rs.field) CANCEL T_USER_INVOKE, START T_F_MM_key_1_min | DI_data_ind(Key_allocate_rx01) | (PASS) | 1) |
| 4 | | ? TIMEOUT T_F_MM_key_1_min | | (PASS) | |
| 5 | | +LTS_auth_req | | | |
| 6 | | LTS_auth_req (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSO_cinft_convert_ac_to_bitstring(TSPX_de cimal_ac_value))) | | | |
| 7 | | START T_P_MM_auth_1 | | | |
| 8 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 9 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx05(TCV_res_tx)) | | 2) |
| 10 | B2 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_unit, TCV_res_rx := TCV_pdu_auth_reply.res.field) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx01) | (PASS) | 3) |
| 11 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 12 | | (TCV_xres := TSO_cinft_algosb1_a2(TSC_rand, TSC_rs, TSO_cinft_convert_ac_to_bitstring (TSPX_decimal_ac_value)), TSV_uak := TSO_cinft_algosb1_a21(TSC_rs, TSO_cinft_convert_ac_to_bitstring (TSPX_decimal_ac_value))) | | | |
| 13 | B3 | [TCV_xres = TCV_res_rx] | | (PASS) | 4) |
| 14 | | +PO_release_link | | | |
| 15 | B4 | [TCV_xres <> TCV_res_rx] | | (FAIL) | |

Continued on next page

Continued from previous page

| Test Case Dynamic Behaviour | | | | | |
|---|-------|-----------------------|-----------------|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 16 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Key allocate message with the <<allocation type>>ie, specifying the DECT standard Authentication Algorithm to be used. 2) Send Authentication Request message with the calculated res and <<authentication type>>ie containing AC. 3) Receive Authentication Reply message with the <<res>>ie, which to be calculated by <<rand>>ie and <<res>>ie. 4) Check received res with calculated res.</p> | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|--|-------|---|--------------------------------------|---------|----------|
| <p>Test Case Name : TC_FT_MM_TI_06 Group : FT/MM/TI/ Purpose : Verify that the IUT is capable of completing the FT initiated Cipher switching procedure at a point in time 10% before expiry of the timer F-<MM_cipher.1>. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT A minimal timer is started, and it is checked if the procedure can still proceed. ETS 300 175-5 [5], subclause 13.8 – ETS 300 444 [10], subclause 8.33</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_cift_ccstate) | | | 1) |
| 2 | | +STP_invoke_ft_init_ciphering_off | | | 2) |
| 3 | | DLS ! DL_ENC_KEY_REQ | DI_enc_key_req(TSV_dck_value) | | 3) |
| 4 | B1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE, START T_F_MM_cipher_1_min | DI_data_ind(Cipher_request_rx01) | (PASS) | 4) |
| 5 | | ? TIMEOUT T_F_MM_cipher_1_min | | (PASS) | |
| 6 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_enabled) | | 5) |
| 7 | B2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_enabled) | (PASS) | 6) |
| 8 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Select the state appropriate for testing of ft initiated ciphering. 2) Invoke the FT initiated ciphering procedure. 3) Pass the dck value to DLC. 4) Wait for Cipher Request with <<cipher_info>>ie containing ciphering on. 5) Start ciphering in LT 6) Wait for the DL_ENCRYPT_IND with ciphering status 'enabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_MM_TI_07
Group : FT/MM/TI/
Purpose : Verify that the IUT, when during the location registration procedure with TPUI assignment, the timer F-<MM_ident.1> expires after the defined time, aborts the procedure, and thus allows a new location registration procedure to proceed.
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
In order for this testcase to be successfully executed, the IUT should assign a TPUI in the {LOCATE-ACCEPT} message
ETS 300 175-5 [5], subclause subclause 13.2.2 – ETS 300 444 [10], subclause 8.28

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--------------------------------------|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_locate_1 | | | |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 1) |
| 5 | B1 | DLS ? DL_DATA_IND(TCV_pdu_locate_req := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_req.portable_id.length) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (PASS) | 2) |
| 6 | | [TCV_port_id_length_tpui = '00'O] | | (I) | 3) |
| 7 | | +PO_release_link | | | |
| 8 | | [TCV_port_id_length_tpui <> '00'O] | | | 4) |
| 9 | | START T_F_MM_ident_1_max | | | |
| 10 | | ? TIMEOUT T_F_MM_ident_1_max | | (PASS) | |
| 11 | | +STP_perform_locate_request(Locate_request_tx01, Locate_accept_rx01) | | | 5) |
| 12 | | +PO_release_link | | | |

Detailed Comments : 1) Send a location update req message with an TPUI.
2) Receive Locate_Update_Accept message with <<portable_id>>ie containing tpui or not.
3) In case of empty tpui, test result is inconclusive.
4) In case of tpui assignment, LT initiates a new location registration after expiry of the maximal value for timer T_F_MM_ident_1.
5) Result of the test depends on the succeeding of this procedure.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|---|---------|----------|
| Test Case Name : TC_FT_ME_BV_01 Group : FT/ME/BV/ Purpose : Verify that the IUT is able to handle the authentication of FT request in parallel with an incoming call establishment. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT ETS 300 175-5 [5], subclause 15.2.1 ETS 300 444 [10], subclause 6.9.6 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | | +STP_initialise_tf(TSC_iut_terminated) | | | |
| 5 | B1 | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.tr ansaction_value) | DI_data_ind(Cc_setup_rx05(TCV_cc_iut_tf)) | (PASS) | 1) |
| 6 | | START T_P_MM_auth_1 | | | |
| 7 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 8 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx01) | | 2) |
| 9 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_alerting_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | 3) |
| 10 | | START T_P_CC_05 | | | |
| 11 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_connect_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 12 | B2 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_u nit, TCV_res_rx := TCV_pdu_auth_reply.res.fi eld) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx_base) | (PASS) | 4) |
| 13 | | (TSV_ft_authentication_ pending := FALSE) | | | |
| 14 | B3 | DLS ? DL_DATA_IND CANCEL T_P_CC_05 | DI_data_ind(Cc_connect_ack_rx_base (TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 5) |
| 15 | | +PO_release_link | | | |
| 16 | B4 | DLS ? DL_DATA_IND CANCEL T_P_CC_05 | DI_data_ind(Cc_connect_ack_rx_base (TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 5) |

Continued on next page

Continued from previous page

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|-------------------------------------|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 17 | B5 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message _unit, TCV_res_rx := TCV_pdu_auth_reply.res. field) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx_base) | (PASS) | 4) |
| 18 | | (TSV_ft_authentication _pending := FALSE) | | | |
| 19 | | +PO_release_link | | | |
| Detailed Comments : 1) LT sends CC-SETUP-REQ to IUT. 2) LT requests authentication of FT. 3) LT sends CC-ALERT to IUT. 4) IUT handles authentication reply. 5) IUT handles incoming call establishment. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|--|---------|----------|
| Test Case Name : TC_FT_ME_BV_02 Group : FT/ME/BV/ Purpose : Verify that the IUT is able to handle an authentication of FT request, when it interrupts a user authentication procedure. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT ETS 300 175-5 [5], subclause 15.5 ETS 300 444 [10], subclause 6.9.6 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_auus_ccstate) | | | |
| 2 | | +STP_invoke_user_authentication | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx03) | (PASS) | 1) |
| 5 | | START T_P_MM_auth_1 | | | |
| 6 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 7 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx01) | | 2) |
| 8 | B2 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_unit, TCV_res_rx := TCV_pdu_auth_reply.res.field) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx_base) | (PASS) | 3) |
| 9 | | (TSV_ft_authentication_pendin g := FALSE) | | | |
| 10 | | (TCV_res_tx_u := TSO_cinft_algosb2_a1(TCV_r and, TCV_rs, TSV_uak, TSO_cinft_convert_upi_to_bit string(TSPX_decimal_upi_valu e))) | | | |
| 11 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx_u)) | | 4) |
| 12 | | +PO_release_link | | | |
| Detailed Comments : 1) Waiting for user authentication, based on UPI. 2) LT requests authentication of FT procedure. 3) Testcase passes, if IUT is able to handle the Authentication of FT correctly. 4) LT terminates user authentication procedure. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_ME_BV_03
Group : FT/ME/BV/
Purpose : Verify that the IUT is able to handle a locate request during an active CC call (state F-10).
Configuration :
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-10
ETS 300 175-5 [5], subclause 15.5
ETS 300 444 [10], subclause 6.9.6

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f10 | | | |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 1) |
| 3 | B1 | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (PASS) | 2) |
| 4 | | [TCV_port_id_length_tpui = '00'O] | | | 3) |
| 5 | | +PO_normal_release | | | |
| 6 | | [TCV_port_id_length_tpui <> '00'O] | | | 4) |
| 7 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_i d_assign_ack_tx_base) | | |
| 8 | | +PO_normal_release | | | |

Detailed Comments : 1) LT sends LOCATE-REQUEST during state F10.
2) Testcase passes, if IUT is able return the LOCATE_ACCEPT message.
3) FT does not perform TPUI assignment.
4) FT does perform TPUI assignment.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|--------------------------------------|---------|----------|
| Test Case Name : TC_FT_ME_B0_01 Group : FT/ME/BO/ Purpose : Verify that the IUT ignores a MM message with a lower priority (a {LOCATE_REQUEST} message) after the IUT (after invocation) has initiated the authentication of PT procedure. Configuration : Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: Specified in PIXIT ETSI 300 175-5 [5], subclause 17.4.4 – ETS 300 444 [10], subclause 13.1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_aupt_ccstate) | | | 1) |
| 2 | | +STP_invoke_pt_authentication | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | B1 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx01) | (PASS) | 2) |
| 5 | | START T_P_MM_locate_1 | | | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 3) |
| 7 | B2 | ? TIMEOUT T_P_MM_locate_1 | | (PASS) | 4) |
| 8 | | +PO_release_link | | | |
| Detailed Comments : 1) Goto the state that has been declared in the PIXIT, as initial state for this procedure. A postcondition to this teststep is that a link is established. 2) IUT initiates authentication of PT procedure. 3) LT interrupts procedure with the attempt to initiate a lower priority procedure. 4) Testcase passes, if IUT ignores the LOCATE-REQUEST from the LT. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|--|-------|-------------------------------|-----------------|---------|----------|
| Test Case Name : TC_FT_LC_BV_LE_01 | | | | | |
| Group : FT/LC/BV/LE/ | | | | | |
| Purpose : Verify that the IUT is able to initiate the indirect (paged) FT-initiated link establishment procedure. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: T-00 ETS 300 175-5 [5], subclause 14.2.1 and 14.2.3 – ETS 300 444 [10], subclause 8.35 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | | +STP_handle_indirect_link_est | | | 1) |
| 4 | | +PO_release_link | | | |
| Detailed Comments : 1) A n indirect link establishment is processed. Test passes. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| Test Case Name : TC_FT_LC_BV_LE_02 | | | | | |
| Group : FT/LC/BV/LE/ | | | | | |
| Purpose : Verify that the IUT rejects the {LCE-PAGE-RESPONSE} with mismatching IPUI during indirect (paged) FT-initiated link establishment and releases the link. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: T-00 ETS 300 175-5 [5], subclause 14.2.1 and 14.2.3 – ETS 300 444 [10], subclause 8.35 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | B1 | DLB? DL_BROADCAST_IND | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | (PASS) | 1) |
| 4 | | DLS ! DL_ESTABLISH_REQ CANCEL T_USER_INVOKE, START T_RELEASE_DELAY | DI_est_req_pdu(Lce_page_response_tx02) | | 2) |
| 5 | B2 | DLS ? DL_DATA_IND CANCEL T_RELEASE_DELAY | DI_data_ind(Lce_page_reject_rx_base) | (PASS) | 3) |
| 6 | | +PO_release_link | | | |
| 7 | B3 | ? TIMEOUT T_RELEASE_DELAY | | (FAIL) | 4) |
| 8 | | +PO_release_link | | | |
| Detailed Comments : 1) A DL_BROADCAST_IND is received, containing a LCE-REQUEST-PAGE PDU. 2) An LCE-PAGE-RESPONSE is sent, containing an unknown IPUI. A timer is started in order to wait for the expected link release. 3) A reject indication is received. 4) No reject indication is received: test fails. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--------------------------------|-----------------|---------|----------|
| Test Case Name : TC_FT_LC_BV_LE_03 | | | | | |
| Group : FT/LC/BV/LE/ | | | | | |
| Purpose : Verify that the IUT is able to handle a PT initiated link establishment. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: T-00 ETS 300 175-5 [5], subclause 14.2.1 and 14.2.3 – ETS 300 444 [10], subclause 8.36 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | 1) |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | +PO_release_link | | | |
| Detailed Comments : 1) Start direct link establishment. | | | | | |

| Test Case Dynamic Behaviour | | | | | |
|---|-------|---|-------------------------------|---------|----------|
| Test Case Name : TC_FT_LC_BV_LR_01 | | | | | |
| Group : FT/LC/BV/LR/ | | | | | |
| Purpose : Verify that the IUT is able to perform a normal PT initiated link release. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: T-00 ETS 300 175-5 [5], subclause 14.2.7 – ETS 300 444 [10], subclause 8.37 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | 1) |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_normal) | | |
| 4 | B1 | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | (PASS) | 3) |
| 5 | | +PO_terminate | | | 4) |
| 6 | B2 | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | (PASS) | |
| 7 | | +PO_terminate | | | |
| Detailed Comments : 1) First start a link establishment 2) Then send a link release reuest 3) Wait for the confirm of the lower layer. 4) A release indication mean: release collision. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_LC_BV_LR_02
Group : FT/LC/BV/LR/
Purpose : Verify that the IUT is able to maintain the link for a specified time, before releasing it, after the termination of an MM procedure. No other entities are using the link.
Configuration :
Default : DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_mm_timeout,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-00
in this testcase it is assumed that no other entities are using the link.
ETS 300 175-5 [5], subclause 14.2.5 – ETS 300 444 [10], subclause 8.39

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|-----------------|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | 1) |
| 3 | | +STP_perform_locate_request (Locate_request_tx01, Locate_accept_rx01) | | | |
| 4 | | START T_F_LCE_02_min | | | 3) |
| 5 | | ? TIMEOUT T_F_LCE_02_min | | | 4) |
| 6 | B1 | DLS ? DL_RELEASE_IND +PO_terminate | DI_rel_ind | (PASS) | |
| 8 | B2 | DLS ? DL_RELEASE_IND +PO_terminate | DI_rel_ind | (FAIL) | 5) |

Detailed Comments : 1) Try to establish a direct link.
2) Execute an MM procedure. In this case: Location registration
3) After completion: start timer T_P_LCE_02_min, being 5% smaller than the actual value.
4) When this timer expires: accept a DL_RELEASE_IND. Test passes
5) If the DL_RELEASE_IND comes sooner: test fails.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_LC_BV_LR_03
Group : FT/LC/BV/LR/
Purpose : Verify that the IUT is able to start the link release after the termination of a call.
Configuration :
Default : DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_mm_timeout,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
in this testcase it is assumed that no other entities are using the link.
ETS 300 175-5 [5], subclause 14.2.5 – ETS 300 444 [10], subclause 8.37

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_goto_f02 | | | 1) |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_02, CANCEL T_P_CC_04 | DI_data_req(Cc_release_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_02 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 3) |
| 4 | B2 | DLS ? DL_RELEASE_IND | DI_rel_ind | (PASS) | 4) |
| 5 | | +PO_terminate | | | |
| 6 | B3 | DLS ? DL_RELEASE_IND CANCEL T_P_CC_02 | DI_rel_ind | (FAIL) | 5) |
| 7 | | +PO_terminate | | | |

Detailed Comments : 1) Start an outgoing call.
2) Start a normal release
3) Receive the CC-RELEASE-COM. Timeout of timer T_P_CC_02 is handled in
DF_handle_any_timeout,
4) Wait for the DL_RELEASE_IND. Test passes
5) If the DL_RELEASE_IND comes too soon: test fails.

Test Case Dynamic Behaviour

Test Case Name : TC_FT_LC_BV_LR_04
Group : FT/LC/BV/LR/
Purpose : Verify that the IUT is able to maintain the link for a specified time, before releasing it, after a CC requested partial release has been agreed on, and no other entities are using the link.
Configuration :
Default : DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_mm_timeout,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Initial state: F-02
in this testcase it is assumed that no other entities are using the link.
ETS 300 175-5 [5], subclause 14.2.7 – ETS 300 444 [10], subclause 8.39

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f02 | | | 1) |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_02, CANCEL T_P_CC_04 | DI_data_req(Cc_release_tx01(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_02, START T_F_LCE_02_min | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 3) |
| 4 | B2 | DLS ? DL_RELEASE_IND CANCEL T_F_LCE_02_min | DI_rel_ind | (FAIL) | 4) |
| 5 | | +PO_terminate | | | |
| 6 | | ? TIMEOUT T_F_LCE_02_min | | | |
| 7 | B3 | DLS ? DL_RELEASE_IND | DI_rel_ind | (PASS) | 5) |
| 8 | | +PO_terminate | | | |

Detailed Comments : 1) Start an incoming call.
2) Request for a partial release
3) Receive the CC-RELEASE-COM. Timeout of timer T_P_CC_02 is handled in DF_handle_any_timeout. Start guard timer T_F_LCE_02_min, guarding the partial release time.
4) If the DL_RELEASE_IND comes before the timer expires: test fails.
5) After expiry of the timer, wait for the DL_RELEASE_IND. Test passes

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|---|---------|----------|
| Test Case Name : TC_FT_LC_BI_01 | | | | | |
| Group : FT/LC/BI/ | | | | | |
| Purpose : Verify that the IUT ignores a message containing a protocol discriminator value that indicates a service that is not supported by the IUT. | | | | | |
| Configuration : | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_unexpected_events | | | | | |
| Comments : Initial state: F-00 ETS 300 175-5 subclause 17.1 – ETS 300 444 [10], subclause 6.9.4 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_It_originated) | | | 1) |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req(Cc_setup_tx11(TCV_cc_tv, TCV_cc_It_tf)) | | 2) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (FAIL) | 3) |
| 7 | | +PO_normal_release | | | |
| 8 | B2 | ? TIMEOUT T_P_CC_03 | | (PASS) | 4) |
| 9 | | +PO_release_link | | | |
| Detailed Comments : 1) Initialise the transaction id flag to be used in the communication. 2) Send a CC_SETUP with a protocol discriminator that is not supported by the IUT. 3) If IUT sends back CC-ALERT, test fails, because the message should be ignored. 4) Test passes if timer times out. | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_LC_BI_04
Group : FT/LC/BI/
Purpose : Verify that the IUT ignores an {AUTH-REQUEST} message containing an illegal transaction identifier.
Configuration :
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_unexpected_events
Comments : Initial state: F-00
ETS 300 175-5 [5], subclause 17.3.1 – ETS 300 444 [10], subclause 6.9.4

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|-------------------------------------|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_MM_auth_1 | | | |
| 4 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx04) | | 1) |
| 6 | B1 | DLS ? DL_DATA_IND CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx_base) | (FAIL) | 2) |
| 7 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 8 | | +PO_release_link | | | |
| 9 | B2 | ? TIMEOUT T_P_MM_auth_1 | | (PASS) | 3) |
| 10 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 11 | | +PO_release_link | | | |

Detailed Comments : 1) Send an authenticate request, with an illegal transaction value.
2) If the reply follows, the test fails.
3) If nothing happens, test passes.

| Test Case Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| <p>Test Case Name : TC_FT_LC_BI_05</p> <p>Group : FT/LC/BI/</p> <p>Purpose : Verify that the IUT ignores an {IDENTITY-REPLY} message with a Transaction Identifier flag set illegally to '0', if the message was received during a FT-initiated identification of PT procedure.</p> <p>Configuration :</p> <p>Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_any_timeout, DF_handle_unexpected_events</p> <p>Comments : Initial state: Selected in PIXIT We will assume in this testcase that the identity request specifies a portable id with IPUI. The way it shall be tested if the reply message is ignored or not, is to start the PT initiated location registration procedure. If an answer is received on the locate request, we know that the IUT is no longer waiting for the response of the identity request, and has thus accepted the false reply message. Test fails. ETS 300 175-5 [5], subclause 17.3.2.5 – ETS 300 444 [10], subclause 6.9.4</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_select_state (TSPX_mmproc_idpt_ccstate) | | | 1) |
| 2 | | +STP_invoke_identity_req | | | 2) |
| 3 | B1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Identity_request_rx01) | (PASS) | 3) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx07) | | 4) |
| 5 | | START T_P_MM_locate_1 | | | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 5) |
| 7 | B2 | DLS ? DL_DATA_IND CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (FAIL) | 6) |
| 8 | | +PO_release_link | | | |
| 9 | B3 | ? TIMEOUT T_P_MM_locate_1 | | (PASS) | 7) |
| 10 | | +PO_release_link | | | |
| <p>Detailed Comments : 1) Goto the state, specified in the PIXIT to initiate an identity request from. 2) Invoke an identity request. For this test, it needs to be a portable id IPUI request. 3) Receive the request. 4) Send back an identity reply with a Transaction Identifier flag set illegally to '0', 5) Now start a location registration procedure. 6) If IUT reacts to that: test fails, because it should still be waiting for a correct identity reply. 7) If IUT does not react: test passes.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_LC_BI_07

Group : FT/LC/BI/

Purpose : Verify that the IUT, when the link fails during an active call, will clear the call.

Configuration :

Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events

Comments : Initial state: F-10

An active call will be set up. After this, the link is released. After this, the link is restored again. It is checked if the call is cleared, by sending a CC-RELEASE message. If the call is still active, a CC-RELEASE-COM is sent back. If the call is no longer active, the CC-RELEASE will be ignored. ETS 300 175-5 [5], subclause 14 – ETS 300 444 [10], subclause 8.34

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---------------------------------------|--|---------|----------|
| 1 | | +PR_goto_f10 | | | 1) |
| 2 | | +STP_release_link | | | 2) |
| 3 | | +STP_direct_link_establishment | | | 3) |
| 4 | | DLS ! DL_DATA_REQ START T_P_CC_02 | DI_data_req(Cc_release_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | 4) |
| 5 | B1 | DLS ? DL_DATA_IND CANCEL T_P_CC_02 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (FAIL) | 5) |
| 6 | | +PO_release_link | | | |
| 7 | B2 | ? TIMEOUT T_P_CC_02 | | (PASS) | 6) |
| 8 | | +PO_release_link | | | |

Detailed Comments : 1) Goto state F-10

2) Send a link release request, and wait for the confirm.

3) Re-establish link, by sending an indirect link establish request (paging)

4) Send a CC-RELEASE.

5) A CC-RELEASE-COM is received back, meaning that the call is not cleared.

6) Timer T_P_CC_02 times out, meaning the CC-RELEASE has been ignored. No active CC call was thus present. Test passes.

| Test Case Dynamic Behaviour | | | | | |
|---|-------|--|-----------------|---------|----------|
| <p>Test Case Name : TC_FT_LC_TI_02 Group : FT/LC/TI/ Purpose : Verify that the IUT, after termination of an MM procedure, maintains the link for a period of <LCE.02>. +- 5%. Configuration : Default : DF_handle_cc_events, DF_handle_mm_events, DF_handle_mm_timeout, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Initial state: F-00 in this testcase it is assumed that no other entities are using the link. ETS 300 175-5 [5], subclause 14.2.7 – ETS 300 444 [10], subclause 8.39</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | 1) |
| 3 | | +STP_perform_locate_request(Locate_request_tx01, Locate_accept_rx01) | | | 2) |
| 4 | | START T_F_LCE_02_min, START T_F_LCE_02_max | | | 3) |
| 5 | | ? TIMEOUT T_F_LCE_02_min | | | 4) |
| 6 | B1 | DLS ? DL_RELEASE_IND +PO_terminate | DI_rel_ind | (PASS) | |
| 7 | | | | | |
| 8 | B2 | ? TIMEOUT T_F_LCE_02_max +PO_terminate | | (FAIL) | 5) |
| 9 | | | | | |
| 10 | B3 | DLS ? DL_RELEASE_IND +PO_terminate | DI_rel_ind | (FAIL) | 6) |
| 11 | | | | | |
| <p>Detailed Comments : 1) Try to establish a direct link. 2) Execute an MM procedure. In this case: Location registration. 3) After completion: start timer T_F_LCE_02_min, being 5% smaller than the actual value, and timer T_F_LCE_02_max, being 5% bigger than the actual value, 4) When the min timer expires: accept a DL_RELEASE_IND. Test passes. 5) If the max timer expires, it has taken too long, Test fails. 5) If the DL_RELEASE_IND comes sooner than the expiry of the min timer: test fails.</p> | | | | | |

Test Case Dynamic Behaviour

Test Case Name : TC_FT_LC_TI_03
Group : FT/LC/TI/
Purpose : Verify that the IUT during indirect link establishment, retransmits the {LCE_PAGE_REQUEST} message after a period of <LCE.03> +- 5%
Configuration :
Default : DF_handle_cc_events,
 DF_handle_any_timeout,
 DF_handle_unexpected_events
Comments : Initial state: T-00
 ETS 300 175-5 [5], subclause 14.2.3 – ETS 300 444 [10], subclause 8.35.1.1

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|--|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | B1 | DLB? DL_BROADCAST_IND START T_F_LCE_03_min, START T_F_LCE_03_max | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | (PASS) | 1) |
| 4 | B2 | DLB ? DL_BROADCAST_IND CANCEL T_F_LCE_03_min, CANCEL T_F_LCE_03_max | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | (FAIL) | 2) |
| 5 | | +PO_release_link | | | |
| 6 | | ? TIMEOUT T_F_LCE_03_min | | | |
| 7 | B3 | DLB ? DL_BROADCAST_IND CANCEL T_F_LCE_03_max | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | (PASS) | 3) |
| 8 | | +PO_release_link | | | |
| 9 | B4 | ? TIMEOUT T_F_LCE_03_max | | (FAIL) | 4) |
| 10 | | +PO_release_link | | | |

Detailed Comments : 1) LT waits for DL_BROADCAST_IND from IUT. If it arrives, guard timers are started.
 2) If the next broadcast message is received before the minimal timer times out: test fails.
 3) If the next broadcast message is received after the minimal timer: test passes
 4) If the next broadcast message comes too late: test fails.

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--------------------------------|-----------------|---------|----------|
| Test Step Name : PR_f00_no_acrgh Group : Preambles/ Objective : To revoke the accessrights of the IUT, as a preamble to testing the obtain accessrights procedures and the location registration after obtain accessrights procedures. If the PT (LT) still has accessrights to the FT (IUT), these accessrights will be revoked. However, no use is made of the PT initiated terminate accessrights procedure, because most FT's will not support this feature. Instead, the accessrights of the PT (LT) will be revoked in a proprietary way. Default : DF_handle_cc_events, DF_handle_mm_events, DF_handle_mm_timeout, DF_handle_unexpected_events Comments : Check the accessrights. If accessrights are available, revoke them. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +STP_check_accessrights | | | |
| 2 | | [TCV_result = FALSE] | | | |
| 3 | | +STP_release_link | | | 1) |
| 4 | | [TCV_result = TRUE] | | | 2) |
| 5 | | +STP_revoke_accessrights_of_pt | | | |
| 6 | | +STP_release_link | | | 3) |
| Detailed Comments : 1) No accessrights available: release link 2) accessrights are still available: revoke them (use proprietary way) 3) release link. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|-----------------------|-----------------|---------|----------|
| Test Step Name : PR_goto_f00 Group : Preambles/ Objective : To bring the IUT in state F-00 (null). Default : Comments : This is done by calling teststep PR_stable_state Postcondition: No link exists. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_stable_state | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| Test Step Name : PR_goto_f01 | | | | | |
| Group : Preambles/ | | | | | |
| Objective : To bring the IUT in state F-01 (Call Initiated). | | | | | |
| Default : | | | | | |
| Comments : Initial state: F-00 Postcondition: Timer T_P_CC_03 is running | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_originated) | | | |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx01(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|--|---------|----------|
| Test Step Name : PR_goto_f02 | | | | | |
| Group : Preambles/ | | | | | |
| Objective : To bring the IUT in state F-02 (Overlap Sending). | | | | | |
| Default : | | | | | |
| Comments : Initial state: F-00 Postcondition: timer T_P_CC_04 is running. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f01 | | | |
| 2 | PR1 | DLS ? DL_DATA_IND CANCEL T_P_CC_03, START T_P_CC_04 | DI_data_ind (Cc_setup_ack_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 1) |
| Detailed Comments : 1) Receive a CC-SETUP-ACK | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|---|---------|----------|
| Test Step Name : PR_goto_f06 | | | | | |
| Group : Preambles/ | | | | | |
| Objective : To bring the IUT in state F-06 (Call Present). | | | | | |
| Default : | | | | | |
| Comments : Initial state: F-00 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | PR1 | +PR_goto_f00 | DI_data_ind(Cc_setup_rx01(TCV_cc_iut_tf)) | (PASS) | |
| 2 | | +STP_invoke_incoming_call | | | |
| 3 | | +STP_handle_indirect_link_est | | | |
| 4 | | +STP_initialise_tf(TSC_iut_terminated) | | | |
| 5 | | DLS ? DL_DATA_IND (TCV_pdu_cc_setup := DL_DATA_IND.message_unit, TCV_cc_tv := TCV_pdu_cc_setup.network_header.t ransaction_value) CANCEL T_USER_INVOKE | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--------------------------------------|---|---------|----------|
| Test Step Name : PR_goto_f07 | | | | | |
| Group : Preambles/ | | | | | |
| Objective : To bring the IUT in state F-07(Call Received). | | | | | |
| Default : | | | | | |
| Comments : Initial state: F-00 Postcondition: Timer T_F_CC_01 is running | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f06 | DI_data_req(Cc_alerting_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_01 | | | |
| Detailed Comments : | | | | | |

Test Step Dynamic Behaviour

Test Step Name : PR_goto_f10
Group : Preambles/
Objective : To bring the IUT in state F-10(Active) with a PT initiated call establishment.
Default :
Comments : Initial state: F-00

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | +PR_goto_f00 | | | |
| 2 | | +STP_direct_link_establishment | | | |
| 3 | | START T_P_CC_03 | | | |
| 4 | | +STP_initialise_tf(TSC_lt_terminated) | | | |
| 5 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx02(TCV_cc_tv, TCV_cc_lt_tf)) | | 1) |
| 6 | | DLS ? DL_DATA_IND CANCEL T_P_CC_03, START T_P_CC_04 | DI_data_ind (Cc_call_proc_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 2) |
| 7 | | DLS ? DL_DATA_IND | DI_data_ind(Cc_alerting_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 8 | | +STP_invoke_cc_connect | | | |
| 9 | | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE, CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 10 | | +STP_check_u_plane(TSPX_ dlei_value) | | | |
| 11 | | DLS ? DL_DATA_IND CANCEL T_P_CC_04 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 12 | | +STP_check_u_plane(TSPX_ _value) | | | |
| 13 | | DLS ? DL_DATA_IND CANCEL T_P_CC_03 | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 14 | | +STP_check_u_plane(TSPX_ _value) | | | |

Detailed Comments : 1) Cc_Setup with 'calling_party_number"ie
 2) use of T_P_CC_04 is optional

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|---|---------|----------|
| Test Step Name : PR_goto_f19 Group : Preambles/ Objective : To bring the IUT in state F-19 (Release Pending) with a FT initiated call release. Default : DF_handle_cc_events, DF_handle_mm_events, DF_handle_unexpected_events Comments : Initial state: F-00 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +PR_goto_f02 | | | |
| 2 | | +STP_invoke_normal_release | | | |
| 3 | PR1 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| Detailed Comments : | | | | | |

Test Step Dynamic Behaviour

Test Step Name : PR_select_state(param : CCSTATE_TYPE)
Group : Preambles/
Objective : To select a certain initial (CC) state to go to, as a preamble to the test of a FT initiated MM procedure. The input parameter indicates the required CC state for a certain MM procedure that is going to be tested.
 If the selected state is F-00, then the teststep initiates link establishment.
Default : DF_handle_cc_timeout,
 DF_handle_cc_events,
 DF_handle_mm_timeout,
 DF_handle_mm_events,
 DF_handle_any_timeout,
 DF_handle_unexpected_events
Comments : See also ETS 300 444 [10], subclause 6.9.6, table 9

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|-----------------|---------|------------------------|
| 1 | | [param = 0] | | | |
| 2 | | +PR_goto_f00 | | | |
| 3 | | +STP_direct_link_establishment | | | 1) |
| 4 | | [param = 1] | | | |
| 5 | | +PR_goto_f01 | | | |
| 6 | | [param = 2] | | | |
| 7 | | +PR_goto_f02 | | | |
| 8 | | CANCEL T_P_CC_04 | | | |
| 9 | | [param = 6] | | | |
| 10 | | +PR_goto_f06 | | | |
| 11 | | [param = 7] | | | |
| 12 | | +PR_goto_f07 | | | |
| 13 | | [param = 10] | | | |
| 14 | | +PR_goto_f10 | | | |
| 15 | | [param = 19] | | | |
| 16 | | +PR_goto_f19 | | | |
| 17 | | [(param = 3) OR (param = 4) OR (param = 5) OR (param = 8) OR (param = 9) OR ((param > 10) AND (param <19)) OR (param > 19)] | | (I) | param outside range |
| 18 | | +PO_terminate | | | |

Detailed Comments : 1) Initiate link establishment

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|-----------------|---------|----------|
| Test Step Name : PR_stable_state Group : Preambles/ Objective : To place the IUT in a stable state, which is defined as follows: - All identities needed by the PT (LT) to access the IUT are available: Accessrights granted, UAK assigned, TPUI assigned, DCK stored. - CC state F-00 - No link established - LT (PT) is locked to the FT (IUT) Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : It is assumed that when the LT locked to the tester, the higher layer broadcast bits A44 and A38 are both set to 1, thus enabling both obtaining accessrights and location registration. The teststep STP_init_broadcast_bits will initialise the relevant broadcast bits and the location area. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | PR1 | +STP_check_accessrights | | (PASS) | 1) |
| 2 | | [TCV_result = FALSE] | | | |
| 3 | | +STP_perform_accessrights_request (Access_rights_request_tx02, Access_rights_accept_rx01) | | | |
| 4 | | +STP_perform_locate_request (Locate_request_tx01, Locate_accept_rx01) | | | |
| 5 | | +STP_release_link | | | |
| 6 | PR2 | [TCV_result = TRUE] | | (PASS) | 2) |
| Detailed Comments : 1) Accessrights are not (or no longer) available. Invoke accessrightsprocedure 2) Accessrights still available | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|-----------------------|--|---------|----------|
| Test Step Name : STP_cc_release_abnormal Group : Teststeps/CC/ Objective : To initiate the abnormal cc release procedure , initiated and the LT side. Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Postcondition: IUT enters the T-00 state | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_release_com_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 2 | S1 | DLS ? DL_RELEASE_IND | DI_rel_ind | (PASS) | |
| Detailed Comments : | | | | | |

Test Step Dynamic Behaviour

Test Step Name : STP_cc_release_normal(param : TRANS_FLAG)
Group : Teststeps/CC/
Objective : To initiate the cc release procedure at the IUT side or LT side.
The parameter indicates the side which shall initiate the call release.
Default : DF_handle_cc_timeout,
DF_handle_cc_events,
DF_handle_mm_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : Precondition: No timer is running.
Postcondition: IUT enters the T-00 state The link is not yet released.

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | | [param = TSC_lt_terminated] | | | 1) |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_02 | DI_data_req(Cc_release_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 3 | S1 | DLS ? DL_DATA_IND CANCEL T_P_CC_02 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 4 | S2 | DLS ? DL_RELEASE_IND CANCEL T_P_CC_02 | DI_rel_ind | (I) | 2) |
| 5 | | [param = TSC_iut_terminated] | | | 3) |
| 6 | | +STP_invoke_normal_release | | | |
| 7 | S3 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 8 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_release_com_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 9 | S4 | DLS ? DL_RELEASE_IND CANCEL T_USER_INVOKE | DI_rel_ind | (I) | 2) |
| 10 | S5 | [(param <> TSC_lt_terminated) AND (param <> TSC_iut_terminated)] | | (I) | |
| 11 | | +PO_release_link | | | |

Detailed Comments : 1) Release is to be initiated by the LT
2) DL_REL_IND received. Result of the test is Inconclusive
3) Release is to be initiated by the IUT

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|---|---------|----------|
| Test Step Name : STP_cc_release_partial(param : TRANS_FLAG) Group : Teststeps/CC/ Objective : To initiate the partial cc release procedure at the IUT side or LT side. The parameter indicates the side which shall initiate the partial release. Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Precondition: No timer is running. Postcondition: IUT enters the T-00 state The link is not yet released. TO BE COMPLETED | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [param = TSC_lt_ originated] | | | 1) |
| 2 | | DLS ! DL_DATA_REQ START T_P_CC_02 | DI_data_req(Cc_release_tx01(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |
| 3 | S1 | DLS ? DL_DATA_IND CANCEL T_P_CC_02 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | |
| 4 | S2 | DLS ? DL_RELEASE_IND CANCEL T_P_CC_02 | DI_rel_ind | (I) | |
| 5 | | [param = TSC_iut_ originated] | | | 3) |
| 6 | | +STP_invoke_partial_release | | | |
| 7 | S3 | DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 4) |
| 8 | | DLS ! DL_DATA_REQ | DI_data_req(Cc_release_com_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 9 | S4 | DLS ? DL_RELEASE_IND CANCEL T_USER_INVOKE | DI_rel_ind | (FAIL) | 5) |
| 10 | S5 | [(param <> TSC_lt_ originated) AND (param <> TSC_iut_ originated)] | | (I) | |
| 11 | | +PO_release_link | | | |
| Detailed Comments : 1) Release is to be initiated by the IUT 2) cc_release_tx01 contains release-reason with release reason code '15'H (partial release) 3) Release is to be initiated by the LT 4) cc_release_rx_base does not put any constraint on the release reason, because release reasons are optional in ETS 300 444. 5) The link should be maintained after a partial release. 6) An error in calling this teststep has been made. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|-----------------|---------|----------|
| Test Step Name : STP_check_u_plane(dlei : DATA_LINK_ENDPOINT_IDENTIFIER) | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To check if the U-plane between the IUT and LT is in place. | | | | | |
| Default : | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_cinft_check_u_plane(dlei))) | | | |
| 2 | S1 | [TCV_result = TRUE] | | (PASS) | |
| 3 | S2 | [TCV_result = FALSE] | | (FAIL) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|-----------------------|---|---------|----------|
| Test Step Name : STP_invoke_cc_connect | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To invoke a CC-CONNECT message to be sent by the IUT | | | | | |
| Default : DF_handle_unexpected_events | | | | | |
| Comments : Invocation method acc. to Pixit question ???? | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | <IUT ! DL_DATA_IND> | DI_data_ind(Cc_connect_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | | |
| 2 | | START T_USER_INVOKE | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--------------------------|--|---------|----------|
| Test Step Name : STP_invoke_incoming_call | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To invoke the IUT to initiate a normal incoming call setup, while in state F-00. See PIXIT Question B.9.7 | | | | | |
| Default : | | | | | |
| Comments : Postcondition: Timer T_USER_INVOKE is started. It will be cancelled when the link is established. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | <IUT ! DL_BROADCAST_IND> | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | | 1) |
| 2 | | START T_USER_INVOKE | | | |
| Detailed Comments : 1) A broadcast message is expected, containing the LCE-REQUEST-PAGE PDU. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|-----------------------|---|---------|----------|
| Test Step Name : STP_invoke_normal_release | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To invoke the IUT to go on hook, thus initiating a normal release, while in any cc state. See PIXIT Question B.9.9 | | | | | |
| Default : | | | | | |
| Comments : A dl_data_indication is to be expected, containing a CC_RELEASE message. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | <IUT ! DL_DATA_IND> | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | | |
| 2 | | START T_USER_INVOKE | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|-----------------------|---|---------|----------|
| Test Step Name : STP_invoke_partial_release | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To invoke the IUT to initiate a partial release. See PIXIT Question B.9.12 | | | | | |
| Default : | | | | | |
| Comments : A precondition to the execution of this teststep is, that a link exists between the It and the iut. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | <IUT ! DL_DATA_IND> | DI_data_ind(Cc_release_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | | 1) |
| 2 | | START T_USER_INVOKE | | | |
| Detailed Comments : 1) cc_release_rx_base does not put any constraint on the release reason, because release reasons are optional in ETS 300 444. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|-----------------|---------|----------|
| Test Step Name : STP_check_dtmf_defined | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To check, if the IUT has switched to defined tone length. | | | | | |
| Default : | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_check_dtmf_defined())) | | | |
| 2 | S1 | [TCV_result = TRUE] | | (PASS) | |
| 3 | S2 | [TCV_result = FALSE] | | (FAIL) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|-----------------|---------|----------|
| Test Step Name : STP_check_dtmf_infinite | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To check, if the IUT has switched to DTMF, infinite tone length. | | | | | |
| Default : | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_check_dtmf_infinite())) | | | |
| 2 | S1 | [TCV_result = TRUE] | | (PASS) | |
| 3 | S2 | [TCV_result = FALSE] | | (FAIL) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--|-----------------|---------|----------|
| Test Step Name : STP_check_basic_digits | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To check the correct transmission of the basic digits sent by the LT. The result of the operation TSO_check_basic_digits is stored in the testsuitevariable TCV_result. | | | | | |
| Default : | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_check_basic_digits())) | | | |
| 2 | S1 | [TCV_result = TRUE] | | (PASS) | |
| 3 | S2 | [TCV_result = FALSE] | | (FAIL) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|-------------------------------------|-----------------|---------|----------|
| Test Step Name : STP_check_pause | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To verify that the FT has sent a dialling pause. | | | | | |
| Default : | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_check_pause())) | | | |
| 2 | S1 | [TCV_result = TRUE] | | (PASS) | |
| 3 | S2 | [TCV_result = FALSE] | | (FAIL) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|-------------------------------------|-----------------|---------|----------|
| Test Step Name : STP_check_pulse | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To observe, if the IUT has switched on to pulse dialling. A precondition for this teststep is that first some digits are sent to the IUT. These digits will be passed to the network simulator, where they will be received in pulse dialling form. | | | | | |
| Default : | | | | | |
| Comments : The result of the operation will be assigned to the testcase variable TCV_result. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_check_pulse())) | | | |
| 2 | S1 | [TCV_result = TRUE] | | (PASS) | |
| 3 | S2 | [TCV_result = FALSE] | | (FAIL) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|-------------|
| Test Step Name : STP_send_called_party_number(nr_of_digits : CPN_LENGTH_TYPE) | | | | | |
| Group : Teststeps/CC/ | | | | | |
| Objective : To send the called party number present in the PIXIT parameter 'TSPX_called_party_number' to the IUT. The called party number information will be sent in successive CC-INFO PDU's, each containing a multi-keypad ie with one digit. | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : The number of digits in the called party number is indicated by the parameter TSPX_nr_of_digits_in_cpn. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_count := 0) | | | |
| 2 | | REPEAT LTS_send_one_digit UNTIL [TCV_count = nr_of_digits] | | | |
| 3 | | LTS_send_one_digit DLS ! DL_DATA_REQ (TCV_count := TCV_count + 1) START T_P_CC_01 | DL_data_req (Cc_info_tx06(TCV_cc_tv, TCV_cc_lt_tf, TSO_get_one_digit(TSPX_called_party_number, TCV_count)) | | Local Tree: |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|-----------------|---------|----------|
| Test Step Name : STP_assign_tpui(tpui_value : PORT_ID_VALUE_TYPE; tpui_length : OCT_1) Group : Teststeps/MM/ Objective : To pass the assigned TPUI to the testsystem. In successive communication, an assigned TPUI will be used, and thus, an assigned PMID. Default : DF_handle_unexpected_events Comments : A call is made to the testsuite operator TSO_assign_tpui. The result of the operation is a BOOLEAN, which is taken to be TRUE. SBH 95.06.08 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := TSO_assign_tpui(tpui_value, tpui_length)) | | | |
| Detailed Comments : | | | | | |

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|-----------------|---------|----------|
| 1 | | (TCV_result := TSO_assign_tpui(tpui_value, tpui_length)) | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|--|---------|----------|
| Test Step Name : STP_check_accessrights | | | | | |
| Group : Teststeps/MM/ | | | | | |
| Objective : To test whether or not the IUT has granted accessrights to the lower tester. The way to test this shall be to attempt an PT initiated link establishment and to perform a location registration. If the link establishment AND the location registration request succeeds, it is assumed that the IUT has granted accessrights to the LT. | | | | | |
| Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : A precondition to this test is that the IUT shall be in state F-00. A postcondition is that the IUT is also in state F-00 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +STP_direct_link_establishment | | | |
| 2 | | START T_P_MM_locate_1 | | | |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | |
| 4 | S2 | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length, TCV_result := TRUE) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | (PASS) | |
| 5 | S3 | [TCV_port_id_length_tpui = '00'O] | | | |
| 6 | | +STP_release_link | | | |
| 7 | S4 | [TCV_port_id_length_tpui <> '00'O] | | | |
| 8 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_id_assign_ack_tx_base) | | |
| 9 | | +STP_release_link | | | |
| 10 | | +STP_assign_tpui(TCV_pdu_locate_accept.portable_id.id_value, TCV_port_id_length_tpui) | | | |
| 11 | S5 | DLS ? DL_DATA_IND(TCV_result := FALSE) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_reject_rx_base) | (PASS) | |
| 12 | | +STP_release_link | | | |
| 13 | S6 | ? TIMEOUT T_P_MM_locate_1 (TCV_result := FALSE) | | | |
| 14 | | +STP_release_link | | | |
| Detailed Comments : | | | | | |

| |
|------------------------------------|
| Test Step Dynamic Behaviour |
|------------------------------------|

| | |
|-----------------------|--|
| Test Step Name | : STP_delete_tpui |
| Group | : Teststeps/MM/ |
| Objective | : To delete the assigned TPUI from the testystem. In successive communication, a default TPUI will be used, and thus, a default PMID. |
| Default | : DF_handle_unexpected_events |
| Comments | : A call is made to the testsuite operator TSO_delete_tpui. The result of the operation is a BOOLEAN, which is taken to be TRUE. The result type indicates success or failure. |

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|-----------------------------------|-----------------|---------|----------|
| 1 | | (TCV_result := TSO_delete_tpui()) | | | |

Detailed Comments :

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|----------------------------------|---------|----------|
| Test Step Name : STP_handle_identity_request Group : Teststeps/MM/ Objective : To send the correct Identity Reply message dependent on id_group and id_type. Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : This teststep supports only following identities: Id_Group: Portable Id AND Id_Type: IPUI Id_Group: Portable Id AND Id_Type: IPEI Id_Group: Portable Id AND Id_Type: TPUI Id_Group: Fixed Id AND Id_Type: ARI Id_Group: Fixed Id AND Id_Type: ARI Id_Group: Fixed Id AND Id_Type: PARK Other combinations are to be implemented, if they are needed. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [(TCV_id_group = '0000'B) AND (TCV_id_type = '0000000'B)] | | (PASS) | 1) |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx01) | | |
| 3 | | [(TCV_id_group = '0000'B) AND (TCV_id_type = '0010000'B)] | | (PASS) | 2) |
| 4 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx02) | | |
| 5 | | [(TCV_id_group = '0000'B) AND (TCV_id_type = '0100000'B)] | | (PASS) | 3) |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx03) | | |
| 7 | | [(TCV_id_group = '0001'B) AND (TCV_id_type = '1110100'B)] | | (I) | 4) |
| 8 | | +PO_release_link | | | |
| 9 | | [(TCV_id_group = '0100'B) AND (TCV_id_type = '0000000'B)] | | (PASS) | 5) |
| 10 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx05) | | |
| 11 | | [(TCV_id_group = '0100'B) AND (TCV_id_type = '0000001'B)] | | (PASS) | 6) |
| 12 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx06) | | |
| 13 | | [(TCV_id_group = '0100'B) AND (TCV_id_type = '0100000'B)] | | (PASS) | 7) |
| 14 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx04) | | |
| Detailed Comments : 1) Id_Group: Portable Id AND Id_Type: IPUI Send Identity Reply with <<portable_id>>ie containing ipui. 1) Id_Group: Portable Id AND Id_Type: IPEI Send Identity Reply with <<portable_id>>ie containing ipei. 3) Id_Group: Portable Id AND Id_Type: TPUI Send Identity Reply with <<portable_id>>ie containing tpui 4) Id_Group: Network Assigned Id AND Id_Type: GSM TMSI Not implemented. 5) Id_Group: Fixed Id AND Id_Type: ARI Send Identity Reply with <<fixed_id>>ie containing ari. 6) Id_Group: Fixed Id AND Id_Type: ARI + Radio fixed part nr. Send Identity Reply with <<fixed_id>>ie containing ari. | | | | | |

Continued on next page

Continued from previous page

| |
|------------------------------------|
| Test Step Dynamic Behaviour |
|------------------------------------|

| |
|---|
| Detailed Comments : ... 7) Id_Group: Fixed Id AND Id_Type: PARK Send Identity Reply with <<fixed_id>>ie containing park. |
|---|

| |
|------------------------------------|
| Test Step Dynamic Behaviour |
|------------------------------------|

| |
|---|
| Test Step Name : STP_invoke_access_term_req Group : Teststeps/MM/ Objective : To invoke the FT initiated terminate access rights procedure. See PIXIT Question B.9.1 and PIXIT Question B.7.8 Default : DF_handle_unexpected_events Comments : The PIXIT parameter TSPX_mmproc_arte_invoke (See PIXIT Question B.7.8), specifies the way the accessrights terminate procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.1 specifies the way to invoke the procedure (NOT using protocol stimuli). |
|---|

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--------------------------------|---|---------|----------|
| 1 | | [TSPX_mmproc_arte_invoke = 0] | | | |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Access_rights_term_req_rx _base) | | 1) |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_arte_invoke <> 0] | | | 2) |

| |
|--|
| Detailed Comments : 1) Invoke the accessrights terminate procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. 2) t.b.s |
|--|

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--------------------------------|--------------------------------------|---------|----------|
| Test Step Name : STP_invoke_pt_authentication Group : Teststeps/MM/ Objective : To invoke the FT initiated PT authentication procedure See PIXIT Question B.9.2 and PIXIT Question B.7.9 Default : DF_handle_unexpected_events Comments : The PIXIT parameter TSPX_mmproc_aupt_invoke (See PIXIT Question B.7.9), specifies the way the authentication of PT procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.2 specifies the way to invoke the procedure (NOT using protocol stimuli). | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [TSPX_mmproc_aupt_invoke = 0] | | | |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Auth_request_rx01) | | 1) |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_aupt_invoke <> 0] | | | |
| 5 | | START T_P_MM_locate_1 | | | |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Locate_request_tx01) | | 2) |
| Detailed Comments : 1) Invoke the authentication of PT procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. 2) Use location registration to invoke authentication of PT. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|-----------------------|------------------------------------|---------|----------|
| Test Step Name : STP_invoke_pt_auth_with_zap Group : Teststeps/MM/ Objective : To invoke the FT initiated PT authentication procedure Default : Comments : A dl_data_indication is to be expected, containing an AUTH_REQUEST message with the <<The AUTH_REQ message shall contain the <<auth_type>>ie with ZAP_increment bit set to 1. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | <IUT ! DL_DATA_IND> | DI_data_ind(Auth_request_rx02) | | 1) |
| 2 | | START T_USER_INVOKE | | | |
| Detailed Comments : 1) ZAP increment bit shall be set to 1. | | | | | |

Test Step Dynamic Behaviour

Test Step Name : STP_invoke_user_authentication
Group : Teststeps/MM/
Objective : To invoke the FT initiated user authentication procedure
 See PIXIT Question B.9.3 and PIXIT Question B.7.10
Default : DF_handle_unexpected_events
Comments : The PIXIT parameter TSPX_mmproc_auus_invoke (See PIXIT Question B.7.10), specifies the way the authentication of user procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0).
 If the value of this parameter is set to 0, PIXIT Question B.9.3 specifies the way to invoke the procedure (NOT using protocol stimuli).

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | | [TSPX_mmproc_auus_invoke = 0] | | | 1) |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Auth_request_rx03) | | |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_auus_invoke <> 0] | | | |
| 5 | | +PR_select_state (TSPX_mmproc_auus_ccstate) | | | |
| 6 | | +STP_initialise_tf(TSC_lt_originated) | | | |
| 7 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx02(TCV_cc_tv, TCV_cc_lt_tf)) | | 2) |

Detailed Comments : 1) Invoke the authentication of user procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used.
 2) Usually, for outgoing call, FT has to authenticate the user.

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--------------------------------|--------------------------------------|---------|----------|
| <p>Test Step Name : STP_invoke_ft_init_cipherng_off</p> <p>Group : Teststeps/MM/</p> <p>Objective : To invoke the FT to initiate cipherng off See PIXIT Question B.9.5 and PIXIT Question B.7.11</p> <p>Default : DF_handle_unexpected_events</p> <p>Comments : The PIXIT parameter TSPX_mmproc_cift_invoke (See PIXIT Question B.7.11), specifies the way the FT initiated cipher switching procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.5 specifies the way to invoke the procedure (NOT using protocol stimulus). In this case a dl_data_ind is expected, containing a CIPHER-REQUEST PDU. If the value of this parameter is set to any other value, the teststep provides a number of alternative protocol stimuli for invoking the</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [TSPX_mmproc_cift_invoke = 0] | | | 1) |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Cipher_request_rx02) | | |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_cift_invoke <> 0] | | | |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx02) | | 2) |
| 6 | | START T_USER_INVOKE | | | |
| <p>Detailed Comments : 1) Invoke the FT initiated cipher switching procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. Ciphering request message with the <<cipher_info>>ie containing ciphering off is expected. 2) Send message with request to switch ciphering off.</p> | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--------------------------------|--------------------------------------|---------|----------|
| Test Step Name : STP_invoke_ft_init_cipherng_on Group : Teststeps/MM/ Objective : To invoke the FT to initiate cipherng on See PIXIT Question B.9.6 and PIXIT Question B.7.11 Default : DF_handle_unexpected_events Comments : The PIXIT parameter TSPX_mmproc_cift_invoke (See PIXIT Question B.7.11), specifies the way the FT initiated cipher switching procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.6 specifies the way to invoke the procedure (NOT using protocol stimulus). In this case a dl_data_ind is expected, containing a CIPHER-REQUEST PDU. If the value of this parameter is set to any other value, the teststep provides a number of alternative protocol stimuli for invoking the | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [TSPX_mmproc_cift_invoke = 0] | | | 1) |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Cipher_request_rx01) | | |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_cift_invoke <> 0] | | | 2) |
| 5 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx01) | | |
| 6 | | START T_USER_INVOKE | | | |
| Detailed Comments : 1) Invoke the FT initiated cipher switching procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. Cipherng request message with the <<cipher_info>>ie containing cipherng on is expected. 2) Send message with request to switch cipherng on. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--------------------------------|---|---------|----------|
| Test Step Name : STP_invoke_identity_req Group : Teststeps/MM/ Objective : To invoke the FT to initiate identity request. See PIXIT Question B.9.8 and PIXIT Question B.7.12 Default : DF_handle_unexpected_events Comments : The PIXIT parameter TSPX_mmproc_idpt_invoke (See PIXIT Question B.7.12), specifies the way the identification of PT procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.8 specifies the way to invoke the procedure (NOT using protocol stimulus). | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [TSPX_mmproc_idpt_invoke = 0] | | | 1) |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Identity_request_rx_base) | | |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_idpt_invoke <> 0] | | | 2) |
| Detailed Comments : 1) Invoke the identification of PT procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. 2) t.b.s | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--------------------------------|---|---------|----------|
| <p>Test Step Name : STP_invoke_key_allocate</p> <p>Group : Teststeps/MM/</p> <p>Objective : To invoke a key allocation procedure initiated by the FT side. See PIXIT Question B.9.10 and PIXIT Question B.7.14</p> <p>Default : DF_handle_unexpected_events</p> <p>Comments : The PIXIT parameter TSPX_mmproc_keal_invoke (See PIXIT Question B.7.14), specifies the way the key allocation procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.10 specifies the way to invoke the procedure (NOT using protocol stimuli). If the value of this parameter is set to any other value, the teststep provides a number of alternative protocol stimuli for invoking the procedure.</p> | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [TSPX_mmproc_keal_invoke = 0] | | | |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Key_allocate_rx01) | | 1) |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_keal_invoke <> 0] | | | |
| 5 | | +PR_f00_no_acrght | | | |
| 6 | | +STP_direct_link_establishment | | | |
| 7 | | START T_P_MM_access_1 | | | |
| 8 | | DLS ! DL_DATA_REQ | DI_data_req(Access_rights_request_tx02) | | 2) |
| <p>Detailed Comments : 1) Invoke the key allocation procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. 2) Use accessrights request to invoke key allocation.</p> | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| Test Step Name : STP_invoke_location_update Group : Teststeps/MM/ Objective : To initiate the FT initiated location update procedure. See PIXIT Question B.9.11 and PIXIT Question B.7.13 Default : Comments : The PIXIT parameter TSPX_mmproc_loup_invoke (See PIXIT Question B.7.13), specifies the way the location update procedure will be invoked. This can either be in a proprietary manner (value is 0), or by means of a protocol stimulus (value !=0). If the value of this parameter is set to 0, PIXIT Question B.9.11 specifies the way to invoke the procedure (NOT using protocol stimuli). | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [TSPX_mmproc_loup_invoke = 0] | | | |
| 2 | | <IUT ! DL_DATA_IND> | DI_data_ind(Mm_info_suggest_rx_base) | | 1) |
| 3 | | START T_USER_INVOKE | | | |
| 4 | | [TSPX_mmproc_loup_invoke <> 0] | | | 2) |
| 5 | | +STP_release_link | | | 3) |
| 6 | | +STP_delete_tpui | | | 4) |
| 7 | | +PR_select_state (TSPX_mmproc_loup_ccstate) | | | |
| 8 | | +STP_initialise_tf(TSC_lt_terminated) | | | |
| 9 | | DLS ! DL_DATA_REQ (TCV_cc_tv := '000'B) | DI_data_req (Cc_setup_tx01(TCV_cc_tv, TCV_cc_lt_tf)) | | 5) |
| Detailed Comments : 1) Invoke the location update procedure in a proprietary way, as specified in the PIXIT. No protocol stimulus is used. 2) Perform call setup with default PMID, in order to invoke location update 3) Release link, in order to restart link with default PMID. 4) assigned TPUI is deleted. 5) Send call setup with default PMID. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|-----------------------|---------|----------|
| Test Step Name : STP_perform_accessrights_request(param_tx : PDU; param_rx : PDU) Group : Teststeps/MM/ Objective : To perform an access rights request procedure, and handle the results. Default : DF_handle_cc_timeout, DF_handle_cc_events, DF_handle_mm_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : param_tx is an input parameter specifying the constraints for the accessrights request. param_rx is an output parameter, specifying the constraint for the accessrights accept. A precondition to this test is that the IUT shall be in state F-00 with established L2-link. See ETS 300 175[5] subclause 13.5.1 | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | START T_P_MM_access_1 | | | |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(param_tx) | | |
| 3 | S1 | DLS ? DL_DATA_IND CANCEL T_P_MM_access_1 | DI_data_ind(param_rx) | (PASS) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--|-----------------------|---------|----------|
| Test Step Name : STP_perform_ft_authentication(param_tx : PDU; param_rx : PDU) Group : Teststeps/MM/ Objective : A general teststep for performing FT authentication. Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : param_tx is an input parameter specifying the constraints for the authentication request. param_rx is an output parameter, specifying the constraint for the authentication reply. A precondition to this teststep, is that a valid uak is present in the testsuite variable TSV_uak. Also, a link has to be present. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TSV_ft_authentication_pending := TRUE) | | | |
| 2 | | START T_P_MM_auth_1 | | | 1) |
| 3 | | DLS ! DL_DATA_REQ | DI_data_req(param_tx) | | 2) |
| 4 | S1 | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_unit, TCV_res_rx := TCV_pdu_auth_reply.res.field) CANCEL T_P_MM_auth_1 | DI_data_ind(param_rx) | (PASS) | 3) |
| 5 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 6 | | (TCV_xres := TSO_cinft_algosb1_a2(TSC_rand, TSC_rs, TSV_uak)) | | | 4) |
| 7 | S2 | [TCV_xres = TCV_res_rx] | | (PASS) | |
| 8 | S3 | [TCV_xres <> TCV_res_rx] | | (FAIL) | |
| Detailed Comments : 1) Start timer. 2) Send authentication request, with param_tx 3) Receive authentication reply with param_rx. Store received res in TCV_res_rx. 4) Check if received res value matches calculated res value. Also, calculate a possible derived cipherring key (Only used if the auth_request constraint specifies upc = 1) | | | | | |

Test Step Dynamic Behaviour

Test Step Name : STP_perform_locate_request(param_tx : PDU; param_rx : PDU)
Group : Teststeps/MM/
Objective : A general teststep for performing location registration
Default : DF_handle_mm_timeout,
DF_handle_mm_events,
DF_handle_cc_events,
DF_handle_any_timeout,
DF_handle_unexpected_events
Comments : param_tx is an input parameter specifying the constraints for the authentication request.
param_rx is an output parameter, specifying the constraint for the authentication reply.
A precondition to this test is that the IUT shall be in state F-00 with established L2-link.
See ETS 300 175[5] subclause 13.4.1

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|--|--|---------|----------|
| 1 | S1 | START T_P_MM_locate_1 | | | |
| 2 | | DLS ! DL_DATA_REQ | DI_data_req(param_tx) | | 1) |
| 3 | | DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length) CANCEL T_P_MM_locate_1 | DI_data_ind(param_rx) | (PASS) | 2) |
| 4 | | [TCV_port_id_length_tpui = '00'O] | | | 3) |
| 5 | | [TCV_port_id_length_tpui <> '00'O] | | | 4) |
| 6 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_id_assign_ack_tx_base) | | |

Detailed Comments : 1) Send a location registration message
2) Receive Locate accept message.
3) In case of empty tpui, LT shall not send a temporary_id_assign_ack.
4) In case of tpui, LT shall send a temporary_id_assign_ack.

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| Test Step Name : STP_perform_pt_init_cipherng_off Group : Teststeps/MM/ Objective : To execute the PT initiated cipherng procedure, in order to switch off cipherng. Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx02) | | 1) |
| 2 | | START T_P_MM_cipher_2 | | | |
| 3 | S1 | DLS ? DL_DATA_IND CANCEL T_P_MM_cipher_2 | DI_data_ind(Cipher_request_rx02) | (PASS) | 2) |
| 4 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_disabled) | | 3) |
| 5 | S2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_disabled) | (PASS) | 4) |
| 6 | S3 | DLS ? DL_DATA_IND | DI_data_ind(Cipher_reject_rx_base) | (FAIL) | 5) |
| Detailed Comments : 1) Send message with request to switch cipherng off. 2) Wait for Cipher Request 3) Stop cipherng in LT 4) Wait for the DL_ENCRYPT_IND with cipherng status 'disabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout. 5) The cipherng request was rejected by the IUT. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| Test Step Name : STP_perform_pt_init_cipherng_on | | | | | |
| Group : Teststeps/MM/ | | | | | |
| Objective : To execute the PT initiated cipherng procedure, in order to switch on cipherng. | | | | | |
| Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | DLS ! DL_DATA_REQ | DI_data_req(Cipher_suggest_tx01) | | 1) |
| 2 | | START T_P_MM_cipher_2 | | | |
| 3 | S1 | DLS ? DL_DATA_IND CANCEL T_P_MM_cipher_2 | DI_data_ind(Cipher_request_rx01) | (PASS) | 2) |
| 4 | | DLS ! DL_ENC_KEY_REQ | DI_enc_key_req(TSV_dck_value) | | 3) |
| 5 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_enabled) | | 4) |
| 6 | S2 | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_enabled) | (PASS) | 5) |
| 7 | S3 | DLS ? DL_DATA_IND | DI_data_ind(Cipher_reject_rx_base) | (FAIL) | 6) |
| Detailed Comments : 1) Send message with request to switch cipherng on. 2) Wait for Cipher Request 3) Pass dck value to DLC. 4) Start cipherng in LT 5) Wait for the DL_ENCRYPT_IND with cipherng status 'enabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout. 6) The cipherng request was rejected by the IUT. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|-----------------|---------|----------|
| Test Step Name : STP_revoke_accessrights_of_pt | | | | | |
| Group : Teststeps/MM/ | | | | | |
| Objective : To revoke the accessrights of the PT (LT), by means of a proprietary management command. | | | | | |
| Default : DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : A situation must be created where the FT(IUT) is ready to accept an accessrights procedure of the PT (LT). This implies that a possibly existing previous accessrights information and identities must be cleared. This shall be done without using the terminate accessrights procedure. The actual revoking is performed by the teststep TSO_reveok_accessrights_of_pt. The result of the operation is considered to be TRUE. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := TSO_revoke_accessrights_of_pt()) | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|-----------------|---------|----------|
| Test Step Name : STP_set_bit_a38(param : INT_8) | | | | | |
| Group : Teststeps/MM/ | | | | | |
| Objective : The set the value of the broadcasted "higher layer capabilities" bit a 38. The parameter indicates the value that the bit shall get. | | | | | |
| Default : DF_handle_unexpected_events | | | | | |
| Comments : The testsuite operator TSO_cinft_set_bit_a38 will do the job. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := TSO_cinft_set_bit_a38(param)) | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|-----------------|---------|----------|
| Test Step Name : STP_check_link_present | | | | | |
| Group : Teststeps/LC/ | | | | | |
| Objective : To test if a link is present between the iut and the It. | | | | | |
| Default : DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : The boolean variable TCV_result contains the result of the test. If it is TRUE, a link is still present, if it is FALSE, no link is present. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | (TCV_result := (TSO_cinft_check_link_present())) | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|-------------------|---------|----------|
| Test Step Name : STP_direct_link_establishment | | | | | |
| Group : Teststeps/LC/ | | | | | |
| Objective : To establish a link, initiated by the PT, using the direct link establishment procedure as described in ETS 300 444, subclause 8.36 | | | | | |
| Default : DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Precondition: Timer T_DLC_RESPONSE is started. Its timeout is handled in DF_handle_any_timeout. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | DLS ! DL_ESTABLISH_REQ START T_DLC_RESPONSE | DI_est_req_no_pdu | | |
| 2 | S1 | DLS ? DL_ESTABLISH_CFM CANCEL T_DLC_RESPONSE | DI_est_cfm | (PASS) | |
| 3 | S2 | DLS ? DL_RELEASE_IND CANCEL T_DLC_RESPONSE | DI_rel_ind | (FAIL) | |
| 4 | | +PO_terminate | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| Test Step Name : STP_handle_indirect_link_est Group : Teststeps/LC/ Objective : To handle the indirect link establishment, initiated by the IUT. Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events, DF_handle_paging Comments : Precondition: Timer T_USER_INVOKE is started. After the link establishment, the timer is cancelled. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | S1 | DLB ? DL_BROADCAST_IND | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | (PASS) | 1) |
| 2 | | DLS ! DL_ESTABLISH_REQ | DI_est_req_pdu(Lce_page_response_tx01) | | 2) |
| 3 | S2 | DLS ? DL_ESTABLISH_CFM CANCEL T_USER_INVOKE | DI_est_cfm | (PASS) | |
| 4 | S3 | DLB ? DL_BROADCAST_IND | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_mm)) | (PASS) | 3) |
| 5 | | DLS ! DL_ESTABLISH_REQ | DI_est_req_pdu(Lce_page_response_tx01) | | 2) |
| 6 | S4 | DLS ? DL_ESTABLISH_CFM CANCEL T_USER_INVOKE | DI_est_cfm | (PASS) | |
| Detailed Comments : 1) A broadcast message is received, with an LCE-REQUEST-PAGE PDU for CC services. 2) An LCE_PAGE_RESPONSE is sent back to the IUT. 3) A broadcast message is received, with an LCE-REQUEST-PAGE PDU for MM services. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|---|-------|---|-----------------|---------|----------|
| Test Step Name : STP_initialise_tf(param : TRANS_FLAG) Group : Teststeps/LC/ Objective : To initialise the transaction flag used in the network header of the CC messages Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | [param = TSC_iut_originated] | | | |
| 2 | | (TCV_cc_iut_tf := '0'B, TCV_cc_lt_tf := '1'B) | | | |
| 3 | | [param = TSC_lt_originated] | | | |
| 4 | | (TCV_cc_iut_tf := '1'B, TCV_cc_lt_tf := '0'B) | | | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|-------------------------------|---------|----------|
| Test Step Name : STP_release_link Group : Teststeps/LC/ Objective : To initiate the link release procedure. A DL_RELEASE_REQ is sent, and the DL_RELEASE_CFM is waited for. Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : It could happen that no link is present whe this teststep is called. Timeout of timer T_LCE_01 is handled in DF_handle_any_timeout, which is attached through the testcase. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_normal) | | |
| 2 | S1 | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | (PASS) | |
| 3 | S2 | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | (PASS) | 1) |
| Detailed Comments : 1) This receive statement captures release collision. | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---|-----------------|---------|----------|
| Test Step Name : PO_normal_release Group : Postambles/ Objective : To perform a normal release, initiated by the LT, and to release the link. A final verdict is assigned. Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events Comments : Expiry of timer T_F_CC_02 is handled in default DF_handle_cc_timeout Before terminating the testcase, time T_RELEASE_DELAY seconds is waited, in order to catch any strange behaviour of the IUT, and act upon it. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | START T_RELEASE_DELAY | | | |
| 2 | PO1 | ? TIMEOUT T_RELEASE_DELAY | | (PASS) | |
| 3 | | +STP_cc_release_normal (TSC_lt_originated) | | | |
| 4 | | +STP_release_link | | | |
| 5 | PO2 | CANCEL | | R | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|--|-----------------|---------|----------|
| Test Step Name : PO_release_link | | | | | |
| Group : Postambles/ | | | | | |
| Objective : To perform a link release procedure, initiated by the LT. A final verdict is assigned. | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Before terminating the testcase and releasing the link, a time T_RELEASE_DELAY seconds is waited, in order to catch any strange behaviour of the IUT, and act upon it. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | START T_RELEASE_DELAY | | | |
| 2 | PO1 | ? TIMEOUT T_RELEASE_DELAY | | (PASS) | |
| 3 | | +STP_release_link | | | |
| 4 | PO2 | CANCEL | | R | |
| 5 | S2 | DLS ? DL_RELEASE_IND CANCEL T_RELEASE_DELAY | DI_rel_ind | (PASS) | |
| Detailed Comments : | | | | | |

| Test Step Dynamic Behaviour | | | | | |
|--|-------|---------------------------|-----------------|---------|----------|
| Test Step Name : PO_terminate | | | | | |
| Group : Postambles/ | | | | | |
| Objective : To terminate the testcase, in case no link is present. A final verdict is assigned. | | | | | |
| Default : DF_handle_cc_timeout, DF_handle_mm_timeout, DF_handle_mm_events, DF_handle_mm_invokation, DF_handle_cc_events, DF_handle_any_timeout, DF_handle_unexpected_events | | | | | |
| Comments : Before terminating the testcase, time T_RELEASE_DELAY seconds is waited, in order to catch any strange behaviour of the IUT, and act upon it. | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | START T_RELEASE_DELAY | | | |
| 2 | PO1 | ? TIMEOUT T_RELEASE_DELAY | | (PASS) | |
| 3 | PO2 | CANCEL | | R | |
| Detailed Comments : | | | | | |

| Default Dynamic Behaviour | | | | | |
|--|-------|--|--|---------|----------|
| Default Name : DF_handle_any_timeout | | | | | |
| Group : | | | | | |
| Objective : To handle a timeout of any of the timers started in a testcase, and FAIL the testcase | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | D1 | ? TIMEOUT T_USER_INVOKE | | (FAIL) | |
| 2 | | +DFLTS_cc_release_abnormal | | | |
| 3 | D2 | CANCEL | | R | |
| 4 | D3 | ? TIMEOUT T_P_LCE_01 | | (FAIL) | |
| 5 | | +DFLTS_release_link | | | |
| 6 | D4 | CANCEL | | R | |
| 7 | D5 | ? TIMEOUT T_CIPHER_SWITCH | | (FAIL) | |
| 8 | | +DFLTS_release_link | | | |
| 9 | D6 | CANCEL | | R | |
| 10 | D7 | ? TIMEOUT T_DLC_RESPONSE | | (FAIL) | |
| 11 | D8 | CANCEL | | R | |
| 12 | D9 | ? TIMEOUT | | (FAIL) | 1) |
| 13 | | +DFLTS_cc_release_abnormal | | | |
| 14 | D10 | CANCEL | | R | |
| 15 | | DFLTS_cc_release_abnormal DLS ! DL_DATA_REQ | DI_data_req(Cc_release_com_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 16 | DS11 | DLS ? DL_RELEASE_IND | DI_rel_ind | | |
| 17 | DS12 | DLS ? OTHERWISE | | (FAIL) | |
| 18 | | +DFLTS_release_link | | | |
| 19 | DS13 | CANCEL | | R | |
| 20 | | DFLTS_release_link DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_abnormal) | | |
| 21 | DS14 | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | | |
| 22 | DS15 | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | | 2) |
| 23 | DS16 | ? TIMEOUT T_P_LCE_01 | | (FAIL) | |
| 24 | DS17 | DLS ? OTHERWISE | | (FAIL) | 3) |
| 25 | DS18 | CANCEL | | R | |
| Detailed Comments : 1) Catch all timeouts 2) This receive statement captures release collision. 3) A general otherwise captures invalid behaviour | | | | | |

| |
|----------------------------------|
| Default Dynamic Behaviour |
|----------------------------------|

Default Name : DF_handle_cc_events

Group :

Objective : To handle any other cc event, and to return to the testcase.

Comments :

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|-----------------------|--|---------|----------|
| 1 | D1 | DLS ? DL_DATA_IND | DL_data_ind(Cc_info_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | (PASS) | 1) |
| 2 | | RETURN | | | |

Detailed Comments : 1) Handle CC_INFO, and return to the testcase

| Default Dynamic Behaviour | | | | | |
|---|-------|---|---|---------|--|
| Default Name : DF_handle_cc_timeout | | | | | |
| Group : | | | | | |
| Objective : To handle a timeout of any of the CC timers started in a testcase, and fail the testcase | | | | | |
| Comments : | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | D1 | ? TIMEOUT T_P_CC_01 | | (FAIL) | |
| 2 | | +DFLTS_cc_release_normal | | | |
| 3 | D2 | CANCEL | | R | |
| 4 | D3 | ? TIMEOUT T_P_CC_02 | | (FAIL) | |
| 5 | | +DFLTS_cc_release_abnormal | | | |
| 6 | D4 | CANCEL | | R | |
| 7 | D5 | ? TIMEOUT T_P_CC_03 | | (FAIL) | |
| 8 | | +DFLTS_cc_release_abnormal | | | |
| 9 | D6 | CANCEL | | R | |
| 10 | D7 | ? TIMEOUT T_P_CC_04 | | (I) | Implementation of this timer is optional |
| 11 | | +DFLTS_cc_release_abnormal | | | |
| 12 | D8 | CANCEL | | R | |
| 13 | | DFLTS_cc_release_normal DLS ! DL_DATA_REQ START T_P_CC_02 | DI_data_req(Cc_release_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 14 | DS9 | DLS ? DL_DATA_IND CANCEL T_P_CC_02 | DI_data_ind(Cc_release_com_rx_base(TCV_cc_tv, TCV_cc_iut_tf)) | | |
| 15 | | +DFLTS_release_link | | | |
| 16 | DS10 | DLS ? DL_RELEASE_IND CANCEL T_P_CC_02 | DI_rel_ind | | |
| 17 | DS11 | ? TIMEOUT T_P_CC_02 | | (I) | |
| 18 | | +DFLTS_cc_release_abnormal | | | |
| 19 | DS12 | DLS ? OTHERWISE | | (FAIL) | |
| 20 | | +DFLTS_release_link | | | |
| 21 | DS13 | CANCEL | | R | |
| 22 | | DFLTS_cc_release_abnormal DLS ! DL_DATA_REQ | DI_data_req(Cc_release_com_tx_base(TCV_cc_tv, TCV_cc_lt_tf)) | | |
| 23 | DS14 | DLS ? DL_RELEASE_IND | DI_rel_ind | | |
| 24 | DS15 | DLS ? OTHERWISE | | (FAIL) | |
| 25 | | +DFLTS_release_link | | | |
| 26 | DS16 | CANCEL | | R | |
| 27 | | DFLTS_release_link DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_abnormal) | | |
| 28 | DS17 | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | | |
| 29 | DS18 | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | | 1) |
| 30 | DS19 | ? TIMEOUT T_P_LCE_01 | | (FAIL) | |
| 31 | DS20 | DLS ? OTHERWISE | | (FAIL) | 2) |

Continued on next page

Continued from previous page

| Default Dynamic Behaviour | | | | | |
|---|-------|-----------------------|-----------------|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 32 | DS21 | CANCEL | | R | |
| Detailed Comments : 1) This receive statement captures release collision. 2) A general otherwise captures invalid behaviour | | | | | |

| Default Dynamic Behaviour | | | | | |
|---|-------|---|---|---------|----------|
| Default Name : DF_handle_mm_events | | | | | |
| Group : | | | | | |
| Objective : To handle intervening MM procedures, during CC or MM testcases | | | | | |
| Comments : The procedure is handled, and afterwards control is passed back to the testcase | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +DFLTS_handle_access_term_request | | | |
| 2 | | RETURN | | | |
| 3 | | +DFLTS_handle_ft_init_cipherring_on | | | |
| 4 | | RETURN | | | |
| 5 | | +DFLTS_handle_identity_request | | | |
| 6 | | RETURN | | | |
| 7 | | +DFLTS_handle_key_allocate | | | |
| 8 | | RETURN | | | |
| 9 | | +DFLTS_handle_location_update | | | |
| 10 | | RETURN | | | |
| 11 | | +DFLTS_handle_pt_authentication | | | |
| 12 | | RETURN | | | |
| 13 | | +DFLTS_handle_user_authentication | | | |
| 14 | | RETURN | | | |
| 15 | DS1 | DFLTS_handle_access_term_request DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Access_rights_term_req_rx _base) | (I) | 1) |
| 16 | DS2 | DFLTS_handle_ft_init_cipherring_on DLS ? DL_DATA_IND CANCEL T_USER_INVOKE | DI_data_ind(Cipher_request_rx01) | | 2) |
| 17 | | DLS ! DL_ENC_KEY_REQ | DI_enc_key_req(TSV_dck_value) | | 3) |
| 18 | | DLS ! DL_ENCRYPT_REQ START T_CIPHER_SWITCH | DI_enc_req(TSC_cs_enabled) | | 4) |
| 19 | | DLS ? DL_ENCRYPT_IND CANCEL T_CIPHER_SWITCH | DI_enc_ind(TSC_cs_enabled) | | 5) |
| 20 | DS3 | DFLTS_handle_identity_request DLS ? DL_DATA_IND(TCV_pdu_identy_request := DL_DATA_IND.message_unit, TCV_id_group := TCV_pdu_identy_request. identity_type.id_group, TCV_id_type := TCV_pdu_identy_request.identity_type.type) | DI_data_ind(Identity_request_rx_base) | | |
| 21 | | [(TCV_id_group = '0000'B) AND (TCV_id_type = '0000000'B)] | | | 6) |
| 22 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx01) | | |
| 23 | | [(TCV_id_group = '0000'B) AND (TCV_id_type = '0010000'B)] | | | 7) |
| 24 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx02) | | |
| 25 | | [(TCV_id_group = '0000'B) AND (TCV_id_type = '0100000'B)] | | | 8) |
| 26 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx03) | | |

Continued on next page

Continued from previous page

| Default Dynamic Behaviour | | | | | |
|---------------------------|-------|--|--|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 27 | DS4 | [(TCV_id_group = '0001'B) AND (TCV_id_type = '1110100'B)] | | (I) | 9) |
| 28 | | +DFLTS_release_link | | | |
| 29 | | [(TCV_id_group = '0100'B) AND (TCV_id_type = '0000000'B)] | | | 10) |
| 30 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx05) | | |
| 31 | | [(TCV_id_group = '0100'B) AND (TCV_id_type = '0000001'B)] | | | 11) |
| 32 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx06) | | |
| 33 | | [(TCV_id_group = '0100'B) AND (TCV_id_type = '0100000'B)] | | | 12) |
| 34 | | DLS ! DL_DATA_REQ | DI_data_req(Identity_reply_tx04) | | |
| 35 | DS5 | DFLTS_handle_key_allocate DLS ? DL_DATA_IND (TCV_pdu_key_allocate := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_key_allocate.rand.field, TCV_rs := TCV_pdu_key_allocate.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Key_allocate_rx01) | | 13) |
| 36 | | [TSV_ft_authentication_pending] | | | |
| 37 | | [NOT TSV_ft_authentication_pending] | | | |
| 38 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSO_cinft_convert_ac_to_bitstring(TSP X_decimal_ac_value))) | | | |
| 39 | | START T_P_MM_auth_1 | | | |
| 40 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_request_tx05(TCV_res_tx)) | | 14) |
| 41 | | DLS ? DL_DATA_IND (TCV_pdu_auth_reply := DL_DATA_IND.message_unit, TCV_res_rx := TCV_pdu_auth_reply.res.field) CANCEL T_P_MM_auth_1 | DI_data_ind(Auth_reply_rx01) | | 15) |
| 42 | | (TCV_xres := TSO_cinft_algosb1_a2(TSC_rand, TSC_rs, TSO_cinft_convert_ac_to_bitstrin g(TSPX_decimal_ac_value)), TSV_uak := TSO_cinft_algosb1_a21(TSC_rs, TSO_cinft_convert_ac_to_bitstrin g(TSPX_decimal_ac_value))) | | | |
| 43 | | [TCV_xres = TCV_res_rx] | | | |
| 44 | DS6 | [TCV_xres <> TCV_res_rx] | | (FAIL) | |
| 45 | DS7 | DFLTS_handle_location_update DLS ? DL_DATA_IND CANCEL T_USER_INVOKE DFLTS_handle_pt_authentication | DI_data_ind(Mm_info_suggest_rx_base) | | 16) |

Continued on next page

Continued from previous page

| Default Dynamic Behaviour | | | | | |
|---------------------------|-------|---|--|---------|----------|
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 46 | DS8 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx01) | | 17) |
| 47 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSV_uak)) | | | |
| 48 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | |
| 49 | DS9 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx05) | | 18) |
| 50 | | (TCV_res_tx := TSO_cinft_algosb1_a1(TCV_rand, TCV_rs, TSO_cinft_convert_ac_to_bitstring(TSPX _decimal_ac_value))) | | | |
| 51 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx)) | | |
| | | DFLTS_handle_user_authentication | | | |
| 52 | DS10 | DLS ? DL_DATA_IND (TCV_pdu_auth_request := DL_DATA_IND.message_unit, TCV_rand := TCV_pdu_auth_request.rand.field, TCV_rs := TCV_pdu_auth_request.rs.field) CANCEL T_USER_INVOKE | DI_data_ind(Auth_request_rx03) | | 19) |
| 53 | | (TCV_res_tx_u := TSO_cinft_algosb2_a1(TCV_rand, TCV_rs, TSV_uak, TSO_cinft_convert_upi_to_bitstring(TSPX _decimal_upi_value))) | | | |
| 54 | | DLS ! DL_DATA_REQ | DI_data_req(Auth_reply_tx01(TCV_res_tx_u)) | | 20) |
| | | DFLTS_release_link | | | |
| 55 | DS11 | DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_abnormal) | | |
| 56 | | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | | |
| 57 | | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | | 21) |
| 58 | DS12 | ? TIMEOUT T_P_LCE_01 | | (FAIL) | |
| 59 | DS13 | DLS ? OTHERWISE | | (FAIL) | 22) |
| 60 | DS14 | CANCEL | | R | |

Detailed Comments : 1) A terminate accessrights request from the FT, will lead to an inconclusive verdict. Why does the FT want to terminate accessrights?
2) Recieve the Cipher Request with <<cipher_info>>ie containing ciphering on.

Continued on next page

Continued from previous page

Default Dynamic Behaviour

Detailed Comments : ...

- 3) Pass dck value to DLC.
- 4) Start ciphering in LT
- 5) Wait for the DL_ENCRYPT_IND with ciphering status 'enabled', and then cancel the timer. The expiry of the timer is handled in DF_handle_mm_timeout.
- 6) Id_Group: Portable Id AND Id_Type: IPUI
Send Identity Reply with <<portable_id>>ie containing ipui.
- 7) Id_Group: Portable Id AND Id_Type: IPEI
Send Identity Reply with <<portable_id>>ie containing ipei.
- 8) Id_Group: Portable Id AND Id_Type: TPUI
Send Identity Reply with <<portable_id>>ie containing tpui
- 9) Id_Group: Network Assigned Id AND Id_Type: GSM TMSI
Not implemented.
- 10) Id_Group: Fixed Id AND Id_Type: ARI
Send Identity Reply with <<fixed_id>>ie containing ari.
- 11) Id_Group: Fixed Id AND Id_Type: ARI + Radio fixed part nr.
Send Identity Reply with <<fixed_id>>ie containing ari.
- 12) Id_Group: Fixed Id AND Id_Type: PARK
Send Identity Reply with <<fixed_id>>ie containing pa
- 13) Key allocate message with the <<allocation type>>ie, specifying the DECT standard Authentication Algorithm to be used.
- 14) Send Authentication Request message with the calculated res and <<authentication type>>ie containing AC.
- 15) Receive Authentication Reply message with the <<res>>ie, which to be calculated by <<rand>>ie and <<res>>ie.
- 16) The locate update is only received. No action is taken, as we are probably in the middle of another procedure anyway.
- 17) Auth_request_rx01 specifies authentication based on the UAK
- 18) Auth_request_rx05 specifies authentication based on the AC
- 19) Authentication is based on UPI. ZAP increment bit shall not be set to 1.
- 20) Copy calculated upi_res field into reply message.
- 21) This receive statement captures release collision.
- 22) A general otherwise captures invalid behaviour

| Default Dynamic Behaviour | | | | | |
|---|-------|--|--|---------|----------|
| Default Name : DF_handle_mm_invokation | | | | | |
| Group : | | | | | |
| Objective : To handle the reply of a LT (PT) initiated MM procedure used for invoking an FT (IUT) initiated procedure. | | | | | |
| Comments : The procedure is handled, and afterwards control is passed back to the testcase | | | | | |
| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
| 1 | | +DFLTS_handle_access_rights_accept | | | |
| 2 | | RETURN | | | |
| 3 | | +DFLTS_handle_location_accept | | | |
| 4 | | RETURN | | | |
| 5 | DS1 | DFLTS_handle_access_rights_accept DLS ? DL_DATA_IND CANCEL T_P_MM_access_1 | DI_data_ind(Access_rights_accept_rx01) | | 1) |
| 6 | DS2 | DFLTS_handle_location_accept DLS ? DL_DATA_IND(TCV_pdu_locate_accept := DL_DATA_IND.message_unit, TCV_port_id_length_tpui := TCV_pdu_locate_accept.portable_id.length) CANCEL T_P_MM_locate_1 | DI_data_ind(Locate_accept_rx01) | | |
| 7 | DS3 | [TCV_port_id_length_tpui = '00'O] | | | |
| 8 | DS4 | [TCV_port_id_length_tpui <> '00'O] | | | |
| 9 | | DLS ! DL_DATA_REQ | DI_data_req(Temporary_id_ assign_ack_tx_base) | | |
| 10 | | (TCV_result := TSO_assign_tpui(TCV_pdu_locate_accept.portable_id.id_ value, TCV_port_id_length_tpui)) | | | |
| Detailed Comments : 1) Receive the accessrights accept, and return to the testcase. | | | | | |

Default Dynamic Behaviour

Default Name : DF_handle_mm_timeout

Group :

Objective : To handle a timeout of any of the MM timers started in a testcase, and fail the testcase

Comments :

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---------------------------------|---------|----------|
| 1 | D1 | ? TIMEOUT T_P_MM_access_1 | | (FAIL) | |
| 2 | | +DFLTS_release_link | | | |
| 3 | D2 | CANCEL | | R | |
| 4 | D3 | ? TIMEOUT T_P_MM_access_2 | | (FAIL) | |
| 5 | | +DFLTS_release_link | | | |
| 6 | D4 | CANCEL | | R | |
| 7 | D5 | ? TIMEOUT T_P_MM_auth_1 | | (FAIL) | |
| 8 | | (TSV_ft_authentication_pending := FALSE) | | | |
| 9 | | +DFLTS_release_link | | | |
| 10 | D6 | CANCEL | | R | |
| 11 | D7 | ? TIMEOUT T_P_MM_cipher_2 | | (FAIL) | |
| 12 | | +DFLTS_release_link | | | |
| 13 | D8 | CANCEL | | R | |
| 14 | D9 | ? TIMEOUT T_P_MM_locate_1 | | (FAIL) | |
| 15 | | +DFLTS_release_link | | | |
| 16 | D10 | CANCEL | | R | |
| | | DFLTS_release_link | | | |
| 17 | | DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_abnormal) | | |
| 18 | DS11 | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | | |
| 19 | DS12 | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | | 1) |
| 20 | DS13 | ? TIMEOUT T_P_LCE_01 | | (FAIL) | |
| 21 | DS14 | DLS ? OTHERWISE | | (FAIL) | 2) |
| 22 | DS15 | CANCEL | | R | |

Detailed Comments : 1) This receive statement captures release collision.
2) A general otherwise captures invalid behaviour

Default Dynamic Behaviour

Default Name : DF_handle_paging
Group :
Objective : To handle any paging message re-transmission during paging procedures.
Comments :

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|------------------------|--|---------|----------|
| 1 | DS1 | DLB ? DL_BROADCAST_IND | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_cc)) | | 1) |
| 2 | | RETURN | | | |
| 3 | DS3 | DLB ? DL_BROADCAST_IND | DI_brc_ind(Lce_request_page_rx_base(TSC_lce_hdr_mm)) | | 2) |
| 4 | | RETURN | | | |

Detailed Comments : 1) Handle a broadcast message with an LCE-REQUEST-PAGE PDU for CC services, and return to the test case or test step.
 2) Handle a broadcast message with an LCE-REQUEST-PAGE PDU for MM services, and return to the test case or test step.

Default Dynamic Behaviour

Default Name : DF_handle_unexpected_events

Group :

Objective : To release the link and to FAIL the testase in case of an unexpected event

Comments : In case a release indication arrives, the result of the test is inconclusive.

| Nr | Label | Behaviour Description | Constraints Ref | Verdict | Comments |
|----|-------|---|---|---------|----------|
| 1 | DS1 | DLS ? DL_RELEASE_IND | DI_rel_ind | I | 1) |
| 2 | | CANCEL | | R | |
| 3 | DS2 | DLS ? DL_DATA_IND | DI_data_ind(Ciss_any_pdu_rx) | | 6) |
| 4 | DS3 | DLS ? DL_DATA_IND | DI_data_ind(Coms_any_pdu_rx) | | 7) |
| 5 | DS4 | DLS ? DL_DATA_IND | DI_data_ind(Cc_out_of_scope_pdu_rx(TCV_cc_tv, TCV_cc_iut_tf)) | | 8) |
| 6 | DS5 | DLS ? DL_DATA_IND | DI_data_ind(Mm_out_of_scope_pdu_rx) | | 9) |
| 7 | DS6 | DLS ? OTHERWISE | | (FAIL) | 2) |
| 8 | | +DFLTS_release_link | | | |
| 9 | DS7 | CANCEL | | R | |
| 10 | DS8 | DLB ? OTHERWISE | | (FAIL) | 3) |
| 11 | | +DFLTS_release_link | | | |
| 12 | DS9 | CANCEL | | R | |
| | | DFLTS_release_link | | | |
| 13 | DS10 | DLS ! DL_RELEASE_REQ START T_P_LCE_01 | DI_rel_req(TSC_rm_abnormal) | | |
| 14 | | DLS ? DL_RELEASE_CFM CANCEL T_P_LCE_01 | DI_rel_cfm | | |
| 15 | | DLS ? DL_RELEASE_IND CANCEL T_P_LCE_01 | DI_rel_ind | | 4) |
| 16 | DS11 | ? TIMEOUT T_P_LCE_01 | | (FAIL) | |
| 17 | DS12 | DLS ? OTHERWISE | | (FAIL) | 5) |
| 18 | DS13 | CANCEL | | R | |

Detailed Comments :

- 1) Unexpected link release: result is inconclusive. Check external conditions
- 2) General otherwise statement, cathcing all unexpected (and thus invalid) events from DLS PCO
- 3) General otherwise statement, cathcing all unexpected (and thus invalid) events from DLB PCO
- 4) This receive statement captures release collision.
- 5) A general otherwise captures invalid behaviour.
- 6) Ignore any CISS PDU, which is out of scope in the GAP.
- 7) Ignore any COMS PDU, which is out of scope in the GAP.
- 8) Ignore CC PDUs, which are out of scope in the GAP.
- 9) Ignore MM PDUs, which are out of scope in the GAP.

Annex B (normative): Partial PIXIT proforma

Notwithstanding the provisions of the copyright clause related to the text of this ETS, ETSI grants that users of this ETS may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

The PIXIT Proforma is based on ISO/IEC 9646-6 [26]. Any additional information needed can be found in this international standard document.

B.1 Identification summary

Table B.1

| | |
|-----------------------|--|
| PIXIT Number: | |
| Test Laboratory Name: | |
| Date of Issue: | |
| Issued to: | |

B.2 ATS summary

Table B.2

| | |
|-------------------------|---|
| Protocol Specification: | |
| Protocol to be tested: | |
| ATS Specification: | |
| Abstract Test Method: | Embedded variant of the Remote Test Method with no UT |

B.3 Test laboratory

Table B.3

| | |
|---------------------------------|--|
| Test Laboratory Identification: | |
| Test Laboratory Manager: | |
| Means of Testing: | |
| SAP Address: | |

B.4 Client identification

Table B.4

| | |
|---------------------------|--|
| Client Identification: | |
| Client Test manager: | |
| Test Facilities required: | |

B.5 SUT

Table B.5

| | |
|----------------------------------|--|
| Name: | |
| Version: | |
| SCS Number: | |
| Machine configuration: | |
| Operating System Identification: | |
| IUT Identification: | |
| PICS Reference for IUT: | |
| Limitations of the SUT: | |
| Environmental Conditions: | |

B.6 Protocol layer information

B.6.1 Protocol identification

Table B.6

| | |
|------------------|--------------------------------|
| Name: | DECT - Data Link Control Layer |
| Version: | |
| PICS References: | |

B.6.2 IUT information

Table B.7: General configuration

| Item | Parameter | Parameter type | Explanation and ETS reference | Value |
|-------------|--------------------------|---|---|-------|
| 1 | TSPX_mmproc_arte_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the access rights terminate request test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 2 | TSPX_mmproc_aupt_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the authentication of PT test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 3 | TSPX_mmproc_auus_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the authentication of PT test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 4 | TSPX_mmproc_cift_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the FT init. ciphering test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 5 | TSPX_mmproc_idpt_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the id. of PT test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 6 | TSPX_mmproc_loup_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the location update test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 7 | TSPX_mmproc_keal_ccstate | CCSTATE_TYPE (INTEGER 0, 1, 2, 3, 4, 6, 7, 10, 19) | Indicates the FT cc state, the key allocation test cases shall be tested in. Ref. ETS 300 175 [5], subclause 13.5 | |
| 8 | TSPX_mmproc_arte_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the access rights terminate proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| (continued) | | | | |

Table B.7: (concluded) General configuration

| | | | | |
|----|--------------------------|----------------------------------|---|--|
| 9 | TSPX_mmproc_aupt_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the authentication of PT proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| 10 | TSPX_mmproc_auus_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the authentication of user proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| 11 | TSPX_mmproc_cift_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the FT initiated ciphering proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| 12 | TSPX_mmproc_idpt_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the identification of PT proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| 13 | TSPX_mmproc_loup_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the location update proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| 14 | TSPX_mmproc_keal_invoke | MMPROC_TYPE (INTEGER 0 .. 10) | Indicates the way of invoking the key allocation proc. Ref. ETS 300 175 [5], subclause 13.5 | |
| 15 | TSPX_nr_of_digits_in_cpn | INT_8 (INTEGER 0..255) | In order to facilitate testing, a number of digits less than 10 is advised. This parameter really indicates the number of CC_INFO messages to be expected during call setup | |
| 16 | TSPX_access_rights_uak | BOOLEAN | TRUE if IUT supports Auth_Key_Type = 1 (UAK) | |

Table B.8: Addresses

| Item | Address name | Parameter type | Explanation and ETS reference | Value |
|------|--------------------------------------|--|--|-------|
| 1 | TSPX_decimal_ac_value | OCT_4 (OCTETSTRING[4]) | Value of AC to be used. The AC will be entered as maximal 8 decimal digits. The AC to bitstring mapping will be done with operator TSO_convert_ac_to_bitstring. Ref. ETS 300 444 [10], subclause 14.2 | |
| 2 | TSPX_complete_fixed_id_ari_value | FIXED_ID_VALUE_TYPE (BITSTRING[8..72]) | Value of fixed_id to be used in case of ARI. Ref. ETS 300 175-5[7.7.18] | |
| 3 | TSPX_complete_fixed_id_ari_rpn_value | FIXED_ID_VALUE_TYPE (BITSTRING[8..72]) | Value of fixed_id to be used in case of ARI + RPN Ref. ETS 300 175 [5], subclause 7.7.18 | |
| 4 | TSPX_dlei_value | DATA_LINK_ENDPOINT_IDENTIFIER (INTEGER) | Value of data link endpoint identifier to be used in the test system (local test system matter) | |
| | | | (continued) | |

Table B.8: (concluded) Addresses

| | | | | |
|----|-------------------------------------|---|--|--|
| 5 | TSPX_ipei_value | PORT_ID_VALUE_TYPE (BITSTRING[8..104]) | Value of IPEI (IPUI-N) to be expected from the IUT (before subscription) Ref. ETS 300 175 [5], subclause 7.7.30 | |
| 6 | TSPX_ipui_value | PORT_ID_VALUE_TYPE (BITSTRING[8..104]) | Value of portable_id to be used in case of a IPUI (after subscription). Contains fill bits '1111'B if necessary Ref. ETS 300 175 [5], subclause 7.7.30 | |
| 7 | TSPX_location_area_level | BIT_6 (BITSTRING[6]) | The location area level that is going to be used Ref. ETS 300 175 [5], subclause 7.7.25 | |
| 8 | TSPX_complete_fixed_id_park_value | FIXED_ID_VALUE_TYPE (BITSTRING[8..72]) | Value of fixed_id to be used in case of PARK Ref. ETS 300 175 [5], subclause 7.7.18 | |
| 9 | TSPX_tpui_value | PORT_ID_VALUE_TYPE (BITSTRING[8..104]) | Value of tpui to be used, when assigning a tpui to the IUT Ref. ETS 300 175 [5], subclause 7.7.30 | |
| 10 | TSPX_decimal_upi_value | OCT_4 (OCTETSTRING[4]) | Value of UPI to be used. The UPI will be entered as maximal 8 decimal digits. The UPI to bitstring mapping will be done with operator TSO_convert_upi_to_bitstring. Ref. ETS 300 444 [10], subclause 8.22 | |
| 11 | TSPX_park_length_indicator | INTEGER | The number of significant bits in TSPX_complete_fixed_id_park_value | |
| 12 | TSPX_ari_length_indicator | INTEGER | The number of significant bits in TSPX_complete_fixed_id_ari_value | |
| 13 | TSPX_called_party_number | OCT_1_14 | Called party number, max 14 digits long, which tester should use in making outgoing call to FT | |
| 14 | TSPX_emergency_cpn | OCT_1_14 | Emergency Called party number, max 14 digits long, which tester should use in making outgoing emergency call to FT | |
| 15 | TSPX_calling_party_number | DECT_1_254 | Calling party number which IUT is expected to include in incoming call to tester | |
| 16 | TSPX_complete_fixed_id_park_value_2 | FIXED_ID_VALUE_TYPE (BITSTRING[8..72]) | Value of fixed_id to be used in case of second PARK Ref. ETS 300 175 [5], subclause 7.7.18 | |
| 17 | TSPX_park_length_indicator_2 | INTEGER | The number of significant bits in TSPX_complete_fixed_id_value_2 | |

Table B.9: Implicit send events

| Item | PIXIT (see Note) | Related implicit send message (PDU) | Indication how the implicit send event can be invoked |
|-------------|--|---|---|
| 1 | TSPX_invoke_access_termination_req | To invoke the FT initiated terminate access rights procedure. A dl_data_indication is to be expected, containing an ACCESS_RIGHTS_TERM_REQUEST message. Expected Constraint: Access_rights_term_req_rx_base | |
| 2 | TSPX_invoke_pt_authentication | To invoke the FT initiated PT authentication procedure. A dl_data_indication is to be expected, containing an AUTH_REQUEST message. Expected Constraint: Auth_request_rx01 | |
| 3 | TSPX_invoke_user_authentication | To invoke the FT initiated user authentication procedure. A dl_data_indication is to be expected, containing an AUTH_REQUEST message with UPI. Expected Constraint: Auth_request_rx03 | |
| 4 | TSPX_invoke_pt_authentication_with_zap | To invoke the FT initiated PT authentication procedure. A dl_data_indication is to be expected, containing an AUTH_REQUEST message. The AUTH_REQ message shall contain the <<auth_type>>.i.e. with ZAP_increment bit set to 1. Expected Constraint: Auth_request_rx02 | |
| 5 | TSPX_invoke_ft_init_ciphering_off | To invoke the FT to initiate ciphering off. A dl_data_ind is expected, containing a CIPHER-REQUEST PDU. Expected Constraint: Cipher_request_rx02 | |
| 6 | TSPX_invoke_ft_init_ciphering_on | A dl_data_ind is expected, containing a CIPHER-REQUEST PDU. Expected Constraint: Cipher_request_rx01 | |
| (continued) | | | |

Table B.9: (concluded) Implicit send events

| | | | |
|----|------------------------------|---|--|
| 7 | TSPX_invoke_incoming_call | To invoke the IUT to initiate a normal incoming call setup, while in state F-00. Postcondition: Timer T_USER_INVOKE is started. It will be cancelled when the link is established. Expected Constraint: Lce_request_page_rx01 | |
| 8 | TSPX_invoke_identity_request | To invoke the FT to initiate identity request. A dl_data_ind is expected, containing a IDENTITY-REQUEST PDU. Expected Constraint: Identity_request_rx_base | |
| 9 | TSPX_invoke_normal_release | To invoke the IUT to go on hook, thus initiating a normal release, while in any cc state. A dl_data_indication is to be expected, containing a CC_RELEASE message. Expected Constraint: Cc_release_rx_base | |
| 10 | TSPX_invoke_key_allocation | To invoke a key allocation procedure initiated by the FT side. Expected Constraint: Allocation_type_rx_dsa | |
| 11 | TSPX_invoke_location_update | To initiate the FT initiated location update procedure. A dl_data_indication is to be expected, containing an MM_INFO_SUGGEST message. Expected Constraint: Mm_info_suggest_rx_base | |
| 12 | TSPX_invoke_partial_release | To invoke the IUT to initiate a partial release. A precondition to the execution of this test step is, that a link exists between the It and the iut. Expected Constraint: Cc_release_rx_base | |
| 2 | TSPX_invoke_call_answering | To invoke the IUT to answer the call by sending a CC-CONNECT message. Expected constraint: Cc_connect_rx_base | |

NOTE: The PIXIT names are related to the test steps where the Implicit send events are handled, e.g. the PIXIT TSPX_invoke_abnormal_release is related to the test step STP_invoke_abnormal_release.

Annex C (normative): Protocol Conformance Test Report (PCTR) Proforma for DECT NWK

Notwithstanding the provisions of the copyright clause related to the text of this ETS, ETSI grants that users of this ETS may freely reproduce the PCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

The PCTR Proforma is based on ISO/IEC 9646-6. Any additional information needed can be found in this document.

C.1 Identification summary

C.1.1 Protocol conformance test report

Table C.1

| | |
|---------------------------------|--|
| PCTR Number: | |
| PCTR Date: | |
| Corresponding SCTR Number: | |
| Corresponding SCTR Date: | |
| Test Laboratory Identification: | |
| Test Laboratory Manager: | |
| Signature: | |

C.1.2 IUT identification

Table C.2

| | |
|-------------------------|--|
| Name: | |
| Version: | |
| Protocol specification: | |
| PICS: | |
| Previous PCTR if any: | |

C.1.3 Testing environment

Table C.3

| | |
|--------------------------------------|---|
| PIXIT Number: | |
| ATS Specification: | |
| Abstract Test Method: | Remote test method, Embedded variant with no UT |
| Means of Testing identification: | |
| Date of testing: | |
| Conformance Log reference(s): | |
| Retention Date for Log reference(s): | |

C.1.4 Limits and reservation

Additional information relevant to the technical contents or further use of the test report, or the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....

C.1.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....
.....
.....
.....
.....

C.2 IUT Conformance status

This IUT has or has not been shown by conformance assessment to be non conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in Clause 3 in this report) and there are no "FAIL" verdicts to be recorded (in Clause 6) strike the words "has or". otherwise strike the words "or has not".

C.3 Static conformance summary

The PICS for this IUT is or is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

C.4 Dynamic conformance summary

The test campaign did or did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded (in clause 6 of this report) strike the words "did or". otherwise strike the words "or did not".

Summary of the results of groups of test:

.....
.....
.....
.....
.....
.....
.....

C.5 Static conformance review report

If clause 3 indicates non-conformance, this subclause itemises the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

.....
.....
.....
.....
.....
.....
.....
.....

C.6 Test campaign report

| ATS reference | Selected? | Run? | Verdict | Observations (Reference to any observations made in clause 7) |
|-------------------|-----------|--------|---------|--|
| TC_FT_CC_BV_OC_01 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_OC_02 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_OC_03 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_OC_04 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_OC_05 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_IC_01 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_IC_02 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_01 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_02 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_04 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_05 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_06 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_07 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_08 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_09 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CI_10 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_01 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_02 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_03 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_04 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_05 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_06 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_07 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_08 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_09 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_10 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_CR_11 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_RS_07 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_BO_01 | Yes/No | Yes/No | | |
| TC_FT_CC_BV_BO_02 | Yes/No | Yes/No | | |
| TC_FT_CC_BI_01 | Yes/No | Yes/No | | |
| TC_FT_CC_BI_02 | Yes/No | Yes/No | | |
| TC_FT_CC_BI_03 | Yes/No | Yes/No | | |
| TC_FT_CC_BI_04 | Yes/No | Yes/No | | |
| TC_FT_CC_TI_01 | Yes/No | Yes/No | | |
| TC_FT_CC_TI_02 | Yes/No | Yes/No | | |
| TC_FT_CC_TI_03 | Yes/No | Yes/No | | |
| TC_FT_CC_TI_04 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_ID_01 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_AU_01 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_AU_02 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_AU_03 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_AU_04 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_AU_05 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_AU_06 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_LO_01 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_LO_02 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_LO_03 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_LO_04 | Yes/No | Yes/No | | |
| TC_FT_MM_BV_LO_05 | Yes/No | Yes/No | | |

(continued)

Annex D (informative): Bibliography

- 1) EWOS/ETSI Project Team No 5: "Project Report and Technical Report. OSI Conformance Testing Methodology and Procedures in Europe".
- 2) ETR 022 (1991): "Advanced Testing Methods (ATM); Vocabulary of terms used in communications protocols conformance testing".
- 3) ETR 141: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; The Tree and Tabular Combined Notation (TTCN) style guide".
- 4) CEPT Recommendation T/SGT SF2 (89) 6/0: "Draft Recommendation T/SF Services and Facilities of Digital European Cordless Telecommunications".
- 5) ETR 015: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Reference document".
- 6) ETR 041: "Transmission and Multiplexing (TM); Digital European Cordless Telecommunications (DECT); Transmission aspects 3,1 kHz telephony Interworking with other networks".
- 7) ETR 042: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); A Guide to DECT features that influence the traffic capacity and the maintenance of high radio link transmission quality, including the results of simulations".
- 8) ETR 043: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); Common interface; Services and Facilities requirements specification".
- 9) ETR 056: "Radio Equipment and Systems (RES); Digital European Cordless Telecommunications (DECT); System description document".
- 10) CTS-3/DECT Consortium DEL.2 Part 6.1, final version (March 1993): "DECT NWK Layer ATS Specification (PT part) - Test Suite Structure and Test Purposes".
- 11) CTS-3/DECT Consortium DEL.2 Part 6.2, final version (March 1993): "DECT NWK Layer ATS Specification (PT part) - Abstract Test Suite".
- 12) CTS-3/DECT Consortium DEL.3 Part 6.1, final version (March 1993): "DECT NWK Layer Methodology Specification (PT part) - PICS Proforma".
- 13) CTS-3/DECT Consortium DEL.3 Part 6.2, final version (March 1993): "DECT NWK Layer Methodology Specification (PT part) - PIXIT Proforma".

History

| Document history | | | |
|------------------|----------------|--------|--------------------------|
| June 1995 | Public Enquiry | PE 85: | 1995-06-05 to 1995-09-29 |
| May 1996 | Vote | V 102: | 1996-05-06 to 1996-08-09 |
| | | | |
| | | | |
| | | | |