

ETSI TR 125 929 V15.0.0 (2018-07)



**Universal Mobile Telecommunications System (UMTS);
Continuous connectivity for packet data users;
1.28 Mcps TDD
(3GPP TR 25.929 version 15.0.0 Release 15)**



Reference

RTR/TSGR-0625929vf00

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	4
Introduction	4
1 Scope	5
2 References	5
3 Definitions, symbols and abbreviations	6
3.1 Definitions	6
3.2 Symbols.....	6
3.3 Abbreviations	6
4 Technical concepts	6
4.0 General	6
4.1 Semi-persistent scheduling in uplink.....	6
4.1.1 Description of the concept	6
4.1.2 Analysis of the concept.....	7
4.1.3 Agreements	7
4.1.4 Open issues of the concept.....	7
4.2 Semi-persistent scheduling in downlink.....	7
4.2.1 Description of the concept	7
4.2.2 Analysis of the concept.....	7
4.2.3 Agreements	7
4.3 Uplink transmission simulation.....	8
4.3.1 Analysis of the scheme	8
4.3.2 Simulation result.....	8
4.3.3 Agreements	10
4.4 Explicit state switch mechanism	10
4.4.1 Analysis of the scheme	10
4.4.2 Agreements	11
5 Technical solution	12
5.1 Overview of the selected solution	12
5.2 Impact on RAN1 specifications.....	12
5.3 Impact on RAN2 specifications.....	12
5.4 Impact on RAN3 specifications.....	12
5.5 Impact on RAN4 specifications.....	12
Annex A: Change history	13
History	14

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

Packet-oriented features like HSDPA and E-DCH in UMTS systems will promote the subscribers' desire for continuous connectivity, where the user stays connected over a long time span with only occasional active periods of data transmission, and avoiding frequent connection termination and re-establishment with its inherent overhead and delay.

This is the perceived mode a subscriber is used to in fixed broadband networks (e.g. DSL) and a precondition to attract users from fixed broadband networks.

For a high number of users in the cell it can be assumed that many users are not transmitting any user data for some time (e.g. for reading during web browsing or in between packets for periodic packet transmission such as VoIP). The corresponding overhead control channels and dedicated channels will significantly limit the number of users that can be efficiently supported.

As completely releasing dedicated channels during periods of temporary traffic inactivity would cause considerable delays for reestablishing data transmission and a corresponding bad user perception, this WI is intended to reduce the impact of control channels while maintaining the DCH state and allowing a much faster reactivation for temporarily inactive users.

1 Scope

The present document summarizes the work done under the WI "Continuous Connectivity for Packet Data Users for 1.28Mcps TDD" defined in [1] by listing technical concepts addressing the objectives of the work item (see below), analysing these technical concepts and selecting the best solution (which might be a combination of technical concepts).

The objective of this work item is to reduce the code consumption (e.g. overhead of physical control channels or related signaling messages) of packet data users for both real-time (e.g. VoIP) and non real-time services, e.g. for users which have temporarily no data transmission in either uplink or downlink. Packet data users as considered in this work item are using only HS-DSCH/E-DCH channels without UL DPCH and DL DPCH.

The aim is to increase the number of packet data users in the UMTS 1.28Mcps TDD system that can be kept efficiently in CELL_DCH state over a longer time period and that can restart transmission after a period of temporary inactivity with a much shorter delay (for example, <100ms) than would be necessary for reestablishment of a new connection.

Another aim is to reduce UE power consumption in CELL_DCH state over a long period by DTX and DRX.

The present document provides the base for the following preparation of change requests to the corresponding RAN specifications.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP Tdoc RP- 080085: " New Work item Proposal: Continuous Connectivity for packet data users for 1.28Mcps TDD ", TSG RAN #39, Puerto Vallarta, Mexico, 04 - 07 March 2008.
- [2] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [3] 3GPP TS 25.221: "Physical channels and mapping of transport channels onto physical channels (TDD)".
- [4] 3GPP TS 25.222: "Multiplexing and channel coding (TDD)".
- [5] 3GPP TS 25.223: "Spreading and modulation (TDD)".
- [6] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [7] 3GPP TS 25.225: "Physical layer – Measurements (TDD)".
- [8] 3GPP TS 25.306: "UE Radio Access Capabilities".
- [9] 3GPP TS 25.308: "UTRA High Speed Downlink Packet Access (HSDPA); Overall description; Stage 2".
- [10] 3GPP TS 25.319: "Enhanced uplink; Overall description; Stage 2".
- [11] 3GPP TS 25.321: "Medium Access Control (MAC) protocol specification".
- [12] 3GPP TS 25.331: "Radio Resource Control (RRC) Protocol Specification".
- [13] 3GPP TS 25.433: "UTRAN Iub Interface NBAP Signalling".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the [following] terms and definitions [given in ... and the following] apply.

example: text used to clarify abstract rules by applying them literally.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

(void)

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACK	Acknowledgement
CQI	Channel Quality Indicator
CRC	Cyclic Redundancy Check
DCH	Dedicated Channel
DL	Downlink
DPCH	Dedicated Physical Channel
DTX	Discontinuous Transmission
E-DCH	Enhanced Dedicated Channel
E-AGCH	E-DCH Absolute Grant Channel
E-HICH	E-DCH HARQ Acknowledgement Indicator Channel
HSDPA	High Speed Downlink Packet Access
HS-DSCH	High Speed Downlink Shared Channel
HS-PDSCH	High Speed Physical Downlink Shared Channel
HS-SCCH	High Speed Physical Downlink Shared Control Channel
NACK	Negative Acknowledgement
P-CCPCH	Primary Common Control Physical Channel
RL	Radio Link
S-CCPCH	Secondary Common Control Physical Channel
SIR	Signal-to-Interference Ratio
TPC	Transmit Power Control
TTI	Transmission Time Interval
UE	User Equipment
UL	Uplink
UTRAN	UMTS Terrestrial Radio Access Network

4 Technical concepts

4.0 General

This clause describes and analyses the suggested technical concepts addressing the problem described by the work item "Continuous Connectivity for Packet Data Users" defined in [1].

4.1 Semi-persistent scheduling in uplink

4.1.1 Description of the concept

In TD-SCDMA HSPA plus system, CPC technique serves as a solution to data transmission for UE in CELL_DCH state, and the data transmission characteristic for such as real-time (e.g. VoIP) service would be periodically and strictly delay sensitive. For uplink transmission, E-AGCH adds a significant overhead to each E-DCH transmission. Although

this overhead is relatively small for transmission of large packets of data, such as in the presence of full-buffer type of traffic, it is considerable for IMS real-time services such as VoIP.

This concept alleviates this overhead by allowing UTRAN to allocate a kind of semi-persistent or long term resource and NodeB can adjust this resource during the transmission. When UE transmits new data using this resources it should wait for the feedback from NodeB by detection corresponding E-HICH, i.e. E-HICH for non-schedule E-DCH shall be used in case of semi-persistent/long term resource assignment.

4.1.2 Analysis of the concept

By this semi-persistent scheduling method, the control channel overhead could be reduced and the VoIP capacity could be increased. The E-AGCH channels are freed up to be used for other services and UEs.

4.1.3 Agreements

- Long term resource assignment shall be introduced in Uplink, and the assignment can be adjusted by NodeB dynamically.
- E-HICH for non-schedule E-DCH shall be used in case of long term resource assignment.
- Node B can re-assign the UE's semi-persistent resource when the UE transfers from the VoIP active period to the VoIP silence period.

4.1.4 Open issues of the concept

- The mapping relation between semi-persistent or long term assignment E-PUCH and E-HICH.
- Semi-persistent resource assignment procedure and frame structure design.
- Authorization trigger event design and authorization algorithm, NodeB data receiving information (for instance, SIR measurement or effective traffic statistics, etc) and the cell's Rot information.

4.2 Semi-persistent scheduling in downlink

4.2.1 Description of the concept

In TD-SCDMA HSPA plus system, CPC technique serves as a solution to data transmission for UE in CELL_DCH state, and the data transmission characteristic for such as real-time (e.g. VoIP) service would be periodically and strictly delay sensitive. For downlink transmission, HS-SCCH adds a significant overhead to each HS-DSCH transmission. Although this overhead is relatively small for transmission of large packets of data, such as in the presence of full-buffer type of traffic, it is considerable for IMS real-time services such as VoIP.

This concept alleviates this overhead by allowing UTRAN to allocate a kind of semi-persistent or long term resource. When the semi-persistent HS-DSCH resources are configured for a UE, the first HS-DSCH transmission is performed without the accompanying HS-SCCH. And HARQ retransmissions of the first HS-DSCH transmission are accompanied by a new format HS-SCCH.

4.2.2 Analysis of the concept

By this semi-persistent scheduling method, the control channel overhead could be reduced and the VoIP capacity could be increased.

4.2.3 Agreements

- When the semi-persistent HS-DSCH resources are configured for a UE, the first HS-DSCH transmission on the semi-persistent HS-DSCH resources is performed without the accompanying HS-SCCH.
- The Node B can assign and re-assign the UE's semi-persistent resource.

4.3 Uplink transmission simulation

4.3.1 Analysis of the scheme

Node B may assign semi-persistent resource for uplink VoIP transmission, and the assignment can be adjusted by Node B via E-AGCH.

When semi-persistent resource is assigned to UE, UE sends uplink data on E-PUCH in the allocated TTIs.

- VoIP active period to silent period

Node B receives the uplink data on E-PUCH and judges whether UE transits from VoIP active period to silent period. If UE transits from active period to silent period, Node B re-assigns the E-PUCH physical resource and informs UE via E-AGCH. Once UE receives the E-AGCH, UE shall send the uplink data on E-PUCH occupying the allocated physical resource in the designated TTIs by E-AGCH.


- VoIP silent period to active period

When UE transits from silent period to active period, UE shall report SI via MAC-e PDU or E-RUCCH to ask for more physical resources. Once Node B receives the request, Node B re-assigns the E-PUCH resource and informs UE via E-AGCH.

The proposed transmission scheme may improve both the physical resource efficiency and the VoIP capacity.

4.3.2 Simulation result

Based on the proposed uplink transmission scheme, the system simulation result is shown below:

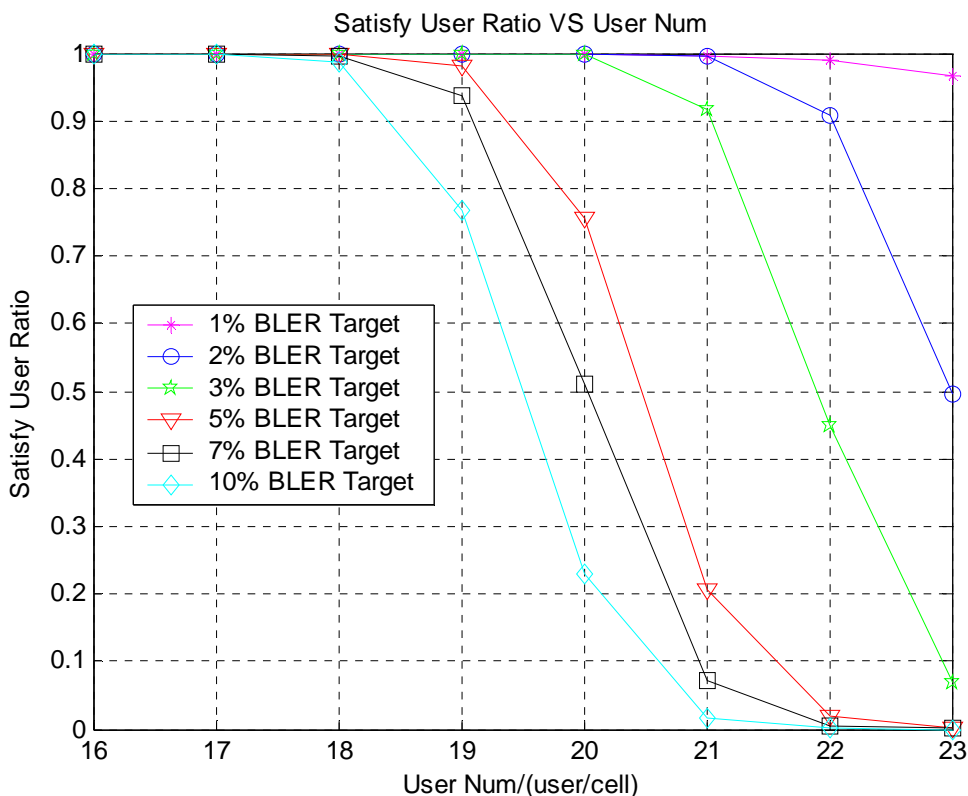

With the criteria that more than 95% users should be satisfied, the VoIP capacity of a cell, namely the number of VoIP satisfied user is listed as following:

Target BLER	1% BLER Target	2% BLER Target	3% BLER Target	5% BLER Target	7% BLER Target	10% BLER Target
User Number	23	21	20	19	18	18

Simulation Assumptions

Multipath Channel Models	<ul style="list-style-type: none"> - PA 3Km/h - Propagation model: Cost231-Hata - Fast fading model: Jakes spectrum
Cell layout and link budget	<ul style="list-style-type: none"> - Number of cells: 19. - Cell Radius: 500m. - 3-sectors per cell. - Node B Tx power: 34 dBm. - Log-normal shadowing: 8 dB. - Shadow-correlation between co-located cells: 1.0. - Shadow-correlation between non co-located cells: 0.5. - Carrier frequency: 2 GHz. - Bandwidth: 1.6 MHz. - Number of UE antennas: 1.
Node B resource	<ul style="list-style-type: none"> - OVFS code used for E-PUCH: <ul style="list-style-type: none"> - 2 timeslots(2 SF2 OVFS codes per timeslot) - Up to 2 E-AGCH transmissions allowed.
VoIP traffic details	<ul style="list-style-type: none"> - AMR 12.2 kbps. - SID transmitted every 160 ms of silence. - Voice activity model: <ul style="list-style-type: none"> - 50% voice activity. - ON and OFF periods of duration exponentially distributed, of average 2 seconds. - 100 ms maximum delay bound with 100 ms SDU discarding at the MAC-hs. - Call length: 120 seconds. - Call Outage: VoIP calls with FER over call length greater than 5% are considered in outage.
Signalling traffic	<ul style="list-style-type: none"> - SRB, RTCP, and SIP not modeled.
Parameters for transmission	<ul style="list-style-type: none"> - TB sizes: <ul style="list-style-type: none"> - 2 TB sizes: 162 bits, 364 bits

	<ul style="list-style-type: none"> - 24-bit CRC overhead. - Every transport block occupies one resource block which is 8 BRU - QPSK only - At most 2 retransmissions are allowed. - No DRX or DTX. - Power control for E-PUCH modeled.
Scheduler	<ul style="list-style-type: none"> - <u>Voice traffic scheduler:</u> <ul style="list-style-type: none"> - HARQ re-transmissions have highest priority - Oldest transmissions are re-transmitted first
Feedback delays	<ul style="list-style-type: none"> - HARQ delay: minimum 10ms from end of a transmission to start of a re-transmission.
Error modelling	<ul style="list-style-type: none"> - No E-AGCH error modeled. - No E-HICH error modeled.

4.3.3 Agreements

The Node B can assign/re-assign the semi-persistent physical resources via E-AGCH.


4.4 Explicit state switch mechanism

4.4.1 Analysis of the scheme

Compare to the implicit state switch mechanism, the explicit state switch mechanism use the fast reconfiguration procedure to change the physical resource for different states. In explicit state switch mechanism, no timer shall be maintained on UE side.

Downlink

For Downlink, When NodeB detects the state switch according to the buffer state. NodeB shall use the HS-SCCH order to reconfigure the physical resource of the UE. The procedure is depicted as below:

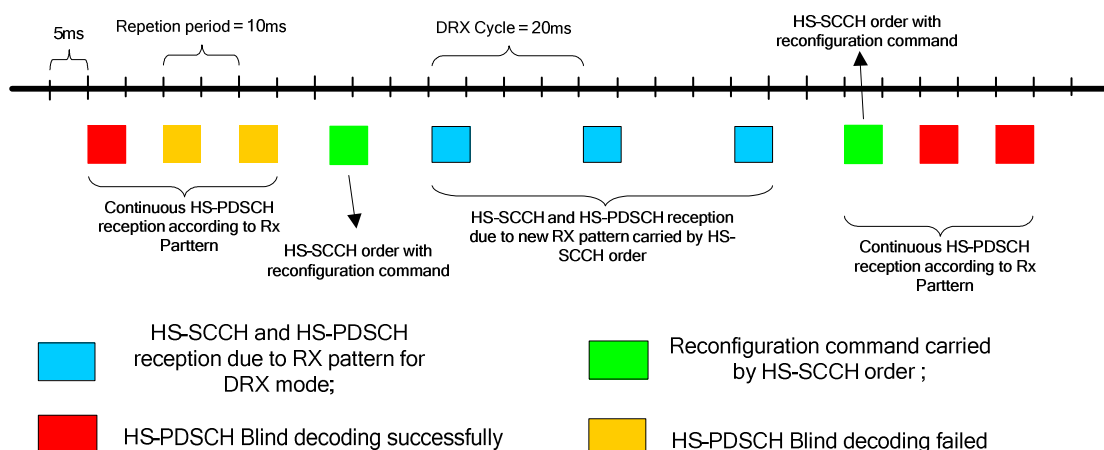


- 1) When NodeB detect the state switch from active to silent according to the buffer of UE, NodeB shall send reconfiguration command by HS-SCCH order to reconfigure the physical resource of UE. The physical resource include the channel code resource and Rx pattern

- 2) When NodeB detect the state switch from silent to active according to the buffer of UE, NodeB shall also use the HS-SCCH order to reconfigure the physical resource of UE.

Uplink

Similar to the Downlink explicit state switch mechanism, a fast reconfiguration procedure can also be used in uplink, the reconfiguration command shall be carried by E-AGCH. The procedure is depicted as below:

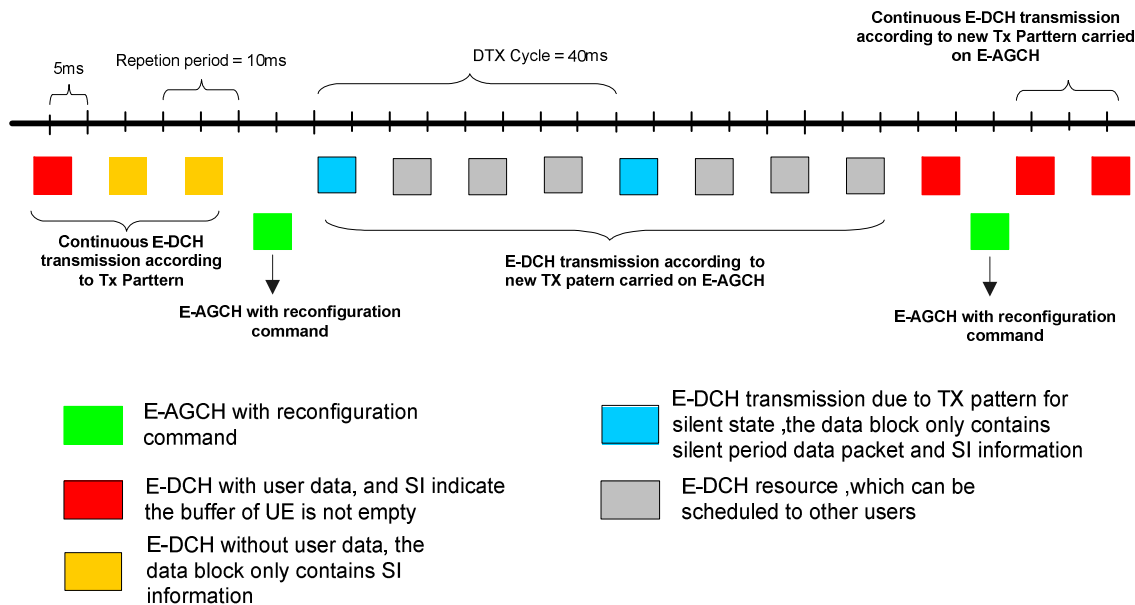

1. When NodeB detect the state switch from active to silent according to the buffer state in SI information, NodeB shall send reconfiguration command by E-AGCH to reconfigure the physical resource of UE. The physical resource include the channel code resource and Tx pattern
2. When NodeB detect the state switch from silent to active according to the buffer state in SI information, NodeB shall also use the E-AGCH to reconfigure the physical resource of UE.

4.4.2 Agreements

For both uplink and downlink, explicit commands will be used to reconfigure resources to handle voice traffic patterns.

5 Technical solution

This section describes which technical concepts of section 4 are selected to solve the problems in the 3GPP standard described by the work item "Continuous Connectivity for Packet Data Users for 1.28Mcps TDD" defined in [1].

5.1 Overview of the selected solution

Editor's note: A summary of which concepts are selected.

5.2 Impact on RAN1 specifications

Editor's note: Overview description of the modifications needed per affected specification, if any.

5.3 Impact on RAN2 specifications

Editor's note: Overview description of the modifications needed per affected specification, if any.

5.4 Impact on RAN3 specifications

Editor's note: Overview description of the modifications needed per affected specification, if any.

5.5 Impact on RAN4 specifications

Editor's note: Overview description of the modifications needed per affected specification, if any.

Annex A: Change history

Change history							
Date	Meeting	Doc.	CR	Rev	Subject/Comment	Old	New
2008-05	RAN1#53	R1-08XXXX	-	-	Skeleton TR	-	0.0.1
2008-10	RAN1#54bis	R1-084010	-	-	Add concept Semi-persistent Scheduling in Uplink	-0.0.1	0.1.0
2008-11	RAN1#55	R1-084147, R1-084148		-	Add agreed TP on Downlink transmission, Uplink transmission Simulation and Explicit state switch mechanism	0.1.0	0.2.0
2008-12	RAN#42	RP-080868	-	-	Update to V1.0.0	0.2.0	1.0.0
2009-05	RAN#44	RP-090582	-	-	TR is presented to RAN for approval	1.0.0	2.0.0
2009-05	RAN#44	-	-	-	Post RAN#44 decision to bring TR under change control	2.0.0	8.0.0
2009-06					Cosmetic clean up by MCC	8.0.0	8.0.1
2009-12	SP_46	-	-	-	Doc to Release 9 at SA_46	8.0.1	9.0.0
2011-03	SP_51	-	-	-	Doc to Release 10 at SA_51	9.0.0	10.0.0
2012-09	SP_57	-	-	-	Update to Rel-11 version (MCC)	10.0.0	11.0.0
2014-09	SP_65	-	-	-	Update to Rel-12 version (MCC)	11.0.0	12.0.0
2015-12	SP_70	-	-	-	Update to Rel-13 version (MCC)	12.0.0	13.0.0
Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-03	SA#75	-	-	-	-	Promotion to Release 14 without technical change (MCC)	14.0.0
2018-06	SA#80	-	-	-	-	Update to Rel-15 version (MCC)	15.0.0

History

Document history		
V15.0.0	July 2018	Publication