

ETSI TS 103 636-2 V2.2.1 (2026-05)



TECHNICAL SPECIFICATION

**DECT-2020 New Radio (NR);
Part 2: Radio reception and transmission requirements;
Release 2**

Reference

RTS/DECT-00420

Keywords5G, DECT, DECT-2020, IMT-2020, NR, OFDM,
radio, radio parameters**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Contents

| | |
|---|----|
| Intellectual Property Rights | 6 |
| Foreword..... | 6 |
| Modal verbs terminology..... | 6 |
| 1 Scope | 7 |
| 2 References | 7 |
| 2.1 Normative references | 7 |
| 2.2 Informative references..... | 7 |
| 3 Definition of terms, symbols and abbreviations..... | 8 |
| 3.1 Terms..... | 8 |
| 3.2 Symbols..... | 8 |
| 3.3 Abbreviations | 8 |
| 4 General | 9 |
| 4.1 Introduction | 9 |
| 4.2 Relationship between minimum requirements and test requirements | 9 |
| 4.3 Applicability of minimum requirements | 10 |
| 5 Operating bands and channel arrangement..... | 10 |
| 5.1 General | 10 |
| 5.2 Operating bands..... | 10 |
| 5.3 Operating channel bandwidths | 10 |
| 5.3.1 General..... | 10 |
| 5.3.2 Channel bandwidth | 11 |
| 5.4 Channel arrangement..... | 11 |
| 5.4.1 Channel spacing..... | 11 |
| 5.4.2 Channel raster | 11 |
| 5.4.3 Operating channel change time..... | 12 |
| 5.4.3.1 Operating channel change time definition..... | 12 |
| 5.4.3.2 Operating channel change time requirement..... | 12 |
| 5.5 Reference time..... | 12 |
| 5.5.1 General..... | 12 |
| 5.5.2 Reference time accuracy | 12 |
| 6 Transmitter characteristics | 13 |
| 6.1 General | 13 |
| 6.2 Transmitter power | 13 |
| 6.2.1 Maximum output power..... | 13 |
| 6.3 Transmitter power control | 13 |
| 6.3.1 Absolute power tolerance | 13 |
| 6.3.2 Relative power tolerance | 14 |
| 6.3.3 Minimum output power | 14 |
| 6.3.4 Transmit OFF power..... | 14 |
| 6.3.5 Transmit ON/OFF time mask | 15 |
| 6.4 Transmit signal quality | 15 |
| 6.4.1 Frequency error..... | 15 |
| 6.4.2 Transmit modulation quality..... | 15 |
| 6.4.3 Transmitter spectrum flatness | 16 |
| 6.4.4 Carrier leakage..... | 16 |
| 6.5 Transmitter spectrum emission requirements | 16 |
| 6.5.1 General..... | 16 |
| 6.5.2 Occupied channel BW | 17 |
| 6.5.3 Out of band emissions..... | 17 |
| 6.5.4 Spurious emissions | 18 |
| 6.5.5 Adjacent Channel Leakage Ratio..... | 18 |
| 7 Receiver characteristics | 19 |

| | | |
|--|---|-----------|
| 7.1 | General | 19 |
| 7.2 | Reference sensitivity | 19 |
| 7.3 | Maximum input level | 19 |
| 7.4 | Adjacent Channel Selectivity | 19 |
| 7.5 | Blocking characteristics | 20 |
| 7.5.1 | General..... | 20 |
| 7.5.2 | In band blocking characteristics..... | 20 |
| 7.5.3 | Out of band blocking characteristics..... | 21 |
| 7.6 | Spurious response..... | 22 |
| 7.7 | Spurious emissions | 22 |
| 7.8 | Receiver intermodulation | 22 |
| 8 | Radio Device measurements | 23 |
| 8.1 | General | 23 |
| 8.2 | Received signal strength (RSSI-1) measurement | 23 |
| 8.2.1 | General..... | 23 |
| 8.2.2 | Measurement accuracy and dynamic range | 23 |
| 8.2.3 | RSSI-1 measurement report mapping | 23 |
| 8.3 | Demodulated signal strength (RSSI-2) measurement..... | 24 |
| 8.3.1 | General..... | 24 |
| 8.3.2 | Measurement accuracy and dynamic range | 24 |
| 8.3.3 | RSSI-2 measurement report mapping | 24 |
| 8.4 | Demodulated Signal to Noise quality value (SNR)..... | 25 |
| 8.4.1 | General..... | 25 |
| 8.4.2 | Measurement accuracy and dynamic range | 25 |
| 8.4.3 | Demodulated signal to noise quality measurement report mapping | 25 |
| 9 | Radio channel decoding performance | 26 |
| 9.1 | Introduction | 26 |
| 9.2 | Fixed Reference Channel performance | 26 |
| 9.2.1 | Fixed Reference Channel with QPSK..... | 26 |
| 9.2.2 | Single receiver requirements..... | 26 |
| Annex A (informative): Reference measurement channel for testing..... | | 28 |
| A.1 | General | 28 |
| A.2 | Reference measurement channels for 1,728 MHz operating bandwidth..... | 28 |
| A.2.1 | Fixed Reference Channel measurement with QPSK | 28 |
| A.2.2 | Fixed Reference Channel measurement with 16-QAM..... | 29 |
| A.3 | Reference measurement channels for 3,456 MHz operating bandwidth..... | 29 |
| A.3.1 | Fixed Reference Channel measurement with QPSK | 29 |
| A.3.2 | Fixed Reference Channel measurement with 16-QAM..... | 30 |
| A.4 | Reference measurement channels for 6,912 MHz operating bandwidth..... | 30 |
| A.4.1 | Fixed Reference Channel measurement with QPSK | 30 |
| A.4.2 | Fixed Reference Channel measurement with 16-QAM..... | 31 |
| A.5 | Propagation condition..... | 32 |
| A.5.1 | General | 32 |
| A.5.2 | Extended Pedestrian A (EPA) channel model | 32 |
| Annex B (normative): Radio Device Capabilities | | 34 |
| B.1 | Introduction | 34 |
| B.2 | Radio Device Capabilities | 34 |
| B.2.1 | Maximum output power | 34 |
| B.2.2 | RX Gain value | 34 |
| Annex C (normative): Environmental conditions | | 35 |
| C.1 | General | 35 |
| C.2 | Temperature | 35 |

C.3 Voltage35

C.4 Vibration.....36

Annex D (informative): Change history37

History38

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 2 of a multi-part deliverable covering the DECT-2020 New Radio (NR) technology. Full details of the entire series can be found in part 1 [i.3].

DECT-2020 NR is recognized in Recommendation ITU-R M.2150 [i.2] as a component RIT fulfilling the IMT-2020 requirements of the IMT-2020 use scenarios URLLC and mMTC. The Set of Radio Interface Technology (SRIT) called "DECT 5G SRIT" is involving 3GPP NR and DECT-2020 NR.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document establishes the minimum RF requirements for DECT-2020 New Radio (NR) Radio Devices (RDs). For clarity these requirements cover both Fixed Termination point (FT) as well as Portable Termination point (PT).

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found in the [ETSI docbox](#).

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] Void.
- [2] [ETSI TS 103 636-3](#): "DECT-2020 New Radio (NR); Part 3: Physical layer; Release 2".
- [3] [ETSI TS 103 636-4](#): "DECT-2020 New Radio (NR); Part 4: MAC layer; Release 2".
- [4] [Recommendation ITU-R M.1545](#): "Measurement uncertainty as it applies to test limits for the terrestrial component of International Mobile Telecommunications-2000".
- [5] [Recommendation ITU-R SM.329](#): "Unwanted emissions in the spurious domain".
- [6] [IEC 60068-2-1](#): "Environmental testing - Part 2-1: Tests - Test A: Cold".
- [7] [IEC 60068-2-2](#): "Environmental testing - Part 2-2: Tests - Test B: Dry heat".
- [8] [ETSI TS 103 636-5](#): "DECT-2020 New Radio (NR); Part 5: DLC and Convergence layers; Release 2".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents may be useful in implementing an ETSI deliverable or add to the reader's understanding, but are not required for conformance to the present document.

- [i.1] ETSI TR 100 028-1 (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1".
- [i.2] Recommendation ITU-R M.2150: "Detailed specifications of the terrestrial radio interfaces of International Mobile Telecommunications-2020 (IMT-2020)".
- [i.3] ETSI TS 103 636-1: "DECT-2020 New Radio (NR); Part 1: Overview; Release 2".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

network ID: network identity as defined in ETSI TS 103 636-4 [3]

transmitter ID: transmitter short radio identity ID as defined in ETSI TS 103 636-4 [3]

transmitted packet: transmission of physical layer packet of given length defined in ETSI TS 103 636-3 [2] and ETSI TS 103 636-4 [3]

3.2 Symbols

For the purposes of the present document, the following symbols apply:

| | |
|----------------------------------|--|
| α | Leaky integrator filter forgetting factor |
| β | Fourier transform scaling factor |
| B_N | Nominal channel bandwidth |
| B_T | Transmission bandwidth |
| B_O | Occupied transmission bandwidth |
| B_G | Guard band ($B_N - B_T$) |
| $\text{Band}_{\text{high edge}}$ | High edge of the band for blocking signal |
| $\text{BW}_{\text{Interferer}}$ | Bandwidth of the interfering signal |
| $\text{Band}_{\text{low edge}}$ | Lower edge of the band for blocking signal |
| f | Frequency |
| F_c | Carrier centre frequency |
| $F_{\text{Interferer}}$ | Frequency offset of the interfering signal from the centre frequency of the desired signal |
| F_o | Reference carrier centre frequency |
| Δf_{Oob} | Δ Frequency of the Out of Band emission |
| n | Carrier number |
| $P_{\text{Interferer}}$ | Received power of the interfering signal |
| P_{MAX} | Maximum transmission power of the RD power class as specified in table 6.2.1-1. |
| ΔP | Power step size in dB between power control commands |
| $\text{RX}_{\text{channelmax}}$ | Maximum receiver wanted signal level |
| $\text{RX}_{\text{sensitivity}}$ | Minimum receiver reference sensitivity |
| $\text{SNRPACKET}(n)$ | Signal to Noise Ratio of packet (n) |
| μ | Subcarrier scaling factor |
| N_{OCC}^{β} | Number of occupied subcarriers for given β |
| NOTE: | See ETSI TS 103 636-3 [2], clause 4.3. |
| Δ_f^{μ} | Subcarrier width for given μ |

NOTE: ETSI TS 103 636-3 [2], clause 4.3.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI TS 103 636-1 [i.3] and the following apply:

NOTE: An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in ETSI TS 103 636-1 [i.3].

| | |
|------|------------------------------------|
| ACS | Adjacent Channel Selectivity |
| ACLR | Adjacent Channel Leakage Rejection |
| EVM | Error Vector Magnitude |
| FT | Fixed Termination point |
| FRC | Fixed Reference Channel |
| DFT | Discrete Fourier Transform |

| | |
|------|--|
| IDFT | Inverse Discrete Fourier Transform |
| MBW | Measurement BandWidth |
| NR | New Radio |
| OFDM | Orthogonal Frequency Domain Modulation |
| ppm | parts per million |
| PT | Portable Termination point |
| RD | Radio Device |
| RF | Radio Frequency |
| rms | root mean square |
| RSSI | Received Signal Strength Indication |
| SNR | Signal to Noise Ratio |

4 General

4.1 Introduction

The present document defines the minimum requirements for DECT-2020 NR radio devices.

Radio channel arrangements, operating channel bandwidths and supported bands are defined in clause 5. The present document defines operating bandwidths 1,728 MHz, 3,456 MHz and 6,912 MHz. The channel numbering scheme enables to assign channels from 450 MHz up to 5 875 MHz band operating enabling to support up to 24 different operating bands.

For transmitter operation the present document specifies 23 dBm, 21 dBm, 19 dBm, 16 dBm, 13 dBm, 10 dBm, 7 dBm and 0 dBm maximum output power classes which adapt to different type of application requirement and support battery powered use cases. The transmitter emission masks performance meets the industry requirements. In addition, the transmitter output power can be adjusted down to -40 dBm level, which enables the support for high density use cases. The RX-TX transition time is defined to operate within the Guard Interval (GI), which enables a very competitive low latency operation with hybrid ARQ operation.

Receiver requirement defines the minimum performance for the radio device with hybrid ARQ support. The reference sensitivity levels scales depending on operating bandwidths.

Measurement requirements are defined for channel access purposes and to support radio environment quality reporting.

Radio requirements testing are considered by defining reference channels such that the requirement verification is possible with simple test.

The requirements are defined keeping in mind the state of art performance, low power consumption and competitive implementation cost.

4.2 Relationship between minimum requirements and test requirements

The present document provides DECT-2020 New Radio RF characteristics and minimum performance requirements.

The Minimum Requirements given in the present document make no allowance for measurement uncertainty. Measurement uncertainties for a given requirement may be studied from ETSI TR 100 028-1 [i.1]. These test tolerances are individually defined and/or calculated for each test. The test tolerances are used to relax the minimum requirements in the present document to create test requirements. For some requirements the test tolerances may be set to zero.

The measurement results returned by the test system are compared - without any modification - against the test requirements as defined by the shared risk principle.

The shared risk principle is defined in Recommendation ITU-R M.1545 [4].

4.3 Applicability of minimum requirements

- a) In the present document, the Minimum Requirements are specified as general requirements and additional requirements. Where the Requirement is specified as a general requirement, the requirement is mandated to be met in all scenarios.
- b) The spurious emissions power requirements are for the long-term average of the power. For the purpose of reducing measurement uncertainty it is acceptable to average the measured power over a period of time sufficient to reduce the uncertainty due to the statistical nature of the signal.

5 Operating bands and channel arrangement

5.1 General

This clause defines the DECT-2020 operating frequency bands, channel bandwidth(s) for communication and operating channel frequencies for the present document release. This clause also defines the radio device reference time accuracy requirement.

5.2 Operating bands

Radio device operating band numbering is defined in table 5.2-1. Radio device may implement one or more band support depending its capabilities.

Table 5.2-1: Operating band numbering

| Band number | Receiving band (MHz) | Transmitting band (MHz) |
|-------------|----------------------|-------------------------|
| 1 | 1 880 to 1 900 | 1 880 to 1 900 |
| 2 | 1 900 to 1 920 | 1 900 to 1 920 |
| 3 | 2 400 to 2 483,5 | 2 400 to 2 483,5 |
| 4 | 902 to 928 | 902 to 928 |
| 5 | 450 to 470 | 450 to 470 |
| 6 | 698 to 806 | 698 to 806 |
| 7 | 716 to 728 | 716 to 728 |
| 8 | 1 432 to 1 517 | 1 432 to 1 517 |
| 9 | 1 920 to 1 930 | 1 920 to 1 930 |
| 10 | 2 010 to 2 025 | 2 010 to 2 025 |
| 11 | 2 300 to 2 400 | 2 300 to 2 400 |
| 12 | 2 500 to 2 620 | 2 500 to 2 620 |
| 13 | 3 300 to 3 400 | 3 300 to 3 400 |
| 14 | 3 400 to 3 600 | 3 400 to 3 600 |
| 15 | 3 600 to 3 700 | 3 600 to 3 700 |
| 16 | 4 800 to 4 990 | 4 800 to 4 990 |
| 17 | 5 725 to 5 875 | 5 725 to 5 875 |
| 18 | 5 150 to 5 350 | 5 150 to 5 350 |
| 19 | 5 470 to 5 725 | 5 470 to 5 725 |
| 20 | 3 800 to 4 200 | 3 800 to 4 200 |
| 21 | 3 700 to 3 800 | 3 700 to 4 200 |
| 22 | 1 910 to 1 930 | 1 910 to 1 930 |
| 23 | 1 786 to 1 805 | 1 786 to 1 805 |
| 24 | 1 910 to 1 920 | 1 901 to 1 920 |

5.3 Operating channel bandwidths

5.3.1 General

This clause defines the transmission bandwidths for this release.

NOTE: Additional channel bandwidths option may be added in the future releases.

5.3.2 Channel bandwidth

DECT-2020 NR supports flexible physical layer numerology defined in ETSI TS 103 636-3 [2], clause 4.3, table 4.3-1.

Table 5.3.2-1: Channel bandwidth

| Parameter | Operating channel bandwidth I | Operating channel bandwidth II | | Operating channel bandwidth III | | |
|---|-------------------------------|--------------------------------|-------|---------------------------------|-------|-------|
| B_N , Nominal channel bandwidth (MHz) | 1,728 | 3,456 | | 6,912 | | |
| (μ, β) | (1,1) | (1,2) | (2,1) | (1,4) | (2,2) | (4,1) |
| B_T , Transmission bandwidth (MHz) | 1,539 | 3,051 | 3,078 | 6,075 | 6,102 | 6,156 |

NOTE: $B_T = (N_{occ}^\beta + 1) \times \Delta_f^\mu$ results from number of occupied subcarriers for given numerology N_{occ}^β , +1 from the DC subcarrier times the subcarrier width Δ_f^μ for given numerology.

5.4 Channel arrangement

5.4.1 Channel spacing

The minimum channel spacing shall be 1,728 MHz between adjacent channels centre to centre frequencies. In wider operating bandwidth cases the channel centre frequencies can be adjusted with 0,864 MHz in bands 1 to 12 and bands 22 and 23. For bands 13 to 16 and bands 20 to 21, the minimum channel centre frequency step size shall be 1,728 MHz. For bands 17 to 19 the minimum channel centre frequency step size shall be 2 MHz.

5.4.2 Channel raster

The radio transmission is possible with defined channel centre frequencies. Absolute centre frequencies are defined covering the frequency range from 450 MHz to 5 875 MHz. The absolute channel numbers are signalled with 13-bits frequency channel IE defined in ETSI TS 103 636-4 [3].

For bands 1, 2 and 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 22, 23 and 24 the carrier centre frequency is defined by:

$$F_c = F_0 + n \times 0,864 \text{ MHz}$$

Where:

$$F_0 = 450,144 \text{ MHz; and}$$

$$n = 1, 2, 3, \dots, 2\,951.$$

For bands 13, 14, 15, 16, 20 and 21 the carrier centre frequency is defined by:

$$F_c = F_0 + (n - 2\,952) \times 1,728 \text{ MHz}$$

Where:

$$F_0 = 3\,000,596 \text{ MHz; and } n = 2\,952, 2\,953, 2\,954, \dots, 4\,104.$$

For bands 17, 18 and 19 the carrier centre frequency is defined by:

$$F_c = F_0 + (n - 4\,104) \times 2 \text{ MHz}$$

Where:

$$F_0 = 5\,150 \text{ MHz; and } n = 4\,105, 4\,106, 4\,107, \dots, 4\,466.$$

The absolute channel numbering range and respective band edge channel frequency are shown in table 5.4.2-1.

Table 5.4.2-1: Absolute channel number range

| Band number | Channel centre frequencies/MHz | Absolute channel frequency numbering | Channel raster/MHz |
|-------------|--------------------------------|--------------------------------------|--------------------|
| 1 | 1 881,792 to 1 899,072 | 1 657 to 1 677 | 0,864 |
| 2 | 1 901,664 to 1 918,944 | 1 680 to 1 700 | 0,864 |
| 3 | 2 401,056 to 2 482,272 | 2 258 to 2 352 | 0,864 |
| 4 | 903,744 to 926,208 | 525 to 551 | 0,864 |
| 5 | 451,008 to 469,152 | 1 to 22 | 0,864 |
| 6 | 698,976 to 805,248 | 288 to 411 | 0,864 |
| 7 | 717,12 to 727,488 | 309 to 321 | 0,864 |
| 8 | 1 432,512 to 1 516,32 | 1 137 to 1 234 | 0,864 |
| 9 | 1 921,536 to 1 928,448 | 1 703 to 1 711 | 0,864 |
| 10 | 2 010,528 to 2 024,352 | 1 806 to 1 822 | 0,864 |
| 11 | 2 300,832 to 2 399,328 | 2 142 to 2 256 | 0,864 |
| 12 | 2 501,28 to 2 619,648 | 2 374 to 2 511 | 0,864 |
| 13 | 3 301,268 to 3 399,764 | 3 126 to 3 183 | 1,728 |
| 14 | 3 401,492 to 3 598,484 | 3 184 to 3 298 | 1,728 |
| 15 | 3 600,212 to 3 698,708 | 3 299 to 3 356 | 1,728 |
| 16 | 4 801,172 to 4 989,524 | 3 994 to 4 103 | 1,728 |
| 17 | 5 726 to 5 874 | 4 392 to 4 466 | 2,000 |
| 18 | 5 152 to 5 348 | 4 105 to 4 203 | 2,000 |
| 19 | 5 472 to 5 724 | 4 265 to 4 391 | 2,000 |
| 20 | 3 802,388 to 4 198,1 | 3 416 to 3 645 | 1,728 |
| 21 | 3 700,436 to 3 798,932 | 3 357 to 3 414 | 1,728 |
| 22 | 1 911,168 to 1 928,448 | 1 691 to 1 711 | 0,864 |
| 23 | 1 787,616 to 1 803,168 | 1 548 to 1 566 | 0,864 |
| 24 | 1 911,168 to 1 918,944 | 1 691 to 1 700 | 0,864 |

NOTE: The actual operating channel raster (channel grid) and RF bandwidth restriction in each band may vary depending on relevant regulatory requirements.

5.4.3 Operating channel change time

5.4.3.1 Operating channel change time definition

RD may change frequency during the operation to reduce interference or requested by the other party for better communication quality. The operating channel change time is defined as a time when the frequency channel change request is received by the RD to the time when RD is ready to transmit in a new frequency. The operating frequency change time includes the channel access monitoring time in the new frequency.

5.4.3.2 Operating channel change time requirement

The maximum time allowed for RD to change operating channel is 200 μ s. The operating channel change time includes channel sensing measurement.

5.5 Reference time

5.5.1 General

The reference time is a notional clock to which the timing of the radio frames is related.

5.5.2 Reference time accuracy

The radio device reference time shall be accurate according to the table 5.5.2-1.

Table 5.5.2-1: Reference time accuracy requirement

| | Accuracy requirement |
|--------------------|----------------------|
| Normal conditions | ±10 ppm |
| Extreme conditions | ±15 ppm |

6 Transmitter characteristics

6.1 General

Transmitter characteristics are specified at the antenna connector of the Radio Device (RD) with single antenna transmissions. The RD having integral antenna, a reference antenna gains of 0 dBi is assumed.

NOTE: Additional power classes may be added in later releases.

6.2 Transmitter power

6.2.1 Maximum output power

The maximum output power (P_{MAX}) is defined as the mean power of the transmitted packet. The maximum transmitter output power for Radio Device is defined in table 6.2.1-1. Radio Device shall not exceed the maximum output power of the declared power class for the operating band.

Table 6.2.1-1: Maximum output power

| RD power class | Operating channel bandwidth (MHz) | | | Tolerance | |
|---|-----------------------------------|-------|-------|-----------|---------|
| | 1,728 | 3,456 | 6,912 | Normal | Extreme |
| | Output power (dBm) | | | (dB) | |
| Class I | 23 | 23 | 23 | ±2,0 | ±3,0 |
| Class II | 21 | 21 | 21 | ±2,0 | ±3,0 |
| Class III | 19 | 19 | 19 | ±2,0 | ±3,0 |
| Class V | 16 | 16 | 16 | ±2,0 | ±3,0 |
| Class VI | 13 | 13 | 13 | ±2,0 | ±3,0 |
| Class IV | 10 | 10 | 10 | ±2,0 | ±3,0 |
| Class VII | 7 | 7 | 7 | ±2,0 | ±3,0 |
| Class VIII | 0 | 0 | 0 | ±2,0 | ±3,0 |
| NOTE 1: The measurement bandwidth equals to the transmission bandwidth of the operating channel bandwidth defined in table 5.3.2-1. | | | | | |
| NOTE 2: Common test parameters are defined in table A.2.1-1 for 1,728 MHz operating channel bandwidth, table A.3.1-1 for 3,456 MHz operating channel bandwidth and table A.4.1-1 for 6,912 MHz operating channel bandwidth operation. | | | | | |
| NOTE 3: Transmission output power tolerance is defined in table 6.3.1-1. | | | | | |

For band 24 operation the maximum allowed transmitter power is 20 dBm e.i.r.p. and maximum allowed operating channel bandwidth is 3,456 MHz. For the band 24 operation the maximum RD power class shall be Class III.

6.3 Transmitter power control

6.3.1 Absolute power tolerance

Absolute power tolerance is the ability of the radio device transmitter to set output power to a specific value. Packet transmission power is signalled in Physical Layer Control Field ETSI TS 103 636-4 [3], clause 6.2.

Transmission power shall be measured as an average over the active period of the transmitted packet. The absolute power tolerance, which shall not be exceeded, is given in table 6.3.1-1 for all power levels supported by the device according to the used transmit power table, ETSI TS 103 636-4 [3], clause 6.2 and device power class defined in clause 6.2.1.

The absolute power shall be measured with common test parameters defined in table A.2.1-1 for 1,728 MHz operating channel bandwidth, table A.3.1-1 for 3,456 MHz operating channel bandwidth and table A.4.1-1 for 6,912 MHz operating channel bandwidth operation. The Measurement BandWidth is defined in table 6.2.1-1.

Table 6.3.1-1: Absolute power tolerance

| Power level | Tolerance | Extreme conditions |
|-----------------------------|--------------|--------------------|
| Power \geq 10 dBm | $\pm 3,0$ dB | $\pm 4,0$ dB |
| 10 dBm > Power \geq 0 dBm | $\pm 4,0$ dB | $\pm 5,0$ dB |
| Power < 0 dBm | $\pm 5,0$ dB | $\pm 6,0$ dB |

6.3.2 Relative power tolerance

The relative power tolerance is the ability of the radio device transmitter to change it is transmitter output power from a reference level to a target level.

The requirements specified in table 6.3.2-1 apply when the power of the reference level and the target are within the power range bounded by the Minimum output power as defined in clause 6.3.3 and the Maximum output power as defined in clause 6.2.1. The power step (ΔP) is defined as the difference in the intended setting of the Transmit power between the reference level and target level. The error is the difference between ΔP and the power change measured at the antenna port. The error shall be less than the relative power tolerance specified in table 6.3.2-1.

Table 6.3.2-1: Relative power tolerance

| Power step ΔP (Up or down) (dB) | Tolerance | Extreme conditions |
|---|--------------|--------------------|
| $2 \leq \Delta P < 3$ | $\pm 1,5$ dB | $\pm 2,0$ dB |
| $3 \leq \Delta P < 4$ | $\pm 2,5$ dB | $\pm 3,0$ dB |
| $4 \leq \Delta P < 10$ | $\pm 3,5$ dB | $\pm 4,0$ dB |
| $10 \leq \Delta P < 15$ | $\pm 5,0$ dB | $\pm 7,0$ dB |
| $15 \leq \Delta P$ | $\pm 6,0$ dB | $\pm 8,0$ dB |

6.3.3 Minimum output power

The minimum controlled output power of the radio device is defined as the power in the channel bandwidth when the power is set to a minimum value. Transmission power tolerance is defined in clause 6.3.1, table 6.3.1-1.

Table 6.3.3-1: Minimum output power

| Parameter/Unit | Channel bandwidth (MHz) | | |
|----------------------------|-------------------------|-------|-------|
| | 1,728 | 3,456 | 6,912 |
| Minimum output power (dBm) | -20 | | |

Supporting output power levels below the minimum output power level in table 6.3.3-1 is optional. Signalled power steps below the minimum output power level in table 6.3.3-1 shall be supported as defined in ETSI TS 103 636-4 [3], clause 6.2. by the receiver.

6.3.4 Transmit OFF power

Transmit OFF power is defined as the mean power when the transmitter is OFF. The transmitter is OFF when the radio device is not allowed to transmit or during periods when it is not transmitting in the radio frame. During active HARQ process the radio device is not considered to be OFF.

The transmit OFF power is defined as the mean power in a duration of at least one frame of 10 ms excluding any transient periods. The transmit OFF power shall not exceed the values specified in table 6.3.4-1.

Table 6.3.4-1: Transmit OFF power

| Parameter/Unit | Channel bandwidth (MHz) | | |
|--|-------------------------|-------|-------|
| | 1,728 | 3,456 | 6,912 |
| Minimum OFF power (dBm) | OFF power < -50 | | |
| NOTE: The Measurement BandWidth is defined in table 6.2.1-1. | | | |

6.3.5 Transmit ON/OFF time mask

The transmit ON/OFF time mask defines the observation period between Transmit OFF and ON power and between Transmit ON and OFF power. The subslot duration is defined in ETSI TS 103 636-3 [2], clause 4.4.

The OFF-power measurement period is defined in a duration of at least one slot before and after the transmission excluding any transient periods. The ON power is defined as the mean power over one or more consecutive slots excluding any transient period.

The TX ON/OFF transient period length shall be no longer than Guard Interval (GI) defined in ETSI TS 103 636-3 [2], clause 5.2.1.

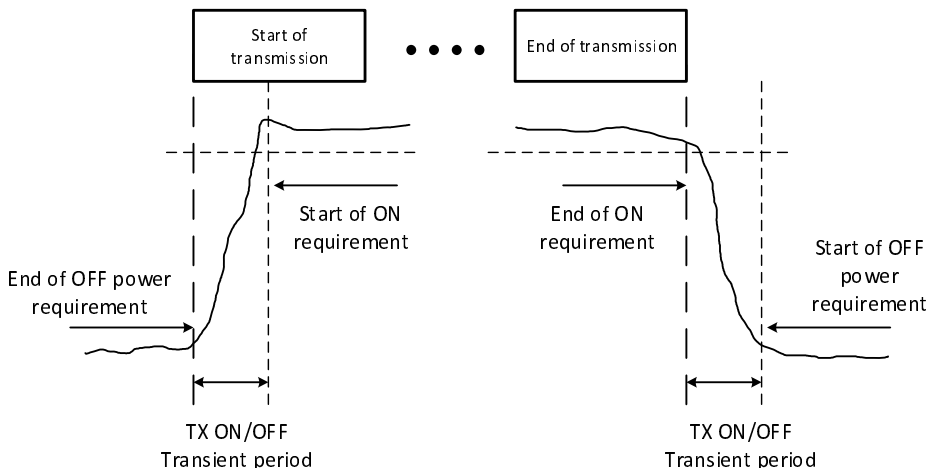


Figure 6.3.5-1: Transmit ON/OFF time mask

6.4 Transmit signal quality

6.4.1 Frequency error

RD modulated transmitter carrier frequency accuracy observed over the transmitted packet shall be within ±10,0 ppm compared to the selected absolute carrier centre frequency as specified in clause 5.4.2.

6.4.2 Transmit modulation quality

The Error Vector Magnitude (EVM) is a measure of the difference between the reference waveform and the measured waveform. The EVM result is defined after the receiver FFT as the square root of the ratio of the mean error vector power to the mean reference power expressed as a percentage.

The EVM is measured over all occupied subcarriers $k = 0, \dots, N_{occ} - 1$ of all OFDM symbols $i = 0, \dots, N_{sym} - 1$ of the transmitted packet and $N = N_{occ} \times N_{sym}$.

$$EVM[\%] = 100 * \sqrt{\frac{1}{N} \sum_{i,k} |r_{i,k} - a_{i,k}|^2 / \frac{1}{N} \sum_{i,k} |a_{i,k}|^2}$$

Where $a_{i,k}$ is the ideal symbol and $r_{i,k}$ is received symbol corrected by phase and clock errors as well as channel transfer function.

As minimum requirement the RMS average of basic EVM measurements of 20 consecutive transmissions of a 2 subslot packet excluding any transient period shall not exceed Average EVM level defined in table 6.4.2-1. The individual transmissions shall have guard interval of at least two subslots in between them, where transmit ON/OFF criteria of clause 6.3.5 shall be satisfied.

Table 6.4.2-1: Error Vector Magnitude requirements

| Modulation | Average EVM level (%) | Power level (dBm) |
|--------------|-----------------------|-------------------|
| QPSK or BPSK | 17,5 | > -40 |
| 16-QAM | 12,5 | > -40 |
| 64-QAM | 8 | > -40 |

NOTE: Additional modulation levels may be added to later releases.

6.4.3 Transmitter spectrum flatness

The equalizer correction applied in the EVM measurement process of clause 6.4.2 shall meet spectral flatness requirement for the EVM measurement to be valid. The EVM equalizer spectrum flatness is defined in terms of the maximum of peak-to-peak ripple of the equalizer coefficients (dB) across the transmission bandwidth B_T . The spectrum flatness is measured over all occupied subcarriers of all OFDM symbols of the transmitted packet.

The maximum peak-to-peak ripple of the equalizer coefficients shall be less than 4 dB.

NOTE: The EVM equalizer depends on the passband response of the transmit pulse shaping and interpolation filters in EUT transmitter implementation. In other words, this requirement is equivalent to OFDM transmit spectrum flatness requirement, measured via EVM equalizer peak-to-peak ripple.

6.4.4 Carrier leakage

Carrier leakage is an unwanted and unmodulated sinusoidal waveform at the carrier frequency. Relative carrier leakage power is defined as ratio of the additive sinusoid waveform power to the modulated waveform power. The relative carrier leakage power shall not exceed the values specified in table 6.4.4-1.

Table 6.4.4-1 Minimum requirements for relative carrier leakage power

| Parameters | Relative limit (dBc) |
|--|----------------------|
| $0 \text{ dBm} \leq \text{Output power}$ | -25 |
| $-30 \text{ dBm} \leq \text{Output power} < 0 \text{ dBm}$ | -20 |
| $-40 \text{ dBm} \leq \text{Output power} < -30 \text{ dBm}$ | -10 |

6.5 Transmitter spectrum emission requirements

6.5.1 General

Radio equipment transmitter spectrum emissions are occupied channel emissions, out of band and spurious emissions. The relation of these emission components is illustrated in figure 6.5.1-1.

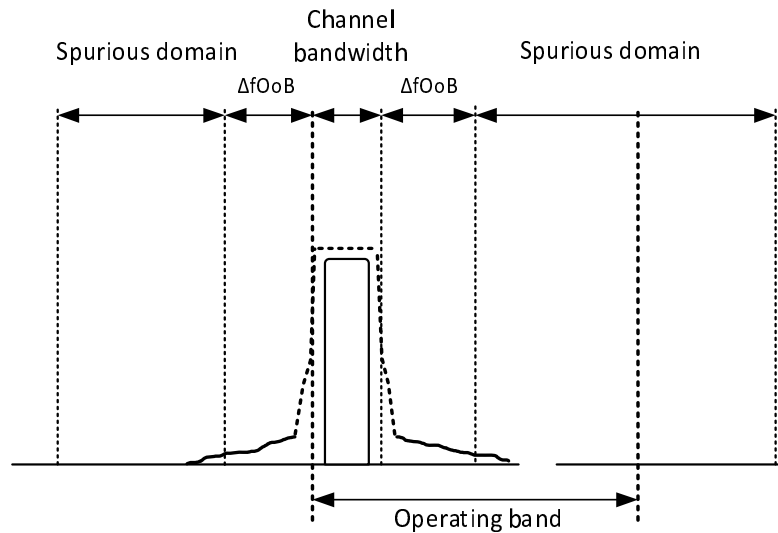


Figure 6.5.1-1: Transmitter RF spectrum

6.5.2 Occupied channel BW

Occupied bandwidth (B_o) is a measure of the bandwidth containing 99 % of the total integrated mean power of the transmitted spectrum on the assigned channel.

The occupied bandwidth shall be less than the nominal channel bandwidth as defined in table 5.3.2-1.

6.5.3 Out of band emissions

The Out of band emissions are unwanted emissions immediately outside the assigned channel bandwidth resulting from the modulation process and non-linearity in the transmitter but excluding spurious emissions.

The spectrum emission mask of the RD applies to frequencies Δf_{oob} starting from the \pm edge (from $F_c + B_N/2$ or from $F_c - B_N/2$) of the assigned channel. The limits specified in Table 6.5.3-1 and 6.5.3-2 shall not be exceeded. For frequencies offset greater than Δf_{oob} as specified in table 6.5.3-2 the spurious requirements in clause 6.5.4 are applicable.

Table 6.5.3-1: Spectrum emission limits 30kHz measurement bandwidth

| Δf_{oob} | | Limit (dBm) | Measurement BandWidth (MBW) |
|--------------------|--------------------|--------------------------------|-----------------------------|
| $B_G/2 \geq 1$ MHz | $B_G/2 < 1$ MHz | | |
| - | 0 to $B_G/2$ | $-10 - 10\log_{10}(B_N/1,728)$ | 30 kHz |
| - | -0 to $-B_G/2$ | $-10 - 10\log_{10}(B_N/1,728)$ | 30 kHz |
| 0 to 1 MHz | $B_G/2$ to 1 MHz | $-21 - 10\log_{10}(B_N/1,728)$ | 30 kHz |
| 0 to -1 MHz | $-B_G/2$ to -1 MHz | $-21 - 10\log_{10}(B_N/1,728)$ | 30 kHz |

NOTE 1: The first center frequency for a 30 kHz measurement filter is at $\Delta f_{oob} = 0,015$ MHz, which is $B_N/2 + 0,015$ MHz from the carrier center frequency.

NOTE 2: The first center frequency for a 30 kHz measurement filter in the range from $B_G/2$ to 1 MHz is at $\Delta f_{oob} = B_G/2 + 0,015$ MHz, which is $B_N/2 + B_G/2 + 0,015$ MHz from the carrier center frequency.

NOTE 3: Symmetrically similarly as in notes 1 and 2 in negative Δf_{oob} frequencies.

Table 6.5.3-2: Spectrum emission limits 1 MHz measurement bandwidth

| Δf_{oob} | Limit (dbm) | | Measurement BandWidth (MBW) |
|-------------------|------------------------------|--------------------------------|-----------------------------|
| | $B_N \leq 6.912 \text{ MHz}$ | $B_N > 6.912 \text{ MHz}$ | |
| 1 MHz to B_N | -10 | $-10 - 10\log_{10}(B_N/6,912)$ | 1 MHz |
| -1 MHz to $-B_N$ | -10 | $-10 - 10\log_{10}(B_N/6,912)$ | 1 MHz |
| B_N to $2B_N$ | -25 | $-25 - 10\log_{10}(B_N/6,912)$ | 1 MHz |
| $-B_N$ to $-2B_N$ | -25 | $-25 - 10\log_{10}(B_N/6,912)$ | 1 MHz |

NOTE 1: The first center frequency for a 1 MHz measurement filter in the range 1 MHz to B_N is at $\Delta f_{oob} = 1,5 \text{ MHz}$.

NOTE 2: The first center frequency for a 1 MHz measurement filter in the range B_N to $2B_N$ at $\Delta f_{oob} = B_N + 0,5 \text{ MHz}$.

NOTE 3: Symmetrically similarly as in notes 1 and 2 in negative Δf_{oob} frequencies.

As a general rule, the resolution bandwidth of the measuring equipment should be equal to the Measurement BandWidth (MBW). However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth may be smaller than the MBW or rectangular type channel filter with very steep transition response can be used. When the resolution bandwidth is smaller than the MBW, the result shall be integrated over the MBW in order to obtain the equivalent noise bandwidth of the MBW.

6.5.4 Spurious emissions

Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emissions, intermodulation products and frequency conversion products, but exclude out of band emissions unless otherwise stated. The spurious emission limits are specified in terms of general requirements in-line with Recommendation ITU-R SM.329 [5].

Unless otherwise stated, the spurious emission limits shall apply for the frequency ranges that are more than F_{OOB} (MHz) in table 6.5.3-1 from the edge of the channel bandwidth. The spurious emission limits in table 6.5.4-1 shall apply for all transmitter bands and channel bandwidths.

The spurious emissions shall be measured during the time period where the transmitter is active excluding any transient periods.

For measurement conditions at the edge of each frequency range, the lowest frequency of the measurement position in each frequency range shall be set at the lowest boundary of the frequency range plus MBW/2. The highest frequency of the measurement position in each frequency range shall be set at the highest boundary of the frequency range minus MBW/2. MBW denotes the measurement bandwidth defined for the protected band.

Table 6.5.4-1: Spurious emission limits

| Frequency Range | Maximum Level | Measurement BandWidth |
|--|---------------|-----------------------|
| $9 \text{ kHz} \leq f < 150 \text{ kHz}$ | -36 dBm | 1 kHz |
| $150 \text{ kHz} \leq f < 30 \text{ MHz}$ | -36 dBm | 10 kHz |
| $30 \text{ MHz} \leq f < 1\,000 \text{ MHz}$ | -36 dBm | 100 kHz |
| $1 \text{ GHz} \leq f < 12,75 \text{ GHz}$ | -30 dBm | 1 MHz |
| $12,75 \text{ GHz} \leq f < 5^{\text{th}}$ harmonic of the upper frequency edge in GHz | -30 dBm | 1 MHz |

6.5.5 Adjacent Channel Leakage Ratio

Adjacent Channel Leakage Ratio (ACLR) is used as a measure of the amount of transmission power leaking into adjacent channels. ACLR is the ratio of the filtered mean power centered on the assigned channel frequency to the filtered mean power centered on an adjacent channel frequency with measurement bandwidth equal to the transmission bandwidth.

ACLR is measured with square window on adjacent channel. A DFT of the transmission signal is taken and the energy of the appropriate bins used to calculate the adjacent channel powers.

ACLR requirement of table 6.5.5-1 shall be met for all transmission powers from -40dBm to P_{MAX} .

Table 6.5.5-1: Adjacent channel leakage ratio limit

| Limit (dBc) |
|-------------|
| -30 |

7 Receiver characteristics

7.1 General

Receiver characteristics are specified at the antenna connector(s) of the Radio Equipment. For REs with an integral antenna only, a reference antenna(s) with a gain of 0 dBi is assumed for each antenna port(s). RD with an integral antenna(s) can convert power levels into field strength requirements by assuming 0 dBi gain antenna.

The levels of the test signal applied to the antenna connector are defined in the respective clauses below.

The receiver test signal(s) configurations are defined in annex A.

7.2 Reference sensitivity

The reference sensitivity power level is the minimum mean power applied to RD antenna port. RD throughput shall meet or exceed the requirements for the specified reference measurement channel.

The throughput shall be $\geq 90\%$ of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1

Table 7.2-1: Minimum receiver reference sensitivity ($RX_{\text{sensitivity}}$) requirement

| Bands | Channel bandwidth (MHz) | | | Unit |
|------------------------|-------------------------|-------|-------|------|
| | 1,728 | 3,456 | 6,912 | |
| 1-12, 22, 23 and 24 | -99,7 | -96,7 | -93,7 | dBm |
| 13-15, 20 and 21 | -97,7 | -94,7 | -91,7 | dBm |
| 16-19 | -95,7 | -92,7 | -89,7 | dBm |

7.3 Maximum input level

The maximum input power is the mean power received at the RD antenna port, at which the throughput shall meet or exceed the minimum requirements for the specified reference measurement channel.

The throughput shall be $\geq 90\%$ of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1

Table 7.3-1: Maximum own signal ($RX_{\text{channelmax}}$) level requirement

| Channel bandwidth (MHz) | | | Unit |
|-------------------------|-------|-------|------|
| 1,728 | 3,456 | 6,912 | |
| -20 | -20 | -20 | dBm |

7.4 Adjacent Channel Selectivity

Adjacent Channel Selectivity (ACS) is a measure of a receiver's ability to receive own signal assigned to a channel frequency in the presence of an adjacent channel signal interference at a given frequency offset from the centre frequency of the assigned channel. ACS is the ratio of the receive filter attenuation on the assigned channel frequency to the receive filter attenuation on the adjacent channel(s).

The RD shall fulfil the minimum requirement specified in table 7.4-1 for all values of an adjacent channel interferer up to -30 dBm while maintaining the 25 dB relative power difference between own signal and interferer. ACS performance is measured the lower and upper range of test parameters as defined in table 7.4-1.

The throughput shall be ≥ 90 % of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1

Interference signal shall have identical signal characteristics (e.g. nominal transmission bandwidth, occupied transmission bandwidth, subcarrier width, Fourier transform size) as wanted signal. Interference signal shall have QPSK modulated random data on all occupied subcarriers and the transmit signal shall be transmit pulse-shaped with square root raised cosine filter with roll-off 0,125.

Table 7.4-1: Adjacent Channel Selectivity requirement

| RX Parameter | Channel bandwidth (MHz) | | | Units |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------|
| | 1,728 | 3,456 | 6,912 | |
| Own signal input level | RX _{sensitivity} + 14 dB | | | dBm |
| P _{Interferer} | RX _{sensitivity} + 39 dB | RX _{sensitivity} + 39 dB | RX _{sensitivity} + 39 dB | dBm |
| BW _{Interferer} | 1,728 | 3,456 | 6,912 | MHz |
| F _{Interferer} (offset) | 1,728 or -1,728 | 3,456 or -3,456 | 6,912 or -6,912 | MHz |

NOTE: The interferer offset is from own signal center frequency to interferer center frequency.

7.5 Blocking characteristics

7.5.1 General

The blocking characteristic is a measure of the receiver's ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the spurious response or the adjacent channels, without this unwanted input signal causing a degradation of the performance of the receiver beyond a specified limit. The blocking performance shall apply at all frequencies except those where a spurious response occurs.

7.5.2 In band blocking characteristics

In-band blocking is defined for an unwanted interfering signal falling into the RD operating band or into the first adjacent channel below or above the RD receive band at which the relative throughput shall meet or exceed the minimum requirement for the specified measurement channels. The test parameters are defined in table 7.5.2-1.

The throughput shall be ≥ 90 % of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1.

The interferer signal shall be modulated with data and has the same bandwidth and characteristic as the wanted signal modulated with data. The first interferer offset shall be $2 \times B_N$ measured from own signal center frequency. The measurements are repeated when interferer offset is increased with maximum step size of B_N until the interferer center frequency is Band(low edge) - 15 MHz + $B_N/2$ and Band(high edge) + 15 MHz - $B_N/2$.

Table 7.5.2-1: In-band blocking requirement

| RX Parameter | Channel bandwidth (MHz) | | | Units |
|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-------|
| | 1,728 | 3,456 | 6,912 | |
| Own signal input level | RX _{sensitivity} + 6 dB | | | dBm |
| P _{Interferer} N=2 | RX _{sensitivity} + 40 dB | RX _{sensitivity} + 40 dB | RX _{sensitivity} + 40 dB | dBm |
| P _{Interferer} N>2 | RX _{sensitivity} + 52 dB | RX _{sensitivity} + 52 dB | RX _{sensitivity} + 52 dB | dBm |
| BW _{Interferer} | 1,728 | 3,456 | 6,912 | MHz |
| F _{Interferer} (offset) | ±N x 1,728, N>=2 | ±N x 3,456, N>=2 | ±N x 6,912, N>=2 | MHz |

NOTE 1: The interferer signal characteristic is same as the wanted signal modulated with data.
NOTE 2: The interferer offset is from own signal center frequency to interferer center frequency.
NOTE 3: Maximum interferer offset is [Band(low edge) - 15 MHz + BW(interferer) / 2 and Band(high edge) + 15 MHz] - BW(interferer) / 2].

7.5.3 Out of band blocking characteristics

Out-of-band band blocking is defined for an unwanted CW interfering signal falling more than 15 MHz below or above the RD receive band. Out of band blocking test parameters are defined in tables 7.5.3-1, 7.5.3-2 and 7.5.3-3 for respective operating channel bandwidth. Blocker signal step size is 1 MHz.

The throughput shall be $\geq 90\%$ of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1.

For the measurement points defined in tables 7.5.3-1, 7.5.3-2 and 7.5.3-3 it is allowed to have a number of spurious response exceptions. The number of exceptions is a maximum of 24 or $8 \times B_N / 1,728$ MHz, whatever is greater depending on the nominal channel bandwidth B_N . For these exceptions, the requirement of clause 7.6 is applicable.

Table 7.5.3-1: Out of band blocking requirement for 1,728 MHz channel bandwidth

| Band | RX Parameter | Channel bandwidth (MHz) | | | Units |
|-----------|------------------------------|--|--|--|-------|
| | | 1,728 | | | |
| All bands | Own signal input level | RX _{sensitivity} + 6 dB | | | dBm |
| | F _{Interferer} (CW) | Range 1 | Range 2 | Range 3 | |
| | | Band _{low edge} - 15 to Band _{low edge} - 60 | Band _{low edge} - 60 to Band _{low edge} - 85 | Band _{low edge} - 85 to 1 | MHz |
| | | Band _{high edge} + 15 to Band _{high edge} + 60 | Band _{high edge} + 60 to Band _{high edge} + 85 | Band _{high edge} + 85 to 12 750 | MHz |
| | P _{Interferer} | -44 | -30 | -15 | dBm |

Table 7.5.3-2: Out of band blocking requirement for 3,456 MHz channel bandwidth

| Band | RX Parameter | Channel bandwidth (MHz) | | | Units |
|-----------|------------------------------|--|--|--|-------|
| | | 3,456 | | | |
| All bands | Own signal input level | RX _{sensitivity} + 6 dB | | | dBm |
| | F _{Interferer} (CW) | Range 1 | Range 2 | Range 3 | |
| | | Band _{low edge} - 15 to Band _{low edge} - 60 | Band _{low edge} - 60 to Band _{low edge} - 85 | Band _{low edge} - 85 to 1 | MHz |
| | | Band _{high edge} + 15 to Band _{high edge} + 60 | Band _{high edge} + 60 to Band _{high edge} + 85 | Band _{high edge} + 85 to 12 750 | MHz |
| | P _{Interferer} | -44 | -30 | -15 | dBm |

Table 7.5.3-3: Out of band blocking requirement for 6,912 MHz channel bandwidth

| Band | RX Parameter | Channel bandwidth (MHz) | | | Units |
|-----------|------------------------------|--|--|--|-------|
| | | 6,912 | | | |
| All bands | Own signal input level | RX _{sensitivity} + 6 dB | | | dBm |
| | F _{Interferer (CW)} | Range 1 | Range 2 | Range 3 | |
| | | Band _{low edge} - 15 to Band _{low edge} - 60 | Band _{low edge} - 60 to Band _{low edge} - 85 | Band _{low edge} - 85 to 1 | MHz |
| | | Band _{high edge} + 15 to Band _{high edge} + 60 | Band _{high edge} + 60 to Band _{high edge} + 85 | Band _{high edge} + 85 to 12 750 | MHz |
| | P _{Interferer} | -44 | -30 | -15 | dBm |

7.6 Spurious response

Spurious response is a measure of the receiver's ability to receive a wanted signal on its assigned channel frequency without exceeding a given degradation due to the presence of an unwanted CW interfering signal at any other frequency at which a response is obtained i.e. for which the out of band blocking limit as specified in clause 7.5.3 is not met. Spurious response test parameters are defined in table 7.6-1.

The RD throughput shall be $\geq 90\%$ of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1.

Table 7.6-1: Spurious response requirement

| RX Parameter | Channel bandwidth (MHz) | | | Units |
|--|----------------------------------|-------|-------|-------|
| | 1,728 | 3,456 | 6,912 | |
| Own signal input level | RX _{sensitivity} + 6 dB | | | dBm |
| P _{Interferer (CW)} | -44 | -44 | -44 | dBm |
| F _{Interferer (offset)} | Spurious response frequencies | | | MHz |
| NOTE: Out of Band ranges are defined in tables 7.5.3-1 to 7.5.3-3. | | | | |

7.7 Spurious emissions

The spurious emissions power is the power of emissions generated or amplified in a receiver that appear at the RD antenna connector.

The power of any narrow band CW spurious emission shall not exceed the maximum level specified in table 7.7-1.

The spurious emissions shall be measured during the time period where the receiver is active.

Table 7.7-1: General receiver spurious emission requirements

| Frequency band | Measurement BandWidth | Maximum level |
|---------------------------------|-----------------------|---------------|
| 30 MHz \leq f < 1 GHz | 100 kHz | -57 dBm |
| 1 GHz \leq f \leq 12,75 GHz | 1 MHz | -47 dBm |

7.8 Receiver intermodulation

Intermodulation response rejection is a measure of the capability of the receiver to receive a wanted signal on its assigned channel frequency in the presence of two or more interfering signals which have a specific frequency relationship to the wanted signal.

The RD shall fulfil the minimum requirement specified in table 7.8-1. The throughput shall be $\geq 90\%$ of the maximum throughput of the Fixed Reference Channel (FRC) measurement as specified in clause 9.2.1.

Table 7.8-1: Receiver intermodulation requirement

| RX Parameter | Channel bandwidth (MHz) | | | Units |
|---|---------------------------------------|---------------------------|---------------------------|-------|
| | 1,728 | 3,456 | 6,912 | |
| Own signal input level | $RX_{sensitivity} + 11$ dB | $RX_{sensitivity} + 8$ dB | $RX_{sensitivity} + 6$ dB | dBm |
| $P_{Interferer\ 1}$ (CW) | -46 | -46 | -46 | dBm |
| $P_{Interferer\ 2}$ (Modulated) | -46 | -46 | -46 | dBm |
| $BW_{Interferer\ 2}$ | 1,728 | 3,456 | 6,912 | MHz |
| $F_{Interferer\ 1}$ (Offset) | 3,456 or -3,456 | 6,912 or -6,912 | 13,824 or -13,824 | MHz |
| $F_{Interferer\ 2}$ (Offset) | $2 \times F_{Interferer\ 1}$ (Offset) | | | |
| NOTE 1: The interferer signal characteristic is same as the wanted signal modulated with data. | | | | |
| NOTE 2: The interferer offset is from own signal centre frequency to interferer centre frequency. | | | | |

8 Radio Device measurements

8.1 General

This clause defines the measurement requirements for Radio Device (RD) in terms how they are measured and measurement times, the dynamic range and accuracy requirements. Unless otherwise noted, the reference point for these measurements is antenna port(s).

8.2 Received signal strength (RSSI-1) measurement

8.2.1 General

RSSI-1 measurement is intended to assess the channel use. The RSSI-1 measurement is a linear average of received power observed during 1 OFDM symbol duration with a Measurement BandWidth of transmission channel bandwidth defined in table 5.3.2-1.

8.2.2 Measurement accuracy and dynamic range

The reported measurement accuracy shall be within the limits stated in the table 8.2.2-1 in 95 % of the reported values.

Table 8.2.2-1: RSSI-1 power measurement requirement

| RSSI-1 measurement requirement | |
|---|-------------------------------|
| RSSI-1 measured power/dBm | Accuracy in normal conditions |
| $RX_{sensitivity} < RSSI-1 \leq (RX_{sensitivity} + 10$ dB) | $\pm 5,5$ dB |
| $(RX_{sensitivity} + 10$ dB) < $RSSI-1 \leq (RX_{sensitivity} + 60$ dB) | $\pm 3,5$ dB |
| $(RX_{sensitivity} + 60$ dB) < $RSSI-1 \leq (RX_{sensitivity} + 70$ dB) | $\pm 5,5$ dB |

8.2.3 RSSI-1 measurement report mapping

The RD shall use the measurement results signalling mapping defined in the table 8.2.3-1.

Table 8.2.3-1: RSSI-1 measurement report mapping

| Reported value | Reported value (dBm) | Measured Value (dBm) |
|----------------|----------------------|----------------------|
| 0xFF | -1 | $-1,5 < x$ |
| 0xFE | -2 | $-1,5 \leq x < -2,5$ |
| 0xFD | -3 | $-2,5 \leq x < -3,5$ |
| ... | ... | ... |
| 0x74 | -140 | $x < -139,5$ |
| 0x73 | Reserved | Reserved |
| 0x72 | Reserved | Reserved |
| ... | ... | ... |

Reported value is calculated from signed integer RSSI -1 by masking out the sign bits:

$RSSI - 1_{REPORTED} = (UInt8)(0x00FF \& RSSI - 1_{dBm})$, where '&' denotes the bitwise AND operation.

The reported value is converted back to signed integer RSSI-1 value by adding the sign bits back:

$RSSI - 1_{dBm} = 0xFF00 | RSSI - 1_{REPORTED}$, where '|' denotes the bitwise OR operation.

8.3 Demodulated signal strength (RSSI-2) measurement

8.3.1 General

The RSSI-2 signal strength measurement is intended to measure signal strength of detected and demodulated DECT-2020 packet and shall be mapped to respective transmitter and network ID.

8.3.2 Measurement accuracy and dynamic range

Measurement accuracy shall be evaluated over periodic packet reception in static radio conditions over 16 transmissions of a two subslot packet from a single transmitter, where receiver shall average the per packet RSSI-2 measurements and report the averaged result.

The reported measurement accuracy of averaged result shall be within the limits stated in table 8.3.2-1 in 95 % of the reported values.

Table 8.3.2-1: RSSI-2 power measurement requirement

| RSSI-2 measurement requirement | |
|---|-------------------------------|
| RSSI-2 measured power/dBm | Accuracy in normal conditions |
| $RX_{sensitivity} < RSSI-2 \leq (RX_{sensitivity} + 10 \text{ dB})$ | $\pm 4 \text{ dB}$ |
| $(RX_{sensitivity} + 10 \text{ dB}) < RSSI-2 \leq (RX_{sensitivity} + 60 \text{ dB})$ | $\pm 2 \text{ dB}$ |
| $(RX_{sensitivity} + 60 \text{ dB}) < RSSI-2 \leq (RX_{sensitivity} + 70 \text{ dB})$ | ± 4 |

8.3.3 RSSI-2 measurement report mapping

The RD shall use the measurement results signalling mapping defined in table 8.3.3-1.

Table 8.3.3-1: RSSI-2 measurement report mapping

| Reported value | Reported value (dBm) | Measured value (dBm) |
|----------------|----------------------|----------------------|
| 0xFF | -1 | $-1,5 < x$ |
| 0xFE | -2 | $-1,5 \leq x < -2,5$ |
| 0xFD | -3 | $-2,5 \leq x < -3,5$ |
| ... | ... | ... |
| 0x74 | -140 | $x < -139,5$ |
| 0x73 | Reserved | Reserved |
| 0x72 | Reserved | Reserved |
| ... | ... | ... |

Reported value is calculated from signed integer RSSI-2 by masking out the sign bits:

$RSSI - 2_{\text{REPORTED}} = (\text{UInt8})(0x00FF \& RSSI - 2_{\text{dBm}})$, where '&' denotes the bitwise AND operation.

The reported value is converted back to signed integer RSSI-2 value by adding the sign bits back:

$RSSI - 2_{\text{dBm}} = 0xFF00 | RSSI - 2_{\text{REPORTED}}$, where '|' denotes the bitwise OR operation.

8.4 Demodulated Signal to Noise quality value (SNR)

8.4.1 General

The received signal to noise quality is intended to measure radio device signal quality from detected and demodulated DECT-2020 packet and shall be mapped to respective transmitter and network ID.

8.4.2 Measurement accuracy and dynamic range

Measurement accuracy shall be evaluated over periodic packet reception in static radio conditions over 16 transmissions of a two subslot packet from a single transmitter, where receiver shall average the per packet SNR measurements and report the averaged result.

The required minimum dynamic range of SNR measurement is depending on the supported modulation schemes of the receiver. The receiver may report SNR values beyond the required minimum range.

The reported measurement accuracy of averaged result shall be within the limits in table 8.4.2-1 in 95 % of the reported values.

Table 8.4.2-1: SNR measurement requirement

| SNR measurement requirement | | |
|---------------------------------------|--|--------------------|
| Receiver supported modulation schemes | Minimum SNR range | Accuracy |
| BPSK, QPSK | $5 \text{ dB} < \text{SNR} \leq 15 \text{ dB}$ | $\pm 3 \text{ dB}$ |
| 16-QAM | $5 \text{ dB} < \text{SNR} \leq 18 \text{ dB}$ | $\pm 3 \text{ dB}$ |
| 64-QAM | $5 \text{ dB} < \text{SNR} \leq 22 \text{ dB}$ | $\pm 3 \text{ dB}$ |
| 256-QAM | $5 \text{ dB} < \text{SNR} \leq 29 \text{ dB}$ | $\pm 3 \text{ dB}$ |
| 1024-QAM | $5 \text{ dB} < \text{SNR} \leq 34 \text{ dB}$ | $\pm 3 \text{ dB}$ |

8.4.3 Demodulated signal to noise quality measurement report mapping

The RD shall use the measurement results signalling mapping defined in table 8.4.3-1.

Table 8.4.3-1: Demodulated signal to noise quality measurement report mapping

| Reported value | Reported value (dB) | Measured value (dB) |
|----------------|---------------------|------------------------|
| 0x7F | 63,5 | $63,25 \leq x$ |
| 0x7E | 63,0 | $62,75 \leq x < 63,25$ |
| 0x7D | 62,5 | $62,25 \leq x < 62,75$ |
| ... | ... | ... |
| 0x01 | 0,5 | $0,25 \leq x < 0,75$ |
| 0x00 | 0 | $-0,25 \leq x < 0,25$ |
| 0xFF | -0,5 | $-0,75 \leq x < -0,25$ |
| ... | ... | ... |
| 0xE0 | -16,0 | $x < -15,75$ |
| 0xDF | Reserved | Reserved |
| ... | ... | ... |
| 0x82 | Reserved | Reserved |
| 0x81 | Reserved | Reserved |
| 0x80 | Reserved | Reserved |

9 Radio channel decoding performance

9.1 Introduction

This clause defines the minimum performance requirements for the physical channels specified in ETSI TS 103 636-3 [2]. The minimum RD performance requirements in this clause are specified by using the measurement channels and propagation conditions specified in annex A. These measurement channels are based on symmetrical traffic allocation in each direction, 16,7 % slot allocation in each direction.

This clause defines Fixed Radio Channel (FRC) which is also used for clauses 6 and 7 tests as a test signal. In this channel the modulation and coding class is static. Physical channel decoding performance may be also tested in different propagation conditions with variable modulation and coding.

Test cases may be defined with different channel bandwidth to verify the same target FRC conditions with the same propagation conditions, correlation matrix and antenna configuration.

The maximum physical layer bitrate capabilities are introduced in ETSI TS 103 636-3 [2], annex C.

9.2 Fixed Reference Channel performance

9.2.1 Fixed Reference Channel with QPSK

Common test parameters QPSK Fixed Reference Channel are defined in clause A.2.1 for 1,728 MHz operating channel bandwidth, clause A.3.1 for 3,456 MHz operating channel bandwidth and clause A.4.1 for 6,912 MHz operating channel bandwidth operation.

The reference maximum throughput performance is defined as average bitrate over a 10 ms radio frame.

9.2.2 Single receiver requirements

The requirement for the receiver's throughput performance is defined to be at least 90 % of the maximum throughput averaged over one radio frame for Fixed Reference Channel (FRC), as defined in clause 9.2.1.

Table 9.2.2-1: Single receiver minimum throughput requirement

| Parameter | Operating channel bandwidth | | Unit |
|-------------------------|-----------------------------|--|---------|
| | 1,728 MHz | | |
| μ, β | (1,1) | | |
| MCS1 maximum throughput | 177,6 | | kbps |
| MCS1 minimum throughput | > 168,72 | | kbps |
| Input signal level | -70 | | dBm/MHz |
| Propagation condition | static | | |

| Parameter | Operating channel bandwidth | | Unit |
|-------------------------|-----------------------------|-----------|---------|
| | 3,456 MHz | 3,456 MHz | |
| μ, β | (1,2) | (2,1) | |
| MCS1 maximum throughput | 427,2 | 456 | kbps |
| MCS1 minimum throughput | > 405,84 | > 433,2 | kbps |
| Input signal level | -70 | -70 | dBm/MHz |
| Propagation condition | static | static | |

| Parameter | Operating channel bandwidth | | | Unit |
|-------------------------|-----------------------------|-----------|-----------|---------|
| | 6,912 MHz | 6,912 MHz | 6,912 MHz | |
| μ, β | (1,4) | (2,2) | (4,1) | |
| MCS1 maximum throughput | 926,4 | 984 | 1 060,8 | kbps |
| MCS1 minimum throughput | > 880,08 | > 934,8 | > 1 007,8 | kbps |
| Input signal level | -70 | -70 | -70 | dBm/MHz |
| Propagation condition | static | static | static | |

Annex A (informative): Reference measurement channel for testing

A.1 General

In this annex the reference channels for receiver and transmitter performance measurement are defined. Unless otherwise stated channels may be used for both receiver and transmitter measurements.

Radio slot allocation for Fixed Reference Channel (FRC) measurements is defined in table A.1-1.

Table A.1-1: Radio frame slot allocation for Fixed Reference Channel measurements

| Radio frame 0 ms to 5 ms | | | | | | | | | | | | |
|---------------------------|----|----|----|----|----|----|----|----|----|----|----|----|
| # slot | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| Direction | DL | - | UL | - | DL | - | UL | - | DL | - | UL | - |
| Radio frame 5 ms to 10 ms | | | | | | | | | | | | |
| # slot | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 |
| Direction | DL | - | UL | - | DL | - | UL | - | DL | - | UL | - |

A.2 Reference measurement channels for 1,728 MHz operating bandwidth

A.2.1 Fixed Reference Channel measurement with QPSK

Table A.2.1-1: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 1,728 | MHz |
| Subcarrier scaling factor $\mu = 1$ | 27 | kHz |
| Fourier transform scaling factor β | 1 | |
| Modulation | QPSK | |
| Coding | 1/2 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 37 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 177,6 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

A.2.2 Fixed Reference Channel measurement with 16-QAM

Table A.2.2-1: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|------------|-------|
| Operating bandwidth | 1,728 | MHz |
| Subcarrier scaling factor $\mu = 1$ | 27 | kHz |
| Fourier transform scaling factor β | 1 | |
| Modulation | 16-QAM | |
| Coding | 3/4 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 117 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 561,6 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

A.3 Reference measurement channels for 3,456 MHz operating bandwidth

A.3.1 Fixed Reference Channel measurement with QPSK

Table A.3.1-1: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 3,456 | MHz |
| Subcarrier scaling factor $\mu = 1$ | 27 | kHz |
| Fourier transform scaling factor β | 2 | |
| Modulation | QPSK | |
| Coding | 1/2 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 89 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 427,2 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

Table A.3.1-2: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 3,456 | MHz |
| Subcarrier scaling factor $\mu = 2$ | 56 | kHz |
| Fourier transform scaling factor β | 1 | |
| Modulation | QPSK | |
| Coding | 1/2 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 95 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 456 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

A.3.2 Fixed Reference Channel measurement with 16-QAM

Table A.3.2-1: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 3,456 | MHz |
| Subcarrier scaling factor $\mu = 1$ | 27 | kHz |
| Fourier transform scaling factor β | 2 | |
| Modulation | 16-QAM | |
| Coding | 3/4 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 263 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 1,262 | Mbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

Table A.3.2-2: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 3,456 | MHz |
| Subcarrier scaling factor $\mu = 2$ | 56 | kHz |
| Fourier transform scaling factor β | 1 | |
| Modulation | 16-QAM | |
| Coding | 3/4 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 287 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 1,378 | Mbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

A.4 Reference measurement channels for 6,912 MHz operating bandwidth

A.4.1 Fixed Reference Channel measurement with QPSK

Table A.4.1-1: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 6,912 | MHz |
| Subcarrier scaling factor $\mu = 1$ | 27 | kHz |
| Fourier transform scaling factor β | 4 | |
| Modulation | QPSK | |
| Coding | 1/2 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 193 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 926,4 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

Table A.4.1-2: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 6,912 | MHz |
| Subcarrier scaling factor $\mu = 2$ | 56 | kHz |
| Fourier transform scaling factor β | 2 | |
| Modulation | QPSK | |
| Coding | 1/2 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 205 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 984 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

Table A.4.1-3: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 6,912 | MHz |
| Subcarrier scaling factor $\mu = 4$ | 112 | kHz |
| Fourier transform scaling factor β | 1 | |
| Modulation | QPSK | |
| Coding | 1/2 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 221 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 1060,8 | kbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

A.4.2 Fixed Reference Channel measurement with 16-QAM

Table A.4.2-1: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|-------------|-------|
| Operating bandwidth | 6,912 | MHz |
| Subcarrier scaling factor $\mu = 1$ | 27 | kHz |
| Fourier transform scaling factor β | 4 | |
| Modulation | 16-QAM | |
| Coding | 3/4 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6 DL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 580 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 2,784 | Mbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

Table A.4.2-2: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|------------|-------|
| Operating bandwidth | 6,912 | MHz |
| Subcarrier scaling factor $\mu = 2$ | 56 | kHz |
| Fourier transform scaling factor β | 2 | |
| Modulation | 16-QAM | |
| Coding | 3/4 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 620 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 2,976 | Mbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

Table A.4.2-3: Fixed Reference Channel for receiver requirements

| Parameter | Value | Unit |
|--|------------|-------|
| Operating bandwidth | 6,912 | MHz |
| Subcarrier scaling factor $\mu = 4$ | 112 | kHz |
| Fourier transform scaling factor β | 1 | |
| Modulation | 16-QAM | |
| Coding | 3/4 | |
| Allocated slot(s) in radio frame for DL and UL | 6 DL + 6UL | |
| Number of HARQ processes | 2 | |
| Maximum number of HARQ transmissions | 1 | |
| Transport block size | 684 | bytes |
| Max averaged throughput over one radio frame (10 ms) | 3,283 | Mbps |
| NOTE: The radio frame slot allocation pattern is defined in table A.1-1. | | |

A.5 Propagation condition

A.5.1 General

The multipath propagation conditions consist of several parts:

- A delay profile in the form of a "tapped delay-line", characterized by a number of taps at fixed positions on a sampling grid. The profile can be further characterized by the rms delay spread and the maximum delay spanned by the taps.
- A combination of channel model parameters that include the Delay profile and the Doppler spectrum, that is characterized by a classical spectrum shape and a maximum Doppler frequency.
- A set of correlation matrices defining the correlation between radio devices antennas in case of multi-antenna systems.
- The propagation conditions used for the performance measurements in multi-path fading environment are indicated as channel mode such as EPA [number] where 'number' indicates the maximum Doppler frequency (Hz).

A.5.2 Extended Pedestrian A (EPA) channel model

EPA delay profile is defined in table A.5.2-1. The Doppler frequency is 5 Hz.

Table A.5.2-1: Extended Pedestrian A model (EPA)

| Excess tap delay (ns) | Relative power (dB) |
|------------------------------|----------------------------|
| 0 | 0,0 |
| 30 | -1,0 |
| 70 | -2,0 |
| 90 | -3,0 |
| 110 | -8,0 |
| 190 | -17,2 |
| 410 | -20,8 |

Annex B (normative): Radio Device Capabilities

B.1 Introduction

Radio device class defines a set of radio functionalities, such as number of RX-TX antenna ports, operating bandwidth(s), maximum bitrates, number of HARQ processes.

The complete definition of radio device class is a combination of requirements stated in ETSI TS 103 636-3 [2], ETSI TS 103 636-4 [3] and ETSI TS 103 636-5 [8] respective annexes and the present annex. Device capabilities are signalled at connection setup to ensure interoperability between radio devices as defined in ETSI TS 103 636-4 [3].

B.2 Radio Device Capabilities

B.2.1 Maximum output power

Device shall support maximum transmitter output power class as defined in table 6.2.1-1.

B.2.2 RX Gain value

Device shall support a RX gain value from the value range: -6 dB, -4 dB, -2 dB or 0 dB as defined in ETSI TS 103 636-4 [3].

Annex C (normative): Environmental conditions

C.1 General

Annex C specifies the environmental requirements of the radio devices. These requirements in this annex apply to all types of radio devices.

The requirements of the present document shall be fulfilled within these operational conditions.

C.2 Temperature

Radio device shall fulfil all requirements in the full temperature range defined in table C.2-1.

Table C.2-1: Operating temperature ranges

| | |
|------------------|---|
| +15 °C to +35 °C | for normal conditions (with relative humidity of 25 % to 75 %) |
| -10 °C to +55 °C | for extreme conditions (see publications IEC 60068-2-1 [6] and IEC 60068-2-2 [7]) |

Outside this temperature range the radio device, if powered on, shall not make ineffective use of the radio frequency spectrum.

C.3 Voltage

The radio device shall fulfil all the requirements in the full voltage range defined in table C.3-1.

The manufacturer shall declare the low and high extreme voltages and the approximate the shutdown voltage when applicable in test case. Radio device may have one or more of the power sources indicated in table C.3-1, in this case these extreme voltage limits apply.

Table C.3-1: Operating voltage ranges

| Power source | Extreme Voltage (LOW) | Extreme Voltage (HIGH) | Normal conditions Voltage |
|-------------------------------|-----------------------|------------------------|---------------------------|
| AC mains | 0,9 × Nominal | 1,1 × Nominal | Nominal |
| Regulated battery (lead acid) | 0,9 × Nominal | 1,3 × Nominal | 1,1 × Nominal |
| Non-regulated batteries: | | | |
| Lithium | 0,95 × Nominal | 1,1 × Nominal | 1,1 × Nominal |
| Mercury/nickel & cadmium | 0,90 × Nominal | Nominal | Nominal |
| Other | 0,85 × Nominal | | Nominal |

Outside this temperature range the radio device, if powered on, shall not make ineffective use of the radio frequency spectrum. The radio device shall inhibit all RF transmissions when the power supply voltage is below the manufacturer declared shutdown voltage.

C.4 Vibration

The radio device shall fulfil all requirements during vibration defined in table C.4-1.

Table C.4-1: Vibration

| Frequency | ASD (Acceleration Spectral Density) random vibration |
|------------------|---|
| 5 Hz to 20 Hz | 0,96 m ² /s ³ |
| 20 Hz to 500 Hz | 0,96 m ² /s ³ at 20 Hz, thereafter -3 dB/Octave |

Outside this vibration range the radio device, if powered on, shall not make ineffective use of the radio frequency spectrum.

Annex D (informative): Change history

| Meeting # | Document # | Title |
|------------------------------|------------------|---|
| TC DECT meeting # 94 | DECT(22)000151 | On transmitter relative frequency accuracy requirement |
| TC DECT meeting # 96 | DECT(22)000250r1 | Corrections on annex B radio device capabilities in ETSI TS 103 636-2 |
| TC DECT meeting # 96 | DECT(22)000249 | Additional information on emission mask measurements in ETSI TS 103 636-2 |
| TC DECT meeting # 97 | DECT(23)000036 | ETSI TS 103 636 -2 Additional frequency band supporting operation on 3,8 to 4,2 GHz |
| TC DECT meeting # 97 | DECT(23)000057r2 | ETSI TS 103 636-2 Corrections and Additions |
| TC DECT meeting # 97 | DECT(23)000067 | ETSI TS 103 636-2 Transmitter frequency error |
| TC DECT meeting # 98 | DECT(23)000102 | Receiver intermodulation requirement for ETSI TS 103 636 part 2 |
| TC DECT meeting # 98 | DECT(23)000111 | Receiver sensitivity requirement update for ETSI TS 103 636 part 2 |
| TC DECT meeting # 98 | DECT(23)000106r2 | RSSI value reporting |
| TC DECT meeting # 98 | DECT(23)000105r2 | SNR value reporting |
| TC DECT meeting # 98 | DECT(23)000107r1 | SNR measurement tolerance |
| TC DECT telco 16.8.2023 | DECT(23)000154 | ETSI TS 103 636-2 Additional frequency band supporting operation on 3,7 to 3,8 GHz |
| TC DECT telco 15.11. 2023 | DECT(23)000224 | Modification of band 9 frequency range and introduction of band 22 |
| TC DECT Telco 13.12.2023 | DECT(23)000240r4 | Transmitter emission requirements -Partial CR implementation based on agreement in DECT(23)000247 TC DECT Telco 13.12,2023 meeting report. |
| TC DECT meeting #100 | DECT(24)000012r1 | Addition of channel raster information in frequency band table |
| TC DECT meeting #100 | DECT(24)000034 | Interference signal definition for ACS requirement |
| TC DECT meeting #100 | DECT(24)000035 | Averaging over packets in SNR and RSSI estimation |
| TC DECT meeting #102 | DECT(24)000149 | Corrections to reference sensitivity requirements in ETSI TS 103 636-2 v2.0.4 |
| TC DECT meeting #103 | DECT(24)000238 | Corrections to single receiver requirement in clause 9.2.2 |
| TC DECT meeting #104 | DECT(24)000279 | Channel number correction for band 4 |
| TC DECT meeting #105 | DECT(25)000049 | Channel Centre frequency corrections |
| TC DECT meeting #106 | DECT(25)000115r1 | CR to ETSI TS 103636-2 on EVM equalizer spectrum flatness |
| TC DECT meeting #106 | DECT(25)000116r1 | CR to ETSI TS 103636-2 on carrier leakage |
| TC DECT meeting #106 | DECT(25)000117r1 | CR to ETSI TS 103636-2 on shall |
| TC DECT meeting #107 | DECT(25)000096r4 | Radio device measurement reporting in ETSI TS 103 636-2 |
| TC DECT meeting #107 | DECT(25)000186 | Transmit Modulation Quality Correction |
| TC DECT meeting #107 | DECT(25)000187 | Transmitter Spectrum Flatness Correction |
| TC DECT meeting #108 | DECT(25)000262 | Requirements to receiver in-band blocking |
| TC DECT meeting #108 | DECT(25)000263 | Requirements to receiver intermodulation |
| TC DECT meeting #108 | DECT(25)000269r1 | New frequency band introduction to ETSI TS 103 636-2 |
| TC DECT meeting #108 | DECT(25)000247r1 | Add more new power classes |
| TC DECT Telco 17.02.2026 | DECT(26)000008r1 | Transmit power tolerances |
| TC DECT meeting #109 | DECT(26)000058r2 | New frequency band introduction to ETSI TS 103 636-2 |
| TC DECT meeting #109 | DECT(26)000101r3 | SNR dynamic range |

History

| Version | Date | Status |
|----------------|--------------|---------------|
| V2.1.1 | October 2024 | Publication |
| V2.2.1 | May 2026 | Publication |
| | | |
| | | |
| | | |