



**Reconfigurable Radio Systems (RRS);
Radio Equipment (RE) information models and protocols
for generalized software reconfiguration architecture;
Part 3: generalized Unified Radio Application Interface (gURAI)**

Reference

DTS/RRS-0224

Keywords

interface, radio, SDR

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	6
3.1 Terms.....	6
3.2 Symbols.....	7
3.3 Abbreviations	7
4 Introduction	8
5 System Identification.....	9
5.1 Radio Computer Structure	9
5.2 gURAI System Requirement Mapping.....	11
6 Notational Tools	11
6.1 Notational Tool for Information Model Classes.....	11
6.2 Notational Tool for Interface Classes.....	11
7 Information Model for Radio Computer	12
7.1 Radio Computer	12
7.2 Class Definitions for Information Model	15
8 Interface Definition	21
8.1 Interface Overview	21
8.2 Radio Application Management Services	22
8.2.1 Overview on Radio Application Management Services	22
8.2.2 Messages for Radio Application Management Services.....	23
8.3 User Data Flow Services	23
8.3.1 Overview on User Data Flow Services	23
8.3.2 Messages for User Data Flow Services.....	24
8.4 Multiradio Control Services	24
8.4.1 Overview on Multiradio Control Services	24
8.4.2 Messages for Multiradio Control Services.....	25
8.5 Class Definitions for Interface.....	25
Annex A (informative): Abstract Data Definitions.....	27
Annex B (informative): gURAI Qualification Methods for Validation.....	31
History	32

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Reconfigurable Radio Systems (RRS).

The present document is part 3 of a multi-part deliverable covering the Radio Equipment (RE) information models and protocols, as identified below:

- Part 1: "generalized Multiradio Interface (gMURI)";
- Part 2: "generalized Reconfigurable Radio Frequency Interface (gRRFI)";
- Part 3: "generalized Unified Radio Application Interface (gURAI)";**
- Part 4: "generalized Radio Programming Interface (gRPI)".

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The scope of the present document is to define an information model and protocol for unified radio application interface for radio equipment reconfiguration. The work is based on the Use Cases defined in ETSI TR 103 585 [i.1], on the system requirements defined in ETSI TS 103 641 [1] and on the radio reconfiguration related architecture for reconfigurable RE defined in ETSI TS 103 648 [i.2].

The present document will be based on ETSI EN 303 146-3 [i.6] and provide a generalized interface definition for the generalized Unified Radio Application Interface.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

- [1] ETSI TS 103 641: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) reconfiguration requirements".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TR 103 585: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) reconfiguration use cases".
- [i.2] ETSI TS 103 648: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) reconfiguration architecture".
- [i.3] IEEE 1900.4TM-2009: "IEEE Standard for Architectural Building Blocks Enabling Network-Device Distributed Decision Making for Optimized Radio Resource Usage in Heterogeneous Wireless Access Networks".
- [i.4] Recommendation ITU-T X.680: "Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [i.5] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of Radio Equipment and repealing Directive 1999/5/EC.
- [i.6] ETSI EN 303 146-3: "Reconfigurable Radio Systems (RRS); Mobile Device (MD) information models and protocols; Part 3: Unified Radio Application Interface (URAI)".

- [i.7] ETSI TS 103 681-1: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture; Part 1: generalized Multiradio Interface (gMURI)".
- [i.8] ETSI TS 103 681-2: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture; Part 3: generalized Unified Radio Application Interface (gURAI)".
- [i.9] ETSI TS 103 681-4: "Reconfigurable Radio Systems (RRS); Radio Equipment (RE) information models and protocols for generalized software reconfiguration architecture; Part 4: generalized Radio Programming Interface (gRPI)".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

association: logical communication link to a Radio Access Network or a peer equipment

NOTE 1: Typically, some control signalling is necessary to maintain the association. No user data transfer may occur with only an association present, but a data flow may be established into an association for this purpose.

NOTE 2: Peer equipment is any communication counterpart of a reconfigurable Radio Equipment. It can be reached by establishing a logical communication link (i.e. an association) between the reconfigurable Radio Equipment and peer equipment.

channel: designated part of the information transfer capability having specified characteristics, provided at the user network interface

NOTE: It is the over-the-air wireless propagation channel which is used to convey an information signal from transmitter to receiver. This definition is specified in ETSI TS 103 648 [i.2].

Communication Services Layer (CSL): layer related to communication services supporting generic applications

NOTE: A communication services layer supports generic applications like Internet access. In the present document, it consists of Administrator, Mobility Policy Manager (MPM), Networking stack and Monitor.

link: connection from one location to another through a given Radio Access Technology for the purpose of transmitting and receiving digital information

Radio Application (RA): software which enforces the generation of the transmit RF signals or the decoding of the receive RF signals

NOTE 1: The Software is executed on a particular radio platform or an RVM as part of the radio platform.

NOTE 2: RAs might have different forms of representation. They are represented as:

- source codes including Radio Library calls of Radio Library native implementation and Radio HAL calls;
- IRs including Radio Library calls of Radio Library native implementation and radio HAL calls;
- Executable codes for a particular radio platform.

radio computer: part of Radio Equipment hardware working under ROS control and on which RAs are executed

NOTE: A Radio Computer typically includes programmable processors, hardware accelerators, peripherals, software, etc. RF part is considered to be part of peripherals.

Radio Control Framework (RCF): control framework which, as a part of the OS, extends OS capabilities in terms of radio resource management

NOTE: RCF is a control framework which consists of Configuration Manager (CM), Radio Connection Manager (RCM), Flow Controller (FC) and Multiradio Controller (MRC). The Resource Manager (RM) is typically part of OS.

Radio Equipment (RE): *"an electrical or electronic product, which intentionally emits and/or receives radio waves for the purpose of radio communication and/or radiodetermination, or an electrical or electronic product which must be completed with an accessory, such as antenna, so as to intentionally emit and/or receive radio waves for the purpose of radio communication and/or radiodetermination"*.

NOTE: The definition above is as defined in the Radio Equipment Directive, Article 2(1)(1) [i.5].

reconfigurable Radio Equipment: Radio Equipment with radio communication capabilities providing support for radio reconfiguration

NOTE: Reconfigurable Radio Equipment includes Smartphones, Feature phones, Tablets, Laptops, Connected Vehicle communication platform, Network platform, IoT device, etc.

Unified Radio Application (URA): Radio Application which complies with the reconfigurable RE framework defined in the present document

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
BLER	BLOCK Error Rate
CM	Configuration Manager
CSL	Communication Services Layer
FC	Flow Controller
gMURI	generalized Multiradio Interface
gRPI	generalized Radio Programming Interface
gRRFI	generalized Reconfigurable Radio Frequency Interface
gURAI	generalized Unified Radio Application Interface
ID	IDentification
IR	Intermediate Representation
ITU-T	International Telecommunication Union Telecommunication Standardization Sector
MPM	Mobility Policy Manager
MRC	MultiRadio Controller
OS	Operating System
RA	Radio Application
RAN	Radio Access Network
RAP	Radio Application Package
RAT	Radio Access Technology
RCF	Radio Control Framework
RCID	Radio Computer IDentification
RCM	Radio Connection Manager
RE	Radio Equipment
RF	Radio Frequency
RM	Resource Manager
ROS	Radio Operating System
RX	Receiver
SINR	Signal to Interference plus Noise Ratio
TX	Transmitter
UML	Unified Modelling Language

4 Introduction

A reconfigurable RE is capable of running multiple radios simultaneously, changing the set of radios by loading new Radio Application Packages (RAP) and setting their parameters. All Radio Applications (RAs) are called Unified Radio Applications (URAs) when they exhibit a common behaviour from the reconfigurable RE's point of view in ETSI TS 103 648 [i.2]. In order to run multiple URAs, the reconfigurable RE will include Communication Services Layer (CSL), Radio Control Frameworks (RCFs), Radio Platforms and 4 sets of interfaces for their interconnection.

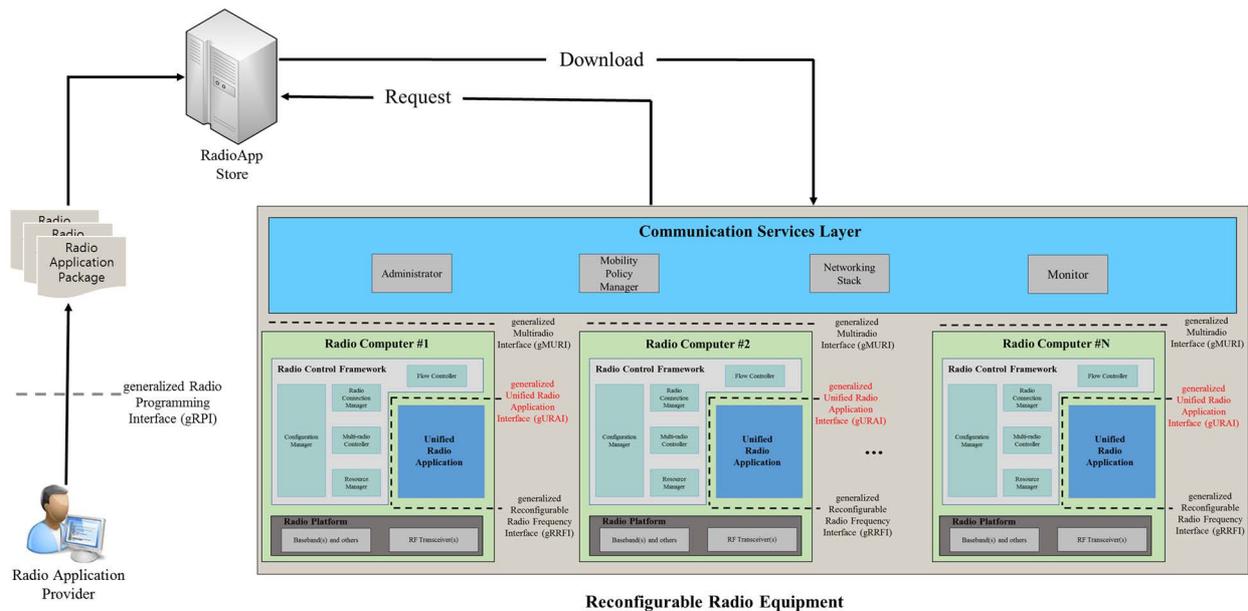


Figure 4.1: Four sets of interfaces for Reconfigurable RE

Figure 4.1 illustrates the Reconfigurable RE architecture with the 4 sets of interfaces, i.e.:

- gMURI for interfacing CSL and RCF (in ETSI TS 103 681-1 [i.7]);
- gRRFI for interfacing URA and RF Transceiver (in ETSI TS 103 681-2 [i.8]);
- gURAI for interfacing URA and RCF which is the scope of the present document;
- gRPI for allowing an independent and uniform production of RAs (in ETSI TS 103 681-4 [i.9]).

The present document defines gURAI.

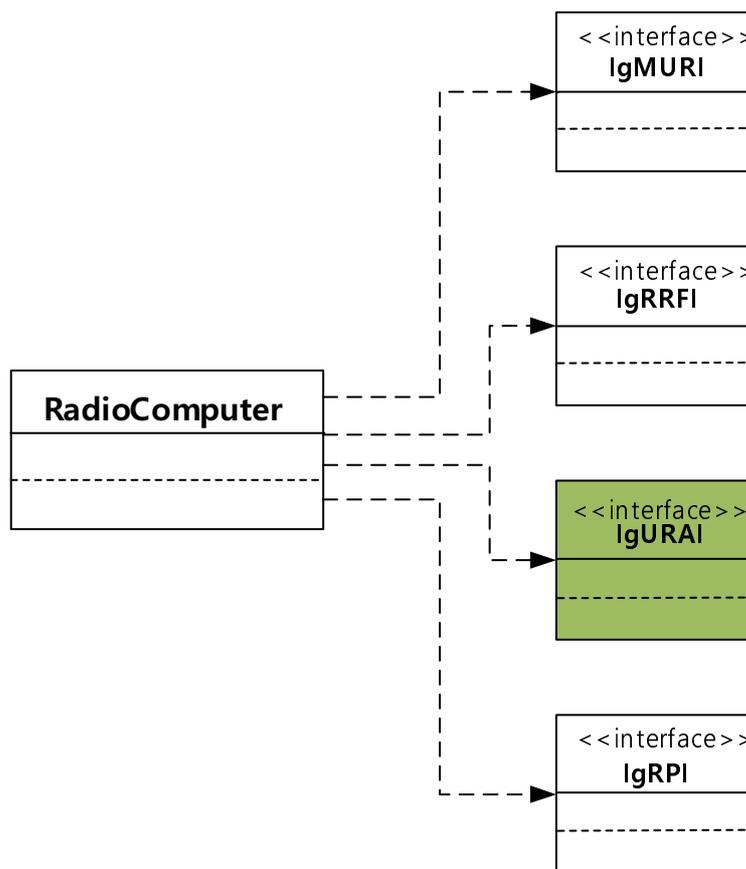


Figure 4.2: UML class diagram for Radio Computer interfaces

Figure 4.2 illustrates UML class diagram for Radio Computer interfaces. The reconfigurable RE may be seen as a set of multiple Radio Computers where individual URAs are engineered as software entities in ETSI TS 103 648 [i.2].

The present document is organized as follows:

- clause 5 describes the system identification;
- clause 6 describes the notational tool for defining both information model classes and interface classes;
- clause 7 describes the information model for radio computer; and
- clause 8 describes the interface definition.

While UML is used for defining the information model and protocol related to gURAI, other modelling languages could be used as well.

5 System Identification

5.1 Radio Computer Structure

Figure 5.1 illustrates how RCF and URA interact with each other using gURAI.

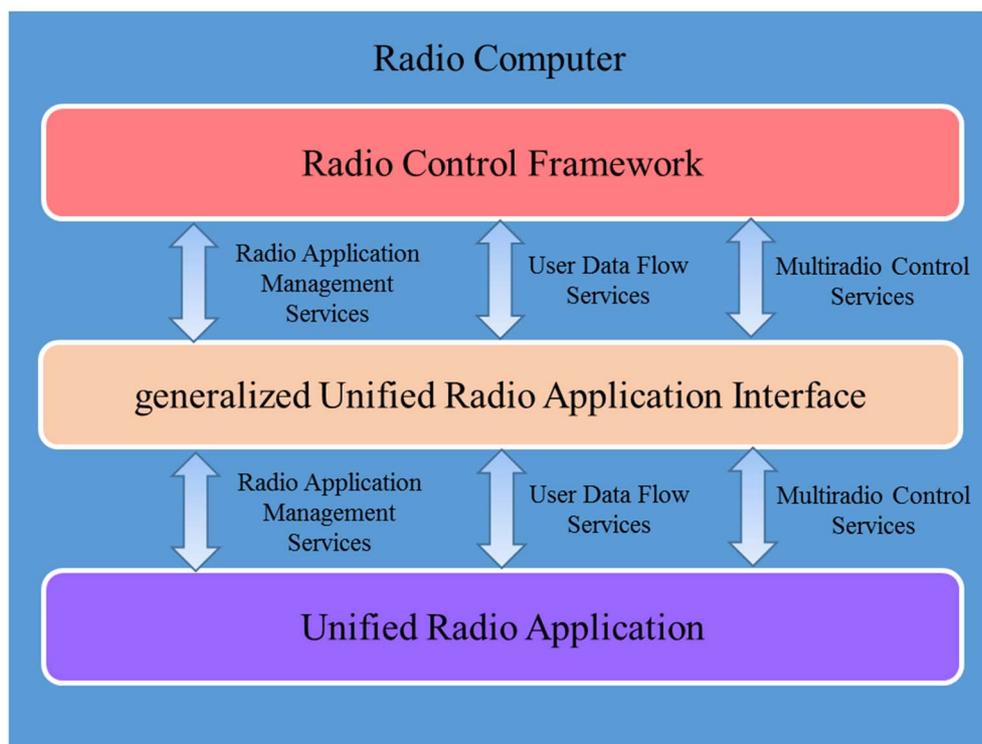


Figure 5.1: Interconnection between RCF and URA using gURAI for Reconfigurable RE

As shown in figure 5.1, gURAI supports 3 kinds of services:

- **Radio Application Management Services**
 - These services are used by Radio Connection Manager (RCM) which is included in the RCF, to control URA functions such as reporting of discovered Peer Equipment's, creating/terminating association with Peer Equipment, starting/stopping communication with Peer Equipment, etc.
- **User Data Flow Services**
 - These services are used by Flow Controller (FC) which is included in the RCF, to transmit user data to URA, or used by URA to transmit received user data to FC. These services also include management of data flow, which is provided by FC.
- **Multiradio Control Services**
 - These services are used by Multiradio Controller (MRC) which is included in RCF, to manage spectral resource usage.
 - The RCF and URA are defined in ETSI TS 103 648 [i.2].

5.2 gURAI System Requirement Mapping

The Radio Computer components above described shall support the gURAI system requirements shown in table 5.1 and described in clause 6 of ETSI TS 103 641 [1].

Table 5.1: Mapping of Radio Computer Components to the system requirements described in ETSI TS 103 641 [1]

Entity/Component/Unit	System Requirements [1]	Comments
Flow Controller	R-FUNC-RAT-05	The requirement is described in clause 6.1.5 of [1]
	R-FUNC-RA-04	The requirement is described in clause 6.2.4 of [1]
Multiradio Controller	R-FUNC-RAT-01	The requirement is described in clause 6.1.1 of [1]
	R-FUNC-RAT-02	The requirement is described in clause 6.1.2 of [1]
	R-FUNC-RAT-03	The requirement is described in clause 6.1.3 of [1]
	R-FUNC-RAT-06	The requirement is described in clause 6.1.6 of [1]
	R-FUNC-RER-03	The requirement is described in clause 6.4.3 of [1]
Radio Connection Manager	R-FUNC-RAT-04	The requirement is described in clause 6.1.4 of [1]
	R-FUNC-RAT-05	The requirement is described in clause 6.1.5 of [1]
	R-FUNC-RAT-06	The requirement is described in clause 6.1.6 of [1]
	R-FUNC-RA-03	The requirement is described in clause 6.2.3 of [1]
	R-FUNC-RER-03	The requirement is described in clause 6.4.3 of [1]

6 Notational Tools

6.1 Notational Tool for Information Model Classes

In the present document, information model classes are used as defined in annex B.1 of IEEE 1900.4TM-2009 [i.3].

6.2 Notational Tool for Interface Classes

Table 6.1 shows a template for defining interface classes for gURAI. Each interface class for gURAI will be defined in clause 8.5 in accordance with the template shown in table 6.1.

Table 6.1: Template for defining Interface Classes

<i>Class</i> <Class name>[(<i>abstract class</i>)]		
<Description of the class>		
OPERATIONS		
<Operation name>	<i>Return type:</i> <Operation return type>	<i>Value type:</i> <Operation value type>
<Description of the operation>		

The template fields in table 6.1 are described below:

- <Class name> is the name of the Class as it appears in the corresponding model. Additional information is also included in case the class in question has been specified as an abstract one.
- OPERATIONS field describes the operations that have been defined in the class. More specifically:
 - <Operation name> identifies the name of an operation, as it is included in the class definition.
 - <Return type> identifies the type of return value at the corresponding operation. Details related to the ASN.1 module are specified in annex B.
 - <Value type> identifies the access levels for member functions: public, private, protected.

7 Information Model for Radio Computer

7.1 Radio Computer

Figure 7.1 shows the UML class diagram for Radio Computer classes related to gURAI which are required to support Software Reconfiguration. The diagram includes classes which are directly and indirectly related to gURAI.

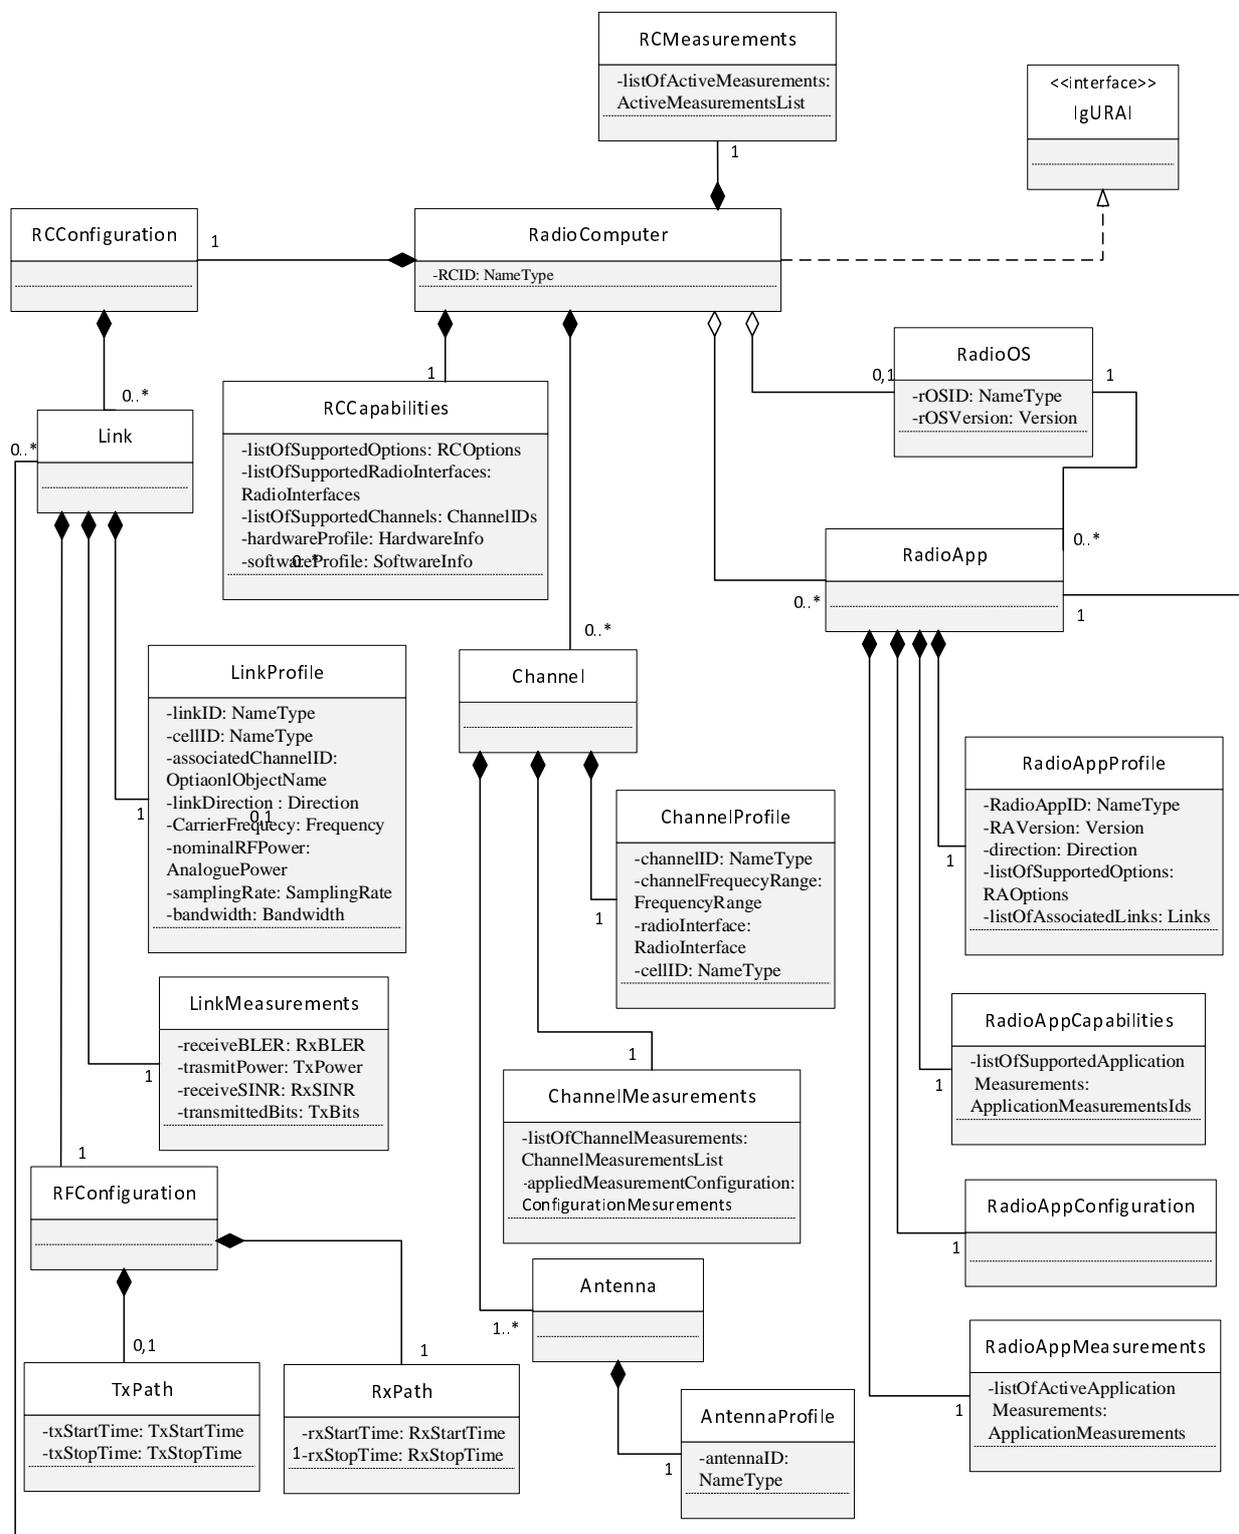


Figure 7.1: UML class diagram for Radio Computer classes related to gURAI

The Radio Computer classes related to gURAI are defined as follows:

- **RadioComputer**
 - This class contains all URA(s) related information about resources and interactions related to hardware and software of a reconfigurable RE, for example, computational/spectral resource usage, collection of context information, channel measurement results, etc.
- **RadioOS**
 - This class describes an installed Radio OS. Each instance of a RadioComputer class can relate to zero or one instance of RadioOS class (0,1). Each instance of RadioOS class is associated with zero or several instances of RadioApp class (0..*).
- **RadioApp**
 - This class describes one currently active Radio Application. Each instance of a RadioComputer class can relate to zero or several instances of RadioApp class (0..*). Each instance of RadioApp class is associated with one instance of Radio OS class. Each instance of RadioApp class is associated with zero, one or many instances of Link class.
- **RadioAppProfile**
 - This class contains general information about the Radio Application, for example, Radio Application ID, current version of Radio Application, direction (downlink or uplink), links used to deliver this Radio Application, etc. Each instance of a RadioApp class can have only one instance of RadioAppProfile class as a member.
- **RadioAppCapabilities**
 - This class contains information about measurements supported by this Radio Application, for example, delay, loss, and bandwidth measurements. Each instance of a RadioApp class can have only one instance of RadioAppCapabilities class as a member.
- **RadioAppMeasurements**
 - This class contains measurements performed by this Radio Application, for example, delay, loss, and bandwidth measurements. Each instance of a RadioApp class can have only one instance of RadioAppMeasurements class as a member. Multiple measurements are contained within the instance of the class.
- **RCMeasurements**
 - This class contains current measurements (instantaneous measurement data and related metadata) related to Reconfigurable RE such as battery capacity, user mobility, RE location determination, and connection history information. Each instance of RadioComputer class shall have only one instance of RCMeasurements class as a member.
- **RCCapabilities**
 - This class contains information about Radio Computer capabilities including hardware, software, transmission and measurement capabilities such as supported RATs and maximum transmission power. Each instance of RadioComputer class shall have only one instance of RCCapabilities class as a member.
- **Channel**
 - This class contains one radio channel that may or may not be used by an active radio link. Each instance of RadioComputer class can have zero, one or several instances of Channel class as members (0..*). In case of an active radio link, at least one Channel class is available.
- **ChannelProfile**
 - This class contains general information about the radio channel such as channel ID, centre frequency, bandwidth, and used RAT. Each instance of Channel class shall have only one instance of Channel Profile class as a member.

- **ChannelMeasurements**
 - This class contains current measurements (instantaneous measurement data and related metadata) and the applied measurement configuration related to this radio channel such as interference and load measurements. Each instance of Channel class shall have only one instance of ChannelMeasurements class as a member.
- **Antenna**
 - This class contains information about antenna selection. Each instance of Channel class shall have at least one instance of Antenna class as a member. (1..*).
- **AntennaProfile**
 - This class contains general information about this antenna, such as antenna port, applicable frequency range and antenna gain. Each instance of Antenna class shall have only one instance of AntennaProfile class as a member.
- **RCConfiguration**
 - This class contains information about the current configuration of Radio Computer. Each instance of RadioComputer class shall have only one instance of RCConfiguration class as a member.
- **Link**
 - This class contains information about one active URA and the corresponding connection between the Reconfigurable RE and the Radio Access Network (RAN). Each instance of RCConfiguration class has zero, one or several instances of Link class as members (0..*). Each instance of Link class is associated with one instance of RadioApp class.
- **LinkProfile**
 - This class contains general information about this active connection, for example, link Identification (ID), serving cell ID, channel used, etc. Each instance of Link class shall have only one instance of LinkProfile class as a member.
- **LinkMeasurements**
 - This class contains current measurements (instantaneous measurement data and related metadata) related to this active connection, such as Block Error Rate (BLER), power, and Signal to Interference plus Noise Ratio (SINR) measurements. Each instance of Link class shall have only one instance of LinkMeasurements class as a member.
- **RFConfiguration**
 - This class contains information about the configuration of the RF transceiver. Each instance of Link class shall have only one instance of RFConfiguration class as a member.
- **TxPath**
 - This class contains information about one transmit path. Each instance of RFConfiguration class has zero or one instance of TxPath class as a member (0,1).
- **RxPath**
 - This class contains information about one receive path. Each instance of RFConfiguration class shall have only one instance of RxPath class as a member.

NOTE: The Channel Class is separate from the Link Class, but the Channel Measurements may be based on any RE configuration which may or may not be used for the final Link Configuration.

7.2 Class Definitions for Information Model

Each class of Radio Computer can be defined using the template presented in clause 6.1 and in accordance with the UML diagram of figure 7.1 which specifies the relations among all the classes of Radio Computer. Radio Computer classes defined in this way are shown in tables 7.1 to 7.20.

Table 7.1: RadioComputer Class

Class RadioComputer			
This class contains all URA related information about resources and interactions related to hardware and software of a reconfigurable RE.			
DERIVED FROM			
ATTRIBUTES			
RCID	<i>Value type:</i> Field	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes ID of a Radio Computer.			
CONTAINED IN			
CONTAINS	RCCapabilities [1], RCConfiguration [1], RCMeasurements [1], Channel [*], RadioAPP [*], RadioOS [0-1]		
SUPPORTED EVENTS			

Table 7.2: RadioOS Class

Class RadioOS			
This class describes installed Radio OS.			
DERIVED FROM			
ATTRIBUTES			
rOSID	<i>Value type:</i> NameType	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes ID of Radio OS.			
rOSVersion	<i>Value type:</i> Version	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a version of Radio OS.			
CONTAINED IN	RadioComputer		
CONTAINS			
SUPPORTED EVENTS			

Table 7.3: RadioApp Class

Class RadioApp	
This class describes installed Radio Application.	
DERIVED FROM	
ATTRIBUTES	
This attribute contains a list of supported options.	
CONTAINED IN	RadioComputer
CONTAINS	RadioAppProfile [1], RadioAppCapabilities [1], RadioAppMeasurements [1]
SUPPORTED EVENTS	

Table 7.4: RadioAppProfile Class

Class RadioAppProfile			
This class contains general information about the Radio Application.			
DERIVED FROM			
ATTRIBUTES			
RadioAppID	<i>Value type:</i> NameType	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes ID of installed Radio Application.			
RAVersion	<i>Value type:</i> Version	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a version of Radio Application.			
direction	<i>Value type:</i> Direction	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes whether this Radio Application is downlink or uplink application or both.			
listOfSupportedOptions	<i>Value type:</i> RAOptionsList	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute contains a list of supported options (i.e. optional features as defined in related standard versus mandatory features).			
listOfAssociatedLinks	<i>Value type:</i> Links	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes list of IDs of links used to transmit user data.			
CONTAINED IN		RadioApp	
CONTAINS			
SUPPORTED EVENTS			

Table 7.5: RadioAppCapabilities Class

Class RadioAppCapabilities			
This class contains information about measurements supported by this Radio Application.			
DERIVED FROM			
ATTRIBUTES			
listOfSupportedApplication Capabilities	<i>Value type:</i> ApplicationMeasurementsIds	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes capabilities supported by this Radio Application.			
CONTAINED IN		RadioApp	
CONTAINS			
SUPPORTED EVENTS			

Table 7.6: RadioAppMeasurements Class

Class RadioAppMeasurements			
This class contains measurements performed by this Radio Application.			
DERIVED FROM			
ATTRIBUTES			
listOfActiveApplication Measurements	<i>Value type:</i> ApplicationMeasurements	<i>Possible access:</i> Read-Add-Remove	<i>Default value:</i> Not specified
This attribute describes measurements that are currently performed by the Radio Application.			
requestOfContextInformations	<i>Value type:</i> ContextInformationInfo	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes context information that are requested by other entity such as Monitor. There can be a request for one-time delivery, a request for cyclic delivery or request for conditional delivery.			
CONTAINED IN		RadioApp	
CONTAINS			
SUPPORTED EVENTS			

Table 7.7: RCMeasurements Class

Class RCMeasurements			
This class contains current measurements related to Reconfigurable Radio terminal.			
DERIVED FROM			
ATTRIBUTES			
listOfActiveMeasurements	<i>Value type:</i> ActiveMeasurementsList	<i>Possible access:</i> Read-Add-Remove	<i>Default value:</i> Not specified
This attribute describes a list of active measurements.			
CONTAINED IN		RadioComputer	
CONTAINS			
SUPPORTED EVENTS			

Table 7.8: RCCapabilities Class

Class RCCapabilities			
This class contains information about Radio Computer capabilities including hardware, software, transmission and measurement capabilities.			
DERIVED FROM			
ATTRIBUTES			
listOfSupportedOptions	<i>Value type:</i> RCOptionsList	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a list of supported options.			
listOfSupportedRadioInterfaces	<i>Value type:</i> RadioInterfacesList	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes radio interfaces supported by this Radio Computer.			
listOfSupportedChannels	<i>Value type:</i> ChannelIDsList	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attributes describes frequency channels supported by this Radio Computer.			
hardwareProfile	<i>Value type:</i> HardwareInfo	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attributes describes hardware capabilities of this Radio Computer.			
softwareProfile	<i>Value type:</i> SoftwareInfo	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attributes describes software capabilities of this Radio Computer.			
CONTAINED IN		RadioComputer	
CONTAINS			
SUPPORTED EVENTS			

Table 7.9: Channel Class

Class Channel	
This class describes one frequency channel that may or may not have active connections on it.	
DERIVED FROM	
ATTRIBUTES	
CONTAINED IN	RadioComputer
CONTAINS	ChannelProfile [1], ChannelMeasurements [1], Antenna [+]
SUPPORTED EVENTS	

Table 7.10: ChannelProfile Class

Class ChannelProfile			
This class contains general information about this frequency channel.			
DERIVED FROM			
ATTRIBUTES			
channelID	<i>Value type:</i> NameType	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes ID of channel.			
channelFrequencyRange	<i>Value type:</i> FrequencyRange	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a value of channel frequency range.			
radiolInterface	<i>Value type:</i> RadiolInterface	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a radio interface.			
cellID	<i>Value type:</i> NameType	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes ID of connected cell.			
CONTAINED IN	Channel		
CONTAINS			
SUPPORTED EVENTS			

Table 7.11: ChannelMeasurements Class

Class ChannelMeasurements			
This class contains current measurements related to this frequency channel.			
DERIVED FROM			
ATTRIBUTES			
listOfChannelMeasurements	<i>Value type:</i> ChannelMeasurementsList	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a list of channel measurements.			
appliedMeasurementsConfiguration	<i>Value type:</i> ConfigurationMeasurements	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes configuration option of the RE, e.g. which Antenna(s) have been used, which RF front-end(s) have been used, etc.			
CONTAINED IN	Channel		
CONTAINS			
SUPPORTED EVENTS			

Table 7.12: Antenna Class

Class Antenna	
This class contains information about antenna selection.	
DERIVED FROM	
ATTRIBUTES	
CONTAINED IN	Channel
CONTAINS	AntennaProfile [1]
SUPPORTED EVENTS	

Table 7.13: AntennaProfile Class

Class AntennaProfile			
This class contains general information about this antenna.			
DERIVED FROM			
ATTRIBUTES			
antennaID	<i>Value type:</i> NameType	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes ID of antenna.			
CONTAINED IN		Antenna	
CONTAINS			
SUPPORTED EVENTS			

Table 7.14: RCConfiguration Class

Class RCConfiguration	
This class contains information about the current configuration of Radio Computer.	
DERIVED FROM	
ATTRIBUTES	
CONTAINED IN	RadioComputer
CONTAINS	Link [*]
SUPPORTED EVENTS	

Table 7.15: Link Class

Class Link	
This class contains information about one active Radio Application and corresponding connection between Reconfigurable Radio terminal and RANs.	
DERIVED FROM	
ATTRIBUTES	
CONTAINED IN	RCConfiguration
CONTAINS	LinkProfile [1], LinkMeasurements [1], RFConfiguration [1]
SUPPORTED EVENTS	

Table 7.16: LinkProfile Class

Class LinkProfile			
This class contains general information about this active connection.			
DERIVED FROM			
ATTRIBUTES			
linkID	<i>Value type:</i> NameType	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes ID of link about activated connection.			
cellID	<i>Value type:</i> NameType	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes ID connected cell.			
associatedChannelID	<i>Value type:</i> OptionalObjectName	<i>Possible access:</i> Read-Add-Remove	<i>Default value:</i> Not specified
This attribute describes ID of associated channel.			
linkDirection	<i>Value type:</i> Direction	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a direction of link.			
carrierFrequency	<i>Value type:</i> FrequencyRange	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a value of carrier frequency.			
nominalRFPower	<i>Value type:</i> AnaloguePower	<i>Possible access:</i> Read	<i>Default value:</i> Not specified
This attribute describes a value of nominal power.			
samplingRate	<i>Value type:</i> SamplingRate	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a value of sampling rate.			
Bandwidth	<i>Value type:</i> Bandwidth	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a value of bandwidth.			
CONTAINED IN	Link		
CONTAINS			
SUPPORTED EVENTS			

Table 7.17: LinkMeasurements Class

Class LinkMeasurements			
This class contains current measurements related to this active connection.			
DERIVED FROM			
ATTRIBUTES			
receiveBLER	<i>Value type:</i> RxBLER	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a value of BLER for received data.			
transmitPower	<i>Value type:</i> TxPower	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a power of transmit signal.			
receiveSINR	<i>Value type:</i> RxSINR	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes a value of SINR for received data.			
transmittedBits	<i>Value type:</i> TxBits	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute describes transmitted bits.			
CONTAINED IN	Link		
CONTAINS			
SUPPORTED EVENTS			

Table 7.18: RFConfiguration Class

Class RFConfiguration	
This class contains information about the configuration of RF transceiver.	
DERIVED FROM	
ATTRIBUTES	
CONTAINED IN	Link
CONTAINS	TxPath [0-1], RxPath [1]
SUPPORTED EVENTS	

Table 7.19: TxPath Class

Class TxPath			
This class describes one transmit path.			
DERIVED FROM			
ATTRIBUTES			
txStartTime	<i>Value type:</i> TxStartTime	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute defines the time when the transceiver start transmission.			
txStopTime	<i>Value type:</i> TxStopTime	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute defines the time when the transceiver stop transmission.			
CONTAINED IN	RFConfiguration		
CONTAINS			
SUPPORTED EVENTS			

Table 7.20: RxPath Class

Class RxPath			
This class describes one receive path.			
DERIVED FROM			
ATTRIBUTES			
rxStartTime	<i>Value type:</i> RxStartTime	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute defines the time when the transceiver start reception.			
rxStopTime	<i>Value type:</i> RxStopTime	<i>Possible access:</i> Read-Write	<i>Default value:</i> Not specified
This attribute defines the time when the transceiver stop reception.			
CONTAINED IN	RFConfiguration		
CONTAINS			
SUPPORTED EVENTS			

8 Interface Definition

8.1 Interface Overview

Figure 8.1 illustrates a UML diagram for gURAI. gURAI supports 3 basic services (i.e. Radio Application Management Services, User Data Flow Services, and Multiradio Control Services) which are further detailed in clauses 8.2, 8.3 and 8.4 respectively.

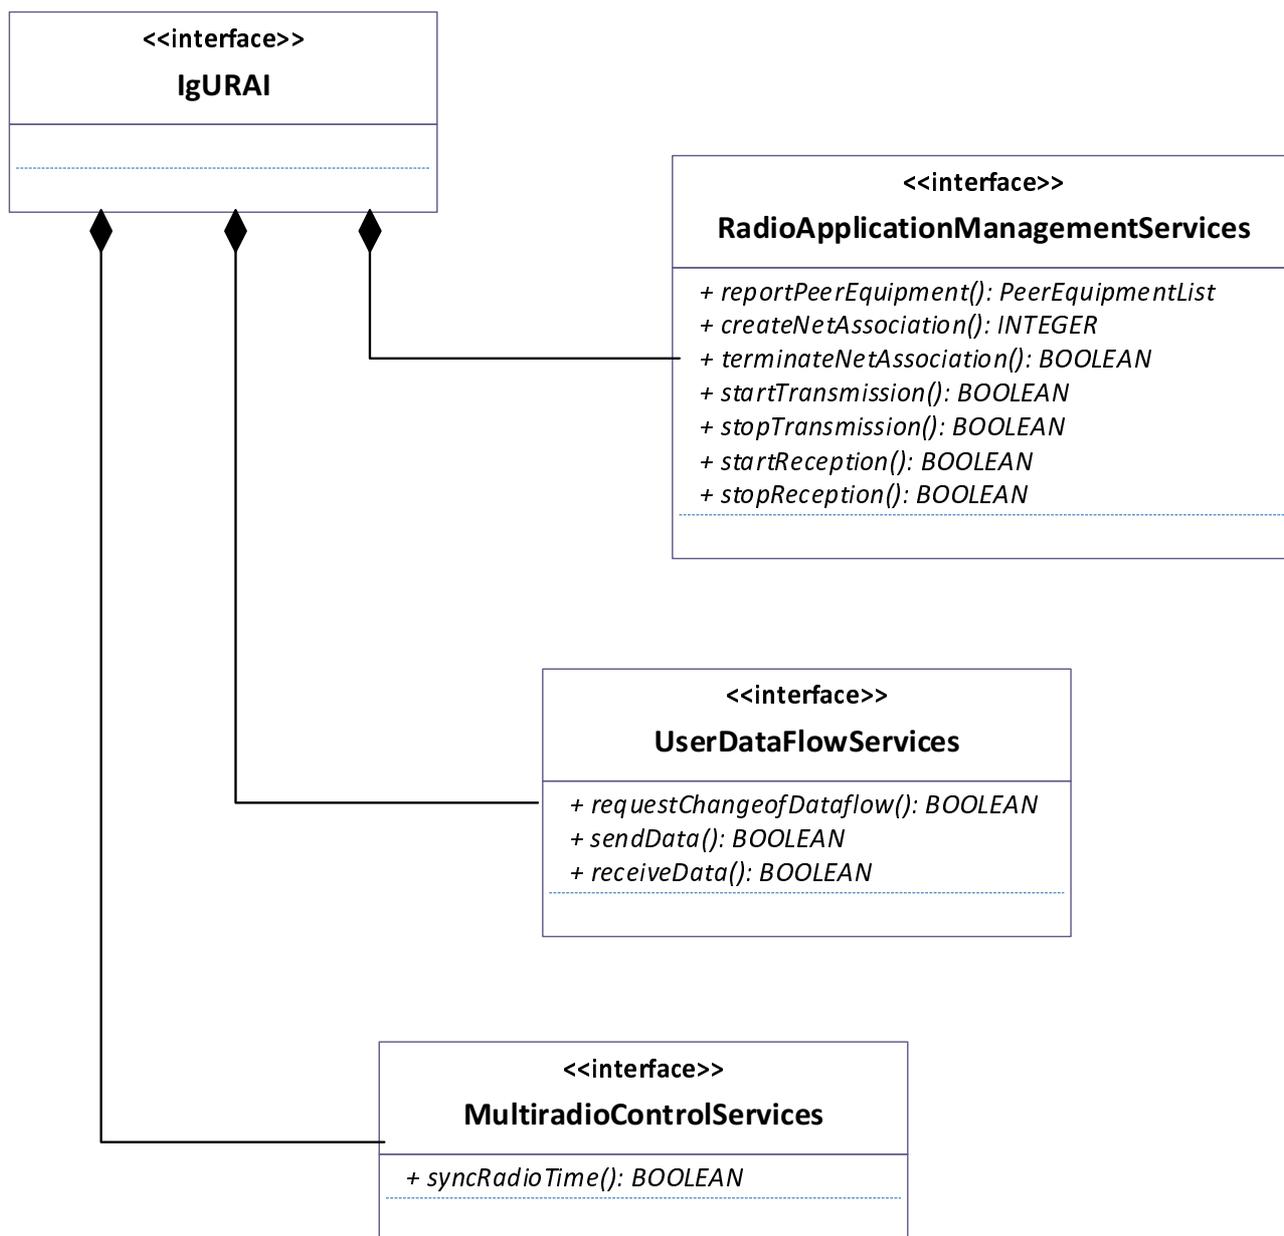


Figure 8.1: UML diagram for gURAI

8.2 Radio Application Management Services

8.2.1 Overview on Radio Application Management Services

Table 8.1 describes an overview on Radio Application Management Services which are associated with RCM. Class definition and related operations are described in clause 8.5.

Table 8.1: Overview on Radio Application Management Services

Radio Application Management Services	Explanation
Report Discovered Peer Equipments.	URA reports RCM about the accessible peer equipment(s) found during the procedure of the discovery process. In the case when the reconfigurable RE is requested to be a peer equipment by another RE, the requesting RE shall be included as an accessible peer equipment too.
Create and Terminate Association with Peer Equipment.	RCM requests URA to create/terminate association with an accessible peer equipment. See note.
Start and stop communication with Peer Equipment.	Among the activated and associated URAs, RCM requests some selected URAs to perform actual transmission/reception of user data.
NOTE:	This service is triggering the creation and termination of associations with peer equipment, using corresponding protocols of the respective RATs.

8.2.2 Messages for Radio Application Management Services

The interfaces for Radio Application Management Services are used to transmit the following messages:

- From RCF to URA:
 - Request of report discovered Peer Equipment.
 - Request of create/terminate association with Peer Equipment.
 - Request of start and stop communication with Peer Equipment.
- From URA to RCF:
 - Confirmation of association creation.
 - Confirmation of association termination.
 - Confirmation of start communication with Peer Equipment.
 - Confirmation of stop communication with Peer Equipment.
 - Failure of association creation.
 - Failure of association termination.
 - Failure of start communication with Peer Equipment.
 - Failure of stop communication with Peer Equipment.
 - Information about discovered Peer Equipments.

8.3 User Data Flow Services

8.3.1 Overview on User Data Flow Services

Table 8.2 describes an overview on User Data Flow Services which are associated with FC. Class definition and related operations are described in clause 8.5.

Table 8.2: Overview on User Data Flow Services

User Data Flow Services	Explanation
Data flow control	In sending or receiving user data, there might be some conflicts in data flow between sender and receiver. URA requests FC to change the configuration of data flow.
Send data	Transfer of transmit data from FC to URA.
Receive data	Transfer of receive data from URA to FC.

8.3.2 Messages for User Data Flow Services

The interfaces for User Data Flow Services are used to transmit the following messages:

- From RCF to URA:

- Request of user data transfer.

NOTE 1: Request of user data transfer initiates TX operation in URA.

- TX Information related to URA.

NOTE 2: Examples of TX Information may include signal bandwidth, carrier frequency, etc. It is provided when appropriate, for example after Request of user data transfer.

- Information related to TX User Data.

NOTE 3: Examples of Information related to TX User Data may include flow ID, size of the data packet, etc. It is provided when appropriate, for example after Request of user data transfer.

- Confirmation of data flow configuration changes.
- Confirmation of user data reception.
- Failure of data flow configuration changes.
- Failure of user data reception.

- From URA to RCF:

- Request for changing of data flow configuration.
- Request for user data reception.

NOTE 4: Request of user data reception initiates RX operation in RCF.

- RX Information related to URA.

NOTE 5: Examples of RX Information may include signal bandwidth, carrier frequency, etc. It is provided when appropriate, for example after Request of user data reception.

- Information related to RX user data.

NOTE 6: Examples of Information related to RX User Data may include flow ID, size of the data packet, etc. It is provided when appropriate, for example after Request of user data reception.

- Confirmation of user data transfer.
- Failure of user data transfer.

8.4 Multiradio Control Services

8.4.1 Overview on Multiradio Control Services

Table 8.3 describes an overview on Multiradio Control Services which are associated with MRC. Class definition and related operations are described in clause 8.5.

Table 8.3: Overview on Multiradio Control Services

Multiradio Control Services	Explanation
Synchronize Radio Time	MRC request all the active URAs to operate with a unified synchronism.

8.4.2 Messages for Multiradio Control Services

The interfaces for Multiradio Control Services are used to transmit the following messages:

- From RCF to URA:
 - Request of synchronize radio time.
- From URA to RCF:
 - Confirmation of synchronize radio time.
 - Failure of synchronize radio time.

8.5 Class Definitions for Interface

Each interface class related to gURAI can be defined using the template presented in clause 6.2 and in accordance with the UML diagram of figure 8.1 which specifies the interface classes related to gURAI. Tables 8.1 to 8.3 specify all the operations related to the three interface classes above described.

Table 8.4: RadioApplicationManagementServices Class

Class RadioApplicationManagementServices		
This class describes interfaces supporting Radio Application Management Services.		
OPERATIONS		
reportPeerEquipment	<i>Return type:</i> PeerEquipmentList	<i>Value type:</i> public
This operation is needed for getting the list of discovered Peer Equipments.		
createNetAssociation	<i>Return type:</i> INTEGER	<i>Value type:</i> public
This operation is needed for creating an association with Peer Equipment.		
terminateNetAssociation	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for terminating an association.		
startTransmission	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for starting user data transmission with Peer Equipment.		
stopTransmission	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for stopping user data transmission with Peer Equipment.		
startReception	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for starting user data reception.		
stopReception	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for stopping user data reception.		

Table 8.5: UserDataFlowServices Class

Class UserDataFlowServices		
This class describes interfaces supporting User data Flow Services.		
OPERATIONS		
requestChangeofDataflow	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for requesting change of data flow.		
sendData	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for initiating send data.		
receiveData	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for initiating receive data.		

Table 8.6: MultiradioControlServices Class

Class MultiradioControlServices		
This class describes interfaces supporting Multiradio Control Services.		
OPERATIONS		
syncRadioTime	<i>Return type:</i> BOOLEAN	<i>Value type:</i> public
This operation is needed for synchronizing radio time.		

Annex A (informative): Abstract Data Definitions

The following ASN.1 in Recommendation ITU-T X.680 [i.4] module contains all necessary abstract data definitions used in the attribute definitions in clause 7.2 and clause 8.5.

```

ETSI-TS-103-681-3-Type-Definitions DEFINITIONS ::= BEGIN
-----
-- START Common Data Types
-----
-- START Name Related Data Types

NameType ::= CHOICE {
    number      INTEGER,
    string      PrintableString
}

ObjectName ::= SEQUENCE OF NameType

OptionalObjectName ::= CHOICE {
    id          ObjectName,
    void        NULL
}

ObjectNameList ::= SEQUENCE OF ObjectName

-- END Name Related Data Types
-----
-- START Version Related Data Types

Version ::= CHOICE {
    intVersion  INTEGER,
    stringVersion PrintableString
}

-- END Version Related Data Types
-----
-- END Common Data Types
-----
-- START Radio Application Related Data Types

RAOptionID ::= ENUMERATED {
    lte5Mhz, lte10Mhz, lte20Mhz, ...
}

RAOptionsList ::= SEQUENCE OF SEQUENCE {
    rOptionName  RAOptionID,
    rOptionValue ANY
}

RAMeasurementsID ::= ENUMERATED {
    observedDelay, observedDelayVariation, observedPacketLoss,
    observedBandwidth, ...
}

ApplicationMeasurements ::= SEQUENCE OF SEQUENCE {
    rMeasurementsName RAMeasurementsID,
    rMeasurementsValue ANY
}

```

```

ContextInformationID ::= ENUMERATED {
    BER, SNR, SINR, Output Power Levels, estimates of propagation delay, estimates of
    link attenuation, ...
}

ContextInformationList ::= SEQUENCE OF SEQUENCE {
    contextInformationName ContextInformationID,
    contextInformationValue ANY
}

SendingDuration ::= ENUMERATED {
    0,10ms,20ms, ...
}

SendingCondition ::= CHOICE {
    None, condition1, condition2, ...
}

ContextInformationInfo ::= SEQUENCE OF SEQUENCE {
    cIIIInfo ContextInformationList,
    period SendingDuration
    condition SendingCondition
}

-- END Radio Application Related Data Types
-----
-----
-- START Radio Computer Related Data Types

RCID ::= CHOICE {
    number INTEGER
    string PrintableString
}

RadioApplicationIDList ::= SEQUENCE OF OptionalObjectName

RCOptionID ::= ENUMERATED {
    rerc-0, rerc-1, rerc-2, maximumTxPower, ...
}

RCOptionsList ::= SEQUENCE OF SEQUENCE {
    rCOptionName RCOptionID,
    rCOptionValue ANY
}

RadioInterfaceID ::= ENUMERATED {
    umts, hsdpa, wimax, lte, wifi, gsm, ...
}

RadioInterface ::= CHOICE {
    id RadioInterfaceID,
    void NULL
}

RadioInterfacesList ::= SEQUENCE OF RadioInterfaceID

ChannelIDsList ::= SEQUENCE OF OptionalObjectName

HardwareInfo ::= ENUMERATED {
    fixedPipeline, programmablePipeline, hybridPipeline, ...
}

SoftwareInfo ::= ENUMERATED {
    rOSVersion, compiler, ...
}

Direction ::= ENUMERATED {
    downlink, uplink
}

RxBLER ::= SEQUENCE {
    accBLER REAL,
    period REAL OPTIONAL,
    instBLER REAL OPTIONAL
}

```

```

}

TxPower ::= SEQUENCE {
    power REAL,
    unit CHARACTER
}

RxSINR ::= SEQUENCE {
    accSINR REAL,
    period REAL OPTIONAL,
    instSINR REAL OPTIONAL
}

Links ::= SEQUENCE OF OptionalObjectName

TxBits ::= SEQUENCE {
    transmittedBit REAL,
    unit CHARACTER
}

ActiveMeasurementID ::= ENUMERATED {
    transmitPower, transportLoad, processingLoad, ...
}

ActiveMeasurementIDs ::= SEQUENCE OF {
    activeMeasurementID
}

ActiveMeasurementsList ::= SEQUENCE OF SEQUENCE {
    activeMeasurementName ActiveMeasurementID,
    activeMeasurementValue ANY
}

FrequencyRange ::= SEQUENCE {
    centralFrequency REAL,
    frequencyBand REAL
}

AnaloguePower ::= SEQUENCE {
    power REAL,
    unit CHARACTER
}

SamplingRate ::= SEQUENCE {
    samplingRate REAL,
    unit CHARACTER
}

Bandwidth ::= SEQUENCE {
    bandwidth REAL,
    unit CHARACTERS
}

TxStartTime ::= CHOICE {
    absoluteTime GeneralizedTime,
    relativeTime INTEGER
}

TxStopTime ::= CHOICE {
    Undefined NULL,
    absoluteTime GeneralizedTime,
    relativeTime INTEGER
}

RxStartTime ::= CHOICE {
    absoluteTime GeneralizedTime,
    relativeTime INTEGER
}

RxStopTime ::= CHOICE {
    Undefined NULL,
    absoluteTime GeneralizedTime,
    relativeTime INTEGER
}

```

```

ChannelMeasurementID ::= ENUMERATED {
    channelInterference, channelLoad, ...
}

ChannelMeasurementsList ::= SEQUENCE OF SEQUENCE {
    channelMeasurementName ChannelMeasurementID,
    channelMeasurementValue ANY
}

ConfigurationMeasurements ::= ENUMERATED {
    antennaProt, RFfrontend, ...
}

-- END Radio Computer Related Data Types
-----
-----
-- START Unified Radio Application Interface Related Data Types

RadioAppParameterID ::= ENUMERATED {
    A, b, c, ...
}

RadioAppParameters ::= SEQUENCE OF SEQUENCE {
    radioAppParameterName RadioAppParameterID,
    radioAppParameterValue ANY
}

RadioAppsList ::= SEQUENCE OF SEQUENCE {
    RadioAppID INTEGER,
    RadioAppName PrintableString
}

RadioMeasurementID ::= ENUMERATED {
    A, B, C, ...
}

RadioMeasurementsList ::= SEQUENCE OF SEQUENCE {
    radioMeasurementName RadioMeasurementID,
    radioMeasurementValue ANY
}

PeerEquipmentId ::= SEQUENCE OF OptionalObjectName

PeerEquipmentList ::= SEQUENCE OF {
    PeerEquipmentId
}

UserData ::= SEQUENCE OF {
    userDataID INTEGER,
    userDataValue OBJECT
}

-- END Unified Radio Application Interface Related Data Types
-----
-----

```

Annex B (informative): gURAI Qualification Methods for Validation

The gURAI requirements are basis for qualification methods to validate that the requirements can be met. A feature list exposing gURAI capabilities is created. Qualification methods correspond to the feature list and they qualify features of a particular gURAI implementation against the feature list.

The following qualification methods might be typically applied:

- Demonstration - The operation of interfacing entities that rely on observable functional operation.
- Test - The operation of interfacing entities using specialist test equipment to collect data for analysis.
- Analysis - The processing of data obtained from methods, such as reduction, interpretation, or extrapolation of test results.
- Inspection - The visual examination of interfacing entities, documentation, etc.
- Special qualification methods - Methods for the interfacing entities, such as specialist tools, techniques, procedures, facilities, etc.

History

Document history		
V1.1.1	March 2020	Publication