

# ETSI TS 124 090 V10.0.0 (2011-05)

---

*Technical Specification*

**Digital cellular telecommunications system (Phase 2+);  
Universal Mobile Telecommunications System (UMTS);  
Unstructured Supplementary Service Data (USSD);  
Stage 3  
(3GPP TS 24.090 version 10.0.0 Release 10)**

---



---

**Reference**RTS/TSGC-0424090va00

---

**Keywords**GSM, UMTS

---

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

---

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011.  
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup>, **TIPHON**<sup>TM</sup>, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**LTE**<sup>TM</sup> is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM**<sup>®</sup> and the GSM logo are Trade Marks registered and owned by the GSM Association.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Contents

|  |           |
|--|-----------|
| Intellectual Property Rights .....   | 2         |
| Foreword.....  | 2         |
| Foreword.....  | 4         |
| 1 Scope .....  | 5         |
| 2 References .....   | 5         |
| 3 Abbreviations .....  | 5         |
| 4 Cross phase compatibility .....  | 5         |
| 5 Network initiated unstructured supplementary service data operations .....                                     | 6         |
| 5.1 Unstructured supplementary service data request .....  | 6         |
| 5.1.1 Normal operation .....   | 6         |
| 5.2 Unstructured supplementary service data notification.....  | 8         |
| 5.2.1 Normal operation.....  | 8         |
| 6 Mobile initiated unstructured supplementary service data operations .....                                      | 10        |
| 6.1 Normal operation.....  | 10        |
| 6.2 Cross phase compatibility .....  | 12        |
| 6.2.1 Network only supports protocol version 1 of unstructured supplementary service data operations .....       | 12        |
| 6.2.2 Mobile station only supports protocol version 1 of unstructured supplementary service data operations..... | 12        |
| <b>Annex A (informative): Change history .....</b>   | <b>13</b> |
| History .....  | 14        |

---

# Foreword

This Technical Specification has been produced by the 3GPP.

This TS specifies the stage 3 description of the Unstructured Supplementary Service Data (USSD) operations within the 3GPP system.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification;

---

## 1 Scope

The present document gives the stage 3 description of the Unstructured Supplementary Service Data (USSD) operations.

The group of unstructured supplementary service data operations is divided into two different classes:

- Network initiated unstructured supplementary service data operations (clause 5);
- Mobile initiated unstructured supplementary service data operations (clause 6).

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] 3GPP TS 24.008: "Mobile radio interface layer 3 specification".

[3] 3GPP TS 24.080: "Mobile radio interface layer 3 supplementary services specification; Formats and coding".

---

## 3 Abbreviations

Abbreviations used in the present document are listed in 3GPP TR 21.905.

---

## 4 Cross phase compatibility

For the mobile initiated USSD operations, a number of changes exist between the present document and the protocol version 1 specification. For these operations the main body of the present document assumes that all network entities comply with this version of the service. In this case an additional subclause defines the additional requirements for when one or more network entities or the Mobile Station (MS) complies with the protocol version 1 specifications for the USSD operations.

## 5 Network initiated unstructured supplementary service data operations

### 5.1 Unstructured supplementary service data request

#### 5.1.1 Normal operation

The network invokes an USSD request by sending a REGISTER message containing a UnstructuredSS-Request invoke component to the MS.


The MS shall respond to the request by sending a FACILITY message containing the user's mobile subscriber's response in a return result component. The network shall pass the data received in the response to the application handling USSD operations and shall wait for the response of the application. The application may either continue or terminate the dialogue.

When the application continues the dialogue, it may initiate another USSD operation by sending a FACILITY message (see figure 5.2). The operation may either be an USSD request or notification (see subclause 5.1.2).

When the application terminates the dialogue, the network shall clear the transaction by sending a RELEASE COMPLETE message. The MS may also clear the transaction at any time by sending a RELEASE COMPLETE message upon the request of the user.

If the MS is unable to process the request received from the network, it shall return an error indication by sending a FACILITY message containing a return error component. Error values are specified in 3GPP TS 24.080.

When the MS receives an USSD operation in parallel to any call independent supplementary service transaction, it shall respond with a return error component in a RELEASE COMPLETE message, containing the "USSD-Busy" error as specified in 3GPP TS 24.080, to indicate the failure in handling a parallel USSD operation. However, the network is allowed to initiate USSD operations in parallel to call related transactions.

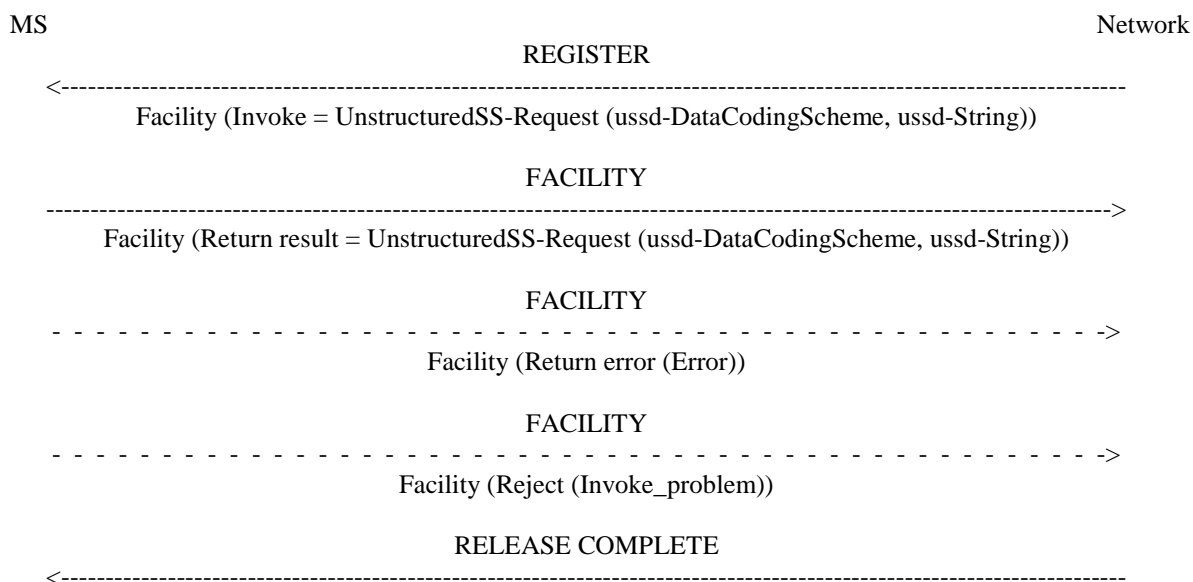

**Figure 5.1: Single network initiated USSD request**

NOTE: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

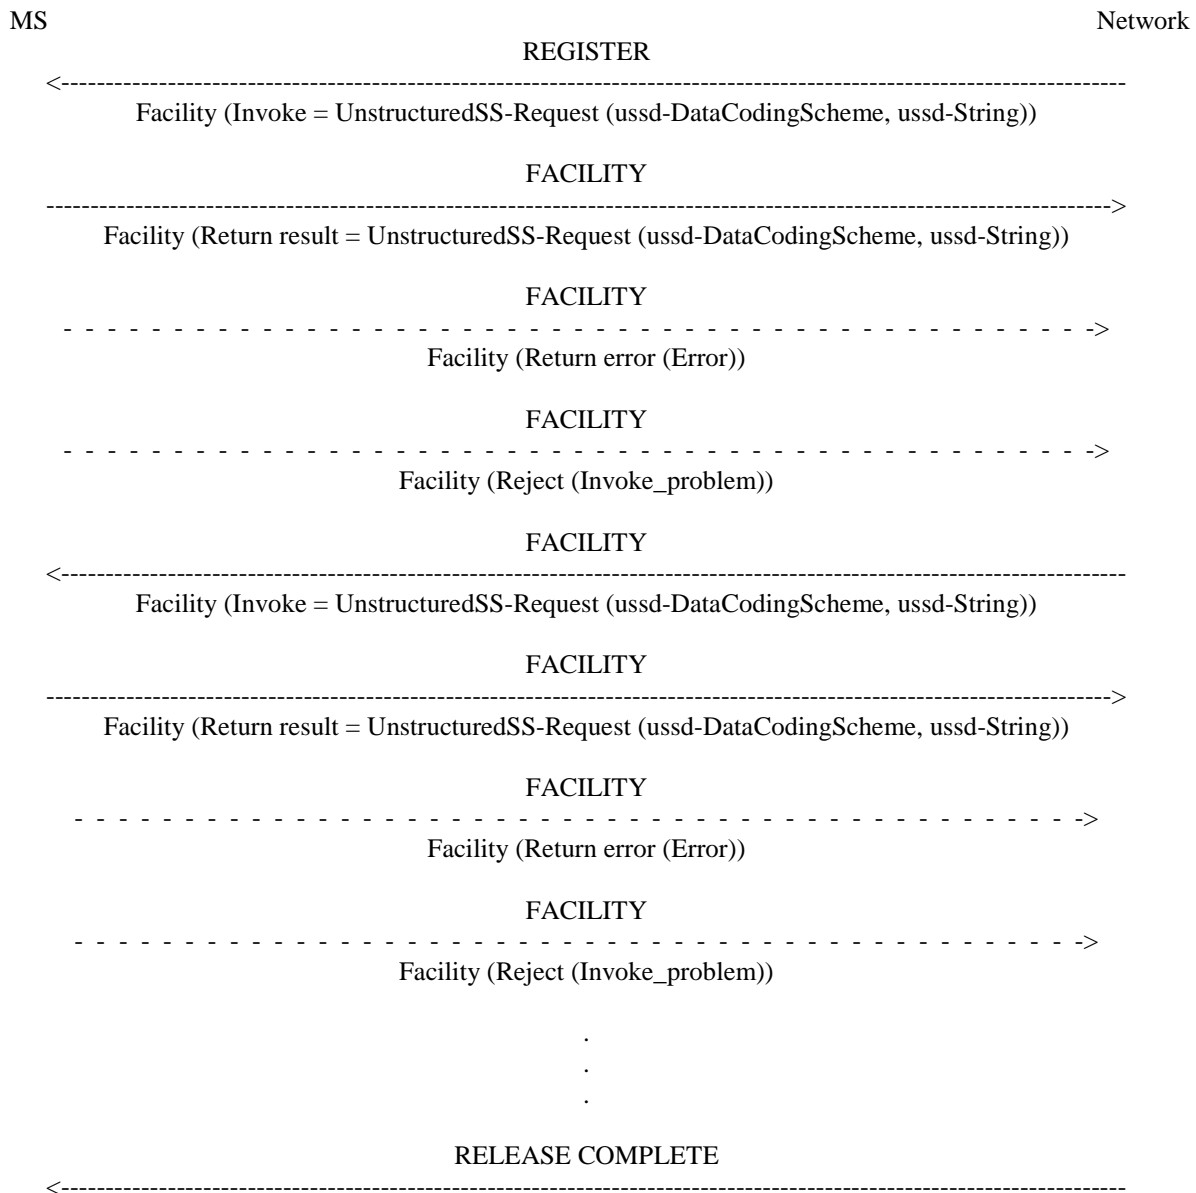


Figure 5.2: Multiple network initiated USSD request



NOTE 1: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

NOTE 2: The second USSD operation may also be an USSD notification. The network may use the on-going transaction for sending further USSD operations. Only one additional USSD request is shown.

## 5.2 Unstructured supplementary service data notification

### 5.2.1 Normal operation

The network invokes an USSD notification by sending a REGISTER message to the MS containing a UnstructuredSS-Notify invoke component.

The MS shall acknowledge the operation by sending a FACILITY message containing an empty result component to the network. The application may either continue or terminate the dialogue.

When the application continues the dialogue, it may initiate another USSD operation by sending a FACILITY message (see figure 5.4). The operation may either be an USSD request (see subclause 5.1.1) or notification.

When the application terminates the dialogue, the network shall clear the transaction by sending a RELEASE COMPLETE message. The MS may also clear the transaction at any time by sending a RELEASE COMPLETE message upon request of the user.

If the MS is unable to process the request received from the network, it shall return an error indication by sending a FACILITY message containing a return error component. Error values are specified in 3GPP TS 24.080.

When the MS receives an USSD operation in parallel to any call independent supplementary service transaction, it shall respond with a return error component in a RELEASE COMPLETE message, containing the "USSD-Busy" error as specified in 3GPP TS 24.080, to indicate the failure in handling a parallel USSD operation. However, the network is allowed to initiated USSD operations in parallel to call related transactions.

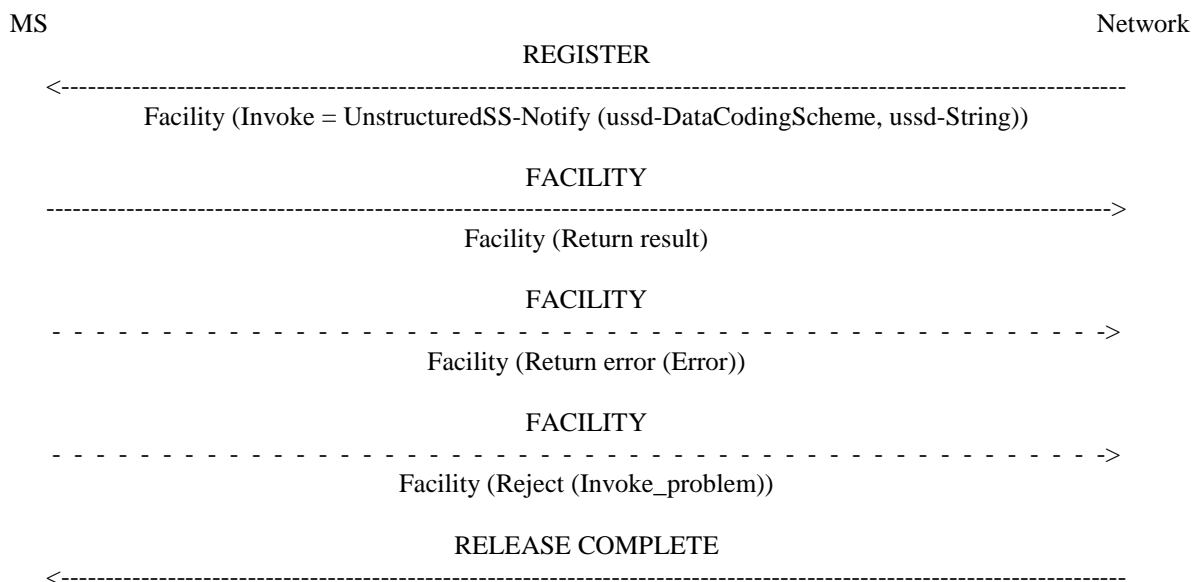


Figure 5.3: Single network initiated USSD notification

NOTE: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

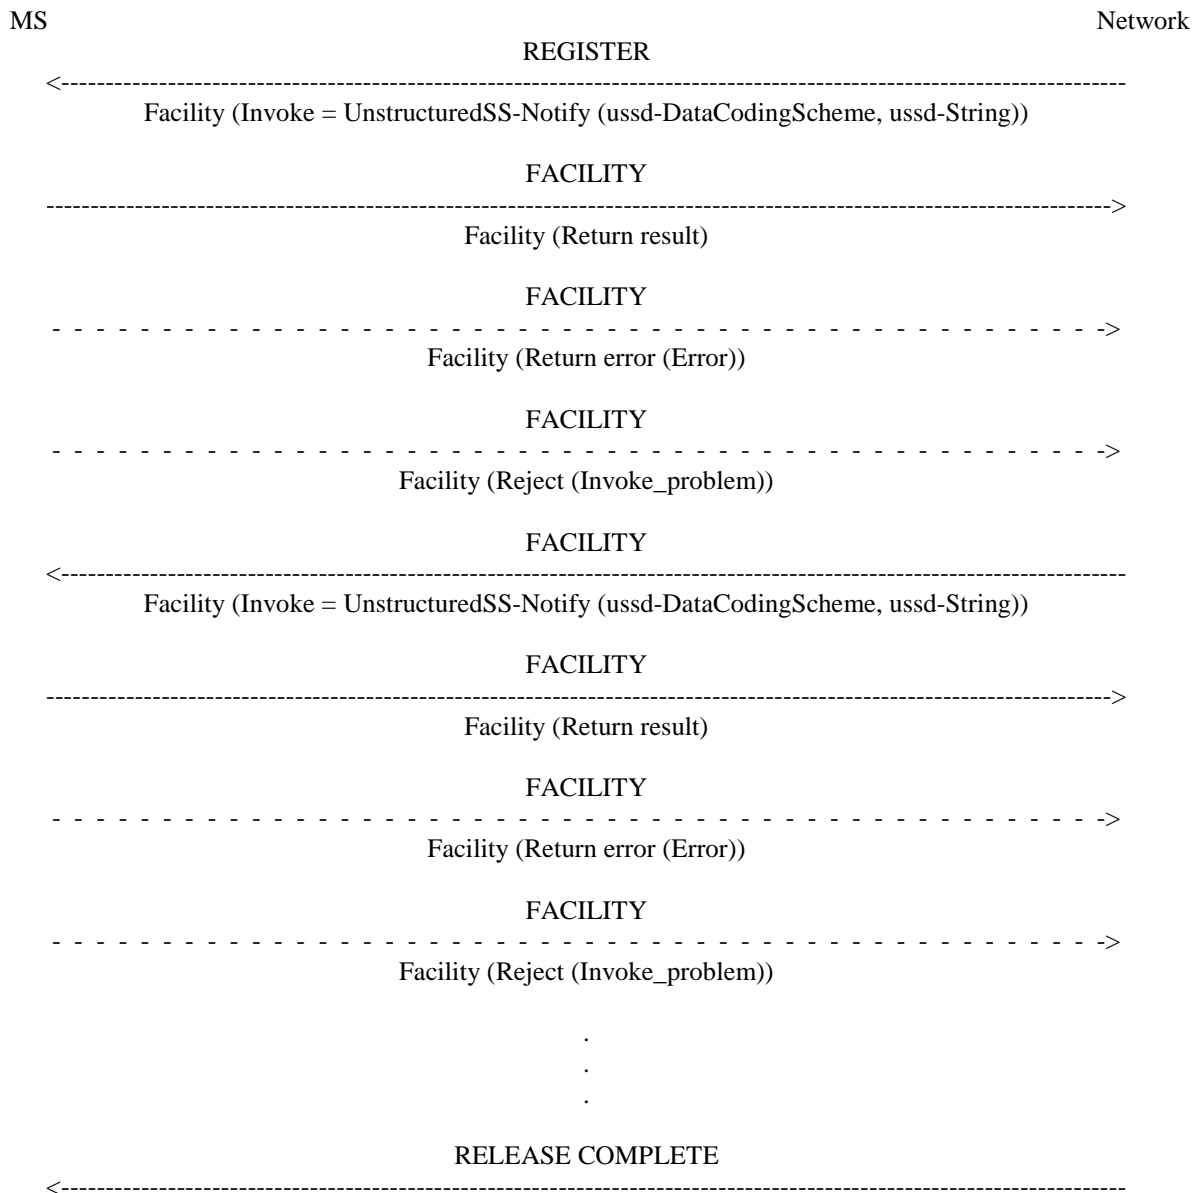


Figure 5.4: Multiple network initiated USSD notification

NOTE 1: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

NOTE 2: The second USSD operation may also be an USSD request. The network may use the on-going transaction for sending further USSD operations. Only one additional USSD notification is shown.

## 6 Mobile initiated unstructured supplementary service data operations

### 6.1 Normal operation

The MS invokes an USSD request by sending a REGISTER message to the network containing a ProcessUnstructuredSS-Request invoke component.

The receiving network entity shall pass the data received in the request to the application handling USSD operations and shall wait for the response of the application. The application may either terminate the dialogue or may request several times further information in order to perform the requested operation (see figures 6.1 and 6.2).

When the application requests more information to process the request, the network shall initiate an USSD request (see subclause 5.1.1), using the on-going transaction (see figure 6.2). The MS shall return the user's response in a FACILITY message containing a return result component. The network shall pass the data received in the response to the application. If the MS is unable to process the request received from the network, it shall return an error indication by sending a FACILITY message containing a return error component.

When the application terminates the dialogue, the network shall clear the transaction by sending a RELEASE COMPLETE message containing a return result component. The MS may also clear the transaction at any time by sending a RELEASE COMPLETE message upon request of the user.

If the network is unable to process the request received from the MS, it shall clear the transaction by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080.

The MS shall not initiate USSD operations in parallel to any call independent supplementary service transaction. Only one transaction for USSD operations per user is allowed at a time. However, the MS is allowed to initiate USSD operations in parallel to call related transactions.


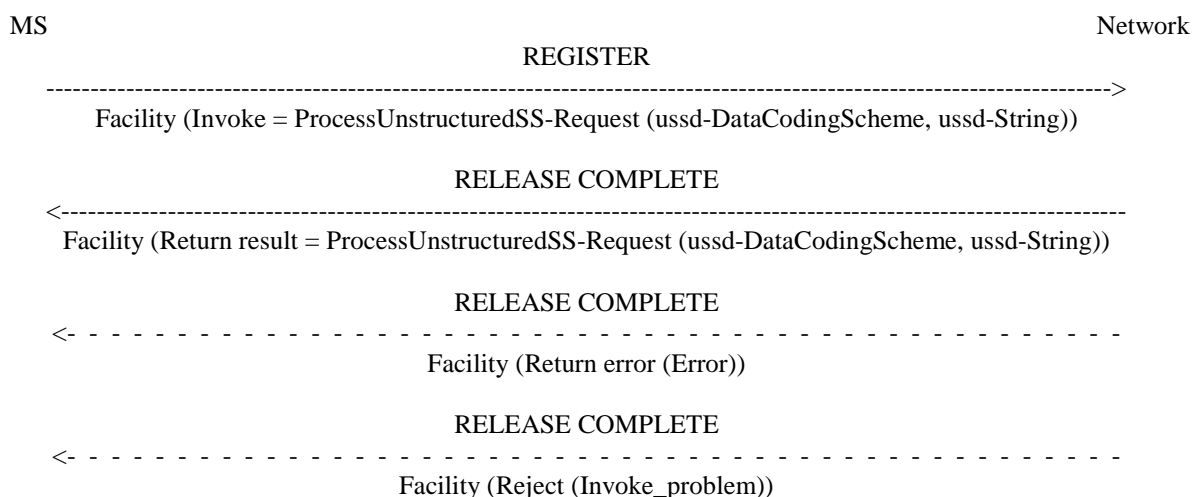


Figure 6.1: Mobile initiated USSD operation, network does not request further information

NOTE: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

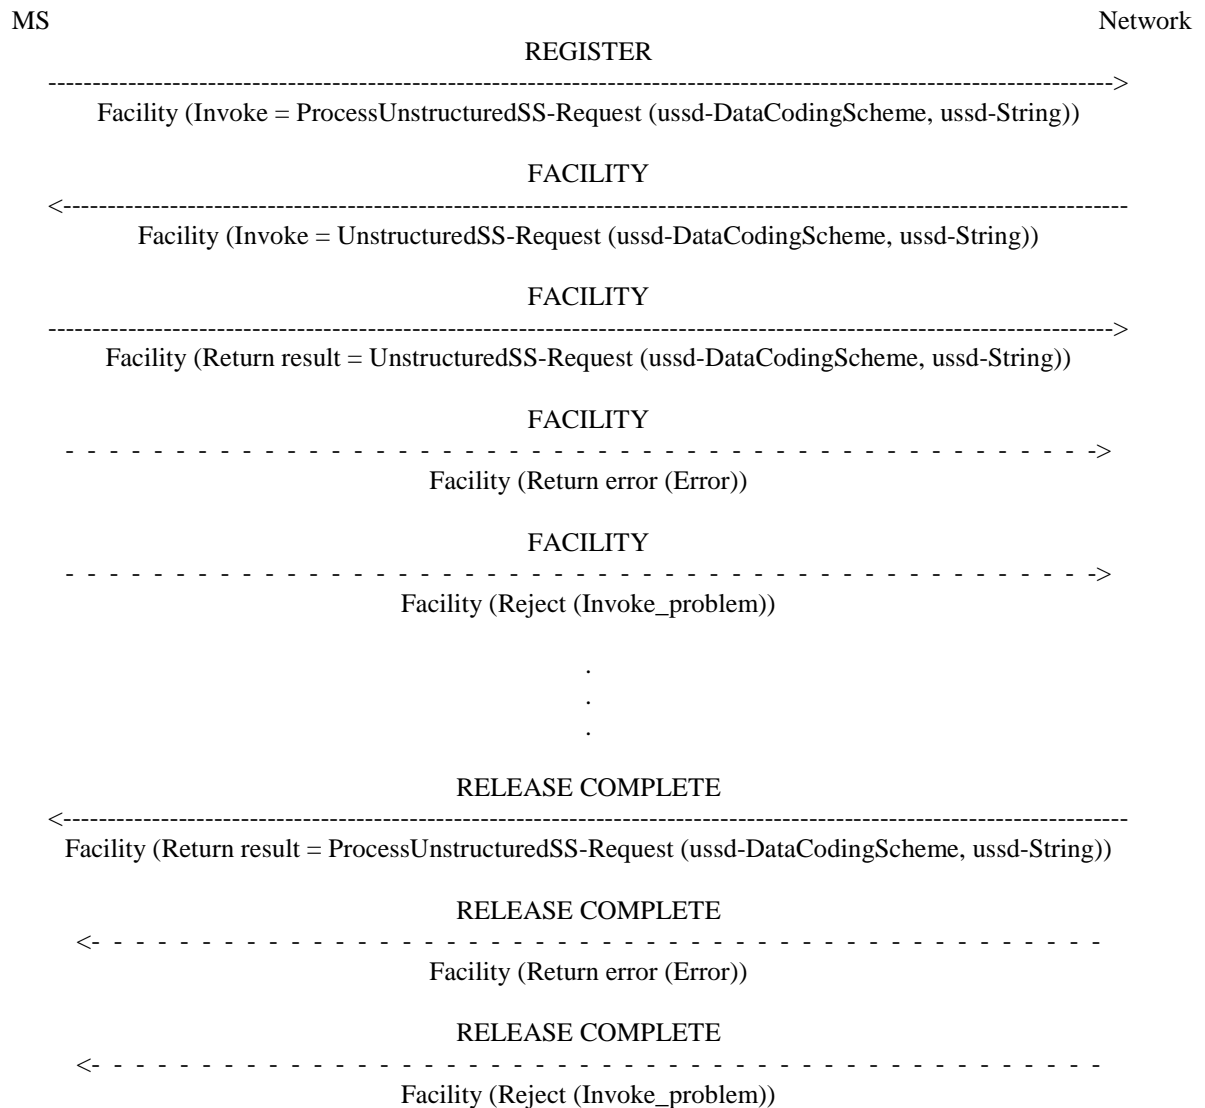

**Figure 6.2: Mobile initiated USSD operation, network requests further information**

NOTE 1: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

NOTE 2: The network may request further information several times. Only one information request is shown. The network initiated USSD operation may also be an USSD notification. Only a network initiated USSD request is shown.

## 6.2 Cross phase compatibility

### 6.2.1 Network only supports protocol version 1 of unstructured supplementary service data operations

If a mobile initiated USSD request using protocol version 2 is rejected by the network, and the reason for the rejection is indicated either by the problem code "unrecognized operation" or a cause "Facility rejected", the MS shall assume that the network only supports protocol version 1 of USSD operations. The MS shall re-attempt the request by using the appropriate protocol version 1 USSD operation without a SS version indicator if the unstructured data entered by the user can be coded as an IA5 string.

### 6.2.2 Mobile station only supports protocol version 1 of unstructured supplementary service data operations

A MS supporting only protocol version 1 invokes an USSD request by sending a REGISTER message to the network containing a ProcessUnstructuredSsData invoke component without a SS version indicator. In this situation the network is not allowed to start a network initiated USSD operation. If the application requires such an operation for its proper function, the USSD operation sent by the MS shall be rejected by the application. The network shall terminate the transaction by sending a RELEASE COMPLETE message with cause "Facility rejected" (see 3GPP TS 24.008).

## Annex A (informative): Change history

| Change history |           |         |    |         |             |                                |
|----------------|-----------|---------|----|---------|-------------|--------------------------------|
| TSG CN#        | Spec      | Version | CR | <Phase> | New Version | Subject/Comment                |
| Apr 1999       | GSM 04.90 | 6.0.0   |    |         |             | Transferred to 3GPP CN1        |
| CN#03          | 24.090    |         |    | R99     | 3.0.0       | Approved at CN#03              |
| CN#11          | 24.090    | 3.0.0   |    | Rel-4   | 4.0.0       | Approved at CN#11              |
| CN#16          | 24.090    | 4.0.0   |    | Rel-4   | 4.0.1       | References updated             |
| CN#16          | 24.090    | 4.0.1   |    | Rel-5   | 5.0.0       | Rel-5 created after CN#16      |
| CN#26          | 24.090    | 5.0.0   |    | Rel-6   | 6.0.0       | Rel-6 created after CN#26      |
| CT#36          | 24.090    | 6.0.0   |    | Rel-7   | 7.0.0       | Upgraded unchanged from Rel-6  |
| CT#42          | 24.090    | 7.0.0   |    | Rel-8   | 8.0.0       | Upgraded unchanged from Rel-7  |
| 2009-12        | 24.090    | 8.0.0   | -  | Rel-9   | 9.0.0       | Update to Rel-9 version (MCC)  |
| 2011-03        | 24.090    | 9.0.0   | -  | Rel-10  | 10.0.0      | Update to Rel-10 version (MCC) |

---

## History

| <b>Document history</b> |          |             |
|-------------------------|----------|-------------|
| V10.0.0                 | May 2011 | Publication |
|                         |          |             |
|                         |          |             |
|                         |          |             |
|                         |          |             |