
ETSI TS 131 102 V5.11.0 (2004-12)

Technical Specification

Universal Mobile Telecommunications System (UMTS); Characteristics of the USIM application (3GPP TS 31.102 version 5.11.0 Release 5)

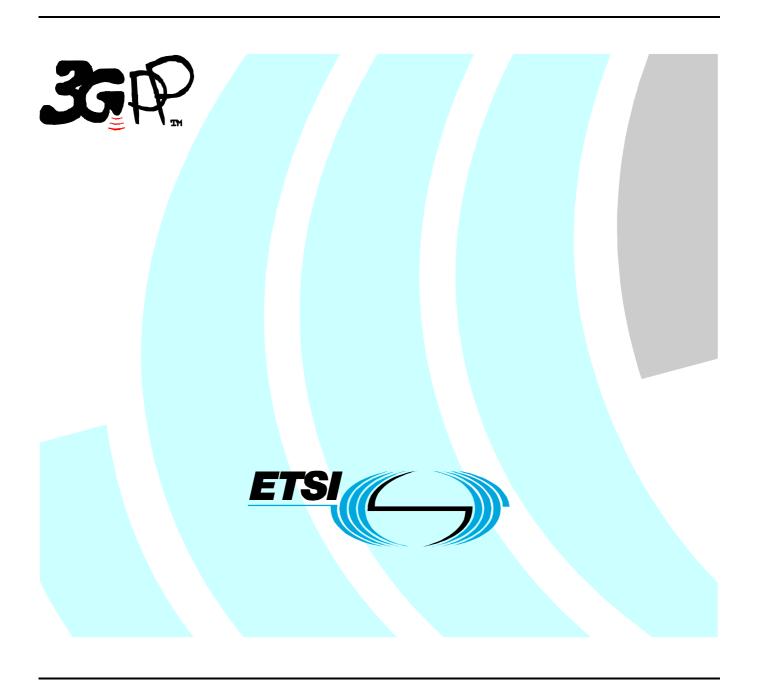

Reference
RTS/TSGT-0331102v5b0

Keywords

UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004. All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**TM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**TM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intelle	ectual Property Rights	2
Forew	vord	2
Forew	vord	8
Introd	luction	8
1	Scope	9
2	References	9
3	Definitions, symbols, abbreviations and coding conventions	11
3.1	Definitions	
3.2	Symbols	
3.3	Abbreviations	
3.4	Coding Conventions	
4	Contents of the Files	13
4.1	Contents of the EFs at the MF level	
4.1.1	EF _{DIR}	
4.1.2	EF _{ICCID} (ICC Identity)	
4.1.3	EF _{PL} (Preferred Languages)	
4.1.4	EF _{ARR} (Access Rule Reference)	
4.2	Contents of files at the USIM ADF (Application DF) level	
4.2.1	EF _{LI} (Language Indication)	
4.2.2	EF _{IMSI} (IMSI)	
4.2.3	EF _{Kevs} (Ciphering and Integrity Keys)	
4.2.4	EF _{KeysPS} (Ciphering and Integrity Keys for Packet Switched domain)	
4.2.5	EF _{PLMNWACT} (User controlled PLMN selector with Access Technology)	
4.2.6	EF _{HPPI,MN} (Higher Priority PLMN search period)	
4.2.7	EF _{ACMmax} (ACM maximum value)	
4.2.8	EF _{UST} (USIM Service Table)	
4.2.9	EF _{ACM} (Accumulated Call Meter)	
4.2.10		
4.2.11		
4.2.12		
4.2.13	The state of the s	
4.2.14	the state of the s	
4.2.15	, , , , , , , , , , , , , , , , , , , ,	
4.2.16		
4.2.17	7	
4.2.18		
4.2.19		
4.2.20		
4.2.21	, , , , , , , , , , , , , , , , , , ,	
4.2.22		
4.2.23		
4.2.24	I BEGGE (
4.2.25		
4.2.26	5.1.5 ()	
4.2.27	THE BELL Y	
4.2.28	SIMSI (
4.2.29	SHISS (
4.2.30	DD11 ()	
4.2.31		
4.2.32		
4.2.33		
4.2.34		
4.2.35	7	

4.2.36	EF _{OCT} (Outgoing Call Timer)	
4.2.37	EF _{EXT5} (Extension5)	
4.2.38	EF _{CCP2} (Capability Configuration Parameters 2)	
4.2.39	EF _{eMLPP} (enhanced Multi Level Precedence and Pre-emption)	
4.2.40	EF _{AAeM} (Automatic Answer for eMLPP Service)	
4.2.41	Void	
4.2.42	EF _{Hiddenkey} (Key for hidden phone book entries)	
4.2.43	Void	
4.2.44	EF _{BDN} (Barred Dialling Numbers)	
4.2.45	EF _{EXT4} (Extension4)	
4.2.46	EF _{CMI} (Comparison Method Information)	
4.2.47	EF _{EST} (Enabled Services Table)	
4.2.48	EF _{ACL} (Access Point Name Control List)	
4.2.49	EF _{DCK} (Depersonalisation Control Keys)	
4.2.50	EF _{CNL} (Co-operative Network List)	
4.2.51	EF _{START-HFN} (Initialisation values for Hyperframe number)	
4.2.52	EF _{THRESHOLD} (Maximum value of START)	
4.2.53	EF _{OPLMNwACT} (Operator controlled PLMN selector with Access Technology)	
4.2.54	EF _{HPLMNwAcT} (HPLMN selector with Access Technology)	
4.2.55	EF _{ARR} (Access Rule Reference)	54
4.2.56	Void	55
4.2.57	EF _{NETPAR} (Network Parameters)	55
4.2.58	EF _{PNN} (PLMN Network Name)	
4.2.59	EF _{OPL} (Operator PLMN List)	58
4.2.60	EF _{MBDN} (Mailbox Dialling Numbers)	58
4.2.61	EF _{EXT6} (Extension6)	59
4.2.62	EF _{MBI} (Mailbox Identifier)	59
4.2.63	EF _{MWIS} (Message Waiting Indication Status)	60
4.2.64	EF _{CFIS} (Call Forwarding Indication Status)	61
4.2.65	EF _{EXT7} (Extension7)	62
4.2.66	EF _{SPDI} (Service Provider Display Information)	62
4.2.67	EF _{MMSN} (MMS Notification)	63
4.2.68	EF _{EXT8} (Extension 8)	65
4.2.69	EF _{MMSICP} (MMS Issuer Connectivity Parameters)	66
4.2.70	EF _{MMSUP} (MMS User Preferences)	67
4.2.71	EF _{MMSUCP} (MMS User Connectivity Parameters)	69
4.2.72	EF _{NIA} (Network's Indication of Alerting)	69
4.2.73	EF _{VGCS} (Voice Group Call Service)	70
4.2.74	EF _{VGCSS} (Voice Group Call Service Status)	
4.2.75	EF _{VBS} (Voice Broadcast Service)	72
4.2.76	EF _{VBSS} (Voice Broadcast Service Status)	74
	DFs at the USIM ADF (Application DF) Level	
4.4	Contents of DFs at the USIM ADF (Application DF) level	75
4.4.1	Contents of files at the DF SoLSA level	75
4.4.1.1	EF _{SAI} (SoLSA Access Indicator)	75
4.4.1.2	EF _{SLL} (SoLSA LSA List)	76
4.4.1.3	LSA Descriptor files	
4.4.2	Contents of files at the DF PHONEBOOK level	79
4.4.2.1	EF _{PBR} (Phone Book Reference file)	79
4.4.2.2	EF _{IAP} (Index Administration Phone book)	81
4.4.2.3	EF _{ADN} (Abbreviated dialling numbers)	82
4.4.2.4	EF _{EXT1} (Extension1)	85
4.4.2.5	EF _{PBC} (Phone Book Control)	
4.4.2.6	EF _{GRP} (Grouping file)	
4.4.2.7	EF _{AAS} (Additional number Alpha String)	
4.4.2.8	EF _{GAS} (Grouping information Alpha String)	
4.4.2.9	EF _{ANR} (Additional Number)	
4.4.2.10	EF _{SNE} (Second Name Entry)	91
4.4.2.11	EF _{CCP1} (Capability Configuration Parameters 1)	
4.4.2.12	Phone Book Synchronisation	
4.4.2.12.1	EF _{UID} (Unique Identifier)	
4.4.2.12.2	EF _{PSC} (Phone book Synchronisation Counter)	93

4.4.2.12	3 EF _{CC} (Change Counter)	94
4.4.2.12	TOID (
4.4.2.13	LWAIL (95
4.4.2.14		
4.4.3	Contents of files at the DF GSM-ACCESS level (Files required for GSM Access)	
4.4.3.1	EF _{Kc} (GSM Ciphering key Kc)	97
4.4.3.2	EF _{KcGPRS} (GPRS Ciphering key KcGPRS)	97
4.4.3.3	Void	98
4.4.3.4	EF _{CPBCCH} (CPBCCH Information)	98
4.4.3.5	EF _{InvScan} (Investigation Scan)	99
4.4.4	Contents of files at the MExE level	99
4.4.4.1	EF _{MExE-ST} (MExE Service table)	99
4.4.4.2	EF _{ORPK} (Operator Root Public Key)	100
4.4.4.3	EF _{ARPK} (Administrator Root Public Key)	101
4.4.4.4	EF _{TPRPK} (Third Party Root Public Key)	102
4.4.4.5	EF _{TKCDF} (Trusted Key/Certificates Data Files)	103
4.5	Contents of EFs at the TELECOM level	103
4.5.1	EF _{ADN} (Abbreviated dialling numbers)	103
4.5.2	EF _{EXT1} (Extension1)	103
4.5.3	EF _{ECCP} (Extended Capability Configuration Parameter)	103
4.5.4	EF _{SUME} (SetUpMenu Elements)	
4.5.5	EF _{ARR} (Access Rule Reference)	
4.6	Contents of DFs at the TELECOM level	105
4.6.1	Contents of files at the DF _{GRAPHICS} level	105
4.6.1.1	EF _{IMG} (Image)	105
4.6.1.2	Image Instance Data Files	106
4.6.2	Contents of files at the DF _{PHONEBOOK} under the DF _{TELECOM}	
4.7	Files of USIM	
_		111
	Application protocol	
5.1	USIM management procedures	
5.1.1	Initialisation	
5.1.1.1	USIM application selection	
5.1.1.2	USIM initialisation	
5.1.1.3	GSM related initialisation procedures	
5.1.2	Session termination	
5.1.2.1	3G session termination	
5.1.2.2	GSM termination procedures	
5.1.3	USIM application closure	
5.1.4	Emergency call codes	
5.1.5	Language indication	
5.1.6	Administrative information request	
5.1.7	USIM service table request	
5.1.8	Spare	
5.1.9	UICC presence detection	
5.2	USIM security related procedures	
5.2.1	Authentication algorithms computation	
5.2.2	IMSI request	
5.2.3	Access control information request	
5.2.4	Higher Priority PLMN search period request	
5.2.5	Location information	
5.2.6	Cipher and Integrity key	
5.2.7	Forbidden PLMN	
5.2.8	Void	
5.2.9	User Identity Request	
5.2.10	GSM Cipher key	
5.2.11	GPRS Cipher key Initialisation value for Hyperframe number	
5.2.12		
5.2.13 5.2.14	Maximum value of START HPLMN selector with Access Technology request	
5.2.14	Packet Switched Location information	
5.2.15 5.2.16	Cipher and Integrity key for Packet Switched domain	110 11 <i>6</i>
J. Z. 10	VALUE AND THE STILL BUY OF A SUBJECT OF THE CONTROL	

5.2.17	LSA information	116
5.2.18	Voice Group Call Services	116
5.2.19	Voice Broadcast Services	116
5.3	Subscription related procedures	
5.3.1	Phone book procedures	117
5.3.1.1		
5.3.1.2		
5.3.1.3	1	
5.3.2	Dialling numbers	
5.3.3	Short messages	
5.3.4	Advice of charge	
5.3.5	Capability configuration parameters	
5.3.6	User controlled PLMN selector with Access Technology	
5.3.7	Cell broadcast message identifier	
5.3.8	Group identifier level 1	
5.3.9	Group identifier level 2	
5.3.10	1	
5.3.11	1 1	
5.3.12		
5.3.13	e i	
5.3.14		
5.3.15	· I · · · · · · · · · · · · · · · · · ·	
5.3.16	1	
5.3.17		
5.3.18	$\boldsymbol{\varepsilon}$	
5.3.19	1	
5.3.20		
5.3.21	<i>U</i> ,	
5.3.22		
5.3.23		
5.3.24		
5.3.25	1	
5.3.26		
5.3.27	$\boldsymbol{\mathcal{U}}$	
5.3.28		
5.3.29 5.3.30		
	· · · · · · · · · · · · · · · · · · ·	
5.3.31 5.3.32		
5.3.32		
5.3.33 5.4	USAT related procedures	
5.4 5.4.1	Data Download via SMS-PP	
5.4.1	Image Request	
5.4.3	Data Download via SMS-CB	
5.4.3 5.4.4	Call Control by USIM	
5.4.5	MO-SMS control by USIM	
5.4.5 5.5	MExE related procedures	
5.5.1	MEXE ST	
5.5.2	Operator root public key	
5.5.3	Administrator root public key	
5.5.4	Third Party root public key(s)	
5.5.5	Trusted Key/Certificates Data Files	
6	Security features	
6.1	Authentication and key agreement procedure	
6.2	Cryptographic Functions	
6.3	GSM Conversion Functions	
6.4	User verification and file access conditions	127
7	USIM Commands	128
7.1	AUTHENTICATE	
7.1	Command description	128

7.1.1.1 3G security	context	129
7.1.1.2 GSM secur	ity context	129
	ameters and data	130
	Returned by the USIM	
	gement	
7.3.2 Status Words of	of the Commands	132
8 UICC Characteristic	2S	132
8.1 Voltage classes		133
	neters (FCP)	
	ication clock frequency	
	ds	
8.5 PPS procedure		133
Annex A (informative):	EF changes via Data Download or USAT applications	134
Annex B (normative):	Image Coding Schemes	136
B.1 Basic Image Coding	g Scheme	136
B.2 Colour Image Codin	ng Scheme	137
Annex C (informative):	Structure of the Network parameters TLV objects	139
Annex D (informative):	Tags defined in 31.102	140
Annex E (informative):	Suggested contents of the EFs at pre-personalization	141
Annex F (informative):	Examples of coding of LSA Descriptor files for SoLSA	144
Annex G (informative):	Phonebook Example	145
Annex H (normative):	List of SFI Values	148
H.1 List of SFI Values a	t the USIM ADF Level	148
H.2 List of SFI Values a	t the DF GSM-ACCESS Level	148
Annex I (informative):	USIM Application Session Activation/Termination	149
Annex J (informative):	Example of MMS coding	150
	or MMS User Preferences	150
J.2 Coding Example f	or MMS Issuer/User Connectivity Parameters	150
Annex K (informative):	Change history	152
History	•	155

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document defines the Universal Subscriber Identity Module (USIM) application. This application resides on the UICC, an IC card specified in TS 31.101 [11]. In particular, TS 31.101 [11] specifies the application independent properties of the UICC/terminal interface such as the physical characteristics and the logical structure.

TS 31.101 is one of the core documents for this specification and is therefore referenced in many places in the present document. The detailed descriptions are no longer listed in TS 31.101, so references to TS 31.101 shall be taken to be direct references to TS 102 221.

1 Scope

The present document defines the USIM application for 3G telecom network operation.

The present document specifies:

- specific command parameters;
- file structures;
- contents of EFs (Elementary Files);
- security functions;
- application protocol to be used on the interface between UICC (USIM) and ME.

This is to ensure interoperability between a USIM and an ME independently of the respective manufacturer, card issuer or operator.

The present document does not define any aspects related to the administrative management phase of the USIM. Any internal technical realisation of either the USIM or the ME is only specified where these are reflected over the interface. The present document does not specify any of the security algorithms which may be used.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1]	3GPP TS 21.111: "USIM and IC Card Requirements".
[2]	3GPP TS 22.011: "Service accessibility".
[3]	3GPP TS 22.024: "Description of Charge Advice Information (CAI)".
[4]	3GPP TS 22.030: "Man-Machine Interface (MMI) of the User Equipment (UE)".
[5]	3GPP TS 23.038: "Alphabets and language".
[6]	3GPP TS 23.040: "Technical realization of the Short Message Service (SMS)".
[7]	3GPP TS 23.060: "General Packet Radio Service (GPRS); Service description; Stage 2".
[8]	3GPP TS 22.067: "enhanced Multi Level Precedence and Pre-emption service (eMLPP) - Stage 1".
[9]	3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols; Stage 3".
[10]	3GPP TS 24.011: "Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".
[11]	3GPP TS 31.101: "UICC-Terminal Interface, Physical and Logical Characteristics".
[12]	3GPP TS 31.111: "USIM Application Toolkit (USAT)".

[13]	3GPP TS 33.102: "3GPP Security; Security Architecture".
[14]	3GPP TS 33.103: "3GPP Security; Integration Guidelines".
[15]	3GPP TS 22.086: "Advice of charge (AoC) Supplementary Services - Stage 1".
[16]	3GPP TS 23.041: "Technical realization of Cell Broadcast (CB)".
[17]	Void.
[18]	3GPP TS 51.011 Release 4: "Specification of the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface".
[19]	ISO 639 (1988): "Code for the representation of names of languages".
[20]	ISO/IEC 7816-4 (1995): "Identification cards - Integrated circuit(s) cards with contacts, Part 4: Interindustry commands for interchange".
[21]	ISO/IEC 7816-5 (1994): "Identification cards - Integrated circuit(s) cards with contacts, Part 5: Numbering system and registration procedure for application identifiers".
[22]	ITU-T Recommendation E.164: "The international public telecommunication numbering plan".
[23]	ITU-T Recommendation T.50: "International Alphabet No. 5 Information technology - 7-bit coded character set for information interchange").
[24]	3GPP TS 22.101: "Service aspects; service principles".
[25]	3GPP TS 23.003: "Numbering, Addressing and Identification".
[26]	ISO/IEC 7816-9 (2000): "Identification cards - Integrated circuit(s) cards with contacts, Part 9: Additional Interindustry commands and security attributes".
[27]	3GPP TS 22.022: "Personalisation of Mobile Equipment (ME); Mobile functionality specification".
[28]	3GPP TS 44.018 "Mobile Interface Layer3 Specification, Radio Resource control protocol"
[29]	3GPP TS 23.022: "Functions related to Mobile Station (MS) in idle mode and group receive mode".
[30]	3GPP TS 23.057: "Mobile Execution Environment (MExE); Functional description; Stage 2".
[31]	3GPP TS 23.122: "NAS Functions related to Mobile Station (MS) in idle mode"
[32]	ISO/IEC 7816-6 (1996): "Identification cards Integrated circuit(s) cards with contacts Part 6: Interindustry data elements".
[33]	3GPP TS 25.101: "UE Radio Transmission and Reception (FDD)"
[34]	3GPP TS 45.005: "Radio Transmission and Reception"
[35]	ISO/IEC 8825 (1990): "Information technology; Open Systems Interconnection; Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)"
[36]	3GPP TS 23.097: "Multiple Subscriber Profile (MSP)"
[37]	ETSI TS 102 221 Release 5: "Smart cards; UICC-Terminal interface; Physical and logical characteristics"
[38]	3GPP TS 23.140: "Multimedia Messaging Service (MMS); Functional description; stage 2".
[39]	3GPP TS 23.073: "Support of Localised Service Area (SoLSA); Stage 2".

3 Definitions, symbols, abbreviations and coding conventions

Definitions 3.1

For the purposes of the present document, the following definition applies.

ADM: access condition to an EF which is under the control of the authority which creates this file

3.2 **Symbols**

For the purposes of the present document, the following symbols apply:

	Concatenation
\oplus	Exclusive OR
f1	Message authentication function used to compute MAC
f1*	A message authentication code (MAC) function with the property that no valuable information can
	be inferred from the function values of f1* about those of f1,, f5 and vice versa
f2	Message authentication function used to compute RES and XRES
f3	Key generating function used to compute CK
f4	Key generating function used to compute IK
f5	Key generating function used to compute AK

3.3 **Abbreviations**

ICI

For the purposes of the present document, the following abbreviations apply:

3GPP	3 rd Generation Partnership Project
AC	Access Condition
ACL	APN Control List
ADF	Application Dedicated File
AID	Application IDentifier
AK	Anonymity key
ALW	ALWays
AMF	Authentication Management Field
AoC	Advice of Charge
APN	Access Point Name
ASN.1	Abstract Syntax Notation One
AuC	Authentication Centre
AUTN	Authentication token
BDN	Barred Dialling Number
BER-TLV	Basic Encoding Rule - TLV
CCP	Capability Configuration Parameter
CK	Cipher key
CLI	Calling Line Identifier
CNL	Co-operative Network List
CPBCCH	COMPACT Packet BCCH
CS	Circuit switched
DCK	Depersonalisation Control Keys
DF	Dedicated File
DO	Data Object
EF	Elementary File
FCP	File Control Parameters
FFS	For Further Study
GSM	Global System for Mobile communications
HE	Home Environment
ICC	Integrated Circuit Card

Incoming Call Information

ICT Incoming Call Timer

ID IDentifier

IEI Information Element Identifier

IK Integrity key

IMSI International Mobile Subscriber Identity

K USIM Individual key

K_C Cryptographic key used by the cipher A5

KSI Key Set Identifier
LI Language Indication
LSB Least Significant Bit
MAC Message authentication code

MAC-A MAC used for authentication and key agreement MAC-I MAC used for data integrity of signalling messages

MCC Mobile Country Code

MExE Mobile Execution Environment

MF Master File

MMI Man Machine Interface MNC Mobile Network Code

MODE Indication packet switched/circuit switched mode

MSB Most Significant Bit

NEV NEVer

NPI Numbering Plan Identifier
OCI Outgoing Call Information
OCT Outgoing Call Timer
OFM Operational Feature Monitor
PBID Phonebook Identifier

PIN Personal Identification Number

PL Preferred Languages
PS Packet switched
PS_DO PIN Status Data Object
RAND Random challenge

RAND_{MS} Random challenge stored in the USIM

RES User response

RFU Reserved for Future Use

RST Reset

SDN Service dialling number SE Security Environment SFI Short EF Identifier

SGSN Serving GPRS Support Node

SN Serving Network SQN Sequence number

SRES Signed RESponse calculated by a USIM

SW Status Word
TLV Tag Length Value

USAT USIM Application Toolkit

USIM Universal Subscriber Identity Module

VLR Visitor Location Register XRES Expected user RESponse

3.4 Coding Conventions

The following coding conventions apply to the present document.

All lengths are presented in bytes, unless otherwise stated. Each byte is represented by bits b8 to b1, where b8 is the most significant bit (MSB) and b1 is the least significant bit (LSB). In each representation, the leftmost bit is the MSB.

The coding of Data Objects in the present document is according to ISO/IEC 7816-6 [32].

'XX': Single quotes indicate hexadecimal values. Valid elements for hexadecimal values are the numbers

'0' to '9' and 'A' to 'F'.

4 Contents of the Files

This clause specifies the EFs for the 3G session defining access conditions, data items and coding. A data item is a part of an EF which represents a complete logical entity, e.g. the alpha tag in an EF_{ADN} record.

EFs or data items having an unassigned value, or, which during the 3G session, are cleared by the ME, shall have their bytes set to 'FF'. After the administrative phase all data items shall have a defined value or have their bytes set to 'FF'. If a data item is 'deleted' during a 3G session by the allocation of a value specified in another 3GPP TS, then this value shall be used and the data item is not unassigned. For example, for a deleted LAI in EF_{LOCI} the last byte takes the value 'FE' (TS 24.008 [9] refers).

A file is associated with attributes that depending of the file type indicates how data is to be accessed e.g. file size, record length etc. Although in the present document some files and data items stored in a file are indicated as having a fixed length; when reading such structures the terminal shall derive the length of the data item from the attributes provided in the file information i.e. not use the fixed value specified for the file in the present document. Although the terminal is able to read the entire structure it should only use those elements in the data item which is recognised by the terminal.

EFs are mandatory (M), optional (O), or conditional (C). A conditional file is mandatory if a specific requirement is fulfilled. The file size of an optional EF may be zero. All implemented EFs with a file size greater than zero shall contain all mandatory data items. Optional data items may either be filled with 'F', or, if located at the end of an EF, need not exist.

For any EF, when the SFI is not indicated in the description of the file it is not allowed to assign an SFI. If in the description of the file an SFI value is indicated the file shall support SFI. The SFI value shall be assigned by the card issuer. It is mandatory for EFs stating an SFI value ('YY') in the description of their structure to provide an SFI. For files where in the file description the SFI is indicated as 'Optional' the file may support an SFI.

When the coding is according to ITU-T Recommendation T.50 [23], bit 8 of every byte shall be set to 0.

For an overview containing all files see figures 4.1 and 4.2.

4.1 Contents of the EFs at the MF level

There are four EFs at the Master File (MF) level. These EFs are specified in TS 31.101 [11].

4.1.1 EF_{DIR}

This EF contains the Application Identifier (AID) and the Application Label as mandatory elements.

The USIM application can only be selected by means of the AID selection. The EF_{DIR} entry shall not contain a path object for application selection.

It is recommended that the application label does not contain more than 32 bytes.

Contents:

- according to TS 31.101 [11].

Coding:

according to TS 31.101 [11].

4.1.2 EF_{ICCID} (ICC Identity)

This EF provides a unique identification number for the ICC.

Contents:

```
according to TS 31.101 [11].

Coding:
according to TS 31.101 [11].
```

4.1.3 EF_{PI} (Preferred Languages)

This EF contains the codes for up to n languages. This information, determined by the user/operator, defines the preferred languages of the user in order of priority. This information may be used by the ME for MMI purposes.

This information may also be used for the screening of Cell Broadcast messages in a preferred language, as follows.

When the CB Message Identifier capability is available, the ME selects only those CB messages the language of which corresponds to an entry in this EF or in EF_{LI} , whichever of these EFs is used (see clause 5.1.1). The CB message language is defined by the Data Coding Scheme (see TS 23.038 [5]) received with the CB message. The ME shall be responsible for translating the language coding indicated in the Data Coding Scheme for the Cell Broadcast Service (as defined in TS 23.038 [5]) to the language coding as defined in ISO 639 [19] if it is necessary to check the language coding in EF_{PL} .

Contents:

according to TS 31.101 [11].

Coding:

- according to TS 31.101 [11].

4.1.4 EF_{ARR} (Access Rule Reference)

This EF contains the access rules for access to the EFs under the master file including this EF. This file is mandatory for the USIM application.

Contents:

- according to TS 31.101 [11].

Coding:

according to TS 31.101 [11].

4.2 Contents of files at the USIM ADF (Application DF) level

The EFs in the USIM ADF contain service and network related information.

4.2.1 EF_{LI} (Language Indication)

This EF contains the codes for one or more languages. This information, determined by the user/operator, defines the preferred languages of the user in order of priority. This information may be used by the ME for MMI purposes. This information may also be used for the screening of Cell Broadcast messages in a preferred language, as follows.

When the CB Message Identifier capability is available, the ME selects only those CB messages the language of which corresponds to an entry in this EF or in EF_{PL} , whichever of these EFs is used (see clause 5.1.1). The CB message language is defined by the Data Coding Scheme (DCS: see TS 23.038 [5]) received with the CB message. The ME shall be responsible for translating the language coding indicated in the Data Coding Scheme for the Cell Broadcast Service (as defined in TS 23.038 [5]) to the language coding as defined in ISO 639 [19] if it is necessary to check the language coding in EF_{PL} .

Identifie	er: '6F 05'	Stru	ucture: transparent		Optional
	SFI: '02'				
Fi	le size: 2n bytes		Update	activity	: low
Access Conditions: READ ALW UPDATE PIN DEACTIVATE ADM ACTIVATE ADM					
Bytes		Description	1	M/O	Length
1 to 2	1 st language code	e (highest pri	ority).	М	2 bytes
3 to 4	2 nd language cod	е		0	2 bytes
	lth .				
2n-1 to 2n	N th language cod	e (lowest pric	ority).	0	2 bytes

Coding

- each language code is a pair of alpha-numeric characters, defined in ISO 639 [19]. Each alpha-numeric character shall be coded on one byte using the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0.

Unused language entries shall be set to 'FF FF'.

4.2.2 EF_{IMSI} (IMSI)

This EF contains the International Mobile Subscriber Identity (IMSI).

Identifie	er: '6F07'	Stru	ucture: transparent		Mandatory
	SFI: '07'				
F	ile size: 9 bytes		Update activity: low		: low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN ADM ADM ADM			
Bytes		Description	า	M/O	Length
1	Length of IMSI			М	1 byte
2 to 9	IMSI	<u> </u>	<u> </u>	М	8 bytes

- Length of IMSI

Contents:

- the length indicator refers to the number of significant bytes, not including this length byte, required for the IMSI.

Coding:

- according to TS 24.008 [9].

- IMSI


Contents:

- International Mobile Subscriber Identity.

Coding:


- this information element is of variable length. If a network operator chooses an IMSI of less than 15 digits, unused nibbles shall be set to 'F'.

Byte 2:



For the parity bit, see TS 24.008 [9].

Byte 3:

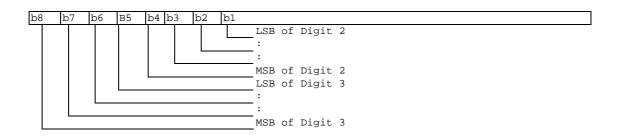

etc.

4.2.3 EF_{Keys} (Ciphering and Integrity Keys)

This EF contains the ciphering key CK, the integrity key IK and the key set identifier KSI.

Identifi	er: '6F08'	Stru	ucture: transparent		Mandatory
SF	I: '08'				
Fi	le size: 33 bytes		Update activity: high		high
Access Conditi READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1	Key set identifier	KSI		M	1 byte
2 to 17	Ciphering key CK	<u> </u>		M	16 bytes
18 to 33	Integrity key IK			М	16 bytes

- Key Set Identifier KSI.

Coding:



- Ciphering key CK.

Coding:

- the least significant bit of CK is the least significant bit of the 17th byte. The most significant bit of CK is the most significant bit of the 2nd byte.
- Integrity key IK.

Coding:

- the least significant bit of IK is the least significant bit of the 33rd byte. The most significant bit of IK is the most significant bit of the 18th byte.

4.2.4 EF_{KevsPS} (Ciphering and Integrity Keys for Packet Switched domain)

This EF contains the ciphering key CKPS, the integrity key IKPS and the key set identifier KSIPS for the packet switched (PS) domain.

Identifie	Identifier: '6F09' Struc		ucture: transparent		Mandatory
	SFI: '09'				
Fi	le size: 33 bytes		Update	activity:	high
Access Conditions: READ PIN UPDATE PIN DEACTIVATE ADM ACTIVATE ADM					
Bytes		Description	า	M/O	Length
1	Key set identifier KSIPS		M	1 byte	
2 to 17	Ciphering key CKPS			M	16 bytes
18 to 33	Integrity key IKPS	6		М	16 bytes

- Key Set Identifier KSIPS.

Coding:



- Ciphering key CKPS.

Coding:

- the least significant bit of CKPS is the least significant bit of the 17th byte. The most significant bit of CKPS is the most significant bit of the 2nd byte.
- Integrity key IKPS.

Coding:

- the least significant bit of IKPS is the least significant bit of the 33rd byte. The most significant bit of IKPS is the most significant bit of the 18th byte.

4.2.5 EF_{PLMNwAcT} (User controlled PLMN selector with Access Technology)

This EF contains the coding for n PLMNs, where n is at least eight. This information is determined by the user and defines the preferred PLMNs of the user in priority order. The first record indicates the highest priority and the nth record indicates the lowest. The EF also contains the Access Technologies for each PLMN in this list. (see TS 23.122 [31])

Identifier: '6F60'		Stru	ucture: transparent		Optional
SFI: '0A'					
File size: 5n	(where n ≥8 by	ytes)	Update	e activity	: low
Access Conditions:	Access Conditions:				
READ		PIN			
UPDATE		PIN			
DEACTIVA	TF	ADM			
ACTIVATE	. –	ADM			
,,,,,,,,,		, , , , , , , , , , , , , , , , , , , ,			
Bytes		Descripti	on	M/O	Length
1 to 3	1 st PLMN (hig	hest priority)		M	3 bytes
4 to 5	1 st PLMN Acc	ess Technol	ogy Identifier	М	2 bytes
6 to 8	2 nd PLMN			М	3 bytes
9 to 10	2 nd PLMN Acc	ess Technol	logy Identifier	М	2 bytes
:		:			
36 to 38	8 th PLMN			M	3 bytes
39 to 40	8 th PLMN Acc	ess Technol	ogy Identifier	М	2 bytes
41 to 43	9 th PLMN			0	3 bytes
44 to 45	9 th PLMN Access Technology Identifier		0	2 bytes	
:		:			
(5n-4) to (5n-2)	N th PLMN (lov			0	3 bytes
(5n-1) to 5n	N th PLMN Acc	ess Technol	ogy Identifier	0	2 bytes

- PLMN

Contents:

- Mobile Country Code (MCC) followed by the Mobile Network Code (MNC).


Coding:

- according to TS 24.008 [9].
- Access Technology Identifier:


Coding:

- 2 bytes are used to select the access technology where the meaning of each bit is as follows:
 - bit = 1: access technology selected;
 - bit = 0: access technology not selected.

Byte5n-1:



Byte 5n:



4.2.6 EF_{HPPLMN} (Higher Priority PLMN search period)

This EF contains the interval of time between searches for a higher priority PLMN (see TS 22.011 [2]).

Identifie	er: '6F31'	Stru	ucture: transparent		Mandatory
	SFI: '12'				
F	ile size: 1 byte		Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDATI	E	ADM			
DEACT	IVATE	ADM			
ACTIVA	TE	ADM			
Bytes		Description	า	M/O	Length
1	Time interval			М	1 byte

- Time interval.

Contents:

the time interval between two searches.

Coding:

the time interval is coded in integer multiples of n minutes. The range is from n minutes to a maximum value. The value '00' indicates that no attempts shall be made to search for any higher priority PLMN. The encoding is:

- '00': No higher priority PLMN search attempts;

- '01': n minutes;

- '02': 2n minutes;

- :

- 'YZ': (16Y+Z)n minutes (maximum value).

- All other values shall be interpreted by the ME as a default period.

For specification of the integer timer interval n, the maximum value and the default period refer to TS 22.011 [2].

4.2.7 EF_{ACMmax} (ACM maximum value)

This EF contains the maximum value of the accumulated call meter. This EF shall always be allocated if EF_{ACM} is allocated.

Identifie	er: '6F37'	Structure: transparent			Optional
Fi	ile size: 3 bytes		Update activity: low		
Access Condition	ons:	DIN			
READ	E	PIN DIN/D	INO		
UPDATE			PIN/PIN2 (fixed during administrative management)		
DEACT	IVATE	ADM	during administrative	manage	Sillerity
ACTIVA	TE	ADM			
Bytes	Description		M/O	Length	
1 to 3	Maximum value			М	3 bytes

- Maximum value.

Contents:


- maximum value of the Accumulated Call Meter (ACM).

Coding:

First byte:

b8	b7	b6	b5	b4	b3	b2	b1
	I		I	I			
2 ²³	2 ²²	2 ²¹	220	2 ¹⁹	2 ¹⁸	2 ¹⁷	2 ¹⁶

Second byte:



Third byte:



For instance, '00' '00' '30' represents 2⁵+2⁴.

All ACM data is stored in the USIM and transmitted over the USIM/ME interface as binary.

ACMmax is not valid, as defined in TS 22.024 [3], if it is coded '000000'.

If a GSM application is present on the UICC and the ACMmax value is to be shared between the GSM and the USIM application this file shall be shared between the two applications.

4.2.8 EF_{UST} (USIM Service Table)

This EF indicates which services are available. If a service is not indicated as available in the USIM, the ME shall not select this service.

Ident	fier: '6F38' Struc		ucture: transparent		Mandatory
	SFI: '04'				
File	e size: X bytes, X >=	1	Update	activity	: low
Access Cond	ditions:				
READ)	PIN			
UPDA	ATE	ADM			
DEAC	CTIVATE	ADM			
ACTI'	VATE	ADM			
Bytes		Description	า	M/O	Length
1	Services no1 to r	n°8		M	1 byte
2	Services n°9 to r	ո°16		0	1 byte
3	Services n°17 to	Services n°17 to n°24		0	1 byte
4	Services n°25 to	Services n°25 to n°32		0	1 byte
etc.					
X	Services no(8X-7	') to n°(8X)		0	1 byte

-Services Contents: Service n°1: Local Phone Book Service n°2: Fixed Dialling Numbers (FDN) Service n°3: Extension 2 Service n°4: Service Dialling Numbers (SDN) Service n°5: Extension3 Service n°6: Barred Dialling Numbers (BDN) Service n°7: Extension4 Outgoing Call Information (OCI and OCT) Service n°8: Incoming Call Information (ICI and ICT) Service n°9: Service n°10: Short Message Storage (SMS) Service n°11: Short Message Status Reports (SMSR) Service n°12: Short Message Service Parameters (SMSP) Service n°13: Advice of Charge (AoC) Capability Configuration Parameters (CCP) Service n°14: Cell Broadcast Message Identifier Service n°15: Service n°16: Cell Broadcast Message Identifier Ranges Service n°17: Group Identifier Level 1 Service n°18: Group Identifier Level 2 Service n°19: Service Provider Name Service n°20: User controlled PLMN selector with Access Technology **MSISDN** Service n°21: Service n°22: Image (IMG) Service n°23: Support of Localised Service Areas (SoLSA) Service n°24: Enhanced Multi-Level Precedence and Pre-emption Service Service n°25: Automatic Answer for eMLPP Service n°26: **RFU** Service n°27: **GSM Access** Service n°28: Data download via SMS-PP Service n°29: Data download via SMS-CB Service n°30: Call Control by USIM Service n°31: MO-SMS Control by USIM Service n°32: **RUN AT COMMAND command** Service n°33: shall be set to '1' **Enabled Services Table** Service n°34: Service n°35: APN Control List (ACL) Service n°36: **Depersonalisation Control Keys** Service n°37: Co-operative Network List Service n°38: GSM security context Service n°39: **CPBCCH Information** Service n°40: Investigation Scan Service n°41: **MExE** Service n°42: Operator controlled PLMN selector with Access Technology Service n°43: **HPLMN** selector with Access Technology Service n°44: Extension 5 Service n°45: PLMN Network Name Service n°46: Operator PLMN List Service n°47: Mailbox Dialling Numbers Service n°48: Message Waiting Indication Status Service n°49: Call Forwarding Indication Status Service n°50: Reserved and shall be ignored Service Provider Display Information Service n°51: Service n°52 Multimedia Messaging Service (MMS) Service n°53 Extension 8 Call control on GPRS by USIM Service n°54 Service n°55 MMS User Connectivity Parameters Service n°56 Network's indication of alerting in the MS (NIA) VGCS Group Identifier List (EF_{VGCS} and EF_{VGCSS}) Service n°xx

The EF shall contain at least one byte. Further bytes may be included, but if the EF includes an optional byte, then it is mandatory for the EF to also contain all bytes before that byte. Other services are possible in the future and will be coded on further bytes in the EF. The coding falls under the responsibility of the 3GPP.

VBS Group Identifier List (EF_{VBS} and EF_{VBSS})

Coding:

Service n°yy


1 bit is used to code each service:

bit = 1: service available;


bit = 0: service not available.

Service available means that the USIM has the capability to support the service and that the service is available for the user of the USIM unless the service is identified as "disabled" in EF_{EST}.
Service not available means that the service shall not be used by the USIM user, even if the USIM has the capability to support the service.

First byte:



Second byte:



etc.

4.2.9 EF_{ACM} (Accumulated Call Meter)

This EF contains the total number of units for both the current call and the preceding calls.

NOTE: The information may be used to provide an indication to the user for advice or as a basis for the calculation of the monetary cost of calls (see TS 22.086 [15]).

Identif	ier: '6F39'	Structure: cyclic			Optional
	SFI: Optional				
Record length: 3 bytes		Update	activity:	high	
Access Condi	ions:				
READ		PIN			
UPDATE PIN/PIN2					
(fixed during administrative management)				ement)	
INCRE	ASE	PIN			
DEAC	ΓΙVAΤΕ	ADM			
ACTIV	ATE	ADM			
Bytes		Description	า	M/O	Length
1 to 3	Accumulated cou	ccumulated count of units M 3 bytes			3 bytes
NOTE: If a SFI is assigned, the recommended value is "1C". However cards may exist					
that indicate another value. Therefore the terminal shall be able to handle other					
valı	ies.				

Accumulated count of units

Contents:

value of the ACM.

Coding:

see the coding of EF_{ACMmax}.

If a GSM application is present on the UICC and the ACM value is to be shared between the GSM and the USIM application this file shall be shared between the two applications.

4.2.10 EF_{GID1} (Group Identifier Level 1)

This EF contains identifiers for particular USIM-ME associations. It can be used to identify a group of USIMs for a particular application.

Identifier: '6F3E'		Stru	ucture: transparent		Optional	
File	e size: 1-n bytes		Update	Update activity: low		
Access Condition READ UPDATI DEACTI ACTIVA	E VATE	PIN ADM ADM ADM				
Bytes	Description		า	M/O	Length	
1 to n	USIM group ident	ifier(s)		0	n bytes	

4.2.11 EF_{GID2} (Group Identifier Level 2)

This EF contains identifiers for particular USIM-ME associations. It can be used to identify a group of USIMs for a particular application.

Identifie	er: '6F3F'	Structure: transparent			Optional
File	File size: 1-n bytes		Update	activity:	low
Access Condition READ UPDAT		PIN ADM			
DEACT ACTIVA		ADM ADM			
Bytes		Description	n	M/O	Length
1 to n	USIM group ident	tifier(s)		0	n bytes

NOTE: The structure of EF_{GID1} and EF_{GID2} is identical. They are provided to allow the network operator to enforce different levels of security dependant on an application.

4.2.12 EF_{SPN} (Service Provider Name)


This EF contains the service provider name and appropriate requirements for the display by the ME.

Identifie	Identifier: '6F46' Stru		ucture: transparent		Optional
File Size: 17 bytes		Update activity: low			
Access Condition	ons:	ALWA	ve		
UPDAT	READ		113		
DEACT	_	ADM ADM			
ACTIVA	TE	ADM			
	T				
Bytes	Description		า	M/O	Length
1	Display Condition			M	1 byte
2 to 17	Service Provider	Name		М	16 bytes

Display Condition

Contents: display condition for the service provider name in respect to the registered PLMN (see TS 22.101[24]).

Coding:

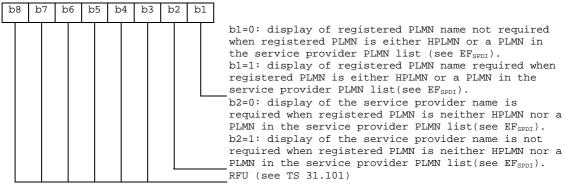

Service Provider Name

Contents:

service provider string

Coding:

the string shall use:

- either the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The string shall be left justified. Unused bytes shall be set to 'FF'.
- or one of the UCS2 code options defined in the annex of TS 31.101 [11].

4.2.13 EF_{PUCT} (Price per Unit and Currency Table)

This EF contains the Price per Unit and Currency Table (PUCT). The PUCT is Advice of Charge related information which may be used by the ME in conjunction with EF_{ACM} to compute the cost of calls in the currency chosen by the subscriber, as specified in TS 22.024 [3]. This EF shall always be allocated if EF_{ACM} is allocated.

Identifie	Identifier: '6F41' Structure: transparent		ucture: transparent		Optional
File size: 5 bytes			Update activity: low		
UPDATE P (f DEACTIVATE A		PIN PIN/P (fixed ADM ADM	IN2 during administrative	manage	ement)
Bytes	Description		า	M/O	Length
1 to 3	Currency code		М	3 bytes	
4 to 5	Price per unit	,			2 bytes

- Currency code

Contents:

the alpha-identifier of the currency code.

Coding:

bytes 1, 2 and 3 are the respective first, second and third character of the alpha identifier. This alpha-tagging shall use the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0.

- Price per unit

Contents:

price per unit expressed in the currency coded by bytes 1-3.

Coding


byte 4 and bits b1 to b4 of byte 5 represent the Elementary Price per Unit (EPPU) in the currency coded by bytes 1-3. Bits b5 to b8 of byte 5 are the decimal logarithm of the multiplicative factor represented by the

absolute value of its decimal logarithm (EX) and the sign of EX, which is coded 0 for a positive sign and 1 for a negative sign.

Byte 4:



Byte 5:



- The computation of the price per unit value is made by the ME in compliance with TS 22.024 [3] by the following formula:

price per unit = EPPU * 10^{EX} .

- The price has to be understood as expressed in the coded currency.

If a GSM application is present on the UICC and the PUCT information is to be shared between the GSM and the USIM application, then this file shall be shared between the two applications.

4.2.14 EF_{CBMI} (Cell Broadcast Message identifier selection)

This EF contains the Message Identifier Parameters which specify the type of content of the cell broadcast messages that the subscriber wishes the UE to accept.

Any number of CB Message Identifier Parameters may be stored in the USIM. No order of priority is applicable.

Identifier: '6F45'		Stru	Structure: transparent		Optional
Fil	e size: 2 n bytes		Update	activity:	low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 to 2	CB Message Ider	ntifier 1		0	2 bytes
3 to 4	CB Message Identifier 2			0	2 bytes
2n-1 to 2n	CB Message Ider	ntifier n		0	2 bytes

- Cell Broadcast Message Identifier Coding:
 - as in TS 23.041 [16], "Message Format on BTS-MS Interface Message Identifier";
 - values listed show the types of message which shall be accepted by the UE;
 - unused entries shall be set to 'FF FF'.

4.2.15 EF_{ACC} (Access Control Class)

This EF contains the assigned access control class(es). The access control class is a parameter to control the access attempts. 15 classes are split into 10 classes randomly allocated to normal subscribers and 5 classes allocated to specific high priority users. For more information see TS 22.011 [2].


Identifie	er: '6F78'	Structure: transparent			Mandatory
	SFI: '06'				
Fi	ile size: 2 bytes		Update	activity	: low
Access Condition	ons:	DIN			
READ	_	PIN			
UPDATI	E	ADM			
DEACTI	IVATE	ADM			
ACTIVA	TE	ADM			
Bytes		Description	1	M/O	Length
1 to 2	Access control cla	asses		М	2 bytes

- Access control classes


Coding:

- each ACC is coded on one bit. An ACC is "allocated" if the corresponding bit is set to 1 and "not allocated" if this bit is set to 0. Bit b3 of byte 1 is set to 0.

Byte 1:



Byte 2:



4.2.16 EF_{FPLMN} (Forbidden PLMNs)

This EF contains the coding for n Forbidden PLMNs (FPLMN). It is read by the ME as part of the USIM initialization procedure and indicates PLMNs which the UE shall not automatically attempt to access.

A PLMN is written to the EF if a network rejects a Location Update with the cause "PLMN not allowed". The ME shall manage the list as follows.

When n FPLMNs are held in the EF, and rejection of a further PLMN is received by the ME from the network, the ME shall modify the EF using the UPDATE command. This new PLMN shall be stored in the nth position, and the existing list "shifted" causing the previous contents of the first position to be lost.

When less than n FPLMNs exist in the EF, storage of an additional FPLMN shall not cause any existing FPLMN to be lost.

Dependent upon procedures used to manage storage and deletion of FPLMNs in the EF, it is possible, when less than n FPLMNs exist in the EF, for 'FFFFFF' to occur in any position. The ME shall analyse all the EF for FPLMNs in any position, and not regard 'FFFFFF' as a termination of valid data.

Identifie	er: '6F7B'	Stru	ucture: transparent		Mandatory
	SFI: '0D'				
File s	File size: n*3 bytes (n>3)			activity:	: low
Access Conditi READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	1	M/O	Length
1 to 3	PLMN 1			M	3 bytes
4 to 6	PLMN 2			М	3 bytes
7 to 9	PLMN 3			М	3 bytes
10 to 12	PLMN 4			М	3 bytes
		•			
(3n-2) to 3n	PLMN n	<u> </u>		0	3 bytes

- PLMN

Contents:

Mobile Country Code (MCC) followed by the Mobile Network Code (MNC).

Coding:

according to TS 24.008 [9].

For instance, using 246 for the MCC and 81 for the MNC and if this is stored in PLMN 3 the contents is as follows:

Bytes 7-9: '42' 'F6' '18'.

If storage for fewer than n PLMNs is required, the unused bytes shall be set to 'FF'.

4.2.17 EF_{LOCI} (Location Information)

This EF contains the following Location Information:

- Temporary Mobile Subscriber Identity (TMSI);
- Location Area Information (LAI);
- Location update status.

See clause 5.2.5 for special requirements when updating EF_{LOCI} .

Identifie	er: '6F7E'	Stru	ucture: transparent		Mandatory
	SFI: '0B'				
Fi	le size: 11 bytes		Update	activity:	high
Access Condition READ UPDAT	E	PIN PIN			
DEACT ACTIVA	—	ADM ADM			
Bytes		Description	า	M/O	Length
1 to 4	TMSI	•		М	4 bytes
5 to 9	LAI			М	5 bytes
10	RFU			М	1 byte
11	Location update	status		М	1 byte


- TMSI

Contents:

Temporary Mobile Subscriber Identity.

Coding:

according to TS 24.008 [9].



- LAI


Contents:

Location Area Information.

Coding:

according to TS 24.008 [9].

Byte 5: first byte of LAI



Location update status

Contents:

status of location update according to TS 24.008 [9].

Coding:

Byte 11:

Bits: b3 b2 b1 0 0 0 : updated. 0 0 1 : not updated. 0 0 : PLMN not allowed. 1 0 : Location Area not allowed. 1 1 1 1 : reserved.

Bits b4 to b8 are RFU (see TS 31.101 [11]).

4.2.18 EF_{AD} (Administrative Data)

This EF contains information concerning the mode of operation according to the type of USIM, such as normal (to be used by PLMN subscribers for 3G operations), type approval (to allow specific use of the ME during type approval procedures of e.g. the radio equipment), cell testing (to allow testing of a cell before commercial use of this cell), manufacturer specific (to allow the ME manufacturer to perform specific proprietary auto-test in its ME during e.g. maintenance phases).

It also provides an indication of whether some ME features should be activated during normal operation as well as information about the length of the MNC, which is part of the International Mobile Subscriber Identity (IMSI).

Identifie	er: '6FAD'	Stru	ucture: transparent		Mandatory
	SFI: '03'				
File	e size: 4+X bytes		Update	activity	: low
Access Conditi	ons:				
READ		ALW			
UPDAT	E	ADM			
DEACT	IVATE	ADM			
ACTIVA	ATE	ADM			
Bytes		Description	1	M/O	Length
1	UE operation mod	de		M	1 byte
2 to 3	Additional informa	ation		M	2 bytes
4	length of MNC in	the IMSI		M	1 byte
5 to 4+X	RFU			0	X bytes

- UE operation mode:

Contents:

mode of operation for the UE

Coding:

Initial value

- '00' normal operation.
- '80' type approval operations.
- '01' normal operation + specific facilities.
- '81' type approval operations + specific facilities.
- '02' maintenance (off line).
- '04' cell test operation.
- Additional information:


Coding:

- specific facilities (if b1=1 in byte 1);

Byte 2 (first byte of additional information):

b8	b7	b6	b5	b4	b3	b2	b1				
								RFU	(see	TS	31.101

Byte 3:



The OFM bit is used to control the Ciphering Indicator as specified in TS 22.101 [24].


- ME manufacturer specific information (if b2=1 in byte 1).
- Length of MNC in the IMSI:

Contents:

The length indicator refers to the number of digits, used for extracting the MNC from the IMSI

Coding:

Byte 4:



4.2.19 Void

4.2.20 EF_{CBMID} (Cell Broadcast Message Identifier for Data Download)

This EF contains the message identifier parameters which specify the type of content of the cell broadcast messages which are to be passed to the USIM.

Any number of CB message identifier parameters may be stored in the USIM. No order of priority is applicable.

Identifie	er: '6F48'	Stru	ucture: transparent		Optional
	SFI: '0E'				
Fi	le size: 2n bytes		Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDAT	E	ADM			
DEACT	IVATE	ADM			
ACTIVA	TE	ADM			
_	T				
Bytes		Description	1	M/O	Length
1 to 2	CB Message Ider	ntifier 1		0	2 bytes
3 to 4	CB Message Ider	ntifier 2		0	2 bytes
2n-1 to 2n	CB Message Ider	ntifier n		0	2 bytes

- Cell Broadcast Message Identifier.

Coding:

- as in TS 23.041 [16]. Values listed show the identifiers of messages which shall be accepted by the UE to be passed to the USIM.

Unused entries shall be set to 'FF FF'.

4.2.21 EF_{ECC} (Emergency Call Codes)

This EF contains emergency call codes.

Identifie	er: '6FB7'	Str	ucture: linear fixed		Mandatory
	SFI: '01'				
Reco	ord size: X+4 bytes	3	Update activity: low		
Access Condition READ UPDAT DEACT ACTIVE	E IVATE	ALW ADM ADM ADM			
Bytes		Description	า	M/O	Length
1 to 3	Emergency Call (Code		М	3 bytes
4 to X+3	Emergency Call (Code Alpha I	dentifier	0	X bytes
X+4	Emergency Servi	ce Category		М	1 byte

- Emergency Call Code.


Contents:

- Emergency Call Code.


Coding:

- the emergency call code is of a variable length with a maximum length of 6 digits. Each emergency call code is coded on three bytes, with each digit within the code being coded on four bits as shown below. If a code of less than 6 digits is chosen, then the unused nibbles shall be set to 'F'.


Byte 1:

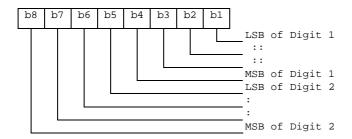

Byte 2:

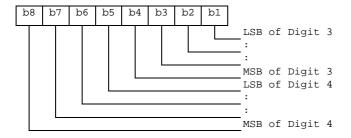

Byte 3:



- Emergency Call Code Alpha Identifier.

Contents:

Information about the dialled emergency number to be displayed to the user.

Coding:

this alpha-tagging shall use

either:

the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The alpha identifier shall be left justified. Unused bytes shall be set to 'FF'.

Or

- one of the UCS2 coded options as defined in the annex of TS 31.101 [11].
- Emergency Service Category.

Contents:

Information to be sent to the network indicating the category of the emergency call.

Coding:

Coding according to 24.008 [9].

4.2.22 EF_{CBMIR} (Cell Broadcast Message Identifier Range selection)

This EF contains ranges of cell broadcast message identifiers that the subscriber wishes the UE to accept.

Any number of CB Message Identifier Parameter ranges may be stored in the USIM. No order of priority is applicable.

Identifier: '0	6F50' Stru	ucture: transparent		Optional
File s	ize: 4n bytes	Update	activity:	low
Access Conditions READ UPDATE DEACTIVA ACTIVATE	PIN PIN TE ADM			
Bytes	Descripti	on	M/O	Length
1 to 4	CB Message Identifier Rar	nge 1	0	4 bytes
5 to 8	CB Message Identifier Rar	nge 2	0	4 bytes
			-	
(4n-3) to 4n	CB Message Identifier Rar	nge n	0	4 bytes

- Cell Broadcast Message Identifier Ranges.

Contents:

- CB Message Identifier ranges:

Coding:

- bytes one and two of each range identifier equal the lower value of a cell broadcast range, bytes three and four equal the upper value of a cell broadcast range, both values are coded as in TS 23.041 [16] "Message Format on BTS-MS Interface - Message Identifier". Values listed show the ranges of messages which shall be accepted by the UE.

Unused entries shall be set to 'FF FF FF FF'.

4.2.23 EF_{PSLOCI} (Packet Switched location information)

This EF contains the following Location Information:

- Packet Temporary Mobile Subscriber Identity (P-TMSI);
- Packet Temporary Mobile Subscriber Identity signature value (P-TMSI signature value);
- Routing Area Information (RAI);
- Routing Area update status.

Identifie	er: '6F73'	Stru	ucture: transparent		Mandatory
	SFI: '0C'				
Fi	le size: 14 bytes		Update activity: high		
Access Condition READ UPDAT DEACT ACTIVE	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 to 4	P-TMSI			М	4 bytes
5 to 7	P-TMSI signature	value		М	3 bytes
8 to13	RAI			М	6 bytes
14	Routing Area upo	late status		М	1 byte

- P-TMSI.

Contents:

Packet Temporary Mobile Subscriber Identity.

Coding:

according to TS 24.008 [9].

Byte 1: first byte of P-TMSI



- P-TMSI signature value.


Contents:

Packet Temporary Mobile Subscriber Identity signature value.

Coding:

according to TS 24.008 [9].

Byte 5: first byte of P-TMSI signature value.



- RAI

Contents:

Routing Area Information.

Coding:

according to TS 24.008 [9].

Byte 8: first byte of RAI



- Routing Area update status.

Contents:

status of routing area update according to TS 24.008 [9].

Coding:

byte 14:

Bits: b3 b2 b1.

0 0 0 : updated. 0 0 1 : not updated.

0 1 0 : PLMN not allowed.

0 1 1 : Routing Area not allowed.

1 1 1 : reserved.

Bits b4 to b8 are RFU (see TS 31.101 [11]).

4.2.24 EF_{FDN} (Fixed Dialling Numbers)

This EF contains Fixed Dialling Numbers (FDN) and/or Supplementary Service Control strings (SSC). In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records at the USIM ADF level. It may also contain an associated alpha-tagging. If this file is present in the USIM, the Enabled Services Table (EF_{EST}) shall also be present.

Identifier	: '6F3B'	Str	ucture: linear fixed		Optional
Record	length: X+14 byt	es	Upd	ate activity:	low
Access Condition	ns:				
READ		PIN			
UPDATE		PIN2			
DEACTI\	/ATE	ADM			
ACTIVAT	Έ	ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier			0	X bytes
X+1	Length of BCD	number/SSC	contents	M	1 byte
X+2	TON and NPI			M	1 byte
X+3 to X+12	Dialling Number	r/SSC String		M	10 bytes
X+13	Capability/Confi	iguration2 Id	entifier	M	1 byte
X+14	Extension2 Rec	ord Identifier	•	M	1 byte

For contents and coding of all data items see the respective data items of the EF_{ADN} (clause 4.4.2.3), with the exception that extension records are stored in the EF_{EXT2} .

By default, destination addresses which are not in EF_{FDN} shall not be allowed on any CS bearer service/teleservice or SMS when FDN is enabled.

For the FDN procedures related to SMS see TS 22.101 [24] and TS 31.111 [12].

NOTE: The value of X (the number of bytes in the alpha-identifier) may be different to the length denoted X in EF_{ADN} .

4.2.25 EF_{SMS} (Short messages)

This EF contains information in accordance with TS 23.040 [6] comprising short messages (and associated parameters) which have either been received by the UE from the network, or are to be used as an UE originated message.

Identifie	er: '6F3C'	Structure: linear fixed			Optional
Recoi	rd length: 176 byte	es	Update	activity	: low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1	Status	•		М	1 byte
2 to 176	Remainder	•		М	175 bytes

- Status.

Contents:

Status byte of the record which can be used as a pattern in the SEARCH RECORD command. For UE originating messages sent to the network, the status shall be updated when the UE receives a status report, or sends a successful SMS Command relating to the status report.

Coding:

b8	b7	b6	b5	b4	b3	b2	b1	
					. I		ļ	
					Х	X	0	free space
					X	X	1	used space
					0	0	1	message received by UE from network; message read
					0	1	1	message received by UE from network; message to be read
					1	1	1	UE originating message; message to be sent
								RFU (see TS 31.101 [11])

b8	b7	b6	b5	b4	b3	b2	b1	
			ļ.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		<u> </u>			
			X	X		Ö	1	UE originating message; message sent to the network:
			0	0	1	0	1	Status report not requested
			0	1	1	0	1	Status report requested but not (yet) received;
			1	0	1	0	1	Status report requested, received but not stored in EF-SMSR;
			1	1	1	0	1	<pre>Status report requested, received and stored in EF-SMSR;</pre>
								RFU (see TS 31.101 [11])

Remainder.

Contents:

This data item commences with the TS-Service-Centre-Address as specified in TS 24.011 [10]. The bytes immediately following the TS-Service-Centre-Address contain an appropriate short message TPDU as specified in TS 23.040 [6], with identical coding and ordering of parameters.

Coding:

according to TS 23.040 [6] and TS 24.011 [10]. Any TP-message reference contained in an UE originated message stored in the USIM, shall have a value as follows:

Value of the TP-message-reference:

message to be sent: 'FF'.

message sent to the network: the value of TP-Message-Reference used in the

message sent to the network.

Any bytes in the record following the TPDU shall be filled with 'FF'.

It is possible for a TS-Service-Centre-Address of maximum permitted length, e.g. containing more than 18 address digits, to be associated with a maximum length TPDU such that their combined length is 176 bytes. In this case the ME shall store in the USIM the TS-Service-Centre-Address and the TPDU in bytes 2-176 without modification, except for the last byte of the TPDU, which shall not be stored.

4.2.26 EF_{MSISDN} (MSISDN)

This EF contains MSISDN(s) related to the subscriber. In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records at the USIM ADF level. It may also contain an associated alpha-tagging.

Identifie	r: '6F40'	Structure: linear fixed			Optional	
Record	length: X+14 byte	S	Update activity: low			
Access Condition READ UPDATE DEACTIVAT	/ATE		PIN PIN/ADM (fixed during administrative management) ADM			
Bytes		Description	n	M/O	Length	
1 to X	Alpha Identifier			0	X bytes	
X+1	Length of BCD nu	imber/SSC contents		М	1 byte	
X+2	TON and NPI			М	1 byte	
X+3 to X+12	Dialling Number/S	SSC String		М	10 bytes	
X+13	Capability/Config	uration2 Ide	ntifier	М	1 byte	
X+14	Extension5 Reco	rd Identifier		М	1 byte	

For contents and coding of all data items see the respective data items of EF_{ADN}.

If the USIM stores more than one MSISDN number and the ME displays the MSISDN number(s) within the initialisation procedure then the one stored in the first record shall be displayed with priority.

NOTE: The value of X (the number of bytes in the alpha-identifier) may be different to the length denoted X in EF_{ADN} .

4.2.27 EF_{SMSP} (Short message service parameters)

This EF contains values for Short Message Service header Parameters (SMSP), which can be used by the ME for user assistance in preparation of mobile originated short messages. For example, a service centre address will often be common to many short messages sent by the subscriber.

The EF consists of one or more records, with each record able to hold a set of SMS parameters. The first (or only) record in the EF shall be used as a default set of parameters, if no other record is selected.

To distinguish between records, an alpha-identifier may be included within each record, coded on Y bytes.

The SMS parameters stored within a record may be present or absent independently. When a short message is to be sent from the UE, the parameter in the USIM record, if present, shall be used when a value is not supplied by the user.

Identifier: '6F42'		Str	Structure: linear fixed		Optional	
Record lea	ngth: 28+Y byt	es	Upda	low		
Access Conditions: READ UPDATE DEACTIVA ACTIVATE		PIN PIN ADM ADM				
Bytes		Descript	ion	M/O	Length	
1 to Y	Alpha-Identific	er		0	Y bytes	
Y+1	Parameter Inc	dicators		М	1 byte	
Y+2 to Y+13	TP-Destinatio	n Address		М	12 bytes	
Y+14 to Y+25	TS-Service Co	entre Addres	S	М	12 bytes	
Y+26	TP-Protocol lo	dentifier		М	1 byte	
Y+27	TP-Data Codi	ng Scheme		М	1 byte	
Y+28	TP-Validity Pe	eriod	·	М	1 byte	

Storage is allocated for all of the possible SMS parameters, regardless of whether they are present or absent. Any bytes unused, due to parameters not requiring all of the bytes, or due to absent parameters, shall be set to 'FF'.

- Alpha-Identifier.

Contents:

Alpha Tag of the associated SMS-parameter.

Coding

see clause 4.4.2.3 (EF_{ADN}).

NOTE: The value of Y may be zero, i.e. the alpha-identifier facility is not used. By using the command GET RESPONSE the ME can determine the value of Y.

- Parameter Indicators.

Contents:

each of the default SMS parameters which can be stored in the remainder of the record are marked absent or present by individual bits within this byte.

Coding:

allocation of bits:

bit number	Parameter indicated.
1	TP-Destination Address.
2	TS-Service Centre Address
3	TP-Protocol Identifier.
4	TP-Data Coding Scheme.
5	TP-Validity Period.
6	reserved, set to 1.
7	reserved, set to 1.
8	reserved, set to 1.
Bit value	Meaning.
0	Parameter present.
1	Parameter absent.

- TP-Destination Address.

Contents and Coding:

as defined for SM-TL address fields in TS 23.040 [6].

- TP-Service Centre Address.

Contents and Coding:

as defined for RP-Destination address Centre Address in TS 24.011 [10].

- TP-Protocol Identifier.

Contents and Coding:

as defined in TS 23.040 [6].

- TP-Data Coding Scheme. Contents and Coding: as defined in TS 23.038 [5].

- TP-Validity Period.

Contents and Coding:

as defined in TS 23.040 [6] for the relative time format.

4.2.28 EF_{SMSS} (SMS status)

This EF contains status information relating to the short message service.

The provision of this EF is associated with EF_{SMS}. Both files shall be present together, or both absent from the USIM.

Identifier: '6F43'		Stru	ucture: transparent		Optional
File	e size: 2+X bytes		Update	activity	: low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 Last Used TP-MR		М	1 byte		
2	SMS "Memory Ca	ap. Exceeded	d" Not. Flag	М	1 byte
3 to 2+X	RFU	•	·	0	X bytes

Last Used TP-MR.

Contents:

 the value of the TP-Message-Reference parameter in the last mobile originated short message, as defined in TS 23.040 [6].

Coding:

- as defined in TS 23.040 [6].
- SMS "Memory Capacity Exceeded" Notification Flag.

Contents

- this flag is required to allow a process of flow control, so that as memory capacity in the UE becomes available, the Network can be informed. The process for this is described in TS 23.040 [6].

Coding:

b1=1 means flag unset; memory capacity available;

b1=0 means flag set;

b2 to b8 are reserved and set to 1.

4.2.29 EF_{SDN} (Service Dialling Numbers)

This EF contains special service numbers (SDN) and/or the respective supplementary service control strings (SSC). In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records at the USIM ADF level. It may also contain associated alpha-tagging.

Identifie	ier: '6F49' Stru		cture: linear fixed		Optional	
Record	d length: X+14 byt	es	Updat	Update activity: low		
Access Condition	ons:					
READ		PIN				
UPDAT	E	ADM				
DEACT	IVATE	ADM				
ACTIVA	TE	ADM				
Bytes		Description	า	M/O	Length	
1-X	Alpha identifier			0	X bytes	
X+1	Length of BCD no	ımber/SSC d	contents	М	1 bytes	
X+2	TON and NPI		М	1 byte		
X+3 to X+12	Dialling Number/SSC String		М	10 bytes		
X+13	Capability/Configuration Identifier		М	1 byte		
X+14	Extension3 Reco	rd Identifier		М	1 byte	

For contents and coding of all data items see the respective data items of the EF_{ADN} (clause 4.4.2.3), with the exception that extension records are stored in the EF_{EXT3} .

NOTE: The value of X (the number of bytes in the alpha-identifier) may be different to the length denoted X in EF_{ADN} .

4.2.30 EF_{EXT2} (Extension2)

This EF contains extension data of an FDN (see FDN in 4.2.24).

Identifie	er: '6F4B' Structure: linear fix		ucture: linear fixed		Optional
Reco	ord length: 13 byte:	S	Update	activity	: low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN2 ADM ADM			
Bytes		Description	า	M/O	Length
1	Record type			М	1 byte
2 to 12	Extension data		·	М	11 bytes
13	Identifier			М	1 byte

For contents and coding see clause 4.4.2.4 (EF_{EXT1}).

4.2.31 EF_{EXT3} (Extension3)

This EF contains extension data of an SDN (see SDN in 4.2.29).

Identifie	er: '6F4C'	Structure: linear fixed			Optional
Reco	ord length: 13 byte	S	Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDAT	E	ADM			
DEACTIVATE		ADM			
ACTIVA	TE	ADM			
Bytes		Description	ı	M/O	Length
1	Record type			М	1 byte
2 to 12	Extension data			М	11 bytes
13	Identifier			М	1 byte

For contents and coding see clause 4.4.2.4 (EF_{EXT1}).

4.2.32 EF_{SMSR} (Short message status reports)

This EF contains information in accordance with TS 23.040 [6] comprising short message status reports which have been received by the UE from the network.

Each record is used to store the status report of a short message in a record of EF_{SMS} . The first byte of each record is the link between the status report and the corresponding short message in EF_{SMS} .

Identifie	er: '6F47'	Structure: linear fixed			Optional
Reco	ord length: 30 bytes	S	Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDAT	E	PIN			
DEACT	IVATE	ADM			
ACTIVA	TE	ADM			
	1				
Bytes		Description	า	M/O	Length
1	SMS record identifier			M	1
2 to 30	SMS status repor	t		М	29 bytes

- SMS record identifier.

Contents:

- this data item identifies the corresponding SMS record in EF_{SMS}, e.g. if this byte is coded '05' then this status report corresponds to the short message in record #5 of EF_{SMS}.

Coding:

- '00' empty record;
- '01' 'FF' record number of the corresponding SMS in EF_{SMS}.
- SMS status report:

Contents:

 this data item contains the SMS-STATUS-REPORT TPDU as specified in TS 23.040 [6], with identical coding and ordering of parameters.

Coding:

- according to TS 23.040 [6]. Any bytes in the record following the TPDU shall be filled with 'FF'.

4.2.33 EF_{ICI} (Incoming Call Information)

If service n°9 is "available", this file shall be present.

This EF is located within the USIM application. The incoming call information can be linked to the phone book stored under $DF_{TELECOM}$ or to the local phone book within the USIM. The EF_{ICI} contains the information related to incoming calls.

The time of the call and duration of the call are stored in this EF. This EF can also contain associated alpha identifier that may be supplied with the incoming call. In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records at the USIM ADF level. The structure of this EF is cyclic, so the contents shall be updated only after a call is disconnected.

If CLI is supported and the incoming phone number matches a number stored in the phone book the incoming call information is linked to the corresponding information in the phone book. If the incoming call matches an entry but is indicated as hidden in the phone book the link is established but the information is not displayed by the ME if the code for the secret entry has not been verified. The ME shall not ask for the secret code to be entered at this point.

Optionally the ME may store the link to phone book entry in the file, so that it does not need to look again for a match in the phone book when it reuses the entry. But the ME will have to check that the incoming call number still exits in the linked phone book entry, as the link might be broken (entry modified). When not used by the ME or no link to the phone book has been found, this field shall be set to 'FFFFFF'.

The first byte of this link is used to identify clearly the phone book location either global (i.e. under $DF_{TELECOM}$) or local (i.e. USIM specific). To allow the reuse of the referring mechanism in further implementation of the phonebook under discussion, this byte can be used to indicate those.

For the current version of the phone book, the phone book entry is identified as follows:

- the record number in the EF_{PBR} which indicates the EF_{ADN} containing the entry;
- the record number inside the indicated EF_{ADN}.

The structure of EF_{ICI} is shown below. Coding scheme is according to EF_{ADN}

Structure of EFICI

Identifier: '6F80'			Structure: Cyclic		Optional
	SFI: '14'				
Record I	ength: X+28 byt	es	Update :	activity:	high
Access Condition	is:	PIN			
UPDATE		PIN			
DEACTIV	ATF	ADM			
ACTIVAT	=	ADM			
	_				
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier			0	X bytes
X+1	Length of BCD	number cont	ents	М	1 byte
X+2	TON and NPI			М	1 byte
X+3 to X+12	Incoming Call N	lumber		М	10 bytes
X+13	Capability/Conf	iguration2 Ide	entifier	М	1 byte
X+14	Extension5 Record Identifier			М	1 byte
X+15 to X+21	Incoming call date and time (see detail 1)			М	7 bytes
X+22 to X+24	Incoming call duration (see detail 2)			М	3 bytes
X+25	Incoming call st	atus (see de	tail 3)	М	1 byte
X+26 to X+28	Link to phone b	ook entry (se	ee detail 4)	М	3 bytes

NOTE: When the contents except incoming call status are invalid, they are filled with 'FF'.


Detail 1 Coding of date and time.

Content


the date and time are defined by the ME.

Coding:


it is according to the extended BCD coding from Byte1 to Byte 7. The first 3 bytes show year, month and day (yy.mm.dd). The next 3 bytes show hour, minute and second (hh.mm.ss). The last Byte 7 is Time Zone. The Time Zone indicates the difference, expressed in quarters of an hour, between the local time and GMT. Bit 4 in Byte 7 represents the algebraic sign of this difference (0: positive, 1: negative). If the terminal does not support the Time Zone, Byte 7 shall be "FF". Byte X+15: Year.

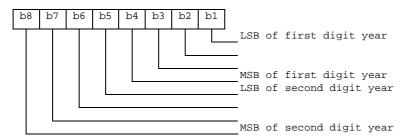


Byte X+16: Month

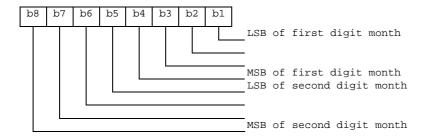


Byte X+17: Day

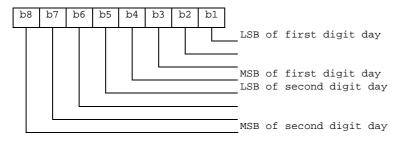


Byte X+18: Hour

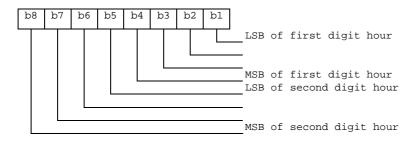


Byte X+19: Minute

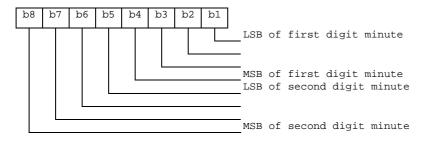

Byte X+20: Second

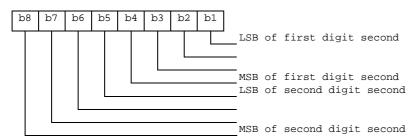


Byte X+21: Time Zone

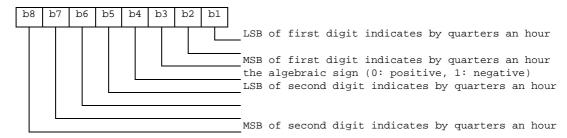


Detail 2 Coding of call duration.

Call duration is indicated by second.


Byte X+22:



Byte X+23:




Byte X+24:



For instance, '00' '00' '30' represents 2^5+2^4 .

Detail 3 Coding of Call status.

Byte X+25:




Detail 4 Link to phone book entry

For the current implementation of the phone book the following coding applies:

Phone book reference.

Byte X+26:



EF_{PBR} record number:

- Byte X+27: Hexadecimal value.

EF_{ADN} record number:

- Byte X+28: Hexadecimal value.

4.2.34 EF_{OCI} (Outgoing Call Information)

If service n°8 is "available", this file shall be present.

This EF is located within the USIM application. The outgoing call information can be linked to the phone book stored under $DF_{TELECOM}$ or to the local phone book within the USIM. The EF_{OCI} contains the information related to outgoing calls.

The time of the call and duration of the call are stored in this EF. It may also contain associated alpha identifier. In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records at the USIM ADF level. The structure of this file is cyclic, so the contents shall be updated only after a call is disconnected.

If the dialled phone number matches a number stored in the phone book the outgoing call information might be linked to the corresponding information in the phone book. The dialled number may match with a hidden entry in the phone book. If the dialled number matches a hidden entry in the phone book the link is established but the information related to the phone book entry is not displayed by the ME, if the hidden code has not been verified. The ME shall not perform hidden code verification at this point.

Optionally, the ME may store the link to phone book entry in the file, so that it does not need to look again for a match in the phone book when it reuses the entry. But the ME will have to check that the outgoing call number still exists in the linked phone book entry, as the link might be broken (entry modified). When not used by the ME or no link to the phone book has been found, this field shall be set to 'FFFFFF'.

Coding scheme is according to EF_{ICI}.

Structure of EFoci

Identifier	: '6F81' Structure		Structure: Cyclic		Optional
	SFI: '15'				
Record	length: X+27 byt	es	Upda	te activity:	high
Access Condition	ns:				
READ		PIN			
UPDATE		PIN			
DEACTIV	'ATE	ADM			
ACTIVAT	E	ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier			0	X bytes
X+1	Length of BCD	number/SSC	contents	М	1 byte
X+2	TON and NPI			М	1 byte
X+3 to X+12	Outgoing Call N	lumber/SSC	String	М	10 bytes
X+13	Capability/Conf	Capability/Configuration2 Identifier			1 byte
X+14	Extension5 Record Identifier			М	1 byte
X+15 to X+21	Outgoing call date and time			М	7 bytes
X+22 to X+24	Outgoing call duration			М	3 bytes
X+25 to X+27	Link to Phone E	Book Entry		М	3 bytes

NOTE: When the contents are invalid, they are filled with 'FF'.

4.2.35 EF_{ICT} (Incoming Call Timer)

If service n°9 is "available", this file shall be present.

This EF contains the accumulated incoming call timer duration value for the current call and previous calls. The EF is USIM specific and resides within the USIM application.

This file should have only one entry.


Structure of EFICT

Identifie	er: '6F82'	;	Structure: cyclic		Optional
Reco	ord length: 3 bytes	3	Update	activity:	high
Access Condition	ons:				
READ		PIN			
UPDATI	E	PIN/P	IN2		
		(fixed	during administrative	manage	ement)
INCREA	ASE	ΡΙΝ	•		,
DEACT	IVATE	ADM	ADM		
ACTIVATE		ADM			
Bytes		Description	า	M/O	Length
1 to 3	Accumulated call timer value			М	3 bytes


Coding:

Accumulated call timer value is indicated by second.

Byte 1:



Byte 2:



Byte 3:



For example, '00' '00' '30' represents 2^5+2^4 .

4.2.36 EF_{OCT} (Outgoing Call Timer)

If service n°8 is "available", this file shall be present.

This EF contains the accumulated outgoing call timer duration value for the current call and previous calls. The EF is USIM specific and resides within the USIM application. The contents of this EF shall be updated only after a call is disconnected. The coding of this EF is the same as EF_{ICT} .

This file should have only one entry.

Structure of EF_{oct}

Identifie	er: '6F83'	Structure: cyclic			Optional
Reco	ord length: 3 bytes	3	Update activity: high		
Access Condition READ UPDATE		PIN PIN/Pi (fixed	IN2 during administrative	manage	ement)
INCREASE DEACTIVATE ACTIVATE		PIN ADM ADM	gaming daminion and	manage	so.i.,
Bytes		Description	า	M/O	Length
1 to 3	Accumulated call	Accumulated call timer value		М	3 bytes

4.2.37 EF_{EXT5} (Extension5)

This EF contains extension data of EF_{ICI} , EF_{OCI} and EF_{MSISDN} of the USIM application.

Identifier: '6F4E'		Str	Structure: linear fixed		Optional
Reco	ord length: 13 byte	S	Update	activity	: low
Access Condition	ons:	DIN			
READ	_	PIN			
UPDAT	_	PIN			
DEACTIVATE		ADM			
ACTIVA	TE	ADM			
Bytes		Description	า	M/O	Length
1	Record type			M	1 byte
2 to 12	Extension data	•	•	M	11 bytes
13	Identifier			М	1 byte

For contents and coding see EF_{EXT1} .

4.2.38 EF_{CCP2} (Capability Configuration Parameters 2)

This EF contains parameters of required network and bearer capabilities and terminal configurations associated with a call established using a fixed dialling number, an MSISDN, a service dialling number, an incoming call, an outgoing call or an MBDN. It is referred by EF_{FDN} , EF_{MSISDN} , EF_{SDN} , EF_{ICI} , EF_{OCI} , EF_{MBDN} and EF_{CFIS} at USIM ADF level.

Identifie	er: '6F4F'	Str	ucture: linear fixed		Optional
SFI	: '16'				
Record	length: X bytes, X	≥15	Upd	ate activity	: low
Access Condition READ UPDATI DEACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 to X	Bearer capability	information e	element	М	X bytes

- Bearer capability information elements.
 - Contents and Coding:
 - see TS 24.008 [9]. The Information Element Identity (IEI) shall be excluded, i.e. the first byte of the EF_{CCP2} record shall be Length of the bearer capability contents.
 - unused bytes are filled with 'FF'.

4.2.39 EF_{eMLPP} (enhanced Multi Level Precedence and Pre-emption)

This EF contains information about priority levels and fast call set-up conditions for the enhanced Multi Level Precedence and Pre-emption service that can be used by the subscriber.

Identifie	er: '6FB5'	Stru	Structure: transparent		Optional
Fi	ile size: 2 bytes		Update	activity	: low
Access Condition READ UPDATE		PIN ADM			
DEACTI ACTIVA		ADM ADM			
Bytes		Description	า	M/O	Length
1	Priority levels	•		М	1 byte
2	Fast call set-up co	onditions		М	1 byte

- Priority levels.


Contents:

- the eMLPP priority levels subscribed to.

Coding:

- each eMLPP priority level is coded on one bit. Priority levels subscribed to have their corresponding bits set to 1. Priority levels not subscribed to have their corresponding bits set to 0. Bit b8 is reserved and set to 0.

Byte 1:

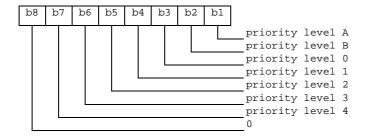

NOTE: Priority levels A and B can not be subscribed to (see TS 22.067 [5] for details).

EXAMPLE 1: If priority levels 0, 1 and 2 are subscribed to, EF_{eMLPP} shall be coded '1C'.

- Fast call set-up conditions.


Contents:

for each eMLPP priority level, the capability to use a fast call set-up procedure.

Coding

each eMLPP priority level is coded on one bit. Priority levels for which fast call set-up is allowed have their corresponding bits set to 1. Priority levels for which fast call set-up is not allowed have their corresponding bits set to 0. Bit b8 is reserved and set to 0.

Byte 2: fast call set-up condition for:

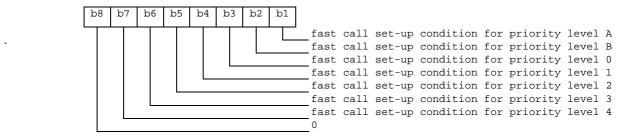

EXAMPLE 2: If fast call set-up is allowed for priority levels 0, and 1, then byte 2 of EF_{eMLPP} is coded '0C'.

4.2.40 EF_{AAeM} (Automatic Answer for eMLPP Service)

This EF contains those priority levels (of the Multi Level Precedence and Pre-emption service) for which the ME shall answer automatically to incoming calls.

Identifie	er: '6FB6'	Structure: transparent			Optional
F	ile size: 1 byte		Update	activity: low	
Access Condition READ UPDATI DEACTI ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	n .	M/O	Length
1	Automatic answe			М	1 byte

- Automatic answer priority levels.


Contents:

- for each eMLPP priority level, the capability for the mobile station to answer automatically to incoming calls (with the corresponding eMLPP priority level).

Coding:

- each eMLPP priority level is coded on one bit. Priority levels allowing an automatic answer from the mobile station have their corresponding bits set to 1. Priority levels not allowing an automatic answer from the mobile station have their corresponding bits set to 0. Bit b8 is reserved and set to 0.

Byte 1:

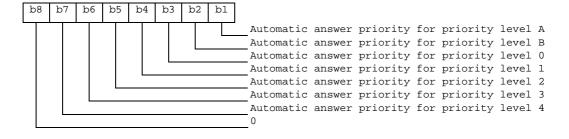

EXAMPLE: If automatic answer is allowed for incoming calls with priority levels A, 0 and 1, then EF_{AAeM} is coded '0D'.

4.2.41 Void

4.2.42 EF_{Hiddenkey} (Key for hidden phone book entries)

This EF contains the hidden key that has to be verified by the ME in order to display the phone book entries that are marked as hidden. The hidden key can consist of 4 to 8 digits.

Identifie	er: '6FC3'	Stru	ucture: transparent		Optional
F	ile size: 4 bytes		Update	activity:	: low
Access Condition	ons:				
READ		PIN			
UPDAT	E	PIN			
DEACT	IVATE	ADM			
ACTIVA	TE	ADM			
Bytes		Description	า	M/O	Length
1 to 4	Hidden Key			M	4 bytes

- Hidden Key.

Coding:

- the hidden key is coded on 4 bytes using BCD coding. The minimum number of digits is 4. Unused digits are padded with 'F'.

NOTE: The phone book entries marked as hidden are not scrambled by means of the hidden key. The are stored in plain text in the phone book.

4.2.43 Void

4.2.44 EF_{BDN} (Barred Dialling Numbers)

This EF contains Barred Dialling Numbers (BDN) and/or Supplementary Service Control strings (SSC). In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records. It may also contain an associated alpha-tagging. As the BDN service relies on the Call Control feature, BDN shall only be available if Call Control is available. If this file is present in the USIM, the Enabled Services Table (EF_{EST}) shall also be present.

Identifier:	Identifier: '6F4D'		ucture: linear fixed		Optional
Record	length: X+15 byt	es	J	Jpdate activity:	low
Access Condition	ns:				
READ		PIN			
UPDATE		PIN2			
DEACTIV	'ATE	ADM			
ACTIVAT	E	ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier			0	X bytes
X+1	Length of BCD	number/SSC	contents	M	1 byte
X+2	TON and NPI			M	1 byte
X+3 to X+12	Dialling Number	pialling Number/SSC String			10 bytes
X+13	Capability/Confi	apability/Configuration Identifier			1 byte
X+14	Extension4 Rec	ord Identifier	r	M	1 byte
X+15	Comparison Me	thod Pointer	,	M	1 byte

For contents and coding of all data items, except for the Comparison Method Pointer, see the respective data items of EF_{ADN} , with the exception that extension records are stored in the EF_{EXT4} . The Comparison Method Pointer refers to a record number in EF_{CMI} .

NOTE: The value of X (the number of bytes in the alpha-identifier) may be different to the length denoted X in EF_{ADN} .

4.2.45 EF_{EXT4} (Extension4)

This EF contains extension data of a BDN/SSC.

Identifie	er: '6F55'	Str	ucture: linear fixed		Optional
Reco	ord length: 13 byte:	S	Update	activity	: low
Access Condition		PIN PIN2			
DEACT ACTIVA	IVE	ADM ADM			
Bytes		Description	า	M/O	Length
1	Record type			М	1 byte
2 to 12	Extension data	•		М	11 bytes
13	Identifier	<u> </u>	·	M	1 byte

For contents and coding see clause $4.4.2.4 \text{ EF}_{\text{EXT1}}$.

4.2.46 EF_{CMI} (Comparison Method Information)

This EF contains the list of Comparison Method Identifiers and alpha-tagging associated with BDN entries (see EF_{BDN}). This EF shall be present if EF_{BDN} is present.

Identifier	: '6F58'	Str	ucture: linear fixed		Optional
Record	length: X+1 byte	es	Update	activity:	low
Access Condition	ns:				
READ		PIN			
UPDATE		ADM			
DEACTIV	'ATE	ADM			
ACTIVAT	Έ	ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier			М	X bytes
X+1	Comparison Me	thod Identific	er	М	1 byte

- Alpha Identifier.

Contents:

Alpha-tagging of the associated Comparison Method Identifier.

Coding:

Same as the alpha identifier in EF_{ADN}.

- Comparison Method Identifier.

Contents:

- this byte describes the comparison method which is associated with a BDN record. Its interpretation is not specified but it shall be defined by the card issuers implementing the BDN feature on their USIMs.

Coding:

- binary; values from 0 to 255 are allowed. The default coding 255 is reserved for empty field.

4.2.47 EF_{EST} (Enabled Services Table)

This EF indicates which services are enabled. If a service is not indicated as enabled in this table, the ME shall not select the service.

Identifie	er: '6F56'	Structure: transparent Optio		Optional	
	SFI: '05'				
Fi	ile size: X bytes		Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDAT	E	PIN2			
DEACT	IVATE	ADM			
ACTIVA	TE	ADM			
Bytes		Description	า	M/O	Length
1	Services n°1 to n	°8		М	1 byte
2	Services n°9 to n°16		0	1 byte	
etc.			·		
Х	Services n°(8X-7) to n°(8X)		0	1 byte

-Services

Contents: Service n°1: Fixed Dialling Numbers (FDN)

Service n°2: Barred Dialling Numbers (BDN)

Service n°3: APN Control List (ACL)


The EF shall contain at least one byte. Further bytes may be included, but if the EF includes an optional byte, then the EF shall also contain all bytes before that byte. Other services are possible in the future. The coding falls under the responsibility of the 3GPP.

Coding:

- 1 bit is used to code each service:
 - bit = 1: service activated;
 - bit = 0: service deactivated.
 - Unused bits shall be set to '0'.

A service which is listed in this table is enabled if it is indicated as available in the USIM Service Table (UST) and indicated as activated in the Enabled Services Tables (EST) otherwise this service is, either not available or disabled.

First byte:



etc.

4.2.48 EF_{ACL} (Access Point Name Control List)

This EF contains the list of allowed APNs (Access Point Names). If this file is present in the USIM, the Enabled Services Table (EF_{EST}) shall also be present.

Identifier	: '6F57'	Stru	ucture: transparent		Optional
File siz	ze: X bytes (X>1))	Update a	activity:	low
Access Condition READ UPDATE DEACTIV ACTIVAT	ATE	PIN PIN2 ADM ADM			
Bytes		Description	on	M/O	Length
1	Number of APN	S		М	1 byte
2 to X	APN TLVs			М	X-1 byte

For contents and coding of APN-TLV values see TS 23.003 [25]. The tag value of the APN-TLV shall be 'DD'. "Network provided APN" is coded with a TLV object of length zero.

4.2.49 EF_{DCK} (Depersonalisation Control Keys)

This EF provides storage for the de-personalization control keys associated with the OTA de-personalization cycle of TS 22.022 [27].

Identifie	er: '6F2C'	Stru	ucture: transparent		Optional
Fil	e Size: 16 bytes		Update	activity	: low
Access Condition READ UPDATI DEACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 to 4	8 digits of networl	k de-persona	alization control key	M	4 bytes
5 to 8	8 digits of network control key	k subset de-p	personalization	М	4 bytes
9 to 12	8 digits of service control key	digits of service provider de-personalization ontrol key			4 bytes
13 to 16	8 digits of corpora key	ate de-persoi	nalization control	М	4 bytes

Empty control key bytes shall be coded 'FFFFFFF'.

4.2.50 EF_{CNL} (Co-operative Network List)

This EF contains the Co-operative Network List for the multiple network personalization services defined in TS 22.022 [27].

Identifie	er: '6F32'	Structure: transparent			Optional
Fi	le size: 6n bytes		Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDAT	E	ADM			
DEACT	IVATE	ADM			
ACTIVA	TE.	ADM			
Bytes		Description	า	M/O	Length
1 to 6	Element 1 of co-c	ent 1 of co-operative net list		М	6 bytes
6n-5 to 6n	Element n of co-c	perative net	list	0	6 bytes

- Co-operative Network List.

Contents:


- PLMN network subset, service provider ID and corporate ID of co-operative networks.

Coding:


- For each 6 byte list element.

Bytes 1 to 3: PLMN (MCC + MNC): according to TS 24.008 [9].


Byte 4:

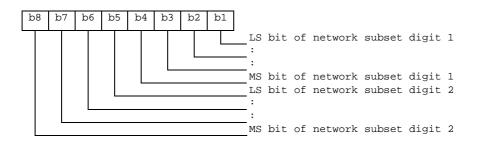

Byte 5:

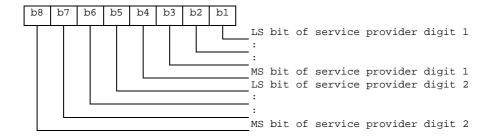

Byte 6:

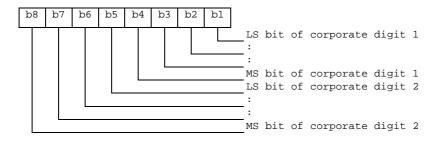

- Empty fields shall be coded with 'FF'.
- The end of the list is delimited by the first MCC field coded 'FFF'.

4.2.51 EF_{START-HFN} (Initialisation values for Hyperframe number)

This EF contains the values of $START_{CS}$ and $START_{PS}$ of the bearers that were protected by the keys in EF_{KEYS} or EF_{KEYSPS} at release of the last CS or PS RRC connection. These values are used to control the lifetime of the keys (see TS 33.102 [13]).

Identifie	er: '6F5B'	Structure: transparent			Mandatory
	SFI: '0F'				
Fi	ile size: 6 bytes		Update	activity:	high
Access Condition READ UPDATI DEACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 to 3	START _{CS}			M	3 bytes
4 to 6	START _{PS}	•		M	3 bytes

- START_{CS}

Contents: Initialisation value for Hyperframe number – CS domain.

Coding: The LSB of START_{CS} is stored in bit 1 of byte 3. Unused nibbles are set to 'F'.

- START_P

Contents: Initialisation value for Hyperframe number – PS domain.

Coding: As for START_{CS}.

4.2.52 EF_{THRESHOLD} (Maximum value of START)

This EF contains the maximum value of $START_{CS}$ or $START_{PS}$. This value is used to control the lifetime of the keys (see TS 33.102 [13]).

Identifie	er: '6F5C'	Structure: transparent			Mandatory
	SFI: '10'				
F	ile size: 3 bytes		Upda	ate activity:	low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN ADM ADM ADM			
Bytes		Description	າ	M/O	Length
1 to 3	Maximum value o	of START _{CS} of	or START _{PS} .	М	3 bytes

Maximum value of START_{CS} or START_{PS}.
 Coding: As for START_{CS}

4.2.53 EF_{OPLMNwACT} (Operator controlled PLMN selector with Access Technology)

This EF contains the coding for n PLMNs where n is determined by the operator. This information is determined by the operator and defines the preferred PLMNs in priority order. The first record indicates the highest priority and the nth record indicates the lowest. The EF also contains the Access Technologies for each PLMN in this list. (see TS 23.122 [31])

Identifier: '6	6F61'	Stru	ucture: transparent		Optional
SFI: '11'					
File size: 5n	(where n ≥8 b	ytes)	Upda	ate activity	: low
Access Conditions:					
READ		PIN			
UPDATE		ADM			
DEACTIVA	TE	ADM			
ACTIVATE		ADM			
Bytes	Description			M/O	Length
1 to 3		1 st PLMN (highest priority)			3 bytes
4 to 5	1 st PLMN Acc	1 st PLMN Access Technology Identifier		M	2 bytes
:		:			
36 to 38	8 th PLMN			М	3 bytes
39 to 40	8 th PLMN Acc	ess Technol	ogy Identifier	М	2 bytes
41 to 43	9 th PLMN			0	3 bytes
44 to 45	9 th PLMN Access Technology Identifier		0	2 bytes	
:		:			
(5n-4) to (5n-2)	N th PLMN (lov	vest priority)		0	3 bytes
(5n-1) to 5n	N th PLMN Acc	cess Technol	ogy Identifier	0	2 bytes

- PLMN.

Contents

- Mobile Country Code (MCC) followed by the Mobile Network Code (MNC).

Coding:

- according to TS 24.008 [9].
- Access Technology Identifier: Coding:
 - See EF_{PLMNwACT} for coding.

4.2.54 EF_{HPLMNwAcT} (HPLMN selector with Access Technology)

The HPLMN Selector with access technology data field shall contain the HPLMN code, or codes together with the respected access technology in priority order (see TS 23.122 [31]).

Identifier: '6	6F62'	Stru	ıcture: Transparent		Optional
9	SFI: '13'				
File size:	5n (n ≥ 1) byte	es	Update	activity	: low
Access Conditions:	:				
READ		PIN			
UPDATE		ADM			
DEACTIVA	TE	ADM			
ACTIVATE		ADM			
Bytes		Descripti	on	M/O	Length
1 to 3	1 st PLMN (hig	hest priority)		M	3 bytes
4 to 5	1 st PLMN Acc	ess Technol	ogy Identifier	M	2 bytes
6 to 8	2 nd PLMN			0	3 bytes
9 to 10	2 nd PLMN Acc	cess Technol	logy Identifier	0	2 bytes
:		:	•		
(5n-4) to (5n-2)	n th PLMN (low	est priority)		0	3 bytes
(5n-1) to 5n	n th PLMN Acc	ess Technol	ogy Identifier	0	2 bytes

- PLMN

Contents:

Mobile Country Code (MCC) followed by the Mobile Network Code (MNC).

Coding:

according to TS 24.008 [47].

- Access Technology:

Contents: The Access Technology of the HPLMN that the ME will assume when searching for the HPLMN, in priority order. The first Access Technology in the list has the highest priority.

Coding

- See EF_{PLMNwACT} for coding.

4.2.55 EF_{ARR} (Access Rule Reference)

This EF contains the access rules for files located under the USIM ADF in the UICC. If the security attribute tag '8B' is indicated in the FCP it contains a reference to a record in this file.

Structure of EF_{ARR} at ADF-level

Identifie	er: '6F06'	Stru	ucture: Linear fixed		Mandatory
	SFI: '17'				
Reco	ord Length: X bytes	3	Update	te activity: low	
Access Condition READ UPDATI DEACTI ACTIVA	E IVATE	ALW ADM ADM ADM			
Bytes		Description	า	M/O	Length
1 to X	Access Rule TLV	data objects	3	М	X bytes

This EF contains one or more records containing access rule information according to the reference to expanded format as defined in ISO/IEC 7816-9 [26]. Each record represents an access rule. Unused bytes in the record are set to 'FF'.

If the card cannot access EF_{ARR} , any attempt to access a file with access rules indicated in this EF_{ARR} shall not be granted.

4.2.56 Void

4.2.57 EF_{NETPAR} (Network Parameters)

This EF contains information concerning the cell frequencies

Network Parameter storage may reduce the extent of the terminal search of FDD, TDD or GSM carriers when selecting a cell. The network parameters stored in the USIM shall be in accordance with the procedures specified in this clause.

The RF carrier frequency information is stored on 2 bytes and coded on 16 bits starting from 0,0 MHz. Each increment of the 16 bit value is an increment of 200 kHz in frequency. This allows the exact channel frequency to be stored in this data field making it independent of any band information. It is up to the terminal to associate the indicated frequency with a particular band, e.g. GSM 900, GSM 1800 etc. This means that a range from 0 to 13,1 GHz can be covered, with the resolution of 200 kHz. The frequency indicated is always the terminal receiver carrier frequency.

The EF provides a minimum storage capacity of 46 bytes in order to provide the capability of storing at least two cell information TLV objects, e.g. GSM/FDD or FDD/TDD in its minimum configuration, i.e. the terminal can rely on the required memory space for storing at least two cell information lists offering 8 GSM neighbour carrier frequencies and 8 Intra/Inter frequencies, respectively. In what configuration the available memory actually is being used is up to the terminal.

A terminal shall ignore a TLV object or the value of a carrier frequency which is beyond its capabilities, i.e. an FDD only terminal shall ignore the GSM related frequency information. When updating this file, the terminal shall update it with the current values available in the terminal. Updating of this file shall start from the beginning of the file. The terminal need not respect the structure of any information previously stored, i.e. an FDD only terminal may overwrite the GSM parameters stored in this file by another terminal.

The GSM cell information constructed TLV object contains the information of the BCCH channel frequency that the terminal is currently camped on, indicated by tag '80'. The constructed TLV object also contains an indication of up to 32 neighbour BCCH carrier frequencies indicated by tag '81'. In order to store a complete set of GSM network parameters, a total of 72 bytes is required. The terminal shall convert the BCCH channel information, as specified in TS 44.018 [28], received from the network into the corresponding frequency before storing it in the USIM.

The FDD cell information constructed TLV object contains the scrambling code information for the intra frequency carrier, tag '80', and the inter frequency scrambling codes, tag '81'. The intra frequency carrier information may contain up to 32 scrambling codes (m) while there is a limitation of the number of inter frequency scrambling codes (n1, n2, n3). The number of inter frequencies that can be indicated is limited to three and the total amount of scrambling codes for the inter frequencies is limited to 32 (n1+n2+n3 <= 32), i.e. if only one inter frequency carrier is indicated, it can contain up to 32 scrambling codes. If two or more inter frequency carriers are indicated, a total of 32 scrambling codes can be provided. How the information is split between the inter frequency carriers is determined by the terminal. In order to store a complete set of FDD cell information a total of 146 bytes is required. The terminal shall convert the UARFCN information, as specified in 25.101 [33], received from the network into the corresponding frequency before storing it in the USIM.

The TDD cell information constructed TLV object has the same structure as the FDD cell information TLV object.

NOTE: Currently there is no inter frequency cell information required for the TDD case.

Identifie	er: '6FC4'	Stru	ucture: transparent		Mandatory
File s	size: X >= 46 bytes	S	Update	activity:	high
Access Condition READ UPDATI DEACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 - X	TLV object(s) cor information	taining GSM	/FDD/TDD cell	0	

- EF_{NETPAR} Cell Information tags

Description	Value	Information Element size bytes
GSM Cell Information Tag	'A0'	1
Camping Frequency Tag	'80'	1
Camping Frequency Information		2
Neighbour Frequency Tag	'81'	1
Neighbour Frequency Information		2*m (8 <= m <= 32)
FDD Cell Information Tag	'A1'	1
Intra Frequency Information Tag	'80'	1
Scrambling code Information		2*m (8 <= m <= 32)
Inter Frequency Information Tag	'81'	1
Scrambling code information		2*(n1+n2+n3) (8 <= n1+n2+n3 <= 32)
TDD Frequency information Tag	'A2'	1
Intra Frequency Information Tag	'80'	1
Cell parameters ID		2*m (8 <= m <= 32)
Inter Frequency Information Tag	'81'	1
Cell parameters ID		2*(n1+n2+n3) (8 <= n1+n2+n3 <= 32)

- GSM Cell Information, if tag 'A0' is present in this EF the content of this TLV is as follows:

Description	Value	M/O	Length
GSM Cell Information Tag	'A0"	M	1
Length	'4+ (2+2*m) (<=70) '	М	1
Current camped cell BCCH frequency information tag	'80'	M	1
Length	'02'	M	1
Current camped BCCH frequency		M	2
Neighbour Cell BCCH Frequency information tag	'81'	0	1
Length	2*m (=< 32)	0	1
Neighbour BCCH carrier frequencies		0	2*m (8 <= m <= 32)

- FDD Cell Information. If tag 'A1' is present in this EF the content of this TLV is as follows:

Description	Value	M/O	Length
FDD Cell Information Tag	'A1'	М	1
Length	4+(2*m)+(4+2*n1	М	1
)+(4+2*n2)+(4+2*		
	n3) (<=144)		
FDD Intra Frequency information tag	'80'	M	1
Length	2+2*m	М	1
Intra Frequency carrier frequency		M	2
Intra Frequency scrambling codes		M	2*m
			(8 <= m <= 32)
FDD Inter Frequency information tag	'81'	0	1
(see NOTE 1)			
Length	2+2*n (NOTE 2)	0	1
Inter Frequency carrier frequencies		0	2
Inter Frequency scrambling codes		0	2*n (NOTE 2)

NOTE 1: This TLV object may occur up to 3 times within the constructed TLV object depending how many inter frequencies are indicated

NOTE 2: n is in this case n1, n2 or n3, 8 <= (n1+n2+n3)<=32

- TDD Cell Information: If tag 'A2' is present in this EF the content of this TLV is as follows:

Description	Value	M/O	Length
TDD Cell Information Tag	'A2'	М	1
Length	4+(2*m)+(4+2*n1)+(4+2*n2)+(4+2* n3) (<=144)	М	1
TDD Intra Frequency information tag	'80'	M	1
Length	2+2*m	M	1
Intra Frequency carrier frequency		M	2
Intra Frequency scrambling codes		М	2*m (8 <= m <= 32)
TDD Inter Frequency information tag (see NOTE 1)	'81'	0	1
Length	2+2*n (NOTE 2)	0	1
Inter Frequency carrier frequencies		0	2
Inter Frequency scrambling codes		0	2*n (NOTE 2)

NOTE 1: This TLV object may occur up to 3 times within the constructed TLV object depending how many inter frequencies are indicated

NOTE 2: n is in this case n1, n2 or n3, 8 <= (n1+n2+n3)<=32

4.2.58 EF_{PNN} (PLMN Network Name)

This EF contains the full and short form versions of the network name for the registered PLMN. The ME shall use these versions in place of its own versions of the network name for the PLMN (stored in the ME's memory list), and also in place of the versions of the network name received when registered to the PLMN, as defined by TS 24.008 [9].

The first record in this EF is used for the default network name when registered to the HPLMN. Subsequent records are to be used for other network names.

Identifier:	'6FC5'	Structure: linear fixed			Optional
	SFI: '19'				
Record le	ngth: X bytes; X	≥ 3	Update activity: low		
Access Condition READ UPDATE ACTIVATI DEACTIV	E	ALWA ADM ADM ADM	YS		
Bytes		Description	on	M/O	Length
1 to X	Network name	TLV objects		М	X bytes

- Network name TLV objects.

The content and coding (Full name for network and Short name for network) is defined below, where the fields within the objects are defined in TS 24.008[9]:

Coding of the Network name TLV objects

Length	Description	Status
1 byte	Full name for network IEI	М
	(This shall be the same as that used in the MM	
	information message).	
1 byte	Length of Full name for network Name contents	М
Y bytes	Full name for network contents (Octets 3 to n of	М
·	network name information element)	
1 byte	Short name for network IEI	0
	(This shall be the same as that used in the MM	
	information message).	
1 byte	Length of Short name for network	C1
Z bytes	Short name for network contents (Octets 3 to n	C1
_	of network name information element)	
C1: this field	shall be present if the short name for network IEI is a	oresent

Unused bytes shall be set to 'FF'.

4.2.59 EF_{OPL} (Operator PLMN List)

This EF contains a prioritised list of Location Area Information (LAI) identities that are used to associate a specific operator name contained in EF_{PNN} with the LAI. The ME shall use this EF in association with the EF_{PNN} in place of any network name stored within the ME's internal list and any network name received when registered to the PLMN, as defined by TS 24.008 [9].

If the EF_{PNN} is not present then this file shall not be present.

Identifier:	'6FC6'	St	ructure: linear fixed		Optional
	SFI: '1A'				
Record len	gth: X bytes, X >	>= 8	Upda	ate activity:	low
Access Condition	s:	4114/	AV/0		
READ UPDATE		ALW. ADM	AYS		
	A T C				
DEACTIV	=	ADM			
ACTIVAT	E	ADM			
Bytes	Description		M/O	Length	
1 to 7	Location Area Identity		М	7 bytes	
8	PLMN Network	Name Reco	ord Identifier	M	1 byte

Location Area Identity

Contents:

Location Area Information, this comprises of the MCC, MNC and LAC

Coding:

PLMN: according to TS 24.008 [9]

A BCD value of 'D' in any of the MCC and/or MNC digits shall be used to indicate a "wild" value for that corresponding MCC/MNC digit

LAC: according to 3G TS 24.008 [9]

Two values for the LAC are stored in order to allow a range of LAC values to be specified for a given PLMN. A value of '0000' stored in bytes 4 to 5 and a value of 'FFFE' stored in bytes 6 to 7 shall be used to indicate the entire range of LACs for the given PLMN. In the case where only a single LAC value is to be specified then the value stored in bytes 4 to 5 shall be identical to the value stored in bytes 6 to 7 for the given PLMN. If a range of LAC values are to be specified, then the value stored in bytes 4 to 5 shall be the start of the LAC range and the value stored in bytes 6 to 7 shall be the end of the LAC range for the given PLMN.

- PLMN Network Name Record Identifier

Contents:

Identifier of operator name to be displayed

Coding:

A value of '00' indicates that the name is to be taken from other sources, see TS 22.101 [24]

A value in the range '01' to 'FE' indicates the record number in EF_{PNN} that shall be displayed as the registered PLMN name

NOTE: The intent of this file is to provide exceptions to the other sources of a network name. Care should be taken not to introduce too many PLMN entries. An excessive number of entries could result in a longer initialisation period.

4.2.60 EF_{MBDN} (Mailbox Dialling Numbers)

This EF contains dialling numbers to access mailboxes associated with Voicemail, Fax, Electronic Mail and other messages. It may also contain associated alpha-tags for each supported mailbox. Each dialling number shall be

associated with a message waiting indication group type using EF_{MBI} (see TS 23.038 [5] for message waiting indication group types).

This EF is mandatory if EF_{UST} indicates that the Mailbox Dialling Numbers service is available.

Identifier	: '6FC7'	Str	ucture: linear fixed		Optional					
Record	length: X+14 byt	es	Update activity: low							
Access Condition	ns:									
READ		PIN								
UPDATE		PIN/A	PIN/ADM							
		(fixed	(fixed during administrative management)							
DEACTIV	'ATE	ÀDΜ	ADM							
ACTIVAT	Έ	ADM	ADM							
Bytes		Description	on	M/O	Length					
1 to X	Alpha Identifier			0	X bytes					
X+1	Length of BCD	number/SSC	contents	M	1 byte					
X+2	TON and NPI			М	1 byte					
X+3 to X+12	Dialling Numbe	r/SSC conte	nts	M	10 bytes					
X+13	Capability/Conf	iguration2 ld	entifier	M	1 byte					
X+14	Extension 6 Re	cord Identifie	er	М	1 byte					

For contents and coding of all data items see the respective data items of the EF_{ADN} (clause 4.4.2.3), with the exception that extension records are stored in the EF_{EXT6} and with the exception that Capability/Configuration parameters are stored in the EF_{CCP2} .

NOTE: The value of X (the number of bytes in the alpha-identifier) may be different to the length denoted X in EF_{ADN} .

4.2.61 EF_{EXT6} (Extension6)

This EF contains extension data of an MBDN (see MBDN in 4.2.58).

Identifie	er: '6FC8'	Str	Structure: linear fixed Option					
Reco	ord length: 13 byte	S	Update activity: low					
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN/Al (fixed ADM ADM	DM during administrative	manage	ement)			
Bytes		Description	า	M/O	Length			
1	Record type			М	1 byte			
2 to 12	Extension data	•		М	11 bytes			
13	Identifier			М	1 byte			

For contents and coding, see clause 4.4.2.4 (EF_{EXT1}).

4.2.62 EF_{MBI} (Mailbox Identifier)

This EF contains information to associate mailbox dialling numbers in EF_{MBDN} with a message waiting indication group type and subscriber profile (as defined in TS 23.097 [36]). A message waiting indication group type may either be Voicemail, Fax, Electronic Mail or Other (as defined in TS 23.038 [5] for Data Coding Scheme).

This EF contains as many records as there are subscriber profiles (shall be record to subscriber profile). Each record contains references to mailbox dialling numbers in EF_{MBDN} (one reference for each message waiting indication group type).

This EF is mandatory if EF_{UST} indicates that the Mailbox Dialling Numbers service is available.

Identifier:	'6FC9'	Str	ucture: linear fixed		Optional			
Record le	ngth: X bytes, X:	>=4	Update activity: low					
Access Condition READ UPDATE DEACTIV ACTIVAT	ATE		PIN/ADM (fixed during administrative management) ADM					
Bytes		Description	on	M/O	Length			
1	Mailbox Dialling	Number Ide	ntifier – Voicemail	M	1 byte			
2	Mailbox Dialling	Number Ide	ntifier – Fax	М	1 byte			
3	Mailbox Dialling Mail	Number Ide	entifier – Electronic	М	1 byte			
4	Mailbox Dialling	Number Ide	ntifier – Other	M	1byte			

- Mailbox Dialling Number Identifier (message waiting group type = Voicemail, Fax, Electronic Mail or Other). Contents:

Identifies the mailbox dialling number to be associated with message waiting type.

Coding:

'00' – no mailbox dialling number associated with message waiting indication group type.

'xx' – record number in EF_{MBDN} associated with message waiting indication group type.

4.2.63 EF_{MWIS} (Message Waiting Indication Status)

This EF contains the status of indicators that define whether or not a Voicemail, Fax, Electronic Mail or Other message is waiting (as defined in TS 23.038 [5] for message waiting indication group types). The ME uses the status after reactivation to determine whether or not to display the respective message-waiting indication on its display.

This EF contains as many records as there are subscriber profiles (shall be record to subscriber profile) as defined in TS 23.097 [36] for MSP.

Identifier: '6	FCA'	Stru	ucture: Linear fixed		Optional		
Record leng	th: X bytes, X :	>= 5	Update	activity: I	high		
Access Conditions:	:						
READ		PIN					
UPDATE		PIN					
DEACTIVA	TE	ADM					
ACTIVATE		ADM					
_	T						
Bytes		Descript	ion	M/O	Length		
1	Message Wai	ting Indicator	Status	М	1 byte		
2	Number of Vo	icemail Mess	sages Waiting	М	1 byte		
3	Number of Fa	x Messages	Waiting	1 byte			
4	Number of Ele	ectronic Mail	Messages Waiting	М	1 byte		
5	Number of Ot	her Message	s Waiting	М	1 byte		

Message Waiting Indication Status

Contents:

Indicates the status of the message-waiting indication.

Coding:

The indicator status for each indicator type is 1 bit long and set as follows:

bit = 1: Set Indication Active bit = 0: Set Indication Inactive



Number of Voicemail Messages Waiting

Contents:

Contains the number of voicemail messages waiting (see TS 23.040 [6]).

Coding:

Binary.

Number of Fax Messages Waiting

Contents:

Contains the number of fax messages waiting (see TS 23.040 [6]).

Coding:

Binary.

Number of Electronic Mail Messages Waiting

Contents:

Contains the number of electronic mail messages waiting (see TS 23.040 [6])

Coding:

Binary.

Number of Other Messages Waiting

Contents

Contains the number of other messages waiting (see TS 23.040 [6]).

Coding:

Binary.

4.2.64 EF_{CFIS} (Call Forwarding Indication Status)

This EF contains the status of indicators that are used to record whether call forward is active. The ME uses the status after re-activation to determine whether or not to display the respective Call Forwarding indicator on its display.

This EF contains as many records as there are subscriber profiles (shall be record to subscriber profile) as defined in TS 23.097 [36] for MSP.

Identifier: '6	FCB'	Stru	Structure: Linear Fixed					
Record I	ength: 16 byte:	S	Up	low				
Access Conditions:								
READ		PIN						
UPDATE		PIN						
DEACTIVA	TE	ADM						
ACTIVATE		ADM						
Bytes		Descript	ion	M/O	Length			
1	MSP number			М	1 byte			
2	CFU indicator	status		M	1 byte			
3	Length of BCI) number		M	1 byte			
4	TON and NPI			М	1 byte			
5 to 14	Dialling Numb	er		M	10 bytes			
15	Capability/Cor	nfiguration2 l	dentifier	M	1 byte			
16	Extension 7 R	ecord Identif	ier	M	1 byte			

NOTE: For contents and coding of data items not detailed below, see the respective data items of EF_{ADN} (clause 4.4.2.3), Capability/Configuration2 Identifier and Extension 7 Record Identifier.

MSP number:

Contents:

The MSP number contains the Profile Identity of the subscriber profile. The Profile Identity shall be between 1 and 4 as defined in TS 23.097 [36] for MSP.

Coding:

Binary.

CFU indicator status:

Contents:


Indicates the status of the call forward unconditional indicator. Service code = 21 (CFU) or 002 (for CFU part of all CF), as defined in TS 22.030 [4]

Coding:

The indicator status for each indicator type is 1 bit long and is set as follows:

bit = 1: Set indication active

bit = 0: Set indication inactive.

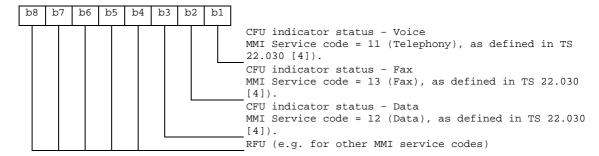

4.2.65 EF_{EXT7} (Extension7)

This EF contains extension data of a CFIS (Call Forwarding Indication Status - see 4.2.64).

Identifi	er: '6FCC'	Str	ucture: linear fixed	Optional		
	ord length: 13 byte		Update	activity		
1100	ord lerigin. To byte	3	Opuaio	activity	. 10W	
Access Condit	ions:					
READ		PIN				
UPDAT	ΓΕ	PIN				
DEACT	ΓΙVATE	ADM				
ACTIV	ATE	ADM				
Bytes		Description	า	M/O	Length	
1	Record type			М	1 byte	
2 to 12	Extension data			М	11 bytes	
13	Identifier			М	1 byte	

For contents and coding see clause 4.4.2.4 (EF_{EXT1}).

4.2.66 EF_{SPDI} (Service Provider Display Information)

This EF contains information regarding the service provider display i.e. the service provider PLMN list.

Identifie	er: '6FCD'	Str	ucture: transparent Optional					
	SFI: '1B'							
F	ïle size: x bytes		Update activity: low					
Access Condition READ UPDAT DEACT ACTIVE	E IVATE	PIN ADM ADM ADM						
Bytes		Description	า	M/O	Length			
1 to x	TLV object(s) cor information	taining Serv	ice Provider	М	x bytes			

Tag Value	Tag Description
'A3'	Service provider display information Tag
'80'	Service provider PLMN list tag

The service provider display information object is a constructed TLV.

- Service provider PLMN list

Contents:

This TLV contains a list of n PLMNs in which the Service Provider Name shall be displayed, as defined in clause 4.2.12 (EF_{SPN}).

Coding:

Description	M/O	Length
Service provider PLMN list tag	M	1 byte
Length (see note)	M	x bytes
1 st PLMN entry	M	3 bytes
2 nd PLMN entry	0	3 bytes
3 rd PLMN entry	0	3 bytes
n th PLMN entry	0	3 bytes
Note: the length is 3*n bytes, where n denotes the be coded on one or more bytes.	e number of PLMN entries. The	length can

Each PLMN is coded as follows:

Mobile Country Code (MCC) followed by the Mobile Network Code (MNC) according to TS 24.008 [9]. In case a PLMN entry is not used, it shall be set to 'FF FF FF'.

4.2.67 EF_{MMSN} (MMS Notification)

If service n°52 is "available", this file shall be present.

This EF contains information in accordance with 3GPP TS 23.140 [38] comprising MMS notifications (and associated parameters) which have been received by the UE from the network.

Identifie	er: "6FCE"	Str	ucture: Linear fixed		Optional		
Reco	rd length: 4+X byte	es	Update activity: low				
Access Condit	ions:						
READ	PIN						
UPDATE	PIN						
DEACTIVA	TE ADM						
ACTIVATE	ADM						
Bytes		Descriptio	n	M/O	Length		
1 to 2	MMS Status			М	2 bytes		
3	MMS Implement	ation		М	1 byte		
4 to X+3	MMS Notification	1		М	X bytes		
X+4	Extension file red	cord number		М	1 byte		

- MMS Status

Content:

The status bytes contain the status information of the notification.

Coding:

b1 indicates whether there is valid data or if the location is free. b2 indicates whether the MMS notification has been read or not. Bits b3-b4 of the first byte indicate the MM retrieval, MM rejection, or MM forwarding status, Bits b5-b8 of the first byte and the entire second byte are reserved for future use.

First byte:

k	80	b7	b6	b5	b4	b3	b2	b1	
					X	X	X	0	I Free space
					Х	Х	Х	1	Used space
				Х	Х	0	1	Notification not read	
					Х	Х	1	1	Notification read
					0	0	Х	1	MM not retrieved
					0	1	Х	1	MM retrieved
					1	0	Х	1	MM rejected
					1	1	Х	1	MM forwarded
									Reserved for future use

Second byte:

	b8	b	7	b	6	b	5	b	4	b	3	b:	2	b	1					
Į.									•		•		•			Reserve	d	for	future	use

- MMS Implementation

Contents:

The MMS Implementation indicates the used implementation type, e.g. WAP.

Coding:

Allocation of bits:

Bit number Parameter indicated

- 1 WAP implementation of MMS
- 2-8 Reserved for future use

Bit value Meaning

0 Implementation not supported.

1 Implementation supported.

- MMS Notification

Contents:

The MMS Notification contains the MMS notification.

Coding

The MMS Notification is coded according to the MMS Implementation as indicated in Byte 3.

Any unused byte shall be set to 'FF'.

- Extension file record number

Contents:

- extension file record number. This byte identifies the number of a record in the EF_{EXT8} containing extension data for the notification information. The use of this byte is optional. If it is not used it shall be set to 'FF'.

Coding:

- binary.

4.2.68 EF_{EXT8} (Extension 8)

If service n°53 is "available", this file shall be present.

This EF contains extension data of a MMS Notification (Multimedia Messaging Service - see 4.2.67).

Identifie	er: '6FCF'	Sti	ructure: linear fixed		Optional
Record length: X+2 bytes Update		activity: low			
Access Condit READ UPDAT DEACT ACTIV	ΓΕ ΓΙVATE	PIN PIN ADM ADM			
Bytes		Descriptio	n	M/O	Length
1	Record type	•		M	1 byte
2 to X+1	Extension data			М	X bytes
X+2	Identifier	•		M	1 byte

The structure of this EF is identical to the structure of EF_{EXT1} (see clause 4.4.2.4).

- Record type.

Contents:

type of the record, see clause 4.4.2.4

Coding:

according to the "additional data" type

Extension data.

Contents:

additional data (MMS notification extension)

Coding:

the first byte of the extension data gives the number of bytes of the remainder of the MMS notification in this record. The following bytes contain the extension of the MMS notification.

- Identifier.

Contents:

identifier of the next extension record (in EXT8) to enable longer storage of information.

Coding:

record number of next record. 'FF' identifies the end of the chain.

4.2.69 EF_{MMSICP} (MMS Issuer Connectivity Parameters)

If service n°52 is "available", this file shall be present.

This EF contains values for Multimedia Messaging Connectivity Parameters as determined by the issuer, which can be used by the ME for MMS network connection. This file may contain one or more sets of Multimedia Messaging Issuer Connectivity Parameters. The first set of Multimedia Messaging Issuer Connectivity Parameters is used as the default set. Each set of Multimedia Messaging Issuer Connectivity Parameters may consist of one or more Interface to Core Network and Bearer information TLV objects, but shall contain only one MMS implementation TLV object, one MMS Relay/Server TLV object and one Gateway TLV object. The order of the Interface to Core Network and Bearer information TLV objects in the MMS Connectivity TLV object defines the priority of the Interface to Core Network and Bearer information, with the first TLV object having the highest priority.

Identifier: '6FD0'		Structure: Transparent	Optional		
File Size: X ₁ ++ X _n bytes		Upo	Update activity: low		
Access Conditions: READ UPDATE	PIN ADM				
DEACTIVATE ACTIVATE	ADM ADM				
Bytes		Description		Length	
1 to X ₁	MMS Conne object	MMS Connectivity Parameters TLV object		X₁ bytes	
$X_1+1 \text{ to } X_1+X_2$	MMS Conne object	MMS Connectivity Parameters TLV object		X ₂ bytes	
$X_1++X_{n-1}+1$ to X_1++X_n	MMS Conne object	ectivity Parameters TLV	0	X _n bytes	

- MMS Connectivity Parameters tags

Description	Tag Value
MMS Connectivity Parameters Tag	'AB'
MMS Implementation Tag	"80"
MMS Relay/Server Tag	"81"
Interface to Core Network and Bearer Information Tag	'82'
GatewayTag	'83'

- MMS Connectivity Parameters contents

Description Value M/O Length (bytes

MMS Connectivity Parameters Tag	'AB'	M	1
Length	Note 1	M	Note 2
MMS Implementation Tag	'80'	M	1
Length	1	М	1
MMS Implementation Information		M	1
MMS Relay/Server Tag	'81'	M	1
Length	X	M	Note 2
MMS Relay/Server Address	-	M	Χ
1 st Interface to Core Network and	'82'	M	1
Bearer Information Tag (highest priority)			
Length	Y1	M	Note 2
1 st Interface to Core Network and		M	Y1
Bearer information			
2 nd Interface to Core Network and	'82'	M	1
Bearer Information Tag			
Length	Y2	M	Note 2
2 nd Interface to Core Network and		M	Y2
Bearer information			
N th Interface to Core Network and	'82'	M	1
Bearer Information Tag (lowest priority)			
Length	Y3	M	Note 2
N th Interface to Core Network and		M	Y3
Bearer information			
GatewayTag	'83'	0	1
Length	Z	0	Note 2
Gateway Information		0	Z
Note 1: This is the total size of the con	structed TLV object		
Note 2: The length is coded according	to ISO/IEC 8825 [35	5]	

- MMS Implementation Tag '80'

See section 4.2.67 for contents and coding.

- MMS Relay/server Tag '81'

Contents:

The MMS relay/server contains the address of the associated MMS relay/server.

Coding

The MMS relay/server address is coded according to the guideline provided in 3GPP TS 23.140 [38].

- Interface to Core Network and Bearer Information Tag '82'

Contents:

The Interface to Core Network and Bearer Information may contain the following information to set up the bearer: Bearer, Address, Type of address, Speed, Call type, Authentication type, Authentication id, Authentication password.

Coding:

The coding is according to the guideline provided in 3GPP TS 23.140 [38].

- Gateway Tag '83'

Contents:

The Gateway may contain the following information; Address , Type of address, Port, Service, Authentication type , Authentication id and Authentication password.

Coding:

The coding is according to the guideline provided in 3GPP TS 23.140 [38].

Unused bytes shall be set to 'FF'.

An Example for the coding of these parameters can be found in Annex J.2.

4.2.70 EF_{MMSUP} (MMS User Preferences)

If service n°52 is "available", this file shall be present.

This EF contains values for Multimedia Messaging Service User Preferences, which can be used by the ME for user assistance in preparation of mobile multimedia messages (e.g. default values for parameters that are often used).

Identifier: '6FD1'	5	Structure: Linear Fixed	cture: Linear Fixed Optional	
Record Length: X bytes Upd		Upda	ate activity: low	
Access Conditions: READ UPDATE DEACTIVATE ACTIVATE	PIN PIN ADM ADM			
Bytes	De	escription	M/O	Length
1 to X	MMS User Preference TLV Objects		М	X bytes

- MMS User Preference tags

Description	Tag Value
MMS Implementation Tag	'80'
MMS User preference profile name Tag	'81'
MMS User Preference information Tag	'82'

MMS User Preference information

Description	Value	M/O	Length (bytes)
MMS Implementation Tag	'80'	M	1
Length	1	M	Note
MMS Implementation information	1	M	1
MMS User preference profile name Tag	'81'	M	1
Length	Χ	M	Note
MMS User profile name		M	X
MMS User Preference information Tag	'82'	M	1
Length	Υ	M	Note
MMS User Preference information		M	Y
Note: The length is coded according to	ISO/IEC 8825 [35]		

- MMS Implementation Tag '80'

For contents and coding see 4.2.67

- MMS User preference profile name Tag '81'

Contents:

Alpha tagging of the MMS user preference profile.

Coding:

this alpha-tagging shall use either:

- the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The alpha identifier shall be left justified.

or:

- one of the UCS2 coded options as defined in the annex of TS 31.101 [11].

- MMS User Preference information Tag '82'

Contents:

The following information elements may be coded; Sender Visibility, Delivery Report, Read-Reply, Priority, Time of Expiry and Earliest Delivery Time.

Coding:

Depending upon the MMS implementation as indicated in Tag '80'.

An Example for the coding of these parameters can be found in Annex J.1.

4.2.71 EF_{MMSUCP} (MMS User Connectivity Parameters)

If service n°52 and n°55 are "available", this file shall be present.

This EF contains values for Multimedia Messaging Connectivity Parameters as determined by the user, which can be used by the ME for MMS network connection. This file may contain one or more sets of Multimedia Messaging User Connectivity Parameters. Each set of Multimedia Messaging User Connectivity Parameters may consist of one or more Interface to Core Network and Bearer information TLV objects, but shall contain only one MMS implementation TLV object, one MMS Relay/Server TLV object and one Gateway TLV object. The order of the Interface to Core Network and Bearer information TLV objects in the MMS Connectivity TLV object defines the priority of the Interface to Core Network and Bearer information, with the first TLV object having the highest priority.

Identifier: '6FD2'		Str	ucture: Transparent	ansparent Optional	
File Size: X ₁ ++ X _n		Up	date activity: I	ow	
Access Conditions:					
READ	PIN				
UPDATE	PIN/P	IN2			
	(fixed o	during admir	nistrative manageme	ent)	
DEACTIVATE	`ADM	Ü	ŭ	,	
ACTIVATE	ADM				
Bytes		Desc	cription	M/O	Length
1 to X ₁	MMS C	Connectivity	Parameters TLV	0	X₁ bytes
	object				-
X_1+1 to $X_1 + X_2$	MMS C	Connectivity	Parameters TLV	0	X ₂ bytes
	object	•			
$X_1++X_{n-1}+1$ to X_1++X_n	MMS C	connectivity	Parameters TLV	0	X _n bytes
	object				

For the contents and coding see 4.2.69.

4.2.72 EF_{NIA} (Network's Indication of Alerting)

If service n°56 is "available", this file shall be present.

This EF contains categories and associated text related to the Network's indication of alerting in the MS service defined in TS 22.101 [24].

Identifie	er: '6FD3'	Structure: linear fixed			Optional
Record length : X+1 bytes Update		activity: low			
Access Conditions:					
READ		PIN			
UPDAT	ΓE	ADM			
INVALIDATE		ADM			
REHABILITATE		ADM			
Bytes	Description		M/O	Length	
1	Alerting category		М	1 byte	
2 to X+1	Informative text			М	X bytes

- Alerting category

Contents:

category of alerting for terminating traffic.

Coding:

according to TS 24.008 [9]. Value 'FF' means that no information on alerting category is available.

- Informative text

Contents:

text describing the type of terminating traffic associated with the category.

Coding:

see the coding of the Alpha Identifier item of the EF_{ADN} . The maximum number of characters for this informative text is indicated in TS 22.101 [24].

4.2.73 EF_{vecs} (Voice Group Call Service)

If service $n^{\circ}57$ is "available", this file shall be present.

This EF contains a list of those VGCS group identifiers the user has subscribed to. The elementary file is used by the ME for group call establishment and group call reception.

Identifier	: '6FB1'	Structure: transparent			Optional
File size	: 4n bytes (n <=	50)	Update	Update activity: low	
Access Conditio READ UPDATE INVALID REHABI	E ATE	PIN ADM ADM ADM			
Bytes		Description	on	M/O	Length
1 to 4	Group ID 1			М	4 bytes
5 to 8	Group ID 2			0	4 bytes
:	:			:	:
(4n-3) to 4n	Group ID n			0	4 bytes


- Group ID

Contents: VGCS Group ID, according to TS 23.003 [25]


Coding:

The VGCS Group ID is of a variable length with a maximum length of 8 digits. Each VGCS Group ID is coded on four bytes, with each digit within the code being coded on four bits corresponding to BCD code. If a VGCS Group ID of less than 8 digits is chosen, then the unused nibbles shall be set to 'F'. VGCS Group ID Digit 1 is the most significant digit of the Group ID.


Byte 1:

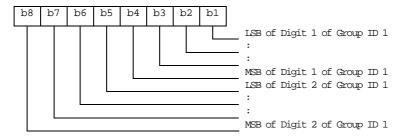


Byte 2:

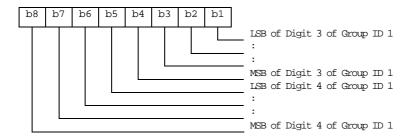


Byte 3:

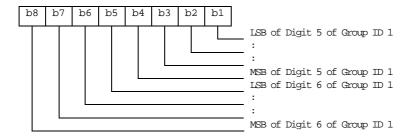

Byte 4:

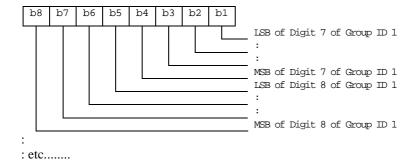

Byte (4n-3) to 4n:

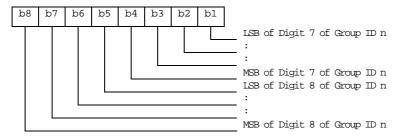

If storage for fewer than the maximum possible number n of VGCS Group IDs, is required, the excess bytes shall be set to 'FF'.

4.2.74 EF_{vecss} (Voice Group Call Service Status)

If service n°57 is "available", this file shall be present.

This EF contains the status of activation for the VGCS group identifiers. The elementary file is directly related to the EF_{VGCS} . This EF shall always be allocated if EF_{VGCS} is allocated.

Identifier	: '6FB2'	Structure: transparent			Optional
File size: 7 bytes		Update	activity	r: low	
Access Conditio READ UPDATE INVALID REHABII	E ATE	PIN PIN/A (fixed ADM ADM	I during administrative	e manag	jement)
Bytes	Description		M/O	Length	
1 to 7	Activation/Dea	Activation/Deactivation Flags		М	7 bytes

- Activation/Deactivation Flags


Contents: Activation/Deactivation Flags of the appropriate Group IDs

Coding:

bit = 0 means - Group ID deactivated


bit = 1 means - Group ID activated

Byte 1:



etc : : : : : :

Byte 7:



4.2.75 EF_{vBs} (Voice Broadcast Service)

If service $n^{\circ}58$ is "available", this file shall be present.

This EF contains a list of those VBS group identifiers the user has subscribed to. The elementary file is used by the ME for broadcast call establishment and broadcast call reception.

Identifier	: '6FB3'	Structure: transparent			Optional
File size: 4n bytes (n <= 50)		Update activity: low			
Access Conditio READ UPDATE INVALID REHABII	E ATE	PIN ADM ADM ADM			
Bytes		Description	on	M/O	Length
1 to 4	Group ID 1			М	4 bytes
5 to 2	Group ID 2			0	4 bytes
:	:			:	:
(4n-3) to 4n	Group ID n	•	_	0	4 bytes


- Group ID

Contents: VBS Group ID, according to TS 23.003 [25]


Coding:

The VBS Group ID is of a variable length with a maximum length of 8 digits. Each VBS Group ID is coded on four bytes, with each digit within the code being coded on four bits corresponding to BCD code. If a VBS Group ID of less than 8 digits is chosen, then the unused nibbles shall be set to 'F'. VBS Group ID Digit 1 is the most significant digit of the Group ID.


Byte 1:

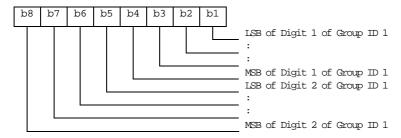


Byte 2:

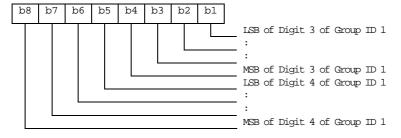


Byte 3:

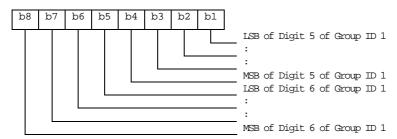

Byte 4:

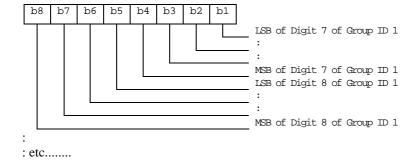

Byte (4n-3) to 4n:

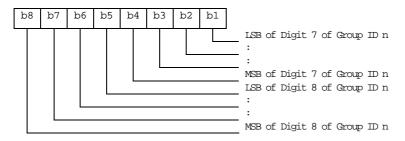

If storage for fewer than the maximum possible number n of VBS Group IDs, is required, the excess bytes shall be set to 'FF'.

4.2.76 EF_{VBSS} (Voice Broadcast Service Status)

If service n°58 is "available", this file shall be present.

This EF contains the status of activation for the VBS group identifiers. The elementary file is directly related to the EF_{VBS} . This EF shall always be allocated if EF_{VBS} is allocated.

Identifier	: '6FB4'	Structure: transparent			Optional
File	e size: 7 bytes	Update		e activity: low	
INVALID	ss Conditions:		gement)		
Bytes	Description		M/O	Length	
1 to 7	Activation/Deactivation Flags		М	7 bytes	

- Activation/Deactivation Flags

Contents: Activation/Deactivation Flags of the appropriate Group IDs

Coding:

see coding of EF_{VGCSS}

4.3 DFs at the USIM ADF (Application DF) Level

DFs may be present as child directories of USIM ADF. The following DFs are defined:

- DF_{PHONEBOOK} '5F3A'.
- DF_{GSM-ACCESS} '5F3B'.

- DF_{MEXE} '5F3C'.

DF_{SoLSA} '5F70'.

(DF for application specific phonebook. This DF has the same structure as the DF_{PHONEBOOK} under DF_{TELECOM}).

4.4 Contents of DFs at the USIM ADF (Application DF) level

4.4.1 Contents of files at the DF SoLSA level

This only applies if the Support of Localised Service Areas is supported, as indicated by Service Number 23 in the USIM Service Table and specified in 3GPP TS 23.073 [39].

The EFs contain information about the users subscribed local service areas.

4.4.1.1 EF_{sai} (SoLSA Access Indicator)

This EF contains the 'LSA only access indicator'. This EF shall always be allocated if DF_{SoLSA} is present.

If the indicator is set, the network will prevent terminated and/or originated calls when the MS is camped in cells that are not included in the list of allowed LSAs in EF_{SLL} . Emergency calls are, however, always allowed.


The EF also contains a text string which may be displayed when the MS is out of the served area(s).

Identifi	er: '4F30'	Structure: transparent			Optional
File size: X + 1 bytes		Update a	Update activity: low		
Access Condit READ UPDAT INVALI REHAE	ГЕ	PIN ADM ADM ADM			
Bytes		Descriptio	n	M/O	Length
1	LSA only access indicator			М	1 byte
2 to X+1	LSA only access	indication te	ext	М	X bytes

- LSA only access indicator

Contents: indicates whether the MS is restricted to use LSA cells only or not.

Coding:



LSA only access indication text

Contents: text to be displayed by the ME when it's out of LSA area.

Coding: the string shall use either

- the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The alpha identifier shall be left justified. Unused bytes shall be set to 'FF'; or
- one of the UCS2 coded options as defined in annex B.

4.4.1.2 EF_{SLL} (SoLSA LSA List)

This EF contains information describing the LSAs that the user is subscribed to. This EF shall always be allocated if DF_{SoLSA} is present.

Each LSA is described by one record that is linked to a LSA Descriptor file. Each record contains information of the PLMN, priority of the LSA, information about the subscription and may also contain a text string and/or an icon that identifies the LSA to the user. The text string can be edited by the user.

Identifi	er: '4F31'	Structure: linear fixed			Optional
Record	Record length: X + 10 bytes Update			activity	r: low
Access Condit READ UPDAT INVALI REHAE	ГЕ	PIN PIN ADM ADM			
Bytes		Description			Length
1 to X	LSA name			0	X bytes
X+1	Configuration pa	Configuration parameters			1 byte
X+2	RFU			М	1 byte
X+3	Icon Identifier	Icon Identifier			1 byte
X+4	Priority			М	1 byte
X+5 to X+7	PLMN code			М	3 bytes
X+8 to X+9	LSA Descriptor File Identifier			М	2 byte
X+10	LSA Descriptor I	Record Ident	ifier	М	1 byte

LSA name

Contents: LSA name string to be displayed when the ME is camped in the corresponding area, dependant on the contents of the LSA indication for idle mode field.


Coding: the string shall use either

- the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The alpha identifier shall be left justified. Unused bytes shall be set to 'FF'; or
- one of the UCS2 code options defined in the annex of TS 31.101 [11].

- Configuration parameters

Contents: Icon qualifier, control of idle mode support and control of LSA indication for idle mode.

Coding:



Icon qualifier:

Contents: The icon qualifier indicates to the ME how the icon is to be used.

b2, b1: 00: icon is not to be used and may not be present

01: icon is self-explanatory, i.e. if displayed, it replaces the LSA name

10: icon is not self-explanatory, i.e. if displayed, it shall be displayed together with the LSA name

11: RFU

Idle mode support:

Contents: The idle mode support is used to indicate whether the ME shall favour camping on the LSA cells in idle mode.

b3 = 0: Idle mode support disabledb3 = 1: Idle mode support enabled

LSA indication for idle mode:

Contents: The LSA indication for idle mode is used to indicate whether or not the ME shall display the LSA name when the ME is camped on a cell within the LSA.

b4 = 0: LSA indication for idle mode disabled b4 = 1: LSA indication for idle mode enabled

Bits b5 to b8 are RFU (see subclause 9.3).

- Icon Identifier

Contents: The icon identifier addresses a record in EF_{IMG}.

Coding: binary.

Priority

Contents: Priority of the LSA which gives the ME the preference of this LSA relative to the other LSAs.

Coding:



'0' is lowest priority, 'F' is highest.

- PLMN code

Contents: MCC + MNC for the LSA.

Coding: according to GSM 24.008 [9] and EF_{LOCI}.

- LSA Descriptor File Identifier:

Contents: these bytes identify the EF which contains the LSA Descriptors forming the LSA.

Coding: byte X+8: high byte of the LSA Descriptor file; byte X+9: low byte of the LSA Descriptor file.

- LSA Descriptor Record Identifier:

Contents: this byte identifies the number of the first record in the LSA Descriptor file forming the LSA.

Coding: binary.

4.4.1.3 LSA Descriptor files


Residing under DF_{SoLSA} , there may be several LSA Descriptor files. These EFs contains one or more records again containing LSA Descriptors forming the LSAs. LSAs can be described in four different ways. As a list of LSA IDs, as a list of LAC + CIs, as a list of CIs or as a list of LACs. As the basic elements (LSA ID, LAC + CI, CI and LAC) of the four types of lists are of different length, they can not be mixed within one record. Different records may contain different kinds of lists within the EFs. Examples of codings of LSA Descriptor files can be found in annex F.

Identifie	er: '4FXX'	Str	ructure: linear fixed		Optional
Record length: n*X+2 bytes Upda			Update	e activity	/: low
Access Condit	ions:				
READ		PIN			
UPDAT	ΓΕ	ADM			
INVAL	IDATE	ADM			
REHA	BILITATE	ADM			
Bytes		Descriptio	n	M/O	Length
1	LSA descriptor t	LSA descriptor type and number			1 byte
2 to X+1	1 st LSA Descript	or		М	X bytes
X+2 to 2X+1	2 nd LSA Descrip	tor		М	X bytes
(n-1)*X+2 to n*X+1	n th LSA Descript	or		М	X bytes
n*X+2	Record Identifier	r		М	1 byte

- LSA descriptor type and number:

Contents: The LSA descriptor type gives the format of the LSA descriptor and the number of valid LSA Descriptors within the record.

Coding:



LSA descriptor type:

Contents: Gives the format of the LSA Descriptors.

b2, b1: 00: LSA ID. 01: LAC + CI 10: CI 11: LAC

Number of LSA Descriptors:

Contents: Gives the number of valid LSA Descriptors in the record.

Coding: binary, with b8 as MSB and b3 as LSB leaving room for 64 LSA Descriptors per record.

LSA Descriptor

Contents: Dependant of the coding indicated in the LSA descriptor type:

- in case of LSA ID the field length 'X' is 3 bytes;
- in case of LAC + CI the field length 'X' is 4 bytes;
- in case of CI the field length 'X' is 2 bytes;
- in case of LAC the field length 'X' is 2 bytes.

Coding: according to TS 24.008 [9].

- Record Identifier:

Contents: This byte identifies the number of the next record containing the LSA Descriptors forming the LSA.

Coding: record number of next record. 'FF' identifies the end of the chain.

This file utilises the concept of chaining as for EF_{EXT1}.

The identifier '4FXX' shall be different from one LSA Descriptor file to the other and different from the identifiers of EF_{SAI} and EF_{SLL} . For the range of 'XX', see subclause x.x.

4.4.2 Contents of files at the DF PHONEBOOK level

The UICC may contain a global phonebook, or application specific phonebooks, or both in parallel. When both phonebook types co-exist, they are independent and no data is shared. In this case, it shall be possible for the user to select which phonebook the user would like to access.

It is recommended that the terminal searches for the global phonebook located under $DF_{TELECOM}$ as its presence is not indicated anywhere in the USIM application.

The global phonebook is located in $DF_{PHONEBOOK}$ under $DF_{TELECOM}$. Each specific USIM application phonebook is located in $DF_{PHONEBOOK}$ of its respective Application ADF_{USIM} . The organisation of files in $DF_{PHONEBOOK}$ under ADF_{USIM} and under $DF_{TELECOM}$ follows the same rules. Yet $DF_{PHONEBOOK}$ under ADF_{USIM} may contain a different set of files than $DF_{PHONEBOOK}$ under $DF_{TELECOM}$. All phonebook related EFs are located under their respective $DF_{PHONEBOOK}$. USIM specific phonebooks are dedicated to application specific entries. Each application specific phonebook is protected by the application PIN.

 EF_{ADN} and EF_{PBR} shall always be present if the $DF_{Phonebook}$ is present. If any phonebook file other than EF_{ADN} or EF_{EXT1} , is used, then EF_{PBC} shall be present.

If a GSM application resides on the UICC, the EFs ADN and EXT1 from one $DF_{PHONEBOOK}$ (defined at GSM application installation) are mapped to $DF_{TELECOM}$. Their file IDs are specified in TS 51.011 [18], i.e. $EF_{ADN} = '6F3A'$ and $EF_{EXT1} = '6F4A'$, respectively.

If the UICC is inserted into a terminal accessing the ADN and EXT1 files under $DF_{TELECOM}$; and a record in these files has been updated, a flag in the corresponding entry control information in the EF_{PBC} is set from 0 to 1 by the UICC. If the UICC is later inserted into a terminal that supports the 3G phonebook, the terminal shall check the flag in EF_{PBC} and if this flag is set, shall update the EF_{CC} , and then reset the flag. A flag set in EF_{PBC} results in a full synchronisation of the phonebook between an external entity and the UICC (if synchronisation is requested).

The EF structure related to the public phonebook is located under $DF_{PHONEBOOK}$ in $DF_{TELECOM}$. A USIM specific phonebook may exist for application specific entries. The application specific phonebook is protected by the application PIN. The organisation of files in the application specific phonebook follows the same rules as the one specified for the public phone book under $DF_{TELECOM}$. The application specific phonebook may contain a different set of files than the one in the public area under $DF_{TELECOM}$.

4.4.2.1 EF_{PBR} (Phone Book Reference file)

This file describes the structure of the phonebook. All EFs representing the phonebook are specified here (with the exception of EF_{PSC} , EF_{PUID} and EF_{CC}), together with their file identifiers (FID) and their short file identifiers (SFI), if applicable.

Certain kinds of EFs can occur more than once in the phonebook, e.g. there may be two entities of Abbreviated Dialling Numbers, EF_{ADN} and EF_{ADN1} . For these kinds of EFs, no fixed FID values are specified. Instead, the value '4FXX' indicates that the value is to be assigned by the card issuer. These assigned values are then indicated in the associated TLV object in EF_{PBR} .

The SFI value assigned to an EF which is indicated in EF_{PBR} shall correspond to the SFI indicated in the TLV object in EF_{PBR} .

The reference file is a file that contains information how the information in the different files is to be combined together to form a phone book entry. The reference file contains records. Each record specifies the structure of up to 254 entries

in the phone book. Each phone book entry consists of data stored in files indicated in the reference file record. The entry structure shall be the same over all the records in the EF _{PBR}. If more than 254 entries are to be stored, a second record is needed in the reference file. The structure of a phone book entry is defined by different TLV objects that are stored in a reference file record. The reference file record structure describes the way a record in a file that is part of the phonebook is used to create a complete entry. Three different types of file linking exist.

- Type 1 files: Files that contain as many records as the reference/master file (EF_{ADN} , EF_{ADN1}) and are linked on record number bases (Rec1 -> Rec1). The master file record number is the reference.
- Type 2 files: Files that contain less entries than the master file and are linked via pointers in the index administration file (EF_{IAP}).
- Type 3 files are files that are linked by a record identifier within a record.

Tag Value	Constructed TAG Description
'A8'	Indicating files where the amount of records equal to
	master EF, type 1
'A9'	Indicating files that are linked using the index administration file, type 2. Order of pointer appearance
	in index administration EF is the same as the order of
	file IDs following this tag
'AA'	Indicating files that are linked using a record identifier, type 3. (The file pointed to is defined by the TLV object.)

Table 4.1: Phone Book Reference file Constructed Tags

The first file ID indicated using constructed Tag 'A8' is called the master EF. Access conditions for all other files in the index structure is set to the same as for the master EF unless otherwise specified.

File IDs indicated using constructed Tag 'A8' is a type 1 file and contains the same number of records as the first file that is indicated in the data part of this TLV object. All files following this Tag are mapped one to one using the record numbers/IDs of the first file indicated in this TLV object.

File IDs indicated using constructed Tag 'A9' are mapped to the master EF (the file ID indicated as the first data object in the TLV object using Tag 'A8') using the pointers in the index administration file. The order of the pointers in the index administration file is the same as the order of the file IDs presented after Tag 'A9'. If this Tag is not present in the reference file record the index administration file is not present in the structure. In case the index administration file is not present in the structure it is not indicated in the data following tag 'A8'.

File IDs indicated using constructed Tag 'AA' indicate files that are part of the reference structure but they are addressed using record identifiers within a record in one or more of the files that are part of the reference structure. The length of the tag indicates whether the file to be addressed resides in the same directory or if a path to the file is provided in the TLV object.

Type 2 and type 3 files contain records that may be shared between several phonebook entries (except when otherwise indicated). The terminal shall ensure that a shared record is emptied when the last phonebook entry referencing it is modified in such a way that it doesn't reference the record anymore.

NOTE: in the current version of the specification, only type 3 files contain records that may be shared.

Each constructed Tag contains a list of primitive Tags indicating the order and the kind of data (e.g. ADN, IAP,...) of the reference structure.

The primitive tag identifies clearly the type of data, its value field indicates the file identifier and, if applicable, the SFI value of the specified EF. That is, the length value of a primitive tag indicates if an SFI value is available for the EF or not:

- Length = '02' Value: 'FID (2 bytes)'
- Length = '03' Value: 'FID (2 bytes)', 'SFI (1 byte)'

Table 4.2: Tag definitions for the phone book kind of file

Tag Value	TAG Description
'C0'	EF _{ADN} data object
'C1'	EF _{IAP} data object
'C2'	EF _{EXT1} data object
'C3'	EF _{SNE} data object
'C4'	EF _{ANR} data object
'C5'	EF _{PBC} data object
'C6'	EF _{GRP} data object
'C7'	EF _{AAS} data object
'C8'	EF _{GAS} data object
'C9'	EF _{UID} data object
'CA'	EF _{EMAIL} data object
'CB'	EF _{CCP1} data object

Table 4.3 (below) lists the allowed types for each kind of file:

Table 4.3: Presence of files as type

File name	Type 1	Type 2	Type 3
EF _{AAS}			X
EF _{ADN}	Χ		
EF _{ANR}	Χ	X	
EF _{EMAIL}	Χ	X	
EF _{EXT1}			X
EF _{GAS}			X
EF _{GRP}	Χ		
EFIAP	Χ		
EF _{PBC}	Χ		
EF _{SNE}	Χ	X	
EF _{UID}	Χ		
EF _{CCP1}			X

Phone Book Reference file EF_{PBR} structure

Identifier	: '4F30'	Structure: linear fixed			Conditional (see Note)
Record	d Length: X byte:	S	Update	activity:	low
Access Condition READ UPDATE DEACTIV ACTIVAT	'ATE	PIN ADM ADM ADM			
Bytes		Description	on	M/O	Length
1 to X TLV object(s) for indicating EFs that are p the phone book structure		EFs that are part of	М	X bytes	
NOTE: This fil					

At the end of each record, unused bytes, if any, shall be filled with 'FF'.

4.4.2.2 EF_{IAP} (Index Administration Phone book)

This file is present if Tag 'A9' is indicated in the reference file.

The EF contains pointers to the different records in the files that are part of the phone book. The index administration file record number/ID is mapped one to one with the corresponding EF_{ADN} (shall be record to record). The index administration file contains the same amount of records as EF_{ADN} . The order of the pointers in an EF_{IAP} shall be the same as the order of file IDs that appear in the TLV object indicated by Tag 'A9' in the reference file record. The amount of bytes in a record is equal to the number of files indicated the EF_{PBR} following tag 'A9'.

The value 'FF' is an invalid record number/ID and is used in any location in to indicate that no corresponding record in the indicated file is available.

The content of EF_{IAP} is set to 'FF' at the personalisation stage.

Index administration file EFIAP structure

Identifier: '4FXX' Structure: linear fixed			Conditional (see Note)	
SFI: 'YY'				
Record Length: 2	X bytes	Update	activity:	low
Access Conditions:				
READ	PIN			
UPDATE	PIN			
DEACTIVATE	ADM			
ACTIVATE	ADM			
Bytes	Description	on	M/O	Length
1 Record n Tag 'A9'	Record number of the first object indicated after Tag 'A9'		М	1 byte
	Record number of the second object indicated after Tag 'A9'		С	1 byte
X Record no Tag 'A9'	umber of the x th ob	ject indicated after	С	1 byte
NOTE 1: This file is mandatory if and only if type 2 files are present. NOTE 2: x th -field marked with "C" is mandatory if x th -object indicated following tag "A9" is present in EF _{PBR}				

4.4.2.3 EF_{ADN} (Abbreviated dialling numbers)

This EF contains Abbreviated Dialling Numbers (ADN) and/or Supplementary Service Control strings (SSC). In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records. It may also contain an associated alpha-tagging.

Identifier:	'4FXX'	FXX' Structure			Conditional (see Note)
SFI: '	YY'				
Record I	length: X+14 byt	es	Update	activity:	low
Access Condition	ns:	PIN			
UPDATE		PIN			
DEACTIV	'ATE	ADM			
ACTIVATE		ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier			0	X bytes
X+1	Length of BCD	number/SSC	contents	М	1 byte
X+2	TON and NPI			М	1 byte
X+3 to X+12	Dialling Numbe	r/SSC String		М	10 bytes
X+13	Capability/Conf	iguration1 Ide	entifier	М	1 byte
X+14	Extension1 Rec	ord Identifier	ſ	М	1 byte
NOTE: This fil	le is mandatory i	f and only if I	DF _{PHONEBOOK} is prese	nt.	

- Alpha Identifier.

Contents:

- Alpha-tagging of the associated dialling number.

Coding

- this alpha-tagging shall use either:
 - the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The alpha identifier shall be left justified. Unused bytes shall be set to 'FF'.

or:

- one of the UCS2 coded options as defined in the annex of TS 31.101 [11].

NOTE 1: The value of X may be from zero to 241. Using the command GET RESPONSE the ME can determine the value of X.

- Length of BCD number/SSC contents.

Contents:

- this byte gives the number of bytes of the following two data items containing actual BCD number/SSC information. This means that the maximum value is 11, even when the actual ADN/SSC information length is greater than 11. When an ADN/SSC has extension, it is indicated by the extension1 identifier being unequal to 'FF'. The remainder is stored in the EF_{EXT1} with the remaining length of the additional data being coded in the appropriate additional record itself (see clause 4.4.2.4).

Coding:

- according to TS 24.008 [9].
- TON and NPI.

Contents:

- Type of number (TON) and numbering plan identification (NPI).

Coding:

- according to TS 24.008 [9]. If the Dialling Number/SSC String does not contain a dialling number, e.g. a control string deactivating a service, the TON/NPI byte shall be set to 'FF' by the ME (see note 2).

NOTE 2: If a dialling number is absent, no TON/NPI byte is transmitted over the radio interface (see TS 24.008 [9]). Accordingly, the ME should not interpret the value 'FF' and not send it over the radio interface.



- Dialling Number/SSC String


Contents:

- up to 20 digits of the telephone number and/or SSC information.


Coding

- according to TS 24.008 [9], TS 22.030 [4] and the extended BCD-coding (see table 4.4). If the telephone number or SSC is longer than 20 digits, the first 20 digits are stored in this data item and the remainder is stored in an associated record in the EF_{EXT1}. The record is identified by the Extension1 Record Identifier. If ADN/SSC require less than 20 digits, excess nibbles at the end of the data item shall be set to 'F'. Where individual dialled numbers, in one or more records, of less than 20 digits share a common appended digit string the first digits are stored in this data item and the common digits stored in an associated record in the EF_{EXT1}. The record is identified by the Extension 1 Record Identifier. Excess nibbles at the end of the data item shall be set to 'F'.

Byte X+3

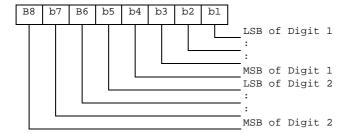

Byte X+4:

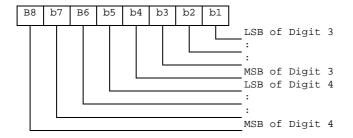

etc.

- Capability/Configuration1 Identifier.

Contents:

- capability/configuration identification byte. This byte identifies the number of a record in the EF_{CCP1} containing associated capability/configuration parameters required for the call. The use of this byte is optional. If it is not used it shall be set to 'FF'.

Coding:

- binary.
- Extension1 Record Identifier.

Contents:

- extension1 record identification byte. This byte identifies the number of a record in the EF_{EXT1} containing an
 associated called party subaddress or additional data. The use of this byte is optional. If it is not used it shall
 be set to 'FF'.
- if the ADN/SSC requires both additional data and called party subaddress, this byte identifies the additional record. A chaining mechanism inside EF_{EXT1} identifies the record of the appropriate called party subaddress (see clause 4.4.2.4).

Coding:

- binary.

NOTE 3: EF_{ADN} in the public phone book under DF_{TELECOM} may be used by USIM, GSM and also other applications in a multi-application card. If the non-GSM application does not recognise the use of Type of Number (TON) and Number Plan Identification (NPI), then the information relating to the national dialling plan shall be held within the data item dialling number/SSC and the TON and NPI fields set to UNKNOWN. This format would be acceptable for 3G operation and also for the non-GSM application where the TON and NPI fields shall be ignored.

EXAMPLE: SIM storage of an International Number using E.164 [22] numbering plan.

	TON	NPI	Digit field.
USIM application	001	0001	abc
Other application compatible with 3G	000	0000	xxxabc
where "abc" denotes the subscriber number of	digits (incl	luding its c	ountry code), and "xxx.
denotes escape digits or a national prefix repla	cing TON	and NPI.	

NOTE 4: When the ME acts upon the EF_{ADN} with a SEARCH RECORD command in order to identify a character string in the alpha-identifier, it is the responsibility of the ME to ensure that the number of characters used as SEARCH RECORD parameters are less than or equal to the value of X if the MMI allows the user to offer a greater number.

Table 4.4: Extended BCD coding

BCD Value	Character/Meaning
'0'	"0"
:	•
'9'	"9"
'A'	11*11
'B'	"# "
'C'	DTMF Control digit separator (see TS 22.101 [24]).
'D'	"Wild" value. This will cause the MMI to prompt the user for a single digit (see TS 22.101 [24]).
'E'	RFU.
'F'	Endmark e.g. in case of an odd number of digits.

BCD values 'C', 'D' and 'E' are never sent across the radio interface.

NOTE 5: The interpretation of values 'D', 'E' and 'F' as DTMF digits is for further study.

NOTE 6: A second or subsequent 'C' BCD value will be interpreted as a 3 second PAUSE (see TS 22.101 [24]).

4.4.2.4 EF_{EXT1} (Extension1)

This EF contains extension data of an ADN/SSC.

Extension data is caused by:

- an ADN/SSC which is greater than the 20 digit capacity of the ADN/SSC Elementary File or where common digits are required to follow an ADN/SSC string of less than 20 digits. The remainder is stored in this EF as a record, which is identified by a specified identification byte inside the ADN/SSC Elementary File. The EXT1 record in this case is specified as additional data;
- an associated called party subaddress. The EXT1 record in this case is specified as subaddress data.


Identifie	er: '4FXX'	Structure: linear fixed			Optional
SFI	: 'YY'				
Reco	ord length: 13 byte	S	Update	activity	: low
Access Condition	ons:				
READ		PIN			
UPDAT	Έ	PIN			
DEACT	IVATE	ADM			
ACTIVA	ATE	ADM			
Bytes		Description	ı	M/O	Length
1	Record type			М	1 byte
2 to 12	Extension data			М	11 bytes
13	Identifier			M	1 byte

- Record type.

Contents:

type of the record.


Coding:



- b3-b8 are reserved and set to 0;
- a bit set to 1 identifies the type of record;
- only one type can be set;

- '00' indicates the type "unknown" or "free".

The following example of coding means that the type of extension data is "additional data":



Extension data.

Contents:

additional data or Called Party Subaddress depending on record type.

Coding:

Case 1, Extension1 record is additional data:

- The first byte of the extension data gives the number of bytes of the remainder of ADN/SSC. The coding of remaining bytes is BCD, according to the coding of ADN/SSC. Unused nibbles at the end shall be set to 'F'. It is possible if the number of additional digits exceeds the capacity of the additional record to chain another record inside the EXT1 Elementary File by the identifier in byte 13. In this case byte 2 (first byte of the extension data) of all records for additional data within the same chain indicates the number of bytes ('01' to '0A') for ADN/SSC (respectively MSISDN, LND) within the same record unequal to 'FF'.

Case 2, Extension1 record is Called Party Subaddress:

- The subaddress data contains information as defined for this purpose in TS 24.008 [9]. All information defined in TS 24.008, except the information element identifier, shall be stored in the USIM. The length of this subaddress data can be up to 22 bytes. In those cases where two extension records are needed, these records are chained by the identifier field. The extension record containing the first part of the called party subaddress points to the record which contains the second part of the subaddress.
- Identifier.


Contents:

identifier of the next extension record to enable storage of information longer than 11 bytes.

Coding:

record number of next record. 'FF' identifies the end of the chain.

- Example of a chain of extension records being associated to an ADN/SSC. The extension1 record identifier (Byte 14+X) of EF_{ADN} is set to 3.

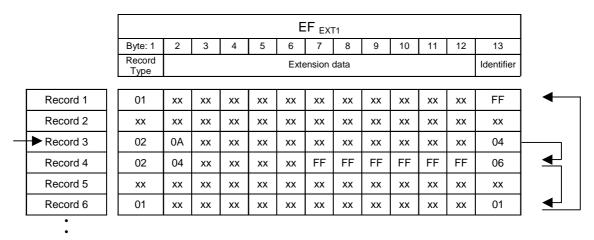

In this example, ADN/SSC is associated to additional data (records 3 and 4) which represent the last 27 or 28 digits of the whole ADN/SSC (the first 20 digits are stored in EF_{ADN}) and a called party subaddress whose length is more than 11 bytes (records 6 and 1).

4.4.2.5 EF_{PBC} (Phone Book Control)

This EF contains control information related to each entry in the phone book. This EF contains as many records as the EF_{ADN} associated with it (shall be record to record). Each record in EF_{PBC} points to a record in its EF_{ADN} . This file indicates the control information and the hidden information of each phone book entry.

The content of EF_{PBC} is linked to the associated EF_{ADN} record by means of the ADN record number/ID (there is a one to one mapping of record number/identifiers between EF_{PBC} and EF_{ADN}).

Structure of control file EF_{PBC}

Identifier: '4FXX'	St	Structure: linear fixed		Conditional (see Note)
SFI: 'YY'				,
Record length:	2 bytes	Update	activity:	low
Access Conditions: READ UPDATE DEACTIVATE ACTIVATE	PIN PIN ADM ADM			
Bytes	Descript	ion	M/O	Length
1 Entry Co	ntrol Information		М	1 byte
2 Hidden II	nformation		M	1 byte
NOTE: This file is mandatory if one or both of the following is true: - hidden entries are supported - a GSM SIM application is supported in the UICC.				

- Entry Control Information.

Contents:

- provides some characteristics about the phone book entry e.g. modification by a terminal accessing the ADN and EXT1 files under DF_{TELECOM} (see clause 4.4.2).

Coding:



- Hidden Information.

Contents:

indicates to which USIM application of the UICC this phone book entry belongs, so that the corresponding secret code can be verified to display the phone book entry. If the secret code is not verified, then the phone book entry is hidden.

Coding:

'00' – the phone book entry is not hidden;

'xx' - the phone book entry is hidden. 'xx' is the record number in EF_{DIR} of the associated USIM application.

4.4.2.6 EF_{GRP} (Grouping file)

This EF contains the grouping information for each phone book entry. This file contains as many records as the associated EF_{ADN} . Each record contains a list of group identifiers, where each identifier can reference a group to which the entry belongs.

Structure of grouping file EFGRP

Identifier:	'4FXX'	Structure: linear fixed			Conditional (see Note)
SFI: '	YY'				
Record Leng	gth: X bytes (1 ≤	X ≤10)	Update	activity:	low
Access Condition	ns:				
READ		PIN			
UPDATE		PIN			
DEACTIV	'ATE	ADM			
ACTIVAT	E	ADM			
	•				
Bytes		Description	on	M/O	Length
1	Group Name Id	Group Name Identifier 1			1 byte
2	Group Name Identifier 2		0	1 byte	
X	Group Name Id	entifier X		0	1 byte
NOTE: This file is mandatory if and only if EF _{GAS} is present.					

- Group Name Identifier x.

Content:

- indicates if the associated entry is part of a group, in that case it contains the record number of the group name in EF_{GAS} .
- One entry can be assigned to a maximum of 10 groups.

Coding:

- '00' – no group indicated;

'XX' – record number in EF_{GAS} containing the alpha string naming the group of which the phone book entry is a member.

4.4.2.7 EF_{AAS} (Additional number Alpha String)

This file contains the alpha strings that are associated with the user defined naming tags for additional numbers referenced in EF_{ANR} .

Structure of EF_{AAS}

Identifier:	'4FXX'	Str	ucture: linear fixed		Optional
SFI: Op	tional				
Record	d length: X bytes	i	Update a	activity:	low
Access Condition READ UPDATE DEACTIV ACTIVAT	ATE	PIN PIN ADM ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha text string]		М	X bytes

Alpha text string.

Content:

- user defined text for additional number.

Coding:

- same as the alpha identifier in EF_{ADN} .

4.4.2.8 EF_{GAS} (Grouping information Alpha String)

This file contains the alpha strings that are associated with the group name referenced in EF_{GRP}.

Structure of EFGAS

Identifier:	'4FXX'	Structure: linear fixed		Conditional (see Note)	
SFI: Op	tional				
Record	d length: X bytes	3	Update a	ctivity:	low
Access Condition READ UPDATE DEACTIV ACTIVATI	ATE	PIN PIN ADM ADM			
Bytes		Description	on	M/O	Length
1 to X	Alpha text string	9		М	X bytes
NOTE: This file is mandatory if and only if EFGRP is present.					

- Alpha text string

Content:

- group names.

Coding:

- same as the alpha identifier in EF_{ADN} .

4.4.2.9 EF_{ANR} (Additional Number)

Several phone numbers and/or Supplementary Service Control strings (SSC) can be attached to one EF_{ADN} record, using one or several EF_{ANR} . The amount of additional number entries may be less than or equal to the amount of records in EF_{ADN} . The EF structure is linear fixed. Each record contains an additional phone number or Supplementary Service Control strings (SSC). This record cannot be shared between several phonebook entries. The first byte indicates whether the record is free or the type of additional number referring to the record number in EF_{AAS} , containing the text to be displayed. The following part indicates the additional number and the reference to the associated record in the EF_{ADN} file. In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records.

Structure of EF_{ANR}

Identifier:	'4FXX'	Str	ucture: linear fixed		Optional
SFI: "	YY'		·		·
Record le	ngth: 15 or 17 by	ytes .	Update	activity:	: low
Access Condition	ie.				
READ		PIN			
UPDATE		PIN			
DEACTIV	ΔTF	ADM			
ACTIVAT	=	ADM			
ACTIVATI	L	ADIVI			
Bytes		Description			Length
1	Additional Number identifier			М	1 byte
2	Length of BCD	number/SSC	contents	М	1 byte
3	TON and NPI			М	1 byte
4 to 13	Additional numb	oer/SSC Strir	ng	М	10 bytes
14	Capability/Confi	iguration1 Ide	entifier	М	1 byte
15	Extension1 Rec	ord Identifier	•	М	1 byte
16	ADN file SFI			С	1 byte
17	ADN file Record	d Identifier		С	1 byte
NOTE: The fields marked C above are mandatory if and only if the file is not type 1 (as specified in EF _{PBR})					

- Additional Number Identifier

Content:

- describes the type of the additional number defined in the file EF_{AAS}.

Coding:

- '00' no additional number description;
- 'xx' record number in EF_{AAS} describing the type of number (e.g. "FAX");

'FF' – free record.

- Length of BCD number/SSC contents

Contents:

- this byte gives the number of bytes of the following two data items containing actual BCD number/SSC information. This means that the maximum value is 11, even when the actual additional number/SSC information length is greater than 11. When the additional number/SSC has extension, it is indicated by the extension1 identifier being unequal to 'FF'. The remainder is stored in the EF_{EXT1} with the remaining length of the additional data being coded in the appropriate additional record itself (see clause 4.4.2.4).

Coding:

- same as the length of BCD number/SSC string byte in EF_{ADN}
- TON and NPI.

Contents:

- Type of number (TON) and numbering plan identification (NPI).

Coding:

- same as the TON and NPI byte in EF_{ADN}.
- Additional number/SSC string

Content:

- up to 20 digits of the additional phone number and/or SSC information linked to the phone book entry.

Coding:

- same as the dialling number /SSC string in EF_{ADN}.
- Capability/Configuration1 Identifier.

Contents:

- This byte identifies the number of a record in the EF_{CCP1} containing associated capability/configuration parameters required for the call. The use of this byte is optional. If it is not used it shall be set to 'FF'.

Coding:

- binary.
- Extension1 Record Identifier.

Contents:

- extension1 record identification byte. This byte identifies the number of a record in the EF_{EXT1} containing an associated called party subaddress or additional data. The use of this byte is optional. If it is not used it shall be set to 'FF'.

if the number requires both additional data and called party subaddress, this byte identifies the additional record. A chaining mechanism inside EF_{EXT1} identifies the record of the appropriate called party subaddress (see clause 4.4.2.4).

Coding:

- binary.
- ADN file SFI.

Content:

- Short File identifier of the associated EF_{ADN} file.

Coding:

- as defined in the UICC specification.

- ADN file Record Identifier

Content:

- record identifier of the associated phone book entry.

Coding:

- 'xx' – record identifier of the corresponding ADN record.

4.4.2.10 EF_{SNE} (Second Name Entry)

The phone book also contains the option of a second name entry. The amount of second name entries may be less than or equal to the amount of records in EF_{ADN} . Each record contains a second name entry. This record cannot be shared between several phonebook entries.

Structure of EF_{SNE}

Identifier:	: '4FXX' Structure: line		ucture: linear fixed		Optional
SFI: '	YY'				
Record le	ngth: X or X+2 b	ytes	Update	activity:	low
Access Condition	ns:	PIN			
UPDATE		PIN			
DEACTIV ACTIVAT		ADM ADM			
ACTIVAT		ADIVI			
Bytes		Description	on	M/O	Length
1 to X	Alpha Identifier	of Second N	ame	М	X bytes
X+1	ADN file SFI			С	1 byte
X+2	ADN file Record	d Identifier		C	1 byte
NOTE: The fields marked C above are mandatory if and only if the file is not type 1 (as specified in EF _{PBR})					

- Alpha Identifier of Second Name.

Content:

- string defining the second name of the phone book entry.

Coding:

- as the alpha identifier for EF_{ADN}.
- ADN file SFI.

Content:

- Short File identifier of the associated EF_{ADN} file.

Coding:

- as defined in the UICC specification.
- ADN file Record Identifier

Content:

record identifier of the associated phone book entry.

Coding:

'xx' – record identifier of the corresponding ADN record.

4.4.2.11 EF_{CCP1} (Capability Configuration Parameters 1)

This EF contains parameters of required network and bearer capabilities and ME configurations associated with a call established using a phone book entry.

Structure of EF_{CCP1}

Identifie	er: '4FXX'	Structure: linear fixed Option			Optional	
SFI	: 'YY'					
Record I	ength: X bytes, X	≥ 15	Upda	Update activity: low		
Access Condition READ UPDATI DEACTIVA	E IVATE	PIN PIN ADM ADM				
Bytes		Description	า	M/O	Length	
1 to X	Bearer capability	information e	element	М	X bytes	

- Bearer capability information element.

Contents and Coding:

- see TS 24.008 [9]. The Information Element Identity (IEI) shall be excluded; i.e. the first byte of the EF_{CCP1} record shall be Length of the bearer capability contents.
- "- unused bytes are filled with 'FF'

4.4.2.12 Phone Book Synchronisation

To support synchronisation of phone book data with other devices, the USIM may provide the following files to be used by the synchronisation method: a phone book synchronisation counter (PSC), a unique identifier (UID) and change counter (CC) to indicate recent changes.

If synchronisation is supported in the phonebook, then EF_{PSC}, EF_{UID}, EF_{PUID} and EF_{CC} are all mandatory.

4.4.2.12.1 EF_{UID} (Unique Identifier)

The EF_{UID} is used to uniquely identify a record and to be able to keep track of the entry in the phone book. The terminal assigns the (UID) when a new entry is created. The value of the UID does not change as long as the value of the PBID remains the same. The UID shall remain on the UICC, in EF_{UID} , until the PBID is regenerated. This means that when a phone book entry is deleted, the content of the linked information (e.g. ADN, E-MAIL,...) shall be set to the personalization value 'FF...FF'. But the UID-value of the deleted record shall not be used when a new entry is added to the phonebook until the PBID is regenerated, but it shall be set to a new value.

If/when the PBID is regenerated, all UIDs for the entry in the phone book shall be assigned new values starting from 1. The new value of the UID for each entry shall then be kept until the PBID is regenerated again.

Structure of EFuid

Identifier:	'4FXX'	Structure: linear fixed			Conditional (see Note)
SFI: '	YY'				
Record	d length: 2 bytes	i	Update	activity:	low
Access Condition READ UPDATE DEACTIVATE	ATE	PIN PIN ADM ADM			
Bytes		Description	on	M/O	Length
			none Book Entry	M	2 bytes
NOTE: This file					

Unique Identifier of Phone Book Entry.

Content:

- number to unambiguously identify the phone book entry for synchronisation purposes.

Coding:

- hexadecimal value. At initialisation all UIDs are personalised to "00 00" (i.e. empty).

4.4.2.12.2 EF_{PSC} (Phone book Synchronisation Counter)

The phone book synchronisation counter (PSC) is used by the ME to construct the phone book identifier (PBID) and to determine whether the accessed phone book is the same as the previously accessed phone book or if it is a new unknown phone book (might be the case that there is one phonebook under DF-telecom and one phone book residing in a USIM-application). If the PSC is unknown, a full synchronisation of the phone book will follow.

The PSC is also used to regenerate the UIDs and reset the CC to prevent them from running out of range. When the UIDs or the CC has reached its maximum value, a new PSC is generated. This leads to a scenario where neither the CC nor the UIDs will run out of range.

The PSC shall be regenerated by the terminal if one of the following situation applies:

- the values of the UIDs have run out of range;
- the whole phone book has been reset/deleted;
- the value of the CC has run out of range.

Structure of EF_{PSC}

Identifier:	'4F22'	Structure: transparent			Conditional (see Note)
SFI: "	YY'				
File	size: 4 bytes		Update	activity:	low
Access Condition READ UPDATE DEACTIV ACTIVATI	ATE	PIN PIN ADM ADM			
Bytes	Description			M/O	Length
1 to 4	Phone book syr	ne book synchronisation counter (PSC)			4 bytes
NOTE: This file is mandatory if and only if synchronisation is supported in the phonebook.					

- PSC: Unique synchronisation counter of Phone Book.

Content

number to unambiguously identify the status of the phone book for synchronisation purposes.

Coding:

hexadecimal value.

The phone book identifier (PBID) coding based on the EF_{PSC} is described hereafter:

- For a phone book residing in DF-telecom:
 - PBID = ICCid (10bytes) "fixed part" + 4 bytes (in EF_{PSC}) "variable part".
- For a phone book residing in an USIM application:
 - PBID = 10 last bytes of (ICCid XOR AID) "fixed part" + 4 bytes (in EF_{PSC}) "variable part".

To be able to detect if the PSC needs to be regenerated (i.e. the variable part) the following test shall be made by the terminal before for each update of either the CC or the assignment of a new UID:

- Each time the terminal has to increment the value of the UID the following test is needed:
 - If UID = 'FF FF' then.

{Increment **PSC** mod 'FF FF FF FF'; all the UIDs shall be regenerated}.

- Each time the terminal has to increment the value of CC the following test is needed:

If CC = 'FF FF' then.

{Increment **PSC** mod 'FF FF FF FF'; CC=0001}.

NOTE: If the phonebook is deleted then the terminal will change the **PSC** according to:

Incrementing PSC modulus 'FFFFFFF'.

4.4.2.12.3 EF_{CC} (Change Counter)

The change counter (CC) shall be used to detect changes made to the phone book.

Every update/deletion of an existing phone book entry or the addition of a new phone book entry causes the terminal to increment the EF_{CC} . The concept of having a CC makes it possible to update the phone book in different terminals, which still are able to detect the changes (e.g. changes between different handset and/or 2^{nd} and 3^{rd} generation of terminals).

Structure of EF_{CC}

Identifier:	'4F23'	Structure: transparent			Conditional (see Note)
SFI: "	YY'				
File	size: 2 bytes		Up	date activity:	high
Access Condition READ UPDATE DEACTIV ACTIVATI	ATE	PIN PIN ADM ADM			
Bytes		Description		M/O	Length
1 to 2	Change Counte	r (CC) of Phone Book M 2 bytes			2 bytes
NOTE: This file					

- Change Counter of Phone Book.

Content:

- indicates recent change(s) to phone book entries for synchronisation purposes.

Coding:

- hexadecimal value. At initialisation, CC shall be personalised to '00 00' (i.e. empty).

4.4.2.12.4 EF_{PUID} (Previous Unique Identifier)

The PUID is used to store the previously used unique identifier (UID). The purpose of this file is to allow the terminal to quickly generate a new UID, which shall then be stored in the EF_{UID} .

Structure of EF_{PUID}

Identifier	: '4F24'	Stru	ucture: transparent		Conditional (see Note)
SFI: '	YY'				
File	e size: 2 bytes		Update activity: high		
UPDATE PII DEACTIVATE AD		PIN PIN ADM ADM			
Bytes		Description	on	M/O	Length
1 to 2	Previous Uniqu	revious Unique Identifier (PUID) of Phone		М	2 bytes
	Book Entry				
NOTE: This fil	NOTE: This file is mandatory if and only if synchronisation is supported in the phonebook.				

- Previous unique Identifier of Phone Book Entry.

Content:

- Previous number that was used to unambiguously identify the phone book entry for synchronisation purposes.

Coding:

- As for EF_{UID}

4.4.2.13 EF_{EMAIL} (e-mail address)

This EF contains the e-mail addresses that may be linked to a phone book entry. Several e-mail addresses can be attached to one EF_{ADN} record, using one or several EF_{EMAIL} . The number of email addresses may be equal to or less than the amount of records in EF_{ADN} . Each record contains an e-mail address. The first part indicates the e-mail address, and the second part indicates the reference to the associated record in the EF_{ADN} file. This record cannot be shared between several phonebook entries.

Structure of EF_{EMAIL}

Identifie	er: '4FXX'	Str	ucture: linear fixed		Optional	
	SFI: 'YY'					
Record	length: X or X+2 b	ytes	Update	activity	: low	
Access Conditi	ons:					
READ		PIN				
UPDAT	E	PIN				
DEACT	IVATE	ADM				
ACTIVA	ATE	ADM				
	•					
Bytes		Description	า	M/O	Length	
1 to X	E-mail Address			M	X bytes	
:						
:						
X+1	ADN file SFI			С	1 byte	
X+2	ADN file Record I	dentifier		С	1 byte	
	· · · · · · · · · · · · · · · · · · ·					

- E-mail Address.

Content:

- string defining the e-mail address

Coding:

- the SMS default 7-bit coded alphabet as defined in TS 23.038 [5] with bit 8 set to 0. The alpha identifier shall be left justified. Unused bytes shall be set to 'FF'.
- ADN file SFI.

Content:

- short File identifier of the associated EF_{ADN} file.

Coding

- as defined in TS 31.101.
- ADN file Record Identifier.

Content:

- record identifier of the associated phone book entry.

Coding:

binary.

4.4.2.14 Phonebook restrictions

This clause lists some general restrictions that apply to the phonebook:

- if an EF_{PBR} file contains more than one record, then they shall all be formatted identically on a type-by-type basis, e.g. if EF_{PBR} record #1 contains one type 1 e-mail then all EF_{PBR} records shall have one type 1 email;
- if an EF_{PBR} record contains more than one reference to one kind of file, such as two EF_{EMAIL} files, then they shall all be formatted identically on a type-by-type basis, e.g. if an EF_{PBR} record has 2 email addresses, then they shall have the same record size and the same number of records in each EF_{PBR} entry;
- an EF_{PBR} record may contain TLV entries indicating that the file exist as a type 1 and 2 file, e.g. a phonebook entry may have two emails, one with a one-to-one mapping (type 1) and one with a indirect mapping (type 2). Regardless of the type, files in all entries shall have the same record configuration;
- an EF_{PBR} record shall not contain more than one occurrence of a given kind of file indicated in tag 'AA' (type 3 link). For instance, an EF_{PBR} record may only contain one reference to an EF_{EXT1}.

4.4.3 Contents of files at the DF GSM-ACCESS level (Files required for GSM Access)

The EFs described in this clause are required for the USIM application to be able to access service through a GSM network.

The presence of this DF and thus the support of a GSM access is indicated in the 'USIM Service Table' as service no. '27' being available.

4.4.3.1 EF_{Kc} (GSM Ciphering key Kc)

This EF contains the ciphering key Kc and the ciphering key sequence number n for enciphering in a GSM access network. If the GSM access service is available on the USIM, then this file is mandatory.

Identifie	er: '4F20'	Structure: transparent Optional			Optional
	SFI: '01'				
F	ile size: 9 bytes		Update	activity:	high
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	n	M/O	Length
1 to 8	Ciphering key Kc			М	8 bytes
9	Ciphering key sed	quence numb	per n	М	1 byte

- Ciphering key Kc.

Coding:

- the least significant bit of Kc is the least significant bit of the eighth byte. The most significant bit of Kc is the most significant bit of the first byte.
- Ciphering key sequence number n Coding:



NOTE: TS 24.008 [9] defines the value of n=111 as "key not available". Therefore the value '07' and not 'FF' should be present following the administrative phase.

4.4.3.2 EF_{KcGPRS} (GPRS Ciphering key KcGPRS)

This EF contains the ciphering key KcGPRS and the ciphering key sequence number n for GPRS (see TS 23.060 [7]). If the GSM access service is available on the USIM, then this file is mandatory.

Identifie	er: '4F52'	Stru	ucture: transparent		Optional
	SFI: '02				
Fi	ile size: 9 bytes		Update	activity:	high
Access Condition READ UPDATI DEACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes		Description	า	M/O	Length
1 to 8	Ciphering key Ko	Ciphering key KcGPRS		М	8 bytes
9	Ciphering key sed	quence numb	oer n for GPRS	М	1 byte

- Ciphering key KcGPRS.

Coding:

the least significant bit of KcGPRS is the least significant bit of the eighth byte. The most significant bit of KcGPRS is the most significant bit of the first byte.

Ciphering key sequence number n for GPRS.
 Coding:



NOTE: TS 24.008 [9] defines the value of n=111 as "key not available". Therefore the value '07' and not 'FF' should be present following the administrative phase.

4.4.3.3 Void

4.4.3.4 EF_{CPBCCH} (CPBCCH Information)


This EF contains information concerning the CPBCCH according to TS 44.018 [28].

CPBCCH storage may reduce the extent of a Mobile Station's search of CPBCCH carriers when selecting a cell. The CPBCCH carrier lists shall be in accordance with the procedures specified TS 23.022 [29]. The MS stores CPBCCH information (from the System Information 19 message, Packet System Information 3, and Packet System Information 3 bis) on the USIM. The same CPBCCH carrier shall never occur twice in the list.


Identific	er: '4F63'	Structure: transparent		Optional	
Fi	le size: 2n bytes	Update activity:		: high	
Access Conditi READ UPDAT DEACT ACTIVA	E IVATE	PIN PIN ADM ADM			
Bytes 1 to 2	Element 1 of CPE	Description BCCH carrier		M/O M	Length 2 bytes
2n-1 to 2n	Element n of CPE	3CCH carrier	list	М	2 bytes

- Element in CPBCCH carrier list Coding:

Byte 1: first byte of CPBCCH carrier list element



Byte 2: second byte of CPBCCH carrier list element



- ARFCN (10 bits) as defined in TS 45.005 [34].
- High/Low band indicator: If the ARFCN indicates possibly a channel in the DCS 1800 or a channel in the PCS 1900 band, if the bit is set to '1' the channel is in the higher band (GSM 1900). If the bit is set to '0', the lower band (GSM 1800) is indicated. If ARFCN indicates a unique channel, this indicator shall be set to '0'.

- Empty indicator: If this bit is set to '1', no valid CPBCCH carrier is stored in this position. If the Empty Indicator is set to '1', the content of the CPBCCH carrier field shall be ignored. The empty indicator shall also be used, and set to '1', if storage of fewer than maximum number n, of CPBCCH carrier fields is required.


4.4.3.5 EF_{InvScan} (Investigation Scan)

This EF contains two flags used to control the investigation scan for higher prioritized PLMNs not offering voice services.

Identifie	er: '4F64'	Stru	ucture: transparent		Optional
F	ïle size: 1 byte		Update	Update activity: low	
Access Condition READ UPDATI DEACTI ACTIVA	E VATE	PIN ADM ADM ADM			
Bytes		Description	า	M/O	Length
1	Investigation scar	n flags		М	1 byte

- Investigation scan flags

Coding:



A '1' in a bit position indicates that the investigation scan shall be performed for the condition corresponding to that bit position and a '0' that it shall not be performed.

If this elementary file is not present, no investigation scan shall be performed.

4.4.4 Contents of files at the MExE level

This clause specifies the EFs in the dedicated file DF_{MExE} . It only applies if the USIM supports MExE (see TS 23.057 [30]).

The EFs in the Dedicated File DF_{MExE} contain execution environment related information.

4.4.4.1 EF_{MExE-ST} (MExE Service table)

This EF indicates which MExE services are available. If a service is not indicated as available in the USIM, the ME shall not select this service.

Identifie	er: '4F40' Struct		ucture: transparent		Optional
Files	size: X bytes, X ≥	1	Update	activity	: low
Access Condition READ UPDAT DEACT ACTIVA	E IVATE	PIN ADM ADM ADM			
Bytes		Description	า	M/O	Length
1	Services no1 to n	·°8		М	1 byte
2	Services n°9 to n	∘16		0	1 byte
etc.					
X	Services (8X-7) to	(8X)		0	1 byte

-Services

Contents: Service n°1: Operator Root Public Key

Service n°2: Administrator Root Public Key Service n°3: Third Party Root Public Key

Service n°4: RFU

Coding:

the coding rules of the USIM Service Table apply to this table.

4.4.4.2 EF_{ORPK} (Operator Root Public Key)

This EF contains the descriptor(s) of certificates containing the Operator Root Public Key. This EF shall only be allocated if the operator wishes to verify applications and certificates in the MExE operator domain using a root public key held in the USIM. Each record of this EF contains one certificate descriptor.

For example, an operator may provide a second key for recover disaster procedure in order to limit OTA data to load.


Identific	er: '4F41'	Str	ucture: linear fixed		Optional
Record	l length: X + 10 by	tes	Update	activity	: low
Access Conditi READ UPDAT DEACT ACTIVA	E IVATE	PIN ADM ADM ADM			
Bytes		Description			Length
1	Parameters indic	ator		М	1 byte
2	Flags			М	1 byte
3	Type of certificate)		М	1 byte
4 to 5	Key/certificate file	identifier		М	2 bytes
6 to 7	Offset into key/ce	Offset into key/certificate file			2 bytes
8 to 9	ength of key/certificate data			М	2 bytes
10	Key identifier leng	gth (X)		М	1 byte
11 to 10+X	Key identifier			М	X bytes

- Parameter indicator

Contents:

The parameter indicator indicates if record is full and which optional parameters are present

Coding: bit string




Flags

Contents:

The authority flag indicates whether the certificate identify an authority (i.e. CA or AA) or not.

Coding: bit string



- Type of certificate

Contents:

This field indicates the type of certificate containing the key.

Coding: binary:

0 : WTLS 1 : X509 2 : X9.68

Other values are reserved for further use

- Key/certificate File Identifier

Contents:

these bytes identify an EF which is the key/certificate data file (see clause 4.4.4.5), holding the actual key/certificate data for this record.

Coding:

byte 4: high byte of Key/certificate File Identifier; byte 5: low byte of Key/certificate File Identifier.

Offset into Key/certificate File

Contents:

these bytes specify an offset into the transparent key/certificate data File identified in bytes 4 and 5.

Coding:

byte 6: high byte of offset into Key/certificate Data File; byte 7: low byte of offset into Key/certificate Data File

Length of Key/certificate Data

Contents:

these bytes yield the length of the key/certificate data, starting at the offset identified in "Offset into Key/certificate File" field.

Coding:

byte 8: high byte of Key/certificate Data length; byte 9: low byte of Key/certificate Data length.

Key identifier length

Contents:

This field gives length of key identifier

Coding:

binary

Key identifier

Contents:

This field provides a means of identifying certificates that contain a particular public key (chain building) and linking the public key to its corresponding private key. For more information about value and using see TS 23.057 [30].

Coding:

octet string

NOTE: transparent key/certificate data longer than 256 bytes may be read using successive READ BINARY commands.

4.4.4.3 EF_{ARPK} (Administrator Root Public Key)

This EF contains the descriptor(s) of certificates containing the Administrator Root Public Key. This EF shall only be allocated if the SIM issuer wishes to control the Third Party certificates on the terminal using an Administrator root

public key held in the USIM. Each record of this EF contents one certificate descriptor.

This file shall contain only one record.

Identifie	er: '4F42'	Str	ucture: linear fixed	Optional	
Record	l length: X + 10 by	tes	Update	activity	: low
Access Condition READ UPDAT DEACT ACTIVA	ons: E IVATE	PIN ADM ADM ADM			
Bytes		Description	n	M/O	Length
1	Parameters indica	ator		М	1 byte
2	Flags			М	1 byte
3	Type of certificate)		М	1 byte
4 to 5	Key/certificate file	identifier		М	2 bytes
6 to 7	Offset into key/ce	Offset into key/certificate file			2 bytes
8 to 9	Length of key/cer	ength of key/certificate data			2 bytes
10	Key identifier leng	gth (X)		М	1 byte
11 to 10+X	Key identifier	•		М	X bytes

For contents and coding of all data items see the respective data items of the EF_{ORPK} (clause 4.4.4.2).

4.4.4.4 EF_{TPRPK} (Third Party Root Public Key)

This EF contains descriptor(s) of certificates containing the Third Party root public key (s). This EF shall only be allocated if the USIM issuer wishes to verify applications and certificates in the MExE Third Party domain using root public key(s) held in the USIM. This EF can contain one or more root public keys. Each record of this EF contains one certificate descriptor.

For example, an operator may provide several Third Party Root Public Keys.

Identifi	er:'4F43'	Structure: linear fixed			Optional
Record le	ength: X + Y + 11 t	oytes	Update	activity	r: low
Access Condition		PIN			
UPDAT DEACT ACTIVA	IVATE	ADM ADM ADM			
Bytes		Description	1	M/O	Length
1	Parameters indica	ator		М	1 byte
2	Flags			М	1 byte
3	Type of certificate)		М	1 byte
4 to 5	Key/certificate file	identifier		М	2 bytes
6 to 7	Offset into key/ce	rtificate file		М	2 bytes
8 to 9	Length of key/cer	tificate data		М	2 bytes
10	Key identifier leng	gth (X)		М	1 byte
11 to 10+X	Key identifier	, , ,		М	X bytes
11+X	Certificate identifi	er length (Y)		М	1 byte
12+X to 11+X+Y	Certificate identifi	er		М	Y bytes

- Certificate identifier length

Contents

This field gives the length of the certificate identifier

Coding:

binary

- Certificate identifier

Contents:

This field identifies the issuer and provides an easy way to find a certificate. For more information about the value and usage see TS 23.057 [30].

Coding:

Octet string

For contents and coding of all other data items see the respective data items of the EF_{ORPK} (clause 4.4.4.2).

4.4.4.5 EF_{TKCDF} (Trusted Key/Certificates Data Files)

Residing under DF_{MExE} , there may be several key/certificates data files. These EFs containing key/certificates data shall have the following attributes:

Identifier:	'4FXX'	Stru	ucture: transparent		Optional	
File	size: Y bytes		Update a	Update activity: low		
Access Condition	s:					
READ		PIN				
UPDATE		ADM				
DEACTIV	ATE	ADM				
ACTIVAT	E	ADM				
Bytes		Description	on	M/O	Length	
1 to Y	Key/Certificate	Data		M	Y bytes	

Contents and coding:

Key/certificate data are accessed using the key/certificates descriptors provided by EF_{TPRPK} (see clause 4.4.4.4).

The identifier '4FXX' shall be different from one key/certificate data file to another. For the range of 'XX', see TS 31.101 [11]. The length Y may be different from one key/certificate data file to another.

4.5 Contents of EFs at the TELECOM level

The EFs in the Dedicated File $DF_{TELECOM}$ contain service related information.

4.5.1 EF_{ADN} (Abbreviated dialling numbers)

In case of a present GSM application on the UICC the first EF_{ADN} (i.e. reflected by the first record in EF_{PBR}) of the $DF_{PHONEBOOK}$ is mapped (with an identifier equal to '6F3A') to $DF_{TELECOM}$ to ensure backwards compatibility.

A 3G ME shall not access this file. The information is accessible for a 3G ME in EF_{ADN} under DF_{PHONEBOOK}.

4.5.2 EF_{EXT1} (Extension1)

In case of a present GSM application on the UICC the first EF_{EXT1} (i.e. reflected by the first record in EF_{PBR}) of the $DF_{PHONEBOOK}$ is mapped (with an identifier equal to '6F4A') to $DF_{TELECOM}$ to ensure backwards compatibility.

4.5.3 EF_{ECCP} (Extended Capability Configuration Parameter)

In case of a present GSM application on the UICC the first EF_{CCP1} (i.e. reflected by the first record in EF_{PBR}) of the $DF_{PHONEBOOK}$ is mapped (with an identifier equal to '6F4F') to $DF_{TELECOM}$ to ensure backwards compatibility. There shall not be any EF_{CCP} (with a file-id of '6F3D') under $DF_{TELECOM}$ because otherwise a GSM terminal could create inconsistencies within the phonebook.

4.5.4 EF_{SUME} (SetUpMenu Elements)

This EF contains Simple TLVs related to the menu title to be used by a UICC when issuing a SET UP MENU proactive command.

Identifier: '6F54'		Structure: transparent			Optional	
File size: X+Y bytes			Update	: low		
Access Conditions:						
READ		ADM				
UPDATE		ADM				
DEACTIVATE		ADM				
ACTIVATE		ADM				
				1		
Bytes		Description	n	M/O	Length	
1 to X	Title Alpha Identifier			М	X bytes	
1+X to X+Y	Title Icon Identifie	er		0	Y bytes	

- Title Alpha Identifier.

Contents:

- this field contains the Alpha Identifier Simple TLV defining the menu title text.

Coding:

- according to TS 31.111 [12].
- Title Icon Identifier

Contents:

- this field contains the Icon Identifier Simple TLV defining the menu title icon.

Coding:

- according to TS 31.111 [12]. If not present the field shall be set to 'FF'.
- Unused bytes of this file shall be set to 'FF'.

4.5.5 EF_{ARR} (Access Rule Reference)

This EF contains the access rules for files located under the $DF_{TELECOM}$ in the UICC. If the security attribute tag '8B' is indicated in the FCP it contains a reference to a record in this file.

Structure of EF_{ARR} at DF_{Telecom}-level

Identifier: '6F06'		Structure: Linear fixed			Mandatory
Record length: X bytes		Update activity: low			
Access Conditions: READ UPDATE DEACTIVATE ACTIVATE		ALW ADM ADM ADM			
Bytes		Description	า	M/O	Length
1 to X	Access Rule TLV	data objects	3	М	X bytes

This EF contains one or more records containing access rule information according to the reference to expanded format as defined in ISO/IEC 7816-9 [26]. Each record represents an access rule. Unused bytes in the record are set to 'FF'.

If the card cannot access EF_{ARR} , any attempt to access a file with access rules indicated in this EF_{ARR} shall not be granted.

4.6 Contents of DFs at the TELECOM level

DFs may be present as child directories of DF_{TELECOM}. The following DFs have been defined:

- $DF_{GRAPHICS}$ '5F50'.

- DF_{PHONEBOOK} '5F3A'.

(DF for public phone book. This DF has the same structure as DF_{PHONEBOOK} under ADF USIM).

4.6.1 Contents of files at the DF_{GRAPHICS} level

The EFs in the Dedicated File DF_{GRAPHICS} contain graphical information.

4.6.1.1 EF_{IMG} (Image)

Each record of this EF identifies instances of one particular graphical image, which graphical image is identified by this EF's record number.

Image instances may differ as to their size, having different resolutions, and the way they are coded, using one of several image coding schemes.

As an example, image k may represent a company logo, of which there are i instances in the UICC, of various resolutions and perhaps encoded in several image coding schemes. Then, the i instances of the company's logo are described in record k of this EF.

Identifier: '4F20'		Structure: linear fixed			Optional	
Record length: 9n+1 or 9n+2 b		bytes	Update activity:			low
Access Conditions:						
READ		PIN				
UPDATE		ADM				
DEACTIVATI	Ξ	ADM				
ACTIVATE		ADM				
Bytes		Descrip	tion		M/O	Length
1	Number of Actual Image Instances				M	1 byte
2 to 10	Descriptor of Image Instance 1				M	9 bytes
11 to 19	Descriptor of Image Instance 2				0	9 bytes
		•	•			
9(n-1)+2 to 9n+1	Descriptor o	f Image Insta	ance n		0	9 bytes
9n + 2	RFU (see TS	S 31.101 [11])		0	1 byte

Number of Actual Image Instances.

Contents:

- this byte gives the number of actual image instances described in the following data items (i.e. unused descriptors are not counted).

Coding:

- binary.
- Image Instance Descriptor

Contents:

- a description of an image instance.

Coding:

- Byte 1: Image Instance Width

Contents:

- this byte specifies the image instance width, expressed in raster image points.

Coding:

- binary.

Byte 2: Image Instance Height.

Contents:

- this byte specifies the image instance height, expressed in raster image points.

Coding:

- binary.

Byte 3: Image Coding Scheme.

Contents:

- this byte identifies the image coding scheme that has been used in encoding the image instance.

Coding:

- '11' basic image coding scheme as defined in annex B;
- '21' colour image coding scheme as defined in annex B; other values are reserved for future use.

Bytes 4 and 5: Image Instance File Identifier.

Contents:

- these bytes identify an EF which is the image instance data file (see clause 4.6.1.2), holding the actual image data for this particular instance.

Coding:

- byte 4: high byte of Image Instance File Identifier;
- byte 5: low byte of Image Instance File Identifier.

Bytes 6 and 7: Offset into Image Instance File.

Contents:

- these bytes specify an offset into the transparent Image Instance File identified in bytes 4 and 5.

Coding:

byte 6: high byte of offset into Image Instance File;
 byte 7: low byte of offset into Image Instance File.

Bytes 8 and 9: Length of Image Instance Data.

Contents:

- these bytes yield the length of the image instance data, starting at the offset identified in bytes 6 and 7. For the colour image coding scheme, as defined in annex B, the length of image instance data excludes the CLUT.

Coding:

- byte 8: high byte of Image Instance Data length;
- byte 9: low byte of Image Instance Data length.

NOTE: Transparent image instance data longer than 256 bytes may be read using successive READ BINARY commands.

4.6.1.2 Image Instance Data Files

Residing under $DF_{GRAPHICS}$, there may be several image instance data files. These EFs containing image instance data shall have the following attributes:

Identifier:	'4FXX'	Structure: transparent			Optional
Record length: Y bytes		Update activity: low			
Access Condition READ UPDATE DEACTIV ACTIVAT	ATE	PIN ADM ADM ADM			
Bytes		Description	on	M/O	Length
1 to Y	Image Instance	Data		М	Y bytes

Contents and coding:

- Image instance data are accessed using the image instance descriptors provided by EF_{IMG} (see clause 4.6.1.1).


The identifier '4FXX' shall be different from one image instance data file to the other. For the range of 'XX', TS 31.101 [11]. The length Y may be different from one image instance data file to the other.

4.6.2 Contents of files at the DF_{PHONEBOOK} under the DF_{TELECOM}

This DF has the same structure as $\text{DF}_{\text{PHONEBOOK}}$ under the $\text{ADF}_{\text{USIM}}.$

4.7 Files of USIM


This clause contains two figures depicting the file structure of the UICC and the ADF_{USIM} . ADF_{USIM} shall be selected using the AID and information in EF_{DIR} .

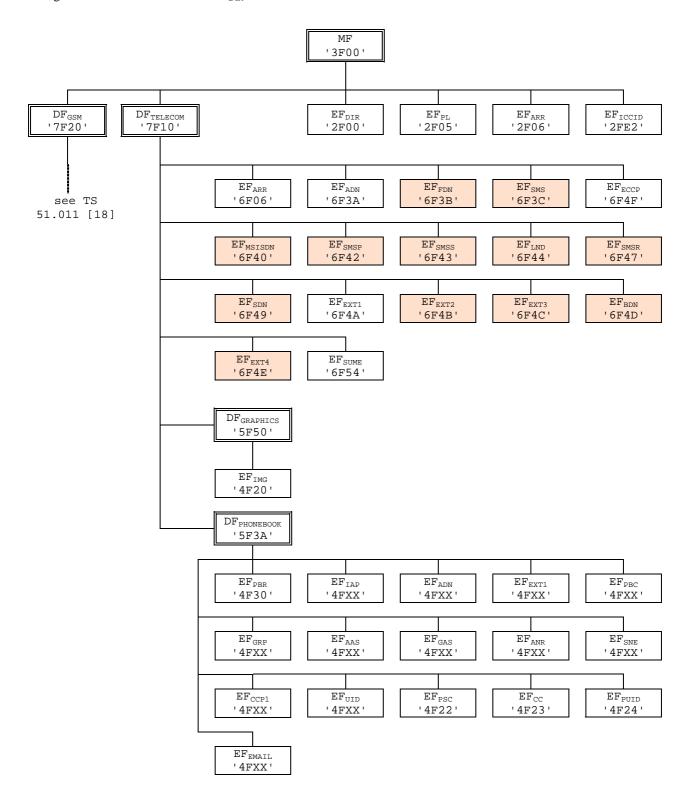

NOTE 1: Files under DF_{TELECOM} with shaded background are defined in TS 51.011 [18].

NOTE 2: The value '6F65' under ADFUSIM was used in earlier versions of this specification, and should not be reassigned in future versions.

Figure 4.1: File identifiers and directory structures of UICC

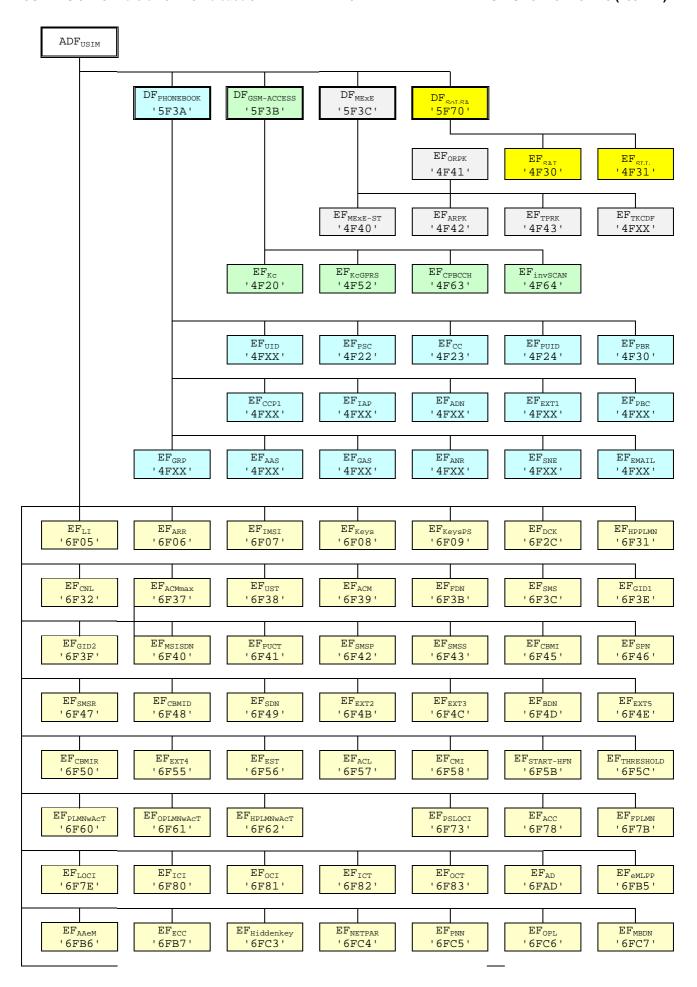

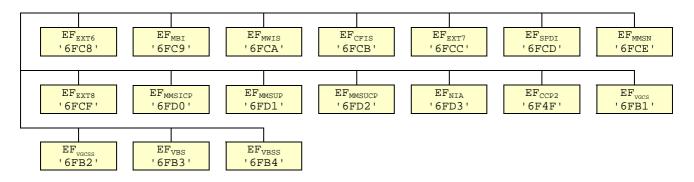


Figure 4.2: File identifiers and directory structures of USIM

5 Application protocol

When involved in administrative management operations, the USIM interfaces with appropriate equipment. These operations are outside the scope of the present document.

When involved in network operations the USIM interfaces with an ME with which messages are exchanged. A message can be a command or a response.

- A USIM Application command/response pair is a sequence consisting of a command and the associated response.
- A USIM Application procedure consists of one or more USIM Application command/response pairs which are used to perform all or part of an application-oriented task. A procedure shall be considered as a whole, that is to say that the corresponding task is achieved if and only if the procedure is completed. The ME shall ensure that, when operated according to the manufacturer's manual, any unspecified interruption of the sequence of command/response pairs which realise the procedure, leads to the abortion of the procedure itself.
- A USIM session is the interval of time starting at the completion of the USIM initialisation procedure and ending either with the start of the 3G session termination procedure, or at the first instant the link between the UICC and the ME is interrupted.

During the 3G network operation phase, the ME plays the role of the master and the USIM plays the role of the slave.

The USIM shall execute all commands defined in TS 31.101 [11], if applicable for the USIM (see section 8.3 for optional commands), including USAT commands, in such a way as not to jeopardise, or cause suspension, of service provisioning to the user. This could occur if, for example, execution of the AUTHENTICATE is delayed in such a way which would result in the network denying or suspending service to the user.

The procedures listed in clause "USIM management procedures" are required for execution of the procedures in the subsequent clauses "USIM security related procedures" and "Subscription related procedures". The procedures listed in clauses "USIM security related procedures" are mandatory. The procedures listed in "Subscription related procedures" are only executable if the associated services, which are optional, are provided in the USIM. However, if the procedures are implemented, it shall be in accordance with clause "Subscription related procedures".

If a procedure is related to a specific service indicated in the USIM Service Table, it shall only be executed if the corresponding bits denote this service as "service available" (see clause " EF_{UST} "). In all other cases the procedure shall not start.

5.1 USIM management procedures

If a USIM application is present on the UICC, a 3GPP ME shall only use the USIM application regardless of the radio access technology in use. In this case, a possibly existing SIM application shall never be used by a 3GPP ME.

5.1.1 Initialisation

5.1.1.1 USIM application selection

After UICC activation (see TS 31.101 [11]), the ME selects a USIM application. If no EF_{DIR} file is found or no USIM applications are listed in the EF_{DIR} file, the ME may then try to select the GSM application as specified in TS 51.011 [18].

NOTE: there may be cards that need to be reset before selecting the GSM application.

After a successful USIM application selection, the selected USIM (AID) is stored on the UICC. This application is referred to as the last selected USIM application. The last selected USIM application shall be available on the UICC after a deactivation followed by an activation of the UICC.

If a USIM application is selected using partial DF name, the partial DF name supplied in the command shall uniquely identify a USIM application. Furthermore if a USIM application is selected using a partial DF name as specified in TS 31.101 [11] indicating in the SELECT command the last occurrence the UICC shall select the USIM application stored as the last USIM application. If, in the SELECT command, the options first, next/previous are indicated, they have no meaning if an application has not been previously selected in the same session and shall return an appropriate error code.

5.1.1.2 USIM initialisation

The ME requests the emergency call codes. For service requirements, see TS 22.101 [24].

The ME requests the Language Indication. The preferred language selection shall always use the EF_{LI} in preference to the EF_{PL} at the MF unless any of the following conditions applies:

- if the EF_{LI} has the value 'FFFF' in its highest priority position, then the preferred language selection shall be the language preference in the EF_{PL} at the MF level according the procedure defined in TS 31.101[11];
- if the ME does not support any of the language codes indicated in EF_{LI}, or if EF_{LI} is not present, then the language selection shall be as defined in EF_{PL} at the MF level according the procedure defined in TS 31.101[11];
- if neither the languages of EF_{LI} nor EF_{PL} are supported by the terminal, then the terminal shall use its own internal default selection.

The ME then runs the user verification procedure. If the procedure is not performed successfully, the USIM initialisation stops.

The ME performs the administrative information request.

The ME performs the USIM Service Table request.

The ME performs the Enabled Services Table Request.

In case FDN is enabled, an ME which does not support FDN shall allow emergency calls but shall not allow MO-CS calls and MO-SMS.

If BDN is enabled, an ME which does not support Call Control shall allow emergency calls but shall not allow MO-CS calls.

If ACL is enabled, an ME which does not support ACL shall not send any APN to the network.

If all these procedures have been performed successfully then 3G session shall start. In all other cases 3G session shall not start.

Afterwards, the ME runs the following procedures if the ME and the USIM support the related services:

- IMSI request.
- Access control information request.
- Higher Priority PLMN search period request.

- HPLMN selector with Access Technology request;
- User controlled PLMN selector with Access Technology request;
- Operator controlled PLMN selector with Access Technology request;
- GSM initialisation requests.
- Location Information request for CS-and/or PS-mode.
- Cipher key and integrity key request for CS- and/or PS-mode.
- Forbidden PLMN request.
- Initialisation value for hyperframe number request.
- Maximum value of START request.
- CBMID request.
- Depending on the further services that are supported by both the ME and the USIM the corresponding EFs have to be read.

After the USIM initialisation has been completed successfully, the ME is ready for a 3G session and shall indicate this to the USIM by sending a particular STATUS command.

5.1.1.3 GSM related initialisation procedures

If GSM access is enabled the following procedures shall be performed if the applicable service is enabled and if the ME supports the GSM compact access technology.

- Investigation Scan request;
- CPBCCH information request.

5.1.2 Session termination

5.1.2.1 3G session termination

NOTE 1: This procedure is not to be confused with the deactivation procedure in TS 31.101 [11].

The 3G session is terminated by the ME as follows.

The ME shall indicate to the USIM by sending a particular STATUS command that the termination procedure is starting.

The ME then runs all the procedures which are necessary to transfer the following subscriber related information to the USIM, if the ME and the USIM support the related services:

- Location Information update for CS-and/or PS-domain.
- Cipher Key and Integrity Key update for CS-and/or PS-domain.
- Advice of Charge increase.
- Forbidden PLMN update.
- GSM Termination procedures.

Finally, the ME deletes all these subscriber related information elements from its memory.

NOTE 2: If the ME has already updated any of the subscriber related information during the 3G session, and the value has not changed until 3G session termination, the ME may omit the respective update procedure.

To actually terminate the session, the ME shall then use one of the mechanisms described in TS 31.101 [11].

5.1.2.2 GSM termination procedures

If GSM access is enabled the following termination procedures shall be performed if the applicable service is enabled.

- CPBCCH information update (if the ME supports the GSM compact access technology);

5.1.3 USIM application closure

After termination of the 3G session as defined in 5.1.2 the USIM application may be closed by closing the logical channels that are used to communicate with this particular USIM application.

5.1.4 Emergency call codes

Request: The ME performs the reading procedure with EF_{ECC} . If EF_{ECC} does not contain any valid number, the ME shall use the emergency numbers it stores for use in setting up an emergency call without a USIM.

Update: The ME performs the updating procedure with EF_{ECC}.

NOTE: The update procedure is only applicable when access conditions of ADM for update is set to ALW, PIN

or PIN2.

5.1.5 Language indication

Request: The ME performs the reading procedure with EF_{LI}.

Update: The ME performs the updating procedure with EF_{LI}.

5.1.6 Administrative information request

The ME performs the reading procedure with EF_{AD} .

5.1.7 USIM service table request

The ME performs the reading procedure with EF_{UST}.

5.1.8 Spare

5.1.9 UICC presence detection

The ME checks for the presence of the UICC according to TS 31.101 [11] within all 30 s periods of inactivity on the UICC-ME interface during a call. If the presence detection according to TS 31.101 [11] fails the call shall be terminated as soon as possible but at least within 5s after the presence detection has failed. Here a call covers a circuit switched call, and/or an active PDP context.

5.2 USIM security related procedures

5.2.1 Authentication algorithms computation

The ME selects a USIM application and uses the AUTHENTICATE command (see 7.1.1). The response is sent to the ME (in case of the T=0 protocol when requested by a subsequent GET RESPONSE command).

After a successful AUTHENTICATE command, the ME shall perform cipher and integrity key update procedure.

5.2.2 IMSI request

The ME performs the reading procedure with EF_{IMSI}.

5.2.3 Access control information request

The ME performs the reading procedure with EF_{ACC}.

5.2.4 Higher Priority PLMN search period request

The ME performs the reading procedure with EF_{HPPLMN}.

5.2.5 Location information

Request: The ME performs the reading procedure with $\ensuremath{\mathsf{EF}}_{\ensuremath{\mathsf{LOCI}}}.$

Update: The ME performs the updating procedure with EF_{LOCI}.

In the case when updating EF_{LOCI} with data containing the TMSI value and the card reports the error '6581' (Memory Problem), the ME shall terminate 3G operation.

5.2.6 Cipher and Integrity key

Request: The ME performs the reading procedure with EF_{Keys} .

Update: The ME performs the updating procedure with EF_{Keys} .

5.2.7 Forbidden PLMN

Request: The ME performs the reading procedure with EF_{FPLMN}.

Update: The ME performs the updating procedure with EF_{FPLMN} .

5.2.8 Void

5.2.9 User Identity Request

The ME selects a USIM and performs the reading procedure with EF_{IMSI}.

5.2.10 GSM Cipher key

Requirement: Service n°27 "available".

Request: The ME performs the reading procedure with EF_{Kc} .

Update: The ME performs the updating procedure with EF_{Kc} .

5.2.11 GPRS Cipher key

Requirement: Service n°27 "available".

Request: The ME performs the reading procedure with EF_{KcGPRS} .

Update: The ME performs the updating procedure with EF_{KcGPRS} .

5.2.12 Initialisation value for Hyperframe number

Request: The ME performs the reading procedure with $\text{EF}_{\text{START-HFN}}$.

Update: The ME performs the updating procedure with EF_{START-HFN}.

5.2.13 Maximum value of START

Request: The ME performs the reading procedure with EF_{THRESHOLD}.

5.2.14 HPLMN selector with Access Technology request

Request: The ME performs the reading procedure with EF_{HPLMNwAcT}.

5.2.15 Packet Switched Location information

Request: The ME performs the reading procedure with EF_{PSLOCI} .

Update: The ME performs the updating procedure with EF_{PSLOCI} .

5.2.16 Cipher and Integrity key for Packet Switched domain

Request: The ME performs the reading procedure with EF_{KeysPS} . Update: The ME performs the updating procedure with EF_{KeysPS} .

5.2.17 LSA information

Requirement: Service n°23 "available".

Request: The ME performs the reading procedure with EF_{SAI}, EF_{SLL} and its associated LSA Descriptor files.

Update: The ME performs the updating procedure with EF_{SLL}.

5.2.18 Voice Group Call Services

Requirement: Service n°57 "allocated and activated".

Voice Group Call Service

Request: The ME performs the reading procedure with EF_{VGCS} .

Voice Group Call Service Status

Request: The ME performs the reading procedure with EF_{VGCSS} .

Update: The ME performs the updating procedure with EF_{VGCSS} .

5.2.19 Voice Broadcast Services

Requirement: Service n°58 "allocated and activated".

Voice Broadcast Service

Request: The ME performs the reading procedure with EF_{VBS} .

Voice Broadcast Service Status

Request: The ME performs the reading procedure with EF_{VBSS} .

Update: The ME performs the updating procedure with EF_{VBSS} .

5.3 Subscription related procedures

5.3.1 Phone book procedures

5.3.1.1 Initialisation

The ME first reads the content of EF_{PBR} to determine the configuration phonebook. If the EF_{IAP} file is indicated in EF_{PBR} following tag 'A8' the ME reads the content of EF_{IAP} in order to establish the relation ship between the content in the files indicated using tag 'A9' and files indicated by tag 'A8'. The ME may read the contents of the phone book related files in any order.

5.3.1.2 Creation/Deletion of information

In order to avoid unlinked data to introduce fragmentation of the files containing phone book data the following procedures shall be followed when creating a new entry in the phone book. The data related to EF_{ADN} is first stored in the relevant record. As the record number is used as a pointer the reference pointer is now defined for the entry. The rule for storing additional information for an entry is that the reference pointer shall be created before the actual data is written to the location.

In case of deletion of a complete or part of an entry the data shall be deleted first followed by the reference pointer for that data element. In case of deletion of a complete entry the contents of EF_{ADN} is the last to be deleted.

5.3.1.3 Hidden phone book entries

If a phone book entry is marked as hidden by means of EF_{PBC} the ME first prompts the user to enter the 'Hidden Key'. The key presented by the user is compared against the value that is stored in the corresponding $EF_{Hiddenkey}$. Only if the presented and stored hidden key are identical the ME displays the data stored in this phone book entry. Otherwise the content of this phone book entry is not displayed by the ME.

Request: The ME performs the reading procedure with EF_{Hiddenkey}.

Update: The ME performs the updating procedure with EF_{Hiddenkey}.

5.3.2 Dialling numbers

Requirements:

- Service n°1 "available" for ADN located under the local phonebook;
- Presence of EF_{ADN} in EF_{PBR} for ADN located under the global phonebook;
- Presence of EF_{ANR} in EF_{PBR} for ANR;
- Service n°2 "available" for FDN;
- Service n°21 "available" for MSISDN;
- Service n°4 "available" for SDN;
- Service n°6 "available" for BDN;
- Service n°8 "available" for EFOCI:
- Service n°9 "available" for EFICI.

The following procedures may not only be applied to EF_{ADN} and its associated extension files EF_{CCP1} and EF_{EXT1} as described in the procedures below, but also to EF_{ANR} , EF_{FDN} , EF_{MSISDN} , EF_{BDN} , EF_{SDN} , EF_{OCI} , EF_{ICI} , and EF_{MBDN} and their associated extension files. If these files are not allocated and activated, as denoted in the USIM service table, the current procedure shall be aborted and the appropriate EFs shall remain unchanged.

As an example, the following procedures are described as applied to ADN.

Update: The ME analyses and assembles the information to be stored as follows (the byte identifiers used below correspond to those in the definition of the relevant EFs in the present document):

- i) The ME identifies the Alpha-tagging, Capability/Configuration Identifier and Extension1 Record Identifier.
- ii) The dialling number/SSC string shall be analysed and allocated to the bytes of the EF as follows:
 - if a "+" is found, the TON identifier is set to "International";
 - if 20 or less "digits" remain, they shall form the dialling number/SSC string;
 - if more than 20 "digits" remain, the procedure shall be as follows:
 - The ME seeks for a free record in EF_{EXT1}. If an Extension1 record is not marked as "free", the ME runs the Purge procedure. If an Extension1 record is still unavailable, the procedure is aborted.
 - The first 20 "digits" are stored in the dialling number/SSC string. The value of the length of BCD number/SSC contents is set to the maximum value, which is 11. The Extension1 record identifier is coded with the associated record number in the EF_{EXT1}. The remaining digits are stored in the selected Extension1 record where the type of the record is set to "additional data". The first byte of the Extension1 record is set with the number of bytes of the remaining additional data. The number of bytes containing digit information is the sum of the length of BCD number/SSC contents of EF_{ADN} and byte 2 of all associated chained Extension1 records containing additional data.
- iii) If a called party subaddress is associated to the ADN/SSC the procedure shall proceed as follows:
- If the length of the called party subaddress is less than or equal to 11 bytes (see TS 24.008 [9] for coding):
 - The ME seeks for a free record in EF_{EXT1}. If an Extension1 record is not marked as "free", the ME runs the Purge procedure. If an Extension1 record is still unavailable, the procedure is aborted.
 - The ME stores the called party subaddress in the Extension1 record, and sets the Extension1 record type to "called party subaddress".
 - If the length of the called party subaddress is greater than 11 bytes (see TS 24.008 [9] for coding):
 - The ME seeks for two free records in EF_{EXT1}. If no such two records are found, the ME runs the Purge procedure. If two Extension1 records are still unavailable, the procedure is aborted.
 - The ME stores the called party subaddress in the two Extension1 records. The identifier field in the Extension1 record containing the first part of the subaddress data is coded with the associated EF_{EXT1} record number containing the second part of the subaddress data. Both Extension1 record types are set to "called party subaddress".

Once i), ii), and iii) have been considered the ME performs the updating procedure with EF_{ADN} . If the USIM has no available empty space to store the received ADN/SSC, or if the procedure has been aborted, the ME advises the user.

For reasons of memory efficiency, the ME may analyse all Extension1 records to recognise if the additional or subaddress data to be stored is already existing in EF_{EXT1} . In this case, the ME may use the existing chain or the last part of the existing chain from more than one ADN. The ME is only allowed to store extension data in unused records. If existing records are used for multiple access, the ME shall not change any data in those records to prevent corruption of existing chains.

Erasure: The ME sends the identification of the information to be erased. The content of the identified

record in EF_{ADN} is marked as "free".

Request: The ME sends the identification of the information to be read. The ME shall analyse the data of

EF_{ADN} to ascertain, whether additional data is associated in EF_{EXT1} or EF_{CCP1}. If necessary, then the

ME performs the reading procedure on these EFs to assemble the complete ADN/SSC.

Purge:

The ME shall access each EF which references EF_{EXT1} (EF_{EXT2} , EF_{EXT6}) for storage and shall identify records in these files using extension data (additional data or called party subaddress). Note that existing chains have to be followed to the end. All referred Extension1 (Extension2, Extension6) records are noted by the ME. All Extension1 (Extension2, Extension6) records not noted are then marked by the ME as "free" by setting the record to '00FF...FF'.

The following three procedures are only applicable to service n°2 (FDN).

FDN capability request. The ME shall check the state of service $n^{\circ}2$, i.e. if FDN is "enabled" or "disabled". If FDN is enabled, the ME shall only allow outgoing calls as defined in the fixed number dialling description in TS 22.101 [24]. To ascertain the state of FDN, the ME shall check in EF_{UST} and EF_{EST} if FDN is enabled (service activated and available). In all other cases service $n^{\circ}2$ is disabled.

FDN enabling is done by activating the FDN service in EF_{EST}.

FDN disabling is done by deactivating the FDN service in EF_{EST}.

The following three procedures are only applicable to service n°6 (BDN).

- BDN capability request. The ME shall check the state of service n°6, i.e. if BDN is "enabled" or "disabled". To ascertain the state of BDN, the ME shall check in EF_{UST} and EF_{EST} if BDN is "enabled" (service available and activated). In all other cases, the BDN service is "disabled".
- BDN enabling is done by activating the BDN service in EF_{EST}.
- BDN disabling is done by deactivating the BDN service in EF_{EST}.

5.3.3 Short messages

- Requirement: Service n°10 "available".
- Request: The USIM seeks for the identified short message. If this message is found, the ME performs the reading procedure with EF_{SMS}.
- If service n°10 is "available" and the status of the SMS is '1D' (status report requested, received and stored in EF_{SMSR}), the ME performs the reading procedure with the corresponding record in EF_{SMSR}. If the ME does not find a corresponding record in EF_{SMSR}, then the ME shall update the status of the SMS with '15' (status report requested, received but not stored in EF_{SMSR}).
- If the short message is not found within the USIM memory, the USIM indicates that to the ME.
- Update: The ME looks for the next available area to store the short message. If such an area is available, it performs the updating procedure with EF_{SMS} .
- If there is no available empty space in the USIM to store the received short message, a specific MMI will have to take place in order not to loose the message.
- Erasure: The ME will select in the USIM the message area to be erased. Depending on the MMI, the message may be read before the area is marked as "free". After performing the updating procedure with EF_{SMS}, the memory allocated to this short message in the USIM is made available for a new incoming message. The memory of the USIM may still contain the old message until a new message is stored in this area.
- If service n°11 is "available" and the status of the SMS is '1D' (status report requested, received and stored in EF_{SMSR}), the ME performs the erasure procedure for EF_{SMSR} with the corresponding record in EF_{SMSR} .

5.3.4 Advice of charge

- Requirement: Service n°13 "available".
- Accumulated Call Meter.

- Request: The ME performs the reading procedure with EF_{ACM}. The USIM returns the last updated value of the ACM.
- Initialisation: The ME performs the updating procedure with EF_{ACM} using the new initial value.
- Increasing: The ME performs the increasing procedure with EF_{ACM} sending the value which has to be added.

Accumulated Call Meter Maximum Value.

- Request: The ME performs the reading procedure with EF_{ACMmax}.
- Initialisation: The ME performs the updating procedure with EF_{ACMmax} using the new initial maximum value.

Price per Unit and Currency Table (PUCT).

- Request: The ME performs the reading procedure with EF_{PUCT}.
- Update: The ME performs the updating procedure with EF_{PUCT}.

5.3.5 Capability configuration parameters

- Requirement: Service n°14 "available".
- Request: The ME performs the reading procedure with EF_{CCP2}.
- Update: The ME performs the updating procedure with EF_{CCP2}.
- Erasure: The ME sends the identification of the requested information to be erased. The content of the

identified record in EF_{CCP2} is marked as "free".

5.3.6 User controlled PLMN selector with Access Technology

- Requirement: Service n°20 "available".
- Request: The ME performs the reading procedure with $EF_{PLMNwACT}$.
- Update: The ME performs the updating procedure with EF_{PLMNwACT}.

5.3.7 Cell broadcast message identifier

- Requirement: Service n°15 "available".
- Request: The ME performs the reading procedure with EF_{CBMI}.
- Update: The ME performs the updating procedure with EF_{CBMI}.

5.3.8 Group identifier level 1

- Requirement: Service n°17 "available".
- Request: The ME performs the reading procedure with EF_{GID1}.

5.3.9 Group identifier level 2

- Requirement: Service n°18 "available".
- Request: The ME performs the reading procedure with EF_{GID2} .

5.3.10 Service provider name

- Requirement: Service n°19 "available".
- Request: The ME performs the reading procedure with EF_{SPN}.

5.3.11 Enhanced multi level precedence and pre-emption service

- Requirement: Service n°24 "available".

Enhanced Multi Level Precedence and Pre-amption.

- Request: The ME performs the reading procedure with EF_{eMLPP}.

Automatic Answer on eMLPP service.

- Request: The ME performs the reading procedure with EF_{AAeM}.

Update: The ME performs the updating procedure with EF_{AAeM}.

5.3.12 Cell broadcast message identifier ranges

- Requirement: Service n°16 "available".

- Request: The ME performs the reading procedure with EF_{CBMIR}.

- Update: The ME performs the updating procedure with EF_{CBMIR}.

5.3.13 Short message status report

- Requirement: Service n°11 "available".

- Request: If the status of a stored short message indicates that there is a corresponding status report, the ME

performs the search record function with EF_{SMSR} to identify the record containing the appropriate

status report. The ME performs the reading procedure with EF_{SMSR} .

- Update: If a status report is received, the ME first seeks within the SMS record identifiers of EF_{SMSR} for the same record number it used for the short message in EF_{SMS} . If such a record identifier is found

in EF_{SMSR} , it is used for storage. If such a record identifier is not found, then the ME seeks for a free entry in EF_{SMSR} for storage. If no free entry is found the ME runs the Purge procedure with

 $\mathsf{EF}_{\mathsf{SMSR}}.$ If there is still no free entry, the status report is not stored.

- If the ME found an appropriate record in EF_{SMSR} for storage, it updates the record with the status report setting the record identifier in EF_{SMSR} to the appropriate record number of the short message in EF_{SMS} .

- The status in EF_{SMS} is updated accordingly by performing the update procedure with EF_{SMS}.

- Erasure: The ME runs the update procedure with EF_{SMSR} by at least storing '00' in the first byte of the record.

The ME may optionally update the following bytes with 'FF'.

Purge: The ME shall read the SMS record identifier (byte 1) of each record of EF_{SMSR}. With each record the

ME checks the corresponding short messages in EF_{SMS}. If the status (byte 1) of the corresponding

SMS is not equal '1D' (status report requested, received and stored in EF_{SMSR}), the ME shall perform the

erasure procedure with the appropriate record in EF_{SMSR}.

5.3.14 APN Control List

- Requirement: Service n°35 "available".

- Request: The ME performs the reading procedure with EF_{ACL}.

- Update: The ME performs the updating procedure with EF_{ACL}.

- Enabling: The ME activates service n°3 in EF_{EST} (bit n°3 set to "1").

- Disabling: The ME deactivates service n°3 in EF_{EST} (bit n°3 set to "0").

When the APN Control List service is enabled, the ME shall check that the entire APN of any PDP context is listed in EF_{ACL} before requesting this PDP context activation from the network. If the APN is not present in EF_{ACL} , the ME shall not request the corresponding PDP context activation from the network.

In the case that the APN Control List is enabled and no APN is indicated in the PDP context request, indicating that a network provided APN is to be used, then the ME shall only request the PDP context activation if "network provided APN" is contained within EF_{ACL} .

5.3.15 Depersonalisation Control Keys

- Requirement: Service n°36 "available".
- Request: The ME performs the reading procedure with EF_{DCK}.

5.3.16 Co-operative Network List

- Requirement: Service n°37 "available".
- Request: The ME performs the reading procedure with EF_{CNL} .

5.3.17 CPBCCH information

- Requirement: Service n°39 "available".
- Request: The ME performs the reading procedure with EF_{CPBCCH}.
- Update: The ME performs the updating procedure with EF_{CPBCCH} .

5.3.18 Investigation Scan

- Requirement: Service n°40 "available".
- Request: The ME performs the reading procedure with EF_{InvScan}.

5.3.19 Enabled Services Table Request

- Requirement: Service n°34 "available".
- Request: The ME performs the reading procedure with EF_{EST}.
- Update: The ME performs the updating procedure with ${\rm EF_{EST}}.$

5.3.20 Operator controlled PLMN selector with Access Technology

- Requirement: Service n°42 "available".
- Request: The ME performs the reading procedure with $EF_{OPLMNwACT}$

5.3.21 HPLMN selector with Access Technology

- Requirement: Service n°43 "available".
- Request: The ME performs the reading procedure with $EF_{HPLMNACT}$

5.3.22 Void

5.3.23 Network Parameter information

- Request: The ME performs the reading procedure with EF_{NETPAR} .
- Update: The ME performs the updating procedure with EF_{NETPAR}.

5.3.24 PLMN network name

Requirement: Service n°45 "available".

- Request: The ME performs the reading procedure with EF_{PNN} .

5.3.25 Operator PLMN List

- Requirement: Service n°46 "available".

- Request: The ME performs the reading procedure with EF_{OPL}

5.3.26 Message Waiting Indication

- Requirement: Service n°48 "available".

- Request: The ME performs the reading procedure with EF_{MWIS}.

- Update: The ME performs the updating procedure with EF_{MWIS}.

5.3.27 Call Forwarding Indication Status

- Requirement: Service n°49 "available".

Request: The ME performs the reading procedure with EF_{CFIS}.

- Update: The ME performs the updating procedure with EF_{CFIS}.

5.3.28 Service Provider Display Information

Requirement: Service n°19 and 51 are "available".

- Request: The ME performs the reading procedure with EF_{SPDI}.

- Update: The ME performs the updating procedure with EF_{SPDI} .

5.3.29 MMS Notifications

- Requirement: Service n°52 "available".

- Request: The ME sends the identification of the information to be read, then the ME performs the reading procedure with EF_{MMSN} . If Service n°53 is available the ME shall analyse the data of EF_{MMSN} to ascertain, whether additional data is associated in EF_{EXT8} . If necessary, then the ME performs the reading procedure on EF_{EXT8} to assemble the complete MMS notification.
- Update: The ME analyses and assembles the MMS notification to be stored as follows:
 - if the MMS notification contains not more bytes than the maximum possible number for EF_{MMSN} then the ME looks for the next available area to store the MMS notification. If such an area is available, it performs the updating procedure with EF_{MMSN}.
 - if the MMS notification contains <u>more</u> bytes than the maximum possible number for EF_{MMSN} then the ME seeks for a sufficient number of free records in EF_{EXT8} to store the complete MMS notification.
 - If there is not a sufficient number of EF_{EXT8} records marked as "free" to store the complete MMS notification, the procedure is aborted.
 - otherwise, the ME performs the updating procedure and stores as many bytes as possible in EF_{MMSN}. The Extension file record number of EF_{MMSN} is coded with the associated record number in the EF_{EXT8}. The remaining bytes are stored in the selected EF_{EXT8} record where the type of the record is then set to "additional data". The second byte of the EF_{EXT8} record is set with the number of bytes of the remaining additional data. It is possible, if the number of additional digits exceeds the capacity of the additional record, to chain

another record inside the EF_{EXT8} by the identifier in the last byte of the record. In this case byte 2 of each record for additional data within the same chain indicates the number of bytes within the same record.

The ME is only allowed to store extension data in unused records of EF_{EXT8}

If there is no available empty space in the USIM to store the MMS notification, it is up to ME implementation how the notification is handled.

Erasure: The ME will select in the USIM the MMS notification to be erased. Depending on the MMI, the MMS notification may be read before the area is marked as "free". The memory of the USIM may still contain the old MMS notification until a new message is stored. If Service n°53 is available all associated records in EF_{EXT8} are then marked by the ME as "free" by setting them to 'FF'.

5.3.30 MMS Issuer Connectivity Parameters

- Requirement: Service n°52 "available".

- Request: the ME performs the reading procedure with EF_{MMSICP}.

Update: The ME performs the updating procedure with EF_{MMSICP}.

5.3.31 MMS User Preferences

Requirement: Service n°52 "available".

- Request: the ME performs the reading procedure with EF_{MMSUP}.

- Update: The ME performs the updating procedure with EF_{MMSUP}.

5.3.32 MMS User Connectivity Parameters

- Requirement: Service n°52 and n°55 "available".

- Request: the ME performs the reading procedure with EF_{MMSUCP} .

- Update: The ME performs the updating procedure with EF_{MMSUCP}.

5.3.33 Network's indication of alerting

Requirement: Service n°56 "allocated and activated".

Request: The ME performs the reading procedure with EF_{NIA} .

5.4 USAT related procedures

5.4.1 Data Download via SMS-PP

- Requirement: USIM Service n°28 "available".

The procedures and commands for Data Download via SMS-PP are defined in TS 31.111 [12].

5.4.2 Image Request

The terminal sends the identification of the information to be read. The terminal shall analyse the data of EF_{IMG} to identify the files containing the instances of the image. If necessary, then the terminal performs READ BINARY commands on these files to assemble the complete image instance data.

5.4.3 Data Download via SMS-CB

- Requirement: USIM Service n°29 "available".

The ME shall perform the reading procedure with EF_{CBMID} , and add the message identifiers to the Cell Broadcast search list. On receiving a cell broadcast message the procedure defined in TS 31.111 [12] applies.

5.4.4 Call Control by USIM

- Requirement: USIM Service n°30 "available".

The procedures and commands for Call Control by USIM are defined in TS 31.111 [12]. It is mandatory for the ME to perform the procedures if it has indicated that it supports Call Control by USIM in the TERMINAL PROFILE command.

5.4.5 MO-SMS control by USIM

- Requirement: USIM Service n°31 "available".

The procedures and commands for MO-SMS control by USIM are defined in TS 31.111 [12]. It is mandatory for the ME to perform the procedures if it has indicated that it supports MO-SMS control by USIM in the TERMINAL PROFILE command.

5.5 MExE related procedures

MExE is an optional feature. The higher level procedures, and contents and coding of the commands are given in TS 23.057 [30]. Procedures relating to the transmission of commands and responses across the USIM/ME interface are given in this clause. A USIM or ME supporting MExE shall conform to the requirements given in this clause.

5.5.1 MEXE ST

Requirement: Service n°41 (MExE) "available".

Request: The ME performs the reading procedure with $EF_{MExE-ST}$

5.5.2 Operator root public key

Requirement: Service n°41 (MExE) "available" and MExE ST service n°1 (EF_{ORPK}) "available".

Request: The ME performs the reading procedure with EF_{ORPK} . The ME shall analyse the data of EF_{ORPK}

(clause 4.4.1.4.2) to identify the files containing the certificate instances. If necessary, then the ME performs READ BINARY commands on these files to assemble the complete certificate instance

data.

5.5.3 Administrator root public key

Requirement: Service n°41 (MExE) "available" and MExE ST service n°2 (EF_{ARPK}) "available".

Request: The ME performs the reading procedure with EF_{ARPK} . The ME shall analyse the data of EF_{ARPK}

(clause 4.4.1.4.3) to identify the file containing the certificate instance. If necessary, then the ME performs READ BINARY commands on this file to assemble the complete certificate instance

data.

5.5.4 Third Party root public key(s)

Requirement: Service n°41 (MExE) "available" and MExE ST service n°3 (EF_{TPRPK}) "available".

Request: The ME performs the reading procedure with EF_{TPRPK}. The ME shall analyse the data of EF_{TPRPK}

(clause 4.4.1.4.4) to identify the files containing the certificate instances. If necessary, then the ME performs READ BINARY commands on these files to assemble the complete certificate instance

data

5.5.5 Trusted Key/Certificates Data Files

Requirement: Service n°41 (MExE) "available".

Request: The ME performs the reading procedure with EF_{TKCDF} . The ME shall analyse the data of EF_{TKCDF}

and, if necessary, perform READ BINARY commands on these files

6 Security features

The security aspects of 3G are specified in TS 33.102 [13] and TS 33.103 [14]. This clause gives information related to security features supported by the USIM to enable the following:

- authentication of the USIM to the network;
- authentication of the network to the USIM;
- authentication of the user to the USIM;
- data confidentiality over the radio interface;
- file access conditions;
- conversion functions to derive GSM parameters.

6.1 Authentication and key agreement procedure

This clause gives an overview of the authentication mechanism and cipher and integrity key generation which are invoked by the network. For the specification of the corresponding procedures across the USIM/ME interface see clause 5.

The mechanism achieves mutual authentication by the user and the network showing knowledge of a secret key K which is shared between and available only to the USIM and the AuC in the user's HE. In addition, the USIM and the HE keep track of counters SQN_{MS} and SQN_{HE} respectively to support network authentication. SQN_{HE} is a counter in the HLR/AuC, individual for each user and SQN_{MS} denotes the highest sequence number the USIM has ever accepted.

When the SN/VLR initiates an authentication and key agreement, it selects the next authentication vector and sends the parameters RAND and AUTN (authentication token) to the user. Each authentication token consists of the following components: a sequence number SQN, an Authentication Management Field (AMF) and a message authentication code MAC over the RAND, SQN and AMF.

The USIM checks whether AUTN can be accepted and, if so, produces a response RES which is sent back to the SN/VLR. The SN/VLR compares the received RES with XRES. If they match the SN/VLR considers the authentication and key agreement exchange to be successfully completed. The USIM also computes CK and IK. The established keys CK and IK will be used by the ME to perform ciphering and integrity functions.

A permanent secret key K is used in this procedure. This key K has a length of 128 bits and is stored within the USIM for use in the algorithms described below. Also more than one secret key K can be stored in the USIM. The active key to be used by the algorithms is signalled within the AMF field in the AUTN.

6.2 Cryptographic Functions

The names and parameters of the cryptographic functions supported by the USIM are defined in TS 33.102 [13]. These are:

- f1: a message authentication function for network authentication used to compute XMAC;
- f1*: a message authentication function for support to re-synchronisation with the property that no valuable information can be inferred from the function values of f1* about those of f1, ..., f5, f5* and vice versa;
- f2: a message authentication function for user authentication used to compute SRES;
- f3: a key generating function to compute the cipher key CK;
- f4: a key generating function to compute the integrity key IK;
- f5: a key generating function to compute the anonymity key AK (optional);
- f5*: a key generating function to compute AK in re-synchronisation procedures with the property that no valuable information can be inferred from the function values of f5* about those of f1, f1*, f2, ..., f5 and vice versa.

These cryptographic functions may exist either discretely or combined within the USIM.

6.3 GSM Conversion Functions

To gain GSM access, the USIM provides the conversion functions c2 and c3. These functions derive the required GSM parameters (SRES, cipher key Kc) from available 3G parameters.

6.4 User verification and file access conditions

The USIM application uses 2 PINs for user verification, PIN and PIN2. PIN2 is used only in the ADF. The PIN and PIN2 are mapped into key references as defined in TS 31.101 [11]. The Universal PIN shall be associated with a usage qualifier. Other key references may be associated with a usage qualifier as defined in ISO/IEC7816-9 [26]. The PIN status is indicated in the PS_DO, which is part of the FCP response when an ADF/DF is selected. The coding of the PS_DO is defined in TS 31.101 [11].

PIN and PIN2 are coded on 8 bytes. Only (decimal) digits (0-9) shall be used, coded in CCITT T.50 [23] with bit 8 set to zero. The minimum number of digits is 4. If the number of digits presented by the user is less than 8 then the ME shall pad the presented PIN with 'FF' before sending it to the USIM.

The coding of the UNBLOCK PINs is identical to the coding of the PINs. However, the number of (decimal) digits is always 8.

The security architecture as defined in TS 31.101 [11] applies to the USIM application with the following definitions and additions.

- The USIM application shall use a global key reference as PIN and local key reference as PIN2. For access to DF_{TELECOM} the PIN shall be verified. Access with PIN2 is limited to the ADF(USIM).
- The only valid values for the usage qualifier are '00' (verification requirement is not used) and '08' (user authentication knowledge based (PIN)) as defined in ISO/IEC 7816-9 [26]. The terminal shall support the multiapplication capabilities as defined in 31.101 [11].
- Every file in the USIM application shall have a reference to an access rule stored in EF_{ARR}.
- Every file under DF_{Telecom} shall have a reference to an access rule stored in EF_{ARR} under DF_{Telecom}.
- A multi-application capability UICC (from the security context point of view) shall support the referenced format using SEID as defined in TS 31.101 [11].
- A multi-application capability UICC (from the security context point of view) shall support the replacement of a USIM application PIN with the Universal PIN, key reference '11', as defined in TS 31.101 [11]. Only the Universal PIN is allowed as a replacement.
- A terminal shall support the use of level 1 and level 2 user verification requirements as defined in TS 31.101 [11].
- A terminal shall support the replacement of a USIM application PIN with the Universal PIN, key reference '11', as defined in TS 31.101 [11].
- A terminal shall support the security attributes defined using tag's '8C', 'AB' and '8B' as defined in TS 31.101 [11]. In addition both the referencing methods indicated by tag '8B' shall be supported as defined in TS 31.101 [11].

Disabling of PIN2 is allowed. This is, however, not the case if PIN2 is mapped to the CHV2 of a GSM application.

The access rule is referenced in the FCP using tag '8B'. The TLV object contains the file ID (the file ID of EF_{ARR}) and record number, or file ID (the file ID of EF_{ARR}), SEID and record number, pointer to the record in EF_{ARR} where the access rule is stored. Each SEID refers to a record number in EF_{ARR} . EFs having the same access rule use the same record reference in EF_{ARR} . For a example EF_{ARR} , see TS 31.101 [11].

7 USIM Commands

7.1 AUTHENTICATE

7.1.1 Command description

The function is used during the procedure for authenticating the USIM to its HE and vice versa. In addition, a cipher key and an integrity key are calculated. For the execution of the command the USIM uses the subscriber authentication key K, which is stored in the USIM.

The function is related to a particular USIM and shall not be executable unless the USIM application has been selected and activated, and the current directory is the USIM ADF or any subdirectory under this ADF and a successful PIN verification procedure has been performed (see clause 5).

The function can be used in two different contexts:

- a 3G security context, when 3G authentication vectors (RAND, XRES, CK, IK, AUTN) are available (i.e. the UE is located in the UTRAN, or in a GSM radio access network which is connected to a 3G or 3G capable VLR/SGSN), or
- a GSM security context, when GSM authentication data are available only (i.e. the UE is located in the GSM radio access network which is connected to a non-3G capable VLR/SGSN).

7.1.1.1 3G security context

The USIM first computes the anonymity key $AK = f5_K$ (RAND) and retrieves the sequence number $SQN = (SQN \oplus AK) \oplus AK$.

Then the USIM computes XMAC = $f1_K$ (SQN || RAND || AMF) and compares this with the MAC which is included in AUTN. If they are different, the USIM abandons the function.

Next the USIM verifies that the received sequence number SQN is previously unused. If it is unused and its value is lower than SQN_{MS} , it shall still be accepted if it is among the last 32 sequence numbers generated. A possible verification method is described in TS 33.102 [13].

NOTE: This implies that the USIM has to keep a list of the last used sequence numbers and the length of the list is at least 32 entries.

If the USIM detects the sequence numbers to be invalid, this is considered as a synchronisation failure and the USIM abandons the function. In this case the command response is AUTS, where:

 $AUTS = Conc(SQN_{MS}) \parallel MACS;$

 $Conc(SQN_{MS}) = SQN_{MS} \oplus f5*_{K}(RAND)$ is the concealed value of the counter SQN_{MS} in the USIM; and.

 $MACS = fI *_{K}(SQN_{MS} // RAND // AMF)$ where:

RAND is the random value received in the current user authentication request;

the AMF assumes a dummy value of all zeroes so that it does not need to be transmitted in clear in the resynchronisation message.

If the sequence number is considered in the correct range, the USIM computes RES = $f2_K$ (RAND), the cipher key $CK = f3_K$ (RAND) and the integrity key $IK = f4_K$ (RAND) and includes these in the command response. Note that if this is more efficient, RES, CK and IK could also be computed earlier at any time after receiving RAND.

The use of AMF is HE specific and while processing the command, the content of the AMF has to be interpreted in the appropriate manner. The AMF may e.g. be used for support of multiple algorithms or keys or for changing the size of lists, see TS 33.102 [13].

If Service $n^{\circ}27$ is "available", the USIM calculates the GSM response parameter K_C , using the conversion function defined in TS 33.102 [13].

Input:

- RAND, AUTN (AUTN:= $SQN \oplus AK \parallel AMF \parallel MAC$).

Output:

- RES, CK, IK if Service n°27 is "not available".

or

- RES, CK, IK, K_C if Service n°27 is "available".

or

- AUTS.

7.1.1.2 GSM security context

USIM operation in an GSM security context is supported if Service n°38 is "available".

The USIM computes RES = $f2_K$ (RAND), the cipher key CK = $f3_K$ (RAND) and the integrity key IK = $f4_K$ (RAND). Next the USIM calculates the GSM response parameters SRES and K_C , using the conversion functions defined in TS 33.102 [13].

Input:

- RAND.

Output:

- SRES; K_C.

7.1.2 Command parameters and data

Code	Value
CLA	As specified in TS 31.101
INS	'88'
P1	'00'
P2	See table below
Lc	See below
Data	See below
Le	'00', or maximum length of data expected in
	response

Parameter P2 specifies the authentication context as follows:

Coding of the reference control P2

Coding b8-b1	Meaning
'1'	Specific reference data (e.g. DF
	specific/application dependant key)
' -XXXXXX- '	'000000'
'X'	Authentication context:
	0 GSM context
	1 3G context

All other codings are RFU.

Command parameters/data:

Byte(s)	Description	Length
1	Length of RAND (L1)	1
2 to (L1+1)	RAND	L1
(L1+2)	Length of AUTN (L2) (see note)	1
(L1+3) to	AUTN (see note)	L2
(L1+L2+2)		
Note: Parameter present if and only if in 3G security context.		

The coding of AUTN is described in TS 33.102 [13]. The most significant bit of RAND is coded on bit 8 of byte 2. The most significant bit of AUTN is coded on bit 8 of byte (L1+3).

Response parameters/data, case 1, 3G security context, command successful:

Byte(s)	Description	Length
1	"Successful 3G authentication" tag = 'DB'	1
2	Length of RES (L3)	1
3 to (L3+2)	RES	L3
(L3+3)	Length of CK (L4)	1
(L3+4) to	CK	L4
(L3+L4+3)		
(L3+L4+4)	Length of IK (L5)	1
(L3+L4+5) to	IK	L5
(L3+L4+L5+4)		
(L3+L4+L5+5)	Length of K_C (= 8) (see note)	1
(L3+L4+L5+6	K _C (see note)	8
to		
(L3+L4+L5+13)		
Note: Parameter present if and only if Service n°27 is "available".		

The most significant bit of RES is coded on bit 8 of byte 3. The most significant bit of CK is coded on bit 8 of byte (L3+4). The most significant bit of IK is coded on bit 8 of byte (L3+L4+5).

Response parameters/data, case 2, 3G security context, synchronisation failure:

Byte(s)	Description	Length
1	"Synchronisation failure" tag = 'DC'	1
2	Length of AUTS (L1)	1
3 to (L1+2)	AUTS	L1

The coding of AUTS is described in TS 33.102 [13]. The most significant bit of AUTS is coded on bit 8 of byte 3.

Response parameters/data, case 3, GSM security context, command successful:

Byte(s)	Description	Length
1	Length of SRES (= 4)	1
2 to 5	SRES	4
6	Length of K _C (= 8)	1
7 to 14	Kc	8

The most significant bit of SRES is coded on bit 8 of byte 2. The most significant bit of Kc is coded on bit 8 of byte 7.

7.2 Void

7.3 Status Conditions Returned by the USIM

Status of the card after processing of the command is coded in the status bytes SW1 and SW2. This clause specifies the coding of the status bytes in the following tables, in addition to the ones defined in TS 31.101 [11].

7.3.1 Security management

SW1	SW2	Error description
'98'	'62'	- Authentication error, incorrect MAC
'98'	'64	- Authentication error, GSM security context not supported

7.3.2 Status Words of the Commands

The following table shows for each command the possible status conditions returned (marked by an asterisk *).

Commands and status words

Status Words	AUTHENTICATE
90.00	*
90 00	*
91 XX	
93 00	
98 50	
98 62	*
98 64	*
62 00	*
62 81	
62 82	
62 83	
63 CX	
64 00	*
65 00	*
65 81	*
67 00	*
67 XX – (see note)	*
68 00	*
68 81	*
68 82	*
69 81	
69 82	*
69 83	
69 84	*
69 85	*
69 86	
6A 80	
	*
6A 81	-
6A 82 6A 83	
	*
6A 86	<u> </u>
6A 87	*
6A 88	*
6B 00	*
6E 00	
6F 00	*
6F XX – (see note)	*
NOTE: Except SW2 = '	00'.

8 UICC Characteristics

The UICC characteristics are defined in TS 31.101 [11]. As TS 31.101 [11] refers to TS 102 221 [37] for the details of the characteristics, and because the scope of TS 102 221 [37] also encompasses other mobile systems, it is necessary to list those issues which are not applicable to the USIM application, which deviate from TS 102 221 [37] or options which require further precision. This clause contains such information.

8.1 Voltage classes

A UICC holding a USIM application shall support at least two consecutive voltage classes as defined in TS 31.101 [11], e.g. AB or BC. If the UICC supports more than two classes, they shall all be consecutive, e.g. ABC.

8.2 File Control Parameters (FCP)

This clause defines the contents of the data objects which are part of the FCP information where there is a difference compared to the values as specified in TS 31.101 [11]. This clause also specifies values for data objects in the FCP information where there is no exact value given in TS 31.101 [11] and there is a need for such from the USIM application point of view.

8.2.1 Minimum application clock frequency

This data object is indicated by tag '82' in the proprietary constructed data object in the FCP information, identified by tag 'A5', as defined in TS 31.101 [11]. This data object specifies the minimum clock frequency to be provided by the terminal during the USIM session. The value indicated in this data object shall not exceed 3 MHz, corresponding to '1E'. The terminal shall use a clock frequency between the value specified by this data object and the maximum clock frequency for the UICC as defined in TS 31.101 [11]. If this data object is not present in the FCP response or the value is 'FF' then the terminal shall assume that the minimum clock frequency is 1 MHz.

8.3 Optional commands

The following command is optional for the USIM application:

- GET CHALLENGE command.

8.4 Interface protocol

No extra guard time, indicated in TC1 in the ATR, needs to be supported when sending characters from the terminal to the card. The terminal may reject a UICC indicating values other than 0 or 255 in TC1.

NOTE: In previous versions of this release a value for the time between the start bit of the last character received by the UICC or the terminal and the start bit of the first character sent in opposite direction for T=0 has been referenced to as 16 etu.

8.5 PPS procedure

If the value of TA1 in the ATR is not '11' or '01', the PPS procedure shall be used.

When the terminal does not support or cannot recognize the values indicated by the card in character TA1 of the ATR, it shall initiate at least one PPS procedure indicating Fi and Di values specified in TS 31.101 [11] before issuing a PPS with default values.

Annex A (informative): EF changes via Data Download or USAT applications

This annex defines if changing the content of an EF by the network (e.g. by sending an SMS), or by a USAT Application, is advisable. Updating of certain EFs "over the air" such as EF_{ACC} could result in unpredictable behaviour of the UE; these are marked "Caution" in the table below. Certain EFs are marked "No"; under no circumstances should "over the air" changes of these EFs be considered.

ile identification	Description	Change advised
'2F00'	Application directory	Caution
'2F05'	Preferred languages	Yes
'2F06'	Access rule reference	Caution
'2FE2'	ICC identification	No
'4F20'	Image data	Yes
"4F20"	GSM Ciphering key Kc	No
'4FXX'	Image Instance data Files	Yes
'4FXX'	Unique identifier	Yes
'4F22'	Phone book synchronisation counter	Yes
'4F23'	Change counter	Yes
'4F24'	Previous unique identifier	Yes
'4F30'	Phone book reference file	Yes
'4FXX'	Capability configuration parameters 1	Yes
'4F30'	SoLSA Access Indicator	Caution
'4F31'	SoLSA LSA List	Caution
	LSA Descriptor files	Caution
"4F52"	GPRS Ciphring key KcGPRS	No
'4F63'	CPBCCH Information	No
'4F64"	Investigation Scan	Caution
'4FXX'	Additional number alpha string	Yes
'4FXX'	Additional number	Yes
'4FXX'	Second name entry	Yes
'4FXX'	Grouping information alpha string	Yes
'4FXX'	Phone book control	Yes
'4FXX'	E-mail addresses	Yes
'4FXX'	Index administration phone book	Yes
'4FXX'	Extension 1	Yes
'4FXX'	Abbreviated dialling numbers	Yes
'4FXX'	Grouping file	Yes
'6F05'	Language indication	Yes
"6F06"	Access rule reference (under ADF _{USIM} and DF _{TELECOM})	Caution
'6F07'	IMSI	Caution (Note 1
'6F08'	Ciphering and integrity keys	No
'6F09'	Ciphering and integrity keys for packet switched domain	No
'6F2C'	De-personalization Control Keys	Caution
'6F31'	Higher Priority PLMN search period	Caution
'6F32'	Co-operative network list	Caution
'6F37'	ACM maximum value	Yes
'6F38'	USIM service table	Caution
'6F39'	Accumulated call meter	Yes
'6F3B'	Fixed dialling numbers	Yes
'6F3C'	Short messages	Yes
'6F3E'	Group identifier level 1	Yes
'6F3F'	Group identifier level 2	Yes

File identification	Description	Change advised
'6F40'	MSISDN storage	Yes
'6F41'	PUCT	Yes
'6F42'	SMS parameters	Yes
'6F43'	SMS status	Yes
'6F45'	CBMI	Caution
'6F46'	Service provider name	Yes
'6F47'	Short message status reports	Yes
'6F48'	CBMID	Yes
'6F49'	Service Dialling Numbers	Yes
'6F4B'	Extension 2	Yes
'6F4C'	Extension 3	Yes
'6F4D'	Barred dialling numbers	Yes
'6F4E'	Extension 5	Yes
'6F4F'	Capability configuration parameters 2	Yes
'6F50'	CBMIR	Yes
'6F54'	SetUp Menu Elements	Yes
"6F55"	Extension 4	Yes
'6F56'	Enabled services table	Caution
'6F57'	Access point name control list	Yes
'6F58'	Comparison method information	Yes
'6F5B'	Initialisation value for Hyperframe number	Caution
'6F5C'	Maximum value of START	Yes
'6F60'	User controlled PLMN selector with Access Technology	No
'6F61'	Operator controlled PLMN selector with Access Technology	Caution
'6F62'	HPLMN selector with Access Technology	Caution
'6F73'	Packet switched location information	Caution
'6F78'	Access control class	Caution
'6F7B'	Forbidden PLMNs	Caution
'6F7E'	Location information	No (Note 1)
'6F80'	Incoming call information	Yes
'6F81'	Outgoing call information	Yes
'6F82'	Incoming call timer	Yes
'6F83'	Outgoing call timer	Yes
'6FAD'	Administrative data	Caution
'6FB1'	Voice Group Call Service	Yes
'6FB2'	Voice Group Call Service Status	Yes
'6FB3'	Voice Broadcast Service	Yes
'6FB4'	Voice Broadcast Service Status	Yes
'6FB5'	Enhanced Multi Level Pre-emption and Priority	Yes
'6FB6'	Automatic Answer for eMLPP Service	Yes
'6FB7'	Emergency Call Codes	Caution
'6FC3'	Key for hidden phone book entries	No
'6FC4'	Network Parameters	No
'6FC5'	PLMN Network Name	Yes
'6FC6'	Operator Network List	Yes
'6FC7'	Mailbox Dialling Numbers	Yes
'6FC8'	Extension 6	Yes
'6FC9'	Mailbox Identifier	Caution
'6FCA'	Message Waiting Indication Status	Caution
'6FCB'	Call Forwarding Indication Status	Caution
'6FCC'	Extension 7	Yes
'6FCD'	Service Provider Display Information	Yes
"6FCE"	MMS Notification	Yes
"6FCF"	Extension 8	Yes
"6FD0"	MMS Issuer Connectivity Parameters	Yes
"6FD1"	MMS User Preferences	Yes
"6FD2"	MMS User Connectivity Parameters	Yes
'6FD3'	Network's indication of alerting (NIA)	Caution
NOTE1: If EF _{IMSI} is	changed, the UICC should issue REFRESH as defined in TS 3	1.111 and update

NOTE1: If EF_{IMSI} is changed, the UICC should issue REFRESH as defined in TS 31.111 and update EF_{LOCI} accordingly.

Annex B (normative): Image Coding Schemes

The following image coding schemes are applicable to rectangular raster images. Raster image points are assumed to be of square shape. They are numbered sequentially from 1 onwards, starting at the upper left corner, proceeding line by line downwards, each line in turn proceeding from left to right, and ending at the image's lower right corner.

The following example illustrates the numbering scheme for raster image points by showing how the corner points are numbered, assuming an image length of x points and an image height of y points.



B.1 Basic Image Coding Scheme


This coding scheme applies to rectangular raster images made up of raster points that are either set or not set. This coding scheme does not support any notion of colour. Image data are coded as follows:

Byte(s)	Description	Length
1	image width = X	1
2	image height = Y	1
3 to K+2	image body	K


Coding of image body:

- The status of each raster image point is coded in one bit, to indicate whether the point is set (status = 1) or not set (status = 0).

Byte 1:

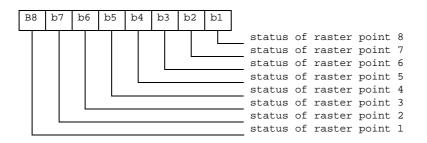

Byte 2:

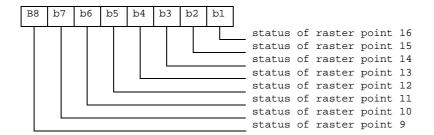

etc.

Unused bits shall be set to 1.

B.2 Colour Image Coding Scheme

This coding scheme applies to coloured rectangular raster images. Raster image point colours are defined as references into a colour look-up table (CLUT), which contains a subset of the red-green-blue colour space. The CLUT in turn is located in the same transparent file as the image instance data themselves, at an offset defined within the image instance data.

Image data are coded as follows:

Byte(s)	Description	Length
1	Image width = X	1
2	Image height = Y	1
3	Bits per raster image point = B	1
4	Number of CLUT entries = C	1
5 to 6	Location of CLUT (Colour Look-up Table)	2
7 to K+6	Image body	K

Bits per raster image point:

Contents:

- the number B of bits used to encode references into the CLUT, thus defining a raster image point's colour. B shall have a value between 1 and 8.

Coding:

- binary.

Number of entries in CLUT:

Contents:

- the number C of entries in the CLUT which may be referenced from inside the image body. CLUT entries are numbered from 0 to C-1. C shall have a value between 1 and 2**B.

Coding:

- binary. The value 0 shall be interpreted as 256.

Location of CLUT:

Contents:

- this item specifies where the CLUT for this image instance may be found. The CLUT is always located in the same transparent file as the image instance data themselves, at an offset determined by these two bytes.

Coding:


- Byte 1: high byte of offset into Image Instance File.
- Byte 2: low byte of offset into Image Instance File.

Image body:

Coding:

- each raster image point uses B bits to reference one of the C CLUT entries for this image instance. The CLUT entry being thus referenced yields the raster image point's colour. The image body is arrayed as for the Basic Colour Image Coding Scheme, that is, starting with the highest bit of the first raster image point's colour information.

Byte 1:

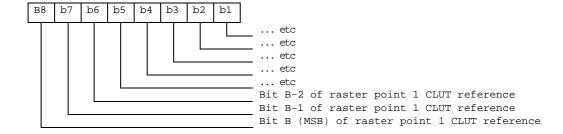

etc.

Unused bits shall be set to 1.

The CLUT (Colour Look-up Table) for an image instance with C colours is defined as follows:

Contents:

- C CLUT entries defining one colour each.

Coding:

- the C CLUT entries are arranged sequentially:

Byte(s) of CLUT	CLUT Entry
1-3	entry 0
3*(C-1) +1 to 3*C	Entry C-1

Each CLUT entry in turn comprises 3 bytes defining one colour in the red-green-blue colour space:

Byte(s) of CLUT entry	Intensity of Colour
1	Red
2	Green
3	Blue

A value of 'FF' means maximum intensity, so the definition 'FF' '00' 00' stands for fully saturated red.

NOTE 1: Two or more image instances located in the same file can share a single CLUT.

NOTE 2: Most MEs capable of displaying colour images are likely to support at least a basic palette of red, green, blue and white.

Annex C (informative): Structure of the Network parameters TLV objects

Structure of the GSM network parameter TLV object, 0<= m <=32

Tag	Length	Tag Currently Camped Frequenc y	Length	BCCH Frequer y downlir	nc	Tag Neighbour BCCH Frequency	Length	BCCH Neighbour Frequency 1	BCCH Neighbour Frequency 2	 	BCCH Neighbour Frequency m	
'A0'		'80'	'02'			'81'						

Structure of the FDD network parameter TLV object, 0 <= m <= 32

Tag	Length	Tag	Length	Intra	Primary	Primary	Tag	Lengt	Inter	Primary
	_	Intra	_	Frequency	Scrambling	Scrambling	Inter	h	Frequency	Scrambling
		frequency		downlink	code 1	code m	frequency		downlink	code n1
		carrier		carrier			carrier		carrier	
'A1'		'80'					'81'			

Structure of the TDD network parameter TLV object, 0 <= m <= 32

Tag	Length	Tag	Length	Intra	Primary	Primary	Tag	Lengt	Inter	Primary
_	_	Intra	_	Frequency	Scrambling	Scrambling	Inter	h	Frequency	Scrambling
		frequency		downlink	code 1	code m	frequency		downlink	code n1
		carrier		carrier			carrier		carrier	
'A2'		'80'					'81'			

Annex D (informative): Tags defined in 31.102

Tag	Name of Data Element	Usage
'A0'	GSM cell information	Network Parameters (EF _{NETPAR})
	The following tags are encapsulated within 'A0':	
	'80' GSM Camping Frequency data object	
	'81' GSM Neighbour Frequency Information data object	
'A1'	FDD cell information	Network Parameters (EF _{NETPAR})
	The following tags are encapsulated within 'A1':	
	'80' FDD Intra Frequency data object	
	'81' FDD Inter Frequency Information data object	
'A2'	TDD cell information	Network Parameters (EF _{NETPAR})
	The following tags are encapsulated within 'A2':	
	'80' TDD Intra Frequency data object	
	'81' TDD Inter Frequency Information data object	
'A3'	Service provider display information	Service Provider Display Information
	The following tags are encapsulated within 'A3':	(EF _{SPDI})
	'80' Service provider PLMN list	
'A8'	Indicator for type 1 EFs (amount of records equal to master EF)	Phone Book Reference File (EF _{PBR})
	The following tags are encapsulated within 'A8':	
	'C0' EF _{ADN} data object	
	'C1' EF _{IAP} data object	
	'C3' EF _{SNE} data object	
	'C4' EF _{ANR} data object	
	'C5' EF _{PBC} data object	
	'C6' EF _{GRP} data object	
	'C9' EF _{UID} data object	
	'CA' EF _{EMAIL} data object	
'A9'	Indicator for type 2 EFs (EFs linked via the index administration file)	Phone Book Reference File (EF _{PBR})
	The following tags are encapsulated within 'A9':	
	'C3' EF _{SNE} data object	
	'C4' EF _{ANR} data object 'CA' EF _{FMAII} data object	
'AA'		Dhana Daak Dafaranaa Fila (FF)
AA	Indicator for type 3 EFs (EFs addressed inside an object using a	Phone Book Reference File (EF _{PBR})
	record identifier as a pointer)	
	The following tags are encapsulated within 'AA':	
	'C2' EF _{EXT1} data object 'C7' EF _{AAS} data object	
	'C8' EF _{GAS} data object	
	'CB' EF _{CCP1} data object	
"AB"	MMS Connectivity Parameters:	MMS Connectivity Parameters
AD	The following are encapsulated under "AB":	(EF _{MMSICP} / EF _{MMSUCP})
	"80" MMS Implementation Tag	(LI MMSICP / EFMMSUCP)
	"81" MMS Relay/Server Tag	
	"82" Interface to core network and bearer Tag	
	"83" Gateway Tag	
'DB'	Successful 3G authentication	Response to AUTHENTICATE
'DC'	Synchronisation failure	Response to AUTHENTICATE
'DD'	Access Point Name	APN Control List (EF _{ACL})
טט	רטיבים ו טוווג ואמווופ	IVI IN COLLIOI FISE (ELYCF)

NOTE: the value 'FF' is an invalid tag value. For ASN.1 tag assignment rules see ISO/IEC 8825 [35]

Annex E (informative): Suggested contents of the EFs at pre-personalization

If EFs have an unassigned value, it may not be clear from the main text what this value should be. This annex suggests values in these cases.

File Identification	Description	Value
'2F00'	Application directory	Card issuer/operator dependant
'2F05'	Preferred languages	'FFFF'
'2F06'	Access rule reference	Card issuer/operator dependant
'2FE2'	ICC identification	operator dependant
'4F20'	Image data	'00FFFF'
"4F20"	GSM Ciphering key Kc	'FFFF07'
'4FXX'	Image instance data files	'FFFF'
'4FXX'	Unique identifier	'0000'
'4F22'	Phone book synchronisation counter	'0000000'
'4F23'	Change counter	'0000'
'4F24'	Previous unique identifier	'0000'
'4F30'	Phone book reference file	Operator dependant
'4F30'	SoLSA Access Indicator	'00FFFF'
'4F31'	SoLSA LSA List	'FFFF'
'4FXX'	LSA Descriptor files	'FFFF'
'4FXX'	Capability configuration parameters 1	'FFFF'
"4F52"	GPRS Ciphring key KcGPRS	'FFFF07'
'4F63'	CPBCCH Information	'FFFF'
'4F64'	Investigation PLMN scan	'00'
'4FXX'	E-mail addresses	'FFFF'
'4FXX'	Additional number alpha string	'FFFF'
'4FXX'	Second name entry	'FFFF'
'4FXX'	Abbreviated dialling numbers	'FFFF'
'4FXX'	Grouping file	'0000'
'4FXX'	Grouping information alpha string	'FFFF'
'4FXX'	Phone book control	'0000'
'4FXX'	Index administration phone book	'FFFF'
'4FXX'	Additional number	'FFFF'
'4FXX'	Extension 1	'00FFFF'
'6F05'	Language indication	'FFFF'
'6F06'	Access rule reference (under ADF _{USIM} and DF _{TELECOM})	Card issuer/operator dependant
'6F07'	IMSI	Operator dependant
'6F08'	Ciphering and integrity keys	'07FFFF'
'6F09'	Ciphering and integrity keys for packet switched domain	'07FFFF'
'6F2C'	De-personalization control keys	'FFFF'
'6F31'	Higher Priority PLMN search period	'FF'
'6F32'	Co-operative network list	'FFFF'
'6F37'	ACM maximum value	'000000' (see note 1)
'6F38'	USIM service table	Operator dependant
'6F39'	Accumulated call meter	'000000'
'6F3B'	Fixed dialling numbers	'FFFF'
'6F3C'	Short messages	'00FFFF'
'6F3E'	Group identifier level 1	Operator dependant
'6F3F'	Group identifier level 2	Operator dependant
'6F40'	MSISDN storage	'FFFF'
'6F41'	PUCT	'FFFFF0000'
'6F42'	SMS parameters	'FFFF'
'6F43'	SMS status	'FFFF'
'6F45'	CBMI	'FFFF'
'6F46'	Service provider name	Operator dependant
'6F47'	Short message status reports	'00FFFF'
'6F48'	CBMID	'FFFF'
'6F49'	Service Dialling Numbers	'FFFF'
'6F4B' '6F4C'	Extension 2	'00FFFF'
0740	Extension 3	'00FFFF'
	Continued	ı

File Identification	Description	Value				
'6F4D'	Barred Dialling Numbers	'FFFF'				
'6F4E'	Extension 5	'00FFFF'				
'6F4F'	Capability configuration parameters 2	'FFFF'				
'6F50'	CBMIR	'FFFF'				
'6F54'	SetUp Menu Elements	Operator dependant				
'6F55'	Extension 4	'00FFFF'				
'6F56'	Enabled services table	Operator dependant				
'6F57'	Access point name control list	'00FFFF'				
'6F58'	Comparison method information	'FFFF'				
'6F5B'	Initialisation value for Hyperframe number	'F0 00 00 F0 00 00'				
'6F5C'	Maximum value of START	Operator dependant				
'6F60'	User controlled PLMN selector with Access Technology	'FFFFF0000FFFFF0000'				
'6F61'	Operator controlled PLMN selector with Access Technology	'FFFFF0000FFFFFF0000'				
'6F62'	HPLMN selector with Access Technology	'FFFFF0000FFFFF0000'				
'6F73'	Packet switched location information	'FFFFFFF FFFFFF xxxxxx 0000 FF 01' (see note 2)				
'6F78'	Access control class	Operator dependant				
'6F7B'	Forbidden PLMNs	'FFFF'				
'6F7E	Location information	'FFFFFFF xxxxxx 0000 FF 01' (see note 2)				
'6F80'	Incoming call information	'FFFF 000000 00 01FFFF'				
'6F81'	Outgoing call information	'FFFF 000000 01FFFF'				
'6F82'	Incoming call timer	'000000'				
'6F83'	Outgoing call timer	'000000'				
'6FAD'	Administrative data	Operator dependant				
'6FB1'	Voice Group Call Service	Operator dependant				
'6FB2'	Voice Group Call Service Status	Operator dependant				
'6FB3'	Voice Broadcast Service	Operator dependant				
'6FB4'	Voice Broadcast Service Status	Operator dependant				
'6FB5'	EMLPP	Operator dependant				
'6FB6'	AaeM	'00'				
'6FB7'	Emergency call codes	Operator dependant				
'6FC3'	Key for hidden phone book entries	'FFFF'				
'6FC4'	Network Parameters	'FFFF'				
'6FC5'	PLMN Network Name	Operator dependant				
'6FC6'	Operator Network List	Operator dependant				
'6FC7'	Mailbox Dialling Numbers	Operator dependant				
'6FC8'	Extension 6	'00 FFFF'				
'6FC9'	Mailbox Identifier	Operator dependant				
'6FCA'	Message Waiting Indication Status	'00 00 00 00 00'				
'6FCB'	Call Forwarding Indication Status	'xx 00 FFFF'				
'6FCC'	Extension 7	'00 FFFF'				
'6FCD'	Service Provider Display Information					
"6FCE"	MMS Notification	"00 00 00 FFFF"				
"6FCF"	Extension 8	'00FFFF'				
"6FD0"	MMS Issuer Connectivity Parameters	"FFFF"				
"6FD1"	MMS User Preferences	"FFFF"				
"6FD2"	MMS User Connectivity Parameters	"FFFF"				
'6FD3'	Network's Indication of Alerting (NIA)	'FFFF'				

NOTE 1: The value '000000' means that ACMmax is not valid, i.e. there is no restriction on the ACM. When assigning a value to ACMmax, care should be taken not to use values too close to the maximum possible value 'FFFFFF', because the INCREASE command does not update EF_{ACM} if the units to be added would exceed 'FFFFFF'. This could affect the call termination procedure of the Advice of Charge function.

NOTE 2: xxxxxx stands for any valid MCC and MNC, coded according to TS 24.008 [9].

Annex F (informative): Examples of coding of LSA Descriptor files for SoLSA

The length of all the records is determined by the LSA descriptor containing the largest number of bytes. Combinations containing different numbers of LSA IDs, LAC+ CI and CI or LAC can therefore be done. Various examples are show. Due to the OTA management of the records it is recommended that the record length is maximum 100 bytes in order to leave room for command descriptor and signature information in the SMS.

This first example contains two LSAs, one described by two LSA IDs and another described by three Cell IDs, giving a record length of 8 bytes.

1 st record:	LSA descriptor type = LSA ID and number = 2 (1 byte)	LSA ID (3 bytes)	LSA ID (3 bytes)	Identifier (1 byte)	
2 nd record:	LSA descriptor type = CI and number = 3 (1 byte)	CI (2 bytes)	CI (2 bytes)	CI (2 bytes)	Identifier (1 byte)
The second example record length of	mple contains two LSA	s, one described by o	one LSA ID and one	described by two Cel	l Ids, giving a

1 st record:	LSA descriptor type = LSA ID and number = 1 (1 byte)	LSA ID (3 bytes)	'FF'	Identifier (1 byte)	
2 nd record:	LSA descriptor type = CI and number = 2 (1 byte)	CI (2 bytes)	CI (2 bytes)	Identifier (1 byte)	

Annex G (informative): Phonebook Example

This example phonebook has more than 254 entries. Additional number (3 additional numbers) information, second name and e-mail information can be added to each ADN entry. The phonebook also contains three files that are shared EF_{EXT1} , EF_{AAS} and EF_{GAS} . These files are addressed from inside a file. EF_{EXT1} is addressed via EF_{ADN} , EF_{ADN1} , EF_{AAS} is addressed via EF_{ANRA} , EF_{ANRA} , EF_{ANRB} , EF_{ANRB} , EF_{ANRC} , EF_{ANRC} and EF_{GAS} is addressed via EF_{GRP} . The phonebook supports two levels of grouping and hidden entries in EF_{PBC} .

Two records are needed in the phonebook reference file PBR '4F30' for supporting more than 254 entries. The content of the phonebook reference file PBR '4F30' records is as shown in table G.2. The structure of the DF_{PHONEBOOK} is shown in table G.1.

The content of phonebook entries in the range from 1-508 is described in the tables G.3 and G.4.

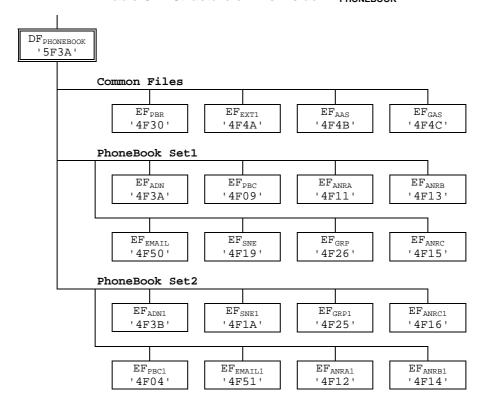


Table G.1: Structure of EFs inside DF_{PHONEBOOK}

Table G.2: Contents of EF_{PBR}

Rec 1	Tag'A8'	L='28']	(for Pho	nebook	Set1)								
	Tag'C0'	L='03'	'4F3A'	'01'	Tag'C5'	L='03'	'4F09'	'02'	Tag'C6'	L='03'	'4F26'	'03'	Tag'C4'	L='03'
	'4F11'	'04'	Tag'C4'	L='03'	'4F13'	'05'	Tag'C4'	L='03'	'4F15'	'06'	Tag'C3'	L='03'	'4F19'	'07'
	Tag'CA'	L='03'	'4F50'	'09']									
	Tag'AA'	L='0D'			_									
	Tag'C2'	L='03'	'4F4A'	'08'	Tag'C7'	L='02'	'4F4B'	Tag'C8	L='02'	'4F4C'				

Rec 2 Tag'A8' L='28' (for Phonebook Set 2)

Tag'C0' I	_='03'	'4F3B'	'0A'	Tag'C5'	L='03'	'4F0A'	'0B'	Tag'C6'	L='03'	'4F25'	'0C'	Tag'C4'	L='03'
'4F12'	'OD'	Tag'C4'	I ='03'	'4F14'	'0F'	Tag'C4'	I ='03'	'4F16'	'0F'	Tag'C3'	I ='03'	'4F1A'	'10'

Tag'CA' L='03' | '4F51' | '11'

Tag'AA' L='0D'

Tag'C2' L='03' | '4F4A' | '08' | Tag'C7' L='02' | '4F4B' | Tag'C8' L='02' | '4F4C |

Table G.3: Structure of the 254 first entries in the phonebook

Phone book entry	'4F	ON '3A' '01'	PBC '4F09' SFI '02'	GRP '4F26' SFI '03'	ANRA '4F11' SFI '04'	ANRB '4F13' SFI '05'	ANRC '4F15' SFI '06'	SNE '4F19' SFI '07'	EXT1 '4F4A' SFI '08'	AAS '4F4B'	GAS '4F4C'	EMAIL '4F50' SFI '09'
# 1	ADN Content Bytes (1- (X+13))	EXT1 Ident. (Byte X+14): Rec '02'	Hidden (AID rec N° 3)	Rec n°1 Rec n°3 '00'	ANRA Rec n°1	ANRB Rec n°1	ANRC Rec n°1	Second Name Alpha String	Rec '02'	Record numbers as defined in the ANRs	Record no.'s as defined in GRP	email address
# 2	ADN Content Bytes (1- (X+13))	EXT1 Ident. (Byte X+14): Rec '2A'	Not Hidden	Rec n°2 Rec n°1 Rec n°3	ANRA Rec n°2	ANRB Rec n°2	ANRC Rec n°2	Second Name Alpha String	Rec '2A'	Record numbers as defined in the ANRs	Record no.'s as defined in GRP	email address
# 3												
:							·	•				·
:												
:												
# 254												

Table G.4: Structure of phone book entries 255 to 508 (Rec 1-254)

Phone book entry	AD '4F SFI	3B'	PBC1 '4F0A' SFI '0B'	GRP1 '4F25' SFI '0C'	ANRA1 '4F12' SFI '0D'	ANRB1 '4F14' SFI '0E'	ANRC1 '4F16' SFI '0F'	SNE1 '4F1A' SFI '10'	EXT1 '4F4A' SFI '08'	AAS '4F4B'	GAS '4F4C'	EMAIL1 '4F51' SFI '11'
#255	ADN	EXT1	Hidden	Rec n°1	ANRA1	ANRB1	ANRC1	Second	Rec '03'	Record	Record	email
	Content	Ident.	_(AID	Rec n°3	Rec n°1	Rec n°1	Rec n°1	Name		numbers	no.'s as	address
	Bytes	(Byte	Rec n°	'00'				Alpha		as	defined	
	(1-	X+14):	3)					String		defined in	in	
	(X+13))	Rec '03'								the ANRs	GRP1	
#256	ADN	EXT1	Not	Rec n°2	ANRA1	ANRB1	ANRC1	Second	Rec '2B'	Record	Record	email
	Content	ldent.	Hidden	Rec n°1	Rec n°2	Rec n°2	Rec n°2	Name		numbers	no.'s as	address
	Bytes	(Byte		Rec n°3				Alpha		as	defined	
	(1-	X+14):						String		defined in	in	
	(X+13))	Rec '2B'								the ANRs	GRP1	
#257												
:												
:								•				
:												
#508								•				

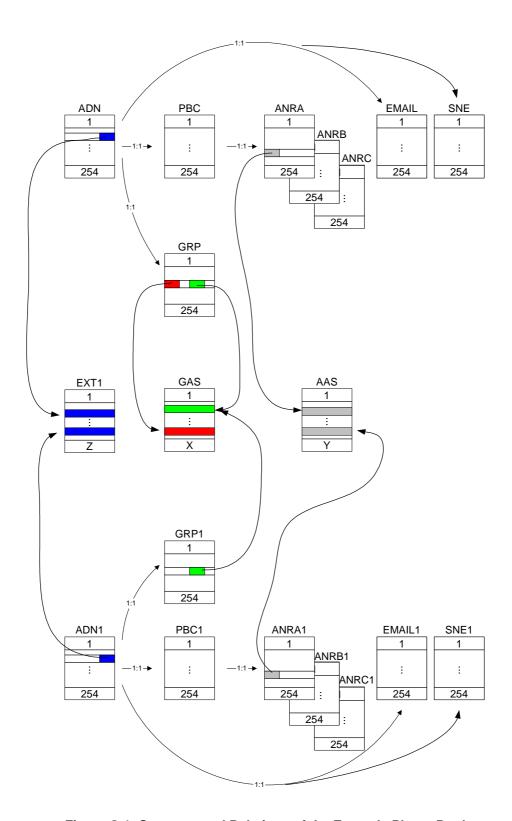


Figure G.1: Structure and Relations of the Example Phone Book

Annex H (normative): List of SFI Values

This annex lists SFI values assigned in the present document.

List of SFI Values at the USIM ADF Level H.1

File Identification	SFI	Description
'6FB7'	'01'	Emergency call codes
'6F05'	'02'	Language indication
'6FAD'	'03'	Administrative data
'6F38'	'04'	USIM service table
'6F56'	'05'	Enabled services table
'6F78'	'06'	Access control class
'6F07'	'07'	IMSI
'6F08'	'08'	Ciphering and integrity keys
'6F09'	'09'	Ciphering and integrity keys for packet switched domain
'6F60'	'0A'	User PLMN selector
'6F7E	'0B'	Location information
'6F73'	'0C'	Packet switched location information
'6F7B'	'0D'	Forbidden PLMNs
'6F48'	'0E'	CBMID
'6F5B'	'0F'	Hyperframe number
'6F5C'	'10'	Maximum value of hyperframe number
'6F61'	'11'	Operator PLMN selector
'6F31'	'12'	Higher Priority PLMN search period
'6F62'	'13'	Preferred HPLMN access technology
'6F80'	'14'	Incoming call information
'6F81'	'15'	Outgoing call information
'6F4F'	'16'	Capability configuration parameters 2
'6F06'	'17'	Access Rule Reference
'6FC5'	'19'	PLMN Network Name
'6FC6'	'1A'	Operator Network List
'6FCD'	'1B'	Service Provider Display Information
"6F39"	"1C"	Accumulated Call Meter (see note)
NOTE: When used t	he value "1C	shall be used as SFI for EF _{ACM} , for compatibility reasons the terminal shall
accept other	values.	

All other SFI values are reserved for future use.

List of SFI Values at the DF GSM-ACCESS Level H.2

File Identification	SFI	Description
'4F20'	'01'	GSM Ciphering Key Kc
'4F52'	'02'	GPRS Ciphering Key KcGPRS

All other SFI values are reserved for future use.

Annex I (informative): USIM Application Session Activation/Termination

The purpose of this annex is to illustrate the different Application Session procedures.

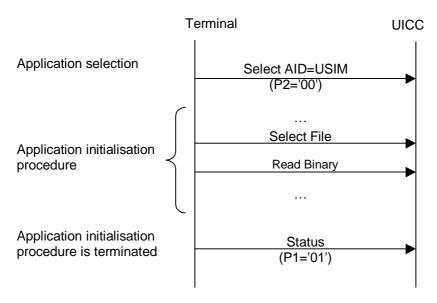


Figure I.1 USIM Application Session Activation procedure

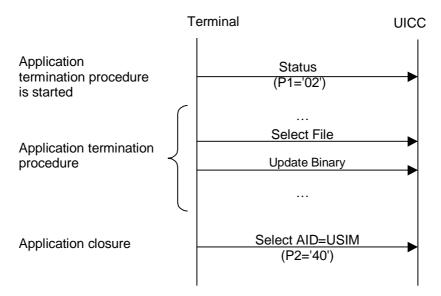


Figure I.2 USIM Application Session Termination procedure

Annex J (informative): Example of MMS coding

This annex gives an example for the coding of MMS User Preferences, while the MMS User Information Preference parameters are coded according to the WAP implementation of MMS.

J.1 Coding example for MMS User Preferences

```
0x80 MMS Implementation Tag
```

```
0x01 (Length = "1")
```

0x01 (MMS implementation information = "(WAP")

0x81 MMS User Preference Profile Name Tag

```
0x0E (Length = "14")
```

43 68 72 69 73 74 6D 61 73 20 43 61 72 64

(profile name = "Christmas Card"; 14 characters, 14 Bytes)

0x82 MMS User Information Preference Information Tag

```
0x19 (Length = "25")
```

0x14 0x80 (visibility: = "hide"; 2 Bytes)

0x06 0x80 (delivery report: = "yes"; 2 Bytes)

0x10 0x80 (read-reply: = "yes"; 2 Bytes)

0x0F 0x81 (priority: = "normal"; 2 Bytes)

0x07 0x07 0x80 0x05 0x11 0x22 0x33 0x44 0x55

(Delivery-Time-Tag, Value-Length, Absolute-Token-Tag, Date-Value-Length, Date-Value; 9 Bytes)

0x08 0x06 0x81 0x04 0x55 0x22 0x33 0x44

(Expiry Tag, Value-Length, Relative-Token-Tag, Delta-Second-Value-Length, Delta-Second-Value; 8 Bytes)

J.2 Coding Example for MMS Issuer/User Connectivity Parameters

0xAB MMS Connectivity Parameters Tag

0x81 0x9F (Length = "136") (Length bytes greater than 127 are coded onto 2 bytes according to ISO/IEC 8825 [35])

0x80 MMS Implementation Tag

```
0x01 \text{ (Length} = "1")
```

0x01 (MMS implementation information = "WAP"; 1 Byte)

0x81 MMS Relay/Server Tag

0x17 (Length = "23")

0x68 0x74 0x74 0x70 0x3A 0x2F 0x2F 0x6D 0x6D 0x73 0x2D 0x6F 0x70 0x65 0x72 0x61 0x74 0x6F 0x72 0x2E 0x63 0x6F 0x6D

(MMS Relay/Server information = "http://mms-operator.com"; 23 characters; 23 Bytes)

0x82 Interface to Core Network and Bearer Tag

0x32 (Length = "50")

0x10 0xAA (bearer = "GSM-CSD"; 2 Bytes)

0x08 0x2B 0x34 0x39 0x35 0x33 0x34 0x31 0x39 0x30 0x36 0x00 (address = "+495341906", 12 Bytes)

0x09 0x87 (type of address = "E164"; 2 Bytes)

0x25 0xC5 (speed = "autobauding"; 2 Bytes)

0x0A 0x90 (call type = "ANALOG_MODEM"; 2 Bytes)

0x0C 0x9A (authentication type = "PAP"; 2 Bytes)

0x0D 0x64 0x75 0x6D 0x6D 0x79 0x5F 0x6E 0x61 0x6D 0x65 0x00 (authentication id = "dummy_name"; 12 Bytes)

0x0E 0x64 0x75 0x6D 0x6D 0x79 0x5F 0x70 0x61 0x73 0x73 0x77 0x6F 0x72 0x64 0x00 (authentication pw = "dummy_password"; 16 Bytes)

0x83 Gateway Tag

0x36 (Length = "54")

0x20 0x31 0x37 0x30 0x2E 0x31 0x38 0x37 0x2E 0x35 0x31 0x2E 0x33 0x00 (address = "170.187.51.3"; 14 Bytes)

0x21 0x85 (type of address = "IPv4"; 2 Bytes)

0x23 0x39 0x32 0x30 0x33 0x00 (port = "9203"; 6 Bytes)

0x24 0xCB (service = "CO-WSP"; 2 Bytes)

0x19 0x9C (authentication type = "HTTP BASIC"; 2 Bytes)

0x1A 0x64 0x75 0x6D 0x6D 0x79 0x5F 0x6E 0x61 0x6D 0x65 0x00 (authentication id = "dummy_name"; 12 Bytes)

0x1B 0x64 0x75 0x6D 0x6D 0x79 0x5F 0x70 0x61 0x73 0x73 0x77 0x6F 0x72 0x64 0x00 (authentication pw = "dummy_password"; 16 Bytes)

Annex K (informative): Change history

The table below indicates all CRs that have been incorporated into the present document since it was initially approved.

						Change history		
Date	TSG #	TSG Doc.	CR	Rev	Cat	Subject/Comment	Old	New
2000-04	TP-07	TP-000014	001		F	Removal of EFappi	3.0.0	3.1.0
		TP-000014			F	Mandatory status for the EFs KcGPRS&LOCIGPRS		
		TP-000014			В	Implementation of FDN (Fixed Dialling Numbers)	<u> </u>	
		TP-000014	004		В	Barred Dialling Numbers (BDN)	<u> </u>	
		TP-000019		1	F	Emergency call codes	1	
		TP-000014	006		F	Mandatory status for the EF containing the Packet		
		TP-000014	007		F	switched domain keys Authentication	1	
		TP-000014			F	Alignment of terminology for authentication; addition of	1	
		17-000014	000			Kc-GPRS procedure		
		TP-000014	009		F	Correction to USIM specific FCP coding	1	
		TP-000014			F	Removal of SoLSA feature from Release 99	1	
		TP-000014			F	Alignment with 33.102 - AUTHENTICATE Command		
		TP-000014			В	Introduction of e-mail addresses in the Phone Book	1	
		TP-000014	015		C	APN control list	1	
		TP-000014			F	Phone book example		
		TP-000014			F	Alignment with GSM 11.11 R99	Ī	
		TP-000014	018		F	Alignment with 33.102 - Cipher key and integrity key	Ī	
						lifetime]	
		TP-000014	019		В	Operator controlled PLMN selection		
		TP-000014	020		С	Changes to 31.102 to align with 24.008		
		TP-000014	021		D	Collection of 31.102 editorial changes - part 1	Ī	
		TP-000014	023		F	Update to pre-personalisation values in Annex E		
		TP-000014	024		F	Update to "EF changes via Data Download or USAT		
						applications" table in Annex A	<u> </u>	
		TP-000014	025		В	Addition of security procedures	ļ	
		TP-000014			F	EF_LOCI access conditions		
2000-07	TP-08	TP-000095			F	removal of EUIC feature from R99	3.1.0	3.2.0
		TP-000095	029		F	Alignment with 33.102 Replace COUNT by START	ļ	
		TP-000095	031		F	Alignment to GSM 11.11 - Introduction of CPBCCH		
						information and Investigation Scan indicator	<u> </u>	
		TP-000095		2	В	HPLMN Length	<u> </u>	
		TP-000095		1	F	LAI, RAI and CNL: alignment with GSM 04.08	<u> </u>	
		TP-000095			F	Deletion of EF(LOCIGSM) and EF(LOCIGPRS)	1	
		TP-000095			F	Files to be read at USIM initialization	1	
		TP-000095	037 038	2	F	Alignment with 33.102 regarding key set identifier Addition of SFI values to files read at initialisation of the	1	
		17-000095	036	2	Г	USIM application		
		TP-000095	030		F	Support of voltage classes	1	
		TP-000110			В	Addition of files for MExE	1	
		TP-000095			F	Alignment with 33.102 regarding conversion functions	1	
		TP-000095	042		F	Addition of procedures for reading and updating the	1	
		00000	٠			content of the Enabled Services Table.		
		TP-000095	043		F	Correction of the application activation termination		
						procedures		
2000-10	TP-09	TP-000176	030		F	PLMN Selection additions	3.2.0	3.3.0
		TP-000176			F	Alignment to GSM 11.11 regarding Terminology	1	
		TP-000152	044	1	F	Correction to call information access conditions and	1	
						correction of DF_GSM file IDs]	
ļ		TP-000152			F	Clarification of the type 3 links of the phonebook]	
		TP-000152			F	Alignment of EF(CCP2) with EF(ECCP)	<u> </u>	
		TP-000152		1	F	Correction of record length, editorial errors, missing FID		
		TP-000152			F	APN Control List coding]	
		TP-000152	049		F	Alignment with TS 33.102 regarding authentication		
		TD 00015	050			Sequence Numbers	1	
		TP-000152			F	Preferred language selection	1	
		TP-000152			F	Application Selection by partial AID	4	
		TP-000152			F	Phone book clarifications	4	
		TP-000182	054		F	Update condition for OPLMN Selector list	1	1

P-10	5 / T	T00 "	T00 D	00			nge history (continued)		T.
TP-000203 056	Date	TSG #	TSG Doc.	CR	Rev		Subject/Comment	Old	New
TP-000203 069 F File-ID EFs of the phonebook Example TP-000203 068 F Correction of the phonebook example TP-000203 069 F Alignments with TS 33.102 v3.6.0	2000-12	TP-10						3.3.0	3.4.0
TP-000203 059	·							}	
TP-000203 069							Correction of the phonebook example		
TP-000203 GEZ F Phonebook correction on CCPs TP-00024 GeS F Storage of Network Parameters Storage of Network							Alignments with TS 33.102 v3.6.0	ĺ	
TP-11			TP-000203	062		F		j	
TP-010038 066 F Correction to DEF(ANR), EP(SNE) and EP(EMAIL)			TP-000254	063		F	Storage of Network Parameters		
TP-010038 067 2 F Clarification on EF(ANR), EF(SNE) and EF(EMAIL)	2001-03	TP-11			3			3.4.0	4.0.0
TP-010038 069 T									
TP-010038 070 F Clarification of EFARR access conditions TP-010038 070 F Indication of minimum clock frequency required by the USIM application TP-010038 072 F Correction of the EF(UST) for Packet Domain TP-010038 073 C Introduction of the volcemal, message waiting and call forward indication features from the Common PCN Handset Specification (CPHS) TP-010038 074 C Introduction of the volcemal, message waiting and call forward indication features from the Common PCN Handset Specification (CPHS) TP-010038 076 F Usage of FF in the EF(PBR) TP-010038 076 F Usage of FF in the EF(PBR) TP-010038 076 F Usage of FF in the EF(PBR) TP-010038 077 F Correction of EF(ARN) (CR number changed from CR 078) TP-01007 080 A A A Correction of Status Words for AUTHENTICATE with TS 102 221 TP-010107 084 A Correction of Status Words for AUTHENTICATE with TS 102 221 TP-010107 084 A Correction of Status Words for AUTHENTICATE with TS 102 221 TP-010107 084 A Correction of Status Words for AUTHENTICATE with TS 102 221 TP-010107 089 A Clarification of the Vigo Sinks of the phonebook TP-010107 089 A Clarification of the Vigo Sinks of the phonebook TP-010107 089 A Clarification of the Authenticate command description TP-010107 093 A Clarification of the Authenticate command description TP-010107 095 C New implementation of SPN TP-010107 095 C New implementation of SPN TP-010107 095 C New implementation of SPN TP-010204 101 TP-010204 102 TP-010204 102 TP-010204 103 TP-010204 103 TP-010204 104 TP-010204 105 TP-010204 105 TP-010204 105 TP-010204 105 TP-010204 107 TP-010206 107								ļ	
TP-010038 070 F Indication of minimum clock frequency required by the USIM application TP-010038 071 F General corrections TP-010038 072 TP-010038 073 C Introduction of the EF(USI) for Packet Domain TP-010038 073 C Introduction of the EF(USI) for Packet Domain TP-010038 073 C Introduction of the EF(USI) for Packet Domain TP-010038 074 C Introduction of the PURIN Network Name feature from CPHS TP-010038 076 C Introduction of the PURIN Network Name feature from CPHS TP-010038 076 F Usage of FF in the EF(PBR) TP-010038 076 F Usage of FF in the EF(PBR) TP-010038 077 F Correction of EF(ANR) (CR number changed from CR 076) TP-01007 080 A Alignment of Status Words for AUTHENTICATE with TS 102 221 TP-010107 081 A General Corrections TP-010107 082 A Clarification of the Type 3 links of the phonebook TP-010107 083 A Clarification of the type 3 links of the phonebook TP-010107 093 A Clarification of the Authenticate command description TP-010107 094 A Correction of compact Edge files TP-010107 095 C New implementation of SPFN TP-010107 096 F EF(EXT1) Clarification of Length Indicator for Additional At 1.0 At 2.0 TP-010203 096 F EF(EXT1) Clarification of Length Indicator for Additional At 1.0 At 2.0 TP-010204 TP-010204					1			}	
USIM application TP-010038 071 F General corrections TP-010038 072 F General corrections TP-010038 073 C Introduction of the SE(UST) for Packet Domain TP-010038 073 C Introduction of the Voicemail, message waiting and call forward indication features from the Common PCN Handset Specification (CPHS) TP-010038 076 F Useage of FF in the EF(PBR) TP-010038 076 F Useage of FF in the EF(PBR) TP-010038 076 F Useage of FF in the EF(PBR) TP-010038 077 F Correction of EF(ANR) (CR number changed from CR 070	·							}	
TP-010038 072 F Correction of the EF(UST) for Packet Domain TP-010038 073 C Introduction of the EF(UST) for Packet Domain TP-010038 073 C Introduction of the EF(UST) for Packet Domain TP-010038 074 C Introduction of the Volcemail, message waiting and call forward indication features from the Common PCN Handset Specification (CPHS) TP-010038 076 C Introduction of the PLMN Network Name feature from CPHS TP-010038 076 F Usage of FF in the EF(PBR) TP-010038 077 F Correction of EF(ANR) (CR number changed from CR 076) TP-010038 077 F Correction of EF(ANR) (CR number changed from CR 076) TP-010107 080 A Alignment of Status Words for AUTHENTICATE with TS 4.0.0 4.1.0 102 221 TP-010107 086 A General corrections TP-010107 089 A Colaridation of the Type 3 links of the phonebook TP-010107 089 A Colaridation of the Type 3 links of the phonebook TP-010107 093 A Colaridation of the Nype 3 links of the phonebook TP-010107 094 A Correction of compact Edge files TP-010107 095 C New implementation of SPN TP-010107 095 C New implementation of SPN TP-010107 096 TP-010203 096 F EF(EXT1) Clarification of Length Indicator for Additional 4.1.0 4.2.0 TP-010203 096 F EF(EXT1) Clarification of Length Indicator for Additional TP-010204 101 A General Corrections GEOPLINWACT and procedures 4.2.0 4.3.0 TP-010204 101 A General Corrections GEOPLINWACT and procedures 4.2.0 4.3.0 TP-010204 102 F Optional Corrections GEOPLINWACT and procedures 4.2.0 4.3.0 TP-010204 103 F Correction of EF(OPL) TP-020066 104 F Optional Commands clarification and corrections 5.0.0 5.1.0 TP-020066 104 F Optional Commands clarification and corrections 5.0.0 5.1.0 TP-020066 104 F Correction and clarification and corrections 5.0.0 5.1.0 TP-020066 104 F Correction and clarification and corrections 5.0.0 5.0.0 5.			11-010038	070		ı			
P-010038 072 F Correction of the EF(UST) for Packet Domain			TP-010038	071		F			
TP-010038 073						F		1	
Handset Specification (CPHS)	·					С		ĺ	
Pro-010038 075 C Introduction of Operator PLMN List TP-010038 076 F Usage of 'FF' in the EF(PBR) TP-010038 076 F Usage of 'FF' in the EF(PBR) TP-010038 078 F Correction of EF(ANR) (CR number changed from CR 076) 076							forward indication features from the Common PCN Handset Specification (CPHS)		
TP-010038 076							CPHS		
TP-010038 077 F Correction of EF(ANR) (CR number changed from CR 076)									
TP-010088 78 F Correction of Tag values							Usage of 'FF' in the EF(PBR)	 	
TP-12							076)		
TP-010107									
TP-010107 086	2001-06	TP-12					102 221	4.0.0	4.1.0
TP-010107 089								ļ	
TP-010107 092	•							ļ	
TP-010107 093								}	
TP-010107 094									
TP-010107 095 C New implementation of SPN F EF(EXT1): Clarification of Length Indicator for Additional Data TP-010203 098 A General Corrections General Corrections TP-010204 TP-020065 TP-010204 TP-020065 TP-020065	•							}	
TP-13								l	
TP-14	2001-09	TP-13	•				EF(EXT1): Clarification of Length Indicator for Additional	4.1.0	4.2.0
TP-010244 102 F Optional commands clarification	İ		TP-010203	098		Α	General Corrections	Ì	
TP-010244 102	2001-12	TP-14	TP-010244	101		Α		4.2.0	4.3.0
TP-010244 103								ļ	
TP-15				_					
TP-020065 107	2002.02	TD 15						420	500
TP-020065 104	2002-03	TP-15						4.3.0	5.0.0
TP-020065 106 B Indication of Call Control on GPRS in UST							'	}	
TP-16									
A A Correction Correcti	2002-06	TP-16				F		5.0.0	5.1.0
114				110		F			
TP-17				114		F		1	
118	2002-09	TP-17	TP-020210			_		5.1.0	5.2.0
121	2002 00		0202.0					00	0.2.0
123								ĺ	
Several EFS 125						Α		<u> </u>	
2003-03 TP-19 TP-030018 132 A Example for MMS connectivity parameters F CR to make EF-EXT1 optional in the USIM Phonebook F CR to make EF-EXT1 optional in the USIM Phonebook S.4.0 S.5.0	2002-12	TP-18	TP-020280	128		Α		5.2.0	5.3.0
2003-03 TP-19 TP-030018 132 A Example for MMS connectivity parameters F CR to make EF-EXT1 optional in the USIM Phonebook F CR to make EF-EXT1 optional in the USIM Phonebook S.4.0 S.5.0			<u></u>	125		F		<u> </u>	
2003-06 TP-20 TP-030121 143 A Correction of the MMS example 5.4.0 5.5.0 147 A Corrections and clarifications 5.5.0 5.5.0 151 A Clarification on the support of extra guardtime 5.5.0 153 F Clarification on SIM support by R5 terminal 5.5.0 2003-09 TP-21 TP-030179 157 F Correction to SMS 5.5.0 TP-030186 158 A CR to delete Elementary File EFRPLMNACT, in accordance with TP-020168 from TP#16 in Marco Island. 5.6.0 5.7.0 2003-12 TP-22 TP-030251 165 - A Removal of references to TS 02.07 5.6.0 5.7.0	2003-03	TP-19	TP-030018				Example for MMS connectivity parameters	5.3.0	5.4.0
147						F			
151	2003-06	TP-20	TP-030121					5.4.0	5.5.0
153								<u> </u>	
2003-09 TP-21 TP-030179 157 F Correction to SMS TP-030186 158 A CR to delete Elementary File EFRPLMNACT, in accordance with TP-020168 from TP#16 in Marco Island. 5.5.0 5.6.0 5.6.0 5.6.0 5.7.0 5.6.0 5.7.0 5.6.0 5.7.0 5.6.0 5.7.0 5.7.0 5.6.0 5.7.								{	
TP-030186 158 A CR to delete Elementary File EFRPLMNAcT, in accordance with TP-020168 from TP#16 in Marco Island. 2003-12 TP-22 TP-030251 165 - A Removal of references to TS 02.07 5.6.0 5.7.0	2003.00	TD. 21	TD_020170					550	560
2003-12 TP-22 TP-030251 165 - A Removal of references to TS 02.07 5.6.0 5.7.0	2003-03	11 -21					CR to delete Elementary File EFRPLMNAcT, in	3.3.0	3.0.0
	2003-12	TP-22	TP-030251		-			5.6.0	5.7.0

			172	-	А	Corrections on files for support of GSM services using USIM / NIA		
			176	-	Α	Support of GSM services on USIM		
			180	-	Α	Corrections on files for support of GSM services using USIM - ASCI Files		
			188	-	Α	Correction of SFI support		
			193	-	Α	Correction to the description of mandatory SFIs		
			197	-	F	Clarification of 'free' entry in EF_EXT1/4/8		
		TP-030308	184	1	А	Alignment of EF-HPLMN Search Period with 22.011 and 23.122		
2004-03	TP-23	TP-040024	202		Α	Correction of EFIAP coding	5.7.0	5.8.0
		TP-040024	204		F	Correction to Annex G Phonebook Example	5.7.0	5.8.0
		TP-040024	208		Α	Adding missing note about DTMF string	5.7.0	5.8.0
		TP-040024	214		Α	Correction of CHV1 to PIN	5.7.0	5.8.0
		TP-040029	217		Α	Correction of image instance descriptor for colour icons	5.7.0	5.8.0
2004-06	TP-24	TP-040101	223		А	Correction of coding example for MMS Issuer/User Connectivity Parameters	5.8.0	5.9.0
		TP-040101	229		Α	Correction of presence indication for NIA, VGCS/VBS files	5.8.0	5.9.0
2004-09	TP-25	TP-040181	240		F	Correction of a wrong reference to TS 102 221	5.9.0	5.10.0
		TP-040181	243		F	Correction of PPS procedure	5.9.0	5.10.0
2004-12	TP-26	TP-040256	252		F	Correction of non-specific references to ETSI-SCP documents	5.10.0	5.11.0
		TP-040256	246		А	Clarification of EXT8 coding (MMS notification extension)	5.10.0	5.11.0
		TP-040256	256		F	Correction of update access condition for EFs VGCSS and VBSS	5.10.0	5.11.0

History

		Document history
V5.0.0	March 2002	Publication
V5.1.0	June 2002	Publication
V5.2.0	September 2002	Publication
V5.3.0	December 2002	Publication
V5.4.0	March 2003	Publication
V5.5.0	June 2003	Publication
V5.6.0	September 2003	Publication
V5.7.0	December 2003	Publication
V5.8.0	March 2004	Publication
V5.9.0	June 2004	Publication
V5.10.0	September 2004	Publication
V5.11.0	December 2004	Publication