ETSI TS 144 018 V4.7.0 (2002-01)

Technical Specification

Digital cellular telecommunications system (Phase 2+);
Mobile radio interface layer 3 specification;
Radio Resource Control Protocol
(3GPP TS 44.018 version 4.7.0 Release 4)



Reference RTS/TSGG-0244018Uv4R3 Keywords GSM

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, send your comment to: $\underline{\text{editor} @\, \text{etsi.fr}}$

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002. All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under www.etsi.org/key.

Contents

Intellectual Property Rights		
Forewoo	rd	2
Forewo	rd	14
1 S	cope	15
1.1	Scope of the Technical Specification	
1.2	Application to the interface structures	
1.3	Structure of layer 3 procedures	
1.4	Test procedures	
1.5	Use of logical channels.	
1.6	Overview of control procedures	
1.6.1	List of procedures	
1.7	Applicability of implementations	
1.7.1	Voice Group Call Service (VGCS) and Voice Broadcast Service (VBS)	
1.7.2	General Packet Radio Service (GPRS)	
2 R	eferences	
2.1	Definitions and abbreviations	
2.1.1	Random values	
2.1.2	Vocabulary	
	adio Resource management procedures	
3.1	Overview/General	
3.1.1	General	
3.1.2	Services provided to upper layers	
3.1.2.1	Idle mode	
3.1.2.2 3.1.2.3	Dedicated mode	
3.1.2.3	Group transmit made	
3.1.2.4	Group transmit mode	
3.1.2.5	Packet transfer mode	
3.1.2.7	Dual transfer mode (DTM)	
3.1.3	Services required from data link and physical layers	
3.1.4	Change of dedicated channels	
3.1.4.1	Change of dedicated channels using SAPI = 0.	
3.1.4.2	Change of dedicated channels using other SAPIs than 0	
3.1.5	Procedure for Service Request and Contention Resolution	
3.1.6	Preemption	
3.2	Idle mode procedures and general procedures in packet idle and packet transfer modes	
3.2.1	Mobile Station side	
3.2.2	Network side	28
3.2.2.1	System information broadcasting	28
3.2.2.2	Paging	30
3.3	RR connection establishment	30
3.3.1	RR connection establishment initiated by the mobile station	
3.3.1.1	Entering the dedicated mode: immediate assignment procedure	30
3.3.1.1.1		
3.3.1.1.2		
3.3.1.1.3		
3.3.1.1.3		
3.3.1.1.3		
3.3.1.1.4	e i	
3.3.1.1.4		
3.3.1.1.5		
3.3.1.2	Entering the group transmit mode: uplink access procedure	
3.3.1.2.1		
3.3.1.2.1	.1 Uplink investigation procedure	35

3.3.1.2.1.2	Uplink access procedure	
3.3.1.2.2	Network side	35
3.3.1.2.3	Abnormal cases	
3.3.1.3	Dedicated mode and GPRS	36
3.3.2	Paging procedure for RR connection establishment	36
3.3.2.1	Paging initiation by the network	36
3.3.2.1.1	Paging initiation using paging subchannel on CCCH	37
3.3.2.1.2	Paging initiation using paging subchannel on PCCCH	38
3.3.2.1.3	Paging initiation using PACCH	
3.3.2.2	Paging response	
3.3.2.3	Abnormal cases	
3.3.3	Notification procedure	
3.3.3.1	Notification of a call	
3.3.3.2	Joining a VGCS or VBS call	
3.3.3.3	Reduced NCH monitoring mechanism.	
3.3.3.4	Notification response procedure	
	Procedures in dedicated mode and in group transmit mode	
3.4.1	SACCH procedures.	
3.4.1.1	General	
3.4.1.2	Measurement Report and Enhanced Measurement Report	
3.4.1.2 3.4.1.2.1	Parameters for Measurements and Reporting	
3.4.1.2.1 3.4.1.2.1.1		
	Deriving the 3G Neighbour Cell list from the 3G Neighbour Cell Description:	
3.4.1.2.1.2	Deriving the GSM Neighbour Cell list from the BSICs and the BA (list)	
3.4.1.2.1.3	Deriving the Neighbour Cell list from the GSM Neighbour Cell list and the 3G Neighbour	
2 4 1 2 1 4	Cell list	
3.4.1.2.1.4	Real Time Differences	
3.4.1.2.1.5	Report Priority Description	
3.4.1.2.1.6	GPRS Parameters	
3.4.1.2.1.7	The 3G Cell Reselection list	
3.4.1.2.1.8	CCN Support description	
3.4.1.3	Extended measurement report \$(MAFA)\$	
3.4.2	Transfer of messages and link layer service provision	
3.4.3	Channel assignment procedure	
3.4.3.1	Channel assignment initiation	
3.4.3.2	Assignment completion	
3.4.3.3	Abnormal cases	
3.4.4	Handover procedure	
3.4.4.1	Handover initiation	
3.4.4.2	Physical channel establishment	
3.4.4.2.1	Finely synchronized cell case	51
3.4.4.2.2	Non synchronized cell case	51
3.4.4.2.3	Pseudo-synchronized cell case	52
3.4.4.2.4	Pre-synchronized cell case	52
3.4.4.3	Handover completion	53
3.4.4.4	Abnormal cases	53
3.4.4a	Handover to UTRAN procedure	54
3.4.4a.1	Handover to UTRAN initiation	54
3.4.4a.2	Handover to UTRAN completion	55
3.4.4a.3	Abnormal cases	
3.4.4b	Handover to CDMA2000 procedure	55
3.4.4b.1	Handover to CDMA2000 initiation	
3.4.4b.2	Handover to CDMA2000 completion	
3.4.4b.3	Abnormal cases	
3.4.5	Frequency redefinition procedure	
3.4.5.1	Abnormal cases	
3.4.6	Channel mode modify procedure	
3.4.6.1	Normal channel mode modify procedure	
3.4.6.1.1	Initiation of the channel mode modify procedure	
3.4.6.1.2	Completion of channel mode modify procedure	
3.4.6.1.2	Abnormal cases	
3.4.6.1.3 3.4.6.2		
	Channel mode modify procedure for a voice group call talker	
3.4.6.2.1	Initiation of the channel mode modify procedure	58

3.4.6.2.2	Completion of mode change procedure	58
3.4.6.2.3	Abnormal cases	
3.4.7	Ciphering mode setting procedure	59
3.4.7.1	Ciphering mode setting initiation	59
3.4.7.2	Ciphering mode setting completion	59
3.4.8	Additional channel assignment procedure	60
3.4.8.1	Additional assignment procedure initiation	60
3.4.8.2	Additional assignment procedure completion	60
3.4.8.3	Abnormal cases	
3.4.9	Partial channel release procedure	
3.4.9.1	Partial release procedure initiation	
3.4.9.2	Abnormal cases	
3.4.10	Classmark change procedure	
3.4.11	Classmark interrogation procedure	
3.4.11.1	Classmark interrogation initiation	
3.4.11.2	Classmark interrogation completion	
3.4.12	Indication of notifications and paging information	
3.4.13	RR connection release procedure	
3.4.13.1	Normal release procedure	
3.4.13.1.1	Channel release procedure initiation in dedicated mode and in group transmit mode	
3.4.13.1.2	Abnormal cases	
3.4.13.2	Radio link failure in dedicated mode or dual transfer mode	
3.4.13.2.1	Mobile side	
3.4.13.2.2	Network side	
3.4.13.3	RR connection abortion in dedicated mode or dual transfer mode	
3.4.13.4	Uplink release procedure in group transmit mode	
3.4.13.5	Radio link failure in group transmit mode	
3.4.13.5.1	Mobile side	
3.4.13.5.2	Network side	
3.4.14	Receiving a RR STATUS message by a RR entity	
3.4.15	Group receive mode procedures	
3.4.15.1	Mobile station side	
3.4.15.1.1	Reception of the VGCS or VBS channel	
3.4.15.1.2	Monitoring of downlink messages and related procedures	
3.4.15.1.2.1	(void)	
3.4.15.1.2.1	(void)	
3.4.15.1.2.2	Channel mode modify procedure	
3.4.15.1.2.4	Notification and paging information	
3.4.15.1.2.4 3.4.15.1.2.4.1		
3.4.15.1.2.4.1 3.4.15.1.2.5	Uplink status messages	
3.4.15.1.2.6	Channel release message.	
3.4.15.1.2.7	Information on paging channel restructuring	
3.4.15.1.2.7		
	Uplink reply procedure	
3.4.15.1.4 3.4.15.1.4.1	Leaving the group receive mode	
	Returning to idle mode	
3.4.15.1.4.2	Going to group transmit mode	
3.4.15.2	Network side	
3.4.15.2.1	Provision of messages on the VGCS or VBS channel downlink	
3.4.15.2.1.1	General	
3.4.15.2.1.2	Provision of general information messages	
3.4.15.2.1.3	Provision of messages related to the voice group call uplink channel	
3.4.15.2.2	Release of the VGCS or VBS Channels	
3.4.15.3	Failure cases	
3.4.16	Configuration change procedure	
3.4.16.1	Configuration change initiation	
3.4.16.2	Configuration change completion	
3.4.16.3	Abnormal cases	
3.4.17	Mapping of user data substreams onto timeslots in a multislot configuration	
3.4.18	Handling of classmark information at band change	71
3.4.19	Assignment to a Packet Data channel	
3.4.19.1	Assignment to PDCH initiation	
3.4.19.2	Completion of the Assignment to PDCH procedure	72

3.4.19.3	Abnormal cases	72
3.4.20	RR-Network Controlled Cell Change Order	
3.4.20.1	RR-network controlled cell change order initiation	
3.4.20.2	Network controlled cell reselection completion	74
3.4.20.3	Abnormal cases	
3.4.21	Application Procedures	75
3.4.21.1	General	
3.4.21.2	Location Services (LCS)	
3.4.21.3	Application Information Transfer	
3.4.21.3.1	Normal Procedure without Segmentation	
3.4.21.3.2	Normal Procedure with Segmentation	
3.4.21.3.3	Abnormal Cases	
3.4.22	RR procedures related to packet resource establishment while in dedicated mode	
3.4.22.1	Packet request procedure while in dedicated mode	
3.4.22.1.1	Entering the dual transfer mode	
3.4.22.1.1.1	Permission to access the network	
3.4.22.1.1.2	Initiation of establishment of the packet request procedure	
3.4.22.1.1.3	Answer from the network	
3.4.22.1.1.3.1	E .	
3.4.22.1.1.3.2	· · · · · · · · · · · · · · · · · · ·	
3.4.22.1.1.3.3	1 3	
3.4.22.1.1.4	Packet request completion	
3.4.22.1.1.5	Abnormal cases	
3.4.22.2	Packet notification procedure in dedicated mode	
3.4.22.2.1	Packet notification initiation by the network	
3.4.22.2.2	Packet notification response	
3.4.22.3	Packet downlink assignment in dedicated mode	
3.4.22.3.1	Initiation of the packet downlink assignment procedure in dedicated mode	
3.4.22.3.2	Packet downlink assignment completion	
3.4.22.3.3	Abnormal cases	
3.4.22.4	Modification of packet resources while in DTM	
3.4.23	RR procedures related to packet resource maintenance while in dual transfer mode	
3.4.24	RR procedures related to packet resource release while in dual transfer mode	
3.4.25	GPRS suspension procedure	
3.4.25.1	General	
3.4.25.2	MS in class B mode of operation	
3.4.25.3	Dual transfer mode not supported	
3.4.26	GPRS Transparent Transport Procedure	
	R procedures on CCCH related to temporary block flow establishment	
3.5.1	Packet paging procedure using CCCH	
3.5.1.1	Packet paging initiation by the network	
3.5.1.2	On receipt of a packet paging request	
3.5.2	Packet access procedure using CCCH	
3.5.2.1 3.5.2.1.1	Entering the packet transfer mode: packet access procedure	
	Permission to access the network	
3.5.2.1.2 3.5.2.1.3	Initiation of the packet access procedure: channel request	
3.5.2.1.3.1	Packet immediate assignmentOn receipt of a CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST	
3.3.2.1.3.1	message	Q
3.5.2.1.3.2	One phase packet access	
3.5.2.1.3.3 3.5.2.1.3.3a	Single block packet access	
3.5.2.1.3.3a 3.5.2.1.3.4	Packet access rejection.	
3.5.2.1.3.4	Packet access rejection	
3.5.2.1.4	Abnormal cases	
3.5.2.1.3	Sending an RLC/MAC control message: single block packet access procedure	
3.5.2.2	Packet downlink assignment procedure using CCCH	
3.5.3.1	Entering the packet transfer mode: packet downlink assignment procedure	
3.5.3.1.2	Initiation of the packet downlink assignment procedure	
3.5.3.1.2	Packet downlink assignment completion	
3.5.3.1.4	Abnormal cases	
3.5.3.1.4	Sending an RI C/MAC control message: single block packet downlink assignment procedure	

4	Elementary procedures for Mobility Management	94
5	Elementary procedures for circuit-switched Call Control	94
6	Support for packet services	94
7	Examples of structured procedures	94
8	Handling of unknown, unforeseen, and erroneous protocol data	94
8.1	General	94
8.2	Message too short	
8.3	Unknown or unforeseen transaction identifier	
8.4	Unknown or unforeseen message type	
8.5	Non-semantical mandatory information element errors	
8.5.1	Radio resource management	
8.6	Unknown and unforeseen IEs in the non-imperative message part	
8.6.1	IEIs unknown in the message	
8.6.2	Out of sequence IEs	
8.6.3	Repeated IEs	
8.7	Non-imperative message part errors	
8.7.1	Syntactically incorrect optional IEs	97
8.7.2	Conditional IE errors	97
8.8	Messages with semantically incorrect contents	97
8.9	Incomplete rest octets	
9	Massaca formational definitions and contents	00
	Message functional definitions and contents	
9.1	Messages for Radio Resources management	
9.1.1	Additional assignment	
9.1.1.1		
9.1.1.2	ϵ	
9.1.2	Assignment command	
9.1.2.1		
9.1.2.2	Description of the Second Channel	104
9.1.2.3	Mode of the Second Channel	104
9.1.2.4	Mobile Allocation and Frequency List, after the starting time	104
9.1.2.5	Starting Time	104
9.1.2.6		
9.1.2.7	ė į	
9.1.2.8	*	
9.1.2.9		
9.1.2.1		
9.1.2.1	<u>.</u>	
9.1.2.1 9.1.3	Assignment complete	
9.1.3	Assignment failure	
	e e e e e e e e e e e e e e e e e e e	
9.1.5	Channel mode modify	
9.1.5.1	1	
9.1.5.2	Č	
9.1.5.3	$\boldsymbol{\mathcal{U}}$	
9.1.6	Channel mode modify acknowledge	
9.1.7	Channel release	
9.1.7.1	Channel description and mobile allocation	109
9.1.7.2	Group Cipher Key Number	109
9.1.7.3	UTRAN Frequency List	109
9.1.8	Channel request	109
9.1.9	Ciphering mode command	
9.1.10	Ciphering mode complete	
9.1.10		
9.1.11	Classmark change	
9.1.11		
9.1.11		
9.1.11		
9.1.11	· · · · · · · · · · · · · · · · · · ·	
9.1.11 9 1 11	6	113 114

9.1.12	Classmark enquiry	114
9.1.12a	(void)	
9.1.12b	Configuration change command	
9.1.12b.1	Description of the multislot allocation	
9.1.12b.2	Mode of Channel Set "X" (1= <x<=8)< td=""><td></td></x<=8)<>	
9.1.12c.2	Configuration change acknowledge	
9.1.12d	Configuration change reject.	
9.1.12e	DTM Assignment Command	
9.1.12e.1	TBF starting time	
9.1.12e.2	RR Packet Uplink Assignment and RR Packet Downlink Assignment IEs	
9.1.12f	DTM Assignment Failure	
9.1.12g	DTM Information	
9.1.12g	DTM Reject	
9.1.12i	DTM Request	
9.1.13	Frequency redefinition	
9.1.13.1	Cell Channel Description	
9.1.13a	PDCH Assignment command	
9.1.13a.1	Mobile Allocation and Frequency List, after the starting time	
9.1.13a.1	Starting Time	
9.1.13a.2	Reference cell frequency list	
9.1.13a.4	Cell Channel Description	
9.1.13a.1	Packet Assignment	
9.1.13b	GPRS suspension request	
9.1.14	Handover access	
9.1.15	Handover command	
9.1.15.1	Synchronization Indication	
9.1.15.2	Mode of the First Channel (Channel Set 1) and Mode of Channel Set "X" (2= <x<=8)< td=""><td></td></x<=8)<>	
9.1.15.3	Description of the Second Channel	
9.1.15.4	Mode of the Second Channel	
9.1.15.5	Frequency Channel Sequence, Frequency List, Frequency short list and Mobile Allocation,	
J.1.13.3	time.	
9.1.15.6	Starting Time	
9.1.15.7	Reference cell frequency list	
9.1.15.8	Real Time Difference	
9.1.15.9	Timing Advance	
9.1.15.10	Cipher Mode Setting	
9.1.15.11	VGCS target mode indication	
9.1.15.12	Description of the multislot allocation	
9.1.15.13	MultiRateconfiguration	
9.1.15.14	Dynamic ARFCN Mapping	
9.1.15a	Inter System To UTRAN Handover Command	
9.1.15b	Inter System To cdma2000 Handover Command	
9.1.16	Handover complete	
9.1.16.1	Mobile Observed Time Difference	
9.1.17	Handover failure	
9.1.18	Immediate assignment	
9.1.18.0a	Dedicated mode or TBF	
9.1.18.0b	Channel Description	
9.1.18.0c	Packet Channel Description	
9.1.18.0d	Request Reference	
9.1.18.0e	Timing Advance	
9.1.18.1	Mobile Allocation	
9.1.18.2	Starting Time	
9.1.18.3	IA Rest Octets (Frequency parameters, before time)	
9.1.18.4	IA Rest Octets (assignment of uplink or downlink TBF)	
9.1.19	Immediate assignment extended	
9.1.19.1	Unnecessary IEs	
9.1.19.2	Mobile Allocation	
9.1.19.3	Starting Time	
9.1.19.4	Maximum message length	
9.1.19.5	IAX Rest Octets	134
9 1 20	Immediate assignment reject	134

9.1.20.1	Use of the indexes	
9.1.20.2	Filling of the message	
9.1.20.2a	Request Reference	135
9.1.20.3	Wait Indication	135
9.1.20.4	IAR Rest Octets	135
9.1.21	Measurement report	135
9.1.21a	Notification/FACCH	135
9.1.21a.1	(void)	137
9.1.21a.2	(void)	137
9.1.21a.3	(void)	137
9.1.21a.4	(void)	137
9.1.21b	Notification/NCH	137
9.1.21b.1	(void)	137
9.1.21b.2	(void)	137
9.1.21c	(void)	137
9.1.21d	Notification response	137
9.1.21e	RR-Cell Change Order	138
9.1.21e.1	3G Target Cell	138
9.1.21f	Packet Assignment	138
9.1.21f.1	RR Packet Uplink Assignment and RR Packet Downlink Assignment IEs	139
9.1.21g	Packet Notification	
9.1.22	Paging request type 1	
9.1.22.1	Unnecessary IE	
9.1.22.2	Channels needed for Mobiles 1 and 2	
9.1.22.3	Mobile Identities	140
9.1.22.4	P1 Rest Octets	
9.1.23	Paging request type 2	
9.1.23.1	Channels needed for Mobiles 1 and 2	
9.1.23.2	Mobile Identity 3	
9.1.23.3	P2 Rest Octets	
9.1.24	Paging request type 3	
9.1.24.1	Channels needed for Mobiles 1 and 2	
9.1.24.2	P3 Rest Octets	
9.1.25	Paging response	
9.1.25.1	Mobile Station Classmark	
9.1.26	Partial release	
9.1.26.1	Channel Description	
9.1.27	Partial release complete	
9.1.28	Physical information	
9.1.28a	RR Initialisation Request	
9.1.29	RR Status	
9.1.30a	Synchronization channel information	
9.1.30b	COMPACT Synchronization channel information	
9.1.31	System information Type 1	
9.1.32	System information type 2	
9.1.33	System information type 2bis	
9.1.34	System information type 2ter	
9.1.34a	System information type 2quater	
9.1.35	System information type 3	
9.1.36	System information type 4	
9.1.36.1	CBCH Channel description	
9.1.36.2	CBCH Mobile Allocation	
9.1.36.3	SI 4 Rest Octets	
9.1.37	System information type 5	
9.1.38	System information type 5 Sissing System Syste	
9.1.39	System information type 5ter	
9.1.40	System information type 6	
9.1.40.1	Cell Identity	
9.1.40.2	Location Area Identification	
9.1.40.3	Cell Options	
9.1.40.4	NCC permitted	
9.1.41	System information type 7	
	~ / ~ · · · · · · · · · · · · · · · · ·	

9.1.42	System information type 8	154
9.1.43	System information Type 9	155
9.1.43a	System information Type 13	155
9.1.43b	(void)	156
9.1.43c	(void)	156
9.1.43d	System information type 16	156
9.1.43e	System information type 17	156
9.1.43f	System information type 19	157
9.1.43g	System information type 18	157
9.1.43h	System information type 20	158
9.1.43i	System information Type 14	158
9.1.43j	System information type 15	159
9.1.44	Talker indication	159
9.1.45	Uplink access	159
9.1.46	Uplink busy	160
9.1.47	Uplink free	161
9.1.48	Uplink release	161
9.1.49	VGCS uplink grant	162
9.1.50	System information type 10 \$(ASCI)\$	162
9.1.51	EXTENDED MEASUREMENT ORDER	163
9.1.52	Extended measurement report	163
9.1.53	Application Information	164
9.1.54	MEASUREMENT INFORMATION	
9.1.55	ENHANCED MEASUREMENT REPORT	
9.2	Messages for mobility management	
9.3	Messages for circuit-switched call control	
9.4	GPRS Mobility Management Messages	
9.5	GPRS Session Management Messages	
9.6	GTTP Messages	
9.6.1	GPRS Information	
9.6.1.1	TLLI	
9.6.1.2	LLC PDU Container	175
10 G	eneral message format and information elements coding	175
10.1	Overview	
10.2	Protocol Discriminator	
10.3	Skip indicator	
10.3.1	Skip indicator	
10.4	Message Type	
10.5	Other information elements	
10.5.1	Common information elements	
10.5.2	Radio Resource management information elements	
10.5.2.1a		
10.5.2.1b		
10.5.2.1b	•	
10.5.2.1b	<u> •</u>	
10.5.2.1b	<u>*</u>	
10.5.2.1b	•	
10.5.2.1b	p.5 Range 256 format	185
10.5.2.1b	p.6 Range 128 format	186
10.5.2.1b	variable bit map format	187
10.5.2.1c	BA List Pref	187
10.5.2.1d	d UTRAN Frequency List	188
10.5.2.2	Cell Description	189
10.5.2.3	Cell Options (BCCH)	189
10.5.2.3a	1 '	
10.5.2.4	Cell Selection Parameters	
10.5.2.4a	MAC Mode and Channel Coding Requested	193
10.5.2.5	Channel Description	
10.5.2.5a	1	
10.5.2.6	Channel Mode	197
10 5 2 7	Channel Mode 2	198

10.5.2.7b(void)	199 199
10.5.2.7cClassmark Enquiry Mask10.5.2.8Channel Needed10.5.2.8aChannel Request Description10.5.2.8bChannel Request Description 2	199 199
10.5.2.8Channel Needed10.5.2.8aChannel Request Description10.5.2.8bChannel Request Description 2	199
10.5.2.8a Channel Request Description	
10.5.2.8b Channel Request Description 2	
10.5.4.7 Cidici Mode Setting	
10.5.2.10 Cipher Response	
10.5.2.11 Control Channel Description	
10.5.2.11a DTM Information Rest Octets	
10.5.2.11b Dynamic ARFCN Mapping	
10.5.2.12 Frequency Channel Sequence	
10.5.2.13 Frequency List	
10.5.2.13.1 General description	
10.5.2.13.2 Bit map 0 format	
10.5.2.13.3 Range 1024 format	
10.5.2.13.4 Range 512 format	
10.5.2.13.5 Range 256 format	
10.5.2.13.6 Range 128 format	
10.5.2.13.7 Variable bit map format	
10.5.2.14 Frequency Short List	
10.5.2.14a Frequency Short List 2	
10.5.2.14b Group Channel Description	
10.5.2.14c GPRS Resumption	
10.5.2.14d GPRS broadcast information	
10.5.2.15 Handover Reference	
10.5.2.16 IA Rest Octets	
10.5.2.17 IAR Rest Octets	228
10.5.2.18 IAX Rest Octets	228
10.5.2.19 L2 Pseudo Length	229
10.5.2.20 Measurement Results	229
10.5.2.20a GPRS Measurement Results	232
10.5.2.21 Mobile Allocation	233
10.5.2.21a Mobile Time Difference	234
10.5.2.21aa MultiRate configuration	234
10.5.2.21b Multislot Allocation	
10.5.2.21c NC mode	
10.5.2.22 Neighbour Cell Description	
10.5.2.22a Neighbour Cell Description 2	
10.5.2.22b (void)	241
10.5.2.22c NT/N Rest Octets	241
10.5.2.23 P1 Rest Octets	
10.5.2.24 P2 Rest Octets	
10.5.2.25 P3 Rest Octets	
10.5.2.25a Packet Channel Description	
10.5.2.25b Dedicated mode or TBF	
10.5.2.25c RR Packet Uplink Assignment	
10.5.2.25d RR Packet Downlink Assignment	
10.5.2.26 Page Mode	
10.5.2.26a (void)	
10.5.2.26b (void)	
10.5.2.26c (void)	
10.5.2.26d (void)	
10.5.2.27 NCC Permitted	
10.5.2.28 Power Command	
10.5.2.28a Power Command and access type	
10.5.2.29 RACH Control Parameters	
10.5.2.30 Request Reference	
10.5.2.31 RR Cause	
10.5.2.32 SI 1 Rest Octets	
10.5.2.33 SI 2bis Rest Octets	259

10.5.2.33b	SI 2quater Resi	t Octets	262	
10.5.2.34		SI 3 Rest Octets		
10.5.2.35	SI 4 Rest Octet	S.	269	
10.5.2.35a	SI 6 Rest Octet	S	272	
10.5.2.36	SI 7 Rest Octet	S	274	
10.5.2.37	SI 8 Rest Octet	S	274	
10.5.2.37a	SI 9 Rest Octet	S	274	
10.5.2.37b	SI 13 Rest Octo	ets	276	
10.5.2.37c	(void)		279	
10.5.2.37d	(void)		279	
10.5.2.37e	SI 16 Rest Octo	ets	279	
10.5.2.37f		ets		
10.5.2.37g	SI 19 Rest Octo	ets	280	
10.5.2.37h	SI 18 Rest Octo	ets	283	
10.5.2.37i		ets		
10.5.2.37j		ets		
10.5.2.37k		ets		
10.5.2.38				
10.5.2.39	_	n Indication		
10.5.2.40		De		
10.5.2.41		ce		
10.5.2.41a				
10.5.2.41				
10.5.2.42 10.5.2.42a		node Indication		
10.5.2.42a	_	1		
10.5.2.43		s \$(ASCI)\$		
10.5.2.44		MEASUREMENT RESULTS		
10.5.2.46		surement Frequency List		
10.5.2.47	*	use		
10.5.2.48				
10.5.2.49	_			
10.5.2.50		TED ANY CO		
10.5.2.51		JTRAN Command		
10.5.2.52		dma2000 Command		
10.5.2.53				
10.5.2.54				
10.5.2.55				
10.5.2.56				
10.5.3	• •	nent information elements.		
10.5.4		nation elements.		
10.5.5		anagement information elements		
10.5.6		ent information elements		
10.5.7		formation elements		
10.5.8		elements.		
10.5.8.1	LLC PDU Con	tainer	300	
11 List	of exetam paramete	ers	201	
		or radio resource management		
11.1		<u> </u>		
		vile station side		
11.1.2		vork side		
11.1.3	-			
		anagement		
11.3	i imers of circuit-swite	ched call control	305	
Annex A	(informative):	Example of subaddress information element coding	306	
Annex B	(normative):	Compatibility checking	307	
Annex C	(normative):	Low layer information coding principles	308	
Annex D	(informative):	Examples of bearer capability information element coding	309	

Annex E	(informative):	Comparison between call control procedures specified in 3GPP TS 24.008 and CCITT Recommendation Q.931	310
Annex F	(informative):	GSM specific cause values for radio resource management	311
Annex G	(informative):	GSM specific cause values for mobility management	313
Annex H	(informative):	GSM specific cause values for call control	314
Annex I	(informative):	GSM specific cause values for session management	315
Annex J	(informative):	Algorithm to encode frequency list information elements	316
J.1	Introduction		316
J.2	General principle		316
J.3			
J.4			
J.5			
J.6	A detailed example		322
Annex K	(informative):	Default Codings of Information Elements	324
K.1	Common information	n elements	324
K.2	Radio Resource mana	agement information elements	324
Annex L	(normative):	Additional Requirements for backward compatibility with PCS 19	
		for NA revision 0 ME	325
Annex M	I (informative):	Change history	326
History			328

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the procedures used at the radio interface (Reference Point Um, see 3GPP TS 24.002) for Radio Resource (RR) management.

Notation "Reserved clause number" is used to indicate which clauses of the specification were moved from this part of the standard to the other part when this standard was split between RAN and CN parts.

When the notations for "further study" or "FS" or "FFS" are present in this specification they mean that the indicated text is not a normative portion of this standard.

These procedures are defined in terms of messages exchanged over the control channels of the radio interface. The control channels are described in 3GPP TS 44.003.

The structured functions and procedures of this protocol and the relationship with other layers and entities are described in general terms in 3GPP TS 24.007.

1.1 Scope of the Technical Specification

The procedures currently described in the present document are for radio resource management for circuit-switched and GPRS services.

3GPP TS 24.010 contains functional procedures for support of supplementary services.

3GPP TS 04.11 contains functional procedures for support of point-to-point short message services.

3GPP TS 44.012 contains functional description of short message - cell broadcast.

3GPP TS 44.060 contains procedures for radio link control and medium access control (RLC/MAC) of packet data physical channels.

3GPP TS 24.071 contains functional descriptions and procedures for support of location services.

3GPP TS 24.008 contains the procedures for CN protocols.

NOTE: "layer 3" includes the functions and protocols described in this Technical Specification. The terms "data link layer" and "layer 2" are used interchangeably to refer to the layer immediately below layer 3.

1.2 Application to the interface structures

The layer 3 procedures apply to the interface structures defined in 3GPP TS 44.003. They use the functions and services provided by layer 2 defined in 3GPP TS 44.005 and 3GPP TS 44.006. 3GPP TS 24.007 gives the general description of layer 3 including procedures, messages format and error handling.

1.3 Structure of layer 3 procedures

A building block method is used to describe the layer 3 procedures.

The basic building blocks are "elementary procedures" provided by the protocol control entities of the three sublayers, i.e. radio resource management, mobility management and connection management sublayer.

Complete layer 3 transactions consist of specific sequences of elementary procedures. The term "structured procedure" is used for these sequences.

1.4 Test procedures

Test procedures of the GSM radio interface signalling are described in 3GPP TS 51.010 and 3GPP TS 11.2x series.

1.5 Use of logical channels

The logical control channels are defined in 3GPP TS 45.002. In the following those control channels are considered which carry signalling information or specific types of user packet information:

- i) Broadcast Control CHannel (BCCH): downlink only, used to broadcast Cell specific information;
- ii) Synchronization CHannel (SCH): downlink only, used to broadcast synchronization and BSS identification information;
- iii) Paging CHannel (PCH): downlink only, used to send page requests to Mobile Stations (MSs);
- iv) Random Access CHannel (RACH): uplink only, used to request a Dedicated Control CHannel;
- v) Access Grant CHannel (AGCH): downlink only, used to allocate a Dedicated Control CHannel;
- vi) Standalone Dedicated Control CHannel (SDCCH): bi-directional;
- vii) Fast Associated Control CHannel (FACCH): bi-directional, associated with a Traffic CHannel;
- viii) Slow Associated Control CHannel (SACCH): bi-directional, associated with a SDCCH or a Traffic CHannel:
- ix) Cell Broadcast CHannel (CBCH): downlink only used for general (not point to point) short message information;
- x) Notification CHannel (NCH): downlink only, used to notify mobile stations of VBS (Voice Broadcast Service) calls or VGCS (Voice Group Call Service) calls.

Two service access points are defined on signalling layer 2 which are discriminated by their Service Access Point Identifiers (SAPI) (see 3GPP TS 44.006):

- i) SAPI 0: supports the transfer of signalling information including user-user information;
- ii) SAPI 3: supports the transfer of user short messages.

Layer 3 selects the service access point, the logical control channel and the mode of operation of layer 2 (acknowledged, unacknowledged or random access, see 3GPP TS 44.005 and 3GPP TS 44.006) as required for each individual message.

1.6 Overview of control procedures

1.6.1 List of procedures

The following procedures are specified in this Technical Specification:

- a) Clause 3 specifies elementary procedures for Radio Resource management:
 - system information broadcasting (clause 3.2.2)
 - RR connection establishment (clause 3.3)
 - entering the dedicated mode: immediate assignment procedure (clause 3.3.1.1)
 - paging procedure for RR connection establishment (clause 3.3.2)
 - notification procedure (clause 3.3.3)
 - Procedures in dedicated mode and in group transmit mode (clause 3.4)
 - measurement report procedure (clause 3.4.1.2)
 - intracell change of channels (clause 3.4.3)
 - intercell change of channels (clause 3.4.4)

- frequency redefinition procedure (clause 3.4.5)
- channel mode change procedure (clause 3.4.6)
- ciphering mode setting procedure (clause 3.4.7)
- additional channel assignment procedure (clause 3.4.8)
- partial channel release procedure (clause 3.4.9)
- radio resources connection release (clause 3.4.13)
- specific RR procedures for voice broadcast channels and voice group call channels (clause 3.4.15)
- application procedures (clause 3.4.21)
- RR procedures on CCCH related to temporary block flow establishment (clause 3.5)
 - packet paging procedure using CCCH (clause 3.5.1)
 - packet access procedure using CCCH (clause 3.5.2)
- packet downlink assignment procedure using CCCH (clause 3.5.3)
- RR procedures on DCCH related to temporary block flow establishment
 - Assignment to Packet Data Channel procedure (clause 3.4.19)
 - Network controlled cell reselection (clause 3.4.20)

Clause 8 specifies actions to be taken on various error conditions and also provides rules to ensure compatibility with future enhancements of the protocol.

1.7 Applicability of implementations

The applicability of procedures of this technical specification for the mobile station is dependent on the services and functions which are to be supported by a mobile station. For the MS, the Revision level indicating Release '99 is linked to the full support of the RR protocol and procedures in 3GPP TS 44.018 Release '99.

1.7.1 Voice Group Call Service (VGCS) and Voice Broadcast Service (VBS)

For mobile stations supporting the Voice Group Call Service or the Voice Broadcast Service, it is explicitly mentioned throughout this technical specification if a certain procedure is applicable only for such a service and, if necessary, how mobile stations not supporting such a service shall behave.

For VGCS and VBS, the following possible mobile station implementations exist:

- support of listening to voice broadcast calls (VBS listening)
- support of originating a voice broadcast call (VBS originating)
- support of listening to voice group calls (VGCS listening)
- support of talking in voice group calls (VGCS talking. This always includes the implementation for VGCS listening)
- support of originating a voice group call (VGCS originating. This always includes the implementation for VGCS talking)

Apart from the explicitly mentioned combinations, all possible combinations are optional and supported by this technical specification.

The related terms are used in this technical specification, if information on these implementation options is required.

1.7.2 General Packet Radio Service (GPRS)

For mobile stations supporting the General Packet Radio Service (GPRS), it is explicitly mentioned throughout the technical specification if a certain procedure is applicable only for such a service and, if necessary, how mobile stations not supporting such a service shall behave.

A GPRS MS may operate in one of the following MS operation modes, see 3GPP TS 23.060 [74]:

- MS operation mode A;
- MS operation mode B; or
- MS operation mode C.

The MS operation mode depends on the services that the MS is attached to, i.e., only GPRS or both GPRS and non-GPRS services, and upon the MS's capabilities to operate GPRS and other GSM services simultaneously. Mobile stations that are capable to operate GPRS services are referred to as GPRS MSs.

NOTE: Other GSM technical specifications may refer to the MS operation modes A, B, and C as GPRS class-A MS, GPRS class-B MS, and GPRS class-C MS.

It should be noted that it is possible that for a GPRS MS, the GMM procedures currently described in the present document do not support combinations of VGCS, VBS and GPRS. The possible interactions are not studied yet.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1]	(void)
[2]	3GPP TS 21.905: "Vocabulary for 3GPP Specifications".
[3]	(void)
[4]	(void)
[5]	(void)
[6]	3GPP TS 22.011: "Service accessibility".
[7]	(void)
[8]	(void)
[9]	(void)
[10]	3GPP TS 23.003: "Numbering, addressing and identification".
[11]	3GPP TS 43.013: "Discontinuous Reception (DRX) in the GSM system".
[12]	(void)
[12a]	3GPP TS 23.071: "Location Services; Functional description – Stage 2".
[13]	(void)

[14]	3GPP TS 23.022: "Functions related to Mobile Station (MS) in idle mode".	
[15]	3GPP TS 24.002: "GSM Public Land Mobile Network (PLMN) access reference configuration	on".
[16]	3GPP TS 44.003: "Mobile Station - Base Station System (MS - BSS) interface Channel struct and access capabilities".	tures
[17]	3GPP TS 44.004: "Layer 1 General requirements".	
[18]	3GPP TS 44.005: "Data Link (DL) layer General aspects".	
[19]	3GPP TS 44.006: "Mobile Station - Base Station System (MS - BSS) interface Data Link (DI layer specification".	(ــ)
[20]	3GPP TS 24.007: "Mobile radio interface signalling layer 3; General aspects".	
[21]	3GPP TS 24.010: "Mobile radio interface layer 3 Supplementary services specification; Gene aspects".	ral
[22]	3GPP TS 24.011: "Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".)
[23]	3GPP TS 44.012: "Short Message Service Cell Broadcast (SMSCB) support on the mobile rainterface".	dio
[23a]	3GPP TS 24.071: "Mobile radio interface layer 3 location services specification.	
[23b]	3GPP TS 44.031 "Location Services; Mobile Station (MS) – Serving Mobile Location Centre (SMLC); Radio Resource LCS Protocol (RRLP)".	
[[24]	3GPP TS 24.080: "Mobile radio interface layer 3 supplementary services specification Forma and coding".	ıts
[25]	(void)	
[26]	(void)	
[27]	(void)	
[28]	(void)	
[29]	(void)	
[30]	(void)	
[31]	(void)	
[32]	3GPP TS 45.002: "Multiplexing and multiple access on the radio path".	
[33]	3GPP TS 45.005: "Radio transmission and reception".	
[34]	3GPP TS 45.008: "Radio subsystem link control".	
[35]	3GPP TS 45.010: "Radio subsystem synchronization".	
[36]	(void)	
[37]	(void)	
[38]	(void)	
[39]	3GPP TS 51.010: "Mobile Station (MS) conformity specification".	
[40]	(void)	
[41]	(void)	
[42]	(void)	

[43]	(void)
[44]	(void)
[45]	(void)
[46]	(void)
[47]	(void)
[48]	(void)
[49]	(void)
[50]	(void)
[51]	(void)
[52]	(void)
[53]	ITU-T Recommendation Q.931: ISDN user-network interface layer 3 specification for basic control".
[54]	(void)
[55]	(void)
[56]	(void)
[57]	(void)
[58]	(void)
[59]	(void)
[60]	(void)
[61]	(void)
[62]	(void)
[63]	(void)
[64]	(void)
[65]	(void)
[66]	(void)
[67]	(void)
[68]	(void)
[69]	(void)
[70]	(void)
[71]	(void)
[72]	(void)
[73]	(void)
[74]	3GPP TS 23.060: "General Packet Radio Service (GPRS); Service Description; Stage 2".
[75]	(void)

[76]	3GPP TS 44.060: "General Packet Radio Service (GPRS); Mobile Station - Base Station System (MS-BSS) interface; Radio Link Control and Medium Access Control (RLC/MAC) layer specification".
[77]	(void)
[78]	(void)
[79]	3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols - Stage 3".
[80]	TIA/EIA/IS-2000-5-A: "Upper Layer (Layer 3) Signaling Standard for cdma2000 Spread Spectrum Systems".
[81]	TIA/EIA/IS-833: "Multi-Carrier Specification for Spread Spectrum Systems on GSM MAP (MC-MAP) (Lower Layers Air Interface)".
[82]	TIA/EIA/IS-2000-4-A: "Signaling Link Access Control (LAC) Standard for cdma2000 Spread Spectrum Systems".

2.1 Definitions and abbreviations

Abbreviations used in this specification are listed in 3GPP TS 3GPP TS 21.905: "3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Vocabulary for 3GPP Specifications".

2.1.1 Random values

In a number of places in this Technical Specification, it is mentioned that some value must take a "random" value, in a given range, or more generally with some statistical distribution. Such cases interest only the Mobile Station.

It is required that there is a low probability that two MSs in the same conditions (including the case of two MSs of the same type from the same manufacturer) will choose the same value. Moreover, it is required that, if it happens that two MSs in similar conditions choose the same value, the probability of their choices being identical at the next occasion is the same as if their first choices had been different.

The meaning of such a specification is that any statistical test for these values, done on a series of similar events, will obtain a result statistically compatible with the specified distribution. This shall hold even in the cases where the tests are conducted with a subset of possible events, with some common parameters. Moreover, basic tests of independence of the values within the series shall pass.

Data against which correlation with the values shall not be found are the protocol state, or the IMSI, or identities or other unrelated information broadcast by the network, or the current TDMA frame number.

2.1.2 Vocabulary

The following terms are used in this Technical Specification:

- **idle mode:** In this mode, the mobile station is not allocated any dedicated channel; it listens to the CCCH and the BCCH.
- **group receive mode:** (only applicable for mobile stations supporting VGCS listening or VBS listening) In this mode, the mobile station is not allocated a dedicated channel with the network; it listens to the downlink of a voice broadcast channel or voice group call channel allocated to the cell. Occasionally, the mobile station has to listen to the BCCH of the serving cell as defined in 3GPP TS 23.022 and 3GPP TS 45.008.
- **dedicated mode:** In this mode, the mobile station is allocated at least two dedicated channels, only one of them being a SACCH.
- **group transmit mode:** (only applicable for mobile stations supporting VGCS talking) In this mode, one mobile station of a voice group call is allocated two dedicated channels, one of them being a SACCH. These channels can be allocated to one mobile station at a time but to different mobile stations during the voice group call.

- **packet idle mode**: (only applicable for mobile stations supporting GPRS) In this mode, mobile station is not allocated any radio resource on a packet data physical channel; it listens to the PBCCH and PCCCH or, if those are not provided by the network, to the BCCH and the CCCH, see 3GPP TS 44.060.
- **packet transfer mode**: (only applicable for mobile stations supporting GPRS) In this mode, the mobile station is allocated radio resource on one or more packet data physical channels for the transfer of LLC PDUs.
- dual transfer mode: (only applicable for mobile stations supporting GPRS and DTM) In this mode, the mobile station is allocated radio resources providing an RR connection and a Temporary Block Flow (3GPP TS 44.060) on one or more physical channels. The allocation of radio resource for the RR connection and the Temporary Block Flow is co-ordinated by the network to comply with the capabilities of the mobile station in dual transfer mode.
- **main DCCH:** In Dedicated mode and group transmit mode, only two channels are used as DCCH, one being a SACCH, the other being a SDCCH or a FACCH; the SDCCH or FACCH is called here "the main DCCH".
- A channel is **activated** if it can be used for transmission, in particular for signalling, at least with UI frames. On the SACCH, whenever activated, it must be ensured that a contiguous stream of layer 2 frames is sent.
- A TCH is **connected** if circuit mode user data can be transferred. A TCH cannot be connected if it is not activated. A TCH which is activated but not connected is used only for signalling, i.e. as a DCCH.
- The data link of SAPI 0 on the main DCCH is called the **main signalling link**. Any message specified to be sent on the main signalling link is sent in acknowledged mode except when otherwise specified.
- The term "to establish" a link is a short form for "to establish the multiframe mode" on that data link. It is possible to send UI frames on a data link even if it is not established as soon as the corresponding channel is activated. Except when otherwise indicated, a data link layer establishment is done without an information field.
- "channel set" is used to identify TCHs that carry related user information flows, e.g., in a multislot configuration used to support circuit switched connection(s), which therefore need to be handled together.
- A **temporary block flow** (TBF) is a physical connection used by the two RR peer entities to support the unidirectional transfer of LLC PDUs on packet data physical channels, see 3GPP TS 44.060.
- **RLC/MAC block:** A RLC/MAC block is the protocol data unit exchanged between RLC/MAC entities, see 3GPP TS 44.060.
- A GMM context is established when a GPRS attach procedure is successfully completed.
- Network operation mode

The three different network operation modes I, II, and III are defined in 3GPP TS 23.060.

The network operation mode shall be indicated as system information. For proper operation, the network operation mode should be the same in each cell of one routing area.

- GPRS MS operation mode

The three different GPRS MS operation modes A, B, and C are defined in 3GPP TS 23.060.

3 Radio Resource management procedures

3.1 Overview/General

3.1.1 General

Radio Resource management procedures include the functions related to the management of the common transmission resources, e.g. the physical channels and the data link connections on control channels.

The general purpose of Radio Resource procedures is to establish, maintain and release RR connections that allow a point-to-point dialogue between the network and a mobile station. This includes the cell selection/reselection and the handover procedures. Moreover, Radio Resource management procedures include the reception of the uni-directional BCCH and CCCH when no RR connection is established. This permits automatic cell selection/reselection.

If VGCS listening or VBS listening are supported, the radio resource management also includes the functions for the reception of the voice group call channel or the voice broadcast channel, respectively, and the automatic cell reselection of the mobile station in Group receive mode.

If VGCS talking is supported, the radio resource management also includes the functions for the seizure and release of the voice group call channel.

If GPRS point-to-point services are supported, the radio resource management procedures includes functions related to the management of transmission resources on packet data physical channels. This includes the broadcast of system information to support a mobile station in packet idle and packet transfer modes, see also 3GPP TS 44.060.

- NOTE 1: This chapter includes some procedures used for multislot operation and for the TCH/H + TCH/H configuration which need not be supported by simple mobile stations.
- NOTE 2: The procedures and the information content relating to the TCH/H + TCH/H configuration in RR messages is for further study.

3.1.2 Services provided to upper layers

A RR connection is a physical connection used by the two peer entities to support the upper layers' exchange of information flows.

3.1.2.1 Idle mode

In idle mode no RR connection exists.

The RR procedures include (on the mobile station side) those for automatic cell selection/reselection. The RR entity indicates to upper layers the unavailability of a BCCH/CCCH and the cell change when decided by the RR entity. Upper layers are advised of the BCCH broadcast information when a new cell has been selected, or when a relevant part of this information changes.

For cell-reselection the BA (list), together with the 3G Cell Reselection list for a multi-RAT MS, shall be used.

In Idle mode, upper layers can require the establishment of an RR connection.

3.1.2.2 Dedicated mode

In dedicated mode, the RR connection is a physical point-to-point bi-directional connection, and includes a SAPI 0 data link connection operating in multiframe mode on the main DCCH. If dedicated mode is established, RR procedures provide the following services:

- establishment/release of multiframe mode on data link layer connections other than SAPI 0, on the main DCCH or on the SACCH associated with the channel carrying the main signalling link;
- transfer of messages on any data link layer connection;

- indication of temporary unavailability of transmission (suspension, resuming);
- indication of loss of RR connection;
- automatic cell reselection and handover to maintain the RR connection:
- setting/change of the transmission mode on the physical channels, including change of type of channel, change
 of the coding/decoding/transcoding mode and setting of ciphering;
- allocation/release of an additional channel (for the TCH/H + TCH/H configuration);
- allocation/release of additional channels for multislot operation;
- release of an RR connection.

3.1.2.3 Group receive mode

Only applicable for mobile stations supporting VGCS listening or VBS listening.

In this mode, the RR procedures on the mobile station side provide the services:

- local connection to the voice broadcast channel or voice group call channel;
- reception of messages in unacknowledged mode;
- automatic cell reselection for the mobile station in Group receive mode;
- local disconnection from the received voice group call or broadcast call channels.

For mobile stations supporting both VGCS listening and VGCS transmit, in addition, the RR procedures on the mobile station side provide the service:

- uplink access procedures to establish the RR connection.

3.1.2.4 Group transmit mode

Only applicable for mobile stations supporting VGCS talking.

In group transmit mode, the RR connection is a physical point-to-point bi-directional connection, and includes a SAPI 0 data link connection operating in multiframe mode on the main DCCH. If the group transmit mode is established, RR procedures provide the following services:

- transfer of messages on the SAPI 0 of the data link layer connection;
- indication of loss of RR connection;
- automatic cell reselection and handover to maintain the RR connection;
- setting of the transmission mode on the physical channels, change of type of channel and setting of ciphering;
- release of the RR connection.

3.1.2.5 Packet idle mode

Only applicable for mobile stations supporting GPRS.

In packet idle mode, no temporary block flow exists (see 3GPP TS 44.060). Upper layers may require the transfer of a LLC PDU, which implicitly triggers the establishment of a temporary block flow.

3.1.2.6 Packet transfer mode

Only applicable for mobile stations supporting GPRS.

In packet transfer mode, the mobile station is allocated radio resource providing a temporary block flow on one or more packet data physical channels. The RR sublayer provides the following services, see also 3GPP TS 44.060:

- transfer of LLC PDUs in acknowledged mode;
- transfer of LLC PDUs in unacknowledged mode.

Depending on the GPRS mode of operation (class A or B), the mobile station may leave both packet idle mode and packet transfer mode before entering dedicated mode, group receive mode or group transmit mode.

Cell reselection in packet idle and packet transfer modes is specified in 3GPP TS 45.008. The RR entity on the mobile station side indicates to the upper layers the availability of a cell and a cell change when decided by the RR sublayer. Upper layers are advised of system information broadcast in the cell when a new cell has been selected, or when a relevant part of this information changes.

3.1.2.7 Dual transfer mode (DTM)

In dual transfer mode, the mobile station is simultaneously in dedicated mode and in packet transfer mode. This feature is optional for the mobile station and the network. It is only applicable for a mobile station supporting GPRS or EGPRS. Dual transfer mode is a subset of class A mode of operation, only possible if there is radio resource allocation coordination in the network.

3.1.3 Services required from data link and physical layers

The RR sublayer uses the services provided by the data link layer as defined in 3GPP TS 44.005.

Moreover, the RR sublayer directly uses services provided by the physical layer such as BCCH searching and transfer of RLC/MAC blocks, as defined in 3GPP TS 44.004.

3.1.4 Change of dedicated channels

3.1.4.1 Change of dedicated channels using SAPI = 0

In case a change of dedicated channels is required using a dedicated assignment and handover procedure, respectively, the RR sublayer will request the data link layer to suspend multiple frame operation before the mobile station leaves the old channel. When the channel change has been completed, layer 3 will request the data link layer to resume multiple frame operation again. The layer 2 suspend/resume procedures are described in 3GPP TS 44.005 and 44.006.

These procedures are specified in such a way that a loss of a layer 3 message cannot occur on the radio interface. However, messages sent from the mobile station to the network may be duplicated by the data link layer if a message has been transmitted but not yet completely acknowledged before the mobile station leaves the old channel (see 3GPP TS 44.006).

As the RR sublayer is controlling the channel change, a duplication of RR messages does not occur. However, there are some procedures for which a duplication is possible, e.g. DTMF procedures. For all upper layer procedures using the transport service of the GSM RR sub-layer (e.g., MM and CM procedures but not GMM or Session Management procedures), the request messages sent by the mobile station contain a sequence number in order to allow the network to detect duplicated messages, which are then ignored by the network. The same sequence number is used to protect against message duplication caused by channel changes between GSM and UTRAN and also by other UTRAN procedures (e.g. hard handover). The procedures for sequenced transmission on layer 3 are described in clause 3.1.4.2.

3.1.4.2 Change of dedicated channels using other SAPIs than 0

For SAPIs other than 0, the data link procedures described in 3GPP TS 44.006 do not provide any guarantee against message loss or duplication.

Therefore, if an application uses a SAPI other than 0 and if this application is sensitive to message loss or duplication, then it has to define its own protection mechanism. No general protection mechanism is provided by the protocol defined in this Technical Specification.

3.1.5 Procedure for Service Request and Contention Resolution

Upon seizure of the assigned dedicated channel, the mobile station establishes the main signalling link on this channel by sending a layer 2 SABM frame containing a layer 3 service request message. The data link layer will store this message to perform the contention resolution. The service request message will be returned by the network in the UA frame.

The data link layer in the mobile station compares the content of the information field (i.e. the layer 3 service request message) received in the UA frame with the stored message and leaves the channel in case they do not match. This procedure resolves contentions in the case where several mobile stations have accessed at the same random access slot and with the same random reference and one has succeeded due to capture. The full description of the procedure is given in 3GPP TS 44.006.

The purpose of the service request message is to indicate to the network which service the mobile station is requesting. This then allows the network to decide how to proceed (e.g. to authenticate or not).

The service request message must contain the identity of the mobile station and may include further information which can be sent without encryption.

The layer 3 service request message is typically one of the following:

- CM SERVICE REQUEST
- LOCATION UPDATING REQUEST
- IMSI DETACH
- PAGING RESPONSE
- CM RE-ESTABLISHMENT REQUEST
- NOTIFICATION RESPONSE
- IMMEDIATE SETUP
- RR INITIALISATION REQUEST

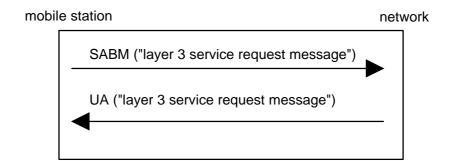


Figure 3.1.5.1/3GPP TS 44.018: Service request and contention resolution

3.1.6 Preemption

The datalink layer provides the capability to assign a priority to any message transferred in dedicated mode on SAPI 0 with multiframe operation. The available message priorities defined in 3GPP TS 44.006 are "high", "normal" and "low". Messages assigned a "high" priority are enabled to preempt, in the data link layer, all preceding untransmitted and partially transmitted messages assigned a "low" priority that are using the same data link connection (same SAPI and logical channel). Messages or message portions that are preempted are discarded without notification to higher layers except that the first 2*N201 octets of any partially transmitted message are not discarded. The following priority assignments are defined for those Radio Resource, Mobility Management and Connection Management messages that use SAPI 0.

Priority Messages Low RR Application Information message Normal All MM messages All CM messages All GTTP messages All other RR messages using SAPI 0 not listed here High RR Channel Establishment: ADDITIONAL ASSIGNMENT RR Configuration Change: CONFIGURATION CHANGE COMMAND RR Handover related ASSIGNMENT COMMAND HANDOVER COMMAND RR-CELL CHANGE ORDER PDCH ASSIGNMENT COMMAND RR Channel release CHANNEL RELEASE PARTIAL RELEASE

Table 3.1.6.1/3GPP TS 44.018: Priority Values of Layer 3 Messages

Use of the preemption capability by layer 3 is not required in a BSS or MS that does not send any "low" priority message. In this case, all messages may be treated as having "normal" priority.

Preemption capabilities in Layer 3 is not applicable to the Uplink messages, hence all Uplink messages are treated with "normal" priority. Note that the "Suspension and Resumption of Multiple frame operation" (See 3GPP TS 04.06) will affect the order in which the layer 3 messages are delivered on the Uplink.

3.2 Idle mode procedures and general procedures in packet idle and packet transfer modes

3.2.1 Mobile Station side

In idle mode, the MS listens to the BCCH and to the paging sub-channel for the paging group the MS belongs to in idle mode (cf. 3GPP TS 43.013); it measures the radio propagation for connection with other cells.

In packet idle and packet transfer modes (applicable only to a GPRS mobile station), the mobile station listens to either the PBCCH, if that is present in the cell, or BCCH. The requirements for the monitoring of system information is further specified in 3GPP TS 44.060. Moreover, the mobile station measures the radio propagation for connection with other cells.

In packet idle mode (applicable only to a GPRS mobile station), the mobile station listens to the paging sub-channels on the PCCCH or CCCH. Paging sub-channels are monitored according to the paging group determined for the mobile station and its current discontinuous reception (DRX) mode. The determination of paging group for the mobile station is defined in 3GPP TS 45.002. The DRX procedures are defined in 3GPP TS 44.060 and 3GPP TS 45.002.

A UTRAN capable mobile station in idle mode or packet idle mode attempts to read predefined configuration information from UTRAN Channels, as specified in 3GPP TS 45.008. This is only applicable to a mobile station supporting circuit-switched services.

Measurements are treated to assess the need of a cell change as specified in 3GPP TS 45.008. When the decision to change cells is made, the mobile station switches to the BCCH or PBCCH of the new cell. The broadcast information is then checked to verify the allowance to camp on this cell (cf. clause 3.2.2). Dependent on the mobile station type and configuration, the mobile station may be required to try to read further BCCH and PBCCH information. If allowed, the cell change is confirmed, and the broadcast information is then treated for Mobility Management actions (cf. clause 4). Similarly, physical contexts are updated (list of neighbouring cells frequencies, thresholds for some actions, etc. (cf. 3GPP TS 45.008 and clause 3.2.2)).

3.2.2 Network side

3.2.2.1 System information broadcasting

SYSTEM INFORMATION TYPE 2 to 4 messages, and optionally TYPE 1, 2bis, 2ter, 7, 8, 13, 16 and 17 and further types are regularly broadcast by the network on the BCCH. Based on this information the mobile station is able to decide whether and how it may gain access to the system via the current cell. The SYSTEM INFORMATION TYPE 2bis message shall be sent if and only if the EXT-IND bit in the Neighbour Cell Description IE in both the TYPE 2 and TYPE 2bis messages indicates that each IE only carries part of the BA. SYSTEM INFORMATION TYPE 2ter message shall be sent if and only if this is indicated in SYSTEM INFORMATION TYPE 3 message.

A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may consider the EXT-IND bit in the Neighbour Cell Description IE in the SYSTEM INFORMATION TYPE 2 message as a spare bit. If it does so it shall assume that the information element carries the complete BA and it shall ignore any SYSTEM INFORMATION TYPE 2bis and 2ter messages.

SYSTEM INFORMATION TYPE 2quater messages may be sent to provide further information for Enhanced Measurement Report. It may also include UTRAN information for cell-reselection, measurement and reporting. A mobile station with no UTRAN capability should ignore 3G related information in this message. SYSTEM INFORMATION TYPE 2quater message shall be sent if and only if this is indicated in SYSTEM INFORMATION TYPE 3 message.

SI2 ter Rest Octet information element in the SI2 ter message may provide information on UTRAN Cells and 3G Measurement Parameters. Information received in this message is only used for cell reselection in idle mode.

When the SI2ter_MP_CHANGE_MARK parameter is changed in this information element, the MS shall re-read 3G Measurement parameters in all instances of SI2ter (by using SI2ter_INDEX and SI2ter_COUNT). When the SI2ter_3G_CHANGE_MARK is changed in this information element, the MS shall re-read UTRAN FDD Description and UTRAN TDD Description in all instances of SI2ter (by using SI2ter INDEX and SI2ter COUNT).

If the additional cell reselection parameters are broadcast then SYSTEM INFORMATION TYPE 3 message shall always contain these parameters. In addition to SYSTEM INFORMATION TYPE 3 at least either SYSTEM INFORMATION TYPE 4 or SYSTEM INFORMATION TYPE 7 and 8 messages shall contain these parameters too. SYSTEM INFORMATION TYPE 7 and 8 messages shall be sent if and only if this is indicated in SYSTEM INFORMATION TYPE 4 message.

SYSTEM INFORMATION TYPE 15 message is broadcast if dynamic ARFCN mapping is used in the PLMN. In this case ARFCN values are allocated and dynamically mapped to physical frequencies, see 3GPP TS 45.005. The presence of dynamic ARFCN mapping shall be indicated in Cell Options (BCCH) IE. When the value of the parameter DM_CHANGE_MARK is changed in the SYSTEM INFORMATION TYPE 15 message, the mobile station shall reread information on dynamic mapping in a full set of SYSTEM INFORMATION 15 messages.

After the release of a dedicated connection, when returning to idle mode or packet idle mode, the mobile station may keep the dynamic ARFCN mapping information for the PLMN of the chosen cell under the following conditions:

- there has not been any handover during the connection; or

- the mobile station chooses the last cell (identified by the BCCH carrier and BSIC) that was used during the connection and there has not been any handover including dynamic ARFCN mapping information after reception of the dynamic ARFCN mapping information.

Otherwise, the mobile station shall acquire new dynamic ARFCN mapping information

If additional SoLSA specific parameters are broadcast then SYSTEM INFORMATION TYPE 16 and 17 messages, shall always contain these parameters. In addition to SYSTEM INFORMATION TYPE 16 and 17 messages at least either SYSTEM INFORMATION TYPE 4 or SYSTEM INFORMATION TYPE 7 and 8 messages shall contain these SoLSA specific parameters too. SYSTEM INFORMATION TYPE 16 and 17 messages shall be sent if and only if this is indicated in SYSTEM INFORMATION TYPE 3 message. The SoLSA information of any SYSTEM INFORMATION message shall be the same.

The SYSTEM INFORMATION TYPE 18 and 20 messages are sent when non-GSM broadcast information must be transmitted. The scheduling and repetition rate of these messages is determined by the system operator and is indicated in SYSTEM INFORMATION TYPE 9 message. Mobile stations without non-GSM capabilities defined for SI 18 and SI 20 should ignore these messages. An MS with non-GSM capabilities shall decode and identify information related to the respective Non-GSM protocol by reading the Non-GSM Protocol Discriminator field.

SYSTEM INFORMATION TYPE 19 messages shall be provided if COMPACT neighbour cells exist (see 3GPP TS 45.008). The presence of SI 19 messages shall be indicated in SI 9 message.

The support of GPRS shall be indicated in SYSTEM INFORMATION TYPE 3 message. In addition, the support of GPRS shall be indicated in either SYSTEM INFORMATION TYPE 4 or SYSTEM INFORMATION TYPE 7 and 8 messages. If GPRS is supported, SYSTEM INFORMATION TYPE 13 message shall be sent. SI 13 message shall not be sent if GPRS is not supported. Additional requirements for the broadcast of system information in a cell supporting GPRS are specified in 3GPP TS 44.060.

- NOTE 1: The allowed scheduling of SYSTEM INFORMATION messages on the BCCH are specified in 3GPP TS 45.002.
- NOTE 2: The network should take into account limitations of certain mobile stations to understand SYSTEM INFORMATION TYPE 2bis, TYPE 2ter, the EXT-IND bit in the Neighbour Cell Description, the indication of 2ter in SYSTEM INFORMATION TYPE 3 and formats used in the Neighbour Cell Description IE and Cell Channel Description IE used in SYSTEM INFORMATION messages, see this clause, clause 10.5.2.1b, and clause 10.5.2.22.
- NOTE 3: The network should take into account the limitations of earlier versions of mobile equipment to understand the 3-digit MNC format of the location area identification, see clause 10.5.1.3.

The information broadcast may be grouped in the following classes:

- information giving unique identification of the current network, location area and cell;
- information used for candidate cell measurements for handover and cell selection procedures;
- information describing the current control channel structure;
- information controlling the random access channel utilization;
- information defining different options supported within the cell; and
- information about the length of the part of the message belonging to the phase 1 protocol.

The network may send to the mobile station BCCH scheduling information as specified below:

- 1) The BCCH scheduling information may be contained in the SYSTEM INFORMATION TYPE 9 messages. If so, SYSTEM INFORMATION TYPE 3 specifies where to find SYSTEM INFORMATION TYPE 9 messages carrying BCCH scheduling information.
- 2) If the mobile station has received BCCH scheduling information, it shall assume that this BCCH scheduling information is valid in the location area until new scheduling information is received. It may store the information in the ME and assume its validity after switch on in the same location area.
- 3) The network need not indicate the schedule of all SYSTEM INFORMATION messages in SYSTEM INFORMATION 9. For any System Information message, the MS shall monitor all blocks specified in

3GPP TS 45.002 for that System Information message and all blocks specified in the SYSTEM INFORMATION TYPE 9 message for that System Information message.

4) When the mobile station detects that the BCCH information is not scheduled as defined in the last received SI 9 message, it shall read the SYSTEM INFORMATION TYPE 3 message. If presence of BCCH scheduling information in SYSTEM INFORMATION TYPE 9 message is indicated, it shall try to read the information and continue as in 2 above. If presence of BCCH scheduling information in SYSTEM INFORMATION TYPE 9 message is not indicated, it shall assume that there is no valid BCCH scheduling information.

3.2.2.2 Paging

The network is required to send valid layer 3 messages continuously on all paging subchannels on CCCH.

3.3 RR connection establishment

3.3.1 RR connection establishment initiated by the mobile station

The purpose of the immediate assignment procedure is to establish an RR connection between the mobile station and the network.

3.3.1.1 Entering the dedicated mode: immediate assignment procedure

The immediate assignment procedure can only be initiated by the RR entity of the mobile station. Initiation is triggered by request from the MM sublayer or LLC layer to enter the dedicated mode or by the RR entity in response to a PAGING REQUEST message or to initiate a notification response procedure. Upon such a request,

- if access to the network is allowed (as defined in 3.3.1.1.1), the RR entity of the mobile station initiates the immediate assignment procedure as defined in clause 3.3.1.1.2;
- otherwise, it rejects the request.

The request from the MM sublayer to establish an RR connection specifies an establishment cause. Similarly, the request from the RR entity to establish a RR connection in response to a PAGING REQUEST 1, 2 or 3 message specifies one of the establishment causes "answer to paging"; the request from the RR entity to establish an RR connection in order to initiate a notification response procedure specifies one of the establishment causes "procedures that can be completed with a SDCCH".

3.3.1.1.1 Permission to access the network

All mobile stations with an inserted SIM are members of one out of 10 access classes numbered 0 to 9. The access class number is stored in the SIM. In addition, mobile stations may be members of one or more out of 5 special access classes (access classes 11 to 15) (see 3GPP TS 22.011), this is also held on the SIM card.

The system information messages on the BCCH broadcast the list of authorized access classes and authorized special access classes in the system information messages, and whether emergency calls are allowed in the cell to all mobile stations or only to the members of authorized special access classes.

If the establishment cause for the request of the MM sublayer is not "emergency call", access to the network is allowed if and only if the mobile station is a member of at least one authorized:

- access class; or
- special access class.

If the establishment cause for the request of the MM sublayer is "emergency call", access to the network is allowed if and only if:

- emergency calls are allowed to all mobile stations in the cell or the mobile station is a member of at least one authorized special access class
- the network support voice services.

If requesting emergency call access in a cell where voice services are not available (CELL_BAR_QUALIFY_2 parameter indicates no voice service), the mobile station shall immediately go to "Any Cell Selection" state as defined in 3GPP TS 23.022, prior to establishing the emergency call.

3.3.1.1.2 Initiation of the immediate assignment procedure

The RR entity of the mobile station initiates the immediate assignment procedure by scheduling the sending on the RACH and leaving idle mode (in particular, the mobile station shall ignore PAGING REQUEST messages).

It then sends maximally M+1 CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages on the RACH in a way such that:

- the number of slots belonging to the mobile station's RACH between initiation of the immediate assignment procedure and the first CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST message (excluding the slot containing the message itself) is a random value drawn randomly for each new initial assignment initiation with uniform probability distribution in the set {0, 1, ..., max (T,8) 1};
- the number of slots belonging to the mobile station's RACH between two successive CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages (excluding the slots containing the messages themselves) is a random value drawn randomly for each new transmission with uniform probability distribution in the set $\{S, S+1, ..., S+T-1\}$;

Here, T is the value of the parameter "Tx-integer" broadcast on the BCCH;

M is the value of the parameter "max retrans" broadcast on the BCCH;

S is a parameter depending on the CCCH configuration and on the value of Tx-integer as defined in Table 3.3.1.1.2.1/3GPP TS 44.018.

The CHANNEL REQUEST messages are sent on the RACH (cf. clause 1.5) and contain as parameters:

- an establishment cause which corresponds to the establishment cause given by the MM sublayer and the
 broadcast NECI value, or which corresponds to one of the establishment causes "answer to paging" given by the
 RR entity in response to a PAGING REQUEST message including the Channel Needed information, or which
 corresponds to one of the establishment causes "procedures that can be completed with a SDCCH" given by the
 RR entity in order to initiate a notification response procedure;
- a random reference which is drawn randomly from a uniform probability distribution for every new transmission.

After sending the first CHANNEL REQUEST message, the mobile station shall start listening to the BCCH; it shall also listen to the full downlink CCCH timeslot corresponding to its CCCH group.

Having sent M + 1 CHANNEL REQUEST messages, the RR entity of the mobile station starts timer T3126. At expiry of timer T3126, the immediate assignment procedure is aborted; if the immediate assignment procedure was triggered by a request from the MM sublayer, a random access failure is indicated to the MM sublayer.

Table 3.3.1.1.2.1/3GPP TS 44.018: Values of parameter S

TX-integer	non combined CCCH	combined CCH/SDCCH
3,8,14,50	55	41
4,9,16	76	52
5,10,20	109	58
6,11,25	163	86
7,12,32	217	115

3.3.1.1.3 Answer from the network

3.3.1.1.3.1 On receipt of a CHANNEL REQUEST message

The network may allocate a dedicated channel to the mobile station by sending an IMMEDIATE ASSIGNMENT message or IMMEDIATE ASSIGNMENT EXTENDED message in unacknowledged mode on the same CCCH timeslot on which it has received the CHANNEL REQUEST. There is no further restriction on what part of the downlink CCCH an IMMEDIATE ASSIGNMENT message or IMMEDIATE ASSIGNMENT EXTENDED message

can be sent. The type of channel allocated (SDCCH or TCH; the channel mode shall be set to signalling only) is a network operator decision. Timer T3101 is then started on the network side.

NOTE: There are two types of immediate assignment messages:

- IMMEDIATE ASSIGNMENT message, containing assignment information for one mobile station only;
- IMMEDIATE ASSIGNMENT EXTENDED message, containing assignment information for two mobile stations at the same time.

The IMMEDIATE ASSIGNMENT or IMMEDIATE ASSIGNMENT EXTENDED message contains:

- the description of the assigned channel;
- the information field of the CHANNEL REQUEST message and the frame number of the frame in which the CHANNEL REQUEST message was received;
- the initial timing advance (cf. 3GPP TS 44.004);
- optionally, a starting time indication.

If frequency hopping is applied, the mobile station uses the last CA received on the BCCH to decode the Mobile Allocation.

On receipt of an IMMEDIATE ASSIGNMENT or IMMEDIATE ASSIGNMENT EXTENDED message corresponding to one of its 3 last CHANNEL REQUEST messages, the mobile station stops T3126 (if running), stops sending CHANNEL REQUEST messages, switches to the assigned channels, sets the channel mode to signalling only and activates the assigned channels. It then establishes the main signalling link with an SABM containing an information field (see clause 3.1.5).

An IMMEDIATE ASSIGNMENT or IMMEDIATE ASSIGNMENT EXTENDED message may indicate a frequency change in progress, with a starting time and possibly alternative channel descriptions.

In the case of the reception of an IMMEDIATE ASSIGNMENT EXTENDED message, or of an IMMEDIATE ASSIGNMENT message which contains only the description of a channel to be used after the starting time, the mobile station shall wait up to the starting time before accessing the channel. If the starting time has already elapsed, the mobile shall access the channel as an immediate reaction to the reception of the message (see 3GPP TS 45.010 for the timing constraints).

If the message contains both the description of a channel to be used after the indicated time and of a channel to be used before, the mobile station accesses a channel as an immediate reaction to the reception of the message. If the moment the mobile station is ready to access is before the indicated time, the mobile station accesses the channels described for before the starting time. The mobile station then changes to the channel described for after the starting time at the indicated time. New parameters can be frequency list and MAIO. Other parameters describing the channel to be used before the starting time are taken from the description of the channel defined for use after the starting time. If the moment the mobile station is ready to access is after the starting time, the mobile station accesses the channel described for after the starting time.

If frequency hopping is applied, the mobile station uses the last CA received on the BCCH.

3.3.1.1.3.2 Assignment rejection

If no channel is available for assignment, the network may send to the mobile station an IMMEDIATE ASSIGNMENT REJECT message in unacknowledged mode on the same CCCH timeslot on which the channel request message was received. There is no further restriction on what part of the downlink CCCH timeslot an IMMEDIATE ASSIGNMENT REJECT message can be sent. This message contains the request reference and a wait indication.

On receipt of an IMMEDIATE ASSIGNMENT REJECT message corresponding to one of its 3 last CHANNEL REQUEST messages, the mobile station, stops sending CHANNEL REQUEST messages, starts timer T3122 with the indicated value, ("wait indication" information element), starts T3126 if it has not already been started, and listens to the downlink CCCH until T3126 expires. During this time, additional IMMEDIATE ASSIGNMENT REJECT messages are ignored, but any immediate assignment corresponding to any other of its 3 last CHANNEL REQUEST messages make the mobile station follow the procedure in clause 3.3.1.2. If no such immediate assignment is received, the mobile station returns to CCCH idle mode (listening to its paging channel).

As an option the mobile station may return to CCCH idle mode as soon as it has received responses from the network on all, or in case more than 3 were sent the last 3, of its CHANNEL REQUEST messages.

The mobile station is not allowed to make a new attempt to establish a non emergency RR connection in the same cell until T3122 expires. Provided that an IMMEDIATE ASSIGNMENT REJECT message has not been received for an emergency RR connection attempt, the mobile station may attempt to enter the dedicated mode for an emergency call in the same cell before T3122 has expired.

The Wait Indication IE (i.e. T3122) relates to the cell from which it was received.

The mobile station in packet idle mode (only applicable to mobile station supporting GPRS) may initiate packet access in the same cell before T3122 has expired, see 3GPP TS 44.060 and clause 3.5.2.1.3.4.

After T3122 expiry, no CHANNEL REQUEST message shall be sent as a response to a page until a PAGING REQUEST message for the mobile station is received.

3.3.1.1.4 Assignment completion

The immediate assignment procedure is terminated on the network side when the main signalling link is established. Timer T3101 is stopped and the MM sublayer on the network side is informed that the RR entity has entered the dedicated mode.

On the mobile station side, the procedure is terminated when the establishment of the main signalling link is confirmed. The MM sublayer is informed that the RR entity has entered the dedicated mode.

3.3.1.1.4.1 Early classmark sending

Early classmark sending consists in the mobile station sending as early as possible after access a CLASSMARK CHANGE message to provide the network with additional classmark information. In addition a MS supporting UTRAN sends a UTRAN Classmark Change message; an MS supporting CDMA2000 sends a CDMA2000 Classmark Change. When a CLASSMARK CHANGE message and one or more additional UTRAN Classmark Change or CDMA2000 Classmark Change messages are to be sent, the CLASSMARK CHANGE message shall be sent first.

A mobile station which implements the « Controlled Early Classmark Sending » option shall perform the early classmark sending if and only if it is accepted by the network, as indicated in the last reception in the accessed cell of the SYSTEM INFORMATION TYPE 3 message or the PACKET SYSTEM INFORMATION TYPE 2 message (see 3GPP TS 44.060). If the PACKET SYSTEM INFORMATION TYPE 2 messages have been received, but the Early Classmark Sending Control flag is not included, the mobile station may either read the SYSTEM INFORMATION TYPE 3 message or it shall assume that the early classmark sending is allowed in the cell.

A mobile station which implements support for multiple band shall also implement the « Controlled Early Classmark Sending » option.

A mobile station which implements the support of one or more 3G Radio Access Technology shall also implement the « Controlled Early Classmark Sending » option; in this case neither UTRAN CLASSMARK CHANGE nor CDMA2000 CLASSMARK CHANGE message shall be sent by the mobile if prohibited by the 3G Early Classmark Sending Restriction parameter in the last reception in the accessed cell of the SYSTEM INFORMATION TYPE 3 message or PACKET SYSTEM INFORMATION TYPE 2 message (3GPP TS 44.060). If the PACKET SYSTEM INFORMATION TYPE 2 messages have been received, but the Early Classmark Sending Control flag is not included, the mobile station may either read the SYSTEM INFORMATION TYPE 3 message or it shall assume that the early classmark sending is allowed in the cell.

A mobile station which implements the « multislot capability » option shall also implement the « Controlled Early Classmark Sending » option.

A mobile station that implements some form of treatment of UCS2 alphabet (see 3GPP TS 03.38) encoded character string (e.g., in short message, or in USSD string) may indicate so in the classmark. (An example is a Mobile Equipment able to display UCS2 encoded character string.) In such a case, it should also implement the « Controlled Early Classmark Sending » option. It is the mobile station responsibility to provide the UCS2 support information in due time. If the network needs this information and the mobile station did not provide it, the network may assume that the Mobile Equipment does not support UCS2.

A mobile station which implements the R-GSM band (see 3GPP TS 45.005) shall also implement the « Controlled Early Classmark Sending » option.

A mobile station which implements the extended measurement function shall also implement the « Controlled Early Classmark Sending » option.

A mobile station which implements the «GPRS» option shall also implement the « Controlled Early Classmark Sending » option.

A mobile station which implements the «SoLSA» option shall also implement the « Controlled Early Classmark Sending» option.

A mobile station which implements the «EDGE» option shall also implement the « Controlled Early Classmark Sending » option.

A mobile station which implements the «LCS» option shall also implement the « Controlled Early Classmark Sending» option.

A mobile station which implements the « Controlled Early Classmark Sending » option shall indicate it in the classmark (ES IND bit).

3.3.1.1.5 Abnormal cases

If a lower layer failure occurs on the mobile station side on the new channel before the successful establishment of the main signalling link, the allocated channels are released; the subsequent behaviour of the mobile station depends on the type of failure and previous actions.

- If the failure is due to information field mismatch in the contention resolution procedure, see clause 3.1.5, and no repetition as described in this paragraph has been performed, the immediate assignment procedure shall be repeated.
- If the failure is due to any other reason or if a repetition triggered by a contention resolution failure has been performed. The mobile station returns to idle mode (RR connection establishment failure), transactions in progress are aborted and cell reselection then may take place.

If the information available in the mobile station, after the reception of an IMMEDIATE ASSIGNMENT message does not satisfactorily define a channel, an RR connection establishment failure has occurred.

If the Mobile Allocation IE indexes frequencies in more than one frequency band then a RR connection establishment failure has occurred.

If an IMMEDIATE ASSIGNMENT message indicates (a) channel(s) in a different frequency band to which the CHANNEL REQUEST message was sent then, if the frequency band is supported by the mobile station, the mobile station shall access the indicated channel(s) with the same power control level as used for the CHANNEL REQUEST message.

If an IMMEDIATE ASSIGNMENT message indicates a channel in non-supported frequency band then a RR connection establishment failure has occurred.

On the network side, if timer T3101 elapses before the main signalling link is established, the newly allocated channels are released and the request is forgotten. Note that the network has no means to distinguish repeated attempts from initial attempts from a mobile station.

3.3.1.2 Entering the group transmit mode: uplink access procedure

Only applicable for mobile stations supporting « VGCS transmit ».

The purpose of the uplink control procedure is to establish an RR connection on a VGCS channel between a mobile station which is in group receive mode on that channel and the network.

The mobile station enters the group transmit mode when a successful establishment of the RR connection is indicated. The channel mode assumed by the mobile station is the one derived from the channel description.

3.3.1.2.1 Mobile station side

3.3.1.2.1.1 Uplink investigation procedure

The mobile station in group receive mode shall consider the uplink as free if the last message indicating the uplink as being free was received less than 480 ms ago and if no UPLINK BUSY message has been received since the last message indicating the uplink as free.

On receipt of a request from the upper layer to access the uplink and if the uplink is not free, the mobile station starts the timer T3128.

If the uplink is free or becomes free before expiry of timer T3128, then the uplink investigation procedure is terminated, the mobile station shall stop T3128, and start the uplink access procedure.

NOTE: The start of the uplink access procedure is not subject to the access class of the mobile station.

If the uplink is not indicated free before the timer expires, the mobile station shall remain in the group receive mode and indicate a reject of the uplink request to the upper layer.

3.3.1.2.1.2 Uplink access procedure

The mobile station shall send UPLINK ACCESS messages on the voice group call channel with the appropriate establishment cause. The first UPLINK ACCESS message shall be transmitted by the mobile station with a random delay between 0 and 20ms. The UPLINK ACCESS messages shall be repeated after a further period of 100ms plus a random delay between 0 and 20ms.

The UPLINK ACCESS messages contain a random reference which is drawn randomly from a uniform probability distribution. The UPLINK ACCESS messages repetitions shall contain the same random reference as the one contained in the first message.

If an uplink identity code (UIC) of the current cell has been provided by the network in the UPLINK FREE message, the mobile station shall use this UIC IE for the coding of the UPLINK ACCESS messages (see 3GPP TS 45.003). If no UIC is provided, the mobile station shall use the BSIC received from the current cell, for instance from the initial synchronization.

Having sent the first UPLINK ACCESS message, the mobile station starts timer T3130. At expiry of timer T3130, the mobile station shall repeat the same procedure if the uplink is free. A maximum of three attempts is allowed and after that a rejection of the uplink request is indicated to the upper layers.

If no VGCS UPLINK GRANT or UPLINK BUSY message is received by the mobile station 480 ms after having sent the first UPLINK ACCESS message, the mobile station shall stop sending UPLINK ACCESS messages and wait in order to receive a VGCS UPLINK GRANT or UPLINK BUSY message.

On receipt of an VGCS UPLINK GRANT message corresponding to one of its UPLINK ACCESS messages, the mobile station stops T3130, stops sending UPLINK ACCESS messages, and establishes the main signalling link with an SABM containing the TALKER INDICATION message in the information field. Early classmark sending shall be performed if applicable. If a UA is received containing the message sent, the mobile station enters the group transmit mode and indicates the successful seizure of the uplink to the upper layer. If a UA is received with a message different from the message sent, the mobile station shall remain in the group receive mode and indicate the rejection of the uplink request to the upper layers.

When receiving an UPLINK BUSY message or a VGCS UPLINK GRANT message aimed to another mobile station (i.e. not corresponding to one of its UPLINK ACCESS messages), the mobile station stops T3130 and stops sending UPLINK ACCESS messages. The mobile shall remain in the group receive mode and shall indicate a rejection of the uplink request to the upper layers.

3.3.1.2.2 Network side

On receipt of an UPLINK ACCESS message the network shall perform, if necessary, contention resolution and grant the uplink to one mobile station by sending a VGCS UPLINK GRANT message to the mobile station in unacknowledged mode on the main signalling link. Furthermore, the network shall provide UPLINK BUSY messages on the main signalling link in all cells of the group call area. After having sent the first message, the network starts T3115. If the timer expires before the reception of a correctly decoded frame from the MS, the network repeats the

VGCS UPLINK GRANT message to the mobile station, reset and restarts timer T3115. If the VGCS UPLINK GRANT message has been repeated Ny2 times without a correctly decoded frame being received from the MS, the network shall stop sending VGCS UPLINK GRANT messages and provide an UPLINK FREE message on the main signalling channel and wait for a new UPLINK ACCESS message. The correct decoding of a frame means that the decoding algorithm and the error detection tests, if any, indicate no error.

After the data link layer is established, the RR entity of the network shall analyse the TALKER INDICATION message received from the mobile station, adapt the RR procedures to the new classmark if necessary and provide the mobile subscriber identity to the upper layer.

3.3.1.2.3 Abnormal cases

If a lower link failure has occurred or an indication of the release of the data link layer was provided by the lower layer and no RR release request was previously received from the upper layer, the network shall provide an UPLINK FREE message on the main signalling channel and wait for a new UPLINK ACCESS message.

3.3.1.3 Dedicated mode and GPRS

A mobile station whose Channel Request message contained a packet access establishment cause may receive an Immediate Assignment message to a Channel which is to be used in dedicated mode. A mobile station supporting the <<GPRS>> option shall obey this command. When establishing the main signalling link the information field in the SABM shall contain an RR INITIALISATION REQUEST message.

This message contains:

TLLI;

MS Classmark type 2;

Ciphering Key Sequence Number;

MAC Mode and Channel Coding Requested;

Channel Request Description.

Following a successful contention resolution procedure, the mobile station shall implement the Early Classmark Sending option. Then, the upper layers in the mobile station shall wait for commands from the network, eg for the allocation of a GPRS resource.

While on the dedicated channel the mobile station shall obey the RR management procedures of 3GPP TS 44.018, in particular the mobile station shall send measurement reports on the SACCH.

3.3.2 Paging procedure for RR connection establishment

The network can initiate the establishment of an RR connection by the paging procedure for RR connection establishment. Such a procedure can only be initiated by the network.

3.3.2.1 Paging initiation by the network

The network initiates the paging procedure to trigger RR connection establishment by broadcasting a paging request message on the appropriate paging subchannel on CCCH or PCCCH, and starts timer T3113. The paging subchannels on CCCH and PCCCH are specified in 3GPP TS 45.002 and 3GPP TS 43.013.

The network may also send paging related information on PACCH to a mobile station in packet transfer mode, see clause 3.3.2.1.3.

The network may also broadcast paging related information on any voice broadcast or voice group call channel downlink.

3.3.2.1.1 Paging initiation using paging subchannel on CCCH

Paging initiation using the paging subchannel on CCCH is used when sending paging information to a mobile station in idle mode. It is also used when sending paging information to a mobile station in packet idle mode, if PCCCH is not present in the cell.

NOTE 1: There are 3 types of paging messages which may be used on CCCH:

- PAGING REQUEST TYPE 1;
- PAGING REQUEST TYPE 2; and
- PAGING REQUEST TYPE 3.

In a PAGING REQUEST message on CCCH to trigger RR connection establishment, the mobile station shall be identified by the TMSI (non-GPRS TMSI) or its IMSI. If the mobile station is identified by the TMSI, it shall proceed as specified in clause 3.3.2.2.

If the mobile station in packet idle mode is identified by its IMSI, it shall parse the message for a corresponding *Packet Page Indication* field:

- if the *Packet Page Indication* field indicates a paging procedure for RR connection establishment, or the field is not present in the message, the mobile station shall proceed as specified in clause 3.3.2.2;
- if the *Packet Page Indication* field indicates a packet paging procedure, the mobile station shall proceed as specified in clause 3.5.1.2.

A PAGING REQUEST message on CCCH includes for each mobile station that is paged to trigger RR connection establishment an indication which defines how mobiles of different capabilities shall code the establishment cause field in the CHANNEL REQUEST message. The information received in the CHANNEL REQUEST can be used by the network to assign a suitable channel.

A PAGING REQUEST message on CCCH may include more than one mobile station identification.

A PAGING REQUEST TYPE 1 message on CCCH may have additionally a notification message coded in the P1 rest octets information element.

A PAGING REQUEST message on CCCH may also include priority levels related to the mobile station identifications. A mobile station in group receive mode supporting eMLPP shall take into account this information to decide whether to respond to this PAGING REQUEST and, if the call is answered, the mobile station shall store the priority level for the duration of the call. A mobile station not supporting eMLPP shall ignore this information element when received in a PAGING REQUEST message.

NOTE 2: A mobile station not supporting VGCS or VBS may ignore this information element when received in a PAGING REQUEST message, since the priority level is also provided in the SETUP message.

If VGCS or VBS is supported by the network, messages sent on the PCH may also include an indication of the change of the information sent on the NCH (see clause 3.3.3.2).

The choice of the message type depends on the number of mobile stations to be paged and of the types of identities that are used. The maximum number of paged mobile stations per message is 4 when using only TMSIs for identification of the mobile stations.

The mobile station in idle mode is required to receive and analyse the paging messages and immediate assignment messages sent on the paging subchannel corresponding to its paging subgroup, as specified in 3GPP TS 45.002.

NOTE 3: The possible immediate assignment messages are: the IMMEDIATE ASSIGNMENT, the IMMEDIATE ASSIGNMENT EXTENDED and the IMMEDIATE ASSIGNMENT REJECT messages.

The paging and immediate assignment type messages contain a page mode information element. This information element controls possible additional requirements on mobile stations belonging to the paging subgroup corresponding to the paging subchannel the message was sent on. This implies that a given mobile station shall take into account the page mode information element of any message sent on its own paging subchannel whatever the nature of this message (paging messages or immediate assignment messages). This further implies that the mobile station does not take into account page mode information element of messages sent on paging subchannels other than its own paging subchannel. The requirements yielded by the page mode information element are as follows:

- a) normal paging: no additional requirements;
- b) extended paging: the mobile station is required in addition to receive and analyse the next but one message on the PCH;
- c) paging reorganization: The mobile station shall receive all messages on the CCCH regardless of the BS-AG-BLKS-RES setting. It is required to receive all BCCH messages. When the mobile station receives the next message to its (possibly new) paging subgroup the subsequent action is defined in the page mode information element in that message;
- d) same as before: No change of page mode from the previous page mode.

Note that a mobile station takes into account the page mode information only in messages of its own paging subchannel whatever the currently applied requirements (a, b, c or d).

When the mobile station selects a new PCH, the initial page mode in the mobile station shall be set to paging reorganization. If a message in the paging subchannel is not received correctly, the message is ignored and the previous page mode is assumed.

3.3.2.1.2 Paging initiation using paging subchannel on PCCCH

Paging initiation using a paging subchannel on PCCCH, see 3GPP TS 44.060, applies when sending paging information to a mobile station in packet idle mode and PCCCH is provided in the cell.

The paging initiation procedure and the paging request message used on PCCCH are specified in 3GPP TS 44.060.

3.3.2.1.3 Paging initiation using PACCH

Paging initiation using PACCH, see 3GPP TS 44.060, applies to a mobile station in packet transfer mode.

The paging initiation procedure and the message used to carry paging related information on PACCH are specified in 3GPP TS 44.060.

3.3.2.2 Paging response

Upon receipt of a paging request message, or other message containing information to trigger the establishment of a RR connection, and if access to the network is allowed, the addressed mobile station shall, when camped on a cell as specified in 3GPP TS 23.022, initiate the immediate assignment procedure as specified in 3.3.1. The establishment of the main signalling link is then initiated by use of an SABM with information field containing the PAGING RESPONSE message (see clause 3.1.5). The MM sublayer in the mobile station is informed that the RR entity has entered the dedicated mode.

Upon receipt of the PAGING RESPONSE message the network stops timer T3113. The MM sublayer in the network is informed that an RR connection exists.

3.3.2.3 Abnormal cases

Lower layer failure occurring during the immediate assignment procedure is treated as specified for that procedure.

If timer T3113 expires and a PAGING RESPONSE message has not been received, the network may repeat the paging request message and start timer T3113 again. The number of successive paging attempts is a network dependent choice.

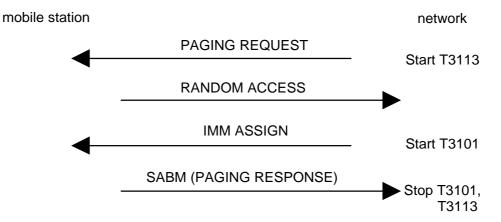


Figure 3.3.2.3.1/3GPP TS 44.018: Paging sequence

3.3.3 Notification procedure

The support of notification procedure is mandatory for mobile stations supporting « VGCS receive » and/or « VBS receive ».

The network informs the mobile station of starting or on-going voice broadcast calls and voice group calls with the notification procedure.

In cases where the mobile station has initiated a VGCS call, if the channel mode modify procedure is applied to turn the dedicated channel into a VGCS channel and ciphering may be applied for that call, in this case the network should suspend transmission of notification messages until ciphering with the group cipher key has started on the dedicated channel.

3.3.3.1 Notification of a call

The mobile station may receive a notification that a voice broadcast call or a voice group call is established. Notifications may be sent on the NCH, on the PCH, or on the FACCH when in dedicated mode or group receive mode. The presence of an NCH is indicated on the PCH in the Pi Rest Octets IE. A notification contains the group call reference and possibly other related information. This notification may be contained:

- in a NOTIFICATION/NCH message sent on the NCH to notify mobile stations of VBS or VGCS calls in the current cell, possibly together with a description of the related VBS or VGCS channel;
- in a NOTIFICATION/FACCH message sent in unacknowledged mode on the main DCCH to notify mobile stations in dedicated mode or on the main DCCH of a VGCS or VBS channel, of other VBS or VGCS calls in the current cell, possibly together with a description of the related VBS or VGCS channel;
- in the rest octets part of a PAGING REQUEST TYPE 1 message.

A mobile station supporting neither VGCS listening nor VBS listening may ignore the notifications sent on the NCH or PCH. It may also ignore the notifications sent on the main DCCH except that a RR-STATUS message shall be sent to the network with cause #97, "message not existent or not implemented".

Upon receipt of every notification message a mobile station supporting VGCS listening or VBS listening shall give an indication containing the notified group call reference(s) to upper layers in the mobile station which may then decide:

- not to react on the notification, or
- join the voice broadcast call or the voice group call, if needed after having stopped on going activities.

3.3.3.2 Joining a VGCS or VBS call

In order to join a VGCS or a VBS call the following procedures apply.

In this clause, the term **notification** refers to the notification which has triggered the decision to join a VGCS or VBS call.

If the notification on the main DCCH concerns a VBS or VGCS in the current cell and does not contain a description of the VGCS or VBS channel, the mobile station shall read the corresponding notification on the NCH.

If the description of the VGCS or VBS channel was included in the notification for the current cell, RR connection establishment shall not be initiated, instead, the mobile station shall enter the group receive mode.

If no description for the VGCS or VBS channel is included in the notification, the mobile station shall establish a RR connection in dedicated mode in order to initiate the notification response procedure.

3.3.3.3 Reduced NCH monitoring mechanism

This clause applies to mobile stations which read the NCH in idle mode in order to receive the notification messages for the voice broadcast call and the voice group call, which read the PCH to receive pagings and which aim at reducing the reception load.

A reduced NCH monitoring mechanism shall be used on the NCH. When the mobile station in idle mode enters a cell and deduces from the BCCH that an NCH is present, it shall read the NCH until it has received at least two messages on the NCH indicating NLN, with the two last received NLN being identical. Then it may stop reading the NCH until it receives on the PCH an NLN(PCH) different from the last previously received NLN or on the SACCH an NLN(SACCH) different from the last previously received NLN.

For this, parameters are provided:

- **NLN:** Notification List Number;
- The NLN is a modulo 4 counter. A change of NLN indicates that new notifications are provided on the NCH. The network shall ensure that a mobile station receives the NLN as often as necessary for a good functioning of the reduced monitoring.
- NLN status:

The NLN status is a single bit field which indicates the status of the content of the NOTIFICATION/NCH messages for a particular NLN value. A change of the NLN status field indicates a change of information on the NCH which is not related to new calls (e.g. There may have been a release of a previous notified call or change of priority, etc ...).

The network has to provide both NLN and NLN status parameters.

These parameters are defined on the NCH, PCH and SACCH:

- **NLN(NCH):** Notification List Number (contained in certain NOTIFICATION messages on the NCH as required by the reduced NCH monitoring function).
- NLN(PCH): Notification List Number (contained in all PAGING REQUEST TYPE 2 messages, PAGING REQUEST TYPE 3 messages and those PAGING REQUEST TYPE 1 messages with P1 rest octets value part of length >=1 on the PCH).
- **NLN(SACCH):** Notification List Number (contained in all SYSTEM INFORMATION TYPE 6 messages on the SACCH when there are NCH blocks allocated).
- **NLN status(PCH):** NLN status (contained in all PAGING REQUEST TYPE 2 messages, PAGING REQUEST TYPE 3 messages and those PAGING REQUEST TYPE 1 messages with P1 rest octets value part of length >=1 on the PCH).
- **NLN status(SACCH):** NLN status (contained in all SYSTEM INFORMATION TYPE 6 messages on the SACCH when there are NCH blocks allocated).

When there are no VGCS or VBS calls active in the cell, the network shall transmit notification messages with an empty notification list (not necessarily in every NCH block) but with NLN(NCH).

A mobile station supporting neither VGCS listening nor VBS listening shall ignore the NLN(NCH), NLN(PCH), NLN(SACCH) and NLN status fields.

If a mobile station (supporting VGCS listening and/or VBS listening) receives a NLN parameters on the NLN(PCH) or NLN(SACCH) field different from the last received NLN value it shall read the NCH until it has received at least two messages on the NCH indicating NLN with the two last received NLN being identical.

If a message in the paging subchannel is not received correctly, or if a paging message does not contain the information on the notification status, the mobile station shall read the NCH until it has received at least two messages on the NCH indicating NLN, with the two last received NLN being identical.

3.3.3.4 Notification response procedure

In order to initiate the notification response procedure, if access to the network is allowed, the mobile station shall, when camped on a cell as specified in 3GPP TS 23.022, initiate the immediate assignment procedure as specified in 3.3.1. The establishment of the main signalling link is then initiated by use of an SABM with information field containing the NOTIFICATION RESPONSE message (see clause 3.1.5). The Group or Broadcast Call Reference and the Service Flag in the *Descriptive Group* or *Broadcast Call Reference* Information Element shall be identical as received in the corresponding IE in the notification or paging messages. The MM sublayer in the mobile station is informed that the RR entity has entered the dedicated mode.

Upon receipt of the NOTIFICATION RESPONSE message the network stops timer T3101. The MM sublayer in the network may be informed that an RR connection exists; in this case, the MM sublayer may initiate MM common procedures.

The network may use the dedicated connection to order the mobile station to enter the group receive mode.

3.4 Procedures in dedicated mode and in group transmit mode

Procedures described in this clause apply to the dedicated mode and/or the group transmit mode.

Those procedures which are specific for group transmit mode or refer to transitions to the group transmit mode are only applicable for mobile stations supporting VGCS talking.

Direct transition between dedicated mode and group transmit mode is possible in both directions by use of the following procedures:

- Channel assignment procedure;
- Handover procedure;
- Channel mode modify procedure.

3.4.1 SACCH procedures

3.4.1.1 General

In dedicated mode and group transmit mode, the SACCH is used in signalling layer at least for measurement results transmission from the mobile station.

The SACCH has the particularity that continuous transmission must occur in both directions at least on the channel carrying the main signalling link. For that purpose, in the mobile station to network direction, measurement result messages are sent at each possible occasion when nothing else has to be sent (see clause 3.4.1.2). Similarly, SYSTEM INFORMATION TYPE 5, 6 and optionally 5bis and 5ter messages are sent in the network to mobile station direction in UI frames when nothing else has to be sent.

The network may in adddition send MEASUREMENT INFORMATION messages on the SACCH, which may order the MS to use the enhanced measurement report.

In a multislot configuration the SYSTEM INFORMATION TYPE 5, 6 and optionally 5bis, 5ter and MEASUREMENT INFORMATION messages shall be sent on the SACCH associated with the channel carrying the main signalling link.

In a multislot configuration the mobile station shall ignore all messages received on the SACCH(s) that are not associated with the channel carrying the main signalling link.

On a VGCS channel, the network may send additional or alternative system information messages for both mobile stations in group transmit mode and those in group receive mode (see clause 3.4.15.2.1).

A mobile station with extended measurement capabilities which receives EXTENDED MEASUREMENT ORDER (EMO) messages on the SACCH, shall perform and report extended measurements, see clause 3.4.1.3.

The SYSTEM INFORMATION TYPE 5bis message shall be sent if and only if the EXT IND bit in the Neighbour Cell Description information element in both the SYSTEM INFORMATION TYPE 5 and TYPE 5bis messages indicates that each information element only carries part of the BA.

A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may consider the EXT-IND bit in the Neighbour cell description IE in the SYSTEM INFORMATION TYPE 5 message bit as a spare bit, assume that the information element carries the complete BA, and ignore any SYSTEM INFORMATION TYPE 5bis messages.

NOTE: The network should take into account limitations of certain mobile stations to understand SYSTEM INFORMATION TYPE 5ter and TYPE 5bis messages, the EXT-IND bit in the Neighbour cell description, and formats used in the Neighbour cell description information element and Cell Channel Description information element used in SYSTEM INFORMATION messages, see clause 10.5.2.1b, and clause 10.5.2.22.

As specified in 3GPP TS 45.008, problems occurring in the reception of SACCH frames are interpreted as a loss of communication means and appropriate procedures are then triggered as specified in clause 3.4.13.

3.4.1.2 Measurement Report and Enhanced Measurement Report

When in dedicated mode or group transmit mode, the mobile station regularly sends either MEASUREMENT REPORT or ENHANCED MEASUREMENT REPORT messages to the network. These messages contain measurement results about reception characteristics from the current cell and from neighbour cells. The BA (list) which is the initial basis for the measurements is derived from information received on the BCCH in System Information 2 and optionally 2bis and/or 2ter and on the SACCH in System Information 5 and optionally 5bis and/or 5ter. MEASUREMENT INFORMATION and SI2quater messages may add information for the GSM Neighbour Cell List and provide 3G Neighbour Cell list. The Mobile Station shall use ENHANCED MEASUREMENT REPORT messages instead of MEASUREMENT REPORT messages if that is indicated by the parameter REPORT_TYPE and if at least one BSIC is allocated to each BA (list) frequency. For report with the MEASUREMENT REPORT message, reporting is performed on two separate lists: the BA (list) and the 3G Neighbour Cell List (for a multi-RAT MS). For report with the ENHANCED MEASUREMENT REPORT message, reporting is performed on the Neighbour Cell List (defined in clause 3.4.1.2.1.3).

In addition, the MS which implements ECSD options shall use fast inband procedure for downlink quality reporting if the use of such procedure has been ordered by the BSC.

When the information is received in more than one message the mobile station shall only combine information relating to the BA (list) from messages received on the same channel and indicating the same value of the BCCH allocation sequence number (BA_IND) without any message indicating a different value of BA_IND received in between. If neighbour cell information for the serving cell is not available, the mobile station indicates this in the MEASUREMENT REPORT message. These measurement results are obtained as specified in 3GPP TS 45.008.

These messages are sent on the slow ACCH, in unacknowledged mode.

If no other message is scheduled on the SACCH at the instant when a layer 2 frame is due to be sent, then the mobile station shall send a MEASUREMENT REPORT message or an ENHANCED MEASUREMENT REPORT or an EXTENDED MEASUREMENT REPORT message (see clause 3.4.1.3) in that frame. The interval between two successive layer 2 frames containing messages for measurement reporting shall not exceed one layer 2 frame.

3.4.1.2.1 Parameters for Measurements and Reporting

Parameters from the Measurement Information or SI2quater messages allow to build lists which are used for Measurement reporting and Enhanced Measurement reporting.

A full set/all instances of MEASUREMENT INFORMATION (respectively: SI2quater) messages is defined by a number of different instances indicated by the parameter MI_COUNT (respectively SI2quater_COUNT). Two different instances of MEASUREMENT INFORMATION (respectively: SI2quater) messages are two MEASUREMENT INFORMATION (respectively: SI2quater) messages with different MI_INDEX (respectively: SI2quater_INDEX) parameter values.

In Idle mode a multi-RAT MS shall read and decode a full set of SI2quater messages to form a 3G Neighbour Cell list (each instance can be used as received). When the 3G_BA_IND parameter is changed in idle mode, the MS shall reread all instances and rebuild the 3G Neighbour Cell list. This list shall then be used for reporting when the MS enters dedicated mode, until the MS has received a given number of instances of MEASUREMENT INFORMATION messages that contain 3G Neighbour Cell Description. This number of instances is defined by the 3G-WAIT parameter. When the 3G_BA_IND parameter is changed when on SACCH, the MS shall also re-read all instances, rebuild the 3G Neighbour Cell list, and use the new list for reporting based on the parameter 3G-Wait.

For the GSM neighbour cell list the MS shall combine the BA (list) received in SI5/SI5bis/SI5ter with the BSIC list received in one or more instances of the MEASUREMENT INFORMATION message with the same BA_IND value as the BA (list). When the BA_IND is changed the MS shall rebuild the combined list (the BSIC list shall also be rebuilt). The GSM neighbour cell list is also defined by the combination of the BA (list) received in SI2/SI2bis/SI2ter and the BSIC list from the SI2quater. When the BA_IND is changed the MS shall rebuild the combined list (the BSIC list shall also be rebuilt).

The MS shall combine the BA (list) with the Real Time Differences parameters received in the MEASUREMENT INFORMATION message with the same BA_IND value as the BA (list). When the BA_IND is changed the MS shall re-read the Real Time Differences parameters in all instances.

The MS shall combine the Neighbour Cell list with the REP_PRIORITY parameters received in the MEASUREMENT INFORMATION message with the same BA_IND and 3G_BA_IND values respectively as the Neighbour Cell list. When the BA_IND or 3G_BA_IND are changed the MS shall re-read the REP_PRIORITY parameters in all instances.

The MS shall combine the Neighbour Cell list with the CCN_SUPPORTED parameters received in the SI2quater messages with the same BA_IND and 3G_BA_IND values respectively as the Neighbour Cell list. When the BA_IND or 3G_BA_IND are changed the MS shall re-read the CCN_SUPPORTED parameters in all instances.

If the MP_CHANGE_MARK parameter is changed, the MS shall re-read the Real Time differences, REP_PRIORITY, CCN_SUPPORTED, Measurement Parameters and 3G Measurement Parameters in all instances. The MS shall start using the parameters as soon as they have been received. In the case that not all the parameters have been received in a full set of instances, then the default values shall be used. If different values occur for the same parameter in different instances of a message, the instance with the highest index shall be used.

3.4.1.2.1.1 Deriving the 3G Neighbour Cell list from the 3G Neighbour Cell Description:

This applies only to a multi-RAT MS. One or more instances of the Measurement Information message or SI2quater message may provide 3G Neighbour Cell Description information. This is used to build the 3G Neighbour Cell list. The 3G Neighbour Cell list may contain up to 96 3G Neighbour Cells.

Building of the 3G Neighbour Cell list:

Each 3G Neighbour Cell Description received is added to the 3G Neighbour Cell list, starting with the index equal to the parameter Index_Start_3G. If this parameter is not present then the value 0 shall be used.

For each 3G Neighbour Cell Description, the cells are indexed in the following order:

- 1) UTRAN FDD cells: FDD ARFCNs are indexed in the order of occurrence in the 3G Neighbour Cell description. Then for each FDD ARFCN, the cells are indexed in the order of increasing values of the decoded FDD_CELL_INFORMATION parameters.
- 2) UTRAN TDD cells: TDD ARFCNs are indexed in the order of occurrence in the 3G Neighbour Cell description. Then for each TDD ARFCN, the cells are indexed in the order of increasing values of the decoded TDD_CELL_INFORMATION parameters.
- 3) CDMA 2000 cells: The cells are indexed in the order of occurrence in the 3G Neighbour Cell description.

If a 3G Neighbour Cell Description includes non-supported frequencies or Radio Access Technologies, this shall not be considered as an error; indices in the 3G Neighbour Cell list shall be incremented accordingly. If more than one cell with the same index in the 3G Neighbour Cell list are provided by different instances of 3G Neighbour Cell Descriptions, the cell from the message instance with the highest index shall be used. In case the same 3G Cell occurs more than once in the resulting 3G Neighbour Cell list, each occurrence shall be assigned an index but only the cell with the highest index in the 3G Neighbour Cell list shall be referred to in measurement reports. If a cell is provided for an index higher than 95 in the 3G Neighbour Cell list, this shall not be considered as an error; the cell shall not be included in the 3G Neighbour Cell list.

3.4.1.2.1.2 Deriving the GSM Neighbour Cell list from the BSICs and the BA (list)

One or more instances of the Measurement Information message may provide BSIC information. This is used to build the GSM Neighbour Cell list. The GSM Neighbour Cell list may contain up to 96 Neighbour Cells.

The BSICs are associated to the frequencies in the BA (list) with the same BA_IND value. The BSICs may be received before the corresponding BA (list). The first BSIC in each instance applies to the frequency in the BA (list) referenced by the parameter BA_Index_Start_BSIC. For each successive BSIC, one bit indicates if the BSIC applies to the same frequency as the previous BSIC or to the next frequency in the BA (list), as defined in clause 9.1.54, Measurement Information message.

If GPRS BSIC Description is provided in the SI2quater message (see clause 3.4.1.2.1.6), it shall be saved and used by a non-GPRS mobile station as initial BSIC information in connected mode.

3.4.1.2.1.3 Deriving the Neighbour Cell list from the GSM Neighbour Cell list and the 3G Neighbour Cell list

For report with the ENHANCED MEASUREMENT REPORT message, the Neighbour Cell list is the concatenation of the GSM Neighbour Cell list and the 3G Neighbour Cell list (if any). In this concatenation the value of the parameter Absolute_Index_Start_EMR is added to the 3G Neighbour Cell list indices. The Neighbour Cell list may contain up to 96 Neighbour Cells. If the same index occurs for a GSM Cell and a 3G Cell, the GSM Cell shall be used.

NOTE: For report with the MEASUREMENT REPORT MESSAGE, the concatenated list is not used. Instead, the two lists are used separately, as defined in clause 10.5.2.20, 'Measurement Results'.

3.4.1.2.1.4 Real Time Differences

One or more instances of the Measurement Information message may provide Real Time Difference information. This is used to build the Real Time Difference list. The Real Time Difference list may contain up to 96 Real Time Difference parameters.

The Real Time Difference list is associated with the BA (list) having the same BA_IND value. Each frequency in the BA (list) may be associated to 0, 1 or more Real Time Difference parameters. The Real Time Difference parameters may be received before the corresponding BA (list). The parameter BA_Index_Start_RTD in each structure indicates the index of the frequency in the BA (list) to be taken as a starting reference. A sub-structure is included for each frequency referenced. Each of those sub-structures indicates if 0, 1 or more RTD parameters are present for this frequency. If a frequency in the BA (list) is not provided with Real Time Difference information by any of the message instances with correct BA_IND, it shall be assumed that no information is available for that frequency, see clause 9.1.54 'Measurement Information message'.

If GPRS Real Time Differences Description is provided the SI2quater message (see clause 3.4.1.2.1.6), it may also be used by a non-GPRS mobile station in Idle mode.

3.4.1.2.1.5 Report Priority Description

Report Priority information can be received in one instance of the MEASUREMENT INFORMATION message. The Report Priority information is associated with the Neighbour Cell list (see 3.4.1.2.1.3) having the same BA_IND value and 3G_BA_IND value. Each REP_PRIORITY bit of this field relates to indices of the Neighbour Cell list, starting with index 0. The Report Priority information may be received before the corresponding Neighbour Cell list.

Indices exceeding the value 95 shall be ignored. If there are fewer indices than the number of Neighbour Cells, the value 0 shall be assumed for the missing bits.

3.4.1.2.1.6 GPRS Parameters

A set of information may be received in the SI2quater message to be used for GPRS neighbour cell measurement and (NC) Measurement reporting when the cell has no PBCCH allocated, see 3GPP TS 44.060 clause 5.6 ("Measurement reports"). This information comprises GPRS Report Priority Description, GPRS BSIC Description, GPRS Real Time Differences Description, GPRS Measurement Parameters, GPRS 3G Measurement Parameters and NC Measurement Parameters. The use of the parameters is similar to parameters without the term "GPRS".

3.4.1.2.1.7 The 3G Cell Reselection list

This applies only to a multi-RAT MS. One or more instances of the SI2quater and/or SI2ter messages may provide 3G Cells. If 3G Cells are provided in both of these messages, the union of the cells shall be included in the 3G Cell Reselection list. The 3G Cell Reselection list may contain up to 96 3G Cells. 3G Cells not provided explicitly in the SI2ter message or in the SI2quater message (frequencies on their own or frequencies with SC_P_SCG bitmap) are not included in these 96 cells. Up to 8 frequencies on their own, together with up to 4 frequencies with SC_P_SCG, can be added to these 96 cells.

3.4.1.2.1.8 CCN Support description

The SI2quater message may also contain information, the CCN Support description, to be used when CCN is enabled in the serving cell, see 3GPP TS 44.060. This CCN Support description is associated with the Neighbour Cell list (see 3.4.1.2.1.3) having the same BA_IND value and 3G_BA_IND value. Each CCN_SUPPORTED bit of this field relates to indices of the Neighbour Cell list, starting with index 0. The CCN Support description may be received before the corresponding Neighbour Cell list.

Indices exceeding the value 95 or the number of cells in the Neighbour Cell List shall be ignored. If there are fewer indices than the number of cells in the Neighbour Cell List, the value 0 shall be assumed for the missing bits.

When this information is not present but CCN is enabled in the serving cell, the mobile station shall assume that CCN is enabled towards all neighbour cells.

3.4.1.3 Extended measurement report \$(MAFA)\$

Only applicable to mobile stations which support extended measurement.

When in dedicated mode or group transmit mode, a mobile station may receive an EXTENDED MEASUREMENT ORDER (EMO) message, from the network. The mobile station shall then, as defined in 3GPP TS 45.008, for one reporting period perform measurements on the frequencies specified by this EMO message. The mobile station shall thereafter send an EXTENDED MEASUREMENT REPORT message. This message contains the measurement results as defined in 3GPP TS 45.008.

If the mobile station has not started to send its EXTENDED MEASUREMENT REPORT within 10 seconds after the reception of the EMO message, no EXTENDED MEASUREMENT REPORT shall be sent. The mobile station shall after a successful channel change abort any pending measurements or reporting related to an EMO message received on the old channel.

If a mobile station receives an EMO message indicating the same value of the sequence code as an EMO message received earlier on the same channel without having received any EMO message indicating a different value of the sequence code in between, that EMO message shall be ignored. If the mobile station, before the reporting related to an EMO message has started, receives a new EMO message with a different value of the sequence code, any pending measurements or reporting related to the earlier EMO message shall be aborted and the new message treated.

The EMO message and the EXTENDED MEASUREMENT REPORT message are sent on the SACCH, in unacknowledged mode.

3.4.2 Transfer of messages and link layer service provision

When in dedicated mode or in group transmit mode, upper layers can send messages in multiframe or unacknowledged mode on SAPI 0.

Moreover, but only when in dedicated mode, upper layers have access to the full link layer services for SAPIs other than 0, with the exception of the error indication and local end release that are directly treated by the RR sublayer, as specified in particular places of clause 3.

3.4.3 Channel assignment procedure

In dedicated mode, dual transfer mode or in group transmit mode, an intracell change of channel can be requested by upper layers for changing the channel type, or decided by the RR sublayer, e.g. for an internal handover. This change may be performed through the dedicated channel assignment procedure.

The purpose of the channel assignment procedure is to completely modify the physical channel configuration of the mobile station without frequency redefinition or change in synchronization while staying in the same cell.

This procedure shall not be used for changing between dependent configurations, i.e. those sharing Radio Resource for the main signalling link. An example of dependent channels is a full rate channel and one of the corresponding half rate channels. In multislot operation however, it is allowed to use the same timeslots before and after the assignment, as long as the main signalling link has been changed. The only procedures provided for changing between dependent configurations for the main signalling link are the additional assignment and the partial release procedures.

The channel assignment procedure happens only in dedicated mode, dual transfer mode and in group transmit mode. This procedure cannot be used in the idle mode; in this case the immediate assignment procedure is used.

The channel assignment procedure includes:

- the suspension of normal operation except for RR management (layer 3);
- the release of the main signalling link, and of the other data links as defined in clause 3.1.4, the disconnection of TCHs if any, and the release of packet resources, if in dual transfer mode;
- the deactivation of previously assigned channels (layer 1);
- the activation of the new channels and their connection if applicable;
- The triggering of the establishment of the data link connections for SAPI = 0.

The channel assignment procedure is always initiated by the network.

3.4.3.1 Channel assignment initiation

The network initiates the channel assignment procedure by sending an ASSIGNMENT COMMAND message to the mobile station on the main signalling link. It then starts timer T3107.

NOTE: The network should take into account limitations of certain mobile stations to understand formats used in the Frequency List IE and Cell Channel Description IE used in the ASSIGNMENT COMMAND message, see clause 10.5.2.13 and clause 10.5.2.1b.

When sending this message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases is suspended until resumption is indicated. These RR messages can be deduced from clauses 3.4.3 and 8.8 Radio Resource management.

Upon receipt of the ASSIGNMENT COMMAND message, the mobile station initiates a local end release of link layer connections and packet resources, if in dual transfer mode, disconnects the physical channels, commands the switching to the assigned channels and initiates the establishment of lower layer connections (this includes the activation of the channels, their connection and the establishment of the main signalling links).

The ASSIGNMENT COMMAND message contains the description of the new configuration, including for the multislot configuration and the TCH/H + TCH/H + ACCHs configuration, the exact ACCHs to be used and a power command. The power level defined in this power command shall be used by the mobile station for the initial power on the new channel(s). It shall not affect the power used on the old channel(s). The message may also contain definitions of the channel mode to be applied for one or several channel sets. If a previously undefined channel set is defined by the ASSIGNMENT COMMAND message, a definition of the channel mode for the new channel set shall be included in the message.

If the channel mode to be applied corresponds to an initial assignment of a multi-rate speech codec, the ASSIGNMENT COMMAND message shall contain the MultiRate Configuration IE, which defines the set of codec modes and related information to use on the new channel.

If the assignment is related to an intra-cell handover from a multi-rate speech codec to a multi-rate speech codec, the MultiRate Configuration IE shall be included in the case of full rate to half rate. If not included in this case, the mobile station shall behave as if the MultiRate Configuration IE was inconsistent. If not included in other cases, the MS shall use on the new channel the AMR configuration it was using on the old channel when it received the ASSIGNMENT COMMAND message.

An ASSIGNMENT COMMAND message may indicate a frequency change in progress, with a starting time and possibly alternative channel descriptions.

In the case of the reception of an ASSIGNMENT COMMAND message which contains only the description of a channel to be used after the starting time, the mobile station shall wait up to the starting time before accessing the channel. If the starting time has already elapsed, the mobile shall access the channel as an immediate reaction to the reception of the message (see 3GPP TS 45.010 for the timing constraints).

If the message contains both the description of a channel to be used after the indicated time and of a channel to be used before, the mobile station accesses a channel as an immediate reaction to the reception of the message. If the moment the mobile station is ready to access is before the indicated time, the mobile station accesses the channels described for before the starting time. The mobile station then changes to the channel described for after the starting time at the indicated time. New parameters can be frequency list, MAIO and HSN. Other parameters describing the allocated channels must be identical to the parameters described for before the starting time. If the moment the mobile station is ready to access is after the starting time, the mobile station accesses the channel described for after the starting time.

If frequency hopping is applied, the cell allocation if present in the message is used to decode the mobile allocation. If the cell allocation is not included, the mobile station uses its current cell allocation, the current CA is the last CA received on the BCCH. Afterward, the current CA may be changed by some messages sent on the main signalling link containing a CA (the possible messages are: ASSIGNMENT COMMAND, HANDOVER COMMAND and FREQUENCY REDEFINITION). Note that there are cases in which the current CA is undefined, see clause 3.4.3.3.

The ASSIGNMENT COMMAND message may contain a cipher mode setting IE. In that case, this ciphering mode has to be applied on the new channel. If no such information is present, the ciphering mode is the same as on the previous channel. In either case the ciphering key shall not be changed. The ASSIGNMENT COMMAND message shall not contain a cipher mode setting IE that indicates "start ciphering" unless a CIPHERING MODE COMMAND message has been transmitted earlier in the RR connection: if such an ASSIGNMENT COMMAND message is received it shall be regarded as erroneous, an ASSIGNMENT FAILURE with cause "Protocol error unspecified" message shall be returned immediately, and no further action taken. In the case of UMTS to GSM handover, the HANDOVER COMMAND message, which is sent transparently via RNC from BSS to the mobile station, shall always contain the cipher mode setting IE.

In a voice group call, the ASSIGNMENT COMMAND message may contain a VGCS target mode information element defining which RR mode is to be used on the new channel (i.e. dedicated mode or group transmit mode). If this information element is not present, the mode shall be assumed to be the same as on the previous channel. The VGCS target mode information element shall also indicate the group cipher key number for the group cipher key to be used on the new channel or if the new channel is non ciphered. If the information element is not present, the ciphering mode and group cipher key shall be the same as on the previous channel. Mobile stations not supporting VGCS talking shall ignore the ASSIGNMENT COMMAND message if the VGCS target mode information element is included in the message and shall send an RR STATUS message to the network with cause #96. If a VGCS target mode information element and a cipher mode setting information element is included in the same message, then a mobile station supporting VGCS talking mobile shall regard the ASSIGNMENT COMMAND message as erroneous, an ASSIGNMENT FAILURE message with cause "Protocol error unspecified" shall be returned immediately, and no further action taken.

3.4.3.2 Assignment completion

After the main signalling link is successfully established, the mobile station returns an ASSIGNMENT COMPLETE message, specifying cause "normal event", to the network on the main DCCH.

The sending of this message on the mobile station side and its receipt on the network side allow the resumption of the transmission of signalling layer messages other than those belonging to RR management.

At the receipt of the ASSIGNMENT COMPLETE message, the network releases the previously allocated resources and stops timer T3107.

3.4.3.3 Abnormal cases

If the mobile station has no current CA and if it needs a CA to analyse the ASSIGNMENT COMMAND message, it stays on the current channel(s) and sends an ASSIGNMENT FAILURE message with cause "no cell allocation available".

If the ASSIGNMENT COMMAND message instructs the mobile station to use a Channel Description or Mode that it does not support, or if the Channel Mode to use is not defined for all channel sets, then the mobile station shall return an ASSIGNMENT FAILURE message with cause "channel mode unacceptable", and the mobile station shall remain on the current channel(s) and uses the old Channel Description or Channel Mode(s).

If the mobile station receives an ASSIGNMENT COMMAND message containing an inconsistent MultiRate Configuration IE, then the mobile station shall return an ASSIGNMENT FAILURE message with cause "channel mode unacceptable", and the mobile station shall remain on the current channel(s) and uses the old Channel Description or Channel Mode(s).

The MultiRate Configuration IE shall be considered as inconsistent by the MS if:

- the active set does not include any codec mode or the active set includes more than four codec modes; or
- one or more codec modes of the active codec set are not supported by the assigned channel; or
- the threshold and hysteresis values are not set according to requirements given in 3GPP TS 45.009.

If during the initial assignment of the multirate speech the mobile station receives an ASSIGNMENT COMMAND message and the MultiRate Configuration IE is not present, then the mobile station shall return an ASSIGNMENT FAILURE message with cause "channel mode unacceptable", and the mobile station shall remain on the current channel(s) and uses the old Channel Description or Channel Mode(s).

If the ASSIGNMENT COMMAND message instructs the mobile station to use a frequency that it is not capable of, then the mobile station shall return an ASSIGNMENT FAILURE message with cause "frequency not implemented", and the mobile station shall remain on the current channel(s).

If the mobile station receives an ASSIGNMENT COMMAND message with a Frequency List IE indicating frequencies that are not all in one band, then the mobile station shall stay on the current channel(s) and send an ASSIGNMENT FAILURE message with cause "frequency not implemented". If the mobile station receives an ASSIGNMENT COMMAND message with a Mobile Allocation IE indexing frequencies that are not all in one band, then the mobile station shall stay on the current channel(s) and send an ASSIGNMENT FAILURE message with cause "frequency not implemented".

NOTE: An ASSIGNMENT COMMAND message sent to a multi band mobile station shall not be considered invalid because it indicates frequencies that are all in a different frequency band to that of the current channel.

On the mobile station side, if a lower layer failure happens on the new channel before the ASSIGNMENT COMPLETE message has been sent, the mobile station deactivates the new channels, reactivates the old channels, reconnects the TCHs if any and triggers the establishment of the main signalling link. It then sends a ASSIGNMENT FAILURE message, cause "protocol error unspecified" on the main DCCH and resumes the normal operation, as if no assignment attempt had occurred. The operational parameters (e.g. ciphering mode) when returning on the old channel are those applied before the procedure.

When receiving the ASSIGNMENT FAILURE message, the network stops T3107.

If a lower layer failure happens while attempting to connect back to the old channels, the radio link failure procedure is applied (see clause 3.4.13.2 for dedicated mode and 3.4.13.5 for group transmit mode).

On the network side, if timer T3107 elapses before either the ASSIGNMENT COMPLETE message has been received on the new channels or an ASSIGNMENT FAILURE message is received on the old channels, the old channels and the new channels are released if they both were dedicated channels and, unless the mobile station has re-established the call, all contexts related to the connections with that mobile station are cleared. If one of the channels was a VGCS channel, it shall be maintained and the uplink shall be set free. If both channels were VGCS channels, the network shall maintain one of the channels and the uplink shall be set free.

On the network side, lower layer failure occurring on the old channels after the sending of the ASSIGNMENT COMMAND message are ignored. Lower layer failures occurring after the receipt of the SABM Frame on the new main signalling link are treated following the general rules (cf. clause 3.5.2).

3.4.4 Handover procedure

In dedicated mode, dual transfer mode or group transmit mode, an intercell or intracell change of channel(s) can be requested by the network RR sublayer. This change may be performed through the handover procedure

NOTE: The decision to do a handover and the choice of the new cell is out of the scope of this technical specification.

The purpose of the handover procedure is to completely modify the channels allocated to the mobile station e.g. when the cell is changed. A change in the channel configuration nature is possible. This procedure is used only while in dedicated mode, dual transfer mode or group transmit mode.

The handover procedure shall not be used for changing between dependent configurations (see clause 3.4.3).

The handover procedure includes:

- The suspension of normal operation except for RR management (layer 3).
- The disconnection of the main signalling link, and of the other links via local end release (layer 2), and the disconnection of the TCH(s) if any.
- The abortion of the packet resources (see 3GPP TS 44.060), if in class A mode of operation.
- The disconnection and the deactivation of previously assigned channels and their release (layer 1).
- The activation of the new channels, and their connection if applicable.
- The triggering of the establishment of data link connection for SAPI = 0 on the new channels.

The handover procedure is always initiated by the network.

3.4.4.1 Handover initiation

The network initiates the handover procedure by sending a HANDOVER COMMAND message to the mobile station on the main DCCH. It then starts timer T3103.

If the HANDOVER COMMAND message refers to a cell to which the mobile station is not synchronised to, this shall not be considered as an error (see 3GPP TS 45.008).

NOTE: The network should take into account limitations of certain mobile stations to understand formats used in the Frequency List IE, Frequency Short List IE, and Cell Channel Description IE used in the HANDOVER COMMAND message, see clause 10.5.2.13, clause 10.5.2.14, and clause 10.5.2.1b.

When sending this message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases, is suspended until resuming is indicated. These RR messages can be deduced from clause 3.4.3 and 8.5.1 "Radio Resource management".

Upon receipt of the HANDOVER COMMAND message, the mobile station initiates, as described in clause 3.1.4, the release of link layer connections, disconnects the physical channels (including the packet resources, if in class A mode of operation), commands the switching to the assigned channels and initiates the establishment of lower layer connections (this includes the activation of the channels, their connection and the establishment of the data links).

The HANDOVER COMMAND message contains:

- The characteristics of the new channels, including for the multislot configuration and the TCH/H + TCH/H + ACCHs configuration the exact ACCHs to be used. The message may also contain definitions of the channel mode to be applied for one or several channel sets. If a previously undefined channel set is defined by the HANDOVER COMMAND message, a definition of the channel mode for the new channel set shall be included in the message.

- The characteristics of the new cell that are necessary to successfully communicate (e.g. frequency list in the case of slow frequency hopping), including the data that allows the mobile station to use the pre-knowledge about synchronization it acquires by the measurement process (i.e. BSIC + BCCH frequency).
- A power command (cf. 3GPP TS 45.008). The power level defined in this power command shall be used by the mobile station for the initial power on the new channel(s). It shall not affect the power used on the old channel(s).
- An indication of the physical channel establishment procedure to be used.
- A handover reference, used as specified in the following clause. The choice of the handover reference by the network is out of the scope of this specification and left to the manufacturers.
- Optionally a timing advance to be used on the new cell.
- Optionally a cipher mode setting. In that case, this ciphering mode has to be applied on the new channel. If no such information is present, the ciphering mode is the same as on the previous channel. In either case the ciphering key shall not be changed. In the case of 2G to 2G handover, the HANDOVER COMMAND message shall not contain a cipher mode setting IE that indicates "start ciphering" unless a CIPHERING MODE COMMAND message has been transmitted previously in this instance of the dedicated mode: if such a HANDOVER COMMAND message is received it shall be regarded as erroneous, a HANDOVER FAILURE message with cause "Protocol error unspecified" shall be returned immediately, and no further action taken. In the case of UTRAN to GSM handover, the HANDOVER COMMAND message, which is sent transparently via RNC from BSS to the mobile station, shall always contain the cipher mode setting IE to indicate the ciphering mode to be used in GSM. In the case of CDMA2000 to GSM handover, the HANDOVER COMMAND message, which is sent transparently via RNC from BSS to the mobile station, shall always contain the cipher mode setting IE.
- Optionally, in a voice group call, a VGCS target mode information element defining which RR mode is to be used on the new channel (i.e. dedicated mode or group transmit mode). If this information element is not present, the mode shall be assumed to be the same as on the previous channel. The VGCS target mode information element shall also indicate the group cipher key number for the group cipher key to be used on the new channel or if the new channel is non ciphered. If the information element is not present, the ciphering mode and ciphering key shall be the same as on the previous channel. Mobile stations not supporting VGCS talking shall ignore the HANDOVER COMMAND message if the VGCS target mode information element is included in the message and shall send an RR STATUS message to the network with cause #96. If a VGCS target mode information element and a cipher mode setting information element is included in the same message, then a mobile station supporting VGCS talking shall regard the HANDOVER COMMAND message as erroneous, an HANDOVER FAILURE message with cause "Protocol error unspecified" shall be returned immediately, and no further action taken.
- Optionally, when the channel mode indicates that a multi-rate speech codec must be applied, the
 MultiRateconfiguration to be used in the new cell. The MultiRate Configuration IE defines the set of codec
 mode and related information to use after the handover. When accessing the new channel, the mobile station
 shall use for the Initial Codec Mode the mode specified in the MultiRate Configuration IE, if present, or apply by
 default the implicit rule defined in 3GPP TS 45.009.

In addition, a HANDOVER COMMAND message may indicate a frequency change in progress, with a starting time and possibly alternative channel descriptions.

In the case of the reception of a HANDOVER COMMAND message which contains only the description of a channel to be used after the starting time, the mobile station shall wait up to the starting time before accessing the channel. If the starting time has already elapsed, the mobile shall access the channel as an immediate reaction to the reception of the message (see 3GPP TS 45.010 for the timing constraints).

In the case of a handover towards a GSM cell to which the mobile station is not synchronised to and in the case of an intersystem handover to GSM, at the reception of a HANDOVER COMMAND message which contains only the description of a channel to be used after the starting time, the mobile station shall wait up to the starting time before accessing the new channel. If the starting time has already elapsed, the mobile shall access the new channel as an immediate reaction to the reception of the message (see 3GPP TS 45.010 for the timing constraints). Between the reception of the HANDOVER COMMAND and the starting time there is no requirement for the mobile station to receive or transmit on the old channel.

NOTE: This case may result to a long interruption and should not be used.

If the message contains both the description of a channel to be used after the indicated time and of a channel to be used before, the mobile station accesses a channel as an immediate reaction to the reception of the message. If the moment the mobile station is ready to access is before the indicated time, the mobile station accesses the channels described for before the starting time. The mobile station then changes to the channel described for after the starting time at the indicated time. New parameters can be frequency list, MAIO and HSN. Other parameters describing the allocated channels must be identical to the parameters described for before the starting time. If the moment the mobile station is ready to access is after the starting time, the mobile station accesses the channel described for after the starting time.

If the channel mode indicates that a multi-rate speech codec must be applied, and the MultiRateConfiguration IE is not included in the HANDOVER COMMAND message, then the mobile station shall use on the new channel the AMR configuration it was using on the old channel when it received the HANDOVER COMMAND message. The MultiRate Configuration IE shall be included in the case of full rate channel to half rate channel handover. If not included in this case, the mobile station shall behave as if the MultiRate Configuration IE was inconsistent

3.4.4.2 Physical channel establishment

Four procedures are defined. The support of three of them is mandatory in the mobile station. The pseudo-synchronization case is optional in the mobile station. A pseudo-synchronized handover can be commanded only to a mobile station that can support it, as indicated in the classmark.

3.4.4.2.1 Finely synchronized cell case

If the mobile station knows that the timing advance with the new cell is not out of range, i.e. smaller than or equal to the maximum timing advance that can be coded as specified in 3GPP TS 44.004, or if the new cell does accept out of range timing advance as indicated in the HANDOVER COMMAND message, the mobile station proceeds as follows.

After having switched to the assigned channels, the mobile station sends four times the HANDOVER ACCESS message in four successive layer 1 frames on the main DCCH. This message is sent in an access burst. Its content is reduced to the handover reference information element. The transmission of these four messages is optional if so indicated by the network in the HANDOVER COMMAND message.

Before completion of the 4 access bursts on the DCCH, additional access bursts may also be sent on the SACCH.

In those cells that support extended TA values if TA value in new cell is greater than 63 and the HANDOVER COMMAND message indicates that the transmission of four HANDOVER ACCESS messages is optional the MS shall not transmit these four messages. MS shall not send additional bursts on the SACCH.

It then activates the channels in sending and receiving mode and connects the channels if need be.

If applicable, ciphering is immediately started . The access bursts are not ciphered.

3.4.4.2.2 Non synchronized cell case

After having switched to the assigned channels, the mobile station starts repeating the HANDOVER ACCESS message in successive layer 1 frames on the main DCCH and optionally on the SACCH. This message is sent in an access burst. Its content is reduced to the handover reference information element. The mobile station starts timer T3124 at the start point of the timeslot in which the HANDOVER ACCESS message is sent the first time on the main DCCH.

The mobile station then activates the channels in receiving mode and connects the channels if need be (only for reception).

If applicable, deciphering is then immediately started . The access bursts are not ciphered.

When the network has the RF characteristics that are necessary, it sends in unacknowledged mode a PHYSICAL INFORMATION message to the mobile station on the main DCCH. If applicable, ciphering and deciphering is immediately started (i.e., before even the reception of a correct access burst), and the message is sent enciphered.

The PHYSICAL INFORMATION message contains various physical layer related information, allowing a proper transmission by the mobile station.

When sending the PHYSICAL INFORMATION message, the network starts timer T3105. If this timer times out before the reception of a correctly decoded layer 2 frame in format A or B (see 3GPP TS 44.006), or a correctly decoded TCH

frame from the mobile station, the network repeats the PHYSICAL INFORMATION message and restarts timer T3105. The maximum number of repetitions is Ny1.

The correct decoding of a frame means that the decoding algorithm and the error detection tests, if any, indicate no error

When the mobile station receives a PHYSICAL INFORMATION message, it stops timer T3124, stops sending access bursts, activates the physical channels in sending and receiving mode and connects the channels if need be. If the allocated channel is an SDCCH (+ SACCH), performance of the mobile station must enable the mobile station to accept a correct PHYSICAL INFORMATION message sent by the network in any block while T3124 is running.

3.4.4.2.3 Pseudo-synchronized cell case

The details of the use of this procedure are described in 3GPP TS 45.010. The mobile station computes the timing advance to be used with the new cell from the real time difference value given in the HANDOVER COMMAND message. If the mobile station knows that the timing advance with the new cell is not out of range , i.e. smaller or equal to the maximum timing advance that can be coded as specified in 3GPP TS 44.004, or if the new cell accepts an out of range timing advance as indicated in the HANDOVER COMMAND message, the mobile station switches to the new channel and proceeds as follows.

After having switched to the assigned channels, the mobile station sends in four successive slots on the main DCCH a HANDOVER ACCESS message. This message is sent in random mode and thus does not follow the basic format. Its content is reduced to the handover reference information element. The transmission of these four messages is optional if so indicated by the network in the HANDOVER COMMAND message.

Before completion of the 4 access bursts on the DCCH, additional access bursts may also be sent on the SACCH.

In those cells that support extended TA values if TA value in new cell is greater than 63 and the HANDOVER COMMAND message indicates that the transmission of four HANDOVER ACCESS messages is optional the MS shall not transmit these four messages. The MS shall not send additional bursts on the SACCH.

The mobile station then activates the channels in sending and receiving mode and connects the channels if need be. The mobile station may activate the channels in receiving mode and connect the channels while sending access bursts.

If applicable, ciphering is then immediately started. The access bursts are not ciphered.

3.4.4.2.4 Pre-synchronized cell case

The details of the use of this procedure are described in 3GPP TS 45.010. The mobile station switches to the new channel and proceeds as follows.

After having switched to the assigned channels, the mobile station sends in four successive slots on the main DCCH a HANDOVER ACCESS message. This message is sent in an access burst and thus does not follow the basic format. Its content is reduced to the handover reference information element. The transmission of these four messages is optional if so indicated by the network in the HANDOVER COMMAND message.

Before completion of the 4 access bursts on the DCCH, additional access bursts may also be sent on the SACCH.

In those cells that support extended TA values if TA value in new cell is greater than 63 and the HANDOVER COMMAND message indicates that the transmission of four HANDOVER ACCESS messages is optional the MS shall not transmit these four messages. MS shall not send additional bursts on the SACCH.

The mobile station then activates the channel in sending and receiving mode and connects the channels if need be. The timing advance value to be used with the new cell is:

- either the value contained in the HANDOVER COMMAND message if the timing advance information element is present;
- or the default value for pre-synchronized handover as defined in 3GPP TS 45.010, if the timing advance information element is not included in the HANDOVER COMMAND message. The MS may activate the channels in receiving mode and connect the channels while sending access bursts.

If applicable, ciphering is immediately started. The access bursts are not ciphered.

3.4.4.3 Handover completion

After lower layer connections are successfully established, the mobile station returns a HANDOVER COMPLETE message, specifying cause "normal event", to the network on the main DCCH.

The sending of this message on the mobile station side and its receipt on the network side allow the resumption of the transmission of signalling layer messages other than those for RR management.

When receiving the HANDOVER COMPLETE message, the network stops timer T3103 and releases the old channels.

If requested to do so in the HANDOVER COMMAND message, the mobile station includes the observed time difference it has measured when performing the handover, corrected by half the timing advance, in the HANDOVER COMPLETE message (detailed specifications are given in 3GPP TS 45.010).

If the new cell supports DTM and the mobile station was in DTM in the old cell or the network does not have enough information about the RR mode in the old cell, the network sends the DTM INFORMATION message on the main DCCH after the HANDOVER COMPLETE message has been received.

3.4.4.4 Abnormal cases

In the case of a synchronous or pseudo-synchronous handover, if the mobile station knows that the timing advance with the new cell is out of range, i.e. is bigger than the maximum timing advance that can be coded as specified in 3GPP TS 44.004, and if the new cell does not accept out of range timing advance as indicated in the HANDOVER COMMAND message, the mobile station sends a HANDOVER FAILURE message, cause "handover impossible, timing advance out of range", on the main signalling link and does not attempt that handover.

If the HANDOVER COMMAND message instructs the mobile station to use a Channel Description or Mode that it does not support, or if the Channel Mode to use is not defined for all channel sets, then the MS shall return a HANDOVER FAILURE message with cause "channel mode unacceptable", and the MS shall remain on the current channel(s) and uses the old Channel Description or Mode(s).

If the mobile station receives a HANDOVER COMMAND message containing an inconsistent MultiRateConfiguration IE, then the mobile station shall return a HANDOVER FAILURE message with cause "channel mode unacceptable", and the mobile station shall remain on the current channel(s) and uses the old Channel Description or Mode(s).

The MultiRate Configuration IE shall be considered as inconsistent by the MS if:

- the active set does not include any codec mode or the active set includes more than four codec modes; or
- one or more codec modes of the active codec set are not supported by the assigned channel; or
- the threshold and hysteresis values are not set according to requirements given in 3GPP TS 45.009.

If the HANDOVER COMMAND message instructs the mobile station to use a frequency that it is not capable of, then the mobile station shall return a HANDOVER FAILURE message with cause "frequency not implemented", and the mobile station shall remain on the current channel(s).

If the mobile station receives a HANDOVER COMMAND message with a Frequency List IE or Frequency Short List IE indicating frequencies that are not all in one band, then the mobile station shall stay on the current channel(s) and send a HANDOVER FAILURE message with cause "frequency not implemented". If the mobile station receives a HANDOVER COMMAND message with a Mobile Allocation IE indexing frequencies that are not all in one band, then the mobile station shall stay on the current channel(s) and send a HANDOVER FAILURE message with cause "frequency not implemented".

NOTE: A HANDOVER COMMAND message sent to a multi band mobile station shall not be considered invalid because it indicates target channel frequencies that are all in a different frequency band to that of the ARFCN in the Cell Description IE.

On the mobile station side, if timer T3124 times out (only in the non-synchronized case) or if a lower layer failure happens on the new channel before the HANDOVER COMPLETE message has been sent, the mobile station deactivates the new channels, reactivates the old channels, reconnects the TCHs if any and triggers the establishment of the main signalling link. It then sends a HANDOVER FAILURE message on the main signalling link and resumes normal operation as if no handover attempt had occurred. The operational parameters (e.g. ciphering mode) when returning on the old channel are those applied before the HANDOVER COMMAND message was received.

When the HANDOVER FAILURE message has been received, the network releases the new channels if they were dedicated channels and stops timers T3105 and stops T3103 in the non-synchronized case. If the new channels were VGCS channels, they shall be maintained.

If a lower layer failure happens while attempting to connect back to the old channels, the standard rules are applied (cf. clause 3.4.13.2 for dedicated mode and 3.4.13.5 for group transmit mode).

On the network side, if timer T3103 elapses before either the HANDOVER COMPLETE message is received on the new channels, or a HANDOVER FAILURE message is received on the old channels, or the mobile station has reestablished the call, the old channels are released if they were dedicated channels and all contexts related to the connections with that mobile station are cleared. If the old channel was a VGCS channel, it shall be maintained and the uplink shall be set free.

On the network side, if neither a correctly layer 2 frame in format A or B nor a correctly TCH frame have been received from the mobile station on the new channel, the newly allocated channels are released if they were dedicated channels. If the new channels were VGCS channels, they shall be maintained and the uplink shall be set free.

On the network side, lower layer failures occurring on the old channels after the sending of the HANDOVER COMMAND message are ignored. Lower layer failures occurring after the receipt of the SABM frame on the new main signalling link are treated following a general scheme (cf. clause 3.4.13.2 for dedicated mode and 3.4.13.5 for group transmit mode).

3.4.4a Handover to UTRAN procedure

Only valid for a UTRAN capable MS. In dedicated mode or dual transfer mode, a change to UTRAN channel(s) can be requested by the network RR sublayer. This change is performed through the handover to UTRAN procedure.

NOTE: The decision to do a handover to UTRAN and the choice of the new cell is out of the scope of this technical specification.

The handover to UTRAN procedure includes:

- The suspension of normal operation except for RR management (layer 3).
- The disconnection of the main signalling link, and of the other links via local end release (layer 2), and the disconnection of the TCH(s) if any.
- The disconnection and the deactivation of previously assigned channels and their release (layer 1).
- The abortion of the packet resources (see 3GPP TS 44.060), if in class A mode of operation.
- The establishment of UTRAN channel(s), see 3GPP TS 25.331.

The handover to UTRAN procedure is always initiated by the network.

3.4.4a.1 Handover to UTRAN initiation

The network initiates the handover to UTRAN procedure by sending an INTER SYSTEM TO UTRAN HANDOVER COMMAND message to the mobile station on the main DCCH. It then starts timer T3121.

If the INTER SYSTEM TO UTRAN HANDOVER COMMAND refers to a not known cell (see 3GPP TS 25.133 and 3GPP TS 25.123), this shall not be considered as an error.

When sending this message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases, is suspended until resuming is indicated. These RR messages can be deduced from clause 3.4.3 and 8.5.1 "Radio Resource management".

Upon receipt of the INTER SYSTEM TO UTRAN HANDOVER COMMAND message, the mobile station initiates, as described in clause 3.1.4, the release of link layer connections and disconnects the physical channels (including the packet resources, if in class A mode of operation). Switching to the assigned cell(s) and physical channel establishment is described in 3GPP TS 25.331.

3.4.4a.2 Handover to UTRAN completion

NOTE: After lower layer connections are successfully established, the mobile station returns a Handover to UTRAN Complete message on UTRAN channels(s), see 3GPP TS 25.331.

When receiving the Handover to UTRAN Complete message (3GPP TS 25.331), the network stops timer T3121 and releases the old channels.

3.4.4a.3 Abnormal cases

If the INTER SYSTEM TO UTRAN HANDOVER COMMAND message instructs the mobile station to use a frequency that it is not capable of, then the mobile station shall stay on the current channel(s) and return a HANDOVER FAILURE message with cause "frequency not implemented".

If the INTER SYSTEM TO UTRAN HANDOVER COMMAND message instructs the mobile station to use a UTRAN predefined configuration that the mobile station has not read or instructs to use a default configuration not implemented by the mobile station, then the mobile station shall stay on the current channel(s) and return a HANDOVER FAILURE message with cause "UTRAN configuration unknown". If connection is not possible on the UTRAN channel(s) (see 3GPP TS 25.331), the MS reactivates the old channel(s), reconnects TCHs and triggers the establishment of the main signalling link. It then sends a HANDOVER FAILURE message on the main signalling link and resumes normal operation.

When sending a HANDOVER FAILURE message in response to an INTERSYSTEM TO UTRAN HANDOVER COMMAND, the mobile station shall erase all the UTRAN predefined configurations .

When the HANDOVER FAILURE message has been received, the network releases the UTRAN channel(s) if they were dedicated channels and stops timer T3121.

If a lower layer failure happens while attempting to connect back to the old channels, the standard rules are applied (cf. clause 3.4.13.2 for dedicated mode).

On the network side, if timer T3121 elapses before either the Handover to UTRAN Complete (3GPP TS 25.331) message is received on the UTRAN channel(s), or a HANDOVER FAILURE message is received on the old channels, or the mobile station has re-established the call, the old channels are released if they were dedicated channels and all contexts related to the connections with that mobile station are cleared.

On the network side, lower layer failures occurring on the old channels after the sending of the INTER SYSTEM TO UTRAN HANDOVER COMMAND message are ignored.

3.4.4b Handover to CDMA2000 procedure

Only valid for a CDMA2000 capable MS. In dedicated mode or dual transfer mode, a change to CDMA2000 channel(s) can be requested by the network RR sublayer. This change is performed through the handover to CDMA2000 procedure.

NOTE: The decision to do a handover to CDMA2000 and the choice of the new cell is out of the scope of this technical specification.

The handover to CDMA2000 procedure includes:

- The suspension of normal operation except for RR management (layer 3).
- The disconnection of the main signalling link, and of the other links via local end release (layer 2), and the disconnection of the TCH(s) if any.
- The disconnection and the deactivation of previously assigned channels and their release (layer 1).
- The abortion of the packet resources (see 3GPP TS 44.060), if in class A mode of operation.
- The establishment of CDMA2000 channel(s), see TIA/EIA/IS-833 and TIA/EIA/IS-2000-5-A.

The handover to CDMA2000 procedure is always initiated by the network.

3.4.4b.1 Handover to CDMA2000 initiation

The network initiates the handover to CDMA2000 procedure by sending an INTER SYSTEM TO CDMA2000 HANDOVER COMMAND message to the mobile station on the main DCCH. It then starts timer T3123.

If the INTER SYSTEM TO CDMA2000 HANDOVER COMMAND refers to a not known base station (see TIA/EIA/IS-98-D), this shall not be considered as an error.

When sending this message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases, is suspended until resuming is indicated. These RR messages can be deduced from clause 3.4.3 and 8.5.1 "Radio Resource management".

Upon receipt of the INTER SYSTEM TO CDMA2000 HANDOVER COMMAND message, the mobile station initiates, as described in clause 3.1.4, the release of link layer connections and disconnects the physical channels (including the packet resources, if in class A mode of operation). Switching to the assigned base stations and physical channel establishment is described in TIA/EIA/IS-2000-5-A.

3.4.4b.2 Handover to CDMA2000 completion

NOTE: After lower layer connections are successfully established, the mobile station returns a Handoff Completion Message on CDMA2000 channels(s), see TIA/EIA/IS-833.

When receiving the Handoff Completion Message (TIA/EIA/IS-833), the network stops timer T3123 and releases the old channels.

3.4.4b.3 Abnormal cases

If the INTER SYSTEM TO CDMA2000 HANDOVER COMMAND message instructs the mobile station to use a frequency that it is not capable of, then the mobile station shall return a HANDOVER FAILURE message with cause "frequency not implemented", and the mobile station shall remain on the current channel(s).

If connection is not possible on the CDMA2000 channel(s) (see TIA/EIA/IS-2000-5-A), the MS reactivates the old channels, reconnects TCHs and triggers the establishment of the main signalling link. It then sends a HANDOVER FAILURE message on the main signalling link and resumes normal operation.

When the HANDOVER FAILURE message has been received, the network releases the CDMA2000 channel(s) if they were dedicated channels and stops timer T3123.

If a lower layer failure happens while attempting to connect back to the old channels, the standard rules are applied (cf. clause 3.4.13.2 for dedicated mode).

On the network side, if timer T3123 elapses before either the Handoff Completion Message (TIA/EIA/IS-833) is received on the CDMA2000 channel(s), or a HANDOVER FAILURE message is received on the old channels, or the mobile station has re-established the call, the old channels are released if they were dedicated channels and all contexts related to the connections with that mobile station are cleared.

On the network side, lower layer failures occurring on the old channels after the sending of the INTER SYSTEM TO CDMA2000 HANDOVER COMMAND message are ignored.

3.4.5 Frequency redefinition procedure

In dedicated mode and group transmit mode, this procedure is used by the network to change the frequencies and hopping sequences of the allocated channels. This is meaningful only in the case of frequency hopping.

The network sends to the mobile station a FREQUENCY REDEFINITION message containing the new parameters together with a starting time indication.

NOTE: The network should take into account limitations of certain mobile stations to understand formats used in the Cell Channel Description IE used in the FREQUENCY REDEFINITION message, see clause 10.5.2.13.

When receiving such a message, the mobile station modifies the frequencies/hopping sequences it uses at the exact indicated time slot, i.e. the indicated time slot is the first with new parameters. All other functions are not disturbed by this change. New parameters can be the cell channel description, the mobile allocation and the MAIO. In case of multislot configuration, the Channel Description IE shall describe the channel carrying the main signalling link, the new parameters however, shall be used for all assigned timeslots. Other parameters describing the allocated channels must be identical to the current parameters.

3.4.5.1 Abnormal cases

If the mobile station receives a FREQUENCY REDEFINITION message with a Mobile Allocation IE indexing frequencies that are not all in one band and a Starting Time IE indicating a time that has not elapsed, then the mobile station shall stay on the current channel(s) and send a RR STATUS message with cause "frequency not implemented".

If the mobile station receives a FREQUENCY REDEFINITION message with a Mobile Allocation IE indexing frequencies that are not all in one band and a Starting Time IE indicating a time that has elapsed, then the mobile station shall locally abort the radio connection and, if permitted, attempt Call Re-establishment.

If the mobile station receives a FREQUENCY REDEFENITION message on a channel for which it has a pending redefinition (defined by the immediate assignment, assignment or handover procedure or a previous frequency redefinition procedure) the frequencies, hopping and starting time parameters defined by the new frequency redefinition procedure supersedes those of the pending one.

NOTE: A FREQUENCY REDEFINITION message sent to a multi band mobile station shall not be considered invalid because it indicates new frequencies that are all in a different frequency band to that of the ARFCN of the serving cell.

3.4.6 Channel mode modify procedure

In dedicated mode or group transmit mode, higher layers can request the setting of the channel mode.

The channel mode modify procedure allows the network to request the mobile station to set the channel mode for one channel or one channel set. The procedure shall not be used if the multislot configuration contains more than one channel set. The channel mode covers the coding, decoding and transcoding mode used on the indicated channel.

This message shall not be used to modify the mode of a non-multislot configured traffic channel when the MS has requested a multislot configuration, ie it cannot be used to modify the mode of a traffic channel when the channel was assigned during the immediate assignment procedure and the user has requested a multislot configuration.

This procedure is always initiated by the network.

NOTE: Direct transitions between full rate speech coder version 1 and full rate speech coder version 2 (and vice versa) may cause unpleasant audio bursts.

3.4.6.1 Normal channel mode modify procedure

3.4.6.1.1 Initiation of the channel mode modify procedure

The network initiates the procedure by sending a CHANNEL MODE MODIFY message to the mobile station. This message contains:

- a channel description of the channel(s) on which the mode in the CHANNEL MODE MODIFY message shall be applied; and
- the mode to be used on that channel, or on all the channels of a channel set in a multislot configuration.
- Optionally, when the channel mode indicates that a multi-rate speech codec must be applied, the MultiRateconfiguration to be used. The MultiRateConfiguration IE defines the set of codec modes and related information to use after the mode modify procedure.

If the channel mode is changed from a non multi-rate speech codec to a multi-rate speech codec, the CHANNEL MODE MODIFY message shall contain the MultiRate Configuration IE, which defines the set of codec modes and related information to use as a new mode.

If the old channel mode and the new channel mode are both multi-rate speech codec, the MultiRate Configuration IE may not be present. If not present, the MS shall go on with the current multi-rate speech configuration.

3.4.6.1.2 Completion of channel mode modify procedure

When it has received the CHANNEL MODE MODIFY message, the mobile station sets the mode for the indicated channel, and if that is in a multislot configuration, the whole channel set and then replies by a CHANNEL MODE MODIFY ACKNOWLEDGE message indicating the ordered channel mode.

This applies whether the mode commanded by the CHANNEL MODE MODIFY is different from the one used by the mobile station or whether it is already in use.

3.4.6.1.3 Abnormal cases

If the new mode is multi-rate speech codec and if the MultiRate Configuration IE is inconsistent, the MS shall ignore the CHANNEL MODE MODIFY message and shall not send CHANNEL MODE MODIFY ACKNOWLEDGE message to the network.

No other specific action for a lower layer failure is specified in this clause. If the mobile station does not support the indicated mode, it shall retain the old mode and return the associated channel mode information in the CHANNEL MODE MODIFY ACKNOWLEDGE message.

3.4.6.2 Channel mode modify procedure for a voice group call talker

3.4.6.2.1 Initiation of the channel mode modify procedure

The network initiates the procedure by sending a CHANNEL MODE MODIFY message to the mobile station. This message contains:

- a channel description of the channel on which the CHANNEL MODE MODIFY message is sent; and
- the new channel mode to be used on the channel; and
- optionally, the VGCS target mode information element defining which RR mode is to be used with the new channel mode (i.e. dedicated mode or group transmit mode). If this information element is not present, the RR mode shall be assumed to be the same as with the previous channel mode. The VGCS target mode information element shall also indicate the group cipher key number for the group cipher key to be used on the new channel or if the new channel is non ciphered. If the information element is not present, the ciphering mode and ciphering key shall be the same as with the previous channel mode. Mobile stations not supporting VGCS talking shall ignore the CHANNEL MODE MODIFY message if the VGCS target mode information element is included in the message and shall send an RR STATUS message to the network with cause #96.

The start of ciphering with a group cipher key with the new channel mode is only possible when the mode on the old channel was not ciphered.

If a VGCS target mode information element indicating a group cipher key number is included in the message and the previous mode is not non ciphered and the group cipher key number is different to the previous cipher key number, the mobile station shall behave as if it would not support the indicated channel mode.

3.4.6.2.2 Completion of mode change procedure

When it has received the CHANNEL MODE MODIFY message, the mobile station changes the mode for the indicated channel and then replies by a CHANNEL MODE MODIFY ACKNOWLEDGE message indicating the new channel mode.

3.4.6.2.3 Abnormal cases

No specific action for a lower layer failure is specified in this clause. If the mobile station does not support the indicated mode, it shall retain the old mode and return the associated channel mode information in the CHANNEL MODE MODIFY ACKNOWLEDGE message.

3.4.7 Ciphering mode setting procedure

In dedicated mode, the ciphering mode setting procedure is used by the network to set the ciphering mode, i.e. whether or not the transmission is ciphered, and if so which algorithm to use. The procedure shall only be used to change from "not ciphered" mode to "ciphered" mode, or vice-versa, or to pass a CIPHERING MODE COMMAND message to the mobile station while remaining in the "not ciphered" mode. The ciphering mode setting procedure is always triggered by the network and it only applies to dedicated resources.

The cipher mode setting procedure shall not be applied in group transmit mode.

3.4.7.1 Ciphering mode setting initiation

The network initiates the ciphering mode setting procedure by sending a CIPHERING MODE COMMAND message to the mobile station on the main signalling link, indicating whether ciphering shall be used or not, and if yes which algorithm to use.

Additionally, the network may, by the use of the cipher response information element, request the mobile station to include its IMEISV in the CIPHERING MODE COMPLETE message.

The new mode is applied for reception on the network side after the message has been sent.

3.4.7.2 Ciphering mode setting completion

Whenever the mobile station receives a valid CIPHERING MODE COMMAND message, it shall, if a SIM is present and considered valid by the ME and the ciphering key sequence number stored on the SIM indicates that a ciphering key is available, load the ciphering key stored on the SIM into the ME. A valid CIPHERING MODE COMMAND message is defined to be one of the following:

- one that indicates "start ciphering" and is received by the mobile station in the "not ciphered" mode;
- one that indicates "no ciphering" and is received by the MS in the "not ciphered" mode; or
- one that indicates "no ciphering" and is received by the mobile station in the "ciphered" mode.

Other CIPHERING MODE COMMAND messages shall be regarded as erroneous, an RR STATUS message with cause "Protocol error unspecified" shall be returned, and no further action taken.

Upon receipt of the CIPHERING MODE COMMAND message indicating ciphering, the mobile station shall start transmission and reception in the indicated mode.

When the appropriate action on the CIPHERING MODE COMMAND has been taken, the mobile station sends back a CIPHERING MODE COMPLETE message. If the "cipher response" field of the cipher response information element in the CIPHERING MODE COMMAND message specified "IMEI must be included" the mobile station shall include its IMEISV in the CIPHERING MODE COMPLETE message.

Upon receipt of the CIPHERING MODE COMPLETE message or any other correct layer 2 frame which was sent in the new mode, the network starts transmission in the new mode.

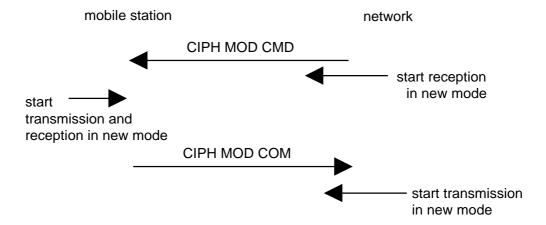


Figure 3.4.7.2.1/3GPP TS 44.018: Ciphering mode setting sequence

3.4.8 Additional channel assignment procedure

NOTE: In the present state of 3GPP TS 44.003, this procedure is only possible for the TCH/H + ACCHs to TCH/H + TCH/H + ACCHs transition. As a consequence it is not needed for simple mobile stations. The description of the procedure is in general terms to cope with possible evolution.

In dedicated mode, a change of channel configuration to include an additional channel can be requested by upper layers.

The additional channel assignment procedure shall not be applied in group transmit mode,

The purpose of the additional assignment procedure is to allocate an additional dedicated channel to a mobile station while keeping the previously allocated channels. In particular the main DCCH and the SACCH are not modified, and signalling exchanges are not interrupted.

The additional assignment procedure may happen only in dedicated mode. It is used for instance for the transition from the TCH/H + ACCHs configuration to the TCH/H + ACCHs configuration.

The additional assignment procedure is always initiated by the network.

3.4.8.1 Additional assignment procedure initiation

The network initiates the procedure by sending an ADDITIONAL ASSIGNMENT message to the mobile station on the main DCCH. The ADDITIONAL ASSIGNMENT message contains the description of the newly assigned channel.

On receipt of the message, the mobile station activates the new channel.

3.4.8.2 Additional assignment procedure completion

The mobile station sends an ASSIGNMENT COMPLETE message to the network on the channel, on which it receives the ADDITIONAL ASSIGNMENT message.

3.4.8.3 Abnormal cases

A lower layer failure occurring during the procedure is treated according to the general case (see clause 3. 4.13.2).

The network considers the channel as allocated from the sending of the ADDITIONAL ASSIGNMENT message. As a consequence, if a re-establishment occurs, the network will consider the context as if the mobile station has received the message, and the new configuration allocated after the re-establishment may differ from the one the mobile station had before the re-establishment.

3.4.9 Partial channel release procedure

In dedicated mode, a change of channel configuration to release one channel can be requested by upper layers.

The partial channel release procedure shall not be applied in group transmit mode.

The purpose of this procedure is to deactivate part of the dedicated channels in use. The channel configuration remains dedicated.

NOTE: In the present state of 3GPP TS 44.003, this procedure is only possible for the TCH/H + TCH/H + ACCHs to TCH/H + ACCHs transition. As a consequence it is not needed for simple mobile stations.

The partial release procedure is always initiated by the network.

3.4.9.1 Partial release procedure initiation

The network initiates the partial release by sending a PARTIAL RELEASE message to the mobile station on the main DCCH.

On receipt of the PARTIAL RELEASE message the mobile station:

- Initiates the disconnection of all the link layer connections carried by the channel to be released;
- Simultaneously initiates the connection on remaining channels of the data link layer connections that have been released;
- Deactivates the physical channels to be released.
- Sends a PARTIAL RELEASE COMPLETE to the network on the (possibly new) main signalling link.

3.4.9.2 Abnormal cases

A lower layer failure is treated following the general rules as specified in clause 3.4.13.2.

Moreover, on the network side, the channel configuration nature is set from the sending of the PARTIAL RELEASE message onward. As a consequence, any new assignment after a re-establishment may concern a different channel configuration nature from the one known by the mobile station before the re-establishment.

3.4.10 Classmark change procedure

In dedicated mode or in group transmit mode, this procedure allows the mobile station to indicate to the network a change of characteristics reflected in the classmark (e.g. due to addition of power amplification). Furthermore, a mobile station which implements the « controlled early classmark sending » option may also send a CLASSMARK CHANGE message and/or a UTRAN CLASSMARK CHANGE message and/or a CDMA2000 CLASSMARK CHANGE message as described in clause 3.3.1.1.4.1, even if no change of characteristics has occurred.

The mobile station sends a CLASSMARK CHANGE message to the network. This message contains the new mobile station classmark 2 information element. It may also contain a Classmark 3 Information Element. There is no acknowledgement from the network at layer 3.

A UTRAN capable MS, indepently of sending a CLASSMARK CHANGE message, sends a UTRAN CLASSMARK CHANGE message to the network. This message contains the INTER RAT HANDOVER INFO defined in 3GPP TS 25.331 There is no acknowledgement from the network at layer 3.

NOTE: For the network, UTRAN predefined configuration status information may be invalid if the PLMN where predefined configurations were read and the PLMN of the connected cell do not use common predefined configurations.

If the CLASSMARK CHANGE and one or more of these additional messages are to be sent by the MS, the CLASSMARK CHANGE message shall be sent first.

3.4.11 Classmark interrogation procedure

This procedure allows the network to request additional classmark information from the mobile station (e.g. if the information initially sent by the mobile station is not sufficient for network decisions). For a multi-RAT MS this procedure allows in addition to request UTRAN UE Capability and/or UTRAN predefined configuration status information (version numbers) and/or UTRAN security information and/or CDMA2000 UE Capability.

3.4.11.1 Classmark interrogation initiation

The network initiates the classmark interrogation procedure by sending a CLASSMARK ENQUIRY message to the mobile station on the main DCCH.

3.4.11.2 Classmark interrogation completion

On receipt of the CLASSMARK ENQUIRY message the mobile station sends a CLASSMARK CHANGE and/or a UTRAN CLASSMARK CHANGE and/or a CDMA2000 CLASSMARK CHANGE message to the network on the main DCCH. The Classmark Enquiry Mask information element in the CLASSMARK ENQUIRY message indicates the type of request. If the Classmark Enquiry Mask information element is not included in the CLASSMARK ENQUIRY message, this indicates a request for CLASSMARK CHANGE message.

The CLASSMARK CHANGE message contains the mobile station classmark 2 information element. It may also contain a Classmark 3 Information Element.

The UTRAN CLASSMARK CHANGE message contains the INTER RAT HANDOVER INFO (UTRAN specific information).

The CDMA2000 CLASSMARK CHANGE message contains CDMA2000 UE capability information.

If the CLASSMARK CHANGE and one or more of these additional messages are to be sent by the MS, the CLASSMARK CHANGE message shall be sent first.

3.4.12 Indication of notifications and paging information

Only applicable for mobile stations supporting VGCS or VBS:

In dedicated mode or in group transmit mode, the RR entity shall provide indications to the upper layer on all received notifications for voice group calls or voice broadcast calls according to the VGCS or VBS subscription data stored in the mobile station. The indication shall include the notified group or broadcast call reference and possibly the related priority, if provided.

In group transmit mode, if the mobile station has decoded a paging message with the own mobile station identity on the PCH or on the voice group call channel downlink, the RR entity shall provide an indication to the upper layers, together with the related priority, if applicable.

In group transmit mode, if the RR entity receives information on the voice group call channel of the existence of a paging message in its paging subgroup of the PCH, the RR entity shall pass this information to the upper layers together with the related priority if provided (see also clause 3.3.2 and 3.3.3).

3.4.13 RR connection release procedure

3.4.13.1 Normal release procedure

The release of the RR connection can be requested by upper layers.

The purpose of this procedure is to deactivate all the dedicated channels in use. When the channels are released and the mobile station is not IMSI attached for GPRS services (clause 4), the mobile station returns to the CCCH configuration, idle mode.

If the mobile station is IMSI attached for GPRS services the following three cases apply:

- If the mobile station has no radio resources (i.e., no temporary block flow) allocated on a PDCH, the mobile station returns to the PCCCH or CCCH configuration, packet idle mode.

- If the mobile station is operating in dual transfer mode when the RR connection is released, the radio resources allocated on a PDCH are released, the mobile station returns to the PCCCH or CCCH configuration, packet idle mode.
- Otherwise, if the mobile station has radio resources allocated on a PDCH, the mobile station enters packet transfer mode.

The channel release procedure can be used in a variety of cases, including TCH release after a call release, and DCCH release when a dedicated channel allocated for signalling is released.

In dedicated mode and group transmit mode, the channel release procedure is always initiated by the network.

3.4.13.1.1 Channel release procedure initiation in dedicated mode and in group transmit mode

The network initiates the channel release by sending a CHANNEL RELEASE message to the mobile station on the main DCCH, starts timer T3109 and deactivates the SACCH.

On receipt of a CHANNEL RELEASE message the mobile station starts timer T3110 and disconnects the main signalling link. When T3110 times out, or when the disconnection is confirmed, the mobile station deactivates all channels, considers the RR connection as released, and returns to CCCH idle mode, returns to PCCCH or CCCH packet idle mode or enters packet transfer mode.

NOTE: Data Links other than the main signalling link are disconnected by local end link release.

If case of dedicated mode, on the network side, when the main signalling link is disconnected, the network stops timer T3109 and starts timer T3111. When timer T3111 times out, the network deactivates the channels, they are then free to be allocated to another connection.

NOTE: The sole purpose of timer T3111 is to let some time to acknowledge the disconnection and to protect the channel in case of loss of the acknowledge frame.

If timer T3109 times out, the network deactivates the channels; they are then free to be allocated to another connection.

The CHANNEL RELEASE message will include an RR cause indication as follows:

#0: if it is a normal release, e.g. at the end of a call or at normal release of a DCCH.

#1: to indicate an unspecified abnormal release.

#2, #3 or #4: to indicate a specific release event.

#5: if the channel is to be assigned for servicing a higher priority call (e.g. an emergency call).

#65: if e.g. a handover procedure is stopped because the call has been cleared.

The CHANNEL RELEASE message may include the information element BA Range which may be used by a mobile station in its selection algorithm (see 3GPP TS 45.008 and 3GPP TS 23.022).

Mobile stations not supporting VGCS or VBS listening shall consider Group Channel Description and Group Cipher Key Number information elements as unnecessary in the message and perform the channel release procedure as normal.

For mobile stations supporting VGCS listening, the following procedures apply:

The CHANNEL RELEASE message may include the information element Group Channel Description. In this case, the mobile station shall release the layer 2 link, enter the group receive mode and give an indication to the upper layer. If a CHANNEL RELEASE message with no Group Channel Description is received, the normal behaviour applies.

If ciphering is applied on the VGCS or VBS channel, the network shall provide in the CHANNEL RELEASE message with the Group Cipher Key Number information element for the group cipher key to be used by the mobile station for reception of the VGCS or VBS channel. If this information element is not included, no ciphering is applied on the VGCS or VBS channel.

A mobile station not supporting the « GPRS » option shall consider the GPRS Resumption information element as an information element unknown in the CHANNEL RELEASE message and perform the RR connection release procedure as normal.

For a mobile station supporting the « GPRS » option, the following additional procedures also apply:

- The CHANNEL RELEASE message may include the information element GPRS Resumption. If the GPRS Resumption information element indicates that the network has resumed GPRS services, the RR sublayer of the mobile station shall indicate a RR GPRS resumption complete to the MM sublayer, see clause 4. If the GPRS Resumption information element indicates that the network has not successfully resumed GPRS services, the RR sublayer of the mobile station shall indicate a RR GPRS resumption failure to the MM sublayer, see clause 4.
- If the mobile station has performed the GPRS suspension procedure (clause 3.3.1.1.4.2) and the GPRS Resumption information element is not included in the message, the RR sublayer of the mobile station shall indicate a RR GPRS resumption failure to the MM sublayer, see clause 4.
- If the mobile station has not performed the GPRS suspension procedure and the GPRS Resumption information element is not included in the message, the mobile station shall perform the RR connection release procedure as normal.

3.4.13.1.2 Abnormal cases

Abnormal cases are taken into account in the main part of the description of the procedure.

3.4.13.2 Radio link failure in dedicated mode or dual transfer mode

The main part of these procedures concerns the "normal" cases, i.e. those without any occurrence of loss of communication means. A separate paragraph at the end of the description of each procedure treats the cases of loss of communication, called a radio link failure. In dedicated mode, in most of the cases the reaction of the mobile station or the network is the same. Those reactions are described in this clause to avoid repetitions.

A radio link failure can be detected by several ways:

- 1) By analysis of reception at layer 1, as specified in 3GPP TS 45.008 and clause 3.4.1.1.
- 2) By a data link layer failure as specified in 3GPP TS 44.006, on the main signalling link. A data link failure on any other data link shall not be considered as a radio link failure.
- 3) When a lower layer failure happens while the mobile station attempts to connect back to the old channels in a channel assignment procedure, handover procedure, PDCH assignment procedure, RR-cell change order procedure or DTM assignment procedure with relocation of the RR connection.
- 4) In some cases where timers are started to detect the lack of answer from the other party, as described in clause 3.

The two first cases are known by the term "lower layer failure".

3.4.13.2.1 Mobile side

When a radio link failure is detected by the mobile station,

- the MS shall perform a local end release on all signalling links unless otherwise specified;
- the mobile station shall deactivate all dedicated channels:
- if the mobile station is in dual transfer mode, it shall abort the packet resources;
- the RR sublayer of the mobile station shall indicate an RR connection failure to the MM sublayer unless otherwise specified.

NOTE: Upper layers may decide on a re-establishment (cf. clause 5.5.4).

When a mobile station which has performed the GPRS suspension procedure (clause 3.3.1.1.4.2) detects a radio link failure, the RR sublayer of the mobile station shall indicate a RR GPRS resumption failure to the MM sublayer, see clause 4.

3.4.13.2.2 Network side

In dedicated mode, the reaction of the network to a lower layer failure depends on the context. Except when otherwise specified, it is to release the connection either with the channel release procedure as specified in clause 3.5.1, or with the following procedure. The network starts timer T3109 and deactivates the SACCH (and hence to stop transmission on the SACCH). If the mobile station is in dual transfer mode, the network also aborts all the allocated packet resources.

When a radio link failure has been detected, an indication is passed to the upper Mobility Management sublayer on the network side.

When timer T3109 expires, the network can regard the channels as released and free for allocation.

This procedure relies on the fact that if a mobile station does not receive the SACCH for some time, it completely releases the channels (cf. 3GPP TS 45.008).

NOTE: The network should maintain for a while the transaction context in order to allow call re-establishment. The length of timer is for further study.

When a mobile station which has performed the GPRS suspension procedure (clause 3.3.1.1.4.2) detects a radio link failure, the RR sublayer of the mobile station shall indicate a RR GPRS resumption failure to the MM sublayer, see clause 4.

3.4.13.3 RR connection abortion in dedicated mode or dual transfer mode

The mobile station aborts the RR connection by initiating a normal release of the main signalling link, performing local end releases on all other signalling links, disconnecting all traffic channels, if any, and aborting all the packet resources, if any.

When a mobile station which has performed the GPRS suspension procedure (clause 3.3.1.1.4.2) aborts the RR connection, the RR sublayer of the mobile station shall indicate a RR GPRS resumption failure to the MM sublayer, see clause 4.

3.4.13.4 Uplink release procedure in group transmit mode

If the uplink release is requested by the upper layer the mobile station shall send an UPLINK RELEASE message on the voice group call channel uplink, perform a release of the main signalling link and go back to the group receive mode.

If the UPLINK RELEASE message is received from the network on the voice group call channel downlink, the MS shall perform a release of the main signalling link and go back to the group receive mode.

3.4.13.5 Radio link failure in group transmit mode

The main part of these procedures concerns the "normal" cases, i.e. those without any occurrence of loss of communication means. A separate paragraph at the end of the description of each procedure treats the cases of loss of communication, called a radio link failure. In group transmit mode, in most of the cases the reaction of the mobile station or the network is the same. Those reactions are described in this clause to avoid repetitions.

A radio link failure can be detected by several ways:

- 1) By analysis of reception at layer 1, as specified in 3GPP TS 45.008 and clause 3.4.1.1.
- 2) By a data link layer failure as specified in 3GPP TS 44.006, on the main signalling link. A data link failure on any other data link shall not be considered as a radio link failure.
- 3) When a lower layer failure happens while the mobile station attempts to connect back to the old channels in a channel assignment procedure or handover procedure.
- 4) In some cases where timers are started to detect the lack of answer from the other party, as described in clause 3.

The two first cases are known by the term "lower layer failure".

3.4.13.5.1 Mobile side

When a radio link failure is detected by the mobile station,

- the MS shall perform a local end release on all signalling links;
- the mobile station shall go back to idle mode and, when possible, to group receive mode;
- the RR sublayer of the mobile station shall indicate an RR connection failure to the MM sublayer unless otherwise specified.

3.4.13.5.2 Network side

When the uplink has been allocated and the network detects a lower layer failure, the network shall set the uplink free and provide an UPLINK FREE message on the main signalling channel, when appropriate.

When a radio link failure has been detected, an indication is passed to the upper Mobility Management sublayer on the network side.

3.4.14 Receiving a RR STATUS message by a RR entity.

If the RR entity of the mobile station receives a RR STATUS message no transition and no specific action shall be taken as seen from the radio interface, i.e. local actions are possible.

The actions to be taken on receiving a RR STATUS message in the network are an implementation dependent option see also clause 8.

3.4.15 Group receive mode procedures

Only applicable for support of VGCS listening or VBS listening.

3.4.15.1 Mobile station side

3.4.15.1.1 Reception of the VGCS or VBS channel

In group receive mode, the mobile station receives the downlink of the voice broadcast channel or voice group call channel for which the channel description was provided within the notification message or in the related command message. The mobile station should also listen to the CCCH of the serving cell. Moreover, it measures the received levels on the serving cell and on the neighbour cells to assess the need for a cell reselection as specified in 3GPP TS 45.008. The general cell reselection procedure for the mobile station in group receive mode is described in 3GPP TS 23.022.

Information on neighbour cells used for cell reselection and reception of the VGCS or VBS channel in the neighbour cells may be provided on the downlink messages (see clause 3.4.15.1.2). If no such information is provided or information is missing, the mobile station shall try to read this information on the BCCH and NCH of the neighbour cells.

3.4.15.1.2 Monitoring of downlink messages and related procedures

Mobile stations in group receive mode shall monitor messages related to the following procedures on the VGCS or VBS channel downlink and act appropriately in order to be able to keep receiving the VGCS or VBS channel downlink.

All messages for mobile stations in group receive mode shall be sent in UI format on the VGCS or VBS channel downlink. Mobile stations in group receive mode shall ignore all messages which are not sent in UI format or which are not related to the following mentioned procedures.

The mobile should also monitor messages on the PCH or NCH of the current cell.

3.4.15.1.2.1 (void)

3.4.15.1.2.2 (void)

3.4.15.1.2.3 Channel mode modify procedure

The mobile station shall receive CHANNEL MODE MODIFY messages. The mobile station shall use the new channel mode but shall not transmit any response to the network.

3.4.15.1.2.4 Notification and paging information

The mobile station shall monitor messages related to notification and paging procedures.

The RR entity shall provide indications on all received notifications for voice group calls or voice broadcast calls to the upper layer. The indication shall include the notified group or broadcast call reference and, if provided, and if the mobile station supports eMLPP the related priority.

On request by the upper layer to join another voice broadcast call or voice group call for which a corresponding notification has been received on the VGCS or VBS channel downlink, the RR entity shall read the corresponding notification on the NCH.

If the mobile station has received a paging message with its own mobile station identity on the PCH or on the voice broadcast channel or voice group call channel downlink, the RR entity shall provide an indication to the upper layers, together with the related priority, if applicable.

3.4.15.1.2.4.1 Use of Reduced NCH monitoring

This clause applies to mobile stations which are in group receive mode or group transmit mode of dedicated mode and which in addition want to receive notification messages for other voice broadcast calls or voice group calls and which aim at reducing the reception load.

When the MS in group receive mode or group transmit mode enters a cell, it may read the NCH until it has received at least two messages on the NCH indicating NLN, with the two last received NLN being identical. Then it may stop reading the NCH until it receives on the SACCH an NLN(SACCH) different from the last previously received NLN.

For this, a parameter is provided on the SACCH in the SYSTEM INFORMATION TYPE 6 message:

- NLN(SACCH): Notification List Number.

If a mobile station receives on the SACCH an NLN(SACCH) different from the last received NLN it may read the NCH until it has received at least two messages on the NCH indicating NLN with the two last received NLN being identical.

If a message in the SACCH is not received correctly the MS may read the NCH until it has received at least two messages on the NCH indicating NLN, with the two last received NLN being identical.

3.4.15.1.2.5 Uplink status messages

Mobile stations supporting VGCS talking shall monitor the VGCS uplink control related messages UPLINK FREE and UPLINK BUSY.

3.4.15.1.2.6 Channel release message

The mobile station shall receive CHANNEL RELEASE messages. On receipt of a CHANNEL RELEASE message, the RR entity shall go to idle mode and give an indication to the upper layer. (See also clause 3.4.15.1.4.1, 4th paragraph.)

3.4.15.1.2.7 Information on paging channel restructuring

On receipt of a SYSTEM INFORMATION TYPE 6 message indicating that paging channel restructuring has taken place, if the mobile station wants to be able to read its paging subchannel while in group receive mode or group transmit mode, the mobile station should read the related messages on the BCCH to know the position of its paging group.

3.4.15.1.3 Uplink reply procedure

In Group Receive mode, on receipt of an UPLINK FREE message with an uplink access request indication from the network on the voice group call channel downlink, the mobile station shall send two UPLINK ACCESS messages on the voice group call channel with establishment cause "Reply on uplink access request" and then stop immediately transmitting on the uplink.

The first UPLINK ACCESS message shall be transmitted by the mobile station with a random delay between 0 and 20 ms. The second UPLINK ACCESS messages shall be repeated after a further period of 100 ms plus a random delay between 0 and 20 ms.

If an uplink identity code (UIC) of the current cell has been provided by the network in the UPLINK FREE message, the mobile station shall use this UIC for the coding of the UPLINK ACCESS messages. If no UIC is provided, the mobile station shall use the BSIC received of the serving cell, for instance as received from the initial synchronization.

3.4.15.1.4 Leaving the group receive mode

3.4.15.1.4.1 Returning to idle mode

If the mobile station enters a new cell in which:

- notifications for the current group or broadcast call are sent; but
- no VGCS or VBS channel description for the current group or broadcast call is provided;

the mobile station shall go to idle mode and give an indication to the upper (sub-)layers.

NOTE: Upper (sub-)layers then can request the establishment of an RR connection in order to be informed about the channel description by the network.

If the mobile station enters a cell in which notifications for the current group or broadcast call are not sent, the mobile station shall disconnect locally the TCH, go to idle mode and give an indication to the upper (sub-)layers.

On request by the upper layer in order to respond to a paging message the RR entity shall go to the idle mode in order to establish a dedicated RR connection.

On receipt of a CHANNEL RELEASE message in UI format from the network the RR entity shall go to idle mode and give an indication to the upper layer.

If the upper layer requests to abort the group receive mode, the mobile station shall go back to idle mode.

3.4.15.1.4.2 Going to group transmit mode

Only applicable for mobile stations supporting VGCS talking.

If the upper layer requests an uplink access, the mobile station shall perform the uplink investigation procedure as defined in clause 3.3.1.2.1.1.

If the uplink investigation procedure is not successful, the mobile station shall give an indication to the upper layers and remain in group receive mode.

If the uplink investigation procedure is successful, the uplink access procedure is initiated as defined in clause 3.3.1.2.1.2.

If the uplink access procedure is successful, the mobile station shall give an indication to the upper layers and enter the group transmit mode.

If the uplink access procedure is not successful, the mobile station shall give an indication to the upper layers and remain in group receive mode.

3.4.15.2 Network side

3.4.15.2.1 Provision of messages on the VGCS or VBS channel downlink

3.4.15.2.1.1 General

The network shall provide all messages directed to mobile stations in group receive mode (see clause 3.4.15.1.2) in unacknowledged mode. Those messages which are also sent to the mobile station in group transmit mode in acknowledged mode have therefore to be repeated in addition as UI messages on the VGCS channel downlink if they shall also be received by mobile stations in group receive mode.

3.4.15.2.1.2 Provision of general information messages

In the case where the group call area exceeds one cell, the network should provide the SYSTEM INFORMATION TYPE 6 message on the SACCH related to the voice broadcast channel or voice group call channel.

In addition, if the group call area exceeds one cell, the network should provide SYSTEM INFORMATION TYPE 5 (possibly together with TYPE 5bis and 5ter) on the SACCH related to the voice broadcast channel or voice group call channel.

- The SYSTEM INFORMATION TYPE 5, TYPE 5bis and TYPE 5ter messages provide information on the BCCH frequency of the neighbour cells.
- The SYSTEM INFORMATION TYPE 6 message provides information on the location area of the current cell, possibly the status of the NCH (see conditions in clause 3.3.3), and an indication of whether paging channel restructuring has taken place.
- \$(ASCI)\$ The SYSTEM INFORMATION TYPE 10 message provides information for cell re-selection in group receive mode.

The network may also provide layer 3 messages for notification on the VGCS or VBS channel downlink FACCH.

3.4.15.2.1.3 Provision of messages related to the voice group call uplink channel

Only applicable for the support of VGCS talking.

The network shall provide UPLINK FREE messages on the main signalling link of all voice group call channels when the uplink is set free. The provision of UPLINK FREE messages shall be repeated as long as no uplink is granted to a mobile station.

The network shall provide an UPLINK BUSY message on the main signalling link of all voice group call when the uplink has been granted to a mobile station.

The network may send UPLINK FREE messages containing an uplink access request on the main signalling channel of the VGCS channels in order to obtain knowledge on whether any listening mobile is present in a cell or not. If there is no mobile station responding to the uplink access request, the network may decide to clear the VGCS channel in that cell.

3.4.15.2.2 Release of the VGCS or VBS Channels

If a release request for a voice group call is received from the upper layer, the network, after having released the RR connection with the mobile station in group transmit mode, shall stop the notification procedures for that voice group call and clear all related voice group call channels.

If a release request for a voice broadcast call is received from the upper layer, the network shall stop the notification procedures for that voice broadcast call and locally disconnect any channel related to the voice broadcast call.

3.4.15.3 Failure cases

If the mobile station looses the voice group call channel or voice broadcast channel, the mobile station shall search all possible channel positions on the current cell and the neighbour cells for which a channel description is known for that call.

3.4.16 Configuration change procedure

This is only applicable for multislot configuration. This message shall not be used to change a non-multislot configured channel to a multislot configured channel.

The configuration change procedure is used by the network to change the number of timeslots used in a multislot configuration. The procedure can also be used to change the channel mode of one or several channels and change their allocation. The main signalling link however, cannot be changed by the configuration change procedure. If a change of the main signalling link is needed, the assignment or handover procedures shall be used.

The network shall not initiate a new configuration change procedure before a response to the previous CONFIGURATION CHANGE COMMAND message has been received from the mobile station.

3.4.16.1 Configuration change initiation

The procedure starts when the network sends a CONFIGURATION CHANGE COMMAND to the mobile station on the main DCCH. The message indicates:

- which timeslots to use in uplink;
- which timeslots to use in downlink; and
- which channel set each timeslot belongs to.

The message may also contain definitions of the channel mode to be applied for one or several channel sets. If a previously undefined channel set is defined by the CONFIGURATION CHANGE COMMAND a definition of the channel mode for the new channel set shall be included in the message.

3.4.16.2 Configuration change completion

When the mobile station receives the CONFIGURATION CHANGE COMMAND it changes its configuration in accordance with the message contents and returns a CONFIGURATION CHANGE ACKNOWLEDGE on the same channel as the command message was received, confirming the new channel configuration. This applies irrespective of whether the new configuration is different from the one already in use by the mobile station or if it is the same.

3.4.16.3 Abnormal cases

If the CONFIGURATION CHANGE COMMAND message instructs the mobile station to use a Channel Configuration or Mode(s) that it does not support, or if the channel mode to use is not defined for all channel sets, the mobile station shall return a CONFIGURATION CHANGE REJECT message with cause 'channel mode unacceptable', and the mobile station shall remain on the current channel(s) and use the old Channel Configuration and Channel Mode(s).

3.4.17 Mapping of user data substreams onto timeslots in a multislot configuration

For multislot configurations the following rules for mapping of the user data substreams onto timeslots shall apply for each channel set:

- at initial assignment (using assignment procedure), the lowest numbered user data substream shall be mapped to the lowest numbered timeslot etc. in ascending order (the user data substreams are numbered 0 to (n-1), where n is the number of substreams)
- at channel changes using handover procedure or assignment procedure (where none of the timeslots are present in both the old and the new configuration), the lowest numbered user data substream shall be mapped to the lowest numbered timeslot etc. in ascending order (the user data substreams are numbered 0 to (n-1), where n is the number of substreams)
- at channel changes using assignment procedure (where at least one of the timeslots is the same in both the old and the new configuration) or configuration change procedure:
 - user data substream(s) mapped to timeslot(s) that are present in both the old and the new configuration shall continue to be mapped to the same timeslot(s) as before the channel change; and

 possibly added timeslot(s) shall carry the lowest numbered available user data substream so that the lowest numbered data substream among the added is mapped to the lowest numbered added timeslot and so on in ascending order.

NOTE: The user data substream number is a number that need not be the same as the inband number used for transparent services. The user data substream number is only used as a point of reference to a specific user data substream.

3.4.18 Handling of classmark information at band change

The coding of some fields in the *Mobile Station Classmark 1* and in the *Mobile Station Classmark 2* information elements depends on the band in use as described in clause 10.5.1.5 and clause 10.5.1.6. When a command to change the frequency band (GSM 900, DCS 1800) has been received (by, e.g., an IMMEDIATE ASSIGNMENT message, an ASSIGNMENT COMMAND message, a HANDOVER COMMAND message or a FREQUENCY REDEFINITION message) the following applies:

- When an IMMEDIATE ASSIGNMENT message is received, "the band used" for the purpose of coding the classmark information in the service request message, see clause 3.1.5, shall be understood as the band used for the CHANNEL REQUEST message or (one of) the band(s) indicated by the IMMEDIATE ASSIGNMENT message.
- For other cases "the band used" for the purpose of coding the classmark information shall be understood as one of the bands used or attempted to be used within the 2 seconds preceding the passing of the layer 3 message containing the classmark information to the layer 2 send queue as described in 3GPP TS 44.006.

NOTE: This definition means that when a band change is being done the network must take appropriate actions to handle possible ambiguities in the frequency band related information in the classmark.

3.4.19 Assignment to a Packet Data channel

This clause is only applicable to mobile stations supporting the <<GPRS>> option.

When in dedicated mode or in group transmit mode, the network may wish to change the resources used by a mobile station that supports the <<GPRS option>>. This change may be performed through the assignment to a Packet Data Channel procedure.

The purpose of the assignment to PDCH channel procedure is to completely modify the physical channel configuration of the mobile station without frequency redefinition or change in synchronization while staying in the same cell.

The assignment to PDCH procedure only commences in dedicated mode or in group transmit mode. This procedure cannot be used in the idle mode.

The assignment to PDCH procedure includes:

- the suspension of normal operation;
- the release of the main signalling link, and of the other data links as defined in clause 3.1.4, and the disconnection of TCHs if any;
- the deactivation of previously assigned channels (layer 1);
- The triggering of the establishment of a Temporary Block Flow.

The assignment to PDCH procedure is always initiated by the network.

3.4.19.1 Assignment to PDCH initiation

The network initiates the assignment to PDCH procedure by sending a PDCH ASSIGNMENT COMMAND message to the mobile station on the main signalling link. It then starts timer T3117.

NOTE: The network should take into account limitations of certain mobile stations to understand formats used in the Frequency List IE and Cell Channel Description IE used in the PDCH ASSIGNMENT COMMAND message, see clause 10.5.2.13 and clause 10.5.2.1b.

When sending this message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases is suspended until resumption is indicated. These RR messages can be deduced from clauses 3.4.3 and 8.8 Radio Resource management.

Upon receipt of the PDCH ASSIGNMENT COMMAND message, the mobile station initiates a local end release of dedicated mode link layer connections, disconnects the physical channels, commands the switching to the identified channels and obeys the procedures relevant to the establishment of the Temporary Block Flow. The mobile station starts timer T3190.

The PDCH ASSIGNMENT COMMAND message contains the description of either the uplink TBF or the downlink TBF

The information on the power to be used on the target TBF shall not affect the power used on the old channel(s).

A PDCH ASSIGNMENT COMMAND message may indicate a frequency change in progress, with a starting time and possibly alternative channel descriptions.

In the case of the reception of a PDCH ASSIGNMENT COMMAND message which contains only the description of a TBF to be used after the starting time, the mobile station shall wait up to the starting time before using the TBF. If the starting time has already elapsed, the mobile shall use the TBF as an immediate reaction to the reception of the message (see 3GPP TS 45.010 for the timing constraints).

If the message contains both the description of a TBF to be used after the indicated time and of a TBF to be used before, the mobile station uses the TBF as an immediate reaction to the reception of the message. If the moment the mobile station is ready to access is before the indicated time, the mobile station uses the TBF described for before the starting time. The mobile station then changes to the TBF described for after the starting time at the indicated time. New parameters can be frequency list, MAIO and HSN. Other parameters describing the allocated channels shall be identical to the parameters described for before the starting time. If the moment the mobile station is ready to access is after the starting time, the mobile station uses the TBF described for after the starting time.

If frequency hopping is applied, the cell allocation if present in the message is used to decode the mobile allocation. If the cell allocation is not included, the mobile station uses its current cell allocation, the current CA is the last CA received on the BCCH. Afterward, the current CA may be changed by some messages sent on the main signalling link containing a CA (the possible messages are: ASSIGNMENT COMMAND, HANDOVER COMMAND and FREQUENCY REDEFINITION). Note that there are cases in which the current CA is undefined, see clause 3.4.3.3.

The PDCH ASSIGNMENT COMMAND does not contain a cipher mode setting IE. Any RR layer ciphering that may have been applied in dedicated mode shall not be applied to the target TBF.

3.4.19.2 Completion of the Assignment to PDCH procedure

The network regards the procedure as successfully completed when RLC/MAC blocks are received from the mobile station on the target TBF. The network then stops timer T3117.

The mobile station regards the procedure as successfully completed when RLC/MAC blocks with any TFI are received on the new PDCH.

3.4.19.3 Abnormal cases

If the mobile station has no current CA and if it needs a CA to analyse the PDCH ASSIGNMENT COMMAND message, it stays on the current channel(s) and sends an ASSIGNMENT FAILURE message with cause "no cell allocation available".

If the PDCH ASSIGNMENT COMMAND message instructs the mobile station to use a Coding Scheme that it does not support then the mobile station shall return an ASSIGNMENT FAILURE message with cause "channel mode unacceptable", and the mobile station shall remain on the current channel(s) and uses the old Channel Description or Channel Mode(s).

If the PDCH ASSIGNMENT COMMAND message instructs the mobile station to use a frequency that it is not capable of, then the mobile station shall return an ASSIGNMENT FAILURE message with cause "frequency not implemented", and the mobile station shall remain on the current channel(s).

If the mobile station receives a PDCH ASSIGNMENT COMMAND message with a Frequency List IE indicating frequencies that are not all in one band, then the mobile station shall stay on the current channel(s) and send an ASSIGNMENT FAILURE message with cause "frequency not implemented". If the mobile station receives a PDCH ASSIGNMENT COMMAND message with a Mobile Allocation IE indexing frequencies that are not all in one band, then the mobile station shall stay on the current channel(s) and send an ASSIGNMENT FAILURE message with cause "frequency not implemented".

NOTE: A PDCH ASSIGNMENT COMMAND message sent to a multi band mobile station shall not be considered invalid because it indicates frequencies that are all in a different frequency band to that of the current channel.

On the mobile station side, if RLC/MAC blocks are not successfully received within T3190 seconds, the mobile station reactivates the old channels, reconnects the TCHs if any and triggers the establishment of the main signalling link. It then sends an ASSIGNMENT FAILURE message, cause "protocol error unspecified" on the main DCCH and resumes the normal operation, as if no assignment attempt had occurred. The operational parameters (e.g. ciphering mode) when returning on the old channel are those applied before the procedure.

When receiving the ASSIGNMENT FAILURE message, the network stops T3117.

If a lower layer failure happens while attempting to connect back to the old channels, the radio link failure procedure is applied (see clause 3.4.13.2).

On the network side, if timer T3117 elapses before either the network receives an RLC/MAC block from the mobile station on the new channel, or, an ASSIGNMENT FAILURE message is received on the old channels, then the old channels and the new resources are released, except that, if the old channel was a VGCS channel, the old channel shall be maintained and the uplink shall be set free.

On the network side, lower layer failure occurring on the old channels after the sending of the PDCH ASSIGNMENT COMMAND message are ignored.

3.4.20 RR-Network Controlled Cell Change Order

This clause is only applicable to mobiles supporting the <<GPRS>> option.

In dedicated mode or in group transmit mode, intracell or intercell change of channel(s) can be requested by the network RR sublayer. This change may be performed through the RR-network controlled cell change order procedure.

The purpose of the RR-network controlled cell change order procedure is to permit the complete modification of the channels allocated to the mobile station e.g. when the cell is changed. This procedure only commences while in dedicated mode or in group transmit mode.

The RR-network controlled cell change order procedure includes:

- The suspension of normal operation except for RR management (layer 3).
- The disconnection of the main signalling link, and of the other links via local end release (layer 2), and the disconnection of the TCH(s) if any.
- The disconnection and the deactivation of previously assigned channels and their release (layer 1).
- The complete acquisition of BCCH or PBCCH messages of the target cell. For a UTRAN target cell, broadcast channel acquisitions are defined in 3GPP TS 25.331 instead.
- The triggering of the establishment of a Temporary Block Flow. For a UTRAN target cell, the behaviour following channel establishment is defined in 3GPP TS 25.331 instead.

The RR-network controlled cell change order procedure is always initiated by the network.

3.4.20.1 RR-network controlled cell change order initiation

The network initiates the RR-network controlled cell change order procedure by sending a RR-CELL CHANGE ORDER message to the mobile station on the main DCCH. The network then starts timer T3119.

When a handover has taken place during dedicated connection, the network shall send a RR-CELL CHANGE ORDER message to the mobile station in order to establish TBF. In this case the target cell is equal to the old cell.

When sending this message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases, is suspended until resuming is indicated. These RR messages can be deduced from clause 3.4.3 and 8.5.1 "Radio Resource management".

Upon receipt of the RR-CELL CHANGE ORDER message, the mobile station starts timer T3134, and initiates, as described in clause 3.1.4, the release of link layer connections, disconnects the physical channels and commands the switching to the identified cell.

GERAN target cell:

The mobile station then performs a complete acquisition of BCCH or PBCCH messages (see 3GPP TS 44.060), and obeys the procedures relevant to the establishment of the Temporary Block Flow. The mobile station shall obey the RR-CELL CHANGE ORDER message irrespective of whether or not the mobile station has any knowledge of the relative synchronisation of the target cell to the serving cell.

UTRAN target cell:

Establishment of channel(s) is defined in 3GPP TS 25.331. A UTRAN capable mobile station shall obey the RR-CELL CHANGE ORDER message irrespective of whether the cell is known or not known (see 3GPP TS 25.133 and 3GPP TS 25.123).

The RR-CELL CHANGE ORDER message contains:

- The characteristics of the new cell that are necessary to identify it (i.e. BSIC + BCCH frequency). For a (3G) multi-RAT mobile station, the RR-CELL CHANGE ORDER message may contain information on a 3G target cell; in this case BSIC and BCCH frequency shall be ignored;
- the NC mode to be initially applied on the new cell.

The RR-CELL CHANGE ORDER does not contain a cipher mode setting IE. Any RR layer ciphering that may have been applied in dedicated mode shall not be applied to the target TBF or with the target cell.

3.4.20.2 Network controlled cell reselection completion

GSM target cell:

The network regards the procedure as successfully completed when it knows that communication has been established with that mobile station via the new cell (e.g. the network has received a RLC/MAC Block containing the mobile station's identity). The network then stops timer T3119.

The mobile station regards the procedure as successfully completed when it has received a response to a (PACKET) CHANNEL REQUEST message on the new cell which allocates it a resource on the new cell.

UTRAN target cell:

The network regards the procedure as successfully completed when it knows that communication has been established with that mobile station via the new cell (see 3GPP TS 25.331). The network then stops timer T3119.

The mobile station regards the procedure as successfully completed when it has received a successful response to its RRC Connection Request message, see 3GPP TS 25.331.

3.4.20.3 Abnormal cases

If the RR-CELL CHANGE ORDER message instructs the mobile station to use a frequency that it is not capable of, then the mobile station shall return a HANDOVER FAILURE message with cause "frequency not implemented", and the mobile station shall remain on the current channel(s).

GSM target cell:

On the mobile station side, if timer T3134 times out before a response to the (PACKET) CHANNEL REQUEST message has been received, or, if an IMMEDIATE ASSIGNMENT REJECT message or a PACKET ACCESS REJECT is received from the new cell, or, if the contention resolution procedure fails on the new cell then the mobile station shall reactivate the old channels, reconnect the TCHs if any and trigger the establishment of the main signalling link. It then sends a HANDOVER FAILURE message on the main signalling link and resumes normal operation as if no handover attempt had occurred. The operational parameters (e.g. ciphering mode) when returning on the old channel

are those applied before the RR-CELL CHANGE ORDER message was received. UTRAN target cell:

On the mobile station side, if timer T3134 times out before a response to the RRC Connection Request message has been received on the new cell, or if a RRC Connection Reject message including Inter-RAT info set to 'GSM' is received from the new cell, then the mobile station shall reactivate the old channels, reconnect the TCHs if any and trigger the establishment of the main signalling link. It then sends a HANDOVER FAILURE message on the main signalling link and resumes normal operation as if no handover attempt had occurred. The operational parameters (e.g. ciphering mode) when returning on the old channel are those applied before the RR-CELL CHANGE ORDER message was received.

When the HANDOVER FAILURE message has been received, the network stops T3119.

If a lower layer failure happens while attempting to connect back to the old channels, the standard rules are applied (cf. clause 3.4.13.2).

On the network side, if timer T3119 elapses before either the mobile station has been recognised on the new cell, or a HANDOVER FAILURE message is received on the old channels, then the old channels are released, except that, if the old channel was a VGCS channel, the old channel shall be maintained and the uplink shall be set free.

On the network side, lower layer failures occurring on the old channels after the sending of the RR-CELL CHANGE ORDER message are ignored.

3.4.21 Application Procedures

3.4.21.1 General

While in dedicated mode, the following applications associated with the Radio Resource management layer may be supported in the network and MS:

3.4.21.2 Location Services (LCS)

Common procedures are defined in the Radio Resource management layer to assist these applications.

3.4.21.3 Application Information Transfer

The Application Information Transfer procedure enables an Application on the network side and a peer application in the MS to exchange Application Protocol Data Units (APDUs).

3.4.21.3.1 Normal Procedure without Segmentation

The maximum size of an APPLICATION INFORMATION message is 251 octets as defined in 3GPP TS 44.006. Segmentation shall not be used when an APDU fits into a single APPLICATION INFORMATION message of maximum or smaller size.

```
Mobile Station Network

APPLICATION INFORMATION [APDU, C/R]

APPLICATION INFORMATION [APDU, C/R]
```

Figure 3.4.21.3.4.1/3GPP TS 44.018: Application Information Transfer without segmentation

Either the network or MS may send an APPLICATION INFORMATION message once the MS is in dedicated mode. The APDU Data in the APPLICATION INFORMATION message shall contain a complete APDU according to the protocol in use. The APDU ID IE identifies the protocol and associated application. The APDU Flags IE indicates "First or Only Segment", "Last or Only Segment" and conveys a C/R flag transparently between the communicating applications. The C/R Flag may be used to distinguish a command from other messages and a final response from a non-final response. The use of the C/R flag is defined with respect to each application. On receiving an APPLICATION

INFORMATION message, the receiving layer 3 entity shall deliver the message contents to the identified local application.

3.4.21.3.2 Normal Procedure with Segmentation

Segmentation is applicable when an APDU is too large to fit into a single APPLICATION INFORMATION message. The procedure is applicable for either direction of transfer.

```
Mobile Station or Network Network or Mobile Station

APPLICATION INFORMATION [APDU segment, First Segment, not Last Segment]

APPLICATION INFORMATION [APDU segment, not First Segment, not Last Segment]

APPLICATION INFORMATION [APDU segment, not First Segment, Last Segment, C/R]
```

Figure 3.4.21.3.2.1/3GPP TS 44.018: Application Information Transfer with segmentation

The sending layer 3 entity shall segment an APDU by dividing it into one or more segments exactly fitting into maximum sized APPLICATION INFORMATION messages plus a final segment fitting into an APPLICATION INFORMATION message of maximum size or smaller. Once segmented, the resulting APPLICATION INFORMATION messages shall be transferred in sequence to the data link layer for transmission, without being intersperced by other level 3 messages. The first APPLICATION INFORMATION message in the sequence shall indicate "First Segment" and "Not Last Segment". Subsequent APPLICATION INFORMATION messages except for the last shall indicate "Not First Segment" and "Not Last Segment". The last APPLICATION INFORMATION message shall indicate "Not First Segment" and "Last Segment" and shall include a C/R flag as provided by the sending application.

The receiving layer 3 entity shall reassemble any segmented APDU before transfer to the local application. The receiver may employ a timer to detect possible loss of APDU segments. If employed, the timer shall be started when the first APDU segment is received and cancelled after the last segment is received.

3.4.21.3.3 Abnormal Cases

APPLICATION INFORMATION messages are sent using "low" priority at the data link layer. This can lead to message loss or truncation when preempted by other "high" priority messages. A receiving layer 3 entity shall detect APDU truncation if an APPLICATION INFORMATION message is received carrying an APDU or APDU segment that is shorter than indicated by the length indicator for the APDU Data IE. This test is reliable because preemption in the data link layer guarantees that at least the first 2*N201 octets of any truncated message will be reliably transferred.

An APPLICATION INFORMATION transfer error shall be detected due to any of the following:

- a) Receipt of a truncated APDU or APDU segment;
- b) While performing APDU reassembly
 - receipt of any other layer 3 message defined to use SAPI 0 on the main DCCH;
 - receipt of an APDU or APDU segment indicating "First or Only Segment";
 - expiration of the reassembly timer (if supported);
- c) While not performing APDU reassembly, receipt of an APDU segment indicating "not First or only segment";
- d) Detection of any other error for a received message as defined in clause 8.

If APDU reassembly was in process when the error occurred, the receiving layer 3 entity shall discard the partially reassembled APDU and reprocess any received APDU or APDU segment that caused the error provided not an error defined in clause 8. In all other cases, any received APDU or APDU segment shall be discarded.

3.4.22 RR procedures related to packet resource establishment while in dedicated mode

The establishment of a packet resource is supported by procedures on the main DCCH when the mobile station is in dedicated mode. The procedures are only applicable to a mobile station supporting both GPRS and DTM. The procedures are optional for the network.

These procedures constitute a complement to the corresponding procedures for temporary block flow establishment using CCCH or PCCCH while in idle mode defined in 3GPP TS 44.018 and 3GPP TS 44.060, respectively.

The packet request procedure is initiated by the MS and it is described in clause 3.4.22.1. The packet notification procedure is initiated by the network and it is described in 3.4.22.2. The packet downlink assignment is initiated by the network and it is described in clause 3.4.22.3.

3.4.22.1 Packet request procedure while in dedicated mode

The packet request procedure using the main DCCH may be used to establish a packet resource to support the transfer of LLC PDUs in the direction from the mobile station to the network.

3.4.22.1.1 Entering the dual transfer mode

While in dedicated mode, the establishment of an uplink packet resource may be initiated by the RR entity of the mobile station using the packet request procedure. The procedure is triggered by a request from upper layers to transfer an LLC PDU; see 3GPP TS 24.007. The request from upper layers specifies:

- TLLI,
- radio priority,
- RLC mode associated with the packet transfer,
- LLC frame type,
- establishment cause and
- QoS information for the requested packet session.

Upon such a request, the RR entity of the mobile station

- if access to the network is allowed (clause 3.4.22.1.1.1), it initiates the packet request procedure as defined in clause 3.4.22.1.1.2;
- otherwise, it rejects the request.

If the request from upper layers indicates any signalling procedure the acknowledged RLC mode shall be used.

3.4.22.1.1.1 Permission to access the network

Access to the network is allowed:

- if dual transfer mode is supported in the cell.

NOTE: belonging to an authorised access class or special class, radio priority level and LSA permission are not considered since they only apply to a mobile station in idle mode.

3.4.22.1.1.2 Initiation of establishment of the packet request procedure

The mobile station initiates the establishment the packet resource by sending a DTM REQUEST message on the main DCCH.

The DTM REQUEST message contains:

- TLLI:
- Channel Request Description;
- Packet establishment cause which indicates, as applicable, a request to send user data, cell update, page response or a mobility management message;

Having sent the DTM REQUEST message, the mobile station starts timer T3148.

3.4.22.1.1.3 Answer from the network

3.4.22.1.1.3.1 Packet assignment

On receipt of a DTM REQUEST message the network may allocate an uplink packet resource. The packet uplink resource is assigned to the mobile station in one of the DTM assignment messages:

- DTM ASSIGNMENT COMMAND or
- PACKET ASSIGNMENT.

These messages are sent in acknowledged mode on the main DCCH. If frequency hopping is applied, the mobile station shall use the cell allocation defined for the cell to decode the mobile allocation.

The allocation of the uplink packet resource may imply the reallocation of the resource for the RR connection. In this case, the DTM ASSIGNMENT COMMAND message is used and the timer T3107 is started on the network side. The DTM ASSIGNMENT COMMAND message shall not be used to change to a dependent configuration.

When sending the DTM ASSIGNMENT COMMAND message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases is suspended until resumption is indicated. These RR messages can be deduced from clauses 3.4.22.1 and 8.8 Radio Resource management.

The PACKET ASSIGNMENT message is only used when the packet resource is a PDCH and no reallocation of the RR connection is needed.

On receipt of:

- DTM ASSIGNMENT COMMAND message or
- PACKET ASSIGNMENT message,

the mobile station shall stop T3148.

If the received DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message includes uplink packet resources, the mobile station shall proceed with the packet access. If the received message includes downlink packet resources and no uplink packet resources, the mobile station shall abort the packet access procedure and proceed with the procedure specified in clause 3.4.22.3, and then attempt an establishment of uplink TBF, using the applicable procedure specified in 3GPP TS 44.060.

Upon receipt of the DTM ASSIGNMENT COMMAND message, the mobile station initiates a local end release of link layer connections, disconnects the physical channels, commands the switching to the assigned channel and initiates the establishment of lower layer connection (this includes the activation of the channel, their connection and the establishment of the main signalling link).

3.4.22.1.1.3.2 RR reallocation only

If the mobile station receives an ASSIGNMENT COMMAND or HANDOVER COMMAND message during the packet access procedure, the mobile station shall abort the packet access procedure, stop timer T3148 and proceed with the channel assignment procedure as specified in clause 3.4.3 or the handover procedure as specified in clause 3.4.4. The mobile station shall then attempt an establishment of uplink TBF, using the procedure specified in clause 3.4.22.

If the mobile station receives a CHANNEL RELEASE message during the packet access procedure, the mobile station shall abort the packet access procedure, stop timer T3148 and proceed with the RR connection release procedure as specified in clause 3.4.13. The mobile station shall then attempt an establishment of uplink TBF.

If the mobile station receives an INTER SYSTEM TO UTRAN HANDOVER COMMAND message during the packet access procedure, the mobile station shall abort the packet access procedure, stop timer T3148 and proceed with the handover to UTRAN procedure as specified in clause 3.4.4a.

3.4.22.1.1.3.3 Packet request rejection

If the network cannot allocate the requested packet resource it may send the mobile station a DTM REJECT message in acknowledged mode on the main DCCH. This message contains a wait time ("wait indication" information element).

On receipt of the DTM REJECT message, the mobile station stops T3148, notifies upper layers of a packet resource establishment failure and starts timer T3142 with the indicated value.

The mobile station is not allowed to make a new attempt for packet access in the same cell until T3142 expires. The value of the wait indication (i.e. T3142) relates to the cell from which it was received.

3.4.22.1.1.4 Packet request completion

The completion of the packet request procedure depends on the actual assignment message used by the network:

- when the network sends a DTM ASSIGNMENT COMMAND message (i.e. reallocation of the CS resource is required), after the main signalling link is successfully established, the mobile station returns an ASSIGNMENT COMPLETE message, specifying cause "normal event", to the network on the main DCCH. The packet request procedure is completed for the mobile station when the ASSIGNMENT COMPLETE message is sent and for the network when it is received. The network then stops timer T3107. The sending of the ASSIGNMENT COMPLETE message on the mobile station side and its receipt on the network side allow the resumption of the transmission of signalling layer messages other than those belonging to RR management.
- when the network sends a PACKET ASSIGNMENT message, the packet request procedure is completed for the network when assignment message is sent and for the mobile station when it is received.

When the packet request procedure is completed, the mobile station has entered the dual transfer mode.

3.4.22.1.1.5 Abnormal cases

If a failure occurs on the mobile station side before the packet request procedure is completed, all the allocated packet resources are released, the mobile station remains on the current channel and upper layers are notified (packet resource establishment failure). If the received message was DTM ASSIGNMENT COMMAND, the mobile station shall return a DTM ASSIGNMENT FAILURE message with an appropriate cause value. In the following cases a packet resource establishment failure has occurred:

- If a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message indicates resources in a non-supported frequency band. The cause value is "frequency not implemented".
- If the information available in the mobile station after the reception of a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message does not satisfactorily define uplink packet resources. The cause value is "protocol error unspecified".
- If a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message includes a mobile allocation or a frequency list that indexes frequencies in more than one frequency band. The cause value is "frequency not implemented".
- If a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message assigns resources not compliant with the multislot capabilities of the mobile station. The cause value is "channel mode unacceptable".

- If the mobile station has no current CA and if it needs a CA to analyse the DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message. The cause value is "no cell allocation available".
- If the DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message instructs the mobile station to use a channel description or mode that it does not support. The cause value is "channel mode unacceptable".
- If the DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message does not include any uplink or downlink packet resources. The cause value is "protocol error unspecified".
- If the network commands the mobile station to reallocate the RR connection and the establishment of the main DCCH fails, the mobile station shall revert to the old channel and send a DTM ASSIGNMENT FAILURE message on the old main DCCH with cause value "lower layer failure".
- At expiry of timer T3148.

When receiving the ASSIGNMENT FAILURE message, the network stops T3107.

3.4.22.2 Packet notification procedure in dedicated mode

The packet notification procedure is initiated by the RR entity of the network side. It is triggered by a page request from the GMM sublayer, see 3GPP TS 24.007.

3.4.22.2.1 Packet notification initiation by the network

The network initiates the packet notification procedure by sending the mobile station a PACKET NOTIFICATION message on the main DCCH.

The network shall not send the PACKET NOTIFICATION message to a mobile station that does not support dual transfer mode operation. If a mobile station not supporting dual transfer mode receives this message, it shall ignore it and remain in dedicated mode.

3.4.22.2.2 Packet notification response

Upon receipt of the PACKET NOTIFICATION message, the RR sublayer of the mobile station indicates the receipt of a packet paging request to the GMM sublayer; see 3GPP TS 24.007.

3.4.22.3 Packet downlink assignment in dedicated mode

The packet downlink assignment procedure in dedicated mode may be used to establish a packet resource to support the transfer of LLC PDUs in the direction from the network to the mobile station.

This procedure is only applicable to a mobile station in dedicated mode and with no TBF allocated. If the mobile station already has an ongoing TBF, the establishment of the downlink packet resource is performed on the PACCH; see 3GPP TS 44.060.

The establishment of a downlink packet resource is initiated by the RR entity on the network side using the packet downlink assignment procedure in dedicated mode. The procedure is triggered by a request from upper layers to transfer an LLC PDU; see 3GPP TS 24.007. The request from upper layers specifies a QoS profile, an *RLC mode*, *DRX parameters* and an *MS classmark* associated with the packet transfer.

3.4.22.3.1 Initiation of the packet downlink assignment procedure in dedicated mode

The network initiates the packet downlink assignment procedure in dedicated mode by sending a DTM assignment message (i.e. DTM ASSIGNMENT COMMAND or a PACKET ASSIGNMENT) in acknowledged mode on the main DCCH.

When sending the DTM ASSIGNMENT COMMAND message on the network side, and when receiving it on the mobile station side, all transmission of signalling layer messages except for those RR messages needed for this procedure and for abnormal cases is suspended until resumption is indicated. These RR messages can be deduced from clauses 3.4.22.3 and 8.8 Radio Resource management.

The allocation of the downlink packet resource may imply the reallocation of the resource for the RR connection. In this case, the DTM ASSIGNMENT COMMAND message is used and the timer T3107 is started on the network side. The DTM ASSIGNMENT COMMAND message shall not be used to change to a dependent configuration.

The network shall not send any of the DTM assignment messages to a mobile station that does not support dual transfer mode operation. If a mobile station not supporting dual transfer mode receives any of these messages, it shall ignore it and remain in dedicated mode.

When a TBF is assigned:

- The assignment message may indicate a TBF starting time.
- If the mobile station receives the message before the TBF starting time has expired, it shall wait until the frame number indicated by the TBF starting time and switch to the assigned PDCH.
- If the mobile station receives the message after the TBF starting time has expired, it shall ignore the indicated TBF starting time and switch to the assigned PDCH.

Upon receipt of the DTM ASSIGNMENT COMMAND message, the mobile station initiates a local end release of link layer connections, disconnects the physical channels, commands the switching to the assigned channel and initiates the establishment of lower layer connection (this includes the activation of the channel, their connection and the establishment of the main signalling link).

3.4.22.3.2 Packet downlink assignment completion

The completion of the packet downlink assignment procedure while in dedicated mode depends on the actual assignment message used by the network:

- when the network sends a DTM ASSIGNMENT COMMAND message (i.e. reallocation of the RR connection is required), after the main signalling link is successfully established, the mobile station returns an ASSIGNMENT COMPLETE message, specifying cause "normal event", to the network on the main DCCH. The packet downlink assignment procedure is completed for the mobile station when the ASSIGNMENT COMPLETE message is sent and for the network when it is received. The network then stops timer T3107. The sending of the ASSIGNMENT COMPLETE message on the mobile station side and its receipt on the network side allow the resumption of the transmission of signalling layer messages other than those belonging to RR management.
- when the network sends a PACKET ASSIGNMENT message, the packet downlink assignment procedure is completed for the network when assignment message is sent and for the mobile station when it is received.

3.4.22.3.3 Abnormal cases

If a failure occurs on the mobile station side before the packet downlink assignment procedure is completed (packet establishment failure), all the allocated packet resources are released and the mobile station remains on the current channel. If the received message was a DTM ASSIGNMENT COMMAND, the mobile station shall return a DTM ASSIGNMENT FAILURE message with an appropriate cause value.

In the following cases a packet resource establishment failure has occurred:

- If a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message indicates packet resources in a non-supported frequency band. The cause value is "frequency not implemented".
- If the information available in the mobile station after the reception of a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message does not satisfactorily define downlink packet resources. The cause value is "protocol error unspecified".
- If a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message includes a mobile allocation or a frequency list that indexes frequencies in more than one frequency band. The cause value is "frequency not implemented".
- If a DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message assigns resources not compliant with the multislot capabilities of the mobile station. The cause value is "channel mode unacceptable".
- If the mobile station has no current CA and if it needs a CA to analyse the DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message. The cause value is "no cell allocation available".

- If the DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message instructs the mobile station to use a channel description or mode that it does not support. The cause value is "channel mode unacceptable".
- If the DTM ASSIGNMENT COMMAND or PACKET ASSIGNMENT message does not include any downlink packet resources, or if it includes uplink packet resources. The cause value is "protocol error unspecified".
- If the network commands the mobile station to reallocate the RR connection and the establishment of the main DCCH fails, the mobile station shall revert to the old channel and send a DTM ASSIGNMENT FAILURE message on the old main DCCH with cause value "lower layer failure".

When receiving the ASSIGNMENT FAILURE message, the network stops T3107.

3.4.22.4 Modification of packet resources while in DTM

When the mobile station is in dual transfer mode, the network or mobile station may wish to modify the allocated packet resource. When the mobile station has an ongoing TBF, the procedures described in 3GPP TS 44.060 shall be used. When the main DCCH is the only packet resource that the mobile station has, the RR procedures related to packet resource establishment while in dedicated mode shall be used.

3.4.23 RR procedures related to packet resource maintenance while in dual transfer mode

Once the mobile station enters the dual transfer mode, the existent procedures apply (see 3GPP TS 44.060). Some exceptions to the existent procedures while in dedicated mode are:

- When all packet resources have been released (or aborted), the mobile station returns to dedicated mode.
- When the mobile station is in dual transfer mode, it shall ignore any RR-CELL CHANGE ORDER or PACKET CELL CHANGE ORDER message and shall remain in dual transfer mode.
- When the mobile station receives a HANDOVER COMMAND or an ASSIGNMENT COMMAND message, it shall abandon the packet resource immediately, enter dedicated mode and perform the handover or assignment procedure, respectively.
- As stated in 3GPP TS 45.008, no GPRS measurement reporting is performed.

The mobile station remains in dual transfer mode until the RR connection or all the packet resources are released.

3.4.24 RR procedures related to packet resource release while in dual transfer mode

The release of a TBF shall follow the procedures in 3GPP TS 44.060.

In the case of the release of the RR connection while in dual transfer mode, the mobile station shall abandon the packet resource and, once in idle mode and packet idle mode, it may start a new establishment as described in 3GPP TS 44.060.

3.4.25 GPRS suspension procedure

3.4.25.1 General

This procedure enables the network to suspend GPRS services packet flow in the downlink direction. The support of this procedure is conditional to the support of GPRS by the mobile station.

When a mobile station which is IMSI attached for GPRS services (see 3GPP TS 24.008) enters the dedicated mode, and when the mobile station limitations make it unable to handle both dedicated mode and either packet idle mode or packet transfer mode simultaneously, the mobile station shall perform the GPRS suspension procedure.

The RR sublayer of the mobile station shall indicate a RR GPRS suspend condition to the MM sublayer, see 3GPP TS 24.008.

3.4.25.2 MS in class B mode of operation

The GPRS suspension procedure shall be used to suspend GPRS services when the mobile station is in class B mode of operation and a circuit switched service is initiated. It is also used when a mobile station in CS/PS mode of operation in UTRAN reverts to class B mode of operation in GSM.

The GPRS suspension procedure is initiated by the mobile station by sending a GPRS SUSPENSION REQUEST message with the appropriate suspension cause. This can be done as early as possible after access but shall be done after sending a CLASSMARK CHANGE message.

3.4.25.3 Dual transfer mode not supported

The GPRS suspension procedure shall be used to suspend GPRS services:

- a) when the mobile station in a class A mode of operation is handed over to a cell where the support of Class A mode of operation is not possible (e.g. a DTM mobile station entering a cell not supporting DTM)
- b) when the GPRS attached mobile station is in a cell that does not support DTM and a circuit switched service is initiated.

In case a), when the mobile station concludes that DTM is not supported in the new cell after the handover procedure is completed, it shall initiate the GPRS suspension procedure by sending a GPRS SUSPENSION REQUEST message with the suspension cause set to "DTM not supported in the cell".

In case b), the GPRS suspension procedure is initiated by the mobile station by sending a GPRS SUSPENSION REQUEST message with the suspension cause set to "DTM not supported in the cell". This can be done as early as possible after access but shall be done after sending a CLASSMARK CHANGE message.

3.4.26 GPRS Transparent Transport Procedure

While in dedicated mode, upper layers in the mobile station or in the network may request the transport of GPRS information transparently over the radio interface. This procedure is only applicable when

- the information from upper layers is signalling information and
- the GTTP length of the message is below the maximum indicated by the network.

In any other case, the RR procedures related to packet resource establishment while in dedicated mode apply.

The information from upper layers shall be carried inside the GTTP Information message. The GTTP Information message contains:

- the TLLI of the MS and
- the LLC PDU.

The GTTP messages are sent using "normal" priority at the data link layer.

3.5 RR procedures on CCCH related to temporary block flow establishment

The establishment of a temporary block flow (TBF) on a packet data physical channel is supported by procedures on CCCH when PCCCH is not provided in the cell. The procedures for temporary block flow establishment using CCCH are only applicable to a mobile station supporting GPRS. The procedures are optional for the network.

These procedures constitute a complement to the corresponding procedures for temporary block flow establishment using PCCCH, defined in 3GPP TS 44.060, and include the procedures using CCCH for *packet paging* (clause 3.5.1), *packet access* (clause 3.5.2) and *packet downlink assignment* (clause 3.5.3).

3.5.1 Packet paging procedure using CCCH

The network can initiate the packet paging procedure in order to cause upper layers in the mobile station to respond, see clause 4. The packet paging procedure can only be initiated by the network.

3.5.1.1 Packet paging initiation by the network

The packet paging procedure is initiated by the RR entity of the network side. It is triggered by a page request from the MM sublayer, see 3GPP TS 24.007.

The network initiates the paging procedure by sending a paging request message on an appropriate paging subchannel on CCCH or PCCCH. Paging initiation using a paging subchannel on CCCH is used when sending paging information to a mobile station and PCCCH is not present in the cell.

NOTE 1: There are three types of paging request messages that are applicable:

- PAGING REQUEST TYPE 1;
- PAGING REOUEST TYPE 2: and
- PAGING REQUEST TYPE 3.

In a PAGING REQUEST message used for the packet paging procedure, the mobile station shall be identified by the P-TMSI (GPRS TMSI) or its IMSI. If the mobile station is identified by the P-TMSI, it shall proceed as specified in clause 3.5.1.2.

If the mobile station identified by its IMSI, it shall parse the message for a corresponding *Packet Page Indication* field:

- if the *Packet Page Indication* field indicates a paging procedure for RR connection establishment, or the field is not present in the message, the mobile station shall proceed as specified in clause 3.3.2.2;
- if the *Packet Page Indication* field indicates a packet paging procedure, the mobile station shall proceed as specified in clause 3.5.1.2.

A PAGING REQUEST message may include more than one mobile station identification.

The mobile station in packet idle mode is required to receive and analyse the paging messages and immediate assignment messages sent on the paging subchannels on CCCH corresponding to the paging groups determined for it in packet idle mode, as specified in 3GPP TS 45.002. These messages contain a page mode information element.

NOTE 2: The possible immediate assignment messages are: the IMMEDIATE ASSIGNMENT, the IMMEDIATE ASSIGNMENT EXTENDED and the IMMEDIATE ASSIGNMENT REJECT messages.

The treatment of page mode information, including the procedure when the mobile station selects a new PCH, and the procedure if a message in a paging subchannel is not received correctly are defined in clause 3.3.2.1.1.

3.5.1.2 On receipt of a packet paging request

On the receipt of a paging request message, the RR sublayer of addressed mobile station indicates the receipt of a paging request to the MM sublayer, see 3GPP TS 24.007.

3.5.2 Packet access procedure using CCCH

The packet access procedure using CCCH may be used to establish a temporary block flow to support the transfer of LLC PDUs in the direction from the mobile station to the network. Establishment using one phase and two phase packet access, see 3GPP TS 44.060, are supported. The two phase packet access is supported by means of the single block or multiple block packet access option in this procedure, allowing the transfer of a PACKET RESOURCE REQUEST and possibly an ADDITIONAL MS RADIO ACCESS CAPABILITIES message to the network.

The single block packet access option in this procedure may also be used by a mobile station in packet idle mode to transfer an RLC/MAC control message other than the PACKET RESOURCE REQUEST message to the network, see clause 3.5.2.2.

3.5.2.1 Entering the packet transfer mode: packet access procedure

The establishment of an uplink temporary block flow may be initiated by the RR entity of the mobile station using the packet access procedure. The procedure is triggered by a request from upper layers to transfer a LLC PDU, see 3GPP TS 24.007. The request from upper layers specifies *radio priority* and an *RLC mode* associated with the packet transfer or it indicates that the packet to be transferred contains signalling.

Upon such a request,

- if access to the network is allowed (clause 3.5.2.1.1), the RR entity of the mobile station initiates the packet access procedure as defined in clause 3.5.2.1.2;
- otherwise, it rejects the request.

If the request from upper layers indicates signalling, the highest *radio priority* level shall be used at determination if access to the network is allowed, and the acknowledged RLC mode shall be used.

3.5.2.1.1 Permission to access the network

Access to the network is allowed:

- if the mobile station is a member of at least one authorized access class or special access class as defined in clause 3.3.1.1.1, and
- if packet access is allowed in the cell for the *radio priority* level associated with the packet transfer, as indicated by the PRIORITY_ACCESS_THR parameter broadcast in SI 13 message.
- if the cell belongs to one of the allowed LSAs for the mobile station, as indicated on the SIM, in the case where the mobile station is a LSA only access subscriber.

3.5.2.1.2 Initiation of the packet access procedure: channel request

The mobile station initiates the packet access procedure by scheduling the sending of CHANNEL REQUEST messages on RACH.

Alternatively, if the SI13 indicates that the cell is EGPRS capable and EGPRS PACKET CHANNEL REQUEST on RACH is supported in the cell, an EGPRS mobile station shall send the 11 bits EGPRS PACKET CHANNEL REQUEST messages at one-phase access attempts, two-phase access attempts and short access attempts (see 3GPP TS 44.060); if the SI 13 indicates that the cell is EGPRS capable and EGPRS PACKET CHANNEL REQUEST on RACH is not supported in the cell, the EGPRS mobile station shall use the 8 bit CHANNEL REQUEST message and shall initiate a two phase access request.

The mobile station then leaves the packet idle mode. In particular, the mobile station station shall ignore PAGING REQUEST messages indicating a packet paging procedure.

A mobile station belonging to GPRS MS class A or B shall continue to monitor its paging subchannel on CCCH for PAGING REQUEST messages indicating an establishment of RR connection. A mobile station belonging to GPRS MS class B may abort the packet access procedure at the receipt of a PAGING REQUEST messages indicating an establishment of RR connection.

The mobile station schedules CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages on RACH as defined in clause 3.3.1.1.2.

The CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages are sent on RACH and contain the parameters:

- an establishment cause which indicates packet access, and as applicable, a request for one phase packet access or single block packet access for a CHANNEL REQUEST (clause 9.1.8), or a request for one phase access or two phase access or short access for a EGPRS PACKET CHANNEL REQUEST (see 3GPP TS 44.060);
- a random reference which is drawn randomly from an uniform probability distribution for every new transmission.

If the requested RLC mode is *unacknowledged mode*, the mobile station shall request a single block packet access and attempt a two phase packet access. If the requested RLC mode is *unacknowledged EGPRS mode TBF*, the mobile station shall request and attempt a two phase packet access.

If the purpose of the packet access procedure is to send a Page Response, Cell update, for a GPRS Mobility Management or a GPRS Session Management procedure, (i.e. the access is for Layer 3 signalling only, and not for a Layer 3 data transfer), the mobile station shall request a one phase packet access by sending a CHANNEL REQUEST message.

If the purpose of the packet access procedure is to send a PACKET PAUSE message the mobile station shall request a single block packet access. Upon sending the first CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST message the mobile station shall start timer T3204. If timer T3204 expires before an IMMEDIATE ASSIGNMENT message granting a single block period on an assigned packet uplink resource is received, the packet access procedure is aborted. If the mobile station receives an IMMEDIATE ASSIGNMENT message during the packet access procedure indicting a packet downlink assignment procedure, the mobile station shall ignore the message.

After sending the first CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST message, the mobile station shall start listening to the BCCH; it shall also listen to the full downlink CCCH timeslot corresponding to its CCCH group. The mobile station shall perform signal strength measurements as they are defined for packet idle mode, see 3GPP TS 45.008.

Having sent the maximum number of CHANNEL REQUEST messages, the mobile station starts timer T3146. At expiry of timer T3146, the packet access procedure is aborted and a packet access failure is indicated to upper layers.

If the mobile station receives an IMMEDIATE ASSIGNMENT message during the packet access procedure indicating a packet downlink assignment procedure, the mobile station shall abort the packet access procedure and respond to the IMMEDIATE ASSIGNMENT message as specified in clause 3.5.3.1.2. The mobile station shall then attempt an establishment of uplink TBF, using the procedure specified in 3GPP TS 44.060 which is applicable in packet transfer mode.

3.5.2.1.3 Packet immediate assignment

3.5.2.1.3.1 On receipt of a CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST message

On receipt of a CHANNEL REQUEST message indicating a packet access, the network may allocate a temporary flow identity and assign a packet uplink resource comprising one PDCH for an uplink temporary block flow in GPRS TBF mode. On receipt of a EGPRS PACKET CHANNEL REQUEST message, the network may allocate a temporary flow identity and assign a packet uplink resource comprising one PDCH for an uplink temporary block flow in EGPRS TBF mode or GPRS TBF mode.

If the establishment cause in the CHANNEL REQUEST message indicates a request for a single block packet access, the network shall grant only the single block period on the assigned packet uplink resource if the network allocates resource for the mobile station. If the establishment cause in the EGPRS PACKET CHANNEL REQUEST message indicates a request for a two phase access, the network shall grant one or two radio blocks for the mobile station (within a Multi Block allocation) to send a PACKET RESOURCE REQUEST and possibly an ADDITIONAL MS RADIO ACCESS CAPABILITIES messages on the assigned packet uplink resource if the network allocates resource for the mobile station.

If the establishment cause in the CHANNEL REQUEST message indicates a request for one phase packet access, the network may grant either a one phase packet access or a single block packet access for the mobile station. If a single block packet access is granted, it forces the mobile station to perform a two phase packet access. If the establishment cause in the EGPRS PACKET CHANNEL REQUEST message indicates a request for one phase packet access, the network may grant either a one phase packet access or a two phase access (within a Multi Block allocation). If a multiple block packet access is granted, it forces the mobile station to perform a two phase packet access.

The packet uplink resource is assigned to the mobile station in an IMMEDIATE ASSIGNMENT message sent in unacknowledged mode on the same CCCH timeslot on which the network has received the CHANNEL REQUEST or the EGPRS PACKET CHANNEL REQUEST message. There is no further restriction on what part of the downlink CCCH timeslot the IMMEDIATE ASSIGNMENT message can be sent. Timer T3141 is started on the network side.

The IMMEDIATE ASSIGNMENT message contains:

- the information field of the CHANNEL REQUEST or the EGPRS PACKET CHANNEL REQUEST message and the frame number of the frame in which the CHANNEL REQUEST or the EGPRS PACKET CHANNEL REQUEST message was received;
- the packet channel description;
- the initial timing advance;
- the packet uplink assignment or EGPRS packet uplink assignment construction.

If frequency hopping is applied, the network may use the indirect encoding or the direct encoding of the frequency configuration in the *Packet Channel Description* information element. If the indirect encoding is used, the mobile station uses information received in system information or stored from a previous assignment to determine the frequency parameters, see 3GPP TS 44.060. If the direct encoding is used, the mobile station uses the cell allocation defined for the cell to decode the mobile allocation.

If the *indirect encoding* is used, the IMMEDIATE ASSIGNMENT message may contain a CHANGE_MARK_1 field. If that is present, the mobile station shall verify the validity of the SI13_CHANGE_MARK associated with the GPRS mobile allocation to which the message refers, see 3GPP TS 44.060. If the CHANGE_MARK_1 field and the SI13_CHANGE_MARK do not match, the message does not satisfactorily define a PDCH.

If the mobile station receives an IMMEDIATE ASSIGNMENT message and the *Dedicated mode or TBF* information element indicates that this is the first message in a two-message assignment, the mobile station shall continue to listen to the full CCCH. The network may send a second IMMEDIATE ASSIGNMENT message to the mobile station within two multiframe periods following the first IMMEDIATE ASSIGNMENT message, specifying the packet channel description and, if required, a mobile allocation for the assignment. The two IMMEDIATE ASSIGNMENT messages in a two-message assignment shall have the same contents of the *Request Reference* information elements.

If the mobile station does not receive the second IMMEDIATE ASSIGNMENT messages in a two-message assignment within two multiframe periods following the first message, the mobile station shall discard the first IMMEDIATE ASSIGNMENT message received.

On receipt of an IMMEDIATE ASSIGNMENT message or, in case of a two-message assignment, a matching pair of IMMEDIATE ASSIGNMENT messages corresponding to one of its 3 last CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages, the mobile station stops T3146 (if running), stops sending CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages, and switches to the assigned PDCH.

The content of the packet uplink assignment construction (respectively EGPRS packet uplink assignment construction indicates which type of packet access is granted: *one phase packet access* or *single (respectively multiple) block packet access*

3.5.2.1.3.2 One phase packet access

In the case the one phase packet access is granted, the packet uplink assignment construction contains:

- the temporary flow identity;
- the USF value, if the medium access method is dynamic allocation; or
 - the fixed allocation bitmap, if the medium access method is fixed allocation;
- the channel coding scheme for RLC data blocks;
- the power control parameters;
- the polling bit ;- optionally, the timing advance index (see 3GPP TS 45.010);
- optionally, the TBF starting time (note: TBF starting time is mandatory if medium access method is fixed allocation).

In addition, the EGPRS packet uplink assignment construction also contains :

- the EGPRS modulation and coding scheme;

- information whether retransmitted uplink data blocks shall be resegmented or not;
- the EGPRS window size to be used within the transmission;
- optionally a request for the mobile station to send its radio access capability information.

The medium access method is *dynamic allocation* or *fixed allocation* and the RLC mode is *acknowledged mode*, see 3GPP TS 44.060.

If the medium access method is *fixed allocation*, and the number of blocks allocated in the ALLOCATION_BITMAP is not sufficient to transfer all the RLC/MAC blocks that the MS has to transmit at the time the packet uplink assignment construction is received, the MS shall request additional resources by sending a PACKET RESOURCE REQUEST on one of the allocated blocks.

If the timing advance index (TAI) is included in the packet uplink assignment construction, the mobile station shall use the continuous update timing advance mechanism, see 3GPP TS 45.010, using PTCCH in the same timeslot as the assigned PDCH. If a timing advance index (TAI) field is not included, the continuous update timing advance mechanism shall not be used.

In case the packet uplink assignment or EGPRS packet uplink assignment construction contains a TBF starting time and the mobile station receives the message before the TBF starting time has expired, it shall wait until the frame number indicated by the TBF starting time before accessing the channel. If the mobile station receives the message after the TBF starting time has expired, it shall ignore the TBF starting time and may immediately access the channel. If the medium access method is *dynamic allocation*, the mobile station shall start timer T3164. Regardless of which allocation mode is used, the mobile station shall proceed with the contention resolution at one phase access defined in 3GPP TS 44.060.

If the Polling bit is set to 1, MS shall send a PACKET CONTROL ACKNOWLEDGEMENT message (see 44.060) on the assigned PDCH, in the uplink block specified by the TBF Starting Time. In this case the TBF Starting Time is used both to indicate when the assigned PDCH becomes valid and to specify the uplink block. If the TBF Starting Time is not present or has expired, the MS shall ignore the polling request.

When the mobile station switches to the assigned PDCH, it shall take the power control parameters received in the IMMEDIATE ASSIGNMENT message into account, perform signal strength measurements and apply output power control procedures as they are defined for packet transfer mode, see 3GPP TS 45.008.

When assigning an EGPRS TBF, the network may request information about radio access capabilities of the mobile station on one or several frequency bands within the IMMEDIATE ASSIGNMENT message; the list of frequency bands is ordered by the network starting with the most important and ending with the least important one. The mobile station shall provide the network with its radio access capabilities for the frequency bands it supports, in the same priority order as the one specified by the network, by sending a PACKET RESOURCE REQUEST message, and an ADDITIONAL MS RADIO ACCESS CAPABILITIES if all the requested informations do not fit in the PACKET RESOURCE REQUEST. If the mobile station does not support any frequency band requested by the network, it shall report its radio access capabilities for the BCCH frequency band. The mobile station shall indicate in the PACKET RESOURCE REQUEST if it will send more information about its radio access capabilities in the ADDITIONAL MS RADIO ACCESS CAPABILITIES message. The PACKET RESOURCE REQUEST and the ADDITIONAL MS RADIO ACCESS CAPABILITIES shall be sent within the one or two first radio blocks allocated for the mobile station on the assigned PDCH.

The network may request a retransmission of the PACKET RESOURCE REQUEST and the ADDITIONAL MS RADIO ACCESS CAPABILITIES messages. A request for retransmission of one or both of these messages shall be indicated in the PACKET UPLINK ACK/NACK message. The mobile station has to indicate within the PACKET RESOURCE REQUEST if the message is a retransmitted one.

3.5.2.1.3.3 Single block packet access

In the case the single block packet access is granted, the packet uplink resource description contains:

- the power control parameter setting;
- the TBF starting time.

If the mobile station receives the IMMEDIATE ASSIGNMENT message before the TBF starting time has expired, it shall wait until the block period indicated by the TBF starting time. The network shall use the TBF starting time to indicate the first frame number belonging to the single block period granted for packet access. The mobile station may either use the assigned block period to send a PACKET RESOURCE REQUEST message to initiate the two phase packet access procedure defined in 3GPP TS 44.060, or to send an RLC/MAC control message other than the PACKET RESOURCE REQUEST message to the network, see clause 3.5.2.2.

If the mobile station receives the IMMEDIATE ASSIGNMENT message after the TBF starting time has expired, a failure has occurred.

If a failure occurs and the packet access attempt was due to a request from upper layers to transfer a LLC PDU, a TBF establishment failure has occurred and the mobile station proceeds as specified in clause 3.5.2.1.5. If a failure occurs and the packet access attempt was due to the sending of an RLC/MAC control message, the packet access is aborted, the mobile station returns to packet idle mode.

3.5.2.1.3.3a Multiblock packet access

In the case the multiblock packet access is granted, the EGPRS packet uplink assignment description contains:

- timeslot number of the allocation and the number of blocks allocated;
- the power control parameter setting;
- the TBF starting time.

When assigning a multiblock packet access, the network may request information about radio access capabilities of the mobile station on one or several frequency bands within the IMMEDIATE ASSIGNMENT message and allocate one or two radio blocks for uplink control messages accordingly; the list of frequency bands is ordered by the network starting with the most important and ending with the least important one. The mobile station shall then provide the network with its radio access capabilities for the frequency bands it supports, in the same priority order as the one specified by the network, by sending a PACKET RESOURCE REQUEST message in the first radio block on the assigned PDCH, and an ADDITIONAL MS RADIO ACCESS CAPABILITIES immediately after the PACKET RESOURCE REQUEST message on the assigned PDCH if all the requested informations do not fit in the PACKET RESOURCE REQUEST and two radio blocks have been allocated by the network. If the mobile station does not support any frequency band requested by the network, it shall report its radio access capabilities for the BCCH frequency band in the PACKET RESOURCE REQUEST message. The mobile station shall indicate in the PACKET RESOURCE REQUEST if it will send more information about its radio access capabilities in the ADDITIONAL MS RADIO ACCESS CAPABILITIES message. If the mobile station has been allocated two radio blocks and all the requested informations fit in the PACKET RESOURCE REQUEST message, no ADDITIONAL MS RADIO ACCESS CAPABILITIES message shall be sent (see 3GPP TS 44.060). Instead, some uplink control block (e.g. packet measurement report, packet uplink dummy control block) may be sent by the mobile station.

The network may indicate in the next PACKET UPLINK ASSIGNMENT message a request for retransmission of the ADDITIONAL MS RADIO ACCESS CAPABILITIES message (see 3GPP TS 44.060).

If the mobile station receives the IMMEDIATE ASSIGNMENT message before the TBF starting time has expired, it shall wait until the block period indicated by the TBF starting time. The network shall use the TBF starting time to indicate the first frame number belonging to the multi block period granted for packet access. If the mobile station receives the IMMEDIATE ASSIGNMENT message after the TBF starting time has expired, a failure has occurred.

If a failure occurs and the packet access attempt was due to a request from upper layers to transfer a LLC PDU, a TBF establishment failure has occurred and the mobile station proceeds as specified in clause 3.5.2.1.5. If a failure occurs and the packet access attempt was due to the sending of an RLC/MAC control message, the packet access is aborted, the mobile station returns to packet idle mode.

3.5.2.1.3.4 Packet access rejection

The network may send to the mobile station an IMMEDIATE ASSIGNMENT REJECT message in unacknowledged mode on the same CCCH timeslot on which the channel request message was received. There is no further restriction on what part of the downlink CCCH timeslot an IMMEDIATE ASSIGNMENT REJECT message can be sent. This message contains the request reference and a wait indication.

On receipt of an IMMEDIATE ASSIGNMENT REJECT message corresponding to one of its 3 last CHANNEL REQUEST messages, the mobile station stops sending CHANNEL REQUEST messages, starts timer T3142 with the indicated value, ("wait indication" information element), starts T3146 if it has not already been started, and listens to the downlink CCCH until T3146 expires. During this time, additional IMMEDIATE ASSIGNMENT REJECT messages are ignored, but any immediate assignment corresponding to any other of its 3 last CHANNEL REQUEST messages make the mobile station follow the procedure in clause 3.5.2.1.3.1. If no such immediate assignment is received, the mobile station returns to packet idle mode and notify higher layers (TBF establishment failure) and notify higher layers (TBF establishment failure).

If the purpose of the packet access procedure is to send a PACKET PAUSE message and an IMMEDIATE ASSIGNMENT REJECT message is received, the packet access procedure is aborted.

If the mobile station has received responses from the network on all, or in case more than 3 were sent the last 3, of its CHANNEL REQUEST messages, it shall immediately return to packet idle mode and notify higher layers.

The mobile station is not allowed to make a new attempt for packet access in the same cell until T3142 expires, but may attempt packet access in an other cell after successful cell reselection for radio conditions reasons (see 3GPP TS 45.008). The value of the wait indication (i.e. T3142) relates to the cell from which it was received.

The mobile station may initiate RR connection establishment in the same cell before T3142 has expired, see clause 3.3.1.1.3.2.

3.5.2.1.4 Packet access completion

The one phase packet access procedure is completed at a successful contention resolution. The mobile station has entered the packet transfer mode. Timer T3141 is stopped on the network side. Timer T3164 is stopped on the mobile station side.

3.5.2.1.5 Abnormal cases

If a failure occurs on the mobile station side before a successful contention resolution procedure is completed, the allocated temporary block flow is released; the mobile station returns to packet idle mode, upper layers are notified (TBF establishment failure), transactions in progress are aborted:

- If a TLLI mismatch has occurred during the contention resolution procedure, and the repetition of the packet access has been repeated the maximum number of times as defined in 3GPP TS 44.060, a TBF establishment failure has occurred.
- If the information available in the mobile station, after the reception of an IMMEDIATE ASSIGNMENT message or the second IMMEDIATE ASSIGNMENT message of a two-message assignment, does not satisfactorily define a PDCH, a TBF establishment failure has occurred.
- If the mobile allocation indexes frequencies in more than one frequency band then a TBF establishment failure has occurred.
- If an IMMEDIATE ASSIGNMENT message indicates a PDCH in a non-supported frequency band then a TBF establishment failure has occurred.

On the network side, if timer T3141 elapses before a successful contention resolution procedure is completed, the newly allocated temporary block flow is released as specified in 3GPP TS 44.060 and the packet access is forgotten.

3.5.2.2 Sending an RLC/MAC control message: single block packet access procedure

The sending of an RLC/MAC control message other than the PACKET RESOURCE REQUEST message from a mobile station in packet idle mode to the network may be initiated by the RR entity on the mobile station side using the packet access procedure. If access to the network is allowed (clause 3.5.2.1.1), the packet access is done according to the procedures defined in clauses 3.5.2.1.2 and 3.5.2.1.3, using the single block packet access option defined in clause 3.5.2.1.3.3.

Further action depends on the RLC/MAC control message sent by the mobile station, see 3GPP TS 44.060. Unless otherwise indicated by the RLC/MAC control message, the mobile station remains in packet idle mode.

3.5.3 Packet downlink assignment procedure using CCCH

The packet downlink assignment procedure using CCCH may be used to establish a temporary block flow to support the transfer of LLC PDUs in the direction from the network to the mobile station.

This procedure may also be used to assign a single downlink block on a PDCH to support the transfer of an RLC/MAC control message from the network to a mobile station in packet idle mode, see 3.5.3.2.

3.5.3.1 Entering the packet transfer mode: packet downlink assignment procedure

The establishment of a downlink temporary block flow may be initiated by the RR entity on the network side using the packet downlink assignment procedure. The procedure is triggered by a request from upper layers to transfer a LLC PDU, see 3GPP TS 24.007. The request from upper layers specifies an optional *Priority* level, a QoS profile including the requested *RLC mode*, optional *DRX parameters*, and optional *IMSI* and an optional *MS Radio Access Capability* associated with the packet transfer.

Upon such a request, the network shall determine whether the mobile station is in packet idle mode or packet transfer mode. The packet downlink assignment procedure using CCCH is applicable when the mobile station is in packet idle mode and when there is no PCCCH present in the cell.

The network may allocate a temporary flow identity and assign a packet downlink resource comprising one PDCH for a downlink temporary block flow.

3.5.3.1.2 Initiation of the packet downlink assignment procedure

The network initiates the packet downlink assignment procedure by sending an IMMEDIATE ASSIGNMENT message in unacknowledged mode on the CCCH timeslot corresponding to CCCH group the mobile station belongs to. appropriate CCCH group is calculated from the IMSI, see 3GPP TS 45.002. The behaviour of the network when the RR entity does not receive the IMSI from the upper layers is implementation dependent for the calculation of the CCCH group where the IMMEDIATE ASSIGNMENT message has to be sent. If the mobile station is in non-DRX mode or if the RR entity does not receive the IMSI or the DRX parameters from the upper layers, there is no further restriction on what part of the downlink CCCH timeslot the IMMEDIATE ASSIGNMENT message, or the first part of the IMMEDIATE ASSIGNMENT message (in the case of a two-message assignment), can be sent. If the mobile station applies DRX, the IMMEDIATE ASSIGNMENT message, or the first part of the IMMEDIATE ASSIGNMENT message (in the case of a two-message assignment), shall be sent in a CCCH block corresponding to a paging group determined for the mobile station in packet idle mode, see 3GPP TS 45.002.

The IMMEDIATE ASSIGNMENT message contains:

- the packet channel description;
- the initial timing advance;
- the packet downlink assignment construction

The contents of the packet downlink assignment construction determines the further action. At the establishment of a downlink temporary block flow, the packet downlink assignment construction shall contain:

- the TLLI;
- the temporary flow identity;

- the RLC mode;
- the power control parameters;
- the polling bit;
- the initial timing advance validity flag;
- optionally, EGPRS Window Size (see 3GPP TS 44.060) and Link Quality Measurement Mode (see 3GPP TS 44.060);
 - optionally, the timing advance index (see 3GPP TS 45.010);
 - optionally, the TBF starting time.

If frequency hopping is applied, the network may use the indirect encoding or the direct encoding of the frequency configuration in the *Packet Channel Description* information element. If the indirect encoding is used, the mobile station uses information received in system information or stored from a previous assignment to determine the frequency parameters, see 3GPP TS 44.060. If the direct encoding is used, the mobile station uses the cell allocation defined for the cell to decode the mobile allocation.

If the *indirect encoding* is used, the IMMEDIATE ASSIGNMENT message may contain a CHANGE_MARK_1 field. If that is present, the mobile station shall verify the validity of the SI *change mark* associated with the GPRS mobile allocation to which the message refers, see 3GPP TS 44.060. If the CHANGE_MARK_1 field and the SI *change mark* do not match, the message does not satisfactorily define a PDCH.

If the mobile station receives an IMMEDIATE ASSIGNMENT message and the *Dedicated mode or TBF* information element indicates that this is the first message in a two-message assignment, the mobile station shall start listen to the full CCCH. The network may send a second IMMEDIATE ASSIGNMENT message to the mobile station within two multiframe periods following the first IMMEDIATE ASSIGNMENT message, specifying the packet channel description and, if required, a mobile allocation for the assignment. The two IMMEDIATE ASSIGNMENT messages in a two-message assignment shall have the same contents of the *Request Reference* information elements.

If the mobile station was operating in DRX mode when it received the first message of a two-message assignment, the network shall not send the second IMMEDIATE ASSIGNMENT message within the two block periods immediately following the first message.

If the mobile station does not receive the second IMMEDIATE ASSIGNMENT messages in a two-message assignment within two multiframe periods following the first message, the mobile station shall discard the first IMMEDIATE ASSIGNMENT message received. After the two multiframe periods following the first message, the mobile station may resume to DRX mode.

On receipt of an IMMEDIATE ASSIGNMENT message or, in case of a two-message assignment, a matching pair of IMMEDIATE ASSIGNMENT messages, the mobile station stops monitoring downlink CCCH and switches to the assigned PDCH and starts listening for downlink RLC/MAC blocks identified by the assigned TFI; it starts timer T3190.

The IMMEDIATE ASSIGNMENT message may indicate a TBF starting time. If the mobile station receives the message before the TBF starting time has expired, it shall wait until the frame number indicated by the TBF starting time, start timer T3190 and switch to the assigned PDCH. If the mobile station receives the message after the TBF starting time has expired, it shall ignore the indicated TBF starting time, immediately start timer T3190 and switch to the assigned PDCH.

When the mobile station switches to the assigned PDCH, it shall take the power control parameters received in the IMMEDIATE ASSIGNMENT message into account, perform signal strength measurements and apply output power control procedures as they are defined for packet transfer mode, see 3GPP TS 45.008.

If the Polling bit is set to 1, MS shall send a PACKET CONTROL ACKNOWLEDGEMENT message (see 44.060) on the assigned PDCH, in the uplink block specified by the TBF Starting Time. In this case the TBF Starting Time is used both to indicate when the assigned PDCH becomes valid and to specify the uplink block. If the TBF Starting Time is not present or has expired, the MS shall ignore the polling request.

An IMMEDIATE ASSIGNMENT message may indicate a timing advance index (TAI) in the packet timing advance IE. The mobile station shall then use the continuous update timing advance mechanism, see 3GPP TS 45.010, using

PTCCH in the same timeslot as the assigned PDCH. If there is no indication of a timing advance index, the continuous update timing advance mechanism shall not be used.

The TA_VALID flag indicates if the value of the *Timing Advance* IE is valid or not.

If the network does not have a valid timing advance value for the mobile station to include in the IMMEDIATE ASSIGNMENT message, the network shall use the procedures defined in 3GPP TS 44.060 on the assigned TBF, or the polling mechanism defined in the above paragraph if the PACKET CONTROL ACKNOWLEDGEMENT format is set to four access bursts, to obtain a timing advance value and to update the initially assigned timing advance value before the mobile station is required to transmit other than access burst on the newly assigned channel.

The packet downlink construction may optionally contain the EGPRS Window Size (see 3GPP TS 44.060) and Link Quality Measurement Mode (see 3GPP TS 44.060). The presence of these fields indicates EGPRS TBF mode (see 3GPP TS 44.060). If these fields are not present, this indicates GPRS TBF mode.

3.5.3.1.3 Packet downlink assignment completion

After having sent the packet downlink assignment, the network starts sending downlink RLC/MAC blocks on the assigned packet downlink resource and the packet downlink assignment procedure is completed at the network side.

On the mobile station side, the procedure is completed when the mobile station receives an RLC/MAC block identified by the assigned temporary flow identity. The mobile station stops timer T3190. The mobile station has entered packet transfer mode.

3.5.3.1.4 Abnormal cases

If a failure occurs on the mobile station side before the packet downlink assignment procedure is completed (TBF establishment failure), the temporary block flow is released; the mobile station returns to packet idle mode:

- If the mobile station does not receive a RLC/MAC block on the assigned PDCHs before timer T3190 expires, then a TBF establishment failure has occurred.
- If the information available in the mobile station, after the reception of an IMMEDIATE ASSIGNMENT message or the second IMMEDIATE ASSIGNMENT message of a two-message assignment, does not satisfactorily define a PDCH, then a TBF establishment failure has occurred.
- If the mobile allocation in the frequency parameters indexes frequencies in more than one frequency band, then a TBF establishment failure has occurred.

If an IMMEDIATE ASSIGNMENT message indicates a PDCH in a non-supported frequency band, then a TBF establishment failure has occurred.

3.5.3.2 Sending an RLC/MAC control message: single block packet downlink assignment procedure

The sending of an RLC/MAC control message to a mobile station in packet idle mode may be initiated by the RR entity on network side using the packet downlink assignment procedure. The procedure is used to assign a single downlink block on a PDCH for the transfer of the RLC/MAC control message. Using this procedure, the network shall not apply segmentation of the RLC/MAC control message.

The single downlink block assignment is done according to the procedure defined in 3.5.3.1.2, with the following exceptions:

The packet downlink assignment construction in the IMMEDIATE ASSIGNMENT message shall contain only:

- the TLLI; and
- the TBF starting time.

If the mobile station receives the IMMEDIATE ASSIGNMENT message before the TBF starting time has expired, it shall wait until the frame number indicated by the TBF starting time. The network shall use the TBF starting time to indicate the first frame number belonging to the single block period assigned to the mobile station. The mobile station shall switch to the assigned PDCH and attempt to decode an RLC/MAC control message in the assigned downlink block. Further action depends on the RLC/MAC control message sent by the network, see 3GPP TS 44.060. Unless

otherwise indicated by the RLC/MAC control message, the mobile station remains in packet idle mode. If the mobile station remains in packet idle mode, it shall continue to monitor downlink CCCH once the block period indicated by the TBF starting time has passed.

If the mobile station fails to decode or does not receive an RLC/MAC control message in the assigned downlink block, it shall remain in packet idle mode and continue to monitor downlink CCCH once the block period indicated by the TBF starting time has passed.

If the mobile station receives the IMMEDIATE ASSIGNMENT message after the TBF starting time has expired, it shall ignore the assignment.

If a failure occurs on the mobile station side due to any other reason, the mobile station shall ignore the assignment.

4 Elementary procedures for Mobility Management

See 3GPP TS 24.008.

5 Elementary procedures for circuit-switched Call Control

See 3GPP TS 24.008.

6 Support for packet services

See 3GPP TS 24.008.

7 Examples of structured procedures

See 3GPP TS 24.008.

8 Handling of unknown, unforeseen, and erroneous protocol data

8.1 General

The procedures specified in 3GPP TS 44.018 and call-related supplementary service handling in 3GPP TS 24.010 apply to those messages which pass the checks described in this clause.

This clause also specifies procedures for the handling of unknown, unforeseen, and erroneous protocol data by the receiving entity. These procedures are called "error handling procedures", but in addition to providing recovery mechanisms for error situations they define a compatibility mechanism for future extensions of the protocols.

Error handling concerning the value part of the Facility IE and of the SS Version Indicator IE are not in the scope of this technical specification. It is defined in 3GPP TS 24.010 and the 3GPP TS 04.8x series.

Clauses 8.1 to 8.8 shall be applied in order of precedence.

Most error handling procedures are mandatory for the mobile station.

Detailed error handling procedures in the network are implementation dependent and may vary from PLMN to PLMN. However, when extensions of this protocol are developed, networks will be assumed to have the error handling that is indicated in this clause as mandatory ("shall") and that is indicated as strongly recommended ("should"). Clauses 8.2,

8.3, 8.4, 8.5 and 8.7.2 do not apply to the error handling in the network applied to the receipt of initial layer 3 message: If the network diagnoses an error described in one of these clauses in the initial layer 3 message received from the mobile station, it shall either:

- try to recognize the classmark and then take further implementation dependent actions; or
- release the RR-connection.

Also, the error handling of the network is only considered as mandatory or strongly recommended when certain thresholds for errors are not reached during a dedicated connection.

In this clause the following terminology is used:

- An IE is defined to be syntactically incorrect in a message if it contains at least one value defined as "reserved" in clause 10, or if its value part violates rules of clause 10. However it is not a syntactical error that a type 4 IE specifies in its length indicator a greater length than defined in clause 10.
- A message is defined to have semantically incorrect contents if it contains information which, possibly dependent on the state of the receiver, is in contradiction to the resources of the receiver and/or to the procedural part (i.e. clauses 3, 4, 5) of 3GPP TS 44.018, 3GPP TS 24.010, or relevant 3GPP TS 04.8x series.

8.2 Message too short

When a message is received that is too short to contain a complete message type information element, that message shall be ignored, cf. 3GPP TS 24.007.

8.3 Unknown or unforeseen transaction identifier

See 3GPP TS 24.008.

8.4 Unknown or unforeseen message type

If a mobile station receives an RR message with message type not defined for the PD or not implemented by the receiver in unacknowledged mode, it shall ignore the message.

If a mobile station receives an RR message with message type not defined for the PD or not implemented by the receiver in acknowledged mode, it shall return a status message (RR STATUS) with cause # 97 "message type non-existent or not implemented".

If the network receives an RR message with message type not defined for the PD or not implemented by the receiver in a protocol state where reception of an unsolicited message with the given PD from the mobile station is not foreseen in the protocol, the network actions are implementation dependent. Otherwise, if the network receives a message with message type not defined for the PD or not implemented by the receiver, it shall ignore the message except that it should return a status message (RR STATUS) with cause #97 "message type non-existent or not implemented".

NOTE: A message type not defined for the PD in the given direction is regarded by the receiver as a message type not defined for the PD, see 3GPP TS 24.007 [20].

If the mobile station receives a message not compatible with the protocol state, the mobile station shall ignore the message except for the fact that, if an RR connection exists, it returns a status message (RR STATUS) with cause #98 "Message type not compatible with protocol state".

If the network receives a message not compatible with the protocol state, the network actions are implementation dependent.

8.5 Non-semantical mandatory information element errors

When on receipt of a message,

- an "imperative message part" error; or

- a "missing mandatory IE" error

is diagnosed or when a message containing:

- a syntactically incorrect mandatory IE; or
- an IE unknown in the message, but encoded as "comprehension required" (see clause 3GPP TS 24.007); or
- an out of sequence IE encoded as "comprehension required" (see clause 3GPP TS 24.007)

is received,

- the mobile station shall proceed as follows:

If the message is not one of the messages listed in clauses 8.5.1, 8.5.2, 8.5.3 the mobile station shall ignore the message except for the fact that, if an RR connection exists, it shall return a status message (RR STATUS) with cause # 96 "Invalid mandatory information".

- the network shall proceed as follows:

When the message is not one of the messages listed in clause 8.5.3 b), c), d) or e) and 8.5.5 a), b), d) or e), the network shall either

- try to treat the message (the exact further actions are implementation dependent), or
- ignore the message except that it should return a status message (RR STATUS) with cause # 96 "Invalid mandatory information".

8.5.1 Radio resource management

For the mobile station the following procedures shall apply:

- a) If the message is a CHANNEL RELEASE message, the actions taken shall be the same as specified in 3.5 "RR connection release".
- b) If the message is a PARTIAL RELEASE message, the reactions of the MS are for further study.

8.6 Unknown and unforeseen IEs in the non-imperative message part

8.6.1 IEIs unknown in the message

The MS shall ignore all IEs unknown in a message which are not encoded as "comprehension required" (see 3GPP TS 24.007).

The network shall take the same approach.

8.6.2 Out of sequence IEs

The MS shall ignore all out of sequence IEs in a message which are not encoded as "comprehension required" (see 3GPP TS 24.007).

The network should take the same approach.

8.6.3 Repeated IEs

If an information element with format T, TV, or TLV is repeated in a message in which repetition of the information element is not specified in clause 9 of this technical specification, only the contents of the information element appearing first shall be handled and all subsequent repetitions of the information element shall be ignored. When repetition of information elements is specified, only the contents of specified repeated information elements shall be handled. If the limit on repetition of information elements is exceeded, the contents of information elements appearing

first up to the limit of repetitions shall be handled and all subsequent repetitions of the information element shall be ignored.

The network should follow the same procedures.

8.7 Non-imperative message part errors

This category includes:

- syntactically incorrect optional IEs;
- conditional IE errors.

8.7.1 Syntactically incorrect optional IEs

The MS shall treat all optional IEs that are syntactically incorrect in a message as not present in the message.

The network shall take the same approach.

8.7.2 Conditional IE errors

When the MS upon receipt of an RR message diagnoses a "missing conditional IE" error or an "unexpected conditional IE" error or when it receives an RR message containing at least one syntactically incorrect conditional IE, it shall ignore the message except for the fact that, if an RR connection exists, it shall return a status message (RR STATUS) with cause value # 100 "conditional IE error".

When the MS upon receipt of a GMM or SM message diagnoses a "missing conditional IE" error or an "unexpected conditional IE" error or when it receives a GMM or SM message containing at least one syntactically incorrect conditional IE, it shall ignore the message and it shall return a status message (GMM STATUS or SM STATUS depending on the PD) with cause value # 100 "conditional IE error".

When the network receives a message and diagnose a "missing conditional IE" error or an "unexpected conditional IE" error or when it receives a message containing at least one syntactically incorrect conditional IE, the network shall either:

- try to treat the message (the exact further actions are implementation dependent), or
- ignore the message except that it should return a status message (RR STATUS) with cause # 100 "conditional IE error".

8.8 Messages with semantically incorrect contents

When a message with semantically incorrect contents is received, the foreseen reactions of the procedural part of 3GPP TS 44.018 (i.e. of clauses 3) are performed. If however no such reactions are specified, the MS shall ignore the message except for the fact that, if an RR connection exists, it returns a status message (RR STATUS) with cause value # 95 "semantically incorrect message".

The network should follow the same procedure except that a status message is not normally transmitted.

Semantic checking of the Facility information element value part (defined in 3GPP TS 24.080) is the subject of the technical specifications 3GPP TS 24.010 and the 3GPP TS 04.8x series.

8.9 Incomplete rest octets

When the number of octets in a rest octets information element is too low to contain the complete set of components, these components may be truncated by the sending entity (i.e the network) to fit into the rest octets information element. Whether or not truncation is allowed depends on the construction of the rest octets information element and must be explicit specified in the relevant rest octet definition.

If truncation is allowed, the mobile station shall assume the value 'L' for the missing components.

If the trunctation is not specified for the relevant rest octet definition, the sending entity must ensure that the complete set of components fit into the rest octets.

```
{<a><b><c>}
```

The above set may be truncated into

```
{<a><b>} or
{<a><b>} or
{<a>} or
null
```

9 Message functional definitions and contents

This clause defines the structure of the messages of those layer 3 protocols defined in 3GPP TS 44.018. These are standard L3 messages as defined in 3GPP TS 24.007 with the exception of those sent on the SCH, RACH, and the HANDOVER ACCESS message.

Each definition given in the present clause includes:

- a) a brief description of the message direction and use, including whether the message has:
 - 1. Local significance, i.e. relevant only on the originating or terminating access;
 - 2. Access significance, i.e. relevant in the originating and terminating access, but not in the network;
 - 3. Dual significance, i.e. relevant in either the originating or terminating access and in the network; or
 - 4. Global significance, i.e. relevant in the originating and terminating access and in the network.
- b) a table listing the information elements known in the message and their order of their appearance in the message. In messages for circuit-switched call control also a *shift* information element shall be considered as known even if not included in the table. All information elements that may be repeated are explicitly indicated. (V and LV formatted IEs, which compose the imperative part of the message, occur before T, TV, and TLV formatted IEs which compose the non-imperative part of the message, cf. 3GPP TS 24.007.) In a (maximal) sequence of consecutive information elements with half octet length, the first information element with half octet length occupies bits 1 to 4 of octet N, the second bits 5 to 8 of octet N, the third bits 1 to 4 of octet N+1 etc. Such a sequence always has an even number of elements.

For each information element the table indicates:

1. the information element identifier, in hexadecimal notation, if the IE has format T, TV, or TLV. Usually, there is a default IEI for an information element type; default IEIs of different IE types of the same protocol are different. If the IEI has half octet length, it is specified by a notation representing the IEI as a hexadecimal digit followed by a "-" (example: B-).

NOTE The same IEI may be used for different information element types in different messages of the same protocol.

- 2. the name of the information element (which may give an idea of the semantics of the element). The name of the information element (usually written in italics) followed by "IE" or "information element" is used in 3GPP TS 44.018 as reference to the information element within a message.
- 3. the name of the type of the information element (which indicates the coding of the value part of the IE), and generally, the referenced clause of clause 10 of 3GPP TS 44.018 describing the value part of the information element.
- 4. the presence requirement indication (M, C, or O) for the IE as defined in 3GPP TS 24.007.
- 5. The format of the information element (T, V, TV, LV, TLV) as defined in 3GPP TS 24.007.
- 6. The length of the information element (or permissible range of lengths), in octets, in the message, where "?" means that the maximum length of the IE is only constrained by link layer protocol, and in the case of the Facility IE by possible further conditions specified in 3GPP TS 24.010. This indication is non-normative.

c) clauses specifying, where appropriate, conditions for IEs with presence requirement C or O in the relevant message which together with other conditions specified in 3GPP TS 44.018 define when the information elements shall be included or not, what non-presence of such IEs means, and - for IEs with presence requirement C - the static conditions for presence and/or non-presence of the IEs (cf. 3GPP TS 24.007).

9.1 Messages for Radio Resources management

Table 9.1.1/3GPP TS 44.018 summarizes the messages for Radio Resources management.

Table 9.1.1/3GPP TS 44.018: Messages for Radio Resources management

Channel actablishment massages	Poforonoo
Channel establishment messages: ADDITIONAL ASSIGNMENT	Reference
IMMEDIATE ASSIGNMENT	9.1.1 9.1.18
IMMEDIATE ASSIGNMENT EXTENDED IMMEDIATE ASSIGNMENT REJECT	9.1.19
DTM ASSIGMENT FAILURE	9.1.20
DTM REJECT	9.1.12f 9.1.12g
DTM REQUEST	9.1.12g 9.1.12h
PACKET ASSIGNMENT	9.1.12ff
RR INITIALISATION REQUEST	9.1.28a
Ciphering messages:	Reference
CIPHERING MODE COMMAND	9.1.9
CIPHERING MODE COMPLETE	9.1.10
Handover messages:	Reference
ASSIGNMENT COMMAND	9.1.2
ASSIGNMENT COMPLETE	9.1.3
ASSIGNMENT FAILURE	9.1.4
DTM ASSIGMENT COMMAND	9.1.4 9.1.12e
INTER SYSTEM TO UTRAN HANDOVER COMMAND	9.1.15a
PDCH ASSIGNMENT COMMAND	9.1.13a
HANDOVER ACCESS	9.1.14
HANDOVER COMMAND	9.1.15
HANDOVER COMPLETE	9.1.16
HANDOVER FAILURE	9.1.17
RR-CELL CHANGE ORDER	9.1.21e
PHYSICAL INFORMATION	9.1.28
INTER SYSTEM TO CDMA2000 HANDOVER COMMAND	9.1.15b
Channel release messages:	Reference
CHANNEL RELEASE	9.1.7
PARTIAL RELEASE	9.1.26
PARTIAL RELEASE COMPLETE	9.1.27
Paging messages:	Reference
PACKET NOTIFICATION	9.1.21g
PAGING REQUEST TYPE 1	9.1.22
PAGING REQUEST TYPE 2	9.1.23
PAGING REQUEST TYPE 3	
I AON O REGOLOT THE C	9.1.24
PAGING RESPONSE	9.1.24 9.1.25
PAGING RESPONSE	9.1.25
PAGING RESPONSE System information messages:	9.1.25 Reference
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1	9.1.25 Reference 9.1.31
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2	9.1.25 Reference 9.1.31 9.1.32
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis	9.1.25 Reference 9.1.31 9.1.32 9.1.33
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35 9.1.36
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5bis SYSTEM INFORMATION TYPE 5ter	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35 9.1.36 9.1.37
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5bis	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35 9.1.36 9.1.37 9.1.38
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6 SYSTEM INFORMATION TYPE 6	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5bis SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39 9.1.40
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6 SYSTEM INFORMATION TYPE 7 SYSTEM INFORMATION TYPE 8 SYSTEM INFORMATION TYPE 9	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.34a 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39 9.1.40 9.1.41
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5bis SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6 SYSTEM INFORMATION TYPE 7 SYSTEM INFORMATION TYPE 8 SYSTEM INFORMATION TYPE 9 SYSTEM INFORMATION TYPE 9 SYSTEM INFORMATION TYPE 13	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39 9.1.40 9.1.41 9.1.42 9.1.43 9.1.43
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6 SYSTEM INFORMATION TYPE 7 SYSTEM INFORMATION TYPE 8 SYSTEM INFORMATION TYPE 9	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39 9.1.40 9.1.41 9.1.42 9.1.43
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5bis SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6 SYSTEM INFORMATION TYPE 7 SYSTEM INFORMATION TYPE 8 SYSTEM INFORMATION TYPE 9 SYSTEM INFORMATION TYPE 9 SYSTEM INFORMATION TYPE 13	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39 9.1.40 9.1.41 9.1.42 9.1.43 9.1.43
PAGING RESPONSE System information messages: SYSTEM INFORMATION TYPE 1 SYSTEM INFORMATION TYPE 2 SYSTEM INFORMATION TYPE 2bis SYSTEM INFORMATION TYPE 2ter SYSTEM INFORMATION TYPE 2quater SYSTEM INFORMATION TYPE 3 SYSTEM INFORMATION TYPE 4 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5 SYSTEM INFORMATION TYPE 5bis SYSTEM INFORMATION TYPE 5ter SYSTEM INFORMATION TYPE 6 SYSTEM INFORMATION TYPE 7 SYSTEM INFORMATION TYPE 8 SYSTEM INFORMATION TYPE 9 SYSTEM INFORMATION TYPE 13 SYSTEM INFORMATION TYPE 16	9.1.25 Reference 9.1.31 9.1.32 9.1.33 9.1.34 9.1.35 9.1.36 9.1.37 9.1.38 9.1.39 9.1.40 9.1.41 9.1.42 9.1.43 9.1.43a 9.1.43a 9.1.43d

SYSTEM INFORMATION TYPE 20	9.1.43.h
Specific messages for VBS/VGCS:	Reference
NOTIFICATION/FACCH	9.1.21a
NOTIFICATION/NCH	9.1.21b
NOTIFICATION RESPONSE	9.1.21d
TALKER INDICATION	9.1.44
UPLINK ACCESS	9.1.45
UPLINK BUSY	9.1.46
UPLINK FREE	9.1.47
UPLINK RELEASE	9.1.48
VGCS UPLINK GRANT	9.1.49
Measurement specific messages:	Reference
EXTENDED MEASUREMENT ORDER	9.1.51
EXTENDED MEASUREMENT REPORT	9.1.52
MEASUREMENT REPORT	9.1.21
MEASUREMENT INFORMATION	9.1.54
ENHANCED MEASUREMENT REPORT	9.1.55
Miscellaneous messages:	Reference
CHANNEL MODE MODIFY	9.1.5
CHANNEL MODE MODIFY ACKNOWLEDGE	9.1.6
CHANNEL REQUEST	9.1.8
CLASSMARK CHANGE	9.1.11
CLASSMARK ENQUIRY	9.1.12
UTRAN CLASSMARK CHANGE	9.1.11a
cdma2000 CLASSMARK CHANGE	9.1.11b
FREQUENCY REDEFINITION	9.1.13
MEASUREMENT REPORT	9.1.21
SYNCHRONIZATION CHANNEL INFORMATION	9.1.30
RR STATUS	9.1.29
GPRS SUSPENSION REQUEST	9.1.13b
Configuration Change messages:	Reference
CONFIGURATION CHANGE COMMAND	9.1.12b
CONFIGURATION CHANGE ACKNOWLEDGE	9.1.12c
CONFIGURATION CHANGE REJECT	9.1.12d
Application messages:	Reference
APPLICATION INFORMATION	9.1.53

9.1.1 Additional assignment

This message is sent on the main DCCH by the network to the mobile station to allocate an additional dedicated channel while keeping the previously allocated channels. See Table 9.1.1.1/3GPP TS 44.018.

Message type: ADDITIONAL ASSIGNMENT

Significance: dual

Direction: network to mobile station

Table 9.1.1.1/3GPP TS 44.018: ADDITIONAL ASSIGNMENT message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Additional Assignment	Message Type	M	V	1
	Message Type	10.4			
	Channel Description	Channel Description	M	V	3
		10.5.2.5			
72	Mobile Allocation	Mobile Allocation	С	TLV	3-10
		10.5.2.21			
7C	Starting Time	Starting Time	0	TV	3
	_	10.5.2.38			

9.1.1.1 Mobile Allocation

This information element shall appear if the Channel Description information element indicates frequency hopping.

If the *Channel Description* IE does not indicate frequency hopping and the information element is present it shall be considered as an IE unnecessary in the message.

9.1.1.2 Starting Time

This information element appears in particular if e.g., a change of frequency is planned.

9.1.2 Assignment command

This message is sent on the main DCCH by the network to the mobile station to change the channel configuration to another independent dedicated channel configuration, when no timing adjustment is needed. See Table 9.1.2.1/3GPP TS 44.018.

Message type: ASSIGNMENT COMMAND

Significance: dual

Direction: network to mobile station

Table 9.1.2.1/3GPP TS 44.018: ASSIGNMENT COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Assignment command Message Type	Message Type 10.4	M	V	1
	Description of the First Channel, after time	Channel Description 2 10.5.2.5a	M	V	3
	Power Command	Power Command 10.5.2.28	M	V	1
05	Frequency List, after time	Frequency List 10.5.2.13	С	TLV	4-132
62	Cell Channel Description	Cell Channel Description 10.5.2.1b	0	TV	17
10	Description of the multislot configuration	Multislot Allocation 10.5.2.21b	С	TLV	3-12
63	Mode of the First Channel (Channel Set 1)	Channel Mode 10.5.2.6	0	TV	2
11	Mode of Channel Set 2	Channel Mode 10.5.2.6	0	TV	2
13	Mode of Channel Set 3	Channel Mode 10.5.2.6	0	TV	2
14	Mode of Channel Set 4	Channel Mode 10.5.2.6	0	TV	2
15	Mode of Channel Set 5	Channel Mode 10.5.2.6	0	TV	2
16	Mode of Channel Set 6	Channel Mode 10.5.2.6	0	TV	2
17	Mode of Channel Set 7	Channel Mode 10.5.2.6	0	TV	2
18	Mode of Channel Set 8	Channel Mode 10.5.2.6	0	TV	2
64	Description of the Second Channel, after time	Channel Description 10.5.2.5	0	TV	4
66	Mode of the Second Channel	Channe I Mode 2 10.5.2.7	0	TV	2
72	Mobile Allocation, after time	Mobile Allocation 10.5.2.21	С	TLV	3-10
7C	Starting Time	Starting Time 10.5.2.38	0	TV	3
19	Frequency List, before time	Frequency List 10.5.2.13	С	TLV	4-132
1C	Description of the First Channel, before time	Channel Description 2 10.5.2.5a	0	TV	4
1D	Description of the Second Channel, before time	Channel Description 10.5.2.5	0	TV	4
1E	Frequency channel sequence before time	Frequency channel sequence 10.5.2.12	С	TV	10
21	Mobile Allocation, before time	Mobile Allocation 10.5.2.21	С	TLV	3-10
9-	Cipher Mode Setting	Cipher Mode Setting 10.5.2.9	0	TV	1
01	VGCS target mode Indication	VGCS target mode Indication 10.5.2.42a	0	TLV	3
03	Multi-Rate configuration	MultiRate configuration 10.5.2.21aa	0	TLV	4-8

9.1.2.1 Mode of the First Channel (Channel Set 1) and Mode of Channel Set "X" (2=<X=<8)

If this information element is not present the channel mode of the previously allocated channel or channels for Channel Set "X" (1=< X<=8) shall be assumed.

If Channel Set "X" is not defined for the configuration, the *Mode of Channel Set "X"* IE shall be considered as an IE unnecessary in the message.

NOTE: Clause 3.4.3.1 defines cases when one or several *Mode of Channel Set "X"* IEs shall be included in the message.

9.1.2.2 Description of the Second Channel

These information elements appear in the case of an assignment occurring if the mobile station carries two connections (on two dedicated channels, for the TCH/H + TCH/H configuration).

The connection using the channel previously defined in the *Description of the First Channel* IEs of an ASSIGNMENT COMMAND or HANDOVER COMMAND message shall use the channel defined in the *Description of the First Channel* IEs of the ASSIGNMENT COMMAND message defining the new configuration.

The channel described in the *Description of the First Channel* IEs carries the main DCCH. The SACCH used is the one associated with that channel.

9.1.2.3 Mode of the Second Channel

If no *Description of the Second Channel* IE is present but the information element is present it shall be considered as an IE unnecessary in the message.

This information element appears at least when the channel mode is changed for the channel defined in the second channel description information elements.

9.1.2.4 Mobile Allocation and Frequency List, after the starting time

If at least one of the channel descriptions for the starting time indicates frequency hopping, one and only one of the following information elements shall be present and apply to all assigned channels:

- Mobile Allocation, after time;
- Frequency List, after time.

If neither of the Channel Description IEs for after time indicate frequency hopping, if decoding of Channel Description IEs for before time does not require a frequency list for after time (see next clause), and one or both of the two information elements are present they shall be considered as IEs unnecessary in the message.

9.1.2.5 Starting Time

The *starting time* information element is included when the network wants the mobile station to change the frequency parameters of the channels more or less at the moment a change of channel occurs. In this case a number of information elements may be included to give the frequency parameters to be used before the starting time.

If the *starting time* information element is present and none of the information elements referring to before the starting time are present, the mobile station waits and accesses the channels at the indicated time.

If the *starting time* information element is present and at least one of the information elements referring to before the starting time is present, the mobile station does not wait for the indicated time and accesses the channel using the frequency parameters for before the starting time.

If the *starting time* information element is not present and at some of the information elements referring to before the starting time is present, these information elements shall be considered as IEs unnecessary in the message.

If the *description of the first channel, before time* IE is not present, the channel description to apply for before the time, if needed, is given by the *description of the first channel, after time* IE.

If the *description of the second channel, after time* IE is present, the *description of the second channel, before time* IE not present, and a description of the configuration for before the time needed, the channel configuration before the starting time is nevertheless of two traffic channels, and the channel description to apply to the second channel before the starting time is given by the *description of the second channel, after time* IE.

If the *starting time* IE is present and at least one of the channel descriptions for before the starting time indicates frequency hopping, one and only one of the following information elements may be present and applies before the starting time to all assigned channels:

- Mobile Allocation, before time IE;
- Frequency list, before time IE;
- Frequency channel sequence, before time IE.

If the *starting time* IE is present and at least one of the channel descriptions for before the starting time indicates frequency hopping, and none of the above mentioned IE is present, a frequency list for after the starting time must be present (see 9.1.2.4), and this list applies also for the channels before the starting time.

9.1.2.6 Reference cell frequency list

If any of the *mobile allocation* information elements is present, then the network must ensure that either the mobile station has received in a previous message the proper reference cell frequency list (CA), or that the *cell channel description* IE is present.

If the *cell channel description* IE is present, it is used to decode the *mobile allocation* IEs in the message, as well as in later messages until reception of a new reference cell frequency list or the cell is left.

9.1.2.7 Cell Channel Description

If present, this information element shall be used to decode the *Mobile Allocation* IE in the same message and in subsequent messages.

9.1.2.8 Cipher Mode Setting

If this information element is omitted, the mode of ciphering is not changed after the mobile station has switched to the assigned channel.

9.1.2.9 VGCS target mode Indication

This information element is identified as "comprehension required". Only mobile stations supporting « VGCS talking » are required to accept the presence of the element. The presence of the element shall trigger an exception handling if received by a mobile station not supporting « VGCS talking ».

This IE indicates which mode is to be used on the new channel (i.e. dedicated mode or group transmit mode). If this information element is not present, the mode shall be the same as on the previous channel.

The IE also indicates the group cipher key number for the group cipher key to be used on the new channel or if the new channel is non ciphered. If the information element is not present, the ciphering mode shall be the same as on the previous channel.

NOTE: A mobile station supporting VGCS talking shall not consider a syntactical error when this IE is present and the channel mode is not speech.

9.1.2.10 Description of the multislot allocation

This information element is included if so indicated by the channel type and TDMA offset field in the *Channel Description* information element and is used to assign channels that do not carry a main signalling link in a multislot configuration. It indicates how the used timeslots are divided into separate channel sets.

If the *Channel Description* IE does not require the presence of the information element the *Description of the multislot allocation* IE shall be considered as an IE unnecessary in the message.

If multislot configuration is indicated by the *Channel Description* IE but the *Multislot Allocation* IE is not present, all channels in the configuration belong to one channel set, "Channel Set 1".

NOTE: As a change of timeslot number cannot occur for the channel described after the starting time, the *Multislot Allocation* IE does not have to be included more than once.

9.1.2.11 Multi Rate configuration

This information element appears if the Mode of the First Channel indicates a multi-rate speech codec, and if the assigned configuration is new, i.e. it is different from the MultiRateconfiguration of a previously allocated channel in the cell.

9.1.3 Assignment complete

This message is sent on the main DCCH from the mobile station to the network to indicate that the mobile station has established the main signalling link successfully. See Table 9.1.3.1/3GPP TS 44.018.

Message type: ASSIGNMENT COMPLETE

Significance: dual

Direction: mobile station to network

Table 9.1.3.1/3GPP TS 44.018: ASSIGNMENT COMPLETE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Assignment Complete	Message Type	M	V	1
	Message Type	10.4			
	RR Cause	RR Cause	M	V	1
		10.5.2.31			

9.1.4 Assignment failure

This message is sent on the main DCCH on the old channel from the mobile station to the network to indicate that the mobile station has failed to seize the new channel. See Table 9.1.4.1/3GPP TS 44.018.

Message type: ASSIGNMENT FAILURE

Significance: dual

Direction: mobile station to network

Table 9.1.4.1/3GPP TS 44.018: ASSIGNMENT FAILURE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	М	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Assignment Failure	Message Type	М	V	1
	Message Type	10.4			
	RR cause	RR Cause	М	V	1
		10.5.2.31			

9.1.5 Channel mode modify

This message is sent on the main DCCH by the network to the mobile station to request the setting of the mode for the indicated channel(s). The message can be used to change the channel mode of a Multislot Configuration which only contains one channel set. See Table 9.1.5.1/3GPP TS 44.018.

Message type: CHANNEL MODE MODIFY

Significance: local

Direction: network to mobile station

Table 9.1.5.1/3GPP TS 44.018: CHANNEL MODE MODIFY message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Channel Mode Modify	Message Type	M	V	1
	Message Type	10.4			
	Channel Description	Channel Description 2	M	V	3
		10.5.2.5a			
	Channel Mode	Channel Mode	M	V	1
		10.5.2.6			
01	VGCS target mode Indication	VGCS target mode Indication	0	TLV	3
		10.5.2.42a			
03	Multi-Rate	MultiRate configuration	0	TLV	4-8
	configuration	10.5.2.21aa			

9.1.5.1 Channel Description

This is sufficient to identify the channel in the case of a TCH/H + TCH/H configuration. If used for a multislot configuration, the IE shall describe the present channel configuration with TN indicating the main channel. The IE shall not indicate a new channel configuration when included in the Channel Mode Modify message.

9.1.5.2 VGCS target mode Indication

This information element is identified as "comprehension required". Only mobile stations supporting « VGCS talking » are required to accept the presence of the element. The presence of the element shall trigger an exception handling if received by a mobile station not supporting « VGCS talking ».

This IE indicates which RR mode is to be used with the new channel mode (i.e. dedicated mode or group transmit mode). If this information element is not present, the RR mode shall be the same as with the previous channel mode.

The IE also indicates the group cipher key number for the group cipher key to be used on the new channel or if the new channel is non ciphered. If the information element is not present, the ciphering mode shall be the same as with the previous channel mode.

NOTE: A mobile station supporting VGCS Talking shall not consider a syntactical error if this IE is present and the channel mode is not speech.

9.1.5.3 Multi Rate configuration

This information element appears if the Channel Mode IE indicates a multi-rate speech codec.

9.1.6 Channel mode modify acknowledge

This message is sent on the main DCCH by the mobile station to the network to indicate the successful or unsuccessful execution of a channel mode modify request. See Table 9.1.6.1/3GPP TS 44.018.

Message type: CHANNEL MODE MODIFY ACKNOWLEDGE

Significance: local

Direction: mobile station to network

Table 9.1.6.1/3GPP TS 44.018: CHANNEL MODE MODIFY ACKNOWLEDGE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Channel Mode Modify	Message Type	M	V	1
	Acknowledge Message Type	10.4			
	Channel Description	Channel Description 2	M	V	3
		10.5.2.5a			
	Channel Mode	Channel Mode	M	V	1
		10.5.2.6			

9.1.7 Channel release

This message is sent on the main DCCH from the network to the mobile station to initiate deactivation of the dedicated channel used. See Table 9.1.7.1/3GPP TS 44.018.

Message type: CHANNEL RELEASE

Significance: dual

Table 9.1.7.1/3GPP TS 44.018: CHANNEL RELEASE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Channel Release Message Type	Message Type 10.4	М	V	1
	RR Cause	RR Cause 10.5.2.31	M	V	1
73	BA Range	BA Range 10.5.2.1a	0	TLV	6 - ?
74	Group Channel Description	Group Channel Description 10.5.2.14b	0	TLV	4-13
8x	Group Cipher Key Number	Group Cipher Key Number 10.5.1.10	С	TV	1
Сх	GPRS Resumption	GPRS Resumption 10.5.2.14c	0	TV	1
75	BA List Pref	BA List Pref 10.5.2.1c	0	TLV	3-?
76	UTRAN Freq List	UTRAN Freq List 10.5.2.1d	0	TLV	3-?

9.1.7.1 Channel description and mobile allocation

If a CHANNEL RELEASE is send to a mobile station which is in dedicated mode and which is involved in a voice group call or has responded to a notification to a voice group call or voice broadcast call, a group channel description may be included, describing the voice group call channel or voice broadcast channel to which the mobile station shall go after the channel release procedure.

Mobile stations not supporting VGCS listening or VBS listening shall consider this information element as unnecessary.

9.1.7.2 Group Cipher Key Number

This IE may be present only if the Group channel description IE is provided. The presence of this IE indicates that the mobile station shall use the Group Cipher Key indicated by the Group Cipher Key Number IE for deciphering on the VGCS or VBS channel. If this IE is not present, no ciphering is applied on the VGCS or VBS channel.

Mobile stations not supporting VGCS listening or VBS listening shall ignore this information element.

9.1.7.3 UTRAN Frequency List

This IE should only be sent to UTRAN capable mobile station. This information element is used to describe the UTRAN frequencies used by the network.

9.1.8 Channel request

This message is sent in random mode on the RACH. It does not follow the basic format. The possible formats are presented directly below, without reference to information fields. The order of bit transmission is defined in 3GPP TS 44.004.

The message is only one octet long, coded as shown in figure 9.1.8.1/3GPP TS 44.018 and Table 9.1.8.1/3GPP TS 44.018.




Figure 9.1.8.1/3GPP TS 44.018: CHANNEL REQUEST message content

ESTABLISHMENT CAUSE (octet 1)

This information field indicates the reason for requesting the establishment of a connection. This field has a variable length (from 3 bits up to 6 bits).

RANDOM REFERENCE (octet 1)

This is an unformatted field with variable length (from 5 bits down to 2 bits).

The Channel Request message is coded as follows:

(Random Reference field is filled with "x").

Table 9.1.8.1/3GPP TS 44.018: CHANNEL REQUEST message content

MS codes Accord	ding to Establishment cause:
bits	
8 1	
101xxxxx	Emergency call
110xxxxx	Call re-establishment; TCH/F was in use, or TCH/H was in use but the network does not set NECI bit to 1
011010xx	Call re-establishment; TCH/H was in use and the network sets NECI bit to 1
011011xx	Call re-establishment; TCH/H + TCH/H was in use and the network sets NECl bit to 1
100xxxxx	Answer to paging
0010xxxx	
0011xxxx	See Table 9.1.8.2/3GPP TS 44.018.
0001xxxx	
111xxxxx 1	Originating call and TCH/F is needed, or originating call and the network does not set NECI bit to 1, or procedures that can be completed with a SDCCH and the network does not set NECI bit to 1. note
0100xxxx	Originating speech call from dual-rate mobile station when TCH/H is sufficient and supported by the MS for speech calls and the network sets NECI bit to 1. See note 5
0101xxxx	Originating data call from dual-rate mobile station when TCH/H is sufficient and supported by the MS for data calls and the network sets NECI bit to 1. See note 5
000xxxxx	Location updating and the network does not set NECI bit to 1
0000xxxx	Location updating and the network sets NECI bit to 1
0001xxxx	Other procedures which can be completed with note 1an SDCCH and the network sets NECI bit to 1
011110xx 01111x0x 01111xx0	One phase packet access with request for single timeslot uplink transmission; one PDCH is needed.
01110xxx	Single block packet access; one block period on a PDCH is needed for two phase packet access or other RR signalling purpose.
01100111	LMU establishment, see note 2
01100xx0 01100x01	Reserved for future use
01100011	note 2a
01111111	Reserved, see note 2b

- NOTE 1: Examples of these procedures are: IMSI detach, Short Message Service (SMS), Supplementary Service management, Location Services.
- NOTE 2: If such messages are received by a network, an SDCCH shall be allocated.
- NOTE 2a: If such messages are received by a network, an SDCCH may be allocated.
- NOTE 2b:This value shall not be used by the mobile station on RACH. If such message is received by the network, it may be ignored. The value is used by the network to answer to a 11 bits EGPRS Packet Channel request.

Table 9.1.8.2/3GPP TS 44.018: CHANNEL REQUEST message (when answering to paging for RR connection establishment)

MS Capability Paging Indication (NOTE 3)	Full rate only	Dual rate (NOTE 5)	SDCCH only
Any channel	100xxxxx	100xxxxx	100xxxxx
SDCCH	0001xxxx	0001xxxx	0001xxxx
TCH/F	100xxxxx	0010xxxx	0001xxxx
TCH/H or TCH/F	100xxxxx	0011xxxx	0001xxxx

- NOTE 3: The Paging Indication is provided by the Channel Needed IE (or the Channel Needed field) associated with the page which triggered the sending of the CHANNEL REQUEST message.
- NOTE 4: In some cases the established connection will be used only to allow a default rejection mechanism to take place (typically the mobile station will send a RELEASE COMPLETE message with cause #88 "incompatible destination" as an answer to the incoming SETUP message).

NOTE 5: In this clause, "dual rate capability" means that the MS supports both full rate and half-rate channels at least for the signalling channel mode. In addition, it may support either speech channel mode, or data channel modes, or both on half-rate channels.

9.1.9 Ciphering mode command

This message is sent on the main DCCH from the network to the mobile station to indicate that the network has started deciphering and that enciphering and deciphering shall be started in the mobile station, or to indicate that ciphering will not be performed. See Table 9.1.9.1/3GPP TS 44.018.

Message type: CIPHERING MODE COMMAND

Significance: dual

Direction: network to mobile station

Table 9.1.9.1/3GPP TS 44.018: CIPHERING MODE COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Cipher Mode Command	Message Type	M	V	1
	Message Type	10.4			
	Ciphering Mode Setting	Cipher Mode Setting	M	V	1/2
		10.5.2.9			
	Cipher Response	Cipher Response	М	V	1/2
		10.5.2.10			

9.1.10 Ciphering mode complete

This message is sent on the main DCCH from the mobile station to the network to indicate that enciphering and deciphering has been started in the MS. See Table 9.1.10.1/3GPP TS 44.018.

Message type: CIPHERING MODE COMPLETE

Significance: dual

Direction: mobile station to network

Table 9.1.10.1/3GPP TS 44.018: CIPHERING MODE COMPLETE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Cipher Mode Complete	Message Type	M	V	1
	Message Type	10.4			
17	Mobile Equipment	Mobile Identity	0	TLV	3-11
	Identity	10.5.1.4			

9.1.10.1 Mobile Equipment Identity

This information element is included if and only if the mobile station shall include its IMEISV (see clause 3.4.7). This information element shall only refer to IMEISV.

9.1.11 Classmark change

This message is sent on the main DCCH by the mobile station to the network to indicate a classmark change or as a response to a classmark enquiry. See Table 9.1.11.1/3GPP TS 44.018.

Message type: CLASSMARK CHANGE

Significance: dual

Direction: mobile station to network

Table 9.1.11.1/3GPP TS 44.018: CLASSMARK CHANGE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Classmark Change	Message Type	M	V	1
	Message Type	10.4			
	Mobile Station	Mobile Station Classmark 2	M	LV	4
	Classmark	10.5.1.6			
20	Additional Mobile Station	Mobile Station Classmark 3	С	TLV	3-14
	Classmark Information	10.5.1.7			

9.1.11.1 Additional Mobile Station Classmark Information

This IE shall be included if and only if the CM3 bit in the *Mobile Station Classmark* IE is set to 1.

9.1.11.2 Mobile Station Classmark

This IE shall include for multiband MS the Classmark 2 corresponding to the frequency band in use.

9.1.11a UTRAN Classmark Change

This message is sent on the main DCCH by the mobile station to the network to indicate a UTRAN Classmark Change or as a response to a UTRAN classmark enquiry. See Table 9.1.11a.1/3GPP TS 44.018.

Message type: UTRAN CLASSMARK CHANGE

Significance: dual

Direction: mobile station to network

Table 9.1.11a.1/3GPP TS 44.018: UTRAN CLASSMARK CHANGE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	UTRAN Classmark Change	Message Type	M	V	1
	Message Type	10.4			
	UTRAN Classmark	UTRAN Classmark	M	LV	2-n
		10.5.2.7a			

NOTE: The ASN.1 coding of the INTER RAT HANDOVER INFO (see 3GPP TS 25.331) included in *UTRAN Classmark* information element is done such that segmentation of the UTRAN CLASSMARK CHANGE message and hence excessive call setup time can be avoided if the network uses similar values of version numbers (Value Tags).

9.1.11b cdma2000 Classmark Change

This message is sent on the main DCCH by the mobile station to the network to indicate a cdma2000 Classmark Change or as a response to a classmark enquiry with cdma2000 Capabilities specified in the Classmark Enquiry Mask. See Table 9.1.11b.1/3GPP TS 44.018.

Message type: CDMA2000 CLASSMARK CHANGE

Significance: dual

Direction: mobile station to network

Table 9.1.11b.1/3GPP TS 44.018: CDMA2000 CLASSMARK CHANGE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	cdma2000 Classmark Change Message Type	Message Type 10.4	М	V	1
	Terminal Information	Terminal Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Security Status	Security Status TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Band Class Information	Band Class Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Power Class Information	Power Class Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Operating Mode Information	Operating Mode Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Service Option Information	Service Option Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Multiplex Option Information	Multiplex Option Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Power Control Information	Power Control Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Capability Information	Capability Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Channel Configuration Capability Information	Channel Configuration Capability Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Extended Multiplex Option Information	Extended Multiplex Option Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Band Subclass Information	Band Subclass Information TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n
	Encryption Capability	Encryption Capability TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833	M (1)	LV	1-n

¹ The variable part of the Information Element is coded as the corresponding Information Record defined in TIA/EIA/IS-2000-5-A and TIA/EIA/IS-833. The bit number 1 of the first octet of each Information Element shall be coded as the first bit of the first field of the corresponding Information Record defined in TIA/EIA/IS-

2000-5-A and in TIA/EIA/IS-833, reading the fields defined in TIA/EIA/IS-2000-5-A and in TIA/EIA/IS-833 from left to right.

9.1.11c (void)

9.1.12 Classmark enquiry

This message is sent on the main DCCH by the network to the mobile station to request classmark information and/or (for a multi-RAT mobile station) UTRAN information and/or CDMA2000 capability information. See Table 9.1.12.1/3GPP TS 04.18.

Message type: CLASSMARK ENQUIRY

Significance: dual

Direction: network to mobile station

Table 9.1.12.1/3GPP TS 44.018: CLASSMARK ENQUIRY message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Classmark Enquiry Message Type	Message Type 10.4	M	V	1
10	Classmark Enquiry Mask	Classmark Enquiry Mask 10.5.2.7c	0	TLV	3

9.1.12a (void)

9.1.12b Configuration change command

This message is sent on the main DCCH from the network to the mobile station to change the channel configuration of a multislot configuration. See Table 9.1.12b.1/3GPP TS 44.018.

Message type: CONFIGURATION CHANGE COMMAND

Significance: dual

Direction: network to mobile station

Table 9.1.12b.1/3GPP TS 44.018: CONFIGURATION CHANGE COMMAND message contents

IEI	Information element	Type/Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Configuration change Message Type	Message Type 10.4	M	V	1
	Description of the multislot configuration	Multislot Allocation 10.5.2.21b	M	LV	2-11
63	Mode of Channel Set 1	Channel Mode 10.5.2.6	0	TV	2
11	Mode of Channel Set 2	Channel Mode 10.5.2.6	0	TV	2
13	Mode of Channel Set 3	Channel Mode 10.5.2.6	0	TV	2
14	Mode of Channel Set 4	Channel Mode 10.5.2.6	0	TV	2
15	Mode of Channel Set 5	Channel Mode 10.5.2.6	0	TV	2
16	Mode of Channel Set 6	Channel Mode 10.5.2.6	0	TV	2
17	Mode of Channel Set 7	Channel Mode 10.5.2.6	0	TV	2
18	Mode of Channel Set 8	Channel Mode 10.5.2.6	0	TV	2

9.1.12b.1 Description of the multislot allocation

This information element is used to assign channels that do not carry the main signalling link in a multislot configuration. It indicates if multiple channel sets are used.

9.1.12b.2 Mode of Channel Set "X" (1=<X<=8)

If this information element is not present the channel mode of the previously allocated channel or channels for Channel Set "X" shall be assumed.

If Channel Set "X" is not defined for the configuration, the *Mode of Channel Set "X"* IE shall be considered as an IE unnecessary in the message.

NOTE: Clause 3.4.16.1 defines cases when one or several *Mode of Channel Set "X"* IEs shall be included in the message.

9.1.12c Configuration change acknowledge

This message is sent on the main DCCH from the mobile station to the network to indicate that the mobile station has changed to the ordered channel configuration successfully. See Table 9.1.12c.1/3GPP TS 44.018.

Message type: CONFIGURATION CHANGE ACKNOWLEDGE

Significance: dual

Direction: mobile station to network

Table 9.1.12c.1/3GPP TS 44.018: CONFIGURATION CHANGE ACKNOWLEDGE message contents

IEI	Information element	Type/Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
	-	10.3.1			
	Configuration Change	Message Type	M	V	1
	Acknowledge Message Type	10.4			

9.1.12d Configuration change reject

This message is sent on the main DCCH from the mobile station to the network to indicate that the mobile station has not managed to switch to the channel configuration ordered by the configuration change command and is still using the previous configuration. See Table 9.1.12d.1/3GPP TS 44.018.

Message type: CONFIGURATION CHANGE REJECT

Significance: dual

Direction: mobile station to network

Table 9.1.12d.1/3GPP TS 44.018: CONFIGURATION CHANGE REJECT message contents

IEI	Information element	Type/Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Configuration Change Reject	Message Type	M	V	1
	Message Type	10.4			
	RR Cause	RR Cause	M	V	1
		10.5.2.31			

9.1.12e DTM Assignment Command

This message is sent on the main DCCH by the network to the mobile station to change the channel configuration to a configuration with CS and packet connections when no timing adjustment is needed and reallocation of the CS timeslot is required. See Table 9.1.12e.1/3GPP TS 44.018.

Message type: DTM ASSIGNMENT COMMAND

Significance: dual

Direction: network to mobile station

Table 9.1.12e.1/3GPP TS 44.018: DTM ASSIGNMENT COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	DTM Assignment Command Message Type	Message Type 10.4	M	V	1
	CS Power Command	Power Command 10.5.2.28	M	V	1
	Description of the CS Channel	Channel Description 10.5.2.5	M	V	3
	GPRS broadcast information	GPRS broadcast information 10.5.2.14d	M	LV	7 - n
10	Cell Channel Description	Cell Channel Description 10.5.2.1b	0	TV	17
11	Channel mode	Channel mode 10.5.2.6	0	TV	2
12	Frequency List	Frequency List 10.5.2.13	С	TLV	4 - 132
13	Mobile Allocation	Mobile Allocation 10.5.2.21	С	TLV	3 - 10
14	TBF starting time	Starting time 10.5.2.38	0	TV	3
15	Description of the Uplink Packet Channel Assignment	RR Packet Uplink Assignment 10.5.2.25c	0	TLV	3 - n
16	Description of the Downlink Packet Channel Assignment	RR Packet Downlink Assignment 10.5.2.25d	0	TLV	3 - n

9.1.12e.1 TBF starting time

If this information element is not present or has elapsed, the mobile station shall switch to the assigned PDCH(s). Otherwise, the mobile station shall wait until the point in time denoted by the TBF Starting Time and then switch to the assigned PDCH(s).

The mobile station shall establish the RR connection immediately, irrespective of the TBF starting time.

9.1.12e.2 RR Packet Uplink Assignment and RR Packet Downlink Assignment IEs

These information elements are optional, but at least one of them shall be present.

9.1.12f DTM Assignment Failure

This message is sent on the main DCCH from the mobile station to the network to indicate that the mobile station has failed to seize the new packet channel. See Table 9.1.12f.1/3GPP TS 44.018.

Message type: DTM ASSIGNMENT FAILURE

Significance: dual

Direction: mobile station to network

Table 9.1.12f.1/3GPP TS 44.018: DTM ASSIGNMENT FAILURE message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	DTM Assignment Failure Message	Message Type	М	V	1
	Type	10.4			
	RR cause	RR Cause	М	V	1
		10.5.2.31			

9.1.12g DTM Information

This message is sent on the main DCCH by the network to the mobile station to provide the mobile station with necessary information for the operation in dual transfer mode. See Table 9.1.12g.1/3GPP TS 44.018.

Message type: DTM INFORMATION

Significance: dual

Table 9.1.12g.1/3GPP TS 44.018: DTM INFORMATION message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	DTM Information Message Type	Message Type	M	V	1
		10.4			
	Routeing Area Identification	Routeing Area Identification	M	V	6
		10.5.5.15			
	DTM Information Rest Octets	DTM Information Rest Octets	M	LV	2
		10.5.2.11a			

9.1.12h DTM Reject

This message is sent on the main DCCH by the network to the mobile station to indicate that no radio resources are available for assignment. See Table 9.1.12h.1/3GPP TS 44.018.

Message type: DTM REJECT

Significance: dual

Direction: network to mobile station

Table 9.1.12h.1/3GPP TS 44.018: DTM REJECT message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	DTM Reject Message Type	Message Type	M	V	1
		10.4			
	DTM wait indication	Wait indication	M	V	1
		10.5.2.43			

9.1.12i DTM Request

This message is sent on the main DCCH by the mobile station to request the establishment of dual transfer mode. See Table 9.1.12i.1/3GPP TS 44.018.

Message type: DTM Request

Significance: dual

Direction: mobile station to network

Table 9.1.12i.1/3GPP TS 44.018: DTM Request message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	DTM Request Message Type	Message Type	M	V	1
		10.4			
	TLLI	TLLI	M	V	4
		10.5.2.41a			
	Channel Request Description	Channel Request Description 2	M	LV	5 - n
		10.5.2.8b			

NOTE: the MS Radio Access capabilities IE is not present since all the relevant information has already been received by the network in Classmark 3.

9.1.13 Frequency redefinition

This message is sent on the main DCCH from the network to the MS to indicate that the frequencies and the hopping sequence of the allocated channels shall be changed. See Table 9.1.13.1/3GPP TS 44.018

Message type: FREQUENCY REDEFINITION

Significance: dual

Direction: network to MS

Table 9.1.13.1/3GPP TS 44.018: FREQUENCY REDEFINITION message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Frequency Redefinition	Message Type	M	V	1
	Message Type	10.4			
	Channel Description	Channel Description	M	V	3
		10.5.2.5			
	Mobile Allocation	Mobile Allocation	M	LV	1-9
		10.5.2.21			
	Starting Time	Starting Time	M	V	2
		10.5.2.38			
62	Cell Channel Description	Cell Channel Description	0	TV	17
		10.5.2.1b			

9.1.13.1 Cell Channel Description

If it does not appear, the cell channel description is assumed to be unchanged.

9.1.13a PDCH Assignment command

This message is sent on the main DCCH by the network to the mobile station to change the channel configuration to a PDCH, when no timing adjustment is needed. See Table 9.1.13a.1/3GPP TS 44.018.

A mobile station that does not support the <<GRPS>> option shall regard this message as an unknown message.

Message type: PDCH ASSIGNMENT COMMAND

Significance: dual

Direction: network to mobile station

Table 9.1.13a.1/3GPP TS 44.018: PDCH ASSIGNMENT COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	PDCH Assignment command Message Type	Message Type 10.4	M	V	1
	Description of the Channel, after time	Channel Description 10.5.2.5	M	V	3
62	Cell Channel Description	Cell Channel Description 10.5.2.1b	0	TV	17
05	Frequency List, after time	Frequency List 10.5.2.13	С	TLV	4-132
72	Mobile Allocation, after time	Mobile Allocation 10.5.2.21	С	TLV	3-10
7C	Starting Time	Starting Time 10.5.2.38	0	TV	3
19	Frequency List, before time	Frequency List 10.5.2.13	С	TLV	4-132
1C	Description of the Channel, before time	Channel Description 10.5.2.5	0	TV	4
1E	Frequency channel sequence before time	Frequency channel sequence 10.5.2.12	С	TV	10
21	Mobile Allocation, before time	Mobile Allocation 10.5.2.21	С	TLV	3-10
22	RR Packet Uplink Assignment	RR Packet Uplink Assignment 10.5.2.25c	С	TLV	3-?
23	RR Packet Downlink Assignment	RR Packet Downlink Assignment 10.5.2.25d	С	TLV	3-?

9.1.13a.1 Mobile Allocation and Frequency List, after the starting time

If the channel description for after the starting time indicates frequency hopping, one and only one of the following information elements shall be present

- Mobile Allocation, after time
- Frequency List, after time.

If the Channel Description IE for after time does not indicate frequency hopping, if decoding of Channel Description IE for before time does not require a frequency list for after time (see next clause), and one or both of the two information elements are present they shall be considered as IEs unnecessary in the message.

9.1.13a.2 Starting Time

The *starting time* information element is included when the network wants the mobile station to change the frequency parameters of the channels more or less at the moment the change to a TBF occurs. In this case a number of information elements may be included to give the frequency parameters to be used before the starting time.

If the *starting time* information element is present and none of the information elements referring to before the starting time are present, the mobile station waits and uses the TBFfrom the indicated time.

If the *starting time* information element is present and at least one of the information elements referring to before the starting time is present, the mobile station does not wait for the indicated time and uses the TBF using the frequency parameters for before the starting time.

If the *starting time* information element is not present and some of the information elements referring to before the starting time is present, these information elements shall be considered as IEs unnecessary in the message.

If the *description of the channel, before time* IE is not present, the channel description to apply for before the time, if needed, is given by the *description of the channel, after time* IE.

If the *starting time* IE is present and the channel description for before the starting time indicates frequency hopping, one and only one of the following information elements may be present and applies before the starting time

- Mobile Allocation, before time IE;
- Frequency list, before time IE;
- Frequency channel sequence, before time IE.

If the *starting time* IE is present and the channel description for before the starting time indicates frequency hopping, and none of the above mentioned IE is present, a frequency list for after the starting time must be present (see 9.1.2.4), and this list applies also for the TBF before the starting time.

9.1.13a.3 Reference cell frequency list

If any of the *mobile allocation* information elements are present, then the network shall ensure that either the mobile station has received in a previous message the proper reference cell frequency list (CA), or that the *cell channel description* IE is present.

If the *cell channel description* IE is present, it is used to decode the *mobile allocation* IEs in the message, as well as in later dedicated mode messages until reception of a new reference cell frequency list or the cell is left.

9.1.13a.4 Cell Channel Description

If present, this information element shall be used to decode the *Mobile Allocation* IE in the same message and in subsequent messages.

9.1.13a.5 Packet Assignment

One and only one of the following information elements shall be present:

- RR Packet Uplink Assignment
- RR Packet Downlink Assignment.

9.1.13b GPRS suspension request

This message is sent on the main DCCH by the mobile station to the network to request a suspension of GPRS services. See Table 9.1.13b.1/3GPP TS 44.018.

Message type: GPRS SUSPENSION REQUEST

Significance: dual

Direction: mobile station to network

Table 9.1.13b.1/3GPP TS 44.018: GPRS SUSPENSION REQUEST message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	GPRS Suspension Request	Message Type	M	V	1
	Message Type	10.4			
	Temporary Logical Link Identity	TLLI	M	V	4
		10.5.2.41a			
	Routeing Area Identification	Routeing Area Identification	M	V	6
		10.5.5.15			
	Suspension cause	Suspension cause	M	V	1
		10.5.2.47			

9.1.14 Handover access

This message is sent in random mode on the main DCCH during a handover procedure. It does not follow the basic format. The format is presented directly below without reference to information elements. The order of bit transmission is defined in 3GPP TS 44.004.

This message is only one octet long, coded as shown in figure 9.1.14.1/3GPP TS 44.018 and table 9.1.14.1/3GPP TS 44.018.



Figure 9.1.14.1/3GPP TS 44.018: HANDOVER ACCESS message content

Table 9.1.14.1/3GPP TS 44.018: HANDOVER ACCESS message content

HANDOVER REFERENCE
This is an unformatted 8 bit field.
(also described in clause 10.5.2.15)

9.1.15 Handover command

This message is sent on the main DCCH by the network to the mobile station to change the dedicated channel configuration, timing adjustment needed. See Table 9.1.15.1/3GPP TS 44.018.

Message type: HANDOVER COMMAND

Significance: dual

Table 9.1.15.1/3GPP TS 44.018: HANDOVER COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Handover Command Message Type	Message Type 10.4	М	V	1
	Cell Description	Cell description 10.5.2.2	М	V	2
	Description of the first channel, after time	Channel Description 2 10.5.2.5a	М	V	3
	Handover Reference	Handover Reference 10.5.2.15	М	V	1
	Power Command and Access type	Power Command and Access type 10.5.2.28a	M	V	1
D-	Synchronization Indication	Synchronization Indication 10.5.2.39	0	TV	1
02	Frequency Short List, after time	Frequency Short List 10.5.2.14	С	TV	10
05	Frequency List, after time	Frequency List 10.5.2.13	С	TLV	4-131
62	Cell Channel Description	Cell Channel Description 10.5.2.1b	С	TV	17
10	Description of the multislot configuration	Multislot Allocation 10.5.2.21b	С	TLV	3-12
63	Mode of the First Channel(Channel Set 1))	Channel Mode 10.5.2.6	0	TV	2
11	Mode of Channel Set 2	Channel Mode 10.5.2.6	0	TV	2
13	Mode of Channel Set 3	Channel Mode 10.5.2.6	0	TV	2
14	Mode of Channel Set 4	Channel Mode 10.5.2.6	0	TV	2
15	Mode of Channel Set 5	Channel Mode 10.5.2.6	0	TV	2
16	Mode of Channel Set 6	Channel Mode 10.5.2.6	0	TV	2
17	Mode of Channel Set 7	Channel Mode 10.5.2.6	0	TV	2
18	Mode of Channel Set 8	Channel Mode 10.5.2.6	0	TV	2
64	Description of the Second Channel, after time	Channel Description 10.5.2.5	0	TV	4
66	Mode of the Second Channel	Channel Mode 2 10.5.2.7	0	TV	2
69	Frequency Channel Sequence, after time	Frequency Channel Sequence 10.5.2.12	С	TV	10

IEI	Information element	Type / Reference	Presence	Format	length
72	Mobile Allocation, after time	Mobile Allocation 10.5.2.21	С	TLV	3-10
7C	Starting Time	Starting Time 10.5.2.38	0	TV	3
7B	Real Time Difference	Time Difference 10.5.2.41	С	TLV	3
7D	Timing Advance	Timing Advance 10.5.2.40	С	TV	2
12	Frequency Short List, before time	Frequency Short List 10.5.2.14	С	TV	10
19	Frequency List, before time	Frequency List 10.5.2.13	С	TLV	4-131
1C	Description of the First Channel, before time	Channel Description 2 10.5.2.5a	0	TV	4
1D	Description of the Second Channel, before time	Channel Description 10.5.2.5	0	TV	4
1E	Frequency channel sequence before time	Frequency channel sequence 10.5.2.12	С	TV	10
21	Mobile Allocation, before time	Mobile Allocation 10.5.2.21	С	TLV	3-10
9-	Cipher Mode Setting	Cipher Mode Setting 10.5.2.9	0	TV	1
01	VGCS target mode Indication	VGCS target mode Indication 10.5.2.42a	0	TLV	3
03	Multi-Rate configuration	MultiRate configuration 10.5.2.21aa	0	TLV	4-8
76	Dynamic ARFCN Mapping	Dynamic ARFCN Mapping 10.5.2.11b	0	TLV	6-34

9.1.15.1 Synchronization Indication

If this information element does not appear, the assumed value is "non-synchronized".

9.1.15.2 Mode of the First Channel (Channel Set 1) and Mode of Channel Set "X" (2=<X<=8)

If this information element is not present the channel mode of the previously allocated channel or channels for Channel Set "X" (1=< X <= 8) shall be assumed.

If Channel Set "X" is not defined for the configuration, the *Mode of Channel Set "X"* IE shall be considered as an IE unnecessary in the message.

NOTE: Clause 3.4.4.1 defines cases when one or several *Mode of Channel Set "X"* IEs shall be included in the message.

9.1.15.3 Description of the Second Channel

These information element appear if the mobile station carries two connections (on two dedicated channels, for the TCH/H+TCH/H configuration).

The connection using the channel previously defined in the *Description of the First Channel* IE of an ASSIGNMENT COMMAND or HANDOVER COMMAND message shall use the channel defined in the first channel description IE of the HANDOVER COMMAND message defining the new configuration.

The channel described in the *Description of the First Channel* IE carries the main DCCH. The SACCH used is the one associated with that channel.

9.1.15.4 Mode of the Second Channel

If the *Description of the Second Channel* IE is not present and the information element is present it shall be considered as an IE unnecessary in the message.

This element appears at least when the channel mode is changed for the channel defined in the Description of the Second Channel information element.

9.1.15.5 Frequency Channel Sequence, Frequency List, Frequency short list and Mobile Allocation, after time.

If at least one of the channel descriptions for after time indicates frequency hopping, one and only one of the following information elements shall be present:

- Frequency Channel Sequence, after time;
- Frequency list, after time;
- Frequency Short List, after time;
- Mobile Allocation, after time.

If neither of the Channel Description IEs indicate frequency hopping, if they are not required for the decoding of Channel Description IEs for before time, and if any of the four information elements are present they shall be considered as IEs unnecessary in the message.

The Frequency Channel Sequence information element shall not be used unless all the ARFCNs that it indicates are in the P-GSM band.

9.1.15.6 Starting Time

The *starting time* information element is included when the network wants the mobile station to change the frequency parameters of the channels more or less at the moment a change of channel occurs. In this case a number of information elements may be included to give the frequency parameters to be used before the starting time.

The starting time information element refers to the new cell time.

If the *starting time* information element is present and none of the information elements referring to before the starting time are present, the mobile station waits and accesses the channels at the indicated time.

If the *starting time* information element is present and at least one of the information elements referring to before the starting time is present, the mobile station does not wait for the indicated time and accesses the channel using the frequency parameters for before the starting time.

If the *starting time* information element is not present and some of the information elements referring to before the starting time is present, these information elements shall be considered as IEs unnecessary in the message.

If the *description of the first channel, before time* IE is not present, the channel description to apply for before the time, if needed, is given by the *description of the first channel, after time* IE.

If the *description of the second channel, after time* IE is present, the *description of the second channel, before time* IE not present, and a description of the configuration for before the time needed, the channel configuration before the starting time is nevertheless of two traffic channels, and the channel description to apply to the second channel before the starting time is given by the *description of the second channel, after time* IE.

If the *starting time* IE is present and at least one of the channel descriptions for before the starting time indicates frequency hopping, one and only one of the following information elements may be present and applies before the starting time to all assigned channels:

- Mobile Allocation, before time IE;
- Frequency Short list, before time IE;
- Frequency list, before time IE;
- Frequency channel sequence, before time IE.

If the *starting time* IE is present and at least one of the channel descriptions for before the starting time indicates frequency hopping, and none of the above mentioned IE is present, a frequency list for after the starting time must be present (see 9.1.2.4), and this list applies also for the channels before the starting time.

9.1.15.7 Reference cell frequency list

If any of the *mobile allocation* information elements is present, then the *cell channel description* IE must be present. It is used to decode the *mobile allocation* IEs in the message.

In addition, if no information elements pertaining to before the starting time is present in the message, the frequency list defined by the *cell channel description* IE is used to decode the *mobile allocation* IEs in later messages received in the new cell until reception of a new reference cell frequency list or the new cell is left.

9.1.15.8 Real Time Difference

This information element shall appear if the *Synchronization Indication* information element indicates a pseudo-synchronous handover otherwise it shall be considered as an unnecessary information element.

9.1.15.9 Timing Advance

This information element shall appear if the "synchronization indication" element indicates a presynchronized handover. If not included for a presynchronized handover, then the default value as defined in 3GPP TS 45.010 shall be used. For other types of handover it shall be considered as an unnecessary information element.

9.1.15.10 Cipher Mode Setting

If this information element is omitted, the mode of ciphering is not changed after the mobile station has switched to the assigned channel.

Only applicable for mobile stations supporting VGCS talking:

The cipher mode setting IE shall not be included if a HANDOVER COMMAND message is sent on a VGCS channel or in a HANDOVER COMMAND message on a dedicated channel for a handover to a VGCS channel.

9.1.15.11 VGCS target mode indication

This information element is identified as "comprehension required". Only mobile stations supporting « VGCS talking » are required to accept the presence of the element. The presence of the element shall trigger an exception handling if received by a mobile station not supporting « VGCS talking ».

This IE indicates which mode is to be used on the new channel (i.e. dedicated mode or group transmit mode). If this information element is not present, the mode shall be the same as on the previous channel.

The IE also indicates the group cipher key number for the group cipher key to be used on the new channel or if the new channel is non ciphered. If the information element is not present, the ciphering mode shall be the same as on the previous channel.

NOTE: A mobile station supporting VGCS Talking shall not consider a syntactical error if this IE is present and the channel mode is not speech.

9.1.15.12 Description of the multislot allocation

This information element is included if so indicated by the channel type and TDMA offset field in the *Channel Description* information element and is used to assign channels that do not carry a main signalling link in a multislot configuration. It indicates how the used timeslots are divided into separate channel sets.

If the *Channel Description* IE does not require the presence the information element it shall be considered as an IE unnecessary in the message.

If multislot configuration is indicated by the *Channel Description* IE but the *Multislot Allocation* IE is not present, all channels in the configuration belong to one channel set, "Channel Set 1".

NOTE: As a change of timeslot number cannot occur for the channel described for after the starting time, the *Multislot Allocation* IE does not have to be included more than once.

9.1.15.13 MultiRateconfiguration

This information element appears if the Mode of the First Channel indicates a multi-rate speech codec, and if the assigned configuration is new, i.e. it is different from the MultiRateconfiguration used in the serving cell. If the Mode of the First Channel indicates a multi-rate speech codec, and this IE is not included, then the mobile station shall assume that the MultiRateconfiguration has not changed.

9.1.15.14 Dynamic ARFCN Mapping

This information element should only be included if the network supports dynamic ARFCN mapping and there is a need to define new dynamic ARFCN mapping, e.g. at handover to another PLMN or from another RAT to GSM. This information replaces any previously received information about dynamic ARFCN mapping. After returning to idle mode or packet idle mode, the mobile station shall acquire new dynamic ARFCN mapping information, except for the cases specified in clause 3.2.2.1 (SI15). This mapping shall apply to any ARFCN used in the same message.

NOTE: If this information nelement is received with a value part length equal to zero or a value part that does not contain any dynamic ARFCN mapping, any previously received information about dynamic ARFCN mapping is deleted.

9.1.15a Inter System To UTRAN Handover Command

This message is sent on the main DCCH by the network to the mobile station to change the dedicated channel in GSM to a dedicated channel configuration in UTRAN. See Table 9.1.15a.1/3GPP TS 44.018.

Message type: INTER SYSTEM TO UTRAN HANDOVER COMMAND

Significance: dual

Table 9.1.15a.1/3GPP TS 44.018: INTER SYSTEM TO UTRAN HANDOVER COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Inter System to UTRAN Handover Command Message Type	Message Type 10.4	М	V	1
	Handover to UTRAN Command	Handover To UTRAN Command 10.5.2.51	М	LV	2-n

9.1.15b Inter System To cdma2000 Handover Command

This message is sent on the main DCCH by the network to the mobile station to change the dedicated channel in GSM to a dedicated channel configuration in cdma2000. See Table 9.1.15b.1/3GPP TS 44.018.

Message type: INTER SYSTEM TO CDMA2000 HANDOVER COMMAND

Significance: dual

Direction: network to mobile station

Table 9.1.15b.1/3GPP TS 44.018: INTER SYSTEM TO CDMA2000 HANDOVER COMMAND message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Inter System to cdma2000	Message Type	M	V	1
	Handover Command Type	10.4			
	Message				
	Handover to cdma2000	Handover To cdma2000	M	LV	4 - n
	Command	Command			
		10.5.2.52			

9.1.16 Handover complete

This message is sent on the main DCCH from the mobile station to the network to indicate that the mobile station has established the main signalling link successfully. See Table 9.1.16.1/3GPP TS 44.018.

Message type: HANDOVER COMPLETE

Significance: dual

Direction: mobile station to network

Table 9.1.16.1/3GPP TS 44.018: HANDOVER COMPLETE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Handover Complete Message Type	Message Type 10.4	M	V	1
	RR Cause	RR Cause 10.5.2.31	M	V	1
77	Mobile Observed Time Difference	Mobile Time Difference 10.5.2.21a	0	TLV	5

9.1.16.1 Mobile Observed Time Difference

This information element is included if and only if the Synchronization Indication IE in the HANDOVER COMMAND message requests it to be sent.

9.1.17 Handover failure

This message is sent on the main DCCH on the old channel from the mobile station to the network to indicate that the mobile station has failed to seize the new channel. See Table 9.1.17.1/3GPP TS 44.018.

Message type: HANDOVER FAILURE

Significance: dual

Direction: mobile station to network

Table 9.1.17.1/3GPP TS 44.018: HANDOVER FAILURE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Handover Failure Message Type	Message Type	M	V	1
		10.4			
	RR Cause	RR Cause	M	V	1
		10.5.2.31			

9.1.18 Immediate assignment

This message is sent on the CCCH by the network to the mobile station in idle mode to change the channel configuration to a dedicated configuration while staying in the same cell or to the mobile station in packet idle mode to change the channel configuration to either an uplink or a downlink packet data channel configuration in the cell. See Table 9.1.18.1/3GPP TS 44.018.

The L2 pseudo length of this message is the sum of lengths of all information elements present in the message except the *IA Rest Octets* and *L2 Pseudo Length* information elements.

Message type: IMMEDIATE ASSIGNMENT

Significance: dual

Table 9.1.18.1/3GPP TS 44.018: IMMEDIATE ASSIGNMENT message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Immediate Assignment Message Type	Message Type 10.4	M	V	1
	Page Mode	Page Mode 10.5.2.26	М	V	1/2
	Dedicated mode or TBF	Dedicated mode or TBF 10.5.2.25b	М	V	1/2
	Channel Description	Channel Description 10.5.2.5	С	V	3
	Packet Channel Description	Packet Channel Description 10.5.2.25a	С	V	3
	Request Reference	Request Reference 10.5.2.30	М	V	3
	Timing Advance	Timing Advance 10.5.2.40	М	V	1
	Mobile Allocation	Mobile Allocation 10.5.2.21	М	LV	1-9
7C	Starting Time	Starting Time 10.5.2.38	0	TV	3
	IA Rest Octets	IA Rest Octets 10.5.2.16	М	V	0-11

9.1.18.0a Dedicated mode or TBF

A mobile station not supporting GPRS may ignore the contents of this information element and regard it as an unnecessary IE. Such mobile station shall assume that this message assigns a dedicated mode resource.

9.1.18.0b Channel Description

If the *Dedicated mode or TBF* IE indicates that the message assigns a dedicated mode resource, the mobile station shall consider this information element present in the message.

9.1.18.0c Packet Channel Description

If the *Dedicated mode or TBF* IE indicates that the message assigns a Temporary Block Flow (TBF), the mobile station shall consider this information element present in the message. If the *Dedicated mode or TBF* IE indicates that this message is the first of two in a two-message assignment of an uplink or downlink TBF, the mobile station shall ignore the contents of this information element and regard it as an unnecessary IE.

9.1.18.0d Request Reference

If this message is used in an assignment of a downlink TBF, the network shall code this information element, e.g. by using a suitably offset frame number, such that the resource reference cannot be confused with any CHANNEL REQUEST message sent by a mobile station.

If the *IA Rest Octets* IE indicates that this message is the second message of a two-message assignment of an uplink or downlink TBF, this information element shall have the same contents as the first message of the assignment.

When set to the value '0111 1111', the RA information of the Request Reference IE indicates that an Extended RA field may be included in the IA Rest Octets. The mobile station shall use the information in the Extended RA field to identify the Immediate Assignment message corresponding to an EGPRS Packet Channel Request message. If the Extended RA field is not included, the mobile station shall assume that the Immediate Assignment message does not correspond to the EGPRS Packet Channel Request message.

9.1.18.0e Timing Advance

If the *IA Rest Octets* IE indicates that this message is the second message of a two-message assignment of an uplink or downlink TBF, the mobile station shall ignore the contents of this information element and regard it as an unnecessary IE.

9.1.18.1 Mobile Allocation

If this message assigns a dedicated mode resource and the *Channel Description* IE does not indicate frequency hopping , the length indicator of this information element shall be set to zero, and the mobile station shall consider the IE as an unnecessary IE.

If this message assigns a TBF and the *Packet Channel Description* IE does not indicate frequency hopping or if it uses indirect encoding of a hopping RF channel configuration, the length indicator of this information element shall be set to zero, and the mobile station shall consider the IE as an unnecessary IE.

9.1.18.2 Starting Time

This information element appears if e.g. a frequency change is in progress.

If this message is used in an assignment of an uplink or downlink TBF, the mobile station shall ignore the contents of the Starting Time information element if included and consider it as an unnecessary IE.

9.1.18.3 IA Rest Octets (Frequency parameters, before time)

The sum of the length of this IE and the L2 Pseudo Length of the message equals 22.

If the *starting time* IE is present but not the *frequency parameters, before time* construction, the mobile stations must wait until the starting time before accessing the channel.

If the *starting time* IE is present and the *Channel Description* IE does not indicate frequency hopping the mobile station shall consider the *frequency parameters*, *before time* construction as unnecessary in the message and the mobile must wait until the starting time before accessing the channel.

If the *starting time* IE is not present, the mobile station shall consider the *frequency parameters, before time* construction as unnecessary in the message.

9.1.18.4 IA Rest Octets (assignment of uplink or downlink TBF)

If the *Dedicated mode or TBF* IE indicates that this message is used in an assignment of a TBF, this information element shall contain a *Packet Uplink Assignment*, *Packet Downlink Assignment* or *Second Part Packet Assignment* construction.

If the *Dedicated mode or TBF* IE indicates that this message assigns a dedicated mode resource, but not that the mobile station is identified in the *IA Rest Octets* IE information element, the mobile station shall consider the *Packet Uplink Assignment, Packet Downlink Assignment* and *Second Part Packet Assignment* constructions as unnecessary in the message.

9.1.19 Immediate assignment extended

This message is sent on the CCCH by the network to two mobile stations in idle mode to change their channel configurations to different dedicated configurations while they stay in the same cell. See Table 9.1.19.1/3GPP TS 44.018

The L2 pseudo length of this message is the sum of lengths of all information elements present in the message except the *IAX Rest Octets* and *L2 Pseudo Length* information elements.

Message type: IMMEDIATE ASSIGNMENT EXTENDED

Significance: dual

Table 9.1.19.1/3GPP TS 44.018: IMMEDIATE ASSIGNMENT EXTENDED message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Immediate Assignment Extended Message Type	Message Type 10.4	М	V	1
	Page Mode	Page Mode 10.5.2.26	М	V	1/2
	Spare Half Octet	Spare Half Octet 10.5.1.8	М	V	1/2
	Channel Description 1	Channel Description 10.5.2.5	М	V	3
	Request Reference 1	Request Reference 10.5.2.30	М	V	3
	Timing Advance 1	Timing Advance 10.5.2.40	М	V	1
	Channel Description 2	Channel Description 10.5.2.5	М	V	3
	Request Reference 2	Request Reference 10.5.2.30	М	V	3
	Timing Advance 2	Timing Advance 10.5.2.40	М	V	1
	Mobile Allocation	Mobile Allocation 10.5.2.21	М	LV	1-5
7C	Starting Time	Starting Time 10.5.2.38	0	TV	3
	IAX Rest Octets	IAX Rest Octets 10.5.2.18	М	V	0-4

NOTE: Index 1 refers to the first mobile station, index 2 refers to the second mobile station.

9.1.19.1 Unnecessary IEs

A mobile station which reacts on the request reference 1 shall consider all information elements as unnecessary IEs except for Requests Reference 1, Channel Description 1, Timing advance 1, Starting Time and if Channel Description 1 IE indicates frequency hopping mobile allocation.

A mobile station which reacts on the request reference 2 shall consider all information elements as unnecessary IE except *Requests Reference 2*, *Channel Description 2*, *Timing advance 2*, *Starting Time* and if *channel description 2* IE indicates frequency hopping mobile allocation.

A mobile station in idle mode shall consider all information elements as unnecessary IEs except for the Page Mode IE.

9.1.19.2 Mobile Allocation

If both channel description IE do not indicate frequency hopping, the length indicator shall be set to zero.

9.1.19.3 Starting Time

This information element appears if a frequency change is in progress. If included the starting time is common to the two referenced mobile stations.

9.1.19.4 Maximum message length

As the maximum length of the resulting layer 3 data cannot exceed 22 octets, it is not possible to use this message type if the total length of the value part of the *Mobile Allocation* plus, optionally, the length of the *Starting Time* IE exceeds 5 octets. In this case it is necessary to use the IMMEDIATE ASSIGNMENT message.

9.1.19.5 IAX Rest Octets

The sum of the length of this IE and the L2 Pseudo Length of the message equals 22.

9.1.20 Immediate assignment reject

This message is sent on the CCCH by the network to up to four mobile stations to indicate that no channel is available for assignment. See Table 9.1.20.1/3GPP TS 44.018. This message has L2 pseudo length 19.

Message type: IMMEDIATE ASSIGNMENT REJECT

Significance: dual

Direction: network to mobile station

Table 9.1.20.1/3GPP TS 44.018: IMMEDIATE ASSIGNMENT REJECT message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Immediate Assignment Reject Message Type	Message Type 10.4	M	V	1
	Page Mode	Page Mode 10.5.2.26	M	V	1/2
	Spare Half Octet	Spare Half Octet 10.5.1.8	М	V	1/2
	Request Reference 1	Request Reference 10.5.2.30	М	V	3
	Wait Indication 1	Wait Indication 10.5.2.43	М	V	1
	Request Reference 2	Request Reference 10.5.2.30	М	V	3
	Wait Indication 2	Wait Indication 10.5.2.43	М	V	1
	Request Reference 3	Request Reference 10.5.2.30	М	V	3
	Wait Indication 3	Wait Indication 10.5.2.43	М	V	1
	Request Reference 4	Request Reference 10.5.2.30	М	V	3
	Wait Indication 4	Wait Indication 10.5.2.43	М	V	1
	IAR Rest Octets	IAR Rest Octets 10.5.2.17	М	V	3

NOTE: Index 1 refers to the first mobile station, index 2 refers to the second MS and so on.

9.1.20.1 Use of the indexes

A request reference information element and the following wait indication information element refer to the same mobile station. So it is possible to reject up to four channel requests with this message.

9.1.20.2 Filling of the message

If necessary the request reference information element and the wait indication information element should be duplicated to fill the message.

9.1.20.2a Request Reference

When set to the value '0111 1111', the RA information of the Request Reference i IE indicates that an Extended RA i field may be included in the IAR Rest Octets. The mobile station shall use the information in the Extended RA i field to identify the Immediate Assignment Reject message corresponding to an EGPRS Packet Channel Request message. If the Extended RA i field is not included, the mobile station shall assume that the Request Reference i IE does not correspond to the EGPRS Packet Channel Request message.

9.1.20.3 Wait Indication

When IMMEDIATE ASSIGNMENT REJECT message is for RR connection establisment then this IE contains timeout value for T3122. If IMMEDIATE ASSIGNMENT REJECT message is for TBF establisment for GPRS MS then this IE contain timeout value for T3142.

9.1.20.4 IAR Rest Octets

The sum of the length of this IE and the L2 Pseudo Length of the message equals 22.

9.1.21 Measurement report

This message is sent on the SACCH by the mobile station to the network to report measurement results about the dedicated channel and about neighbour cells. See Table 9.1.21.1/3GPP TS 44.018.

Message type: MEASUREMENT REPORT

Significance: dual

Direction: mobile station to network

Table 9.1.21.1/3GPP TS 44.018: MEASUREMENT REPORT message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	М	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Measurement Report Message Type	Message Type 10.4	М	V	1
	Measurement Results	Measurement Results 10.5.2.20	М	V	16

9.1.21a Notification/FACCH

The understanding of this message is only required for mobile stations supporting VGCS listening or VBS listening.

This message is sent on the main DCCH, in unacknowledged mode using the RR short protocol discriminator by the network to notify the mobile stations in dedicated mode or in on-going voice broadcast calls or voice group calls on other voice broadcast calls or voice group calls in that cell.

Notification/FACCH messages for VBS or VGCS calls are differentiated by a flag in the call reference.

The message shall not exceed a maximum length of 20 octets.

Mobile stations not supporting VGCS listening or VBS listening shall ignore this message.

See Table 9.1.21a.1/3GPP TS 44.018.

Message type: NOTIFICATION/FACCH

Significance: dual

Table 9.1.21a.1/3GPP TS 44.018: NOTIFICATION/FACCH message content

<Group Call Reference>

This field is syntactically and semantically equivalent to octets 2-5 and bits 5 to 8 of octet 6 of the *Descriptive Group or Broadcast Call Reference* information element.

The <Group Channel Description> field is optionally present. When present only the Channel description is provided in the case of non hopping channels. In the case where the channel is hopping then either a mobile allocation or a frequency short list is provided.

<Channel Description>

This field is syntactically and semantically equivalent to octets 2-4 of the *Channel Description* information element. See 10.5.2.5.

<Frequency Short List>

This field is syntactically and semantically equivalent to octets 1-8 of the *Frequency Short List 2* information element. See 10.5.2.14a.

<Mobile Allocation>

This field is syntactically and semantically equivalent to octet 2 to n+2 of the *Mobile Allocation* information element. See 10.5.2.21.

The <Paging Information> field may be used to inform the mobile station in Group Receive or in Group Transmit mode that the corresponding mobile identity is paged in that cell.

<mobile identity>

This field is syntactically and semantically equivalent to octet 2-n of the *Mobile Identity* information element. See 10.5.1.4.

<channel first>

This field is syntactically and semantically equivalent to bits 1 and 2 of the *Channel Needed* information element. See 10.5.2.8.

<eMLPP priority>

This field is coded as the <Priority1> field in the P1 Rest Octets information element. See 10.5.2.23.

9.1.21a.1 (void)

9.1.21a.2 (void)

9.1.21a.3 (void)

9.1.21a.4 (void)

9.1.21b Notification/NCH

The understanding of this message is only required for mobile stations supporting VGCS listening or VBS listening.

This message is sent on the NCH by the network to notify mobile stations of VBS or VGCS calls in the current cell. The VBS or VGCS calls are identified by their broadcast call reference or group call reference, respectively. For each reference, the corresponding VBS or VGCS call channel may be indicated. See Table 9.1.21b.1/3GPP TS 44.018.

Notification/NCH messages for VBS or VGCS calls are differentiated by a flag in the call reference.

The L2 pseudo length of this message has a value one

Mobile stations not supporting VGCS listening or VBS listening shall ignore this message.

Message type: NOTIFICATION/NCH

Significance: dual

Direction: network to mobile station

Table 9.1.21b.1/3GPP TS 44.018: NOTIFICATION/NCH message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
	-	10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Notification/NCH Message Type	Message Type	M	V	1
		10.4			
	NT/N Rest Octets	NT/N Rest Octets	M	V	20
		10.5.2.22c			

9.1.21b.1 (void)

9.1.21b.2 (void)

9.1.21c (void)

9.1.21d Notification response

This message is sent by the mobile station to the network to respond on a notification for a voice group call or voice broadcast call. See Table 9.1.21d.1/3GPP TS 44.018.

Message type: NOTIFICATION RESPONSE

Significance: dual

Direction: mobile station to network

Table 9.1.21d.1/3GPP TS 44.018: NOTIFICATION RESPONSE message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol	Protocol discriminator	М	V	1/2
	discriminator	10.2			
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Notification response Message type	Message type 10.4	M	V	1
	Mobile station Classmark	Mobile station classmark 2 10.5.1.6	M	LV	4
	Mobile identity	Mobile identity 10.5.1.4	M	LV	2-9
	Group or broadcast Call reference	Call reference 10.5.1.9	M	V	5

9.1.21e RR-Cell Change Order

This message is sent on the main DCCH by the network to the mobile station to order it to reselect a cell. For a (3G) multi-RAT MS the target cell may be a 3G cell. See Table 9.1.21e.1/3GPP TS 44.018.

A mobile station that does not support the <<GPRS>> option shall regard this message as an unknown message.

Message type: RR-CELL CHANGE ORDER

Significance: dual

Direction: network to mobile station

Table 9.1.21e.1/3GPP TS 44.018: RR-CELL CHANGE ORDER message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	М	V	1/2
		10.3.1			
	RR-Cell Change Order Message	Message Type	M	V	1
	Туре	10.4			
	Cell Description	Cell description	M	V	2
		10.5.2.2			
	NC mode for target cell	NC mode	M	V	1/2
	_	10.5.2.21c			
	Spare half octet	Spare half octet	M	V	1/2
		10.5.1.8			
19	3G Target Cell	3G Target Cell	0	TLV	3-6
	_	10.5.2.56			

9.1.21e.1 3G Target Cell

If this information element is present and not ignored (see 3G Target Cell, 10.5.2.53), the content of the Cell Description information element shall be ignored.

9.1.21f Packet Assignment

This message is sent on the main DCCH by the network to the mobile station to change the channel configuration to a multislot configuration with CS and PS connections when neither timing adjustment nor reallocation of the CS timeslot is needed. See Table 9.1.21f.1/3GPP TS 44.018.

Message type: PACKET ASSIGNMENT

Significance: dual

Table 9.1.21f.1/3GPP TS 44.018: PACKET ASSIGNMENT message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Packet Assignment Message	Message Type	M	V	1
	Туре	10.4			
	GPRS broadcast information	GPRS broadcast information	M	LV	7 - n
		10.5.2.14d			
22	Description of the Uplink Packet	RR Packet Uplink Assignment	0	TLV	3 - n
	Channel Assignment	10.5.2.25c			
23	Description of the Downlink	RR Packet Downlink	0	TLV	3 - n
	Packet Channel Assignment	Assignment			
	_	10.5.2.25d			

9.1.21f.1 RR Packet Uplink Assignment and RR Packet Downlink Assignment IEs

These information elements are optional, but at least one of them shall be present.

9.1.21g Packet Notification

This message is sent on the main DCCH by the network to trigger the mobile station to perform a cell update procedure. See Table 9.1.21g.1/3GPP TS 44.018.

Message type: PACKET NOTIFICATION

Significance: dual

Direction: network to mobile station

Table 9.1.21g.1/3GPP TS 44.018: PACKET NOTIFICATION message content

IEI	Information element	Type / Reference	Presence	Format	Length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Packet Notification Message	Message Type	M	V	1
	Type	10.4			
10	Packet TMSI	P-TMSI	С	TV	5
		10.5.2.42			
11	Mobile identity	Mobile identity	С	TLV	3-11
	·	10.5.1.4			

9.1.22 Paging request type 1

This message is sent on the CCCH by the network to up to two mobile stations. It may be sent to a mobile station in idle mode to trigger channel access. It may be sent to a mobile station in packet idle mode to transfer MM information (i.e. trigger of cell update procedure). The mobile stations are identified by their TMSI/P-TMSI or IMSI. See Table 9.1.22.1/3GPP TS 44.018.

The L2 pseudo length of this message is the sum of lengths of all information elements present in the message except the *P1 Rest Octets* and *L2 Pseudo Length* information elements.

Message type: PAGING REQUEST TYPE 1

Significance: dual

Table 9.1.22.1/3GPP TS 44.018: PAGING REQUEST TYPE 1 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Paging Request Type 1 Message Type	Message Type 10.4	M	V	1
	Page Mode	Page Mode 10.5.2.26	М	V	1/2
	Channels Needed for Mobiles 1 and 2	Channel Needed 10.5.2.8	M	V	1/2
	Mobile Identity 1	Mobile Identity 10.5.1.4	M	LV	2-9
17	Mobile Identity 2	Mobile Identity 10.5.1.4	0	TLV	3-10
	P1 Rest Octets	P1 Rest Octets 10.5.2.23	М	V	0-17

9.1.22.1 Unnecessary IE

A mobile station in idle mode shall consider all information elements as unnecessary IEs except for the Page Mode IE.

9.1.22.2 Channels needed for Mobiles 1 and 2

The first CHANNEL field of *Channel Needed* IE is associated with *Mobile Identity 1*. The second CHANNEL field of *Channel Needed* IE is associated with *Mobile Identity 2*.

If this message is used in the packet paging procedure, the *Channel Needed* IE associated with the corresponding *Mobile Identity 1 or 2* shall be coded with the value 00 (any channel) by the network. The mobile station receiving a packet paging request shall treat this information element as unnecessary in the message.

9.1.22.3 Mobile Identities

The Mobile Identity 1 and 2 IEs shall not refer to IMEI.

9.1.22.4 P1 Rest Octets

The sum of the length of this IE and the L2 Pseudo Length of the message equals 22.

This IE may contain a *notification list number* field and/or, referring to each one of the *Mobile Identity 1 and 2* IEs, a *Priority 1 and 2* field and/or a *Packet Page Indication 1 and 2* field.

9.1.23 Paging request type 2

This message is sent on the CCCH by the network to two or three mobile stations. It may be sent to a mobile station in idle mode to trigger channel access. It may be sent to a mobile station in packet idle mode to transfer MM information (i.e. trigger of cell update procedure). Two of the mobile stations are identified by their TMSI/P-TMSI while the third is identified by its TMSI/P-TMSI or IMSI. See Table 9.1.23.1/3GPP TS 44.018.

The L2 pseudo length of this message is the sum of lengths of all information elements present in the message except the *P2 Rest Octets* and *L2 Pseudo Length* information elements.

Message type: PAGING REQUEST TYPE 2

Significance: dual

Table 9.1.23.1/3GPP TS 44.018: PAGING REQUEST TYPE 2 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Paging Request Type 2 Message Type	Message Type 10.4	М	V	1
	Page Mode	Page Mode 10.5.2.26	М	V	1/2
	Channels Needed for Mobiles 1 and 2	Channel Needed 10.5.2.8	М	V	1/2
	Mobile Identity 1	TMSI/P-TMSI 10.5.2.42	М	V	4
	Mobile Identity 2	TMSI/P-TMSI 10.5.2.42	М	V	4
17	Mobile Identity 3	Mobile Identity 10.5.1.4	0	TLV	3-10
	P2 Rest Octets	P2 Rest Octets 10.5.2.24	M	V	1-11

9.1.23.1 Channels needed for Mobiles 1 and 2

The first CHANNEL field of Channel Needed IE is associated with Mobile Identity 1. The second CHANNEL field of *Channel Needed* IE is associated with *Mobile Identity* 2.

If this message is used in the packet paging procedure, the *Channel Needed* IE associated with the corresponding *Mobile Identity 1 or 2* shall be coded with the value 00 (any channel) by the network. The mobile station receiving a packet paging request shall treat this information element as unnecessary in the message.

9.1.23.2 Mobile Identity 3

The *Mobile Identity 3* information element shall not refer to IMEI.

9.1.23.3 P2 Rest Octets

The sum of the length of this IE and the L2 Pseudo Length of the message equals 22.

This IE contains the channel needed indication related to the paging of *Mobile Identity 3*. The treatment of this indication in the case this message is used in a packet paging procedure is specified in clause 9.1.23.1.

This IE may further contain a *notification list number* field and/or, referring to each one of the *Mobile Identity 1, 2 and 3* IEs, a *Priority 1, 2 and 3* field and/or, referring to the *Mobile Identity 3* IE, a *Packet Page Indication 3* field.

9.1.24 Paging request type 3

This message is sent on the CCCH by the network to four mobile stations. It may be sent to a mobile station in idle mode to trigger channel access. It may be sent to a mobile station in packet idle mode to transfer MM information (i.e. trigger of cell update procedure). The mobile stations are identified by their TMSIs/P-TMSIs. See Table 9.1.24.1/3GPP TS 44.018.

This message has a L2 Pseudo Length of 19.

Message type: PAGING REQUEST TYPE 3

Significance: dual

Table 9.1.24.1/3GPP TS 44.018: PAGING REQUEST TYPE 3 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Paging Request Type 3 Message Type	Message Type 10.4	M	V	1
	Page Mode	Page Mode 10.5.2.26	М	V	1/2
	Channels Needed for Mobiles 1 and 2	Channel Needed 10.5.2.8	М	V	1/2
	Mobile Identity 1	TMSI/P-TMSI 10.5.2.42	М	V	4
	Mobile Identity 2	TMSI/P-TMSI 10.5.2.42	М	V	4
	Mobile Identity 3	TMSI/P-TMSI 10.5.2.42	М	V	4
	Mobile Identity 4	TMSI/P-TMSI 10.5.2.42	М	V	4
	P3 Rest Octets	P3 Rest Octets 10.5.2.25	М	V	3

9.1.24.1 Channels needed for Mobiles 1 and 2

The first CHANNEL field of *Channel Needed* IE is associated with *Mobile Identity 1*. The second CHANNEL field of *Channel Needed* IE is associated with *Mobile Identity 2*.

If this message is used in the packet paging procedure, the *Channel Needed* IE associated with the corresponding *Mobile Identity 1 or 2* shall be coded with the value 00 (any channel) by the network. The mobile station receiving a packet paging request shall treat this information element as unnecessary in the message.

9.1.24.2 P3 Rest Octets

This IE contains the channel needed indication related to the paging of *Mobile Identity 3 and 4*. The treatment of these indications in the case this message is used in a packet paging procedure is specified in clause 9.1.24.1.

This IE may further contain a *notification list number* field and/or, referring to each one of the *Mobile Identity 1, 2, 3* and 4 IEs, a *Priority 1, 2, 3* and 4 field.

9.1.25 Paging response

This message is sent on the main DCCH by the mobile station to the network in connection with establishment of the main signalling link as a response to the paging request message. See Table 9.1.25.1/3GPP TS 44.018.

Message type: PAGING RESPONSE

Significance: dual

Direction: mobile station to network

Table 9.1.25.1/3GPP TS 44.018: PAGING RESPONSE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Paging Response Message Type	Message Type 10.4	М	V	1
	Ciphering Key Sequence Number	Ciphering Key Sequence Number 10.5.1.2	M	V	1/2
	Spare Half Octet	Spare Half Octet 10.5.1.8	М	V	1/2
	Mobile Station Classmark	Mobile Station Classmark 2 10.5.1.6	М	LV	4
	Mobile Identity	Mobile Identity 10.5.1.4	М	LV	2-9

9.1.25.1 Mobile Station Classmark

This IE shall include for multiband mobile station the Classmark 2 corresponding to the frequency band in use.

9.1.26 Partial release

This message is sent on the main DCCH by the network to the mobile station to deactivate part of the dedicated channels in use. See Table 9.1.26.1/3GPP TS 44.018.

Message type: PARTIAL RELEASE

Significance: dual

Direction: network to mobile station

Table 9.1.26.1/3GPP TS 44.018: PARTIAL RELEASE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Partial Release Message Type	Message Type	M	V	1
		10.4			
	Channel Description	Channel Description	M	V	3
		10.5.2.5			

9.1.26.1 Channel Description

This information element describes the channel to be released.

9.1.27 Partial release complete

This message is sent on the main DCCH by the mobile station to the network to indicate that a part of the dedicated channels has been deactivated. See Table 9.1.27.1/3GPP TS 44.018.

Message type: PARTIAL RELEASE COMPLETE

Significance: dual

Direction: mobile station to network

Table 9.1.27.1/3GPP TS 44.018: PARTIAL RELEASE COMPLETE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	Partial release Complete Message Type	Message Type 10.4	М	V	1

9.1.28 Physical information

This message is sent on the main DCCH by the network to the mobile station to stop the sending of access bursts from the mobile station. See Table 9.1.28.1/3GPP TS 44.018.

Message type: PHYSICAL INFORMATION

Significance: dual

Direction: network to mobile station

Table 9.1.28.1/3GPP TS 44.018: PHYSICAL INFORMATION message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Physical Information Message	Message Type	M	V	1
	Type	10.4			
	Timing Advance	Timing Advance	M	V	1
		10.5.2.40			

9.1.28a RR Initialisation Request

This message is sent on the main DCCH by the mobile station to request establishment of dedicated mode.

Message type: RR Initialisation Request

Significance: local

Direction: mobile station to network

Table 9.1.28a.1/3GPP TS 44.018RR Initialisation Request message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	RR Initialisation Request Message Type	Message Type 10.4	М	V	1
	Ciphering Key Sequence Number	Ciphering Key sequence Number 10.5.1.2	M	V	1/2
	MAC Mode and Channel Coding Requested	Channel Coding Requested 10.5.2.4a	М	V	1/2
	Mobile station classmark	Mobile station classmark 2 10.5.1.6	М	LV	4
	TLLI	TLLI 10.5.2.41a	М	V	4
	Channel Request Description	Channel Request Description 10.5.2.8a	М	V	5
	GPRS Measurement Results	GPRS Measurement Results 10.5.2.20a	M	V	2

9.1.29 **RR Status**

This message is sent by the mobile station or the network at any time to report certain error conditions as described in clause 8. See Table 9.1.29.1/3GPP TS 44.018.

Message type: **RR STATUS**

both

Significance: local Direction:

Table 9.1.29.1/3GPP TS 44.018: RR STATUS message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	RR Status Message Type	Message Type	M	V	1
		10.4			
	RR Cause	RR Cause	M	V	1
		10.5.2.31			

9.1.30a Synchronization channel information

This message is sent on the SCH, which is one of the broadcast channels (ref. 3GPP TS 45.002 clause 3.3.2). Its purpose is to support the synchronization of a mobile station to a BSS. It does not follow the basic format. Its length is 25 bits. The order of bit transmission is defined in 3GPP TS 44.004. See Figure 9.1.30a.1/3GPP TS 44.018 and Table 9.1.30a.1/3GPP TS 44.018.

SYNCHRONIZATION CHANNEL INFORMATION Message type:

Significance: dual




Figure 9.1.30a.1/3GPP TS 44.018: Frame synchronization information element

Table 9.1.30a.1/3GPP TS 44.018: Synchronization channel information message contents

BSIC, the base station identity code of the base station

T1, T2 and T3', the 3 parts of the reduced TDMA frame number (RFN) as specified in 3GPP TS 45.002 clause 3.3.2.

9.1.30b COMPACT Synchronization channel information

This message is sent on the CSCH, which is one of the broadcast channels (ref. 3GPP TS 45.002 clause 3.3.2). Its purpose is to support the synchronization of a COMPACT mobile station to a BSS. It does not follow the basic format. Its length is 25 bits. The order of bit transmission is defined in 3GPP TS 44.004. See Figure 9.1.30b.1/3GPP TS 44.018 and Table 9.1.30b.1/3GPP TS 44.018.

Message type: COMPACT SYNCHRONIZATION CHANNEL INFORMATION

Significance: dual

Direction: network to mobile station




Figure 9.1.30b.1/3GPP TS 44.018: COMPACT Frame synchronization information element

Table 9.1.30b.1/3GPP TS 44.018: COMPACT Synchronization channel information message contents

BSIC, the base station identity code of the base station

R1 and R2, the 2 parts of the reduced TDMA frame number (RFN) as specified in 3GPP TS 45.002 clause 3.3.2.

TG, the time group as specified in 3GPP TS 45.002 clause 4.3.4.

9.1.31 System information Type 1

This message is sent on the BCCH by the network to all mobile stations within the cell giving information of control of the RACH and of the cell allocation. See Table 9.1.31.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002. This message has a L2 Pseudo Length of 21.

Message type: SYSTEM INFORMATION TYPE 1

Significance: dual

Table 9.1.31.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 1 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 1 Message Type	Message Type 10.4	М	V	1
	Cell Channel Description	Cell Channel Description 10.5.2.1b	M	V	16
	RACH Control Parameter	RACH Control Parameters 10.5.2.29	M	V	3
	SI 1 Rest Octets	SI 1 Rest Octets 10.5.2.32	M	V	1

9.1.32 System information type 2

This message is sent on the BCCH by the network to all mobile stations within the cell giving information of control of the RACH and of the BCCH allocation in the neighbour cells. See Table 9.1.32.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002. This message has a L2 Pseudo Length of 22.

Message type: SYSTEM INFORMATION TYPE 2

Significance: dual

Direction: network to mobile station

Table 9.1.32.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 2 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 2 Message Type	Message Type 10.4	M	V	1
	BCCH Frequency List	Neighbour Cell Description 10.5.2.22	M	V	16
	NCC Permitted	NCC permitted 10.5.2.27	M	V	1
	RACH Control Parameter	RACH Control Parameters 10.5.2.29	M	V	3

9.1.33 System information type 2bis

This message is sent optionally on the BCCH by the network to all mobile stations within the cell giving information on control of the RACH and of the extension of the BCCH allocation in the neighbour cells. See Table 9.1.33.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002.

A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may ignore this message, see clause 3.2.2.1.

This message has a L2 pseudo length of 21.

Message type: SYSTEM INFORMATION TYPE 2bis

Significance: dual

Direction: network to mobile station

Table 9.1.33.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 2bis message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 2bis Message Type	Message Type 10.4	M	V	1
	Extended BCCH Frequency List	Neighbour Cell Description 10.5.2.22	M	V	16
	RACH Control Parameters	RACH Control Parameters 10.5.2.29	M	V	3
	SI 2bis Rest Octets	SI 2bis Rest Octets 10.5.2.33	M	V	1

9.1.34 System information type 2ter

This message is sent optionally on the BCCH by the network to all mobile stations within the cell giving information on the extension of the BCCH allocation in the neighbour cells. See Table 9.1.34.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002.

A mobile station that supports either:

- only the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005), or
- only the DCS 1800 band (cf. 3GPP TS 45.005)

may ignore this message, see clause 3.2.2.1.

This message has a L2 pseudo length of 18. This message may be sent by the network with either a L2 pseudo length of 18 or some other value. A mobile station that does not ignore this message shall not discard the message due to a received L2 pseudo length different from 18.

Message type: SYSTEM INFORMATION TYPE 2ter

Significance: dual

Table 9.1.34.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 2ter message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 2ter Message Type	Message Type 10.4	M	V	1
	Extended BCCH Frequency List	Neighbour Cell Description 2 10.5.2.22a	M	V	16
	SI 2ter Rest Octets	SI 2ter Rest Octets 10.5.2.33a	M	V	4

9.1.34a System information type 2quater

This message is sent optionally on the BCCH by the network to all mobile stations within the cell giving information on additional measurement and reporting parameters and/or UTRAN neighbour cells. A mobile station with no UTRAN capability should ignore the 3G Neighbour Cell, 3G MEASUREMENT parameter and GPRS_3G MEASUREMENT parameter descriptions in this message. The message may contain more than one instance. Special requirements for the transmission of this message apply on BCCH, see 3GPP TS 45.002.

This message has a L2 pseudo length of 1.

Message type: SYSTEM INFORMATION TYPE 2quater

Significance: dual

Direction: network to mobile station

Table 9.1.34a.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 2 quater message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 2quater Message Type	Message Type 10.4	M	V	1
	SI 2 quater Rest Octets	SI 2quater Rest Octets 10.5.2.33b	M	V	20

9.1.35 System information type 3

This message is sent on the BCCH by the network giving information of control on the RACH, the location area identification, the cell identity and various other information about the cell. See Table 9.1.35.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002. This message has a L2 Pseudo Length of 18.

Message type: SYSTEM INFORMATION TYPE 3

Significance: dual

Table 9.1.35.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 3 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	System Information Type 3 Message Type	Message Type 10.4	М	V	1
	Cell Identity	Cell Identity 10.5.1.1	М	V	2
	Location Area Identification	Location Area Identification 10.5.1.3	М	V	5
	Control Channel Description	Control Channel description 10.5.2.11	М	V	3
	Cell Options	Cell Options (BCCH) 10.5.2.3	М	V	1
	Cell Selection Parameters	Cell Selection Parameters 10.5.2.4	М	V	2
	RACH Control Parameters	RACH Control Parameters 10.5.2.29	М	V	3
	SI 3 Rest Octets	SI 3 Rest Octets 10.5.2.34	М	V	4

9.1.36 System information type 4

This message is sent on the BCCH by the network giving information on control of the RACH, the location area identification, the cell identity and various other information about the cell. See Table 9.1.36.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002. The L2 pseudo length of this message is the sum of lengths of all information elements present in the message except the *SI 4 Rest Octets* and *L2 Pseudo Length* information elements.

Message type: SYSTEM INFORMATION TYPE 4

Significance: dual

Table 9.1.36.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 4 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	М	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 4 Message Type	Message Type 10.4	М	V	1
	Location Area Identification	Location Area Identification 10.5.1.3	M	V	5
	Cell Selection Parameters	Cell Selection Parameters 10.5.2.4	M	V	2
	RACH Control Parameters	RACH Control Parameters 10.5.2.29	M	V	3
64	CBCH Channel Description	Channel description 10.5.2.5	0	TV	4
72	CBCH Mobile Allocation	Mobile Allocation 10.5.2.21	С	TLV	3-6
	SI 4 Rest Octets	SI 4 Rest Octets 10.5.2.35	М	V	0-10

9.1.36.1 CBCH Channel description

This information element is present if SMSCB is active in the cell and indicates (together with the CBCH Mobile Allocation IE) where to find the CBCH.

9.1.36.2 CBCH Mobile Allocation

If the *CBCH Channel Description* Information Element indicates frequency hopping, the *CBCH Mobile Allocation* IE shall be present. If the *CBCH Channel Description* does not indicate frequency hopping, the *CBCH Mobile Allocation* IE shall be considered as an unnecessary IE in the message.

9.1.36.3 SI 4 Rest Octets

The sum of the length of this IE and the L2 pseudo length of the message equals 22.

9.1.37 System information type 5

This message is sent on the SACCH by the network to mobile stations within the cell giving information on the BCCH allocation in the neighbour cells. See Table 9.1.37.1/3GPP TS 44.018.

When received this information shall be used as the list of BCCH frequencies of the neighbouring cells to be reported on. Any change in the neighbour cell description must overwrite any old data held by the mobile station. The mobile station must analyse all correctly received system information type 5 messages. This message has a L2 Pseudo Length of 18.

Message type: SYSTEM INFORMATION TYPE 5

Significance: dual

Direction: network to mobile station

Table 9.1.37.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 5 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 5 Message Type	Message Type 10.4	M	V	1
	BCCH Frequency List	Neighbour Cell Description 10.5.2.22	М	V	16

9.1.38 System information type 5bis

This message is sent optionally on the SACCH by the network to mobile stations within the cell giving information on the extension of the BCCH allocation in the neighbour cells. See Table 9.1.38.1/3GPP TS 44.018.

A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may ignore this message, see clause 3.2.2.1.

When received (and not ignored) this information must be used as the list of neighbouring cells to be reported on. Any change in the neighbour cell description must overwrite any old data held by the mobile station. The mobile station must, with the exception stated above, analyse all correctly received system information type 5 messages. This message has a L2 Pseudo Length of 18.

Message type: SYSTEM INFORMATION TYPE 5bis

Significance: dual

Direction: network to mobile station

Table 9.1.38.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 5bis message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length	М	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 5 bis	Message Type	M	V	1
	Message Type	10.4			
•	Extension of the BCCH	Neighbour Cell Description	М	V	16
	Frequency List Description	10.5.2.22			

9.1.39 System information type 5ter

This message is sent optionally on the SACCH by the network to mobile stations within the cell giving information on the extension of the BCCH allocation in the neighbour cells. See Table 9.1.39.1/3GPP TS 44.018.

A mobile station that supports either:

- only the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005), or

- only the DCS 1800 band (cf. 3GPP TS 45.005)

- may ignore this message, see clause 3.2.2.1.

When received (and not ignored) this information must be used as part of the list of neighbouring cells to be reported on. Any change in the neighbour cell description must overwrite this part of any old data held by the mobile station. The mobile station shall, with the exception stated above, analyse all correctly received system information type 5ter messages. This message has a L2 Pseudo Length of 18.

Message type: SYSTEM INFORMATION TYPE 5ter

Significance: dual

Table 9.1.39.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 5ter message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length	M	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 5ter	Message Type	M	V	1
	Message Type	10.4			
•	Extended BCCH Frequency List	Neighbour Cell Description 2	M	V	16
		10.5.2.22a			

9.1.40 System information type 6

This message is sent on the SACCH by the network to mobile stations within the cell giving information of location area identification, of cell identity and various other information. See Table 9.1.40.1/3GPP TS 44.018. If received correctly by the mobile station this message is treated as in Clauses 9.1.40.1 to 9.1.40.4.

This message has a L2 Pseudo Length of 11.

Message type: SYSTEM INFORMATION TYPE 6

Significance: dual

Direction: network to mobile station

Table 9.1.40.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 6 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 6 Message Type	Message Type 10.4	M	V	1
	Cell Identity	Cell Identity 10.5.1.1	M	V	2
	Location Area Identification	Location Area Identification 10.5.1.3	М	V	5
	Cell Options	Cell Options (SACCH) 10.5.2.3	М	V	1
	NCC Permitted	NCC Permitted 10.5.2.27	М	V	1
	SI 6 Rest Octets	SI6 Rest Octets 10.5.2.35a	М	V	7

9.1.40.1 Cell Identity

Only applicable for mobile stations supporting SIM Application Toolkit class 2 or higher:

- if a new Cell Identity is identified, an indication shall be given to the upper layer together with the new identity.

Other mobile stations may ignore this IE.

9.1.40.2 Location Area Identification

Only applicable for mobile stations supporting VGCS listening and VBS listening or SIM Application Toolkit class 2 or higher :

- if a new Location Area Identification is identified, an indication shall be given to the upper layer together with the new identification.

Other mobile stations may ignore this IE.

9.1.40.3 Cell Options

When correctly received, this information shall be used as the current Cell Options information. Any change in the Cell Options shall overwrite any old Cell Options data held by the mobile station.

9.1.40.4 NCC permitted

As for BCCH Frequency List in SYSTEM INFORMATION TYPE 5.

9.1.41 System information type 7

This message is sent on the BCCH by the network giving information about cell reselection parameters to be used in that cell. See Table 9.1.41.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002. The L2 pseudo length of this message has the value 1.

Message type: SYSTEM INFORMATION TYPE 7

Significance: dual

Direction: network to mobile station

Table 9.1.41.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 7 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length	M	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 7	Message Type	M	V	1
	Message Type	10.4			
	SI 7 Rest Octets	SI 7 Rest Octets	M	V	20
		10.5.2.36			

9.1.42 System information type 8

This message is sent on the BCCH by the network giving information about cell reselection parameters to be used in that cell. See Table 9.1.42.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002. The L2 Pseudo Length of this message has the value 1.

Message type: SYSTEM INFORMATION TYPE 8

Significance: dual

Table 9.1.42.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 8 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 8	Message Type	M	V	1
	Message Type	10.4			
	SI 8 Rest Octets	SI 8 Rest Octets	M	V	20
		10.5.2.37			

9.1.43 System information Type 9

This message is sent on the BCCH by the network to all mobile stations within the cell giving some, but not necessarily all information on the scheduling of information on the BCCH. See Table 9.1.43.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see clause 3.2.2.1 and 3GPP TS 45.002. This message has a L2 Pseudo Length of 1.

Message type: SYSTEM INFORMATION TYPE 9

Significance: dual

Direction: network to mobile station

Table 9.1.43.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 9 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 9 Message Type	Message Type 10.4	M	V	1
	RACH Control Parameter	RACH Control Parameters 10.5.2.29	M	V	3
	SI 9 Rest Octets	SI 9 Rest Octets 10.5.2.37a	M	V	17

9.1.43a System information Type 13

This message is sent on the BCCH if indicated in at least one of the SYSTEM INFORMATION TYPE 3, 4, 7 or 8 messages. The message is sent by the network to provide information related to GPRS in the cell. See Table 9.1.43a.1/3GPP TS 04.18. Special requirements for the transmission of this message apply, see 3GPP TS 45.002.

A mobile station not supporting GPRS shall treat this message as an unknown message type.

The L2 Pseudo Length of this message has the value 0.

Message type: SYSTEM INFORMATION TYPE 13

Significance: dual

Table 9.1.43a.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 13 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
	-	10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 13	Message Type	M	V	1
	Message Type	10.4			
	SI 13 Rest Octets	SI 13 Rest Octets	M	V	20
		10.5.2.37b			

9.1.43b (void)

9.1.43c (void)

9.1.43d System information type 16

This message is sent on the BCCH if indicated in the SYSTEM INFORMATION TYPE 3 message. The message is sent by the network giving information about cell selection and reselection parameters to be used in that cell. See Table 9.1.43d.1/3GPP TS 44.018. Special requirements for the transmission of this message applies, see 3GPP TS 45.002.

The L2 pseudo length of this message has the value 1.

Message type: SYSTEM INFORMATION TYPE 16

Significance: dual

Direction: network to mobile station

Table 9.1.43d.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 16 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 16 Message Type	Message Type 10.4	М	V	1
	SI 16 Rest Octets	SI 16 Rest Octets 10.5.2.37e	M	V	20

9.1.43e System information type 17

This message is sent on the BCCH if indicated in the SYSTEM INFORMATION TYPE 3 message. The message is sent by the network giving information about cell selection and reselection parameters to be used in that cell. See Table 9.1.43e.1/3GPP TS 44.018. Special requirements for the transmission of this message applies, see 3GPP TS 45.002.

The L2 pseudo length of this message has the value 1.

Message type: SYSTEM INFORMATION TYPE 17

Significance: dual

Table 9.1.43e.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 17 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 17	Message Type	M	V	1
	Message Type	10.4			
	SI 17 Rest Octets	SI 17 Rest Octets	M	V	20
		10.5.2.37f			

9.1.43f System information type 19

This message is sent optionally on the BCCH by the network to all mobile stations within the cell giving information on COMPACT neighbour cells. See Table 9.1.43f.1/3GPP TS 44.018. Special requirements for the transmission of this message apply, see 3GPP TS 45.002.

A mobile station that does not support COMPACT should ignore this message.

This message has a L2 pseudo length of 1.

Message type: SYSTEM INFORMATION TYPE 19

Significance: dual

Direction: network to mobile station

Table 9.1.43f.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 19 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length 10.5.2.19	M	V	1
	RR management Protocol Discriminator	Protocol Discriminator 10.2	M	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	System Information Type 19 Message Type	Message Type 10.4	M	V	1
	SI 19 Rest Octets	SI 19 Rest Octets 10.5.2.37g	M	V	20

9.1.43g System information type 18

This message is sent in one or more instances on the BCCH when the operator decides to transmit non-GSM broadcast information.

A mobile station with non-GSM capabilities shall read all instances of this message (by using parameters in the SI 18 Rest Octets). The mobile station needs only decode the Non-GSM information according to the Non-GSM protocols it supports, indicated by the Non-GSM protocol discriminator.

The L2 pseudo length of this message has the value 1.

Message type: SYSTEM INFORMATION TYPE 18

Significance: dual

Table 9.1.43g.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 18 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
		10.5.2.19			
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information	Message Type	M	V	1
	Type 18 Message Type	10.4			
	SI 18 Rest Octets	SI 18 Rest Octets	M	V	20
		10.5.2.37h			

9.1.43h System information type 20

This message is sent in one or more instances on the BCCH when the operator decides to transmit non-GSM broadcast information.

A mobile station with non-GSM capabilities shall read all instances of this message (by using parameters in the SI 20 Rest Octets). The mobile station needs only decode the Non-GSM information according to the Non-GSM protocols it supports, indicated by the Non-GSM protocol discriminator.

The L2 pseudo length of this message has the value 1.

Message type: SYSTEM INFORMATION TYPE 20

Significance: dual

Direction: network to mobile station

Table 9.1.43h.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 20 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
		10.5.2.19			
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	М	V	1/2
		10.3.1			
	System Information	Message Type	M	V	1
	Type 20 Message Type	10.4			
	SI 20 Rest Octets	SI 18 Rest Octets	М	V	20
		10.5.2.37i			

9.1.43i System information Type 14

This message is sent optionally on the SACCH by the network to mobile stations within the cell giving information on dynamic ARFCN mapping. It allows to allocate ARFCN values and dynamically map them to physical frequencies, see 3GPP TS 45.005. See Table 9.1.43i.1/3GPP TS 44.018. This message may contain more than one instance.

When received, this information replaces any previously received information about dynamic ARFCN mapping. This message has a L2 Pseudo Length of 18.

Message type: SYSTEM INFORMATION TYPE 14

Significance: dual

Table 9.1.43i.1/3GPP TS 44.018: SYSTEM INFORMATION TYPE 14 message content

IEI	Information element	Type / Reference	Presence	Format	Length
	L2 pseudo length	L2 pseudo length	M	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 14	Message Type	M	V	1
	Message Type	10.4			
	SI 14 Rest Octets	SI 14 Rest Octets	M	V	16
		10.5.2.37j			

9.1.43j System information type 15

This message is sent optionally on the BCCH by the network to all mobile stations within the cell giving information about dynamic ARFCN mapping. It allows to allocate ARFCN values and dynamically map them to physical frequencies, see 3GPP TS 45.005. This message may contain more than one instance. Special requirements for the transmission of this message apply on BCCH, see 3GPP TS 45.002.

This message has a L2 pseudo length of 1

Message type: SYSTEM INFORMATION TYPE 15

Significance: dual

Direction: network to mobile station

Table 9.1.43j.1/3GPP TS 44.018: SYSTEM INFORMATION 15 message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 Pseudo Length	L2 Pseudo Length	M	V	1
		10.5.2.19			
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	System Information Type 15	Message Type	M	V	1
	Message Type	10.4			
	SI 15 Rest Octets	SI 15 Rest Octets	M	V	20
		10.5.2.37k			

9.1.44 Talker indication

This message is sent on the main DCCH by the mobile station to the network to give the talker information when a new layer 2 connection is established on a VGCS channel after an uplink access. See Table 9.1.44.1/3GPP TS 44.018.

Message type: TALKER INDICATION

Significance: dual

Direction: mobile station to network

Table 9.1.44.1/3GPP TS 44.018: TALKER INDICATION message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator 10.3.1	M	V	1/2
	Talker Indication Message Type	Message Type 10.4	M	V	1
	Mobile Station Classmark	Mobile Station Classmark 2 10.5.1.6	M	LV	4
	Mobile Identity	Mobile Identity 10.5.1.4	М	LV	2-9

9.1.45 Uplink access

This message is sent in random mode on the voice group call channel uplink. It does not follow the basic format. The possible formats are presented directly below, without reference to information fields. The order of bit transmission is defined in 3GPP TS 44.004.

The message is only one octet long, coded as shown in Figure 9.1.45.1/3GPP TS 44.018 and Table 9.1.45.1/3GPP TS 44.018.




Figure 9.1.45.1/3GPP TS 44.018: UPLINK ACCESS message content

ESTABLISHMENT CAUSE (octet 1)

This information field indicates the reason for requesting the establishment of a connection. This field has a variable length (from 3 bits up to 8 bits).

RANDOM REFERENCE (octet 1)

This is an unformatted field with variable length (from 5 bits down to 0 bits).

The Uplink access message is coded as follows:

(Random Reference field is filled with "x").

Table 9.1.45.1/3GPP TS 44.018: UPLINK ACCESS message content

Message 8 7 6 5 4 3 2 1	Meaning of Establishment Cause
110xxxxx	Subsequent talker uplink request
00100101	Reply on uplink access request
other values	reserved for future use

9.1.46 Uplink busy

The understanding of this message is only required for mobile stations supporting VGCS talking.

This message is broadcasted on the voice group call channel on the main DCCH, SAPI=0, by the network in unacknowledged mode to inform the mobile station of the uplink status of the voice group call channel. See Table 9.1.46.1/3GPP TS 44.018.

Message type: UPLINK BUSY

Significance: dual

Table 9.1.46.1/3GPP TS 44.018: UPLINK BUSY message content

IEI	Information element	Type / Reference Presence		Format	length
	RR management Protocol	Protocol Discriminator	М	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Uplink busy Message Type	Message Type	M	V	1
		10.4			

9.1.47 Uplink free

This message is sent on the main DCCH, in unacknowledged mode using the RR short protocol discriminator by the network to inform the mobile station of the uplink status of the voice group call channel. See Table 9.1.47.1/3GPP TS 44.018. The message indicates the uplink as free unless the Uplink Access Request field indicates the uplink as not free.

This message may also be used by the network to request the mobile station to perform an uplink reply procedure.

Message type: UPLINK FREE

Significance: dual

Direction: network to mobile station

Table 9.1.47.1/3GPP TS 44.018: UPLINK FREE message content

<up><UPLINK FREE> ::= <RR short PD : bit> See 3GPP TS 24.007

<message type : bit(5)> See 10.4

<short layer 2 header : bit(2)</p>
See 3GPP TS 44.006

<Uplink Access Request bit>

{L|H < Uplink Identity Code bit(6)>}

<implicit spare>;

Uplink Access Request:

L Mobile station shall not perform the uplink reply procedure;

H Mobile station shall perform the uplink reply procedure.

When set to H, this element also indicates the uplink as not free for the uplink access procedure.

Uplink Identity Code:

This field is coded as the binary representation of the UIC.

If provided by the network, the Uplink Identity Code shall be used by the mobile for the coding of the UPLINK ACCESS message

9.1.48 Uplink release

Only applicable for mobile stations supporting VGCS talking.

This message is sent on the uplink of the voice group call channel to initiate a deactivation of the group transmit mode and to set the uplink free or on the downlink of the voice group call channel in order to reject an uplink access which was already granted by the network. See Table 9.1.48.1/3GPP TS 44.018

Message type: UPLINK RELEASE

both

Significance: local

Direction:

Table 9.1.48.1/3GPP TS 44.018: UPLINK RELEASE message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Uplink Release Message Type	Message Type	M	V	1
		10.4			
	RR Cause	RR Cause	М	V	1
		10.5.2.31			

9.1.49 VGCS uplink grant

The understanding of this message is only required for mobile stations supporting VGCS talking.

This message is sent in unacknowledged mode on the main signalling channel by the network to the mobile station to stop the sending of access bursts from the mobile station and to change the channel configuration to a dedicated configuration. See Table 9.1.49.1/3GPP TS 44.018.

Message type: VGCS UPLINK GRANT

Significance: dual

Direction: network to mobile station

Table 9.1.49.1/3GPP TS 44.018: VGCS UPLINK GRANT message content

IEI	Information element	Type / Reference	Presence	Format	length
	RR management Protocol	Protocol Discriminator	M	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	VGCS Uplink Grant Message	Message Type	M	V	1
	Туре	10.4			
	Request Reference	Request Reference	M	V	3
		10.5.2.30			
	Timing Advance	Timing Advance	M	V	1
		10.5.2.40			

9.1.50 System information type 10 \$(ASCI)\$

The understanding of messages of this message type is only required for mobile stations supporting VGCS listening and VBS listening. A mobile station not understanding the message shall treat it as unknown message.

Messages of this message type are optionally sent by the network in unacknowledged mode on the SACCH related to the voice broadcast channel or voice group call channel. SYSTEM INFORMATION TYPE 10 messages contain information about neighbour cells. When sent on the SACCH of a VGCS or VBS downlink, SYSTEM INFORMATION TYPE 10 messages address all mobile stations receiving that downlink within the cell. There may be different SYSTEM INFORMATION TYPE 10 messages sent on the same SACCH.

They are not standard layer 3 messages. They shall be transferred using the short header format for SACCH messages sent in unacknowledged mode specified in 3GPP TS 24.007.

Each SYSTEM INFORMATION TYPE 10 message defines a list of cells and may contain further information for cells of that list, a cell being identified by the pair of ARFCN and BSIC of the BCCH. Newer information about a cell received in SYSTEM INFORMATION TYPE 10 messages shall replace older information.

Message type: SYSTEM INFORMATION TYPE 10

Significance: dual

<SYSTEM INFORMATION TYPE 10> ::=

<RR short PD : bit> -- See 3GPP TS 24.007

<message type : bit(5)> -- See 10.4

EXTENDED MEASUREMENT ORDER

This message is sent on the SACCH by the network to the mobile station, to order the mobile station to send one extended measurement report. See table 9.1.51.1/3GPP TS 44.018.

A mobile station which does not support Extended Measurements shall discard this message.

This message has a L2 Pseudo Length of 18.

Message type: EXTENDED MEASUREMENT ORDER

Significance: dual

9.1.51

Direction: network to mobile station

Table 9.1.51.1/3GPP TS 44.018EXTENDED MEASUREMENT ORDER message content

IEI	Information element	Type / Reference	Presence	Format	length
	L2 pseudo length	L2 pseudo length	M	V	1
		10.5.2.19			
	RR management	Protocol Discriminator	M	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	M	V	1/2
		10.3.1			
	Extended Measurement	Message Type	M	V	1
	Order	10.4			
	Extended Measurement	Extended Measurement	M	V	16
	Frequency List	Frequency List			
		10.5.2.46			

9.1.52 Extended measurement report

This message is sent on the SACCH by the mobile station to the network to report extended measurement results about the signal strength on specified carriers. See table 9.1.52.1/3GPP TS 44.018.

Message type: EXTENDED MEASUREMENT REPORT

Significance: dual

Direction: mobile station to network

Table 9.1.52.1/3GPP TS 44.018: EXTENDED MEASUREMENT REPORT message content

IEI	Information element	Information element Type / Reference Presence		Format	length
	RR management	Protocol Discriminator	М	V	1/2
	Protocol Discriminator	10.2			
	Skip Indicator	Skip Indicator	М	V	1/2
		10.3.1			
	Extended Measurement Report	Message Type	М	V	1
	Message Type	10.4			
	Extended Measurement	Extended Measurement	M	V	16
	Results	Results			
		10 5 2 45			

9.1.53 Application Information

This message is sent on the main DCCH by the network or the mobile station to convey an embedded Application Protocol Data Unit (APDU) or APDU segment between the network and the mobile station. See table 9.1.53.1/3GPP TS 44.018.

Message type: Application

Significance: global

Direction: both

Table 9.1.53.1/3GPP TS 44.018: Application Information message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	RR management Protocol	Protocol discriminator	М	V	1/2
	Discriminator	10.2			
	Skip Indicator	Skip Indicator	М	V	1/2
		10.3.1			
	Application Information message	Message type	М	V	1
	type	10.4			
	APDU ID	APDU ID	М	V	1/2
		10.5.2.48			
	APDU Flags	APDU Flags	M	V	1/2
	-	10.5.2.49			
	APDU Data	APDU Data	М	LV	2 to N
		10.5.2.50			

9.1.54 MEASUREMENT INFORMATION

This message is sent on the SACCH by the network to the mobile station. If not all information fits into one message, the remaining information will be sent in other instances of this message. This message may contain a combination of information for e.g. 3G Neighbour Cell Description, Real Time Differences, BSICs, Report priority, Measurement parameters or 3G Measurement parameters.

Message type: MEASUREMENT INFORMATION

Significance: dual

```
<Measurement information> ::=
< RR short PD : bit > -- See 3GPP TS 44.007 
< Message type : bit (5) > -- See 10.4
< Short layer 2 header : bit (2) > -- See 3GPP TS 44.006
< BA_IND : bit >
< 3G_BA_IND : bit >
< MP_CHANGE_MARK : bit >
< MI_INDEX : bit (4) >
< MI_COUNT : bit (4) >
< PWRC : bit >
< REPORT_TYPE : bit >
< REPORTING RATE : bit >
< INVALID_BSIC_REPORTING : bit >
{ 0 | 1 < Real Time Difference Description : < Real Time Difference Description struct >> }
{ 0 | 1 < BSIC Description : < BSIC Description struct >> }
{ 0 | 1 < REPORT PRIORITY Description : < REPORT PRIORITY Description struct >> }
{ 0 | 1 < MEASUREMENT Parameters Description : < MEASUREMENT Parameters Description struct >> }
\{ 0 \mid 1 < extension length : bit (8) >
   < spare bit (val(extension length)+1) > } - used for future extensions of the 2G parameters
{ 0 | 1 < 3G Neighbour Cell Description : < 3G Neighbour Cell Description struct >> }
{ 0 | 1 < 3G MEASUREMENT Parameters Description : < 3G MEASUREMENT Parameters Description struct >> }
< spare padding > :
< 3G Neighbour Cell Description struct > ::=
\{ 0 \mid 1 < 3G_Wait : bit (3) > \}
{ 0 | 1 < Index_Start_3G : bit (7) > }
{ 0 | 1 < Absolute_Index_Start_EMR : bit (7) > }
{ 0 | 1 < UTRAN FDD Description : < UTRAN FDD Description struct >> }
{ 0 | 1 < UTRAN TDD Description : < UTRAN TDD Description struct >> }
{ 0 | 1 < CDMA2000 Description : < CDMA2000 Description struct >> };
< UTRAN FDD Description struct > ::=
\{ 0 \mid 1 < Bandwidth_FDD : bit (3) > \}
{ 1 < Repeated UTRAN FDD Neighbour Cells : < Repeated UTRAN FDD Neighbour Cells struct >> } ** 0 ;
< Repeated UTRAN FDD Neighbour Cells struct > ::=
\{ 0 < FDD-ARFCN : bit (14) > | 1 < FDD-ARFCN-INDEX : bit (3) > \} 
< FDD_Indic0 : bit >
< NR_OF_FDD_CELLS : bit (5) >
< FDD_CELL_INFORMATION Field: bit(p(NR_OF_FDD_CELLS)) > ; -- p(x) defined in table 9.1.54.1/3GPP TS 44.018.
< UTRAN TDD Description struct > ::=
\{ 0 \mid 1 < Bandwidth TDD : bit (3) > \}
{ 1 < Repeated UTRAN TDD Neighbour Cells : Repeated UTRAN TDD Neighbour Cells struct > } ** 0 ;
< Repeated UTRAN TDD Neighbour Cells struct > ::=
\{\ 0 < \text{TDD-ARFCN}: \text{bit } (14) > |\ 1 < \text{TDD-ARFCN-INDEX}: \text{bit } (3) > \}
< TDD_Indic0 : bit >
< NR_OF_TDD_CELLS : bit (5) >
< TDD_CELL_INFORMATION Field: bit(q(NR_OF_TDD_CELLS) > ; -- q(x) defined in table 9.1.54.1/3GPP TS 44.018.
```

```
< CDMA 2000 Description struct > ::=
   < cdma2000 frequency band : bit(5)>
   < cdma2000 frequency : bit(11)>
   < number_cdma2000_cells : bit (5) >
       { < Pilot PN offset : bit (9) >
          -- this information is enough for 1X Common Pilot
       \{ 0 \mid 1 \mid \{000 \mid \{ < TD\_MODE : bit (2) > \{ < TD\_POWER\_LEVEL : bit (3) > \} \}
          -- additional information for 1X Common Pilot with Transmit Diversity
              | 001 { < QOF : bit (2) > < WALSH_LEN_A : bit (3) >
                     <AUX_PILOT_WALSH: bit(val(WALSH_LEN_A)+6) >}
          -- additional information for 1X Auxiliary Pilot
              | 010 { < QOF : bit (2) > < WALSH_LEN_B : bit (3) >
                     < AUX_TD_WALSH: bit (val(WALSH_LEN_B)+6) >
                     < AUX_TD_POWER_LEVEL : bit (2) > <TD_MODE : bit (2) >}
          -- additional information for 1X Auxiliary Pilot with Transmit Diversity
              | 011 { < SR3_PRIM_PILOT : bit (2) > < SR3_PILOT_POWER1 : bit (3) >
                     < SR3_PILOT_POWER2 : bit(3)>}
          -- additional information for 3X Common Pilot
              | 110 { < SR3_PRIM_PILOT : bit (2) > < SR3_PILOT_POWER1 : bit (3) >
                     < SR3_PILOT_POWER2 : bit (3) > < QOF : bit (2) >
                     < WALSH_LEN_C : bit (3) >
                     < AUX_WALSH_LEN : bit(val(WALSH_LEN_C)+6) >
                 \{ 0 \mid 1 < QOF1 : bit (2) > < WALSH_LENGTH1 : bit (3) >
                     < AUX_PILOT_WALSH1 : bit(val(WALSH_LENGTH1)+6) > }
                 { 0 | 1 < QOF2 : bit (2) > < WALSH_LENGTH2 : bit (3) >
                     < AUX_PILOT_WALSH2 : bit(val(WALSH_LENGTH2)+6)> } }
          -- additional information for 3X Auxiliary Pilot
              }
          } * val(number cdma2000 cells);
< Real Time Difference Description struct > ::=
   { 0 | 1 { 0 | 1 < BA_Index_Start_RTD : bit (5) > }
                                                           --default value=0
          < RTD Struct : < RTD6 Struct >>
          { 0 < RTD Struct : < RTD6 Struct >> } **1 }
                                                           -- '0' indicates to increment by 1
                                                           -- the index of the frequency in the BA (list)
   { 0 | 1 { 0 | 1 < BA_Index_Start_RTD : bit (5) > }
                                                          --default value=0
          < RTD Struct : < RTD12 Struct >>
          { 0 < RTD Struct : < RTD12 Struct >> } **1 };
                                                           -- '0' indicates to increment by 1
                                                           -- the index of the frequency in the BA (list)
< RTD6 Struct > ::=
   \{ 0 < RTD : bit (6) > \} ** 1;
                                  -- Repeat until '1'; '1' means last RTD for this frequency
< RTD12 Struct > ::=
   \{ 0 < RTD : bit (12) > \} ** 1;
                                  -- Repeat until '1'; '1' means last RTD for this frequency
< BSIC Description struct > ::=
   \{ 0 \mid 1 < BA \mid Index Start BSIC : bit (5) > \}
                                                           -- default value=0
   < BSIC : bit (6) >
   < Number Remaining BSIC: bit (7) >
     < Frequency_Scrolling : bit >
                                                           -- 0 means same frequency
       < BSIC : bit (6) > } * (val(Number_Remaining_BSIC));
< REPORT PRIORITY Description struct > ::=
   < Number_Cells : bit (7) >
   { REP_PRIORITY : bit } * (val(Number_Cells)) ;
```

```
< MEASUREMENT PARAMETERS Description struct > ::=
   \{ 0 \mid 1 < MULTIBAND REPORTING: bit (2) > \}
   \{ 0 \mid 1 < SERVING BAND REPORTING: bit (2) > \}
   < SCALE_ORD : bit (2) >
   \{0 \mid 1 < 900 \text{ REPORTING OFFSET} : bit (3) >
         < 900 REPORTING THRESHOLD: bit (3) > }
   { 0 | 1 < 1800_REPORTING_OFFSET : bit (3) >
         < 1800_REPORTING_THRESHOLD : bit (3) > }
   \{0 \mid 1 < 400 \text{ REPORTING OFFSET} : bit (3) >
         < 400_REPORTING_THRESHOLD: bit (3) > }
   { 0 | 1 < 1900 REPORTING OFFSET : bit (3) >
         < 1900_REPORTING_THRESHOLD : bit (3) > }
   { 0 | 1 < 850_REPORTING_OFFSET : bit (3) >
         < 850_REPORTING_THRESHOLD : bit (3) > };
< 3G MEASUREMENT PARAMETERS Description struct > ::=
   < Qsearch_C : bit (4) >
   < 3G_SEARCH_PRIO: bit (1) >
   < FDD_REP_QUANT : bit (1) >
                                                                          -- FDD Parameters
   \{ 0 \mid 1 < FDD_MULTIRAT_REPORTING : bit (2) > \}
   { 0 | 1 < FDD_REPORTING_OFFSET : bit (3) >
         < FDD_REPORTING_THRESHOLD : bit (3) > }
   \{ 0 \mid 1 < TDD_MULTIRAT_REPORTING : bit (2) > \}
                                                                          -- TDD Parameters
   \{0 \mid 1 < TDD_REPORTING_OFFSET : bit (3) > 1\}
         < TDD_REPORTING_THRESHOLD : bit (3) > }
   { 0 | 1 < CDMA2000_MULTIRAT_REPORTING : bit (2) > }
                                                                          -- CDMA2000 Parameters
   { 0 | 1 < CDMA2000 REPORTING OFFSET : bit (3) >
         < CDMA2000_REPORTING_THRESHOLD : bit (3) > };
```

Figure 9.1.54.1/3GPP TS 44.018: Measurement Information message content

Table 9.1.54.1/3GPP TS 44.018: Measurement Information information element details.

BA_IND (1 bit), BCCH allocation sequence number indication.

The BA_IND is needed to allow the network to discriminate measurements results related to different GSM Neighbour Cell lists sent to the MS, as described in clause 3.4.1.2.1 'The Use of parameters from the Measurement Information/SI2quater messages'. The value of this parameter is reflected in the ENHANCED MEASUREMENT REPORT message and in the MEASUREMENT REPORT message.

3G BA IND (1 bit), 3G Sequence Number.

The 3G_BA_IND parameter is needed to allow the network to discriminate measurement results related to different 3G Neighbour Cell lists sent to the MS, as described in clause 3.4.1.2.1, 'The Use of parameters from the Measurement Information/Si2quater messages'. The value of this parameter is reflected in the ENHANCED MEASUREMENT REPORT and MEASUREMENT REPORT messages.

MP_CHANGE_MARK (1 bit), measurement parameters change mark.

This parameter is used to indicate the MS a change of information concerning REPORT PRIORITY, MEASUREMENT INFORMATION and 3G MEASUREMENT INFORMATION, as described in clause 3.4.1.2.1, 'The Use of parameters from the Measurement Information/SI2 quater messages'.

MI INDEX (4 bits) and MI COUNT (4 bits)

The purpose of the MI_INDEX and MI_COUNT fields is to indicate the number of individual messages within the sequence of MEASUREMENT INFORMATION messages and to assign an index to identify each of them. The MI_INDEX field is binary coded, range 0 to 15, and provides an index to identify the individual MEASUREMENT INFORMATION message. The MI_COUNT field is binary coded, range 0 to 15, and provides the MI_INDEX value for the last (highest indexed) message in the sequence of MEASUREMENT INFORMATION messages.

PWRC, Power control indicator (1 bit field)

The use of this parameter is defined in 3GPP TS 45.008.

Bit

- 0 PWRC is not set
- 1 PWRC is set.

REPORT TYPE (1bit)

This parameter is used to indicate to the mobile to use the Enhanced Measurement report or Measurement report messages for reporting:

Rit

- **0** The MS shall use the Enhanced Measurement Report message for reporting if at least one BSIC is allocated to each BA (list) frequency. Otherwise, the Measurement Report message shall be used.
- 1 The MS shall use the Measurement Report message for reporting.

REPORTING_RATE (1 bit)

This parameter is used for measurements, see 3GPP TS 45.008.

bit

- 0 SACCH rate reporting
- 1 Reduced reporting rate allowed.

INVALID BSIC REPORTING (1 bit)

This field specifies if cells with invalid BSIC and allowed NCC part of BSIC are allowed to be reported or not, see 3GPP TS 45.008.

bit

- **0** Report on cells with invalid BSIC and allowed NCC part of BSIC is not allowed.
- 1 Report on cells with invalid BSIC and allowed NCC part of BSIC is allowed.

3G Neighbour Cell Description:

The building of the 3G Neighbour Cell list and the ordering of indices within each Radio Access Technology is described in clause 3.4.1.2.1.1, 'Deriving the 3G Neighbour Cell list from the 3G Neighbour Cell Description'.

3G-WAIT (3 bits)

When 3G_BA_IND is received in a changed state, this parameter indicates the number of instances of MEASUREMENT INFORMATION messages that contain 3G Neighbour Cell Description which shall be received before the MS reports on the new 3G Neighbour Cell list. Two different instances of MEASUREMENT INFORMATION messages are two MEASUREMENT INFORMATION messages with different MI_INDEX. See clause 3.4.1.2.1.

bit

321

- 0 0 0 1 instance that contain 3G Neighbour Cell Description shall be received
- 0 0 1 2 instances that contain Neighbour Cell Description shall be received
- 1 1 1 8 instances that contain Neighbour Cell description shall be received

Index Start 3G (7 bit)

This optional information element indicates the binary value of the first index to use to build this instance of the 3G Neighbour Cell list. When missing, the value 0 is assumed. See clause 3.4.1.2.1.1.

Absolute_Index_Start_EMR (7 bit)

This parameter indicates in binary the value to be added to the indexes of the 3G Neighbour Cell list for reporting 3G Cells with the ENHANCED MEASUREMENT REPORT message (see clause 3.4.1.2.1.1). If different values are received for this parameter in different instances of this message, the instance with the highest index shall be used. If this parameter is absent in all instances of the message, the value "0" shall be used.

NOTE: This parameter is not used for reporting 3G Cells with the MEASUREMENT REPORT message, see clause 10.5.2.20, 'Measurement Results'.

UTRAN FDD Description:

Bandwidth FDD (3bit field)

This optional information element will be used for future releases of the protocol. When missing, this indicates the present FDD bandwidth. When present, this shall not be considered as an error; indices of the 3G Neighbour Cell list shall be incremented accordingly.

FDD ARFCN (14 bit field)

This optional information element is defined as the UARFCN in 3GPP TS 25.101. Any non-supported frequency shall not be considered as an error; indices of the 3G Neighbour Cell list shall be incremented accordingly.

FDD-ARFCN-INDEX (3 bit field)

This field points to the absolute frequency received in the UTRAN Freq list information element in the Channel Release message (see clause 10.5.2.1d, UTRAN frequency list) or in the UTRAN Frequency List description struct (see 3G TS 44.060). If there is no frequency associated to this value of the FDD-ARFCN-INDEX parameter, this shall not be considered as an error; indices of the 3G Neighbour Cell list shall be incremented accordingly.

FDD_Indic0, information 0 indicator (1 bit):

This field indicates if the FDD_CELL_INFORMATION parameter value '0000000000' is a member of the set.

Bit

- 0 parameter value '0000000000' is not a member of the set
- 1 parameter value '0000000000' is a member of the set

NOTE: This bit FDD_Indic0 is equivalent to the bit F0 bit in the frequency list information element (see clause 10.5.2.13.3).

NR OF FDD CELLS (5 bit field)

This field defines the number of FDD_CELL_INFORMATION parameters.

FDD CELL INFORMATION Field (p bit field)

This field allows to compute a set of 10-bit-long FDD_CELL_INFORMATION parameters, re-using the *Range 1024 format* compression algorithm, see Annex J: 'Algorithm to encode frequency list information'. The formulas for decoding are given in the 'Range 1024 format' clause, 10.5.2.13.3. The consecutive parameters of this field are concatenated, starting with w1, and then w2, w3...

The total number of bits p of this field depends on the value of the parameter NR_OF_FDD_CELLS = n, as follows:

n	p	n	p	n	p	n	p
0	0	5	44	10	81	15	116
1	10	6	52	11	88	16	122
2	19	7	60	12	95	17-31	0
3	28	8	67	13	102		
4	36	9	74	14	109		

Table 9.1.54.1a.

If n=0 and FDD_Indic0=0, this indicates the 3G Neighbour Cell list index for report on RSSI, see 3GPP TS 45.008.

If n is equal or greater than 17, this shall not be considered as an error; the corresponding index in the 3G Neighbour Cell list shall be incremented by one.

For each (10-bit-long) decoded Parameter, bits 1-9 are the Scrambling Code and bit 10 is the corresponding Diversity Parameter.

Scrambling Code (9 bit field)

This parameter indicates the Primary Scrambling Code as defined in 3GPP TS 25.213.

Diversity (1 bit field)

This parameter indicates if diversity is applied for the cell:

Bit

- 0 Diversity is not applied for this cell
- 1 Diversity is applied for this cell.

UTRAN TDD Description:

Bandwidth TDD (3 bit field)

This optional information element refers to 3GPP TS 25.331.

Bit 321

000 3.84Mcps

001 1.28Mcps

All other values shall not be interpreted as an error; indices of the 3G Neighbour Cell list shall be incremented accordingly (and no measurements can be performed). When missing, this indicates 3.84 Mcps.

TDD_ARFCN (14 bit field)

This optional information element is defined as the UARFCN in 3GPP TS 25.102. Any non-supported frequency shall not be considered as an error; indices of the 3G Neighbour Cell list shall be incremented accordingly.

TDD-ARFCN-INDEX (3 bit field)

This field points to the absolute frequency received in the UTRAN Freq list information element in the Channel Release message (see clause 10.5.2.1d, 'UTRAN frequency list') or in the UTRAN Frequency List description struct (see 3GPP TS 44.060). If there is no frequency associated to this value of the TDD-ARFCN-INDEX parameter, this shall not be considered as an error; indices of the 3G Neighbour Cell list shall be incremented accordingly.

TDD_Indic0, information 0 indicator (1 bit):

This field indicates if the TDD_CELL_INFORMATION parameter value '0000000000' is a member of the set.

Bit

- 0 parameter value '000000000' is not a member of the set
- 1 parameter value '0000000000' is a member of the set

NR_OF_TDD_CELLS (5 bit field)

This field defines the number of TDD_CELL_INFORMATION parameters.

TDD CELL INFORMATION Field (q bit field)

This field allows to compute a set of 9-bit-long TDD_CELL_INFORMATION parameters, re-using the *Range 512 format* compression algorithm, see Annex J: 'Algorithm to encode frequency list information'. The formulas for decoding are given in the 'Range 512 format' clause, 10.5.2.13.4, with w0=0. The consecutive parameters of this field are concatenated, starting withw1, and then w2, w3...

The total number of bits q of this field depends on the value of the parameter NR_OF_TDD_CELLS = m, as follows:

m	q	m	q	m	q	m	q	m	q
0	0	5	39	10	71	15	101	20	126
1	9	6	46	11	77	16	106	21-31	0
2	17	7	53	12	83	17	111		
3	25	8	59	13	89	18	116		
4	32	9	65	14	95	19	121		

Table 9.1.54.1b.

If m=0 and TDD_Indic0=0 or m is equal or greater than 21, this shall not be considered as an error; the corresponding index in the 3G Neighbour Cell list shall be incremented by one.

For each (9-bit-long) decoded Parameter, bits 1-7 are the Cell Parameter, bit 8 is the Sync Case and bit 9 is the Diversity bit.

Cell Parameter (7 bit field)

This parameter is defined in 3GPP TS 25.213.

Sync Case (1 bit field)

This parameter indicates the Sync Case as defined in 3GPP TS 25.304.

Bit

0 Sync case 1

1 Sync case 2.

Diversity (1 bit field)

This parameter indicates if diversity is applied for the cell:

Bit

- 0 Diversity is not applied for this cell
- 1 Diversity is applied for this cell.

CDMA 2000 Description:

cdma2000 frequency band (5 bit field)

A binary representation of cdma2000 BAND_CLASS, as defined in TIA/EIA-IS-2000-5-A. The mobile station shall ignore all the information relative to a cdma2000 frequency band that it can not support.

cdma2000 frequency (5 bit field)

A binary representation of cdma2000 CDMA_FREQ, as defined in TIA/EIA-IS-2000-5-A. The mobile station shall ignore all the information relative to a cdma2000 frequency that it can not support.

number_cdma2000_cells (5 bit field)

This field indicates the number of CDMA 2000 neighbour cells.

cdma2000 Pilot PN offset (9 bit field)

A binary representation of the PN offset of the Pilot PN sequence (in units of 64 cdma2000 1x-chips), PILOT_PN, as defined in TIA/EIA-IS-2000-5-A.

TD MODE (2 bit field)

An indication of transmit diversity mode is specified in TIA/EIA-IS-2000-5-A. The mobile station shall ignore TD_MODE if it does not support 1X Common Pilot with Transmit Diversity.

TD POWER LEVEL (3 bit field)

Power level of the Transmit Diversity Pilot relative to that of the Forward Pilot Channel as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore TD_POWER_LEVEL if it does not support 1X Common Pilot with Transmit Diversity.

QOF (2 bit field)

Quasi-orthogonal function index is defined in TIA/EIA/IS-2000-5-A. The mobile station shall ignore QOF if it does not support the quasi-orthogonal function.

WALSH LEN A, WALSH LEN B and WALSH LEN C (3 bit field each)

A three bit field to indicate the length of the Walsh code for the pilot that is used in as the Auxiliary Pilot, and specified as WALSH_LEN in TIA/EIA/IS-2000-5-A. The mobile station shall ignore WALSH_LEN if it does not support 1X Auxiliary Pilot.

AUX_PILOT_WALSH (var. length)

Indicates the walsh code corresponding to the Auxiliary Pilot, as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore AUX_PILOT_WALSH if it does not support 1X Auxiliary Pilot.

AUX TD WALSH (var. length)

Indicates the walsh code corresponding to the Auxiliary Transmit Diversity Pilot, as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore AUX_TD_WALSH if it does not support 1X Auxiliary Pilot with Transmit Diversity.

AUX TD POWER LEVEL (2 bit field)

Power level of the Auxiliary Transmit Diversity Pilot relative to that of the Forward Pilot Channel as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore AUX_TD_POWER_LEVEL if it does not support 1X Auxiliary Pilot with Transmit Diversity.

SR3 PRIM PILOT (2 bit field)

Position of the primary SR3 pilot as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore SR3_PRIM_PILOT if it does not support 3X Common Pilot.

SR3 PILOT POWER1 (2 bit field)

Relative power level between the primary SR3 pilot and the pilot on the lower frequency of the two remaining SR3 frequencies, as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore SR3_PILOT_POWER1 if it does not support 3X Common Pilot.

SR3 PILOT POWER2 (2 bit field)

Relative power level between the primary SR3 pilot and the pilot on the higher frequency of the two remaining SR3 frequencies, as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore SR3_PILOT_POWER2 if it does not support 3X Common Pilot.

QOF1 (1 bit field), WALSH LEN1 (3 bit field) and AUX PILOT WALSH1 (var. length)

Are the corresponding quantities for pilot on the lower frequency of the two remaining SR3 frequencies, as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore QOF1, WALSH_LEN1 and AUX_PILOT_WALSH1 if it does not support 3X Auxiliary Pilot.

QOF2 (2 bit field), WALSH_LENGTH2 (3 bit field) and AUX_PILOT_WALSH2 (var. length)

Are the corresponding quantities for pilot on the higher frequency of the two remaining SR3 frequencies, as specified in TIA/EIA/IS-2000-5-A. The mobile station shall ignore QOF2, WALSH_LEN2 and AUX_PILOT_WALSH2 if it does not support 3X Auxiliary Pilot.

PRIORITY Description

REP PRIORITY bit:

- **0** Normal reporting priority
- 1 High reporting priority

The use of these bits is defined in clause 3.4.1.2.1.5 'Report Priority Description'.

BSIC Description

BSIC parameters are used to create the GSM Neighbour Cell list, see clause 3.4.1.2.1.2 'Deriving the GSM Neighbour Cell list from the BSICs and the BA (list)'.

The first **BSIC** parameter received in the structure relates to the index in the BA(list) frequency referenced by the parameter **BA_Index_Start_BSIC** (index 0 if **BA_Index_Start_BSIC** is missing). Then the

FREQUENCY_SCROLLING bit indicates whether the next **BSIC** in the structure relates to the same frequency in the BA(list), with '0', or if the next **BSIC** in the structure relates to the subsequent frequency in the BA (list), with '1'. Each next BSIC received within the structure creates a subsequent GSM Cell list index.

When BSIC information is received in different instances, the first BSIC referring to a BA (list) index in one instance shall be allocated the subsequent GSM Cell list index than the last BSIC referring to the previous BA (list) index in another instance.

Real Time Difference Description

BA_Index_Start_RTD (5 bit field)

This field indicates the BA (list) index for the first RTD parameter. When missing, the value '0' is assumed.

RTD (6 or 12 bit field) are defined in 3GPP TS 45.008.

The use of these parameters is defined in clause 3.4.1.2.1.4, 'Real Time Differences'.

MEASUREMENT PARAMETERS Description

The fields of this Description are used for measurements as defined in 3GPP TS 45.008.

3G MEASUREMENT PARAMETERS Description

The fields of this Description are used for measurements as defined in 3GPP TS 45.008.

9.1.55 ENHANCED MEASUREMENT REPORT

This message containing measurement results is sent on the SACCH by the mobile to the network. See figure 9.1.55.1/3GPP TS 44.018.

This message may contain reports on GSM and/or 3G Radio Access Technologies. Measurements are defined in 3GPP TS 45.008.

Message type: ENHANCED MEASUREMENT REPORT

Significance: dual

Direction: mobile station to network

```
<Enhanced Measurement report> ::=
                                      -- See 3GPP TS 24.007
< RR short PD : bit >
< Message type : bit (5) >
                                        -- See 10.4
< Short layer 2 header : bit (2) >
                                        -- See 3GPP TS 44.006
< BA_USED : bit >
< 3G_BA_USED : bit >
< BSIC_Seen : bit >
< SCALE : bit >
{ 0 | 1 < Serving cell data : < Serving cell data struct >> }
{ 1 < Repeated Invalid_BSIC_Information : < Repeated Invalid_BSIC_Information struct >> } ** 0
\{0 \mid 1 \mid 0 \mid 1 < REPORTING_QUANTITY : bit (6) > \}^{**}\} -- bitmap type reporting
< spare padding > ;
< Serving cell data struct > ::=
< DTX USED : bit >
< RXLEV_VAL : bit (6) >
< RX_QUAL_FULL : bit (3) >
< MEAN_BEP : bit (5) >
< CV_BEP : bit (3) >
< NBR_RCVD_BLOCKS : bit (5) > ;
< Repeated Invalid BSIC Information struct > ::=
< BCCH-FREQ-NCELL : bit (5) >
< BSIC : bit (6) >
< RXLEV-NCELL : bit (6) > ;
```

Figure 9.1.55.1/3GPP TS 44.018: Enhanced Measurement Report message content

Table 9.1.55.1/3GPP TS 44.018: Enhanced Measurement Report information element details.

BA_USED (1 bit field),

The value of the BA-IND field of the neighbour cell description information element or elements defining the BCCH allocation used. Range 0 to 1.

3G_BA_USED (1 bit field)

The value of the 3G-BA-IND field of the neighbour cell description information element or elements defining the 3G allocation used. Range 0 to 1.

BSIC_Seen (1 bit field)

This parameters indicates if a GSM cell with invalid BSIC and allowed NCC part of BSIC is one of the six strongest, see 3GPP TS 45.008.

Bit

- 0 No cell with invalid BSIC and allowed NCC part of BSIC is seen
- 1 One Cell or more with invalid BSIC and allowed NCC part of BSIC is seen

SCALE (1 bit field)

The value of this field is defined in 3GPP TS 45.008.

Serving cell reporting

If this structure is missing, this indicates that no valid measurement exist for the serving cell.

Parameters RXLEV_VAL (6 bits), RX_QUAL_FULL (3 bits), MEAN_BEP (5 bits), CV_BEP (3 bits), NBR_RCVD_BLOCKS (5 bits) are defined in 3GPP TS 45.008.

DTX USED (1 bit field)

This bit indicates whether or not the mobile station used DTX during the previous measurement period.

- 0 DTX was not used
- 1 DTX was used.

Neighbour cell reporting

Repeated Invalid BSIC

This structure contains the report of cells with invalid BSIC.

BCCH-FREQ-NCELL (5 bits). This field represents the index of the BA (list), see 10.5.2.20.

BSIC (6 bits). Base station identity code of the corresponding index in the BA (list).

RXLEV (6 bits). GSM reporting quantity, see 3GPP TS 45.008.

Bitmap type reporting:

This structure contains the report of cells with valid BSIC.

Each bit of the bitmap points to the corresponding index of the Neighbour Cell list defined in clause 3.4.1.2.1.3 'Deriving the Neighbour Cell list from the GSM Neighbour Cell list and the 3G Neighbour Cell list'.

If this structure is present and more bits than needed are available at the end of the message, the MS shall set the value of the redundant bitmap positions to '0'.

After the last REPORTING_QUANTITY parameter, some remaining bits indicating no report may be missing.

REPORTING_QUANTITY (6 bits):

Measurement quantities are defined in 3GPP TS 45.008.

9.2 Messages for mobility management

See 3GPP TS 24.008.

9.3 Messages for circuit-switched call control

See 3GPP TS 24.008.

9.4 GPRS Mobility Management Messages

See 3GPP TS 24.008.

9.5 GPRS Session Management Messages

See 3GPP TS 24.008.

9.6 GTTP Messages

Table 9.6.1/3GPP TS 44.018 summarises the GTTP messages.

Table 9.6.1/3GPP TS 44.018: GTTP messages

GPRS Transparent Transport messages	Reference
GPRS Information	9.6.1

9.6.1 GPRS Information

This message is sent in acknowledged mode on the main DCCH in order to carry GPRS information in a transparent manner between the mobile station and the network. See table 9.6.2/3GPP TS 44.018.

Message type: GPRS Information

Significance: global Direction: both

Table 9.6.2/3GPP TS 44.018: GPRS Information message content

IEI	Information element	Type / Reference	Presence	Format	length
	GTTP Protocol Discriminator	Protocol Discriminator 10.2	М	V	1/2
	Skip Indicator	Skip Indicator 10.3.1	М	V	1/2
	GPRS Information Message Type	Message Type 10.4	М	V	1
	TLLI	TLLI 10.5.2.41a	M	V	4
	LLC PDU	LCC PDU Container 10.5.8.1	М	LV	2-n

9.6.1.1 TLLI

This information element carries the Temporary Logical Link Identifier.

9.6.1.2 LLC PDU Container

This information element carries an LLC PDU with upper layer information.

10 General message format and information elements coding

The figures and text in this clause describe the Information Elements contents.

10.1 Overview

Within the RR protocols defined in 3GPP TS 44.018, every message with the exception of the messages sent on the BCCH, downlink CCCH, SCH, RACH, and the HANDOVER ACCESS message, is a standard L3 message as defined in 3GPP TS 24.007 [20]. This means that the message consists of the following parts:

- a) protocol discriminator;
- b) transaction identifier;
- c) message type;
- d) other information elements, as required.

This organization is illustrated in the example shown in Figure 10.1.1/3GPP TS 44.018.




Figure 10.1.1/3GPP TS 44.018: General message organization example

Unless specified otherwise in the message descriptions of clause 9, a particular information element shall not be present more than once in a given message.

The term "default" implies that the value defined shall be used in the absence of any assignment, or that this value allows negotiation of alternative values in between the two peer entities.

When a field extends over more than one octet, the order of bit values progressively decreases as the octet number increases. The least significant bit of the field is represented by the lowest numbered bit of the highest numbered octet of the field.

10.2 Protocol Discriminator

The Protocol Discriminator (PD) and its use are defined in 3GPP TS 24.007 [20].

10.3 Skip indicator

10.3.1 Skip indicator

Bits 5 to 8 of the first octet of every Radio Resource management message contain the skip indicator. A message received with skip indicator different from 0000 shall be ignored. A message received with skip indicator encoded as 0000 shall not be ignored (unless it is ignored for other reasons). A protocol entity sending a Radio Resource management message shall encode the skip indicator as 0000.

10.4 Message Type

The message type IE and its use are defined in 3GPP TS 24.007 [20]. Tables 10.1.1/3GPP TS 44.018 and 10.4.2/3GPP TS 44.018 define the value part of the message type IE used in the Radio Resource management protocol. Table 10.4.3/3GPP TS 44.018 defines the value part of the message type IE used in the GPRS Transparent Transport protocol.

Table 10.4.1/3GPP TS 44.018: Message types for Radio Resource management

```
7 6 5 4 3 2 1
0 0 1 1 1 - - -
                 Channel establishment messages:
          1 0 0
                 - RR INITIALISATION REQUEST
          0 1 1
                 - ADDITIONAL ASSIGNMENT
          1 1 1 - IMMEDIATE ASSIGNMENT
0 0 1 - IMMEDIATE ASSIGNMENT EXTENDED
                - IMMEDIATE ASSIGNMENT REJECT
          0 1 0
0 1 0 0 1 0 0 0
                 - DTM ASSIGNMENT FAILURE
                 - DTM REJECT
0 1 0 0 1 0 0 1
0 1 0 0 1 0 1 0
                 - DTM REQUEST
0 1 0 0 1
          1 1 1
                 - PACKET ASSIGNMENT
 0 1 1 0
                Ciphering messages:
          1 0 1 - CIPHERING MODE COMMAND
                - CIPHERING MODE COMPLETE
          0 1 0
0 0 1 1 0 - - -
                 Configuration change messages:
          0 0 0
                - CONFIGURATION CHANGE COMMAND
          0 0 1 - CONFIGURATION CHANGE ACK.
          0 1 1
                  - CONFIGURATION CHANGE REJECT
```

```
8 7 6 5 4 3 2 1
0 0 1 0 1 - - - Handover messages:
          1 1 0 - ASSIGNMENT COMMAND
          0 0 1 - ASSIGNMENT COMPLETE
          1 1 1
                 - ASSIGNMENT FAILURE
          0 1 1 - HANDOVER COMMAND
          1 0 0 - HANDOVER COMPLETE
          0 0 0 - HANDOVER FAILURE
          1 0 1 - PHYSICAL INFORMATION
0 1 0 0 1 1 0 1 - DTM ASSIGNMENT COMMAND
0 0 0 0 1 0 0 0 0 - RR-CELL CHANGE ORDER
0 0 1 0 0 0 1 1 - PDCH ASSIGNMENT COMMAND
0 0 0 0 1 - - - Channel release messages:
          1 0 1 - CHANNEL RELEASE
0 1 0 - PARTIAL RELEASE
          1 1 1 - PARTIAL RELEASE COMPLETE
0 0 1 0 0 - - -
                 Paging and Notification messages:
          0 0 1 - PAGING REQUEST TYPE 1
          0 1 0 - PAGING REQUEST TYPE 2
          1 0 0 - PAGING REQUEST TYPE 3
          1 1 1 - PAGING RESPONSE
          0 0 0
                 - NOTIFICATION/NCH
          1 0 1
                 - Reserved (see NOTE)
          1 1 0 - NOTIFICATION/RESPONSE
                 - Reserved (see NOTE)
0 0 0 0 1 0 1 1
                 - 3G Specific messages
0 1 1 0 0
          0 0 0
                 - UTRAN Classmark Change
          0 1 0 - cdma 2000 Classmark Change
          0 1 1 - Inter System to UTRAN Handover Command
          1 0 0
                 - Inter System to cdma2000 Handover Command
0 0 0 1 1 - - - System information messages:
          0 0 0 - SYSTEM INFORMATION TYPE 8 0 0 1 - SYSTEM INFORMATION TYPE 1
          0 1 0 - SYSTEM INFORMATION TYPE 2
          0 1 1
                 - SYSTEM INFORMATION TYPE 3
                - SYSTEM INFORMATION TYPE 4
          1 0 0
          1 0 1 - SYSTEM INFORMATION TYPE 5
                - SYSTEM INFORMATION TYPE 6
          1 1 0
          1 1 1 - SYSTEM INFORMATION TYPE 7
0 0 0 0 0 -
              - System information messages:
          0 1 0 - SYSTEM INFORMATION TYPE 2bis
          0 1 1 - SYSTEM INFORMATION TYPE 2ter
          1 1 1
                 - SYSTEM INFORMATION TYPE 2quater
          1 0 1 - SYSTEM INFORMATION TYPE 5bis
          1 1 0 - SYSTEM INFORMATION TYPE 5ter
                - SYSTEM INFORMATION TYPE 9
          1 0 0
          0 0 0 - SYSTEM INFORMATION TYPE 13
                 - SYSTEM INFORMATION TYPE 14
          0 0 1
0 0 1 1 1 - - - System information messages:
          1 0 0 - SYSTEM INFORMATION TYPE 15
1 0 1 - SYSTEM INFORMATION TYPE 16
                - SYSTEM INFORMATION TYPE 17
          1 1 0
0 1 0 0 0 - - -
                 System information messages:
          0 0 0
                - SYSTEM INFORMATION TYPE 18
          0 0 1 - SYSTEM INFORMATION TYPE 19
          0 1 0
                 - SYSTEM INFORMATION TYPE 20
0 0 0 1 0 - - -
                 Miscellaneous messages:
          0 0 0 - CHANNEL MODE MODIFY
          0 1 0 - RR STATUS
          1 1 1 - CHANNEL MODE MODIFY ACKNOWLEDGE
                - FREQUENCY REDEFINITION
          1 0 0
          1 0 1 - MEASUREMENT REPORT
          1 1 0 - CLASSMARK CHANGE
                 - CLASSMARK ENQUIRY
          0 1 1
0 0 1 1 0 1 1 0 - EXTENDED MEASUREMENT REPORT
0 0 1 1 0 1 1 1 - EXTENDED MEASUREMENT ORDER
0 0 1 1 0 1 0 0 - GPRS SUSPENSION REQUEST
0 1 0 0 1 1 0 1 - DTM INFORMATION
VGCS uplink control messages:
0 0 0 0 1 0 0 1 - VGCS UPLINK GRANT
0 0 0 0 1 1 1 0 - UPLINK RELEASE
0 0 0 0 1 1 0 0 - Reserved (see NOTE)
0 0 1 0 1 0 1 0 - UPLINK BUSY 0 0 0 1 0 0 0 1 - TALKER INDICATION
Application messages:
0 0 1 1 1 0 0 0 - Application Information
```

Bit 8 is reserved for possible future use as an extension bit, see 3GPP TS 24.007.

NOTE: This value was allocated but never used in earlier phases of the protocol.

Table 10.4.2/3GPP TS 44.018: Message types for Radio Resource management messages using the RR short protocol discriminator

5	4	3	2	1		
0	0	0	0	0	System Information Type 10	
0	0	0	0	1	Notification/FACCH	
0	0	0	1	0	Uplink Free	
0	0	1	0	0	Enhanced Measurement Report (uplink)	
0	0	1	0	1	Measurement Information (downlink)	

Table 10.4.3/3GPP TS 44.018: Message types for GTTP messages

Message type	Message		
87654321	Message		
00000000	GPRS Information		

10.5 Other information elements

The different formats (V, LV, T, TV, TLV) and the four categories of information elements (type 1, 2, 3, and 4) are defined in 3GPP TS 24.007.

The first octet of an information element in the non-imperative part contains the IEI of the information element. If this octet does not correspond to an IEI known in the message, the receiver shall determine whether this IE is of type 1 or 2 (i.e. it is an information element of one octet length) or an IE of type 4 (i.e. that the next octet is the length indicator indicating the length of the remaining of the information element) (see 3GPP TS 24.007).

This allows the receiver to jump over unknown information elements and to analyse any following information elements.

The information elements which are common for at least two of the three protocols Radio Resources management, Mobility Management and Call Control, are listed in 3GPP TS 04.08, clause 10.5.1.

The information elements for the protocols Radio Resources management are listed in clause 10.5.2. Default information element identifiers are listed in annex K.

NOTE: Different information elements may have the same default information element identifier if they belong to different protocols.

The descriptions of the information element types in clause 10.5.2 are organized in alphabetical order of the IE types. Each IE type is described in one clause.

The clause may have an introduction:

- possibly explaining the purpose of the IE;
- possibly describing whether the IE belongs to type 1, 2, 3, 4 or 5;
- possibly indicating the length that the information element has if it is either type 5 or if it is used in format TV (type 1 and 3) or TLV (type 4).

A figure of the clause defines the structure of the IE indicating:

- possibly the position and length of the IEI. (However it depends on the message in which the IE occurs whether the IE contains an IEI.);
- the fields the IE value part is composed of;
- possibly the position and length of the length indicator. (However it depends on the IE type whether the IE contains a length indicator or not.);

- possibly octet numbers of the octets that compose the IE (see clause a) below).

Finally, the clause contains tables defining the structure and value range of the fields that compose the IE value part. The order of appearance for information elements in a message is defined in clause 9.

The order of the information elements within the imperative part of messages has been chosen so that information elements with 1/2 octet of content (type 1) go together in succession. The first type 1 information element occupies bits 1 to 4 of octet N, the second bits 5 to 8 of octet N, the third bits 1 to 4 of octet N + 1 etc. If the number of type 1 information elements is odd then bits 5 to 8 of the last octet occupied by these information elements contains a spare half octet IE in format V.

Where the description of information elements in this Technical Specification contains bits defined to be "spare bits", these bits shall set to the indicated value (0 or 1) by the sending side, and their value shall be ignored by the receiving side. With few exceptions, spare bits are indicated as being set to "0" in 3GPP TS 44.018.

The following rules apply for the coding of type 4 information elements:

- a) The octet number of an octet (which is defined in the figure of a clause) consists of a positive integer, possibly of an additional letter, and possibly of an additional asterisk, see clause f). The positive integer identifies one octet or a group of octets.
- b) Each octet group is a self contained entity. The internal structure of an octet group may be defined in alternative ways.
- c) An octet group is formed by using some extension mechanism. The preferred extension mechanism is to extend an octet (N) through the next octet(s) (Na, Nb, etc.) by using bit 8 in each octet as an extension bit.

The bit value "0" indicates that the octet group continues through to the next octet. The bit value "1" indicates that this octet is the last octet of the group. If one octet (Nb) is present, the preceding octets (N and Na) shall also be present.

In the format descriptions appearing in clause 10.5.1 to 10.5.4, bit 8 is marked "0/1 ext" if another octet follows. Bit 8 is marked "1 ext" if this is the last octet in the extension domain.

Additional octets may be defined in later versions of the protocols ("1 ext" changed to "0/1 ext") and equipments shall be prepared to receive such additional octets; the contents of these octets shall be ignored. However the length indicated in clauses 9 and 10 only takes into account this version of the protocols.

- d) In addition to the extension mechanism defined above, an octet (N) may be extended through the next octet(s) (N+1, N+2 etc.) by indications in bits 7-1 (of octet N).
- e) The mechanisms in c) and d) may be combined.
- f) Optional octets are marked with asterisks (*).

10.5.1 Common information elements.

See 3GPP TS 24.008.

10.5.2 Radio Resource management information elements.

10.5.2.1a BA Range

The purpose of the BA Range information element is to provide the mobile station with ARFCN range information which can be used in the cell selection procedure.

The BA Range information element is coded as shown in Figure 10.5.21a.1/3GPP TS 44.018 and Table 10.5.2.1a.1/3GPP TS 44.018.

The BA Range is a type 4 information element with a minimum length of 6 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (see 3GPP TS 44.006).

8	7	6	5	4	3	2	1				
			BA	RANGE	EIEI			octet 1			
		Length	n of BA I	Range c	ontents			octet 2			
	octet 3										
	RANGE1_LOWER (high part)										
	1_LOWER			RANGE	1_HIGH	ER		octet 5			
`	/ part)				h part)						
F	RANGE1_		₹			2_LOWI	∃R	octet 6			
	(low p				(hig	h part)					
	R/	_	_LOWE	₹			2_HIGHER	octet 7			
		(low p				(nig	h part)				
				HER (lo				octet 8			
		RANG	E3_LOV	VER (hiç	gh part)			octet 9			
	3_LOWER			RANGE	3_HIGH	ER		octet 10			
(IOW	/ part)				h part)						
F	RANGE3_	HIGHE	₹		RANGE	4_LOW	₽R	octet 11			
	(low part) (high part)										
	RANGE4_LOWER RANGE4_HIGHER										
	(low part) (high part)										
	RANGE4_HIGHER (low part)										
·	;										

Figure 10.5.21a.1/3GPP TS 44.018: BA RANGE information element

Table 10.5.2.1a.1/3GPP TS 44.018: BA Range information element

```
Number of Ranges parameter
 The number of Ranges parameter indicates in binary
 the number of ranges to be transmitted in the IE. It
 shall have a minimum value of 1.
RANGEI LOWER
 If $(impr-BA-range-handling)$ is not supported:
 $begin
 The RANGEi_LOWER is coded as the binary representa-
  tion of the ARFCN used as the lower limit of a range
  of frequencies to be used by the mobile station in
  cell selection (see 3GPP TS 45.008 and 3GPP TS 23.022)
  $end
 If $(impr-BA-range-handling)$ is supported:
 The RANGEi_LOWER is coded as the binary representa-
 tion of the ARFCN used as the lower limit of a range
 of frequencies which could be used by the mobile
 station in cell selection (see 3GPP TS 45.008 and
 3GPP TS 23.022)
 Send
RANGEi_HIGHER
If $(impr-BA-range-handling)$ is not supported:
 $begin
 The RANGEi_HIGHER is coded as the binary representa-
 tion of the ARFCN used as the higher limit of a range
 of frequencies to be used by the mobile station in
 cell selection (see 3GPP TS 45.008 and 3GPP TS 23.022)
 $end
 If $(impr-BA-range-handling)$ is supported:
 $begin
 The RANGEI HIGHER is coded as the binary representa-
 tion of the ARFCN used as the higher limit of a
 range of frequencies which could be used by the
 mobile station in cell selection (see 3GPP TS 45.008 and
 3GPP TS 23.022)
 Send
 If the length of the BA range information element is
 greater than the number of octets required to carry
 the Number of Ranges given in octet 3, then any
 unused octets or parts of octets at the end of the
 IE shall be considered as spare.
 If $(impr-BA-range-handling)$ is supported:
 If a mobile station receives range information
 which has ranges or part of the ranges which are not
 supported by the mobile station, the mobile station
 shall take into account those parts of the ranges
 which it does support.
```

10.5.2.1b Cell Channel Description

The purpose of the *Cell Channel Description* information element is to provide the reference frequency list to be used to decode the mobile allocation information element.

The Cell Channel Description is a type 3 information element with 17 octets length.

There are several formats for the *Cell Channel Description* information element, distinguished by the "format indicator" subfield. Some formats are frequency bit maps, the others use a special encoding scheme.

NOTE: No more than 64 RF channels should be encoded in the Cell Allocation since this is the maximum number of RF channels which can be referenced in the Mobile Allocation IE.

10.5.2.1b.1 General description

Figure 10.5.2.1b.1.1/04.18 shows only a special bit numbering. The different general format is described in Table 10.5.2.1b.1.1/04.18.

8	7	6	5	4	3	2	1				
Cell Channel Description IEI											
	0 0										
Bit	Bit	spare	spare	Bit	Bit	Bit	Bit	octet 2			
128	127			124	123	122	121				
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 3			
120	119	118	117	116	115	114	113				
Ī											
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 17			
800	007	006	005	004	003	002	001				

Figure 10.5.2.1b.1.1/3GPP TS 44.018: Cell Channel Description information element (general format)

Table 10.5.2.1b.1.1/3GPP TS 44.018: Cell Channel Description information element, general format

FORMAT-ID, Format Identifier (Bit 128 and next) The different formats are distinguished by the bits of higher number. The possible values are the following: Bit Bit Bit Bit format notation 128 127 124 123 122 X X X Ω bit map 0 0 X X 1024 range 0 0 0 1 1 512 range 0 1 256 range 1 0 1 0 1 1 0 128 range 0 1 variable bit map All other combinations are reserved for future use. A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may consider all values except the value for bit map 0 as reserved. The significance of the remaining bits depends on the FORMAT-ID. The different cases are specified in the next clauses. Mobile stations shall treat all ARFCNs in the set $\{0, 1, 2 \ldots 1023\}$ as valid ARFCN values even if the mobile station is unable to transmit or receive on that ARFCN.

10.5.2.1b.2 Bit map 0 format

8	7	6	5	4	3	2	1		
Cell Channel Description IEI									
0	0	0	0	CA	CA	CA	CA		
		spare	spare	ARFCN	ARFCN	ARFCN	ARFCN	octet 2	
FORM	1AT-ID			124	123	122	121		
CA	CA	CA	CA	CA	CA	CA	CA		
ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	octet 3	
120	119	118	117	116	115	114	113		
CA	CA	CA	CA	CA	CA	CA	CA		
ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	ARFCN	octet 17	
800	007	006	005	004	003	002	001		

Figure 10.5.2.1b.2.1/3GPP TS 44.018: Cell Channel Description information element, bit map 0 format

Table 10.5.2.1b.2.1/3GPP TS 44.018: Cell channel Description information element, bit map 0 format

```
CA ARFCN N, Cell Allocation Absolute RF Channel Number N (octet 2 etc.)

For a RF channel with ARFCN = N belonging to the cell allocation the CA ARFCN N bit is coded with a "1"; N = 1, 2, ..., 124.

For a RF channel with ARFCN = N not belonging to the cell allocation the CA ARFCN N bit is coded with a "0"; N = 1, 2 ..., 124.
```

10.5.2.1b.3 Range 1024 format

8	7	6	5	4	3	2	1		
			Cell Cha	nnel Descr	iption IEI			octet 1	
1	0	0	0	0					
FORM	/AT-ID	spare	spare	FORMA T-ID	F0	W (high		octet 2	
				ow part)				octet 3	
			W(2) (h	igh part)				octet 4	
W(2)									
(low)									
	W(3) W(4)							octet 6	
	part)				part)				
	(4)				(5)			octet 7	
	part)				part) (6)				
	(5)				octet 8				
	part) (6)				part) (7)			octet 9	
	part)				ociei 9				
	(7)				octet 10				
	part)			W(8) (high part)					
W(8)	J 4			W(9)	μω. τ/			octet 11	
(low)				(-)					
			W(10)				W(11)	octet 12	
							high		
	W(11) W(12)							octet 13	
			part)			(high			
		(12) (low pa	art)		W(13) (high p	art)	octet 14 octet 15	
		low part)		W(14) (high part) W(15) (high part)					
	(14) (low pa	art)		octet 16					
	(15)			W(16)			octet 17	
(low	(low part)								

Figure 10.5.2.1b.3.1/3GPP TS 44.018: *Cell Channel Description* information element (1024 range format)

Table 10.5.2.1b.3.1/3GPP TS 44.018: Cell Channel Description information element, range 1024 format

```
F0, frequency 0 indicator (octet 2, bit 3):

0 ARFCN 0 is not a member of the set
1 ARFCN 0 is a member of the set

W(i), i from 1 to 16 (octet 2 to 17):

Each W(i) encodes a non negative integer in binary format.

If W(k) is null, W(k+1) to W(16) must be null also.

Each non null W(k) allows to compute, together with some previous W(i) the ARFCN F(k) of a frequency in the set. The computation formulas are given in clause 10.5.2.13.3.
```

10.5.2.1b.4 Range 512 format

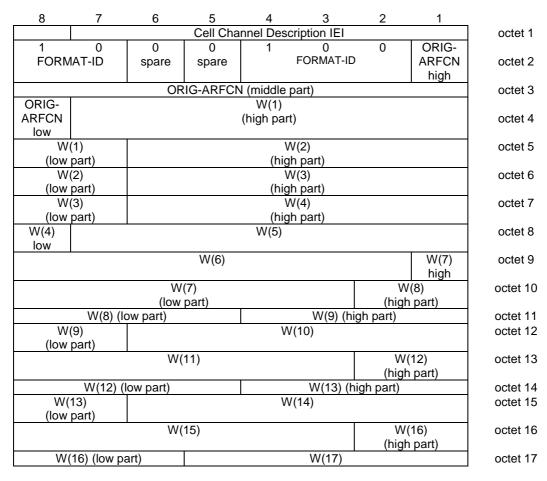


Figure 10.5.2.1b.4.1/3GPP TS 44.018: *Cell Channel Description* information element (512 range format)

Table 10.5.2.1b.4.1/3GPP TS 44.018: Cell Channel Description information element, range 512 format

ORIG-ARFCN, origin ARFCN (octet 2, 3 and 4)

This field encodes the ARFCN of one frequency belonging to the set. This value is also used to decode the rest of the element.

W(i), i from 1 to 17 (octet 4 to 17):

Each W(i) encodes a non negative integer in binary format.

If W(k) is null, W(k+1) to W(17) must be null also.

Each non null W(k) allows to compute, together with some previous W(i) the ARFCN F(k) of a frequency in the set. The computation formulas are given in clause 10.5.2.13.4.

10.5.2.1b.5 Range 256 format

8	7	6	5	4	3	2	1	
			Cell Cha	nnel Des	cription IEI			octet 1
1	0	0	0	1	0	1	ORIG-	
FORM	/AT-ID	spare	spare		FORMAT-ID		ARFCN	octet 2
							high	_
2510		OR	IG-ARFCN		part)			octet 3
ORIG-				W(1)	4\			
ARFCN				(high pa	rt)			octet 4
low W(1)				W(2)				octet 5
(low)	νν(<i>Σ</i>)							ociei 5
(1044)			W(3)				W(4)	octet 6
			**(0)				high	00:0: 0
	W	(4) (low pa	rt) W(5) (high pa					octet 7
W	(5) (low pa		7	1	N(6) (high pa		· · · · ·	octet 8
W(6)				(7)	· / · · · · · ·		W(8)	octet 9
low				. ,	high			
	W(8) (le	ow part)	W(9) (high part)					octet 10
W(9)			W(10)			W((11)	octet 11
low						(high	part)	
W	(11) (low pa				W(12)			octet 12
		W(13)				14) (high p		octet 13
	(14)			W(15)			W(16)	octet 14
lo	low						high	
	W(16)			W(17)			W(18)	octet 15
	(low part)			W(19)			high	
	W(18)			\	W(20) high	octet 16		
	(low part)			W(04)				
	W(20)			W(21)			0	octet 17
	(low part)						spare]

Figure 10.5.2.1b.5.1/3GPP TS 44.018: Cell Channel Description information element, range 256 format

Table 10.5.2.1b.5.1/3GPP TS 44.018: Cell Channel Description information element, range 256 format

ORIG-ARFCN, origin ARFCN (octet 2, 3 and 4)

This field encodes the ARFCN of one frequency belonging to the set. This value is also used to decode the rest of the element.

W(i), i from 1 to 21 (octet 4 to 17):

Each W(i) encodes a non negative integer in binary format.

If W(k) is null, W(k+1) to W(21) must be null also.

Each non null W(k) allows to compute, together with some previous W(i) the ARFCN F(k) of a frequency in the set. The computation formulas are given in clause 10.5.2.13.5.

10.5.2.1b.6 Range 128 format

8	7	6	5	4	3	2	1	
			Cell Cha	nnel Desc	cription IEI			octet 1
1	0	0	0	1	1	0	ORIG-	
FORM	1AT-ID	spare	spare		FORMAT-ID		ARFCN	octet 2
							high	
				ARFCN				octet 3
	,		(middl	e part)				
ORIG-				W(1)				
ARFCN								octet 4
low			>				>	_
		W	(2)	1		W	(3)	octet 5
	W(3) (lo	ow part)			W(4) (hi			octet 6
W(4)			W(5)				(6)	octet 7
low						(high	part)	
W	(6) (low pa	rt)			W(7)			octet 8
	W	(8)			W(9)		octet 9
	W(10)			W(1	l1)		octet 10
	W(12)			octet 11			
	W(14)		W(13) W(15)				octet 12
	W(16)	•		W(17)	Ì	18)	octet 13	
	` ,						part)	
W(18)		W(19)	•		W(20)		W(21)	octet 14
low		, ,					high	
W(21)		W(22)			W(23)		octet 15
(low	(low part)				(-,			
,	W(24)	•		W(25)		W(26)	octet 16
	` '			(high part)				
W(26)	(26) W(27)				W(28) 0			octet 17
lòw		` '			, ,		spare	

Figure 10.5.2.1b.6.1//3GPP TS 44.018: *Cell Channel Description* information element, range 128 format

Table 10.5.2.1b.6.1/3GPP TS 44.018: Cell Channel Description information element, range 128 format

ORIG-ARFCN, origin ARFCN (octet 2, 3 and 4)

This field encodes the ARFCN of one frequency belonging to the set. This value is also used to decode the rest of the element.

W(i), i from 1 to 28 (octet 4 to 17):

Each W(i) encodes a non negative integer in binary format.

If W(k) is null, W(k+1) to W(28) must be null also.

Each non null W(k) allows to compute, together with some previous W(i) the ARFCN F(k) of a frequency in the set. The computation formulas are given in clause 10.5.2.13.6.

10.5.2.1b.7 Variable bit map format

8	7	6	5	4	3	2	1		
			Cell Cha	nnel Descr	iption IEI			octet 1	
0	0	0	0	1	1	1	CA		
FORM	FORMAT-ID spare spare FORMAT-ID ARFCN								
	high								
			ORIG-	ARFCN				octet 3	
	(middle part)								
ORIG-									
ARFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	octet 4	
low	1	2	3	4	5	6	7		
							CA		
RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	ARFCN	octet 17	
104	105	106	107	108	109	110	111		

Figure 10.5.2.1b.7.1//3GPP TS 44.018: *Cell Channel Description* information element, variable bit map format

Table 10.5.2.1b.7.1/3GPP TS 44.018: Cell Channel Description information element, variable bit map format

```
ORIG-ARFCN, origin ARFCN (octet 2, 3 and 4)

This field encodes the ARFCN of one frequency belonging to the set. This value is also used as origin of the bit map to generate all other frequencies.

RRFCN N, relative radio frequency channel number N (octet 4 etc.)

For a RF channel with ARFCN = (ORIG-ARFCN + N) mod 1024 belonging to the set, RRFCN N bit is coded with a "1"; N = 1, 2, ..., 111

For a RF channel with ARFCN = (ORIG-ARFCN + N) mod 1024 not belonging to the set, RRFCN N bit is coded with a "0"; N = 1, 2, ..., 111
```

10.5.2.1c BA List Pref

The purpose of the BA List Pref information element is to provide the mobile station with ARFCN information which can be used in the cell selection/reselection procedure.

<BA List Pref>::=

The BA List Pref is a type 4 information element with a minimum length of 3 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (see 3GPP TS 44.006).

188

The RANGE LOWER is coded as the binary representation of the ARFCN used as the lower limit of a range of frequencies to be used by the mobile station in cell selection and reselection (see 3GPP TS 45.008 and 3GPP TS 23.022).

The RANGE HIGHER is coded as the binary representation of the ARFCN used as the higher limit of a range of frequencies to be used by the mobile station in cell selection and reselection (see 3GPP TS 45.008 and 3GPP TS 23.022).

BA FREQ is coded as the binary representation of the ARFCN indicating a single frequency to be used by the mobile station in cell selection and reselection (see 3GPP TS 45.008 and 3GPP TS 23.022).

10.5.2.1d UTRAN Frequency List

The UTRAN frequency list information element provides the mobile station with a list of UTRAN frequencies used by the network. These frequencies may be used in the cell selection procedure, see 3GPP TS 25.304.

44.006In addition, an FDD-ARFCN-INDEX value shall be associated with each absolute FDD frequency and/or a TDD-ARFCN-INDEX value shall be associated with each absolute TDD frequency provided in the list. The index values range from 0 to 7 and may be used in other messages to refer to the corresponding UTRAN frequency. The first FDD frequency shall be assigned to FDD-ARFCN-INDEX 0. Each subsequent FDD frequency in the information element shall increment the value of FDD-ARFCN-INDEX by 1. Then the first TDD frequency shall be assigned to TDD-ARFCN-INDEX 0. Each subsequent TDD frequency in the information element shall increment the value of TDD-ARFCN-INDEX by 1.

FDD_ARFCN and TDD_ARFCN are defined as the UARFCN in 3GPP TS 25.101 and 3GPP TS 25.102. If the MS receives some information on some non-supported frequencies, this shall not be considered as an error; the FDD-ARFCN-INDEX and/or TDD-ARFCN-INDEX shall be incremented accordingly. If both an UTRAN Frequency List information element and an UTRAN Frequency List Description struct (3GPP TS 44.060) are received, the mobile station shall use the one most recently received.

The UTRAN Frequency List is a type 4 information element with a minimum length of 3 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (see 3GPP TS 44.006).

```
< UTRAN Freq List >::=

< LENGTH OF UTRAN FREQ LIST : bit (8) > -- length following in octets

{ 1 < FDD_ARFCN > : bit (14) } ** 0 -- FDD frequencies

{ 1 < TDD_ARFCN > : bit (14) } ** 0 -- TDD frequencies

<spare bit>**;
```

Spare bits in the end of the field are used to fill the last octet.

10.5.2.2 Cell Description

The purpose of the *Cell Description* information element is to provide a minimum description of a cell, e.g. to allow the mobile station to use its pre-knowledge about synchronization.

The *Cell Description* information element is coded as shown in Figure 10.5.2.2.1/3GPP TS 44.018 and Table 10.5.2.2.1/3GPP TS 44.018.

The *Cell Description* is a type 3 information element with 3 octets length.




Figure 10.5.2.2.1/3GPP TS 44.018: Cell Description information element

Table 10.5.2.2.1/3GPP TS 44.018: Cell Description information element

```
NCC, PLMN colour code (octet 2)
The
     NCC
           field is
                       coded
                               as
                                    the
                                          binary
representation of the PLMN colour code
(see 3GPP TS 23.003).
BCC, BS colour code (octet 2)
     BCC
           field
                  is
                       coded
                              as
                                    the
                                          binary
representation of the BS colour code
(see 3GPP TS 23.003).
BCCH ARFCN (octet 2, bits 7 and 8, and octet 3)
The BCCH ARFCN number field is coded as the
       representation
                        of
                             the BCCH carriers
binary
absolute RF channel number.
Range: 0 to 1023
```

10.5.2.3 Cell Options (BCCH)

The purpose of the Cell Options (BCCH) information element is to provide a variety of information about a cell.

The *Cell Options* (BCCH) information element is coded as shown in Figure 10.5.2.3.1/3GPP TS 44.018 and Table 10.5.2.3a.1/3GPP TS 44.018.

The Cell Options (BCCH) is a type 3 information element with 2 octets length.




Figure 10.5.2.3.1/3GPP TS 44.018: Cell Options (BCCH) information element

10.5.2.3a Cell Options (SACCH)

The purpose of the Cell Options (SACCH) information element is to provide a variety of information about a cell.

The *Cell Options* (SACCH) information element is coded as shown in figure 10.5.2.3a.1/3GPP TS 44.018 and Table 10.5.2.3a.2/3GPP TS 44.018.

The Cell Options (SACCH) is a type 3 information element with 2 octets length.

8	7	6	5	4	3	2	1					
		Cell Channel Description IEI										
DTX	PWRC	PWRC DTX RADIO-LINK-TIMEOUT										

Figure 10.5.2.3a.1/3GPP TS 44.018: Cell Options (SACCH) information element

Table 10.5.2.3a.1/3GPP TS 44.018: Cell Options (BCCH) information element

```
PWRC Power control indicator (octet 2) Note 1
bit 7
0 PWRC is not set
1 PWRC is set
DTX, DTX indicator (octet 2) Note 3
Bit
 6 5
 0 0 The MSs may use uplink discontinuous
      transmission
 0 1 The MSs shall use uplink discontinuous
     transmission
 1 0 The MS shall not use uplink discontinuous
     transmission
RADIO-LINK_TIMEOUT (octet 2) Note 2
 Bits
 4 3 2 1
 0 0 0 0
             4
 0 0 0 1
            8
 0 0 1 0
            12
1 1 1 0
            60
 1 1 1 1
DN-IND, Dynamic ARFCN mapping indicator (octet 2) Note 4
Bit
 0
        Dynamic ARFCN mapping is not used by the PLMN
       Dynamic ARFCN mapping is used by the PLMN
 1
```

- NOTE 1: The precise meaning of the PWRC parameter can be found in 3GPP TS 45.008.
- NOTE 2: The precise meaning of RADIO-LINK-TIMEOUT parameter can be found in 3GPP TS 45.008.
- NOTE 3: The DTX indicator field is not related to the use of downlink discontinuous transmission.
- NOTE 4: Dynamic ARFCN mapping is specified in 3GPP TS 45.005.

Table 10.5.2.3a.2/3GPP TS 44.018: Cell Options (SACCH) information element

```
PWRC Power control indicator (octet 2) Note 1
bit 7
0 PWRC is not set
1 PWRC is set
DTX, DTX indicator (octet 2) Note 3
8 6 5
0 0 0
      The MS may use uplink discontinuous
       transmission on a TCH-F. The MS shall not use
       uplink discontinuous transmission on TCH-H.
0 0 1 The MS shall use uplink discontinuous
       transmission on a TCH-F. The MS shall not use
       uplink discontinuous transmission on TCH-H.
0 1 0 The MS shall not use uplink discontinuous
       transmission on a TCH-F. The MS shall not use
       uplink discontinuous transmission on TCH-H.
0 1 1 Note 4: The MS shall use uplink discontinuous
       transmission on a TCH-F. The MS may use
       uplink discontinuous transmission on TCH-H.
1 0 0 The MS may use uplink discontinuous
       transmission on a TCH-F. The MS may use
       uplink discontinuous transmission on TCH-H.
1 0 1 \, The MS shall use uplink discontinuous
       transmission on a TCH-F. The MS shall use
       uplink discontinuous transmission on TCH-H.
1 1 0 The MS shall not use uplink discontinuous
       transmission on a TCH-F. The MS shall use
       uplink discontinuous transmission on TCH-H.
1 1 1 Note 4: The MS may use uplink discontinuous
       transmission on a TCH-F. The MS shall use
       uplink discontinuous transmission on TCH-H.
RADIO-LINK_TIMEOUT (octet 2) Note 2
 Bits
 4 3 2 1
 0 0 0 0
             4
 0 0 0 1
             8
 0 0 1 0
            12
 1 1 1 0
            60
 1 1 1 1
            64
```

- NOTE 1: The precise meaning of the PWRC parameter can be found in 3GPP TS 45.008.
- NOTE 2: The precise meaning of RADIO-LINK-TIMEOUT parameter can be found in 3GPP TS 45.008.
- NOTE 3: The DTX indicator field is not related to the use of downlink discontinuous transmission.
- NOTE 4: These codes shall not be sent to mobile stations that implement an earlier version of this protocol in which these codes were not defined.

10.5.2.4 Cell Selection Parameters

The purpose of the Cell Selection Parameters information element is to provide a variety of information about a cell.

The *Cell Selection Parameters* information element is coded as shown in Figure 10.5.2.4.1/3GPP TS 44.018 and Table 10.5.2.4.1/3GPP TS 44.018.

The Cell Selection Parameters information element is a type 3 information element with 3 octets length.

8	7	6	5	4	3	2	1	
			Cell Sele	ction Parar	neters IEI			octet 1
	L-RESELI YSTERES			MS-T>	(PWR-MA)	(-CCH		octet 2
ACS	NECI			RXLEV-AC	CESS-MIN			octet 3

Figure 10.5.2.4.1/3GPP TS 44.018: Cell Selection Parameters information element

Table 10.5.2.4.1/3GPP TS 44.018: Cell Selection Parameters information element

```
CELL-RESELECT-HYSTERESIS (octet 2)
The usage of this information is defined in 3GPP TS 45.008
Bits
8 7 6
0 0 0
        0 dB RXLEV hysteresis for LA re-selection
        2 dB RXLEV hysteresis for LA re-selection
      4 dB RXLEV hysteresis for LA re-selection
0 1 0
0 1 1
        6 dB RXLEV hysteresis for LA re-selection
        8 dB RXLEV hysteresis for LA re-selection
1 0 0
1 0 1 \, 10 dB RXLEV hysteresis for LA re-selection
       12 dB RXLEV hysteresis for LA re-selection
1 1 0
1 1 1
       14 dB RXLEV hysteresis for LA re-selection
MS-TXPWR-MAX-CCH (octet 2)
The MS-TXPWR-MAX-CCH field is coded as the binary
representation of the "power control level" in
3GPP TS 45.005 corresponding to the maximum TX power
level an MS may use when accessing on a Control
Channel CCH. This value shall be used by the Mobile
Station according to 3GPP TS 45.008.
Range: 0 to 31.
RXLEV-ACCESS-MIN (octet 3)
The RXLEV-ACCESS-MIN field is coded as the binary
representation of the minimum received signal level
at the MS for which it is permitted to access the
system.
Range: 0 to 63.
                          (See 3GPP TS 45.008).
ACS, ADDITIONAL RESELECT PARAM IND (octet 3)
Bit 8:
  In System Information type 3 message:
        System information type 16 and 17 are not
        broadcast on the BCCH.
        System information type 16 and 17 are
        broadcast on the BCCH.
    A mobile station which does not support System
    information type 16 and 17 may consider this bit
    as "0".
  In System Information type 4 message:
       The SI 4 rest octets, if present, and SI 7
        and SI 8 rest octets, if so indicated in the
        SI 4 rest octets shall be used to derive the
        value of PI and possibly
        C2 parameters and/or other parameters
      The value of PI and possibly C2 parameters
        and/or other parameters in a {\tt System}
        information type 7 or type 8 message shall
       be used
NECI: HALF RATE SUPPORT (octet 3)
Bit 7:
       New establishment causes are not supported
       New establishment causes are supported
```

10.5.2.4a MAC Mode and Channel Coding Requested

The purpose of the *MAC Mode and Channel Coding Requested* information element is for the mobile station to indicate to the network which channel coding rate the mobile station desires the network to use on the downlink.

The *MAC Mode and Channel Coding Requested* information element is coded as shown in Figure 10.5.2.4a.1/3GPP TS 44.018 and Table 10.5.2.4a.1/3GPP TS 44.018.

The MAC Mode and Channel Coding Requested is a type 1 information element.

8	7	6	5	4	3	2	1	
	M	AC Mode a	nd	MA	VC 0			octet 1
	Cha	an Cod Rec	ı IEI	m	ode		S	

Figure 10.5.2.4a.1/3GPP TS 44.018: MAC Mode and Channel Coding Requested information element

Table 10.5.2.4a.1/3GPP TS 44.018: MAC Mode and Channel Coding Requested information element

```
CS : Coding Scheme
This field indicates to network the channel coding
scheme (see 3GPP TS 45.003) that the network should use
on the downlink. The field is encoded according to
the following table:
bits
2 1
0 0
     CS 1
    CS 2
0 1
1 0
    CS 3
    CS 4
1 1
MAC Mode (bits 3-4, octet 1)
This field is encoded the same as the MAC MODE field
in the PACKET RESOURCE REQUEST message described in
3GPP TS 44.060.
```

10.5.2.5 Channel Description

The purpose of the *Channel Description* information element is to provide a description of an allocable channel together with its SACCH.

The *Channel Description* information element is coded as shown in Figure 10.5.2.5.1/3GPP TS 44.018 and Table 10.5.2.5.1/3GPP TS 44.018.

The Channel Description is a type 3 information element with 4 octets length.

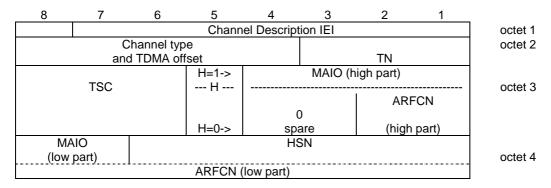


Figure 10.5.2.5.1/3GPP TS 44.018: Channel Description information element

Table 10.5.2.5.1/3GPP TS 44.018: Channel Description information element

```
Channel type and TDMA offset (octet 2)
   Bits
 8 7 6 5 4
 0 0 0 0 1
            TCH/F + ACCHs
 0 0 0 1 T
            TCH/H + ACCHs
0 0 1 T T SDCCH/4 + SACCH/C4 or CBCH (SDCCH/4)
0 1 T T T SDCCH/8 + SACCH/C8 or CBCH (SDCCH/8)
 The T bits indicate the subchannel number coded in
 binary.
All other values are reserved.
The Channel Type and TDMA offset field shall be
 ignored and all bits treated as spare when received
 in a PDCH ASSIGNMENT COMMAND message. The sender
set the spare bits to the coding for TCH/F+ACCHs
TN, Timeslot number (octet 2)
The TN field is coded as the binary representation
 of the timeslot number as defined in 3GPP TS 45.010.
Range: 0 to 7.
The Timeslot number field shall be ignored and all
bits treated as spare when received in a PDCH
 ASSIGNMENT COMMAND message. The sender sets the spare
bits as '000'
TSC, Training Sequence Code (octet 3)
The TSC field is coded as the binary representation
 of the Training Sequence code as defined in 3GPP TS 45.003
 Range: 0 to 7.
H, Hopping channel (octet 3)
Bit
          Single RF channel
          RF hopping channel
 Note: The value of H affects the semantics of the
       channel selector field
 Channel selector (octet 3 and 4)
 H = "0": The channel selector field
        consists of the absolute RF channel number
       Octet 3
        Bits
        4 3
        0 0
               Spare
ARFCN, (octet 3, bits 2 and 1, and
               octet 4, bits 8 to 1)
         The ARFCN is coded as the binary representa-
         tion of the absolute RF channel number
          Range: 0 to 1023
H = "1": The channel selector field consists of the
          mobile allocation index offset, MAIO, and
          the hopping sequence number, HSN.
           MAIO, (octet 3 bit 4 to 1 high part and
                  octet 4 bit 8 to 7 low part)
           The MAIO field is coded as the binary rep-
           resentation of the mobile allocation index
           offset as defined in 3GPP TS 45.002.
          Range: 0 to 63.
          HSN, (octet 4 bit 6 to 1)
          The HSN field is coded as the binary repres-
          entation of the hopping sequence number
          as defined in 3GPP TS 45.002
          Range 0 to 63.
```

10.5.2.5a Channel Description 2

The purpose of the *Channel Description* 2 information element is to provide a description of an allocable channel configuration together with its SACCH.

The *Channel Description* 2 information element is coded as shown in figure 10.5.2.5a.1/3GPP TS 44.018 and Table 10.5.2.5a.1/3GPP TS 44.018.

The Channel Description 2 is a type 3 information element with 4 octets length.

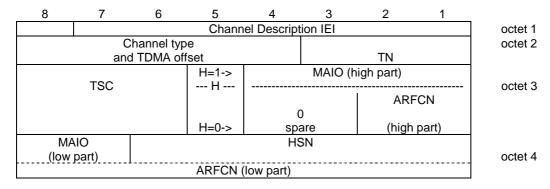


Figure 10.5.2.5a.1/3GPP TS 44.018: Channel Description 2 information element

Table 10.5.2.5a.1/3GPP TS 44.018: Channel Description 2 information element

```
Channel type and TDMA offset (octet 2)
   Bits
 8 7 6 5 4
0 0 0 0 0 TCH/F + FACCH/F and SACCH/M at the
            timeslot indicated by TN, and
            additional bidirectional or
            undirectional TCH/Fs and SACCH/Ms
            according to the multislot allocation
            information element
 0 0 0 0 1 TCH/F + FACCH/F and SACCH/F
 0 0 0 1 T
            TCH/H + ACCHs
 0 0 1 T T SDCCH/4 + SACCH/C4 or CBCH (SDCCH/4)
 0 1 T T T SDCCH/8 + SACCH/C8 or CBCH (SDCCH/8)
 The T bits indicate the subchannel number coded in
 binary.
 In the description below "n" is the timeslot number
 indicated by TN. The description is valid only if
 all the indicated timeslot numbers are in the range
0 to 7.
1 0 X X X TCH/F + FACCH/F and SACCH/M at the
           time slot indicated by TN, and additional
            bidirectional TCH/Fs and SACCH/Ms at other
            timeslots according to the following:
     0 0 0 no additional timeslots
     0 0 1 at timeslot n-1
     0\ 1\ 0 at timeslot n+1, n-1
     0 1 1 at timeslot n+1, n-1 and n-2
     1 0 0 at timeslot n+1, n-1, n-2, and n-3 1 0 1 at timeslot n+1, n-1, n-2, n-3 and n-4
     1 1 0 at timeslot n+1, n-1, n-2, n-3, n-4
     1 1 1 at timeslot n+1, n-1, n-2, n-3, n-4, n-5
            and n-6
1 1 0 0 1
1 1 0 1 1 TCH/F + FACCH/F and SACCH/M at the time
            slot indicated by TN and additional
            unidirectional TCH/FDs and SACCH/MDs at
            other timeslots according to the
            following:
1 1 0 0 1 at timeslot n-1
1 1 0 1 0 at timeslot n+1, n-1
 1 1 0 1 1 at timeslot n+1, n-1 and n-2
1 1 1 1 0 TCH/F + FACCH/F and SACCH/M at the time
            slot indicated by TN and additional
            bidirectional TCH/F and SACCH/M at
            timeslot n+1 and unidirectional TCH/FD
            and SACCH/MD at timeslot n-1
All other values are reserved.
TN, Timeslot number (octet 2)
The TN field is coded as the binary representation
of the timeslot number as defined in 3GPP TS 3GPP TS 45.010.
Range: 0 to 7.
TSC, Training Sequence Code (octet 3)
The TSC field is coded as the binary representation
 of the Training Sequence code as defined in 3GPP TS 45.003
Range: 0 to 7.
```

```
H, Hopping channel (octet 3)
Bit.
 5
 0
          Single RF channel
          RF hopping channel
Note: The value of H affects the semantics of the
       channel selector field
Channel selector (octet 3 and 4)
H = "0": The channel selector field
        consists of the absolute RF channel number
        Bits
        4 3
        0 0
                Spare
       ARFCN, (octet 3, bits 2 and 1, and
               octet 4, bits 8 to 1)
         The ARFCN is coded as the binary representa-
         tion of the absolute RF channel number
          Range: 0 to 1023
H = "1": The channel selector field consists of the
          mobile allocation index offset, MAIO, and
          the hopping sequence number, HSN.
           MAIO, (octet 3 bit 4 to 1 high part and
                   octet 4 bit 8 to 7 low part)
           The MAIO field is coded as the binary rep-
           resentation of the mobile allocation index % \left( \frac{1}{2}\right) =0
           offset as defined in 3GPP TS 45.002.
          Range: 0 to 63.
          HSN, (octet 4 bit 6 to 1)
          The HSN field is coded as the binary repres-
          entation of the hopping sequence number
           as defined in 3GPP TS 45.002
          Range 0 to 63.
```

10.5.2.6 Channel Mode

The *Channel Mode* information element gives information of the mode on coding/decoding and transcoding. The exact mode is determined by the contents of this IE and the channel type.

The *Channel Mode* information element is coded as shown in Figure 10.5.2.6.1/3GPP TS 44.018 and Table 10.5.2.6.1/3GPP TS 44.018.

The Channel Mode is a type 3 information element with 2 octets length.




Figure 10.5.2.6.1/3GPP TS 44.018: Channel Mode information element

Table 10.5.2.6.1/3GPP TS 44.018: Channel Mode information element

```
The mode field is encoded as follows:
(octet 2)
Bits
8 7 6 5 4 3 2 1
0 0 0 0 0 0 0 0
                  signalling only
0 0 0 0 0 0 0 1
                  speech full rate or half rate version 1
0 0 1 0 0 0 0 1
                  speech full rate or half rate version 2
                  speech full rate or half rate version 3
0 1 0 0 0 0 0 1
0 1 1 0 0 0 0 1
                  data, 43.5 kbit/s (downlink)+14.5 kbps (uplink)
0 1 1 0 0 0 1 0
                  data, 29.0 kbit/s (downlink)+14.5 kbps (uplink)
0 1 1 0 0 1 0 0
                  data, 43.5 kbit/s (downlink)+29.0 kbps (uplink)
 1 1 0 0 1 1 1
                  data, 14.5 kbit/s (downlink)+43.5 kbps (uplink)
0 1 1 0 0 1 0 1
                  data, 14.5 kbit/s (downlink)+29.0 kbps (uplink)
0 1 1 0 0 1 1 0
                  data, 29.0 kbit/s (downlink)+43.5 kbps (uplink)
0 0 1 0 0 1 1 1
                  data, 43.5 kbit/s radio interface rate
 1 1 0 0 0 1 1
                  data, 32.0 kbit/s radio interface rate
 1 0 0 0 0 1 1
                  data, 29.0 kbit/s radio interface rate
                  data, 14.5 kbit/s radio interface rate
0 0 0 0 1 1 1 1
0 0 0 0 0 0 1 1
                  data, 12.0 kbit/s radio interface rate
0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 1 \ 1
                  data, 6.0 kbit/s radio interface rate
0 0 0 1 0 0 1 1
                  data, 3.6 kbit/s radio interface rate
Other values are reserved for future use.
Note 1: The speech full rate or half rate version 3 is
       also referred as the adaptive multi-rate full rate
       or half rate speech version 1
```

10.5.2.7 Channel Mode 2

The Channel Mode 2 information element gives information of the mode of coding/decoding and transcoding.

The *Channel Mode 2* information element is coded as shown in Figure 10.5.2.7.1/3GPP TS 44.018 and Table 10.5.2.7.1/3GPP TS 44.018.

The *Channel Mode 2* is a type 3 information element with 2 octets length.




Figure 10.5.2.7.1/3GPP TS 44.018: Channel Mode 2 information element

Table 10.5.2.7.1/3GPP TS 44.018: Channel Mode 2 information element

```
The mode field is encoded as follows:
(octet 2)
Bits
8 7 6 5 4 3 2 1
0 0 0 0 0 0 0 0
                   signalling only
                   speech half rate version 1
0 0 0 0 0 1 0 1
0 0 1 0 0 1 0 1
                   speech half rate version 2
0 1 0 0 0 1 0 1
                   speech half rate version 3
0 0 0 0 1 1 1 1
                   data, 6.0 kbit/s radio interface rate
                   data, 3.6 kbit/s radio interface rate
0 0 0 1 0 1 1 1
Other values are reserved for future use.
Note 1: The speech half rate version 3 is
        also referred as the adaptive multi-rate
        half rate speech version 1
```

10.5.2.7a UTRAN Classmark information element

Only valid for a UTRAN capable mobile station. The *UTRAN Classmark* information element includes the INTER RAT HANDOVER INFO (defined in 3GPP TS 25.331) which gives UTRAN related information to the network (target system) for intersystem handover.

TheUTRAN Classmark information element is a type 4 information element with a minimum length of 2 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (see 3GPP TS 04.06).




Figure 10.5.2.7a/3GPP TS 04.18: UTRAN Classmark information element

The value part of the *UTRAN Classmark information element* is the INTER RAT HANDOVER INFO as defined in 3GPP TS 25.331.

10.5.2.7b (void)

10.5.2.7c Classmark Enquiry Mask

The Classmark Enquiry mask defines the information to be returned to the network. The bit mask defines the specific information to be returned, such as UTRAN specific information and/or CDMA2000 capability and/or requests the sending of the CLASSMARK CHANGE message.

The Classmark Enquiry Mask is a type 4 information element with 3 octets length.




Figure 10.5.2.7c.1/3GPP TS 44.018: Classmark Enquiry Mask information element

Table 10.5.2.7c.2/3GPP TS 44.018: Classmark Enquiry Mask value part.

```
Bit 8:

0 CLASSMARK CHANGE message is requested
1 CLASSMARK CHANGE message is not requested

Bits 7-5

000 UTRAN CLASSMARK CHANGE message is requested
111 UTRAN CLASSMARK CHANGE message is not requested.

All other values shall not be sent. If received, they shall be interpreted as '000'.

Bit 4:

0 CDMA2000 CLASSMARK CHANGE message requested
1 CDMA2000 CLASSMARK CHANGE message not requested.

Bits 3 - 1: spare(0).
```

10.5.2.8 Channel Needed

The purpose of the *Channel Needed* information element is to indicate to up to two mobile stations which type of channel is needed (for each mobile station) for the transaction linked to the paging procedure.

The *Channel Needed* information element is coded as shown in Figure 10.5.2.8.1/3GPP TS 44.018 and Table 10.5.2.8.1/3GPP TS 44.018.

The *Channel Needed* is a type 1 information element.

8	7	6	5	4	3	2	1	_
	Channel	Needed		CHAI	NNEL	CHA	octet 1	
	IEI				ond)	(fi		

Figure 10.5.2.8.1/3GPP TS 44.018: Channel Needed information element

Table 10.5.2.8.1/3GPP TS 44.018: Channel Needed information element

```
CHANNEL (octet 1)
Bits
2/4
     1/3
0
      0
           Any channel.
 n
      1
           SDCCH.
           TCH/F
 1
      0
                  (Full rate).
           TCH/H or TCH/F (Dual rate).
If this information element is used for only one
mobile station, then the first CHANNEL field is
used and the second CHANNEL field is spare.
```

10.5.2.8a Channel Request Description

The purpose of the *Channel Request Description* information element is to indicate to the network the type of requested uplink resources or to indicate the type of paging that is being responded to.

The *Channel Request Description* information element is coded as shown in Figure 10.5.2.8a.1/3GPP TS 44.018 and Table 10.5.2.8a.1/3GPP TS 44.018.

The Channel Request Description is a type 3 information element with a length of 6 octets.

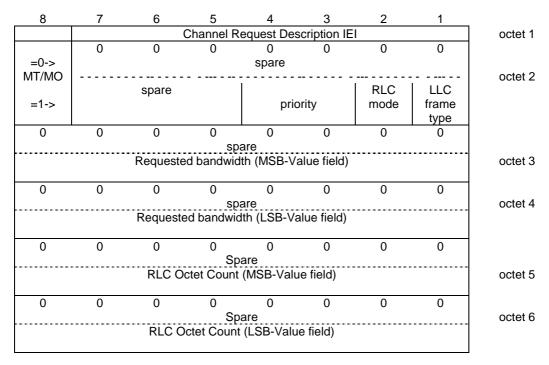


Figure 10.5.2.8a.1/3GPP TS 44.018: Channel Request Description information element

Table 10.5.2.8a.1/3GPP TS 44.018: Channel Request Description information element details

MT/MO (bit 8, octet 2)

- 1 Mobile originated (MO)
- 0 Mobile terminated (MT)

PRIORITY (bits 3-4, octet 2)

When MT/MO indicates MO, this field indicates the priority of the requested TBF

bit

43

- 0 0 Priority Level 1 (Highest priority)
- 0 1 Priority Level 2
- 10 Priority Level 3
- 1 1 Priority Level 4 (Lower priority)

RLC_MODE (bit 2, octet 2)

When MT/MO indic

ates MO, this field indicates the RLC mode of the requested TBF.

- 0 RLC acknowledged mode
- 1 RLC unacknowledged mode

LLC_FRAME_TYPE (bit 1, octet 2)

When MT/MO indicates MO, this field indicates the type of the first LLC frame to be transmitted over the requested uplink TBF.

- 0 LLC frame is SACK or NACK
- 1 LLC frame is not SACK or NACK

REQUESTED_BANDWIDTH (16 bits field, octets 3 and 4)

When MT/MO indicates MO, this field indicates the useful uplink bandwidth requested in bit rate.

The bit rate field is the binary encoding of the rate information expressed in 100 bits/s, starting from 0 x 100 bits/s until 65535 x 100 bits/s.

The throughput granted by BSS may be higher to cope with protocol overhead and retransmissions.

RLC_OCTET_COUNT (16 bits field, octets 5 and 6)

When MT/MO indicates MO, this field indicates the number of octets of RLC data the mobile station wishes to transfer: see 3GPP TS 44.060.

10.5.2.8b Channel Request Description 2

The purpose of the *Channel Request Description 2* information element is to indicate to the network the reason of the request to enter dual transfer mode.

The *Channel Request Description 2* information element is coded as shown in figure 10.5.2.8b.1/3GPP TS 44.018 and Table 10.5.2.8b.1/3GPP TS 44.018.

The Channel Request Description 2 information element is a type 4 information element.

Figure 10.5.2.8b.1/3GPP TS 44.018: Channel Request Description 2 information element

Table 10.5.2.8b.1/3GPP TS 44.018: Channel Request Description 2 information element details

```
PACKET_ESTABLISHMENT_CAUSE (2 bit field)
This field indicates the reason for requesting the access.

Bit 2 1
0 0 User Data
0 1 Page Response
1 0 Cell Update
1 1 Mobility Management procedure

Channel Request Description (information element)
The Channel Request Description information element is defined in 3GPP TS 44.060.
```

10.5.2.9 Cipher Mode Setting

The purpose of the *Cipher Mode Setting* information element is to indicate whether stream ciphering shall be started or not and if it is to be started, which algorithm to use.

The *Cipher Mode Setting* information element is coded as shown in Figure 10.5.2.9.1/3GPP TS 44.018 and Table 10.5.2.9.1/3GPP TS 44.018.

The Cipher Mode Setting is a type 1 information element.




Figure 10.5.2.9.1/3GPP TS 44.018: Cipher Mode Setting information element

Table 10.5.2.9.1/3GPP TS 44.018: Cipher Mode Setting information element

```
algorithm identifier
If SC=1 then:
bits
4 3 2
0 0 0 cipher with algorithm A5/1
0 0 1 cipher with algorithm A5/2
0 1 0 cipher with algorithm A5/3
0 1 1 cipher with algorithm A5/4
1 0 0 cipher with algorithm A5/5
1 0 1 cipher with algorithm A5/6
1 1 0 cipher with algorithm A5/7
1 1 1 reserved
If SC=0 then bits 4, 3 and 2 are spare and set to "0"
SC (octet 1)
Bit.
1
0
        No ciphering
        Start ciphering
```

10.5.2.10 Cipher Response

The *Cipher Response* information element is used by the network to indicate to the mobile station which information the mobile station has to include in the CIPHERING MODE COMPLETE message.

The *Cipher Response* information element is coded as shown in Figure 10.5.2.10.1/3GPP TS 44.018 and Table 10.5.2.10.1/3GPP TS 44.018.

The Cipher Response is a type 1 information element.




Figure 10.5.2.10.1/3GPP TS 44.018: Cipher Response information element

Table 10.5.2.10.1/3GPP TS 44.018: Cipher Response information element

```
CR Cipher Response (octet 1)
Bit
1
0 IMEISV shall not be included
1 IMEISV shall be included
```

10.5.2.11 Control Channel Description

The purpose of the Control Channel Description information element is to provide a variety of information about a cell.

The *Control Channel Description* information element is coded as shown in Figure 10.5.2.11.1/3GPP TS 44.018 and Table 10.5.2.11.1/3GPP TS 44.018.

The Control Channel Description is a type 3 information element with 4 octets length.




Figure 10.5.2.11.1/3GPP TS 44.018: Control Channel Description information element

Table 10.5.2.11.1/3GPP TS 44.018: Control Channel Description information element

```
MSCR, MSC Release (octet 2)
Bit
8
0
            MSC is Release '98 or older
           MSC is Release '99 onwards
ATT, Attach-detach allowed (octet 2)
           MSs in the cell are not allowed to apply
 0
            IMSI attach and detach procedure.
           MSs in the cell shall apply IMSI attach
           and detach procedure.
BS-AG-BLKS-RES (octet 2)
The BS-AG-BLKS-RES field is coded as the binary
representation of the number of blocks reserved for
 access grant.
Range 0 to 2 if CCCH-CONF = "001"
      0 to 7 for other values of CCCH-CONF
All other values are reserved in the first case
CBQ2, Cell Bar Qualify 2 (octet 3)
Bits
 5 4
0 0
           Cell Bar Qualify 2 inactive
0 1
           Reserved, shall be interpreted as 11
           Voice not supported, cell not barred, norm. cell
1 0
selection priority
1 1
           Voice not supported, cell not barred, low cell
selection priority
Note: See 3GPP TS 45.008 for information on Cell Bar Qualify 2
CCCH-CONF (octet 2)
 3 2 1
           1 basic physical channel used for CCCH,
 0 0 0
           not combined with SDCCHs
 0 0 1
           1 basic physical channel used for CCCH,
           combined with SDCCHs
 0 1 0
           2 basic physical channel used for CCCH,
           not combined with SDCCHs
 1 0 0
           3 basic physical channel used for CCCH,
           not combined with SDCCHs
           4 basic physical channels used for CCCH,
1 1 0
           not combined with SDCCHs
  all other values are reserved
```

```
BS-PA-MFRMS (octet 3)
 Bits
 3 2 1
0 0 0
           2 multiframes period for transmission of
             PAGING REQUEST messages to the same
             paging subgroup
0 0 1
            3 multiframes period for transmission of
             PAGING REQUEST messages to the same
              paging subgroup
 0 1 0
            4 multiframes period for transmission of
             PAGING REQUEST messages to the same
             paging subgroup
1 1 1
            9 multiframes period for transmission of
              PAGING REQUEST messages to the same
              paging subgroup
Note: The number of different paging subchannels on
      the CCCH is:
       MAX(1,(3 - BS-AG-BLKS-RES)) * BS-PA-MFRMS
               if CCCH-CONF = "001"
       (9 - BS-AG-BLKS-RES) * BS-PA-MFRMS
               for other values of CCCH-CONF
T3212 timeout value (octet 4)
The T3212 timeout value field is coded as the binary representation of the timeout value for
periodic updating in decihours.
Range: 1 to 255
The value 0 is used for infinite timeout value
 i.e. periodic updating shall not be used within
 the cell.
```

10.5.2.11a DTM Information Rest Octets

The *DTM Information Rest Octets* Information Element provides the mobile station with relevant GPRS information needed for correct DTM operation. This information element is contained in messages addressed to mobile stations supporting GPRS and DTM.

The *DTM Information Rest Octets* information element is coded as shown in tables 10.5.2.11a.1/3GPP TS 44.018 and 10.5.2.11a..2/3GPP TS 44.018.

The DTM Information Rest Octets is a type 4 information element.

Table 10.5.2.11a.1/3GPP TS 44.018: DTM Information Rest Octets information element

```
< DTM Information Rest Octets IE > ::=

< LENGTH_IN_OCTETS : bit(8) >

< MAX_LAPDm : bit (3) >

< spare bit >**;
```

Table 10.5.2.11a.2/3GPP TS 44.018: DTM Information Rest Octets information element details

LENGTH IN OCTETS (8 bit field)

This field encodes the number that is equal to one eighth of the number of bits (rounded up to the next integer) in the *DTM Information Rest Octets* IE that follows the end of this field.

MAX LAPDm (3 bit field)

This field indicates the maximum number of LAPDm frames on which a layer 3 can be segmented into and be sent on the main DCCH. It is coded as described in the SI 6 Rest Octets IE.

10.5.2.11b Dynamic ARFCN Mapping

The purpose of the *Dynamic ARFCN Mapping* information element is to provide information on ARFCN mapping to physical frequencies (see 3GPP TS 45.005).

The *Dynamic ARFCN Mapping* is a type 4 information element with a minimum length of 6 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (see 3GPP TS 44.060).

Parameters GSM_Band, ARFCN_FIRST, BAND_OFFSET and ARFCN_RANGE are defined in Table 10.5.2.37j.

Spare bits in the end of the field are used to fill the last octet.

Table 10.5.2.11b.1/3GPP TS 44.018: Dynamic ARFCN Mapping content

```
< Dynamic ARFCN Mapping >::=
    < LENGTH OF DYNAMIC ARFCN MAPPING : bit (8) > -- length of value part in octets
    < DYNAMIC ARFCN MAPPING Description : { 1 < DYNAMIC ARFCN MAPPING > } ** 0 >
    < spare bit >** ;

< DYNAMIC ARFCN MAPPING >::=
    < GSM_Band : bit (4) >
    < ARFCN_FIRST : bit (10) >
    < BAND_OFFSET: bit (10) >
    < ARFCN_RANGE : bit (7) > ;
```

10.5.2.12 Frequency Channel Sequence

The purpose of the *Frequency Channel Sequence* information element is to provide the absolute radio frequency channel numbers used in the mobile hopping sequence. This information element shall only be used for radio frequency channels in the primary GSM band (see 3GPP TS 45.005).

The *Frequency Channel Sequence* information element is coded as shown in Figure 10.5.2.12.1/3GPP TS 44.018 and Table 10.5.2.12.1/3GPP TS 44.018.

The Frequency Channel Sequence is a type 3 information element with 10 octets length.

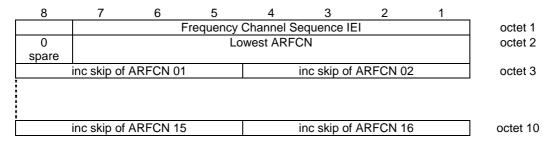


Figure 10.5.2.12.1/3GPP TS 44.018: Frequency Channel Sequence information element

Table 10.5.2.12.1/3GPP TS 44.018: Frequency Channel Sequence information element

Lowest ARFCN (octet 2) The lowest ARFCN field is coded as the binary representation of the lowest absolute RF channel number appearing in the sequence of channels used in the frequency hopping. Range: 1 to 124 All other values are reserved. Increment skip ARFCN n (octet 3 to 10) The increment skip ARFCN n is coded as the binary representation of the increment of the preceding absolute RF channel number appearing in the sequence of channels used in the frequency hopping: n = 1, ..., 16. Range: 0 to 15 The value 0 indicates that the increment value is 15 but the concerned channel is not used and the next field, i.e. Increment skip ARFCN n+1 (if present) must be added to the increment to determine the next absolute RF channel number in the sequence of channels used in the frequency hopping.

10.5.2.13 Frequency List

The purpose of the *Frequency List* information element is to provide the list of the absolute radio frequency channel numbers used in a frequency hopping sequence.

The Frequency List information element is a type 4 information element.

There are several formats for the *Frequency List* information element, distinguished by the "format indicator" subfield. Some formats are frequency bit maps, the others use a special encoding scheme.

10.5.2.13.1 General description

Table 10.5.2.13.1.1/3GPP TS 44.018: Frequency List information element, general format

FORMAT-ID, Format Identifier (part of octet 3) The different formats are distinguished by the FORMAT-ID field. The possible values are the following: Bit Bit Bit Bit format notation 4 3 0 bit map 0 0 Х Х Х 1024 range 1 0 0 Х Χ 1 0 1 0 0 512 range 0 1 0 1 256 range 128 range 1 0 1 0 variable bit map All other combinations are reserved for future use. A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may consider all values except the value for bit map 0 as reserved. The significance of the remaining bits depends on the FORMAT-ID. The different cases are specified in the next clauses.

10.5.2.13.2 Bit map 0 format

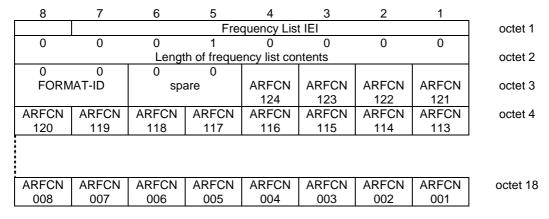


Figure 10.5.2.13.2.1/3GPP TS 44.018: Frequency List information element, bit map 0 format

Table 10.5.2.13.2.1/3GPP TS 44.018: Frequency List information element, bit map 0 format

```
ARFCN N, Absolute RF Channel
Number N (octet 3 etc.)

For a RF channel with ARFCN = N belonging to the frequency list the ARFCN N bit is coded with a "1"; N = 1, 2, ..., 124.

For a RF channel with ARFCN = N not belonging to the frequency list the ARFCN N bit is coded with a "0"; N = 1, 2 ..., 124.
```

10.5.2.13.3 Range 1024 format

The information element contains a header, and W(1) to W(M) for some M. If, due to octet boundaries, some bits are not used at the end of the last octet, these bits must be set to 0.

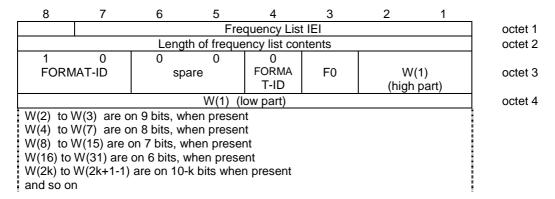


Figure 10.5.2.13.3.1/3GPP TS 44.018: Frequency List information element (Range 1024 format)

Table 10.5.2.13.3.1/3GPP TS 44.018: Frequency List information element, range 1024 format

```
F0, frequency 0 indicator (octet 3, bit 3):
       ARFCN 0 is not a member of the set
       ARFCN 0 is a member of the set
 W(i), i from 1 to M (octet 3 and next):
 Each W(i) encodes a non negative integer in binary
 format.
 If W(k) is null, W(i) for i>k must be null also.
 Each non null W(k) allows to compute, together with some previous W(i) the ARFCN F(k) of a frequency in
 the set. The first computation formulas are given
 hereafter, with the following conventions:
   Wi denotes W(i);
   Fi denotes F(i);
   + indicates the natural integer addition;
      indicates the natural integer multiplication;
   n mod m indicates the remainder of the euclidian
     division of n by m, ie 0 = (n \mod m) = m-1 and there exists k such that n = (k*m) + (n \mod m);
   n smod m indicates the offset remainder of the
     euclidian division of n by m, ie
     1 = (n \mod m) = m and there exists k such that
     n = (k*m) + (n \text{ smod } m);
    F1 = W1
    F2 = (W1 - 512 + W2) \text{ smod } 1023
    F3 = (W1)
                + W3) smod 1023
    F4 = (W1 - 512 + (W2 - 256 + W4) \text{ smod } 511) \text{ smod } 1023
    F5 = (W1 + (W3 - 256 + W5) \text{ smod } 511) \text{ smod } 1023
    F6 = (W1 - 512 + (W2 + W6) smod 511) smod 1023
F7 = (W1 + (W3 + W7) smod 511) smod 1023
    F8 = (W1 - 512 + (W2 - 256 + (W4 - 128 + W8))
          smod 255) smod 511) smod 1023
F9 = (W1
                 + (W3 - 256 + (W5 - 128 + W9))
          smod 255) smod 511) smod 1023
   F10 = (W1 - 512 + (W2))
                                 + (W6 - 128 + W10)
          smod 255) smod 511) smod 1023
                    + (W3
   F11 = (W1)
                                 + (W7 - 128 + W11)
           smod 255) smod 511) smod 1023
   F12 = (W1 - 512 + (W2 - 256 + (W4)
                                              + W12)
          smod 255) smod 511) smod 1023
                    + (W3 - 256 + (W5
   F13 = (W1)
                                              + W13)
          smod 255) smod 511) smod 1023
   F14 = (W1 - 512 + (W2))
                                 + (W6
                                              + W14)
          smod 255) smod 511) smod 1023
   F15 = (W1)
                   + (W3
                                              + W15)
                              + (W7
          smod 255) smod 511) smod 1023
   F16 = (W1 - 512 + (W2 - 256 + (W4 - 128 +
              (W8 - 64 + W16) \text{ smod } 127)
          smod 255) smod 511) smod 1023
```

```
More generally, the computation of F(K) can be done
 with the following program, using ADA language
 (declarative parts are skipped and should be obvious):
 INDEX := K;
 J := GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX);
N := W(INDEX);
 while INDEX>1 loop
   if 2*INDEX < 3*J then
     INDEX := INDEX - J/2;
                                         -- left child
     N := (N + W(PARENT) - 1024/J - 1) mod
           (2048/J - 1) + 1;
                                        -- right child
     INDEX := INDEX - J;
     N := (N + W(PARENT) - 1) \mod (2048/J - 1) + 1;
   end if;
   J := J/2;
 end loop;
 F(K) := N;
```

10.5.2.13.4 Range 512 format

The information element contains a header, and W(1) to W(M) for some M. If, due to octet boundaries, some bits are not used at the end of the last octet, these bits must be set to 0.

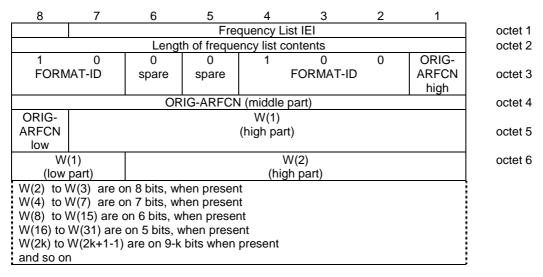


Figure 10.5.2.13.4.1/3GPP TS 44.018: Frequency List information element (Range 512 format)

Table 10.5.2.13.4.1/3GPP TS 44.018: Frequency List information element, range 512 format

```
ORIG-ARFCN, origin ARFCN (octet 3, 4 and 5)
   This field encodes the ARFCN of one frequency
   belonging to the set. This value is also used to
   decode the rest of the element.
W(i), i from 1 to M (octet 5 and next):
 Each W(i) encodes a non negative integer in binary
If W(k) is null, W(i) for i>k must be null also.
Each non null W(k) allows to compute, together with
 some previous W(i) the ARFCN F(k) of a frequency in
 the set. The first computation formulas are given
hereafter, with the following conventions:
   Wi denotes W(i); WO denotes the value of ORIG-ARFCN
  Fi denotes F(i);
   + indicates the natural integer addition;
* indicates the natural integer multiplication;
  {\tt n}\ {\tt mod}\ {\tt m}\ {\tt indicates}\ {\tt the}\ {\tt remainder}\ {\tt of}\ {\tt the}\ {\tt euclidian}
    division of n by m, ie 0 = (n \mod m) = m-1 and
     there exists k such that n = (k*m) + (n \mod m);
   n smod m indicates the offset remainder of the
    euclidian division of n by m, ie
     1 = (n smod m) = m and there exists k such that
    n = (k*m) + (n \text{ smod } m);
F1 = (W0 + W1) \mod 1024
F2 = (W0 + (W1 - 256 + W2) \text{ smod } 511) \text{ mod } 1024
                     + W3) smod 511) mod 1024
 F3 = (W0 + (W1)
F4 = (W0 + (W1 - 256 + (W2 - 128 + W4)) \text{ smod } 255)
        smod 511) mod 1024
 F5 = (W0 + (W1)
                       + (W3 - 128 + W5) smod 255)
       smod 511) mod 1024
 F6 = (W0 + (W1 - 256 + (W2)
                                   + W6) smod 255)
       smod 511) mod 1024
                      + (W3
 F7 = (W0 + (W1)
                                   + W7) smod 255)
       smod 511) mod 1024
 F8 = (W0 + (W1 - 256 + (W2 - 128 + (W4 - 64 + W8)))
        smod 127) smod 255) smod 511) mod 1024
 F9 = (W0 + (W1)
                      + (W3 - 128 + (W5 - 64 + W9))
        smod 127) smod 255) smod 511) mod 1024
 F10 = (W0 + (W1 - 256 + (W2 + (W6 - 64 + W10)))
        smod 127) smod 255) smod 511) mod 1024
 F11 = (W0 + (W1)
                      + (W3 + (W7 - 64 + W11)
       smod 127) smod 255) smod 511) mod 1024
 F12 = (W0 + (W1 - 256 + (W2 - 128 + (W4
                                             + W12)
        smod 127) smod 255) smod 511) mod 1024
 F13 = (W0 + (W1)
                       + (W3 - 128 + (W5)
       smod 127) smod 255) smod 511) mod 1024
 F14 = (W0 + (W1 - 256 + (W2 + (W6 + W14)
       smod 127) smod 255) smod 511) mod 1024
 F15 = (W0 + (W1 + (W3
                                   + (W7
        smod 127) smod 255) smod 511) mod 1024
 F16 = (W0 + (W1 - 256 + (W2 - 128 + (W4 - 64 +
      (W8 - 32 + W16)
      smod 63) smod 127) smod 255) smod 511) mod 1024
 F17 = (W0 + (W1)
                      + (W3 - 128 + (W5 - 64 +
      (W9 - 32 + W17)
      smod 63) smod 127) smod 255) smod 511) mod 1024
```

```
More generally, the computation of F(K) can be done
 with the following program, using ADA language
 (declarative parts are skipped and should be obvious):
 INDEX := K;
 J := GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX);
N := W(INDEX);
 while INDEX>1 loop
   if 2*INDEX < 3*J then
                                        -- left child
     INDEX := INDEX - J/2;
     N := (N + W(PARENT) - 512/J - 1) mod
           (1024/J - 1) + 1;
                                        -- right child
     INDEX := INDEX - J;
     N := (N + W(_INDEX) - 1) \mod (1024/J - 1) + 1;
   end if;
   J := J/2;
 end loop;
 F(K) := (W(0) + N) \mod 1024;
```

10.5.2.13.5 Range 256 format

The information element contains a header, and W(1) to W(M) for some M. If, due to octet boundaries, some bits are not used at the end of the last octet, these bits must be set to 0.

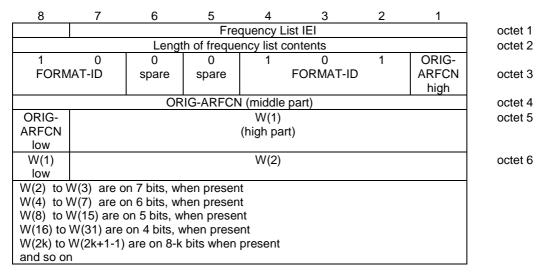


Figure 10.5.2.13.5.1/3GPP TS 44.018: Frequency List information element (Range 256 format)

Table 10.5.2.13.5.1/3GPP TS 44.018: Frequency List information element, range 256 format

```
ORIG-ARFCN, origin ARFCN (octet 3, 4 and 5)
 This field encodes the ARFCN of one frequency belonging to
 the set. This value is also used to decode the rest of the
 element.
 W(i), i from 1 to M (octet 5 and next):
 Each W(i) encodes a non negative integer in binary format.
 If W(k) is null, W(i) for i>k must be null also.
 Each non null W(k) allows to compute, together with
 some previous W(i) the ARFCN F(k) of a frequency in
 the set. The first computation formulas are given
 hereafter, with the following conventions:
     Wi denotes W(i); WO denotes the value of ORIG-ARFCN
    Fi denotes F(i);
     + indicates the natural integer addition;
         indicates the natural integer multiplication;
    \ensuremath{\text{n}} mod \ensuremath{\text{m}} indicates the remainder of the euclidian
        division of n by m, ie 0 = (n \mod m) = m-1 and
        there exists k such that n = (k*m) + (n \mod m);
    n smod m indicates the offset remainder of the
        euclidian division of n by m, ie
        1 = (n \mod m) = m and there exists k such that
        n = (k*m) + (n \text{ smod } m);
F1 = (W0 + W1) \mod 1024
 F2 = (W0 + (W1 - 128 + W2) \text{ smod } 255) \text{ mod } 1024
 F3 = (W0 + (W1 + W3) \text{ smod } 255) \text{ mod } 1024
 F4 = (W0 + (W1 - 128 + (W2 - 64 + W4) \text{ smod } 127) \text{ smod } 255)
         mod 1024
 F5 = (W0 + (W1)
                                      + (W3 - 64 + W5) smod 127) smod 255)
         mod 1024
 F6 = (W0 + (W1 - 128 + (W2)))
                                                          + W6) smod 127) smod 255)
         mod 1024
 F7 = (W0 + (W1)
                                      + (W3
                                                            + W7) smod 127) smod 255)
         mod 1024
F8 = (W0 + (W1 - 128 + (W2 - 64 + (W4 - 32 + W8)) \text{ smod } 63)
         smod 127) smod 255) mod 1024
                                       + (W3 - 64 + (W5 - 32 + W9)) \text{ smod } 63)
 F9 = (W0 + (W1))
         smod 127) smod 255) mod 1024
 F10 = (W0 + (W1 - 128 + (W2
                                                             + (W6 - 32 + W10) \text{ smod } 63)
         smod 127) smod 255) mod 1024
                                                           + (W7 - 32 + W11) smod 63)
 F11 = (W0 + (W1 + (W3)
         smod 127) smod 255) mod 1024
 F12 = (W0 + (W1 - 128 + (W2 - 64 + (W4
                                                                               + W12) smod 63)
         smod 127) smod 255) mod 1024
 F13 = (W0 + (W1)
                                      + (W3 - 64 + (W5)
                                                                               + W13) smod 63)
         smod 127) smod 255) mod 1024
 F14 = (W0 + (W1 - 128 + (W2
                                                            + (W6
                                                                               + W14) smod 63)
         smod 127) smod 255) mod 1024
 F15 = (W0 + (W1)
                                        + (W3
                                                             + (W7
                                                                                + W15) smod 63)
         smod 127) smod 255) mod 1024
 F16 = (W0 + (W1 - 128 + (W2 - 64 + (W4 - 32 + (W8 - 16 + W16))))
         smod 31) smod 63) smod 127) smod 255) mod 1024
 F17 = (W0 + (W1)
                                      + (W3 - 64 + (W5 - 32 + (W9)
         smod 31) smod 63) smod 127) smod 255) mod 1024
 F18 = (W0 + (W1 - 128 + (W2
                                                       + (W6 - 32 + (W10 - 16 + W18)
          smod 31) smod 63) smod 127) smod 255) mod 1024
 F19 = (W0 + (W1 + (W3 
                                                          + (W7 - 32 + (W11 - 16 + W19)
         smod 31) smod 63) smod 127) smod 255) mod 1024
 F20 = (W0 + (W1 - 128 + (W2 - 64 + (W4
                                                                             + (W12 - 16 + W20)
          smod 31) smod 63) smod 127) smod 255) mod 1024
                                      + (W3 - 64 + (W5)
                                                                              + (W13 - 16 + W21)
 F21 = (W0 + (W1)
          smod 31) smod 63) smod 127) smod 255) mod 1024
```

```
More generally, the computation of F(K) can be done
 with the following program, using ADA language
 (declarative parts are skipped and should be obvious):
 J := GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX);
N := W(INDEX);
 while INDEX>1 loop
   if 2*INDEX < 3*J then
                                         -- left child
     INDEX := INDEX - J/2;
     N := (N + W(INDEX) - 256/J - 1) \mod
           (512/J - 1) + 1;
                                        -- right child
     INDEX := INDEX - J;
     N := (N + W(INDEX) - 1) \mod (512/J - 1) + 1;
   end if;
   J := J/2;
 end loop;
 F(K) := (W(0) + N) \mod 1024;
```

10.5.2.13.6 Range 128 format

The information element contains a header, and W(1) to W(M) for some M. If, due to octet boundaries, some bits are not used at the end of the last octet, these bits must be set to 0.

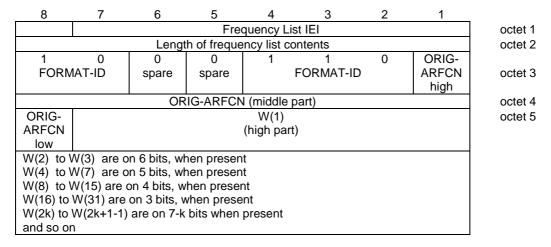


Figure 10.5.2.13.6.1/3GPP TS 44.018: Frequency List information element (Range 128 format)

Table 10.5.2.13.6.1/3GPP TS 44.018: Frequency List information element, range 128 format

```
ORIG-ARFCN, origin ARFCN (octet 3, 4 and 5)
This field encodes the ARFCN of one frequency belonging to
the set. This value is also used to decode the rest of the
element.
W(i), i from 1 to M (octet 5 and next):
Each W(i) encodes a non negative integer in binary format.
If W(k) is null, W(i) for i>k must be null also.
Each non null W(k) allows to compute, together with some previous W(i) the ARFCN F(k) of a frequency in
the set. The first computation formulas are given
hereafter, with the following conventions:
  Wi denotes W(i); WO denotes the value of ORIG-ARFCN
  Fi denotes F(i);
  + indicates the natural integer addition;
* indicates the natural integer multiplication;
  {\tt n}\ {\tt mod}\ {\tt m}\ {\tt indicates}\ {\tt the}\ {\tt remainder}\ {\tt of}\ {\tt the}\ {\tt euclidian}
    division of n by m, ie 0 = (n \mod m) = m-1 and there exists k such that n = (k*m) + (n \mod m);
  n smod m indicates the offset remainder of the
    euclidian division of n by m, ie
    1 = (n \mod m) = m and there exists k such that
     n = (k*m) + (n \text{ smod } m);
```

```
F1 = (W0 + W1) \mod 1024
   F2 = (W0 + (W1 - 64 + W2) \text{ smod } 127) \text{ mod } 1024
   F3 = (W0 + (W1 + W3) \text{ smod } 127) \text{ mod } 1024
   F4 = (W0 + (W1 - 64 + (W2 - 32 + W4) \text{ smod } 63) \text{ smod } 127)
                    mod 1024
   F5 = (W0 + (W1)
                                                                            + (W3 - 32 + W5) smod 63) smod 127)
                   mod 1024
   F6 = (W0 + (W1 - 64 + (W2)))
                                                                                                             + W6) smod 63) smod 127)
                   mod 1024
   F7 = (W0 + (W1)
                                                                           + (W3
                                                                                                                      + W7) smod 63) smod 127)
                   mod 1024
F8 = (W0 + (W1 - 64 + (W2 - 32 + (W4 - 16 + W8)) \text{ smod } 31)
                     smod 63) smod 127) mod 1024
   F9 = (W0 + (W1 + (W3 - 32 + (W5 - 16 + W9)) \text{ smod } 31)
                   smod 63) smod 127) mod 1024
   F10 = (W0 + (W1 - 64 + (W2)
                                                                                                                      + (W6 - 16 + W10) smod 31)
                   smod 63) smod 127) mod 1024
                                                                                                                         + (W7 - 16 + W11) smod 31)
   F11 = (W0 + (W1 + (W3)
                  smod 63) smod 127) mod 1024
   F12 = (W0 + (W1 - 64 + (W2 - 32 + (W4
                                                                                                                                                             + W12) smod 31)
                  smod 63) smod 127) mod 1024
    F13 = (W0 + (W1)
                                                                               + (W3 - 32 + (W5)
                                                                                                                                                               + W13) smod 31)
                   smod 63) smod 127) mod 1024
   F14 = (W0 + (W1 - 64 + (W2 + (W6 +
                                                                                                                                                              + W14) smod 31)
                   smod 63) smod 127) mod 1024
   F15 = (W0 + (W1)
                                                                               + (W3
                                                                                                                         + (W7
                                                                                                                                                                 + W15) smod 31)
                   smod 63) smod 127) mod 1024
   F16 = (W0 + (W1 - 64 + (W2 - 32 + (W4 - 16 + (W8 - 8 + W16)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F17 = (W0 + (W1)
                                                                           + (W3 - 32 + (W5 - 16 + (W9 - 8 + W17))
                    smod 15) smod 31) smod 63) smod 127) mod 1024
   F18 = (W0 + (W1 - 64 + (W2 + (W6 - 16 + (W10 - 8 + W18)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F19 = (W0 + (W1 + (W3 + (W7 - 16 + (W11 - 8 + W19))))
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F20 = (W0 + (W1 - 64 + (W2 - 32 + (W4)
                                                                                                                                                          + (W12 - 8 + W20)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F21 = (W0 + (W1 + (W3 - 32 + (W5 + (W13 - 8 + W21)
                     smod 15) smod 31) smod 63) smod 127) mod 1024
    F22 = (W0 + (W1 - 64 + (W2 + (W6)
                                                                                                                                                      + W(14 - 8 + W22)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
                                                                              + (W3 + (W7 + (W15 - 8 + W23))
   F23 = (W0 + (W1)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F24 = (W0 + (W1 - 64 + (W2 - 32 + (W4 - 16 + (W8 - 16)))))
                                                                                                                                                                                                           + W24)
                  smod 15) smod 31) smod 63) smod 127) mod 1024
   F25 = (W0 + (W1)
                                                                             + (W3 - 32 + (W5 - 16 + (W9)
                                                                                                                                                                                                          + W25)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
    F26 = (W0 + (W1 - 64 + (W2 + (W6 - 16 + (W10 + (W
                                                                                                                                                                                                          + W26)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F27 = (W0 + (W1 + (W3 + (W7 - 16 + (W11 + (W3 + (W7 - 16 + (W11 + (W3 + (W7 - 16 + (W11 + (W3 + (W3 + (W7 + 16 + (W3 +
                                                                                                                                                                                                           + W27)
                   smod 15) smod 31) smod 63) smod 127) mod 1024
   F28 = (W0 + (W1 - 64 + (W2 - 32 + (W4 + (W12 - 32 + (W4 + (W12 
                                                                                                                                                                                                          + W28
                   smod 15) smod 31) smod 63) smod 127) mod 1024
                                                                            + (W3 - 32 + (W5 + (W13
   F29 = (W0 + (W1)
                                                                                                                                                                                                          + W29
                  smod 15) smod 31) smod 63) smod 127) mod 1024
More generally, the computation of F(K) can be done
   with the following program, using ADA language
    (declarative parts are skipped and should be obvious):
   INDEX := K;
    J := GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX);
   N := W(INDEX);
   while INDEX>1 loop
           if 2*INDEX < 3*J then
                                                                                                                                            -- left child
              INDEX := INDEX - J/2;
                 N := (N + W(INDEX) - 128/J - 1) mod
                                      (256/J - 1) + 1;
                                                                                                                                            -- right child
                 INDEX := INDEX - J;
                 N := (N + W(INDEX) - 1) \mod (256/J - 1) + 1;
          end if;
          J := J/2;
    end loop;
    F(K) := (W(0) + N) \mod 1024;
```

10.5.2.13.7 Variable bit map format

8	7	6	5	4	3	2	1		
		Frequency List IEI							
Length of frequency list contents								octet 2	
1	0	0	0	1	1	1	ORIG-		
FORM	1AT-ID	spare	spare	F	ORMAT-II)	ARFCN	octet 3	
					(continued))	high		
		OR	IG-ARFCN	I (middle p	art)			octet 4	
ORIG-								octet 5	
ARFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN		
low	1	2	3	4	5	6	7		
RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	RRFCN	octet k	
8k-40	8k-39	8k-38	8k-37	8k-36	8k-35	8k-34	8k-33		

Figure 10.5.2.13.7.1/3GPP TS 44.018: Frequency List information element, variable bit map format

Table 10.5.2.13.7.1/3GPP TS 44.018: Frequency List information element, variable bit map format

```
ORIG-ARFCN, origin ARFCN (octet 3, 4 and 5)

This field encodes the ARFCN of one frequency belonging to the set. This value is also used as origin of the bit map to generate all the other frequencies.

RRFCN N, relative radio frequency channel number N (octet 5 etc.)

For a RF channel with ARFCN = (ORIG-ARFCN + N) mod 1024 belonging to the set, RRFCN N bit is coded with a "1"; N = 1, 2, ..., 8M+7 with 1 = M = 127

For a RF channel with ARFCN = (ORIG-ARFCN + N) mod 1024 not belonging to the set, RRFCN N bit is coded with a "0"; N = 1, 2, ..., 8M+7 with 1 = M = 127
```

10.5.2.14 Frequency Short List

The purpose of the *Frequency Short List* information element is to provide the list of the absolute radio frequency channel numbers used in a frequency hopping sequence, in a small fixed length information element to obtain when possible the HANDOVER COMMAND message in a single block.

The Frequency Short List information element is a type 3 information element of 10 octet length.

This element is encoded exactly as the *Frequency List* information element, except that it has a fixed length instead of a variable length and does not contain a length indicator and that it shall not be encoded in bitmap 0 format.

10.5.2.14a Frequency Short List 2

The purpose of the *Frequency Short List 2* information element is to provide the list of the absolute radio frequency channel numbers used in a frequency hopping sequence, in a small fixed length information element to obtain the SYSTEM INFORMATION TYPE 11 and NOTIFICATION FACCH messages in a single block.

The Frequency Short List information element is a type 3 information element of 8 octet length.

This element is encoded exactly as the *Frequency List* information element, except that it has a fixed length instead of a variable length and does not contain a length indicator and that it shall not be encoded in bitmap 0 format.

10.5.2.14b Group Channel Description

The purpose of the *Group Channel Description* information element is to provide a description of an allocable voice group call or voice broadcast call channel together with its SACCH and that part of the RF channels belonging to the cell allocation which is used in the mobile hopping sequence if applicable.

The *Group Channel Description* information element is coded as shown in Figure 10.5.2.14b.1/3GPP TS 44.018 and Table 10.5.2.14b.1/3GPP TS 44.018.

The Group Channel Description is a type 4 information element with 4 to 13 octets length.

8	7	6	5	4	3	2	1	
			Group Ch	annel Desc	cription IEI			octet 1
	Length of mobile allocation contents							
	C	hannel typ	е					octet 3
	and	d TDMA off	set			TN		
			H=1->		MAIO (h	igh part)		
	TSC		H					octet 4
						ARI	FCN	
				(0			
				spare (high part)				
	AIO			H	SN			
(low	part)							octet 5
		,	ARFCN (low part)	,		,	
MA	MA	MA	MA	MA	MA	MA	MA	
С	С	С	С	С	С	С	С	octet 6
8n	8n-1	8n-2	8n-3	8n-4	8n-5	8n-6	8n-7	
:								
		ı	1		1	1	1	
MA	MA	MA	MA	MA	MA	MA	MA	
С	С	С	С	С	С	С	С	octet n+5
800	007	006	005	004	003	002	001	

Figure 10.5.2.14b.1/3GPP TS 44.018: Group Channel Description information element

Table 10.5.2.14b.1/3GPP TS 44.018: Group Channel Description information element

```
Channel type and TDMA offset (octet 3)
   Bits
 8 7 6 5 4
 0 0 0 0 1
            TCH/FS + ACCHs (speech codec version 1)
 0 0 0 1 T
            TCH/HS + ACCHs (speech codec version 1)
0 0 1 T T SDCCH/4 + SACCH/C4
0 1 T T T SDCCH/8 + SACCH/C8
 The T bits indicate the subchannel number coded in
 binary.
All other values are reserved for future use.
TN, Timeslot number (octet 3)
The \, TN field is coded as the binary representation
 of the timeslot number as defined in 3GPP TS 45.010.
Range: 0 to 7.
TSC, Training Sequence Code (octet 4)
The TSC field is coded as the binary representation
of the Training Sequence code as defined in 3GPP TS 45.003
Range: 0 to 7.
H, Hopping channel (octet 4)
Bit.
 0
         Single RF channel
         RF hopping channel
Note 1: The value of H affects the semantics of the
       channel selector field
Note 2: If H=0, the information element terminates
       with octet 5
 Channel selector (octet 4 and 5)
 H = "0": The channel selector field
       consists of the absolute RF channel number
       Octet 4
        Bits
        4 3
        0 0
               Spare
       ARFCN, (octet 4, bits 2 and 1, and
               octet 5, bits 8 to 1)
         The ARFCN is coded as the binary representa-
         tion of the absolute RF channel number
          Range: 0 to 1023
H = "1": The channel selector field consists of the
          mobile allocation index offset, MAIO, and
          the hopping sequence number, HSN.
           MAIO, (octet 4 bit 4 to 1 high part and
                  octet 5 bit 8 to 7 low part)
           The MAIO field is coded as the binary rep-
           resentation of the mobile allocation index
           offset as defined in 3GPP TS 45.002.
          Range: 0 to 63.
          HSN, (octet 5 bit 6 to 1)
          The HSN field is coded as the binary repres-
          entation of the hopping sequence number
           as defined in 3GPP TS 45.002
          Range 0 to 63.
```

```
MA C i, Mobile allocation RF channel i (octet 4
 etc.), i = 1, 2, ..., NF
 The MA C i bit indicates whether or not the Mobile
 allocation frequency list includes the i'th
 frequency in the cell allocation frequency list
 In the cell allocation frequency list the absolute
 RF channel numbers are placed in increasing order of
 ARFCN, except that ARFCN 0, if included in the set,
 is put in the last position in the list,
     a RF channel belonging to the mobile allocation
 the
    MA C i bit is coded with a "1"; i = 1, 2, \ldots
 NF.
 For a RF
            channel not belonging to the mobile
 allocation the MA C i bit is coded with a "0"; i =
 1, 2,..., NF.
 If NF mod 8 <> 0 then bits NF to 8n in octet 4 must
 be coded with a "0" in each.
```

10.5.2.14c GPRS Resumption

The purpose of the *GPRS Resumption* information element is to indicate whether the network has successfully resumed GPRS services or not.

The *GPRS Resumption* information element is coded as shown in Figure 10.5.2.14c.1/3GPP TS 44.018 and Table 10.5.2.14c.1/3GPP TS 44.018.

The GPRS Resumption is a type 1 information element.




Figure 10.5.2.14c.1/3GPP TS 44.018: GPRS Resumption information element

Table 10.5.2.14c.1/3GPP TS 44.018: GPRS Resumption information element

The ACK field (1 bit) is the binary acknowledge of a successful resumption of GPRS services:

- 0 resumption of GPRS services not successfully acknowledged;
- 1 resumption of GPRS services successfully acknowledged.

10.5.2.14d GPRS broadcast information

The *GPRS broadcast informationi in* information element provides the mobile station with relevant GPRS information needed for correct DTM operation. This information element is contained in messages addressed to mobile stations supporting GPRS and DTM.

The *GPRS broadcast information* information element is coded as shown in tables 10.5.2.14d.1/3GPP TS 44.018 and 10.5.2.14d.2/3GPP TS 44.018.

The GPRS broadcast information is a type 4 information element.

Table 10.5.2.14d.1/3GPP TS 44.018: GPRS broadcast information information element

```
< GPRS broadcast information IE > ::=
    < LENGTH_IN_OCTETS : bit(8) >
    < GPRS Cell Options : < GPRS Cell Options IE > >
    < GPRS Power Control Parameters : < GPRS Power Control Parameters struct > >
    < spare bit >**;
```

Table 10.5.2.14d.2/3GPP TS 44.018: GPRS broadcast information information element details

LENGTH_IN_OCTETS (8 bit field)

This field encodes the number that is equal to one eighth of the number of bits (rounded up to the next integer) in the *GPRS broadcast information* IE that follows the end of this field.

GPRS Cell Options

The GPRS Cell Option information element is defined in 3GPP TS 44.060.

GPRS Power Control Parameters

The GPRS Power Control Parameters struct is defined in 3GPP TS 44.060.

10.5.2.15 Handover Reference

The purpose of the *Handover Reference* information element is to provide a handover reference value used for access identification.

The *Handover Reference* information element is coded as shown in Figure 10.5.2.15.1/3GPP TS 44.018 and Table 10.5.2.15.1/3GPP TS 44.018.

The Handover Reference is a type 3 information element with 2 octets length.




Figure 10.5.2.15.1/3GPP TS 44.018: Handover Reference information element

Table 10.5.2.15.1/3GPP TS 44.018: Handover Reference information element

```
Handover reference value (octet 2)
The handover reference value field is coded using binary representation.

Range: 0 to 255.
```

10.5.2.16 IA Rest Octets

The IA Rest Octets information element contains spare bits and possibly either a packet uplink assignment construction, a packet downlink assignment construction, a second part packet assignment construction or a frequency parameters, before time construction.

The *frequency parameters, before time* construction combines a mobile allocation (see 10.5.2.21) and a MAIO (see the *channel description* information element).

The *IA Rest Octets* information element is coded according to the syntax specified below and described in Table 10.5.2.16.1/3GPP TS 44.018.

The IA Rest Octets information element is a type 5 information element with 0-11 octets length.

```
<IA Rest Octets> ::=
   { LL
   | LH
      00 }
            < EGPRS Packet Uplink Assignment >
       | 01 -- reserved for future use
                 -- reserved for future use (however the value 7C for the first octet shall not be used)
   | HL
       < Length of frequency parameters : bit string (6) >
       < Frequency Parameters, before time >
   | HH
      { 00
            < Packet Uplink Assignment >
       | 01 | < Packet Downlink Assignment >
             < Second Part Packet Assignment > }
       | 1
   <spare padding>;
< EGPRS Packet Uplink Assignment > : :=
< Extended RA: bit (5) >
{ 0 | 1 < Access Technologies Request : Access Technologies Request struct > }
{ 1
   < TFI_ASSIGNMENT : bit (5) >
   < POLLING: bit >
   0 }
                 -- Dynamic Allocation
      < USF: bit (3) >
      < USF_GRANULARITY : bit >
      { 0 | 1 < P0 : bit (4) >
      < PR_MODE : bit (1) >}
                    -- Fixed Allocation
      < ALLOCATION_BITMAP_LENGTH : bit (5) >
       < ALLOCATION_BITMAP : bit (val(ALLOCATION_BITMAP_LENGTH)) >
      { 0 | 1 < P0 : bit (4) >
          < BTS_PWR_CTRL_MODE : bit (1) >
          < PR_MODE : bit (1) >}
   < EGPRS CHANNEL_CODING_COMMAND : < EGPRS Modulation and Coding IE>>
   < TLLI_BLOCK_CHANNEL_CODING : bit (1) >
   { 0 | 1 < BEP_PERIOD2 : bit (4) >}
   < Resegment : < Resegment IE>>
   < EGPRS Window Size : < EGPRS Window Size IE>>
   \{ 0 \mid 1 < ALPHA : bit (4) > \}
   < GAMMA : bit (5) >
   \{ 0 \mid 1 < TIMING\_ADVANCE\_INDEX : bit (4) > \}
   { 0 | 1 < TBF_STARTING_TIME : bit (16) > }
          -- Multi Block Allocation
   \{ 0 \mid 1 < ALPHA : bit (4) > \}
   < GAMMA : bit (5) >
   < TBF_STARTING_TIME : bit (16) >
   < NUMBER OF RADIO BLOCKS ALLOCATED : bit (2) >
   \{0 \mid 1 < P0 : bit (4) >
          < BTS_PWR_CTRL_MODE : bit (1) >
          < PR_MODE : bit (1) >}
};
<Access Technologies Request struct> ::= -- recursive structure allows any combination of Access technologies
   <Access Technology Type : bit (4)>
   { 0 | 1 < Access Technologies Request struct> };
```

```
< Packet Uplink Assignment > ::=
       < TFI_ASSIGNMENT : bit (5) >
       < POLLING: bit >
                                                                        -- Dynamic Allocation
          < USF: bit (3) >
           < USF GRANULARITY : bit >
          \{ 0 \mid 1 < P0 : bit (4) >
           < PR_MODE : bit (1) >}
                                                                        -- Fixed Allocation
           < ALLOCATION_BITMAP_LENGTH: bit (5) >
           < ALLOCATION_BITMAP : bit (val(ALLOCATION_BITMAP_LENGTH)) >
          \{ 0 \mid 1 < P0 : bit (4) >
              < BTS_PWR_CTRL_MODE : bit (1) >
              < PR_MODE : bit (1) >}
       }
           < CHANNEL_CODING_COMMAND : bit (2) >
           < TLLI_BLOCK_CHANNEL_CODING : bit >
       \{ 0 \mid 1 < ALPHA : bit (4) > \}
       < GAMMA : bit (5) >
       \{ 0 \mid 1 < TIMING\_ADVANCE\_INDEX : bit (4) > \}
       { 0 | 1 < TBF_STARTING_TIME : bit (16) > }
                                                                        -- Single Block Allocation
       \{ 0 \mid 1 < ALPHA : bit (4) > \}
       < GAMMA : bit (5) >
       0 1
                                                                       -- See Note 1
       < TBF_STARTING_TIME : bit (16) >
       \{L \mid H < P0 : bit (4) > \}
              < BTS_PWR_CTRL_MODE : bit (1) >
              < PR_MODE : bit (1) >}
   { L | H
                                                                        -- Additions for R99
   \{ 0 \mid 1 < \text{Extended RA} : \text{bit } (5) > \} \};
< Packet Downlink Assignment > ::=
   < TLLI : bit (32) >
   { 0 | 1
       < TFI_ASSIGNMENT : bit (5) >
       < RLC_MODE : bit >
       \{0 \mid 1 < ALPHA : bit (4) > \}
       < GAMMA : bit (5) >
       < POLLING: bit >
       < TA_VALID : bit (1) >}
       \{ 0 \mid 1 < TIMING\_ADVANCE\_INDEX : bit (4) > \}
       { 0 | 1 < TBF_STARTING_TIME : bit (16) > }
       { 0 | 1 < P0 : bit (4) >
           < BTS_PWR_CRTL_MODE : bit (1) >
           < PR_MODE : bit (1) >}
{ L | H -- indicates EGPRS TBF mode, see 44.060
       < EGPRS Window Size : < EGPRS Window Size IE>>
       < LINK_QUALITY_MEASUREMENT_MODE : bit (2)> ;
       \{ 0 \mid 1 < BEP\_PERIOD2 : bit (4) > \} \};
< Frequency Parameters, before time > ::=
                            -- Length of frequency parameters = 0
   { null
      0 0
       < MAIO : bit (6) >
       < Mobile Allocation: octet (val (Length of frequency parameters) - 1)
< Second Part Packet Assignment > ::=
                  - - Additions for R99
   \{L \mid H
       \{ 0 \mid 1 < \text{Extended RA} : \text{bit } (5) > \} \} ;
```

NOTE 1: A 'Timing Advance index' shall not be allocated at a Single Block allocation. A 'TBF Starting Time' shall be allocated at a Single Block allocation. The control bits set to fixed values to specify these requirements in a way compatible with early GPRS mobile stations in release 97.

Table 10.5.2.16.1/3GPP TS 44.018: IA Rest Octet information element

Packet Uplink Assignment

The **Extended RA** (5 bit field) is the Extended Random Access information. This is an unformatted 5 bit field, whose content is coded as the 5 least significant bits of the the EGPRS PACKET CHANNEL REQUEST message defined in 3GPP TS 44.060.

The **POLLING** field (1 bit field) indicates if the MS is being polled for a PACKET CONTROL ACKNOWLEDGEMENT:

- 0 no action is required from MS;
- 1 MS shall send a PACKET CONTROL ACKNOWLEDGEMENT message in the uplink block specified by TBF Starting Time, on the assigned PDCH.

The **TFI_ASSIGNMENT** field (5 bit field) is the binary representation of the Temporary Flow Identity, see 3GPP TS 44.060. Range: 0 to 31.

The USF field (3 bit field) is the binary representation of the uplink state flag, see 3GPP TS 44.060. Range: 0 to 7.

The **USF_GRANULARITY** field (1 bit field) indicates the USF granularity to be applied by the mobile station when it is assigned a TBF using Dynamic Allocation, see 3GPP TS 44.060:

- 0 the mobile station shall transmit one RLC/MAC block;
- the mobile station shall transmit four consecutive RLC/MAC blocks.

The **ALLOCATION_BITMAP_LENGTH** field (5 bit field) specifies the number of bits in the ALLOCATION_BITMAP.

Range 0 to 31.

The **ALLOCATION_BITMAP** field (variable length field) represents uplink radio blocks, each bit representing one radio block. Each bit indicates whether the mobile station is permitted to transmit during the corresponding uplink radio block. The bitmap describes a one dimensional array of block periods, indexed as follows:

```
block period[z] z = n for n = 0 to L,
```

where:

L = number of bits in the ALLOCATION_BITMAP - 1; z = block period relative to TBF_STARTING_TIME; n = bit number index into the ALLOCATION_BITMAP, range 0 to L;

TBF_STARTING_TIME indicates the first block period of the assigned allocation

The value of each bit is encoded as:

- 0 block period[n] is not part of the assigned allocation
- 1 block period[n] is part of the assigned allocation

The **CHANNEL_CODING_COMMAND** field (2 bit field) indicates the coding scheme to be used for transmission, see 3GPP TS 45.003:

```
00 coding scheme 1, CS-1;
01 coding scheme 2, CS-2;
10 coding scheme 3, CS-3;
11 coding scheme 4, CS-4.
```

The **TLLI_BLOCK_CHANNEL_CODING** field (1 bit field) indicates the channel coding to be used for RLC data block comprising TLLI for contention resolution:

- 0 mobile station shall use CS-1 in GPRS TBF mode or MCS-1 in EGPRS TBF mode;
- 1 mobile station shall use coding scheme as specified by the corresponding CHANNEL CODING COMMAND or EGPRS CHANNEL CODING COMMAND field.

The **ALPHA** field (4 bit field) is the binary representation of the parameter α for MS output power control, see 3GPP TS 45.008:

```
\begin{array}{lll} 0\ 0\ 0\ 0 \\ 0\ 0\ 0\ 1 \\ \vdots \\ 1\ 0\ 1\ 0 \\ \end{array} \qquad \begin{array}{lll} \alpha = 0.0; \\ \alpha = 0.1; \\ \vdots \\ \alpha = 1.0. \end{array}
```

All other values are reserved in this version of the protocol and shall be interpreted by the mobile station as $\alpha = 1.0$.

The **GAMMA** field (5 bit field) is the binary representation of the parameter Γ_{CH} for MS output power control in units of 2 dB, see 3GPP TS 45.008.

The **TIMING_ADVANCE_INDEX** field (4 bit field) is the binary representation of the timing advance index (TAI), see 3GPP TS 45.010 and 3GPP TS 44.004. Range: 0 to 15.

The **TBF_STARTING_TIME** field (16 bit field) defines a starting time for the packet uplink assignment. The TBF starting time is coded using the same coding as the V format of the type 3 information element *Starting Time* (10.5.2.38).

P0 (4 bit field)

For description and encoding, see the Packet Uplink Assignment message in 3GPP TS 44.060.

BTS_PWR_CTRL_MODE (1 bit field)

For description and encoding, see the Packet Uplink Assignment message in 3GPP TS 44.060.

PR MODE (1 bit field)

For description and encoding, see the Packet Uplink Assignment message in 3GPP TS 44.060.

Packet Downlink Assignment

The **TLLI** field (32 bit field) is the binary representation of a TLLI. The coding of TLLI is left open for each administration using the structure specified in 3GPP TS 23.003.

The **TFI_ASSIGNMENT** field (5 bit field) is the binary representation of the Temporary Flow Identity, see 3GPP TS 44.060. Range: 0 to 31.

The RLC_MODE field (1 bit field) indicates the RLC mode, see 3GPP TS 44.060:

- 0 RLC acknowledged mode;
- 1 RLC unacknowledged mode.

The **ALPHA** field (4 bit field) is the binary representations of the parameters α for MS output power control, see *Packet Uplink Assignment* construction.

The **GAMMA** field (5 bit field) is the binary representation of the parameter Γ_{CH} for MS output power control, see *Packet Uplink Assignment* construction.

The **POLLING** field (1 bit field) indicates if the MS is being polled for a PACKET CONTROL ACKNOWLEDGEMENT.

- 0 no action is required from MS;
- 1 MS shall send a PACKET CONTROL ACKNOWLEDGEMENT message in the uplink block specified by TBF Starting Time, on the assigned PDCH.

The **TA_VALID** field (1 bit field) indicates the validity of the timing advance value given in the *Timing Advance* IE.

- 0 the timing advance value is not valid;
- 1 the timing advance value is valid.

The **TIMING_ADVANCE_INDEX** field (4 bit field) is the binary representation of the timing advance index (TAI), see 3GPP TS 45.010 and 3GPP TS 44.004. Range: 0 to 15.

The **TBF_STARTING_TIME** field (16 bit field) defines a starting time for the packet downlink assignment. The TBF starting time is coded using the same coding as the V format of the type 3 information element *Starting Time* (10.5.2.38).

P0 (4 bit field)

For description and encoding, see the Packet Uplink Assignment message in 3GPP TS 44.060.

BTS PWR CTRL MODE (1 bit field)

For description and encoding, see the Packet Uplink Assignment message in 3GPP TS 44.060.

PR MODE (1 bit field)

For description and encoding, see the Packet Uplink Assignment message in 3GPP TS 44.060.

Second Part Packet Assignment

The presence of the Second Part Packet Assignment is the indication that this message is the second message of two IMMEDIATE ASSIGNMENT messages in an assignment of an uplink or downlink Temporary Block Flow (TBF).

The **Extended RA** (5 bits) is the Extended Random Access information. This is an unformatted 5 bit field, whose content is coded as the 5 least significant bits of the the EGPRS PACKET CHANNEL REQUEST message defined in 3GPP TS 44.060. The field shall be ignored by the mobile station, if present in a message used in an assignment of a downlink TBF.

Frequency parameters, before time

Length of frequency parameters (6 bit field)

This field is coded as the binary representation of the number of octets occupied by the frequency parameters, before time field. If this length is 0, the frequency parameters, before time is not present.

The MAIO field (6 bit field) is coded as the binary representation of the mobile allocation index offset. Range: 0 to 63.

The **Mobile Allocation** field (k octet field (k = Length of frequency parameters -1) contains a bitmap referring to the *Cell Channel Description* IE in SI 1 message. The length of the bitmap is 8k, where k = ((NF-1) div 8 + 1) and where NF denotes the number of ARFCNs contained in the cell channel description. The different bit positions in the mobile allocation bitmap are assigned indices i = 1 to 8k, starting with i = 8k in the most significant bit position and ending with i = 1 in the least significant bit position. The bit position with index i corresponds to the ith frequency in the cell channel description arranged in ascending order of ARFCN (except that ARFCN = 0, if included, is put last) and numbered from 1 to NF. Each bit position in the mobile allocation bitmap is coded:

- 0 RF channel not belonging to mobile allocation;
- 1 RF channel belonging to mobile allocation.

If NF mod 8 < > 0, then bit positions i = NF+1 to 8k shall each be coded with a "0".

EGPRS Packet Uplink Assignment

EGPRS Packet Downlink Assignment EGPRS specific fieds are detailed here.

EGPRS Window Size IE

This information element is encoded as the EGPRS window size IE in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

LINK_QUALITY_MEASUREMENT_MODE (2 bit field)

This field is encoded as the LINK_QUALITY_MEASUREMENT_MODE in the PACKET DOWNLINNK ASSIGNMENT message in 3GPP TS 44.060.

Access Technology Type

This field indicates the access technology that is requested from the mobile station. The field is coded according to the definition in 3GPP TS 24.008. The access technology types requested from the MS in the Access Technologies Request structure shall be classified by priority, the most important first. The MS shall reply using the same order.

NUMBER OF RADIO BLOCKS ALLOCATED (2 bit field)

This field indicates the number of blocks reserved for uplink transmission.

```
0 0
1 radio block reserved for uplink transmission;
0 1
2 radio blocks reserved for uplink transmission;
1 0
1 reserved for future use;
1 reserved for future use.
```

EGPRS Modulation and Coding

The EGPRS Modulation and Coding information element is defined in 3GPP TS 44.060.

BEP PERIOD2 (4 bit field)

This field contains a constant which is used for filtering channel quality measurements in EGPRS. This field is encoded as the BEP_PERIOD2 in the PACKET DOWNLINK/UPLINK ASSIGNMENT messages in 3GPP TS 44.060. BEP_PERIOD2 when present shall be used instead of BEP_PERIOD. For details see 3GPP TS 45.008.

Resegment IE

The Resegment information element is defined in 3GPP TS 44.060.

10.5.2.17 IAR Rest Octets

The IAR Rest Octets information element contains spare bits or possibly Extended RA informations.

The IAR Rest Octets information element is a type 5 information element with 3 octets length.

Figure 10.5.2.17.1/3GPP TS 44.018: IAR Rest Octets information element

The **Extended RA i** (5 bits) is the Extended Random Access information related to the Request Reference i (i within the range 1..4).

These are unformatted 5 bit fields, whose contents are coded as the 5 least significant bits of the EGPRS PACKET CHANNEL REQUEST message defined in 3GPP TS 44.060.

10.5.2.18 IAX Rest Octets

The *IAX Rest Octets* information element contains only spare bits only. Its purpose is to allow the upward compatible introduction of new information on the AGCH in later phases.

The IAX Rest Octets information element is a type 5 information element with 0-4 octets length.

```
<IAX Rest Octets> ::= 
<spare padding> ;
```

Figure 10.5.2.18.1/3GPP TS 44.018: IAX Rest Octets information element

10.5.2.19 L2 Pseudo Length

The *L2 Pseudo Length* information element indicates the number of octets following it in the message which are to be interpreted in the scope of the phase 1 protocol, i.e. the total number of octets (excluding the Rest Octets) for which T, V, TV, LV, or TLV formatting is used (reference Table 11.1/3GPP TS 24.007).

The *L2 Pseudo Length* information element is the first part of e.g. SYSTEM INFORMATION messages which are mentioned as exceptions in clause 10.1. It occupies the first octet of such messages.

For any of the SYSTEM INFORMATION messages sent on the BCCH, a mobile station should ignore the contents of the L2 Pseudo Length value contained in the *L2 Pseudo Length* information element. For some specific messages, further requirements are specified in clause 9.

The L2 Pseudo Length Information element is an element with 2 octets length:




Figure 10.5.2.19.1/3GPP TS 44.018: L2 Pseudo Length information element

Table 10.5.2.19.1/3GPP TS 44.018: L2 Pseudo Length information element

L2 pseudo length value (octet 2)

The coding of the L2 pseudo length value field is the binary representation of the L2 pseudo length of the message in which the L2 pseudo length information element occurs.

NOTE: Bits 1 and 2 are not spare.

10.5.2.20 Measurement Results

The purpose of the *Measurement Results* information element is to provide the results of the measurements made by the mobile station on the serving cell and the neighbour cells.

The *Measurement Results* information element is coded as shown in Figure 10.5.2.20.1/3GPP TS 44.018 and Table 10.5.2.20.1/3GPP TS 44.018.

The Measurement Results is a type 3 information element with 17 octets length.

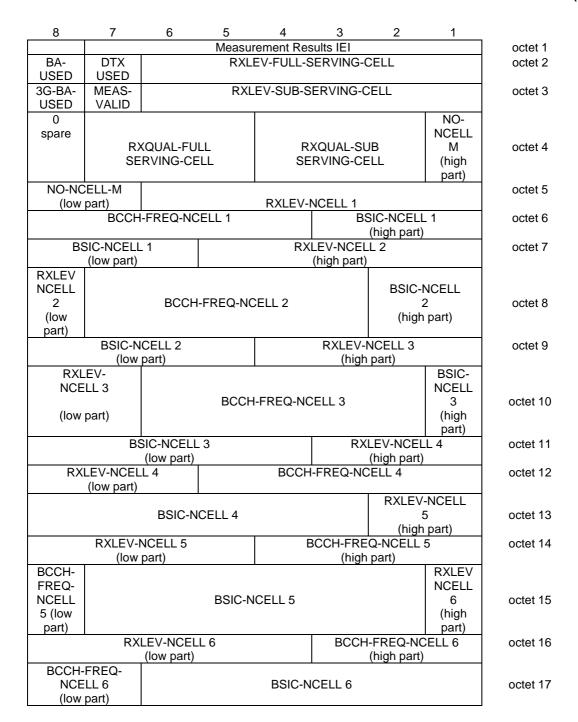


Figure 10.5.2.20.1/3GPP TS 44.018: Measurement Results information element

Table 10.5.2.20.1/3GPP TS 44.018: Measurement Results information element details

BA-USED (octet 2), the value of the BA_IND field of the neighbour cell description information element or elements defining the BCCH allocation used for the coding of BCCH-FREQ-NCELL fields. Range 0 to 1.

DTX-USED (octet 2) This bit indicates whether or not the mobile station used DTX during the previous measurement period.

Bit 7

0 DTX was not used

1 DTX was used

RXLEV-FULL-SERVING-CELL and **RXLEV-SUB-SERVING-CELL**, (octets 2 and 3) Received signal strength on serving cell, measured respectively on all slots and on a subset of slots (see 3GPP TS 45.008)

The RXLEV-FULL-SERVING-CELL and RXLEV-SUB-SERVING-CELL fields are coded as the binary representation of a value N. N corresponds according to the mapping defined in 3GPP TS 45.008 to the received signal strength on the serving cell.

Range: 0 to 63

MEAS-VALID (octet 3)

This bit indicates if the measurement results for the dedicated channel are valid or not

Bit 7

- 0 The measurement results are valid
- 1 the measurement results are not valid

3G-BA-USED (octet 3)

The value of the 3G_BA_IND field of the neighbour cell description information element or elements defining the 3G Neighbour Cell list used for the coding of 3G BCCH-FREQ-NCELL fields. Range 0 to 1.

RXQUAL-FULL-SERVING-CELL and **RXQUAL-SUB-SERVING-CELL** (octet 4) Received signal quality on serving cell, measured respectively on all slots and on a subset of the slots (see 3GPP TS 45.008)

CELL fields are coded as the binary representation of the received signal quality on the serving cell.

Range: 0 to 7 (See 3GPP TS 45.008)

NO-NCELL-M, Number of neighbour cell measurements (octets 4 and 5)

Bits

187 000 No neighbour cell measurement result 001 1 " " " " 010 2 " " " " 011 3 " " " " 100 4 " " " " 101 5 " " " " 110 6 " " " "

1 1 1 Neighbour cell information not available for serving cell

RXLEV-NCELL i, Result of measurement on the i'th neighbour cell (octet 5, 7, 8, 9, 10, 11, 12, 13, 14, 15 and 16)

If the i'th neighbour cell is a GSM cell, the RXLEV-NCELL field is coded as the binary representation of a value N. N corresponds according to the mapping defined in 3GPP TS 45.008 to the received signal strength on the i'th neighbouring cell. See note 1 & 2.

If the i'th neighbour cell is a 3G cell, the contents of the RXLEV-NCELL field is defined in 3GPP TS 45.008.

Range: 0 to 63.

Report on GSM cells:

BCCH-FREQ-NCELL i, BCCH carrier of the i'th neighbour cell (octet 6, 8,10, 12, 14, 15, 16 and 17).

The BCCH-FREQ-NCELL i field is coded as the binary representation of the position, starting with 0, of the i'th neighbour cells BCCH carrier in the BCCH channel list. The BCCH channel list is composed of one or two BCCH channel sub lists, each sub list is derived from the set of frequencies defined by reference neighbour cell description information element or elements. In the latter case the set is the union of the two sets defined by the two neighbour cell description information elements.

In each BCCH channel sub list the absolute RF channel numbers are placed in increasing order of ARFCN, except that ARFCN 0, if included in the set, is put in the last position in the sub list. The BCCH channel list consists either of only the sub list derived from the neighbour cell description information element(s) in System Information 2/5 (and possible 2bis/5bis) or of that sub list immediately followed by the sub list derived from the neighbour cell description information element in System Information 2ter/5ter for the case System Information 2ter/5ter is also received. If the set of ARFCNs defined by the reference neighbour cell description information element or elements includes frequencies that the mobile station does not support then these ARFCNs shall be included in the list.

The notation 2/5 etc. means that the rules above apply to the neighbour cell description information elements received in System Information 2, 2bis and 2ter and to those received in System Information 5, 5bis and 5ter separately.

See note 1 & 2.

Range: 0 to 31/30.

Report on 3G cells:

If no more than 31 (GSM) ARFCN frequencies are included in the BA (list), the index BCCH-FREQ-NCELL 31 indicates report(s) on 3G cells.

In this case, the corresponding 'BSIC-NCELL' field in Figure 10.5.2.20.1 carries the index of the i'th 3G neighbour cell in the 3G Neighbour Cell list defined in clause 3.4.1.2.1.1, "Deriving the 3G Neighbour Cell list from the 3G Neighbour Cell Description".

Range: 0 to 63.

BSIC-NCELL i, Base station identity code of the i'th neighbour cell (octet 6, 7, 8, 9, 10, 11, 13, 15 and 17)

For GSM cells, the BSIC-NCELL i field is coded as the binary representation of the base station identity code of the i'th neighbour cell. See note 1 & 2.

Range: 0 to 63.

NOTE 1: If the field extends over two octets the highest numbered bit of the lowest numbered octet is the most significant and the lowest numbered bit of the highest numbered octet is the least significant.

NOTE 2: If NO-NCELL-M < 6 the remaining RXLEV-NCELL i, BS-FREQ-NCELL i and BSIC-NCELL i fields (NO-NCELL-M < i <= 6) shall be coded with a "0" in each bit.

10.5.2.20a GPRS Measurement Results

The purpose of the *GPRS Measurement Results* information element is to provide the results of the GPRS measurements made by the GPRS mobile station on the serving cell.

The *GPRS Measurement Results* information element is coded as shown in Figure 10.5.2.20a.1/3GPP TS 44.018 and Table 10.5.2.20a.1/3GPP TS 44.018.

The GPRS Measurement Results is a type 3 information element with 3 octets length.

8	7	6	5	4	3	2	1	_
GPRS Measurement Results IEI								
	C_V		RXC (high	octet 2				
RXQ-L (low)	0 spare			SIGN	_VAR			octet 3

Figure 10.5.2.20a.1/3GPP TS 44.018: GPRS Measurement Results information element

Table 10.5.2.20a.1/3GPP TS 44.018: GPRS Measurement Results information element

C_VALUE (octet 1), the value of the C parameter calculated by the GPRS mobile station (see 3GPP TS 45.008). This field is encoded as the binary representation of the C parameter value defined in 3GPP TS 45.008. Range 0 to 63.

RXQUAL (octets 1 and 2), contains the RXQUAL parameter field calculated by the GPRS mobile station (see 3GPP TS 45.008). This field is encoded as defined in 3GPP TS 45.008. Range 0 to 7.

SIGN_VAR (octet 3), contains the signal variance parameter SIGN_VAR calculated by the mobile station (see 3GPP TS 45.008). This field is encoded as defined in 3GPP TS 44.060.

10.5.2.21 Mobile Allocation

The purpose of the *Mobile Allocation* information element is to provide that part of the RF channels belonging to the cell allocation (coded with a "1" in the cell channel description information element) which is used in the mobile hopping sequence.

The *Mobile Allocation* information element is coded as shown in Figure 10.5.2.21.1/3GPP TS 44.018 and Table 10.5.2.21.1/3GPP TS 44.018.

The *Mobile Allocation* is a type 4 information element with 3 to 10 octets length except for the cases specified in clause 9.1.18.1 and 9.1.19.2.

8	7	6	5	4	3	2	1		
	Mobile Allocation IEI								
		Length	of mobile a	allocation of	contents			octet 2	
MA	MA	MA	MA	MA	MA	MA	MA		
С	С	С	С	С	С	С	С	octet 3	
8n	8n-1	8n-2	8n-3	8n-4	8n-5	8n-6	8n-7		
•									
MA	MA	MA	MA	MA	MA	MA	MA		
С	С	С	С	С	С	С	С	octet n+2	
800	007	006	005	004	003	002	001		

Figure 10.5.2.21.1/3GPP TS 44.018: Mobile Allocation information element

Table 10.5.2.21.1/3GPP TS 44.018: Mobile Allocation information element

```
Mobile allocation RF channel i (octet 3
MA C
      i,
etc.), i = 1, 2, ..., NF
The MA C i bit indicates whether or not the Mobile
allocation frequency list includes the i'th
frequency in the cell allocation frequency list.
The cell allocation frequency list is derived from
the set of frequencies defined by the reference cell
channel description information element. NF denotes
the number of frequencies in the cell allocation
frequency list.
In the cell allocation frequency list the absolute
RF channel numbers are placed in increasing order of
ARFCN, except that ARFCN 0, if included in the set,
is put in the last position in the list,
For a RF channel belonging to the mobile allocation
the MA C i bit is coded with a "1"; i = 1, 2, ...,
For a RF channel not belonging to the mobile
allocation the MA C i bit is coded with a "0"; i =
1, 2,..., NF.
If NF mod 8 <> 0 then bits NF to 8n in octet 3 must
be coded with a "0" in each.
```

10.5.2.21a Mobile Time Difference

A *Mobile Time Difference* information element encodes a time related to the synchronization difference between the time bases of two base stations. This type of information is used in conjunction with the HANDOVER COMPLETE message.

The *Mobile Time Difference* information element is coded as shown in Figure 10.5.2.21a.1/3GPP TS 44.018 and Table 10.5.2.21a.1/3GPP TS 44.018.

The Mobile Time Difference information element is a type 4 information element with 5 octets length.

0		U	3	4	3				
	Mobile Time Difference IEI								
	Length of Mobile Time difference contents								
	Mobile Time Difference value (high)								
	Mobile Time Difference value (contd)							Octet 4	
N	Mobile Time Difference value (low) 0 0 0							Octet 5	
					spare	spare	spare		

Figure 10.5.2.21a.1/3GPP TS 44.018: Mobile Time Difference information element

Table 10.5.2.21a.1/3GPP TS 44.018: Mobile Time Difference information element

```
Mobile Time Difference value (octet 3, 4 and 5)
The coding of the Mobile Time Difference value field is the binary representation of the time difference in half bit periods and modulo 2^{21} half bit periods; 1/2 bit period = 24/13 \,\mu s.
```

10.5.2.21aa MultiRate configuration

The MultiRate configuration information element gives all parameters related to a multi-rate speechcodec.

The *MultiRate configuration* information element is coded as shown in Figure 10.5.2.21aa.1/3GPP TS 44.018 and Table 10.5.2.21aa.1/3GPP TS 44.018.

The MultiRate *configuration* is a type 4 information element with a minimum length of 4 octets and a maximum length of 8 octets.

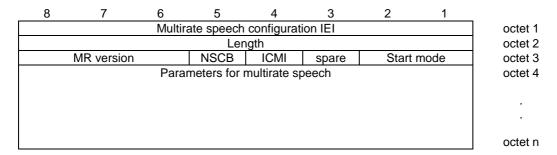


Figure 10.5.2.21aa.1/3GPP TS 44.018: MultiRate configuration information element

_	8	7	6	5	4	3	2	1	
	Set of AMR codec modes								octet 4

Figure 10.5.2.21aa.2/3GPP TS 44.018: Parameters for multirate speech field for the MR version 1 when a set with one codec mode is chosen




Figure 10.5.2.21aa.3/3GPP TS 04: Parameters for multirate speech field for the MR version 1 when a set with two codec modes is chosen

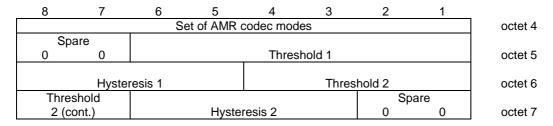


Figure 10.5.2.21aa.4/3GPP TS 44.018: Parameters for multirate speech field for the MR version 1 when a set of three codec modes is chosen

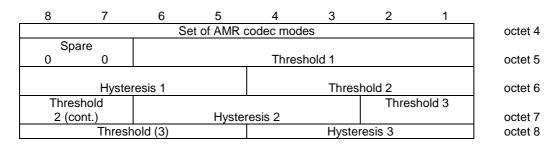


Figure 10.5.2.21aa.5/3GPP TS 44.018: Parameters for multirate speech field for the MR version 1 when a set of four modes is chosen

Table 10.5.2.21aa.1/3GPP TS 44.018: MultiRate configuration information element

Octet 3

Bits

8 7 6 Multirate speech version

0 0 1 Adaptive Multirate speech version 1

Other values reserved

Bit 5 NSCB: Noise Suppression Control Bit

- 0 Noise Suppression can be used (default)
- 1 Noise Suppression shall be turned off

Bit 4 Initial Codec Mode Indicator

- O The initial codec mode is defined by the implicit rule provided in 3GPP TS 45.009
- 1 The initial codec mode is defined by the Start Mode field

Bit 3

0 Spare

Bits

2 1 Start Mode,

The initial codec mode is coded as in 3GPP TS 45.009 clause 3.4.1

When Multirate speech version field indicates Adaptive Multirate speech version 1 then the remaining fields are coded as follows:

THRj (6 bits), is coded as the binary representation of a value N. N corresponds to the threshold of C/I in dB, as defined in 3GPP TS 45.009;

HYSTj (4 bits) is coded as the binary representation of the hysteresis value associated to THRj, as defined in 3GPP TS 45.009.

j = 1 corresponds to the lowest value of threshold in dB, j = 2 to the second lowest, j = 3 to the highest value.

```
Set of adaptive multirate codec modes field (octet 4)
8
   12,2 kbit/s codec rate is not part of the subset;
0
   12,2 kbit/s codec rate is part of the subset;
Bit
0 10,2 kbit/s codec rate is not part of the subset;
1 10,2 kbit/s codec rate is part of the subset;
Bit
0 7,95 kbit/s codec rate is not part of the subset;
  7,95 kbit/s codec rate is part of the subset;
Bit
  7,40 kbit/s codec rate is not part of the subset;
   7,40 kbit/s codec rate is part of the subset;
Bit
0 6.70 kbit/s codec rate is not part of the subset:
   6,70 kbit/s codec rate is part of the subset;
Bit
0 5,90 kbit/s codec rate is not part of the subset;
1 5,90 kbit/s codec rate is part of the subset;
Bit
2
0 5,15 kbit/s codec rate is not part of the subset;
1 5,15 kbit/s codec rate is part of the subset;
Bit
  4,75 kbit/s codec rate is not part of the subset;
   4,75 kbit/s codec rate is part of the subset;
```

10.5.2.21b Multislot Allocation

The purpose of the *Multislot Allocation* information element is to provide a description of which channels are used in downlink and uplink respectively, in a multislot configuration. It also groups the channels into channel sets, the channel mode for each channel set can be defined by a separate information element.

The *Multislot Allocation* information element is coded as shown in Figure 10.5.2.21b.1/3GPP TS 44.018 and Table 10.5.2.21b.1/3GPP TS 44.018.

The multislot allocation information element is a type 4 information element with a minimum length of 3 octets and a maximum length of 12 octets.

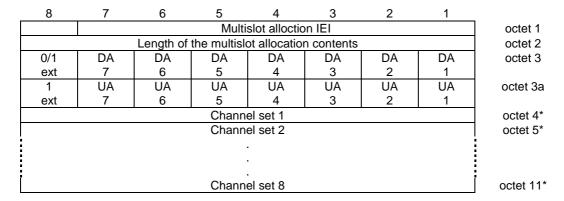


Figure 10.5.2.21b.1/3GPP TS 44.018: Multislot Allocation information element

Table 10.5.2.21b.1/3GPP TS 44.018: Multislot allocation information element

```
DA 1-7, Downlink assignment (octet 3)
Indicates additional downlink channel allocation.
If bit DA n is set to "1" this indicates that
timeslot TN = (n + TNm) \mod 8 is assigned. If bit DA n
is set to "0" the corresponding timeslot is not
assigned. TNm is the timeslot number of the main
UA 1-7, Uplink assignment (octet 3a)
Indicates additional uplink channel allocation.
If bit UA n is set to "1" this indicates that
timeslot TN = (n + TNm) \mod 8 is assigned. If bit UA n
is set to "0" the corresponding timeslot is not
assigned. TNm is the timeslot number of the main
If octet 3a is not included the timeslots indicated
by octet 3 are allocated in both downlink and uplink
direction.
Notel: Allocation of timeslots only in uplink is FFS.
Note2: In combination with the channel description
       IE, all types of channels can be indicated.
       The channel carrying the main signalling link
       (indicated by the channel description IE is of
       type 1 (see below)), all other channels
       allocated both in downlink and uplink are of
       type 2 and channels with allocation in only
       one direction are of type 3.
   Type 1: TCH/F + FACCH/F + SACCH/M bidirectional
           TCH/F + SACCH/M
                                       bidirectional
   Type 3: TCH/F + SACCH/M
                                      unidirectional
Channel set n (octet 4 to 11 (if included))
If octets 4-11 are omitted, all channels belong
to channel set 1.
If bit m of Channel set n is set to "1" then timeslot
m-1 is included in channel set n.
If bit m of Channel set n is set to "0" then timeslot
m-1 is not included in channel set n.
Each allocated timeslot, including the timeslot
carrying the main signalling link, shall be included
in one (and only one) channel set.
```

10.5.2.21c NC mode

The purpose of the *NC mode* information element is for the network to inform the mobile station of the NC mode to be implemented on the target cell.

The *NC mode* information element is coded as shown in Figure 10.5.2.21c.1/3GPP TS 44.018 and Table 10.5.2.21c.1/3GPP TS 44.018.

The NC mode is a type 1 information element.




Figure 10.5.2.21c.1/3GPP TS 44.018: NC mode information element

Table 10.5.2.21c.1/3GPP TS 44.018: NC Mode information element

```
NC mode
This field indicates to the mobile the NC mode for
the target cell (see 3GPP TS 44.060). The field is encoded
according to the following table:
bits
2 1
0 0 NC 0
0 1 NC 1
1 0 NC 2
1 information on NC mode to be gathered from the
target cell
```

10.5.2.22 Neighbour Cell Description

The purpose of the *Neighbour Cell Description* information element is to provide the absolute radio frequency channel numbers of the BCCH carriers to be monitored by the mobile stations in the cell.

The *Neighbour Cell Description* information element is coded as the *Cell Channel Description* information element, as specified in clause 10.5.2.1b, with the exception of bits 5 and 6 of octet 2. Figure 10.5.2.22.1/3GPP TS 44.018 and Table 10.5.2.22.1/3GPP TS 44.018: contains the difference of specifications.

The Neighbour Cell Description information element is a type 3 information element with 17 octets length.

8	7	6	5	4	3	2	1	
			Neighbou	r Cell Desc	ription IEI			octet 1
Bit	Bit	EXT-	BA-	Bit	Bit	Bit	Bit	octet 2
128	127	IND	IND	124	123	122	121	
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 3
120	119	118	117	116	115	114	113	
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 17
800	007	006	005	004	003	002	001	

Figure 10.5.2.22.1/3GPP TS 44.018: Neighbour Cell Description information element

Table 10.5.2.22.1/3GPP TS 44.018: Neighbour Cell Description information element

EXT-IND, Extension indication (octet 2, bit 6)

If received in System Information 2, 2bis, 5 or 5bis this bit indicates whether the information element carries the complete information of a BCCH channel sub list or whether a complementary information element is sent in another message. A GSM 900 mobile station which only supports the primary GSM band P-GSM 900 (cf. 3GPP TS 45.005) may consider this bit as a spare bit and assume that the information element carries the complete BA, see clause 3.2.2.1.

NOTE: This indicator is set to 1 in the neighbour cell description information elements in System Information 2 and 2bis and 5 and 5bis respectively when more than one is needed to describe a BCCH channel sub list.

Bit 6

- 0 The information element carries the complete BA
- 1 The information element carries only a part of the BA

BA-IND, BCCH allocation sequence number indication (octet 2). Range 0 to 1

The BA-IND is needed to allow the network to discriminate measurements results related to different BAs (e.g. BA(BCCH) and BA(SACCH)) sent to the MS.

10.5.2.22a Neighbour Cell Description 2

The purpose of the *Neighbour Cell Description 2* information element is to provide the absolute radio frequency channel numbers of the BCCH carriers to be monitored by the mobile stations in the cell.

The *Neighbour Cell Description 2* information element is coded as the *Cell Channel Description* information element, as specified in clause 10.5.2.1b, with the exception of bits 5 to 7 of octet 2. Figure 10.5.2.22a.1/3GPP TS 44.018 and Table 10.5.2.22a.1/3GPP TS 44.018: contains the difference of specifications.

The Neighbour Cell Description 2 information element is a type 3 information element with 17 octets length.

8	7	6	5	4	3	2	1		
		Neighbour Cell Description IEI							
Bit	Multi	band	BA-	Bit	Bit	Bit	Bit	octet 2	
128	repo	orting	IND	124	123	122	121		
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 3	
120	119	118	117	116	115	114	113		
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 17	
800	007	006	005	004	003	002	001		

Figure 10.5.2.22a.1/3GPP TS 44.018: Neighbour Cell Description 2 information element

Table 10.5.2.22a.1/3GPP TS 44.018: Neighbour Cell Description 2 information element

Octet 2 bit 8, 4, 3 and 2

FORMAT-ID, Format Identifier (Bit 128 and next)

The different formats are distinguished by the bits of higher number. As an exception to the general format for the neighbour cell description the format ID is coded as follows:

Bit	Bit	Bit	Bit	format notation
128	124	123	122	
0	Χ	Χ	X	bit map 0
1	0	Χ	X	1024 range
1	1	0	0	512 range
1	1	0	1	256 range
1	1	1	0	128 range
1	1	1	1	variable bit map

Bits 6 and 7 of Octet 2

Multiband reporting

Binary encoding of multiband reporting parameter as specified in 3GPP TS 45.008.

Range: 0 to 3 Bit 5 of octet 2

BA-IND, BCCH allocation sequence number indication.

The BA-IND is needed to allow the network to discriminate measurements results related to different BAs (e.g.

BA(BCCH) and BA(SACCH)) sent to the MS.

Range 0 to 1.

10.5.2.22b (void)

10.5.2.22c NT/N Rest Octets

The NT/N Rest Octets information element is a type 5 information element with 20 octets length.

NT/N Rest Octets ::=

{0 I 1<NLN(PCH) : bit (2)>}

dist of Group Call NCH information>

<Spare padding>;

<List of Group Call NCH information> ::=

0 | 1 < Group Call information > < List of Group Call NCH information > ;

NLN(PCH)

This field gives the NLN value to be used as specified in 3.3.3

<Group Call information>

See clause 9.1.21a

10.5.2.23 P1 Rest Octets

The *P1 Rest Octets* information element contains information about the status of information on an existing NCH, priority levels and packet page indications applied for mobile station identities and spare bits.

The P1 Rest Octets information element is a type 5 information element with 0-17 octets length.

```
{ <P1 Rest Octets> ::= {L | H <NLN(PCH) : bit (2)> <NLN status : bit>} {L | H <Priority1 ::= Priority>} {L | H <Priority2 ::= Priority>} {L | H <Group Call information>} <Packet Page Indication 1 : {L | H} > <Packet Page Indication 2 : {L | H} > <spare padding>; -- truncation allowed, bits 'L' assumed <Priority> ::= <bit (3)>; <Group Call information> See clause 9.1.21a
```

NOTE 1: The value 17h shall not be used as a value of the first octet when this information element is used in the PAGING REQUEST TYPE 1 message. This will prevent mobile stations misinterpreting this information as the Mobile Identity IEI.

Table 10.5.2.23.1/3GPP TS 44.018: P1 Rest Octets information element

NLN(PCH) Notification List Number

The presence of the *NLN(PCH)* field indicates that if an NCH is present, reduced NCH monitoring can be used, and gives the NLN(PCH) value, to be used as specified in 3.3.3.

Priority: Priority i relates to *Mobile Station Identity i* (i = 1, 2)

no priority applied 0 0 0 0 0 1 call priority level 4 0 1 0 call priority level 3 0 1 1 call priority level 2 call priority level 1 1 0 0 1 0 1 call priority level 0 1 1 0 call priority level B 1 1 1 call priority level A

The **Packet Page Indication i** field relates to *Mobile Station Identity i* (i = 1, 2) and indicates the kind of paging procedure associated with the mobile station identity. If the identity is not IMSI the Packet Page Indication has no meaning and is ignored.

- L paging procedure for RR connection establishment;
- H packet paging procedure.

10.5.2.24 P2 Rest Octets

The *P2 Rest Octets* information element contains information on the channel needed by the network and information about the status of information on an existing NCH, priority levels and packet page indications applied for mobile station identities and spare bits.

The P2 Rest Octets information element is a type 5 information element with 1-11 octets length.

NOTE 1: The value 17h shall not be used as a value of the first octet when this information element is used in the PAGING REQUEST TYPE 2 message. This will prevent mobile stations misinterpreting this information as the Mobile Identity IEI.

Table 10.5.2.24.1/3GPP TS 44.018: P2 Rest Octets information element

CN3 Channel Needed for Mobile Identity 3

The values and semantics used in the *CN3* field are those of the CHANNEL field of *Channel Needed* IE (see 10.5.2.8). The *CN3* field is associated with the Mobile Identity 3 IE of the PAGING REQUEST TYPE 2 message.

If the CN3 field is not present, the default value is 00 (any channel).

NLN Notification List Number

See P1 Rest Octets.

Priority: **Priority** i relates to *Mobile Station Identity* i (i = 1, 2, 3)

```
no priority applied
0 0 0
0 0 1
              call priority level 4
              call priority level 3
0 1 0
              call priority level 2
0 1 1
              call priority level 1
1 0 0
              call priority level 0
1 0 1
1 1 0
              call priority level B
1 1 1
              call priority level A
```

The **Packet Page Indication 3** field relates to *Mobile Station Identity 3* and indicates the kind of paging procedure associated with the mobile station identity. If the identity is not IMSI the Packet Page Indication has no meaning and is ignored.

- L paging procedure for RR connection establishment;
- H packet paging procedure.

10.5.2.25 P3 Rest Octets

The *P3 Rest Octets* information element contains information on the channel needed by the network and information about the status of information on an existing NCH, priority levels applied for mobile station identities and spare bits. The purpose of the spare bits is to allow the upward compatible introduction of new information on the PCH in later phases.

The P3 Rest Octets information element is a type 5 information element with 3 octets length.

Table 10.5.2.25.1/3GPP TS 44.018: P3 Rest Octets information element

```
Channel Needed for Mobile Identity 3
The values and semantics used in the CN3 field are those
of the CHANNEL field of Channel Needed IE (see 10.5.2.8).
The CN3 field is associated with the Mobile Identity 3
IE of the PAGING REQUEST TYPE 3 message.
If the CN3 field is not present, the default value is
00 (any channel)
CN4 Channel Needed for Mobile Identity 4
The values and semantics used in the CN43 field are those
of the CHANNEL field of Channel Needed IE (see 10.5.2.8).
The CN4 field is associated with the Mobile Identity 4
IE of the PAGING REQUEST TYPE 3 message.
If the CN4 field is not present, the default value is
00 (any channel)
     Notification List Number
See P1 Rest Octets
Priority: Priority i relates to Mobile Station Identity i
         i(i = 1, 2, 3, 4)
0 0 0
        no priority applied
0 0 1
        call priority level 4
        call priority level 3
0 1 1
        call priority level 2
1 0 0
         call priority level 1
1 0 1
        call priority level 0
1 1 0
        call priority level B
        call priority level A
1 1 1
```

10.5.2.25a Packet Channel Description

The purpose of the *Packet Channel Description* information element is to provide a description of a packet data physical channel (PDCH).

The *Packet Channel Description* information element is coded according to the syntax specified below and described in table 10.58/3GPP TS 44.018.

The Packet Channel Description is a type 3 information element with 4 octets length.

```
< Packet Channel Description > ::=
   < Channel type : bit (5) >
   < TN : bit (3) >
   < TSC : bit (3) >
   { 0
       { 0 < spare bit >
           < ARFCN : bit (10) >
                                                   -- non-hopping RF channel configuraion
        | 1 < spare bit >
           < MAIO : bit (6) >
                                                   -- indirect encoding of hopping RF channel configuration
          < MA_NUMBER_IND : bit >
           \{ 0 < \text{spare bits : bit } (2) > \}
           | 1 < CHANGE_MARK_1 : bit (2) >
       }
   | 1
       < MAIO : bit (6) >
                                                   -- direct encoding of hopping RF channel configuration
       < HSN : bit (6) >
   };
```

Table 10.5.2.25a.1/3GPP TS 44.018: Packet Channel Description information element

The **Channel type** field (5 bit) shall be ignored by the receiver and all bits treated as spare. For backward compatibility reasons, the sender shall set the spare bits to binary '00001'.

The TN field (3 bit) is the binary representation of the timeslot number as defined in 3GPP TS 45.010. Range: 0 to 7

The **TSC** field (3 bit) is the binary representation of the training sequence code as defined in 3GPP TS 45.002. Range: 0 to 7.

Non-hopping RF channel configuration

The **ARFCN** field (10 bit) is the binary representation of the absolute RF channel number, see 3GPP TS 45.005. Range: 0 to 1023.

Indirect encoding of hopping RF channel configuration

The **MAIO** field (6 bit) is the binary representation of the mobile allocation index offset, see 3GPP TS 45.002. Range: 0 to 63.

The **MA_NUMBER_IND** field (1 bit) is the binary representation of the MA_NUMBER to use as reference to a GPRS mobile allocation:

```
0 MA_NUMBER = 14
1 MA_NUMBER = 15
```

The **CHANGE_MARK_1** field (2 bit) is the binary representation of the allowed value of the SI *change mark* associated with the GPRS mobile allocation to which the MA_NUMBER refers. Range: 0 to 3.

If the *indirect encoding* is used, this information element may contain the CHANGE_MARK_1 field. If that is present, the mobile station being assigned the TBF shall verify the validity of the SI *change mark* associated with the GPRS mobile allocation to which this information element refers, see 3GPP TS 44.060. The CHANGE_MARK_1 field shall not be included in this information element if MA_NUMBER = 15 is used.

Direct encoding of hopping RF channel configuration

The **MAIO** field (6 bit) is the binary representation of the mobile allocation index offset, see 3GPP TS 45.002. Range: 0 to 63.

The **HSN** field (6 bit) is the binary representation of the hopping sequence number, see 3GPP TS 45.002. Range: 0 to 63.

10.5.2.25b Dedicated mode or TBF

The *Dedicated mode or TBF* information element is used by the network to indicate to the mobile station whether the rest of the message shall be decoded as an IMMEDIATE ASSIGNMENT message allocating a channel in dedicated mode or whether the rest of the message shall be decoded as the allocation of a Temporary Block Flow.

This IE also indicates:

- whether the IMMEDIATE ASSIGNMENT message relates to a downlink TBF for a mobile station in packet idle mode; and
- whether the IMMEDIATE ASSIGNMENT message is the first message of two IMMEDIATE ASSIGNMENT messages in a two-message assignment of an uplink or downlink TBF.

The *Dedicated mode or TBF* information element is coded as shown in Figure 10.5.2.25b.1/3GPP TS 44.018 and Table 10.5.2.25b.1/3GPP TS 44.018.

The Dedicated mode or TBF is a type 1 information element.




Figure 10.5.2.25b.1/3GPP TS 44.018: Dedicated mode or TBF information element

Table 10.5.2.25b.1/3GPP TS 44.018: Dedicated mode or TBF information element

 $T/D:TBF \ or \ dedicated \ mode \ (octet \ 1)$

Bit

1

- 0 this message assigns a dedicated mode resource
- this message assigns a Temporary Block Flow (TBF).

Downlink: Downlink assignment to mobile in packet idle mode

Bit

2

- 0 No meaning
- 1 this message assigns a resource to the mobile station identified in the IA rest octets.

TMA: Two-message assignment

Bit

3

- 0 No meaning
- 1 This message is the first message of two in a two-message assignment of an uplink or downlink TBF.

10.5.2.25c RR Packet Uplink Assignment

The RR Packet Uplink Assignment information element is sent by the network to the mobile station to indicate the assigned uplink resources.

The RR Packet Uplink Assignment information element is coded as shown in tables 10.5.2.25c.1/3GPP TS 44.018 and 10.5.2.25c.2/3GPP TS 44.018.

The RR Packet Uplink Assignment is a type 4 information element.

Table 10.5.2.25c.1/3GPP TS 44.018: RR PACKET UPLINK ASSIGNMENT information element

```
< RR Packet Uplink Assignment IE > ::=
   < LENGTH_IN_OCTETS : bit (8) >
   < CHANNEL_CODING_COMMAND : bit (2) >
   < TLLI BLOCK CHANNEL CODING : bit (1) >
   < Packet Timing Advance : Packet Timing Advance IE >
   {01 < Dynamic Allocation : Dynamic Allocation struct>
   | 10 < Single Block Allocation : Single Block Allocation struct>
   11 < Fixed Allocation : Fixed Allocation struct>
   | 00 <Exension>}
       \{0 \mid 1 < EGPRS\_MCS\_MODE : bit (4) >
           < RESEGMENT : bit (1) >
           < EGPRS Window Size : < EGPRS Window Size IE >>}
       { 0 | 1 < Packet Extended Timing Advance : bit (2) >}
< SPARE_BITS : bit** > ;
       <Extension> : := -- Future extension can be done by modifying this structure
<Dynamic Allocation struct > ::=
       < Extended Dynamic Allocation : bit(1)>
       \{0 \mid 1 < \mathbf{P0} : bit (4) >
           < PR_MODE : bit (1) > }
       < USF GRANULARITY: bit (1) >
       \{0 \mid 1 < UPLINK_TFI_ASSIGNMENT : bit (5) > \}
       { 0 | 1 < RLC_DATA_BLOCKS_GRANTED : bit (8) > }
                                          -- Timeslot Allocation
           { 0 | 1 < USF_TN0 : bit (3) >}
           { 0 | 1 < USF_TN1 : bit (3) >}
           { 0 | 1 < USF_TN2 : bit (3) >}
{ 0 | 1 < USF_TN3 : bit (3) >}
{ 0 | 1 < USF_TN4 : bit (3) >}
           \{ 0 \mid 1 < USF_TN5 : bit (3) > \}
           \{ 0 \mid 1 < USF_TN6 : bit (3) > \}
           \{0 \mid 1 < USF_TN7 : bit (3) > \}
            | 1
                                           -- Timeslot Allocation with Power Control Parameters
                < ALPHA : bit (4) >
               \{ 0 \mid 1 < USF_TN0 : bit (3) > \}
               < GAMMA_TN0 : bit (5) > }
               \{ 0 \mid 1 < USF_TN1 : bit (3) > \}
               < GAMMA_TN1 : bit (5) > }
               { 0 | 1 < USF_TN2 : bit (3) > < GAMMA_TN2 : bit (5) > }
               \{0 \mid 1 < USF_TN3 : bit (3) > 1\}
               < GAMMA_TN3 : bit (5) > }
               \{ 0 \mid 1 < USF_TN4 : bit (3) > \}
               < GAMMA_TN4 : bit (5) > }
               \{ 0 \mid 1 < USF_TN5 : bit (3) > 1 \}
               < GAMMA_TN5 : bit (5) > } { 0 | 1 < USF_TN6 : bit (3) >
               < GAMMA_TN6 : bit (5) >
               \{ 0 \mid 1 < USF_TN7 : bit (3) > 
               < GAMMA_TN7 : bit (5) > }};
<Single Block Allocation struct > ::=
       < TIMESLOT_NUMBER : bit (3) >
       \{ 0 \mid 1 < ALPHA : bit (4) > \}
           < GAMMA_TN : bit (5) >}
       \{ 0 \mid 1 < \mathbf{P0} : bit (4) >
           < BTS PWR CTRL MODE: bit (1) >
       < PR_MODE : bit (1) > };
```

```
<Fixed Allocation struct > ::=
      { 0 | 1 < UPLINK_TFI_ASSIGNMENT : bit (5) > }
      < FINAL_ALLOCATION : bit (1)>
      < DOWNLINK_CONTROL_TIMESLOT: bit(3)>
      { 0 | 1 < P0 : bit (4)
          < BTS_PWR_CTRL_MODE : bit (1) >
      < PR_MODE : bit (1) > }
      { 0 < TIMESLOT_ALLOCATION : bit (8) >
         | 1 < Power Control Parameters : Power Control Parameters IE > }
      < HALF_DUPLEX_MODE : bit (1) >
               -- with length of allocation bitmap
      0 0 0
         < BLOCKS_OR_BLOCK_PERIODS : bit (1) >
         < ALLOCATION_BITMAP_LENGTH : bit (7) >
         < ALLOCATION_BITMAP : bit (val(ALLOCATION_BITMAP_LENGTH) >
                -- without length of Allocation Bitmap (fills remainder ofthis IE)
             < ALLOCATION_BITMAP : bit ** > }
         ! < Message escape : 1 bit (*) = <no string> > };
```

Table 10.5.2.25c.2/3GPP TS 44.018: RR PACKET UPLINK ASSIGNMENT information element details

LENGTH_IN_OCTETS (8 bit field)

This field encodes (in binary) the number that is equal to one eighth of the number of bits in the *RR Packet Uplink Assignment* information element that follow the end of this field.

TIMESLOT ALLOCATION (8 bit field)

This field is encoded as the TIMESLOT_ALLOCATION field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

CHANNEL_CODING_COMMAND (2 bit field)

This field is encoded as the CHANNEL_CODING_COMMAND field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

EGPRS_MCS_MODE (4 bit field)

For backward compatibility reasons, the receiver of this message shall consider the case that the EGPRS_MCS_MODE parameter may not be present in the message. EGPRS_MCS_MODE is present for EGPRS only and if present the CHANNEL_CODING_COMMAND which is for GPRS mobiles is not valid. This field is coded as the EGPRS Modulation and Coding Scheme IE in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

RESEGMENT (1 bit field)

This field is coded as the RESEGMENT bit in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

EGPRS Window Size IE

This field is encoded as the EGPRS window size IE in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

TLLI_BLOCK_CHANNEL_CODING (1 bit field)

This field is encoded as the TLLI_BLOCK_CHANNEL_CODING field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

Packet Timing Advance IE

This field is encoded as the Packet Timing Advance IE in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

Dynamic Allocation struct

This information element contains parameters necessary to define the radio resources of a dynamic allocation or an extended dynamic allocation.

Extended Dynamic Allocation (1 bit field)

This information field indicates the medium access mode to be used during the TBF.

- 0 Dynamic Allocation
- 1 Extended Dynamic Allocation

UPLINK TFI ASSIGNMENT (5 bit field)

If present, this field is encoded as the UPLINK_TFI_ASSIGNMENT information element in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

Power Control Parameters IE

If present, this field is encoded as the Power Control Parameters IE in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

RLC_DATA_BLOCKS_GRANTED (8 bit field)

If present, this field is encoded as the RLC_DATA_BLOCKS_GRANTED field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

```
USF for Timeslot Number 0 (TN0) (3 bit field)
USF for Timeslot Number 1 (TN1) (3 bit field)
USF for Timeslot Number 2 (TN2) (3 bit field)
USF for Timeslot Number 3 (TN3) (3 bit field)
```

USF for Timeslot Number 4 (TN4) (3 bit field)

USF for Timeslot Number 5 (TN5) (3 bit field)

USF for Timeslot Number 6 (TN6) (3 bit field)

USF for Timeslot Number 7 (TN7) (3 bit field)

If present, these fields are encoded as the USF for Timeslot Number X field (where 0=<X<8) in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

Single Block Allocation struct

This information element contains parameters necessary to define the radio resources of a Single Block allocation. For example for sending of a PACKET RESOURCE REQUEST message in a two phase access or a Measurement report.

ALPHA (4 bit field)

The ALPHA Power control parameter field is coded according to the following table:

 $\begin{array}{cccc} & & & & & \\ 4 & 3 & 2 & 1 \\ \hline 0 & 0 & 0 & 0 & \alpha = 0.0 \\ 0 & 0 & 0 & 1 & \alpha = 0.1 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \end{array}$

1001 $\alpha = 0.9$ 1010 $\alpha = 1.0$

All other values are reserved in this version of the protocol and shall be interpreted by the mobile station as $\alpha = 1.0$.

TIMESLOT_NUMBER (3 bit field)

If present, this field is encoded as the TIMESLOT_NUMBER field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

GAMMA_TN (5 bit field)

The GAMMA_TN field is the binary representation of the parameter Γ_{CH} for MS output power control in units of 2 dB, see 3GPP TS 45.008.

PO, BTS_PWR_CTRL_MODE and PR_MODE fields

These fields are optional downlink power control parameters and are encoded as in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

Fixed Allocation struct

This information element contains parameters necessary to define the radio resources of a fixed allocation.

FINAL_ALLOCATION (1 bit field)

This field indicates whether this allocation is the last allocation of the TBF.

- 0 this allocation is not the last allocation of the TBF
- 1 this allocation is the last allocation of the TBF

DOWNLINK_CONTROL_TIMESLOT (3 bit field)

This information field indicates the downlink timeslot that mobile station operating in fixed allocation mode shall monitor for downlink PACCH. This field is coded as the binary representation of the timeslot number as defined in 3GPP TS 45.010.

Range 0 to 7

HALF_DUPLEX_MODE (1 bit field)

This information field indicates, for multislot class 19 to 29, whether the mobile station shall operate in half duplex mode.

Bit

- 0 the MS shall not operate in half duplex mode
- 1 the MS shall operate in half duplex mode

BLOCKS OR BLOCK PERIODS (1 bit field)

If present, this field is encoded as the BLOCKS_OR_BLOCK_PERIODS field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

ALLOCATION_BITMAP_LENGTH (7 bit field)

If present, this field is encoded as the ALLOCATION_BITMAP_LENGTH field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

ALLOCATION BITMAP (variable length field)

If present, this field is encoded as the ALLOCATION_BITMAP field in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060. If the ALLOCATION_BITMAP_LENGTH field is not present, the ALLOCATION_BITMAP fills the remainder of the information element. However the network shall ensure, that in the case of a missing ALLOCATION_BITMAP_LENGTH, the length of the ALLOCATION_BITMAP shall not exceed the maximum length of 256 bits. If the network includes more bits than this maximum length the network has to take into account that there may be two kinds of mobiles: mobiles which are capable of handling the large allocation bitmap, and mobiles which would only use the 256 highest numbered ALLOCATION_BITMAP bit number indexes (as the BLOCKS_OR_BLOCK_PERIOD field is missing) and would ignore the bits with lower indices (i.e. the MS would react after 256 blocks as if the allocation had exhausted (3GPP TS 44.060)).

Packet Extended Timing Advance (2 bit field)

This bit field is used to support Extended Timing Advance.

Bit

- 1 bit 7 of the Timing Advance IE defined in clause 10.5.2.40
- 2 bit 8 of the Timing Advance IE defined in clause 10.5.2.40

Extension and Message escape fields

For mobile stations implemented according to this version of the protocol, those fields shall be considered as reserved values.

10.5.2.25d RR Packet Downlink Assignment

The RR Packet Downlink Assignment information element is sent by the network to the mobile station to indicate the assigned downlink resources.

The RR Packet Downlink Assignment information element is coded as shown in tables 10.5.2.25d.1/3GPP TS 44.018: and 10.5.2.25d.2/3GPP TS 44.018.

The RR Packet Downlink Assignment is a type 4 information element.

For a mobile station assigned to operate in the fixed allocation MAC mode, the network may assign regularly repeating intervals during which the mobile station shall measure neighbour cell power levels.

Table 10.5.2.25d.1/3GPP TS 44.018: RR PACKET DOWNLINK ASSIGNMENT information element

```
< RR Packet Downlink Assignment IE > ::=
   < LENGTH_IN_OCTETS : bit (8) >
   < MAC_MODE : bit (2) >
   < RLC_MODE : bit (1) >
   < TIMESLOT ALLOCATION : bit (8) >
         < Packet Timing Advance : Packet Timing Advance IE >
   \{ 0 \mid 1 < \mathbf{P0} : bit (4) >
      < BTS_PWR_CTRL_MODE : bit(1) >
      < PR_MODE : bit (1) >}
   { 0 | 1 < Power Control Parameters : Power Control Parameters IE > }
   \{ 0 \mid 1 < DOWNLINK_TFI_ASSIGNMENT: bit (5) >  \}
   { 0 | 1 < MEASUREMENT_STARTING_TIME : bit (16) >
         < MEASUREMENT_INTERVAL : bit (5) >
         < MEASUREMENT_BITMAP : bit (8) > }
  { 0 | 1-- indicates EGPRS TBF mode, see 44.060
         < EGPRS Window Size : < EGPRS Window Size IE >>
          < LINK_QUALITY_MEASUREMENT_MODE : bit (2)>}
   { 0 | 1 < Packet Extended timing Advance : bit (2)> }
   < SPARE_BITS : bit **> ;
```

Table 10.5.2.25d.2/3GPP TS 44.018: RR PACKET DOWNLINK ASSIGNMENT information element details

LENGTH IN OCTETS (8 bit field)

This field encodes (in binary) the number that is equal to one eighth of the number of bits in the *RR Packet Downlink Assignment* information element that follow the end of this field.

MAC_MODE (2 bit field)

This field is encoded as the MAC_MODE information field in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

RLC_MODE (1 bit field)

This field is encoded as the RLC_MODE field in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

TIMESLOT_ALLOCATION (8 bit field)

This field is encoded as the TIMESLOT_ALLOCATION field in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

Packet Timing Advance IE

This field is encoded as the Packet Timing Advance IE in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

P0, BTS_PWR_CTRL_MODE and PR_MODE fields

These fields are optional downlink power control parameters and are encoded as in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

Power Control Parameters IE

This field is encoded as the Power Control Parameters IE in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

DOWNLINK_TFI_ASSIGNMENT (5 bit field)

If present, this field is encoded as the DOWNLINK_TFI_ASSIGNMENT information element in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

MEAUREMENT STARTING TIME (16 bit field)

If present, this field is encoded as the 16-bit *value part* of the Starting Time IE defined in clause 10.5.2.38 (starting with bit 8 of octet 2 and ending with bit 1 of octet 3 of the Starting Time IE).MEASUREMENT_STARTING_TIME field in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

The frame number shall be aligned to a PDCH block period according to the requirements defined for the 'Absolute Frame Number Encoding' in the 'Starting Time Frame Number Description' IE defined in 3GPP TS 44.060.44.060

MEASUREMENT_BITMAP (8 bit field)

If present, this field is encoded as the MEASUREMENT BITMAP information field in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

MEASUREMENT INTERVAL (5 bit field)

If present, this field is encoded as the MEASUREMENT_INTERVAL field in the PACKET DOWNLINK ASSIGNMENT message in 3GPP TS 44.060.

EGPRS Window Size IE

This field is encoded as the EGPRS window size IE in the PACKET UPLINK ASSIGNMENT message in 3GPP TS 44.060.

LINK_QUALITY_MEASUREMENT_MODE (2 bit field)

This field is encoded as the LINK_QUALITY_MEASUREMENT_MODE in the PACKET DOWNLINNK ASSIGNMENT message in 3GPP TS 44.060.

Packet Extended Timing Advance (2 bit field)

This bit field is used for support of Extended Timing Advance.

Bit

- 1 bit 7 of the Timing Advance IE defined in clause 10.5.2.40
- 2 bit 8 of the Timing Advance IE defined in clause 10.5.2.40

10.5.2.26 Page Mode

The purpose of the *Page Mode* information element is to control the action of the mobile station belonging to the paging subgroup corresponding to the paging subchannel.

The *Page Mode* information element is coded as shown in Figure 10.5.2.26.1/3GPP TS 44.018 and Table 10.5.2.26.1/3GPP TS 44.018.

The Page Mode is a type 1 information element.




Figure 10.5.2.26.1/3GPP TS 44.018: Page Mode information element

Table 10.5.2.26.1/3GPP TS 44.018: Page Mode information element

```
PM (octet 1)
Bits
2 1
0 0
          Normal paging.
0 1
          Extended paging.
1 0
          Paging reorganization.
1 1
           Same as before.
Note: The value "same as before" has been
      defined instead of "reserved" to allow
      the use of this coding with another
      meaning in an upwards compatible way
      in later phases of the GSM system.
```

```
10.5.2.26a (void)
```

10.5.2.26b (void)

10.5.2.26c (void)

10.5.2.26d (void)

10.5.2.27 NCC Permitted

The purpose of the *NCC Permitted* information element is to provide a definition of the allowed NCCs on the BCCH carriers to be reported in the MEASUREMENT REPORT message by the mobile stations in the cell.

The *NCC Permitted* information element is coded as shown in Figure 10.5.2.27.1/3GPP TS 44.018 and Table 10.5.2.27.1/3GPP TS 44.018.

The NCC Permitted is a type 3 information element with 2 octets length.




Figure 10.5.2.27.1/3GPP TS 44.018: NCC Permitted information element

Table 10.5.2.27.1/3GPP TS 44.018: NCC Permitted information element

```
NCC permitted (octet 2)
The NCC permitted field is coded as a bit map, i.e.
bit N is coded with a "0" if the BCCH carrier with
NCC = N-1 is not permitted for monitoring and with a
"1" if the BCCH carrier with NCC = N-1 is permitted
for monitoring; N = 1,2,..,8.
```

10.5.2.28 Power Command

The purpose of the *Power Command* information element is to provide the power level to be used by the mobile station.

The *Power Command* information element is coded as shown in Figure 10.5.2.28.1/3GPP TS 44.018 and Table 10.5.2.28.1/3GPP TS 44.018.

The *Power Command* is a type 3 information element with 2 octets length.




Figure 10.5.2.28.1/3GPP TS 44.018: Power Command information element

Table 10.5.2.28.1/3GPP TS 44.018: Power Command information element

```
FPC (octet 2)
The FPC field (octet 2) indicates whether Fast Measurement
Reporting and Power Control mechanism is used. It is coded as
follows:

Value

0 FPC not in use
1 FPC in use

Power level (octet 2)
The power level field is coded as the binary
representation of the "power control level", see 3GPP TS
3GPP TS 45.005.
This value shall be used by the mobile station
according to 3GPP TS 45.008.

Range: 0 to 31.
```

10.5.2.28a Power Command and access type

The purpose of the *Power Command and access type* information element is to provide the power level to be used by the mobile station and the indication that the mobile station can avoid the transmission of handover access.

The *Power Command and access type* information element is coded as shown in Figure 10.5.2.28a.1/3GPP TS 44.018 and Table 10.5.2.28a.1/3GPP TS 44.018.

The Power Command and access type is a type 3 information element with 2 octets length.




Figure 10.5.2.28a.1/3GPP TS 44.018: Power Command and access type information element

Table 10.5.2.28a.1/3GPP TS 44.018: Power Command and access type information element

```
ATC (Access Type Control) (octet 2)
bit 8
    Sending of Handover access is mandatory
Ω
   Sending of Handover access is optional
   FPC (octet 2)
   The FPC field (octet 2) indicates whether Fast Measurement
   Reporting and Power Control mechanism is used. It is coded as
   follows:
   Value
   0 FPC not in use
   1 FPC in use
  Power level (octet 2)
The power level field is coded as the binary
representation of the "power control level", see 3GPP TS
3GPP TS 45.005.
This value shall be used by the mobile station
according to 3GPP TS 45.008.
Range: 0 to 31.
```

10.5.2.29 RACH Control Parameters

The purpose of the *RACH Control Parameters* information element is to provide parameters used to control the RACH utilization. This information element is broadcast to mobile stations in SYSTEM INFORMATION TYPE 1, 2, 2bis, 3, and 4 messages.

The *RACH Control Parameters* information element is coded as shown in Figure 10.5.2.29.1/3GPP TS 44.018 and Table 10.5.2.29.1/3GPP TS 44.018.

The RACH Control Parameters is a type 3 information element with 4 octets length.

8	7	6	5	4	3	2	1	
			RACH Co	ntrol Para	meters IE	1		octet 1
Max r	etrans		Tx-int	eger		CELL	RE	octet 2
						BARR		
						ACCESS		
AC	AC	AC	AC	AC	AC	AC	AC	
C15	C14	C13	C12	C11	C10	C09	C08	octet 3
AC	AC	AC	AC	AC	AC	AC	AC	
C07	C06	C05	C04	C03	C02	C01	C00	octet 4

Figure 10.5.2.29.1/3GPP TS 44.018: RACH Control Parameters information element

Table 10.5.2.29.1/3GPP TS 44.018: RACH Control Parameters information element

```
retrans.
              Maximum number of retransmissions
Max
(octet 2)
Bits
8
Λ
  0
     Maximum 1 retransmission
0
  1
     Maximum 2 retransmissions
  0 Maximum 4 retransmissions
  1 Maximum 7 retransmissions
Tx-integer, Number of slots to spread transmission
(octet 2)
Bits
  5
      4
6
        3
0
  0
        0
              3 slots used to spread transmission
              4 slots used to spread transmission
0
      1 0
              5 slots used to spread transmission
      1 1
              6 slots used to spread transmission
0
0
  1
     0 0
              7 slots used to spread transmission
0
  1
      0
        1
              8 slots used to spread transmission
              9 slots used to spread transmission
0
             10 slots used to spread transmission
      0 0
   Ω
             11 slots used to spread transmission
1
1
   Ω
      0 1
             12 slots used to spread transmission
1
   0
      1
        0
             14 slots used to spread transmission
             16 slots used to spread transmission
1
  1
      0 0
             20 slots used to spread transmission
1
  1
      0 1
             25 slots used to spread transmission
  1 1 0
             32 slots used to spread transmission
             50 slots used to spread transmission
CELL_BAR_ACCESS, Cell Barred for Access (octet 2)
   Bit
     The cell is not barred, see 3GPP TS 23.022
   1 The cell is barred, see 3GPP TS 23.022
   RE, Call reestablishment allowed (octet 2)
  Bit
   1
   O Call Reestablishment allowed in the cell
   1 Call Reestablishment not allowed in the cell
   EC Emergency Call allowed (octet 3 bit 3)
   3
   0
     Emergency call allowed in the cell to all MSs
     Emergency call not allowed in the cell except
      for the MSs that belong to one of the classes
      between 11 to 15
   AC CN, Access Control Class N (octet 3(except bit 3)
   and octet 4)
   For a mobile station with AC C = N access is not
   barred if the AC CN bit is coded with a "0"; N =
   0, 1, .. 9,11, .., 15.
```

10.5.2.30 Request Reference

The purpose of the *Request Reference* information element is to provide the random access information used in the channel request and the frame number, FN modulo 42432 in which the channel request was received.

The *Request Reference* information element is coded as shown in Figure 10.5.2.30.1/3GPP TS 44.018 and Table 10.5.2.30.1/3GPP TS 44.018.

The Request Reference is a type 3 information element with 4 octets length.




Figure 10.5.2.30.1/3GPP TS 44.018: Request Reference information element

Table 10.5.2.30.1/3GPP TS 44.018: Request Reference information element

```
RA, Random Access Information (octet 2)
This is an unformatted 8 bit field. Typically the
contents of this field are coded the same as the
CHANNEL REQUEST message shown in Table 9.9,
clause 9.1.8
T1' (octet 2)
The T1' field is coded as the binary representation
of (FN div 1326) mod 32.
   (octet 3 and 4)
The T3 field is coded as the binary representation
of FN mod 51. Bit 3 of octet 2 is the most
significant bit and bit 6 of octet 3 is the least
significant bit.
   (octet 4)
The T2 field is coded as the binary representation
of FN mod 26.
NOTE 1: The frame number, FN modulo 42432 can be cal-
        culated as 51x((T3-T2) \mod 26)+T3+51x26xT1'
```

10.5.2.31 RR Cause

The purpose of the *RR Cause* information element is to provide the reason for release or the reason for completion of an assignment or handover.

The *RR Cause* information element is coded as shown in Figure 10.5.2.31.1/3GPP TS 44.018 and Table 10.5.2.31.1/3GPP TS 44.018.

The RR Cause is a type 3 information element with 2 octets length.




Figure 10.5.2.31.1/3GPP TS 44.018: RR Cause information element

Table 10.5.2.31.1/3GPP TS 44.018: RR Cause information element

```
RR cause value (octet 2)
Bits
8 7 6 5 4 3 2 1
0 0 0 0 0 0 0 0 0 0 Normal event
0 0 0 0 0 0 0 1 Abnormal release, unspecified
0 0 0 0 0 1 0 Abnormal release, channel
                    unacceptable
0 0 0 0 0 1 1 Abnormal release, timer expired
0 0 0 0 0 1 0 0 \phantom{0} Abnormal release, no activity on
                   the radio path
0 0 0 0 0 1 0 1 Preemptive release
0 0 0 0 0 1 1 0 UTRAN configuration unknown
0 0 0 0 1 0 0 0 Handover impossible, timing advance
                  out of range
0 0 0 0 1 0 0 1
                  Channel mode unacceptable
0 0 0 0 1 0 1 0 Frequency not implemented
 0 0 0 1 0 1 1
                  Originator or talker leaving group call area
0 0 0 0 1 1 0 0 Lower layer failure
0 0 0 0 1 2 1 1
                  Call already cleared
                  Semantically incorrect message
0 1 0 1 1 1 1 1
0 1 1 0 0 0 0 0 Invalid mandatory information
0 1 1 0 0 0 0 1 Message type non-existent or not
                    implemented
0 1 1 0 0 0 1 0 \, Message type not compatible with
                  protocol state
0 1 1 0 0 1 0 0 Conditional IE error
All other cause values shall be treated as 0000 0000,
'normal event'
The listed RR cause values are defined in Annex F.
```

10.5.2.32 SI 1 Rest Octets

The SI 1 Rest Octets information element contains the position about the NCH and spare bits.

The SI I Rest Octets information element is a type 5 information element with 1 octet length.

Table 10.5.2.32.1a/3GPP TS 44.018: SI 1 Rest Octets information element details

BAND_INDICATOR (1 bit)

The band indicator for 1800 and 1900 associates the ARFCN channel numbers to the DCS 1800 respectively to the PCS 1900 band, see 3GPP TS 45.005.

Table 10.5.2.32.1b/3GPP TS 44.018: SI 1 Rest Octets information element

NCH Position on the CCCH The values in the NCH Position field indicates the block number of the CCCH block which is used for the first NCH block and the number of blocks used for the NCH. (The block numbering corresponds to table 5 in clause 7 of 3GPP TS 45.002) The absence of the NCH position field indicates that there is no NCH in the cell/on the carrying CCCH slot The following coding applies if 1 or more basic physical channels are used for CCCH, not combined with SDCCHs. Value No of blocks Number of first block 0 0 0 0 0 0 0 0 0 0 1 1 1 2 0 0 0 1 0 1 0 0 0 1 1 1 3 0 0 1 0 0 0 0 1 0 1 5 1 0 0 1 1 0 1 0 0 1 1 1 0 1 0 0 0 2 0 1 0 0 1 0 1 0 1 0 2 3 0 1 0 1 1 0 1 1 0 0 1 1 0 1 3 1 1 1 0 3 2 0 1 1 1 1 3 1 0 0 0 0 3 3 1 0 0 0 1 1 0 0 1 0 4 0 1 0 0 1 1 4 1 0 1 0 0 4 2 1 0 1 0 1 4 1 0 1 1 0 5 1 0 1 1 1 5 1 1 1 0 0 0 5 1 1 0 0 1 6 0 1 1 0 1 0 1 1 0 1 1 Other values are reserved for future use. A mobile station receiving a reserved value shall behave as if the NCH position was not present

In the case the CCCH configuration is not compatible with the NCH position (e.g., CCCH with combined SDCCH and the value different from 00000, 00001 or 00111), the mobile station shall behave as if the NCH Position field was not present.

10.5.2.33 SI 2bis Rest Octets

The SI 2bis Rest Octets information element contains only spare bits. Its purpose is to allow the upward compatible introduction of new information on the BCCH in later phases.

The SI 2bis Rest Octets information element is a type 5 information element with 1 octet length.

Table 10.5.2.33.1/3GPP TS 44.018: SI 2bis Rest Octets information element

```
<SI2bis Rest Octets> ::=
  <spare padding> ;
```

10.5.2.33a SI 2ter Rest Octets

SI2ter Rest Octets information element contains optional information on UTRAN cell(s) to be monitored by the mobile in the cell. It is used together with 3G Cell(s) from the SI2quater message to build the 3G Cell Reselection list, see clause 3.4.1.2.1.7. Optionally this information element may in addition include thresholds that the mobile shall use for cell reselection. Information received in this message do not modify the 3G Neighbour Cell list used for reporting and defined in clause 3.4.1.2.1.1.

The SI 2ter Rest Octets information element is a type 5 information element with 4 octets length.

Table 10.5.2.33a.1/3GPP TS 44.018: SI 2ter Rest Octets information element

```
<SI2ter Rest Octets> ::=
   \{L \mid H
   < SI2ter_MP_CHANGE_MARK : bit(1) >
   < SI2ter_3G_CHANGE_MARK : bit(1) >
   < SI2ter_INDEX : bit(3) >
   < SI2ter COUNT : bit(3) >
   { 0 | 1 < UTRAN FDD Description : < UTRANUMTS FDD Description struct > > }
   { 0 | 1 < UTRAN TDD Description : < UTRAN TDD Description struct > > }
   { 0 | 1 < 3G MEASUREMENT Parameters Description :< 3G MEASUREMENT Parameters Description struct > > }
<spare padding> ;
< UTRAN FDD Description >::=
                                                       -- 21 bits are available if this structure is present on its own
         \{ 0 < FDD-ARFCN-INDEX : bit (3) > \} ** 1
                                                       -- requires 2+4n+1 (19 bits for 4 freqs.)
   01
          < FDD-ARFCN : bit (14) >
                                                       -- requires 2+14=16 bits
          < FDD-ARFCN-INDEX : bit (3) >
          < Scrambling Code: bit (9) >
          < Diversity: bit >
                                                       -- requires 15 bits
          < FDD-ARFCN-INDEX : bit (3) >
          < SC_P_SCG : bit (8) > }
                                                       -- requires 13 bits
   \{ 0 \mid 1 < Bandwidth_FDD : bit (3) > \} ;
< UTRAN TDD Description >::=
                                                       -- 21 bits are available if this structure is present on its own
   \{00 \quad \{0 < TDD-ARFCN-INDEX : bit (3) > \} ** 1
                                                       -- requires 2+4n+1
   I 01
          < TDD-ARFCN : bit (14) >
                                                       -- requires 2+14=16 bits
         < TDD-ARFCN-INDEX : bit (3) >
          < Cell Parameter : bit (7) >
          < Sync Case : bit >
          < Diversity: bit >
                                                       -- requires 14 bits
          < TDD-ARFCN-INDEX : bit (3) >
          < TDD-ARFCN-INDEX : bit (3) >
          < TDD-ARFCN-INDEX : bit (3) > }
                                                       -- requires 11 bits
   \{ 0 \mid 1 < Bandwidth\_TDD : bit (3) > \};
< 3G MEASUREMENT Parameters Description >::=
   < Qsearch_I : bit (4) >
   { 0 | 1 < FDD_Qoffset : bit (4) >
                                                       -- FDD Parameters
          < FDD_Qmin : bit (3) > }
   \{ 0 \mid 1 < TDD\_Qoffset : bit (4) > \} ;
                                                       -- TDD Parameters
```

Table 10.5.2.33a.2/3GPP TS 44.018: SI 2ter Rest Octets information element details

SI2ter_MP_CHANGE_MARK (1 bit field), SI2ter Rest Octet Measurement Parameter Change Mark. This parameter is used to indicate to the MS a change of information concerning 3G Measurement Parameters, as described in clause 3.2.2.1, 'System information broadcasting'.

SI2ter_3G_CHANGE_MARK (1 bit field), SI2ter Rest Octet 3G Change Mark.

This parameter is used to indicate to the MS a change of information concerning UTRAN FDD Description and UTRAN TDD Description, as described in clause 3.2.2.1 'System information broadcasting'.

SI2ter_INDEX (3 bit field) and SI2ter_COUNT (3 bit field)

The purpose of the SI2ter_INDEX and SI2ter_COUNT fields is to indicate the number of individual sequences of SI2ter Rest Octet information elements and to assign an index to identify each of them. The SI2ter_INDEX field is binary coded, range 0 to 7, and provides an index to identify the individual SI2ter Rest Octet information element. The SI2ter_COUNT field is binary coded, range 0 to 7, and provides the SI2ter_INDEX value for the last (highest indexed) information element in the sequence of SI2ter Rest Octet information elements.

UTRAN FDD Description

FDD-ARFCN-INDEX (3 bit field)

This field points to the absolute frequency received in the UTRAN Freq list information element in the Channel Release message (see clause 10.5.2.1d, 'UTRAN frequency list') or in the UTRAN Frequency List description struct (see 3GPP TS 44.060). If there is no frequency associated to this value of the FDD-ARFCN-INDEX parameter, this shall not be considered as an error.

FDD ARFCN (14 bit field)

This information element is defined as the UARFCN in 3GPP TS 25.101. Any non-supported frequencies shall be ignored.

When a frequency is included with no scrambling code information (no scrambling code and no SC_P_SCG), this indicates all the scrambling codes.

Scrambling Code (9 bit field)

This parameter indicates the Primary Scrambling Code as defined in 3GPP TS 25.213.

SC P SCG (8 bit field)

Scrambling Codes per Scrambling Code Group. A bitmap indicates which primary Scrambling Codes per Scrambling Code group are used by the network.

Bits 8-1

Each bit "n" set to "1" indicates primary scrambling code subset "n-1". More than one primary scrambling code subset may be indicated.

Each primary Scrambling code subset (k) indicates the 64 primary Scrambling Codes k+8*i, with i=[0..63].

Diversity (1 bit field)

This parameter indicates if diversity is applied for the cell:

Bit

- 0 Diversity is not applied for this cell
- 1 Diversity is applied for this cell.

Bandwidth_FDD (3 bit field)

This optional information element will be used for future releases of the protocol. When missing, this indicates the present FDD bandwidth. When present, this shall not be considered as an error.

UTRAN TDD Description

TDD-ARFCN-INDEX (3 bit field)

This field points to the absolute frequency received in the UTRAN Freq list information element in the Channel Release message (see clause 10.5.2.1d, 'UTRAN frequency list') or in the UTRAN Frequency List description struct (see 3GPP TS 44.060). If there is no frequency associated to this value of the TDD-ARFCN-INDEX parameter, this shall not be considered as an error.

TDD ARFCN (14 bit field)

This optional information element is defined as the UARFCN in 3GPP TS 25.102. Any non-supported frequency shall be ignored.

When a frequency is included with no Cell Parameter information, this indicates all the Cell Parameter values.

Cell Parameter (7 bit field)

This parameter is defined in 3GPP TS 25.213.

Sync Case (1 bit field)

This parameter indicates the Sync Case as defined in 3GPP TS 25. 213.

Rit

0 Sync case 1

1 Sync case 2.

Diversity (1 bit field)

This parameter indicates if diversity is applied for the cell:

Bit

0 Diversity is not applied for this cell

1 Diversity is applied for this cell.

3G Measurement Parameters Description:

These parameters are defined in 3GPP TS 45.008.

Bandwidth_TDD (3 bit field)

This optional information element refers to 3GPP TS 25.331.

Bit 321

000 3.84Mcps

001 1.28Mcps

All other values shall not be interpreted as an error. When missing, this indicates 3.84 Mcps.

10.5.2.33b SI 2quater Rest Octets

The SI 2quater Rest Octets information element contains neighbour cell lists for UTRAN cells. For cell reselection, it is used with the SI 2ter Rest Octets information to build the 3G Cell Reselection list, see clause 3.4.1.2.1.7.

The SI 2quater Rest Octets information element is a type 5 information element with 20 octet length.

Table 10.5.2.33b.1/3GPP TS 44.018: SI2guater message content

```
< SI2quater Rest Octets > ::=
   < BA_IND : bit (1) >
   < 3G_BA_IND : bit (1) >
   < MP CHANGE MARK : bit (1) >
   < SI2quater_INDEX : bit (4) >
   < SI2quater_COUNT : bit (4) >
   { 0 | 1 < 3G Neighbour Cell Description : < 3G Neighbour Cell Description struct >> }
   { 0 | 1 < Measurement_Parameters Description : < Measurement Parameters Description struct >> }
   { 0 | 1 < 3G Measurement Parameters Description : < 3G Measurement Parameters Description struct >> }
   { 0 | 1 < GPRS Real Time Difference Description : < GPRS Real Time Difference Description struct >> }
   { 0 | 1 < GPRS_BSIC Description : GPRS_BSIC Description struct > }
   { 0 | 1 < GPRS_REPORT PRIORITY Description : < GPRS_REPORT_PRIORITY Description struct >> }
   { 0 | 1 < GPRS_MEASUREMENT_Parameters Description : < GPRS_MEASUREMENT Parameters Description
struct >> }
   { 0 | 1 < GPRS_3G_MEASUREMENT Parameters Description : < GPRS_3G MEASUREMENT Parameters
Description struct >> }
   { 0 | 1 < NC Measurement Parameters : < NC Measurement Parameters struct >> }
   { 0 | 1 < CCN Support Description : < CCN Support Description struct >> }
< spare padding > :
< 3G Neighbour Cell Description struct > ::=
{ 0 | 1 < Index_Start_3G : bit (7) }
{ 0 | 1 < Absolute_Index_Start_EMR : bit (7) }
{ 0 | 1 < UTRAN FDD Description : UTRAN FDD Description struct >> }
{ 0 | 1 < UTRAN TDD Description : UTRAN TDD Description struct >> };
< UTRAN FDD Description struct > ::=
\{0 \mid 1 < Bandwidth FDD : bit (3)\}
{ 1 < Repeated UTRAN FDD Neighbour Cells : Repeated UTRAN FDD Neighbour Cells struct >> } ** 0 ;
< Repeated UTRAN FDD Neighbour Cells struct > ::=
\{ 0 < FDD\text{-}ARFCN : bit (14) > | 1 < FDD\text{-}ARFCN\text{-}INDEX : bit (3) > \}
< FDD_Indic0 : bit >
< NR OF FDD CELLS: bit (5) >
< FDD_CELL_INFORMATION Field: bit(p(NR_OF_FDD_CELLS)) > ; -- p(x) defined in table 9.1.54.1/3GPP TS 44.018
< UTRAN TDD Description struct > : :=
{ 0 | 1 < Bandwidth TDD : bit (3) }
{ 1 < Repeated UMTS TDD Neighbour Cells : Repeated UMTS TDD Neighbour Cells struct >> } ** 0 ;
< Repeated UTRAN TDD Neighbour Cells struct > ::=
\{ 0 < TDD-ARFCN : bit (14) > | 1 < TDD-ARFCN-INDEX : bit (3) > \}
< TDD_Indic0 : bit >
< NR OF TDD CELLS: bit (5) >
< TDD_CELL_INFORMATION Field: bit(q(NR_OF_TDD_CELLS) > ; -- q(x) defined in table 9.1.54.1/3GPP TS 44.018
<MEASUREMENT PARAMETERS Description Struct > ::=
   < REPORT_TYPE : bit >
   < SERVING_BAND_REPORTING: bit (2) > ;
< 3G MEASUREMENT PARAMETERS Description struct > ::=
   < Qsearch_I : bit (4) >
   < Qsearch_C_Initial : bit (1) >
   { 0 | 1 < FDD_Qoffset : bit (4) >
                                                               -- FDD information
          < FDD_REP_QUANT : bit (1) >
          < FDD_MULTIRAT_REPORTING: bit (2) >
          < FDD_Qmin : bit (3) > }
                                                               -- TDD information
   \{ 0 | 1 < TDD Qoffset : bit (4) > 
          < TDD_MULTIRAT_REPORTING : bit (2) > };
```

```
< GPRS Real Time Difference Description struct > ::=
   { 0 | 1 { 0 | 1 < BA_Index_Start_RTD : bit (5) > }
                                                       --default value=0
      < RTD : < RTD6 Struct >>
      { 0 < RTD : < RTD6 Struct >> } **1 }
                                                       -- '0': increment by 1 the index of the BA (list) frequency
   { 0 | 1 { 0 | 1 < BA_Index_Start_RTD : bit (5) > }
                                                      --default value=0
      < RTD: < RTD12 Struct >>
      { 0 < RTD : < RTD12 Struct >> } **1 };
                                                       -- '0': increment by 1 the index of the BA (list) frequency
< RTD6 Struct > ::=
   \{ 0 < RTD : bit (6) > \} ** 1;
                               -- Repeat until '1'; '1' means last RTD for this frequency
< RTD12 Struct > ::=
   { 0 < RTD : bit (12) > } ** 1; -- Repeat until '1'; '1' means last RTD for this frequency
< GPRS BSIC Description struct > ::=
   { 0 | 1 < BA_Index_Start_BSIC : bit (5) > }
                                                      -- default value=0
   < BSIC : bit (6) >
   < Number_Remaining_BSIC: bit (7) >
   { < Frequency_Scrolling : bit >
                                                       -- 0 means same frequency
      < BSIC : bit (6) > } * (val(Number_Remaining_BSIC));
< GPRS REPORT PRIORITY Description struct > ::=
< Number Cells : bit (7) >
{ REP_PRIORITY: bit } * (val(Number_Cells));
< GPRS MEASUREMENT PARAMETERS Description struct > ::=
   < REPORT_TYPE : bit >
   < REPORTING_RATE : bit >
   < INVALID BSIC REPORTING: bit >
   \{0 \mid 1 < MULTIBAND_REPORTING : bit (2) > \}
   \{0 \mid 1 < SERVING_BAND_REPORTING : bit (2) > \}
   < SCALE_ORD : bit(2) >
   { 0 | 1 < 900_REPORTING_OFFSET : bit (3) >
          < 900_REPORTING_THRESHOLD : bit (3) > }
   { 0 | 1 < 1800_REPORTING_OFFSET : bit (3) >
          < 1800_REPORTING_THRESHOLD : bit (3) > }
   { 0 | 1 < 400_REPORTING_OFFSET : bit (3) >
          < 400_REPORTING_THRESHOLD : bit (3) > }
   { 0 | 1 < 1900 REPORTING OFFSET : bit (3) >
          < 1900_REPORTING_THRESHOLD : bit (3) > }
   \{ 0 \mid 1 < 850\_REPORTING\_OFFSET : bit (3) > 
          < 850_REPORTING_THRESHOLD : bit (3) > };
< GPRS 3G MEASUREMENT PARAMETERS Description struct > ::=
   < Qsearch_P : bit (4) >
   < 3G_SEARCH_PRIO: bit >
   \{ 0 \mid 1 < FDD_REP_QUANT : bit > \}
                                                                       -- FDD Parameters
          < FDD_MULTIRAT_REPORTING : bit (2) > }
   { 0 | 1 < FDD_REPORTING_OFFSET : bit (3) >
         < FDD_REPORTING_THRESHOLD : bit (3) > }
   \{0 \mid 1 < TDD_MULTIRAT_REPORTING : bit (2) > \}
                                                                       -- TDD Parameters
   { 0 | 1 < TDD_REPORTING_OFFSET : bit (3) >
          < TDD_REPORTING_THRESHOLD : bit (3) > };
< NC Measurement Parameters struct > ::=
   < NETWORK_CONTROL_ORDER: bit (2) >
   { 0 | 1 < NC_ NON_DRX_PERIOD : bit (3) >
         < NC_REPORTING_PERIOD_I : bit (3) >
          < NC_REPORTING_PERIOD_T : bit (3) > };
```

< CCN Support Description struct > ::=

< Number_Cells : bit (7) >

{ CCN_SUPPORTED : bit } * (val(Number_Cells));

Table 10.5.2.33b.2/3GPP TS 44.018: SI2quater message information

BA_IND (1 bit), BCCH allocation sequence number indication.

The BA_IND is needed to allow the network to discriminate measurements results related to different GSM Neighbour Cell lists sent to the MS, as described in clause 3.4.1.2.1 'The Use of parameters from the Measurement Information/SI2quater messages'. The value of this parameter is reflected in the ENHANCED MEASUREMENT REPORT message and in the MEASUREMENT REPORT message.

3G BA IND (1 bit), 3G BCCH allocation sequence number indication.

The 3G_BA_IND is needed to indicate new sets of 3G Neighbour Cell information, as described in clause 3.4.1.2.1, The Use of parameters from the Measurement Information/SI2quater messages. The value received is reflected in the MEASUREMENT REPORT and ENHANCED MEASUREMENT REPORT message.

MP_CHANGE_MARK (1 bit)

The MP_CHANGE_MARK field is changed each time MEASUREMENT INFORMATION or 3G MEASUREMENT INFORMATION has been updated in any instance of the SI2quater messages. A new value indicates that the mobile station shall re-read the MEASUREMENT and 3G MEASUREMENT INFORMATION from all the SI2quater messages, as described in clause 3.4.1.2.1, The Use of parameters from the Measurement Information message/SI2quater. The coding of this field is network dependent.

SI2quater_INDEX (4 bit field)

The SI2quater _INDEX field is used to distinguish individual SI2quater messages. The field can take the binary representation of the values 0 to n, where n is the index of the last SI2quater message. (SI2quater_COUNT).

SI2quater_COUNT (4 bit field)

This field is coded as the binary representation of the SI2quater_INDEX for the last (highest indexed) individual SI2quater message.

3G Neighbour Cell Description:

The building of the 3G Neighbour Cell list and the ordering of indices within each Radio Access Technology is described in clause 3.4.1.2.1.1, 'Deriving the 3G Neighbour Cell list from the 3G Neighbour Cell Description'.

Index_Start_3G (7 bit)

This optional information element indicates the binary value of the first index to use to build this instance of the 3G Neighbour Cell list. When missing, the value 0 is assumed. See clause 3.4.1.2.1.1.

Absolute_Index_Start_EMR (7 bit)

This parameter indicates in binary the value to be added to the indexes of the 3G Neighbour Cell list for reporting 3G Cells with the ENHANCED MEASUREMENT REPORT message (see clause 3.4.1.2.1.1). If different values are received for this parameter in different instances of this message, the instance with the highest index shall be used. If this parameter is absent in all instances of the message, the value "0" shall be used.

UTRAN FDD DESCRIPTION

For detailed element definitions see the Measurement Information message.

UTRAN TDD DESCRIPTION

For detailed element definitions see the Measurement Information message.

MEASUREMENT PARAMETERS Description

The fields of this Description are used for measurements as defined in 3GPP TS 45.008.

3G MEASUREMENT PARAMETERS Description

The fields of this Description are used for measurements as defined in 3GPP TS 45.008.

GPRS PRIORITY Description

REP PRIORITY bit:

- **0** Normal reporting priority
- 1 High reporting priority

This information is used for GPRS Enhanced (NC) Reporting when the cell has no PBCCH allocated, see 3GPP TS 44.060 clause 5.6.3.5 ("Report Priority Description").

The use of these bits is similar to the PRIORITY description, see clause 3.4.1.2.1.5("Report Priority Description").

GPRS BSIC Description

This information is used for GPRS Enhanced (NC) Measurement reporting when the cell has no PBCCH allocated, see 3GPP TS 44.060 clause 5.6.3.2 ("Deriving the GSM Neighbour Cell list from the BSICs and frequency list"). The use of this information is similar to the BSIC Description, see clause 3.4.1.2.1.2 ("Deriving the GSM Neighbour Cell list from the BSICs and the BA (list)").

GPRS Real Time Difference Description

This information is used for GPRS neighbour cell measurement when the cell has no PBCCH allocated, see 3GPP TS 44.060 clause 5.6.3.4 ("GPRS Real Time Differences"). The use of this information is similar to the Real Time Difference Description, see clause 3.4.1.2.1.4 ("Real Time Differences").

GPRS MEASUREMENT PARAMETERS Description

This information is used for GPRS neighbour cell measurement when the cell has no PBCCH allocated, see 3GPP TS 44.060 clause 5.6.3.6 ("GPRS Measurement Parameters and GPRS 3G Measurement Parameters").

The fields of this Description are defined in 3GPP TS 45.008.

3G MEASUREMENT PARAMETERS Description

This information is used for GPRS neighbour cell measurement when the cell has no PBCCH allocated, see 3GPP TS 44.060 clause 5.6.3.6 ("GPRS Measurement Parameters and GPRS 3G Measurement Parameters").

The fields of this Description are defined in 3GPP TS 45.008.

NC Measurement Parameters struct

Information in this structure is used when the cell has no PBCCH allocated, for (NC) measurement reporting. See 3GPP TS 44.060 clause 5.6.1 ("Network Control (NC) measurement reporting").

Coding of the fields is defined in 3GPP TS 44.060, clause 11.2.23 ("PACKET SYSTEM INFORMATION TYPE5").

CCN Support Description

CCN SUPPORTED bit:

- **0** CCN is enabled towards the corresponding cell
- 1 CCN is disabled towards the corresponding cell

This information is used for determining whether the mobile station shall enter CCN mode when re-selecting a cell and CCN is enabled, see 3GPP TS 44.060.

The use of these bits is described in subclause 3.4.1.2.1.6.1("CCN Support description"").

10.5.2.34 SI 3 Rest Octets

The SI 3 Rest Octets information element is coded according to the syntax specified below and described in tables 10.5.2.34.1/3GPP TS 44.018, 10.5.2.34.2/3GPP TS 44.018 and 10.5.2.35.1/3GPP TS 44.018 (See clause 10.5.2.35).

The SI 3 Rest Octets information element is a type 5 information element with 4 octets length.

Table 10.5.2.34.1/3GPP TS 44.018: SI 3 Rest Octets information element

```
<SI3 Rest Octet> ::= < Optional selection parameters>
             <Optional Power offset>
             <System Information 2ter Indicator>
             <Early Classmark Sending Control>
             <Scheduling if and where>
             {L|H <GPRS Indicator>}
             <3G Early Classmark Sending Restriction>
             { L | H < SI2quater Indicator : < SI2quater Indicator struct > > }
             <spare padding> ;
<Optional Selection Parameters> ::=
             L | H <Selection Parameters>;
<Selection Parameters> ::=
             <CBQ: bit (1)>
             <CELL_RESELECT_OFFSET: bit (6)>
             <TEMPORARY_OFFSET: bit (3)>
             <PENALTY_TIME: bit (5)>;
<Optional Power Offset> ::=
             L | H < Power Offset: bit (2)>
<System Information 2ter Indicator> ::=
             L | H;
<Early Classmark Sending Control> ::= L | H;
<Scheduling if and where>::=
             L | H <WHERE: bit (3)>;
<GPRS Indicator> ::=
             < RA COLOUR : bit (3) >
             < SI13 POSITION: bit >;
<3G Early Classmark Sending Restriction>::=
          L|H;
< SI2quater Indicator struct > ::=
< SI2quater_POSITION : bit > ;
```

Table 10.5.2.34.2/3GPP TS 44.018: SI 3 Rest Octets information element details

CBQ, CELL_BAR_QUALIFY (1 bit field)

CELL_BAR_QUALIFY is used by the network to control mobile station cell selection and reselection. The use and coding of this parameter is defined in 3GPP TS 45.008.

CELL_RESELECT_OFFSET (6 bit field)

CELL_RESELECT_OFFSET is coded as the binary representation of the "CELL_RESELECT_OFFSET" in 3GPP TS 45.008. It is a value used by the mobile station to apply a positive or negative offset to the value of C2 as defined in 3GPP TS 23.022 and 3GPP TS 45.008.

TEMPORARY_OFFSET (3 bit field)

The TEMPORARY_OFFSET field is coded as the binary representation of the "TEMPORARY_OFFSET" in 3GPP TS 45.008. It is used by the mobile station as part of its calculation of C2 for the cell reselection process as described in 3GPP TS 45.008. It is used to apply a negative offset to C2 for the duration of PENALTY_TIME.

PENALTY_TIME (5 bit field)

The PENALTY_TIME is coded as the binary representation of the "PENALTY_TIME" in 3GPP TS 45.008. It defines the length of time for which TEMPORARY_OFFSET is active. The usage of PENALTY_TIME is described in 3GPP TS 23.022 and 3GPP TS 45.008.

Power Offset (2 bit field)

Power Offset is used only by DCS 1800 Class 3 MSs to add a power offset to the value of MS_TXPWR_MAX_CCH used for its random access attempts. It is also used by the MS in its calculation of C1 and C2 parameters. Its use is defined in GSM 45.008

If this parameter is transmitted on a BCCH carrier within the DCS 1800 band, its meaning shall be described below:

Value Meaning

- 00 0 dB power offset
- 01 2 dB power offset
- 10 4 dB power offset
- 11 6 dB power offset

If this parameter is transmitted on a BCCH carrier outside the DCS 1800 band, then all bit positions shall be treated as spare.

System Information 2ter Indicator (1 bit field)

- L SYSTEM INFORMATION TYPE 2ter message is not available
- H SYSTEM INFORMATION TYPE 2ter message is available

Early Classmark Sending Control (1 bit field)

- L Early Classmark Sending is forbidden
- H Early Classmark Sending is allowed

WHERE (3 bit field)

If the **WHERE** field is not contained in the information element, this indicates that BCCH scheduling information is not sent in SYSTEM INFORMATION TYPE 9 on the BCCH.

If the **WHERE** field is contained in the information element, this indicates that BCCH scheduling information is sent in SYSTEM INFORMATION TYPE 9 on the BCCH and that SYSTEM INFORMATION TYPE 9 messages are sent in the blocks of the BCCH norm for which ((FN DIV 51) mod (8) = 4 AND (((FN DIV 51) DIV 8) mod (n+1))= 0), where n is the value encoded in binary in WHERE.

GPRS Indicator

The **GPRS Indicator** contains the RA COLOUR field and the SI13_POSITION field. If the GPRS Indicator is contained in the information element, it indicates that GPRS is supported in the cell.

RA COLOUR (3 bit field)

If the mobile station receives different values of the RA COLOUR field in two cells belonging to the same location area or there are two cells belonging to different location areas, the mobile station shall interpret the cell re-selection information as if the two cells belong to different routeing areas. Otherwise, the mobile station shall interpret the cell reselection information as if the two cells belong to the same routeing area.

SI13_POSITION (1 bit field)

The SI13 POSITION field indicates the minimum schedule for where the SYSTEM INFORMATION TYPE 13 message is sent on BCCH, see 3GPP TS 45.002:

- 0 SYSTEM INFORMATION TYPE 13 message is sent on BCCH Norm;
- 1 SYSTEM INFORMATION TYPE 13 message is sent on BCCH Ext.

3G Early Classmark Sending Restriction (1 bit field)

- L Neither UTRAN nor cdma2000 classmark change message shall be sent with the Early classmark sending
- H The sending of UTRAN and CDMA2000 Classmark Sending messages is controlled by the Early Classmark Sending Control parameter

SI2quater Indicator struct

The presence of this field indicates that the SI2quater message is broadcast.

SI2quater POSITION (1 bit field)

This field indicates where the SYSTEM INFORMATION TYPE 2 quater message is sent:

- 0 SYSTEM INFORMATION TYPE 2 quater message is sent on BCCH Norm
- 1 SYSTEM INFORMATION TYPE 2 quater message is sent on BCCH Ext.

10.5.2.35 SI 4 Rest Octets

The SI 4 Rest Octets information element includes parameters which are used by the mobile station for cell selection and reselection purposes. It may also include the POWER OFFSET parameter used by DCS 1800 Class 3 MS.

Its content is described in Table 10.5.2.35a.1/3GPP TS 44.018.

NOTE: In the future evolution of this standard the values 64h and 72h shall not be used as values of the first octet when this information element is used in the SYSTEM INFORMATION TYPE 4 message. This will prevent mobile stations misinterpreting this information as the CBCH IEIs.

The SI 4 Rest Octets information element is a type 5 information element with 0 to 10 octets length.

Table 10.5.2.35.1/3GPP TS 44.018: SI 4 Rest Octets information element content

```
<SI4 Rest Octets> ::=
             <SI4 Rest Octets O>
             {L <Break indicator> | H <SI Rest Octets_S>}
             <spare padding>
} -- truncation allowed, bits 'L' assumed;
<SI4 Rest Octets_O> ::=
             <Optional selection parameters>
             <Optional Power offset>
             {L | H < GPRS Indicator >}
  -- truncation allowed, bits 'L' assumed
<SI4 Rest Octets_S> ::=
             {L | H <LSA Parameters>}
             {L | H < Cell Identity : bit(16)>}
             {L | H < LSA ID information>};
<Break Indicator> : :=
                       L|H;
<SI7 Rest Octets> ::=
                       <SI4 Rest Octets_O><SI4 Rest Octets_S> |<SI4 Rest Octets_S> ;
<SI8 Rest Octets> ::= <SI4 Rest Octets_O><SI4 Rest Octets_S> |<SI4 Rest Octets_S> ;
<Optional Selection Parameters> ::= L | H <Selection Parameters> ;
<Selection Parameters> ::=
                              <CBQ : bit (1)>
                           <CELL_RESELECT_OFFSET : bit (6)>
                                  <TEMPORARY_OFFSET : bit (3)>
                           < PENALTY_TIME : bit (5)>;
<Optional Power Offset> ::=
                              L | H < Power Offset : bit(2)>;
<GPRS Indicator> ::=
                              < RA COLOUR : bit (3) >
                                     < SI13 POSITION : bit > ;
<LSA Parameters> ::=
                              <PRIO_THR: bit (3)>
                              <LSA OFFSET: bit (3)>
                              {0 | 1 < MCC : bit (12)>
                               <MNC : bit (12)>};
<LSA ID information> ::=
                           <LSA identity>
                                  {0 | 1 < LSA ID information>};
                           {0 < LSA_ID : bit (24)>
<LSA identity> : :=
                               1 <ShortLSA_ID : bit (10)>};
If "ACS" in the System information type 4 message is set to "1" then the SI 7 and SI 8 rest octets consists of "SI4 Rest
Octets_O" and "SI4 Rest Octets_S", otherwise of only "SI4 Rest Octets_S".
```

Table 10.5.2.35.2/3GPP TS 44.018: SI 4 Rest Octets information element details

CBQ, CELL_BAR_QUALIFY (1 bit field)

CELL_BAR_QUALIFY is used by the network to control mobile station cell selection and reselection. The use and coding of this parameter is defined in 3GPP TS 45.008.

CELL_RESELECT_OFFSET (6 bit field)

CELL_RESELECT_OFFSET is coded as the binary representation of the "CELL_RESELECT_OFFSET" in 3GPP TS 45.008. It is a value used by the mobile station to apply a positive or negative offset to the value of C2 as defined in 3GPP TS 23.022 and 3GPP TS 45.008.

TEMPORARY OFFSET (3 bit field)

The TEMPORARY_OFFSET field is coded as the binary representation of the "TEMPORARY_OFFSET" in 3GPP TS 45.008. It is used by the mobile station as part of its calculation of C2 for the cell reselection process as described in 3GPP TS 45.008. It is used to apply a negative offset to C2 for the duration of PENALTY_TIME.

PENALTY_TIME (5 bit field)

The PENALTY_TIME is coded as the binary representation of the "PENALTY_TIME" in 3GPP TS 45.008. It defines the length of time for which TEMPORARY_OFFSET is active. The usage of PENALTY_TIME is described in 3GPP TS 23.022 and 3GPP TS 45.008.

POWER OFFSET (2 bit field)

POWER OFFSET is used only by DCS 1800 Class 3 MSs to add a power offset to the value of MS_TXPWR_MAX_CCH used for its random access attempts. It is also used by the MS in its calculation of C1 and C2 parameters. Its use is defined in 3GPP TS 45.008.

If this parameter is transmitted on a BCCH carrier within the DCS 1800 band, its meaning shall be described below:

Value	Meaning
00	0 dB power offset
01	2 dB power offset
10	4 dB power offset
11	6 dB power offset

If this parameter is transmitted on a BCCH carrier outside the DCS 1800 band, then all bit positions shall be treated as spare.

GPRS Indicator

The **GPRS Indicator** contains the RA COLOUR field and the SI13_POSITION field. If the GPRS Indicator is contained in the information element, it indicates that GPRS is supported in the cell.

RA COLOUR (3 bit field)

If the mobile station receives different values of the RA COLOUR field in two cells belonging to the same location area or there are two cells belonging to different location areas, the mobile station shall interpret the cell re-selection information as if the two cells belong to different routeing areas. Otherwise, the mobile station shall interpret the cell re-selection information as if the two cells belong to the same routeing area.

SI13 POSITION (1 bit field)

The SI13 POSITION field indicates the minimum schedule for where the SYSTEM INFORMATION TYPE 13 message is sent on BCCH, see 3GPP TS 45.002:

- 0 SYSTEM INFORMATION TYPE 13 message is sent on BCCH Norm;
- 1 SYSTEM INFORMATION TYPE 13 message is sent on BCCH Ext.

Break Indicator

The Break Indicator indicates if parameters in addition to those in SI 4 rest octets are sent in SI7 and SI8.

- L Additional parameters are not sent in SYSTEM INFORMATION TYPE 7 and 8.
- H Additional parameters, "SI4 Rest Octets_S", are sent in SYSTEM INFORMATION TYPE 7 and 8.

PRIO_THR (3 bit field)

The PRIO_THR field is a signal threshold used by the mobile station to determine whether prioritised cell re-selection shall apply. The use and coding of this parameters is defined in 3GPP TS 45.008.

LSA_OFFSET (3 bit field)

The LSA_OFFSET field applies an offset for LSA reselection between cells with same LSA priorities. The use and coding of this parameters is defined in 3GPP TS 45.008.

MCC and MNC (24 bit field)

If the escape PLMN is broadcast in SI3 and SI4 the cell is used for SoLSA exclusive access and the MCC and MNC field shall be included. The MS shall then for all purposes use the MCC and MNC values received in the LSA Parameters instead of the ones received in the Location Area information element in SI3 and 4, eg when deriving the PLMN identity, the Location Area Identity and Cell Global Identity broadcast by the cell. The MCC and MNC value field is coded as specified in Figure 10.5.2.37.1/3GPP TS 44.018 and Table 10.5.2.37.1/3GPP TS 44.018.

Cell Identity (16 bit field)

The purpose of the Cell Identity is to identify a cell within a location area. The Cell Identity is coded as shown in figure 10.2/3GPP TS 44.018 and table 10.5/3GPP TS 44.018

LSA ID (24 bit field)

The purpose of the LSA_ID field is to identify a LSA. The LSA ID value field is specified in 3GPP TS 23.003.

Short LSA_ID (10 bit field)

The purpose of the Short LSA_ID field is to identify a LSA. The LSA ID defined by the Short LSA_ID is a LSA_ID as specified in 3GPP TS 23.003 with bit 0 set to "0" bit 1 to 10 set to the value of the Short LSA_ID field (LSB in bit 1, MSB in bit 10) and bit 11 to 23 set to "0".

10.5.2.35a SI 6 Rest Octets

The SI 6 Rest Octet information element may contain information concerning the paging, notification channels, VBS and VGCS services of the cell.

The SI 6 Rest Octets information element is a type 5 information element with 7 octets length.

The value part is as shown below:

Table 10.5.2.35a.1/3GPP TS 44.018: SI 6 Rest Octets information element content

```
<SI6 rest octets> ::=
      {LIH < PCH and NCH info>}
       {LIH < VBS/VGCS options : bit(2)>}
   \{ < DTM \text{ support : bit } == L > \}
   I < DTM support : bit == H >
      < RAC : bit (8) >
      < MAX_LAPDm : bit (3) > }
      < Band indicator >
   <implicit spare >;
<PCH and NCH info> ::=
   <Paging channel restructuring>
   <NLN(SACCH): bit(2)>
   {0 I 1 < Call priority : bit (3)>}
   <NLN status : bit >;
<paging channel restructuring> ::=
          -- paging channel is restructured
   1
          -- paging channel is not restructured
<VBS/VGCS options> ::=
   <inband notifications>
   <inband pagings>;
<inband notifications>::=
   0 -- the network does not provide notification on FACCH so that the mobile should
          inspect the NCH for notifications
   1 -- the mobile shall be notified on incoming high priority VBS/VGCS calls through
          NOTIFICATION/FACCH, the mobile need not to inspect the NCH
<inband pagings>::=
          -- the network does not provide paging information on FACCH so that the mobile
   0
             should inspect the PCH for pagings
          -- the mobile shall be notified on incoming high priority point-to-point calls
             through NOTIFICATION/FACCH, the mobile need not to inspect the PCH
< Band indicator > ::=
    < BAND_INDICATOR : bit == L >
                                            -- ARFCN indicates 1800 band
   | < BAND_INDICATOR : bit == H > ;
                                              -- ARFCN indicates 1900 band
```

Table 10.5.2.35a.2/3GPP TS 44.018: SI 6 Rest Octets information element details

Attributes, field contents:

- 1. For <NLN(SACCH): bit(2)>: see 10.5.2.23.
- 2. For <call priority>: see 10.5.2.23. Indication of the highest priority associated with VBS/VGCS calls in a cell.

<u>DTM_support</u> (1 bit field)

This field indicates whether DTM is supported in the serving cell (i.e. whether the MS is allowed to initiate the packet request procedure while in dedicated mode). It is coded as follows:

Bit 0

- L DTM is not supported in the serving cell
- H DTM is supported in the serving cell

RAC (8 bit field)

This field codes the Routeing Area Code of the RA to which the serving cell belongs (see 3GPP TS 23.003).

MAX_LAPDm (3 bit field)

This field indicates the maximum number of LAPDm frames on which a layer 3 can be segmented into and be sent on the main DCCH. It is coded as follows:

Bit	210	
	000	Any message segmented in up to 5 LAPDm frames.
	0 0 1	Any message segmented in up to 6 LAPDm frames.
	010	Any message segmented in up to 7 LAPDm frames.
	0 1 1	Any message segmented in up to 8 LAPDm frames.
	100	Any message segmented in up to 9 LAPDm frames.
	101	Any message segmented in up to 10 LAPDm frames.
	1 1 0	Any message segmented in up to 11 LAPDm frames.
	111	Any message segmented in up to 12 LAPDm frames.

BAND_INDICATOR (1 bit field)

The band indicator for 1800 and 1900 associates the ARFCN channel numbers to the DCS 1800 respectively to the PCS 1900 band, see 3GPP TS 45.005.

10.5.2.36 SI 7 Rest Octets

The SI 7 Rest Octets information element includes parameters which are used by the mobile station for cell selection and reselection purposes. It may also include the POWER OFFSET parameter used by a DCS 1800 Class 3 MS.

The SI 7 Rest Octets information element is a type 5 information element with 20 octets length.

The SI 7 Rest Octets information element is coded as the SI 4 Rest Octets. Its contents is described in Table 10.5.2.35.1/3GPP TS 44.018 and 10.5.2.35.2/3GPP TS 44.018.

10.5.2.37 SI 8 Rest Octets

The SI 8 Rest Octets information element includes parameters which are used by the mobile station for cell selection and reselection purposes. It may also include the POWER OFFSET parameter used by a DCS 1800 Class 3 MS.

The SI 8 Rest Octets information element is a type 5 information element with 20 octets length.

The SI 8 Rest Octets information element is coded as the SI 4 Rest Octets. Its contents is described in Table 10.5.2.35a.1/3GPP TS 44.018 and 10.5.74/3GPP TS 44.018.

10.5.2.37a SI 9 Rest Octets

The SI 9 Rest Octets information element contains information about scheduling of some or all of the information on the BCCH.

The SI 9 Rest Octets information element is a type 5 information element with 17 octets length.

Table 10.5.2.37a.1/3GPP TS 44.018: SI 9 Rest Octets information element content

```
      <SI9 rest octets>
      ::= {L | H < Scheduling info>} {cspare padding>;

      <Scheduling info>
      ::= <Info type> <Positions> {0 | 1 < Scheduling info>};

      <Info type>
      ::= 0 < Info_type_4: bit (4)> | 1 0 < Info_type_5: bit (5)> | 1 1 < Info_type_6: bit6)>;

      <Positions>
      ::= <Position> {0 | 1 < Position>}
```

Table 10.5.2.37a.2/3GPP TS 44.018: SI 9 rest octet information element details

Attributes

The *scheduling info* indicates one or more information types (in *info type*) together with their *positions*. Here, a *position* specifies at which relative position P (specified in **relative_position**) modulo a position modulus M (specified in **modulus**) messages of the given information type are sent, on the BCCH norm or BCCH ext (see 3GPP TS 45.002) as indicated in **bcch_type**. Precisely, messages of the given information type are sent in the multiframes for which

((frame number) DIV 51) mod(M) = P.

If the position modulus M equals 0, the information type is not sent.

Field contents

The fields of the SI 9 Rest Octets information element are coded as shown in table 10.5.37a.1/3GPP TS 44.018.

Info_type_4_(4 bits)

This field contains a binary encoded non-negative integer number assigned to a type of information sent on the BCCH. All values indicate unknown, unnecessary information and are reserved for future use.

Info_type_5 (5 bits)

This field contains a binary encoded non-negative integer number assigned to a type of information sent on the BCCH. All values except those defined below indicate unknown, unnecessary information and are reserved for future use.

Info_type_5:	
0 0000	System Information type 1
0 0001	System Information type 2
0 0010	System Information type 2bis
0 0011	System Information type 2ter
0 0100	System Information type 3
0 0101	System Information type 4
0 0110	System Information type 7
0 0111	System Information type 8
0 1000	System Information type 9
0 1001	System Information type 13
0 1011	System Information type 16
0 1100	System Information type 17
0 1101	System Information type 18
0 1110	System Information type 19
0 1111	System Information type 20

Info_type_6_(6 bits)

This field contains a binary encoded non-negative integer number assigned to a type of information sent on the BCCH. All values indicate unknown, unnecessary information and are reserved for future use.

modulus (4 bits)

This field encodes the **position modulus**, according to the following encoding method. Let N be the integer encoded in binary in the **modulus** field; the **position modulus** is then defined as follows:

If N=0, the **position modulus** is 0, if N>0, the **position modulus** is 2^{N+1} .

relative position (0 bits if the non-negative integer n contained in the **modulus** field is 0; n+1 bits, if the non-negative integer N encoded in the **modulus** field is > 0.

This field contains the N+1 bit binary encoding of a non-negative integer number $< 2^{N+1}$.

10.5.2.37b SI 13 Rest Octets

The SI 13 Rest Octets information element is coded according to the syntax specified below and described in tables 10.5.2.37b.1/3GPP TS 44.018.

The SI 13 Rest Octets information element is a type 5 information element with 20 octets length.

Table 10.5.2.37b.1/3GPP TS 44.018: SI 13 Rest Octets information element content

```
< SI 13 Rest Octets > ::=
   { L | H
       < BCCH CHANGE MARK: bit (3) >
      < SI_CHANGE_FIELD : bit (4) >
      { 0 | 1 < SI13_CHANGE_MARK : bit (2) >
             < GPRS Mobile Allocation : GPRS Mobile Allocation IE > }
                                                                              -- Defined in 3GPP TS 44.060
      { 0
                                                                              -- PBCCH not present in cell:
          < RAC : bit (8) >
          < SPGC_CCCH_SUP : bit >
          < PRIORITY_ACCESS_THR : bit (3) >
          < NETWORK_CONTROL_ORDER : bit (2) >
          < GPRS Cell Options : GPRS Cell Options IE >
                                                                              -- Defined in 3GPP TS 44.060
          < GPRS Power Control Parameters : GPRS Power Control Parameters struct >
                           -- PBCCH present in cell:
          < PSI1_REPEAT_PERIOD : bit (4) >
          < PBCCH Description : PBCCH Description struct >
      { null | L
                                                                    -- Receiver compatible with ealier release
                                                                    -- Additions in release 99:
          < SGSNR : bit >
                                                                    -- Receiver compatible with earlier release
      { null | L
       | H
                                                                    -- Additions in release R4°:
          < SI_STATUS_IND°: bit > } }
   < spare padding > ;
< GPRS Power Control Parameters struct > ::=
   < ALPHA : bit (4) >
   < T_AVG_W : bit (5) >
   < T_AVG_T : bit (5) >
   < PC_MEAS_CHAN : bit >
   < N_AVG_I : bit (4) >;
< PBCCH Description struct > ::=
   <Pb : bit (4)
   < TSC : bit (3) >
   < TN : bit (3) >
   { 00 -- BCCH carrier
        < ARFCN : bit (10) >
   | 01
         < MAIO : bit (6) >};
   | 1
```

Table 10.5.2.37b.2/3GPP TS 44.018: SI 13 Rest Octets information element

BCCH CHANGE MARK (3 bit field)

This field indicates the status of the information on BCCH. The value of this field may be changed when information on BCCH is changed, see 3GPP TS 44.060.

SI CHANGE FIELD (4 bit field)

This field is the binary representation of which information was changed at the last indication in BCCH_CHANGE_MARK, see 3GPP TS 44.060. Range 0 to 15:

- 0 Update of *unspecified* SI message or SI messages;
- 1 Update of SI1 message;
- 2 Update of SI2, SI2 bis or SI2 ter message or any instance of SI2quater messages;
- 3 Update of SI3, SI4, SI7 or SI8 message;
- 4 Update of SI9 message;
- 5 Update of SI18 or SI20 message;
- 6 Update of SI19 message;

All other values shall be interpreted as 'update of unknown SI message type'.

SI13 CHANGE MARK (2 bit field)

This field is the binary representation of the SI change mark identifying the GPRS Mobile Allocation provided in SI13 and PSI13 messages. Range: 0 to 3.

GPRS Mobile Allocation (information element)

This information element is the representation of the GPRS mobile allocation provided in SI13 and PSI13 messages. It is identified by MA_NUMBER = 14 when referenced from a packet assignment message. The *GPRS Mobile Allocation* information element is defined in 3GPP TS 44.060. When used in SI13 or PSI13 message, this information element shall refer to the cell allocation defined for the cell in SI1 or PSI2.

RAC (8 bit field)

This field is the binary representation of the Routing Area Code, see 3GPP TS 23.003.

SPGC CCCH SUP (bit field)

This field indicates the support of the parameter SPLIT PG CYCLE on CCCH from the network side:

- 0 SPLIT_PG_CYCLE is not supported on CCCH in this cell;
- 1 SPLIT_PG_CYCLE is supported on CCCH in this cell.

The **PRIORITY_ACCESS_THR** field (3 bit) is the binary representation of the parameter PRIORITY_ACCESS_THR:

- 000 packet access is not allowed in the cell;
- 0 0 1 spare, shall be interpreted as '000' (packet access not allowed);
- 0 1 0 spare, shall be interpreted as '000' (packet access not allowed);
- 0 1 1 packet access is allowed for priority level 1;
- 100 packet access is allowed for priority level 1 to 2;
- 101 packet access is allowed for priority level 1 to 3;
- 1 1 0 packet access is allowed for priority level 1 to 4;
- 1 1 1 spare, shall be interpreted as '110' (packet access allowed).

The **NETWORK_CONTROL_ORDER** field (2 bit) is the binary representation of the parameter NETWORK_CONTROL_ORDER, see 3GPP TS 44.060:

- 0.0 NC0: MS controlled cell re-selection, no measurement reporting.
- 0 1 NC1: MS controlled cell re-selection, MS sends measurement reports.
- 10 NC2: Network controlled cell re-selection, MS sends measurement reports.
- 1 1 Reserved for future use, interpreted as NC0 by mobile station.

GPRS Cell Options (information element)

The GPRS Cell Option information element is defined in 3GPP TS 44.060.

PSI1_REPEAT_PERIOD (4 bit field)

This field is the representation of the PSI1 repeat period. The field is coded according to the following table:

```
    0000 PSI1 repeat period = 1 multiframe
    0001 PSI1 repeat period = 2 multiframes
    :
    1111 PSI1 repeat period = 16 multiframes
```

GPRS Power Control Parameters struct

The **ALPHA** field (4 bit) is the binary representation of the parameter α for MS output power control in units of 0.1, see 3GPP TS 45.008: Range: 0 to 10. Values greater than 10 shall be interpreted as 10 by the mobile station.

The **T_AVG_W** field (5 bit) is the binary representation of the parameter T_{AVG_W} for MS output power control, see 3GPP TS 45.008: Range: 0 to 25. Values greater than 25 shall be interpreted as 25 by the mobile station.

The T_AVG_T field (5 bit) is the binary representation of the parameter T_{AVG_T} for MS output power control, see 3GPP TS 45.008: Range: 0 to 25. Values greater than 25 shall be interpreted as 25 by the mobile station.

The PC_MEAS_CHAN field (bit) indicates the type of channel which shall be used for downlink measurements for power control:

- 0 BCCH:
- 1 PDCH.

The N_AVG_I field (4 bit) is the binary representation of the parameter N_{AVG_I} for MS output power control, see 3GPP TS 45.008: Range: 0 to 15.

PBCCH Description struct

The PBCCH description struct provides the channel description for the PBCCH. The frequency description for the PBCCH may be specified by an ARFCN (non-hopping radio frequency channel) or a MAIO (hopping radio frequency channel) field. In case of a hopping radio frequency channel, the PBCCH shall use the GPRS mobile allocation specified in this message. If none of the ARFCN or MAIO fields are present, the PBCCH shall use the BCCH carrier.

Pb (4bit) (for encoding and description see the Global Power Control Parameters IE)

The TSC field (3 bit) is the binary representation of the training sequence code used for PBCCH. Range: 0 to 7.

The TN field (3 bit) is the binary representation of the timeslot number for the PBCCH. Range: 0 to 7.

The ARFCN field (10 bit) is the binary representation of the absolute RF channel number. Range: 0 to 1023.

The MAIO field (6 bit) is the binary representation of the mobile allocation index offset. Range: 0 to 63.

SGSNR, SGSN Release (bit field)

- 0 SGSN is Release '98 or older
- 1 SGSN is Release '99 onwards

SI_STATUS_IND (1 bit field):

- 0 The network does not support the PACKET SI STATUS message;
- 1 The network supports the PACKET SI STATUS message.

10.5.2.37c (void)

10.5.2.37d (void)

10.5.2.37e SI 16 Rest Octets

The SI 16 Rest Octets information element includes parameters which are used by the mobile station for cell selection and reselection purposes.

The SI 16 Rest Octets information element is coded according to the syntax specified below. Its contents is described in Table 10.5.2.37c.1/3GPP TS 44.018.

The SI 16 Rest Octets information element is a type 5 information element with 20 octets length.

Table 10.5.2.37e.1/3GPP TS 44.018: SI 16 Rest Octets information element

Table 10.5.2.37e.2/3GPP TS 44.018: SI 16 Rest Octets information element details

PRIO THR (3 bit field)

The PRIO_THR field is a signal threshold used by the mobile station to determine whether prioritised cell re-selection shall apply. The use and coding of this parameters is defined in 3GPP TS 45.008.

LSA_OFFSET (3 bit field)

The LSA_OFFSET field applies an offset for LSA reselection between cells with same LSA priorities. The use and coding of this parameters is defined in 3GPP TS 45.008.

MCC and MNC (24 bit field)

If the escape PLMN is broadcast in SI3 and SI4 the cell is used for SoLSA exclusive access and the MCC and MNC field shall be included. The MS shall then for all purposes use the MCC and MNC values received in the LSA Parameters instead of the ones received in the Location Area information element in SI3 and 4, eg when deriving the PLMN identity, the Location Area Identity and Cell Global Identity broadcast by the cell. The MCC and MNC value field is coded as specified in Figure 10.5.33GPP TS 44.018 and Table 10.5.3/3GPP TS 44.018.

LSA_ID (24 bit field)

The purpose of the LSA_ID field is to identify a LSA. The LSA ID value field is coded as specified in 3GPP TS 23.003.

Short LSA ID (10 bit field)

The purpose of the Short LSA_ID field is to identify a LSA. The LSA ID defined by the Short LSA_ID is a LSA_ID as specified in 3GPP TS 23.003 with bit 0 set to "0" bit 1 to 10 set to the value of the Short LSA_ID field (LSB in bit 1, MSB in bit 10) and bit 11 to 23 set to "0".

10.5.2.37f SI 17 Rest Octets

The SI 17 Rest Octets information element includes parameters, which are used by the mobile station for cell selection and reselection purposes.

The SI 17 Rest Octets information element is a type 5 information element with 20 octets length.

The SI 17 Rest Octets information element is coded as the SI 16 Rest Octets. Its contents is described in Tables 10.5.2.37e.1/3GPP TS 44.018 and 10.5.2.37e.2/3GPP TS 44.018.

10.5.2.37g SI 19 Rest Octets

The SI 19 Rest Octets information element contains information for cell re-selection to COMPACT channels.

The SI 19 Rest Octets information element is a type 5 information element with 20 octets length.

The value part is coded as shown below:

Table 10.5.2.37g.1/3GPP TS 44.018: SI 19 Rest Octets information element

```
< SI 19 Rest Octets > ::=
          < SI19_CHANGE_MARK: bit (2) >
          < SI19_INDEX : bit (3) >
         < SI19_LAST : bit (1) >
          < COMPACT Neighbour Cell Parameters : < COMPACT Neighbour Cell params struct > >
          < spare padding >:
< COMPACT Neighbour Cell params struct > ::=
         { 1 < START_FREQUENCY : bit (10) >
             < COMPACT Cell selection params : COMPACT Cell Selection struct >
             < NR_OF_REMAINING_CELLS : bit (4) >
             < FREQ_DIFF_LENGTH : bit (3) >
             { < FREQUENCY_DIFF : bit (n) >
                              < COMPACT Cell Selection struct > > } * val(NR_OF_REMAINING_CELLS } ** 0;
< COMPACT Cell Selection struct > ::=
         { 0 < BCC : bit (3)> | 1 < BSIC : bit (6)> }
          < CELL_BARRED : bit (1) >
          < CBQ2 : bit (2) >
          { < LA Different parameters : < LA Different struct > > }
          { 0 | 1 < MS_TXPWR_MAX_CCH : bit (5) > }
          { 0 | 1 < RXLEV ACCESS MIN : bit (6) > }
          { 0 | 1 < CELL_RESELECT_OFFSET : bit (6) > }
         { 0 | 1 < TEMPORARY_OFFSET: bit (3)
                < PENALTY_TIME : bit (5) > }
          { 0 | 1 < TIME_GROUP : bit (2) > }
         \{ 0 \mid 1 < GUAR\_CONSTANT\_PWR\_BLKS : bit (2) > \} ;
< LA Different struct > : :=
         \{ 0 \mid 1 < CELL\_RESELECT\_HYSTERISIS : bit (3) > ; \}
```

Table 10.5.2.37g.2/3GPP TS 44.018: SI 19 Rest Octets information element details

SI19 CHANGE MARK (2 bit field)

The SI19 change mark field is changed each time information has been updated in any of the SI19 messages. A new value indicates that the mobile station shall re-read the information from all the SI19 messages. The coding of this field is network dependent.

Range: 0-3.

SI19 INDEX (3 bit field)

The SI19_INDEX field is used to distinguish individual SI19 messages containing information about different neighbour cells. The field can take the binary representation of the values 0 to n, where n is the index of the last SI19 message.

Range: 0-7.

SI19_LAST (1 bit field)

This field is coded as binary one if the SI19_INDEX in this message is the last SI19 message (*i.e.*, it represents the highest SI19_INDEX being broadcast). If the field is coded as binary zero, then this is not the last SI19 message.

Range: 0-1.

START_FREQUENCY (10 bit field)

The Start Frequency defines the ARFCN for the BCCH frequency of the first cell in the list.

FREQ DIFF LENGTH (3 bit field)

The Freq Diff length field specifies the number of bits to be used for the Frequency diff field in the current Frequency group. The field is coded according to the following table

```
3 2 1
0 0 0 1 bit
0 0 1 2 bits
...
1 1 1 8 bits
```

NR OF REMAINING CELLS (4 bit field)

This field specifies the remaining number of cells that are defined in the frequency group. For each of them the parameters 'Frequency diff' and 'Cell selection params' will be repeated.

Range 1-16.

COMPACT Cell Selection params

This struct contains information about COMPACT neighbour cells. The first field of the COMPACT Cell Selection struct, BSIC, defines the BSIC of the cell and then comes the field same RA as serving cell. Then follows none, some, or all of the fields MS_TXPWR_MAX_CCH, RXLEV ACCESS MIN, CELL_RESELECT_OFFSET, TEMPORARY_OFFSET, PENALTY_TIME, TIME_GROUP, GUAR_CONSTANT_PWR_BLKS. If fields are omitted, the values for these parameters are the same as for the preceding cell.

FREQUENCY_DIFF ("Freq Diff length" bit field)

The Frequency Diff field specifies the difference in ARFCN to the BCCH carrier in the next cell to be defined. Note that the difference can be zero if two specified cells use the same frequency.

BSIC (6 bit field)

The BSIC field is coded as the "Base Station Identity Code" defined in 3GPP TS 23.003.

BCC (3 bit field)

The BCC is specified by encoding its binary representation; it specifies the BSIC given by that BCC and the NCC of the BSIC specified by the previous occurrence of <BCC : bit(3)> or <BSIC : bit(6)>.

CELL_BARRED (1 bit field)

- 0 The cell is not barred
- 1 The cell is barred

CBQ2 (2 bit field)

Cell Bar Qualify 2. Coded as described in Table 10.5.2.11.1/3GPP TS 44.018.

TIME_GROUP (2 bit field)

The TIME_GROUP defines which time group (see 3GPP TS 45.002) the cell belongs to

0 0 Time Group 0 0 1 Time Group 1

1 0 Time Group 2

1 1 Time Group 3

GUAR_CONSTANT_PWR_BLKS (2 bit field)

This field indicates the guaranteed number of constant power blocks in the neighbour cell. These are the blocks that the MS can use to perform neighbour cell measurements (see 3GPP TS 45.008). Note that there may be more CPBCCH blocks or allowed paging blocks in the neighbour cell than what is indicated in this field, but never less.

```
Bit
2 1 Blocks at constant power
0 0 4
0 1 5
1 0 6
1 1 12 (i.e. BS_PAG_BLKS_RES = 0 in that cell)
```

10.5.2.37h SI 18 Rest Octets

The SI 18 Rest Octets information element includes parameters for non-GSM networks.

The SI 18 Rest Octets information element is a type 5 information element and is 20 octets long.

Several Non-GSM information containers may be mapped into one instance of this information element, separated by a Non-GSM protocol discriminator. The last Non-GSM information container may be continued in a subsequent instance of this information element.

Table 10.5.2.37h.1/3GPP TS 44.018: SI 18 Rest Octets information element

Table 10.5.2.37h.2/3GPP TS 44.018: SI 18 information element details

SI18_INDEX (3 bit field)

The SI18_INDEX field is used to distinguish individual SI18 messages. The field can take the binary representation of the values 0 to n, where n is the index of the last SI18 message.

Range: 0-7.

```
SI18_LAST (1 bit field)
```

This field is coded as binary one if the SI18_INDEX in this message is the last instance of the SI18 messages (*i.e.*, it represents the highest SI18_INDEX being broadcast). Otherwise, this field is coded as binary zero.

Range: 0-1.

Non-SM Protocol Discriminator (3 bit field)

This information element is used to identify the non-GSM network for which a SI18 message is transmitted and is coded as shown below.

bit 3 2 1

0 0 1 TIA/EIA-136

All other values are reserved

NR OF CONTAINER OCTETS (5 bit field)

This field indicates the number of CONTAINER octets that forms a specific non-GSM message and is coded as shown below.


Bit	
5 4 3 2 1	
$0\ 0\ 0\ 0\ 0$	Zero octets. There are no more NonGSM Message s embedded in this SI message. The
	Non-GSM Protocol Discriminator field is spare (<i>i.e.</i> , sent as '000', not verified by the receiver).
00001	CONTAINER length is 1 octet
00010	CONTAINER length is 2 octets
through	
10010	CONTAINER length is 18 octets
11111	The remaining portion of the SI message instance is used by the associated CONTAINER . The
	Non-GSM message continues in a subsequent instance of the SI message, in the next
	CONTAINER with the same Non-GSM Protocol Discriminator value as the current one.

All other values are reserved.

CONTAINER (8 bits)

The concatenation of one or several CONTAINER octets forms the actual contents, specific to the non-GSM network soliciting the transmission of a S118 message.

NOTE: The format of SI 18 Rest Octets when 2 different Non-GSM messages are sent is exemplified below.

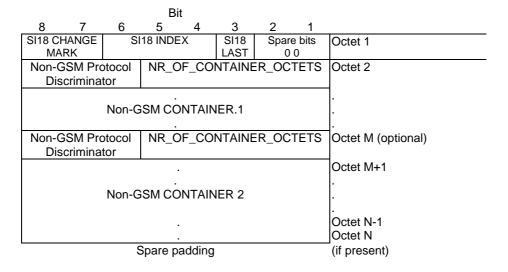

10.5.2.37i SI 20 Rest Octets

The SI 20 Rest Octets information element includes parameters for non-GSM networks.

The SI 20 Rest Octets information element is a type 5 information element and is 20 octets long.

The SI 20 Rest Octets are defined as the SI 18 Rest Octets, see also 10.5.2.37h.

10.5.2.37j SI 14 Rest Octets

The SI 14 Rest Octets information element contains information about dynamic ARFCN mapping. It allows to allocate ARFCN values and dynamically map them to physical frequencies, see 3GPP TS 45.005.

The SI 14 Rest Octets information element is a type 5 information element with 20 octet length.

Table 10.5.2.37j.1/3GPP TS 44.018: SI14 message content

Table 10.5.2.37j.2/3GPP TS 44.018: SI14 message information

SI14_INDEX (2 bit field)

The SI14_INDEX field is used to distinguish individual SI14 messages. The field can take the binary representation of the values 0 to n, where n is the index of the last SI14 message. (SI14_COUNT).

SI14 COUNT (2 bit field)

This field is coded as the binary representation of the SI14_INDEX for the last (highest indexed) individual SI14 message.

DM_CHANGE_MARK (4 bit field), Dynamic ARFCN Mapping Change Mark.

This parameter is used to indicate to the MS a change of information concerning Dynamic ARFCN Mapping.

286

Dynamic ARFCN Mapping parameters description:

GSM_Band (4 bit field)

This field indicates the band applicable for the parameters in this structure.

```
Bits 4 – 1
4 3 2 1
0 0 0 0 0 GSM 750
0 0 0 1 DCS 1800
0 0 1 0 PCS 1900
```

All other values are reserved for future use and shall not be interpreted as an error.

ARFCN_FIRST (10 bit field)

This parameter indicates the first ARFCN number for dynamic ARFCN mapping.

BAND_OFFSET (10 bit field)

This parameter indicates the first carrier, on the band concerned, for dynamic ARFCN mapping.

ARFCN RANGE (7 bit field)

This parameter indicates the number of ARFCNs allocated, subsequent to ARFCN_FIRST.

The use of the parameters GSM_Band, ARFCN_FIRST, BAND_OFFSET and ARFCN_RANGE is described in 3GPP TS 45.005.

If the mobile station receives more than 8 DYNAMIC_ARFCN_MAPPING structures, it shall store at least the 8 first structures in the order of occurrence, starting with the SI14 instance with the lowest index number.

NOTE: For important guidelines on Dynamic ARFCN mapping, see Annex "Guidance on the Usage of Dynamic ARFCN Mapping" in 3GPP TS 45.005.

10.5.2.37k SI 15 Rest Octets

The SI 15 Rest Octets information element contains information about dynamic ARFCN mapping. It allows to allocate ARFCN values and then dynamically map to physical frequencies, see 3GPP TS 45.005.

The SI 15 Rest Octets information element is a type 5 information element with 20 octet length.

Table 10.5.2.37k.1/3GPP TS 44.018: SI15 message content

Table 10.5.2.37k.2/3GPP TS 44.018: SI15 message information

SI15_INDEX (2 bit field)

The SI15_INDEX field is used to distinguish individual SI15 messages. The field can take the binary representation of the values 0 to n, where n is the index of the last SI15 message. (SI15_COUNT).

SI15_COUNT (2 bit field)

This field is coded as the binary representation of the SI15_INDEX for the last (highest indexed) individual SI15 message.

DM_CHANGE_MARK (4 bit field), Dynamic ARFCN Mapping Change Mark.

This parameter is used to indicate to the MS a change of information concerning Dynamic ARFCN Mapping.

Dynamic ARFCN Mapping parameters description

These parameters are described in Table 10.5.2.37j.

10.5.2.38 Starting Time

The purpose of the *Starting Time* information element is to provide the start TDMA frame number, FN modulo 42432.

The *Starting Time* information element is coded as shown in Figure 10.5.2.38.1/3GPP TS 44.018 and Table 10.5.2.38.1/3GPP TS 44.018.

The Starting Time is a type 3 information element with 3 octets length.




Figure 10.5.2.38.1/3GPP TS 44.018: Starting Time information element

Table 10.5.2.38.1/3GPP TS 44.018: Starting Time information element

```
T1' (octet 2)
The T1' field is coded as the binary representation
of (FN div 1326) mod 32.
   (octet 2 and 3)
Т3
The T3 field is coded as the binary representation
of FN mod 51. Bit 3 of octet 2 is the most
                 and bit 6 of octet 3 is the least
significant
            bit
significant bit.
T2 (octet 3)
The T2 field is coded as the binary representation
of FN mod 26.
NOTE 1: The frame number, FN modulo 42432 can be cal-
        culated as 51x((T3-T2) \mod 26)+T3+51x26xT1'
```

The starting time and the times mentioned above are with reference to the frame numbering in the concerned cell. They are given in units of frames (around 4.615 ms).

The *Starting Time* IE can encode only an interval of time of 42 432 frames, that is to say around 195.8 seconds. To remove any ambiguity, the specification for a reception at time T is that the encoded interval is (T-10808, T+31623). In rigorous terms, if we note ST the starting time:

if $0 \le (ST-T) \mod 42432 \le 31623$, the indicated time is the next time when FN mod 42432 is equal to ST if $32024 \le (ST-T) \mod 42432 \le 42431$, the indicated time has already elapsed.

The reception time T is not specified here precisely. To allow room for various MS implementations, the limit between the two behaviours above may be anywhere within the interval defined by

```
31624 \le (ST-T) \mod 42432 \le 32023.
```

10.5.2.39 Synchronization Indication

The purpose of *Synchronization Indication* information element is to indicate which type of handover is to be performed.

The *Synchronization Indication* information element is coded as shown in Figure 10.5.2.39.1/3GPP TS 44.018 and Table 10.5.2.39.1/3GPP TS 44.018.

The Synchronization Indication is a type 1 information element.




Figure 10.5.2.39.1/3GPP TS 44.018: Synchronization Indication information element

Table 10.5.2.39.1/3GPP TS 44.018: Synchronization Indication information element

```
ROT: Report Observed Time Difference (Octet1 bit 3)
     Mobile Time Difference IE shall not be included
0
     in the HANDOVER COMPLETE message
1
     Mobile Time Difference IE shall be included in
     the HANDOVER COMPLETE message
SI: Synchronization indication (octet 1)
Bit
2 1
0 0
    Non-synchronized
0 1
     Synchronized
1 0
     Pre-synchronised
1 1
    Pseudo-synchronised
NCI: Normal cell indication (octet 1, bit 4)
     Out of range timing advance is ignored
     Out of range timing advance shall trigger
     a handover failure procedure
```

10.5.2.40 Timing Advance

The purpose of the *Timing Advance* information element is to provide the timing advance value.

The $Timing\ Advance$ information element is coded as shown in Figure 10.5.2.40.1/3GPP TS 44.018 and Table 10.5.2.40.1/3GPP TS 44.018

The *Timing Advance* is a type 3 information element with 2 octets length.




Figure 10.5.2.40.1/3GPP TS 44.018: Timing Advance information element

Table 10.5.2.40.1/3GPP TS 44.018: Timing Advance information element

```
Timing advance value (octet 2)
The coding of the timing advance value field is the binary representation of the timing advance in bit
```

```
periods; 1 bit period = 48/13~\mu s. For all the bands except GSM 400, the values 0 - 63 are valid TA values, and bit 7 and bit 8 are set to spare. For GSM 400, the values 0 to 219 are vaild TA values. The remaining values 220 to 255 decimal are reserved.
```

10.5.2.41 Time Difference

The purpose of the *Time Difference* information element is to provide information about the synchronization difference between the time bases of two Base Stations. This type of information element is used in relation with the pseudo-synchronization scheme, see 3GPP TS 45.010.

The *Time Difference* information element is coded as shown in Figure 10.5.2.41.1/3GPP TS 44.018 and Table 10.5.2.41.1/3GPP TS 44.018.

The *Time Difference* information element is a type 4 information element with 3 octets length.




Figure 10.5.2.41.1/3GPP TS 44.018: Time Difference information element

Table 10.5.2.41.1/3GPP TS 44.018: Time Difference information element

```
Time Difference value (octet 3) The coding of the time difference value field is the binary representation of time difference in half bit periods, modulo 256 half bit periods; 1/2 bit period = 24/13~\mu s.
```

10.5.2.41a TLLI

The purpose of the *TLLI* information element is to provide the Temporary Logical Link Identifier.

The *TLLI* information element is coded as shown in Figure 10.5.2.41a.1/3GPP TS 44.018 and Table 10.5.2.41a.1/3GPP TS 44.018.

The *TLLI* is a type 3 information element with 5 octets length.




Figure 10.5.2.41a.1/3GPP TS 44.018: TLLI information element

Table 10.5.2.41a.1/3GPP TS 44.018: *TLLI* information element

```
TLLI value (octet 2, 3, 4 and 5)
Bit 8 of octet 2 is the most significant bit and bit
1 of octet 5 is the least significant bit.

The TLLI is encoded as a binary number with a
length of 4 octets. TLLI is defined in 3GPP TS 23.003
```

10.5.2.42 TMSI/P-TMSI

The purpose of the *TMSI/P-TMSI* information element is to provide the Temporary Mobile Subscriber Identity for paging purposes.

The *TMSI/P-TMSI* information element is coded as shown in Figure 10.5.2.42.1/3GPP TS 44.018 and Table 10.5.2.42.1/3GPP TS 44.018.

The TMSI/P-TMSI is a type 3 information element with 5 octets length.




Figure 10.5.2.42.1/3GPP TS 44.018: TMSI/P-TMSI information element

Table 10.5.2.42.1/3GPP TS 44.018: TMSI/P-TMSI information element

TMSI/P-TMSI value (octet 2, 3, 4 and 5)

Bit 8 of octet 2 is the most significant bit and bit 1 of octet 5 is the least significant bit.

The coding of the TMSI/P-TMSI is left open for each administration according to 3GPP TS 23.003. The length is 4 octets.

NOTE: For purposes other than paging the TMSI/P-TMSI should be provided using the mobile identity information element.

10.5.2.42a VGCS target mode Indication

The VGCS target mode Indication information element is a type 3 information element with 2 octets length.

8	7	6	5	4	3	2	1	
			VGCS ta	rget mode	Indic. IEI			octet 1
		Length	of VGCS t	target mod	le Indic.			octet 2
Target	mode	Gr	oup cipher	key numb	er	1	1	octet 3
						spare	spare	

Figure 10.5.2.42a.1/3GPP TS 44.018: VGCS target mode Indication information element

Table 10.5.2.42a.1/3GPP TS 44.018: VGCS target mode information element

```
Target mode (octet 3)
Bit
8 7
0 0
           dedicated mode
0 1
           group transmit mode
Other values are reserved for future use.
Group cipher key number (octet 3)
Bit
6 5 4 3
0 0 0 0
           no ciphering
0 0 0 1
           cipher key number 1
0 0 1 0
           cipher key number 2
0 0 1 1
           cipher key number 3
0 1 0 0
           cipher key number 4
0 1 0 1
           cipher key number 5
 1 1 0
           cipher key number 6
0
 1 1 1
           cipher key number
 0 0 0
1
           cipher key number 8
1 0 0 1
           cipher key number 9
1 0 1 0
           cipher key number A
1
 0 1 1
           cipher key number B
1 1 0 0
           cipher key number C
1
 1 0 1
           cipher key number D
1 1 1 0
           cipher key number E
1 1 1 1
           cipher key number F
```

10.5.2.43 Wait Indication

The purpose of the *Wait Indication* information element is to provide the time the mobile station shall wait before attempting another channel request.

The *Wait Indication* information element is coded as shown in Figure 10.5.2.43.1/3GPP TS 44.018 and Table 10.5.2.43.1/3GPP TS 44.018.

The Wait Indication is a type 3 information element with 2 octets length.




Figure 10.5.2.43.1/3GPP TS 44.018: Wait Indication information element

Table 10.5.2.43.1/3GPP TS 44.018: Wait Indication information element

```
T3122/T3142 timeout value (octet 2)
This field is coded as the binary representation of the T3122/T3142 timeout value in seconds.
```

NOTE 1: The timeout value is used for T3122 when received in IMMEDIATE_ASSIGNMENT REJECT message for RR connection establishment. For GPRS MS the timeout value is used for T3142 when received in the IMMEDIATE ASSIGNMENT REJECT or DTM REJECT message for TBF establishment.

10.5.2.44 SI10 rest octets \$(ASCI)\$

The SI 10 rest octets information element contains information for cell re-selection in group receive mode.

The SI 10 Rest Octets information element is a type 5 information element with 20 octets length.

The value part is coded as shown below:

Table 10.5.2.44.1/3GPP TS 44.018: SI 10 Rest Octets information element

```
<SI10 rest octets> ::=
                              <BA ind : bitstring(1)>
               { L <implicit spare> | H <neighbour information> };
<neighbour information> ::= <first frequency: bitstring(5)> <cell info>
               { H <info field> }* L <implicit spare>;
<cell info> ::=
                      <br/><bsic : bitstring(6)> { H <cell parameters> | L }
<cell parameters> ::=
                          <cell barred> | L <further cell info>
<cell barred> ::=
                          <la different>
<further cell info> ::=
               <ms txpwr max cch : bitstring(5)>
               <rxlev access min : bitstring(6)>
               <cell reselect offset : bitstring(6)>
               <temporary offset : bitstring(3)>
               <penalty time : bitstring(5)>
<la different> ::=
                      { H <cell reselect hysteresis : bitstring(3)> | L }
                      <next frequency>* L <differential cell info>;
<info field> ::=
<next frequency> ::=
<differential cell info> ::=
                             { H <BCC : bitstring(3)> | L <bsic : bitstring(6)> }
               { H < diff cell pars> | L }
<diff cell pars> ::=
                          <cell barred> | L <further diff cell info>
<further diff cell info> ::= <la different>
               { H < ms txpwr max cch : bitstring(5)> | L }
                H <rxlev access min : bitstring(6)> | L }
               { H <cell reselect offset : bitstring(6)> | L }
                H <temporary offset : bitstring(3)> | L }
                H <penalty time : bitstring(5)> | L }
```

Static and dynamic conditions:

- 1) Information from the last received neighbour cell description in SYSTEM INFORMATION TYPE 5/5bis/5ter is necessary for the mobile station to interpret <neighbour information>. If <BA ind> is different from the last received BA IND value indicated in SYSTEM INFORMATION TYPE 5/5bis/5ter, <neighbour information> cannot be interpreted by the mobile station.
- 2) If the correspondence between neighbour cell frequencies and sets of pairs (BSIC, cell information) cannot be established following the rules below, or if more than one set of such pairs corresponds to one neighbour cell frequency, the mobile station shall diagnose an imperative message part error.

Attributes, field contents:

- 1) <cell info> defines a BSIC given by <bsic : bitstring(6)>. It also defines cell information. If <cell parameters> is contained in <cell info>, this cell information is the cell information given by <cell parameters>; if <cell parameters> is not contained in <cell info>, this cell information is empty.
- 2) <differential cell info> defines a BSIC given by <bsic : bitstring(6)> or by <BCC : bitstring(3)>, see below. It also defines cell information. If <diff cell pars> is contained in <differential cell info>, this cell information is the cell information given by <diff cell pars>; if <diff cell pars> is not contained in <differential cell info>, this cell information is empty.
- 3) <cell parameters> either indicates a barred cell (by presence of <cell barred>)or specifies cell information given by <further cell info>.
- 4) Each occurrence of <diff cell pars> either indicates a barred cell (by presence of <cell barred>)or specifies cell information given by <further diff cell info>.
- 5) <further cell info> specifies cell information given by its components

```
    - <la different>
    - <ms txpwr max cch : bitstring(5)>
    - <rxlev access min : bitstring(6)>
    - <cell reselect offset : bitstring(6)>
    - <temporary offset : bitstring(3)>
```

- <penalty time : bitstring(5)>,

as defined below.

6) For each occurrence of <further diff cell info>, a cell information is defined. This information is given by <la different> and remaining cell information established as follows:

The remaining cell information defined for the first occurrence of <further diff cell info> consists of the cell information given by its actual components plus the cell information specified by <further cell info> corresponding to its missing components.

The remaining cell information defined for a later occurrence of <further diff cell info> consists of the cell information given by its actual components plus the remaining cell information corresponding to its missing components which is defined for the previous occurrence of <further diff cell info>.

Here, the

"actual components" of an occurrence of <further diff cell info> denotes those parameters among

- <ms txpwr max cch : bitstring(5)>

- <rxlev access min : bitstring(6)>

- <cell reselect offset : bitstring(6)>

- <temporary offset : bitstring(3)>

- <penalty time : bitstring(5)>

which are present in that occurrence.

"missing components" of an occurrence of <differential cell info> denote those parameters among

- <ms txpwr max cch : bitstring(5)>

- <rxlev access min : bitstring(6)>

- < cell reselect offset : bitstring(6)>

- <temporary offset : bitstring(3)>

- <penalty time : bitstring(5)>

which are not present in that occurrence.

- 7) Each occurrence of <bsic : bitstring(6)> specifies a BSIC by encoding its binary representation. <BCC : bitstring(3)> specifies a BCC by encoding its binary representation; it specifies the BSIC given by that BCC and the NCC of the BSIC specified by the previous occurrence of <BCC : bitstring(3)> or <bsic : bitstring(6)>. All occurrences of <bsic: bitstring(6)> and <BCC : bitstring(3)> establish a list of BSIC.
- 8) <first frequency: bitstring(5)> is the 5 bit binary coding of an integer n with 0 <= n <= 31. It specifies a first frequency number n+1.
- 9) <SI10 rest octets> defines a correspondence between neighbour cell frequencies and sets of pairs (BSIC, cell information) defining the parameters for cell re-selection of any corresponding neighbour cell with BCCH on that frequency and having that BSIC:

Let a(1),..., a(n) be the list of neighbour cell frequencies, in the order determined by the mobile station. Let i be the first frequency number specified by <first frequency: bitstring(5)> (see above).

The first BSIC and the cell information specified by <cell info> build a pair belonging to the set corresponding to a(i).

If an m-th occurrence of <info field> is present (where m >= 2), having established the correspondence of the (m-1)-th BSIC to a neighbour frequency a(k), the m-th BSIC and following <differential cell info>

- belong to a(k), if <next frequency> is not present in the m-th occurrence of <info field>,

- belong to a((smod(k+t)), if <next frequency> is present exactly t times in the m-th occurrence of <info field>.

Here, for an integer j, smod(j) := ((j-1) mod n) + 1.

- 10) If <la different> contains a <cell reselect hysteresis: bitstring(3)>, this means that the cell is to be considered by the mobile station to belong to a different location area and that for the cell, the cell reselect hysteresis specified in <cell reselect hysteresis: bitstring(3)> applies.
 - If <la different> doesn't contain a <cell reselect hysteresis: bitstring(3)>, this means that the cell is to be considered by the mobile station to belong to the same location area.
- 11)<same LA indicator : bitstring(1)> defines whether the location area is the same as the location area of the serving cell
- 12) For <cell reselect hysteresis: bitstring(3)>: see 10.5.2.4.
- 13) For <ms txpwr max cch: bitstring(5)>: see 10.5.2.4.
- 14) For <rxlev access min: bitstring(6) > see 10.5.2.4.
- 15) For <cell reselect offset: bitstring(6)>: see 10.5.2.35.
- 16) For <temporary offset: bitstring(3)>: see 10.5.2.35.
- 17) For <penalty time : bitstring(5)>: see 10.5.2.35.

10.5.2.45 EXTENDED MEASUREMENT RESULTS

The purpose of the *Extended Measurement Results* information element is to provide the results of the measurements made by the mobile station on the carriers specified in the EXTENDED MEASUREMENT ORDER.

The *Extended Measurement Results* information element is coded as shown in Figure 10.5.2.45.1/3GPP TS 44.018 and Table 10.5.2.45.1/3GPP TS 44.018.

The Extended Measurement Results is a type 3 information element with 17 octets length.

8	7	6	5	4	3	2	1	
		E	xtended M	leasureme	nt Results	IEI		octet 1
SC USED	DTX USED			RXLEV	carrier 0			octet 2
	1	RXLEV o	arrier 1			RXLE ^v carrier (high pa	2	octet 3
		carrier 2				/ carrier 3		octet 4
RXI	LEV	part)			(nig	jh part)		
carr	ier 3 part)			RXLEV carrier 4				octet 5
		RXLEV o	arrier 5			RXLE` carrier (high pa	6	octet 6
		carrier 6				/ carrier 7		octet 7
DVI	LEV	part)			(hig	jh part)		
	ier 7			RXLEV	carrier 8			octet 8
	part)				RXLEV			
		RXLEV o	arrier 9			V 10 art)	octet 9	
		carrier 10		RXLEV carrier 11				octet 10
DVI		part)			(hig	jh part)		
carri	LEV er 11 part)			RXLEV carrier 12				octet 11
		RXLEV ca	arrier 13			RXLE ^v carrier (high pa	14	octet 12
	(low	carrier 14 part)				carrier 15 h part)	,	octet 13
carri	LEV er 15 part)			RXLEV	carrier 16			octet 14
·		RXLEV c	arrier 17			RXLE' carrier (high pa	18	octet 15
		carrier 18		RXLEV carrier 19				octet 16
DVI	(low LEV	part)		(high part)				
carri	∟E∨ er 19 part)			RXLEV carrier 20				octet 17

Figure 10.5.2.45.1/3GPP TS 44.018: Extended Measurement Results information element

Table 10.5.2.45.1/3GPP TS 44.018: Extended Measurement Results information element details

SC USED (octet 2), indicates the value of the SEQ-CODE in the extended measurement frequency list information element used for defining the list of frequencies reported on.

Range: 0 to 1.

DTX USED (octet 2).

This bit indicates whether or not the mobile station used DTX during the previous measurement period.

Bit 7

DTX was not used

DTX was used

RXLEV carrier 'N' (octets 2 to 17).

This field is coded as the binary representation of a value M. M corresponds according to the mapping defined in 3GPP TS 45.008 to the received signal strength on carrier N. N is the index to the frequency in the sorted list of frequencies defined in the EXTENDED MEASUREMENT ORDER message. The list is sorted in increasing order of ARFCN, except that ARFCN 0, if included in the EXTENDED MEASUREMENT ORDER, is put in the last position of the sorted list. If the EXTENDED MEASUREMENT ORDER contains more than 21 carriers, only the signal strength of the carriers 0-20 shall be measured and reported.

Range: 0 to 63

If the EXTENDED MEASUREMENT ORDER message contains less than 21 carriers, the fields in the EXTENDED MEASUREMENT REPORT not referring to any specified carrier shall have RXLEV values set to zero.

10.5.2.46 Extended Measurement Frequency List

The purpose of *Extended Measurement Frequency List* information element is to provide the absolute radio frequency channel numbers of carriers to measure signal strength on.

The *Extended Measurement Frequency List* information element is coded as the *Cell Channel Description* information element, as specified in clause 10.5.2.1b, with the exception of bit 5 of octet 2. Figure 10.5.2.46.1/3GPP TS 44.018 and Table 10.5.2.46.1/3GPP TS 44.018: contains the difference of specifications.

The Extended Measurement Frequency List information element is a type 3 information element with 17 octets length.

8	7	6	5	4	3	2	1	
		Exter	nded Meas	urement Fr	equency	List IEI		octet 1
Bit	Bit	0	SEQ-	Bit	Bit	Bit	Bit	octet 2
128	127	spare	CODE	124	123	122	121	
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 3
120	119	118	117	116	115	114	113	
Bit	Bit	Bit	Bit	Bit	Bit	Bit	Bit	octet 17
800	007	006	005	004	003	002	001	

Figure 10.5.2.46.1/3GPP TS 44.018: Extended Measurement Frequency List information element

Table 10.5.2.46.1/3GPP TS 44.018: Extended Measurement Frequency List information element details

```
SEQ-CODE, Sequence code (octet 2, bit 5).

Range 0 to 1.
```

10.5.2.47 Suspension Cause

The purpose of the Suspension Cause information element is to provide the reason for the GPRS suspension.

The *Suspension Cause* information element is coded as shown in Figure 10.5.2.47.1/3GPP TS 44.018 and Table 10.5.2.21aa.1/3GPP TS 44.018.

The Suspension Cause is a type 3 information element with 2 octets length.

	8	7	6	5	4	3	2	1	
ſ				Suspe	ension Ca	use IEI			octet 1
ſ			S	uspension	cause val	ue	•		octet 2

Figure 10.5.2.47.1/3GPP TS 44.018: Suspension Cause information element

Table 10.5.2.21aa.1/3GPP TS 44.018: Suspension Cause information element

```
Suspension cause value (octet 2)
Bits
8 7 6 5 4 3 2 1
0 0 0 0 0 0 0 0
                   Emergency call, mobile originating call or call
                      re-establishment
0 0 0 0 0 0 0 1 Location Area Update 0 0 0 0 0 0 1 MO Short message service (note 1)
                  Other procedure which can be completed with an
0 0 0 0 0 0 1 1
                      SDCCH
0 0 0 0 0 1 0 0 \phantom{0} MO Voice broadcast or group call (note 2)
0 0 0 0 0 1 0 1 Mobile terminating CS connection 0 0 0 0 0 1 1 0 DTM not supported in the cell
Note 1: As an option, cause value 0000 0011 may be used for an
          MO Short message service
Note 2: As an option, cause value 0000 0000 may be used for an
          MO Voice broadcast or group call
All other cause values shall be treated as 0000 0000
```

10.5.2.48 APDU ID

The APDU ID information element identifies the particular protocol and associated application for an APDU.

The *APDU ID* information element is coded as shown in figure 10.5.2.48.1/3GPP TS 44.018 and table 10.5.2.48.1/3GPP TS 44.018.

The APDU ID is a type 1 information element.

8	7	6	5	4	3	2	1		
	AF	PDU ID	IEI	Р	rotocol	identifie	er	oktet 1	

Figure 10.5.2.48.1/3GPP TS 44.018: APDU ID information element

Table 10.5.2.48.1/3GPP TS 44.018: APDU ID information element format

Protocol	identifier (octet 1)
Bits	Protocol / Application
4321	
0000	RRLP (3GPP TS 44.031)/ LCS
0001	
to	reserved for future use
1111	

10.5.2.49 APDU Flags

The APDU Flags information element provides segmentation and control information for an associated APDU.

The APDU Flags information element is coded as shown in figure 10.5.2.49.1/3GPP TS 44.018 and table 10.5.2.49.1/3GPP TS 44.018.

The APDU Flags is a type 1 information element.

8	7	6	5	4	3	2	1	
	APD	U Flag	s IEI	0	C/R	first	last	oktet 1
				spare		seg.	seg.	

Figure 10.5.2.49.1/3GPP TS 44.018: APDU Flags information element

Table 10.5.2.49.1/3GPP TS 44.018: APDU Flags information element format

Last Segment (octet 1)
bit 1

0 Last or only segment

1 Not last or only segment

First Segment (octet 1)
bit 2

0 First or only segment

1 Not first or only segment

C/R (octet 1)
If last seg. = 0, then:
bit 3

0 Command or Final Response

1 Not Command or Final Response

If last seg. = 1, then bit 3 is spare and set to 0

10.5.2.50 APDU Data

The purpose of the information element is to provide an APDU or APDU segment.

The *APDU Data* information element is coded as shown in figure 10.5.2.50.1/3GPP TS 44.018 and table 10.5.2.50.1/3GPP TS 44.018.

The APDU Data is a type 4 information element with minimum length of 2 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (3GPP TS 44.006).

8	7	6	5	4	3	2	1	
			octet 1					
	octet 2							
	octet 3-n							

Figure 10.5.2.50.1/3GPP TS 44.018: APDU Data information element

Table 10.5.2.50.1/3GPP TS 44.018: APDU Data information element format

10.5.2.51 Handover To UTRAN Command

The purpose of Handover To UTRAN Command information element is to provide information to the mobile of handover to UTRAN. The Handover to UTRAN Command information element contains all information needed by the mobile for handover to UTRAN.

The Handover To UTRAN Command is a type 4 information element with length 3-n octets.

	8	7	6	5	4	3	2	1	
ĺ	Handover to UTRAN Command IEI								octet 1
ĺ	Len	gth of F	landove	er to U	TRAN (Comma	nd cont	ents	octet 2
ſ	Handover to UTRAN Command value part								Octet 3-n

Figure 10.5.2.51.1/3GPP TS 44.018: Handover to UTRAN Command information element

The value part of the Handover To UTRAN Command IE is coded as defined in 3GPP TS 25.331.

10.5.2.52 Handover To cdma2000 Command

The purpose of Handover To cdma2000 Command information element is to provide information to the mobile of handover to cdma2000. The Handover to cdma2000 Command information element contains all information needed by the mobile for handover to cdma2000.

The Handover To cdma2000 Command IE is coded as follows:




Figure 10.5.2.52.1/3GPP TS 44.018: Handover to cdma2000 Command information element

The MSG_TYPE of the cdma2000 message used for the intersystem handover shall be included in the first octet of the Handover to cdma2000 value part. It is specified in TIA/EIA/IS-2000-4-A and in TIA/EIA/IS-833. (E.g. MSG_TYPE::= {00010001} if Extended Handoff Direction Message (EHDM) is used, MSG_TYPE::= {00011111} if General Handoff Direction Message is used, etc.). The order of the bits in this octet representing is given by the following example. If MSG_TYPE::={00010001} (EHDM), the bit number 1 of 'cdma2000 MSG_TYPE IEI' shall be '0', the bit number 2 shall be '0', etc., and the bit number 8 shall be '1', as illustrated below.

8	7	6	5	4	3	2	1	bit
1	0	0	0	1	0	0	0	

The remaining octets in the Handover to cdma2000 value part shall be coded as the payload of the message used for the inter system handover, as specified in TIA/EIA/IS-2000-5-A and in TIA/EIA/IS-833. The bit ordering shall be similar to the case described above. The bit number 1 of 'cdma2000 message payload' shall be coded as the first bit of the first record of the message defined in TIA/EIA/IS-2000-5-A and in TIA/EIA/IS-833, reading the records defined in TIA/EIA/IS-2000-5-A and in TIA/EIA/IS-833 from left to right.

The Handover To cdma2000 Command is a type 4 information element with length 4 to n octets.

10.5.2.53 (void)

10.5.2.54

10.5.2.55 (void)

10.5.2.56 3G Target Cell

(void)

The purpose of the 3G Target Cell information element is to indicate to the MS the target 3G Cell.

The 3G Target Cell is a type 4 information element with a minimum length of 3 octets and a maximum length of 6 octets.

If the 3G Target Cell information element contains information on both 3G UTRAN FDD and 3G UTRAN TDD, the information element shall be ignored by the receiver.

Table 10.5.2.56.1/3GPP TS 44.018: 3G Target Cell information element

Parameters in the 3G Target Cell informatin element are defined in the Measurement Information message, clause 9.1.54.

10.5.3 Mobility management information elements.

See 3GPP TS 24.008.

10.5.4 Call control information elements.

See 3GPP TS 24.008.

10.5.5 GPRS mobility management information elements

See 3GPP TS 24.008.

10.5.6 Session management information elements

See 3GPP TS 24.008.

10.5.7 GPRS Common information elements

See 3GPP TS 24.008.

10.5.8 GTTP information elements.

10.5.8.1 LLC PDU Container

The purpose of the *LLC PDU Container* information element is to carry an LLC PDU with upper layer information between the network and the mobile station. Within the scope of 3GPP TS 44.018 the content of the *LLC PDU* field is an array of octets. The usage of the contents of this transportation mechanism is defined in 3GPP TS 04.64.

The LLC PDU Container information element is coded as shown in figure 10.5.8.1.1/3GPP TS 44.018.

The *LLC PDU Container* is a type 4 information element with a minimum length of 3 octets. No upper length limit is specified except for that given by the maximum number of octets in a L3 message (see 3GPP TS 44.006).

8	7	6	5	4	3	2	1	<u></u>	
			LLC PE	OU Cont	ainer IEI			octet 1	
	Le	ngth of L	LC PDU	Contair	ner conte	ents		octet 2	
	LLC PDU								

Figure 10.5.8.1.1/3GPP TS 44.018: LLC PDU Container information element

```
LLC PDU (variable length field, octets 3 to n)
```

This field contains an LLC PDU; see 3GPP TS 04.64.

11 List of system parameters

The description of timers in the following table should be considered a brief summary. The precise details are found in clauses 3 to 6, which should be considered the definitive descriptions.

11.1 Timers and counters for radio resource management

11.1.1 Timers on the mobile station side

T3122: This timer is used during random access, after the receipt of an IMMEDIATE ASSIGN REJECT message.

Its value is given by the network in the IMMEDIATE ASSIGN REJECT message.

T3124: This timer is used in the seizure procedure during a hand-over, when the two cells are not synchronized.

Its purpose is to detect the lack of answer from the network to the special signal.

Its value is set to 675 ms if the channel type of the channel allocated in the HANDOVER COMMAND is an SDCCH (+ SACCH); otherwise its value is set to 320 ms.

T3126: This timer is started either

after sending the maximum allowed number of CHANNEL REQUEST messages during an immediate assignment procedure.

or

on receipt of an IMMEDIATE ASSIGNMENT REJECT message,

whichever occurs first.

It is stopped at receipt of an IMMEDIATE ASSIGNMENT message, or an IMMEDIATE ASSIGNMENT EXTENDED message.

At its expiry, the immediate assignment procedure is aborted.

The minimum value of this timer is equal to the time taken by T+2S slots of the mobile station's RACH. S and T are defined in clause 3.3.1.2. The maximum value of this timer is 5 seconds.

T3128: This timer is started when the mobile station starts the uplink investigation procedure and the uplink is busy.

It is stopped at receipt of the first UPLINK FREE message.

At its expiry, the uplink investigation procedure is aborted.

The value of this timer is set to 1 second.

T3130: This timer is started after sending the first UPLINK ACCESS message during a VGCS uplink access procedure.

It is stopped at receipt of a VGCS ACCESS GRANT message.

At its expiry, the uplink access procedure is aborted.

The value of this timer is set to 5 seconds.

T3110: This timer is used to delay the channel deactivation after the receipt of a (full) CHANNEL RELEASE. Its purpose is to let some time for disconnection of the main signalling link.

Its value is set to such that the DISC frame is sent twice in case of no answer from the network. (It should be chosen to obtain a good probability of normal termination (i.e. no time out of T3109) of the channel release procedure.)

T3134

This timer is used in the seizure procedure during an RR network controlled cell change order procedure. Its purpose is to detect the lack of answer from the network or the lack of availability of the target cell.

Its value is set to 5 seconds.

T3142:

The timer is used during packet access on CCCH and during packet access while in dedicated mode. It is started after the receipt of an IMMEDIATE ASSIGNMENT REJECT or a DTM REJECT message.

Its value is given by the network in the IMMEDIATE ASSIGNMENT REJECT or DTM REJECT message.

T3148: This timer is used during DTM establishment in dedicated mode.

It is started after sending a DTM REQUEST message during a packet access procedure while in dedicated mode.

It is stopped at the receipt of one of the following messages:

- DTM ASSIGNMENT COMMAND
- PACKET ASSIGNMENT
- DTM REJECT
- ASSIGNMENT COMMAND
- HANDOVER COMMAND

At its expiry, the packet access procedure is aborted.

Its value is 4 seconds.

T3146:

This timer is started either

after sending the maximum allowed number of CHANNEL REQUEST or EGPRS PACKET CHANNEL REQUEST messages during a packet access procedure.

or

on receipt of an IMMEDIATE ASSIGNMENT REJECT message during a packet access procedure,

whichever occurs first.

It is stopped at receipt of an IMMEDIATE ASSIGNMENT message, or an IMMEDIATE ASSIGNMENT EXTENDED message.

At its expiry, the packet access procedure is aborted.

The minimum value of this timer is equal to the time taken by T+2S slots of the mobile station's RACH. S and T are defined in clause 3.3.1.2. The maximum value of this timer is 5 seconds.

T3164:

This timer is used during packet access using CCCH. It is started at the receipt of an IMMEDIATE ASSIGNMENT message.

It is stopped at the transmission of a RLC/MAC block on the assigned temporary block flow, see 3GPP TS 44.060.

At expire, the mobile station returns to the packet idle mode.

The value of the timer is 5 seconds.

T3190:

The timer is used during packet downlink assignment on CCCH. It is started at the receipt of an IMMEDIATE ASSIGNMENT message or of an PDCH ASSIGNMENT COMMAND message when in dedicated mode.

It is stopped at the receipt of a RLC/MAC block on the assigned temporary block flow, see 3GPP TS 44.060.

At expiry, the mobile station returns to the packet idle mode.

The value of the timer is 5 seconds.

T3204:

This timer is used by a mobile station with non-GSM capabilities. The timer is started after sending the first CHANNEL REQUEST during a packet access procedure. The CHANNEL REQUEST was sent requesting a single block packet access and the purpose of the packet access procedure is to send a PACKET PAUSE message.

It is stopped at the receipt of an IMMEDIATE ASSIGNMENT message granting a single block period on an assigned packet uplink resource.

At expiry, the packet access procedure is aborted.

The value of the timer is 1 second.

11.1.2 Timers on the network side

T3101: This timer is started when a channel is allocated with an IMMEDIATE ASSIGNMENT message. It is stopped when the MS has correctly seized the channels.

Its value is network dependent.

NOTE: It could be higher than the maximum time for a L2 establishment attempt.

T3103:

This timer is started by the sending of a HANDOVER message and is normally stopped when the MS has correctly seized the new channel. Its purpose is to keep the old channels sufficiently long for the MS to be able to return to the old channels, and to release the channels if the MS is lost.

Its value is network dependent.

NOTE: It could be higher than the maximum transmission time of the HANDOVER COMMAND, plus the value of T3124, plus the maximum duration of an attempt to establish a data link in multiframe mode.)

T3105: This timer is used for the repetition of the PHYSICAL INFORMATION message during the hand-over procedure.

Its value is network dependent.

NOTE: This timer may be set to such a low value that the message is in fact continuously transmitted.

T3107: This timer is started by the sending of an ASSIGNMENT COMMAND or a DTM ASSIGNMENT COMMAND message and is normally stopped when the MS has correctly seized the new RR channels.

Its purpose is to keep the old channel sufficiently long for the MS to be able to return to the old channels, and to release the channels if the MS is lost.

Its value is network dependent.

NOTE: It could be higher than the maximum transmission time of the ASSIGNMENT COMMAND message plus twice the maximum duration of an attempt to establish a data link multiframe mode.

T3109: This timer is started when a lower layer failure is detected by the network, when it is not engaged in a RF procedure. It is also used in the channel release procedure.

Its purpose is to release the channels in case of loss of communication.

Its value is network dependent.

NOTE: Its value should be large enough to ensure that the MS detects a radio link failure.

T3111: This timer is used to delay the channel deactivation after disconnection of the main signalling link. Its purpose is to let some time for possible repetition of the disconnection.

Its value is equal to the value of T3110.

T3113: This timer is started when the network has sent a PAGING REQUEST message and is stopped when the network has received the PAGING RESPONSE message.

Its value is network dependent.

NOTE: The value could allow for repetitions of the Channel Request message and the requirements associated with T3101.

T3115: This timer is used for the repetition of the VGCS UPLINK GRANT message during the uplink access procedure.

Its value is network dependent.

NOTE: This timer may be set to such a low value that the message is in fact continuously transmitted.

T3117: This timer is started by the sending of a PDCH ASSIGNMENT COMMAND message and is normally stopped when the MS has correctly accessed the target TBF.

Its purpose is to keep the old channel sufficiently long for the MS to be able to return to the old channels, and to release the channels if the MS is lost.

Its value is network dependent.

NOTE: It could be higher than the maximum transmission time of the PDCH ASSIGNMENT COMMAND message plus T3132 plus the maximum duration of an attempt to establish a data link in multiframe mode.

This timer is started by the sending of a RR-CELL CHANGE ORDER message and is normally stopped when the MS has correctly accessed the new cell. Its purpose is to keep the old channels sufficiently long for the MS to be able to return to the old channels, and to release the channels if the MS is lost.

Its value is network dependent.

NOTE: It could be higher than the maximum transmission time of the RR_CELL CHANGE ORDER, plus T3134, plus the maximum duration of an attempt to establish a data link in multiframe mode.

This timer is started by the sending of an INTER SYSTEM TO UTRAN HANDOVER message and is normally stopped when the MS has correctly seized the UTRAN channel(s). Its purpose is to keep the old channels sufficiently long for the MS to be able to return to the old channels, and to release the channels if the MS is lost.

Its value is network dependent.

This timer is started by the sending of an INTER SYSTEM TO CDMA2000 HANDOVER message and is normally stopped when the MS has correctly seized the CDMA2000 channel(s). Its purpose is to keep the old channels sufficiently long for the MS to be able to return to the old channels, and to release the channels if the MS is lost.

Its value is network dependent.

T3141: This timer is started when a temporary block flow is allocated with an IMMEDIATE ASSIGNMENT message during a packet access procedure. It is stopped when the mobile station has correctly seized the temporary block flow.

Its value is network dependent.

11.1.3 Other parameters

Ny1: The maximum number of repetitions for the PHYSICAL INFORMATION message during a

handover (see clause 3.4.4.2.2). The value is network dependent.

Ny2: The maximum number of repetitions for the VGCS UPLINK GRANT message during an uplink

access procedure (see clause 3.3.1.2.2). The value is network dependent.

11.2 Timers of mobility management

See 3GPP TS 24.008.

11.3 Timers of circuit-switched call control

Annex A (informative): Example of subaddress information element coding

Annex B (normative): Compatibility checking

Annex C (normative): Low layer information coding principles

Annex D (informative):

Examples of bearer capability information element coding

Annex E (informative):

Comparison between call control procedures specified in 3GPP TS 24.008 and CCITT Recommendation Q.931

Annex F (informative): GSM specific cause values for radio resource management

This annex is informative.

Cause value = 0 Normal event;

indicates that the channel is released because of a normal event or that an assignment or handover is successfully, and normally, completed.

Cause value = 1 Abnormal release, unspecified;

indicates that the channel is released because of an abnormal event without specifying further reasons.

Cause value = 2 Abnormal release, channel unacceptable;

indicates that the channel type or channel characteristics are not acceptable.

Cause value = 3 Abnormal release, timer expired;

indicates that the release is caused by a timer expiry.

Cause value = 4 Abnormal release, no activity on the radio path;

indicates that some supervisory function has detected that the channel is not active.

Cause value = 5 Pre-emptive release;

indicates that the channel is released in order to be allocated to a call with priority (e.g. an emergency call).

Cause value = 6 UTRAN configuration unknown;

indicates that the MS does not know the UTRAN predefined configuration (i.e. was not read from UTRAN Channels) or that the MS does not have the capability to handle the requested default configuration.

Cause value = 8 Handover impossible, timing advance out of range;

indicates that a handover is unsuccessful because the target BTS is beyond the normal range and the target BTS would not accept an out of range timing advance.

Cause value = 9 Channel mode unacceptable

indicates that the MS does not have the capability to handle the requested mode or type of channel.

Cause value = 10 Frequency not implemented

indicates that the MS does not have the capability to operate on (at least one of) the requested frequency(ies).

Cause value = 11 Originator or talker leaving group call area

indicates that VGCS uplink or VBS call is released because the mobile talking is outside the group call area

Cause value = 12 Lower layer failure

indicates that a lower layer failed to establish a connection on the new channel.

Cause value = 65 Call already cleared;

indicates that a handover is unsuccessful because the connection has been released by the network or the remote

Cause value = 95 Semantically incorrect message;

See annex H, clause H5.10.

Cause value = 96 Invalid mandatory information;

See annex H, clause H6.1.

Cause value = 97 Message type non-existent or not implemented;

See annex H, clause H6.2.

Cause value = 98 Message type not compatible with protocol state;

See annex H, clause H6.3

Cause value = 100 Conditional IE error;

See annex H, clause H6.5

Cause value = 101 No cell allocation available;

indicates that an assignment or handover is unsuccessful because the MS has no current CA.

Cause value = 111 Protocol error unspecified;

See annex H, clause H6.8.

Annex G (informative): GSM specific cause values for mobility management

Annex H (informative): GSM specific cause values for call control

Annex I (informative): GSM specific cause values for session management

Annex J (informative): Algorithm to encode frequency list information elements

This annex is informative.

J.1 Introduction

Some information elements encode frequency lists with a special method. The main specification specifies the meaning of the fields and hence the way to decode them, but the corresponding encoding algorithm is difficult to infer from the decoding algorithm. This annex is intended as an aid for implementers of the encoding algorithm.

It could be shown that any set of frequency with less or the same number of frequencies as the number of words can be encoded with a careful choice of F1, F2, and so on, i.e. that a set of Wi can be found so that the decoding algorithm given in the main clause will give back the frequency set. The right order is not the order of the frequency values.

J.2 General principle

The encoding algorithm is based on a recursive dichotomy of both the range (i.e. the set of values that are possible) and the subset (the values to encode).

The dichotomy is best understood if the range is seen as a circle. For instance, for the 1023 range:




Figure J.1: Circular arrangement of 0..1023

The dichotomy consists in finding a value in the subset such that the diameter determined by this value splits the subset in two equal or nearly equal sub-subsets. In the following case, we see that value 290 is acceptable (the two sub-subsets have 3 elements), when value 250 is not acceptable (the two sub-subsets have 4 and 2 elements):





Figure J.2: Example of dichotomy

The pivot value is part of the information field, then the two sub-subsets are renumbered and the same algorithm is applied again on each of them. Because the range is halved at each step, the number of bits needed to encode a pivot value is 1 bit less than the number of bits needed to encode the parent pivot value.

The convention is that if the number of values is even, the left sub-subset (that is to say the values that can be expressed as the pivot value minus some integer between 1 and half the range) will have 1 element more than the right subset.

At each step the subset is numbered from 0 to the range minus 1. The coding in the information field of the pivot value is its value as renumbered, plus 1. Value 0 is reserved to indicate no element.

The order of appearance in the information field of the successive pivot values is particular. If we present the values as organized as a tree, with the left child being the pivot of the left sub-subset and the right child the pivot of the right sub-subset, the order of appearance is given by the following tree:

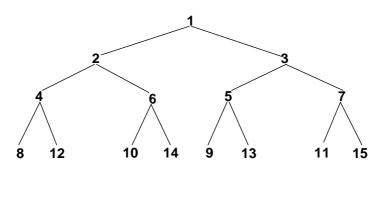

(and so on)

This order has been chosen so that

- a) whatever the number N of elements in the set, the meaningful nodes are the first N and the value for all nodes from N+1 on are null (if sent),
- b) the tree and all subtrees are balanced.

Important properties of these trees are used in the algorithms (with generation 1 corresponding to the root):

Generation g contains 2^{g-1} nodes, and their indices are 2^{g-1} to 2^{g-1} ;

For generation g, nodes 2^{g-1} to $2^{g-1}+2^{g-2}-1$ are left children, the others are right children;

If node k belongs to generation g, its left child is node k + 2g-1, and its right child is k + 2g;

Reciprocally, if k is a left child from generation g, its parent node is node k - 2g-2, and if k is a right child of generation g, its parent is node k - 2g-1.

J.3 Performances

The number of bits needed to encode a given set of values depends on the number of values and on the range they can span.

For the application on the BCCH and the SACCH (CA and BA information) 16 octets are available, and the number of frequencies that can be encoded in one information element is the following:

Range	Number of frequencies
513 to 1024	2 to 16 (17 if frequency 0 is in)
257 to 512	2 to 18
129 to 256	2 to 22
113 to 128	2 to 29
up to 112	any

With two messages (for the BA) the number of frequencies that can be encoded is the following:

Range	Number of frequencies
513 to 1024	2 to 36 (NOTE 1)
257 to 512	2 to 40 (NOTE 2)
225 to 256	2 to 51 (NOTE 3)
up to 224	any

NOTE 1: A 1024 range can be split cyclically in to two 512 ranges each with less than 18 frequencies; each subset is coded in one message with 512 range format.

NOTE 2: A 512 range can be split in to two consecutive 256 ranges. If both sub-ranges contain 22 frequencies or less, it is possible to code each of these in a messages using the 256 range format. Otherwise one of the two ranges contains 23 frequencies or more: 22 of them can be coded in one message using the 256 range format and the remaining frequencies (numbering less than or equal to 18) can be coded in the other message using the 512 range format.

NOTE 3: The principles described in notes 1 and 2, above apply in this case.

The frequency short list information element allows the following:

Range	Number of frequencies
513 to 1024	2 to 7 (8 if frequency 0 is in)
257 to 512	2 to 8
129 to 256	2 to 9
57 to 128	2 to 12
up to 56	any

The number of frequencies as a function of the range and the length in octets of the variable length frequency list information element (including the message type and length fields) is given by the following table:

Table J.1/3GPP TS 44.018: Performance of the variable length frequency list information element

Range (octets)	513 to 1024	257 to 512	129 to 256	up to 128	variable bit map
5	1	1	1	1	8
6	2	2	3	3	16
7	3	3	4	4	24
8	4	4	5	6	32
9	5	6	6	8	40
10	6	7	8	10	48
11	7	8	9	12	56
12	9	9	11	14	64
13	10	11	13	16	72
14	11	12	14	18	80
15	12	13	16	21	88
16	13	15	18	24	96
17	14	16	20	26	104
18	16	18	22	29	112
19	17	19	24	32	120
20	18	21	26		128
21	20	22	28		136
22	21	24	30		144
23	22	26	32		152
24	24	27	34		160
25	25	29	37		168
26	26	30	40		176
27	28	32	42		184
28	29	34	45		192
29	30	36	48		200
30	32	38	50		208
31	33	40	53		216
32	35	42	56		224

J.4 Encoding algorithm

The choice is done recursively as given by the following programs, written in ADA:

Let us define the recursive procedure:

This procedure is given a set of integer values and an index. It chooses one of those values and computes the corresponding W(INDEX) (considered as a global variable), it splits the set less the value in two equal or nearly equal subsets, and calls itself recursively for each of those subsets, with suitable INDEX.

Assumption: all values in SET lie (inclusively) between 0 and RANGE-1, and they are all distinct.

As written, the program does not assume special values for the range. With a range such as 2^{k} -1, some expressions can be simplified.

First the program tests the leaf conditions:

```
if SET'SIZE=0 then
  W(INDEX) := 0;
  return;
elsif SET'SIZE=1 then
  W(INDEX) := 1 + SET(1);
  return;
end if;
```

The following program finds a value in the set such that exactly (SET'SIZE-1)/2 values from the set are between this value plus 1 and this value plus half the range :

```
declare
  N : INTEGER;
  J : INTEGER;
begin
  for I in 1..SET'SIZE loop
    N:=0;
  for J in 1..SET'SIZE loop
    if (SET(J)-SET(I)) mod RANGE <= (RANGE-1)/2 then
        N := N+1;
    end if;
end loop;</pre>
```

The test compares N-1 because the possible pivot value is counted.

```
if N-1 = (SET'SIZE-1)/2 then
    INDEX_IN_SET := I;
    exit;
    end if;
    end loop;
end;
```

INDEX_IN_SET is then the index in the list of the pivot value.

The following sets W(INDEX)

```
W(INDEX) := SET(INDEX_IN_SET) + 1;
```

Then the program does the same thing for the two halves of the range delimited by W(INDEX) and W(INDEX)+RANGE/2. First the left subset:

```
declare
  SUBSET : SET_OF_VALUE(1..SET'SIZE/2);
  SUBSET_INDEX : INTEGER;
  ORIGIN_VALUE : INTEGER;
begin
  ORIGIN_VALUE := (SET(INDEX_IN_SET] + (RANGE-1)/2
                  + 1) mod RANGE;
  SUBSET_INDEX:=1;
  for I in 1..SET'SIZE loop
    if (SET(I)-ORIGIN_VALUE) mod RANGE) < RANGE/2 then
      SUBSET(SUBSET_INDEX) :=
        (SET(I) - ORIGIN_VALUE) mod RANGE;
      SUBSET_INDEX := SUBSET_INDEX + 1;
    end if;
  end loop;
  ENCODE_SUBTREE(
     INDEX := INDEX +
       GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX),
      SET := SUBSET,
      RANGE := RANGE/2);
end;
```

Then the right subset:

```
declare
 SUBSET : SET_OF_VALUE(1..(SET'SIZE-1)/2);
  SUBSET_INDEX : INTEGER;
  ORIGIN_VALUE : INTEGER;
  ORIGIN_VALUE := (SET(INDEX_IN_SET] + 1) mod RANGE;
  SUBSET_INDEX:=1;
  for I in 1..SET'SIZE loop
    if (SET(I)-ORIGIN_VALUE) \mod RANGE) < RANGE/2 then
      SUBSET(SUBSET_INDEX) :=
        (SET(I) - ORIGIN_VALUE) mod RANGE;
      SUBSET_INDEX := SUBSET_INDEX + 1;
   end if;
  end loop;
  ENCODE_SUBTREE (
    INDEX := INDEX +
      2*GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX),
    SET := SUBSET,
```

```
RANGE := (RANGE-1)/2);
end;
end ENCODE SUBTREE;
```

The initial call of the procedure depends on the format. Given some set to encode, the first problem is to verify that it can be encoded, and by so doing to choose the format.

First the encoding process must find the minimum range of the set, that is to say the minimum value R such that there exists one frequency F_0 in the set such that all frequencies in the set can be written $(F_0 + N)$ mod 1024, with some N,

0 = N = R-1. The choice of the format depends on R and the number of frequencies: the 512 range format can be chosen only if R μ 512, the 256 range format can be chosen only if R μ 128.

If the chosen format is "1024 range", then the program must first check if frequency 0 is in the set. If so the F0 subfield is set to 1, and frequency 0 is removed from the set. Otherwise, the F0 subfield is set to 0. Then ENCODE_SUBTREE is called with INDEX := 1, SET set to the set of values equal to the ARFCN of all frequencies minus 1, and RANGE := 1023.

If the chosen format is "512 range", "256 range" or "128 range", F_0 is chosen as ORIG-ARFCN and ENCODE_SUBTREE is called with INDEX := 1, SET set to the set of values equal to the ARFCN of all frequencies except F_0 , minus F_0+1 , and RANGE set respectively to 511, 255 or 127.

J.5 Decoding

The decoding algorithm, as given below, is the inverse transform of the program given in the previous clause, for the specific case where the original range is a power of 2 minus 1. It is given a set of integer values W(i), and an original range R, and it builds a set of values from 0.R-1.

The program is here written so that the fact that it is the inverse of the encoding program needs no more proof.

The next loop follows the tree from child to parent, from the node of index K to the root (index 1). For each iteration the node of index INDEX is tackled. The corresponding range is RANGE, and N is the value of the element in the range defined by the node.

The data are set to their initial values:

```
INDEX := K;
RANGE := ORIGINAL_RANGE / GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX);
N := W(INDEX) - 1;
while INDEX>1 loop
```

Due to the assumption that the original range is a power of two minus one, the range for the parent node can be easily computed, and does not depend upon whether the current node is a left or right child:

```
RANGE := 2*RANGE + 1;
```

Let us note $J := 2^{g-1}$, g being the generation of node INDEX. We have $J = GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX)$.

The numbering used in the tree is such that the nodes of index J to J + J/2 - 1 are left children, and the nodes of index J/2 to J+J-1 are right children. Hence an easy test to distinguish left and right children:

```
then -- left child
```

The next computation gives the index of the parent node of the node of index INDEX, for a left child:

```
INDEX := INDEX -
    GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX)/2;
```

The next formula is the inverse of the renumbering appearing in the encoding for a left child. It gives the value of the parent node in the range defined by the grand-parent node:

The next computation gives the index of the parent node of the node of index INDEX, for a right child:

```
INDEX := INDEX - GREATEST_POWER_OF_2_LESSER_OR_EQUAL_TO(INDEX);
```

The next formula is the inverse of the renumbering appearing in the encoding for a right child:

```
N := (N + W(INDEX) - 1 + 1) mod RANGE;
end if;
end loop;
F(K) := N;
end loop;
nd;
```

A careful study will show that the programs given in the main part of the Technical Specification are equivalent to the one presented here. The main difference is the use of different remnant variables to remove most of the calls to the function giving the greatest power of 2 less than or equal to some integer.

The decoding must be terminated by the correction specific to the format.

J.6 A detailed example

Let us take the following subset of 16 elements of the set [0..1023]: [13, 71, 122, 191, 251, 321, 402, 476, 521, 575, 635, 701, 765, 831, 906, 981]

Range 1024 format will be used. Frequency 0 is not in the set, thus field F0 is set to 0. The set is renumbered, so as to give a subset of 0..1022 : [12, 70, 121, 190, 250, 320, 401, 475, 520, 574, 634, 700, 764, 830, 905, 980].

For the first node (corresponding to W(1)), the value 121 satisfies the requirements. The opposite value is 121 + 511 = 632. There are 8 values between 633 and 120 (namely the left-hand subset 634, 700, 764, 830, 905, 980, 12 and 70), and 7 values between 122 and 632 (namely the right-hand subset 190, 250, 320, 401, 475, 520 and 574).

The encoded value W(1) is 121 + 1, i.e. 122.

The second node (corresponding to W(2)) is the left-hand child of the first node. The corresponding subtree has to encode for the left-hand subset, renumbered beginning at 633. This gives the following 8 element subset of 0..510, ordered as resulting from the example of algorithm: [402, 460, 1, 67, 131, 197, 272, 347]. Out of these values, 1 splits the set in 4 and 3, and the encoded value W(2) is 2.

Similarly, the third node (W(3)) is the right-hand child of the first node and then the corresponding subtree encodes for the right-hand subset, renumbered starting at 122. This gives the following set of 0..510: [68, 128, 198, 279, 353, 398, 452]. Out of these values, 68 splits the set into 3 and 3, and the encoded value W(3) is 69.

The same method is applied for all nodes, giving the following encoded values per node:

Node	Value		
1	122		
1 2 3	2		
	69		
4	204		
5	75		
6	66		
7	60		
8	70		
9	83		
10	3		
11	24		
12	67		
13	54		
14	64		
15	70		
16	9		

The encoding then consists in formatting, in that order:

122 on 10 bits, then 2 and 69 on 9 bits each, then 204, 75, 66 and 60 on 8 bits each, then 70, 83, 3, 24, 67, 54, 64 and 70 on 7 bits each, and finally 9 on 6 bits.

Conversely the decoding can be done easily. For instance for node 2, the original value is:

$$(122 - 512 + 2)$$
 smod $1023 = 635$

For node 14, we have as original value:

$$(122 - 512 + (2 + (66 + 64)smod\ 255)smod\ 511)smod\ 1023 = 765$$

Annex K (informative): Default Codings of Information Elements

This annex is informative.

The information in this annex does NOT define the value of any IEI for any particular message. This annex exists to aid the design of new messages, in particular with regard to backward compatibility with phase 1 mobile stations.

K.1 Common information elements

For the common information elements see 3GPP TS 24.008 Annex K.

K.2 Radio Resource management information elements

For the Radio Resource management information elements listed below, the default coding of the information element identifier bits is summarized in table K.2/3GPP TS 44.018.

Table K.2/3GPP TS 44.018: Default information element identifier coding for Radio Resource management information elements

8	7	6	5	4	3	2	1		Reference	clause
1	:	:	:	-	-	-	-	Type 1 info elements		
1	0	0	1	-	-	-	-	Cipher Mode Setting	10.5.2.9	
1	0	1	0	-	-	-	-	Cipher Response	10.5.2.10	
1	0	1	1	-	-	-	-	Note		
1	1	0	1	-	-	-	-	Synchronization Indication	10.5.2.39	
1	1	1	0	-	-	-	-	Channel Needed	10.5.2.8	
0	:	:	:	:	:	:	:	Type 3 & 4 info elements		
0	0	0	0	0	0	1	0	Frequency Short List	10.5.2.14	
0	0	0	0	0	1	0	1	Frequency List	10.5.2.13	
0	1	1	0	0	0	0		Note		
0	1	1	0	0	0	1	0	Cell Channel Description	10.5.2.1b	
0	1	1	0	0	0	1		Channel Mode	10.5.2.6	
0	1	1	0	0	1	0	0	Channel Description	10.5.2.5	
0	1	1	0	0	1	1	0	Channel Mode 2	10.5.2.7	
0	1	1	0	1	0	0	0	Note		
0	1	1	0	1	0	0	1	Frequency Channel Sequence	10.5.2.12	
0	1	1	0	1	0	1	0	Note		
0	1	1	0	1	0	1	1	Note		
0	1	1	0	1	1	0	0	Note		
0	1	1	1	0	0	0	1	Note		
0	1	1	1	0	0	1	0	Mobile Allocation 10.5.2.21		
0	1	1	1	0	0	1	1	BA range	10.5.2.1	
0	1	1	1	0	1	0	0	Note		
0	1	1	1	0	1	0	1	Note		
0	1	1	1	0	1	1	0	Note		
0	1	1	1	0	1	1	1	Mobile Time difference	10.5.2.21a	
0	1	1	1	1	0	0	0	Note		
0	1	1	1	1	0	0	1	Note		
0	1	1	1	1	0	1	0	Note		
0	1	1	1	1	0	1	1	Time Difference 10.5.2.41		
0	1	1	1	1	1	0	0	Starting Time 10.5.2.38		
0	1	1	1	1	1	0	1	· ·		
0	1	1	1	1	1	1		TMSI	10.5.2.42	
0	1	1	1	1	1	1	1	Note		

NOTE: These values were allocated but never used in earlier phases of the protocol.

Annex L (normative): Additional Requirements for backward compatibility with PCS 1900 for NA revision 0 ME

Annex M (informative): Change history

TSG #	TSG Doc.	CR	Rev	Subject/Comment	New
				August 2000. Conversion to 3GPP layout and number. Based on 04.18 v9.00.	44.018 v4.0.0
GP-01	GP-000357	023	1	Handover to UMTS description procedure including "blind handover" to UMTS.	4.1.0
GP-01	GP-000192	016		Interpretation addition of CELL_BAR_QUALIFY_2 value	4.1.0
GP-01	GP-000096			DTM and EGPRS	4.1.0
GP-01	GP-000267	018		Correction on Measurement Info message	4.1.0
GP-01	GP-000359	029		AMR Noise Suppressor Control	4.1.0
GP-01	GP-000386	019	1	SI2ter bit map correction.	4.1.0
GP-01	GP-000412	021	1	Detailed coding modifications for the Pre-configurations.	4.1.0
GP-01	GP-000128			DTM: tunnelling of GPRS information on the main DCCH	4.1.0
GP-01	GP-000354	024	1	Correction on UTRAN classmark change procedure	4.1.0
GP-01	GP-000307	027	1	Editorial correction on RR Packet Uplink/Downlink Assignment	4.1.0
GP-01	GP-000180	014		DTM: GPRS information for DTM operation – TBF re-establishment	4.1.0
GP-01	GP-000207	020		SI2quater updates to allow GPRS -> UMTS Cell Reselection	4.1.0
GP-01	GP-000122			DTM: Removal of polling from DTM assignment	4.1.0
GP-01	GP-000318	800	1	DTM: reuse of the GPRS Suspension procedure in cells with no DTM capabilities	4.1.0
GP-01	Gp-000390	013	1	Support of 11 bits request reference in IA and IAR messages	4.1.0
GP-01	GP-000028	003		Handling of Power-Control-Parameter alpha	4.1.0
GP-01	GP-000032			Wrong NLN reference	4.1.0
GP-01	GP-000343		1	DTM: Correction of timers T3148 and T3107	4.1.0
GP-01	GP-000315		1	DTM: provision of GPRS information for correct DTM behaviour	4.1.0
GP-01	GP-000143			DTM: alignment of the handover procedure	4.1.0
GP-01	GP-000145	010		DTM: clarification of Radio Link Failure and RR connection abortion while in DTM	4.1.0
GP-01	GP-000338	011	1	DTM: removal of the Main DCCH Assignment message	4.1.0
GP-01	GP-000151	012		DTM: definition	4.1.0
GP-01	GP-000381	002	1	Extended measurement report (MAFA)	4.1.0
				Oct 2000: Correction to references; change Rel-2000 to Rel-4	4.1.1
GP-02	GP-000839		1	3G Cell Reselection list.	4.2.0
GP-02	GP-000647	047		Inclusion of Cell Bar Quality 2 in the neighbour cell descriptions in SI19	4.2.0
GP-02	GP-000824		2	Editorials and corrections to GSM-UTRAN interworking	4.2.0
GP-02	GP-000689			UTRAN Classmark Change: CSN1 corrections.	4.2.0
GP-02	GP-000830		1	Precision on reduced monitoring	4.2.0
GP-02	GP-000827	053	1	Handover to UMTS procedure, abnormal cases : MS behaviour.	4.2.0
GP-02	GP-000778		1	Indication of availability of UTRAN pre-configurations from the GSM BCCH.	4.2.0
GP-02	GP-000737	058		Editorial corrections	4.2.0
GP-02	GP-000739	059		Cipher mode setting in HO command	4.2.0
GP-02	GP-000645		4	Enable several instances of SI18 and SI20	4.2.0
GP-02	GP-000789		1	Deletion of the UE RAB pre-configuration message	4.2.0
GP-02 GP-02	GP-000538			Correction of send sequence number handling	4.2.0
GP-02 GP-02	GP-000750 GP-000503			DTM: Alignment of the intersystem handover procedure	4.2.0 4.2.0
GP-02 GP-02	GP-000503			Action in group receive mode on entering new cell Information in the NOTIFICATION RESPONSE message send by the MS	4.2.0
GP-02 GP-02	GP-000830		1	Mandatory use of SYSTEM INFORMATION TYPE 10	4.2.0
GP-02	GP-000500		<u> </u>	Support of reduced NCH monitoring	4.2.0
GP-02	GP-000623			DTM: RR interaction with the datalink layer (Rel 4)	4.2.0
GP-02	GP-000502			Indication of no VGCS or VBS calls active in a cell	4.2.0
GP-02	GP-000798		2	DTM: RR reallocation during packet access (Rel 4)	4.2.0
GP-02	GP-000504		-	Provision of NLN on SACCH	4.2.0
GP-02	GP-000821	037	1	Support for interworking with 1.28 Mcps TDD cells	4.2.0
GP-02	GP-000521		<u> </u>	Clarification of downlink bit	4.2.0
GP-02	GP-000554			Second Part Packet Assignment in IA Rest octet	4.2.0
GP-02	GP-000625			DTM: DTM Reject with wait indication (Rel 4)	4.2.0
GP-02	GP-000796		2	DTM: Corrections to the abnormal cases (Rel 4)	4.2.0
GP-02	GP-000501			Sending of NLN and NLN status	4.2.0

GP-03 GP-010346 088 1 BSICs in idle mode and default preconfigurations: procedure and terminology alignments. 4.					Forms atting aligned with 0440 Table and Figure governments	4.2.0
Feminology alignments 4.5	CD 02	- CD 010246	-	-	Formatting aligned with 04.18. Table and Figure numbering corrected.	4.2.0
GP-03 GP-010395 OP Removal of Anonymous Access 4. GP-03 GP-010356 OR All Introduction of PACKET SI STATUS support in SI13 4. GP-03 GP-010356 OR3 Introduction of PACKET SI STATUS support in SI13 4. GP-03 GP-010356 OR3 Introduction of PACKET SI STATUS support in SI13 4. GP-03 GP-010357 OR All Introduction of PACKET SI STATUS support in SI13 4. GP-03 GP-010450 OF 1 Blind Handover ZG→2C (Rel-4) 4. GP-03 GP-010405 OF 4 Control of AFCIN channel numbering for 1800 and 1900. 4. GP-04 GP-010859 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (8UTRAN) 4. GP-04 GP-010869 034 - GSM to UTRAN Rentral frequencies by "Class C GPRS" (8UTRAN) 4. GP-04 GP-010889 034 - GSM to UTRAN Rentral frequencies by "Class C GPRS" (8UTRAN) 4. GP-04 GP-010880 035 1 Editorial alignments and clarifications. 4. <td>GF-03</td> <td>GF-010340</td> <td>000</td> <td>'</td> <td></td> <td>4.3.0</td>	GF-03	GF-010340	000	'		4.3.0
GP-03 GP-010085 070 Removal of Anonymous Access 4.5 GP-03 GP-010366 072 DTM: Replacement of 'padding bits' in RR messages 4.5 GP-03 GP-010366 073 1 Introduction of PACKET SI STATUS support in SI13 4.1 GP-03 GP-010361 073 1 Precision about Bilind handover 2G → 3G (Rel-4) 4.1 GP-03 GP-010361 075 1 Bilind Handover 2G → 2G (Rel-4) 4.2 GP-04 GP-010361 075 4 Control of ARFCN channel numbering for 1800 and 1900. 4.2 GP-04 GP-010895 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (&UTRAN) mobiles. 4.5 GP-04 GP-010893 034 - GSM to UTRAN RR-Network Controlled Cell Change Order: abnormal case. 4.6 GP-04 GP-010893 031 1 Editorial alignments and clarifications. 4.6 GP-04 GP-010825 25 1 MEASUREMENT STARTING_TIME field in RR Packet Downlink 4.5 GP-04 GP-010895 023 1 Introduction of a presence bit indicator for SI2quater 4.6 GP-04 GP-010895	CD 03	CD 010307	060	1		4.3.0
GP-03 GP-010145 072 DTM: Replacement of 'padding bits' in RR messages 4. GP-03 GP-010356 073 1 Introduction of PACKET SI STATUS support in SI13 4. GP-03 GP-010349 074 1 Precision about Blind handover 2G → 3G (Rel4) 4. GP-03 GP-010405 075 1 Blind Handover 2G → 2C (Rel-4) 6. GP-04 GP-010954 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (RUTRAN) mobiles. 4. GP-04 GP-010889 034 - GSM to UTRAN RR-Network Controlled Cell Change Order: abnormal case. 4. GP-04 GP-010884 035 1 Editorial alignments and clarifications. 4. GP-04 GP-010885 025 1 Editorial alignments and clarifications. 4. GP-04 GP-010895 025 1 Introduction of a presence bit indicator for Si2quater 4. GP-04 GP-010898 029 2 Introduction of a presence bit indicator for Si2quater 4. GP-04 GP-010898 029 <td< td=""><td></td><td></td><td></td><td>-</td><td></td><td>4.3.0</td></td<>				-		4.3.0
GP-03 GP-010396 073 1 Introduction of PACKET SI STATUS support in SI13 4. GP-03 GP-010391 074 1 Precision about Blind handover 2G → 3G (Rel4) 4. GP-03 GP-010405 076 4 Control of ARFCN channel numbering for 1800 and 1900. 4. GP-04 GP-010984 02. 2 The use of UTRAN Central frequencies by "Class C GPRS" (8UTRAN) mobiles. 4. GP-04 GP-010889 03. 1 GSM to UTRAN RR-Network Controlled Cell Change Order: abnormal case. 4. GP-04 GP-010840 03. 1 Editorial alignments and clarifications. 4. GP-04 GP-010825 02. 1 Introduction of a presence bit indicator for SI2quater 4. GP-04 GP-010985 02. 2 1 Introduction of a presence bit indicator for SI2quater 4. GP-04 GP-010989 02. 2 1 Introduction of a presence bit indicator for SI2quater 4. GP-04 GP-010989 02. 2 1 Introduction of a presence bit indicator for SI2quater						4.3.0
GP-03 GP-010349 074 1 Precision about Blind handover 2G → 3G (ReI4) 4. GP-03 GP-010351 075 1 Blind Handover 2G → 2G (ReI-4) 4. GP-04 GP-010405 076 4 Control of ARFCN channel numbering for 1800 and 1900. 4. GP-04 GP-010854 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (&UTRAN) mobiles. GP-04 GP-010889 034 - GSM to UTRAN RR-Network Controlled Cell Change Order: abnormal case. GP-04 GP-010840 035 1 Editorial alignments and clarifications. 4. GP-04 GP-010850 026 1 MEASUREMENT_STARTING. TIME field in RR Packet Downlink Assignment IE 4. GP-04 GP-010985 028 1 Introduction of a presence bit indicator for SI2quater 4. GP-04 GP-010985 028 1 Introduction of a presence bit indicator for SI2quater 4. GP-04 GP-010985 028 1 Introduction of a presence bit indicator for SI2quater 4. GP-04 GP-010880 039<				1		4.3.0
GP-03 GP-010351 075 1 Blind Handover 2G→2G (ReI-4) 4.4 GP-03 GP-010405 076 4 Control of ARFCN channel numbering for 1800 and 1900. 4.5 GP-04 GP-010895 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (8UTRAN) mobiles. 4.6 GP-04 GP-010889 034 1 Editorial alignments and clarifications. 4.6 GP-04 GP-010844 035 1 Editorial alignments and clarifications. 4.6 GP-04 GP-010895 028 1 MEASUREMENT_STARTING_TIME field in RR Packet Downlink Assignment IE 4.6 GP-04 GP-010995 028 1 Introduction of a presence bit indicator for Si2quater 4.4 GP-04 GP-010995 029 2 Clarifications on Solsa requirements 4.4 GP-04 GP-010980 039 3 CR for 44.018 on dynamic ARFCN mapping 4.7 GP-04 GP-010882 036 1 Broadcast of CN macket support towards neighbour cells Not College and 10.5,2.37c and d hase been inserted as 1,and k respectively. 4.7						4.3.0
GP-03 GP-010405 076 4 Control of ARFCN channel numbering for 1800 and 1900. 4.5 GP-04 GP-010889 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (&UTRAN) mobiles. 4.6 GP-04 GP-010889 034 - GSM to UTRAN RR-Network Controlled Cell Change Order: abnormal case. 4.7 GP-04 GP-010820 026 1 MEASUREMENT_STARTING_TIME field in RR Packet Downlink Assignment IE 4.7 GP-04 GP-010895 028 1 Introduction of a presence bit indicator for SI2quater 4.7 GP-04 GP-010989 028 1 Introduction of a presence bit indicator for SI2quater 4.7 GP-04 GP-010989 03 1 Ror 44.018 on dynamic ARFCN mapping NOTE: new clauses 9.1.43b and 43c has been inserted as 9.1.43i and 43j, and 10.5.2.37c and 6 has been inserted as ind k respectively. 4.7 GP-04 GP-010882 036 1 Broadcast of CCN mode support towards neighbour cells NOTE: new clauses 3.4.1.2.1.7 has been inserted as 3.4.1.2.1.8. 4.7 GP-04 GP-010980 039 2 3G to GSM HO & dynamic ARFCN mapping 4.7 GP						4.3.0
GP-04 GP-010894 032 2 The use of UTRAN Central frequencies by "Class C GPRS" (8UTRAN) 4.7 mobiles. mobiles. mobiles. mobiles. mobiles. GP-04 GP-010894 035 1 Editorial alignments and clarifications. 4.4 GP-04 GP-010825 026 1 MEASUREMENT_STARTING_TIME field in RR Packet Downlink 4.7 Assignment GP-04 GP-010825 026 1 Introduction of a presence bit indicator for SI2quater 4.7 GP-04 GP-010895 028 1 Introduction of a presence bit indicator for SI2quater 4.7 GP-04 GP-010989 029 2 Clarifications on Solsa requirements 4.7 GP-04 GP-010989 030 3 CR for 44.018 on dynamic ARFCN mapping NOTE: new clauses 9.1.43b and 43c has been inserted as 9.1.43i and 43j, and 10.5.2.37c and d has been inserted as 9.1.43i and 43j, and 10.5.2.37c and d has been inserted as 1 and k respectively. GP-04 GP-010882 036 1 Broadcast of CCN mode support towards neighbour cells NOTE: new clauses 9.1.4.12.1.7 has been inserted as 3.4.1.2.1.8. GP-05 GP-011422 053 3 Clarification of predefined configuration status report GP-05 GP-011070 045 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.8 GP-05 GP-011070 045 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.9 GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.9 GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.9 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.9 GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.9 GP-05 GP-011330 041 1 Coding Corrections to Measurement information and SI2quater 4.9 GP-05 GP-011330 041 1 Coding Corrections to Measurement information and SI2quater 4.9 GP-06 GP-011933 041 1 Coding Corrections to Measurement procedure. 4.9 GP-06 GP-011330 041 1 Coding Corrections to Measuremen						4.3.0
GP-04 GP-010899 034 - GSM to UTRAN RR-Network Controlled Cell Change Order: abnormal case. GP-04 GP-010840 035 Editorial alignments and clarifications. GP-04 GP-010825 026 MEASUREMENT_STARTING_TIME field in RR Packet Downlink						4.4.0
Case. Case					mobiles.	
GP-04 GP-010825 026	GP-04	GP-010689	034	-	· · · · · · · · · · · · · · · · · · ·	4.4.0
Assignment IE	GP-04	GP-010844	035	1	Editorial alignments and clarifications.	4.4.0
GP-04 GP-040 GP-010958 029 2 Clarifications on Solas requirements 4. GP-04 GP-010958 029 2 Clarifications on Solas requirements 4. GP-04 GP-010939 030 3 CR for 44.018 on dynamic ARFCN mapping NOTE: new clauses 9.1.43b and 43c has been inserted as 9.1.43i and 43j, and 10.5.2.37c and d has been inserted as j and k respectively. 4. GP-04 GP-010882 036 1 Broadcast of CCN mode support towards neighbour cells NOTE: new clause 3.4.1.2.1.7 has been inserted as 3.4.1.2.1.8. 4. GP-04 GP-010980 039 2 3G to GSM HO & dynamic ARFCN mapping 4. GP-05 GP-011422 053 3 Clarification of predefined configuration status report 4. GP-05 GP-011975 046 1 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4. GP-05 GP-0111440 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover 4. GP-05 GP-0111440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4. GP-05 GP-011440 <t< td=""><td>GP-04</td><td>GP-010825</td><td>026</td><td>1</td><td></td><td>4.4.0</td></t<>	GP-04	GP-010825	026	1		4.4.0
GP-04 GP-010958 029 2 Clarifications on Solsa requirements 4.	GP-04	GP-010895	028	1		4.4.0
GP-04 GP-010939 030 3 CR for 44.018 on dynamic ARFCN mapping NOTE: new clauses 9.1.43b and 43c has been inserted as 9.1.43i and 43j, and 10.5.2.37c and d has been inserted as j and k respectively.	GP-04			2		4.4.0
NOTE: new clauses 9.1.43b and 43c has been inserted as 9.1.43i and 43j, and 10.5.2.37c and d has been inserted as j and k respectively.	GP-04	GP-010939	030	3		4.4.0
GP-04 GP-010882 036 1 Broadcast of CCN mode support towards neighbour cells NOTE: new clause 3.4.1.2.1.7 has been inserted as 3.4.1.2.1.8. GP-04 GP-010980 039 2 3G to GSM HO & dynamic ARFCN mapping 4.5 GP-011422 053 3 Clarification of predefined configuration status report 4.5 GP-05 GP-011075 046 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.5 GP-05 GP-011075 046 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.5 GP-05 GP-011444 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.5 GP-06 GP-011630 071 Error in the introduction of CR A199 (Rel-4) 4.5 GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012708 134 Trainsparent UMTS specific information in Classmark Change 4.5 GP-07 GP-012230 106 Removal of TOA positioning method impact GP-07 GP-012233					NOTE: new clauses 9.1.43b and 43c has been inserted as 9.1.43i and 43j,	
GP-04 GP-01980 039 2 3G to GSM HO & dynamic ARFCN mapping 4.4 GP-05 GP-011422 053 3 Clarification of predefined configuration status report 4.1 GP-05 GP-010987 025 2 Correction in the RR Sublayer due to removal of Preemption on Uplink 4.3 GP-05 GP-011075 046 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.3 GP-05 GP-011444 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover 4.3 GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.3 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.3 GP-05 GP-010990 040 Invalid BSICs: terminology alignment. 4.3 GP-05 GP-011832 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.3 GP-05 GP-011843 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.3 GP-06<	GP-04	GP-010882	036	1	Broadcast of CCN mode support towards neighbour cells	4.4.0
GP-05 GP-011422 053 3 Clarification of predefined configuration status report 4.1 GP-05 GP-010987 025 2 Correction in the RR Sublayer due to removal of Preemption on Uplink 4.1 GP-05 GP-011075 046 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.1 GP-05 GP-011444 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover 1 Intercolor of the GSM to CDMA2000 handover procedure. 4.1 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.2 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.1 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.3 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.1 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.1 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.1 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.1 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.1 GP-06 GP-011897 099 CP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 1 Removal of IEI explicit value in the BA List Pref information element desc	00.04	00.010000	000	_		4.4.0
GP-05 GP-010987 025 2 Correction in the RR Sublayer due to removal of Preemption on Uplink GP-05 GP-011075 046 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.5 GP-05 GP-011444 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover in the case of blind handover of GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-010990 040 Invalid BSICs: terminology alignment. 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-06 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.5 GP-06 GP-011833 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-01203 106 Removal of Toda positioning method impact 4.6 GP-07 GP-012023 106 Removal of Toda positioning method impact 4.6 GP-07 GP-012023 106 Removal of Toda positioning method impact 4.6 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.5 GP-07 GP-01288 113 1 Transparent UMTS specific information in Classmark Change 4.5 GP-07 GP-01283 116 Clarification of the term primary scrambling code. 4.5						4.4.0
GP-05 GP-011075 046 Transfer of the N(SD) duplication avoidance protocol from GSM 04.18 4.5 GP-05 GP-011444 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover description and SI2quater 4.5 GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.6 GP-05 GP-010990 040 Invalid BSICs: terminology alignment. 4.6 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.6 GP-05 GP-01143 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.6 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.6 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.6 GP-06 GP-011830 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011931 02 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.6 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-01203 101 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.6 GP-07 GP-01283 116 Clarification of the term primary scrambling code.						4.5.0
GP-05 GP-011344 060 1 Handling of starting time in the case of intersystem handover to GSM and in the case of blind handover GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-05 GP-010990 040 Invalid BSICs: terminology alignment. 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.6 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.6 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011934 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.5 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.5 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.5 GP-07 GP-012731 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.5 GP-07 GP-012383 116 Clarification of the term primary scrambling code.				2		4.5.0
in the case of blind handover GP-05 GP-011337 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-05 GP-010990 040 Invalid BSICs : terminology alignment. 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.1 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.1 GP-06 GP-011924 101 Clarification of the band indicator field in SI6 (Rel-4) 4.1 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.1 GP-06 GP-011890 082 2 Clarification of UTRAN blind search from the SI2 quater (Rel-4) 4.1 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 4.1 GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.1 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.1 GP-07 GP-012708 134 Correction on GSM400 measurement parameter coding 4.1 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.1 GP-07 GP-012709 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.1 GP-07 GP-012383 116 Clarification of the term primary scrambling code.						4.5.0
GP-05 GP-011437 049 1 Coding Corrections to Measurement information and SI2quater 4.5 GP-05 GP-011440 042 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-05 GP-010990 040 Invalid BSICs: terminology alignment. 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011431 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.0 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) 4.0 GP-06 GP-011833 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.1 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.1 GP-06 GP-011931 102 Introduction of 'inconsistent' MultiRate configuration IE (Rel-4) 4.1 GP-06 GP-011939 063	GP-05	GP-011444	060	1		4.5.0
GP-05 GP-010990 040 Invalid BSICs : terminology alignment. 4.5 GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.6 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) 4.6 GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.6 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.6 GP-07 GP-012701 126 1 Correction on GSM400 measurement parameter coding 4.6 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.7 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.7 GP-07 GP-012383 116 Clarification of the term primary scrambling code.	GP-05	GP-011337	049	1	Coding Corrections to Measurement information and SI2quater	4.5.0
GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.6 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) 4.6 GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011932 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012701 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding GP-07 GP-01246 128 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.6 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR GP-07 GP-01233 116 Clarification of the term primary scrambling code.	GP-05	GP-011440	042	2	Introduction of the GSM to CDMA2000 handover procedure.	4.5.0
GP-05 GP-011382 051 1 Dynamic ARFCN mapping with equivalent PLMN 4.5 GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. 4.5 GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.6 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) 4.6 GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011932 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification GP-07 GP-012701 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding GP-07 GP-01246 128 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.6 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR GP-07 GP-01233 116 Clarification of the term primary scrambling code.	GP-05		040		Invalid BSICs: terminology alignment.	4.5.0
GP-05 GP-011443 043 2 Introduction of the GSM to CDMA2000 handover procedure. GP-06 GP-011636 071 Error in the introduction of CR A199 (Rel-4) 4.0 GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.0 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.0 GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.0 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.0 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.0 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.0 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.0 GP-07 GP-012704 104 1 Backward compatibility problem in SI2ter Rest octets 4.0 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.0 GP-07 GP-01203 106 Removal of TOA positioning method impact 4.0 GP-07 GP-01203 106 Removal of TOA positioning method impact 4.0 GP-07 GP-012701 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.0 GP-07 GP-01238 116 Clarification of the term primary scrambling code.	GP-05	GP-011382	051	1		4.5.0
GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.5 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.5 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.5 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.5 GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.5	GP-05	GP-011443	043	2		4.5.0
GP-06 GP-011757 084 Removal of IEI explicit value in the UTRAN Frequency list information element description (Rel-4) GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.6 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.7 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.7 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.7 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.7 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.7 GP-07 GP-012883 116 Clarification of the term primary scrambling code.	GP-06	GP-011636	071		Error in the introduction of CR A199 (Rel-4)	4.6.0
GP-06 GP-011853 086 1 Alignments and Clarifications (e.g. for equivalent PLMNs) (Rel-4) 4.6 GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.5 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.5 GP-07 GP-01203 106 Removal of TOA positioning method impact 4.5 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.5 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.5 GP-07 GP-012383 116 Clarification of the term primary scrambling code.	GP-06	GP-011757	084		Removal of IEI explicit value in the UTRAN Frequency list information	4.6.0
GP-06 GP-011931 102 Introduction of the band indicator field in SI6 (Rel-4) 4.6 GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.7 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.7 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.7 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.7 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.7 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.7 GP-07 GP-012383 116 Clarification of the term primary scrambling code.	GP-06	GP-011853	086	1		4.6.0
GP-06 GP-011924 101 Clarification of "inconsistent" MultiRate configuration IE (Rel-4) 4.6 GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (Rel-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.6 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.6 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.6 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.6 GP-07 GP-01203 106 Removal of TOA positioning method impact 4.7 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.7 GP-07 GP-012791 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.7 GP-07 GP-012383 116 Clarification of the term primary scrambling code.						4.6.0
GP-06 GP-011939 063 2 Introduction of UTRAN blind search from the SI2 quater (ReI-4) 4.6 GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (ReI 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (ReI-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.7 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.7 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.7 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-01203 106 Removal of TOA positioning method impact 4.7 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.7 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.7 GP-07 GP-012383 116 Clarification of the term primary scrambling code.	GP-06	GP-011924	101			4.6.0
GP-06 GP-011860 082 2 Clarification of the Index_Start_3G parameter (Rel 4) 4.6 GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) 4.6 GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.7 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.7 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.7 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.7 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.7 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.7 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.7 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.7 GP-07 GP-012383 116 Clarification of the term primary scrambling code.				2		4.6.0
GP-06 GP-011897 099 Removal of IEI explicit value in the BA List Pref information element description (Rel-4) GP-07 GP-012686 122 1 RA colour vs RA code clarification 4.5 GP-07 GP-012708 134 Training Sequence Code on PBCCH/PCCCH 4.5 GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.5 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.5 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.5 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.5 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.5 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.5 GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.5	GP-06			2	• • • • • • • • • • • • • • • • • • • •	4.6.0
GP-07GP-0126861221RA colour vs RA code clarification4.3GP-07GP-012708134Training Sequence Code on PBCCH/PCCCH4.3GP-07GP-0125741041Backward compatibility problem in SI2ter Rest octets4.3GP-07GP-012446128Correction on GSM400 measurement parameter coding4.3GP-07GP-0127011261Correction on Ciphering Mode Setting IE in HANDOVER COMMAND4.3GP-07GP-012023106Removal of TOA positioning method impact4.3GP-07GP-0126891131Transparent UMTS specific information in Classmark Change4.3GP-07GP-0127191241Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR4.3GP-07GP-012383116Clarification of the term primary scrambling code.4.3					Removal of IEI explicit value in the BA List Pref information element	4.6.0
GP-07GP-012708134Training Sequence Code on PBCCH/PCCCH4.GP-07GP-0125741041Backward compatibility problem in SI2ter Rest octets4.GP-07GP-012446128Correction on GSM400 measurement parameter coding4.GP-07GP-0127011261Correction on Ciphering Mode Setting IE in HANDOVER COMMAND4.GP-07GP-012023106Removal of TOA positioning method impact4.GP-07GP-0126891131Transparent UMTS specific information in Classmark Change4.GP-07GP-0127191241Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR4.GP-07GP-012383116Clarification of the term primary scrambling code.4.	GP-07	GP-012686	122	1		4.7.0
GP-07 GP-012574 104 1 Backward compatibility problem in SI2ter Rest octets 4.5 GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4.5 GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4.5 GP-07 GP-012023 106 Removal of TOA positioning method impact 4.5 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.5 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.5 GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.5				-		4.7.0
GP-07 GP-012446 128 Correction on GSM400 measurement parameter coding 4. GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4. GP-07 GP-012023 106 Removal of TOA positioning method impact 4. GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4. GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4. GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.				1		4.7.0
GP-07 GP-012701 126 1 Correction on Ciphering Mode Setting IE in HANDOVER COMMAND 4. GP-07 GP-012023 106 Removal of TOA positioning method impact 4. GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4. GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4. GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.				-		4.7.0
GP-07 GP-012023 106 Removal of TOA positioning method impact 4.3 GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.3 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.3 GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.3				1		4.7.0
GP-07 GP-012689 113 1 Transparent UMTS specific information in Classmark Change 4.1 GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.1 GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.1				<u> </u>		4.7.0
GP-07 GP-012719 124 1 Alignment of ASSIGNMENT CMD, HO CMD and CH MOD MOD for AMR 4.3 GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.3				1		4.7.0
GP-07 GP-012383 116 Clarification of the term primary scrambling code. 4.3					· · ·	4.7.0
gramman						4.7.0
L OL OL LOL VIZOLULUOJI I LAHDUUH DI FADVIJASSIDSIK SEDIDIDI DVAD ENLIJO CADADIE COD	GP-07	GP-012676		1	Support of Early Classmark Sending by an PBCCH capable cell	4.7.0
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1						4.7.0

History

	Document history				
V4.4.0	Avril 2001	Publication			
V4.5.0	June 2001	Publication			
V4.6.0	September 2001	Publication			
V4.7.0	January 2002	Publication			