

**Fixed Radio Systems;
Point-to-point equipment;
Parameters for radio systems for the transmission
of digital signals operating at 23 GHz**



Reference

REN/TM-04074

Keywordsarchitecture, digital, DRRS, point-to-point, radio,
transmission***ETSI***

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

| | |
|---|----|
| Intellectual Property Rights | 5 |
| Foreword..... | 5 |
| 1 Scope | 6 |
| 2 References | 7 |
| 3 Symbols and abbreviations..... | 9 |
| 3.1 Symbols..... | 9 |
| 3.2 Abbreviations | 9 |
| 4 General characteristics | 10 |
| 4.1 Frequency bands and channel arrangements | 10 |
| 4.1.1 Channel arrangements..... | 10 |
| 4.1.2 Channel spacing for systems operating on the same route..... | 10 |
| 4.2 Compatibility requirements between systems | 11 |
| 4.3 Performance and availability requirements | 11 |
| 4.4 Environmental conditions..... | 11 |
| 4.4.1 Equipment within weather protected locations (indoor locations)..... | 11 |
| 4.4.2 Equipment for non-weather protected locations (outdoor locations) | 11 |
| 4.5 Power supply | 11 |
| 4.6 Electromagnetic compatibility..... | 11 |
| 4.7 System block diagram | 12 |
| 4.8 Telecommunications Management Network (TMN) interface..... | 12 |
| 4.9 Branching/feeder/antenna characteristics | 12 |
| 4.9.1 Antenna radiation patterns | 12 |
| 4.9.2 Antenna cross-Polar Discrimination (XPD) | 12 |
| 4.9.3 Antenna Inter-Port Isolation (IPI)..... | 12 |
| 4.9.4 Waveguide flanges (or other connectors) | 12 |
| 4.9.5 Return loss | 13 |
| 5 System Parameters | 13 |
| 5.1 Transmission capacity | 13 |
| 5.2 Baseband parameters | 13 |
| 5.2.1 Plesiochronous interfaces | 13 |
| 5.2.2 SDH baseband interface..... | 13 |
| 5.3 Transmitter characteristics..... | 14 |
| 5.3.1 Transmitter power range | 14 |
| 5.3.2 Transmit power and frequency control | 14 |
| 5.3.2.1 Automatic Transmit Power Control (ATPC) | 14 |
| 5.3.2.2 Remote Transmit Power Control (RTPC) | 14 |
| 5.3.2.3 Remote Frequency Control (RFC) | 15 |
| 5.3.3 Transmitter output power tolerance | 15 |
| 5.3.4 Transmit Local Oscillator (LO) frequency arrangements | 15 |
| 5.3.5 RF spectrum mask | 15 |
| 5.3.6 Spectral lines at the symbol rate | 18 |
| 5.3.7 Spurious emissions | 18 |
| 5.3.7.1 Spurious emissions - external..... | 18 |
| 5.3.7.2 Spurious emissions - internal | 19 |
| 5.3.8 Radio frequency tolerance | 19 |
| 5.4 Receiver characteristics | 19 |
| 5.4.1 Input level range | 19 |
| 5.4.2 Receiver local oscillator frequency arrangements | 19 |
| 5.4.3 Spurious emissions | 19 |
| 5.4.3.1 Spurious emissions - internal | 19 |
| 5.5 System performance without diversity | 19 |
| 5.5.1 BER as a function of Receiver input Signal Level (RSL)..... | 20 |
| 5.5.2 Equipment Residual BER | 20 |

| | | |
|-------------------------------|---|-----------|
| 5.5.3 | Interference sensitivity..... | 20 |
| 5.5.3.1 | Co-channel interference sensitivity | 21 |
| 5.5.3.2 | Adjacent channel Interference..... | 21 |
| 5.5.3.3 | CW Spurious Interference..... | 22 |
| 5.5.3.4 | Front-end non-linearity requirements (two-tone CW spurious interference) | 22 |
| 5.5.4 | Distortion sensitivity..... | 23 |
| 5.6 | System characteristics with diversity | 23 |
| Annex A (informative): | Additional information..... | 24 |
| A.1 | Radio frequency channel arrangement | 24 |
| A.2 | Feeder/antenna return loss | 24 |
| A.3 | Automatic Transmit Power Control (ATPC) | 25 |
| A.4 | RBER | 25 |
| A.5 | Co-channel and adjacent channel interference | 26 |
| Annex B (normative): | Essential requirements for the EC Council Directive 89/336 (EMC Directive) | 30 |
| Annex C (normative): | System type codes for regulatory procedures | 31 |
| Annex D (normative): | Output Power Tolerance and RBER..... | 32 |
| History | | 33 |

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Transmission and Multiplexing (TM), and is now submitted for the Voting phase of the ETSI standards Two-step Approval Procedure.

The present document specifies the minimum performance parameters for radio equipment operating in the frequency ranges as detailed in subclause 4.1.1.


The former title of the present document was "Transmission and Multiplexing (TM); Digital Radio Relay Systems (DRRS); Parameters for DRRS for the transmission of digital signals and analogue video signals operating at 23 GHz".

| Proposed national transposition dates | |
|--|---------------------------------|
| Date of latest announcement of this EN (doa): | 3 months after ETSI publication |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 6 months after doa |
| Date of withdrawal of any conflicting National Standard (dow): | 6 months after doa |

1 Scope

The present document specifies the minimum performance parameters for terrestrial digital fixed service radio communications equipments operating in the 23 GHz frequency band and contains a complete revision in the areas of:

- additional systems with higher spectrum efficiency in the new class 4 systems;
- introduction of unique system type codes for regulatory reference to the various system types detailed in the present document, refer to new annex C and related categories of equipment classes of spectral efficiency;
- change of spectrum mask and adjacent channel selectivity of STM-0 systems in 28 MHz channel spacing to align to EN 300 639 [33];
- introduction of new spectrum efficiency class 5 for STM-1 capacity for 28 MHz Adjacent Channel Alternate-Polarization (ACAP as class 5a) and Adjacent Channel Co-Polarization (ACCP as class 5b), see examples of the spectrum usage in figures 1.1a and 1.1b;

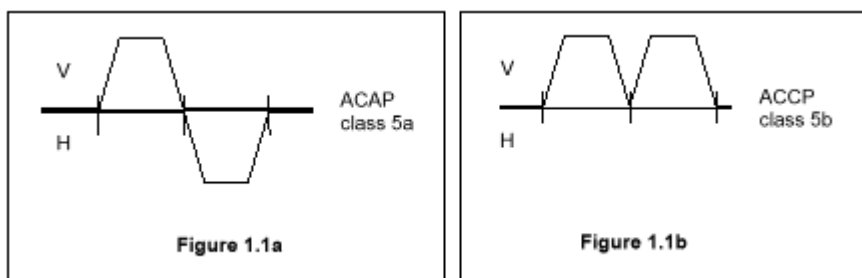

- technical specifications relevant to the EMC Directive, detailed in annex B.

NOTE: In a previous version of the present document there was provision for:

- parameters for wideband analogue systems;
- further options for digital radio systems (there referred as Grade A systems);
- specific antenna radiation patterns (now superseded by EN 300 833 [3]).

These options are not reprinted in this version as they are considered to be no longer of interest for ETSI members. However, for regulatory purposes, they may still be referenced from the previous version.

Digital systems are intended to be used for point-to-point connections in local and regional networks at data rates between 2 Mbit/s and Synchronous Transport Module, level 1 (STM-1).

The parameters to be specified fall into two categories:

- a) those that are required to provide compatibility between channels from different sources of equipment on the same route, connected either:
 - to separate antennas; or
 - to separate polarizations of the same antenna.
- b) parameters defining the transmission quality of the proposed system.

The present document deals with Radio Frequency (RF) and baseband characteristics relevant to low, medium and high capacity Plesiochronous Digital Hierarchy (PDH) transmission systems, STM-0 and STM-1 Synchronous Digital Hierarchy (SDH) transmission systems. Antenna/feeder system requirements are covered in EN 300 833 [3].

The present document does not contain aspects related to test procedures and test conditions however they are to be found in EN 301 126-1 [2].

As the maximum transmission rate in a given bandwidth depends on system spectral efficiency, different equipment classes are defined:

- class 1: equipment performance based on typically 2-states modulation scheme (e.g. 2-FSK (Frequency-Shift Keying), Gaussian Minimum Shift Keying (GMSK) with discriminator detection, or equivalent);
- class 2: equipment spectral efficiency based on typically 4-states modulation scheme (e.g. 4-FSK, 4-QAM, or equivalent);
- class 3: equipment spectral efficiency based on typically 8-states modulation scheme (e.g. 8 PSK, or equivalent);
- class 4: equipment spectral efficiency based on typically 16 or 32-states modulation scheme (e.g. 16-QAM, 32-QAM, or equivalent);
- class 5: equipment spectral efficiency based on typically 64-states or 128-states modulation scheme (e.g. 64-QAM, 128-QAM, or equivalent).

The above classes are indicative only and do not imply any constraint to the actual modulation format, provided that all the requirements in the present document are met.

Safety aspects will not be considered in the present document. However compliance to EN 60950 [34] will be required to comply with 1999/5/EC [35] Directive (R&TTE).

Technical background for most of the parameters and requirements referred in the present document may be found in TR 101 036-1 [30].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] CEPT Recommendation T/R 13-02: "Preferred channel arrangements for fixed services in the range 22,0 GHz to 29,5 GHz".
- [2] ETSI EN 301 126-1: "Fixed Radio Systems; Conformance testing; Part 1: Point-to-Point equipment - Definitions, general requirements and test procedures".
- [3] ETSI EN 300 833: "Fixed Radio Systems; Point to Point Antennas; Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz".
- [4] ITU-R Recommendation F.637-3: "Radio-frequency channel arrangements for radio-relay systems operating in the 23 GHz band".
- [5] ETSI EN 300 645: "Telecommunications Management Network (TMN); Synchronous Digital Hierarchy (SDH) radio relay equipment; Information model for use on Q interfaces".
- [6] ETSI ETS 300 019 (all parts): "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment".
- [7] ETSI ETS 300 132-1: "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources".

- [8] ETSI ETS 300 132-2: "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)".
- [9] ETSI EN 300 385: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment".
- [10] ETSI ETS 300 635: "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH); Radio specific functional blocks for transmission of Mx STM-N".
- [11] ETSI ETS 300 785: "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH); Radio specific functional blocks for transmission of M x sub-STM-1".
- [12] ITU-R Recommendation F.750-3: "Architectures and functional aspects of radio-relay systems for SDH-based networks".
- [13] ITU-R Recommendation F.751-2: "Transmission characteristics and performance requirements of radio-relay systems for SDH-based networks".
- [14] ITU-R Recommendation F.1102: "Characteristics of radio-relay systems operating in frequency bands above about 17 GHz".
- [15] ITU-R Recommendation F.1189-1: "Error performance objectives for constant bit rate digital paths at or above the primary rate carried by digital radio-relay systems which may form part or all of the national portion of a 27 500 km hypothetical reference path".
- [16] ITU-R Recommendation F.1191-1: "Bandwidths and unwanted emissions of digital radio-relay systems".
- [17] ITU-R Recommendation P.530-6: "Propagation data and prediction methods required for the design of terrestrial line-of-sight systems".
- [18] ITU-T Recommendation G.703 (1991): "Physical/electrical characteristics of hierarchical digital interfaces".
- [19] ITU-T Recommendation G.707 (1996): "Network node interface for the synchronous digital hierarchy (SDH)".
- [20] ITU-T Recommendation G.773 (1993): "Protocol suites for Q-interfaces for management of transmission systems".
- [21] ITU-T Recommendation G.708: "Sub STM-0 network node interface for the synchronous digital hierarchy (SDH)".
- [22] IEC 60154-2: "Flanges for waveguides. Part 2: Relevant specifications for flanges for ordinary rectangular waveguides".
- [23] ITU-T Recommendation G.783 (1994): "Characteristics of synchronous digital hierarchy (SDH) equipment functional blocks".
- [24] ITU-T Recommendation G.784 (1994): "Synchronous digital hierarchy (SDH) management".
- [25] ITU T Recommendation G.826 (1993): "Error performance parameters and objectives for international, constant bit rate digital paths at or above the primary rate".
- [26] ITU-T Recommendation G.861 (1996): "Principles and guidelines for the integration of satellite and radio systems in SDH transport networks".
- [27] ITU-T Recommendation G.957 (1995): "Optical interfaces for equipments and systems relating to the synchronous digital hierarchy".
- [28] ITU-T Recommendation O.151 (1992): "Error performance measuring equipment operating at the primary rate and above".
- [29] ITU-T Recommendation O.181 (1996): "Equipment to assess error performance on STM-N interfaces".

- [30] ETSI TR 101 036-1 (V1.1): "Transmission and Multiplexing (TM); Digital Radio Relay Systems (DRRS); Generic wordings for standards on DRRS characteristics; Part 1: General aspects and point-to-point equipment parameters".
- [31] CEPT/ERC Recommendation 74-01: "Spurious Emissions".
- [32] ETSI TR 101 035 (V1.1): "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH) aspects regarding Digital Radio Relay Systems (DRRS)".
- [33] ETSI EN 300 639: "Fixed Radio Systems; Point-to-point equipment; Sub-STM-1 digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 28 MHz co-polar and 14 MHz cross-polar channel spacing".
- [34] EN 60950: "Safety of information technology equipment".
- [35] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.
- [36] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility.

3 Symbols and abbreviations

3.1 Symbols

For the purposes of the present document, the following symbols apply:

| | |
|----------|--------------------------|
| Ω | Ohm |
| dB | decibel |
| dBm | decibel relative to 1 mW |
| GHz | GigaHertz |
| kHz | kiloHertz |
| Mbit/s | Megabits per second |
| MHz | MegaHertz |
| mW | milliWatt |
| ns | nanosecond |
| ppm | parts per million |

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|------|---|
| ac | alternating current |
| ACAP | Adjacent Channel Alternate Polarization |
| ACCP | Adjacent Channel Co-Polarization |
| ATPC | Automatic Transmit Power Control |
| AU | Administrative Unit |
| BB | Base Band |
| BBER | Background Block Error Rate |
| BER | Bit Error Rate |
| C/I | Carrier to Interference ratio |
| CMI | Coded Mark Inversion |
| CW | Continuous Wave |
| dc | direct current |
| DRRS | Digital Radio Relay Systems |
| EIRP | Equivalent Isotropically Radiated Power |
| EMC | ElectroMagnetic Compatibility |
| ESR | Errored Second Ratio |
| FSK | Frequency-Shift Keying (modulation) |

| | |
|-----------|---|
| IF | Intermediate Frequency |
| IPI | Inter-Port Isolation |
| LO | Local Oscillator |
| PDH | Plesiochronous Digital Hierarchy |
| PRBS | Pseudo Random Binary Sequence |
| QAM | Quadrature Amplitude Modulation |
| RBER | Residual BER |
| RF | Radio Frequency |
| RFC | Remote Frequency Control |
| RSL | Receive Signal Level |
| RTPC | Remote Transmit Power Control |
| SDH | Synchronous Digital Hierarchy |
| SOH | Section OverHead |
| STM-0 | medium capacity SDH radio transport module (51,840 Mbit/s AU-3 equivalent, also referred as STM-0 by ITU-T Recommendation G.861 [26]) |
| STM-N | Synchronous Transport Module, level N |
| sub-STM-0 | low capacity SDH radio transport module (n times VC-12 or VC2 equivalent) |
| TMN | Telecommunications Management Network |
| XPD | cross-Polar Discrimination |

4 General characteristics

4.1 Frequency bands and channel arrangements

4.1.1 Channel arrangements

The frequency range shall be 22 GHz to 22,6 GHz paired with 23 GHz to 23,6 GHz. The channel arrangements shall be in accordance with CEPT Recommendation T/R 13-02 [1].

For reader convenience, the basic parameters of the CEPT Recommendation are shown in annex A.

4.1.2 Channel spacing for systems operating on the same route

System bit rates and their relevant channel spacing in the present document are reported in table 1 (for the precise payload bit rates, see subclause 5.1).

NOTE: According to systems characteristics the equipment can be connected either to separate antennas or on a separate polarization to the same antenna.

Table 1: Digital systems channel spacings for various bit rates

| | Payload Bit Rate [Mbit/s]⇒ | 2 | 2 × 2 | 8 | 2 × 8 | 34 | 51 | 140 and 155 |
|--|-----------------------------------|----------|--------------|----------|--------------|-----------|-----------|--------------------|
| Channel Spacings [MHz] | Class 2 equipments | 3,5 | 3,5 | 7 | 14 | 28 | 56 | |
| | Class 4 equipments | | | 3,5 | 7 | 14 | 14/28 | 56 |
| | Class 5 equipments | | | | | | | 28 |
| NOTE: $n \times 2$ Mbit/s and $n \times 34$ Mbit/s bit rates may be used where appropriate. $n \times 2$ Mbit/s mapped into SDH VC12 transport bit rates (sub-STM-0 defined by ITU-T Recommendation G.708 [21]) may be used where appropriate (e.g. three or four times VC12 into an 8 Mbit/s channel spacing). The class 2, 2Mbit/s in 3.5MHz and the class 4 in 28MHz reflects equipment more typical to a class 1 (2Mbit/s) and class 3 (STM-0) system and as a result the adjacent channel interference parameters are more stringent. | | | | | | | | |

For regulatory purposes in national procedures for licensing radio equipment according to the present document, the above system types shall be identified by the "system type codes" reported in annex C.

4.2 Compatibility requirements between systems

The compatibility requirements between systems are as follows:

- there shall be no requirement to operate transmitting equipment from one manufacturer with receiving equipment from another;
- there shall not be a requirement to multiplex different manufacturers equipment on the same polarization of the same antenna;
- there may be a requirement to multiplex different manufacturers equipment on different polarization of the same antenna. This will not apply to systems with integral antenna;
- depending on the application, it shall be possible to operate the system in vertical and/or horizontal polarization, if required by the channel arrangement.

4.3 Performance and availability requirements

Digital equipment shall be designed in order to meet network performance and availability requirements foreseen by ITU-T Recommendation G.826 [25], following the criteria defined in ITU-R Recommendations F.1189-1 [15] for the national portion of the digital connection.

The implication of the link design on the performance is recognized and the general design criteria reported in ITU-R Recommendations P.530-6 [17] and F.1102 [14] shall be applied.

4.4 Environmental conditions

The equipment shall be required to meet the environmental conditions set out in ETS 300 019 [6] which defines weather protected and non-weather protected locations, classes and test severity. The manufacturer shall state which class the equipment is designed to withstand.

4.4.1 Equipment within weather protected locations (indoor locations)

Equipment intended for operation within temperature controlled locations or partially temperature controlled locations shall meet the requirements of ETS 300 019 [6] classes 3.1 and 3.2 respectively.

Optionally, the more stringent requirements of ETS 300 019 [6] classes 3.3 (non-temperature controlled locations), 3.4 (sites with heat trap) and 3.5 (sheltered locations) may be applied.

4.4.2 Equipment for non-weather protected locations (outdoor locations)

Equipment intended for operation within non-weather protected locations shall meet the requirements of ETS 300 019 [6], class 4.1 or 4.1E.

Class 4.1 applies to many European countries and class 4.1E applies to all European countries.

4.5 Power supply


The power supply interface shall be in accordance with the characteristics of one or more of the secondary voltages foreseen in ETS 300 132-1 [7] and ETS 300 132-2 [8].

NOTE: Some applications may require secondary voltages that are not covered by ETS 300 132-1 [7] and ETS 300 132-2 [8].

4.6 Electromagnetic compatibility

Equipment shall operate under the conditions specified in EN 300 385 [9].

4.7 System block diagram

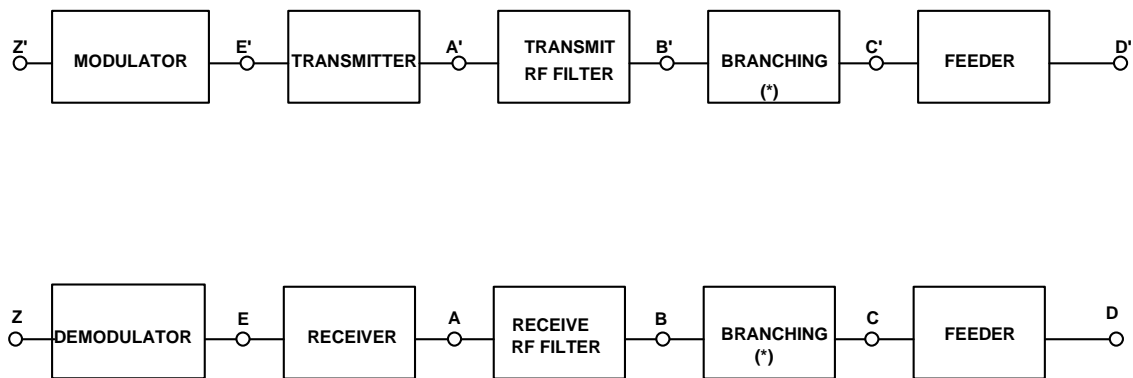

(*) NO FILTERING INCLUDED

NOTE 1: For the purpose of defining the measurement points, the branching network does not include a hybrid.

NOTE 2: The points shown above are reference points only; points C and C', D and D' in general coincide.

NOTE 3: Points B and C, B' and C' may coincide when simple duplexer is used.

Figure 2: System block diagram

4.8 Telecommunications Management Network (TMN) interface

For SDH equipment ITU-T Recommendations G.784 [24] and G.773 [20] and ITU-R Recommendations F.750-3 [12] and F.751-2 [13] give the general requirements for TMN interface and functionality. ETS 300 635 [10], ETS 300 785 [11] and EN 300 645 [5] give the radio specific functional block description and the related radio fragment information model respectively.

NOTE: The standardization of TMN interface functionality is under study in ETSI TMN, and will be applicable to the radio relay systems considered in the present document.

4.9 Branching/feeder/antenna characteristics

4.9.1 Antenna radiation patterns

See EN 300 833 [3] .

4.9.2 Antenna cross-Polar Discrimination (XPD)

See EN 300 833 [3] .

4.9.3 Antenna Inter-Port Isolation (IPI)

See EN 300 833 [3] .

4.9.4 Waveguide flanges (or other connectors)

When flanges are required at reference point C, C', the following shall be used according to IEC 60154-2 [22]:

- UBR/PBR/CBR-220, for the complete frequency range.

4.9.5 Return loss

Equipments according to the present document are likely to have integral antennas or very similar technical solutions, without long feeder connections; return loss is not considered an essential requirement.

When an antenna is an integral part of the equipment there shall be no requirement.

For feeder/antenna return loss requirement see annex A.

5 System Parameters

5.1 Transmission capacity

Payload bit rates considered in the present document are:

- 2 048 Mbit/s;
- $2 \times 2\,048$ Mbit/s;
- 8 448 Mbit/s;
- $2 \times 8\,448$ Mbit/s;
- 34 368 Mbit/s;
- 51 840 Mbit/s (STM-0);
- 139 264 Mbit/s; and
- 155 520 Mbit/s (STM-1).

System rates configured as n-times 2 Mbit/s or n-times 34 Mbit/s or n-times 2 Mbit/s mapped into SDH VC-12 (sub-STM-0) are also considered.

In the following clauses, these capacities will be simply referred as 2 Mbit/s, 2×2 Mbit/s, 8 Mbit/s, 2×8 Mbit/s, 34 Mbit/s, 51 Mbit/s (STM-0), 140 Mbit/s, and 155 Mbit/s (STM-1) respectively.

5.2 Baseband parameters

All the following specified baseband parameters refer to point Z and Z' of figure 2. Parameters for service channels and wayside traffic channels are outside the scope of the present document.

5.2.1 Plesiochronous interfaces

Plesiochronous interfaces at 2 Mbit/s, 8 Mbit/s, 34 Mbit/s and 140 Mbit/s shall comply with ITU-T Recommendation G.703 [18].

5.2.2 SDH baseband interface

The SDH baseband interface shall be in accordance with ITU-T Recommendations G.703 [18], G.707 [19], G.783 [23], G.784 [24] and G.957 [27] and ITU-R Recommendations F.750-3 [12] and F.751-2 [13]. For sub-STM-0 rates ITU-T Recommendation G.861 [26] mapping applies.

Two STM-1 interfaces shall be possible:

- Coded Mark Inversion (CMI) electrical (ITU-T Recommendation G.703 [18]); and
- Optical (ITU-T Recommendation G.957 [27]).

The use of reserved bytes contained in the Section OverHead (SOH), and their termination shall be in accordance with ITU-R Recommendations F.750-3 [12], F.751-2 [13] and for sub-STM-0 with ITU-T Recommendation G.708 [21].

NOTE: Further details on the possible use of the SOH bytes reserved for future international standardization are given in annex 1 of TR 101 035 [32].

5.3 Transmitter characteristics

The specified transmitter characteristics shall be met with the appropriate baseband signals applied at reference point Z' of figure 2. For PDH interface this shall be a Pseudo Random Binary Sequence (PRBS) according to ITU-T Recommendation O.151 [28] while for SDH interface ITU-T Recommendation O.181 [29] test signal applies.

5.3.1 Transmitter power range

Transmitter maximum mean output power at reference point C' of the system block diagram (figure 2) shall not exceed +30 dBm (including tolerance and, if applicable, ATPC/RTPC influence).

Regulatory administrations may define nominal sub-ranges below this maximum limit.

NOTE: The technological evolution may result in equipment falling outside of the range(s) foreseen in this subclause. In this case the equipments of different output power sub-ranges are not considered to require individual type approval, however their use is subject to individual national agreements.

A capability for output power level adjustment may be required for regulatory purposes, in which case the range of adjustment, either by fixed or automatic attenuators, should be in steps of 5 dB or less.

5.3.2 Transmit power and frequency control

5.3.2.1 Automatic Transmit Power Control (ATPC)

ATPC is an optional feature. Equipment with ATPC will be subject to manufacturer declaration of ATPC ranges and related tolerances. The manufacturer shall declare if the equipment is designed with ATPC as a fixed permanent feature. Testing shall be carried out with output power level corresponding to:

- ATPC set manually to a fixed value for system performance (subclauses 5.5 and 5.6);
- ATPC set at maximum available power for transmit performance (subclause 5.3).

It shall be verified that the emitted RF spectrum is within the absolute RF spectrum mask evaluated for the maximum available output power of the equipment, including the attenuation introduced by RTPC, if any.

NOTE: Where the use of ATPC is considered compulsory for regulatory purposes the transmitter output power should meet the spectrum mask limits throughout the ATPC range.

5.3.2.2 Remote Transmit Power Control (RTPC)

RTPC is an optional feature. Equipment with RTPC will be subject to manufacturer declaration of RTPC ranges and related tolerances. Testing shall be carried out with output power level corresponding to:

- RTPC set to the maximum nominal power for transmit performance (subclause 5.3) and for system performance (subclause 5.5 and 5.6);
- the RF spectrum mask shall be verified in three points (low, medium, and high) of the RTPC power excursion and with ATPC set to maximum available power (if any). When these spectrum measurements are made difficulties may be experienced. Actual measurement methods shall be addressed in further investigations and will be defined in the conformance testing standard, EN 301 126-1 [2].

RTPC range should be restricted, taking into account the wideband noise generated by the transmitter chain, to ensure the spectrum mask requirements are met throughout the transmitter output power range.

NOTE: Where the use of ATPC is considered compulsory for regulatory purposes the transmitter output power should meet the spectrum mask limits throughout the ATPC range.

5.3.2.3 Remote Frequency Control (RFC)

RFC is an optional feature. Equipment with RFC will be subject to manufacturer declaration of RFC ranges and related change frequency procedure. Testing shall be carried out including:

- RFC setting procedure at least for three frequencies (lower, centre and higher of the covered range);
- RFC setting procedure shall not produce emissions outside the previous and final frequency spectrum mask.

5.3.3 Transmitter output power tolerance

The nominal output power shall be declared by the supplier.

The tolerance of the nominal output power shall be within:

- for systems operating within non-weather protected locations and within classes 3.3, 3.4 and 3.5 weather protected locations:
 - nominal output power ± 2 dB.
- for systems operating within other classes of weather protected locations:
 - nominal output power ± 2 dB.

For class 5b systems refer to the annex D for further details.

5.3.4 Transmit Local Oscillator (LO) frequency arrangements

There shall be no requirement on transmit LO frequency arrangement.

5.3.5 RF spectrum mask

The spectrum masks are shown in figure 3a to 3d.


The 0 dB level shown on the spectrum masks relates to the spectral power density of the nominal centre frequency disregarding residual carrier.

Masks shall be measured with a modulating base-band signal given by a PRBS signal given in ITU-T Recommendation O.151 [28] in the case of PDH signal or ITU-T Recommendation O.181 [29] in the case of STM-1 signal.

The recommended spectrum analyser settings for measuring the RF spectrum mask detailed in figures 3 are shown in table 2.


Table 2: Spectrum analyser settings for RF power spectrum measurement

| Channel Spacing [MHz] | 3,5 | 7 | 14 | 28 | 56 |
|-----------------------|--------|--------|--------|--------|--------|
| Centre Frequency | Actual | Actual | Actual | Actual | Actual |
| Sweep width [MHz] | 20 | 40 | 80 | 160 | 320 |
| Scan time | Auto | Auto | Auto | Auto | Auto |
| IF bandwidth [kHz] | 30 | 30 | 30 | 100 | 100 |
| Video bandwidth [kHz] | 0,1 | 0,3 | 0,3 | 0,3 | 0,3 |

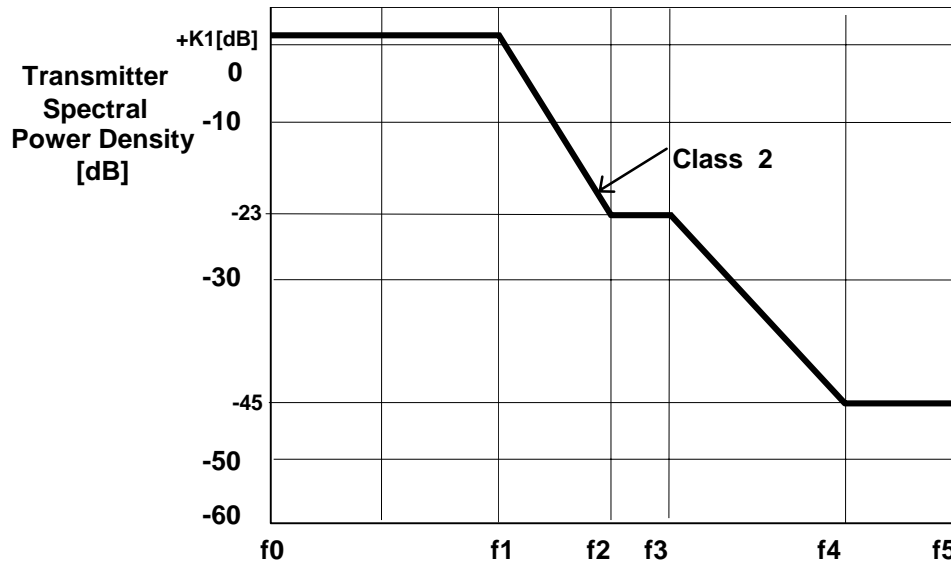


NOTE: Frequency expressed from actual transmitter centre frequency [MHz].

Figure 3a: Limits of spectral power density for class 2 systems

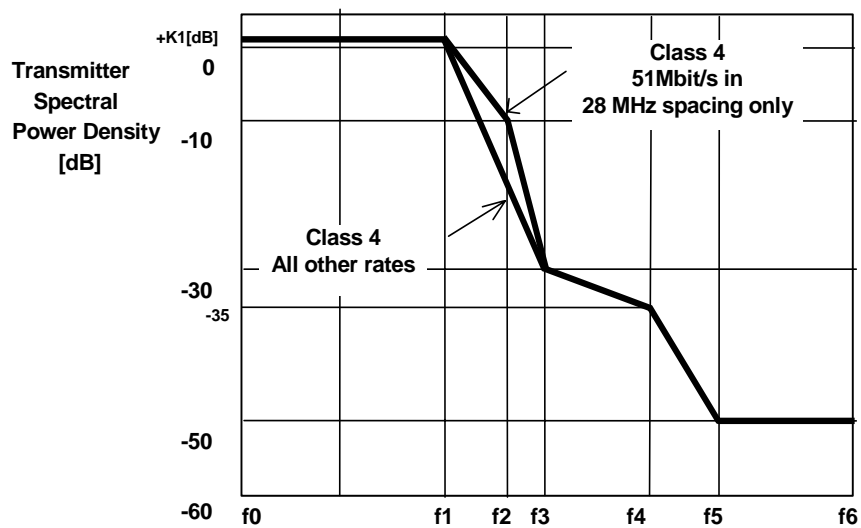


NOTE: Frequency expressed from nominal transmitter centre frequency [MHz].

Figure 3b: Limits of spectral power density for class 4 systems

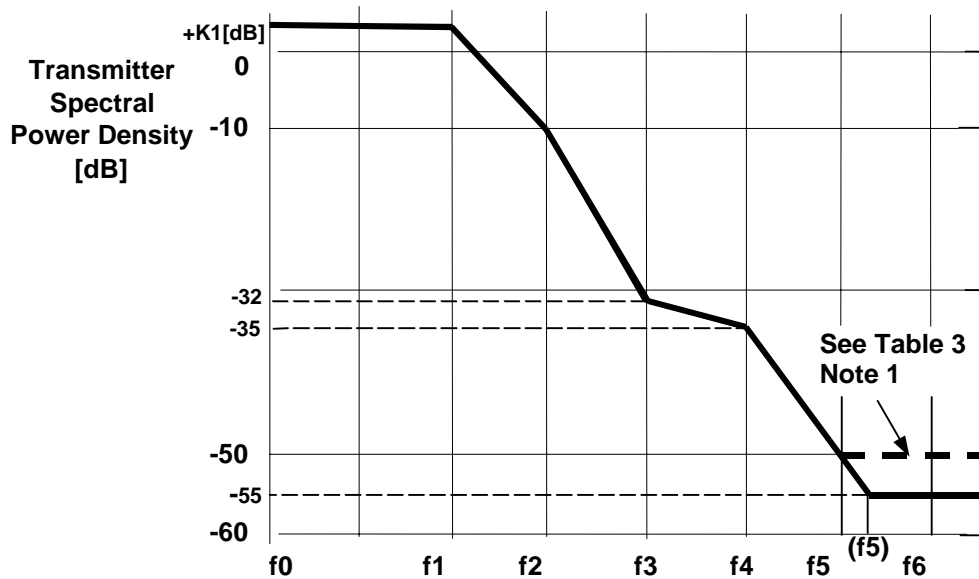

NOTE: Frequency expressed from actual transmitter centre frequency [MHz].

Figure 3c: Limits of spectral power density for Class 5a systems

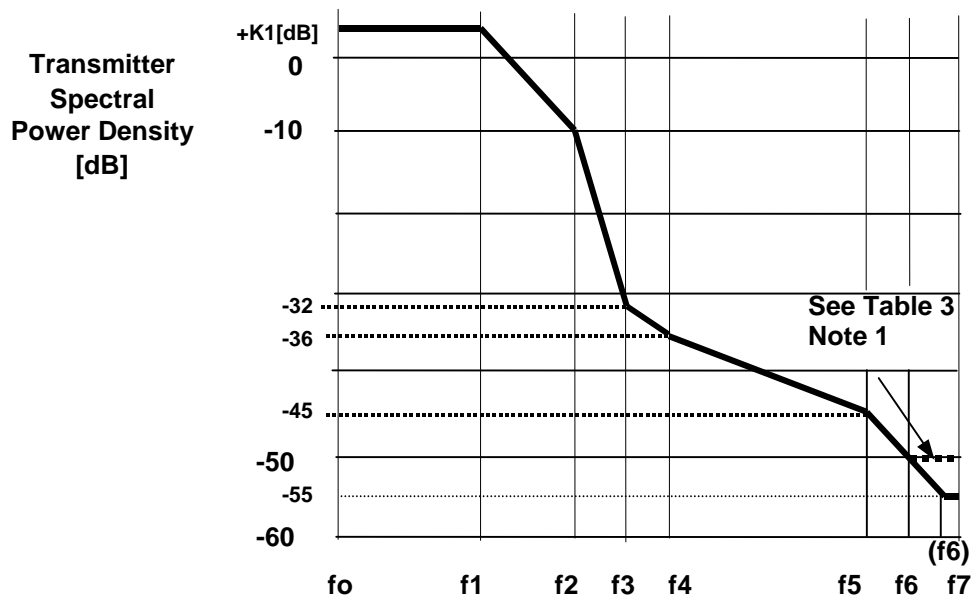

NOTE: Frequency expressed from actual transmitter centre frequency [MHz].

Figure 3d: Limits of spectral power density for Class 5b systems

Due to limitations of some spectrum analysers, difficulties may be experienced when testing high capacity/wideband systems. In this event, the following options are to be considered: measurement using high performance spectrum analyser, use of notch filters and two step measurement technique. Where difficulties are experienced, the plots of one test conducted at ambient and environmental extremes may be produced as evidence to conformance to the spectrum mask.

Reference frequencies f 1 to f 7 and relative attenuation K1[dB] are reported in tables 3 for the bit rate and channel spacing foreseen.

Table 3a: Spectrum mask frequency limits

| Spectrum efficiency class | Bit-rate [Mbit/s] | Channel spacing [MHz] | Figure | K1 [dB] | f 1 [MHz] | f 2 [MHz] | f 3 [MHz] | f 4 [MHz] | f 5 [MHz] | f 6 [MHz] | f 7 [MHz] |
|---------------------------|-------------------|-----------------------|--------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 2 | 2 | 3,5 | 3a | +1 | 1,3 | 2 | 2,3 | 4,3 | 8,75 | n.a. | n.a. |
| | 2 x 2 | 3,5 | | +1 | 1,4 | 2,8 | 3,5 | 7 | 8,75 | n.a. | n.a. |
| | 8 | 7 | | +1 | 2,8 | 5,6 | 7 | 14 | 17,5 | n.a. | n.a. |
| | 2 x 8 | 14 | | +1 | 5,6 | 11,2 | 14 | 28 | 35 | n.a. | n.a. |
| | 34 | 28 | | +1 | 11 | 19 | 25 | 45 | 70 | n.a. | n.a. |
| | 51 | 56 | | +1 | 18 | 32 | 40 | 70 | 140 | n.a. | n.a. |
| 4 | 8 | 3,5 | 3b | +1 | 1,4 | n.a. | 2,8 | 3,5 | 6,15 | 8,75 | n.a. |
| | 2 x 8 | 7 | | +1 | 2,8 | n.a. | 5,6 | 7 | 12,25 | 17,5 | n.a. |
| | 34 | 14 | | +1 | 5,6 | n.a. | 11,2 | 14 | 24,5 | 35 | n.a. |
| | 51 | 14 | | +1 | 7 | n.a. | 9,5 | 14 | 24,5 | 35 | n.a. |
| | 51 | 28 | | +1 | 7,5 | 10,5 | 12,5 | 22 | 30 | 70 | n.a. |
| | 140 or 155 | 56 | | +1 | 22,5 | n.a. | 33 | 65 | 74 | 140 | n.a. |
| 5a | 140 or 155 | 28 | 3c | +2 | 12,5 | 15 | 17 | 20 | 50 | 70 | n.a. |
| 5b | 140 or 155 | 28 | 3d | +2 | 12 | 14,5 | 15,5 | 17 | 25 | 30 | 70 |
| n.a.: not applicable. | | | | | | | | | | | |

NOTE: The mask floor at 55 dB is required for guaranteeing RBER performance in the presence of multiple adjacent channels regardless of the FEC algorithm implemented, however for regulatory purposes attenuation greater than 50 dB is not required. The corresponding f1 - f7 values for a mask floor of 50 dB as in table 3b.

Table 3b: Spectrum mask frequency limits for mask floor of 50dB

| Spectrum efficiency class | Bit-rate [Mbit/s] | Channel spacing [MHz] | Figure | K1 [dB] | f 1 [MHz] | f 2 [MHz] | f 3 [MHz] | f 4 [MHz] | f 5 [MHz] | f 6 [MHz] | f 7 [MHz] |
|---------------------------|-------------------|-----------------------|--------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 5a | 140 or 155 | 28 | 3c | +2 | 12,5 | 15 | 17 | 20 | 42,5 | 70 | n.a. |
| 5b | 140 or 155 | 28 | 3d | +2 | 12 | 14,5 | 15,5 | 17 | 25 | 27,5 | 70 |

5.3.6 Spectral lines at the symbol rate

The power level (reference point B') of spectral lines at a distance from the channel centre frequency equal to the symbol rate shall be more than 23 dB below the average power level of the carrier for class 2, 37 dB for class 4 and 5a and 43 dB for class 5b.

5.3.7 Spurious emissions

It is necessary to define spurious emissions from transmitters for two reasons:

- to limit interference into systems operating wholly externally to the system channel plan (external emissions);
- to limit local interference within the system where transmitters and receivers are directly connected via the filter and branching systems (internal emissions).

This leads to two sets of spurious emission limits where the specific limits given for "internal" interference are required to be no greater than the "external" level limits at reference point B' for indoor systems and C' for outdoor systems (where a common Tx/Rx duplexer is used).

5.3.7.1 Spurious emissions - external

According to ITU-R Recommendation F.1191-1 [16], and CEPT/ERC Recommendation 74-01 [31], the external spurious emissions are defined as emissions at frequencies which are outside the nominal carrier frequency ± 250 % of the relevant channel separation.

The limits of these emissions shall conform to CEPT/ERC Recommendation 74-01 [31].

5.3.7.2 Spurious emissions - internal

When there is the requirement to multiplex different manufacturers equipment on different polarization of the same antenna, the levels of the spurious emissions from the transmitter, referenced to reference point C' shall be as specified in table 4.

The required level will be the total average level of the emission under consideration.

Table 4: Internal levels for the transmitter spurious emissions

| Spurious emission frequency relative to channel assigned frequency | Specification limit | Controlling factor for requirement application |
|--|---------------------|---|
| The average level of all spurious signals both discrete Continuous Wave (CW) and noise-like (including LO, $\pm 1F$, $\pm 2F$), evaluated as total average signal level. | ≤ -70 dBm | If spurious signal's frequency falls within receiver half band. |

5.3.8 Radio frequency tolerance

Maximum radio frequency tolerance shall not exceed ± 15 ppm. This limit includes both short-term factors (environmental effects) and long-term ageing effects.

In the type test the manufacturer shall state the guaranteed short-term part and the expected ageing part.

5.4 Receiver characteristics

5.4.1 Input level range

The input level range for a $BER < 10^{-3}$ shall extend for a minimum of 50 dB above the threshold limit specified for $BER = 10^{-3}$ in subclause 5.5.1 referenced to point C.

The input level range for a $BER < 10^{-8}$ shall extend for a minimum of 41 dB above the threshold limit specified for $BER = 10^{-8}$ in subclause 5.5.1 referenced to point C.

However an upper limit above -20dBm is not required for $BER = 10^{-3}$ and -24dBm for $BER = 10^{-8}$.

For equipment designed to operate only with ATPC as a fixed permanent feature, the above maximum input levels are reduced by an amount up to the ATPC range.

5.4.2 Receiver local oscillator frequency arrangements

There shall be no requirement on receiver LO frequency arrangement.

5.4.3 Spurious emissions

The limits of these emissions shall conform to CEPT/ERC Recommendation 74-01 [31].

5.4.3.1 Spurious emissions - internal

Spurious emissions which fall within receivers half band shall be < -70 dBm (referenced to reference point B).

5.5 System performance without diversity

All parameters are referred to reference point C of figure 2. Losses in RF couplers used for protected systems are not taken into account in the limits specified below.

All measurements shall be carried out with the test signals defined in subclause 5.3.

5.5.1 BER as a function of Receiver input Signal Level (RSL)

Receiver BER thresholds (dBm) referred to reference point C of the system block diagram (see figure 2) for a BER of 10^{-3} , 10^{-6} and 10^{-8} shall be equal to or lower than those stated in table 5.

Table 5: BER performance thresholds

| Spectrum efficiency class ↓ | Bit-rate [Mbit/s] ↓ | RSL @ BER → Channel spacing [MHz] ↓ | RSL @ 10^{-3} [dBm] | RSL @ 10^{-6} [dBm] | RSL @ 10^{-8} [dBm] |
|--------------------------------|---------------------------|--|--------------------------|--------------------------|--------------------------|
| | | | | | |
| 2 | 2 | 3,5 | -90 | -86,5 | -84 |
| | 2 × 2 | 3,5 | -87 | -83,5 | -81 |
| | 8 | 7 | -84 | -80,5 | -78 |
| | 2 × 8 | 14 | -81 | -77,5 | -75 |
| | 34 | 28 | -78 | -74,5 | -72 |
| 4 | 51 | 56 | -77 | -73,5 | -71 |
| | 8 | 3,5 | -80 | -76,5 | -74 |
| | 2 × 8 | 7 | -77 | -73,5 | -71 |
| | 34 | 14 | -74 | -70,5 | -68 |
| | 51 | 14 | -73 | -69,5 | -67 |
| 5a | 51 | 28 | -75 | -71,5 | -69 |
| | 140 or 155 | 56 | -70 | -66,5 | -64 |
| 5b | 140 or 155 | 28 | -64 | -61 | -59 |
| 5b | 140 or 155 | 28 | -66 | -63 | -61 |

5.5.2 Equipment Residual BER

The RBER level under simulated operating conditions without interference shall be guaranteed with a signal level at reference point C which is between 10 dB and 35 dB above the level which gives $BER = 10^{-6}$ (as specified in subclause 5.5.1).

The network operator (see also informative annex A.4) may require equipment to meet a RBER limit with the first adjacent channel interferer. In this case the RBER level under simulated operating conditions with interference shall be guaranteed with a signal level at reference point C which is between 15 dB and 35 dB above the level which gives $BER = 10^{-6}$ (as specified in subclause 5.5.1). The interferer level shall be set to represent a Carrier to Interference ratio (C/I) of +6dB for class 5a systems (this figure includes a 10 dB offset to account for the minimum cross polar discrimination of these systems), -3 or -4 dB for class 5b systems (refer to annex D), and -4 dB for all other system classes.

The RBER shall be:

- for systems capacity less than 34 Mbit/s: $RBER < 10^{-10}$;
- for systems capacity equal and above 34 Mbit/s: $RBER < 10^{-11}$;
- for systems capacity at 140 Mbit/s to 155 Mbit/s: $RBER < 10^{-12}$.

This requirement is intended for the payload bit rates defined in subclause 5.1.

EN 301 126-1 [2] recognizes that this requirement is subject to a supplier declaration only. However, in annex A, clause A.4 some background information relating to the actual test methods and test confidence is given.

5.5.3 Interference sensitivity

All receive signal levels and Carrier to Interference ratio (C/I) measurements are referred to reference point C of the RF system block diagram (see figure 1).

5.5.3.1 Co-channel interference sensitivity

The limits of co-channel interference shall be as in table 6, giving maximum C/I values for 1 dB and 3 dB degradation of the 10^{-6} BER limits specified in subclause 5.5.1.

The indicative behaviour for these and other values of degradation may be found in figures A.2 and A.3.

Table 6: Co-channel interference sensitivity

| Co-Channel Interference | | | C/I at BER @ 10^{-6} RSL degradation | |
|--------------------------------|------------------------|----------------------------|--|------|
| Spectrum efficiency class ↓ | Bit rate [Mbit/s] ↓ | Channel spacing [MHz] ↓ | 1 dB | 3 dB |
| 2 | 2 | 3,5 | 23 | 19 |
| | 2 × 2 | 3,5 | 23 | 19 |
| | 8 | 7 | 23 | 19 |
| | 2 × 8 | 14 | 23 | 19 |
| | 34 | 28 | 23 | 19 |
| | 51 | 56 | 23 | 19 |
| 4 | 8 | 3,5 | 30 | 26 |
| | 2 × 8 | 7 | 30 | 26 |
| | 34 | 14 | 30 | 26 |
| | 51 | 14 | 30 | 26 |
| | 51 | 28 | 30 | 26 |
| | 140 or 150 | 56 | 30 | 26 |
| 5a & 5b | 140 or 150 | 28 | 37 | 33 |

5.5.3.2 Adjacent channel Interference

The limits of adjacent channel interference shall be as given in table 7 for like modulated signals of 1 channel spacing, giving maximum C/I values for 1 dB and 3 dB degradation of the 10^{-6} BER limits specified in subclause 5.5.1.

The indicative behaviour for these and other values of degradation may be found in figures A.4 and A.5.

Table 7: First adjacent channel interference sensitivity

| First adjacent channel interference | | | C/I at BER @ 10^{-6} RSL degradation | |
|---|------------------------|----------------------------|--|--------|
| Spectrum efficiency class ↓ | Bit rate [Mbit/s] ↓ | Channel spacing [MHz] ↓ | 1 dB (note 1) | 3 dB |
| 2 | 2 | 3,5 | -3 | -7 |
| | 2 x 2 | 3,5 | 0 | -4 |
| | 8 | 7 | 0 | -4 |
| | 2 x 8 | 14 | 0 | -4 |
| | 34 | 28 | 0 | -4 |
| | 51 | 56 | 0 | -4 |
| 4 | 8 | 3,5 | -1 | -5 |
| | 2 x 8 | 7 | -1 | -5 |
| | 34 | 14 | -1 | -5 |
| | 51 | 14 | -1 | -5 |
| | 51 | 28 | -10 | -13,5 |
| 5a | 140 or 155 | 28 | +3 | -1 |
| 5b | 140 or 155 | 28 | Note 2 | Note 2 |
| NOTE 1: For class 2, regulatory administrations may wish to vary the value of C/I for 1 dB degradation for adjacent channel interference. Values of C/I are typically in the range 0 dB to -3 dB. | | | | |
| NOTE 2: Refer to annex D. | | | | |

5.5.3.3 CW Spurious Interference

For a receiver operating at the 10^{-6} BER threshold given in table 5, the introduction of a CW interferer at a certain level specified below, with respect to the wanted signal and at any frequency in the range 30 MHz to the second harmonic of the upper frequency of the band, excluding frequencies either side of the wanted centre frequency of the RF channel by up to 250 % the channel spacing, shall not result in a BER greater than 10^{-5} .

The level of the CW interferer shall be:

- for a channel spacing lower than or equal to 14 MHz:
 - +20 dB at any frequency either side of the wanted centre frequency of the RF channel from 250 % up to 500 % the channel spacing;
 - +30 dB outside 500 % the channel spacing;
- for a channel spacing greater than 14 MHz:
 - +30 dB.

NOTE: When waveguide is used between ref. point A and C, which length is higher than twice the free space wavelength of the cut-off frequency (F_c), the lower limit of measurement will be increased to $0,7 F_c$ and to $0,9 F_c$ when the length is higher than 4 times the same wavelength.

This test is designed to identify specific frequencies at which the receiver may have a spurious response, e.g. image frequency, harmonics of the receive filter, etc. The actual test range should be adjusted accordingly. The test is not intended to imply a relaxed specification at all out of band frequencies elsewhere specified in the present document.

5.5.3.4 Front-end non-linearity requirements (two-tone CW spurious interference)

For a receiver operating at the RSL specified in subclause 5.5.1 for 10^{-6} BER threshold, the introduction of two equal CW interferes each with a level of +19 dB, with respect to the wanted signal and located at the second and fourth adjacent channel in the receive half-band, shall not result in a BER greater than 10^{-5} .

5.5.4 Distortion sensitivity

Outage from multi-path phenomena is not considered relevant for the systems subject to the present document.

5.6 System characteristics with diversity

Space diversity receive is not relevant for the systems subject to the present document.

Annex A (informative): Additional information

A.1 Radio frequency channel arrangement

The relevant radio frequency channel arrangement is provided by CEPT Recommendation T/R 13-02; however, for the readers convenience, figure A.1 gives its general overview.

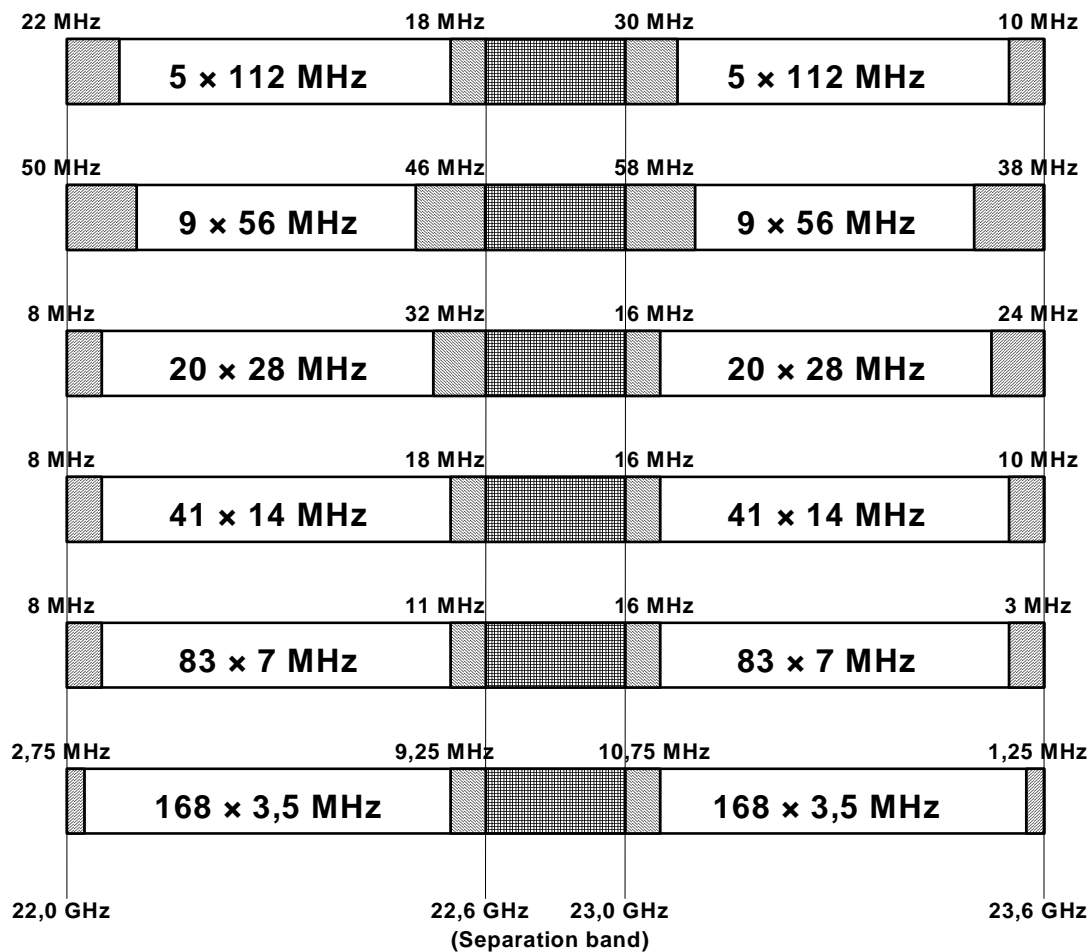


Figure A.1: Radio frequency channel arrangement

A.2 Feeder/antenna return loss

When separated antenna and radio equipment are concerned the antenna/feeder system return loss should be considered not less than 20 dB for class 2 systems, 23 dB for class 4 systems and 26 dB for class 5 systems. The measurement should be referred to reference point D/D' of figure 2 towards the antenna.

A.3 Automatic Transmit Power Control (ATPC)

ATPC may be useful in some circumstances, e.g.:

- to reduce interference between neighbouring systems or adjacent channels of the same system;
- to improve compatibility with analogue and digital systems at nodal stations;
- to improve residual BER or RBER performance;
- to reduce upfading problems;
- to reduce transmitter power consumption;
- to reduce digital to digital and digital to analogue distant interference between hops which re-use the same frequency;
- to increase system gain as a countermeasure against rainfall attenuation.

ATPC as an optional feature is aimed at driving the transmit power amplifier output level from a proper minimum which facilitates the radio network planning requirements and which is used under normal propagation conditions up to a maximum value which fulfils all the specifications defined in the present document.

ATPC may also be used to increase the output power above the nominal level up to the maximum level specified by the manufacturer, with the agreement of administrations and operators, during fading conditions. This can be useful because in frequency ranges above 13 GHz the main limiting factors are given by non selective fading events.

For planning considerations in a nodal environment a system equipped with ATPC can be considered to operate with its minimum transmitter power.

When ATPC is a fixed feature, the ATPC range is defined as the power interval from the maximum (including tolerances) output power level to the lowest transmitter output power level (at reference point B') with ATPC; when it is optional two ranges may be defined, a "down-range" from the nominal level to the minimum (including tolerances) and an "up-range" from the nominal level to the maximum (including tolerances).

A.4 RBER

In particular applications, where there is a high density of radio links in a specific area, e.g. nodal site, closely located radios may use adjacent channels. Therefore to guarantee the grade of service the equipment will need to meet RBER criteria in the presence of an adjacent channel interferer.

The RBER is standardized in order to match the ESR (or the BBER) performance required by ITU-R transmission performance recommendations.

To have sufficient confidence in the measurement, where the BER is relatively low compared to the actual pay load, the test time is very long. The actual background to this measurement and the BER figures are detailed in TR 101 036-1.

When error correction is a fitted feature it may be possible to reduce the measurement time by estimating the RBER using the relevant formula declared by the supplier.


Another option is to ensure that no errors occur during the minimum recording time shown in table 8.

Table 8: Zero errors recording times

| Bit-rate under test [Mbit/s] | Minimum recording time [minutes] | errors |
|---------------------------------|-------------------------------------|--------|
| 2 | 82 | 0 |
| 8 | 21 | 0 |
| 34 | 50 | 0 |
| 51 | 34 | 0 |
| 140/155 | 108 | 0 |

A.5 Co-channel and adjacent channel interference


The performances for co-channel and adjacent channel spaced by one channel spacing C/I are reported in subclauses 5.5.3.1 and 5.5.3.2 respectively, for 1 dB and 3 dB degradation only; figures A.2, A.3, A.4 and A.5 give the indicative behaviour for other values of degradation. The values represented should not be used for frequency co-ordination purposes.

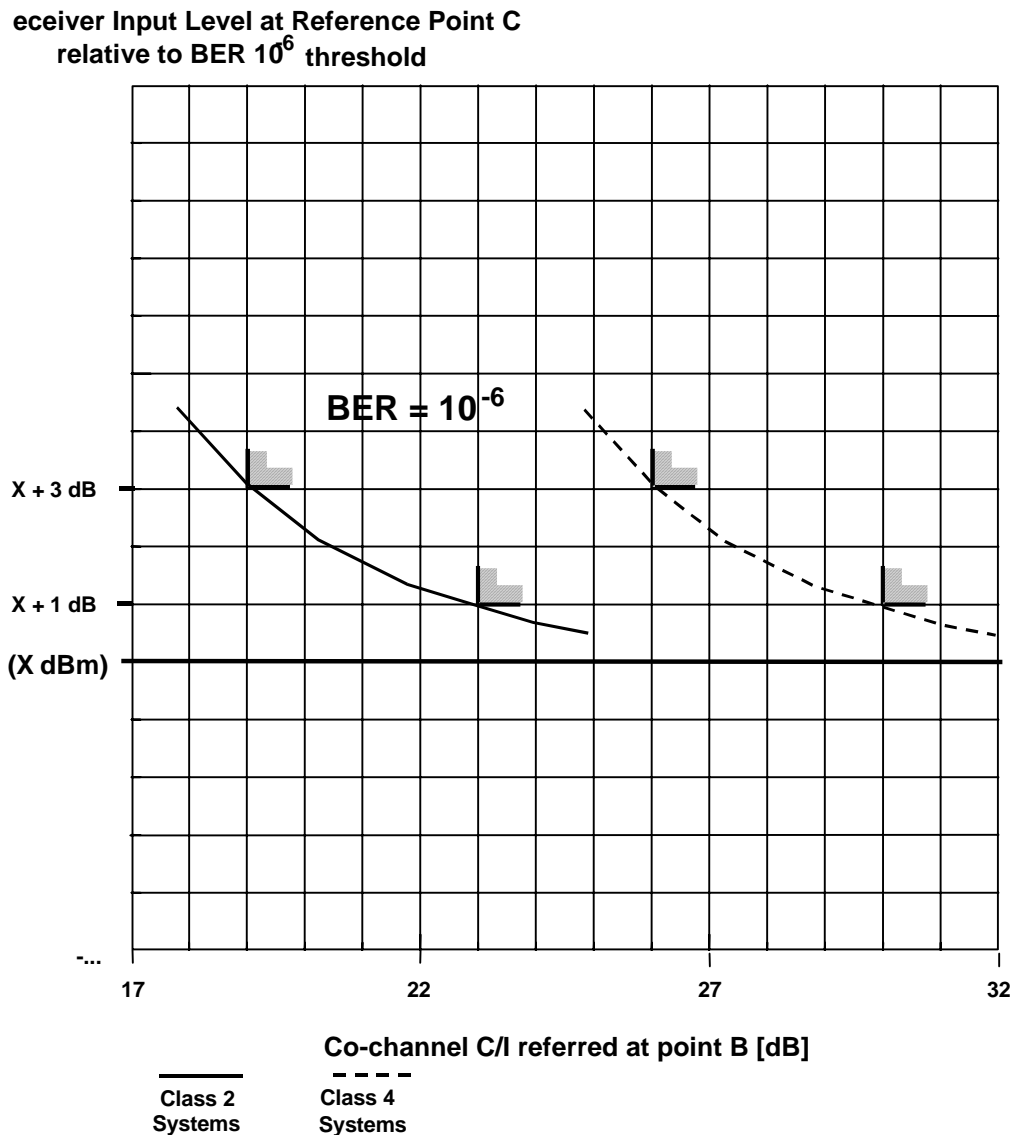

NOTE: X dBm = 10^{-6} BER threshold provided by subclause 5.5.1.

Figure A.2: Co-channel interference threshold degradation

Receiver Input Level at Reference Point C
relative to BER 10^{-6} threshold

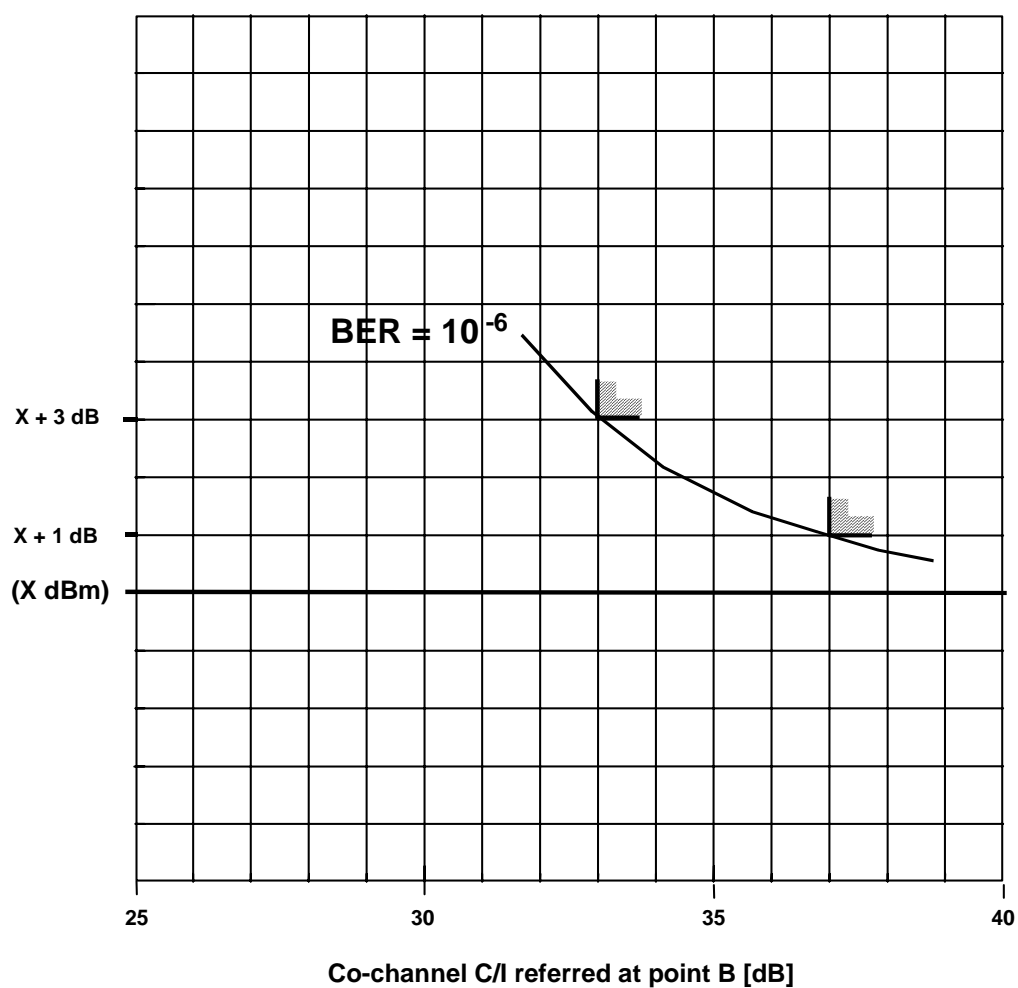


Class 5a & 5b
STM-1 Systems

NOTE: X dBm = 10^{-6} BER threshold provided by subclause 5.5.1.

Figure A.3: Co-channel interference threshold degradation


Receiver Input Level at Reference Point C
relative to BER^{-6} threshold

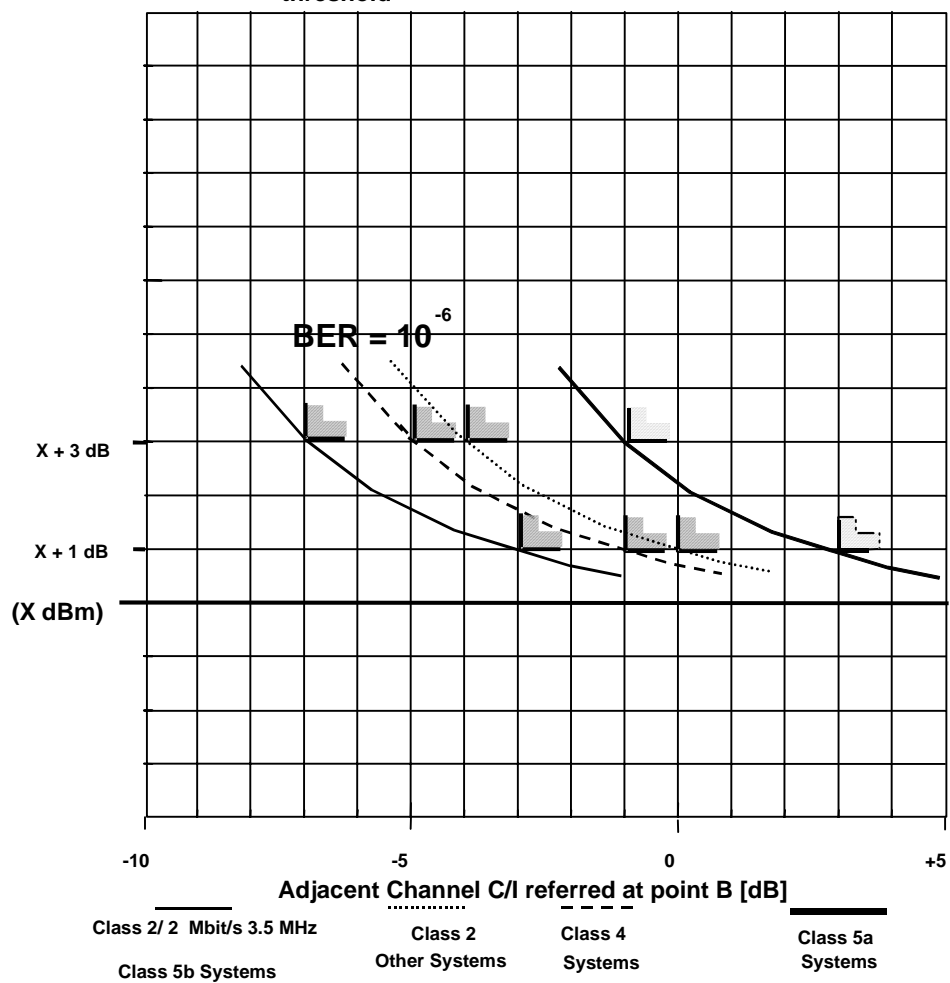

NOTE: $X \text{ dBm} = 10^{-6}$ BER threshold provided by subclause 5.5.1.

Figure A.4: First adjacent channel interference threshold degradation

Receiver Input Level at Reference Point C
relative to BER^{-6} threshold

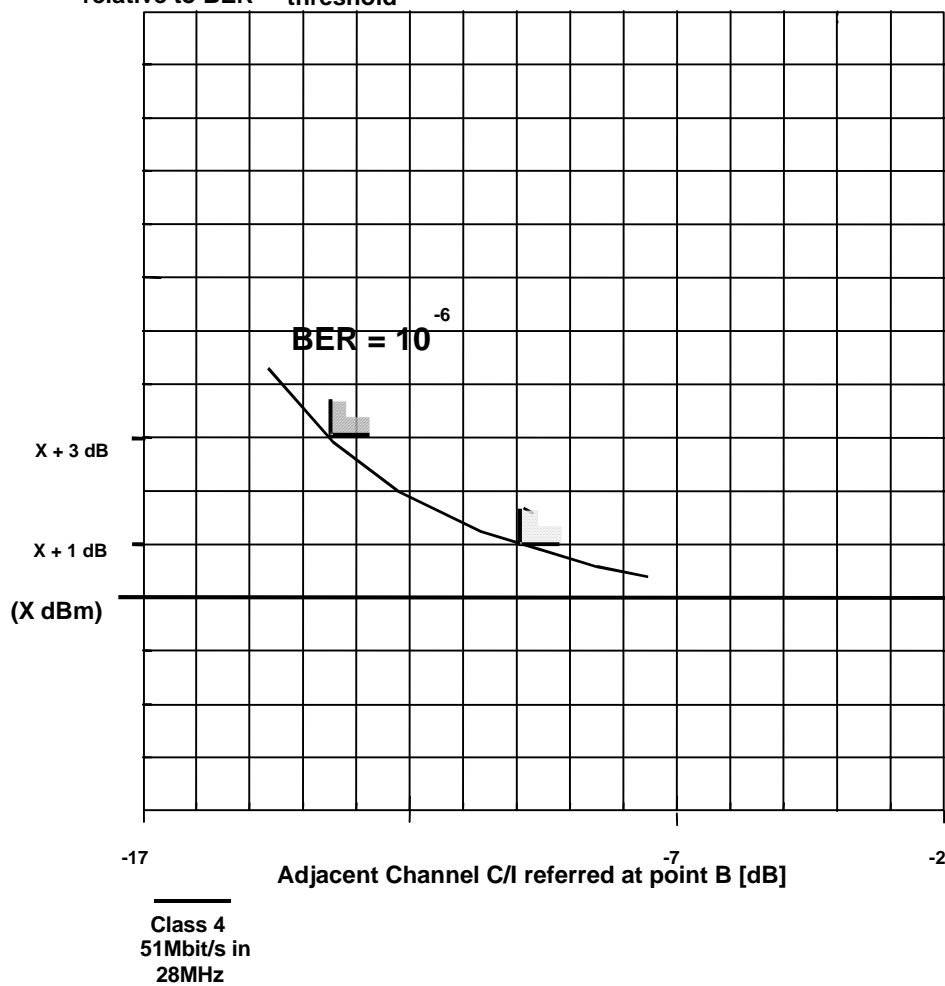

NOTE: $X \text{ dBm} = 10^{-6} \text{ BER threshold provided by subclause 5.5.1.}$

Figure A.5: First adjacent channel interference threshold degradation

Annex B (normative):

Essential requirements for the EC Council Directive 89/336 (EMC Directive)

The clauses of the present document, reported in table B.1, are relevant for the EC directive 89/336.

Table B.1: Subclauses of the present document relevant for compliance with the essential requirements of the EC Council Directive 89/336

| Clause/ subclause number, or annex reference | Title | Corresponding article of Council Directive 89/336/EEC | Qualifying remarks |
|--|--------------------------------|---|--------------------|
| | Spurious emission tests | | |
| 5.3.7.1 | Transmitter Spurious emissions | 4(a) | |
| 5.4.3 | Receiver Spurious emissions | 4(a) | |
| | | | |
| | Receiver Immunity tests | | |
| 5.5.3.3 | CW spurious interference | 4(b) | |

Annex C (normative):

System type codes for regulatory procedures

System types reported in the present document shall be identified with the codes reported in table C.1.

Table C.1: System type codes for radio equipment reported in the present document, relevant to regulatory procedures for national licensing

| Spectrum efficiency class ↓ | Channel spacing [MHz] ↓ | Bit-rate [Mbit/s] ↓ | System type codes ↓ |
|--------------------------------|----------------------------|------------------------|------------------------|
| 2 | 3,5 | 2 | 10 |
| | 3,5 | 2 x 2 | 11 |
| | 7 | 8 | 12 |
| | 14 | 2 x 8 | 13 |
| | 28 | 34 | 14 |
| | 56 | 51 | 15 |
| 4 | 28 | 51 | 20 |
| | 3,5 | 8 | 16 |
| | 7 | 2 x 8 | 17 |
| | 14 | 34 | 18 |
| | 14 | 51 | 19 |
| | 56 | 140 or 155 | 21 |
| 5a | 28 | 140 or 155 | 29 |
| 5b | 28 | 140 or 155 | 30 |

Annex D (normative):

Output Power Tolerance and RBER

Class 5b systems are basically sensitive systems (e.g. 128 state with a roll off of approximately 20 %) standardized for network applications that include adjacent channels on a parallel route, sometimes with terminal co-located stations shared by different network operators. In such cases, even if nominal power (or EIRP) is kept equal through common spectrum management practice, the power tolerance may endanger proper error performance with particular regard to Errored Seconds objectives unless a tighter specification for adjacent channel sensitivity is offered. Therefore it is required that either the transmitter output power tolerance is reduced or the adjacent channel sensitivity is enhanced as shown in the following table.

| | Output Power Tolerance | 1st Adjacent Channel Interference Sensitivity | |
|-----------------|------------------------|---|-----|
| | | 1dB | 3dB |
| Option 1 | +2dB/-1dB | -3 | -7 |
| Option 2 | ± 2dB | -4 | -8 |

The RBER measurement with first adjacent channel interference is performed, in case of adoption of option 1, with the first adjacent channel interference 3 dB above the signal level and, in case of adoption of option 2, with the first adjacent channel interference 4 dB above the signal level.

History

| Document history | | |
|------------------|---------------|--|
| Edition 1 | April 1994 | Publication as ETS 300 198 |
| V1.2.1 | February 1998 | Publication |
| V1.2.2 | November 1998 | Publication |
| V1.3.1 | November 1999 | Public Enquiry PE 200011: 1999-11-17 to 2000-03-17 |
| V1.3.1 | August 2000 | Vote V 20001027: 2000-08-28 to 2000-10-27 |