
EN 300 207-2 V1.2.4 (1998-10)

European Standard (Telecommunications series)

Integrated Services Digital Network (ISDN);
Diversion supplementary services;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 2: Protocol Implementation Conformance
Statement (PICS) proforma specification

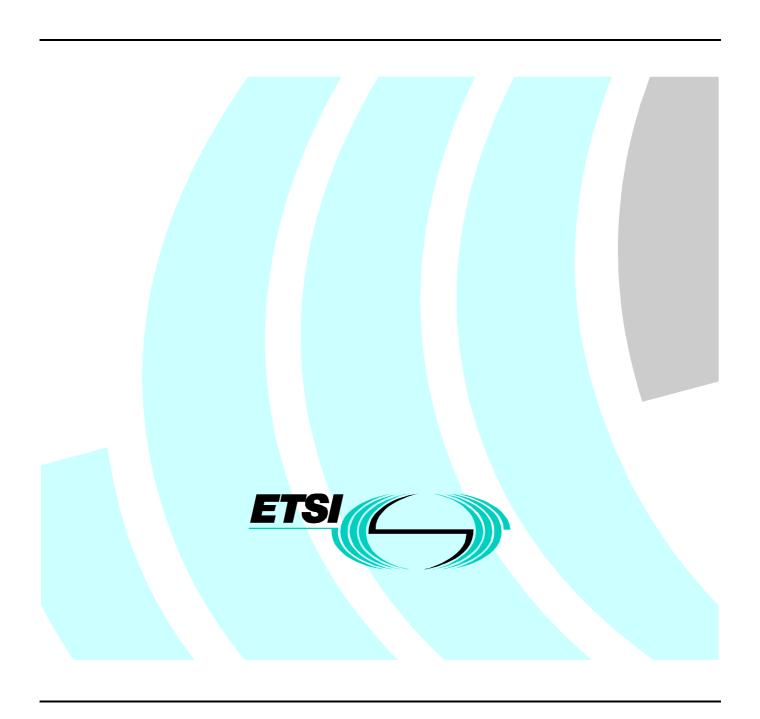

Reference

REN/SPS-05065-2 (1x0i0iqo.PDF)

Keywords

ISDN, DSS1, supplementary service, PICS, CF, SCF, SCFB, SCFNR, SCFU

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr http://www.etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

Contents

Intelle	lectual Property Rights	5
Forev	word	5
1	Scope	
	•	
2	References	
2.1	Normative references	
2.2	Informative references	
3	Definitions, symbols and abbreviations	
3.1	Definitions	
3.2	Symbols	
3.3	Abbreviations	
4	Conformance	
Anne	ex A (normative): PICS proforma for EN 300 207-1	9
A.1	Instructions for completing the PICS proforma	9
A.1.1	1	
A.1.2		
A.1.3	1	
A.1.4	Symbols, abbreviations and terms	10
A.2	Identification of the implementation	10
A.2.1		
A.2.2		
A.2.3		
A.2.4		
A.2.5	Client	11
A.2.6	PICS contact person	
A.3	PICS/SCS relationship	12
A.4	Identification of the protocol	12
A.5	Global statement of conformance	13
A.6	Roles	14
A.7	User	15
A.7.1		
A.7.2	V 1	
A.7.3	v 1	
A.7.4	Protocol data unit parameters	16
A.7.5	Timers	18
A.7.6	6 Call states	18
A.8	Network	18
A.8.1	Major capabilities	
A.8.2	7 1	
A.8.3		
A.8.4	1	
A.8.5		
A.8.6	6 Call states	26
Anne	ex B (normative): Requirements list	27
B.1	User	
B.1.1	Requirements on items used in the basic call PICS	27

B.1.2	Requirements on items used in the generic functional protocol PICS	27
B.1.3	Requirements on items used in the supplementary service interactions PICS	28
B.2	Network	28
B.2.1	Requirements on items used in the basic call PICS	28
B.2.2	Requirements on items used in the generic functional protocol PICS	29
B.2.3	Requirements on items used in the supplementary service interactions PICS	29
Histor	ry	30

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://www.etsi.org/ipr).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Signalling Protocols and Switching (SPS).

The present document is part 2 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) diversion supplementary services, as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented for a given Open Systems Interconnection (OSI) protocol. Such a statement is called a Protocol Implementation Conformance Statement (PICS).

National transposition dates						
Date of adoption of this EN:	30 October 1998					
Date of latest announcement of this EN (doa):	31 January 1999					
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 July 1999					
Date of withdrawal of any conflicting National Standard (dow):	31 July 1999					

1 Scope

This second part of EN 300 207 is applicable to the stage three of the diversion supplementary services for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [11]) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol. Stage three identifies the protocol procedures and switching functions needed to support a telecommunications service (see CCITT Recommendation I.130 [10]).

The present document provides the Protocol Implementation Conformance Statement (PICS) proforma for the ISDN DSS1 diversion supplementary services protocol as specified in EN 300 207-1 [5] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [9].

The supplier of a protocol implementation which is claimed to conform to EN 300 207-1 [5] is required to complete a copy of the PICS proforma provided in annex A of the present document and is required to provide the information necessary to identify both the supplier and the implementation.

2 References

References may be made to:

- a) specific versions of publications (identified by date of publication, edition number, version number, etc.), in which case, subsequent revisions to the referenced document do not apply; or
- b) all versions up to and including the identified version (identified by "up to and including" before the version identity); or
- c) all versions subsequent to and including the identified version (identified by "onwards" following the version identity); or
- d) publications without mention of a specific version, in which case the latest version applies.

A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

2.1 Normative references

- [1] Void.
 [2] EN 300 195-2 (V1.3): "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
 [3] Void.
- [4] ETS 300 196-2 (1996): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [5] EN 300 207-1 (V1.2): "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".

- [6] EN 300 403-1 (V1.2): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [7] EN 300 403-3 (V1.2): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 3: Protocol Implementation Conformance Statement (PICS) proforma specification".

2.2 Informative references

- [8] ISO/IEC 9646-1: "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 1: General concepts".
- [9] ISO/IEC 9646-7: "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 7: Implementation Conformance Statements".
- [10] CCITT Recommendation I.130 (1988): "Method for the characterization of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [11] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces; Reference configurations".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document the following definitions, in addition to those given in EN 300 207-1 [5] apply:

Protocol Implementation Conformance Statement (PICS): A statement made by the supplier of an Open Systems Interconnection (OSI) implementation or system, stating which capabilities have been implemented for a given OSI protocol (see ISO/IEC 9646-1 [8]).

PICS proforma: A document, in the form of a questionnaire, designed by the protocol specifier or conformance test suite specifier, which, when completed for an OSI implementation or system becomes the PICS (see ISO/IEC 9646-1 [8]).

static conformance review: A review of the extent to which the static conformance requirements are met by the IUT, accomplished by comparing the PICS with the static conformance requirements expressed in the relevant standard(s) (see ISO/IEC 9646-1 [8]).

3.2 Symbols

Yes

For the purposes of the present document the following symbols apply:

supported

Boolean "and" AND Conditional requirement (to be observed if the relevant conditions apply) C Μ Mandatory requirement (to be observed in all cases) Not applicable, not supported or the conditions for status are not meet N/A not supported No Boolean "not" NOT Option (may be selected to suit the implementation, provided that any requirements applicable to 0 the option are observed) Boolean "or" ΛR

3.3 Abbreviations

For the purposes of the present document the following abbreviations apply:

CD Call Deflection
CFB Call Forwarding Busy
CFNR Call Forwarding No Reply
CFU Call Forwarding Unconditional

DSS1 Digital Subscriber Signalling System No. one

ISDN Integrated Services Digital Network

IUT Implementation Under Test

MC Major Capabilities
MR Messages Received
MT Messages Transmitted

NDUB Network Determined User Busy
OSI Open Systems Interconnection

P Parameters

PICS Protocol Implementation Conformance Statement

R Role

SC Subsidiary Capabilities
SCF Selective Call Forwarding
SCFB Selective Call Forwarding Busy
SCFNR Selective Call Forwarding No Reply
SCFU Selective Call Forwarding Unconditional

SCS System Conformance Statement

SUT System Under Test

TM Timers

UDUB User Determined User Busy

4 Conformance

A PICS proforma which conforms to this PICS proforma specification shall be technically equivalent to annex A, and shall preserve the numbering and ordering of the items in annex A.

A PICS which conforms to this PICS proforma specification shall:

- a) describe an implementation which claims to conform to EN 300 207-1 [5];
- b) be a conforming ICS proforma which has been completed in accordance with the instructions for completion given in annex A, clause A.1;
- c) include the information necessary to uniquely identify both the supplier and the implementation.

Annex A (normative): PICS proforma for EN 300 207-1

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PICS proforma in this annex so that it can be used for its intended purposes and may further publish the completed PICS.

A.1 Instructions for completing the PICS proforma

A.1.1 Identification of the implementation

Identification of the Implementation Under Test (IUT) and the system in which it resides (the System Under Test (SUT)) should be filled in so as to provide as much detail as possible regarding version numbers and configuration options.

The product supplier information and client information should both be filled in if they are different.

A person who can answer queries regarding information supplied in the PICS should be named as the contact person.

The System Conformance Statement (SCS) as defined in ISO/IEC 9646-1 [8] is a document supplied by the client or product supplier that summarizes which OSI standards are implemented and to which conformance is claimed. The PICS/SCS clause should describe the relationship of the PICS to the SCS.

A.1.2 Global statement of conformance

If the answer to the statement in this subclause is "Yes", all subsequent subclauses should be completed to facilitate selection of test cases for optional functions.

If the answer to the statement in this subclause is "No", all subsequent subclauses should be completed, and all non-supported mandatory capabilities should be identified and explained. Explanations may be entered in the comments field at the bottom of each table or on attached sheets of paper.

A.1.3 Explanation of PICS proforma subclauses

The PICS proforma contains a Roles clause and thereafter is presented in two parts (for user and network) with the following subclauses, as required:

- major capabilities;
- subsidiary capabilities;
- protocol data unit support;
- protocol data unit parameters;
- timers;
- call states

The User clause shall only be completed for user implementations (including private network implementations) while the Network clause shall only be completed for network implementations. The Roles subclause shall be completed for all implementations.

The relationship between this PICS proforma and other related PICS proforma (e.g. the basic call PICS proforma) is expressed in the requirements list contained in annex B. This provides the additional restrictions placed on the related proforma (different conditions, different status, etc.).

A.1.4 Symbols, abbreviations and terms

The PICS proforma contained in this annex is comprised of information in tabular form in accordance with the guidelines presented in ISO/IEC 9646-7 [9].

The reference column contained in the tables gives reference to the appropriate part(s) of EN 300 207-1 [5] (unless another numbered reference is explicitly indicated) describing the particular item. Note, however, that a reference merely indicates the place where the core of a description of an item can be found. Any additional information contained in EN 300 207-1 [5] (or any other possibly used reference) has to be taken into account when making a statement about the conformance of that particular item.

The following common notations, defined in ISO/IEC 9646-7 [9], are used for the status column:

M mandatory
O optional
N/A not applicable

O.<integer> for mutually exclusive or selectable options from a set

The following common notations, defined in ISO/IEC 9646-7 [9], are used for the support column:

Yes for supported/implemented
No for not supported/not implemented

A.2	Identification of the implementation
A.2.1	Date of the statement
A.2.2 IUT name:	Implementation Under Test (IUT) identification
IUT version:	
A.2.3 SUT name:	System Under Test (SUT) identification
Hardware co	nfiguration:

Operating sy	vstem:
A.2.4 Name:	Product supplier
Address:	
Telephone n Facsimile nu	
Additional in	
A.2.5 Name:	Client
Address:	
Telephone n	
Facsimile nu	ımber:

hone number: mile number: ional information: B PICS/SCS relationship	
A.2.6 PICS contact person	
Name:	
Address:	••••
	••••
	••••
Telephone number:	••••
	••••
Facsimile number:	
Additional information:	
	••••
A.3 PICS/SCS relationship	
Provide the relationship of the PICS with the SCS for the system:	

A.4 Identification of the protocol

This PICS proforma applies to the following standard:

EN 300 207-1 (V1.2): "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".

A.5 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No)

NOTE: Answering "No" to this question indicates non-conformance to the protocol specification. Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the implementation is non-conforming. Explanations may be entered in the comments field at the bottom of each table or on attached pages.

A.6 Roles

Table A.1: Type of implementation

Major role:	Conditions for	Status	Reference	Support	
Does the implementation	status				
Type of implementation					
support call forwarding supplementary service(s)?		0.1		[]Yes []No	
support the CFB supplementary service?	R 1.1	0.2		[]Yes []No	
	NOT R 1.1	N/A		[]N/A	
support the CFU supplementary service?	R 1.1	O.2		[]Yes []No	
				[]N/A	
support the CFNR supplementary service?		_		[]Yes []No	
	NOT R 1.1			[]N/A	
		_		[]Yes []No	
support the SCF supplementary service?		-		[]Yes []No	
				[]N/A	
support the SCFB supplementary service?		_		[]Yes []No	
				[]N/A	
support the SCFU supplementary service?		_		[]Yes []No	
				[]N/A	
support the SCFNR supplementary service?	-	I -		[]Yes []No	
	NOT R 1.1.3			[]N/A	
				[]Yes []No	
				[]Yes []No	
reference point?	R 2.2 R 2.1	O.4 O.5	9	[]Yes []No	
	R 2.2	O.4	10	[]Yes []No	
ISDN at the T reference point?		O.5			
support user requirements at the interface of the	_	M	9,	[]Yes []No	
served user?			10.6	[]N/A	
			40	5 33 / 5 38 I	
· · ·			10	[]Yes []No	
remote user? (note)		N/A		[]N/A	
aupport upor requirements at the interfere of the		-		N/A	
, ,, , , , , , , , , , , , , , , , , ,	IN/A			IN/A	
	D 4 2	N/I	10.2	[]Yes []No	
			10.2	[]N/A	
			0 10	[]Yes[]No	
			9, 10	[]N/A	
			9 10	[]Yes[]No	
		1	5, 10	[]N/A	
			9 10	[]Yes[]No	
		1	0, 10	[]N/A	
			9. 10	[]Yes []No	
			0, .0	[]N/A	
		11 -		11.2	
Support of at least one of these options is required.	•				
Support of one and only one of these options is required.					
Support of at least one of these options is required.					
Where D 2 1 is supported all presedures for remote (as	alling or divorted to)	HOOF OF DE	avided as part of the	o booio call	
	Type of implementation support call forwarding supplementary service(s)? support the CFB supplementary service? support the CFU supplementary service? support the CFU supplementary service? support the CD supplementary service? support the SCF supplementary service? support the SCFB supplementary service? support the SCFU supplementary service? support the SCFU supplementary service? support the SCFU supplementary service? support user requirements? support network requirements? support requirements at the coincident S and T reference point? support procedures for interworking with private ISDN at the T reference point? support user requirements at the interface of the served user? support user requirements at the interface of a remote user? (note) support user requirements at the interface of the diverted-to user? support network requirements at the interface of the served user? support network requirements at the interface of the diverted-to user? support network requirements at the interface of the served user? support network requirements at the interface of the calling user? support network requirements at the interface of the served user? support network requirements at the interface of the served user? support network requirements at the interface of the served user? support network requirements at the interface of the diverted-to user? support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required. Support of at least one of these options is required.	Type of implementation support call forwarding supplementary service(s)? support the CFB supplementary service? support the CFU supplementary service? support the CFNR supplementary service? support the CFNR supplementary service? support the CD supplementary service? support the CD supplementary service? support the SCF supplementary service? support the SCFB supplementary service? support the SCFB supplementary service? support the SCFB supplementary service? support the SCFNR supplementary service? support the SCFNR supplementary service? support the SCFNR supplementary service? support user requirements? support user requirements? support network requirements? support requirements at the coincident S and T R 2.2 reference point? support user requirements at the interface of the served user? support user requirements at the interface of a remote user? (note) support user requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of a remote user? support network requirements at the interface of the calling user? support network requirements at the interface of a remote user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? support network requirements at the interface of the calling user? sup	Type of implementation support call forwarding supplementary service(s)? support the CFB supplementary service? R 1.1 NOT R 1.1 N/A support the CFU supplementary service? R 1.1 NOT R 1.1 N/A support the CFNR supplementary service? R 1.1 NOT R 1.1 N/A support the CD supplementary service? R 1.1 NOT R 1.	Does the implementation Type of implementation Support call forwarding supplementary service(s)? O.1 Support the CFB supplementary service? R 1.1 O.2 NOT R 1.1 N/A Support the CFU supplementary service? R 1.1 O.2 NOT R 1.1 N/A Support the CFNR supplementary service? R 1.1 O.2 NOT R 1.1 N/A Support the CD supplementary service? R 1.1 O.2 NOT R 1.1 N/A Support the SCF supplementary service? R 1.1 O.3 Support the SCF supplementary service? R 1.1 O.3 Support the SCF supplementary service? R 1.1.1 N/A Support the SCFU supplementary service? R 1.1.2 N/A Support the SCFU supplementary service? R 1.1.2 N/A Support the SCFNR supplementary service? R 1.1.3 N/A Support the SCFNR supplementary service? R 1.1.3 N/A Support user requirements? O.3 9, 10 Support user requirements? O.3 9, 10 Support network requirements at the coincident S and T R 2.2 O.4 9 Support procedures for interworking with private R 2.1 O.5 Support user requirements at the interface of the R 2.1 AND R 3.2 O.6 10.6 Support user requirements at the interface of the R 2.1 AND R 3.2 O.6 10.6 Support user requirements at the interface of the R 2.2 N/A Support user requirements at the interface of the R 2.2 N/A Support user requirements at the interface of the R 2.2 N/A Support user requirements at the interface of the R 2.2 N/A Support user requirements at the interface of R 2.2 N/A Support network requirements at the interface of R 2.2 N/A Support network requirements at the interface of R 2.2 N/A Support network requirements at the interface of R 2.2 N/A Support network requirements at the interface of R 2.2 N/A Support network requirements at the interface of R 3.4 N/A Support of at least one of these options is required. Support of at least one of these options is required. Support of one and only one	

Comments:

A.7 User

The tables provided in this clause need only to be completed for user implementations, where item R 2.1 above is supported.

A.7.1 Major capabilities

Table A.2: Major capabilities - user

Item	Major capability:	Conditions for status	Status	Reference	Support
	Does the implementation				
	support				
MC 1	the request for the activation of a specific call forwarding supplementary service?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	9.1.1, 10.6	[]Yes []No []N/A
MC 2	the request for the deactivation of a specific call forwarding supplementary service?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	9.1.2, 10.6	[]Yes []No []N/A
MC 3	the procedures for the interrogation of the served user numbers?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	9.1.3, 10.6	[]Yes []No []N/A
MC 3.1	the procedures for the interrogation of the SCF list?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	9.1.5, 10.6	[]Yes []No []N/A
MC 4	the procedures for the interrogation of the details of the instance(s) of a call forwarding supplementary service?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	9.1.4, 10.6	[]Yes []No []N/A
MC 4.1	the procedures for the interrogation of the details of the instance(s) of a SCF service?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	9.1.4, 10.6	[]Yes []No []N/A
MC 5	the request for the invocation of the call deflection supplementary service?	R 1.2 AND R 4.1 NOT (R 1.2 AND R 4.1)	M N/A	9.2.4.5, 10.6	[]Yes []No []N/A
MC 6	the procedures where a call is diverted within or beyond the private network?	R 3.2 NOT R 3.2	M N/A	10.1	[]Yes []No []N/A
MC 7	the procedures where a diverted call is presented to the private network?	R 4.2.2 NOT R 4.2.2	M N/A	10.2	[]Yes []No []N/A
MC 8	the procedures where a diverted call is presented by the private network?	R 3.2 NOT R 3.2	M N/A	10.4	[]Yes []No []N/A
MC 9	the procedures of diversion by partial rerouteing?	R 3.2 NOT R 3.2	M N/A	10.5	[]Yes []No []N/A

Comments:

A.7.2 Subsidiary capabilities

No items requiring response.

A.7.3 Protocol data units

No items requiring response.

A.7.4 Protocol data unit parameters

Table A.3: Facility information element components received by the user

Item	Facility information element components: Does the implementation support	Conditions for status	Status	Reference	Support
P 1.1	ActivationDiversion return result?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 1.1.1	ActivationSCF return result?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 1.2	ActivationDiversion return error?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 1.2.1	ActivationSCF return error?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 2.1	DeactivationDiversion return result?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 2.1.1	DeactivationSCF return result?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 2.2	DeactivationDiversion return error?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 2.2.1	DeactivationSCF return error?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	7.1, 9.1.2, 10.6	[]Yes[]No []N/A
Р3	ActivationStatusNotificationDiv invoke	R 1.1 AND R 4.1	M	7.1, 9.1.1	[] Yes [] No
P 3.1	ActivationStatus	NOT (R 1.1 AND R 4.1)	N/A M	7.1, 9.1.1	[] N/A []Yes []No
	NotificationSCF invoke?	NOT (R 1.1 AND R 4.1)	N/A		[]N/A
P 4	DeactivationStatusNotificationDiv invoke	R 1.1 AND R 4.1	M	7.1, 9.1.2	[] Yes [] No
P 4.1	DeactivationStatus	NOT (R 1.1 AND R 4.1) R 1.1 AND R 4.1	N/A M	7.1, 9.1.2	[] N/A []Yes []No
P 5.1	NotificationSCF invoke? InterrogationDiversion return result?	NOT (R 1.1 AND R 4.1) R 1.1 AND R 4.1	N/A M	7.1, 9.1.4, 10.6	[]N/A []Yes []No
P 5.1.1	InterrogationSCF return result?	NOT (R 1.1 AND R 4.1) R 1.3 AND R 4.1	N/A M	7.1, 9.1.4, 10.6	[]N/A []Yes []No
P 5.2	InterrogationDiversion return error?	NOT (R 1.3 AND R 4.1) R 1.1 AND R 4.1	N/A M	7.1, 9.1.4, 10.6	[]N/A []Yes []No
P 5.2.1	InterrogationSCF return error?	NOT (R 1.1 AND R 4.1) R 1.3 AND R 4.1	N/A M	7.1, 9.1.4, 10.6	[]N/A []Yes []No
P 6.1	InterrogateServedUser	NOT (R 1.3 AND R 4.1) R 1.1 AND R 4.1	N/A M	7.1, 9.1.3, 10.6	[]N/A []Yes []No
P 6.1.1	Numbers return result? InterrogateSCFList return result?	NOT (R 1.1 AND R 4.1) R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	7.1, 9.1.5, 10.6	[]N/A []Yes []No []N/A
P 6.2	InterrogateServedUser Numbers return error?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	7.1, 9.1.3, 10.6	[]Yes[]No []N/A
P 6.2.1	InterrogateSCFList return error?	R 1.3 AND R 4.1 NOT (R 1.3 AND R 4.1)	M N/A	7.1, 9.1.5, 10.6	[]Yes[]No []N/A
P 7	DiversionInformation invoke?	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	7.1, 9.2.4.1, 9.2.4.2, 9.2.4.3, 9.2.4.4, 10.6	[]Yes []No []N/A
P 8.1	CallDeflection return result?	R 1.2 AND R 4.1 NOT (R 1.2 AND R 4.1)	M N/A	7.1, 9.2.4.5, 10.6	[]Yes []No []N/A
P 8.2	CallDeflection return error?	R 1.2 AND R 4.1 NOT (R 1.2 AND R 4.1)	M N/A	7.1, 9.2.4.5, 10.6	[]Yes []No []N/A
P 9.1	CallRerouteing return result?	MC 9 NOT MC 9	M N/A	7.1, 10.5	[]Yes []No []N/A
P 9.2	CallRerouteing return error?	MC 9 NOT MC 9	M N/A	7.1, 10.5	[]Yes []No []N/A

ETSI

Table A.3 (concluded): Facility information element components received by the user

Item	Facility information element components: Does the implementation support	Conditions for status	Status	Reference	Support
P 10	DivertingLegInformation2 invoke?	R 4.2.2 NOT R 4.2.2	M N/A	7.1, 10.2	[]Yes []No []N/A
P 11	DivertingLegInformation3 invoke?	MC 8 NOT MC 8	M N/A	7.1, 10.4	[]Yes []No []N/A
Comments:		•			

Table A.4: Facility information element components transmitted by the user

Item	Facility information element components: Does the implementation	Conditions for status	Status	Reference	Support
	support				
P 12	ActivationDiversion invoke?	R 1.1 AND R 4.1	M	7.1, 9.1.1, 10.6	[]Yes []No
		NOT (R 1.1 AND R 4.1)	N/A		[]N/A
P 12.1	ActivationSCF invoke?	R 1.3 AND R 4.1	M	7.1, 9.1.1, 10.6	[]Yes []No
		NOT (R 1.3 AND R 4.1)	N/A		[]N/A
P 13	DeactivationDiversion invoke?	R 1.1 AND R 4.1	M	7.1, 9.1.2, 10.6	[]Yes []No
		NOT (R 1.1 AND R 4.1)	N/A		[]N/A
P 13.1	DeactivationSCF invoke?	R 1.3 AND R 4.1	М	7.1, 9.1.2, 10.6	[]Yes []No
		NOT (R 1.3 AND R 4.1)	N/A		[]N/A
P 14	InterrogationDiversion invoke?	R 1.1 AND R 4.1	M	7.1, 9.1.4, 10.6	[]Yes []No
		NOT (R 1.1 AND R 4.1)	N/A		[]N/A
P 14.1	InterrogationSCF invoke?	R 1.3 AND R 4.1	М	7.1, 9.1.4, 10.6	[]Yes []No
		NOT (R 1.3 AND R 4.1)	N/A		[]N/A
P 15	InterrogateServedUser	R 1.1 AND R 4.1	М	7.1, 9.1.3, 10.6	[]Yes []No
	Numbers invoke?	NOT (R 1.1 AND R 4.1)	N/A		[]N/A
P 15.1	InterrogateSCFLists invoke?	R 1.3 AND R 4.1	M	7.1, 9.1.5, 10.6	[]Yes []No
		NOT (R 1.3 AND R 4.1)	N/A		[]N/A
P 16	CallDeflection invoke?	R 1.2 AND R 4.1	M	7.1, 9.2.4.5, 10.6	[]Yes []No
		NOT (R 1.2 AND R 4.1)	N/A		[]N/A
P 17	CallRerouteing invoke?	MC 9	M	7.1, 10.5	[]Yes []No
		NOT MC 9	N/A		[]N/A
P 18	DivertingLegInformation1 invoke?	MC 6	М	7.1, 10.1	[]Yes []No
		NOT MC 6	N/A		[]N/A
P 19	DivertingLegInformation2 invoke?	MC 8	М	7.1, 10.4	[]Yes []No
		NOT MC 8	N/A		[]N/A
P 20	DivertingLegInformation3 invoke?	R 4.2.2	М	7.1, 10.1, 10.2	[]Yes []No
		NOT R 4.2.2	N/A		[]N/A

Comments:

A.7.5 Timers

Table A.5: Timers - user

Item	Timer:	Conditions for status	Status	Reference	Support
	Does the implementation				
	support				
TM 1	T-ACTIVATE? (Value 4 s)	R 1.1 AND R 4.1	М	13;	[]Yes []No
		NOT (R 1.1 AND R 4.1)	N/A	[3] 10.2.7	[]N/A
TM 2	T-DEACTIVATE? (Value 4 s)	R 1.1 AND R 4.1	M	13;	[]Yes []No
		NOT (R 1.1 AND R 4.1)	N/A	[3] 10.2.7	[]N/A
TM 3	T-INTERROGATE? (Value 4 s)	R 1.1 AND R 4.1	M	13;	[]Yes []No
		NOT (R 1.1 AND R 4.1)	N/A	[3] 10.2.7	[]N/A
	The generic support of these timers is s	pecified in ETS 300 196-2 [4]. This	s table includ	es the values requi	red by
E	EN 300 207-1 [5].				
Comments:					

A.7.6 Call states

No items requiring response.

A.8 Network

The tables provided in this clause need only to be completed for network implementations, where item R 2.2 above is supported.

A.8.1 Major capabilities

Table A.6: Major capabilities - network

Major capability:	Conditions for status	Status	Reference	Support
		1		
supplementary service(s) on a per	R 4.3 NOT R 4.3	O.7 N/A	5	[]Yes []No []N/A
the provision of diversion	R 4.3	0.7	5	[]Yes []No
supplementary service(s) to the whole access?		N/A		[]N/A
the procedures associated with the	MC 10.1 AND R 1.1 OR R.1.3	0	6.1	[]Yes []No
activation, deactivation and interrogation for all ISDN numbers on the same access?	NOT (MC 10.1 AND R 1.1 OR R 1.3)	N/A		[]N/A
the procedures associated with the noti information) for		a call has be	een forwarded (with	call offering
CFU?	R 4.3 AND R 1.1.2 NOT (R 4.3 AND R 1.1.2)	O N/A	6.1	[]Yes []No []N/A
CFB?	R 4.3 AND R 1.1.1 NOT (R 4.3 AND R 1.1.1)	O N/A		[]Yes []No []N/A
CFNR?	NOT (R 4.3 AND R 1.1.3)	O N/A		[]Yes []No []N/A
	R 4.4.1 NOT R 4.4.1	O N/A	6.1	[]Yes []No []N/A
	NOT R 4.4.1	N/A		[]Yes []No []N/A
	R 4.4.1 NOT R 4.4.1	O N/A		[]Yes []No []N/A
	R 4.4.1 NOT R 4.4.1	O N/A		[]Yes []No []N/A
the procedures associated with the noti	fication of diversion to the callin	g user witho	out diverted-to numb	
CFU?	R 4.4.1 NOT R 4.4.1	O N/A	6.1	[]Yes []No []N/A
	NOT R 4.4.1	N/A		[]Yes []No []N/A
	R 4.4.1 NOT R 4.4.1	N/A		[]Yes []No []N/A
	R 4.4.1 NOT R 4.4.1	O N/A		[]Yes []No []N/A
specific call forwarding supplementary service?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A		[]Yes []No []N/A
the procedures for activation of a specific SCF supplementary service?	MC 15 NOT MC 15	O N/A	9.1.1, 10.6	[]Yes []No []N/A
	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	9.1.2, 10.6	[]Yes []No []N/A
the procedures for deactivation of a specific SCF supplementary service?	MC 16 NOT MC 16	O N/A	9.1.2, 10.6	[]Yes []No []N/A
the procedures for interrogation of the served user numbers?	MC 11 NOT MC 11	M N/A	9.1.3, 10.6	[]Yes []No []N/A
the procedures for interrogation of the SCF list?	MC 17 NOT MC 17	O N/A	9.1.5, 10.6	[]Yes []No []N/A
the procedures for interrogation of the details of the instance(s) of a call forwarding supplementary service?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	9.1.4, 10.6	[]Yes []No []N/A
	MC 18 NOT MC 18	O N/A	9.1.4, 10.6	[]Yes []No []N/A
	1		1	[]Yes []No
	Does the implementation support the provision of diversion supplementary service(s) on a per ISDN number basis? the provision of diversion supplementary service(s) to the whole access? the procedures associated with the activation, deactivation and interrogation for all ISDN numbers on the same access? the procedures associated with the notinformation) for CFU? CFB? CFNR? CFNR? CPNR? CPNR? CPNR? CPNR? CPNR? CPNR? CPNR? CPNR? CFB? CFNR? CFNR?	Does the implementation support the provision of diversion supplementary service(s) on a per ISDN number basis? the provision of diversion supplementary service(s) to the whole access? the procedures associated with the activation, deactivation and interrogation for all ISDN numbers on the same access? the procedures associated with the notification to the served user that information) for CFU? R 4.3 AND R 1.1.2 CFB? R 4.3 AND R 1.1.2 NOT (R 4.3 AND R 1.1.1) CFNR? R 4.3 AND R 1.1.1 NOT (R 4.3 AND R 1.1.1) CFNR? R 4.3 AND R 1.1.1 NOT (R 4.3 AND R 1.1.1) CFNR? R 4.4.1 NOT R 4.4.1 CFP? R 4.4.1 NOT R 4.4.1 NOT R 4.4.1 CFP? R 4.4.1 NOT R 4.4.1 NOT R 4.4.1 CFP? R 4.4.1 NOT R 4.4.1 NOT R 4.4.1 CFP? R 4.4.1 NOT R 4.4.1 NOT R 4.4.1 NOT R 4.4.1 NOT R 4.4.1 CFP? R 4.4.1 NOT R 4.	Does the implementation support the provision of diversion R 4.3 NoT R 4.4 NoT R	Does the implementation support the provision of diversion supplementary service(s) on a per ISDN number basis? the procedures associated with the activation discretely information and interrogation for all ISDN numbers on the same access? the procedures associated with the activation of a specific SCF supplementary service(s) to the whole access? the procedures associated with the notification to the served user that a call has been forwarded (with information) for CFU? R4.3 AND R 1.1.2 R5.3 AND R 1.1.2 R6.1 AND R 1.1.2 R7.3 AND R 1.1.2 R7.3 AND R 1.1.2 R7.3 AND R 1.1.3 R8.4 AND R 1.1.1 R8.4 AND R 1.1.3 R8.4 AND R 1.1.2 R8.4 AND R

Table A.6 (continued): Major capabilities - network

Item	Major capability: Does the implementation	Conditions for status	Status	Reference	Support
	- I				
	support		1	0.00.40.0	5.33.4
MC 20	the procedures for identification of the	R 4.4.1	M	9.2.3, 10.3	[]Yes []No
110.04	diverted-to user to the calling user?	NOT R 4.4.1	N/A	0.0.4.4.0.0	[]N/A
MC 21	the procedures for the CFU	R 4.3 AND R 1.1.2	M	9.2.4.1, 10.6	[]Yes []No
	supplementary service at the served	NOT (R 4.3 AND R 1.1.2)	N/A		[]N/A
	user?				
MC 21.1	the procedures for the SCFU	R 4.3 AND R 1.3.2	M	9.2.6, 10.6	[]Yes []No
	supplementary service at the served	NOT (R4.3 AND R 1.3.2)	N/A		[]N/A
	user?				
MC 22	the Network Determined User Busy	R 4.3 AND R 1.1.1	M	9.2.4.2, 10.6	[]Yes []No
	(NDUB) procedures for the CFB	NOT (R 4.3 AND R 1.1.1)	N/A		[]N/A
	supplementary service at the served				
	user?				
MC 22.1	the Network Determined User Busy	R 4.3 AND R 1.3.1	M	9.2.6, 10.6	[]Yes []No
	(NDUB) procedures for the SCFB	NOT (R 4.3 AND R 13.1)	N/A		[]N/A
	supplementary service at the served				
	user?				
MC23	the User Determined User Busy	R 4.3 AND R 1.1.1	М	9.2.4.3, 10.6	[]Yes []No
	(UDUB) procedures for the CFB	NOT (R 4.3 AND R 1.1.1)	N/A	,	[]N/A
	supplementary service at the served	(***)			11.4
	user?				
MC 23.1	the User Determined User Busy	R 4.3 AND R 1.3.1	М	9.2.6, 10.6	[]Yes []No
2 20.1	(UDUB) procedures for the SCFB	NOT (R 4.3 AND R 13.1)	N/A	5.2.0, 10.0	[]N/A
	supplementary service at the served				L 1. 3/ 1
	user?				
MC 24	the procedures for the CFNR	R 4.3 AND R 1.1.3	М	9.2.4.4 10.6	[]Yes []No
IVIC 24	supplementary service at the served	-	N/A	9.2.4.4 10.0	
	, , ,	NOT (R 4.3 AND R 1.1.3)	N/A		[]N/A
110 01 1	user?	D 40 D 400		0.00.40.0	5 33 / 5 38 I
MC 24.1	the procedures for the SCFNR	R 4.3 AND R 1.3.3	M	9.2.6, 10.6	[]Yes []No
	supplementary service at the served	NOT (R 4.3 AND R 1.3.3)	N/A		[]N/A
	user?				
MC 25	the procedures for the CD	R 4.3 AND R 1.2	M	9.2.4.5, 10.6	[]Yes []No
	supplementary service at the served	NOT (R 4.3 AND R 1.2)	N/A		[]N/A
	user?				
MC 26	the procedures associated with release				1
MC 26.1	CFU?	R 4.4.2	О	6.1 table1	[]Yes []No
		NOT R 4.4.2	N/A		[]N/A
MC 26.2	CFB?	R 4.4.2	О	6.1 table1	[]Yes []No
		NOT R 4.4.2	N/A		[]N/A
MC 26.3	CFNR?	R 4.4.2	0	6.1 table1	[]Yes []No
		NOT R 4.4.2	N/A		[]N/A
MC 26.4	CD?	R 4.4.2	0	6.1 table1	[]Yes []No
		NOT R 4.4.2	N/A		[]N/A
MC 27	the procedures associated with the sen		the served u	ser for	12.7
MC 27.1	CFU?	R 4.3 AND R 1.1.2 AND R 3.1	0	6.1 table1	[]Yes []No
1010 27.1	0101	NOT (R 4.3 AND R 1.1.2 AND	N/A	o. i table i	[]N/A
		R 3.1)	18/73		
MC 27.2	CFB?	R 4.3 AND R 1.1.1 AND R 3.1	0	6.1 table1	[]Yes []No
VIC 27.2	CFB?		-	b. I table I	
		NOT (R 4.3 AND R 1.1.1 AND	N/A		[]N/A
110.07.0	OFNER	R 3.1)		0.4.4.1.4	5 33 / 5 33 I
MC 27.3	CFNR?	R 4.3 AND R 1.1.3 AND R 3.1	0	6.1 table1	[]Yes []No
		NOT (R 4.3 AND R 1.1.3 AND	N/A		[]N/A
		R 3.1)	1	1	
MC 28	the procedures associated with the	R 3.2	M	10.1	[]Yes []No
1010 20		INOT R 3.2	N/A		[]N/A
WIO 20	diversion of a call within or beyond the			i .	
	private ISDN?				_
		R 3.2	M	10.2	[]Yes []No
MC 29	private ISDN?		M N/A	10.2	[]Yes []No []N/A
MC 29	private ISDN? the procedures for presentation of a	R 3.2		10.2	[]N/A
MC 29	private ISDN? the procedures for presentation of a diverted call to a private ISDN?	R 3.2 NOT R 3.2	N/A M		
MC 29 MC 30	private ISDN? the procedures for presentation of a diverted call to a private ISDN? the procedures for diverted calls presented from a private ISDN?	R 3.2 NOT R 3.2 R 3.2 NOT R 3.2	N/A		[]N/A []Yes []No
MC 29 MC 30 MC 31	private ISDN? the procedures for presentation of a diverted call to a private ISDN? the procedures for diverted calls presented from a private ISDN? procedures of diversion by partial rerou	R 3.2 NOT R 3.2 R 3.2 NOT R 3.2 teing for	N/A M N/A	10.4	[]N/A []Yes []No []N/A
MC 29 MC 30 MC 31	private ISDN? the procedures for presentation of a diverted call to a private ISDN? the procedures for diverted calls presented from a private ISDN?	R 3.2 NOT R 3.2 R 3.2 NOT R 3.2 teing for R 3.2 AND R 1.1.1	N/A M N/A		[]N/A []Yes []No []N/A
MC 29 MC 30 MC 31 MC 31.1	private ISDN? the procedures for presentation of a diverted call to a private ISDN? the procedures for diverted calls presented from a private ISDN? procedures of diversion by partial rerou CFB?	R 3.2 NOT R 3.2 R 3.2 NOT R 3.2 teing for R 3.2 AND R 1.1.1 NOT (R 3.2 AND R 1.1.1)	N/A M N/A O N/A	10.4 6.1 table 2, 10.5	[]N/A []Yes []No []N/A
MC 29 MC 30 MC 31	private ISDN? the procedures for presentation of a diverted call to a private ISDN? the procedures for diverted calls presented from a private ISDN? procedures of diversion by partial rerou	R 3.2 NOT R 3.2 R 3.2 NOT R 3.2 teing for R 3.2 AND R 1.1.1 NOT (R 3.2 AND R 1.1.1) R 3.2 AND R 1.1.2	N/A M N/A O N/A	10.4	[]N/A []Yes []No []N/A []Yes []No []N/A
MC 29 MC 30 MC 31 MC 31.1	private ISDN? the procedures for presentation of a diverted call to a private ISDN? the procedures for diverted calls presented from a private ISDN? procedures of diversion by partial rerou CFB?	R 3.2 NOT R 3.2 R 3.2 NOT R 3.2 teing for R 3.2 AND R 1.1.1 NOT (R 3.2 AND R 1.1.1)	N/A M N/A O N/A	10.4 6.1 table 2, 10.5	[]N/A []Yes []No []N/A

Table A.6 (concluded): Major capabilities - network

Item	Major capability: Does the implementation support	Conditions for status	Status	Reference	Support
MC 31.3	CFNR?	R 3.2 AND R 1.1.3 NOT (R 3.2 AND R 1.1.3)	O N/A	6.1 table 2, 10.5	[]Yes []No []N/A
MC 31.4	CD?	R 3.2 AND R 1.2 NOT (R 3.2 AND R 1.2)	O N/A	6.1 table 2, 10.5	[]Yes []No []N/A
MC 32	the procedures of interactions with other networks?		М	11	[]Yes[]No
0.7	Support of at least one of these optio	ns is required.		•	•
Comments:					

A.8.2 Subsidiary capabilities

Table A.7: Subsidiary capabilities - network

Item	Subsidiary capability: Does the implementation	Conditions for status	Status	Reference	Support
SC 1.1	support retention of the call at the CFNR served user until alerting begins at the diverted-to user?	R 4.3 AND R 1.1.3 NOT (R 4.3 AND R 1.1.3)	O.8 N/A	6.1, 9.2.4.4	[]Yes []No []N/A
SC 1.2	support clearing of the call at the CFNR served user on invocation of the call diversion service?	R 4.3 AND R 1.1.3 NOT (R 4.3 AND R 1.1.3)	O.8 N/A	6.1, 9.2.4.4	[]Yes []No []N/A
SC 1.3	support retention of the call at the	R 4.3 AND R 1.3.3	O.11	6.1, 9.2.4.4	[]Yes []No
	SCFNR served user until alerting begins	NOT (R 4.3 AND R 1.3.3)	N/A		[]N/A
	at the diverted-to user?				
SC 1.4	support clearing of the call at the	R 4.3 AND R 1.3.3	O.11	6.1, 9.2.4.4	[]Yes []No
	SCFNR served user on invocation of the	NOT (R 4.3 AND R 1.3.3)	N/A		[]N/A
	call diversion service?				
SC 2.1	support retention of the call at the CD served user until alerting begins at the diverted-to user?	R 4.3 AND R 1.2 NOT (R 4.3 AND R 1.2)	O.9 N/A	6.1, 9.2.4.5	[]Yes []No []N/A
SC 2.2	support clearing of the call at the CD served user on invocation of the call diversion service?	R 4.3 AND R 1.2 NOT (R 4.3 AND R 1.2)	O.9 N/A	6.1, 9.2.4.5	[]Yes []No []N/A
SC 3.1	support retention of the call at the partial rerouteing private ISDN until alerting begins at the diverted-to user?	MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4 NOT (MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4)	O.10 N/A	6.1, 10.5	[]Yes []No []N/A
SC 3.2	support clearing of the call at the partial rerouteing private ISDN on invocation of the call diversion service?	MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4 NOT (MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4)	O.10 N/A	6.1, 10.5	[]Yes []No []N/A
SC 4	override the value of the subscription option "Diverting number is released to the diverted-to user" with call-by-call indications?	R 4.3 AND R 1.2	O N/A	6.1, 9.2.4.5	[]Yes []No []N/A
0.8	Support of at least one of these options				
O.9 O.10	Support of at least one of these options Support of at least one of these options				
O.10 O.11	Support of at least one of these options	•			
Comments:	·				

A.8.3 Protocol data units

No items requiring response.

A.8.4 Protocol data unit parameters

Table A.8: Facility information element components received by the network

Item	Facility information element components: Does the implementation support	Conditions for status	Status	Reference	Support
P 21	ActivationDiversion invoke?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 21.1	ActivationSCF invoke?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 22	DeactivationDiversion invoke?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 22.1	DeactivationSCF invoke?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 23	InterrogationDiversion invoke?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.4, 10.6	[]Yes []No []N/A
P 23.1	InterrogationSCF invoke?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.4, 10.6	[]Yes []No []N/A
P 24	InterrogateServedUser Numbers invoke?	MC 11 NOT MC 11	M N/A	7.1, 9.1.3, 10.6	[]Yes []No []N/A
P 24.1	InterrogationSCFList invoke?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.5, 10.6	[]Yes []No []N/A
P 25	CallDeflection invoke?	R 1.2 AND R 4.3 NOT (R 1.2 AND R 4.3)	M N/A	7.1, 9.2.4.5, 10.6	[]Yes []No []N/A
P 26	CallRerouteing invoke?	MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4 NOT (MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4)	M N/A	7.1, 10.5	[]Yes []No []N/A
P 27	DivertingLegInformation1 invoke?	R 3.2 AND MC 28 NOT (R 3.2 AND MC 28)	M N/A	7.1, 10.1	[]Yes []No []N/A
P 28	DivertingLegInformation2 invoke?	R 3.2 AND MC 30 NOT (R 3.2 AND MC 30)	M N/A	7.1, 10.4	[]Yes []No []N/A
P 29	DivertingLegInformation3 invoke?	R 3.2 AND R 4.4.2 NOT R 3.2	M N/A	7.1, 10.1, 10.2	[]Yes []No []N/A

Comments:

Table A.9: Facility information element components transmitted by the network

Item	Facility information element components: Does the implementation support	Conditions for status	Status	Reference	Support
P 30.1	ActivationDiversion return result?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 30.1.1	ActivationSCF return result?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
P 30.2	ActivationDiversion return error?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
² 30.2.1	ActivationSCF return error?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.1, 10.6	[]Yes []No []N/A
9 31.1	DeactivationDiversion return result?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 31.1.1	DeactivationSCF return result?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 31.2	DeactivationDiversion return error?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
P 31.2.1	DeactivationSCF return error?	R 1.3 AND R 4.3 NOT (R 1.3 AND R 4.3)	M N/A	7.1, 9.1.2, 10.6	[]Yes []No []N/A
9 32	ActivationStatusNotificationDiv invoke	R 1.1 AND R 4.3	M	7.1, 9.1.1	[] Yes [] No
200.4	Anthoritor Otatus	NOT (R 1.1 AND R 4.3)	N/A	74.044	[] N/A
P 32.1	ActivationStatus NotificationSCF invoke?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.1	[]Yes []No []N/A
P 33	DeactivationStatusNotificationDiv invoke	R 1.1 AND R 4.3	M	7.1, 9.1.2	[] Yes [] No
2 2 2 4	Departmention Status	NOT (R 1.1 AND R 4.3)	N/A	74.040	[] N/A
33.1	DeactivationStatus NotificationSCF invoke?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.2	[]Yes []No []N/A
34.1	InterrogationDiversion return result?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.4, 10.6	[]Yes []No []N/A
34.2	InterrogationDiversion return error?	R 1.1 AND R 4.3 NOT (R 1.1 AND R 4.3)	M N/A	7.1, 9.1.4, 10.6	[]Yes []No []N/A
35.1	InterrogateServedUser Numbers return result?	MC 11 NOT MC 11	M N/A	7.1, 9.1.3, 10.6	[]Yes []No []N/A
35.1.1	InterrogateSCFList return result?	MC 11.1 NOT MC 11.1	M N/A	7.1, 9.1.5, 10.6	[]Yes []No []N/A
35.2	InterrogateServedUser Numbers return error?	MC 11 NOT MC 11	M N/A	7.1, 9.1.3, 10.6	[]Yes []No []N/A
35.2	InterrogateSCFList return error?	MC 11.1 NOT MC 11.1	M N/A	7.1, 9.1.5, 10.6	[]Yes []No []N/A
P 36	DiversionInformation invoke?	MC 12.1 OR MC 12.2 OR MC 12.3 NOT (MC 12.1 OR MC 12.2 OR MC 12.3)	M N/A	7.1, 9.2.4.1, 9.2.4.2, 9.2.4.3, 9.2.4.4, 10.6	[]Yes[]No []N/A
9 37.1	CallDeflection return result?	R 1.2 AND R 4.3 NOT (R 1.2 AND R 4.3)	M N/A	7.1, 9.2.4.5, 10.6	[]Yes []No []N/A
37.2	CallDeflection return error?	R 1.2 AND R 4.3 NOT (R 1.2 AND R 4.3)	M N/A	7.1, 9.2.4.5, 10.6	[]Yes []No []N/A
² 38.1	CallRerouteing return result?	MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4 NOT (MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4)	M N/A	7.1, 10.5	[]Yes []No []N/A
9 38.2	CallRerouteing return error?	MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4 NOT (MC 31.1 OR MC 31.2 OR MC 31.3 OR MC 31.4)	M N/A	7.1, 10.5	[]Yes []No []N/A
39	DivertingLegInformation2 invoke?	R 3.2 AND R 4.4.2 NOT (R 3.2 AND R 4.4.2)	M N/A	7.1, 10.2	[]Yes []No []N/A
P 40	DivertingLegInformation3 invoke?	R 3.2 AND MC 30 NOT (R 3.2 MC 30)	M N/A	7.1, 10.4	[]Yes []No []N/A

Table A.10: Notification indicator information element values transmitted by the network

Item	Notification indicator information element values: Does the implementation support	Conditions for status	Status	Reference	Support
P 41.1	"Call is diverting"?	R 4.4.1 NOT R 4.4.1	M N/A	7.2.1, 9.2.2.1	[]Yes []No []N/A
P 41.2	"Diversion activated"?	MC 27.1 OR MC 27.2 OR MC 27.3 NOT (MC 27.1 OR MC 27.2 OR MC 27.3)	M N/A	7.2.1, 9.3.1	[]Yes []No []N/A
Comments:					

Table A.11: SETUP PDU information elements transmitted by the network

Item	SETUP PDU information elements: Does the implementation support	Conditions for status	Status	Reference	Support
P 42	Redirecting number?	R 4.4.2	М	7.2.2, 9.2.5.1	[]Yes []No
		NOT R 4.4.2	N/A		[]N/A
NOTE: T	hese parameters are additional to those required for	or support of basic call	(EN 300 403	3-1 [6]).	
Comments:		• •	•	,	

Table A.12: ALERTING PDU information elements transmitted by the network

Item	ALERTING PDU information elements: Does the implementation support	Conditions for status	Status	Reference	Support
P 43	Redirection number?	R 4.4.1 NOT R 4.4.1	O.11 N/A	7.2.3, 9.2.3.1, 10.3	[]Yes []No []N/A
	able A.16 These parameters are additional to those required for	support of basic call	(EN 300 403	3-1 [6]).	

Table A.13: CONNECT PDU information elements transmitted by the network

Item	CONNECT PDU information elements: Does the implementation support	Conditions for status	Status	Reference	Support
P 44	Redirection number?		O.11 N/A	7.2.3, 9.2.3.1, 10.3	[]Yes []No []N/A
	ole A.16 ese parameters are additional to those required for	support of basic call	(EN 300 403	3-1 [6]).	
Comments:					

Table A.14: INFORMATION PDU information elements transmitted by the network

Item	INFORMATION PDU information elements: Does the implementation support	Conditions for status	Status	Reference	Support
P 45	Redirection number?	R 4.4.1	O.11	7.2.3, 9.2.3.1, 10.3	[]Yes []No
		NOT R 4.4.1	N/A		[]N/A
O.11 see ta	able A.16				
NOTE: T	hese parameters are additional to those required for	support of basic call	(EN 300 403	3-1 [6]).	
Comments:					

Table A.15: NOTIFY PDU information elements transmitted by the network

Item	NOTIFY PDU information elements: Does the implementation support	Conditions for status	Status	Reference	Support
P 46	Redirection number?		O.11 N/A	7.2.3, 9.2.3.1, 10.3	[]Yes []No []N/A
	ble A.16 nese parameters are additional to those required f	for support of basic call	(EN 300 403	3-1 [6]).	

Table A.16: PROGRESS PDU information elements transmitted by the network

Item	PROGRESS PDU information elements:	Conditions for	Status	Reference	Support
	Does the implementation support	status			
P 47	Redirection number?	R 4.4.1	O.11	7.2.3, 9.2.3.1, 10.3	[]Yes []No
		NOT R 4.4.1	N/A		[]N/A
O.11 Suppo	rt of at least one of these options is required.		_		-
NOTE: Th	ese parameters are additional to those required for	support of basic call	(EN 300 40	3-1 [6]).	
Comments:			•		

A.8.5 Timers

Table A.17: Timers - network

Item	Timer: Does the implementation support	Conditions for status	Status	Reference	Support
TM 1	T-CFNR?	R 1.1.3 AND R 4.3 NOT (R 1.1.3 AND R 4.3)	M N/A	9.2.4.4, 13	[]Yes []No []N/A
Comments:		NOT (K 1.1.3 AND K 4.3)	INA		II JIWA

A.8.6 Call states

No items requiring response.

Annex B (normative): Requirements list

This annex repeats in the form of a requirements list some items of the basic call, generic functional protocol and supplementary service interactions PICS proforma required for support of EN 300 207-1 [5]. No support column is provided as the answers are to be entered in the relevant base PICS proforma.

In the tables which follow in this annex, the status of the base PICS proforma is indicated as "C" (conditional) or "O" (optional). The "C" status is used where the base PICS proforma contains a number of interdependent items which need not be repeated in the present document. "O" indicates that the item in the base PICS proforma is dependent on one or more other items, at least one of which has an optional status. The exact interdependency is fully specified in the base PICS proforma specification.

B.1 User

B.1.1 Requirements on items used in the basic call PICS

No additional requirements.

B.1.2 Requirements on items used in the generic functional protocol PICS

In the tabulations which follow in this subclause, all item numbers are as contained in ETS 300 196-2 [4]. All references are to EN 300 207-1 [5] unless otherwise stated.

Item	Major capability:	Status	SS conditions	SS	Reference
	Does the implementation support	base	for status	status	
MCu 2	the functional protocol (common information element category) for the control of supplementary services?	0	R 4.1 OR R 3.2 NOT (R 4.1 OR R 3.2)	M N/A	6.3, 8
MCu 2.2	bearer independent supplementary services procedure?	0	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	8.3.2
MCu 2.3	point-to-point (bearer related) transport mechanism?	С	(R 1.2 AND R 4.1) OR R 3.2 NOT ((R 1.2 AND R 4.1) OR R 3.2)	M N/A	8.3.1, 8.3.1.1
MCu 5	generic procedures for the supplementary services management?	0	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	10.2
MCu 5.1	activation?	С	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	10.2.2
MCu 5.2	deactivation?	С	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	10.2.3
MCu 5.3	interrogation?	С	R 1.1 AND R 4.1 NOT (R 1.1 AND R 4.1)	M N/A	10.2.4

Table B.1: Major capabilities - user

Table B.2: Messages transmitted - user

Item	Message: Does the implementation support	Status base	SS conditions for status	SS status	Reference
MTu 1	the inclusion of FACILITY?	_	R 2.1 NOT R 2.1		9, 10; [3] 8.3, 11.1.1.1

Table B.3: Messages received - user

Item	Message:	Status		SS	Reference
	Does the implementation support	base	for status	status	
MRu 1	the interpretation of FACILITY?	0	R 2.1	M	9, 10;
			NOT R 2.1	N/A	[3] 8.3, 11.1.1.1

B.1.3 Requirements on items used in the supplementary service interactions PICS

In the tabulations which follow in this subclause, all item numbers are as contained in ETS 300 195-2 [2]. All references are to EN 300 207-1 [5] unless otherwise stated.

Table B.4: Major capabilities - user

Item	Major capability:	Status	SS conditions	SS	Reference
	Does the implementation support	base	for status	status	
MC 1.21	the CFB supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.1.1 NOT (R 2.1 AND R 1.1.1)	M N/A	12; [1] 5.5, 5.21, 5.22, 5.23
MC 1.21.1	the SCFB supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.3.1 NOT (R 2.1 AND R 1.3.1)	M N/A	12; [1] 5.67
MC 1.22	the CFNR supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.1.3 NOT (R 2.1 AND R 1.1.3)	M N/A	12; [1] 5.6, 5.24, 5.25, 5.26
MC 1.22.1	the SCFNR supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.3.3 NOT (R 2.1 AND R 1.3.3)	M N/A	12; [1] 5.67
MC 1.23	the CFU supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.1.2 NOT (R 2.1 AND R 1.1.2)	M N/A	12; [1] 5.7, 5.27, 5.28, 5.29
MC 1.23.1	the SCFU supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.3.2 NOT (R 2.1 AND R 1.3.2)	M N/A	12; [1] 5.67
MC 1.24	the CD supplementary service interactions with other implemented supplementary services?	0	R 2.1 AND R 1.2 NOT (R 2.1 AND R 1.2)	M N/A	12; [1] 5.4, 5.18, 5.19, 5.20

B.2 Network

B.2.1 Requirements on items used in the basic call PICS

In the tabulations which follow in this subclause, all item numbers are as contained in EN 300 403-3 [7]. All references are to EN 300 207-1 [5] unless otherwise stated.

Table B.5: Information elements - network to user (transmitted by the network)

Item	Message:	Status	SS conditions	SS	Reference
	Does the implementation support	base	for status	status	
MTn9-IE19	the inclusion of Notification indicator?	0	R 4.3 OR R 4.4.1	M	9.2.2.1, 9.3.1, 10.3;
			NOT (R 4.4 OR R 4.4.1)	N/A	[6] 4.5.21

B.2.2 Requirements on items used in the generic functional protocol PICS

In the tabulations which follow in this subclause, all item numbers are as contained in ETS 300 196-2 [4]. All references are to EN 300 207-1 [5] unless otherwise stated.

Table B.6: Major capabilities - network

Item	Major capability:	Status	SS conditions	SS	Reference
	Does the implementation support	base	for status	status	
MCn 2	the functional protocol (common information element category) for the control of supplementary services?	-	R 2.2 NOT R 2.2	M N/A	6.3, 8
MCn 2.2	bearer independent supplementary services procedure?	0	R 1.1 AND R 2.2 NOT (R 1.1 AND R 2.2)	M N/A	8.3.2
MCn 2.3	point-to-point (bearer related) transport mechanism?	С	R 2.2 AND (R 1.2 OR R 3.2) NOT (R 2.2 AND (R 1.2 OR R 3.2))	M N/A	8.3.1, 8.3.1.1
MCn 5	generic procedures for the supplementary services management?	0	R 1.1 AND R 2.2 NOT (R 1.1 AND R 2.2)	M N/A	10.2
MCn 5.1	activation?	С	R 1.1 AND R 2.2 NOT (R 1.1 AND R 2.2)	M N/A	10.2.2
MCn 5.2	deactivation?	С	R 1.1 AND R 2.2 NOT (R 1.1 AND R 2.2)	M N/A	10.2.3
MCn 5.3	interrogation?	С	R 1.1 AND R 2.2 NOT (R 1.1 AND R 2.2)	M N/A	10.2.4

Table B.7: Messages transmitted - network

Item	Message:	Status	SS conditions	SS	Reference
	Does the implementation support	base	for status	status	
MTn 1	the inclusion of FACILITY?	0	R 2.2	M	9, 10;
			NOT R 2.2	N/A	[3] 8.3, 11.1.1.1

B.2.3 Requirements on items used in the supplementary service interactions PICS

In the tabulations which follow in this subclause, all item numbers are as contained in ETS 300 195-2 [2]. All references are to EN 300 207-1 [5] unless otherwise stated.

Table B.8: Major capabilities - network

Item	Major capability:	Status	SS conditions	SS	Reference
	Does the implementation support	Base	for status	status	
MC 2.21	the CFB supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.1.1 NOT (R 2.2 AND R 1.1.1)	M N/A	12; [1] 5.5, 5.21, 5.22, 5.23
MC 2.21.1	the SCFB supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.3.1 NOT (R 2.2 AND R 1.3.1)	M N/A	12; [1] 5.67
MC 2.22	the CFNR supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.1.3 NOT (R 2.2 AND R 1.1.3)	M N/A	12; [1] 5.6, 5.24, 5.25, 5.26
MC 2.22.1	the SCFNR supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.3.3 NOT (R 2.2 AND R 1.3.3)	M N/A	12; [1] 5.67
MC 2.23	the CFU supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.1.2 NOT (R 2.2 AND R 1.1.2)	M N/A	12; [1] 5.7, 5.27, 5.28, 5.29
MC 2.23.1	the SCFU supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.3.2 NOT (R 2.2 AND R 1.3.2)	M N/A	12; [1] 5.67
MC 2.24	the CD supplementary service interactions with other implemented supplementary services?	0	R 2.2 AND R 1.2 NOT (R 2.2 AND R 1.2)	M N/A	12; [1] 5.4, 5.18, 5.19, 5.20

History

Document history					
Edition 1	September 1996	Publication as ETS 300 207-2			
V1.2.1	December 1997	Public Enquiry	PE 9817:	1997-12-26 to 1998-04-24	
V1.2.3	August 1998	Vote	V 9843:	1998-08-25 to 1998-10-23	
V1.2.4	October 1998	Publication			

ISBN 2-7437-2641-5 Dépôt légal : Octobre 1998