

Draft **EN 300 207-5** V1.2.1 (1998-12)

European Standard (Telecommunications series)

**Integrated Services Digital Network (ISDN);
Diversion supplementary services;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 5: Test Suite Structure and Test Purposes (TSS&TP)
specification for the network**



Reference

REN/SPS-05065-5 (1x190ioo.PDF)

Keywords

ISDN, DSS1, supplementary service, diversion,
testing, TSS&TP, network

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998.
All rights reserved.

Contents

Intellectual Property Rights.....	5
Foreword	5
1 Scope.....	6
2 References.....	6
3 Definitions.....	7
3.1 Definitions related to conformance testing	7
3.2 Definitions related to EN 300 207-1	7
4 Abbreviations	8
5 Test Suite Structure (TSS)	9
5.1 TSS for call diversion excluding SCF.....	9
5.2 TSS for SCF.....	10
6 Test Purposes (TP).....	10
6.1 Introduction.....	10
6.1.1 TP naming convention.....	10
6.1.2 Source of TP definition	10
6.1.3 TP structure.....	11
6.1.4 Test strategy	11
6.2 Network TPs for call diversion excluding SCF.....	11
6.2.1 Common (S/T or T).....	12
6.2.1.1 Calling user procedures	12
6.2.1.1.1 EN 300 207-1, subclause 9.2.2	12
6.2.1.1.2 EN 300 207-1, subclause 9.2.3	12
6.2.1.2 Served user procedures	14
6.2.1.2.1 EN 300 207-1, subclause 9.1	14
6.2.1.2.1.1 Activation	14
6.2.1.2.1.2 Deactivation	18
6.2.1.2.2 EN 300 207-1, subclause 9.2.4	25
6.2.2 S/T only.....	37
6.2.2.1 Served user procedures	37
6.2.2.1.1 EN 300 207-1, subclause 9.3	37
6.2.2.2 Called (diverted-to) user procedures	37
6.2.2.2.1 EN 300 207-1, subclause 9.2.5	37
6.2.3 T only.....	38
6.2.3.1 EN 300 207-1, subclause 10.1	38
6.2.3.2 EN 300 207-1, subclause 10.2	40
6.2.3.3 EN 300 207-1, subclause 10.4	41
6.2.3.4 EN 300 207-1, subclause 10.5	41
6.2.4 Interworking.....	46
6.3 Network TPs for SCF	46
6.3.1 Signalling procedures at the coincident S and T reference point.....	46
6.3.1.1 SCFB supplementary service	46
6.3.1.1.1 Activation.....	46
6.3.1.1.2 Deactivation	51
6.3.1.2 SCFU supplementary service.....	56
6.3.1.2.1 Activation.....	56
6.3.1.2.2 Deactivation	61
6.3.1.3 SCFNR supplementary service	65
6.3.1.3.1 Activation.....	65
6.3.1.3.2 Deactivation	70
6.3.1.4 Interrogation - SCF.....	75
6.3.1.5 Interrogation - Screening List	75

7	Compliance	76
8	Requirements for a comprehensive testing service.....	76
	History	77

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Signalling Protocols and Switching (SPS), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document is part 5 of a multi-part standard covering the Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN), as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";**
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

1 Scope

This fifth part of EN 300 207 specifies the Test Suite Structure and Test Purposes (TSS&TP) for the Network side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [7]) of implementations conforming to the stage three standard for the diversion supplementary services for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, EN 300 207-1 [1].

A further part of the present document specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma based on the present document. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the User side of the T reference point or coincident S and T reference point of implementations conforming to EN 300 207-1 [1].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] EN 300 207-1 (V1.2): "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [2] EN 300 207-2 (V1.2): "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [3] ISO/IEC 9646-1: "Information Technology; Open Systems Interconnection; Conformance Testing Methodology and Framework; Part 1: General Concepts".
- [4] ISO/IEC 9646-2: "Information Technology; Open Systems Interconnection; Conformance Testing Methodology and Framework; Part 2: Abstract Test Suite specification".
- [5] ISO/IEC 9646-3: "Information Technology; Open Systems Interconnection; Conformance Testing Methodology and Framework; Part 3: The Tree and Tabular Combined Notation (TTCN)".
- [6] EN 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [7] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
- [8] EN 300 403-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [9] ITU-T Recommendation I.112 (1993): "Vocabulary and terms for ISDNs".
- [10] ITU-T Recommendation E.164 (1997): "The international public telecommunication numbering plan".

- [11] ITU-T Recommendation I.210 (1993): "Principles of the telecommunication services supported by an ISDN and the means to describe them".
- [12] EN 300 403-3: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 3: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [13] ETS 300 196-2: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [14] ETS 300 406: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

3 Definitions

For the purposes of the present document, the following definitions apply:

3.1 Definitions related to conformance testing

abstract test case: Refer to ISO/IEC 9646-1 [3].

Abstract Test Suite (ATS): Refer to ISO/IEC 9646-1 [3].

Implementation Under Test (IUT): Refer to ISO/IEC 9646-1 [3].

implicit send event: Refer to ISO/IEC 9646-3 [5].

Lower tester: Refer to ISO/IEC 9646-1 [3].

point of control and observation: Refer to ISO/IEC 9646-1 [3].

Protocol Implementation Conformance Statement (PICS): Refer to ISO/IEC 9646-1 [3].

PICS proforma: Refer to ISO/IEC 9646-1 [3].

Protocol Implementation eXtra Information for Testing (PIXIT): Refer to ISO/IEC 9646-1 [3].

PIXIT proforma: Refer to ISO/IEC 9646-1 [3].

System under test: Refer to ISO/IEC 9646-1 [3].

test purpose: Refer to ISO/IEC 9646-1 [3].

3.2 Definitions related to EN 300 207-1

call reference: See EN 300 403-1 [8], subclause 4.3.

component: See EN 300 196-1 [6], subclause 11.2.2.1.

Integrated Services Digital Network (ISDN): See ITU-T Recommendation I.112 [9], definition 308.

ISDN number: A number conforming to the numbering and structure specified in ITU-T Recommendation E.164 [10].

Invoke component: See EN 300 196-1 [6], subclause 11.2.2.1.

network: The DSS1 protocol entity at the Network side of the user-network interface where a T reference point or coincident S and T reference point applies.

Network (S/T): The DSS1 protocol entity at the Network side of the user-network interface where a coincident S and T reference point applies.

network (T): The DSS1 protocol entity at the Network side of the user-network interface where a T reference point applies (Network connected to Private ISDN).

Return error component: See EN 300 196-1 [6], subclause 11.2.2.1.

return result component: See EN 300 196-1 [6], subclause 11.2.2.1.

Served user: The user who invokes the call diversion supplementary service.

service; telecommunication service: See ITU-T Recommendation I.112 [9], definition 201.

Supplementary service: See ITU-T Recommendation I.210 [11], subclause 2.4.


4 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
CD	Call Deflection
CFB	Call Forwarding Busy
CFNR	Call Forwarding No Reply
CFU	Call Forwarding Unconditional
DCR	Dummy Call Reference
DSS1	Digital Subscriber Signalling System No. one
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
NDUB	Network Determined User Busy
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
SCFB	Selective Call Forwarding Busy
SCFNR	Selective Call Forwarding No Reply
SCFU	Selective Call Forwarding Unconditional
TP	Test Purpose
TSS	Test Suite Structure
UDUB	User Determined User Busy

5 Test Suite Structure (TSS)

5.1 TSS for call diversion excluding SCF

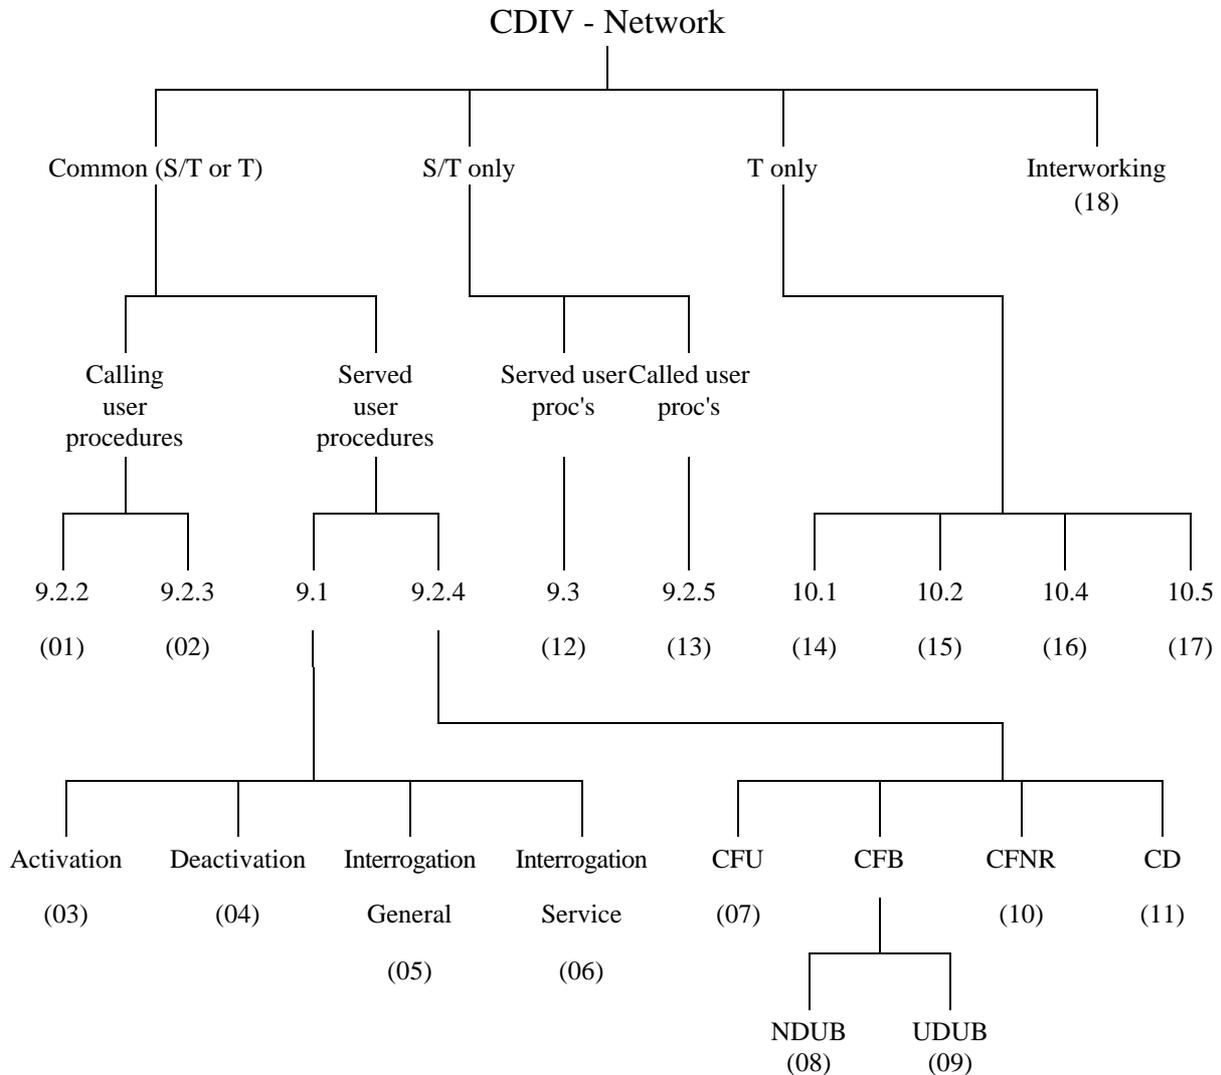

NOTE 1: Numbers in brackets represent group numbers and are used in TP identifiers.

NOTE 2: See EN 300 207-1 [1] for titles of referenced subclauses (9.2.2 etc.).

Figure 1: Test suite structure

5.2 TSS for SCF

Signalling procedures at the coincident S and T reference point

SCFB supplementary service

Activation	N01
Deactivation	N02

SCFU supplementary service

Activation	N03
Deactivation	N04

SCFNR supplementary service

Activation	N05
Deactivation	N06
Interrogation - SCF	N07
Interrogation - screening list	N08

NOTE 1: Numbers in brackets represent group numbers and are used in TP identifiers.

Figure 2: Test suite structure

6 Test Purposes (TP)

6.1 Introduction

For each test requirement a TP is defined.

6.1.1 TP naming convention

Tps are numbered, starting at 001, within each group. Groups are organized according to the TSS. Additional references are added to identify the actual supplementary service and whether it applies to the network or the user (see table 1).

Table 1: TP identifier naming convention scheme

Identifier: <ss>_<iut><group>_ [<service>_] <nnn>			
<ss>	=	supplementary service:	e.g. "SCF"
<iut>	=	type of IUT:	U User N Network
<group>	=	group	2 digit field representing group reference according to TSS
<Service>	=	service (optional)	abbreviation of service name (see note 2 in 6.2).
<nnn>	=	sequential number	(001-999)

6.1.2 Source of TP definition

The TPs are based on EN 300 207-1 [1].

6.1.3 TP structure

A particular structure, compatible with ETS 300 406 [14] has been used and this is illustrated in table 2. This table should be read in conjunction with any TP, i.e. use a TP as an example to fully understand the table.

Table 2: Structure of a single TP

TP Part	Text	Example
Header	TP Identifier Reference to the subclause of the base specification containing the conformance requirement. Reference to selection criteria	see table 1 subclause 9.1.1 see note 1
Stimulus	Ensure that the IUT in the <basic call state> and <supplementary service state> <trigger> <i>see below for message structure</i> <i>or</i> <goal>	U00, U10 etc. SCNFR Wait Deactivation state receiving a XXXX message to request a ...
Reaction	<action> <conditions> <i>if the action is sending</i> <i>see below for message structure</i> <next action>, etc. and enters <supplementary service state> <i>and/or</i> and remains in the same call state(s) <i>or</i> and enters call state <state>	sends, saves, does, etc. using en-bloc sending, ...
Message structure	<message type> message containing a a) <info element> information element with b) a <field name> encoded as <i>or</i> including <coding of the field> and <i>back to a or b</i> ,	SETUP, FACILITY, CONNECT, ... Bearer capability, Facility, ... see note 2
Selection	Selection criteria reference	Call forwarding supported. PICS: R 1.3
NOTE 1: In order to use the same structure as for test group selection, the selection criteria is indicated at the bottom of the test purpose.		
NOTE 2: Unless specified the messages are valid and contain at least the mandatory information elements and possibly optional information elements, the information elements are valid and contain at least the mandatory parameters and possibly optional parameters.		

6.1.4 Test strategy

The TPs were generated as a result of an analysis of the base standard EN 300 207-1 [1] and the PICS specification EN 300 207-2 [2].

The TPs are only based on conformance requirements related to the externally observable behaviour of the IUT, and are limited to conceivable situations to which a real implementation is likely to be faced (ETS 300 406 [14]).

6.2 Network TPs for call diversion excluding SCF

NOTE 1: Where a FACILITY message is followed by "(DCR)", this means that the message is sent or received using the dummy call reference. FACILITY messages with no indication of DCR indicate that the call reference of the associated call is used.

<service> = CFB, CFNR, CFU

NOTE 2: As a large amount of the protocol for CFB, CFNR and CFU is independent of which of the three services is supported, the TPs have mostly been written in a general way. This ensures consistent TPs and should help in the development of consistent test cases and in their maintenance. Each TP containing "<service>" is in fact three TPs - one for each of the three services. The other service, CD, is treated separately.

6.2.1 Common (S/T or T)

NOTE: This subclause contains TPs for implementations which support coincident S and T reference point procedures and for implementations which support T reference point procedures. Thus this subclause contains TPs which are generally independent of the reference point configuration. Note, however, that there are a number of exceptions, and in these cases the selection expression attached to the TP gives a clear indication of which reference point configuration is appropriate.

6.2.1.1 Calling user procedures

6.2.1.1.1 EN 300 207-1, subclause 9.2.2

CDIV_N01_001 subclause 9.2.2.1 valid mandatory

Ensure that the IUT in the Call Initiated call state N01, to indicate that the first call diversion has occurred, sends a CALL PROCEEDING or NOTIFY message containing a Notification indicator information element coded "call is diverting" to the calling user.

CDIV_N01_002 subclause 9.2.2.1 valid mandatory

Ensure that the IUT in the Outgoing Call Proceeding call state N03, to indicate that the first call diversion has occurred, sends an ALERTING, PROGRESS, CONNECT, INFORMATION or NOTIFY message containing a Notification indicator information element coded "call is diverting" to the calling user.

CDIV_N01_003 subclause 9.2.2.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate that a subsequent call diversion with the diverting cause CDA or CFNR has occurred, sends a PROGRESS, CONNECT, INFORMATION or NOTIFY message containing a Notification indicator information element coded "call is diverting" to the calling user.

CDIV_N01_004 subclause 9.2.2.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate diversion from the diverted-to user where no progress indicator has been received, sends a NOTIFY message with the diversion notifications as indicated by the restriction requirements to the calling user.

CDIV_N01_005 subclause 9.2.2.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate diversion from the diverted-to user where a progress indicator has been received, sends a PROGRESS message with the diversion notifications as indicated by the restriction requirements to the calling user.

6.2.1.1.2 EN 300 207-1, subclause 9.2.3

CDIV_N02_001 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate completion of the call at the diverted-to user where presentation of the diverted-to number is not allowed in accordance with the COLR supplementary service of the diverted-to user, sends a CONNECT message and possibly a NOTIFY, INFORMATION or PROGRESS message none of which includes a Redirection number information element.

CDIV_N02_002 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate completion of the call at the diverted-to user where presentation of the diverted-to number is allowed in accordance with the COLR supplementary service of the diverted-to user, sends a CONNECT message and possibly a NOTIFY, INFORMATION or PROGRESS message none of which includes a Redirection number information element.

CDIV_N02_003 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Outgoing Call Proceeding call state N03, to indicate that the presentation of the diverted-to number is allowed in accordance with the COLR supplementary service of the diverted-to user,
sends to the calling user an ALERTING, CONNECT, NOTIFY, INFORMATION or PROGRESS message containing a Redirection number information element with the presentation indicator set to "presentation allowed", the numbering identification field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown", the type of number field set to "national number", "international number" or "unknown" and the redirection number information provided in the number digits field.

CDIV_N02_004 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate that the presentation of the diverted-to number is allowed in accordance with the COLR supplementary service of the diverted-to user,
sends to the calling user a CONNECT, NOTIFY, INFORMATION or PROGRESS message containing a Redirection number information element with the presentation indicator set to "presentation allowed", the numbering identification field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown", the type of number field set to "national number", "international number" or "unknown" and the redirection number information provided in the number digits field.

CDIV_N02_005 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Outgoing Call Proceeding call state N03, to indicate that the presentation of the diverted-to number is not allowed in accordance with the COLR supplementary service of the diverted-to user,
sends an ALERTING, CONNECT, NOTIFY, INFORMATION or PROGRESS message containing a Redirection number information element with the numbering identification field and the type of number field set to "unknown", without a number digits field and the presentation indicator set to "presentation restricted".

CDIV_N02_006 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate that the presentation of the diverted-to number is not allowed in accordance with the COLR supplementary service of the diverted-to user,
sends a CONNECT, NOTIFY, INFORMATION or PROGRESS message containing a Redirection number information element with the numbering identification field and the type of number field set to "unknown", without a number digits field and the presentation indicator set to "presentation restricted".

CDIV_N02_007 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Outgoing Call Proceeding call state N03, to indicate that the diverted-to number is not available in accordance with the COLR supplementary service of the diverted-to user,
sends an ALERTING, CONNECT, NOTIFY, INFORMATION or PROGRESS message containing a Redirection number information element with the presentation indicator set to "number not available due to interworking", the numbering identification field and the type of number field set to "unknown" and without a number digits field.

CDIV_N02_008 subclause 9.2.3.1 valid mandatory

Ensure that the IUT in the Call Delivered call state N04, to indicate that the diverted-to number is not available in accordance with the COLR supplementary service of the diverted-to user,
sends a CONNECT, NOTIFY, INFORMATION or PROGRESS message containing a Redirection number information element with the presentation indicator set to "number not available due to interworking", the numbering identification field and the type of number field set to "unknown" and without a number digits field.

6.2.1.2 Served user procedures

6.2.1.2.1 EN 300 207-1, subclause 9.1

6.2.1.2.1.1 Activation

CDIV_N03_<service>_001 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N03_<service>_002 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N03_<service>_003 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_004 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_005 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_006 subclause 9.1.1.1 inopportune optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, subscription option for the use of all numbers is "no" and MSN provided, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_007 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N03_<service>_008 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N03_<service>_009 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N03_<service>_010 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_011 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_012 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N03_<service>_013 subclause 9.1.1.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N03_<service>_014 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the requested call forwarding supplementary service has not been subscribed to for the indicated basic service,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "notSubscribed".

CDIV_N03_<service>_015 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the requested call forwarding supplementary service is not available for the indicated basic service,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "notAvailable".

CDIV_N03_<service>_016 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the ISDN number provided to identify the served user is not a valid number,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "invalidServedUserNr".

CDIV_N03_<service>_017 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the provision of the call forwarding supplementary service activation is constrained by an interactions procedure,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N03_<service>_018 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the served user has not subscribed to the basic service for which the call forwarding supplementary service was requested,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "basicServiceNotProvided".

CDIV_N03_<service>_019 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the resources required to perform adequately the requested call forwarding supplementary service are not available,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "resourceUnavailable".

CDIV_N03_<service>_020 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the indicated forwarded-to number cannot be accepted,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "InvalidDivertedToNr".

CDIV_N03_<service>_021 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "specialServiceNr".

CDIV_N03_<service>_022 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "diversionToServedUserNr".

CDIV_N03_<service>_023 subclause 9.1.1.2 inopportune mandatory

Ensure that the IUT in the call state N00, having sent a <service> ActivationDiversion component (return result or return error), on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component,
 takes no action.

CDIV_N03_<service>_024 subclause 10.6 valid optional

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> ActivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> ActivationDiversion return error component indicating "invalidServedUserNr".

Selection: T reference point procedures supported. PICS: R 3.2.

6.2.1.2.1.2 Deactivation

CDIV_N04_<service>_001 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N04_<service>_002 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
 sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N04_<service>_003 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_004 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_005 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_006 subclause 9.1.2.1 inopportune optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers set to "no", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_007 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component and,

using the connectionless broadcast transport mechanism, a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationStatusNotificationDiv invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration. PICS: [12] MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N04_<service>_008 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N04_<service>_009 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription to the whole access on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N04_<service>_010 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_011 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00 configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_012 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N04_<service>_013 subclause 9.1.2.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration. PICS: [12] NOT MC 2.5.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N04_<service>_014 subclause 9.1.2.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component and if the requested call forwarding supplementary service has not been subscribed to for the indicated basic service, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return error component indicating "notSubscribed".

CDIV_N04_<service>_015 subclause 9.1.2.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component and if the requested call forwarding supplementary service is not available for the indicated basic service, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return error component indicating "notAvailable".

CDIV_N04_<service>_016 subclause 9.1.2.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component and if the ISDN number provided to identify the served user is not a valid number, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return error component indicating "invalidServedUserNr".

CDIV_N04_<service>_017 subclause 9.1.2.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component and if none of the requested instances of the service is activated, sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return error component indicating "notActivated".

CDIV_N04_<service>_018 subclause 9.1.2.2 inopportune mandatory

Ensure that the IUT in the call state N00, having sent a <service> DeactivationDiversion component (return result or return error), on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component, takes no action.

CDIV_N04_<service>_019 subclause 10.6 valid optional

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> DeactivationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> DeactivationDiversion return error component indicating "invalidServedUserNr".

Selection: T reference point procedures supported. PICS: R 3.2.

6.2.1.2.1.3 Interrogation - general

CDIV_N05_001 subclause 9.1.3.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription option activation, deactivation and interrogation for all ISDN numbers on the same access set to "yes", having activated a number of call forwarding supplementary services, on receipt of a FACILITY message (DCR) containing a Facility information element coded as

InterrogateServedUserNumbers invoke component,

sends a FACILITY message (DCR) containing a Facility information element with a valid InterrogateServedUserNumbers return result component providing in the ServedUserNumberList parameter the ISDN numbers that have a call forwarding supplementary service associated with themselves.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N05_002 subclause 9.1.3.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription option activation, deactivation and interrogation for all ISDN numbers on the same access set to "yes", if no activation of a call forwarding supplementary service exists, on receipt of a FACILITY message (DCR) containing a Facility information element coded as

InterrogateServedUserNumbers invoke component,

sends a FACILITY message (DCR) containing a Facility information element with a valid InterrogateServedUserNumbers return result component with the size of the ServedUserNumberList parameter set to zero.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N05_003 subclause 9.1.3.2 inopportune mandatory

Ensure that the IUT in the call state N00, configured for subscription option activation, deactivation and interrogation for all ISDN numbers on the same access set to "no", on receipt of a FACILITY message (DCR) containing a Facility information element coded as InterrogateServedUserNumbers invoke component,

sends a FACILITY message (DCR) containing a Facility information element with a valid InterrogateServedUserNumbers return error component indicating "notSubscribed".

CDIV_N05_004 subclause 9.1.3.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as InterrogateServedUserNumbers invoke component and if the requested call forwarding supplementary service has not been subscribed to,

sends a FACILITY message (DCR) containing a Facility information element with a valid InterrogateServedUserNumbers return error component indicating "notSubscribed".

CDIV_N05_005 subclause 9.1.3.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as InterrogateServedUserNumbers invoke component and if the requested information is not available,

sends a FACILITY message (DCR) containing a Facility information element with a valid InterrogateServedUserNumbers return error component indicating "notAvailable".

CDIV_N05_006 subclause 9.1.3.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as InterrogateServedUserNumbers invoke component and if the data provided by the network exceeds the maximum length allowed for a message,

sends a FACILITY message (DCR) containing a Facility information element with a valid InterrogateServedUserNumbers return error component indicating "notAvailable".

CDIV_N05_007 subclause 9.1.3.2 inopportune mandatory

Ensure that the IUT in the call state N00, having sent a valid InterrogateServedUserNumbers component, on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component, takes no action.

6.2.1.2.1.4 Interrogation - service

CDIV_N06_<service>_001 subclause 9.1.4.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with collected data of the <service> call forwarding service for the whole access in a valid InterrogationDiversion return result component indicating "allNumbers".

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N06_<service>_002 subclause 9.1.4.1 valid optional

Ensure that the IUT in the call state N00, configured for subscription to the whole access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with collected data of the <service> call forwarding service for the whole access in a valid InterrogationDiversion return result component indicating "allNumbers".

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

CDIV_N06_<service>_003 subclause 9.1.4.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with collected data of the individual instance of the <service> call forwarding service in a valid InterrogationDiversion return result component indicating "individualNumber".

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N06_<service>_004 subclause 9.1.4.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with collected data of the individual instance of the <service> call forwarding service in a valid InterrogationDiversion return result component indicating "individualNumber".

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N06_<service>_005 subclause 9.1.4.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message (DCR) containing a Facility information element with collected data of the individual instance of the <service> call forwarding service in a valid InterrogationDiversion return result component indicating "individualNumber".

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N06_<service>_006 subclause 9.1.4.1 inopportune optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers set to "no", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> InterrogationDiversion return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

CDIV_N06_<service>_007 subclause 9.1.4.1 valid optional

Ensure that the IUT in the call state N00, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message (DCR) containing a Facility information element with collected data of the <service> call forwarding service for the whole access in a valid InterrogationDiversion return result component.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

CDIV_N06_<service>_008 subclause 9.1.4.1 valid mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component and if no activation of a call forwarding supplementary service exists,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> InterrogationDiversion return result component with the size of the single IntResultList parameter set to zero.

CDIV_N06_<service>_009 subclause 9.1.4.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component and if the requested call forwarding supplementary service has not been subscribed to for any basic service,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> InterrogationDiversion return error component indicating "notSubscribed".

CDIV_N06_<service>_010 subclause 9.1.4.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component and if the requested call forwarding supplementary service is not available for any basic service,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> InterrogationDiversion return error component indicating "notAvailable".

CDIV_N06_<service>_011 subclause 9.1.4.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component and if the data provided by the network exceeds the maximum length allowed for a message,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> InterrogationDiversion return error component indicating "notAvailable".

CDIV_N06_<service>_012 subclause 9.1.4.2 inopportune mandatory

Ensure that the IUT in the call state N00 on receipt of a FACILITY message (DCR) containing a Facility information element coded as <service> InterrogationDiversion invoke component and if the ISDN number provided to identify the served user is not a valid number,

sends a FACILITY message (DCR) containing a Facility information element with a valid <service> InterrogationDiversion return error component indicating "invalidServedUserNr".

CDIV_N06_<service>_013 subclause 9.1.4.2 inopportune mandatory

Ensure that the IUT in the call state N00, having sent a valid <service> InterrogationDiversion component (return result or return error), on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component,
takes no action.

6.2.1.2.2 EN 300 207-1, subclause 9.2.4

6.2.1.2.2.1 CFU

Selection: CFU supported. PICS: R 1.1.2.

CDIV_N07_001 subclause 9.2.4.1.1 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded unconditionally,
sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_002 subclause 9.2.4.1.1 valid optional

Ensure that the IUT, configured for MSN provided and served user's subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded unconditionally,
sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_003 subclauses 9.2.4.1.1, 10.6 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information" and DDI provided, to indicate that a call to the served user is forwarded unconditionally,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: T reference point procedures supported. PICS: R 3.2.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_004 subclause 9.2.4.1.1 valid mandatory

Ensure that the IUT, configured for SUB provided and served user's subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded unconditionally,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the servedUserSubaddress parameter set to the served user's subaddress as provided by the Called party subaddress information element.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_005 subclause 9.2.4.1.1 valid mandatory

Ensure that the IUT, configured for CLIP provided and served user's subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and the presentation of the calling address is not restricted, to indicate that a call to the served user is forwarded unconditionally,
 sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the callingAddress parameter set to "presentationAllowedAddress" giving the calling party address.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_006 subclause 9.2.4.1.1 valid optional

Ensure that the IUT, configured for CLIP provided and served user's subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and the presentation of the calling address is restricted, to indicate that a call to the served user is forwarded unconditionally,
 sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the callingAddress parameter set to "presentationRestricted".

Selection: CLIP supported

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_007 subclause 9.2.4.1.1 valid optional

Ensure that the IUT, configured for CLIP provided and served user's subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and the calling address is not available due to interworking, to indicate that a call to the served user is forwarded unconditionally,
 sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the callingAddress parameter set to "numberNotAvailableDueToInterworking".

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_008 subclause 9.2.4.1.1 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and previous diversions have occurred, to indicate that a call to the served user is forwarded unconditionally,
 sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with a valid originalCalledNr parameter, a valid lastDivertingNr parameter and a valid lastDivertingReason parameter.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFU. PICS: MC 12.1

CDIV_N07_009 subclause 9.2.4.1.2 inopportune mandatory

Ensure that the IUT, having sent a valid DiversionInformation invoke component indicating "cfu", on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component,
 takes no action.

6.2.1.2.2.2 CFB

Selection: CFB supported. PICS: R 1.1.1.

6.2.1.2.2.2.1 NDUB

CDIV_N08_001 subclause 9.2.4.2.1 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded on network determined user busy,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_002 subclause 9.2.4.2.1 valid optional

Ensure that the IUT, configured for MSN provided and subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded on network determined user busy,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_003 subclause 9.2.4.2.1, subclause 10.6 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information" and DDI provided, to indicate that a call to the served user is forwarded on network determined user busy,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: T reference point procedures supported. PICS: R 3.2.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_004 subclause 9.2.4.2.1 valid mandatory

Ensure that the IUT, configured for SUB provided and subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded on network determined user busy,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the servedUserSubaddress parameter set to the served user's subaddress as provided by the Called party subaddress information element.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_005 subclause 9.2.4.2.1 valid mandatory

Ensure that the IUT, configured for CLIP provided and subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and the presentation of the calling address is not restricted, to indicate that a call to the served user is forwarded on network determined user busy,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the callingAddress parameter set to "presentationAllowedAddress" giving the calling party address.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_006 subclause 9.2.4.2.1 valid optional

Ensure that the IUT, configured for CLIP provided and served user's subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and the presentation of the calling address is restricted, to indicate that a call to the served user is forwarded on network determined user busy, sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the callingAddress parameter set to "presentationRestricted" .

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_007 subclause 9.2.4.2.1 valid optional

Ensure that the IUT, configured for CLIP provided and subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and the presentation of the calling address is not available due to interworking, to indicate that a call to the served user is forwarded on network determined user busy, sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with the callingAddress parameter set to "numberNotAvailableDueToInterworking".

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_008 subclause 9.2.4.2.1 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", and previous diversions have occurred, to indicate that a call to the served user is forwarded on network determined user busy, sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component with a valid originalCalledNr parameter, a valid lastDivertingNr parameter and a valid lastDivertingReason parameter.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N08_009 subclause 9.2.4.2.2 inopportune mandatory

Ensure that the IUT, having sent a valid DiversionInformation invoke component indicating "cfb", on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component, takes no action.

6.2.1.2.2.2.2 UDUB**CDIV_N09_001 subclause 9.2.4.3.1 valid optional**

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information". to indicate that a call to the served user is forwarded on user determined user busy, sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component only containing the diversionReason parameter set to "cfb" and the basicService parameter.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N09_002 subclause 9.2.4.3.1 valid optional

Ensure that the IUT, configured for MSN provided and subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", to indicate that a call to the served user is forwarded on user determined user busy, sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component only containing the diversionReason parameter set to "cfb" and the basicService parameter and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

CDIV_N09_003 subclauses 9.2.4.3.1, 10.6 valid optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" is "yes, with call offering information" and DDI provided, to indicate that a call to the served user is forwarded on user determined user busy,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component only containing the diversionReason parameter set to "cfb" and the basicService parameter and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: T reference point procedures supported. PICS: R 3.2.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFB. PICS: MC 12.2.

6.2.1.2.2.3 CFNR

Selection: CFNR supported. PICS: R 1.1.3.

CDIV_N10_001 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, configured for subscription option "served user receives notification that a call has been forwarded" is "yes, with call offering information" and MSN not provided, on expiry of timer T-CFNR,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component only containing the diversionReason parameter set to "cfnr" and the basicService parameter.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFNR. PICS: MC 12.3.

CDIV_N10_002 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, configured for subscription option "served user receives notification that a call has been forwarded" is "yes, with call offering information" and MSN provided, on expiry of timer T-CFNR,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component only containing the diversionReason parameter set to "cfnr" and the basicService parameter and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFNR. PICS: MC 12.3.

CDIV_N10_003 subclauses 9.2.4.4.1, 10.6 valid optional

Ensure that the IUT in the Call Received call state N07, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information" and DDI provided, on expiry of timer T-CFNR,

sends a FACILITY message (DCR) containing a Facility information element coded as DiversionInformation invoke component only containing the diversionReason parameter set to "cfnr" and the basicService parameter and a Called party information element with the type of number field set to "international", "national", "subscriber" or "unknown", the numbering plan field set to "ISDN numbering plan (ITU-T Recommendation E.164 [10])" or "unknown" and the called user's number provided in the number digits field.

Selection: T reference point procedures supported. PICS: R 3.2.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFNR. PICS: MC 12.3.

CDIV_N10_004 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, on expiry of timer T-CFNR,

sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation". PICS: SC 1.2.

CDIV_N10_005 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, after expiry of timer T-CFNR, on receipt of a CONNECT message before receiving an indication that the diverted-to network is in the Call Received, Connect Request or Active states,

sends a CONNECT ACKNOWLEDGE message.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 1.1.

CDIV_N10_006 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, after expiry of timer T-CFNR and the call has not been offered to the diverted-to user (e.g. network congestion),

takes no action, retaining the call in call state N07.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 1.1.

CDIV_N10_007 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, after expiry of timer T-CFNR,

takes no action, retaining the call in call state N07.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 1.1.

CDIV_N10_008 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, after expiry of timer T-CFNR, on receipt of the indication that the diverted-to network is in the Call Received call state N07,

sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 1.1.

CDIV_N10_009 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, after expiry of timer T-CFNR, on receipt of the indication that the diverted-to network is in the Connect Request call state N08,

sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 1.1.

CDIV_N10_0010 subclause 9.2.4.4.1 valid optional

Ensure that the IUT in the Call Received call state N07, after expiry of timer T-CFNR, on receipt of the indication that the diverted-to network is in the Active state,

sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 1.1.

CDIV_N10_011 subclause 9.2.4.4.2 inopportune optional

Ensure that the IUT, configured for subscription option "served user receives notification that a call has been forwarded" set to "yes, with call offering information", having sent a FACILITY message (DCR) containing a Facility information element including a DiversionInformation invoke component indicating "cfnr", on receipt of a FACILITY message (DCR) containing a Facility information element with a reject component,

takes no action.

Selection: IUT supports the procedures associated with the notification to the served user that a call has been forwarded (with call offering information) for CFNR. PICS: MC 12.3.

6.2.1.2.2.4 CD

Selection: CD supported. PICS: R 1.2.

CDIV_N11_001 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component,

sends a DISCONNECT message, with cause #31 and containing a Facility information element with a CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation". PICS: SC 2.2.

CDIV_N11_002 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component,

sends a DISCONNECT message with cause #31 and containing a Facility information element with a CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation". PICS: SC 2.2.

CDIV_N11_003 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component,

sends a DISCONNECT message with cause #31 and containing a Facility information element with a CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation". PICS: SC 2.2.

CDIV_N11_004 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component,

sends a FACILITY message with a Facility information element coded as CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_005 subclauses 9.2.4.5.1, 10.6 valid optional

Ensure that the IUT in the Call Received call state N07, configured for DDI provided, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component,

sends a FACILITY message containing a correctly coded Called party number information element including the called user's number and a Facility information element coded as CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user", PICS: SC 2.1.

Selection: T reference point procedures supported. PICS: R 3.2.

CDIV_N11_006 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component,

sends a FACILITY message containing a Facility information element coded as CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_007 subclauses 9.2.4.5.1, 10.6 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, configured for DDI provided, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component, sends a FACILITY message containing a correctly coded Called party number information element including the called user's number and a Facility information element coded as CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user", PICS: SC 2.1.

Selection: T reference point procedures supported. PICS: R 3.2.

CDIV_N11_008 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component, sends a FACILITY message containing a Facility information element coded as CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_009 subclauses 9.2.4.5.1, 10.6 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, configured for DDI provided, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component, sends a FACILITY message containing a correctly coded Called party number information element including the called user's number and a Facility information element coded as CallDeflection return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user", PICS: SC 2.1.

Selection: T reference point procedures supported. PICS: R 3.2.

CDIV_N11_010 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of an ALERTING message before receiving an indication that the deflected call is in the Call Received, Connect Request or Active call state, takes no action.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_011 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of an ALERTING message before receiving an indication that the deflected call is in the Call Received, Connect Request or Active call states, takes no action.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_012 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of an ALERTING message before receiving an indication that the deflected call is in the Call Received, Connect Request or Active call states, takes no action.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_013 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of the indication that the diverted-to network is in the Call Received call state N07 and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_014 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of the indication that the diverted-to network is in the Call Received call state N07 and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_015 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of the indication that the diverted-to network is in the Call Received call state N07 and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_016 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of the indication that the diverted-to network is in the Connect Request call state N08 and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_017 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of the indication that the diverted-to network is in the Connect Request call state N08 and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_018 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of the indication that the diverted-to network is in the Connect Request call state N08 and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_019 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of the indication that the diverted-to network is in the Active state and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_020 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of the indication that the diverted-to network is in the Active state and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_021 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of the indication that the diverted-to network is in the Active state and if the call to the served user is deflected, sends a DISCONNECT or RELEASE message with cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_022 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of a CONNECT message before receiving an indication that the deflected call is in the Call Received, Connect Request or Active call state and if the call to the served user is deflected,
sends a CONNECT ACKNOWLEDGE message.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_023 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a CONNECT message before receiving an indication that the deflected call is in the Call Received, Connect Request or Active call state and if the call to the served user is deflected,
sends a CONNECT ACKNOWLEDGE message.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_024 subclause 9.2.4.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a CONNECT message before receiving an indication that the deflected call is in the Call Received, Connect Request or Active call state and if the call to the served user is deflected,
sends a CONNECT ACKNOWLEDGE message.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 2.1.

CDIV_N11_025 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflecting supplementary service has not been subscribed to for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "notSubscribed".

CDIV_N11_026 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflecting supplementary service is not available for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "notAvailable".

CDIV_N11_027 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the provision of the call deflection supplementary service activation is constrained by an interactions procedure,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N11_028 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number cannot be accepted,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "InvalidDivertedToNr".

CDIV_N11_029 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number identifies a special service number and forwarding is prohibited to this special service number,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "specialServiceNr".

CDIV_N11_030 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number is identical to the ISDN number identifying the served user,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "diversionToServedUserNr".

CDIV_N11_031 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the limit of the number of diversions has already been reached,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "numberOfDiversionsExceeded".

CDIV_N11_032 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflection activation request is overruled by a basic call procedure,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "incomingCallAccepted".

CDIV_N11_033 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflection activation request is received whilst another request is being processed,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "requestAlreadyAccepted".

CDIV_N11_034 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflecting supplementary service has not been subscribed to for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "notSubscribed".

CDIV_N11_035 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflecting supplementary service is not available for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "notAvailable".

CDIV_N11_036 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the provision of the call deflection supplementary service activation is constrained by an interactions procedure,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N11_037 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number cannot be accepted,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "InvalidDivertedToNr".

CDIV_N11_038 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number identifies a special service number and forwarding is prohibited to this special service number,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "specialServiceNr".

CDIV_N11_039 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number is identical to the ISDN number identifying the served user,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "diversionToServedUserNr".

CDIV_N11_040 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the limit of the number of diversions has already been reached,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "numberOfDiversionsExceeded".

CDIV_N11_041 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflection activation request is overruled by a basic call procedure,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "incomingCallAccepted".

CDIV_N11_042 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflection activation request is received whilst another request is being processed,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "requestAlreadyAccepted".

CDIV_N11_043 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflecting supplementary service has not been subscribed to for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "notSubscribed".

CDIV_N11_044 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflecting supplementary service is not available for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "notAvailable".

CDIV_N11_045 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the provision of the call deflection supplementary service activation is constrained by an interactions procedure,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N11_046 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number cannot be accepted,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "InvalidDivertedToNr".

CDIV_N11_047 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number identifies a special service number and forwarding is prohibited to this special service number,
sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "specialServiceNr".

CDIV_N11_048 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the indicated deflected-to number is identical to the ISDN number identifying the served user,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "diversionToServedUserNr".

CDIV_N11_049 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the limit of the number of diversions has already been reached,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "numberOfDiversionsExceeded".

CDIV_N11_050 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflection activation request is overruled by a basic call procedure,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "incomingCallAccepted".

CDIV_N11_051 subclause 9.2.4.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a Facility information element coded as CallDeflection invoke component and if the call deflection activation request is received whilst another request is being processed,

sends a FACILITY message containing a Facility information element with a valid CallDeflection return error component indicating "requestAlreadyAccepted".

6.2.2 S/T only

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

6.2.2.1 Served user procedures

6.2.2.1.1 EN 300 207-1, subclause 9.3

CDIV_N12_001 subclause 9.3.1 valid optional

Ensure that the IUT, configured for subscription option "served user receives reminder notification on outgoing calls that forwarding is currently activated" set to "yes", on receipt of a valid SETUP message indicating in the Bearer capability information element the same basic service as call diversion is activated for,

returns a SETUP ACKNOWLEDGE or a CALL PROCEEDING message including a Notification information element with the notification description set to "diversion activated".

Selection: IUT supports "served user receives reminder notification on outgoing calls that forwarding is currently activated". PICS: MC 27.1 OR MC 27.2 OR MC 27.3.

6.2.2.2 Called (diverted-to) user procedures

6.2.2.2.1 EN 300 207-1, subclause 9.2.5

CDIV_N13_001 subclause 9.2.5.1 valid mandatory

Ensure that the IUT in order to establish the call to the diverted-to user and if the indication is received that the presentation of the number is allowed and only one call diversion occurred,

sends a SETUP message containing one valid Redirecting number information element giving the reason for the call diversion with the presentation indicator set to "presentation allowed" and the redirecting number information provided in the number digits field.

CDIV_N13_002 subclause 9.2.5.1 valid mandatory

Ensure that the IUT in order to establish the call to the diverted-to user and if the indication is received that the presentation of the number is restricted and only one call diversion occurred,
sends a SETUP message containing one valid Redirecting number information element giving the reason for the call diversion with the presentation indicator set to "presentation restricted".

CDIV_N13_003 subclause 9.2.5.1 valid mandatory

Ensure that the IUT in order to establish the call to the diverted-to user and if the indication is received that the diverted-to number is not available and only one call diversion occurred,
sends a SETUP message containing one valid Redirecting number information element giving the reason for the call diversion with the presentation indicator set to "number not available due to interworking" and without a number digits field.

CDIV_N13_004 subclause 9.2.5.1 valid mandatory

Ensure that the IUT in order to establish the call to the diverted-to user and if the indication is received that the presentation of the number is allowed and more than one call diversions occurred,
sends a SETUP message containing two valid Redirecting number information elements giving the reason for the last call diversion in the second occurrence of the information element (the first reason for diversion field set to "unknown") with the presentation indicator set to "presentation allowed" and the redirecting number information provided in the number digits field.

CDIV_N13_005 subclause 9.2.5.1 valid mandatory

Ensure that the IUT in order to establish the call to the diverted-to user and if the indication is received that the presentation of the number is restricted and more than one call diversions occurred,
sends a SETUP message containing two valid Redirecting number information elements giving the reason for the last call diversion in the second occurrence of the information element (the first reason for diversion field set to "unknown") with the presentation indicator set to "presentation restricted".

CDIV_N13_006 subclause 9.2.5.1 valid mandatory

Ensure that the IUT in order to establish the call to the diverted-to user and if the indication is received that the diverted-to number is not available and more than one call diversions occurred,
sends a SETUP message containing two valid Redirecting number information elements giving the reason for the last call diversion in the second occurrence of the information element (the first reason for diversion field set to "unknown") with the presentation indicator set to "number not available due to interworking" and without a number digits field.

6.2.3 T only

Selection: IUT supports T reference point procedures. PICS: R 3.2.

6.2.3.1 EN 300 207-1, subclause 10.1

CDIV_N14_001 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation1 invoke component,
does not respond to this invoke component and remains in state N06.

CDIV_N14_002 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation1 invoke component,
does not respond to this invoke component and remains in state N07.

CDIV_N14_003 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Connect Request call state N08, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation1 invoke component,
does not respond to this invoke component and remains in state N08.

CDIV_N14_004 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation1 invoke component,
does not respond to this invoke component and remains in state N09.

CDIV_N14_005 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a PROGRESS message containing a Facility information element with a DivertingLegInformation1 invoke component, does not respond to this invoke component and remains in state N07.

CDIV_N14_006 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a PROGRESS message containing a Facility information element with a DivertingLegInformation1 invoke component, does not respond to this invoke component and remains in state N09.

CDIV_N14_007 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a ALERTING message containing a Facility information element with a DivertingLegInformation1 invoke component, does not respond to this invoke component and enters state N07.

CDIV_N14_008 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a ALERTING message containing a Facility information element with a DivertingLegInformation1 invoke, does not respond to this invoke component and enters state N07.

CDIV_N14_009 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and remains in state N06.

CDIV_N14_010 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and remains in state N07.

CDIV_N14_011 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Connect Request call state N08, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and remains in state N08.

CDIV_N14_012 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and remains in state N09.

CDIV_N14_013 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a ALERTING message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and enters state N07.

CDIV_N14_014 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a ALERTING message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and enters state N07.

CDIV_N14_015 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a CONNECT message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received, does not respond to this invoke component and enters state N08.

CDIV_N14_016 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a CONNECT message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received,
does not respond to this invoke component and enters state N08.

CDIV_N14_017 subclause 10.1.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a CONNECT message containing a Facility information element with a DivertingLegInformation3 invoke component and if a DivertingLegInformation1 invoke component has already been received,
does not respond to this invoke component and enters state N08.

6.2.3.2 EN 300 207-1, subclause 10.2**CDIV_N15_001 subclause 10.2.1 valid mandatory**

Ensure that the IUT in the Null call state N00 in order to present a diverted call to the private ISDN,
sends a SETUP message containing a Facility information element including a DivertingLegInformation2 invoke component giving information about the call diversion(s) in the diversionCounter, the diversionReason, the divertingNr parameters and if more than one diversion occurred, the originalCalledNr parameter.

CDIV_N15_002 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and remains in state N06.

CDIV_N15_003 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and remains in state N07.

CDIV_N15_004 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Connect Request call state N08, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and remains in state N08.

CDIV_N15_005 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and remains in state N09.

CDIV_N15_006 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a ALERTING message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and enters state N07.

CDIV_N15_007 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a ALERTING message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and enters state N07.

CDIV_N15_008 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Call Present call state N06, on receipt of a CONNECT message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and enters state N08.

CDIV_N15_009 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a CONNECT message containing a Facility information element with a DivertingLegInformation3 invoke component,
does not respond to this invoke component and enters state N08.

CDIV_N15_010 subclause 10.2.1 valid mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a CONNECT message containing a Facility information element with a DivertingLegInformation3 invoke component, does not respond to this invoke component and enters state N08.

CDIV_N15_011 subclause 10.2.2 inopportune mandatory

Ensure that the IUT, having sent a SETUP message containing a Facility information element including a DivertingLegInformation2 invoke component, on receipt of a reject component, accepts the information and continues with call establishment.

6.2.3.3 EN 300 207-1, subclause 10.4**CDIV_N16_001 subclause 10.4.1 valid mandatory**

Ensure that the IUT in the Null call state N00, on receipt of a SETUP message containing a DiversionLegInformation2 invoke component in the Facility information element, continues normal call handling and returns a DivertingLegInformation3 invoke component that indicates in the presentationAllowedIndicator parameter if presentation of the diverted-to user's ISDN number to the calling user is allowed in the Facility information element of either a FACILITY, ALERTING (in call state N02 or N03) or CONNECT (in state N02, N03 or N04) message.

CDIV_N16_002 subclause 10.4.2 inopportune mandatory

Ensure that the IUT, on receipt of a reject component as answer to a DivertingLegInformation3 invoke component, accepts the information and continues with call establishment.

6.2.3.4 EN 300 207-1, subclause 10.5**CDIV_N17_001 subclause 10.5.1 valid optional**

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element, sends a FACILITY message containing a Facility information element with a CallRerouting return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_002 subclause 10.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element, sends a FACILITY message containing a Facility information element with a CallRerouting return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_003 subclause 10.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element, sends a FACILITY message containing a Facility information element with a CallRerouting return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_004 subclause 10.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of the indication that the diverted-to user is alerting or has answered, sends a DISCONNECT message with the cause information element indicating cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_005 subclause 10.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of the indication that the diverted-to user is alerting or has answered,
sends a DISCONNECT message with the cause information element indicating cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_006 subclause 10.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of the indication that the diverted-to user is alerting or has answered,
sends a DISCONNECT message with the cause information element indicating cause #31.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_007 subclause 10.5.1 valid optional

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element,
sends a DISCONNECT message with the cause information element indicating cause #31 and containing a Facility information element with a CallRerouting return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation of diversion". PICS: SC 3.2.

CDIV_N17_008 subclause 10.5.1 valid optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element,
sends a DISCONNECT message with the cause information element indicating cause #31 and containing a Facility information element with a CallRerouting return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation of diversion". PICS: SC 3.2.

CDIV_N17_009 subclause 10.5.1 valid optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element,
sends a DISCONNECT message with the cause information element indicating cause #31 and containing a Facility information element with a CallRerouting return result component.

Selection: Network provider option "served user call retention on invocation of diversion" is "clear call on invocation of diversion". PICS: SC 3.2.

CDIV_N17_010 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the requested call forwarding supplementary service has not been subscribed to,
sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "notSubscribed".

CDIV_N17_011 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the requested call forwarding supplementary service is not available,
sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "notAvailable".

CDIV_N17_012 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the provision of the call forwarding supplementary service activation is precluded by an interworking procedure,
sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N17_013 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the resources required to perform adequately the requested call forwarding supplementary service are not available,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "resourceUnavailable".

CDIV_N17_014 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number cannot be accepted,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "InvalidDivertedToNr".

CDIV_N17_015 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "specialServiceNr".

CDIV_N17_016 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "diversiOnToSerVedUserNr".

CDIV_N17_017 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Call Received call state N07, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the limit on the number of diversions has already been reached,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "numberOFDiversionExceeded".

CDIV_N17_018 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the requested call forwarding supplementary service has not been subscribed to,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "notSubscribed".

CDIV_N17_019 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the requested call forwarding supplementary service is not available,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "notAvailable".

CDIV_N17_020 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the provision of the call forwarding supplementary service activation is precluded by an interworking procedure,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N17_021 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the resources required to perform adequately the requested call forwarding supplementary service are not available,
 sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "resourceUnavailable".

CDIV_N17_022 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number cannot be accepted,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "InvalidDivertedToNr".

CDIV_N17_023 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "specialServiceNr".

CDIV_N17_024 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "diversiOnToSerVedUserNr".

CDIV_N17_025 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the limit on the number of diversions has already been reached,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "numberOFDiversionExceeded".

CDIV_N17_026 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the requested call forwarding supplementary service has not been subscribed to,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "notSubscribed".

CDIV_N17_027 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the requested call forwarding supplementary service is not available,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "notAvailable".

CDIV_N17_028 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the provision of the call forwarding supplementary service activation is precluded by an interworking procedure,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "supplementaryServiceInteractionNotAllowed".

CDIV_N17_029 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the resources required to perform adequately the requested call forwarding supplementary service are not available,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "resourceUnavailable".

CDIV_N17_030 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouting invoke component in the Facility information element and if the indicated forwarded-to number cannot be accepted,

sends a FACILITY message containing in the Facility information element a CallRerouting error component indicating "InvalidDivertedToNr".

CDIV_N17_031 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouteing invoke component in the Facility information element and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,
sends a FACILITY message containing in the Facility information element a CallRerouteing error component indicating "specialServiceNr".

CDIV_N17_032 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouteing invoke component in the Facility information element and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,
sends a FACILITY message containing in the Facility information element a CallRerouteing error component indicating "diversiOnToSerVedUserNr".

CDIV_N17_033 subclause 10.5.2 inopportune mandatory

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of a FACILITY message containing a CallRerouteing invoke component in the Facility information element and if the limit on the number of diversions has already been reached,
sends a FACILITY message containing in the Facility information element a CallRerouteing error component indicating "numberOFDiversionsExceeded".

CDIV_N17_034 subclause 10.5.2 inopportune optional

Ensure that the IUT in the Call Received call state N07, on receipt of the indication that call to the diverted-to user fails,
takes no action and remains in state N07.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_035 subclause 10.5.2 inopportune optional

Ensure that the IUT in the Incoming Call Proceeding call state N09, on receipt of the indication that call to the diverted-to user fails,
takes no action and remains in state N09.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_036 subclause 10.5.2 inopportune optional

Ensure that the IUT in the Overlap Receiving call state N25, on receipt of the indication that call to the diverted-to user fails,
takes no action and remains in state N25.

Selection: Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user". PICS: SC 3.1.

CDIV_N17_037 subclause 10.5.2 inopportune mandatory

Ensure that the IUT, having sent a CallRerouteing component, on receipt of a FACILITY message containing a Facility information element with a reject component,
takes no action.

6.2.4 Interworking

CDIV_N24_001 subclause 11 **valid** **mandatory**

Ensure that the IUT, while in the Call Received call state N07 and after the call has been forwarded using the CFNR supplementary service and the forwarded portion of the call encounters interworking, sends a PROGRESS message containing a Progress indicator information element indicating in-band tones and announcements to the calling user.

CDIV_N24_002 subclause 11 **valid** **optional**

Ensure that the IUT, while in the Call Received call state N07 after forwarding the call using the CFNR supplementary service and an indication of interworking has been received, sends a DISCONNECT or RELEASE message with cause #16 to the served user.

Selection: CFNR supported and Network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user", PICS: SC 1.1.

6.3 Network TPs for SCF

All PICS items referred to in this subclause are as specified in EN 301 207-2 [2] unless indicated otherwise by another numbered reference.

Unless specified the FACILITY messages are transmitted using the point to point connectionless bearer independent transport mechanism (dummy call reference, DL-DATA-REQUEST) as specified in EN 300 196-1 [6] 8.3.2.2. Where the broadcast connectionless bearer independent transport mechanism applies (dummy call reference, DL-UNIT DATA-REQUEST), the indication of the corresponding subclause of EN 300 196-1 [6] is given (i.e. subclause 8.3.2.4 of EN 300 196-1 [6]).

Selection: IUT supports SCF supplementary services. PICS: R 1.3.

6.3.1 Signalling procedures at the coincident S and T reference point

Selection: IUT supports network requirements at the interface of the served user. PICS: R 4.3.

NOTE: The signalling procedures use mainly the bearer-independent connectionless transport mechanism with the dummy call reference. To augment the readability of the test purposes, basic call states are only mentioned where significant.

6.3.1.1 SCFB supplementary service

Selection: IUT supports SCFB supplementary services. PICS: R 1.3.1.

6.3.1.1.1 Activation

SCF_N01_001 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the SCFProcedure parameter and "individualNumber" in the servedUserNr parameter, sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N01_002 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N01_003 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_004 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_005 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_006 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "no", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_007 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N01_008 subclause 9.1.1.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and with no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with no sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N01_009 subclause 9.1.1.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and with a valid sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N01_010 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N01_011 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N01_012 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT MC 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_013 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_014 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N01_015 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N01_016 subclause 9.1.1.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and with no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N01_017 subclause 9.1.1.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and with a valid sCFListInUse parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N01_018 subclause 9.1.1.4

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and without the sCFListsInUse parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "noScreeningListSpecified".

Selection: IUT supports SCF with more than one screening list.

SCF_N01_019 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating an incorrect identifier in the sCFListsInUse parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidScreeningListID".

SCF_N01_020 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the requested call forwarding supplementary service has not been subscribed to for any basic service,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "notSubscribed".

SCF_N01_021 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the requested call forwarding supplementary service is not available for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "notAvailable".

SCF_N01_022 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the ISDN number provided to identify the served user is not a valid number,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidServedUserNr".

SCF_N01_023 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the provision of the call forwarding supplementary service activation is constrained by an interactions procedure,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "supplementaryServiceInteractionNotAllowed".

SCF_N01_024 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the served user has not subscribed to the basic service for which the call forwarding supplementary service was requested,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "basicServiceNotProvided".

SCF_N01_025 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the resources required to perform adequately the requested call forwarding supplementary service are not available,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "resourceUnavailable".

SCF_N01_026 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the indicated forwarded-to number cannot be accepted,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "InvalidDivertedToNr".

SCF_N01_027 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "specialServiceNr".

SCF_N01_028 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "diversionToServedUserNr".

SCF_N01_029 subclause 9.1.1.4

Ensure that the IUT, having sent a ActivationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,
 sends no message.

SCF_N01_030 subclause 9.1.1.4 and 10.6

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component.

Selection: T reference point procedures supported. PICS: R 3.2.

6.3.1.1.2 Deactivation**SCF_N02_001 subclause 9.1.2.3**

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N02_002 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N02_003 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_004 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_005 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_006 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "no", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_007 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N02_008 subclause 9.1.2.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and including no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with no sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N02_009 subclause 9.1.2.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and including the sCFListInUse parameter corresponding to a list which is in use,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N02_010 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N02_011 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N02_012 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT MC 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_013 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_014 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N02_015 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N02_016 subclause 9.1.2.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and including no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N02_017 subclause 9.1.2.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and including the sCFListInUse parameter corresponding to a list which is in use,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N02_018 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the requested call forwarding supplementary service has not been subscribed to for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notSubscribed".

SCF_N02_019 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the requested call forwarding supplementary service is not available for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notAvailable".

SCF_N02_020 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the ISDN number provided to identify the served user is not a valid number,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidServedUserNr".

SCF_N02_021 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and if the supplementary service is not activated,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notActivated".

SCF_N02_022 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfb" in the sCFProcedure parameter and indicating an incorrect identifier in the sCFListsInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidScreeningListID".

SCF_N02_023 subclause 9.1.2.4

Ensure that the IUT, having sent a DeactivationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,

sends no message.

6.3.1.2 SCFU supplementary service

Selection: IUT supports SCFU supplementary services. PICS: R 1.3.2.

6.3.1.2.1 Activation

SCF_N03_001 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N03_002 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N03_003 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_004 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_005 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter, sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_006 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "no", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_007 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N03_008 subclause 9.1.1.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and with no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with no sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N03_009 subclause 9.1.1.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and with a valid sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N03_010 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component [12].

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N03_011 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N03_012 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT MC 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_013 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_014 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N03_015 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N03_016 subclause 9.1.1.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and with no sCFListInUse parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N03_017 subclause 9.1.1.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and with a valid sCFListInUse parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N03_018 subclause 9.1.1.4

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and without the sCFListsInUse parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "noScreeningListSpecified".

Selection: IUT supports SCF with more than one screening list.

SCF_N03_019 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating an incorrect identifier in the sCFListsInUse parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidScreeningListID".

SCF_N03_020 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the requested call forwarding supplementary service has not been subscribed to for any basic service,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "notSubscribed".

SCF_N03_021 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the requested call forwarding supplementary service is not available for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "notAvailable".

SCF_N03_022 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the ISDN number provided to identify the served user is not a valid number,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidServedUserNr".

SCF_N03_023 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the provision of the call forwarding supplementary service activation is constrained by an interactions procedure,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "supplementaryServiceInteractionNotAllowed".

SCF_N03_024 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the served user has not subscribed to the basic service for which the call forwarding supplementary service was requested,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "basicServiceNotProvided".

SCF_N03_025 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the resources required to perform adequately the requested call forwarding supplementary service are not available,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "resourceUnavailable".

SCF_N03_026 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the indicated forwarded-to number cannot be accepted,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "InvalidDivertedToNr".

SCF_N03_027 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "specialServiceNr".

SCF_N03_028 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "diversionToServedUserNr".

SCF_N03_029 subclause 9.1.1.4

Ensure that the IUT, having sent a ActivationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,
sends no message.

SCF_N03_030 subclause 9.1.1.4 and 10.6

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component.

Selection: T reference point procedures supported. PICS: R 3.2.

6.3.1.2.2 Deactivation**SCF_N04_001 subclause 9.1.2.3**

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and "individualNumber" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N04_002 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N04_003 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_004 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_005 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_006 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "no", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_007 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N04_008 subclause 9.1.2.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and including no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with no sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N04_009 subclause 9.1.2.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and including the sCFListInUse parameter corresponding to a list which is in use,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N04_010 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N04_011 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N04_012 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT MC 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_013 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_014 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N04_015 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N04_016 subclause 9.1.2.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and including no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N04_017 subclause 9.1.2.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and including the sCFListInUse parameter corresponding to a list which is in use,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N04_018 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the requested call forwarding supplementary service has not been subscribed to for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notSubscribed".

SCF_N04_019 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the requested call forwarding supplementary service is not available for the indicated basic service,
 sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notAvailable".

SCF_N04_020 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the ISDN number provided to identify the served user is not a valid number,
 sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidServedUserNr".

SCF_N04_021 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and if the supplementary service is not activated,
 sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notActivated".

SCF_N04_022 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfu" in the sCFProcedure parameter and indicating an incorrect identifier in the sCFListsInUse parameter,
 sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidScreeningListID".

SCF_N04_023 subclause 9.1.2.4

Ensure that the IUT, having sent a DeactivationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,
 sends no message.

6.3.1.3 SCFNR supplementary service

Selection: IUT supports SCFNR supplementary services. PICS: R 1.3.3.

6.3.1.3.1 Activation**SCF_N05_001 subclause 9.1.1.3**

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and "individualNumber" in the servedUserNr parameter,
 sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N05_002 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N05_003 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_004 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_005 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_006 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "no", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_007 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N05_008 subclause 9.1.1.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and with no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with no sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N05_009 subclause 9.1.1.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and with a valid sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid ActivationStatusNotificationSCF invoke component with the sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N05_010 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N05_011 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N05_012 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT MC 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_013 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_014 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N05_015 subclause 9.1.1.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N05_016 subclause 9.1.1.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and with no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N05_017 subclause 9.1.1.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and with a valid sCFListInUse parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N05_018 subclause 9.1.1.4

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and without the sCFListsInUse parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "noScreeningListSpecified".

Selection: IUT supports SCF with more than one screening list.

SCF_N05_019 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating an incorrect identifier in the sCFListsInUse parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidScreeningListID".

SCF_N05_020 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the requested call forwarding supplementary service has not been subscribed to for any basic service,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "notSubscribed".

SCF_N05_021 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the requested call forwarding supplementary service is not available for the indicated basic service,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "notAvailable".

SCF_N05_022 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the ISDN number provided to identify the served user is not a valid number,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "invalidServedUserNr".

SCF_N05_023 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the provision of the call forwarding supplementary service activation is constrained by an interactions procedure,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "supplementaryServiceInteractionNotAllowed".

SCF_N05_024 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the served user has not subscribed to the basic service for which the call forwarding supplementary service was requested,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "basicServiceNotProvided".

SCF_N05_025 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the resources required to perform adequately the requested call forwarding supplementary service are not available,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "resourceUnavailable".

SCF_N05_026 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the indicated forwarded-to number cannot be accepted,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "InvalidDivertedToNr".

SCF_N05_027 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the indicated forwarded-to number identifies a special service number and forwarding is prohibited to this special service number,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "specialServiceNr".

SCF_N05_028 subclause 9.1.1.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the indicated forwarded-to number is identical to the ISDN number identifying the served user,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component indicating "diversionToServedUserNr".

SCF_N05_029 subclause 9.1.1.4

Ensure that the IUT, having sent a ActivationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,
sends no message.

SCF_N05_030 subclause 9.1.1.4 and 10.6

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as ActivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid ActivationSCF return error component.

Selection: T reference point procedures supported. PICS: R 3.2.

6.3.1.3.2 Deactivation**SCF_N06_001 subclause 9.1.2.3**

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and "individualNumber" in the servedUserNr parameter,
sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N06_002 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N06_003 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_004 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_005 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "individualNumber".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_006 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "no", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidServedUserNr".

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_007 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access, subscription option for the use of all numbers set to "yes", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the servedUserNr parameter set to "allNumbers".

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N06_008 subclause 9.1.2.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and including no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with no sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N06_009 subclause 9.1.2.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and including the sCFListInUse parameter corresponding to a list which is in use,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component and,

a FACILITY message (subclause 8.3.2.4 of [6]) containing a Facility information element with a valid DeactivationStatusNotificationSCF invoke component with the sCFListInUse parameter.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N06_010 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N06_011 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion to the whole access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports provision of diversion to the whole access. PICS: MC 10.2.

SCF_N06_012 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT MC 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_013 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN not provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_014 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis and MSN provided to the access, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "individualNumber" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

SCF_N06_015 subclause 9.1.2.3

Ensure that the IUT, configured for provision of diversion on a per number basis, MSN provided to the access and subscription option for the use of all numbers is "yes", on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating "allNumbers" in the servedUserNr parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports coincident S and T reference point procedures? PICS: R 3.1.

Selection: IUT supports provision of diversion on a per number basis. PICS: MC 10.1.

Selection: IUT supports activation, deactivation, interrogation for all numbers. PICS: MC 11.

SCF_N06_016 subclause 9.1.2.3

Ensure that the IUT, configured for a single screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and including no sCFListInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with a single screening list.

SCF_N06_017 subclause 9.1.2.3

Ensure that the IUT, configured for more than one screening list, on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and including the sCFListInUse parameter corresponding to a list which is in use,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return result component.

Selection: IUT does NOT support basic access, point-to-multipoint configuration? PICS: [12] NOT R 7.2.

Selection: IUT supports SCF with more than one screening list.

SCF_N06_018 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the requested call forwarding supplementary service has not been subscribed to for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notSubscribed".

SCF_N06_019 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the requested call forwarding supplementary service is not available for the indicated basic service,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notAvailable".

SCF_N06_020 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the ISDN number provided to identify the served user is not a valid number,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidServedUserNr".

SCF_N06_021 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and if the supplementary service is not activated,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "notActivated".

SCF_N06_022 subclause 9.1.2.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element coded as DeactivationSCF invoke component indicating "scfnr" in the sCFProcedure parameter and indicating an incorrect identifier in the sCFListsInUse parameter,

sends a FACILITY message containing a Facility information element with a valid DeactivationSCF return error component indicating "invalidScreeningListID".

SCF_N06_023 subclause 9.1.2.4

Ensure that the IUT, having sent a DeactivationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,

sends no message.

6.3.1.4 Interrogation - SCF

SCF_N07_001 subclause 9.1.4.3

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogationSCF invoke component including the sCFEveryList parameter set to "everyList", sends a FACILITY message containing a Facility information element with a valid InterrogationSCF return result component including the IntResultSCF parameter coded as allSCFLists parameter.

SCF_N07_002 subclause 9.1.4.3

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogationSCF invoke component including the sCFEveryList parameter set to "onlyListsInUse", sends a FACILITY message containing a Facility information element with a valid InterrogationSCF return result component including the IntResultSCF parameter coded as activatedSCFLists parameter.

SCF_N07_003 subclause 9.1.4.3

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogationSCF invoke component including the sCFEveryList parameter set to "onlyListsInUse" and no screening list is in use, sends a FACILITY message containing a Facility information element with a valid InterrogationSCF return result component including an IntResultSCF parameter including an activatedSCFLists parameter containing no SCFInUse parameters..

SCF_N07_004 subclause 9.1.4.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogationSCF invoke component including the sCFEveryList parameter and if the call forwarding supplementary service has not been subscribed to for any basic service, sends a FACILITY message containing a Facility information element with a valid InterrogationSCF return error component indicating "notSubscribed".

SCF_N07_005 subclause 9.1.4.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogationSCF invoke component including the sCFEveryList parameter and if the call forwarding supplementary service is not available for any basic service, sends a FACILITY message containing a Facility information element with a valid InterrogationSCF return error component indicating "notAvailable".

SCF_N07_006 subclause 9.1.4.4

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogationSCF invoke component including the sCFEveryList parameter and if the ISDN number provided to identify the served user is not a valid number, sends a FACILITY message containing a Facility information element with a valid InterrogationSCF return error component indicating "invalidServedUserNr".

SCF_N07_007 subclause 9.1.4.4

Ensure that the IUT, having sent an InterrogationSCF component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component, sends no message.

6.3.1.5 Interrogation - Screening List

SCF_N08_001 subclause 9.1.5.1

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogateSCFList invoke component, sends a FACILITY message containing a Facility information element with a valid InterrogateSCFList return result component.

SCF_N08_002 subclause 9.1.5.2

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogateSCFList invoke component and if the call forwarding supplementary service has not been subscribed to for any basic service, sends a FACILITY message containing a Facility information element with a valid InterrogateSCFList return error component indicating "notSubscribed".

SCF_N08_003 subclause 9.1.5.2

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogateSCFList invoke component and if the call forwarding supplementary service is not available for any basic service,

sends a FACILITY message containing a Facility information element with a valid InterrogateSCFList return error component indicating "notAvailable".

SCF_N08_004 subclause 9.1.5.2

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogateSCFList invoke component and if the ISDN number provided to identify the served user is not a valid number,

sends a FACILITY message containing a Facility information element with a valid InterrogateSCFList return error component indicating "invalidServedUserNr".

SCF_N08_005 subclause 9.1.5.2

Ensure that the IUT on receipt of a FACILITY message containing a Facility information element with an InterrogateSCFList invoke component and if the identifier provided to identify the screening list is incorrect,

sends a FACILITY message containing a Facility information element with a valid InterrogateSCFList return error component indicating "invalidScreeningListID".

SCF_N08_006 subclause 9.1.5.2

Ensure that the IUT, having sent an InterrogateSCFList component (return result or return error), on receipt of a FACILITY message containing a Facility information element with a reject component,

sends no message.

7 Compliance

An ATS which complies with this TSS&TP specification shall:

- a) consist of a set of test cases corresponding to the set or to a subset of the TPs specified in either 6.2 or 6.3;
- b) use a TSS which is an appropriate subset of the whole of the TSS specified in 5.1 or 5.2;
- c) use the same naming conventions for the test groups and test cases;
- d) maintain the relationship specified in clause 6 between the test groups and TPs and the entries in the PICS proforma to be used for test case deselection;
- e) comply with ISO/IEC 9646-2 [4].

In the case of a) or b) above, a subset shall be used only where a particular Abstract Test Method (ATM) makes some TPs untestable. All testable TPs from either 6.2 or 6.3 shall be included in a compliant ATS.

8 Requirements for a comprehensive testing service

As a minimum the Remote test method, as specified in ISO/IEC 9646-2 [4], shall be used by any organization claiming to provide a comprehensive testing service for user equipment claiming conformance to EN 300 207-1 [1].

History

Document history		
Edition 1	October 1996	Publication as ETS 300 207-5
V1.2.1	December 1998	Public Enquiry PE 9914: 1998-12-04 to 1999-04-02