

Draft **EN 300 291-1** V1.2.1 (1998-04)

European Standard (Telecommunications series)

**Telecommunications Management Network (TMN);
Functional specification of Customer Administration (CA)
on the Operations System/Network Element (OS/NE) interface;
Part 1: Single line configurations**



European Telecommunications Standards Institute

Reference

REN/TMN-00033 (2p090ioo.PDF)

Keywords

TMN, Q3 interface, network

ETSI Secretariat

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr

<http://www.etsi.fr>

<http://www.etsi.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

Contents

Intellectual Property Rights.....	10
Foreword	10
Introduction	10
1 Scope.....	12
2 References.....	12
2.1 Normative references	12
2.2 Informative references	15
3 Definitions and abbreviations	16
3.1 Definitions	16
3.2 Abbreviations.....	16
4 Functional requirements.....	17
4.1 Manage service provision	17
4.2 Administer service facilities and supplementary services	17
4.3 Administer customer line	17
5 Information model diagrams	17
5.1 Entity relationship diagrams	18
5.2 Inheritance hierarchy	20
5.3 Naming hierarchy.....	22
6 Information model description.....	24
6.1 Object class descriptions.....	24
6.1.1 Managed element	24
6.1.2 Access port fragment.....	24
6.1.2.1 Access port	24
6.1.2.2 ETSI access port.....	25
6.1.2.3 ETSI access port analogue.....	25
6.1.2.4 ETSI access port digital.....	26
6.1.2.5 ETSI access port ISDN basic rate.....	26
6.1.2.6 ETSI access port ISDN primary rate	26
6.1.2.7 Access channel	27
6.1.2.8 ETSI access channel	27
6.1.2.9 Access port profile.....	27
6.1.3 V5 interface fragment.....	28
6.1.3.1 Virtual access port	28
6.1.3.2 Virtual analogue access	28
6.1.3.3 Virtual basic rate access	29
6.1.3.4 Virtual Leased Access	29
6.1.3.5 Virtual primary rate access	30
6.1.3.6 Virtual access channel	30
6.1.3.7 V5 bearer channel reservation	31
6.1.3.8 V5 leased line reservation.....	31
6.1.4 Directory number fragment	31
6.1.4.1 Directory number.....	31
6.1.4.2 ETSI directory number E.164.....	32
6.1.4.3 Directory number X.121	32
6.1.5 Customer profile fragment	32
6.1.5.1 Customer profile	32
6.1.5.2 ETSI customer profile	32
6.1.5.3 Analogue customer profile.....	33
6.1.5.4 Digital customer profile.....	33
6.1.5.5 ISDN customer profile.....	33
6.1.5.6 Customized Resource	33
6.1.5.7 ETSI customized Resource.....	33

6.1.6	Bearer service fragment.....	34
6.1.6.1	Bearer service	34
6.1.6.2	ETSI bearer service	34
6.1.6.3	Circuit mode 3,1 kHz audio.....	34
6.1.6.4	Circuit mode 64 kbit/s unrestricted.....	35
6.1.6.5	ETSI packet B channel	35
6.1.6.6	ETSI packet D channel.....	35
6.1.6.7	Layer entity.....	36
6.1.6.8	Multiple rate unrestricted.....	36
6.1.6.9	Speech	36
6.1.6.10	Unrestricted digital info with tones/announcements (7 kHz audio).....	36
6.1.7	Teleservice fragment	37
6.1.7.1	Teleservice.....	37
6.1.7.2	ETSI teleservice.....	37
6.1.7.3	Telefax group 4.....	37
6.1.7.4	Telephony 3,1 kHz	37
6.1.7.5	Telephony 7 kHz	37
6.1.7.6	Videotelephony.....	38
6.1.7.7	Videotex	38
6.1.8	Service dependent supplementary service fragment.....	38
6.1.8.1	Supplementary service service dependent	38
6.1.8.2	Customized supplementary service.....	38
6.1.8.3	Absent customer fixed announcement	39
6.1.8.4	Absent customer operator position	39
6.1.8.5	Absent customer predetermined announcement.....	39
6.1.8.6	Advice of charge: charging information at call set-up time	39
6.1.8.7	Advice of charge: charging information at the end of the call	40
6.1.8.8	Advice of charge: charging information during the call	40
6.1.8.9	Alarm call	40
6.1.8.10	Blocking	41
6.1.8.11	Call deflection	41
6.1.8.12	Call forwarding busy	41
6.1.8.13	Call forwarding unconditional	42
6.1.8.14	Call forwarding no reply.....	42
6.1.8.15	Call hold	43
6.1.8.16	Call waiting.....	43
6.1.8.17	Calling line identification presentation.....	43
6.1.8.18	Calling line identification restriction	44
6.1.8.19	Closed user group subscription option.....	44
6.1.8.20	Completion of calls to busy subscriber.....	44
6.1.8.21	Completion of call on no reply	44
6.1.8.22	Conference call add-on	45
6.1.8.23	Connected line identification presentation.....	45
6.1.8.24	Connected line identification restriction	45
6.1.8.25	Cordless terminal mobility.....	45
6.1.8.26	Detailed billing	46
6.1.8.27	Explicit call transfer.....	46
6.1.8.28	Fixed destination call.....	46
6.1.8.29	Incoming call barring.....	47
6.1.8.30	Interception of calls	47
6.1.8.31	Malicious call identification	47
6.1.8.32	Outgoing call barring	47
6.1.8.33	Remote control of supplementary service.....	48
6.1.8.34	Subaddressing	48
6.1.8.35	Terminal portability	48
6.1.8.36	Three party	48
6.1.8.37	User to user signalling	49
6.1.8.38	Virtual private network.....	49
6.1.8.39	Voice messaging busy	49
6.1.8.40	Voice messaging no reply.....	49

6.1.8.41	Voice messaging unconditional	50
6.1.9	Service independent supplementary service fragment.....	50
6.1.9.1	Supplementary service service independent	50
6.1.9.2	ETSI supplementary service service independent.....	50
6.1.9.3	Abbreviated dialling	51
6.1.9.4	Closed user group	51
6.1.9.5	Customer observation	52
6.1.9.6	Different ringing	52
6.1.9.7	Direct dialling in.....	53
6.1.9.8	General facility reset.....	53
6.1.9.9	Home meter	53
6.1.9.10	Message waiting indication controller	53
6.1.9.11	Message waiting indication receiver.....	53
6.1.9.12	Multiple subscriber number	54
6.1.9.13	PIN	54
6.1.9.14	Priority.....	55
6.1.9.15	Semi permanent connection.....	55
6.1.9.16	Terminating calls not charged.....	55
6.1.10	General services	55
6.1.10.1	Catalogued supplementary service.....	55
6.1.10.2	Catalogued teleservice	56
6.1.10.3	General ISDN service container	56
6.1.10.4	General PSTN service container.....	56
6.1.10.5	Non ISDN service.....	56
6.1.11	Service provision fragment.....	57
6.1.11.1	Service manager	57
6.1.11.2	Configuration service manager	57
6.1.11.3	Service package	57
6.1.11.4	Reference service configuration	57
6.2	Attributes description.....	58
6.2.1	Relative distinguished name.....	58
6.2.2	Relationship attributes.....	58
6.2.3	State attributes	58
6.2.4	Counter.....	58
6.3	Actions description	58
6.4	Notifications description.....	58
7	Formal object class definitions	59
7.1	Definition of object classes.....	59
7.1.1	Managed element	59
7.1.2	Access port fragment.....	59
7.1.2.1	Access port	59
7.1.2.2	ETSI access port.....	59
7.1.2.3	ETSI access port analogue.....	59
7.1.2.4	ETSI access port digital.....	60
7.1.2.5	ETSI access port ISDN basic rate.....	60
7.1.2.6	ETSI access port ISDN primary rate	60
7.1.2.7	Access channel	61
7.1.2.8	ETSI access channel	61
7.1.2.9	Access port profile.....	61
7.1.3	V5 interface fragment.....	61
7.1.3.1	Virtual access port	61
7.1.3.2	Virtual analogue access	62
7.1.3.3	Virtual basic rate access	62
7.1.3.4	Virtual leased access.....	63
7.1.3.5	Virtual primary rate access	63
7.1.3.6	Virtual access channel	64
7.1.3.7	V5 bearer channel reservation	64
7.1.3.8	V5 leased line reservation.....	64
7.1.4	Directory number fragment	65
7.1.4.1	Directory number.....	65

7.1.4.2	ETSI directory number E.164.....	65
7.1.4.3	Directory number X.121.....	65
7.1.5	Customer profile fragment	65
7.1.5.1	Customer profile.....	65
7.1.5.2	ETSI customer profile	65
7.1.5.3	Analogue customer profile.....	66
7.1.5.4	Digital customer profile.....	66
7.1.5.5	ISDN customer profile.....	66
7.1.5.6	Customized resource.....	66
7.1.5.7	ETSI customized resource	66
7.1.6	Bearer service fragment.....	67
7.1.6.1	Bearer service	67
7.1.6.2	ETSI bearer service	67
7.1.6.3	Circuit mode 3,1 kHz audio.....	67
7.1.6.4	Circuit mode 64 kbit/s unrestricted.....	67
7.1.6.5	ETSI packet B channel	67
7.1.6.6	ETSI packet D channel	68
7.1.6.7	Layer entity.....	68
7.1.6.8	Multiple rate unrestricted.....	68
7.1.6.9	Speech	68
7.1.6.10	Unrestricted digital info with tones/announcements (7 kHz audio).....	68
7.1.7	Teleservice fragment	69
7.1.7.1	Teleservice.....	69
7.1.7.2	ETSI teleservice.....	69
7.1.7.3	Telefax group 4.....	69
7.1.7.4	Telephony 3,1 kHz	69
7.1.7.5	Telephony 7 kHz	69
7.1.7.6	Videotelephony.....	70
7.1.7.7	Videotex	70
7.1.8	Service dependent supplementary service fragment.....	70
7.1.8.1	Supplementary service service dependent	70
7.1.8.2	Customized supplementary service.....	70
7.1.8.3	Absent customer fixed announcement	70
7.1.8.4	Absent customer operator position	71
7.1.8.5	Absent customer predetermined announcement.....	71
7.1.8.6	Advice of charge: charging information at call set-up time	71
7.1.8.7	Advice of charge: charging information during the call	71
7.1.8.8	Advice of charge: charging information at the end of the call	72
7.1.8.9	Alarm call	72
7.1.8.10	Blocking	72
7.1.8.11	Call deflection	72
7.1.8.12	Call forwarding busy	73
7.1.8.13	Call forwarding no reply.....	73
7.1.8.14	Call forwarding unconditional	73
7.1.8.15	Call hold	73
7.1.8.16	Calling line identification presentation	73
7.1.8.17	Calling line identification restriction	74
7.1.8.18	Call waiting.....	74
7.1.8.19	Closed user group subscription options	74
7.1.8.20	Completion of call on no reply	74
7.1.8.21	Completion of calls to busy subscribers	75
7.1.8.22	Conference call add-on.....	75
7.1.8.23	Connected line identification presentation.....	75
7.1.8.24	Connected line identification restriction.....	75
7.1.8.25	Cordless terminal mobility.....	75
7.1.8.26	Detailed billing	76
7.1.8.27	Explicit call transfer.....	76
7.1.8.28	Fixed destination call.....	76
7.1.8.29	Incoming call barring.....	76
7.1.8.30	Interception of calls	77

7.1.8.31	Malicious call identification	77
7.1.8.32	Outgoing call barring	77
7.1.8.33	Remote control of supplementary service	77
7.1.8.34	Subaddressing	77
7.1.8.35	Terminal portability	78
7.1.8.36	Three party	78
7.1.8.37	User to user signalling	78
7.1.8.38	Virtual private network	78
7.1.8.39	Voice messaging busy	78
7.1.8.40	Voice messaging no reply	79
7.1.8.41	Voice messaging unconditional	79
7.1.9	Service independent supplementary service fragment	79
7.1.9.1	Supplementary service service independent	79
7.1.9.2	ETSI supplementary service service independent	79
7.1.9.3	Abbreviated dialling	80
7.1.9.4	Closed user group	80
7.1.9.5	Customer observation	80
7.1.9.6	Different ringing	80
7.1.9.7	Direct dialling in	81
7.1.9.8	General facility reset	81
7.1.9.9	Home meter	81
7.1.9.10	Message waiting indication controller	81
7.1.9.11	Message waiting indication receiver	81
7.1.9.12	Multiple subscriber number	82
7.1.9.13	PIN	82
7.1.9.14	Priority	82
7.1.9.15	Terminating calls not charged	83
7.1.10	General services	83
7.1.10.1	Catalogued supplementary service	83
7.1.10.2	Catalogued teleservice	83
7.1.10.3	General ISDN service container	83
7.1.10.4	General PSTN service container	83
7.1.10.5	Non ISDN service	84
7.1.11	Service provision fragment	84
7.1.11.1	Service manager	84
7.1.11.2	Configuration service manager	84
7.1.11.3	Service package	84
7.1.11.4	Reference service configuration	84
7.2	Name bindings	85
7.2.1	Access channel-service package	85
7.2.2	Access port profile-managed element	85
7.2.3	Access port profile-service package	85
7.2.4	Customer observation-ETSI access port	85
7.2.5	Customer observation-ETSI customized resource	85
7.2.6	Customer observation-ETSI directory number E.164	85
7.2.7	Customer profile-managed element	86
7.2.8	Customer profile-service package	86
7.2.9	Customized supplementary service-general ISDN service container	86
7.2.10	Customized supplementary service-general PSTN service container	86
7.2.11	Customized supplementary service-non ISDN service	86
7.2.12	Customized supplementary service-service package	86
7.2.13	Directory number-managed element	87
7.2.14	ETSI access channel-ETSI access port	87
7.2.15	ETSI access port-managed element	87
7.2.16	ETSI bearer service-customer profile	87
7.2.17	ETSI bearer service- general ISDN service container	87
7.2.18	ETSI bearer service-service package	87
7.2.19	ETSI customized Resource-customer profile	87
7.2.20	ETSI supplementary service service independent-general ISDN service container	88
7.2.21	ETSI supplementary service service independent-general PSTN service container	88

7.2.22	ETSI supplementary service service independent-service package.....	88
7.2.23	ETSI teleservice-customer profile.....	88
7.2.24	ETSI teleservice-general ISDN service container.....	88
7.2.25	ETSI teleservice-service package.....	88
7.2.26	General ISDN service container-managed element.....	89
7.2.27	General PSTN service container-managed element.....	89
7.2.28	Non ISDN service-customer profile.....	89
7.2.29	Service manager-managed element.....	89
7.2.30	Service package-managed element.....	89
7.3	Definition of packages.....	89
7.3.1	Acting role package.....	89
7.3.2	Administrative state package.....	89
7.3.3	Automatic invocation package.....	90
7.3.4	Customer characteristics package.....	90
7.3.5	Customized resource pointer list package.....	90
7.3.6	Directionality package.....	90
7.3.7	Generally provided fixed destination call package.....	91
7.3.8	General service list package.....	91
7.3.9	Line test capability package.....	91
7.3.10	Local defined number package.....	91
7.3.11	Local packet handler package.....	91
7.3.12	Master property package.....	91
7.3.13	Maximum number of information channels package.....	92
7.3.14	Maximum number of total calls package.....	92
7.3.15	Message waiting indication controlling user package.....	92
7.3.16	Message waiting indication receiver pointer package.....	92
7.3.17	Metering counter package.....	92
7.3.18	Observation mode package.....	92
7.3.19	Origin for analysis package.....	92
7.3.20	Origin for charging package.....	93
7.3.21	Origin for routing package.....	93
7.1.22	Override package.....	93
7.3.23	Ported directory number package.....	93
7.3.24	Primary inter exchange carrier package.....	93
7.3.25	Semipermanent line package.....	93
7.3.26	Third wire equipment package.....	93
7.3.27	Voice messaging number package.....	94
7.4	Definition of attributes.....	94
7.5	Definition of behaviours.....	104
7.6	Definition of actions.....	104
7.6.1	Add service to configuration.....	104
7.6.2	Change access port.....	105
7.6.3	Change directory number.....	105
7.6.4	Establish customer configuration.....	105
7.7	Definition of notifications.....	106
7.7.1	Failed alarm call.....	106
7.8	ASN.1 defined types module.....	106

Annex A (normative):	References to service description standards	112
Annex B (informative):	Object classes defined in the ITU-T Recommendation Q.824 series which are not used in the context of this standard.....	115
B.1	ITU-T Recommendation Q.824.0	115
B.2	ITU-T Recommendation Q.824.1	115
B.3	ITU-T Recommendation Q.824.2	115
B.4	ITU-T Recommendation Q.824.3	116
B.5	ITU-T Recommendation Q.824.4	116
Annex C (informative):	Examples for customer configurations.....	117
C.1	PSTN single line configuration.....	117
C.2	ISDN single line configuration	117
Annex D (informative):	Modelling of centrex.....	118
D.1	Entity relationship diagram.....	118
D.2	Inheritance hierarchy.....	118
D.3	GDMO definitions	119
D.3.1	Object class definitions.....	119
D.3.2	Name bindings	120
D.3.3	Attribute definitions	120
D.3.4	ASN.1 types	121
D.4	Further remarks	121
History	122

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETR 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.fr/ipr> or <http://www.etsi.org/ipr>).

Pursuant to the ETSI Interim IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETR 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Telecommunications Management Networks (TMN), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document is part 1 of a multi-part EN covering the functional specification of Customer Administration (CA) on the Operations System/Network Element (OS/NE) interface, as identified below:

Part 1: "Single line configurations";

Part 2: "Not yet identified (DEN/TMN-00042)".

Further parts are under study.

Proposed national transposition dates	
Date of latest announcement of the EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Introduction

For the present document, the following priorities were assigned for the scope of the customer administration model:

- modelling of analogue, digital and Integrated Services Digital Network (ISDN) customer installation configurations;
- modelling of the most frequently required ETSI ISDN teleservices, bearer services, and supplementary services;
- modelling of the most frequently required CEPT services and non-standardized services;
- re-definition of the V5 interface related object classes as far as they are affected by changes in their superclasses as defined in the recent I-ETS 300 291 when re-defining them in the present document.

Extendibility to cover all ETSI ISDN teleservices, bearer services and supplementary services, Private Branch Exchanges (PBXs), mobile customers, ATM, cordless and Universal Personal Telecommunication (UPT) customers, centrex, packet switching, the full range of CEPT services, non-standardized services (e.g. hunting, etc.) is foreseen via subclassing (see entity-relationship diagram subclause 5.1, and descriptions in subclause 6.1).

In the present document, the customer administration model is restricted to modelling of semi-permanent customer data. Call processing and dynamic (state) information are no subject of the present document.

The present document is based on the ITU-T Recommendation Q.824 series [46] to [50], from which all relevant object classes were subclassed as far as necessary.

1 Scope

The present document specifies the management aspects of Customer Administration (CA) for Public Switched Telephone Network (PSTN), and public Integrated Services Digital Network (ISDN), in line with descriptions in ETR 047 [68], and restricted to service provisioning and service configuration only. The aspects of the local exchange part of V5 configuration management influenced by the present document are considered as well.

The model is restricted to the Operations System to Network Element (OS/NE) interface.

Although not included in the present document, the model has been designed to be extendible for Private Branch Exchanges (PBXs), centrex, mobile, Asynchronous Transfer Mode (ATM), cordless and Universal Personal Telecommunication (UPT) customers.

Since centrex is no standardized service and implementations vary, no centrex related definitions are introduced into the normative part of the present document. In the informative annex D, a modelling approach for centrex is given.

The ISDN teleservices, bearer services and supplementary services included in this issue of the model have been selected from ETR 010 [65], to test the structure of the model and ensure that it is applicable to all services.

2 References

References may be made to:

- a) specific versions of publications (identified by date of publication, edition number, version number, etc.), in which case, subsequent revisions to the referenced document do not apply; or
- b) all versions up to and including the identified version (identified by "up to and including" before the version identity); or
- c) all versions subsequent to and including the identified version (identified by "onwards" following the version identity); or
- d) publications without mention of a specific version, in which case the latest version applies.

A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

2.1 Normative references

- [1] EN 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [2] ETS 300 108: "Integrated Services Digital Network (ISDN); Circuit-mode 64 kbit/s unrestricted 8 kHz structured bearer service category; Service description".
- [3] ETS 300 109: "Integrated Services Digital Network (ISDN); Circuit-mode 64 kbit/s 8 kHz structured bearer service category usable for speech information transfer; Service description".
- [4] ETS 300 110: "Integrated Services Digital Network (ISDN); Circuit-mode 64 kbit/s 8 kHz structured bearer service category usable for 3,1 kHz audio information transfer; Service description".
- [5] ETS 300 389: "Integrated Services Digital Network (ISDN); Circuit-mode multiple-rate unrestricted 8 kHz structured bearer service category; Service description".
- [6] ETS 300 048: "Integrated Services Digital Network (ISDN); ISDN Packet Mode Bearer Services (PMBS) ISDN Virtual Call (VC) and Permanent Virtual Call (PVC) bearer services provided by the B-channel of the user access - basic and primary rate".

- [7] ETS 300 049: "Integrated Services Digital Network (ISDN); ISDN Packet Mode Bearer Services (PMBS) ISDN Virtual Call (VC) and Permanent Virtual Call (PVC) bearer services provided by the D-channel of the user access - basic and primary rate".
- [8] ETS 300 111: "Integrated Services Digital Network (ISDN); Telephony 3,1 kHz teleservice; Service description".
- [9] ETS 300 120: "Integrated Services Digital Network (ISDN); Service requirements for telefax group 4".
- [10] ETS 300 262: "Integrated Services Digital Network (ISDN); Syntax-based Videotex teleservice; Service description".
- [11] ETS 300 263: "Integrated Services Digital Network (ISDN); Telephony 7 kHz teleservice; Service description".
- [12] ETS 300 264: "Integrated Services Digital Network (ISDN); Videotelephony teleservice; Service description".
- [13] ETS 300 050: "Integrated Services Digital Network (ISDN); Multiple Subscriber Number (MSN) supplementary service; Service Description".
- [14] ETS 300 053: "Integrated Services Digital Network (ISDN); Terminal Portability (TP) supplementary service; Service Description".
- [15] ETS 300 056: "Integrated Services Digital Network (ISDN); Call Waiting (CW) supplementary service; Service Description".
- [16] ETS 300 059: "Integrated Services Digital Network (ISDN); Subaddressing (SUB) supplementary service Service Description".
- [17] ETS 300 062: "Integrated Services Digital Network (ISDN); Direct Dialling In (DDI) supplementary service; Service Description".
- [18] ETS 300 089: "Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) supplementary service; Service description".
- [19] ETS 300 648: "Public Switched Telephone Network (PSTN); Calling Line Identification Presentation (CLIP) supplementary service; Service description".
- [20] ETS 300 090: "Integrated Services Digital Network (ISDN); Calling Line Identification Restriction (CLIR) supplementary service".
- [21] ETS 300 649: "Public Switched Telephone Network (PPSTN); Calling Line Identification Restriction (CLIR) supplementary service; Service description".
- [22] ETS 300 094: "Integrated Services Digital Network (ISDN); Connected Line Identification Presentation (COLP) supplementary service; Service description".
- [23] ETS 300 095: "Integrated Services Digital Network (ISDN); Connected Line Identification Restriction (COLR) supplementary service; Service description".
- [24] ETS 300 128: "Integrated Services Digital Network (ISDN); Malicious Call Identification (MCID) supplementary service; Service description".
- [25] ETS 300 136: "Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Service description".
- [26] ETS 300 139: "Integrated Services Digital Network (ISDN); Call Hold (HOLD) supplementary service; Service description".
- [27] ETS 300 178: "Integrated Services Digital Network (ISDN); Advice of Charge: charging information at call set-up time (AOC-S) supplementary service; Service description".

- [28] ETS 300 179: "Integrated Services Digital Network (ISDN); Advice of Charge: charging information during the call (AOC-D) supplementary service; Service description".
- [29] ETS 300 180: "Integrated Services Digital Network (ISDN); Advice of Charge: charging information at the end of the call (AOC-E) supplementary service; Service description".
- [30] ETS 300 183: "Integrated Services Digital Network (ISDN); Conference call, add-on (CONF) supplementary service; Service description".
- [31] ETS 300 186: "Integrated Services Digital Network (ISDN); Three-Party (3PTY) supplementary service; Service description".
- [32] ETS 300 199: "Integrated Services Digital Network (ISDN); Call Forwarding Busy (CFB) supplementary service; Service description".
- [33] ETS 300 200: "Integrated Services Digital Network (ISDN); Call Forwarding Unconditional (CFU) supplementary service; Service description".
- [34] ETS 300 201: "Integrated Services Digital Network (ISDN); Call Forwarding No Reply (CFNR) supplementary service; Service description".
- [35] ETS 300 202: "Integrated Services Digital Network (ISDN); Call Deflection (CD) supplementary service; Service description".
- [36] ETS 300 284: "Integrated Services Digital Network (ISDN); User-to-User Signalling (UUS) supplementary service; Service description".
- [37] ETS 300 357: "Integrated Services Digital Network (ISDN); Completion of Calls to Busy Subscriber (CCBS) supplementary service; Service description".
- [38] EN 300 367: "Integrated Services Digital Network (ISDN); Explicit Call Transfer (ECT) supplementary service; Service description".
- [39] ETS 300 650: "Integrated Services Digital Network (ISDN); Message Waiting Indication (MWI) supplementary service; Service description".
- [40] EN 301 082: "Network Aspects (NA); Integrated Services Digital Network (ISDN) Outgoing Call Barring-Fixed (OCB-F); Service description".
- [41] EN 301 084: "Network Aspects (NA); Integrated Services Digital Network (ISDN); Outgoing Call Barring-User Controlled (OCB-UC) supplementary service; Service description".
- [42] EN 300 292: "Telecommunication Management Network (TMN); Functional specification of call routing information management on the Operation System/Network Element (OS/NE) interface".
- [43] CCITT Recommendation E.164 (1991): "The international public numbering plan".
- [44] CCITT Recommendation I.210: "Principles of telecommunication services supported by an ISDN and the means to describe them".
- [45] CCITT Recommendation M.3100: "Generic network information model".
- [46] ITU-T Recommendation Q.824.0 (1996): "Stage 2 and stage 3 description for the Q3 interface - customer administration - common information".
- [47] ITU-T Recommendation Q.824.1 (1996): "Stage 2 and stage 3 description for the Q3 interface - customer administration - Integrated Services Digital Network (ISDN) basic and primary rate access".
- [48] ITU-T Recommendation Q.824.2 (1996): "Stage 2 and stage 3 description for the Q3 interface - customer administration - Integrated Services Digital Network (ISDN) supplementary services".
- [49] ITU-T Recommendation Q.824.3 (1996): "Stage 2 and stage 3 description for the Q3 interface - customer administration - Integrated Services Digital Network (ISDN) optional user facilities".

- [50] ITU-T Recommendation Q.824.4 (1996): "Stage 2 and stage 3 description for the Q3 interface - customer administration - Integrated Services Digital Network (ISDN) teleservices".
- [51] CCITT Recommendation X.121 (1992): "International numbering plan for public data networks".
- [52] CCITT Recommendation X.720 | ISO/IEC 10165-1: "Information technology - Open Systems Interconnection - Structure of management information: Management information model".
- [53] CCITT Recommendation X.721 | ISO/IEC 10165-2 (1992): "Information technology - Open Systems Interconnection - Structure of management information: Definition of management information".
- [54] CCITT Recommendation X.722 | ISO/IEC 10165-4 (1992): "Information technology - Open Systems Interconnection - Structure of management information: Guidelines for the definition of managed objects".
- [55] CCITT Recommendation X.730 | ISO/IEC 10164-1 (1992): "Information technology - Open Systems Interconnection - Systems management: Object management function".
- [56] CCITT Recommendation X.731 | ISO/IEC 10164-2 (1992): "Information technology - Open Systems Interconnection - Systems management: State management function".
- [57] CCITT Recommendation X.732 | ISO/IEC 10164-3 (1992): "Information technology - Open Systems Interconnection - Systems management: Attributes for representing relationships".
- [58] CEPT Handbook on services and facilities offered to the subscribers in telephone system Section I & II: "Services and facilities within the Public Network. 3rd Edition 1981".
- [59] ETS 300 377-1: "Signalling Protocols and Switching (SPS); Q3 interface at the Local Exchange (LE) for configuration management of V5 interfaces and associated customer profiles. Part 1: Q3 interface specification".
- [60] ITU-T Recommendation I.324: "ISDN network architecture".
- [61] ETS 300 379: "Signalling Protocols and Switching (SPS); Q3 interface at the Local Exchange (LE) for fault and performance management of V5 interfaces and associated customer profiles; Part 1: Q3 interface specification".
- [62] ETS 300 007: "Integrated Services Digital Network (ISDN); Support of packet-mode terminal equipment by an ISDN".
- [63] ETS 301 134: "Integrated Services Digital Network (ISDN); Completion of calls on No Reply (CCNR) supplementary service; Service description".
- [64] ETS 301 175: "Cordless Terminal Mobility (CTM); Phase 1; Service description".

2.2 Informative references

- [65] ETR 010: "ISDN Standards Management (ISM); The ETSI basic guide on the European integrated services digital network".
- [66] ETR 037: "Network Aspects (NA); Telecommunications Management Network (TMN); Objectives, principles, concepts and reference configurations".
- [67] ETR 046: "Network Aspects (NA); Telecommunications management networks modelling guidelines".
- [68] ETR 047: "Network Aspects (NA); Telecommunications Management Network (TMN) Management services".
- [69] ETR 078: "Maintenance: Telecommunications management network; TMN interface specification methodology [CCITT Recommendation M.3020 (1992)]".

- [70] ETR 088: "Network Aspects (NA); Time/type of day dependant scheduling function support object classes".
- [71] Draft ITU-T Recommendation Q.824.5 (1996): "Stage 2 and stage 3 description for the Q3 interface - customer administration - analog access".
- [72] CCITT Recommendation M.3010 (1992): "Principles for a telecommunications management network".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following definitions apply:

customer administration: The function of managing customer service provisioning information on an exchange.

The following definitions apply to managed classes which are more fully described in clause 6 and formally defined in clause 7.

access port profile: The access port object class represents the physical view on a termination point of the customer service access within the exchange.

access port: The access port object class represents the logical view on termination points of the customer service access within the exchange.

access channel: The access channel object class represents the logical termination of an ISDN B-channel or D-channel or an individual channel of a digital access port.

customer profile: The customer profile object class relates resources used by the customer and contains services provisioned for him.

customized resource: The customized resource object class relates a subset of the customer's services and resources where all services are not applicable to all access ports, access channels and directory numbers (DNs).

The definition of all ISDN teleservices, bearer services and supplementary services may be found in the ETS/EN listed in clause 6 of ETR 010 [65].

connection related function: The connection related function (CRF) is the function of the managed element to provide the telecommunication service to a customer (see ITU-T Recommendation I.324 [61]).

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation 1
ATM	Asynchronous Transfer Mode
BA	Basic Access
CD	Changed Destination
CUG	Closed User Group
DTMF	Dual Tone Multi Frequency
GDMO	Guidelines for the Definition of Managed Objects
ICB	Incoming Call Barring
ID	Identifier
ISDN	Integrated Services Digital Network
M/C/O	Mandatory/Conditional/Optional
NE	Network Element
OS	Operations System
OSI	Open Systems Interconnection

PABX	Private Automatic Branch Exchange
PBX	Private Branch Exchange
PRA	Primary Rate Access
PSTN	Public Switched Telephone Network
PIN	Personal Identification Number
RDN	Relative Distinguished Name
S	Interface reference point S
T	Interface reference point T
TIB	Task Information Base
TMN	Telecommunications Management Network
TTP	Trail Termination Point
UPT	Universal Personal Telecommunications

4 Functional requirements

The functional requirements are derived from the TIB A and TIB B specified in ETR 047 [68] for the customer administration service.

Customer administration is a management activity that the network operator performs in order to exchange with the customer all the customer related management data and functions required to offer a telecommunication service and to exchange with the network all the customer related management data and functions necessary for the network to produce that telecommunication service.

In a wide sense, this could include interactions for the purpose of service provision management, configuration administration, fault administration, charging (including detailed billing) administration, complaints administration, quality of service administration, traffic measurement administration etc. Here, however, only customer administration in the more traditional sense of service provision and service configuration has been included.

The components of service mentioned hereafter are within the scope of the present document.

4.1 Manage service provision

After receiving a customer order, find an available directory number and a suitable access port in an appropriate exchange and connect these.

4.2 Administer service facilities and supplementary services

Record user service requirements as data related to directory number. Some services can be both customer controlled and operator controlled. Examples are abbreviated dialling, priority, malicious call tracing, charging observation, traffic restriction, free of charge etc.

4.3 Administer customer line

Administer line characteristics which are relevant for the local exchange (e.g. line status, traffic direction).

5 Information model diagrams

The following information model diagrams have been drawn for the purpose of clarifying the relations between the different object classes of customer administration. There are three different types of diagrams:

- entity relationship models, showing the relations of the different managed objects;
- inheritance hierarchy, showing how managed objects are derived from each other (i.e. the different paths of inherited characteristics of the different managed objects);

- naming hierarchy showing the derivation of names for managed objects (i.e. the different naming paths for instances of managed objects).

These three different diagrams are only for clarification. The formal specification in terms of Guidelines for the Definition of Managed Objects (GDMO) templates and Abstract Syntax Notation 1 (ASN.1) type definitions are the relevant information for the implementation of the present document.

5.1 Entity relationship diagrams

Figure 1 shows the relationships of the object classes defining an ISDN/PSTN customer configuration. The service fragment indicated in figure 1 is detailed in figure 2.

In figure 3, the relationships of the object classes used for general service provision are shown.

Figure 4 gives the relationships of the object classes used for reference service configurations.

Object classes defined in the present document are indicated in the entity relationship diagrams by **bold** letters.

The relationships of the V5 interface related object classes are given in ETS 300 377-1 [59].

The relationships of object classes defined in other documents are only shown as far as needed.

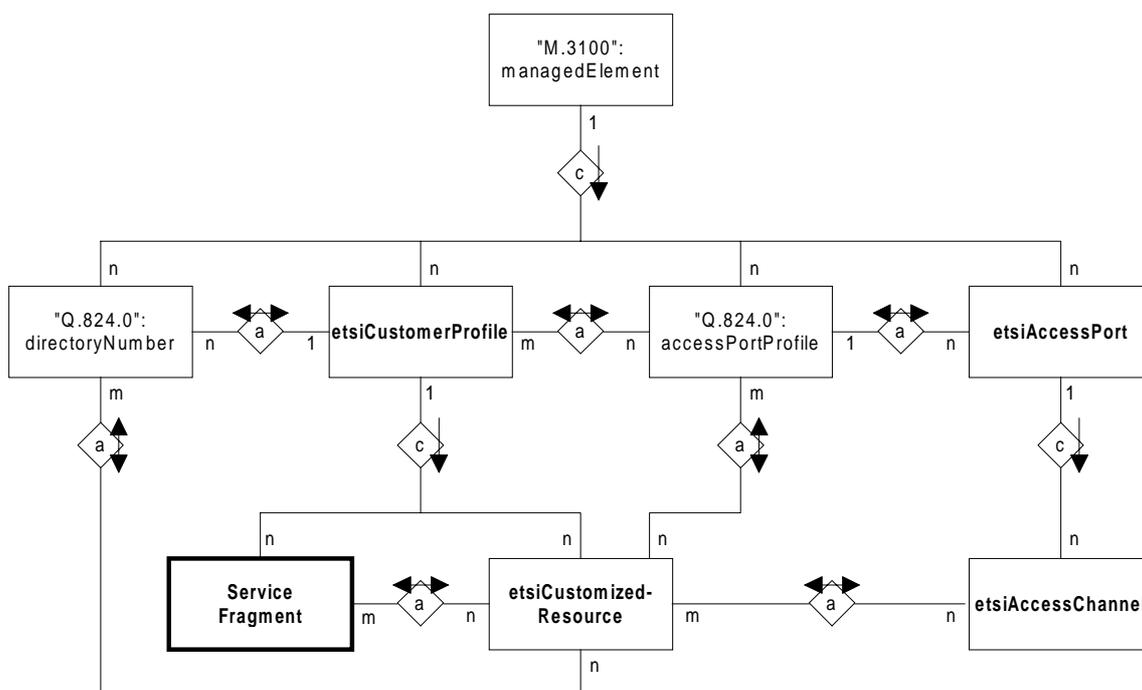


Figure 1: ISDN/PSTN customer configuration

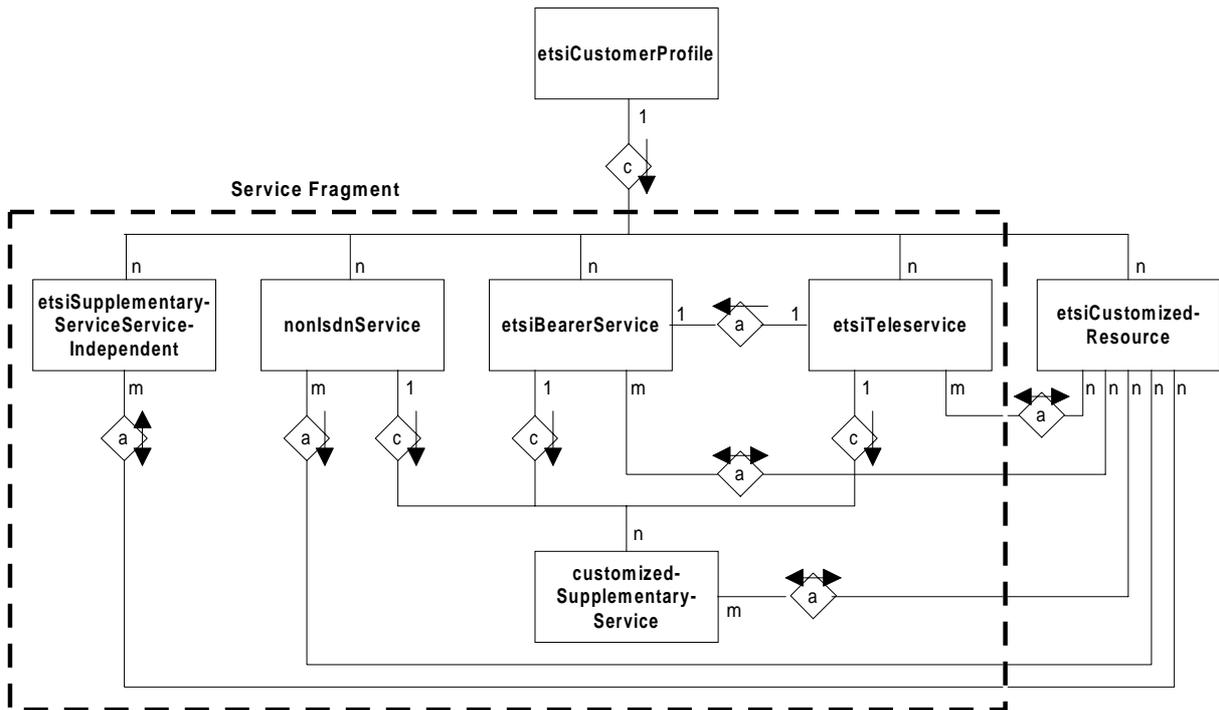


Figure 2: Customer specific services fragment

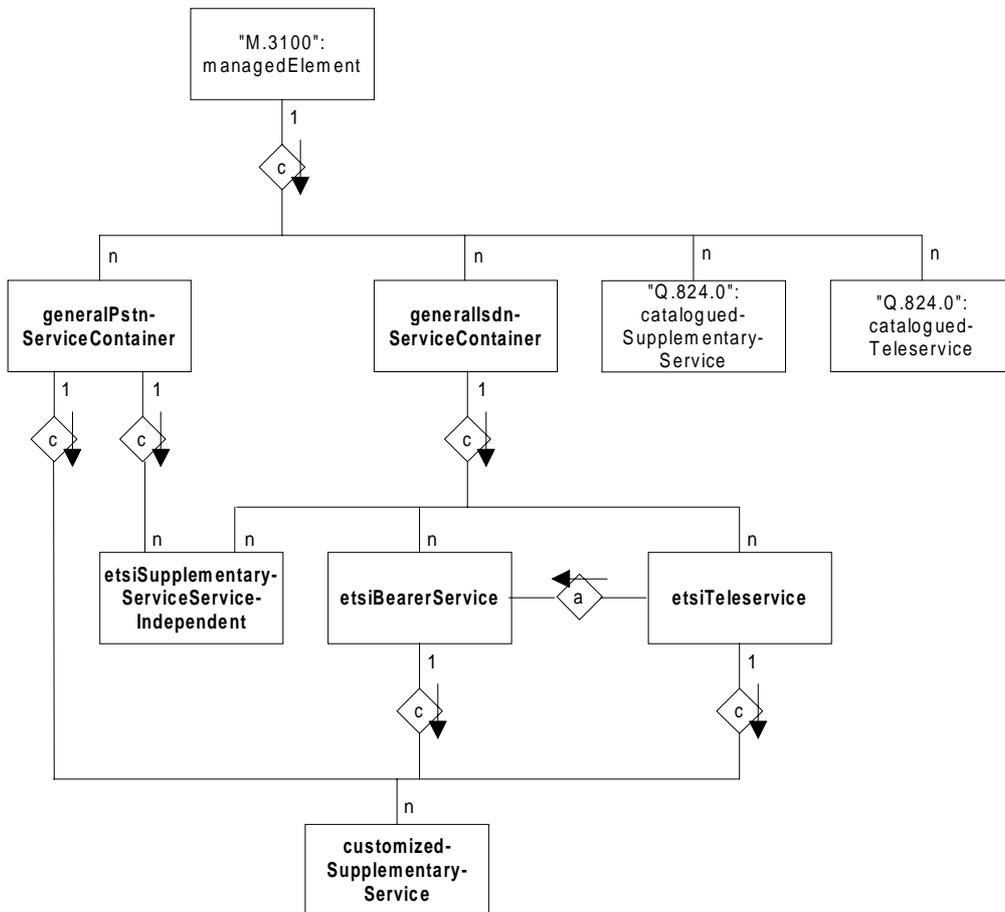


Figure 3: General services fragment

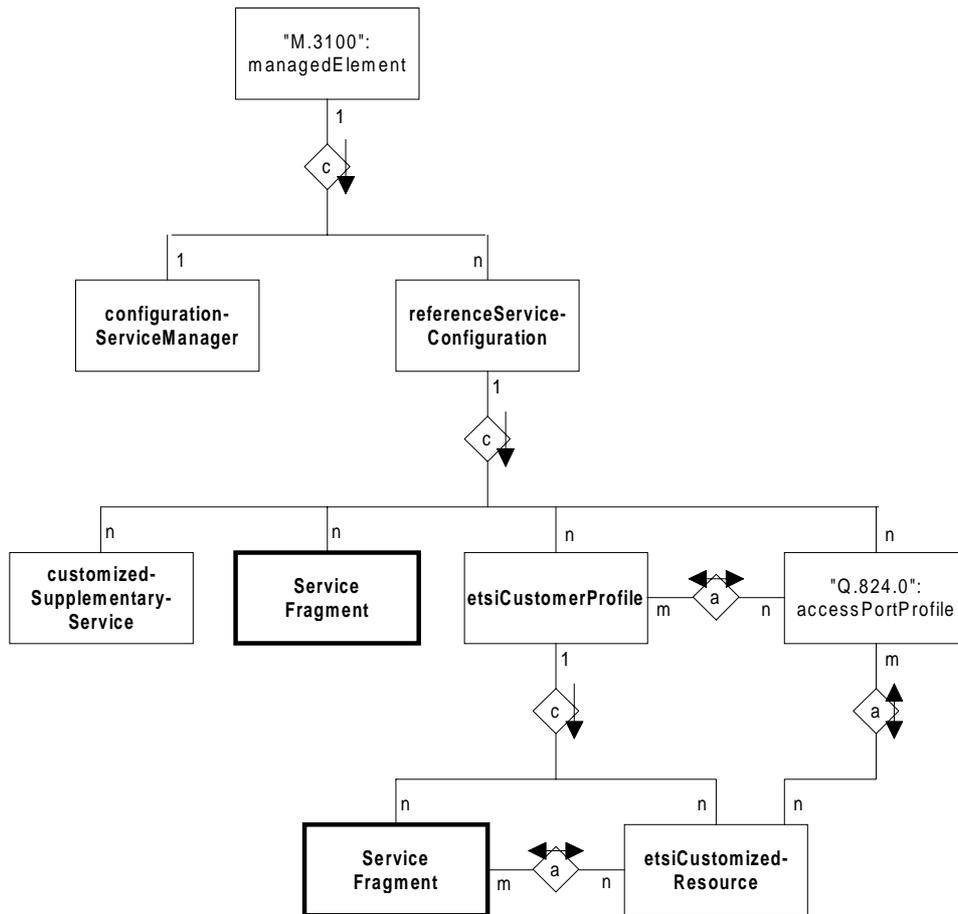


Figure 4: Service provision fragment

5.2 Inheritance hierarchy

These figures show the inheritances of the object classes defined in the present document. The inheritances of object classes referenced from other documents but not subclassed in the present document are defined in the referenced documents. As well, the inheritance of the service related object classes (subclasses) defined in the present document is not shown in these figures. Within the present document they are to be found in the fragment where their superclass is defined (e.g. telephony 3.1 kHz within the teleservice fragment). Object classes defined in the present document are highlighted in **bold** letters.

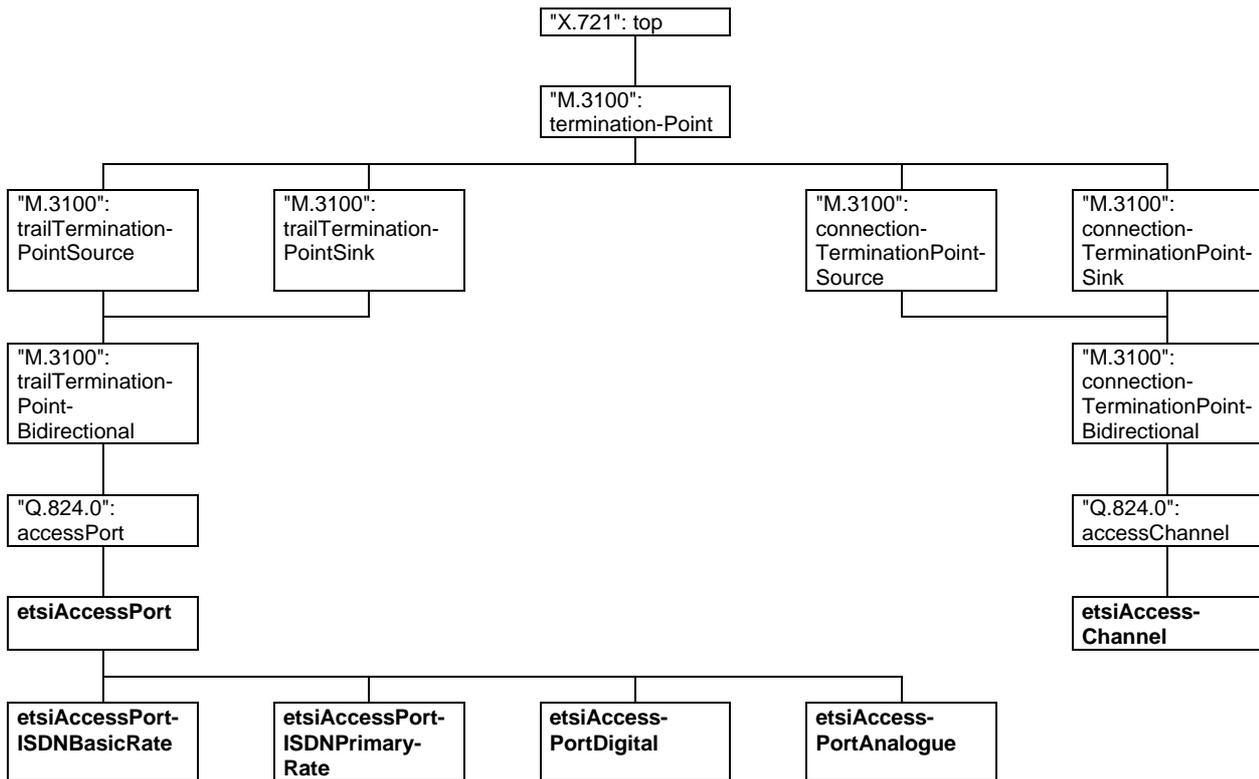


Figure 5: Inheritance hierarchy (1)

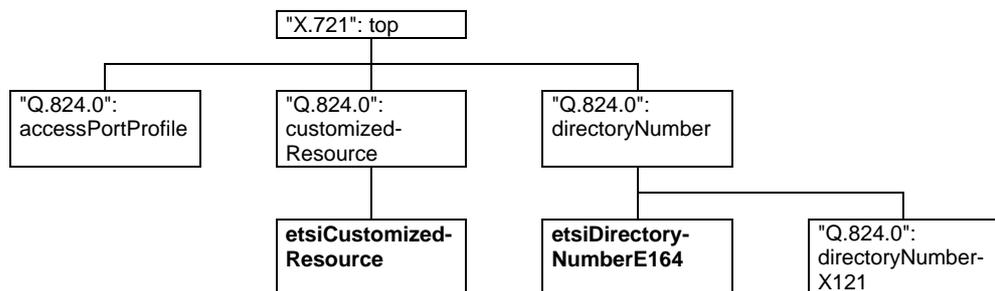


Figure 6: Inheritance hierarchy (2)

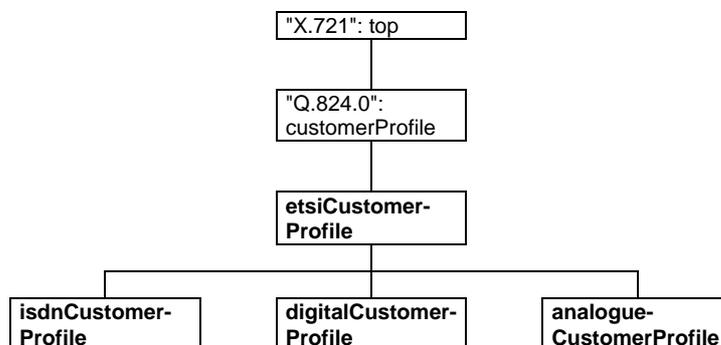


Figure 7: Inheritance hierarchy (3)

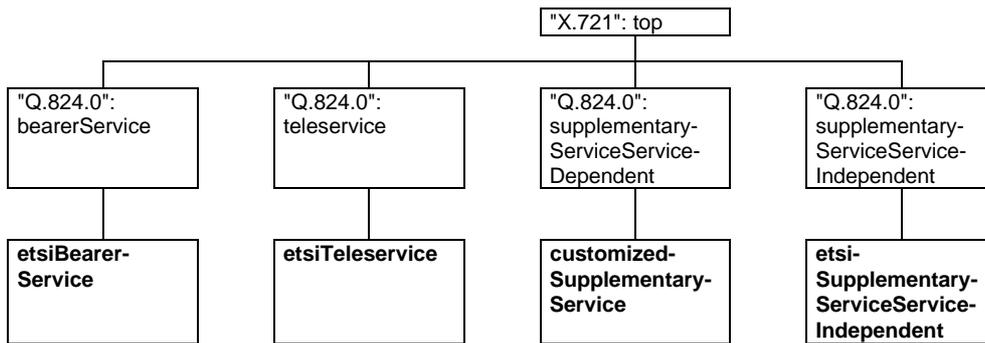


Figure 8: Inheritance hierarchy (4)

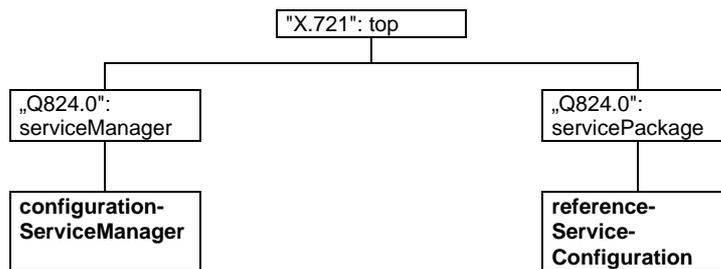


Figure 9: Inheritance hierarchy (5)

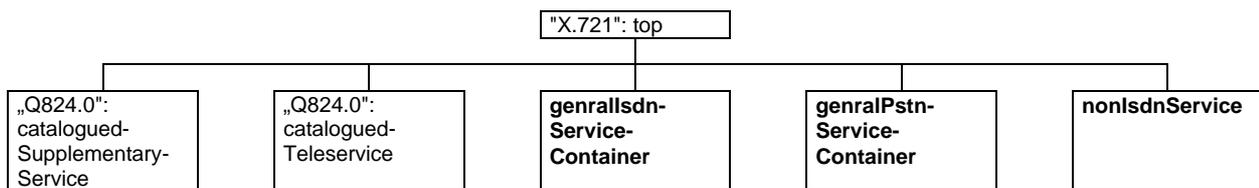


Figure 10: Inheritance hierarchy (6)

5.3 Naming hierarchy

This figure shows the name bindings (containment relationships) of the object classes defined in the present document. The name bindings of object classes referenced from other documents are defined in the referenced documents. They are only indicated in this table where necessary. Object classes defined in the present document are highlighted in **bold** letters.

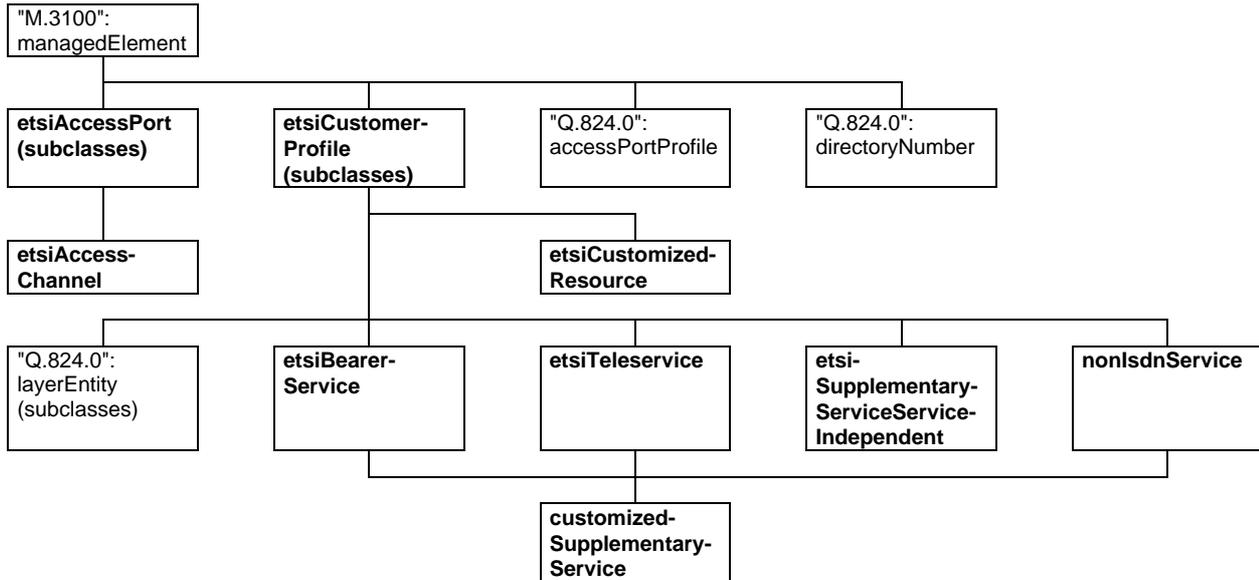


Figure 11: Naming hierarchy (1)

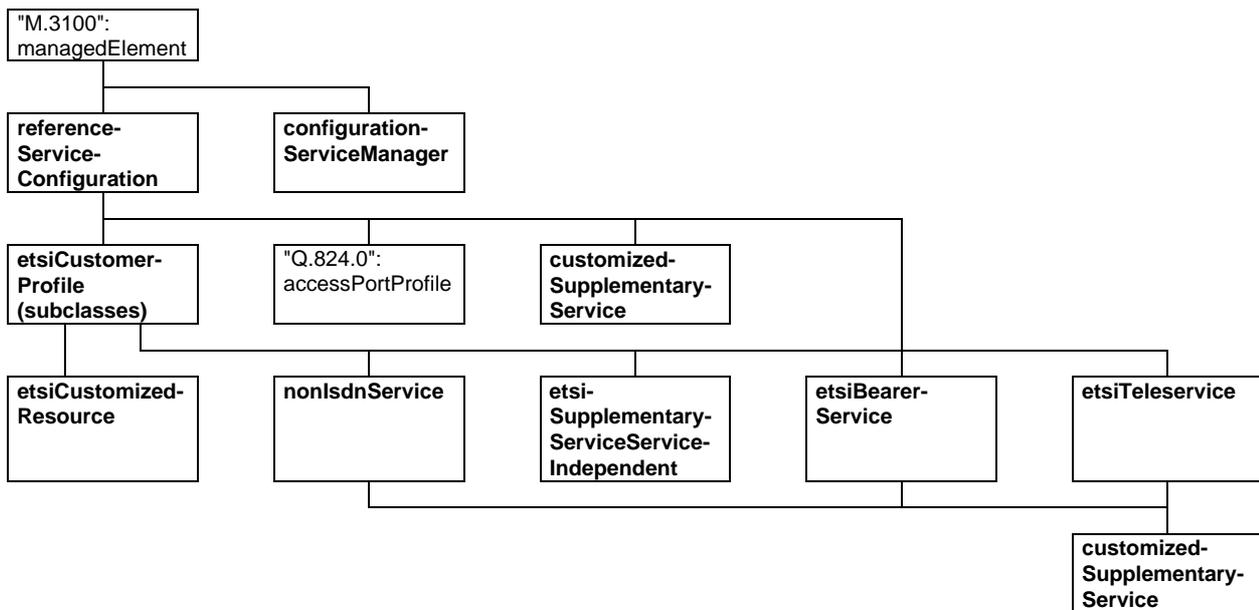


Figure 12: Naming hierarchy (2)

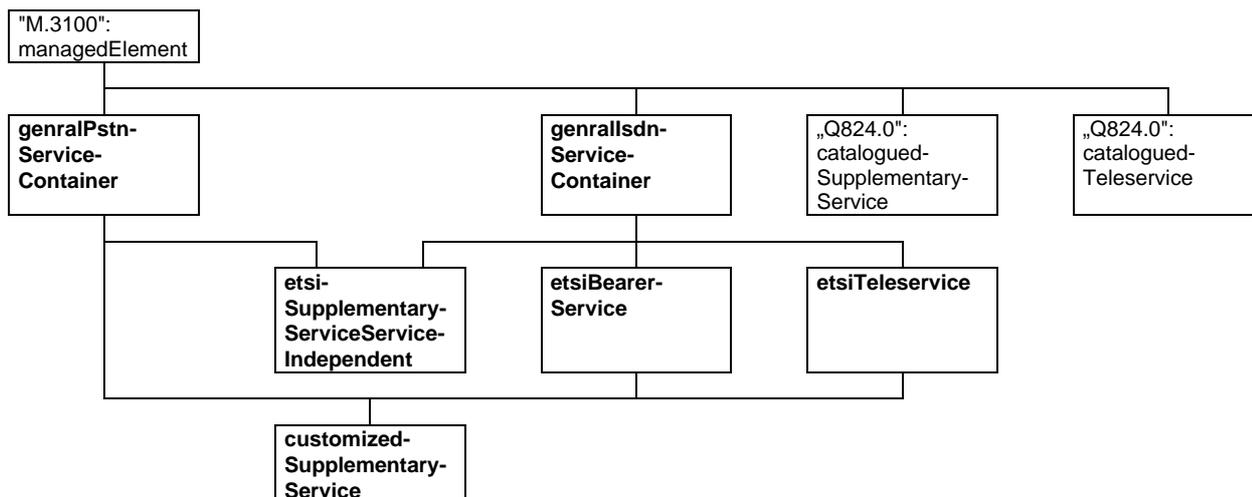


Figure 13: Naming hierarchy (3)

6 Information model description

This clause provides a high-level informal description of the customer administration information model.

Subclause 6.1 contains a brief description for each object class used in the model covering:

- the purpose of the object class;
- the attributes defined for the object class; and
- the relationship of the object class to other object classes.

Attributes which are common to several object classes are described in subclause 6.2.

Subclause 6.3 describes actions which are influencing several object classes in the information model.

Subclause 6.4 describes the common aspects of the notifications used in the information model.

6.1 Object class descriptions

This subclause is divided into subclauses in which the object classes of the information model are described, where they are not described in other documents. In these cases, references are given.

In the tables listing the attributes of the object classes, the attributes inherited from CCITT Recommendation X.721 [53]: top are not mentioned explicitly, although they are present in these object classes as defined in CCITT Recommendation X.721 [53].

6.1.1 Managed element

The managedElement object class represents the location where the Q3 interface and its associated resources are provided. This managed object class is defined in CCITT Recommendation M.3100 [45].

6.1.2 Access port fragment

6.1.2.1 Access port

The accessPort object class is defined in ITU-T Recommendation Q.824.0 [46]. It represents the resource concept and is used to identify the resource capabilities supporting a customer services. The resource abstraction is defined as the trail

termination points that terminates trails between the switching network element and the customer premise equipment. These trail termination points send the signalling and service information to the customer.

6.1.2.2 ETSI access port

The etsiAccessPort is derived from ITU-T Recommendation Q.824.0 [46]: accessPort. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

Both etsiDirectoryNumberE164 and etsiAccessPort have the conditional package meteringCounterPkg containing the meteringCounter attribute. This package shall only be instantiated with one of these two object classes or their subclasses within the same managed element.

Within one network operators environment preferably only one of those two possibilities of instantiating the meteringCounterPkg should be chosen.

This object class is not instantiated.

Table 1

Name	M/C/O	Value Set
lineTestCapability	C	single
meteringCounter	C	single
localDefinedNumber	O	single
lineTestCapability	is present if this access port is equipped with line test facilities. It can have two values: 1) TRUE: line test is allowed; and 2) FALSE: line test is not allowed.	
meteringCounter	gives the current value of the metering counter for charging.	
localDefinedNumber	is an identifier for the access port that is used if in a configuration the port itself is not associated with a E.164 directory number.	

6.1.2.3 ETSI access port analogue

The etsiAccessPortAnalogue object class is the conventional two-wire loop access to a basic telephone set. An analogue access port can be thought of as possessing only one access channel with a bearer capability of speech.

It is derived from etsiAccessPort. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

This information model only covers the aspect of relationship of a customer configuration to a semi permanent connection. The semi permanent connection as such might e.g. be modelled by using the M3100:crossConnection object class or a subclass of it. If the semi permanent connection as such is managed by this means, the semipermanentLine attribute should not be used. Instead, the information whether a customer configuration is involved in a semi permanent line can be retrieved by reading the crossConnection object pointer attribute.

Table 2

Name	M/C/O	Value Set
lineSignalling	M	single
lineCharacteristics	M	single
thirdWireEquipment	O	single
directionality	C	single
semipermanentLine	C	single
lineSignalling		specifies which signalling the analogue access port uses for the line (e.g. Dual Tone Multi Frequency (DTMF) or pulse dialling).
lineCharacteristics		specifies the transmission characteristics of the analogue line (e.g. attenuation). The following values shall be assigned: 0: short line (with attenuation) 1: long line (without attenuation) Other values are for implementation specific use.
thirdWireEquipment		specifies whether the analogue access port supports control of external equipment via a third wire. This attribute specifies the capability of the analogue access port, it does not represent subscription to a service requiring this capability (e.g. private customer meter).
directionality		indicates the directionality (incoming, outgoing, bothways, where bothways is default value)
semipermanentLine		indicates whether this entity is related to a semipermanent line (TRUE) or not (FALSE).

6.1.2.4 ETSI access port digital

The etsiAccessPortDigital object class represents the termination of any non-ISDN digital access.

It is derived from etsiAccessPort. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

No specific attributes were identified.

6.1.2.5 ETSI access port ISDN basic rate

The etsiAccessPortISDNBasicRate is derived etsiAccessPort. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

The etsiAccessPortISDNBasicRate object class supports up to 2 B-channels of 64 kbit/s for transfer of information and data and 1 D-channel of 16 kbit/s for signalling and data transfer (2 B + D).

Table 3

Name	M/C/O	Value Set
dChannelLayer1Activation	M	single
dChannelLayer2Activation	M	single
dChannelLayer1Activation, dChannelLayer2Activation		specifies whether layers one and/or two have to be held active.

6.1.2.6 ETSI access port ISDN primary rate

The etsiAccessPortISDNPrimaryRate is derived etsiAccessPort. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

The etsiAccessPortISDNPrimaryRate object class supports up to 30 B-channels of 64 kbit/s for transfer of information and data and 1 D-channel of 64 kbit/s for signalling and data transfer (30 B + D).

Table 4

Name	M/C/O	Value Set
dChannelLayer2Activation actingRole	M C	single single
dChannelLayer2Activation actingRole		specifies whether layer two has to be held active. specifies whether this access port is able to play the primary and/or secondary role.

6.1.2.7 Access channel

The accessChannel object class is defined in ITU-T Recommendation Q.824.0 [46]. It represents an individual ISDN B-channel or D-channel of an ISDN access port or an individual channel of a digital access port. This object class is a specialization of the bi-directional connection termination point object class defined in CCITT Recommendation M.3100 [45].

The number of access channels belonging to an access port depends on the access port architecture. This object class may be related to a set of customizedResource when services shall be provisioned on a per access channel basis.

6.1.2.8 ETSI access channel

The etsiAccessChannel is derived from ITU-T Recommendation Q.824.0 [46]: accessChannel. It represents an individual ISDN B-channel or D-channel of an ISDN access port or an individual channel of a digital access port.

It identifies the set of attributes which apply in common to all types of ISDN and digital access channels. Instances of this object class are contained within ISDN or digital access ports.

This information model only covers the aspect of relationship of a customer configuration to a semi permanent connection. The semi permanent connection as such might e.g. be modelled by using the CCITT Recommendation M.3100 [45]: crossConnection object class or a subclass of it. If the semi permanent connection as such is managed by this means, the semipermanentLine attribute should not be used. Instead, the information whether a customer configuration is involved in a semi permanent line can be retrieved by reading the crossConnection object pointer attribute.

Table 5

Name	M/C/O	Value Set
channelType	M	single
"ITU-T Recommendation M.3100: 1995":channelNumber	M	single
directionality	C	single
semipermanentLine	C	single
channelType		specifies the channel type (e.g. ISDN D-channel, non-ISDN channel)
channelNumber		identifies the channel within the access port (e.g. 1 = first B-channel of an ISDN access).
directionality		indicates the directionality (incoming, outgoing, bothways, where bothways is default value)
semipermanentLine		indicates whether this entity is related to a semipermanent line (TRUE) or not (FALSE).

6.1.2.9 Access port profile

The accessPortProfile object class is defined in ITU-T Recommendation Q.824.0 [46].

The accessPortProfile object class (and its subclasses) represents those aspects of an exchange access that cannot be configured until subscription at which time the mode in which the access port is to be used by the customer is known.

6.1.3 V5 interface fragment

ETS 300 377-1 [59] covers the configuration management of V5 interfaces and associated customer profiles. Since the customer administration related part of it was based on I-ETS 300 291 which is replaced by the present document, hereafter a re-definition of the affected object classes is given. The corresponding labels are extended by "R1".

6.1.3.1 Virtual access port

A virtualAccessPortR1 is an object class representing an image of the customer access port which is located in an AN and connected to the LE via V5 interface. It is a subclass of etsiAccessPort and used for provisioning services to the customer.

The upstreamConnectivityPointer and the downstreamConnectivityPointer attributes have NULL value.

The inherited operationalStatePackage is mandatory in this object class.

The operationalState attribute indicates whether or not the user port is able to provide its service to the customer's terminal equipment. It reflects the states of the user port Finite State Machine (FSM) in the LE according to annex A of ETS 300 377-1 [59].

An access port may have assigned one or more bearer time slots and/or one or more C-paths providing transport for different data types (bearer, signalling, f-type, p-type). The operationalState attribute shall be set to "enabled" as long as the port has access to any service, and if there are no other contradictory conditions.

The operationalState attribute shall be set to "disabled" if an access port has no service at all, i.e. the V5 interface itself or the related ISDN Ds or the PSTN C-path has failed.

The assocV5Interface attribute gives the relation to the V5 interface, that virtual access port is assigned to. It is a group relationship attribute according to CCITT Recommendation X.732 [57]. The V5 interface is the owner object.

The relationships are maintained by use of the setReciprocalPointers and releaseReciprocalPointers actions of the v5Interface object class.

If the CCITT Recommendation M.3100 [45]: tmnCommunicationsAlarmInformationPackage is instantiated, then the communicationsAlarm notification shall be used to report errors related to this object class. The errors to be reported and the usage of the alarm report parameters are specified in ETS 300 379-1.

This object class is subclassed for the different types of virtual access ports and not instantiated within the scope of this application.

Table 6

Name	M/C/O	Value Set
"ETS 300 377-1 (1995)":assocV5Interface	M	single
assocV5Interface		gives the relation to the V5 interface, that virtual access port is assigned to. It is a group relationship attribute according to CCITT Recommendation X.732 [57]. The V5 interface is the owner object.

6.1.3.2 Virtual analogue access

A virtualAnalogueAccessR1 is an information entity used for the association of a PSTN customer's layer 3 port address with a V5.1/V5.2 interface. It is a specialization of the virtualAccessPortR1 object class.

If no virtualAccessChannelR1 object instance is contained in the virtualAnalogueAccessR1 object instance in the case of a V5.1 interface, the assocV5TimeSlot attribute points to the associated V5 time slot object instance. Otherwise it has NULL value. It is a peer relationship according to CCITT Recommendation X.732 [57]. The V5 time slot is provider.

Table 7

Name	M/C/O	Value Set
"ETS 300 377-1 (1995)":layer3PortAddress	M	single
"ETS 300 377-1 (1995)":assocV5TimeSlot	M	single
lineSignalling	M	single
directionality	C	single
semipermanentLine	C	single
layer3PortAddress		gives the layer 3 port address the analogue access is assigned to.
assocV5TimeSlot		points to the associated V5 time slot object instance in the case of a V5.1 interface. It is a peer relationship according to CCITT Recommendation X.732 [57].
lineSignalling		specifies which signalling the analogue access port uses for the line (e.g. Dual Tone Multi Frequency (DTMF) or pulse dialling).
directionality		indicates the directionality (incoming, outgoing, bothways, where bothways is default value)
semipermanentLine		indicates whether this entity is related to a semipermanent line (TRUE) or not (FALSE).

6.1.3.3 Virtual basic rate access

A virtualBasicRateAccessR1 is an information entity used for the association of an envelope function address representing an ISDN basic access with a V5.1/V5.2 interface. It is a specialization of the virtualAccessPortR1 object class.

Table 8

Name	M/C/O	Value Set
dChannelLayer1Activation	M	single
dChannelLayer2Activation	M	single
"ETS 300 377-1 (1995)":envelopeFunctionAddress	M	single
"ETS 300 377-1 (1995)":assocV5TimeSlotB1	M	single
"ETS 300 377-1 (1995)":assocV5TimeSlotB2	M	single
"ETS 300 377-1 (1995)":assocIsdnSignallingCommPath	M	single
"ETS 300 377-1 (1995)":assocPacketCommPath	M	single
"ETS 300 377-1 (1995)":assocFrameCommPath	M	single
dChannelLayer1Activation, dChannelLayer2Activation		specifies whether layers one and/or two have to be held active.
envelopeFunctionAddress		gives the envelope function address the basic access is assigned to.
assocV5TimeSlotB1, assocV5TimeSlotB2		indicates for B-channel 1 or 2 the associated V5 time slot object instance, if no virtual access channel object instance is contained in the virtual basic rate access object instance in the case of a V5.1 interface. It is a peer relationship according to CCITT Recommendation X.732 [57].
assocIsdnSignallingCommPath		points to the associated ISDN communication path carrying the signalling messages of the assigned ISDN access. It is a group relationship according to CCITT Recommendation X.732 [57]. The ISDN communication path is owner.
assocPacketCommPath		points to the associated ISDN communication path carrying the D-channel packet mode data of the assigned ISDN access if the customer has subscribed to this service. It is a group relationship according to CCITT Recommendation X.732 [57]. The ISDN communication path is owner.
assocFrameCommPath		points to the associated ISDN communication path carrying the D-channel frame mode data of the assigned ISDN access if the customer has subscribed to this service. It is a group relationship according to CCITT Recommendation X.732 [57]. The ISDN communication path is owner.

6.1.3.4 Virtual Leased Access

A virtualLeasedAccessR1 is an information entity used for the association of a single analogue or digital semipermanent leased line or a multiple digital semipermanent leased line configuration with a V5.1/V5.2 interface. It is a specialization of the virtualAccessPortR1 object class.

If it is a single semipermanent leased line, and if no virtualAccessChannelR1 object instance is contained in the virtualLeasedAccessR1 object instance, and if it is associated with a V5.1 interface, the assocV5TimeSlot attribute points to the associated V5 Time Slot object instance. Otherwise it has NULL value. It is a peer relationship according to CCITT Recommendation X.732 [57]. The relationship shall be maintained by use of the setReciprocalPointer and releaseReciprocalPointer actions of the V5 Interface object class.

A virtualLeasedAccessR1 object instance representing a single semipermanent leased line shall contain either no or one object instance. In a multiple semipermanent leased line configuration, the virtualLeasedAccessR1 object instance shall contain the appropriate number of virtualAccessChannelR1 object instances.

The v5UserPortAddress attribute gives for a single semipermanent leased line the layer 3 port address the access is assigned to, otherwise it gives the envelope function address.

Table 9

Name	M/C/O	Value Set
"ETS 300 377-1 (1995)":v5UserPortAddress	M	single
"ETS 300 377-1 (1995)":assocV5TimeSlot	M	single
v5UserPortAddress		gives for a single semipermanent leased line the layer 3 port address the access is assigned to, otherwise it gives the envelope function address.
assocV5TimeSlot		points to the associated V5 Time Slot object instance in the case of a V5.1 interface. It is a peer relationship according to CCITT Recommendation X.732 [57].

6.1.3.5 Virtual primary rate access

A virtualPrimaryRateAccessR1 is an information entity used for the association of an envelope function address representing an ISDN primary rate access with a V5.2 interface. It is a specialization of the virtualAccessPortR1 object class.

Table 10

Name	M/C/O	Value Set
dChannelLayer2Activation	M	single
"ETS 300 377-1 (1995)":envelopeFunctionAddress	M	single
"ETS 300 377-1 (1995)":assocIsdnSignallingCommPath	M	single
"ETS 300 377-1 (1995)":assocPacketCommPath	M	single
"ETS 300 377-1 (1995)":assocFrameCommPath	M	single
actingRole	C	single
dChannelLayer2Activation		specifies whether layer two has to be held active.
envelopeFunctionAddress		gives the envelope function address the primary rate access is assigned to.
assocIsdnSignallingComm-Path		points to the associated ISDN communication path carrying the signalling messages of the assigned ISDN access. It is a group relationship according to CCITT Recommendation X.732 [57]. The ISDN communication path is owner.
assocPacketCommPath		points to the associated ISDN communication path carrying the D-channel packet mode data of the assigned ISDN access if the customer has subscribed to this service. It is a group relationship according to CCITT Recommendation X.732[57]. The ISDN communication path is owner.
assocFrameCommPath		points to the associated ISDN communication path carrying the D-channel frame mode data of the assigned ISDN access if the customer has subscribed to this service. It is a group relationship according to CCITT Recommendation X.732 [57]. The ISDN communication path is owner.
actingRole		specifies whether this access port is able to play the primary and/or secondary role.

6.1.3.6 Virtual access channel

A virtualAccessChannelR1 is an object class representing an individual ISDN B-/D-channel of an ISDN access port, or the bearer channel for an analogue access port, or an individual channel of an access port for a semipermanent leased line. It is a subclass of etsiAccessChannel.

Table 11

Name	M/C/O	Value Set
"ETS 300 377-1 (1995)":permanentLineReservation	M	single
"ETS 300 377-1 (1995)":assocV5TimeSlot	M	single
permanentLineReservation assocV5TimeSlot		indicates whether this access channel is reserved as permanent line or not. points to the associated V5 time slot object instance if the channel type is an ISDN B-channel or a channel of a non-ISDN access in the case of a V5.1 interface. It is a peer relationship according to CCITT Recommendation X.732 [57].

6.1.3.7 V5 bearer channel reservation

The assignment of a V5 bearer channel reservation object instance to a customized resource indicates that a fixed assignment of bearer channels of a V5.2 interface is made for a customer. Which V5 time slot is assigned is controlled by the resource manager but visible at the Q3 interfaces.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

Table 12

Name	M/C/O	Value Set
"ETS 300 377-1 (1995)":noOfBcRequested	M	single
"ETS 300 377-1 (1995)":bcReserved	M	set
noOfBcRequested bcReserved		indicates the number of bearer channels requested for reservation. indicates in a set of octets 3 and 4 of V5 time slot identification information elements which time slots are actually assigned by the BCC protocol.

6.1.3.8 V5 leased line reservation

The assignment of a V5 leased line reservation object instance to a customized resource indicates that a fixed assignment of the bearer channel of a V5 interface is made for a customer. It is used either for analogue semipermanent leased lines without signalling or for digital semipermanent leased lines without signalling. Which V5 time slot in the case of a V5.2 interface is assigned is controlled by the resource manager but visible at the Q3 interface.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

Table 13

Name	M/C/O	Value Set
"ETS 300 377-1 (1995)":bcReserved	M	set
bcReserved		indicates in a set of octets 3 and 4 of V5 time slot Identification information elements which time slots are actual assigned by the BCC protocol.

6.1.4 Directory number fragment

6.1.4.1 Directory number

The directoryNumber object class is a resource in its own right. It is a constituent part of the user interface and is directly related to one or more dialling plans being part of the managed element. DNs may be assigned to an individual customer independently of the access port architecture and subscription service type. A directoryNumber object instance may be associated with one or more customerProfile object instances. A directoryNumber object instance may be associated with several customizedResource instances. This association is used to represent the services and ports provisioned for the directory number.

The directoryNumber object class is defined in ITU-T Recommendation Q.824.0 [46]. It has no instantiations of itself.

6.1.4.2 ETSI directory number E.164

The etsiDirectoryNumberE164 represents directory numbers belonging to the ISDN numbering plan defined in CCITT Recommendation E.164 [43].

Both etsiDirectoryNumberE164 and etsiAccessPort have the conditional package meteringCounterPkg containing the meteringCounter attribute. This package shall only be instantiated with one of these two object classes or their subclasses within the same managed element.

Within one network operators environment preferably only one of those two possibilities of instantiating the meteringCounterPkg should be chosen.

Table 14

Name	M/C/O	Value Set
etsiE164DirectoryNumber	M	single
"ITU-T Recommendation Q.824.0 [46]":interceptTreatmentTerm	M	single
meteringCounter	C	single
routeingInformation	C	single
etsiE164DirectoryNumber		represents the ISDN number according to the ISDN numbering plan defined in CCITT Recommendation E.164 [43]. It is composed of two fields: country code (optional); national significant number. The national significant number is itself composed of two fields: national destination code (optional); customer number.
interceptTreatmentTerm		specifies the treatment (e.g. announcement) to be provided for an unconnected directory number.
meteringCounter		gives the current value of the metering counter for charging.
routeingInformation		gives the directory number porting information. If this attribute is empty string, the directory number is not ported. If it has NULL value, the routeing information is to be retrieved from another server (e.g. IN SCP). In all other cases, the information relevant for routeing is given.

6.1.4.3 Directory number X.121

The directoryNumberX121 object class characterizes the ITU-T Recommendation X.121 [51] packet switched directory number resource.

The directoryNumberX121 object class is defined in ITU-T Recommendation Q.824.0 [46].

6.1.5 Customer profile fragment

6.1.5.1 Customer profile

The customerProfile object class represents a single point of reference used to bind together a range of services and resources for customer administration purposes. it is a class of managed objects representing the characteristics of the directory number(s) assigned to an individual customer, independent of the access type and bearer service. each instance of the customer profile object class includes a directory number pointer list attribute that represents the directory number(s) assigned to the customerProfile object and an accessPortProfilePointerList attribute that represents access port profile(s) also assigned to the customerProfile object.

The customerProfile object class is defined in ITU-T Recommendation Q.824.0 [46].

6.1.5.2 ETSI customer profile

The ETSI customer profile object class provides a single point of reference for a customers installation to one or more ISDN, analogue, digital, and/or CTM lines. An instance of a etsiCustomerProfile subclass may be related to zero, one, or more instances of accessPortProfile and/or one instance of etsiDirectoryNumberE164.

The etsiCustomerProfile object class is not instantiated.

Table 15

Name	M/C/O	Value Set
customerType	M	single
customerCategory	M	single
"CCITT Recommendation X.721: 1992":administrativeState	M	single
„EN 300 292 (1998)":originForRouteing	C	single
originForCharging	C	single
„EN 300 292 (1998)":originForAnalysis	C	single
customerType		specifies whether the customer profile is for a single line or for a multi-line customer.
customerCategory		The customer category attribute identifies the customer as being for instance: a standard customer; a coin box; a mobile customer; a test equipment; an operator, etc.
administrativeState		is defined in CCITT Recommendation X.721 [53]. It indicates the current administrative state of the customer profile.
originForRouteing		groups customer profiles for call routeing purposes as defined in EN 300 292 [43].
originForCharging		groups customer profiles for charging and/or tariffing purposes.
originForAnalysis		groups customer profiles for digit analysis purposes within the call routeing context as defined in EN 300 292 [43].

6.1.5.3 Analogue customer profile

This object class is the reference point for the services, directory numbers, and access ports being part of the related profile. Only accessPortAnalogue shall be associated via the appropriate accessPortProfile instances with this object class.

No specific attributes were identified.

6.1.5.4 Digital customer profile

This object class is the reference point for the services, directory numbers, and access ports being part of the related profile. Only accessPortDigital shall be associated via the appropriate accessPortProfile instances with this object class.

No specific attributes were identified.

6.1.5.5 ISDN customer profile

This object class is the reference point for the services, directory numbers, and access ports being part of the related profile. Only accessPortISDNBasicRate/accessPortISDNPrimaryRate shall be associated via the appropriate accessPortProfile instances with this object class.

No specific attributes were identified.

6.1.5.6 Customized Resource

The customizedResource object class is defined in ITU-T Recommendation Q.824.0 [46].

6.1.5.7 ETSI customized Resource

The etsiCustomizedResource object class allows refinement of the service provisioning for a customer. It allows association of a set of services to:

- one or more access ports;
- one or more DNs;
- one or more access channels.

The channels may span more than one access port. The etsiCustomizedResource object class also allows association between DNs and access ports without any services associated with them.

The etsiCustomizedResource object class is needed when a service is applicable only to a subset of access ports, access channels or DNs. It is not needed when all the services specified are applicable to all the access ports, access channels and DNs.

Table 16

Name	M/C/O	Value Set
supplementaryServiceServiceDependentPtrList	M	set
supplementaryServiceServiceIndependentPtrList	M	set
supplementaryService-ServiceDependentPtrList		points to the associated supplementaryServiceServiceDependent object instances.
supplementaryService-ServiceIndependentPtrList		points to the associated supplementaryServiceServiceIndependent object instances.

6.1.6 Bearer service fragment

6.1.6.1 Bearer service

This object class is defined in ITU-T Recommendation Q.824.0 [46].

This object class contains the characteristics common to all bearer services as defined in CCITT Recommendation I.210 [44]. A bearer service may be associated with a set of supplementary services.

This object class is not instantiated.

6.1.6.2 ETSI bearer service

This object class is derived from ITU-T Recommendation Q.824.0 [46]: bearerService.

The ITU-T Recommendation Q.824.0 [46]: numberOfChannelsPkg and the ITU-T Recommendation Q.824.0 [46]: bearerSignallingPkg shall not be instantiated with subclasses of this object class.

The references of its subclasses to the service describing standards are given in annex A.

This object class is not instantiated.

Table 17

Name	M/C/O	Value Set
primaryInterexchangeCarrier	C	single
primaryInterexchangeCarrier		gives the primary inter exchange carrier.

6.1.6.3 Circuit mode 3,1 kHz audio

This object class is a specialization of the etsiBearerService object class and defines the "3,1 kHz audio" bearer service.

This bearer service shall be used for analogue customers.

Table 18

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.1 (1996)":networkProvidedTone	C	single
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
networkProvidedTone		indicates that tones and/or announcements are to be provided by the network to indicate the progress or otherwise the status of a call.
maxNumOfInfoChannels		gives the maximum number of information channels.
maxNumOfTotalCalls		gives the maximum number of total calls.

6.1.6.4 Circuit mode 64 kbit/s unrestricted

This object class is a specialization of the etsiBearerService object class and defines the "64 kbit/s unrestricted" bearer service.

Table 19

Name	M/C/O	Value Set
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
maxNumOfInfoChannels		gives the maximum number of information channels.
maxNumOfTotalCalls		gives the maximum number of total calls.

6.1.6.5 ETSI packet B channel

This object class is a specialization of the etsiBearerService object class and defines the packet mode bearer service running over a B channel.

According to ETS 300 007[62], the value of the notificationClass attribute shall be restricted to noNotificationClass and conditionalNotification respectively.

Table 20

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.1 (1996)": notificationClass	C	single
"ITU-T Recommendation Q.824.1 (1996)": layer2InfoEntityPtr	C	single
"ITU-T Recommendation Q.824.1 (1996)": layer3InfoEntityPtr	C	single
maxNumOfInfoChannels	C	single
notificationClass		indicates whether the packet mode bearer service is with "noNotificationClass" or "conditionalNotification" respectively.
layer2InfoEntityPtr, layer3InfoEntityPtr		point to the appropriate "ITU-T Recommendation Q.824.0 (1996)":layerEntity subclass instance.
maxNumOfInfoChannels		gives the maximum number of information channels.

6.1.6.6 ETSI packet D channel

This object class is a specialization of the etsiBearerService object class and defines packet mode bearer service running over a D channel .

According to ETS 300 007 [62], the value of the notificationClass attribute shall be restricted to noNotificationClass and conditionalNotification respectively.

Table 21

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.1 (1996)": notificationClass	C	single
"ITU-T Recommendation Q.824.1 (1996)": layer2InfoEntityPtr	C	single
"ITU-T Recommendation Q.824.1 (1996)": layer3InfoEntityPtr	C	single
notificationClass	indicates whether the packet mode bearer service is with "noNotificationClass" or "conditionalNotification" respectively.	
layer2InfoEntityPtr, layer3InfoEntityPtr	point to the appropriate "ITU-T Recommendation Q.824.0 (1996)":layerEntity subclass instance.	

6.1.6.7 Layer entity

The layerEntity object class is defined in ITU-T Recommendation Q.824.0 [46].

Its subclasses layerEntityLAPB, layerEntityLAPD, layerEntityX25PLP, and layerEntityX25PLPShared are defined in ITU-T Recommendation Q.824.1 [47].

6.1.6.8 Multiple rate unrestricted

This object class is a specialization of the etsiBearerService object class and defines the "multiple rate unrestricted" bearer service.

Table 22

Name	M/C/O	Value Set
maxNumOfInfoChannels	C	single
maxNumOfInfoChannels	gives the maximum number of information channels.	

6.1.6.9 Speech

This object class is a specialization of the etsiBearerService object class and defines the "speech" bearer service.

Table 23

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.1 (1996)":networkProvidedTone	C	single
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
networkProvidedTone	indicates that tones and/or announcements are to be provided by the network to indicate the progress or otherwise the status of a call.	
maxNumOfInfoChannels	gives the maximum number of information channels.	
maxNumOfTotalCalls	gives the maximum number of total calls.	

6.1.6.10 Unrestricted digital info with tones/announcements (7 kHz audio)

This object class is a specialization of the etsiBearerService object class and defines the "unrestricted digital info with tones/announcements" bearer service.

Table 24

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.1 (1996)":networkProvidedTone	C	single
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
networkProvidedTone	indicates that tones and/or announcements are to be provided by the network to indicate the progress or otherwise the status of a call.	
maxNumOfInfoChannels	gives the maximum number of information channels.	
maxNumOfTotalCalls	gives the maximum number of total calls.	

6.1.7 Teleservice fragment

6.1.7.1 Teleservice

This object class is defined in ITU-T Recommendation Q.824.0 [46].

It contains the characteristics common to all teleservices as defined in CCITT Recommendation I.210 [44]. A teleservice may or may not be associated with a set of supplementary services.

This object class is not instantiated.

6.1.7.2 ETSI teleservice

This object class is derived from "ITU-T Recommendation Q.824.0 [46]":teleservice.

The "ITU-T Recommendation Q.824.0 [46]": cataloguedTeleservicePtrPkg and the "ITU-T Recommendation Q.824.0 [46]": layerInfoPkg shall not be instantiated with subclasses of this object class.

The bearerServicePtr attribute shall only point to object instances representing bearer services which are permitted to be related to a teleservice represented by the instance of this object class, regarding EN 300 196-1 [1]. Otherwise, it shall be empty string.

The references of its subclasses to the service describing standards are given in annex A.

This object class is not instantiated.

6.1.7.3 Telefax group 4

This object class is a specialization of the etsiTeleservice object class and defines the telefax group 4 teleservice.

Table 25

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.4 (1996)": telefaxClass	M	single
telefaxClass		gives the assigned telefax class

6.1.7.4 Telephony 3,1 kHz

This object class is a specialization of the etsiTeleservice object class and defines the telephony 3,1 kHz teleservice.

Table 26

Name	M/C/O	Value Set
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
maxNumOfInfoChannels		gives the maximum number of information channels.
maxNumOfTotalCalls		gives the maximum number of total calls.

6.1.7.5 Telephony 7 kHz

This object class is a specialization of the etsiTeleservice object class and defines the telephony 7 kHz teleservice.

Table 27

Name	M/C/O	Value Set
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
maxNumOfInfoChannels		gives the maximum number of information channels.
maxNumOfTotalCalls		gives the maximum number of total calls.

6.1.7.6 Videotelephony

This object class is a specialization of the etsiTeleservice object class and defines the videotelephony teleservice.

Table 28

Name	M/C/O	Value Set
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
maxNumOfInfoChannels	gives the maximum number of information channels.	
maxNumOfTotalCalls	gives the maximum number of total calls.	

6.1.7.7 Videotex

This object class is a specialization of the etsiTeleservice object class and defines the videotex teleservice.

Table 29

Name	M/C/O	Value Set
maxNumOfInfoChannels	C	single
maxNumOfTotalCalls	C	single
maxNumOfInfoChannels	gives the maximum number of information channels.	
maxNumOfTotalCalls	gives the maximum number of total calls.	

6.1.8 Service dependent supplementary service fragment

A supplementary service is considered being service dependent, if it is configurable on a per teleservice and/or bearer service basis according to the underlying service definitions. Configurability does not only mean the presence of attributes, but may as well be given by presence or absence of respective supplementary service instances in a service configuration.

If in future additional requirements arise, the need might occur to redefine a supplementary service given hereafter as service independent.

It is to be regarded that services defined hereafter may apply both to ISDN and PSTN.

6.1.8.1 Supplementary service service dependent

This object class is defined in ITU-T Recommendation Q.824.0 [46].

It represents the supplementary services providing additional capabilities to be used with a basic telecommunication service.

This object class is not instantiated.

6.1.8.2 Customized supplementary service

This object class is derived from "ITU-T Recommendation Q.824.0 (1996)": supplementaryServiceServiceDependent.

It represents the supplementary services providing additional capabilities to be used with a basic telecommunication service. It may represent:

- an ISDN supplementary service as defined in ETSI;
- a CEPT supplementary service as defined in the CEPT Handbook on services and facilities [58];
- a non-standard supplementary service, i.e. operator-specific service.

A customized supplementary service may be related with a bearer service or teleservice thereby supplementing this service.

The references of its subclasses to the service describing standards are given in annex A.

This object class is not instantiated.

Table 30

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.0 (1996)":customizedResourcePtrList	M	set
customizedResourcePtrList	is a set-valued attribute whose value(s) points to the associated customizedResource object instances	

6.1.8.3 Absent customer fixed announcement

The absent customer fixed announcement supplementary service provides the possibility for a subscriber to divert his incoming calls to a fixed announcement.

The priority of the different call forwarding services is subject to the implementation of the exchange.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.4 Absent customer operator position

The absent customer operator position supplementary service provides the possibility for a subscriber to divert his incoming calls to an operator position.

The priority of the different call forwarding services is subject to the implementation of the exchange.

This object class is derived from customizedSupplementaryService.

Table 31

Name	M/C/O	Value Set
forwardImmediately	M	single
forwardImmediately	indicates call forward immediately (TRUE) or call forward on no reply (FALSE).	

6.1.8.5 Absent customer predetermined announcement

The absent customer fixed predetermined announcement supplementary service provides the possibility for a subscriber to divert his incoming calls to a predetermined announcement.

The priority of the different call forwarding services is subject to the implementation of the exchange.

This object class is derived from customizedSupplementaryService.

Table 32

Name	M/C/O	Value Set
announcementNumber	M	single
announcementNumber	gives the announcement number (INTEGER). Which announcement corresponds with an announcement number is a matter of local implementation.	

6.1.8.6 Advice of charge: charging information at call set-up time

This supplementary service provides the served user with information about the charging rates at call establishment. In addition, the served user shall be informed if a change in charging rates takes place during the call. The information can be sent for all calls, or on a per call basis. The charge information given shall relate to the charges incurred on the network to which the served user is attached.

This object class is derived from customizedSupplementaryService.

Table 33

Name	M/C/O	Value Set
adviceOfChargeActivation	M	single
adviceOfChargeActivation		is a flag indicating whether the service is available for all calls automatically or on a per call basis

6.1.8.7 Advice of charge: charging information at the end of the call

This supplementary service provides the served user with charging information for a call when the call is terminated. The information can be sent for all calls, or on a per call basis. The charge information given relates to the charges incurred on the network to which the served user is attached.

This object class is derived from customizedSupplementaryService.

Table 34

Name	M/C/O	Value Set
adviceOfChargeActivation	M	single
adviceOfChargeActivation		is a flag indicating whether the service is available for all calls automatically or on a per call basis

6.1.8.8 Advice of charge: charging information during the call

This supplementary service provides the served user with cumulative charging information during the call. The information can be sent for all calls, or on a per call basis. The charge information given relates to the charges incurred on the network to which the served user is attached.

This object class is derived from customizedSupplementaryService.

Table 35

Name	M/C/O	Value Set
adviceOfChargeActivation	M	single
adviceOfChargeActivation		is a flag indicating whether the service is available for all calls automatically or on a per call basis

6.1.8.9 Alarm call

The alarm call supplementary service provides the possibility for a user to cause an alarm call or calls to be made to his line at the time or times specified in advance to him, and to hear an appropriate announcement when the call is answered.

An instance of this object class shall be automatically deleted if all related alarm calls are performed and if it is contained in a customer configuration.

Its failedAlarmCall notification indicates directory number, date, time and reason of unsuccessful alarm calls (e.g. due to absent subscriber, busy line, etc.).

This object class is derived from customizedSupplementaryService.

Table 36

Name	M/C/O	Value Set
timeOfDay	M	single
date	M	single
kindOfAlarmCall	M	single
alarmCallType	M	single
timeOfDay		gives the time of day (hours and minutes) for the execution of the alarm call.
date		gives the date (year, month, and day) for the (first) execution of the alarm call.
kindOfAlarmCall		gives the kind of alarm call (manual, automatic, semi automatic).
alarmCallType		gives the type of alarm call (casual, regular consecutive days, regular specified days) and the related program if the type is not casual.

6.1.8.10 Blocking

This object class gives the reason(s) for which a subscriber or a service is blocked. The accessibility of e.g. emergency numbers during blocking conditions is an implementation matter.

It is derived from customizedSupplementaryService.

Table 37

Name	M/C/O	Value Set
adminBlocking	M	single
maintBlocking	M	single
accountSuspension	M	single
catastrophe	M	single
adminBlocking		gives the blocking direction for administrative blocking (none, incoming, outgoing, bothways)
maintBlocking		gives the blocking direction for maintenance blocking (none, incoming, outgoing, bothways)
accountSuspension		gives the blocking direction for blocking (none, incoming, outgoing, bothways) due to non-payment
catastrophe		indicates the preference category of the access during catastrophe

6.1.8.11 Call deflection

This service enables the subscriber to respond to an incoming call by requesting redirection of that call to another subscriber.

This object class is derived from customizedSupplementaryService.

Table 38

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.2 (1996)":deflectingNumberDelivery	M	single
etsiDeflectingNumberNotification	M	single
deflectingNumberDelivery		is a Boolean attribute indicating the subscription option of allowing whether the a serviced user is permitted to release his directory number to the deflected-to terminal (TRUE) or not (FALSE)
etsiDeflectingNumberNotification		indicates the subscription option of whether a calling user receives notification that his call has been deflected (1) or not (0). In the case the use is to be notified, the deflected to number may be sent to the originator of the call (2)

6.1.8.12 Call forwarding busy

This supplementary service permits a served user to have the network send all incoming calls, which meet busy and are addressed to the served user's number, to another number. The served user's originating service is unaffected.

This object class is derived from customizedSupplementaryService.

Table 39

Name	M/C/O	Value Set
etsiE164DirectoryNumber	M	single
callForwardActiveNotification	M	single
callForwardCallingNotification	M	single
callForwardReleaseNotification	M	single
callForwardServedNotification	M	single
etsiE164DirectoryNumber		represents the ISDN number according to the ISDN numbering plan defined in CCITT Recommendation E.164 [43]. It is composed of two fields: country code (optional); national significant number. The national significant number is itself composed of two fields: national destination code (optional); customer number.
callForwardActiveNotification		is a flag indicating whether the served user is to be notified that call forwarding is active
callForwardCallingNotification		is a flag indicating whether the calling user is to be notified that his call has been forwarded
callForwardReleaseNotification		is a flag indicating whether served user releases number information to forwarded-to user
callForwardServedNotification		is a flag indicating whether served user receives notification that a call has been forwarded

6.1.8.13 Call forwarding unconditional

This supplementary service permits a served user to have the network send all incoming calls addressed to the served user's number, to another number. The served user's originating service is unaffected. If this service is activated, calls are forwarded no matter what the condition of the termination.

This object class is derived from customizedSupplementaryService.

Table 40

Name	M/C/O	Value Set
etsiE164DirectoryNumber	M	single
callForwardActiveNotification	M	single
callForwardCallingNotification	M	single
callForwardReleaseNotification	M	single
callForwardServedNotification	M	single
etsiE164DirectoryNumber		represents the ISDN number according to the ISDN numbering plan defined in CCITT Recommendation E.164 [43]. It is composed of two fields: country code (optional); national significant number. The national significant number is itself composed of two fields: national destination code (optional); customer number.
callForwardActiveNotification		is a flag indicating whether the served user is to be notified that call forwarding is active
callForwardCallingNotification		is a flag indicating whether the calling user is to be notified that his call has been forwarded
callForwardReleaseNotification		is a flag indicating whether served user releases number information to forwarded-to user
callForwardServedNotification		is a flag indicating whether served user receives notification that a call has been forwarded

6.1.8.14 Call forwarding no reply

This supplementary service permits a served user to have the network send all incoming calls, which meet no reply and are addressed to the served user's number, to another number. The served user's originating service is unaffected.

This object class is derived from customizedSupplementaryService.

Table 41

Name	M/C/O	Value Set
etsiE164DirectoryNumber	M	single
callForwardActiveNotification	M	single
callForwardCallingNotification	M	single
callForwardReleaseNotification	M	single
callForwardServedNotification	M	single
etsiE164DirectoryNumber		represents the ISDN number according to the ISDN numbering plan defined in CCITT Recommendation E.164 [43]. It is composed of two fields: country code (optional); national significant number. The national significant number is itself composed of two fields: national destination code (optional); customer number.
callForwardActiveNotification		is a flag indicating whether the served user is to be notified that call forwarding is active
callForwardCallingNotification		is a flag indicating whether the calling user is to be notified that his call has been forwarded
callForwardReleaseNotification		is a flag indicating whether served user releases number information to forwarded-to user
callForwardServedNotification		is a flag indicating whether served user receives notification that a call has been forwarded

6.1.8.15 Call hold

This supplementary service allows a user to interrupt communications on an existing call and then subsequently, if desired, re-establish communications.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.16 Call waiting

This supplementary service permits a user to be informed of an incoming call with an indication when all access to the user is busy. The user then has the choice of accepting, rejecting, or ignoring the waiting call.

This object class is derived from customizedSupplementaryService.

Table 42

Name	M/C/O	Value Set
callWaitingCallingNotification	M	single
maxNumberOfWaitingCalls	M	single
callWaitingCallingNotification		is a flag indicating whether the calling user is to be notified that his call is waiting.
maxNumberOfWaitingCalls		gives the maximum number of calls that can be waiting.

6.1.8.17 Calling line identification presentation

This supplementary service provides the called party with the possibility of receiving identification of the calling party. In addition to the ISDN number, the calling line identity may include a subaddress generated by the calling user and transparently transported by the network. The network will deliver the calling line identity to the called party during call establishment, regardless of the terminal capability to handle the information.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.18 Calling line identification restriction

This supplementary service provides the calling party with the possibility to prevent presentation of the calling party's ISDN number, and subaddress information (if any) to the called party. If the called party subscribes to the calling line identification presentation supplementary service then the called party receives an indication that the calling party information is not available due to restriction.

This object class is derived from customizedSupplementaryService.

Table 43

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.2 (1996)":callIdRestrictionOptions	M	single
callIdRestrictionOptions	gives the options for the calling line identification restriction.	

6.1.8.19 Closed user group subscription option

The CUG subscription options object shall only be instantiated if either attribute preferredCUGIndex is assigned a non-NULL value or attribute interCUGAccess is not empty. M_SET operations, which would result in preferredCUGIndex value NULL and interCUGAccess value empty set, shall be rejected. The value of attribute preferredCUGIndex should not be NULL when interCUGAccess value is 'none' or 'incomingAccess'.

The attribute assocCUGList indicates for which cUGIndex the subscription option applies.

This object class is derived from customizedSupplementaryService.

Table 44

Name	M/C/O	Value Set
preferredCUGIndex	M	single
interCUGAccess	M	single
assocCUGList	M	set
preferredCUGIndex	is used to identify the required CUG in the absence of a CUG index being included in the outgoing call request.	
interCUGAccess	indicates the inter-CUG access of per service subscription option in ETS 300 136 [25]. The values are none, outgoingAccess, incomingAccess and outgoingAndIncomingAccess.	
assocCUGList	is a set-valued attribute indicating for which cUGIndex the subscription option applies	

6.1.8.20 Completion of calls to busy subscriber

This supplementary service enables a calling user, encountering a busy destination, to have the call completed when the busy destination becomes not busy, without having to make a new call attempt.

This object class is derived from customizedSupplementaryService.

Table 45

Name	M/C/O	Value Set
callCompletionBusyRecallMode	M	single
callCompletionBusyRecallMode	is a flag indicating whether a completion of calls to busy subscribers recall is offered to the termination which activated the service or to all compatible terminations.	

6.1.8.21 Completion of call on no reply

This supplementary service permits a user A, encountering a destination B, which does not answer the call (no reply), to be notified when the destination B becomes free after having terminated an activity, and to have the network reinitiate the call to the specified destination B if user A desires.

This object class is derived from customizedSupplementaryService.

Table 46

Name	M/C/O	Value Set
callCompletionNoReplyRecallMode	M	single
callCompletionNoReply-RecallMode		is a flag indicating whether a completion of calls on no replying customer recall is offered to the termination which activated the service or to all compatible terminations.

6.1.8.22 Conference call add-on

The Conference call add-on object class is used to indicate that the customer is authorized to use the conference call add-on supplementary service.

This object class is derived from customizedSupplementaryService.

No specific attributes were identified.

6.1.8.23 Connected line identification presentation

The colpSupplService object class represents a supplementary service offered for the calling party, which indicates the called party at the calling party. The COLP supplementary service is service dependent.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.24 Connected line identification restriction

The COLR supplementary service enables the connected party to prevent presentation of its directory number to the calling party. The COLR supplementary service is applicable to all telecommunication services.

This object class is derived from customizedSupplementaryService.

Table 47

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.2 (1996)":callIdRestrictionOptions	M	single
callIdRestrictionOptions		gives the options for the calling line identification restriction. TRUE: presentation restricted FALSE: presentation not restricted

6.1.8.25 Cordless terminal mobility

The cordless terminal mobility service allows users of cordless terminals to be mobile within and between networks. Where radio coverage is provided and the cordless terminal has appropriate access rights the user is able to make calls from, and to receive calls at, any location within the fixed public and/or private networks, and may move without interruption of a call in progress.

This object class is derived from customizedSupplementaryService.

Table 48

Name	M/C/O	Value Set
ctmId	M	single
permittedMobileArea	M	single
ctmId		provides the relevant data for the search of DECT terminals being part of a CTM configuration.
permittedMobileArea		gives the area of the network in which the DECT terminal can make and receive calls.

6.1.8.26 Detailed billing

The service of detailed billing gives the customer the possibility of being billed with a complete detail of the originated traffic. The completeness of the data presented on the bill depends on the detail class subscribed by the customer or available in the network and/or exchange.

This object class is derived from customizedSupplementaryService.

Table 49

Name	M/C/O	Value Set
detailClass	M	single
detailClass		defines the detail class for the detailed billing service. This detail can be limited e.g. to international calls, national long distance calls, special service calls, successful calls.

6.1.8.27 Explicit call transfer

The explicit call transfer managed object class is used to indicate that the customer is authorized to use the explicit call transfer supplementary service.

This object class is derived from customizedSupplementaryService.

No specific attributes were identified.

6.1.8.28 Fixed destination call

This object class is used to administer the fixed destination call (hot line) service both with or without the possibility of administration via customer controlled input.

For administration controlled service operation, the instantiation of the object is initiated by the OS. The values of the attributes variant and fixedDestinationNumber shall be set at creation, but may afterwards be modified by the OS.

In the case of service operation by the customer on service provision basis, the instantiation of the object is as well initiated by the OS to indicate that the customer has the authorization to use the service. The value of the variant attribute shall be set at creation by the OS according to the service subscription. The value of the fixedDestinationNumber attribute shall be set to NULL. The value of this attribute shall be modified by the resource management of the exchange on the customer input of the service control operation.

If the service is available generally for all subscribers without previous arrangement with the network operator, the resource shall create an object instance according to the customer input of the service control operation (i.e. registration and/or activation). The values of the variant and fixedDestinationNumber attributes shall be set by the resource management of the exchange according to the access code and destination number used in the customer input of the service control operation.

It is left to individual implementations whether the service assignment by the OS or the customer's activation in the case of a generally available service has priority.

This object class is derived from customizedSupplementaryService.

Table 50

Name	M/C/O	Value Set
variant fixedDestinationNumber	M M	single single
variant fixedDestinationNumber		identifies whether the call is forwarded to the fixed destination immediately (TRUE) or after time out (FALSE). gives the directory number to which the call shall be forwarded. Its value NULL means that calls are not to be forwarded to a fixed destination unless the OS or the customer by remote control changes its value to a directory number.

6.1.8.29 Incoming call barring

With this object class, incoming call barring is assigned. It may activate as well a do-not-disturb announcement.

This object class is derived from customizedSupplementaryService.

Table 51

Name	M/C/O	Value Set
doNotDisturb	M	single
doNotDisturb		indicates whether the do-not-disturb announcement is activated (TRUE) or not (FALSE).

6.1.8.30 Interception of calls

This object class allows an interception of calls on a per-service basis.

It is derived from customizedSupplementaryService.

Table 52

Name	M/C/O	Value Set
interceptionReason	M	single
"ITU-T Recommendation Q.824.0 (1996)":interceptTreatmentTerm	M	single
interceptionReason interceptTreatmentTerm		gives the reason for the interception specifies the treatment (e.g. announcement) to be provided.

6.1.8.31 Malicious call identification

This supplementary service allows a subscriber to start up the tracing of the malicious call originator.

Since due to legal and network operator's requirements the format of the malicious call identification notification may vary from country to country, this notification shall be defined with an implementation specific subclass.

This object class is derived from customizedSupplementaryService.

Table 53

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.2 (1996)": automaticInvocation	O	single
automaticInvocation		controls the activation of Malicious Call Identification so that calls that are not answered will be traced automatically.

6.1.8.32 Outgoing call barring

With this object class, outgoing call barring with fixed and/or user controlled program is assigned. The barring program may cover as well subscriber controlled input restrictions.

This object class is derived from customizedSupplementaryService.

Table 54

Name	M/C/O	Value Set
fixedProgram	M	single
userControlledProgram	M	single
activated	M	single
fixedProgram	gives the assigned fixed barring program.	
userControlledProgram	gives the barring program assigned by user control.	
activated	is set TRUE if the user has activated his program. If both program attributes have NULL value, the program common for all the exchange is activated.	

6.1.8.33 Remote control of supplementary service

This supplementary service enables a user to control a supplementary service or a number of supplementary services associated with that user's configuration from another access using the procedures provided for the (supplementary) service(s) to be controlled at the served user's access. Remote control service can be invoked independently of the state of the served user's access, and existing calls at the served user's access shall not be affected by the invocation of the remote control service.

This object class is derived from customizedSupplementaryService.

Table 55

Name	M/C/O	Value Set
remotelyControlledService	M	single
callDiversionRestrictions	M	single
remotelyControlledService	indicates which supplementary services the served user has subscribed for remote control.	
callDiversionRestrictions	indicates whether the forwarded-to number specified at remote activation shall have some restrictions (choice within a specified geographical area or belonging to a list of predetermined forwarded-to numbers) or not.	

6.1.8.34 Subaddressing

The subaddressing object class is used to indicate that the called customer is authorized to use the subaddressing supplementary service.

This object class is derived from customizedSupplementaryService.

No specific attributes were identified.

6.1.8.35 Terminal portability

This supplementary service allows a user engaged in an active call to adjourn communication by an appropriate signalling procedure and resume the call at a later time.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.36 Three party

This supplementary service enables a user to establish a three-way conversation, i.e. a simultaneous communication between the user and two other parties.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.37 User to user signalling

This supplementary service permits a user to send/receive a limited amount of information to/from another user over the signalling channel in association with a call to the other user.

This object class is derived from customizedSupplementaryService.

Table 56

Name	M/C/O	Value Set
uusService1Implicit	M	single
uusService1Explicit	M	single
uusService2	M	single
uusService3	M	single
uusService1Implicit		indicates whether the service is available (TRUE) or not (FALSE) during origination and termination of calls by means of an implicit request.
uusService1Explicit		indicates whether the service is available (TRUE) or not (FALSE) during origination and termination of calls by means of an implicit request.
uusService2		is a flag indicating whether the service is available (TRUE) or not (FALSE) after the calling user has received an indication that the called user is being informed of the call and prior to the establishment of the connection.
uusService3		is a flag indicating whether the service is available (TRUE) or not (FALSE) only during the connection is established.

6.1.8.38 Virtual private network

This object class indicates whether the related customer configuration is part of a virtual private network.

No specific attributes were identified.

This object class is derived from customizedSupplementaryService.

6.1.8.39 Voice messaging busy

The voice messaging busy supplementary service allows the customer to activate a centralized voice messaging system to collect voice messages for calls which meet busy.

This service shall only be assigned to voice-related teleservices.

This object class is derived from customizedSupplementaryService.

Table 57

Name	M/C/O	Value Set
voiceMessagingNumber	C	single
mwiReceiverPointer	C	single
voiceMessagingNumber		gives the routing information (directory number) to the voice messaging box in the voice messaging system.
mwiReceiverPointer		gives the associated mwiReceiver instance.

6.1.8.40 Voice messaging no reply

The voice messaging no reply supplementary service allows the customer to activate a centralized voice messaging system to collect voice messages for calls which meet no reply.

This service shall only be assigned to voice-related teleservices.

This object class is derived from customizedSupplementaryService.

Table 58

Name	M/C/O	Value Set
voiceMessagingNumber	C	single
mwiReceiverPointer	C	single
voiceMessagingNumber		gives the routing information (directory number) to the voice messaging box in the voice messaging system.
mwiReceiverPointer		gives the associated mwiReceiver instance.

6.1.8.41 Voice messaging unconditional

The voice messaging unconditional supplementary service allows the customer to activate a centralized voice messaging system to collect voice messages for all calls no matter what the condition of the termination is.

This service shall only be assigned to voice-related teleservices.

This object class is derived from customizedSupplementaryService.

Table 59

Name	M/C/O	Value Set
voiceMessagingNumber	C	single
mwiReceiverPointer	C	single
voiceMessagingNumber		gives the routing information (directory number) to the voice messaging box in the voice messaging system.
mwiReceiverPointer		gives the associated mwiReceiver instance.

6.1.9 Service independent supplementary service fragment

A supplementary service is considered being service independent, if it is applicable to multiple services in a uniform manner according to the underlying service definitions.

If in future additional requirements arise, the need might occur to redefine a supplementary service given hereafter as service dependent.

It is to be regarded that services defined hereafter may apply both to ISDN and PSTN.

6.1.9.1 Supplementary service service independent

This object class is defined in ITU-T Recommendation Q.824.0 [46].

It represents the supplementary services providing additional capabilities to be used independent from a basic telecommunication service.

The references of its subclasses to the service describing standards are given in annex A.

This object class is not instantiated.

6.1.9.2 ETSI supplementary service service independent

This object class is derived from "ITU-T Recommendation Q.824.0 (1996)": supplementaryServiceServiceIndependent.

It represents the supplementary services providing additional capabilities to be used with a basic telecommunication service. It may represent:

- an ISDN supplementary service as defined in ETSI;
- a CEPT supplementary service as defined in the CEPT Handbook on services and facilities [57];
- a non-standard supplementary service, i.e. operator-specific service.

The references of its subclasses to the service describing standards are given in annex A.

This object class is not instantiated.

Table 60

Name	M/C/O	Value Set
"ITU-T Recommendation Q.824.0 (1996)":customizedResourcePtrList	O	set
customizedResourcePtrList	is a set-valued attribute whose value(s) points to the associated customizedResource object instances	

6.1.9.3 Abbreviated dialling

This managed object class is used to indicate that the customer is authorized to use the abbreviated dialling supplementary service.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

Table 61

Name	M/C/O	Value Set
maxNumberOfEntries	M	single
diallingList	M	single
masterProperty	O	single
maxNumberOfEntries	gives the maximum number of entries for abbreviated dialling	
diallingList	is a pointer to an object instance of abbreviatedDialling representing a shared list, or it gives an individual list.	
masterProperty	indicates the authorization to modify a shared list (TRUE).	

6.1.9.4 Closed user group

The managed object class is used to store the closed user group general subscription options.

The attribute cUGIndex shall be explicitly assigned upon object creation.

No two instances of object class etsiCUG contained within a single object shall have identical values for attribute cUGIndex.

No two instances of object class etsiCUG contained within a single object shall have identical values of attribute cUGInterlockCode and cUGDataNetworkIdentification.

When the value of attribute cUGBarring is outBarred, this CUG shall not be a preferential closed user group (denoted by attribute preferredCUGIndex in cUGSubscriptionOption managed object).

It is a subclass of etsiSupplementaryServiceServiceIndependent.

Table 62

Name	M/C/O	Value Set
cUGIndex	M	set
cUGInterlockCode	M	set
cUGDataNetworkIdentification	M	set
cUGBarring	M	set
cUGIndex		gives the index of the closed user group. It is used by the calling user to select a particular CUG when originating a call
cUGInterlockCode		gives the interlock code of the closed user group. The attribute is a means of identifying a CUG membership within the network.
cUGDataNetworkIdentification		is the information signalled during set-up of a CUG call and serves (in conjunction with the cugInterlockCode) to uniquely identify the CUG in the international network. It can be thought of as the area code of the CUG.
cUGBarring		maintains the Intra-CUG restriction of the general subscription option in ETS 300 136 [25]. It may have one of the following values: none, incomingCallsBarred or outgoingCallsBarred.

6.1.9.5 Customer observation

The customer observation service activates the recording of call details e.g. for verification of the increments to the metering counter of the customer, supervision purposes, quality of service verification, etc.

The format of the customer observation records is an implementation matter, since e.g. due to legal requirements it may vary from network operator to network operator.

For this object class different name bindings are defined (under customer profile, customizedResource, etsiE164DirectoryNumber, and accessPort). Within one managed element, one and only one of these name bindings shall be used.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

Table 63

Name	M/C/O	Value Set
observationMode	O	single
observationMode		distinguishes between e.g. charging observation, expensive call monitoring, and quality of service verification, or between observation of incoming calls and/or outgoing calls, etc. Which observation mode corresponds with the value of this attribute number is a matter of local implementation.

6.1.9.6 Different ringing

The differentRinging managed object class is used to allocate different directory numbers to a single analogue access. For calls to such an access, different ringing signals (e.g. different sequences) are to be sent to the customer installation, according to the directory number dialled by the calling party.

It is to be considered that the assigned port must be capable to provide the different ringing. This object class shall only be assigned to non-ISDN customer configurations.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

Table 64

Name	M/C/O	Value Set
primaryDN	M	single
ringingSequence	M	single
primaryDN		defines whether the line is a primary (TRUE) or secondary (FALSE) line of the customer.
ringingSequence		defines the characteristics of the ringing signal to be sent.

6.1.9.7 Direct dialling in

The direct dialling in supplementary service enables a user to call directly via a public ISDN a user on a private ISDN by use of the public ISDN numbering plan.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

Table 65

Name	M/C/O	Value Set
numOfDigitsNotToTransmit	M	single
numOfDigitsNotToTransmit gives the number of digits not to be transmitted to a PABX.		

6.1.9.8 General facility reset

The general facility reset object class is used to indicate that the customer is authorized to use the general facility reset supplementary service.

The general facility reset supplementary service allows a customer to deactivate with one subscriber controlled input command (SCI) a number of supplementary services.

The supplementary services to be deactivated as a result of the SCI can be network operator dependent.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

No specific attributes were identified.

6.1.9.9 Home meter

The homeMeter managed object class is used to assign to a customer configuration the transmission of metering pulses to the customer premises.

This object class shall only be assigned to non-ISDN customer configurations. It is to be considered that the assigned port must be capable to provide the installation in the customer's premises with the metering pulses.

No specific attributes were identified.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

6.1.9.10 Message waiting indication controller

This service permits a user to activate and deactivate the message waiting indication of a user which supports the voice messaging supplementary service. The user of this object class is likely to be a voice mail box.

No specific attributes were identified.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

6.1.9.11 Message waiting indication receiver

This service permits a user to receive changes to the condition of a message waiting indicator. The user of this object class is likely to be subscribed to a voice messaging service which forwards calls to a voice mail box.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

Table 66

Name	M/C/O	Value Set
mwIInvocationMode	M	single
messageWaitingIndicator	M	single
mwIControllingUser	C	single
mwIInvocationMode	Indicates when the service is to be invoked either when the receiving user makes an outgoing call or on activation of the service (by the controlling user).	
messageWaitingIndicator	Indicates if one or more messages are waiting for the receiving user.	
mwIControllingUser	Gives the controlling user number.	

6.1.9.12 Multiple subscriber number

The MSN supplementary service provides the possibility for assigning multiple numbers (not necessarily consecutive) to a single public or private interface. This enables the selection of one or more multiple distinct terminals attached to the same interface.

The service provider shall fix the length of the numbers to be transmitted to the user's installation. They may comprise from the least significant digit up to the full ISDN number (see CCITT Recommendation E.164 [43]). The digit(s) significant for terminal differentiation shall be an integral part of the ISDN numbering scheme.

NOTE 1: Within a private ISDN, multiple subscriber number digits may be different from the digits of the public ISDN number. This additional possibility, if provided, has no impact on the public ISDN.

NOTE 2: More than one multiple subscriber number may be assigned to one terminal.

NOTE 3: The actual method of relating the ISDN number to a particular terminal is a matter of national implementation.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

Table 67

Name	M/C/O	Value Set
assocDefaultDN	M	single
screenOriginatingDN	M	single
numOfDigitsForCallId	M	single
assocDefaultDN	gives the default directory number for an MSN configuration.	
screenOriginatingDN	indicates whether the originating directory number is to be screened.	
numOfDigitsForCallId	gives the number of digits for call identification.	

6.1.9.13 PIN

The pin managed object class is used to assign a PIN to one or more supplementary services to prevent from their unauthorized use.

The initial value and the default value of the pin attribute is determined by the network element resource on its own.

The PIN given in the pin attribute is valid for all PIN controlled customized services assigned to a customer configuration identified by the PIN profile reference.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

Table 68

Name	M/C/O	Value Set
pin	M	single
pinProfileRef	M	single
pin		contains the PIN. The initial value and the default value of this attribute is determined by the network element resource on its own.
pinProfileRef		identifies the PIN controlled customized services assigned to a customer configuration for which the PIN given in the pin attribute is valid. It is a choice between an INTEGER representing pre-defined profiles on exchange level and a SET OF ObjectClass representing supplementary service object classes.

6.1.9.14 Priority

This supplementary service is used to assign priority to some or all access ports of the related customer profile e.g. to override traffic controls assigned to non-priority traffic.

No specific attributes were identified.

It is a subclass of etsiSupplementaryServiceServiceIndependent.

6.1.9.15 Semi permanent connection

This information model only covers the aspect of relationship of a customer configuration to a semi permanent connection. The semi permanent connection as such might e.g. be modelled by using the M3100:crossConnection object class or a subclass of it. If the semi permanent connection as such is managed by this means, the semipermanentLine attribute should not be used. Instead, the information whether a customer configuration is involved in a semi permanent line can be retrieved by reading the crossConnection object pointer attribute.

6.1.9.16 Terminating calls not charged

The supplementary service terminating calls not charged is a service associated with the called party.

Calls to a directory number with this service will not be charged.

To prevent the charging in the originating exchange in case of an incoming terminating call, the terminating exchange will, if the signalling system supports it, send a backward signal "no charge" and provide for the answer signal or, in case the signalling system does not support the sending of information that the call is not to be charged, withhold the answer signal.

No specific attributes were identified.

This object class is derived from etsiSupplementaryServiceServiceIndependent.

6.1.10 General services

The object classes given hereafter are placeholders for methods of general service provision to all customer configurations accessed to an exchange. With the catalogued service object classes, superclasses are provided for teleservice and supplementary service facilities to be configured on exchange base. Appropriate subclasses may be derived from them. The service container object classes are superiour object classes for e.g. supplementary services defined in the present document, which may be subject to be provided on a general base to all customer configurations.

6.1.10.1 Catalogued supplementary service

This object class is defined in ITU-T Recommendation Q.824.0 [46].

The catalogued supplementary service managed object class is a superclass for other service subclasses that have attributes that are not customizable by the customer. The subclasses will be defined once candidates for the non-customizable attributes have been identified.

This object class is not instantiated.

6.1.10.2 Catalogued teleservice

This object class is defined in ITU-T Recommendation Q.824.0 [46].

The catalogued teleservice managed object class defines a communication service that makes available layer 4 - layer 7 capabilities, and has attributes that are not customizable by the customer. This object class is a superclass from which specific catalogued teleservice objects may be derived as subclasses.

This object class is not instantiated.

6.1.10.3 General ISDN service container

The General ISDN service container is the superior object classes for supplementary services available to all ISDN customer configurations.

It is to be considered that a service configuration within a customer configuration overrides this general service configuration.

This object class shall only be used for the general provision of services for which the resource (i.e. the exchange) is capable to provide them generally on exchange level.

Table 69

Name		M/C/O	Value Set
serviceContainerId		M	single
generalServiceList		O	single
serviceContainerId	gives the RDN		
generalServiceList	lists the services having no configurable attributes which are available generally for the respective customer configurations.		

6.1.10.4 General PSTN service container

The General PSTN service container is the superior object classes for supplementary services available to all PSTN customer configurations.

It is to be considered that a service configuration within a customer configuration overrides this general service configuration.

This object class shall only be used for the general provision of services for which the resource (i.e. the exchange) is capable to provide them generally on exchange level.

Table 70

Name		M/C/O	Value Set
serviceContainerId		M	single
generalServiceList		O	single
serviceContainerId	gives the RDN		
generalServiceList	lists the services having no configurable attributes which are available generally for the respective customer configurations.		

6.1.10.5 Non ISDN service

The non ISDN service object class is defined to allow the creation of specific supplementary services for analogue customerProfiles.

Table 71

Name	M/C/O	Value Set
nonIsdnServiceId	M	single
"CCITT Recommendation X.721: 1992":administrativeState	M	single
"ITU-T Recommendation Q.824.0 (1996)":customizedResourcePtrList	M	set
nonIsdnServiceId	gives the RDN.	
administrativeState	is defined in CCITT Recommendation X.721 [53]. It indicates the current administrative state of the non ISDN service.	
customizedResourcePtrList	is a set-valued attribute whose value(s) points to the associated customizedResource object instances	

6.1.11 Service provision fragment

6.1.11.1 Service manager

The serviceManager is a support object that is needed complete the exchange provisioning without a detailed knowledge of the provisioning model. The serviceManager is a superclass object that can be subclassed to support specific actions for specific functions or technologies. The serviceManager is used in conjunction with servicePackage object instances to perform these actions. The servicePackage contains instances of managed objects with initial values that are used in creating all or part of a customer's service. If resource managed object classes are included in a servicePackage, then their attributes (e.g., etsiE164DirectoryNumber attribute of the etsiDirectoryNumberE164 object or the officeEquipment attribute of the accessPort object) must have dummy values. The actual values are taken from the ACTION parameters. Knowledge of the serviceManager or service packages used to create the customer service is not retained. Different service packages may be defined by service providers to meet specific business requirements.

Service packages that can be defined for a particular serviceManager must only use those parameters that are defined in the Action of that serviceManager. If additional input parameters are required, a new subclass of serviceManager has to be created.

These service packages are defined using the same object classes as in the model providing service definitions.

The serviceManager object class is defined in ITU-T Recommendation Q.824.0 [46].

6.1.11.2 Configuration service manager

The configurationServiceManager object class is derived from ITU-T Recommendation Q.824.0 [46]: serviceManager.

The configurationServiceManager performs actions which establish customer configurations and services. In addition, the configurationServiceManager performs actions which change directory number and access port assignments.

No specific attributes were identified.

6.1.11.3 Service package

This object class is used to group instances of different object classes that are used to provide initial values for attributes of service objects created by the serviceManager object class.

The servicePackage object class is defined in ITU-T Recommendation Q.824.0 [46].

6.1.11.4 Reference service configuration

The referenceServiceConfiguration object class is derived from ITU-T Recommendation Q.824.0 [46]: servicePackage.

An instance of this object class contains reference profiles for service assignments which are referenced in ACTIONS on an instance of configurationServiceManager. If the override attribute is not empty set, an addServiceToConfiguration action shall replace an instance of a service defining object class indicated in this attribute if this object class is part of the contained profile. Else, an existing instance of a service defining object class shall not be replaced. In both cases, no error information shall be indicated.

Table 72

Name	M/C/O	Value Set
override	O	set
override		identifies whether an instance of a service defining object class indicated in this attribute shall be replaced by an addServiceToConfiguration action if this object class is part of the contained profile. The instantiation of conditional packages is considered in this attribute as an option.

6.2 Attributes description

This subclause provides the description of all generic attributes used within the customer administration model. It is to be regarded that they are either inherited from superclasses, or attributes defined in the present document are derived from them.

6.2.1 Relative distinguished name

The semantics of the RDN attribute type are specified in CCITT Recommendation X.720 [52]. This attribute type is used to identify an instance of a managed object uniquely within the scope of its immediate superior in the management information tree.

6.2.2 Relationship attributes

Relationship attributes of managed objects for customer administration conform to the generic relationship model as defined by CCITT Recommendation X.732 [57]. In general the group relationship is utilized.

6.2.3 State attributes

State related attributes of managed objects in this information model comprise the generic state model as defined by CCITT Recommendation X.731 [56].

6.2.4 Counter

The counter attribute is defined in CCITT Recommendation X.721 [53].

6.3 Actions description

The following actions are defined within the present document:

Table 73

Action	Purpose
addServiceToConfiguration	This action is used to add service instances to a customer configuration.
changeAccessPort	This action is used to change the accessPort for a given customer profile.
changeDirectoryNumber	This action is used to change the etsiE164DirectoryNumber for a given customer profile.
establishCustomerConfiguration	This action is used to create all instances relevant for a single line access.

6.4 Notifications description

The following generic notifications will be utilized by the customer administration:

- object creation according to CCITT Recommendations X.721 [53] and X.730 [55];

- object deletion according to CCITT Recommendations X.721 [53] and X.730 [55];
- attribute value change according to CCITT Recommendations X.721 [53] and X.730 [55];
- state change according to CCITT Recommendations X.721 [53] and X.731 [56];
- relationship change according to CCITT Recommendations X.721 [53] and X.732 [57].

It is to be considered that in most cases these notifications applying to the object classes defined in the present document are inherited from their superclasses defined in the ITU-T Q.824 Recommendation series.

The following specific notification will be utilized by the customer administration:

- failedAlarmCall.

The failedAlarmCall notification indicates directory number, date, time and reason of unsuccessful alarm calls (e.g. due to absent subscriber, busy line, etc.).

7 Formal object class definitions

7.1 Definition of object classes

7.1.1 Managed element

The managedElement object class is defined in CCITT Recommendation M.3100 [45].

7.1.2 Access port fragment

7.1.2.1 Access port

The accessPort object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.2.2 ETSI access port

```
etsiAccessPort MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)": accessPort;
  CHARACTERIZED BY
  etsiAccessPortPkg PACKAGE
    BEHAVIOUR
      etsiAccessPortBhv BEHAVIOUR
      DEFINED AS "It represents the resource concept and is used to identify the resource
        capabilities supporting a customer services.
        Both etsiDirectoryNumberE164 and etsiAccessPort have the conditional package
        meteringCounterPkg containing the meteringCounter attribute. This package shall only be
        instantiated with one of these two object classes or their subclasses within one managed
        element.";;;
    CONDITIONAL PACKAGES
      meteringCounterPkg
      PRESENT IF "an instance supports it and if this package is not instantiated with
        etsiDirectoryNumberE164 or its subclasses within the same managed element",
      lineTestCapabilityPkg
      PRESENT IF "an access port is equipped with line test facilities",
      localDefinedNumberPkg
      PRESENT IF "an instance supports it";
  REGISTERED AS {ocaManagedObjectClass 1};
```

7.1.2.3 ETSI access port analogue

```
etsiAccessPortAnalogue MANAGED OBJECT CLASS
  DERIVED FROM etsiAccessPort;
  CHARACTERIZED BY
  etsiAccessPortAnaloguePkg PACKAGE
    BEHAVIOUR
      etsiAccessPortAnalogueBhv BEHAVIOUR
```

DEFINED AS "It is the conventional two-wire loop access to a basic telephone set. An analogue access port can be thought of as possessing only one access channel with a bearer capability of speech. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.";

ATTRIBUTES

lineSignalling	DEFAULT VALUE CustomerAdminModuleV2.lineSignallingDefault GET-REPLACE,
lineCharacteristics	DEFAULT VALUE CustomerAdminModuleV2.lineCharacteristicsDefault GET-REPLACE;;

CONDITIONAL PACKAGES

thirdWireEquipmentPkg
PRESENT IF "an instance supports it",
directionalityPkg
PRESENT IF "directionality is required in the customer configuration for this entity",
semipermanentLinePkg
PRESENT IF "this entity may be related to a semipermanent line and it is required in the customer configuration";

REGISTERED AS {ocaManagedObjectClass 2};

7.1.2.4 ETSI access port digital

etsiAccessPortDigital MANAGED OBJECT CLASS

DERIVED FROM etsiAccessPort;

CHARACTERIZED BY

etsiAccessPortDigitalPkg PACKAGE

BEHAVIOUR

etsiAccessPortDigitalBhv BEHAVIOUR

DEFINED AS "It represents the termination of any non-ISDN digital access. It represents the resource concept and is used to identify the resource capabilities supporting a customer services.";;;

REGISTERED AS {ocaManagedObjectClass 3};

7.1.2.5 ETSI access port ISDN basic rate

etsiAccessPortISDNBasicRate MANAGED OBJECT CLASS

DERIVED FROM etsiAccessPort;

CHARACTERIZED BY

etsiAccessPortISDNBasicRatePkg PACKAGE

BEHAVIOUR

etsiAccessPortISDNBasicRateBhv BEHAVIOUR

DEFINED AS "It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

The etsiAccessPortISDNBasicRate object class supports up to 2 B-channels of 64 kbit/s for transfer of information and data and 1 D-channel of 16 kbit/s for signalling and data transfer (2 B + D).";;

ATTRIBUTES

dChannelLayer1Activation	DEFAULT VALUE CustomerAdminModuleV2.d-ChannelActivationDefault GET-REPLACE,
dChannelLayer2Activation	DEFAULT VALUE CustomerAdminModuleV2.d-ChannelActivationDefault GET-REPLACE;;

REGISTERED AS {ocaManagedObjectClass 4};

7.1.2.6 ETSI access port ISDN primary rate

etsiAccessPortISDNPrimaryRate MANAGED OBJECT CLASS

DERIVED FROM etsiAccessPort;

CHARACTERIZED BY

etsiAccessPortISDNPrimaryRatePkg PACKAGE

BEHAVIOUR

etsiAccessPortISDNPrimaryRatePkgBhv BEHAVIOUR

DEFINED AS "It represents the resource concept and is used to identify the resource capabilities supporting a customer services.

The etsiAccessPortISDNPrimaryRate object class supports up to 30 B-channels of 64 kbit/s for transfer of information and data and 1 D-channel of 64 kbit/s for signalling and data transfer (30 B + D).";;

ATTRIBUTES

dChannelLayer2Activation	DEFAULT VALUE CustomerAdminModuleV2.d-ChannelActivationDefault GET-REPLACE;;
--------------------------	--

CONDITIONAL PACKAGES

actingRolePkg

PRESENT IF "the primary and secondary role according to CCITT I.310 is supported";

REGISTERED AS {ocaManagedObjectClass 5};

7.1.2.7 Access channel

The accessChannel object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.2.8 ETSI access channel

```
etsiAccessChannel MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":accessChannel;
  CHARACTERIZED BY
    "CCITT Recommendation M.3100:1992":channelNumberPackage
  etsiAccessChannelPkg PACKAGE
    BEHAVIOUR
      etsiAccessChannelBhv BEHAVIOUR
      DEFINED AS "It represents an individual ISDN B-channel or D-channel of an ISDN access port
or an individual channel of a digital access port. It identifies the set of attributes which
apply in common to all types of ISDN and digital access channels. Instances of this object
class are contained within ISDN or digital access ports.
The number of access channels belonging to an access port depends on the access port
architecture. This object class may be related to a set of customizedResource when services
shall be provisioned on a per access channel basis.";;
    ATTRIBUTES
      channelType      GET-REPLACE;;;
  CONDITIONAL PACKAGES
    directionalityPkg
      PRESENT IF "directionality is required in the customer configuration for this entity",
      semipermanentLinePkg
      PRESENT IF "this entity may be related to a semipermanent line and it is required in the
customer configuration";
REGISTERED AS {ocaManagedObjectClass 6};
```

7.1.2.9 Access port profile

The accessPortProfile object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.3 V5 interface fragment

ETS 300 377-1 [59] covers the configuration management of V5 interfaces and associated customer profiles. Since the customer administration related part of it was based on I-ETS 300 291 which is replaced by the present document, hereafter a re-definition of the affected object classes is given. The corresponding labels are extended by "R1".

The "ASN1DefinedTypesModule" references in the INITIAL VALUE definitions within this fragment refer to ETS 300 377-1 [59].

7.1.3.1 Virtual access port

This object class is subclassed for the different types of customer access ports and not instantiated within the scope of this application.

```
virtualAccessPortR1 MANAGED OBJECT CLASS
  DERIVED FROM etsiAccessPort;
  CHARACTERIZED BY
    "CCITT Recommendation M.3100:1992":httpInstancePackage,
    "ETS 300 377-1 (1995)":commonDeleteBehaviourPackage,
  virtualAccessPortR1Pkg PACKAGE
    BEHAVIOUR
      virtualAccessPortR1Bhv BEHAVIOUR
      DEFINED AS "A virtualAccessPortR1 is an object class representing an image of the customer
access port which is located in an AN and connected to the LE via V5 interface.
The upstreamConnectivityPointer and the downstreamConnectivityPointer attributes have NULL
value.
The inherited operationalStatePackage is mandatory in this object class.
The operationalState attribute indicates whether or not the user port is able to provide its
service to the customer's terminal equipment. It reflects the states of the user port FSM in
the LE according to Annex A of ETS 300 377-1 (1995).
An access port may have assigned one or more bearer time slots and/or one or more C-paths
providing transport for different data types (bearer, signalling, f-type, p-type). The
operationalState attribute shall be set to 'enabled' as long as the port has access to any
service, and if there are no other contradictory conditions.
The operationalState attribute shall be set to 'disabled' if an access port has no service
at all, i.e. the V5 interface itself or the related ISDN Ds or the PSTN C-path has failed.
```

The assocV5Interface attribute gives the relation to the V5 interface, that virtual access port is assigned to. It is a group relationship attribute according to CCITT Recommendation X.732. The V5 interface is the owner object.

The relationships are maintained by use of the setReciprocalPointers and releaseReciprocalPointers actions of the v5Interface object class.

If the "CCITT Recommendation M.3100:1992":tmnCommunicationsAlarmInformationPackage is instantiated, then the communicationsAlarm notification shall be used to report errors related to this object class. The errors to be reported and the usage of the alarm report parameters are specified in ETS 300 379-1.;;

ATTRIBUTES

```
"ETS 300 377-1 (1995)":assocV5Interface      INITIAL VALUE
                                             ASN1DefinedTypesModule.initialPointer
                                             GET;;;
```

CONDITIONAL PACKAGES

```
"CCITT Recommendation M.3100:1992":tmnCommunicationsAlarmInformationPackage
```

```
PRESENT IF "an instance supports it",
```

```
"CCITT Recommendation M.3100:1992":alarmSeverityAssignmentPointerPackage
```

```
PRESENT IF "an instance supports it",
```

```
"ETS 300 377-1 (1995)":anFaultReportedPackage
```

```
PRESENT IF "the associated interface is a V5.2 interface and an instance supports it";
```

```
REGISTERED AS {ocaManagedObjectClass 7};
```

7.1.3.2 Virtual analogue access

```
virtualAnalogueAccessR1 MANAGED OBJECT CLASS
```

```
DERIVED FROM virtualAccessPortR1;
```

```
CHARACTERIZED BY
```

```
virtualAnalogueAccessR1Pkg PACKAGE
```

```
BEHAVIOUR
```

```
virtualAnalogueAccessR1Bhv BEHAVIOUR
```

```
DEFINED AS "A virtualAnalogueAccessR1 is an information entity used for the association of a PSTN customer's layer 3 port address with a V5.1/V5.2 interface.
```

```
If no virtualAccessChannelR1 object instance is contained in the virtualAnalogueAccessR1 object instance in the case of a V5.1 interface, the assocV5TimeSlot attribute points to the associated V5 time slot object instance. Otherwise it has NULL value. It is a peer relationship according to CCITT Recommendation X.732. The V5 time slot is provider.";;
```

```
ATTRIBUTES
```

```
"ETS 300 377-1 (1995)":layer3PortAddress    GET-REPLACE,
"ETS 300 377-1 (1995)":assocV5TimeSlot     INITIAL VALUE
                                             ASN1DefinedTypesModule.initialPointer
```

```
GET,
lineSignalling                             DEFAULT VALUE
                                             CustomerAdminModuleV2.lineSignallingDefault
                                             GET-REPLACE;;;
```

CONDITIONAL PACKAGES

```
directionalityPkg
```

```
PRESENT IF "directionality is required in the customer configuration for this entity",
semipermanentLinePkg
```

```
PRESENT IF "this entity may be related to a semipermanent line and it is required in the customer configuration";
```

```
REGISTERED AS {ocaManagedObjectClass 8};
```

7.1.3.3 Virtual basic rate access

```
virtualBasicRateAccessR1 MANAGED OBJECT CLASS
```

```
DERIVED FROM virtualAccessPortR1;
```

```
CHARACTERIZED BY
```

```
virtualBasicRateAccessR1Pkg PACKAGE
```

```
BEHAVIOUR
```

```
virtualBasicRateAccessR1Bhv BEHAVIOUR
```

```
DEFINED AS "A virtualBasicRateAccessR1 is an information entity used for the association of an envelope function address representing an ISDN basic access with a V5.1/V5.2 interface. The assocIsdnSignallingCommPath attribute points to the associated ISDN communication path carrying the signalling messages of the assigned ISDN access.
```

```
The assocPacketCommPath attribute points to the associated ISDN communication path carrying the D-channel packet mode data of the assigned ISDN access if the customer has subscribed to this service. Else, it has NULL value.
```

```
The assocFrameCommPath attribute points to the associated ISDN communication path carrying the D-channel frame mode data of the assigned ISDN access if the customer has subscribed to this service. Else, it has NULL value.
```

```
They are group relationships according to CCITT Recommendation X.732. The ISDN communication path is owner.
```

```
The assocV5TimeSlotB1 and assocV5TimeSlotB2 attributes indicate for both B-channels the associated V5 time slot object instances, if no virtualAccessChannelR1 object instance is contained in the virtualBasicRateAccessR1 object instance in the case of a V5.1 interface. Otherwise it has NULL value. It is a peer relationship according to CCITT Recommendation X.732.
```

```
These relationships are maintained by use of the setReciprocalPointer and releaseReciprocalPointer actions of the v5Interface object class.";;
```

```
ATTRIBUTES
```

```

dChannelLayer1Activation      DEFAULT VALUE
                              CustomerAdminModuleV2.d-ChannelActivationDefault
                              GET-REPLACE,
dChannelLayer2Activation      DEFAULT VALUE
                              CustomerAdminModuleV2.d-ChannelActivationDefault
                              GET-REPLACE,
"ETS 300 377-1 (1995)":envelopeFunctionAddress  GET-REPLACE,
"ETS 300 377-1 (1995)":assocIsdnSignallingCommPath  INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET,
"ETS 300 377-1 (1995)":assocPacketCommPath        INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET,
"ETS 300 377-1 (1995)":assocFrameCommPath         INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET,
"ETS 300 377-1 (1995)":assocV5TimeSlotB1         INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET,
"ETS 300 377-1 (1995)":assocV5TimeSlotB2         INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET;;;

CONDITIONAL PACKAGES
"ETS 300 377-1 (1995)":qualityOfServiceAlarmPackage
PRESENT IF "there is a remote digital subclause or if performance parameters are to be
monitored against a pre-defined threshold";
REGISTERED AS {ocaManagedObjectClass 9};

```

7.1.3.4 Virtual leased access

```

virtualLeasedAccessR1 MANAGED OBJECT CLASS
DERIVED FROM virtualAccessPortR1;
CHARACTERIZED BY
virtualLeasedAccessR1Pkg PACKAGE
BEHAVIOUR
virtualLeasedAccessR1Bhv BEHAVIOUR
DEFINED AS "A virtualLeasedAccessR1 is an information entity used for the association of a
single analogue or digital semipermanent leased line or a multiple digital semipermanent
leased line configuration with a V5.1/V5.2 interface.
If it is a single semipermanent leased line, and if no virtualAccessChannelR1 object
instance is contained in the virtualLeasedAccessR1 object instance, and if it is associated
with a V5.1 interface, the assocV5TimeSlot attribute points to the associated V5 Time Slot
object instance. Otherwise it has NULL value. It is a peer relationship according to CCITT
Recommendation X.732. The relationship shall be maintained by use of the
setReciprocalPointer and releaseReciprocalPointer actions of the V5 Interface object class.
A virtualLeasedAccessR1 object instance representing a single semipermanent leased line
shall contain either no or one virtualAccessChannelR1 object instance. In a multiple
semipermanent leased line configuration, the virtualLeasedAccessR1 object instance shall
contain the appropriate number of virtualAccessChannelR1 object instances.
The v5UserPortAddress attribute gives for a single semipermanent leased line the layer 3
port address the access is assigned to, otherwise it gives the envelope function address.";;
ATTRIBUTES
"ETS 300 377-1 (1995)":v5UserPortAddress  INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET-REPLACE,
"ETS 300 377-1 (1995)":assocV5TimeSlot    INITIAL VALUE
                              ASN1DefinedTypesModule.initialPointer
                              GET;;;

REGISTERED AS {ocaManagedObjectClass 10};

```

7.1.3.5 Virtual primary rate access

```

virtualPrimaryRateAccessR1 MANAGED OBJECT CLASS
DERIVED FROM virtualAccessPortR1;
CHARACTERIZED BY
virtualPrimaryRateAccessR1Pkg PACKAGE
BEHAVIOUR
virtualPrimaryRateAccessR1Bhv BEHAVIOUR
DEFINED AS "A virtualPrimaryRateAccessR1 is an information entity used for the association
of an envelope function address representing an ISDN primary rate access with a V5.2
interface.
The assocIsdnSignallingCommPath attribute points to the associated ISDN communication path
carrying the signalling messages of the assigned ISDN access.
The assocPacketCommPath attribute points to the associated ISDN communication path carrying
the D-channel packet mode data of the assigned ISDN access if the customer has subscribed to
this service. Else, it has NULL value.
The assocFrameCommPath attribute points to the associated ISDN communication path carrying
the D-channel frame mode data of the assigned ISDN access if the customer has subscribed to
this service. Else, it has NULL value."

```

They are group relationships according to CCITT Recommendation X.732. The ISDN communication path is owner. These relationships are maintained by use of the setReciprocalPointer and releaseReciprocalPointer actions of the v5Interface object class.";;

```

ATTRIBUTES
dChannelLayer2Activation          DEFAULT VALUE
                                   CustomerAdminModuleV2.d-ChannelActivationDefault
                                   GET-REPLACE,
"ETS 300 377-1 (1995)":envelopeFunctionAddress  GET-REPLACE,
"ETS 300 377-1 (1995)":assocIsdnSignallingCommPath  INITIAL VALUE
                                   ASN1DefinedTypesModule.initialPointer
                                   GET,
"ETS 300 377-1 (1995)":assocPacketCommPath          INITIAL VALUE
                                   ASN1DefinedTypesModule.initialPointer
                                   GET,
"ETS 300 377-1 (1995)":assocFrameCommPath          INITIAL VALUE
                                   ASN1DefinedTypesModule.initialPointer
                                   GET;;;

```

CONDITIONAL PACKAGES

```

actingRolePkg
PRESENT IF "the primary and secondary role according to CCITT I.310 is supported";
"ETS 300 377-1 (1995)":qualityOfServiceAlarmPackage
PRESENT IF "there is a remote digital subclause or if performance parameters are to be
monitored against a pre-defined threshold";

```

```
REGISTERED AS {ocaManagedObjectClass 11};
```

7.1.3.6 Virtual access channel

```
virtualAccessChannelR1 MANAGED OBJECT CLASS
```

```
DERIVED FROM etsiAccessChannel;
```

```
CHARACTERIZED BY
```

```
"ETS 300 377-1 (1995)":commonDeleteBhvPackage,
"CCITT Recommendation M.3100:1992":ctpInstancePackage,
virtualAccessChannelR1Pkg PACKAGE
```

```
BEHAVIOUR
```

```
virtualAccessChannelR1Bhv BEHAVIOUR
```

```
DEFINED AS "A virtualAccessChannelR1 is an object class representing an individual ISDN B-
/D-channel of an ISDN access port, or the bearer channel for an analogue access port, or an
individual channel of an access port for a semipermanent leased line.
```

```
If the channel type is an ISDN B-channel or a channel of a non-ISDN access in the case of a
V5.1 interface, the assocV5TimeSlot attribute points to the associated V5 time slot object
instance. Otherwise it has NULL value. It is a peer relationship according to CCITT
Recommendation X.732.
```

```
The relationship is maintained by use of the setReciprocalPointers and
releaseReciprocalPointers actions of the v5Interface object class.
```

```
The upstreamConnectivityPointer and the downstreamConnectivityPointer attributes have NULL
value.";;
```

```
ATTRIBUTES
```

```
"ETS 300 377-1 (1995)":permanentLineReservation  GET-REPLACE,
"ETS 300 377-1 (1995)":assocV5TimeSlot
                                   INITIAL VALUE ASN1DefinedTypesModule.initialPointer
                                   GET;;;

```

```
REGISTERED AS {ocaManagedObjectClass 12};
```

7.1.3.7 V5 bearer channel reservation

```
v5BcReservationR1 MANAGED OBJECT CLASS
```

```
DERIVED FROM etsiSupplementaryServiceServiceIndependent;
```

```
CHARACTERIZED BY
```

```
v5BcReservationR1Pkg PACKAGE
```

```
BEHAVIOUR
```

```
v5BcReservationR1Bhv BEHAVIOUR
```

```
DEFINED AS "The assignment of a v5BcReservationR1 object instance to a customized resource
indicates that a fixed assignment of bearer channels of a V5.2 interface is made for a
customer. Which V5 time slot is assigned is controlled by the resource manager but visible
at the Q3 interface.";;
```

```
ATTRIBUTES
```

```
"ETS 300 377-1 (1995)":noOfBcRequested  GET-REPLACE,
"ETS 300 377-1 (1995)":bcReserved      GET SET-BY-CREATE;;;

```

```
REGISTERED AS {ocaManagedObjectClass 13};
```

7.1.3.8 V5 leased line reservation

```
v5LlReservationR1 MANAGED OBJECT CLASS
```

```
DERIVED FROM etsiSupplementaryServiceServiceIndependent;
```

```
CHARACTERIZED BY
```

```
v5LlReservationR1Pkg PACKAGE
```

```
BEHAVIOUR
```

```
v5LlReservationR1Bhv BEHAVIOUR
```

DEFINED AS "The assignment of a v5LlReservationR1 object instance to a customized resource indicates that a fixed assignment of the bearer channel of a V5 interface is made for a customer. It is used either for analogue semipermanent leased lines without signalling or for digital semipermanent leased lines without signalling. Which V5 time slot in the case of a V5.2 interface is assigned is controlled by the resource manager but visible at the Q3 interface.";;

ATTRIBUTES

"ETS 300 377-1 (1995)":bcReserved GET SET-BY-CREATE;;;

REGISTERED AS {ocaManagedObjectClass 14};

7.1.4 Directory number fragment

7.1.4.1 Directory number

The directoryNumber object class is defined in ITU-T Recommendation Q.824.0 [46]. It has no instantiations of itself.

7.1.4.2 ETSI directory number E.164

```
etsiDirectoryNumberE164 MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":directoryNumber;
  CHARACTERIZED BY
  etsiDirectoryNumberE164Pkg PACKAGE
    BEHAVIOUR
      etsiDirectoryNumberE164Bhv BEHAVIOUR
      DEFINED AS "The etsiDirectoryNumberE164 represents directory numbers belonging to the ISDN
        numbering plan defined in CCITT Recommendation E.164.
        Both etsiDirectoryNumberE164 and etsiAccessPort have the conditional package
        meteringCounterPkg containing the meteringCounter attribute. This package shall only be
        instantiated with one of these two object classes or their subclasses within one managed
        element.";;
      ATTRIBUTES
        "ITU-T Recommendation Q.824.0 (1996)":interceptTreatmentTerm GET-REPLACE,
        etsiE164DirectoryNumber GET SET-BY-CREATE;;;
  CONDITIONAL PACKAGES
    meteringCounterPkg
    PRESENT IF "an instance supports it and if this package is not instantiated with
      etsiAccessPort or its subclasses within the same managed element",
    portedDirectoryNumberPkg
    PRESENT IF "required for the administration of number portability";
REGISTERED AS {ocaManagedObjectClass 15};
```

7.1.4.3 Directory number X.121

The directoryNumberX121 object class characterizes the ITU-T Recommendation X.121 [51] packet switched directory number resource.

The directoryNumberX121 object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.5 Customer profile fragment

7.1.5.1 Customer profile

The customerProfile object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.5.2 ETSI customer profile

```
etsiCustomerProfile MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":customerProfile;
  CHARACTERIZED BY
  customerCharacteristicsPkg,
  etsiCustomerProfilePkg PACKAGE
    BEHAVIOUR
      etsiCustomerProfileBhv BEHAVIOUR
      DEFINED AS "An instance of a etsiCustomerProfile subclass may be related to zero, one, or
        more instances of accessPortProfile and/or one instance of etsiDirectoryNumberE164.";;
      ATTRIBUTES
        "CCITT Recommendation X.721: 1992":administrativeState GET-REPLACE;;;
  CONDITIONAL PACKAGES
    originForRouteingPkg
    PRESENT IF "aspects for call routeing purposes are to be considered",
```

```

originForChargingPkg
PRESENT IF "aspects for charging and/or tariffing purposes are to be considered",
originForAnalysisPkg
PRESENT IF "aspects for digit analysis purposes within the call routing context are to be
considered";
REGISTERED AS {ocaManagedObjectClass 16};

```

7.1.5.3 Analogue customer profile

```

analogueCustomerProfile MANAGED OBJECT CLASS
DERIVED FROM etsiCustomerProfile;
CHARACTERIZED BY
analogueCustomerProfilePkg PACKAGE
BEHAVIOUR
analogueCustomerProfileBhv BEHAVIOUR
DEFINED AS "This object class is the reference point for the services, directory numbers,
and access ports being part of the related profile. Only accessPortAnalogue shall be
associated via the appropriate accessPortProfile instances with this object class.";;;
REGISTERED AS {ocaManagedObjectClass 17};

```

7.1.5.4 Digital customer profile

```

digitalCustomerProfile MANAGED OBJECT CLASS
DERIVED FROM etsiCustomerProfile;
CHARACTERIZED BY
digitalCustomerProfilePkg PACKAGE
BEHAVIOUR
digitalCustomerProfileBhv BEHAVIOUR
DEFINED AS "This object class is the reference point for the services, directory numbers,
and access ports being part of the related profile. Only accessPortDigital shall be
associated via the appropriate accessPortProfile instances with this object class.";;;
REGISTERED AS {ocaManagedObjectClass 18};

```

7.1.5.5 ISDN customer profile

```

isdnCustomerProfile MANAGED OBJECT CLASS
DERIVED FROM etsiCustomerProfile;
CHARACTERIZED BY
isdnCustomerProfilePkg PACKAGE
BEHAVIOUR
isdnCustomerProfileBhv BEHAVIOUR
DEFINED AS "This object class is the reference point for the services, directory numbers,
and access ports being part of the related profile. Only
accessPortISDNBasicRate/accessPortISDNPrimaryRate shall be associated via the appropriate
accessPortProfile instances with this object class.";;;
REGISTERED AS {ocaManagedObjectClass 19};

```

7.1.5.6 Customized resource

The customizedResource object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.5.7 ETSI customized resource

```

etsiCustomizedResource MANAGED OBJECT CLASS
DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":customizedResource;
CHARACTERIZED BY
etsiCustomizedResourcePkg PACKAGE
BEHAVIOUR
etsiCustomizedResourceBhv BEHAVIOUR
DEFINED AS "This object class allows refinement of the service provisioning for a customer.
It allows association of a set of services to:
- one or more access ports
- one or more DNS
- one or more access channels
The channels may span more than one access port. The etsiCustomizedResource object class
also allows association between DNSs and access ports without any services associated with
them.
This object class is needed when a service is applicable only to a subset of access ports,
access channels or DNSs. It is not needed when all the services specified are applicable to
all the access ports, access channels and DNSs.";;;
ATTRIBUTES
supplementaryServiceServiceDependentPtrList          DEFAULT VALUE
CustomerAdminModuleV2.defaultPointerList
GET-REPLACE ADD-REMOVE,

```

```

supplementaryServiceServiceIndependentPtrList          DEFAULT VALUE
CustomerAdminModuleV2.defaultPointerList
GET-REPLACE ADD-REMOVE;;;
REGISTERED AS {ocaManagedObjectClass 20};

```

7.1.6 Bearer service fragment

7.1.6.1 Bearer service

This object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.6.2 ETSI bearer service

The references of the bearer service subclasses to the service describing standards are given in annex A.

```

etsiBearerService MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":bearerService;
  CHARACTERIZED BY
  etsiBearerServicePkg PACKAGE
    BEHAVIOUR
    etsiBearerServiceBhv BEHAVIOUR
    DEFINED AS "The 'ITU-T Recommendation Q.824.0':numberOfChannelsPkg and the 'ITU-T
    Recommendation Q.824.0': bearerSignallingPkg shall not be instantiated with subclasses of
    this object class.";;;
  CONDITIONAL PACKAGES
    primaryInterexchangeCarrierPkg
    PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 21};

```

7.1.6.3 Circuit mode 3,1 kHz audio

```

circuitMode3100Hz MANAGED OBJECT CLASS
  DERIVED FROM etsiBearerService;
  CHARACTERIZED BY
  circuitMode3100HzPkg PACKAGE
    BEHAVIOUR
    circuitMode3100HzBhv BEHAVIOUR
    DEFINED AS "This object class defines the '3,1 kHz audio' bearer service . This bearer
    service shall be used as well for analogue customers.";;;
  CONDITIONAL PACKAGES
    "ITU-T Recommendation Q.824.1 (1996)":networkProvidedTonePkg
    PRESENT IF "supported by the network",
    maxNumOfInfoChannelsPkg
    PRESENT IF "supported by the network",
    maxNumOfTotalCallsPkg
    PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 22};

```

7.1.6.4 Circuit mode 64 kbit/s unrestricted

```

circuitMode64kb MANAGED OBJECT CLASS
  DERIVED FROM etsiBearerService;
  CHARACTERIZED BY
  circuitMode64kbPkg PACKAGE
    BEHAVIOUR
    circuitMode64kbBhv BEHAVIOUR
    DEFINED AS "This object class defines the '64 kbit/s unrestricted' bearer service .";
  CONDITIONAL PACKAGES
    maxNumOfInfoChannelsPkg
    PRESENT IF "supported by the network",
    maxNumOfTotalCallsPkg
    PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 23};

```

7.1.6.5 ETSI packet B channel

```

etsiPacketBChannel MANAGED OBJECT CLASS
  DERIVED FROM etsiBearerService;
  CHARACTERIZED BY
  etsiPacketBChannelPkg PACKAGE
    BEHAVIOUR
    etsiPacketBChannelBhv BEHAVIOUR

```

```

    DEFINED AS "This object class defines the packet mode bearer service running over a B
    channel .";;;;
CONDITIONAL PACKAGES
    localPacketHandlerPkg
    PRESENT IF "the packet handler is integrated into the local connection related function",
    maxNumOfInfoChannelsPkg
    PRESENT IF "supported by the network and the packet handler is integrated into the local
    connection related function";
REGISTERED AS {ocaManagedObjectClass 24};

```

7.1.6.6 ETSI packet D channel

```

etsiPacketDChannel MANAGED OBJECT CLASS
    DERIVED FROM etsiBearerService;
    CHARACTERIZED BY
    etsiPacketDChannelPkg PACKAGE
        BEHAVIOUR
            etsiPacketDChannelBhv BEHAVIOUR
            DEFINED AS "This object class defines the packet mode bearer service running over a D
            channel .";;;;
    CONDITIONAL PACKAGES
        localPacketHandlerPkg
        PRESENT IF "the packet handler is integrated into the local connection related function";
REGISTERED AS {ocaManagedObjectClass 25};

```

7.1.6.7 Layer entity

The layerEntity object class is defined in ITU-T Recommendation Q.824.0 [46].

Its subclasses layerEntityLAPB, layerEntityLAPD, layerEntityX25PLP, and layerEntityX25PLPShared are defined in ITU-T Recommendation Q.824.1 [47].

7.1.6.8 Multiple rate unrestricted

```

multipleRateUnrestricted MANAGED OBJECT CLASS
    DERIVED FROM etsiBearerService;
    CHARACTERIZED BY
    multipleRateUnrestrictedPkg PACKAGE
        BEHAVIOUR
            multipleRateUnrestrictedBhv BEHAVIOUR
            DEFINED AS "This object class defines the 'multiple rate unrestricted' bearer service .";;;;
    CONDITIONAL PACKAGES
        maxNumOfInfoChannelsPkg
        PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 26};

```

7.1.6.9 Speech

```

speech MANAGED OBJECT CLASS
    DERIVED FROM etsiBearerService;
    CHARACTERIZED BY
    speechPkg PACKAGE
        BEHAVIOUR
            speechBhv BEHAVIOUR
            DEFINED AS "This object class defines the 'speech' bearer service .";;;;
    CONDITIONAL PACKAGES
        "ITU-T Recommendation Q.824.1 (1996)":networkProvidedTonePkg
        PRESENT IF "supported by the network",
        maxNumOfInfoChannelsPkg
        PRESENT IF "supported by the network",
        maxNumOfTotalCallsPkg
        PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 27};

```

7.1.6.10 Unrestricted digital info with tones/announcements (7 kHz audio)

```

audio7khz MANAGED OBJECT CLASS
    DERIVED FROM etsiBearerService;
    CHARACTERIZED BY
    audio7khzPkg PACKAGE
        BEHAVIOUR
            audio7khzBhv BEHAVIOUR
            DEFINED AS "This object class defines the 'unrestricted digital info with
            tones/announcements' bearer service."";;;;

```

```

CONDITIONAL PACKAGES
  "ITU-T Recommendation Q.824.1 (1996)":networkProvidedTonePkg
  PRESENT IF "supported by the network",
  maxNumOfInfoChannelsPkg
  PRESENT IF "supported by the network",
  maxNumOfTotalCallsPkg
  PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 28};

```

7.1.7 Teleservice fragment

7.1.7.1 Teleservice

This object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.7.2 ETSI teleservice

The references of the teleservice subclasses to the service describing standards are given in annex A.

```

etsiTeleservice MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":teleservice;
  CHARACTERIZED BY
  etsiTeleservicePkg PACKAGE
    BEHAVIOUR
    etsiTeleserviceBhv BEHAVIOUR
  DEFINED AS "The 'ITU-T Recommendation Q.824.0': cataloguedTeleservicePtrPkg and the 'ITU-T
  Recommendation Q.824.0': layerInfoPkg shall not be instantiated with subclasses of this
  object class.
  The bearerServicePtr attribute shall only point to object instances representing bearer
  services which are permitted to be related to a teleservice represented by the instance of
  this object class, regarding EN 300 196-1. Otherwise, it shall be empty string.";;;
REGISTERED AS {ocaManagedObjectClass 29};

```

7.1.7.3 Telefax group 4

```

telefaxG4 MANAGED OBJECT CLASS
  DERIVED FROM etsiTeleservice;
  CHARACTERIZED BY
  telefaxG4Pkg PACKAGE
    BEHAVIOUR
    telefaxG4Bhv BEHAVIOUR
  DEFINED AS "This object class defines the telefax group 4 teleservice .";;
  ATTRIBUTES
  "ITU-T Recommendation Q.824.4 (1996)":telefaxClass GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 30};

```

7.1.7.4 Telephony 3,1 kHz

```

telephony MANAGED OBJECT CLASS
  DERIVED FROM etsiTeleservice;
  CHARACTERIZED BY
  telephonyPkg PACKAGE
    BEHAVIOUR
    telephonyBhv BEHAVIOUR
  DEFINED AS "This object class defines the telephony 3,1 kHz teleservice .";;
  CONDITIONAL PACKAGES
  maxNumOfInfoChannelsPkg
  PRESENT IF "supported by the network",
  maxNumOfTotalCallsPkg
  PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 31};

```

7.1.7.5 Telephony 7 kHz

```

telephony7khz MANAGED OBJECT CLASS
  DERIVED FROM etsiTeleservice;
  CHARACTERIZED BY
  telephony7khzPkg PACKAGE
    BEHAVIOUR
    telephony7khzBhv BEHAVIOUR
  DEFINED AS "This object class defines the telephony 7 kHz teleservice .";;
  CONDITIONAL PACKAGES

```

```

    maxNumOfInfoChannelsPkg
    PRESENT IF "supported by the network",
    maxNumOfTotalCallsPkg
    PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 32};

```

7.1.7.6 Videotelephony

```

videotelephony MANAGED OBJECT CLASS
  DERIVED FROM etsiTeleservice;
  CHARACTERIZED BY
  videotelephonyPkg PACKAGE
  BEHAVIOUR
  videotelephonyBhv BEHAVIOUR
  DEFINED AS "This object class defines the videotelephony teleservice.";;;
  CONDITIONAL PACKAGES
  maxNumOfInfoChannelsPkg
  PRESENT IF "supported by the network",
  maxNumOfTotalCallsPkg
  PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 33};

```

7.1.7.7 Videotex

```

videotex MANAGED OBJECT CLASS
  DERIVED FROM etsiTeleservice;
  CHARACTERIZED BY
  videotexPkg PACKAGE
  BEHAVIOUR
  videotexBhv BEHAVIOUR
  DEFINED AS "This object class defines the videotex teleservice .";;;
  CONDITIONAL PACKAGES
  maxNumOfInfoChannelsPkg
  PRESENT IF "supported by the network",
  maxNumOfTotalCallsPkg
  PRESENT IF "supported by the network";
REGISTERED AS {ocaManagedObjectClass 34};

```

7.1.8 Service dependent supplementary service fragment

It is to be regarded that services defined hereafter may apply both to ISDN and PSTN.

7.1.8.1 Supplementary service service dependent

This object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.8.2 Customized supplementary service

The references of the supplementary service subclasses to the service describing standards are given in annex A.

```

customizedSupplementaryService MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceServiceDependent;
  CHARACTERIZED BY
  customizedSupplementaryServicePkg PACKAGE
  BEHAVIOUR
  customizedSupplementaryServiceBhv BEHAVIOUR
  DEFINED AS "It represents the supplementary services providing additional capabilities to be
  used with a basic telecommunication service. It may represent:
  - an ISDN supplementary service as defined in ETSI;
  - a CEPT supplementary service as defined in the CEPT Handbook;
  - a non-standard supplementary service, i.e. operator-specific service.
  A customized supplementary service may be related with a bearer service or teleservice
  thereby supplementing this service.";;;
  ATTRIBUTES
  "ITU-T Recommendation Q.824.0 (1996)":customizedResourcePtrList      GET-REPLACE ADD-
  REMOVE;;;
REGISTERED AS {ocaManagedObjectClass 35};

```

7.1.8.3 Absent customer fixed announcement

```

absentCustomerFixedAnnouncement MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;

```

```

CHARACTERIZED BY
absentCustomerFixedPkg PACKAGE
  BEHAVIOUR
  absentCustomerFixedBhv BEHAVIOUR
  DEFINED AS "The absent customer fixed announcement supplementary service provides the
  possibility for a subscriber to divert his incoming calls to a fixed announcement.
  The priority of the different call forwarding services is subject to the implementation of
  the exchange.";;;
REGISTERED AS {ocaManagedObjectClass 36};

```

7.1.8.4 Absent customer operator position

```

absentCustomerOperatorPosition MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  absentCustomerOperatorPkg PACKAGE
  BEHAVIOUR
  absentCustomerOperatorBhv BEHAVIOUR
  DEFINED AS "The absent customer operator position supplementary service provides the
  possibility for a subscriber to divert his incoming calls to an operator position.
  The priority of the different call forwarding services is subject to the implementation of
  the exchange.";;;
  ATTRIBUTES
  forwardImmediately GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 37};

```

7.1.8.5 Absent customer predetermined announcement

```

absentCustomerPredeterminedAnnouncement MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  absentCustomerPredeterminedPkg PACKAGE
  BEHAVIOUR
  absentCustomerPredeterminedBhv BEHAVIOUR
  DEFINED AS "The absent customer predetermined announcement supplementary service provides
  the possibility for a subscriber to divert his incoming calls to a predetermined
  announcement.
  The priority of the different call forwarding services is subject to the implementation of
  the exchange.";;;
  ATTRIBUTES
  announcementNumber GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 38};

```

7.1.8.6 Advice of charge: charging information at call set-up time

```

adviceOfChargeSetup MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  adviceOfChargeSetupPkg PACKAGE
  BEHAVIOUR
  adviceOfChargeSetupBhv BEHAVIOUR
  DEFINED AS "This service provides the served user with information about the charging rates
  at call establishment. In addition, the served user shall be informed if a change in
  charging rates takes place during the call. The information can be sent for all calls, or on
  a per-call basis. The charge information given shall relate to the charges incurred on the
  network to which the served user is attached.";;;
  ATTRIBUTES
  adviceOfChargeActivation GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 39};

```

7.1.8.7 Advice of charge: charging information during the call

```

adviceOfChargeDuring MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  adviceOfChargeDuringPkg PACKAGE
  BEHAVIOUR
  adviceOfChargeDuringBhv BEHAVIOUR
  DEFINED AS "This service provides the served user with cumulative charging information
  during the call. The information can be sent for all calls, or on a per-call basis. The
  charge information given shall relate to the charges incurred on the network to which the
  served user is attached.";;;
  ATTRIBUTES
  adviceOfChargeActivation GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 40};

```

7.1.8.8 Advice of charge: charging information at the end of the call

```

adviceOfChargeEnd MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  adviceOfChargeEndPkg PACKAGE
    BEHAVIOUR
    adviceOfChargeEndBhv BEHAVIOUR
  DEFINED AS "This service provides the served user with charging information for a call when
  the call is terminated. The information can be sent for all calls, or on a per-call basis.
  The charge information given shall relate to the charges incurred on the network to which
  the served user is attached.";;
  ATTRIBUTES
    adviceOfChargeActivation          GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 41};

```

7.1.8.9 Alarm call

```

alarmCall MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
    alarmCallPkg PACKAGE
    BEHAVIOUR
    alarmCallBhv BEHAVIOUR
  DEFINED AS "The alarm call supplementary service provides the possibility for a user to
  cause an alarm call or calls to be made to his line at the time or times specified in
  advance to him, and to hear an appropriate announcement when the call is answered.
  An instance of this object class shall be automatically deleted if all related alarm calls
  are performed and if it is contained in a customer configuration.";;
  ATTRIBUTES
    timeOfDay          GET-REPLACE,
    date               GET-REPLACE,
    kindOfAlarmCall    GET-REPLACE,
    alarmCallType      GET-REPLACE;
  NOTIFICATIONS
    failedAlarmCall;;;
REGISTERED AS {ocaManagedObjectClass 42};

```

7.1.8.10 Blocking

```

blocking MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  blockingPkg PACKAGE
    BEHAVIOUR
    blockingBhv BEHAVIOUR
  DEFINED AS "This object class gives the reason(s) for which a subscriber or a service is
  blocked. The accessibility of e.g. emergency numbers during blocking conditions is an
  implementation matter.";;
  ATTRIBUTES
    adminBlocking          DEFAULT VALUE
                        CustomerAdminModuleV2.blockingDirectionDefault
                        GET-REPLACE,
    maintBlocking          DEFAULT VALUE
                        CustomerAdminModuleV2.blockingDirectionDefault
                        GET-REPLACE,
    accountSuspension      DEFAULT VALUE
                        CustomerAdminModuleV2.blockingDirectionDefault
                        GET-REPLACE,
    catastrophe            GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 43};

```

7.1.8.11 Call deflection

```

callDeflection MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
    callDeflectionPkg PACKAGE
    BEHAVIOUR
    callDeflectionBhv BEHAVIOUR
  DEFINED AS "This service enables the subscriber to respond to an incoming call by requesting
  redirection of that call to another subscriber.";;
  ATTRIBUTES
    "ITU-T Recommendation Q.824.2 (1996)":deflectingNumberDelivery  GET-REPLACE,
    etsiDeflectingNumberNotification                               GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 44};

```

7.1.8.12 Call forwarding busy

```
callForwardBusy MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  callForwardBusyPkgPACKAGE
    BEHAVIOUR
    callForwardBusyBhv BEHAVIOUR
    DEFINED AS "This service permits a served user to have the network send all incoming calls,
    which meet busy and are addressed to the served user's number to another number. The served
    user's originating service is unaffected.";;
    ATTRIBUTES
    etsiE164DirectoryNumber GET-REPLACE,
    callForwardActiveNotification GET-REPLACE,
    callForwardCallingNotification GET-REPLACE,
    callForwardReleaseNotification GET-REPLACE,
    callForwardServedNotification GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 45};
```

7.1.8.13 Call forwarding no reply

```
callForwardNoReply MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  callForwardNoReplyPkg PACKAGE
    BEHAVIOUR
    callForwardNoReplyBhv BEHAVIOUR
    DEFINED AS "This service permits a served user to have the network send all incoming calls,
    which meet no reply and are addressed to the served user's number to another number. The
    served user's originating service is unaffected.";;
    ATTRIBUTES
    etsiE164DirectoryNumber GET-REPLACE,
    callForwardActiveNotification GET-REPLACE,
    callForwardCallingNotification GET-REPLACE,
    callForwardReleaseNotification GET-REPLACE,
    callForwardServedNotification GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 46};
```

7.1.8.14 Call forwarding unconditional

```
callForwardUnc MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  callForwardUncPkg PACKAGE
    BEHAVIOUR
    callForwardUncBhv BEHAVIOUR
    DEFINED AS "This service permits a served user to have the network send all incoming calls
    addressed to the served user's number to another number. The served user's originating
    service is unaffected. If this service is activated, calls are forwarded no matter what is
    the condition of the termination.";;
    ATTRIBUTES
    etsiE164DirectoryNumber GET-REPLACE,
    callForwardActiveNotification GET-REPLACE,
    callForwardCallingNotification GET-REPLACE,
    callForwardReleaseNotification GET-REPLACE,
    callForwardServedNotification GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 47};
```

7.1.8.15 Call hold

```
callHold MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  callHoldPkg PACKAGE
    BEHAVIOUR
    callHoldBhv BEHAVIOUR
    DEFINED AS "This service allows a user to interrupt communications on an existing call and
    then subsequently, if desired, re-establish communications.";;;
REGISTERED AS {ocaManagedObjectClass 48};
```

7.1.8.16 Calling line identification presentation

```
clipSupplService MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  clipSupplServicePkg PACKAGE
```

```

BEHAVIOUR
clipBhv BEHAVIOUR
DEFINED AS "This supplementary service provides the called party with the possibility of
receiving identification of the calling party. In addition to the ISDN number, the calling
line identity may include a subaddress generated by the calling user and transparently
transported by the network. The network shall deliver the calling line identity to the
called party during call establishment, regardless of the terminal capability to handle the
information.";;;
REGISTERED AS {ocaManagedObjectClass 49};

```

7.1.8.17 Calling line identification restriction

```

clirSupplService MANAGED OBJECT CLASS
DERIVED FROM customizedSupplementaryService;
CHARACTERIZED BY
clirSupplServicePkg PACKAGE
BEHAVIOUR
clirBhv BEHAVIOUR
DEFINED AS "This supplementary service provides the calling party with the possibility to
prevent presentation of the calling party's ISDN number, and subaddress information (if any)
to the called party. If the called party subscribes to the CLIP supplementary service then
the called party shall receive an indication that the calling party information is not
available due to restriction.";;;
ATTRIBUTES
"ITU-T Recommendation Q.824.2 (1996)":callIdRestrictionOptions      GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 50};

```

7.1.8.18 Call waiting

```

callWaiting MANAGED OBJECT CLASS
DERIVED customizedSupplementaryService;
CHARACTERIZED BY
callWaitingPkg PACKAGE
BEHAVIOUR
callWaitingBhv BEHAVIOUR
DEFINED AS "This service permits a user to be informed of an incoming call with an
indication when all access to the user is busy. The user then has the choice of accepting,
rejecting or ignoring the waiting call.";;;
ATTRIBUTES
callWaitingCallingNotification      GET-REPLACE,
maxNumberOfWaitingCalls             GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 51};

```

7.1.8.19 Closed user group subscription options

```

etsiCUGSubscriptionOption MANAGED OBJECT CLASS
DERIVED FROM customizedSupplementaryService;
CHARACTERIZED BY
etsiCUGSubscriptionOptionPkg PACKAGE
BEHAVIOUR
etsiCUGSubscriptionOptionBhv BEHAVIOUR
DEFINED AS "The CUG subscription options object shall only be instantiated if either
attribute preferredCUGIndex is assigned a non-NULL value or attribute interCUGAccess is not
empty. M_SET operations, which would result in preferredCUGIndex value NULL and
interCUGAccess value empty set, shall be rejected. The value of attribute preferredCUGIndex
should not be NULL when interCUGAccess value is 'none' or 'incomingAccess'.
The attribute assocCUGList indicates for which cUGIndex the subscription option applies.";;;
ATTRIBUTES
preferredCUGIndex      GET-REPLACE,
interCUGAccess         GET-REPLACE,
assocCUGList           GET-REPLACE ADD-REMOVE;;;
REGISTERED AS {ocaManagedObjectClass 52};

```

7.1.8.20 Completion of call on no reply

```

callCompletionNoReply MANAGED OBJECT CLASS
DERIVED FROM customizedSupplementaryService;
CHARACTERIZED BY
callCompletionNoReplyPkg PACKAGE
BEHAVIOUR
callCompletionNoReplyBhv BEHAVIOUR
DEFINED AS "The completion of call on no reply supplementary service permits a user A,
encountering a destination B, which does not answer the call (no reply), to be notified when
the destination B becomes free after having terminated an activity, and to have the network
reinitiate the call to the specified destination B if user A desires.";;;

```

```

    ATTRIBUTES
    callCompletionNoReplyRecallMode    GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 53};

```

7.1.8.21 Completion of calls to busy subscribers

```

callCompletionBusy MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  callCompletionBusyPkg PACKAGE
  BEHAVIOUR
  callCompletionBusyBhv BEHAVIOUR
  DEFINED AS "This service enables a calling user, encountering a busy destination, to have
the call completed when the busy destination becomes not busy, without having to make a new
call attempt.";;
  ATTRIBUTES
  callCompletionBusyRecallMode    GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 54};

```

7.1.8.22 Conference call add-on

```

conferenceCallAddOn MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  conferenceCallAddOnPackage PACKAGE
  BEHAVIOUR
  conferenceCallAddOnBehaviour BEHAVIOUR
  DEFINED AS "This managed object class is used to indicate that the customer is authorized to
use the conference call add-on supplementary service."
  ;;;;
REGISTERED AS {ocaManagedObjectClass 55};

```

7.1.8.23 Connected line identification presentation

```

colpSupplService MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService ;
  CHARACTERIZED BY
  colpPkg PACKAGE
  BEHAVIOUR
  colpBhv BEHAVIOUR
  "This objekt class is a SupplementaryService offered for the calling party, which indicates
the called party at the calling party. "
REGISTERED AS {ocaManagedObjectClass 56};

```

7.1.8.24 Connected line identification restriction

```

colrSupplService MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplService;
  CHARACTERIZED BY
  colrSupplServicePkg PACKAGE
  BEHAVIOUR
  colrSupplServiceBhv BEHAVIOUR
  DEFINED AS "The called line identification restriction supplementary service is a
supplementary service offered to the called party to prevent presentation of the called
party's ISDN number, and subaddress information (if any) to the calling party.";;
  ATTRIBUTES
  "ITU-T Recommendation Q.824.2 (1996)":callIdRestrictionOptions    GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 57};

```

7.1.8.25 Cordless terminal mobility

```

cordlessTerminalMobility MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  cordlessTerminalMobilityPkgPACKAGE
  BEHAVIOUR
  cordlessTerminalMobilityBhv BEHAVIOUR
  DEFINED AS "The cordless terminal mobility service allows users of cordless terminals to be
mobile within and between networks. Where radio coverage is provided and the cordless
terminal has appropriate access rights the user is able to make calls from, and to receive
calls at, any location within the fixed public and/or private networks, and may move without
interruption of a call in progress.";;
  ATTRIBUTES
  ctmId    GET-REPLACE,
  permittedMobileArea    GET-REPLACE;;;

```

```
REGISTERED AS {ocaManagedObjectClass 58};
```

7.1.8.26 Detailed billing

```
detailedBilling MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  detailedBillingPkg PACKAGE
    BEHAVIOUR
      detailedBillingBhv BEHAVIOUR
      DEFINED AS "The service of detailed billing gives the customer the possibility of being
      billed with a complete detail of the originated traffic. The completeness of the data
      presented on the bill depends on the detail class subscribed by the customer or available in
      the network and/or exchange.";;
    ATTRIBUTES
      detailClass          GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 59};
```

7.1.8.27 Explicit call transfer

```
explicitCallTransfer MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  explicitCallTransferPkg PACKAGE
    BEHAVIOUR
      explicitCallTransferBhv BEHAVIOUR
      DEFINED AS "This managed object class is used to indicate that the customer is authorized to
      use the explicit call transfer supplementary service.";;;
REGISTERED AS {ocaManagedObjectClass 60};
```

7.1.8.28 Fixed destination call

```
fixedDestinationCall MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
    fixedDestinationCallPkg PACKAGE
      BEHAVIOUR
        fixedDestinationCallBhv BEHAVIOUR
        DEFINED AS "This object class is used to administer the fixed destination call (hot line)
        service both with or without the possibility of administration via customer controlled
        input.
        For administration controlled service operation, the instantiation of the object is
        initiated by the OS. The values of the attributes variant and fixedDestinationNumber shall
        be set at creation, but may afterwards be modified by the OS.
        In the case of service operation by the customer on service provision basis, the
        instantiation of the object is as well initiated by the OS to indicate that the customer has
        the authorisation to use the service. The value of the variant attribute shall be set at
        creation by the OS according to the service subscription. The value of the
        fixedDestinationNumber attribute shall be set to NULL. The value of this attribute shall be
        modified by the resource management of the exchange on the customer input of the service
        control operation.";;
      ATTRIBUTES
        variant                GET-REPLACE,
        fixedDestinationNumber  GET-REPLACE;;;
    CONDITIONAL PACKAGES
      generallyProvidedFixedDestinationCallPkg
      PRESENT IF "the fixed destination call service is a general service option of the exchange
      available for all customers";
REGISTERED AS {ocaManagedObjectClass 61};
```

7.1.8.29 Incoming call barring

```
incomingCallBarring MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  incomingCallBarringPkg PACKAGE
    BEHAVIOUR
      incomingCallBarringBhv BEHAVIOUR
      DEFINED AS "With this object class, incoming call barring is assigned. It may activate as
      well a do-not-disturb announcement.";;
    ATTRIBUTES
      doNotDisturb          GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 62};
```

7.1.8.30 Interception of calls

```
interceptionOfCalls MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  interceptionOfCallsPkg PACKAGE
    BEHAVIOUR
      interceptionOfCallsBhv BEHAVIOUR
      DEFINED AS "This object class allows an interception of calls on a per-service basis.>";
  ATTRIBUTES
      interceptionReason          GET-REPLACE,
      "ITU-T Recommendation Q.824.0 (1996)":interceptTreatmentTerm      GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 63};
```

7.1.8.31 Malicious call identification

Since due to legal and network operator's requirements the format of the malicious call identification notification may vary from country to country, this notification shall be defined with an implementation specific subclass.

```
maliciousCallIdentification MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  maliciousCallIdentificationPkg PACKAGE
    BEHAVIOUR
      maliciousCallIdentificationBhv BEHAVIOUR
      DEFINED AS "This supplementary service allows a subscriber to start up the tracing of the
      malicious call originator.";;;
  CONDITIONAL PACKAGES
      automaticInvocationPkg
      PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 64};
```

7.1.8.32 Outgoing call barring

```
outgoingCallBarring MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  outgoingCallBarringPkg PACKAGE
    BEHAVIOUR
      outgoingCallBarringBhv BEHAVIOUR
      DEFINED AS "With this object class, outgoing call barring with fixed and/or user controlled
      program is assigned. The barring program may cover as well subscriber controlled input
      restrictions.>";
  ATTRIBUTES
      fixedProgram                GET-REPLACE,
      userControlledProgram       GET-REPLACE,
      activated                    GET SET-BY-CREATE;;;
REGISTERED AS {ocaManagedObjectClass 65};
```

7.1.8.33 Remote control of supplementary service

```
remoteControlService MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  remoteControlServicePkgPACKAGE
    BEHAVIOUR
      remoteControlServiceBhv BEHAVIOUR
      DEFINED AS "The remote control supplementary service enables a user to control a
      supplementary service or a number of supplementary services associated with that user's
      configuration from another access using the procedures provided for the (supplementary)
      service(s) to be controlled at the served user's access. Remote control service can be
      invoked independently of the state of the served user's access, and existing calls at the
      served user's access shall not be affected by the invocation of the remote control
      service.>";
  ATTRIBUTES
      remotelyControlledService    GET-REPLACE,
      callDiversionRestrictions    GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 66};
```

7.1.8.34 Subaddressing

```
subaddressing MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  subaddressingPackage PACKAGE
```

```

    BEHAVIOUR
    subaddressingBehaviour BEHAVIOUR
    DEFINED AS " This managed object class is used to indicate that the called customer is
    authorized to use the subaddressing supplementary service.";;;
REGISTERED AS {ocaManagedObjectClass 67};

```

7.1.8.35 Terminal portability

```

termPortabilitySupplService MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  termPortabilitySupplServicePkg PACKAGE
  BEHAVIOUR
  termPortabilityBhv BEHAVIOUR
  DEFINED AS "This supplementary service allows a user engaged in an active call to adjourn
  communication by an appropriate signalling procedure and resume the call at a later
  time.";;;
REGISTERED AS {ocaManagedObjectClass 68};

```

7.1.8.36 Three party

```

threeParty MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  threePartyPkg PACKAGE
  BEHAVIOUR
  threePartyBhv BEHAVIOUR
  DEFINED AS "This service enables a user to establish a three-way conversation, i.e. a
  simultaneous communication between the user and two other parties.";;;
REGISTERED AS {ocaManagedObjectClass 69};

```

7.1.8.37 User to user signalling

```

userToUserSignalling MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  userToUserSignallingPkg PACKAGE
  BEHAVIOUR
  userToUserSignallingBhv BEHAVIOUR
  DEFINED AS "The user to user signalling supplementary service permits a user to send/receive
  a limited amount of information to/from another user over the signalling channel in
  association with a call to the other user.";;
  ATTRIBUTES
  uusService1Implicit      GET-REPLACE,
  uusService1Explicit     GET-REPLACE,
  uusService2              GET-REPLACE,
  uusService3              GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 70};

```

7.1.8.38 Virtual private network

```

vpn MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  vpnPkg PACKAGE
  BEHAVIOUR
  vpnBhv BEHAVIOUR
  DEFINED AS "This object class indicates whether the related customer configuration is part
  of a virtual private network.";;;
REGISTERED AS {ocaManagedObjectClass 71};

```

7.1.8.39 Voice messaging busy

```

voiceMessagingBusy MANAGED OBJECT CLASS
  DERIVED FROM customizedSupplementaryService;
  CHARACTERIZED BY
  voiceMessagingBusyPkg PACKAGE
  BEHAVIOUR
  voiceMessagingBusyBhv BEHAVIOUR
  DEFINED AS "The voice messaging supplementary service allows the customer to activate a
  centralised voice messaging system to collect voice messages for calls which meet busy.
  This service shall only be assigned to voice-related teleservices.";;;
  CONDITIONAL PACKAGES
  voiceMessagingNumberPkg
  PRESENT IF "needed for routeing to the voice messaging system on subscription basis",

```

```

mwiReceiverPointerPkg
PRESENT IF "a dedicated mwiReceiver object class is to be assigned";
REGISTERED AS {ocaManagedObjectClass 72};

```

7.1.8.40 Voice messaging no reply

```

voiceMessagingNoReply MANAGED OBJECT CLASS
DERIVED FROM customizedSupplementaryService;
CHARACTERIZED BY
voiceMessagingNoReplyPkg PACKAGE
BEHAVIOUR
voiceMessagingNoReplyBhv BEHAVIOUR
DEFINED AS "The voice messaging supplementary service allows the customer to activate a
centralised voice messaging system to collect voice messages for calls which meet no reply.
This service shall only be assigned to voice-related teleservices.>";
ATTRIBUTES
mwiInvocationMode          GET-REPLACE,
messageWaitingIndicator    GET;;;
CONDITIONAL PACKAGES
voiceMessagingNumberPkg
PRESENT IF "needed for routeing to the voice messaging system on subscription basis",
mwiReceiverPointerPkg
PRESENT IF "a dedicated mwiReceiver object class is to be assigned";
REGISTERED AS {ocaManagedObjectClass 73};

```

7.1.8.41 Voice messaging unconditional

```

voiceMessagingUnconditional MANAGED OBJECT CLASS
DERIVED FROM customizedSupplementaryService;
CHARACTERIZED BY
voiceMessagingUnconditionalPkg PACKAGE
BEHAVIOUR
voiceMessagingUnconditionalBhv BEHAVIOUR
DEFINED AS "The voice messaging supplementary service allows the customer to activate a
centralised voice messaging system to collect voice messages for all calls no matter what
the condition of the termination is.
This service shall only be assigned to voice-related teleservices.>";
ATTRIBUTES
mwiInvocationMode          GET-REPLACE,
messageWaitingIndicator    GET;;;
CONDITIONAL PACKAGES
voiceMessagingNumberPkg
PRESENT IF "needed for routeing to the voice messaging system on subscription basis",
mwiReceiverPointerPkg
PRESENT IF "a dedicated mwiReceiver object class is to be assigned";
REGISTERED AS {ocaManagedObjectClass 74};

```

7.1.9 Service independent supplementary service fragment

It is to be regarded that services defined hereafter may apply both to ISDN and PSTN.

7.1.9.1 Supplementary service service independent

This object class is defined in ITU-T Recommendation Q.824.0 [46].

The references of its subclasses to the service describing standards are given in annex A.

7.1.9.2 ETSI supplementary service service independent

The references of the supplementary service subclasses to the service describing standards are given in annex A.

```

etsiSupplementaryServiceServiceIndependent MANAGED OBJECT CLASS
DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceServiceIndependent;
CHARACTERIZED BY
etsiSupplementaryServiceServiceIndependentPkg PACKAGE
BEHAVIOUR
etsiSupplementaryServiceServiceIndependentBhv BEHAVIOUR
DEFINED AS "It represents the supplementary services providing additional capabilities to be
used with a basic telecommunication service. It may represent:
- an ISDN supplementary service as defined in ETSI;
- a CEPT supplementary service as defined in the CEPT Handbook;
- a non-standard supplementary service, i.e. operator-specific service.>";
CONDITIONAL PACKAGES

```

```

        customizedResourcePtrListPkg
    PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 75};

```

7.1.9.3 Abbreviated dialling

```

abbreviatedDialling MANAGED OBJECT CLASS
    DERIVED FROM etsiSupplementaryServiceServiceIndependent;
    CHARACTERIZED BY
        abbreviatedDiallingPkg PACKAGE
            BEHAVIOUR
                abbreviatedDiallingBhv BEHAVIOUR
            DEFINED AS "This managed object class is used to indicate that the customer is authorized to
            use the abbreviated dialling supplementary service."
            ;;
            ATTRIBUTES
                maxNumberOfEntries          GET-REPLACE,
                diallingList                GET-REPLACE;;;
    CONDITIONAL PACKAGES
        masterPropertyPkg
            PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 76};

```

7.1.9.4 Closed user group

```

etsiCUG MANAGED OBJECT CLASS
    DERIVED FROM etsiSupplementaryServiceServiceIndependent;
    CHARACTERIZED BY
        etsiCUGPkg PACKAGE
            BEHAVIOUR
                etsiCUGBhv BEHAVIOUR
            DEFINED AS "The managed object class is used to store the closed user group general
            subscription options .
            The attribute cUGIndex shall be explicitly assigned upon object creation.
            No two instances of object class etsiCUG contained within a single object shall have
            identical values for attribute cUGIndex.
            No two instances of object class etsiCUG contained within a single object shall have
            identical values of attribute cUGInterlockCode and cUGDataNetworkIdentification.
            When the value of attribute cUGBarring is outBarred, this CUG shall not be a preferential
            closed user group (denoted by attribute preferredCUGIndex in cUGSubscriptionOption managed
            object).";
            ATTRIBUTES
                cUGIndex                    GET SET-BY-CREATE,
                cUGInterlockCode            GET SET-BY-CREATE,
                cUGDataNetworkIdentification GET SET-BY-CREATE,
                cUGBarring                  GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 77};

```

7.1.9.5 Customer observation

```

customerObservation MANAGED OBJECT CLASS
    DERIVED FROM etsiSupplementaryServiceServiceIndependent;
    CHARACTERIZED BY
        customerObservationPkg PACKAGE
            BEHAVIOUR
                customerObservationBhv BEHAVIOUR
            DEFINED AS "The customer observation service activates the recording of call details e.g.
            for verification of the increments to the metering counter of the customer, supervision
            purposes, quality of service verification, etc.
            The format of the customer observation records is an implementation matter, since e.g. due
            to legal requirements it may vary from network operator to network operator.
            For this object class different name bindings are defined (under customer profile,
            customizedResource, etsiE164DirectoryNumber, and accessPort). Within one managed element,
            one and only one of these name bindings shall be used.";;;
    CONDITIONAL PACKAGES
        observationModePkg
            PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 78};

```

7.1.9.6 Different ringing

```

differentRinging MANAGED OBJECT CLASS
    DERIVED FROM etsiSupplementaryServiceServiceIndependent;
    CHARACTERIZED BY
        differentRingingPkg PACKAGE
            BEHAVIOUR

```

differentRinginBhv BEHAVIOUR

DEFINED AS "It is used to allocate different directory numbers to a single analogue access. For calls to such an access, different ringing signals (e.g. different sequences) are to be sent to the customer installation, according to the directory number dialled by the calling party.

It is to be considered that the assigned port must be capable to provide the different ringing. This object class shall only be assigned to non-ISDN customer configurations.";;

ATTRIBUTES

primaryDN GET REPLACE,

ringingSequence GET REPLACE;;;

REGISTERED AS {ocaManagedObjectClass 79};

7.1.9.7 Direct dialling in

ddi MANAGED OBJECT CLASS

DERIVED FROM etsiSupplementaryServiceServiceIndependent;

CHARACTERIZED BY

ddiPkg PACKAGE

BEHAVIOUR

ddiBhv BEHAVIOUR

DEFINED AS "This supplementary service enables a user to call directly via a public ISDN a user on a private ISDN by use of the public ISDN numbering plan.";;

ATTRIBUTES

numOfDigitsNotToTransmit GET-REPLACE;;;

REGISTERED AS {ocaManagedObjectClass 80};

7.1.9.8 General facility reset

generalFacilityReset MANAGED OBJECT CLASS

DERIVED FROM etsiSupplementaryServiceServiceIndependent;

CHARACTERIZED BY

generalFacilityResetPackage PACKAGE

BEHAVIOUR

generalFacilityResetBehaviour BEHAVIOUR

DEFINED AS " This managed object class is used to indicate that the customer is authorized to use general facility reset supplementary service.

The general facility reset supplementary service allows a customer to deactivate with one subscriber controlled input command (SCI) a number of supplementary services.

The supplementary services to be deactivated as a result of the SCI can be network operator dependent.";;;

REGISTERED AS {ocaManagedObjectClass 81};

7.1.9.9 Home meter

homeMeter MANAGED OBJECT CLASS

DERIVED FROM etsiSupplementaryServiceServiceIndependent;

CHARACTERIZED BY

homeMeterPkg PACKAGE

BEHAVIOUR

homeMeterBhv BEHAVIOUR

DEFINED AS "It is used to assign to a customer configuration the transmission of metering pulses to the customer premises.

This object class shall only be assigned to non-ISDN customer configurations. It is to be considered that the assigned port must be capable to provide the installation in the customer's premises with the metering pulses.";;;

REGISTERED AS {ocaManagedObjectClass 82};

7.1.9.10 Message waiting indication controller

mwiController MANAGED OBJECT CLASS

DERIVED FROM etsiSupplementaryServiceServiceIndependent;

CHARACTERIZED BY

mwiControllerPkg PACKAGE

BEHAVIOUR

mwiControllerBhv BEHAVIOUR

DEFINED AS "This service permits a user to activate and deactivate the message waiting indication of a user which supports the voice messaging supplementary service. The user of this object class is likely to be a voice mail box.";;;

REGISTERED AS {ocaManagedObjectClass 83};

7.1.9.11 Message waiting indication receiver

mwiReceiver MANAGED OBJECT CLASS

DERIVED FROM etsiSupplementaryServiceServiceIndependent;

CHARACTERIZED BY

```

mwiReceiverPackage PACKAGE
  BEHAVIOUR
  mwiReceiverBehaviour BEHAVIOUR
  DEFINED AS "This service permits a user to receive changes to the condition of a message
  waiting indicator. The user of this object class is likely to be subscribed to a voice
  messaging service which forwards calls to a voice mail box."
  ;;
  ATTRIBUTES
  mwiInvocationMode          GET-REPLACE,
  messageWaitingIndicator    GET;;;
  CONDITIONAL PACKAGES
  mwiControllingUserPkg
  PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 84};

```

7.1.9.12 Multiple subscriber number

```

msn MANAGED OBJECT CLASS
  DERIVED FROM etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  msnPkg PACKAGE
  BEHAVIOUR
  msnBhv BEHAVIOUR
  DEFINED AS "The MSN supplementary service provides the possibility for assigning multiple
  numbers (not necessarily consecutive) to a single public or private interface. This enables
  the selection of one or more multiple distinct terminals attached to the same interface.
  The MSN supplementary service is only valid for single line, standard subscribers connected
  to a basic access port. The MSN supplementary service shall be created prior to assignment
  of the second CCITT Recommendation E.164 DN to attribute assocMemberEtsiE164DirectoryNumber
  s of the analogue ISDN customer profile.
  The MSN supplementary service object class may not be deleted unless attribute
  assocMemberEtsiE164DirectoryNumber s of the analogue ISDN customer profile contains two or
  more CCITT Recommendation E.164 DN.";;
  ATTRIBUTES
  assocDefaultDN              GET-REPLACE,
  screenOriginatingDN         GET-REPLACE,
  numofDigitsForCallId        GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 85};

```

7.1.9.13 PIN

```

pin MANAGED OBJECT CLASS
  DERIVED FROM etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  pinPkg PACKAGE
  BEHAVIOUR
  pinBhv BEHAVIOUR
  DEFINED AS "This managed object class is used to assign a PIN to one or more supplementary
  services to prevent from their unauthorised use.
  The initial value and the default value of the pin attribute is determined by the network
  element resource on its own.
  The PIN given in the pin attribute is valid for all PIN controlled customized services
  assigned to a customer configuration identified by the PIN profile reference.";;
  ATTRIBUTES
  pin                          REPLACE-WITH-DEFAULT
  pinDefaultAndInitialBhv BEHAVIOUR
  DEFINED AS "The initial value and the default value of the pin attribute is
  determined by the network element resource on its own.";
  INITIAL VALUE
  DERIVATION RULE pinDefaultAndInitialBhv,
  pinProfileRef              GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass 86};

```

7.1.9.14 Priority

```

priority MANAGED OBJECT CLASS
  DERIVED FROM etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  priorityPkg PACKAGE
  BEHAVIOUR
  priorityBhv BEHAVIOUR
  DEFINED AS "This supplementary service is used to assign priority to some or all access
  ports of the related profile e.g. to override traffic controls assigned to non-priority
  traffic.";;;
REGISTERED AS {ocaManagedObjectClass 87};

```

7.1.9.15 Terminating calls not charged

```
terminatingCallsNotCharged MANAGED OBJECT CLASS
  DERIVED FROM etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  terminatingCallsNotChargedPkg PACKAGE
    BEHAVIOUR
      terminatingCallsNotChargedBhv BEHAVIOUR
      DEFINED AS "The terminating calls not charged supplementary service is a service associated
with the called party.
Calls to a directory number with this service will not be charged.
To prevent the charging in the originating exchange in case of an incoming terminating call,
the terminating exchange will, if the signalling system supports it, sent a backward signal
'no charge' and provide for the answer signal or, in case the signalling system does not
support the sending of information that the call is not to be charged, withhold the answer
signal.";;;
REGISTERED AS {ocaManagedObjectClass 88};
```

7.1.10 General services

In this clause, services are defined which are subject to be provided on a per exchange basis.

7.1.10.1 Catalogued supplementary service

This object class is defined in ITU-T Recommendation Q.824.0 [46].

The catalogued supplementary service managed object class is a superclass for other service subclasses that have attributes that are not customizable by the customer. The subclasses will be defined once candidates for the non-customizable attributes have been identified.

This object class is not instantiated.

7.1.10.2 Catalogued teleservice

This object class is defined in ITU-T Recommendation Q.824.0 [46].

The catalogued teleservice managed object class defines a communication service that makes available layer 4 - layer 7 capabilities. and has attributes that are not customizable by the customer. This object class is a superclass from which specific catalogued teleservice objects may be derived as subclasses.

This object class is not instantiated.

7.1.10.3 General ISDN service container

```
isdnServiceContainer MANAGED OBJECT CLASS
  DERIVED FROM "CCITT Recommendation X.721: 1992":top;
  CHARACTERIZED BY
  isdnServiceContainerPkg PACKAGE
    BEHAVIOUR
      isdnServiceContainerBhv BEHAVIOUR
      DEFINED AS "The General ISDN service container is the superior object classes for
supplementary services available to all ISDN customer configurations.
It is to be considered that a service configuration within a customer configuration
overrides this general service configuration.
This object class shall only be used for the general provision of services for which the
resource (i.e. the exchange) is capable to provide them generally on exchange level.";;
  ATTRIBUTES
    serviceContainerId      GET;;;
  CONDITIONAL PACKAGES
    generalServiceListPkg
  PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 89};
```

7.1.10.4 General PSTN service container

```
pstnServiceContainer MANAGED OBJECT CLASS
  DERIVED FROM "CCITT Recommendation X.721: 1992":top;
  CHARACTERIZED BY
  pstnServiceContainerPkg PACKAGE
    BEHAVIOUR
```

```

pstnServiceContainerBhv BEHAVIOUR
DEFINED AS "The General PSTN service container is the superior object classes for
supplementary services available to all PSTN customer configurations.
It is to be considered that a service configuration within a customer configuration
overrides this general service configuration.
This object class shall only be used for the general provision of services for which the
resource (i.e. the exchange) is capable to provide them generally on exchange level.>";
ATTRIBUTES
    serviceContainerId      GET;;;
CONDITIONAL PACKAGES
    generalServiceListPkg
    PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 90};

```

7.1.10.5 Non ISDN service

```

nonIsdnService MANAGED OBJECT CLASS
DERIVED FROM "CCITT Recommendation X.721: 1992":top;
CHARACTERIZED BY
    nonIsdnServicePkg PACKAGE
    BEHAVIOUR
    nonIsdnServiceBhv BEHAVIOUR
    DEFINED AS "This object class is defined to allow the creation of specific supplementary
    services for analogue customerProfiles.>";
    ATTRIBUTES
        nonIsdnServiceId      GET,
        "CCITT Recommendation X.721: 1992":administrativeState      GET-REPLACE,
        "ITU-T Recommendation Q.824.0 (1996)":customizedResourcePtrList GET-REPLACE ADD-REMOVE;
    NOTIFICATIONS
        "CCITT Recommendation X.721: 1992":stateChange,
        "CCITT Recommendation X.721: 1992":attributeValueChange;;;
REGISTERED AS {ocaManagedObjectClass 91};

```

7.1.11 Service provision fragment

7.1.11.1 Service manager

The serviceManager object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.11.2 Configuration service manager

```

configurationServiceManager MANAGED OBJECT CLASS
DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":serviceManager;
CHARACTERIZED BY
    configurationServiceManagerPkg PACKAGE
    BEHAVIOUR
    configurationServiceManagerBhv BEHAVIOUR
    DEFINED AS "The configurationServiceManager performs actions which establish customer
    configurations and services. In addition, the configurationServiceManager performs actions
    which change directory number and access port assignments.>";
    ACTIONS
        changeDirectoryNumber "ITU-T Recommendation Q.824.1 (1996)":invalidReferenceError,
        changeAccessPort "ITU-T Recommendation Q.824.1 (1996)":invalidReferenceError,
        establishCustomerConfiguration "ITU-T Recommendation Q.824.1 (1996)":invalidReferenceError,
        addServiceToConfiguration "ITU-T Recommendation Q.824.1 (1996)":invalidReferenceError;;;
REGISTERED AS {ocaManagedObjectClass 92};

```

7.1.11.3 Service package

The servicePackage object class is defined in ITU-T Recommendation Q.824.0 [46].

7.1.11.4 Reference service configuration

```

referenceServiceConfiguration MANAGED OBJECT CLASS
DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":servicePackage;
CHARACTERIZED BY
    referenceServiceConfigurationPkg PACKAGE
    BEHAVIOUR
    referenceServiceConfigurationBhv BEHAVIOUR
    DEFINED AS "An instance of this object class contains reference profiles for service
    assignments which are referenced in ACTIONS on an instance of
    configurationServiceManager.>";
CONDITIONAL PACKAGES

```

```

        overridePkg
        PRESENT IF "an instance supports it";
REGISTERED AS {ocaManagedObjectClass 93};

```

7.2 Name bindings

7.2.1 Access channel-service package

```

accessChannel-servicePackage NAME BINDING
  SUBORDINATE OBJECT CLASS      "ITU-T Recommendation Q.824.0 (1996)":accessChannel
                                AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":servicePackage
                                AND SUBCLASSES;
  WITH ATTRIBUTE "CCITT Recommendation M.3100":cTPIId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 1};

```

7.2.2 Access port profile-managed element

```

accessPortProfile-managedElement NAME BINDING
  SUBORDINATE OBJECT CLASS      "ITU-T Recommendation Q.824.0 (1996)":accessPortProfile
                                AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "CCITT Recommendation M.3100(1992)":managedElement
                                AND SUBCLASSES;
  WITH ATTRIBUTE "ITU-T Recommendation Q.824.0 (1996)":accessPortProfileId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 2};

```

7.2.3 Access port profile-service package

```

accessPortProfile-servicePackage NAME BINDING
  SUBORDINATE OBJECT CLASS      "ITU-T Recommendation Q.824.0 (1996)":accessPortProfile
                                AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":servicePackage
                                AND SUBCLASSES;
  WITH ATTRIBUTE "ITU-T Recommendation Q.824.0 (1996)":accessPortProfileId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 3};

```

7.2.4 Customer observation-ETSI access port

```

customerObservation-etsiAccessPort NAME BINDING
  SUBORDINATE OBJECT CLASS      customerObservation AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS etsiAccessPort AND SUBCLASSES;
  WITH ATTRIBUTE "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 4};

```

7.2.5 Customer observation-ETSI customized resource

```

customerObservation-etsiCustomizedResource NAME BINDING
  SUBORDINATE OBJECT CLASS      customerObservation AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS etsiCustomizedResource AND SUBCLASSES;
  WITH ATTRIBUTE "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 5};

```

7.2.6 Customer observation-ETSI directory number E.164

```

customerObservation-etsiDirectoryNumberE164 NAME BINDING
  SUBORDINATE OBJECT CLASS      customerObservation AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS etsiDirectoryNumberE164 AND SUBCLASSES;
  WITH ATTRIBUTE "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;

```

```
DELETE;
REGISTERED AS {ocaNameBinding 6};
```

7.2.7 Customer profile-managed element

```
customerProfile-managedElement NAME BINDING
  SUBORDINATE OBJECT CLASS      "ITU-T Recommendation Q.824.0 (1996)":customerProfile
                                AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "CCITT Recommendation M.3100(1992)":managedElement
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":customerProfileId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 7};
```

7.2.8 Customer profile-service package

```
customerProfile-servicePackage NAME BINDING
  SUBORDINATE OBJECT CLASS      "ITU-T Recommendation Q.824.0 (1996)":customerProfile
                                AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":servicePackage
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":customerProfileId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 8};
```

7.2.9 Customized supplementary service-general ISDN service container

```
customizedSupplementaryService-isdnServiceContainer NAME BINDING
  SUBORDINATE OBJECT CLASS      customizedSupplementaryService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS isdnServiceContainer AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 9};
```

7.2.10 Customized supplementary service-general PSTN service container

```
customizedSupplementaryService-pstnServiceContainer NAME BINDING
  SUBORDINATE OBJECT CLASS      customizedSupplementaryService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS pstnServiceContainer AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 10};
```

7.2.11 Customized supplementary service-non ISDN service

```
customizedSupplementaryService-nonIsdnService NAME BINDING
  SUBORDINATE OBJECT CLASS      customizedSupplementaryService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS nonIsdnService AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 11};
```

7.2.12 Customized supplementary service-service package

```
customizedSupplementaryService-servicePackage NAME BINDING
  SUBORDINATE OBJECT CLASS      customizedSupplementaryService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":servicePackage
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 12};
```

7.2.13 Directory number-managed element

```
directoryNumber-managedElement NAME BINDING
  SUBORDINATE OBJECT CLASS      "ITU-T Recommendation Q.824.0 (1996)":directoryNumber
                                AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "CCITT Recommendation M.3100(1992)":managedElement
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":directoryNumberId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 13};
```

7.2.14 ETSI access channel-ETSI access port

```
etsiAccessChannel-etsiAccessPort NAME BINDING
  SUBORDINATE OBJECT CLASS      etsiAccessChannel AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS etsiAccessPort AND SUBCLASSES;
  WITH ATTRIBUTE                 "CCITT Recommendation M.3100:1992":cTpid;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding 14};
```

7.2.15 ETSI access port-managed element

```
etsiAccessPort-managedElement NAME BINDING
  SUBORDINATE OBJECT CLASS      etsiAccessPort AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "CCITT Recommendation M.3100(1992)":managedElement
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "CCITT Recommendation M.3100":tTpid;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 15};
```

7.2.16 ETSI bearer service-customer profile

```
etsiBearerService-customerProfile NAME BINDING
  SUBORDINATE OBJECT CLASS      etsiBearerService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":customerProfile
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":bearerServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 16};
```

7.2.17 ETSI bearer service- general ISDN service container

```
etsiBearerService-isdnServiceContainer NAME BINDING
  SUBORDINATE OBJECT CLASS      etsiBearerService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS isdnServiceContainer AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":bearerServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 17};
```

7.2.18 ETSI bearer service-service package

```
etsiBearerService-servicePackage NAME BINDING
  SUBORDINATE OBJECT CLASS      etsiBearerService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":servicePackage
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 "ITU-T Recommendation Q.824.0 (1996)":bearerServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 18};
```

7.2.19 ETSI customized Resource-customer profile

```
etsiCustomizedResource-customerProfile NAME BINDING
  SUBORDINATE OBJECT CLASS      etsiCustomizedResource AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":customerProfile
```

```

                                AND SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":customizedResourceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE;
REGISTERED AS {ocaNameBinding 19};

```

7.2.20 ETSI supplementary service service independent-general ISDN service container

```

etsiSupplementaryServiceServiceIndependent-isdnServiceContainer NAME BINDING
SUBORDINATE OBJECT CLASS        etsiSupplementaryServiceServiceIndependent AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS  isdnServiceContainer AND SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE;
REGISTERED AS {ocaNameBinding 20};

```

7.2.21 ETSI supplementary service service independent-general PSTN service container

```

etsiSupplementaryServiceServiceIndependent-pstnServiceContainer NAME BINDING
SUBORDINATE OBJECT CLASS        etsiSupplementaryServiceServiceIndependent AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS  pstnServiceContainer AND SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE;
REGISTERED AS {ocaNameBinding 21};

```

7.2.22 ETSI supplementary service service independent-service package

```

etsiSupplementaryServiceServiceIndependent-servicePackage NAME BINDING
SUBORDINATE OBJECT CLASS        etsiSupplementaryServiceServiceIndependent AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS  "ITU-T Recommendation Q.824.0 (1996)":servicePackage
                                AND SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":supplementaryServiceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE;
REGISTERED AS {ocaNameBinding 22};

```

7.2.23 ETSI teleservice-customer profile

```

etsiTeleservice-customerProfile NAME BINDING
SUBORDINATE OBJECT CLASS        etsiTeleservice AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS  "ITU-T Recommendation Q.824.0 (1996)":customerProfile
                                AND SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":teleserviceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 23};

```

7.2.24 ETSI teleservice-general ISDN service container

```

etsiTeleservice-isdnServiceContainer NAME BINDING
SUBORDINATE OBJECT CLASS        etsiTeleservice AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS  isdnServiceContainer AND SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":teleserviceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 24};

```

7.2.25 ETSI teleservice-service package

```

etsiTeleservice-servicePackage NAME BINDING
SUBORDINATE OBJECT CLASS        etsiTeleservice AND SUBCLASSES;
NAMED BY SUPERIOR OBJECT CLASS  "ITU-T Recommendation Q.824.0 (1996)":servicePackage AND
                                SUBCLASSES;
WITH ATTRIBUTE                    "ITU-T Recommendation Q.824.0 (1996)":teleserviceId;
CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE DELETES-CONTAINED-OBJECTS;

```

```
REGISTERED AS {ocaNameBinding 25};
```

7.2.26 General ISDN service container-managed element

```
isdnServiceContainer-managedElement NAME BINDING
  SUBORDINATE OBJECT CLASS      isdnServiceContainer AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "CCITT Recommendation M.3100(1992)":managedElement
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 serviceContainerId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 26};
```

7.2.27 General PSTN service container-managed element

```
pstnServiceContainer-managedElement NAME BINDING
  SUBORDINATE OBJECT CLASS      pstnServiceContainer AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "CCITT Recommendation M.3100(1992)":managedElement
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 serviceContainerId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 27};
```

7.2.28 Non ISDN service-customer profile

```
nonIsdnService-customerProfile NAME BINDING
  SUBORDINATE OBJECT CLASS      nonIsdnService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS "ITU-T Recommendation Q.824.0 (1996)":customerProfile
                                AND SUBCLASSES;
  WITH ATTRIBUTE                 nonIsdnServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE DELETES-CONTAINED-OBJECTS;
REGISTERED AS {ocaNameBinding 28};
```

7.2.29 Service manager-managed element

The serviceManger-managedElement name binding is defined in ITU-T Recommendation Q.824.0 [46].

7.2.30 Service package-managed element

The servicePackage-managedElement name binding is defined in ITU-T Recommendation Q.824.0 [46].

7.3 Definition of packages

7.3.1 Acting role package

```
actingRolePkg PACKAGE
  BEHAVIOUR
  actingRolePkgBhv BEHAVIOUR
  DEFINED AS "An ISDN primary rate access can have three different modes of operation:
  1) Balanced mode: no priority is given a certain communication partner
  2) Master mode:   the appropriate access port is the master in this communication
  3) Slave mode:   the appropriate access port is the slave in this communication";
  ATTRIBUTES
  actingRole                                GET-REPLACE;
REGISTERED AS {ocaPackage 1};
```

7.3.2 Administrative state package

```
adminStatePkg PACKAGE
  ATTRIBUTES
  "CCITT Recommendation X.721:1992":administrativeState  GET-REPLACE;
REGISTERED AS {ocaPackage 2};
```

7.3.3 Automatic invocation package

```
automaticInvocationPkg PACKAGE
  ATTRIBUTES
    "ITU-T Recommendation Q.824.2 (1996)":automaticInvocation      GET-REPLACE;
REGISTERED AS {ocaPackage 3};
```

7.3.4 Customer characteristics package

```
customerCharacteristicsPkg PACKAGE
  BEHAVIOUR
  customerCharacteristicsPkgBhv BEHAVIOUR
  DEFINED AS "The Customer Type attribute specifies whether the customer profile is for:
  - a single line customer; or
  - a hot line customer; or
  - a multi line customer.
```

- **'customerType' attribute value = 'singleLine':** The customer profile instance may be related to at most one access Port instance:
In the case where the access port is analogue or digital the customer profile is related to a single directory Number instance and may contain CEPT or non-standard supplementary services.
In the case of a basicAccess/primaryRateAccess the customer profile may be related to one or more directory Number instances and contains at least one bearer- and/or teleservice.
- **'customerType' attribute value = 'multiLinePBX' or 'multiLineNonPBX':** The customer profile instance may be related to several instances of access Port which may be of different architecture:
In case of an homogeneous analogue access architecture the customer profile is related to one or more directory number instance(s) and may contain CEPT or non-standard supplementary services.
In case of an homogeneous digital access architecture the customer profile is related to one or more directory number instance(s) and may contain CEPT or non-standard supplementary services.
In case of an homogeneous basic access/primary rate access architecture the customer profile may be related to one or more directory number instance(s) and contains at least one bearer- and/or teleservice.
In case of a mixture of analogue-/ISDN-/digital access the customer profile may be related to one or more directory number instance(s) and contains for each access port architecture at least one customized Resource instance and its appropriate service instance(s).

The Customer Category attribute identifies the customer as being for instance:

- a standard customer (default value);
- a coin box;
- a mobile customer;
- a test equipment;
- an operator etc.

The Customer Type attribute is a single-valued, read-write attribute. In the initial state, it has the 'singleLine' value. Changing the value of the Customer Type attribute generates an attribute value change notification.

The Customer Category attribute is a single-valued, read-write attribute. In the initial state, it has the 'standard' value. Changing the value of the Customer Category attribute generates an attribute value change notification.";;

```
ATTRIBUTES
customerType                DEFAULT VALUE
                             CustomerAdminModuleV2.customerTypeDefault
                             GET-REPLACE,
customerCategory            DEFAULT VALUE
                             CustomerAdminModuleV2.customerCategoryDefault
                             GET-REPLACE;
```

```
REGISTERED AS {ocaPackage 4};
```

7.3.5 Customized resource pointer list package

```
customizedResourcePtrListPkg PACKAGE
  ATTRIBUTES
    "ITU-T Recommendation Q.824.0 (1996)":customizedResourcePtrList  GET-REPLACE ADD-REMOVE;
REGISTERED AS {ocaPackage 5};
```

7.3.6 Directionality package

```
directionalityPkg PACKAGE
  BEHAVIOUR
```

```

directionalityPkgBhv BEHAVIOUR
DEFINED AS "In the case of deletion of a customer configuration, this attribute shall be set to
bothways if instantiated with an accessPortAnalogue.";;
ATTRIBUTES
directionality                DEFAULT VALUE
                                CustomerAdminModuleV2.directionalityDefault
                                GET-REPLACE;

```

```
REGISTERED AS {ocaPackage 6};
```

7.3.7 Generally provided fixed destination call package

```

generallyProvidedFixedDestinationCallPkg PACKAGE
BEHAVIOUR
generallyProvidedFixedDestinationCallPkgBhv BEHAVIOUR
DEFINED AS "If the service is available generally for all subscribers without previous
arrangement with the network operator, the resource shall create an object instance according to
the customer input of the service control operation (i.e. registration and/or activation). The
values of the variant and fixedDestinationNumber attributes shall be set by the resource
management of the exchange according to the access code and destination number used in the
customer input of the service control operation.
It is left to individual implementations whether the service assignment by the OS or the
customer's activation in the case of a generally available service has priority.";;
REGISTERED AS {ocaPackage 7};

```

7.3.8 General service list package

```

generalServiceListPkg PACKAGE
ATTRIBUTES
generalServiceList            GET-REPLACE;
REGISTERED AS {ocaPackage 8};

```

7.3.9 Line test capability package

```

lineTestCapabilityPkg PACKAGE
BEHAVIOUR
lineTestCapabilityPkgBhv BEHAVIOUR
DEFINED AS "When a certain access port has the line test capability this attribute shows in case
of:
1) TRUE: a line test is allowed;
2) FALSE: no line test is allowed.";;
ATTRIBUTES
lineTestCapability            GET-REPLACE;
REGISTERED AS {ocaPackage 9};

```

7.3.10 Local defined number package

```

localDefinedNumberPkg PACKAGE
ATTRIBUTES
localDefinedNumber            GET-REPLACE;
REGISTERED AS {ocaPackage 10};

```

7.3.11 Local packet handler package

```

localPacketHandlerPkg PACKAGE
BEHAVIOUR
localPacketHandlerPkgBhv BEHAVIOUR
DEFINED AS "According to ETS 300 007, the value of the notificationClass attribute shall be
restricted to noNotificationClass and conditionalNotification respectively.
The layer2InfoEntityPtr shall only point to an instance of layerEntityLAPB in the case of
packet B channel or to an instance of layerEntityLAPD in the case of packet D channel or its
subclasses.
The layer3InfoEntityPtr shall point to the appropriate instance of layerEntityX25PLP or
layerEntityX25PLPShared or its subclasses.";;
ATTRIBUTES
"ITU-T Recommendation Q.824.1 (1996)": notificationClass            GET-REPLACE
PERMITTED VALUES CustomerAdminModuleV2.PermittedNotificationClass,
"ITU-T Recommendation Q.824.1 (1996)": layer2InfoEntityPtr          GET-REPLACE,
"ITU-T Recommendation Q.824.1 (1996)": layer3InfoEntityPtr          GET-REPLACE;
REGISTERED AS {ocaPackage 11};

```

7.3.12 Master property package

```

masterPropertyPkg PACKAGE
  ATTRIBUTES
    masterProperty          GET-REPLACE;
REGISTERED AS {ocaPackage 12};

```

7.3.13 Maximum number of information channels package

```

maxNumOfInfoChannelsPkg PACKAGE
  BEHAVIOUR
    maxNumOfInfoChannelsPkgBhv BEHAVIOUR
    DEFINED AS "The value of the maxNumOfInfoChannels attribute shall not be in contradiction
with the value of this attribute in the corresponding bearer resp. teleservice object
instance.";;
  ATTRIBUTES
    maxNumOfInfoChannels    GET SET-BY-CREATE;
REGISTERED AS {ocaPackage 13};

```

7.3.14 Maximum number of total calls package

```

maxNumOfTotalCallsPkg PACKAGE
  BEHAVIOUR
    maxNumOfTotalCallsPkgBhv BEHAVIOUR
    DEFINED AS "The value of the maxNumOfTotalCalls attribute shall not be in contradiction with
the value of this attribute in the corresponding bearer resp. teleservice object
instance.";;
  ATTRIBUTES
    maxNumOfTotalCalls      GET SET-BY-CREATE;
REGISTERED AS {ocaPackage 14};

```

7.3.15 Message waiting indication controlling user package

```

mwiControllingUserPkg PACKAGE
  ATTRIBUTES
    mwiControllingUser      GET-REPLACE;
REGISTERED AS {ocaPackage 15};

```

7.3.16 Message waiting indication receiver pointer package

```

mwiReceiverPointerPkg PACKAGE
  ATTRIBUTES
    mwiReceiverPointer      GET-REPLACE;
REGISTERED AS {ocaPackage 16};

```

7.3.17 Metering counter package

```

meteringCounterPkg PACKAGE
  BEHAVIOUR
    meteringCounterPkgBhv BEHAVIOUR
    DEFINED AS "Both etsiDirectoryNumberE164 and etsiAccessPort have the conditional package
meteringCounterPkg containing the meteringCounter attribute. This package shall only be
instantiated with one of these two object classes or their subclasses within one managed
element.";;
  ATTRIBUTES
    meteringCounter         GET;
REGISTERED AS {ocaPackage 17};

```

7.3.18 Observation mode package

```

observationModePkg PACKAGE
  ATTRIBUTES
    observationMode         GET-REPLACE;
REGISTERED AS {ocaPackage 18};

```

7.3.19 Origin for analysis package

```

originForAnalysisPkg PACKAGE
  ATTRIBUTES
    "EN 300 292 (1998)":originForAnalysis    GET-REPLACE;
REGISTERED AS {ocaPackage 19};

```

7.3.20 Origin for charging package

```
originForChargingPkg PACKAGE
  ATTRIBUTES
    originForCharging          GET-REPLACE;
REGISTERED AS {ocaPackage 20};
```

7.3.21 Origin for routing package

```
originForRoutingPkg PACKAGE
  ATTRIBUTES
    "EN 300 292 (1998)":originForRouting          GET-REPLACE;
REGISTERED AS {ocaPackage 21};
```

7.1.22 Override package

```
overridePkg PACKAGE
  BEHAVIOUR
    overridePkgBhv BEHAVIOUR
    DEFINED AS "If the override attribute is not empty set, an addServiceToConfiguration action
    shall replace an instance of a service defining object class indicated in this attribute if this
    object class is part of the contained profile. Else, an existing instance of a service defining
    object class shall not be replaced. In both cases, no error information shall be indicated.";;
  ATTRIBUTES
    override          GET-REPLACE ADD-REMOVE;
REGISTERED AS {ocaPackage 22};
```

7.3.23 Ported directory number package

```
portedDirectoryNumberPkg PACKAGE
  ATTRIBUTES
    routingInformation          GET-REPLACE;
REGISTERED AS {ocaPackage 23};
```

7.3.24 Primary inter exchange carrier package

```
primaryInterexchangeCarrierPkg PACKAGE
  ATTRIBUTES
    primaryInterexchangeCarrier          GET-REPLACE;
REGISTERED AS {ocaPackage 24};
```

7.3.25 Semipermanent line package

```
semipermanentLinePkg PACKAGE
  BEHAVIOUR
    semipermanentLinePkgBhv BEHAVIOUR
    DEFINED AS "This information model only covers the aspect of relationship of a customer
    configuration to a semi permanent connection. The semi permanent connection as such might e.g.
    be modelled by using the M3100:crossConnection object class or a subclass of it. If the semi
    permanent connection as such is managed by this means, the semipermanentLine attribute should
    not be used. Instead, the information whether a customer configuration is involved in a semi
    permanent line can be retrieved by reading the crossConnection object pointer attribute.";;
  ATTRIBUTES
    semipermanentLine          DEFAULT VALUE
                                CustomerAdminModuleV2.semipermanentLineDefault
                                GET-REPLACE;
REGISTERED AS {ocaPackage 25};
```

7.3.26 Third wire equipment package

```
thirdWireEquipmentPkg PACKAGE
  ATTRIBUTES
    thirdWireEquipment          DEFAULT VALUE
                                CustomerAdminModuleV2.thirdWireEquipmentDefault
                                GET-REPLACE;;;
REGISTERED AS {ocaPackage 26};
```

7.3.27 Voice messaging number package

```
voiceMessagingNumberPkg PACKAGE
  ATTRIBUTES
    voiceMessagingNumber          GET-REPLACE;;;
REGISTERED AS {ocaPackage 27};
```

7.4 Definition of attributes

```
accountSuspension ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.BlockingDirection;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    accountSuspensionBhv BEHAVIOUR
  DEFINED AS "It gives the blocking direction for blocking (none, incoming, outgoing, bothways)
  due to non-payment.";;
REGISTERED AS {ocaAttribute 1};

actingRole ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.ActingRole;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    actingRoleBhv BEHAVIOUR
  DEFINED AS "It specifies whether this access port is able to play the primary and/or secondary
  role.";;
REGISTERED AS {ocaAttribute 2};

activated ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    activatedBhv BEHAVIOUR
  DEFINED AS "It is set TRUE if the user has activated his program. If both program attributes
  have NULL value, the program common for all the exchange is activated.";;
REGISTERED AS {ocaAttribute 3};

adminBlocking ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.BlockingDirection;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    adminBlockingBhv BEHAVIOUR
  DEFINED AS "It gives the blocking direction for administrative blocking (none, incoming,
  outgoing, bothways)";;
REGISTERED AS {ocaAttribute 4};

adviceOfChargeActivation ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.AdviceOfChargeActivation;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    adviceOfChargeActivationBhv BEHAVIOUR
  DEFINED AS "Flag indicating whether the service is available for all calls automatically or on a
  per call basis.";;
REGISTERED AS {ocaAttribute 5};

alarmCallType ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.AlarmCallType;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    alarmCallTypeBhv BEHAVIOUR
  DEFINED AS "It gives the type of alarm call (casual, regular consecutive days, regular specified
  days) and the related program if the type is not casual.";;
REGISTERED AS {ocaAttribute 6};

announcementNumber ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Number;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    announcementNumberBhv BEHAVIOUR
  DEFINED AS "It gives the announcement number (INTEGER). Which announcement corresponds with an
  announcement number is a matter of local implementation.";;
REGISTERED AS {ocaAttribute 7};

assocCUGList ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModule.AssocCUGList;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
    assocCUGListBhv BEHAVIOUR
```

```

DEFINED AS "It indicates for which cUGIndex the subscription option applies.;;;
REGISTERED AS {ocaAttribute 8};

assocDefaultDN ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.IsdnNb;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  assocDefaultDNbvh BEHAVIOUR
  DEFINED AS "It gives the default directory number for an MSN configuration.;;;
REGISTERED AS {ocaAttribute 9};

assocMemberAccessChannels ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":member;
  BEHAVIOUR
  assocMemberAccessChannelsbvh BEHAVIOUR
  DEFINED AS "It points to the associated access channels.;;;
REGISTERED AS {ocaAttribute 10};

assocMemberAccessPorts ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":member;
  BEHAVIOUR
  assocMemberAccessPortsbvh BEHAVIOUR
  DEFINED AS "It points to the associated access ports.;;;
REGISTERED AS {ocaAttribute 11};

assocMemberEtsiE164DirectoryNumbers ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":member;
  BEHAVIOUR
  assocMemberEtsiE164DirectoryNumber sbvh BEHAVIOUR
  DEFINED AS "It points to the associated e164DirectoryNumber instances.;;;
REGISTERED AS {ocaAttribute 12};

assocMemberServices ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":member;
  BEHAVIOUR
  assocMemberServicesbvh BEHAVIOUR
  DEFINED AS "It points to the associated services.;;;
REGISTERED AS {ocaAttribute 13};

assocOwnerCustomerProfile ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":owner;
  BEHAVIOUR
  assocOwnerCustomerProfilebvh BEHAVIOUR
  DEFINED AS "It points to the associated customer profile";;
REGISTERED AS {ocaAttribute 14};

assocOwnerCustomizedResource ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":owner;
  BEHAVIOUR
  assocOwnerCustomizedResourcebvh BEHAVIOUR
  DEFINED AS "It points to the associated customized resource.;;;
REGISTERED AS {ocaAttribute 15};

assocOwnerServices ATTRIBUTE
  DERIVED FROM "CCITT Recommendation X.721:1992":owner;
  BEHAVIOUR
  assocOwnerServicesbvh BEHAVIOUR
  DEFINED AS "The associated owner services attribute is a set-valued attribute pointing to a set
of instances of a service object class playing the owner-role.;;;
REGISTERED AS {ocaAttribute 16};

callCompletionBusyRecallMode ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallCompletionRecallMode;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callCompletionBusyRecallModebvh BEHAVIOUR
  DEFINED AS "Flag indicating whether a completion of calls to busy subscribers recall is offered
to the termination which activated the service or to all compatible terminations.;;;
REGISTERED AS {ocaAttribute 17};

callCompletionNoReplyRecallMode ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallCompletionRecallMode;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callCompletionNoReplyRecallModebvh BEHAVIOUR
  DEFINED AS "It is a flag indicating whether a completion of calls on no replying customer recall
is offered to the termination which activated the service or to all compatible terminations.;;;
REGISTERED AS {ocaAttribute 18};

```

```

callDiversionRestrictions ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallDiversionRestrictions;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callDiversionRestrictionsBhv BEHAVIOUR
  DEFINED AS "It indicates whether the forwarded-to number specified at remote activation shall
  have some restrictions (choice within a specified geographical area or belonging to a list of
  predetermined forwarded-to numbers) or not.";;
REGISTERED AS {ocaAttribute 19};

callForwardActiveNotification ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callForwardActiveNotificationBhv BEHAVIOUR
  DEFINED AS "Flag indicating whether the served user is to be notified that call forwarding is
  active.";;
REGISTERED AS {ocaAttribute 20};

callForwardCallingNotification ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallForwardCallingNotification;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callForwardCallingNotificationBhv BEHAVIOUR
  DEFINED AS "Flag indicating whether the calling user is to be notified that his call has been
  forwarded.";;
REGISTERED AS {ocaAttribute 21};

callForwardReleaseInformation ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallForwardReleaseInformation;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callForwardReleaseInformationBhv BEHAVIOUR
  DEFINED AS "Flag indicating whether served user releases number information to forwarded-to
  user.";;
REGISTERED AS {ocaAttribute 22};

callForwardServedNotification ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallForwardServedNotification;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callForwardServedNotificationBhv BEHAVIOUR
  DEFINED AS "Flag indicating whether served user receives notification that a call has been
  forwarded.";;
REGISTERED AS {ocaAttribute 23};

callWaitingCallingNotification ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CallWaitingCallingNotification;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  callWaitingCallingNotificationBhv BEHAVIOUR
  DEFINED AS "Flag indicating whether the calling user is to be notified that his call is
  waiting.";;
REGISTERED AS {ocaAttribute 24};

catastrophe ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Catastrophe;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  catastropheBhv BEHAVIOUR
  DEFINED AS "It indicates the preference category of the access during catastrophe.";;
REGISTERED AS {ocaAttribute 25};

channelRate ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.ChannelRate;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  channelRateBhv BEHAVIOUR
  DEFINED AS "It specifies the data transfer rate of the channel (e.g. 64 kbit/s for ISDN
  B-channel, 16 kbit/s for ISDN basic D-channel).";
REGISTERED AS {ocaAttribute 26};

channelType ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.ChannelType;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  channelTypeBhv BEHAVIOUR
  DEFINED AS "It specifies the channel type (e.g. ISDN D-channel, non-ISDN channel).
  ";
REGISTERED AS {ocaAttribute 27};

```

```

ctmId ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.DialledDigits;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  ctmIdBhv BEHAVIOUR
  DEFINED AS "It provides the relevant data for the search of DECT terminals being part of a CTM
  configuration.";;
REGISTERED AS {ocaAttribute 28};

cUGBarring ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CUGBarring;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  cUGBarringBhv BEHAVIOUR
  DEFINED AS "This attribute maintains the Intra-CUG restriction of the general subscription
  option in ETS 300 136. It may have one of the following values: none, incomingCallsBarred or
  outgoingCallsBarred.";;
REGISTERED AS {ocaAttribute 29};

cUGDataNetworkIdentification ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CUGDataNetworkIdentification;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  cUGDataNetworkIdentificationBhv BEHAVIOUR
  DEFINED AS "This information is signalled during set-up of a CUG call and serves (in conjunction
  with the closed user group interlock code) to uniquely identify the CUG in the international
  network. It can be thought of as the area code of the CUG.";;
REGISTERED AS {ocaAttribute 30};

cUGIndex ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CUGIndex;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  cUGIndexBhv BEHAVIOUR
  DEFINED AS "cUGIndex of general subscription option in ETS 300 136 must be explicitly assigned
  upon object creation. The cUGIndex is used by the calling user to select a particular CUG when
  originating a call.";;
REGISTERED AS {ocaAttribute 31};

cUGInterlockCode ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CUGInterlockCode;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  cUGInterlockCodeBhv BEHAVIOUR
  DEFINED AS "The attribute cUGInterlockCode must be explicitly assigned upon object creation. The
  attribute is a means of identifying a CUG membership within the network.";;
REGISTERED AS {ocaAttribute 32};

customerCategory ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CustomerCategory;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  customerCategoryBhv BEHAVIOUR
  DEFINED AS "The customer category attribute identifies the customer as being for instance:
  - a standard customer,
  - a coin box,
  - a mobile customer,
  - a test equipment,
  - an operator, etc.";;
REGISTERED AS {ocaAttribute 33};

customerType ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.CustomerType;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  customerType Bhv BEHAVIOUR
  DEFINED AS "It specifies whether the customer profile is for a single line or for a multi-line
  customer.";;
REGISTERED AS {ocaAttribute 34};

date ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Date;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  dateBhv BEHAVIOUR
  DEFINED AS "It gives the date (year, month, and day) for the (first) execution of the alarm
  call.";;
REGISTERED AS {ocaAttribute 35};

```

```

dChannelLayer1Activation ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.DChannelActivation;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  dChannelLayer1ActivationBhv BEHAVIOUR
  DEFINED AS "It specifies whether layer one has to be held active.";;
REGISTERED AS {ocaAttribute 36};

dChannelLayer2Activation ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.DChannelActivation;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  dChannelLayer2ActivationBhv BEHAVIOUR
  DEFINED AS "It specifies whether layer two has to be held active.";;
REGISTERED AS {ocaAttribute 37};

detailClass ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.DetailClass;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  detailClassBhv BEHAVIOUR
  DEFINED AS "It defines the detail class for the detailed billing service. This detail can be
  limited e.g. to international calls, national long distance calls, special service calls,
  successful calls.";;
REGISTERED AS {ocaAttribute 38};

diallingList ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.DiallingList;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  diallingListBhv BEHAVIOUR
  DEFINED AS "It is a pointer to an object instance of abbreviatedDialling representing a shared
  list, or it gives an individual list.";;
REGISTERED AS {ocaAttribute 39};

directionality ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModule.Directionality;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  directionalityBhv BEHAVIOUR
  DEFINED AS "It indicates the directionality (incoming, outgoing, bothways, where bothways is
  default value)";;
REGISTERED AS {ocaAttribute 40};

doNotDisturb ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  doNotDisturbBhv BEHAVIOUR
  DEFINED AS "It indicates whether the do-not-disturb announcement is activated (TRUE) or not
  (FALSE).";;
REGISTERED AS {ocaAttribute 41};

etsiDeflectingNumberNotification ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.EtsiDeflectingNumberNotification;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  etsiDeflectingNumberNotificationBhv BEHAVIOUR
  DEFINED AS "It indicates the subscription option of whether a calling user receives notification
  that his call has been deflected (1) or not (0). In the case the use is to be notified, the
  deflected to number may be sent to the originator of the call (2).";;
REGISTERED AS {ocaAttribute 42};

etsiE164DirectoryNumber ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.EtsiE164DirectoryNumber;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  etsiE164DirectoryNumberBhv BEHAVIOUR
  DEFINED AS "It represents the ISDN number according to the ISDN numbering plan defined in CCITT
  Recommendation E.164. It is composed of two fields:
  - country code (optional);
  - national significant number.
  The national significant number is itself composed of two fields:
  - national destination code (optional);
  - customer number.";;
REGISTERED AS {ocaAttribute 43};

fixedDestinationNumber ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.FixedDestinationNumber;
  MATCHES FOR EQUALITY;

```

```

BEHAVIOUR
fixedDestinationNumberBhv BEHAVIOUR
DEFINED AS "It gives the directory number to which the call shall be forwarded. Its value NULL
means that calls are not to be forwarded to a fixed destination unless the OS or the customer by
remote control changes its value to a directory number.";;
REGISTERED AS {ocaAttribute 44};

forwardImmediately ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
MATCHES FOR EQUALITY;
BEHAVIOUR
forwardImmediatelyBhv BEHAVIOUR
DEFINED AS "It indicates call forward immediately (TRUE) or call forward on no reply (FALSE).";
REGISTERED AS {ocaAttribute 45};

fixedProgram ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Program;
MATCHES FOR EQUALITY;
BEHAVIOUR
fixedProgramBhv BEHAVIOUR
DEFINED AS "It gives the assigned fixed barring program.";;
REGISTERED AS {ocaAttribute 46};

generalServiceList ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.GeneralServiceList;
MATCHES FOR EQUALITY;
BEHAVIOUR
generalServiceListBhv BEHAVIOUR
DEFINED AS "It lists the services having no configurable attributes which are available
generally for the respective customer configurations.";;
REGISTERED AS {ocaAttribute 47};

interCUGAccess ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.InterCUGAccess;
MATCHES FOR EQUALITY;
BEHAVIOUR
interCUGAccessCodeBhv BEHAVIOUR
DEFINED AS "Inter-CUG access of per service subscription option in ETS 300 136. The values are
none, outgoingAccess, incomingAccess and outgoingAndIncomingAccess";
REGISTERED AS {ocaAttribute 48};

interceptionReason ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.NameType;
MATCHES FOR EQUALITY;
BEHAVIOUR
interceptionReasonBhv BEHAVIOUR
DEFINED AS "It gives the reason for the interception";
REGISTERED AS {ocaAttribute 49};

kindOfAlarmCall ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.KindOfAlarmCall;
MATCHES FOR EQUALITY;
BEHAVIOUR
kindOfAlarmCallBhv BEHAVIOUR
DEFINED AS "It gives the kind of alarm call (manual, automatic, semi automatic).";
REGISTERED AS {ocaAttribute 50};

lineCharacteristics ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.LineCharacteristics;
MATCHES FOR EQUALITY;
BEHAVIOUR
lineCharacteristicsBhv BEHAVIOUR
DEFINED AS "It specifies the transmission characteristics of the analogue line (e.g.
attenuation).";
REGISTERED AS {ocaAttribute 51};

lineSignalling ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.LineSignalling;
MATCHES FOR EQUALITY;
BEHAVIOUR
lineSignallingBhv BEHAVIOUR
DEFINED AS "It specifies which signalling the analogue access port uses for the line (e.g. Dual
Tone Multi Frequency (DTMF) or pulse dialling).";
REGISTERED AS {ocaAttribute 52};

lineTestCapability ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
MATCHES FOR EQUALITY;
BEHAVIOUR
lineTestCapabilityBhv BEHAVIOUR

```

```

    DEFINED AS "It is present if this access port is equipped with line test facilities. It can have
    two values:
    1) TRUE: line test is allowed; and
    2) FALSE: line test is not allowed.";;
REGISTERED AS {ocaAttribute 53};

localDefinedNumber ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.EtsiE164DirectoryNumber;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    localDefinedNumberBhv BEHAVIOUR
    DEFINED AS "It is an identifier for the access port that is used if in a configuration the port
    itself is not associated with a E.164 directory number.";;
REGISTERED AS {ocaAttribute 54};

maintBlocking ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.BlockingDirection;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    maintBlockingBhv BEHAVIOUR
    DEFINED AS "It gives the blocking direction for maintenance blocking (none, incoming, outgoing,
    bothways).";
REGISTERED AS {ocaAttribute 55};

masterProperty ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    maxNumberOfEntriesBhv BEHAVIOUR
    DEFINED AS "It indicates the authorisation to modify a shared list (TRUE).";
REGISTERED AS {ocaAttribute 56};

maxNumberOfEntries ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Number;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    maxNumberOfEntriesBhv BEHAVIOUR
    DEFINED AS "It gives the maximum number of entries for abbreviated dialling.";;
REGISTERED AS {ocaAttribute 57};

maxNumOfTotalCalls ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.MaxNb;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    maxNumOfTotalCallsBhv BEHAVIOUR
    DEFINED AS "It gives the maximum number of total calls.";;
REGISTERED AS {ocaAttribute 58};

maxNumberOfWaitingCalls ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Number;
    MATCHES FOR EQUALITY, ORDERING;
    BEHAVIOUR
    maxNumberOfWaitingCallsBhv BEHAVIOUR
    DEFINED AS "The maximum number of calls that can be waiting.";;
REGISTERED AS {ocaAttribute 59};

messageWaitingIndicator ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
    MATCHES FOR EQUALITY;
    messageWaitingIndicatorBhv BEHAVIOUR
    BEHAVIOUR
    DEFINED AS "It indicates if one or more messages are waiting for the receiving user (TRUE).";
REGISTERED AS {ocaAttribute 60};

meteringCounter ATTRIBUTE
    DERIVED FROM "CCITT Recommendation X.721:1992":counter;
    BEHAVIOUR
    meteringCounterBhv BEHAVIOUR
    DEFINED AS "It gives the current value of the metering counter for charging.";;
REGISTERED AS {ocaAttribute 61};

mwiControllingUser ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.EtsiE164DirectoryNumber;
    MATCHES FOR EQUALITY;
    mwiControllingUserBhv BEHAVIOUR
    BEHAVIOUR
    DEFINED AS "It gives the controlling user's directory number.";;
REGISTERED AS {ocaAttribute 62};

mwiInvocationMode ATTRIBUTE

```

```

WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
MATCHES FOR EQUALITY;
mwiInvocationModeBhv BEHAVIOUR
BEHAVIOUR
DEFINED AS "It indicates when the service is to be invoked either when the receiving user
makes an outgoing call (TRUE) or on activation of the service (by the controlling user)
(FALSE).";
REGISTERED AS {ocaAttribute 63};

mwiReceiverPointer ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Pointer;
MATCHES FOR EQUALITY;
mwiReceiverPointerBhv BEHAVIOUR
BEHAVIOUR
DEFINED AS "It gives the associated mwiReceiver instance.";
REGISTERED AS {ocaAttribute 64};

nonIsdnServiceId ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.NameType;
MATCHES FOR EQUALITY;
BEHAVIOUR
nonIsdnServiceIdBhv BEHAVIOUR
DEFINED AS "It gives the RDN.";
REGISTERED AS {ocaAttribute 65};

numOfDigitsForCallId ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Number;
MATCHES FOR EQUALITY;
BEHAVIOUR
numOfDigitsForCallIdBhv BEHAVIOUR
DEFINED AS "It gives the number of digits for call identification.";
REGISTERED AS {ocaAttribute 66};

numOfDigitsNotToTransmit ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Number;
MATCHES FOR EQUALITY;
BEHAVIOUR
numOfDigitsNotToTransmitBhv BEHAVIOUR
DEFINED AS "It gives the number of digits not to be transmitted to a PABX.";
REGISTERED AS {ocaAttribute 67};

observationMode ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Number;
MATCHES FOR EQUALITY;
BEHAVIOUR
observationModeBhv BEHAVIOUR
DEFINED AS "It distinguishes between e.g. charging observation, expensive call monitoring, and
quality of service verification, or between observation of incoming calls and/or outgoing calls,
etc. Which observation mode corresponds with the value of this attribute number is a matter of
local implementation.";
REGISTERED AS {ocaAttribute 68};

originForCharging ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Origin;
MATCHES FOR EQUALITY;
BEHAVIOUR
originForChargingBhv BEHAVIOUR
DEFINED AS "It groups customer profiles for charging and/or tariffing purposes.";
REGISTERED AS {ocaAttribute 69};

override ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Override;
MATCHES FOR EQUALITY;
BEHAVIOUR
overrideBhv BEHAVIOUR
DEFINED AS "It identifies whether an instance of a service defining object class indicated in
this attribute shall be replaced by an addServiceToConfiguration action if this object class is
part of the contained profile. The instantiation of conditional packages is considered in this
attribute as an option.";
REGISTERED AS {ocaAttribute 70};

permittedMobileArea ATTRIBUTE
WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Area;
MATCHES FOR EQUALITY;
BEHAVIOUR
permittedMobileAreaBhv BEHAVIOUR
DEFINED AS "It gives the area of the network in which the DECT terminal can make and receive
calls.";
REGISTERED AS {ocaAttribute 71};

```

```

pin ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Pin;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  pinBhv BEHAVIOUR
  DEFINED AS "It contains the PIN. The initial value and the default value of this attribute is
  determined by the network element resource on its own.";;
REGISTERED AS {ocaAttribute 72};

pinProfileRef ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModule.PinProfileRef;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  pinProfileRefBhv BEHAVIOUR
  DEFINED AS "It identifies the PIN controlled customized services assigned to a customer
  configuration for which the PIN given in the pin attribute is valid. It is a choice between an
  INTEGER representing pre-defined profiles on exchange level and a SET OF ObjectClass
  representing supplementary service object classes.";;
REGISTERED AS {ocaAttribute 73};

preferredCUGIndex ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.PreferredCUGIndex;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  preferredCUGIndexBhv BEHAVIOUR
  DEFINED AS "CUG index of general subscription option in ETS 300 136. It is used to identify the
  required CUG in the absence of a CUG index being included in the outgoing call request";
REGISTERED AS {ocaAttribute 74};

primaryDN ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  primaryDNBhv BEHAVIOUR
  DEFINED AS "It defines whether the line is a primary (TRUE) or secondary (FALSE) line of the
  customer.";;
REGISTERED AS {ocaAttribute 75};

primaryInterexchangeCarrier ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.PrimaryInterexchangeCarrier;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  primaryInterexchangeCarrierBhv BEHAVIOUR
  DEFINED AS "It gives the primary inter exchange carrier.";;
REGISTERED AS {ocaAttribute 76};

remotelyControlledService ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.RemotelyControlledService;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  remotelyControlledServiceBhv BEHAVIOUR
  DEFINED AS "It indicates which supplementary services the served user has subscribed for remote
  control.";;
REGISTERED AS {ocaAttribute 77};

ringingSequence ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.RingingSequence;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  ringingSequenceBhv BEHAVIOUR
  DEFINED AS "It defines the characteristics of the ringing signal to be sent.";;
REGISTERED AS {ocaAttribute 78};

routingInformation ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.RoutingInformation;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  routingInformationBhv BEHAVIOUR
  DEFINED AS "It gives the directory number porting information. If this attribute is empty
  string, the directory number is not ported. If it has NULL value, the routing information is to
  be retrieved from another server (e.g. IN SCP). In all other cases, the information relevant for
  routing is given.";;
REGISTERED AS {ocaAttribute 79};

screenOriginatingDN ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  screenOriginatingDNBhv BEHAVIOUR

```

```

    DEFINED AS "If the value of this attribute is TRUE, the originating directory number is to be
    screened.";;
REGISTERED AS {ocaAttribute 80};

semipermanentLine ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModule.SemipermanentLine;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    semipermanentLineBhv BEHAVIOUR
    DEFINED AS "It indicates whether this entity is related to a semipermanent line (TRUE) or not
    (FALSE).";
REGISTERED AS {ocaAttribute 81};

serviceContainerId ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.NameType;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    serviceContainerIdBhv BEHAVIOUR
    DEFINED AS "It gives the RDN.";;
REGISTERED AS {ocaAttribute 82};

supplementaryServiceServiceDependentPtrList ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModule.PointerList;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    Bhv BEHAVIOUR
    DEFINED AS "It points to the associated supplementaryServiceServiceDependent object
    instances.";;
REGISTERED AS {ocaAttribute 83};

supplementaryServiceServiceIndependentPtrList ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModule.PointerList;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    supplementaryServiceServiceIndependentPtrListBhv BEHAVIOUR
    DEFINED AS "It points to the associated supplementaryServiceServiceIndependent object
    instances.";;
REGISTERED AS {ocaAttribute 84};

thirdWireEquipment ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.ThirdWireEquipment;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    thirdWireEquipmentBhv BEHAVIOUR
    DEFINED AS "It specifies whether the analogue access port supports control of external equipment
    via a third wire (TRUE) or not (FALSE). This attribute specifies the capability of the analogue
    access port, it does not represent subscription to a service requiring this capability (e.g.
    private customer meter).";
REGISTERED AS {ocaAttribute 85};

timeOfDay ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TimeOfDay;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    timeOfDayBhv BEHAVIOUR
    DEFINED AS "It gives the time of day (hours and minutes) for the execution of the alarm call.";;
REGISTERED AS {ocaAttribute 86};

userControlledProgram ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.Program;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    userControlledProgramBhv BEHAVIOUR
    DEFINED AS "It gives the barring program assigned by user control.";;
REGISTERED AS {ocaAttribute 87};

uusServiceImplicit ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    uusServiceImplicitBhv BEHAVIOUR
    DEFINED AS "It indicates whether the service is available (TRUE) or not (FALSE) during
    origination and termination of calls by means of an implicit request.";;
REGISTERED AS {ocaAttribute 88};

uusServiceExplicit ATTRIBUTE
    WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
    MATCHES FOR EQUALITY;
    BEHAVIOUR
    uusServiceExplicitBhv BEHAVIOUR

```

```

DEFINED AS "It indicates whether the service is available (TRUE) or not (FALSE) during
origination and termination of calls by means of an implicit request.>";
REGISTERED AS {ocaAttribute 89};

uusService2 ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  uusService2Bhv BEHAVIOUR
  DEFINED AS "It is a flag indicating whether the service is available (TRUE) or not (FALSE) after
the calling user has received an indication that the called user is being informed of the call
and prior to the establishment of the connection.>";
REGISTERED AS {ocaAttribute 90};

uusService3 ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  uusService3Bhv BEHAVIOUR
  DEFINED AS "It is a flag indicating whether the service is available (TRUE) or not (FALSE) only
during the connection is established.>";
REGISTERED AS {ocaAttribute 91};

variant ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.TrueFalse;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  variantBhv BEHAVIOUR
  DEFINED AS "It identifies whether the call is forwarded to the fixed destination immediately
(TRUE) or after time out (FALSE).>";
REGISTERED AS {ocaAttribute 92};

voiceMessagingNumber ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.VoiceMessagingNumber;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  voiceMessagingNumberBhv BEHAVIOUR
  DEFINED AS "It gives the routing information (directory number) to the voice messaging box in
the voice messaging system.>";
REGISTERED AS {ocaAttribute 93};

```

7.5 Definition of behaviours

No general behaviours were identified.

7.6 Definition of actions

7.6.1 Add service to configuration

```

addServiceToConfiguration ACTION
  BEHAVIOUR
  addServiceToConfigurationBhv BEHAVIOUR
  DEFINED AS "The action adds the subtrees contained in the referenceServiceConfiguration
addressed with referenceServiceConfigurationInstance to an already existing customerProfile
or any object class of the subtree of it referenced with managedObjectClass and
managedObjectInstance.
The action first verifies that the referenceServiceConfiguration identified in the service
are valid. If not the agent returns an invalid reference error.
If elements in the referenceServiceConfiguration instance are conflicting with the
destination configuration, the action shall be rejected without changing the customer
configuration.
The service provided by the referenced referenceServiceConfiguration is instantiated based
on the definition provided by a referenceServiceConfiguration.
Further data of existing object instances of the customer configuration (e.g. data which are
configurable on a per subscriber basis) can be given with parameter customerData. The
subcomponent attributeList of parameter customerData indicates how the data of the reference
object classes/object instances (components of customerData) are replaced for the extended
customer service configuration.
The attribute values of conditional packages to be instantiated shall be supplied within the
component customerData of the information syntax of the action.
If the action is successful or partly executed, the reply will also contain the list of
names of the object instances just created. How far the action was successful can be
recognized from the executed value in the reply syntax. Optionally, services being not
created may be indicated. If the action has failed, the action leaves the MIB unaffected
(unchanged) and returns additionally the specified error message.>";

```

```

MODE CONFIRMED;
WITH INFORMATION SYNTAX CustomerAdminModuleV2.AddServiceToConfigurationRequest;
WITH REPLY SYNTAX CustomerAdminModuleV2.AddServiceToConfigurationReply;
REGISTERED AS {ocaAction 1};

```

7.6.2 Change access port

```

changeAccessPort ACTION
  BEHAVIOUR
    changeAccessPortBhv BEHAVIOUR
      DEFINED AS "This action is used to change the accessPort for a given customer profile. The
        action request identifies the customer profile with the old accessPort. The request also
        indicates the new accessPort to use.
        The action verifies that the old accessPort is in service and assigned to the given customer
        profile, and that the new accessPort is valid. The new accessPort is considered valid if it
        exists and does not have a relationship with an accessPortProfile (it is not in service). If
        not, the agent returns an invalid reference error.
        This action shall alter the relationship between accessPortProfile and the old accessPort to
        the new accessPort, create copies of the accessChannel instances under the new accessPort,
        change the pointers between customizedResource and accessChannel instances from old to new,
        and delete the old accessChannel instances.";;
      MODE CONFIRMED;
      WITH INFORMATION SYNTAX CustomerAdminModuleV2.ChangeAccessPortRequest;
      WITH REPLY SYNTAX CustomerAdminModuleV2.ManagedInstancesNames;
    REGISTERED AS {ocaAction 2};

```

7.6.3 Change directory number

```

changeDirectoryNumber ACTION
  BEHAVIOUR
    changeDirectoryNumberBhv BEHAVIOUR
      DEFINED AS "This action is used to change the etsiE164DirectoryNumber for a given customer
        profile. The action request identifies the customer profile with the old
        etsiE164DirectoryNumber. The request also indicates the new etsiE164DirectoryNumber to use
        and the interceptTreatmentTerm to apply to the old etsiE164DirectoryNumber.
        The action verifies that the old etsiE164DirectoryNumber is in service, and that the new
        etsiE164DirectoryNumber and interceptTreatmentTerm are valid. The new
        etsiE164DirectoryNumber is considered valid if it exists and does not have a relationship
        with a customerProfile or its subclasses (it is not in service). If not, the agent returns
        an invalid reference error.
        The action sets the interceptTreatmentTerm of the new etsiE164DirectoryNumber based on the
        values of those attributes of the old etsiE164DirectoryNumber and then sets the value of
        interceptTreatmentTerm of the old etsiE164DirectoryNumber to the value provided by the
        action request information.
        Moreover, the relationship of the customerProfile or its subclasses associated with the old
        etsiE164DirectoryNumber is deleted and replaced by a relationship with the new
        etsiE164DirectoryNumber.";;
      MODE CONFIRMED;
      WITH INFORMATION SYNTAX CustomerAdminModuleV2.ChangeDirectoryNumberRequest;
      WITH REPLY SYNTAX CustomerAdminModuleV2.ManagedInstancesNames;
    REGISTERED AS {ocaAction 3};

```

7.6.4 Establish customer configuration

```

establishCustomerConfiguration ACTION
  BEHAVIOUR
    establishCustomerConfigurationBhv BEHAVIOUR
      DEFINED AS "The action copies the subtree (e.g. of a customerProfile) contained under an
        instance of referenceServiceConfiguration to a customer configuration contained in
        managedElement. It establishes the links from the customerProfile to the
        etsiDirectoryNumberE164 and the accessPort (or accessPortProfile if accessPortProfile is
        already existing) and vice versa.
        If the referenceServiceConfigurationInstance does not exist, the agent returns an invalid
        reference error.
        The links to the etsiDirectoryNumberE164 and the accessPort/accessPortProfile have to be
        supplied in the following way:
        The link to etsiDirectoryNumberE164 is indicated with parameter directoryNumber.
        If the accessPortProfile already exists, the link between the customerProfile and the
        accessPortProfile has to be indicated in parameter access.
        If the accessPortProfile does not yet exist, the accessPortProfile has to be present in the
        reference customer configuration contained in referenceServiceConfiguration and the link to
        the accessPort has to be indicated in parameter access.
        The action verifies that the access port trail termination point name respectively the
        accessPortProfileInstance identified in the service is valid. Otherwise the agent returns an
        invalid reference error. The access port trail termination point name or the
        accessPortProfileInstance is considered valid if an instance for the identifier provided in
        the action exists.

```

Furthermore, the trail termination point (either supplied with the action or already present) and the etsiDirectoryNumberE164 must be compatible with the data given in the customer profile and contained object classes (e.g. supplementary services). Further data of existing object instances of the customer configuration (e.g. data which are configurable on a per subscriber basis) can be given with parameter customerData. The subcomponent attributeList of parameter customerData indicates how the data of the reference object classes/object instances (components of customerData) are replaced for the customer configuration to be instantiated.

It has to be verified that the resulting customer configuration is consistent in itself. If the customerProfileId and/or accessPortProfileId is not given, automatic instance naming is applied.

If the action is successful, the reply will also contain the list of names of the object instances just created. Otherwise the action leaves the MIB unaffected (unchanged) and returns the specified error message.";;

```
MODE CONFIRMED;
WITH INFORMATION SYNTAX CustomerAdminModuleV2.EstablishCustomerConfigurationRequest;
WITH REPLY SYNTAX CustomerAdminModuleV2.ManagedInstancesNames;
REGISTERED AS {ocaAction 4};
```

7.7 Definition of notifications

7.7.1 Failed alarm call

```
failedAlarmCall NOTIFICATION
  BEHAVIOUR
  failedAlarmCallBhv BEHAVIOUR
  DEFINED AS "The failedAlarmCall notification indicates directory number, date, time and reason
  of unsuccessful alarm calls (e.g. due to absent subscriber, busy line, etc.).";;
  WITH INFORMATION SYNTAX CustomerAdminModuleV2.FailedAlarmCall;
REGISTERED AS {ocaNotification 1};
```

7.8 ASN.1 defined types module

```
CustomerAdminModuleV2 {ccitt(0) identified-organization(4) etsi(0) customerAdministration(291)
  informationModel(1) asn1Module(2) asn1DefinedTypesModule(0)}
```

```
DEFINITIONS IMPLICIT TAGS ::=
```

```
BEGIN
```

```
IMPORTS
```

```
-- CCITT Recommendation X.711
  ObjectClass, ObjectInstance, Attribute, AttributeId, Scope, CMISFilter
  FROM CMIP-1 {joint-iso-ccitt ms(9) cmip(1) version1(1) protocol(3)}
-- CCITT Recommendation X.721
  AdministrativeState, AttributeList
  FROM Attribute-ASN1Module {joint-iso-ccitt ms(9) smi(3) part2(2) asn1Module(2) 1};
```

```
informationModel          OBJECT IDENTIFIER ::= {ccitt(0) identified-organization(4) etsi(0)
  customerAdministration(291)
  informationModel(1)}
ocaManagedObjectClass   OBJECT IDENTIFIER ::= {informationModel managedObjectClass   (3)}
ocaPackage                OBJECT IDENTIFIER ::= {informationModel package           (4)}
ocaParameter              OBJECT IDENTIFIER ::= {informationModel parameter        (5)}
ocaNameBinding            OBJECT IDENTIFIER ::= {informationModel nameBinding       (6)}
ocaAttribute              OBJECT IDENTIFIER ::= {informationModel attribute         (7)}
ocaAction                 OBJECT IDENTIFIER ::= {informationModel action            (9)}
```

```
ActingRole ::= ENUMERATED {
  balanced   (0),
  master     (1),
  slave      (2)}
```

```
AddServiceToConfigurationReply ::= SEQUENCE {
  createdInstances      ManagedInstancesNames,
  execution              Execution,
  failedInstances       FailedInstances OPTIONAL}
```

```
AddServiceToConfigurationRequest ::= SEQUENCE {
  referenceServiceConfigurationInstance  ObjectInstance,
  selectionInformation                    SelectionInformation,
  customerData                            CustomerData OPTIONAL}
```

```
AdviceOfChargeActivation ::= ENUMERATED {
  allCalls   (0),
```

```

    perCall      (1)}

AlarmCallEnd ::= CHOICE {
    repetitions   INTEGER,
                -- gives the number of repetitions in consecutive weeks; 0 means infinite
    endDate      Date}
                -- gives an explicit end date

AlarmCallType ::= CHOICE {
    casual        NULL,
    daily         DailyAlarmCall,
    specific      SpecificAlarmCall}

Area ::= ENUMERATED {
    limited      (0),      -- A DECT terminal can make and receive calls only within the area
                    -- code of the directory number
    extended     (1),      -- A DECT terminal can make outgoing calls even outside his area code
                    -- of the directory number but not receive incoming calls outside his
                    -- area code of the directory number
    universal    (0)}      -- A DECT terminal can make and receive calls even outside the area
                    -- code of the directory number

AssocCUGList ::= SET OF CUGIndex

BlockingDirection ::= ENUMERATED {
    noBlocking   (0),
    incoming     (1),
    outgoing     (2),
    bothWay      (3)}

CallCompletionRecallMode ::= ENUMERATED {
    recallAll    (0),
    recallActivator (1)}

CallDiversionRestrictions ::= CHOICE {
    noRestrict   [0]      NULL,
    geogrRestrict [1]      DialedDigits, -- National destination number
    listRestrict [2]      NumberList}

CallForwardCallingNotification ::= ENUMERATED {
    no           (0),
    yesWithoutNumber (1),
    yesWithNumber (2)}

CallForwardReleaseInformation ::= BOOLEAN

CallForwardServedNotification ::= BOOLEAN

CallWaitingCallingNotification ::= BOOLEAN

Catastrophe ::= INTEGER

ChangeAccessPortRequest ::= SEQUENCE {
    customerProfile      ObjectInstance,
    accessPortProfile    ObjectInstance,
    oldAccessPort        ObjectInstance,
    newAccessPort        ObjectInstance}

ChangeDirectoryNumberRequest ::= SEQUENCE {
    customerProfile      ObjectInstance,
    oldEtsiE164DirectoryNumber ObjectInstance,
    oldDirectoryNumberIntercept InterceptTreatmentTerm,
    newEtsiE164DirectoryNumber ObjectInstance}

ChannelType ::= CHOICE {
    isdn          Isdn,
    nonIsdn       NonIsdn}

CondPackages ::= SET OF OBJECT IDENTIFIER
-- object identifiers of conditional packages to be instantiated with the service object class

CUGBarring ::= ENUMERATED {
    none      (0)      -- no blocking of CUG calls
    inBarred (1)      -- Subscriber cannot receive calls from other members of his CUG.
    outBarred (2)}    -- Subscriber cannot originate calls to other members of his CUG.

CUGDataNetworkIdentification ::= DialedDigits (SIZE(4))

-- this information is signalled during set-up of a CUG call and serves (in conjunction with the
-- cugInterlockCode) to uniquely identify the CUG in the international network. It can be thought
-- of as the area code of the CUG.

CUGIndex ::= DialedDigits

```

```

CugInterlockCode ::= DialedDigits (SIZE(5))
-- this information is signalled during set-up of a CUG call and serves to uniquely identify the
-- CUG in the national network. It can be thought of as the 'directory number' for the CUG.

CustomerCategory ::= ENUMERATED {
    standard      (0),
    coinBox       (1),
    mobile         (2),
    testEquipment (3),
    operator       (4)}

CustomerData := SET OF SEQUENCE {
    objectClass      OBJECT IDENTIFIER,
    objectInstance   ObjectInstance OPTIONAL,
    attributeList    AttributeList}

CustomerType ::= ENUMERATED {
    singleLine      (0),
    multiLinePBX    (1),
    multiLineNonPBX (2)}

DailyAlarmCall ::= Sequence {
    repetitions      INTEGER,
                    -- gives the number of repetitions on consecutive days; 0 means infinite
    holidays         BOOLEAN}
                    -- indicates whether alarm calls are to be performed on public holidays
                    -- (TRUE) or not (FALSE)

Date ::= SEQUENCE {
    year      NumericString(SIZE4)(FROM("0"|"1"|".."|"9")), -- gives the year in four digits
    month     NumericString(SIZE2)(FROM("0"|"1"|".."|"9")), -- gives the month in two digits
    day       NumericString(SIZE2)(FROM("0"|"1"|".."|"9"))} -- gives the day in two digits

Day ::= ENUMERATED {
    monday      (1),
    tuesday     (2),
    wednesday   (3),
    thursday    (4),
    friday      (5),
    saturday    (6),
    sunday      (7)}

D-ChannelActivation ::= ENUMERATED {
    deact      (0), --link deactivated
    act1       (1), --layer 1 maintained
    act2       (2)} --layer 1 and 2 maintained

DetailClass ::= INTEGER
-- success long distance      = 0
-- success international      = 1
-- successful calls           = 2
-- calls                      = 3
-- special service 1         = 4
-- special service 2         = 5
-- etc.

DetailedNb ::= SEQUENCE {
    incoming      INTEGER,
    outgoing      INTEGER,
    bothWay       INTEGER}

DialedDigits ::= IA5String
(FROM ("0"|"1"|"2"|"3"|"4"|"5"|"6"|"7"|"8"|"9"|"*"|"#"|"A"|"B"|"C"|"D"|"E"|"F"))
-- According to Q.23 only 16 frequency combinations are available. Therefore, # and * are mapped
-- internally on two of the letters from A to F. This mapping is implementation dependent.

DiallingList ::= CHOICE {
    sharedList      ObjectInstance,
    individualList  IndividualList}

DigitTreatment ::= INTEGER
-- operator        =0
-- external        =1
-- emergency       =2
-- activationCode1 =3
-- accessCode1     =4
-- activationCode2 =5
-- accessCode2     =6
-- etc.

Directionality ::= ENUMERATED {
    bothways      (0),

```

```

incoming          (1),
outgoing          (2)}

EtsiDeflectingNumberNotification ::= ENUMERATED {
  noNotification      (0),
  withoutDN          (1),
  withDN             (2)}

EtsiE164DirectoryNumber ::= SEQUENCE {
  countryCode          DialedDigits OPTIONAL,
  nationalSignificantNumber SEQUENCE {
    nationalDestinationNumber DialedDigits OPTIONAL,
    subscriberNumber          DialedDigits}}

EstablishCustomerConfigurationRequest ::= SEQUENCE {
  referenceServiceConfigurationInstance ObjectInstance,
  access                               ObjectInstance,      -- accessPort(Profile)
  directoryNumber                       ObjectInstance,
  customerData                           CustomerData OPTIONAL}

Execution ::= ENUMERATED {
  successful      (0),      -- all required instances could be copied
  partlyExecuted (1),      -- not all required instances could be copied
  failed         (2)}      -- none of the required instances could be copied

FailedAlarmCall ::= SEQUENCE {
  directoryNumber EtsiE164DirectoryNumber,
  date            Date,
  time            TimeOfDay,
  kindOfAlarmCall KindOfAlarmCall,
  reason         Reason}

FailedInstances ::= SET OF SEQUENCE {
  referredCustomerConfigurationInstance ObjectInstance,      -- destination instance
  referenceConfigurationInstances       PointerList}          -- instances to be copied

FixedDestinationNumber ::= CHOICE {
  noDestination      NULL,
  fixedDestination   DialedDigits}

GeneralServiceList ::= SET OF CHOICE {
  registeredService   ObjectClass,      -- gives the object identifier of a registered
  nonRegisteredService NameType}        -- service representing object class
                                         -- represents a non-registered service

IndividualList ::= SET OF SEQUENCE {
  shortCode          DialedDigits,
  fullDirectoryNumber DialedDigits}

InterCUGAccess ::= ENUMERATED {
  none              (1),
  outgoingAccess    (2),      -- Calls to non-CUG members allowed
  incomingAccess    (3),      -- Incoming calls from non-CUG members allowed
  outgoingAndIncomingAccess (4)} -- Subscriber can be accessed by other members of CUG

Isdn ::= ENUMERATED {
  bChannel (0),
  dChannel (1)}

IsdnNb ::= DialedDigits

KindOfAlarmCall ::= ENUMERATED {
  manual      (0),
  semiAutomatic (1),
  automatic   (2)}

LineCharacteristics ::= INTEGER
-- short: 0
-- long: 1

LineSignalling ::= ENUMERATED {
  dtmf (0),      -- push button
  pulse (1),     -- rotary
  both (2)}

MaxNb ::= CHOICE {
  detailed [0] DetailedNb,
  total    [1] INTEGER}

ManagedInstancesNames ::= SET OF SEQUENCE {
  objectClass   ObjectClass,
  objectInstance ObjectInstance}

```

```

NameType ::= CHOICE {
    number      INTEGER,
    string      GraphicString}

NonIsdn ::= ENUMERATED {
    kbit64      (0),
    kbit32      (1),
    kbit16      (2),
    kbit8       (3)}

Number ::= INTEGER

NumberList ::= SET OF EtsiE164DirectoryNumber

Origin ::= NameType

Override ::= SET OF SEQUENCE {
    service      ObjectClass,
    serviceInstance ObjectInstance OPTIONAL,
    condPackages CondPackages OPTIONAL}

Pin ::= IA5String(SIZE4..12)(FROM("0"|"1" |..|"9"|"A"|"B" |..|"Z"|"a"|"b" |..|"z"))

PinProfileRef ::= CHOICE {
    pinProfile      INTEGER,          -- pre-defined profiles on exchange level
    serviceList     GeneralServiceList} -- explicit pointing to supplementary services

Pointer ::= ObjectInstance

PointerList ::= SET OF ObjectInstance

PreferredCUGIndex ::= CHOICE {
    notDefined [0] NULL,
    defined    [1] CUGIndex}

PrimaryInterexchangeCarrier ::= IA5String

Program ::= CHOICE {
    nonAssignment      [0] NULL,
    assignedProgram    [1] INTEGER(0..255)}

Reason ::= CHOICE {
    specificReason SpecificReason,
    otherReason     NameType}

RemotelyControlledService CHOICE {
    all [0] NULL,
    serviceList [1] GeneralServiceList}

RingingSequence ::= INTEGER

RoutingInformation ::= CHOICE {
    server      NULL,
    routingNumber DialedDigits}

SelectionInformation ::= SEQUENCE {
    referencedObjectInstance ObjectInstance,
    scope                   Scope DEFAULT baseObject,
    filter                   CMISFilter DEFAULT and { } }

SemipermanentLine ::= BOOLEAN

SpecificAlarmCall ::= Sequence {
    daysOfWeek      SET OF Day,
                    -- gives the days of the week on which alarm calls are to be performed
    alarmCallEnd    AlarmCallEnd,
    holidays        BOOLEAN}
                    -- indicates whether alarm calls are to be performed on public holidays
                    -- (TRUE) or not (FALSE)

SpecificReason ::= INTEGER
-- absent customer:    0,
-- busy line:         1,
-- network congestion 2,
-- resource problem   3, etc.

ThirdWireEquipment ::= BOOLEAN

TimeOfDay ::= SEQUENCE {
    hour      INTEGER(0..23),
    minute    INTEGER(0..59)}

TrueFalse ::= BOOLEAN

```

```
VoiceMessagingNumber ::= SEQUENCE {
    etsiE164DirectoryNumber EtsiE164DirectoryNumber,
    controlCode             GraphicString OPTIONAL}

-- default value definitions

blockingDirectionDefault    BlockingDirection    ::= noBlocking
cugBarringDefault           CugBarring           ::= none
cugNetAuthDefault           CugNetworkAuthorizations ::= {}
customerCategoryDefault     CustomerCategory     ::= standard
customerTypeDefault         CustomerType         ::= singleLine
d-ChannelActivationDefault  D-ChannelActivation ::= deact
defaultPointerList          PointerList          ::= {}
directionalityDefault       Directionality       ::= bothways
lineCharacteristicsDefault  LineCharacteristics  ::= 0
lineSignallingDefault       LineSignalling       ::= both
preferredCugIdDefault       PreferredCugIndex   ::= notDefined NULL
semipermanentLineDefault    SemipermanentLine   ::= FALSE
thirdWireEquipmentDefault   ThirdWireEquipment  ::= FALSE

-- permitted value definitions

PermittedNotificationClass ::= notificationClass(noNotificationClass|conditionalNotification)

END -- of CustomerAdminModuleV2
```

Annex A (normative): References to service description standards

The following tables give references to the service description standards.

Table A.1: Circuit mode bearer services

Service	ITU-T Rec.	ETS/EN	Service representing object class
3.1 kHz audio	I.231.3	300 110 [4]	circuitMode3100Hz
64 kbit/s unrestricted	I.231.1	300 108 [2]	circuitMode64kb
Multiple-rate unrestricted	I.231.10	300 389 [5]	multipleRateUnrestricted
Speech	I.231.2	300 109 [3]	speech
Unrestricted digital info with tones/ announcements (7kHz audio)	-	(300 196-1 [1])	audio7khz

Table A.2: Packet -mode bearer services

Service	ITU-T Rec.	ETS	Service representing object class
X.31 case B - B channel	-	300 048 [6]	etsiPacketBChannel
X31 case B - D channel	-	300 049 [7]	etsiPacketDChannel

Table A.3: Teleservices

Service	ITU-T Rec.	ETS	Service representing object class
Telefax 4	I.241.3	300 120 [9]	telefaxG4
Telephony 3,1 kHz	I.241.1	300 111 [8]	telephony
Telephony 7 kHz	I.241.7	300 263 [11]	telephony7khz
Videotelephony	-	300 264 [12]	videotelephony
Videotex	I.241.5	300 262 [10]	videotex

Table A.4: Supplementary services

Service	ITU-T Rec.	ETS / EN / Work Item	Service representing object class
Advice of Charge: charging information at call set-up time (AOC-S)	I.256.2.a	300 178 [27]	adviceOfChargeSetup
Advice of charge: charging information at the end of the call (AOC-E)	I.256.2.c	300 180 [29]	adviceOfChargeEnd
Advice of Charge: charging information during the call (AOC-D)	I.256.2.b	300 179 [28]	adviceOfChargeDuring
Call Deflection (CD)	I.252.5	300 202 [35]	callDeflection
Call Forwarding Busy (CFB)	I.252.2	300 199 [32]	callForwardBusy
Call Forwarding No Reply (CFNR)	I.252.3	300 201 [34]	callForwardNoReply
Call Forwarding Unconditional (CFU)	I.252.4	300 200 [33]	callForwardUnc
Call Hold (HOLD)	I.253.2	300 139 [26]	callHold
Call Waiting (CW)	I.253.1	300 056 [15]	callWaiting
Calling Line Identification Presentation (CLIP)	I.251.3	300 089 (ISDN) [18] 300 648 (PSTN) [19]	clipSupplService
Calling Line Identification Restriction (CLIR)	251.4	300 090 (ISDN) [20] 300 649 (PSTN) [21]	clirSupplService
Closed User Group (CUG)	I.255.1	300 136 [25]	etsiCUG, etsiCUGSubscriptionOption
Completion of Call on no Reply (CCNR)	I.253.4	301 134[63]	callCompletionNoReply
Completion of Calls to Busy Subscribers (CCBS)	I.253.3	300 357 [37]	callCompletionBusy
Conference call, add-on (CONF)	I.254.1	300 183 [30]	conferenceCallAddOn
Connected Line Identification Presentation (COLP)	251.5	300 094 [22]	colpSupplService
Connected Line Identification Restriction (COLR)	I.251.6	300 095 [23]	colrSupplService
Cordless Terminal Mobility (CTM)		301 175 [64]	cordlessTerminalMobility
Direct Dialling In (DDI)	I.251.1	300 062 [17]	ddi
Explicit Call Transfer (ECT)	I.252.7	300 367 [38]	explicitCallTransfer
Malicious Call Identification (MCID)	I.251.7	300 128 [24]	maliciousCallIdentification
Message waiting indication (MWI)		300 650 [39]	mwiReceiver, mwiController
Multiple Subscriber Number (MSN)	I.251.2	300 050 [13]	msn
Outgoing Call Barring- User Controlled (OCB-UC)		301 084 [41]	outgoingCallBarring
Outgoing Call Barring-Fixed (OCB-F)		301 082 [40]	outgoingCallBarring
Remote Control of Supplementary Service (RCSS)	I.258.3	NA010009	remoteControlService
Subaddressing (SUB)	I.251.8	300 059 [16]	subaddressing
Terminal portability (TP)	I.258.1	300 053 [14]	termPortabilitySupplService
Three Party (3PTY)	I.245.2	300 186 [31]	threeParty
User-to-User Signalling (UUS)	I.257.1	300 284 [36]	userToUserSignalling

Table A.5: Selection of additional services not yet defined by ITU-T or ETSI ISDN service descriptions

Service	CEPT Handbook on services and facilities [58], section:	Service representing object class
abbreviated dialling	1.1	abbreviatedDialling
absent subscriber	4.1	absentCustomerFixed, absentCustomerOperator, absentCustomerPredetermined
alarm call (wake up)	2.1	alarmCall
call observation		customerObservation
charging observation		customerObservation
coinbox		customerCategory attribute in customerProfile
detailed billing		detailedBilling
do not disturb	5.1	incomingCallBarring
fixed destination call (hot line)	1.2	fixedDestinationCall
general deactivation	14.8	generalFacilityReset
home meter		homeMeter
incoming call barring	3.2	incomingCallBarring
interception of calls	13.1	interceptionOfCalls
modify keyword		pin
permanent active layer 1/2		dChannelLayer1Activation/ dChannelLayer2Activation in etsiAccessPortISDNBasicRate/ etsiAccessPortISDNPrimaryRate
private number ringing signal		differentRinging
semipermanent/nailed up connection		(M3100:crossConnection)
terminating calls not charged		terminatingCallsNotCharged
toll catastrophe		blocking
traffic restriction		blocking, outgoingCallBarring
voice messaging		voiceMessagingBusy, voiceMessagingNoReply, voiceMessagingUnconditional
vpn		vpn

Annex B (informative): Object classes defined in the ITU-T Recommendation Q.824 series which are not used in the context of this standard

The paragraph numbers given hereafter with the object classes refer to the respective ITU-T Recommendation.

B.1 ITU-T Recommendation Q.824.0

- 3.4 Administered Circuit Endpoint Subgroup
- 3.8 Directory Number E164
- 3.11 Routing Block
- 4.1 Catalogued Optional User Facilities
- 4.5 Optional User Facilities

B.2 ITU-T Recommendation Q.824.1

- 3.1.1 Access Channel B-Channel
- 3.1.2 Access Channel D-Channel
- 3.2.1 Access Port ISDN Basic Rate
- 3.2.2 Access Port ISDN Primary Rate
- 3.3.1 Access Port Profile ISDN
- 3.3.2 Access Port Profile ISDN Basic Rate
- 3.3.3 Access Port Profile ISDN Primary Rate
- 3.3.4 Calling Number Screening
- 3.3.5 Network User Identification
- 4.1 Catalogued Access Port ISDN Primary Rate
- 4.2 Catalogued Access Port Profile ISDN
- 4.3 Catalogued Access Port Profile ISDN Basic Rate
- 4.4 Catalogued Layer Entity DSS1
- 4.5 Catalogued Layer Entity LAPD
- 5.1 Terminal Configuration
- 5.2 Terminal Service Profile
- 6.1.1 Bearer Service For 384 kbps Data
- 6.1.2 Bearer Service For 1536 kbps Data
- 6.1.3 Bearer Service For 1920 kbps Data
- 6.1.4 Bearer Service For Multiple Rate Data
- 6.1.5 Circuit 3.1kHz
- 6.1.6 Circuit Combined Switched Digital Data
- 6.1.7 Circuit Combined Voice Band
- 6.1.8 Circuit MultiUse
- 6.1.9 Bearer Service For 64 kbps Data (Unrestricted) Rate Adapted From 56 kbps
- 6.1.10 Circuit Speech
- 6.1.11 Circuit Unrestricted Digital Data
- 6.1.12 Packet
- 6.1.13 Packet B Channel
- 6.1.14 Packet D Channel
- 7.1 Service Manager ISDN
- 7.2 Service Manager Retrieve Service

B.3 ITU-T Recommendation Q.824.2

- 3.1.1. ISDN Circuit Service Set

- 3.1.2. Service Restrictions
- 3.2.1. Advice of Charge at Call Set-Up Time
- 3.2.2. Advice of Charge During the Call
- 3.2.3. Advice of Charge End of The Call
- 3.2.4. Call Deflection
- 3.2.5. Call Forwarding Busy
- 3.2.6. Call Forwarding No Reply
- 3.2.7. Call Forwarding Unconditional
- 3.2.8. Call Hold
- 3.2.9. Call Transfer
- 3.2.10. Call Waiting
- 3.2.11. CLIP
- 3.2.12. CLIR
- 3.2.13. Conference Calling
- 3.2.14. Direct Dialling In
- 3.2.15. Malicious Call Identification
- 3.2.16. Multiple Subscriber Number
- 3.2.17. Outgoing Call Barring
- 3.2.18. Three Party
- 3.2.19. User-to-User Signalling
- 4.1 Catalogued Call Hold

B.4 ITU-T Recommendation Q.824.3

- 2.1.1. Service X25 Permanent Virtual Circuit (PVC)
- 2.1.2 Semi-Permanent Access To Packet Handler
- 2.2.1. ChargingControl
- 2.2.2. Call Restrictions
- 2.2.3. Path Control

B.5 ITU-T Recommendation Q.824.4

- 3.1. Telefax 4
- 3.2. Telephony
- 3.3. Teletex

Annex C (informative): Examples for customer configurations

This annex gives examples for customer configurations on object instance basis.

In these examples the service assignment to the customer configurations is not drawn.

C.1 PSTN single line configuration

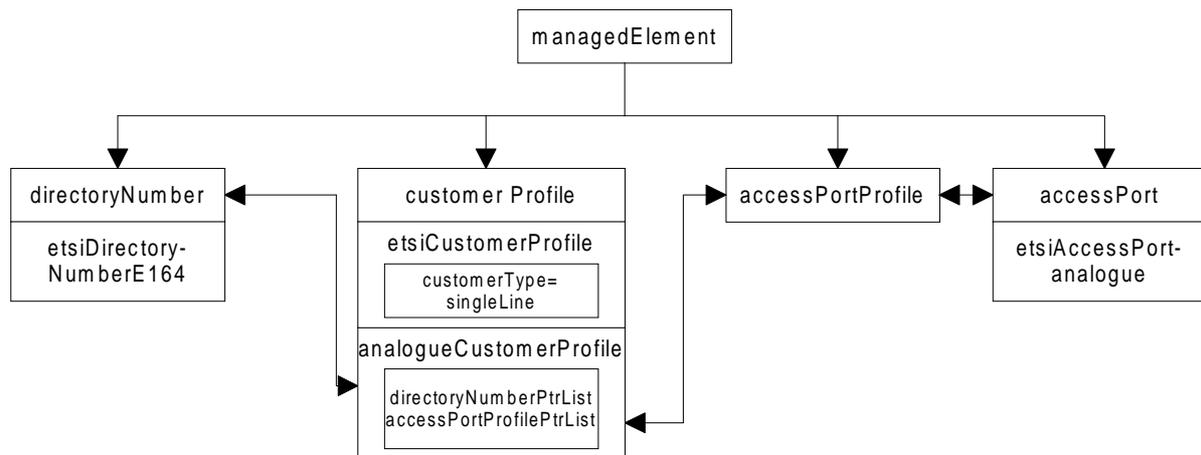


Figure C.1: Logical configuration

C.2 ISDN single line configuration

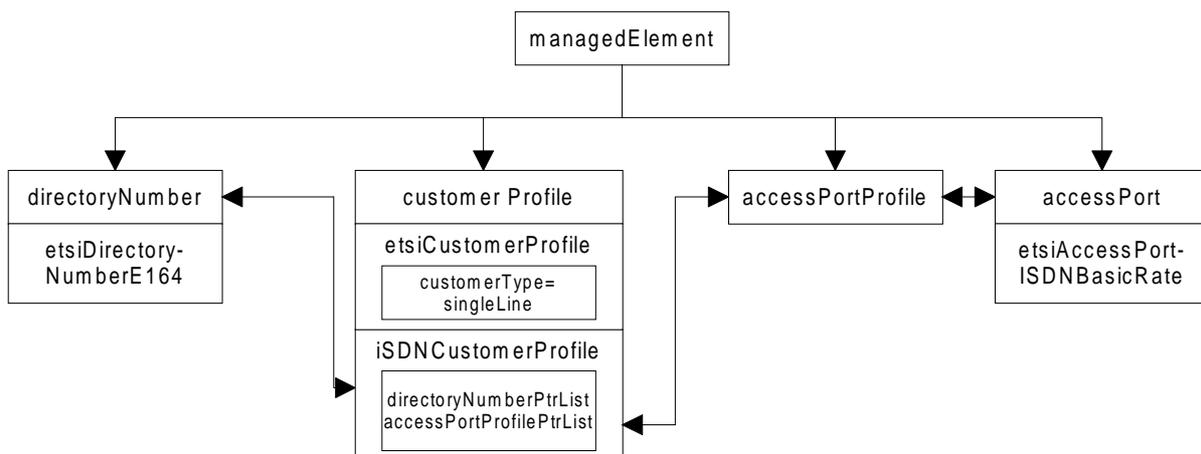


Figure C.2: Logical configuration

Annex D (informative): Modelling of centrex

Centrex is not to be considered as a standardized service. Therefore, the information model fragment given hereafter is to be seen as a potential and non-normative modelling approach for an implementation of centrex within a network.

D.1 Entity relationship diagram

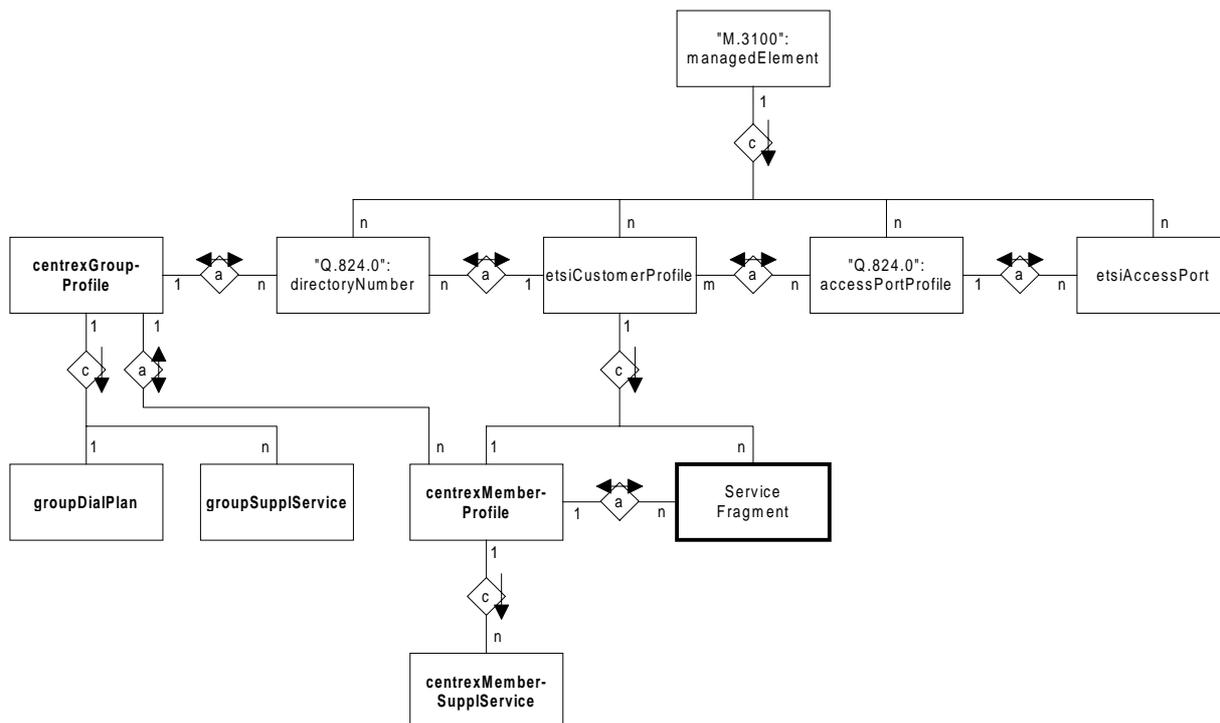


Figure D.1: Entity relationship diagram

D.2 Inheritance hierarchy

An inheritance hierarchy diagram of the centrex specific object classes is given in the following:

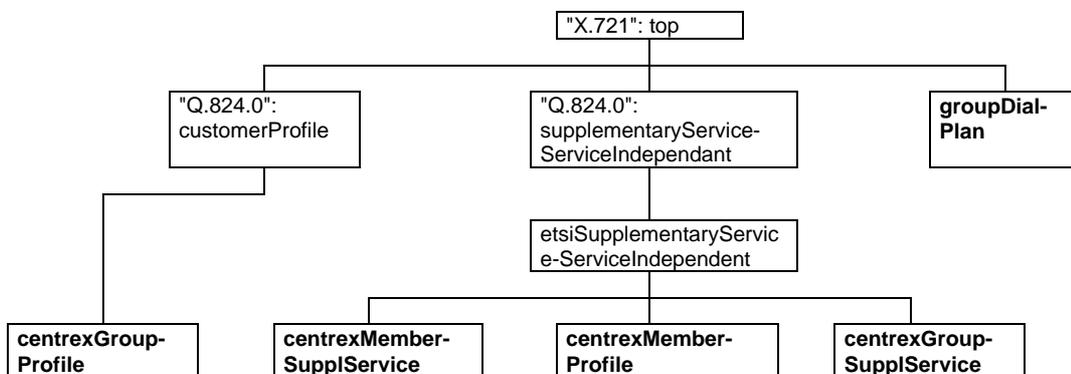


Figure D.2: Inheritance hierarchy

D.3 GDMO definitions

Thus the GDMO template for the object classes and attribute might look as follows:

D.3.1 Object class definitions

The following object class definitions are provided:

```
centrexGroupProfile MANAGED OBJECT CLASS
  DERIVED FROM "ITU-T Recommendation Q.824.0 (1996)":customerProfile;
  CHARACTERIZED BY
  centrexGroupProfilePkg PACKAGE
    BEHAVIOUR
    centrexGroupProfileBhv BEHAVIOUR
  DEFINED AS "The centrex group profile provides the common characteristics for a centrex
  group. It is a subclass of the customer profile object class. It provides a single point of
  reference to the (supplementary) services associated with all users of the group.
  The accessPortProfilePtrList attribute inherited from customerProfile may only contain an
  empty set.";;
  ATTRIBUTES
    centrexCustomerPtrList      GET;;;
REGISTERED AS {ocaManagedObjectClass x};

centrexMemberProfile MANAGED OBJECT CLASS
  DERIVED FROM :etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  centrexMemberProfilePkg PACKAGE
    BEHAVIOUR
    centrexMemberProfileBhv BEHAVIOUR
  DEFINED AS "The centrex member profile provides the common characteristics for all members
  of the centrex group. It provides a single point of reference to the resources and services
  associated with the customer.
  The attribute centrexGroupPtr must not have a NULL value.
  Only one instance of centrexMemberProfile may exist for a given customerProfile.";;
  ATTRIBUTES
    centrexGroupPtr      GET SET-BY-CREATE,
    intercomNumber      GET-REPLACE;;;
REGISTERED AS {ocaManagedObjectClass x};

centrexGroupSupplService MANAGED OBJECT CLASS
  DERIVED FROM :etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  centrexGroupSupplServicePkg PACKAGE
    BEHAVIOUR
    centrexGroupSupplServiceBhv BEHAVIOUR
  DEFINED AS "The centrexGroupSupplService provides the common characteristics for all
  supplementary services associated to an instance of object class centrexGroupProfile.";;;
REGISTERED AS {ocaManagedObjectClass x};

centrexMemberSupplService MANAGED OBJECT CLASS
  DERIVED FROM :etsiSupplementaryServiceServiceIndependent;
  CHARACTERIZED BY
  centrexMemberSupplServicePkg PACKAGE
    BEHAVIOUR
    centrexMemberSupplServiceBhv BEHAVIOUR
  DEFINED AS
  "The centrexMemberSupplService provides the common characteristics for all centrex specific
  supplementary services of an instance of object class centrexMemberProfile.";;;
REGISTERED AS {ocaManagedObjectClass x};

groupDialPlan MANAGED OBJECT CLASS
  DERIVED FROM "CCITT Recommendation X.721: 1992":top;
  CHARACTERIZED BY
  groupDialPlanPkg PACKAGE
    BEHAVIOUR
    groupDialPlanBhv BEHAVIOUR
  DEFINED AS "The group dial plan object class represents the treatment of dialled digits on
  the terminating equipment of centrex users, within a specific centrex group.";;
  ATTRIBUTES
    groupDialPlanId      GET SET-BY-CREATE,
    dialledCodesList    GET-REPLACE ADD-REMOVE,
    translationTable    GET-REPLACE ADD-REMOVE;;;
REGISTERED AS {ocaManagedObjectClass x};
```

D.3.2 Name bindings

```
centrexGroupProfile-groupDialPlan NAME BINDING
  SUBORDINATE OBJECT CLASS      groupDialPlan AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS  centrexGroupProfile AND SUBCLASSES;
  WITH ATTRIBUTE                groupDialPlanId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding x};
```

```
centrexMemberProfile-centrexMemberSupplService NAME BINDING
  SUBORDINATE OBJECT CLASS      centrexMemberSupplService AND SUBCLASSES;
  NAMED BY SUPERIOR OBJECT CLASS  centrexMemberProfile AND SUBCLASSES;
  WITH ATTRIBUTE                supplementaryServiceId;
  CREATE WITH-REFERENCE-OBJECT, WITH-AUTOMATIC-INSTANCE-NAMING;
  DELETE;
REGISTERED AS {ocaNameBinding x};
```

D.3.3 Attribute definitions

```
centrexGroupPtr ATTRIBUTE
  WITH ATTRIBUTE SYNTAX "M.3100":Pointer;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  centrexGroupPtrBhv BEHAVIOUR
  DEFINED AS
  "It points to the associated instance of object class centrexGroupProfile.>";
REGISTERED AS {ocaAttribute x};
```

```
centrexCustomerPtrList ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.PointerList;
  MATCHES FOR EQUALITY,SET-COMPARISON,SET-INTERSECTION;
  BEHAVIOUR
  centrexCustomerPtrListBhv BEHAVIOUR
  DEFINED AS
  "It points to the associated instances of object class centrexCustomerProfile.>";
REGISTERED AS {ocaAttribute x};
```

```
dialledCodesList ATTRIBUTE
  WITH ATTRIBUTE SYNTAX OcaAnnexD.DialledCodesList;
  MATCHES FOR SET-INTERSECTION, SET-COMPARISON;
  BEHAVIOUR
  dialledCodesListBhv BEHAVIOUR
  DEFINED AS "It defines the range of dialled digits which are to receive specific treatments
  within the centrex group. Examples include specific digits used to access attendants, external
  lines, emergency switchboards, etc., as well as the list of access and activation codes for
  service features used within the group.>";
REGISTERED AS {ocaAttribute x};
```

```
groupDialPlanId ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.NameType;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  groupDialPlanIdBhv BEHAVIOUR
  DEFINED AS "It gives the RDN.>";
REGISTERED AS {ocaAttribute x};
```

```
intercomNumber ATTRIBUTE
  WITH ATTRIBUTE SYNTAX CustomerAdminModuleV2.DialledDigits;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  intercomNumberBhv BEHAVIOUR
  DEFINED AS
  "It gives the intercom number of a centrex customer.>";
REGISTERED AS {ocaAttribute x};
```

```
translationTable ATTRIBUTE
  WITH ATTRIBUTE SYNTAX OcaAnnexD.TranslationTable;
  MATCHES FOR EQUALITY;
  BEHAVIOUR
  translationTableBhv BEHAVIOUR
  DEFINED AS "It defines how calls are routed between extensions in the customer group. A sequence
  of dialled digits will translate to a PSTN number range for routing. These need to be mutually
  compatible. A $ is used as a wild card.>";
REGISTERED AS {ocaAttribute 94};
```

D.3.4 ASN.1 types

OcaAnnexD

BEGIN

```
DialledCodesList ::= SET OF SEQUENCE {  
  code      DialledDigits,  
  treatment DigitTreatment}
```

```
TranslationTable ::= SET OF SEQUENCE {  
  dialledNumLength  INTEGER (1..16),  
  dialledNum        DialledDigits,  
  actualNum         DialledDigits}
```

END

D.4 Further remarks

The extension of the model to centrex consoles, centrex attendant groups and centrex attendants is not yet covered.

Centrex group specific supplementary services (e.g. distinctive ringing, feature control, message detail recording, ...) are not yet defined.

Centrex customer specific supplementary services (e.g. call restrictions, call diversion restrictions, ...) are not yet defined. These supplementary services may also have an impact on PSTN supplementary services.

History

Document History		
Edition 1	January 1995	Published as I-ETS 300 291
V1.2.1	April 1998	Public Enquiry PE 9833: 1998-04-17 to 1998-08-14