

**Electromagnetic compatibility  
and Radio spectrum Matters (ERM);  
Wideband Transmission systems;  
Data transmission equipment operating  
in the 2,4 GHz ISM band and  
using spread spectrum modulation techniques;  
Part 1: Technical characteristics and test conditions**

---



---

**Reference**

REN/ERM-TG11-001-3

---

**Keywords**

data, ISM, LAN, mobile, radio, spread spectrum,  
testing, transmission

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
[editor@etsi.fr](mailto:editor@etsi.fr)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.  
All rights reserved.

# Contents

Intellectual Property Rights .....	5
Foreword.....	5
Introduction .....	6
1 Scope .....	7
2 References .....	8
3 Definitions, abbreviations and symbols .....	8
3.1 Definitions .....	8
3.2 Abbreviations .....	10
3.3 Symbols.....	10
4 General .....	10
4.1 Manufacturer declarations.....	10
4.2 Presentation of equipment for type testing .....	11
4.2.1 Choice of model.....	11
4.2.2 Presentation.....	11
4.2.3 Choice of operating frequencies .....	12
4.3 Design .....	12
4.3.1 General.....	12
4.3.2 Controls .....	12
4.4 Interpretation of the measurement results .....	12
5 Technical characteristics .....	12
5.1 Modulation .....	12
5.1.1 FHSS modulation.....	13
5.1.2 DSSS and other forms of modulation .....	13
5.2 Transmitter parameter limits .....	13
5.2.1 Effective radiated power .....	13
5.2.2 Peak power density .....	13
5.2.3 Frequency range.....	13
5.2.4 Spurious emissions .....	14
5.3 Receiver parameter limits.....	14
5.3.1 General.....	14
5.3.2 Spurious emissions .....	14
6 Test conditions .....	15
6.1 Normal and extreme test conditions .....	15
6.2 Power sources.....	15
6.2.1 Power sources for stand-alone equipment .....	15
6.2.2 Power sources for plug-in radio devices .....	15
6.3 Normal test conditions.....	16
6.3.1 Normal temperature and humidity .....	16
6.3.2 Normal power source.....	16
6.3.2.1 Mains voltage .....	16
6.3.2.2 Lead-acid battery power sources used on vehicles.....	16
6.3.2.3 Other power sources.....	16
6.4 Extreme test conditions .....	16
6.4.1 Extreme temperatures .....	16
6.4.2 Extreme power source voltages .....	17
6.4.2.1 Mains voltage .....	17
6.4.2.2 Lead-acid battery power sources used on vehicles.....	17
6.4.2.3 Power sources using other types of batteries.....	17
6.4.2.4 Other power sources.....	17
6.4.3 Procedure for tests at extreme temperatures .....	17
6.5 Testing of host connected equipment and plug-in radio devices .....	18
6.5.1 The use of a host or test jig for testing Plug-In radio devices .....	18

6.5.2	Testing of combinations.....	18
6.5.2.1	Alternative A: General approach for combinations.....	18
6.5.2.2	Alternative B: For host equipment with a plug-in radio device .....	18
6.5.2.3	Alternative C: For combined equipment with a plug-in radio device .....	18
6.5.2.4	Alternative D: For equipment with multiple radios .....	18
6.6	Test data sequence.....	18
7	Methods of measurement .....	19
7.1	General .....	19
7.2	Measurements of transmitter parameters.....	19
7.2.1	Effective radiated power .....	19
7.2.1.1	Radiated measurements.....	19
7.2.1.2	Conducted Measurements .....	19
7.2.2	Peak power density .....	20
7.2.3	Frequency range of equipment using FHSS modulation .....	22
7.2.4	Frequency range of equipment using other forms of modulation .....	23
7.2.5	Spurious emissions .....	23
7.3	Measurements of receiver parameters .....	25
7.3.1	General.....	25
7.3.2	Spurious emissions .....	25
8	Measurement uncertainty values .....	25
<b>Annex A (normative):</b>	<b>Test sites and arrangements for radiated measurements.....</b>	<b>27</b>
A.1	Test sites.....	27
A.1.1	Open air test sites .....	27
A.1.2	Anechoic chamber.....	28
A.1.2.1	General.....	28
A.1.2.2	Description.....	28
A.1.2.3	Influence of parasitic reflections.....	28
A.1.2.4	Calibration and mode of use .....	29
A.2	Test antenna.....	30
A.3	Substitution antenna .....	31
<b>Annex B (normative):</b>	<b>General description of measurement .....</b>	<b>32</b>
B.1	Conducted measurements and use of test fixture .....	32
B.2	Radiated measurements.....	32
B.3	Substitution measurement .....	33
<b>Annex C (informative):</b>	<b>Bibliography.....</b>	<b>34</b>
History	.....	35

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document is part 1 of a multi-part deliverable covering the Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques, as identified below:

**Part 1: "Technical characteristics and test conditions";**

Part 2: "Harmonized EN covering essential requirements under article 3.2 of the R&TTE directive".

Annex A provides additional requirements concerning radiated measurements.

Annex B contains normative specifications for the adjustment of the measurement equipment and of the equipment to be measured in order to achieve correct results.

Annex C provides a Bibliography.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

---

# Introduction

Wideband radio data transmission systems are rapidly being introduced into a variety of commercial and industrial applications and the technology employed by these systems is still developing.

The present document may be used for the assessment of the performance of the equipment. The performance of the equipment submitted for type testing should be representative for the performance of the corresponding production model. In order to avoid any ambiguity in that assessment, the present document contains instructions for the presentation of equipment for type testing purposes where required (clause 4), testing conditions (clause 6) and methods of measurement (clause 7).

It is intended to include requirements for multi-radio equipment in the present document, but at this time the technical considerations are still ongoing. Upon completion of this work, the present document will be revised to include these requirements.

ETSI intend to recommend to CEPT that the requirement for a minimum aggregate bit rate (250 kbit/s) is removed from the CEPT Recommendation 70-03 annex 3 [1]. When CEPT have made this decision, the present document will be revised to reflect this decision.

---

# 1 Scope

The present document covers equipment referred to in CEPT/ERC Recommendation 70-03 annex 3 [1]. The present document covers the minimum technical characteristics for radio data transmission equipment having the following technical parameters:

- wideband radio modulation techniques;
- aggregate bit rates in excess of 250 kbits/s;
- operation in the 2,4 GHz to 2,4835 GHz Industrial, Scientific and Medical (ISM) band;
- effective radiated power of up to -10 dBW (100 mW);
- power density of up to -10 dBW (100 mW) per 100 kHz for frequency hopping modulation;
- power density of up to -20 dBW (10 mW) per 1 MHz for other forms of spread spectrum modulation.

The present document only addresses the transceivers, transmitters and receivers of equipment offered for testing and includes such technologies as IEEE 802.11 [5], HomeRF™.

The equipment offered for testing may be used in fixed, mobile or portable applications, e.g.:

- stand-alone radio equipment with or without their own control provisions;
- plug-in radio devices intended for use with or within a variety of host systems, e.g. personal computers, hand-held terminals, etc.;
- plug-in radio devices intended for use within combined equipment, e.g. cable modems, set-top boxes, access points, etc.;
- combined equipment or a combination of a plug-in radio device and a specific type of host equipment.

The equipment may be fitted with integral antennae and/or antenna connectors.

CEPT/ERC Recommendation 70-03 annex 3 [1] defines the total power and power density limits for systems using spread spectrum modulation together with a minimum aggregate bit rate of 250 kbit/s. The recommendation does not address the details of these modulation techniques. Therefore, the present document does not cover the design or operation of the equipment being tested but describes a common set of measurements to be applied to various types of such equipment, including those employing Frequency Hopping Spread Spectrum (FHSS) modulation and Direct Sequence Spread Spectrum (DSSS) modulation.

CEPT/ERC Recommendation 70-03 annex 3 [1] specifies that spread spectrum modulation be used and it gives power density values for FHSS and DSSS modulation. The present document specifies the minimum technical parameters of FHSS modulation such that it can be clearly differentiated from other types of modulation, including DSSS modulation.

The present document describes measurements for operating frequency range(s), effective radiated power and power density as well as spurious emissions for transmitters and receivers.

The measurement methods have been adapted from TR 100 027 [2] where possible.

The present document specifies test site characteristics, test conditions, equipment calibration and methods of measurement.

The present document is a general standard which may be superseded by specific standards covering specific applications.

Additional standards or specifications may be required for equipment such as that intended for connection to the Public Switched Telephone Network (PSTN) and/or other Public Data Networks (PDN).

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] CEPT Recommendation 70-03 (annex 3): "Relating to the use of Short Range Devices (SRD)".
- [2] ETSI TR 100 027: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Methods of measurement for private mobile radio equipment".
- [3] ETSI TR 100 028-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1".
- [4] ETSI TR 100 028-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2".
- [5] IEEE 802.11: "IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications".

---


## 3 Definitions, abbreviations and symbols

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**aggregate bit rate:** bit rate at the air interface (see point D in figure 1) including protocol overhead where applicable and excluding the effects of signal spreading



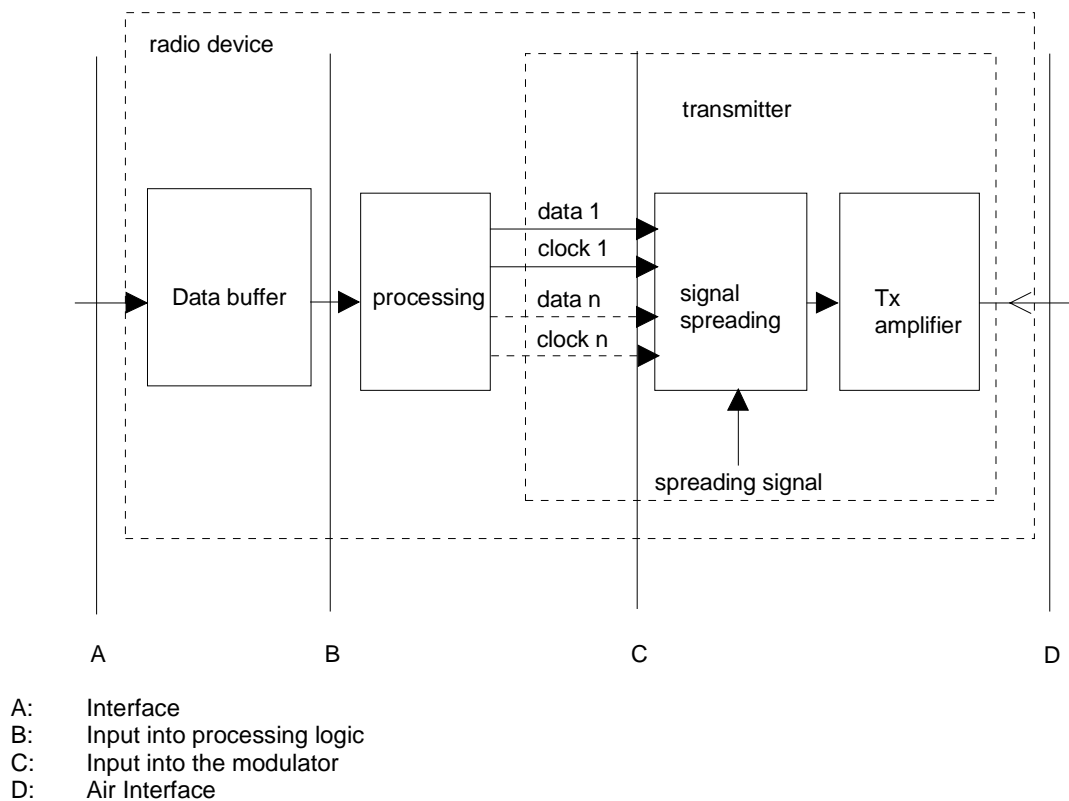

**Figure 1: Parameters related to the aggregate bit rate**

**chip:** unit of modulation used in direct sequence spread spectrum modulation

**chip rate:** number of chips per second

**chip sequence:** sequence of chips with defined length and defined chip polarities

**direct sequence spread spectrum modulation:** form of modulation where a combination of data to be transmitted and a known code sequence (chip sequence) is used to directly modulate a carrier, e.g. by phase shift keying

NOTE 1: The transmitted bandwidth is determined by the chip rate and the modulation scheme.

**fixed station:** equipment intended for use in a fixed location and fitted with one or more antennae

NOTE 2: The equipment may be fitted with either antenna socket(s) or integral antenna(e) or both.

**frequency hopping spread spectrum modulation:** spread spectrum technique in which the transmitter signal occupies a number of frequencies in time, each for some period of time, referred to as the dwell time

NOTE 3: Transmitter and receiver follow the same frequency hop pattern. The frequency range is determined by the lowest and highest hop positions and the bandwidth per hop position (see clause 5.2.3).

**frequency range:** range of operating frequencies over which the equipment can be adjusted

**hand-portable station:** equipment normally used on a stand-alone basis and to be carried by a person or held in the hand

NOTE 4: The equipment may be fitted with one or more antennae. The equipment may be fitted with either antenna socket(s) or integral antenna(e) or both.

**host:** host equipment is any equipment which has complete user functionality when not connected to the radio equipment part and to which the radio equipment part provides additional functionality and to which connection is necessary for the radio equipment part to offer functionality

**integral antenna:** antenna designed to be connected to the equipment without the use of a standard connector and considered to be part of the equipment

NOTE 5: An integral antenna may be fitted internally or externally to the equipment.

**manufacturer:** for the purposes of the present document "manufacturer" is understood to refer to the manufacturer or applicant of equipment offered for testing

**mobile station:** equipment normally used in a vehicle or as a transportable station

NOTE 6: The equipment may be fitted with one or more antennae. The equipment may be fitted with either antenna socket(s) or integral antenna(e) or both.

**operating frequency:** nominal frequency at which the equipment can be operated; this is also referred to as the operating centre frequency

NOTE 7: Equipment may be adjustable for operation at more than one operating frequency.

**plug-in radio device:** radio equipment module intended to be used with or within host, combined or multi-radio equipment, using their control functions and power supply

**combined equipment:** any combination of non-radio equipment that requires a plug-in radio device to offer full functionality

**multi-radio equipment:** radio, host or combined equipment using more than one radio transceiver

**power envelope:** frequency/power contour within which the useful RF power is generated

**spread spectrum modulation:** modulation technique in which the energy of a transmitted signal is spread throughout a relatively large portion of the frequency spectrum

**stand-alone radio equipment:** equipment that is intended primarily as communications equipment and that is normally used on a stand-alone basis

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

DSSS	Direct Sequence Spread Spectrum
e.i.r.p.	equivalent isotropically radiated power
FHSS	Frequency Hopping Spread Spectrum
ISM	Industrial, Scientific and Medical
RF	Radio Frequency
Tx	Transmitter

## 3.3 Symbols

For the purposes of the present document, the following symbols apply:

dBm	dB relative to 1 milliwatt power
dBW	dB relative to 1 watt power

---

# 4 General

## 4.1 Manufacturer declarations

The manufacturer shall declare the following specific characteristics of the equipment:

- a) the aggregate bit rate (see clause 3.1 for the definition);

- b) the type of modulation used: FHSS modulation, DSSS modulation or any other type of spread spectrum modulation (see clause 5.1);
- c) where FHSS modulation is used: the number of hopping channels, the dwell time per channel and the maximum time between two instances of use of the same channel; these values shall fall within the specifications given in clause 5.1.1;
- d) the operating frequency range(s) of the equipment and, where applicable, band(s) of operation (see clause 5.2.3);
- e) the type of the equipment, for example: stand-alone equipment or plug-in radio devices (see also clause 3.1). In case of combined equipment using a plug-in radio device, and more than one combination is intended, each combination should be declared as well (see also clause 6.5);
- f) the extreme operating conditions that apply to the equipment offered for testing;
- g) where the radio equipment is capable of different transmitter power settings, the manufacturer shall declare the intended combination(s) of the radio equipment power settings and one or more antenna assemblies. For each combination, the gain of the antenna assembly i.e. the transfer function between the conducted RF power and e.i.r.p., shall be declared;
- h) the nominal voltages of the stand-alone radio equipment or the nominal voltages of the host equipment or combined equipment in case of plug-in devices.

Where the manufacturer offers different combinations of equipment and antennae, the antennae appropriate for a given combination shall be referenced either on the equipment and on the antennae and/or in the user documentation.

## 4.2 Presentation of equipment for type testing

### 4.2.1 Choice of model

The manufacturer shall offer one or more production models or equivalent preliminary models, as appropriate, for type testing. If type approval is given on the basis of tests on (a) preliminary model(s), then the corresponding production models shall be identical to the tested models in all respects relevant for the purposes of the present document, to the preliminary model(s) tested.

Software fitted to production models shall be substantially the same as that used during type testing.

Due to the low levels of RF signal and the wideband modulations used in this type of equipment, radiated RF power measurements are imprecise. Conducted measurements are much more precise; in combination with the declared antenna assembly gain(s) adequate assurance of the RF characteristics can be achieved. Therefore, equipment offered for testing shall preferably provide a suitable connector for conducted RF power measurements. Where this is not possible, the manufacturer shall provide a documented test fixture that converts the radiated signal into a conducted signal into a suitable termination. Alternatively, radiated measurements shall be performed.

### 4.2.2 Presentation

Stand-alone equipment shall be offered complete with any ancillary equipment needed for testing. The manufacturer shall declare, the range of operating conditions and power requirements as applicable in order to establish the appropriate test conditions.

Plug-in radio devices may be offered for testing together with a suitable test jig and/or host equipment intended for normal use (see clause 6.5). The manufacturer shall declare the range of operating conditions and power requirements that are applicable in order to establish the appropriate test conditions.

Where a manufacturer declares multiple combinations of radio equipment and antennae, the configuration to be used for testing shall be chosen as follows except where specified otherwise:

- for each combination, determine the highest user selectable power level and the antenna assembly with the highest gain;
- from the resulting combinations, choose the one with the highest e.i.r.p.

### 4.2.3 Choice of operating frequencies

Where equipment can be adjusted to or operated at different operating frequencies, a minimum of two operating frequencies shall be chosen such that the lower and higher limits of the operating range(s) of the equipment are covered (see clause 5.2.3).

## 4.3 Design

### 4.3.1 General

The equipment submitted by the manufacturer, shall be designed, constructed and manufactured in accordance with good engineering practice, and with the aim of minimizing harmful interference to other equipment and services.

### 4.3.2 Controls

Those controls (of the radio part) which, if maladjusted, might increase the interfering potential of the equipment shall not be easily accessible to the user.

## 4.4 Interpretation of the measurement results

The interpretation of the test results recorded in a test report for the measurements described in the present document shall be as follows:

- a) the measured value related to the corresponding limit shall be used to decide whether an equipment meets the requirements of the present document;
- b) the actual measurement uncertainty of the test laboratory carrying out the measurements, for each particular measurement, in accordance with TR 100 028-1 [3] and TR 100 028-2 [4], shall be recorded in the test report.

The recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in clause 8 (table of measurement uncertainty).

---

## 5 Technical characteristics

### 5.1 Modulation

The manufacturer shall declare the modulation characteristics of the equipment to be tested. For the purpose of deciding which level of power density applies to equipment offered for testing, the present document defines two categories of equipment: equipment conforming to the stated characteristics of FHSS modulation (see clause 5.1.1) and equipment not conforming to these characteristics. The latter category includes equipment using DSSS modulation (see clause 5.1.2).

### 5.1.1 FHSS modulation

FHSS modulation shall make use of at least 15 well defined, non-overlapping channels or hopping positions separated by the channel bandwidth as measured at 20 dB below peak power. The dwell time per channel shall not exceed 0,4 s. While the equipment is operating (transmitting and/or receiving) each channel of the hopping sequence shall be occupied at least once during a period not exceeding four times the product of the dwell time per hop and the number of channels. Systems that meet the above constraints shall be tested according to the requirements for FHSS modulation.

### 5.1.2 DSSS and other forms of modulation

For the purposes of the present document, other forms of spread spectrum modulation which do not satisfy the constraints of the specification given in clause 5.1.1, shall be considered equivalent to DSSS modulation. Systems using these other forms of modulation shall be considered equivalent to DSSS systems and shall be tested according to the requirements for DSSS modulation.

## 5.2 Transmitter parameter limits

### 5.2.1 Effective radiated power

The effective radiated power is defined as the total power of the transmitter and is calculated according to the procedure given in clause 7.2.1. The effective radiated power shall be equal to or less than -10 dBW (100 mW) e.i.r.p. This limit shall apply for any combination of power level and intended antenna assembly.

See clause 6 for the test conditions; see clause 7.2.1 for the measurement method.

### 5.2.2 Peak power density

The peak power density is defined as the highest instantaneous level of power in Watts per Hertz generated by the transmitter within the power envelope. For equipment using FHSS modulation, the power density shall be limited to -10 dBW (100 mW) per 100 kHz e.i.r.p. For equipment using other types of modulation, the peak power shall be limited to -20 dBW (10 mW) per MHz e.i.r.p.

See clause 6 for the test conditions; see clause 7.2.2 for the measurement and calculation methods.

### 5.2.3 Frequency range

The frequency range of the equipment is determined by the lowest and highest frequencies occupied by the power envelope.

$f_H$  is the highest frequency of the power envelope: it is the frequency furthest above the frequency of maximum power where the output power drops below the level of -80 dBm/Hz e.i.r.p. spectral power density (-30 dBm if measured in a 100 kHz bandwidth).

$f_L$  is the lowest frequency of the power envelope; it is the frequency furthest below the frequency of maximum power where the output power drops below the level equivalent to -80 dBm/Hz e.i.r.p. spectral power density (or -30 dBm if measured in a 100 kHz bandwidth).

For a given operating frequency, the width of the power envelope is ( $f_H - f_L$ ). In equipment that allows adjustment or selection of different operating frequencies, the power envelope takes up different positions in the allocated band. The frequency range is determined by the lowest value of  $f_L$  and the highest value of  $f_H$  resulting from the adjustment of the equipment to the lowest and highest operating frequencies.

For all equipment the frequency range shall lie within the band 2,4 GHz to 2,483 5 GHz ( $f_L > 2,4$  GHz and  $f_H < 2,4835$  GHz).

See clause 6 for the test conditions; see clauses 7.2.3 and 7.2.4 for the measurement methods.

## 5.2.4 Spurious emissions

Spurious emissions are emissions outside the frequency range(s) of the equipment as defined in clause 5.2.3.

The level of spurious emissions shall be measured as:

either:

- a) their power in a specified load (conducted spurious emissions); and
- b) their effective radiated power when radiated by the cabinet or structure of the equipment (cabinet radiation);

or:

- c) their effective radiated power when radiated by cabinet and antenna.

The spurious emissions of the transmitter shall not exceed the values in tables 1 and 2 in the indicated bands.

**Table 1: Transmitter limits for narrowband spurious emissions**

Frequency Range	Limit when operating	Limit when in standby
30 MHz to 1 GHz	-36 dBm	-57 dBm
above 1 GHz to 12,75 GHz	-30 dBm	-47 dBm
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-47 dBm	-47 dBm

The above limit values apply to narrowband emissions, e.g. as caused by local oscillator leakage. The measurement bandwidth for such emissions may be as small as necessary to achieve a reliable measurement result.

Wideband emissions shall not exceed the values given in table 2.

**Table 2: Transmitter limits for wideband spurious emissions**

Frequency Range	Limit when operating	Limit when in standby
30 MHz to 1 GHz	-86 dBm/Hz	-107 dBm/Hz
above 1 GHz to 12,75 GHz	-80 dBm/Hz	-97 dBm/Hz
1,8 GHz to 1,9 GHz 5,15 GHz to 5,3 GHz	-97 dBm/Hz	-97 dBm/Hz

See clause 6 for the test conditions; see clause 7.2.5 for the measurement methods.

## 5.3 Receiver parameter limits

### 5.3.1 General

The present document does not impose limits on the receiver of the equipment other than spurious emission limits.

### 5.3.2 Spurious emissions

The level of spurious emissions shall be measured as:

either:

- a) their power in a specified load (conducted spurious emissions); and
- b) their effective radiated power when radiated by the cabinet or structure of the equipment (cabinet radiation);

or:

- c) their effective radiated power when radiated by cabinet and antenna.

The spurious emissions of the receiver shall not exceed the values in tables 3 and 4 in the indicated bands.

**Table 3: Narrowband spurious emission limits for receivers**

Frequency Range	Limit
30 MHz to 1 GHz	-57 dBm
above 1 GHz to 12,75 GHz	-47 dBm

The above limit values apply to narrowband emissions, e.g. as caused by local oscillator leakage. The measurement bandwidth for such emissions may be as small as necessary to get a reliable measurement result.

Wideband emissions shall be not exceed the values given in table 4.

**Table 4: Wideband spurious emission limits for receivers**

Frequency Range	Limit
30 MHz to 1 GHz	-107 dBm/Hz
above 1 GHz to 12,75 GHz	-97 dBm/Hz

See clause 6 for the test conditions; see clause 7.3 for the measurement methods.

## 6 Test conditions

### 6.1 Normal and extreme test conditions

Type tests shall be made under normal test conditions and where stated in the methods of measurement (see also clause 7), under extreme conditions (clause 6.4.1).

Exceptions to the measurement procedures given in this clause shall be recorded in the test report.

### 6.2 Power sources

#### 6.2.1 Power sources for stand-alone equipment

During type tests, the power source of the equipment shall be replaced by a test power source capable of producing normal and extreme test voltages as specified in clauses 6.3.2 and 6.4.2. The internal impedance of the test power source shall be low enough for its effect on the test results to be negligible. For the purpose of tests, the voltage of the power source shall be measured at the input terminals of the equipment.

For battery operated equipment the battery shall be removed and the test power source shall be applied as close to the battery terminals as practicable.

During tests the power source voltages shall be maintained within a tolerance of  $\pm 1$  % relative to the voltage at the beginning of each test. The value of this tolerance is critical to power measurements; using a smaller tolerance will provide better measurement uncertainty values.

#### 6.2.2 Power sources for plug-in radio devices

The power source for testing plug-in radio devices shall be provided by a test jig or host equipment.

Where the host equipment and/or the plug-in radio device is battery powered, the battery may be removed and the test power source applied as close to the battery terminals as practicable.

## 6.3 Normal test conditions

### 6.3.1 Normal temperature and humidity

The normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges:

- temperature: +15°C to +35°C;
- relative humidity: 20 % to 75 %.

When it is impracticable to carry out the tests under these conditions, a note to this effect, stating the ambient temperature and relative humidity during the tests, shall be recorded in the test report.

The actual values during the tests shall be recorded in the test report.

### 6.3.2 Normal power source

#### 6.3.2.1 Mains voltage

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage or any of the declared voltages for which the equipment was designed.

The frequency of the test power source corresponding to the AC mains shall be between 49 Hz and 51 Hz.

#### 6.3.2.2 Lead-acid battery power sources used on vehicles

When radio equipment is intended for operation from the usual, alternator fed lead-acid battery power source used on vehicles, then the normal test voltage shall be 1,1 times the nominal voltage of the battery (6 V, 12 V, etc.).

#### 6.3.2.3 Other power sources

For operation from other power sources or types of battery (primary or secondary), the nominal test voltage shall be as declared by the equipment manufacturer. This shall be recorded in the test report.

## 6.4 Extreme test conditions

### 6.4.1 Extreme temperatures

For tests at extreme temperatures, measurements shall be made in accordance with the procedures specified in clause 6.4.3, at the upper and lower temperatures of the range as follows:

- temperature: -20°C to +55°C;

Where the manufacturer's declared operating range does not include the range of -20°C to +55°C, the equipment shall be tested over the following temperature ranges:

- a) 0°C to +35 °C for equipment intended for indoor use only, or intended for use in areas where the temperature is controlled within this range;
- b) over the extremes of the operating temperature range(s) of the declared combination(s) or host equipment(s) in case of plug-in radio devices.

The frequency range as in clause 5.2.3 and the e.i.r.p. limit in clause 5.2.1 shall not be exceeded.

The temperature range used in the type testing shall be recorded in the test report and shall be stated in the user manual.



## 6.4.2 Extreme power source voltages

Tests at extreme power source voltages specified below are not required when the equipment under test is designed for operation as part of and powered by another system or piece of equipment. Where this is the case, the limit values of the host equipment or combined equipment shall apply. The appropriate limit values shall be declared by the manufacturer and recorded in the test report.

### 6.4.2.1 Mains voltage

The extreme test voltage for equipment to be connected to an AC mains source shall be the nominal mains voltage  $\pm 10\%$ .

### 6.4.2.2 Lead-acid battery power sources used on vehicles

When radio equipment is intended for operation from the usual type of alternator fed lead-acid battery power source used on vehicles, then extreme test voltage shall be 1,3 and 0,9 times the nominal voltage of the battery (6 V, 12 V etc.).

### 6.4.2.3 Power sources using other types of batteries

The lower extreme test voltages for equipment with power sources using the following types of battery, shall be:

- for the Leclanché or lithium type battery: 0,85 times the nominal voltage of the battery;
- for the mercury or nickel-cadmium type of battery: 0,9 times the nominal voltage of the battery.

In both cases, the upper extreme test voltage shall be 1,15 times the nominal voltage of the battery.

### 6.4.2.4 Other power sources

For equipment using other power sources, or capable of being operated from a variety of power sources (primary or secondary), the extreme test voltages shall be those declared by the manufacturer; these shall be recorded in the test report.

## 6.4.3 Procedure for tests at extreme temperatures

Before measurements are made the equipment shall have reached thermal balance in the test chamber.

The equipment shall be switched off during the temperature stabilizing period. In the case of equipment containing temperature stabilizing circuits designed to operate continuously, these circuits shall be switched on for 15 minutes after thermal balance has been reached. After this time the equipment shall meet the specified requirements. For this type of equipment the manufacturer shall provide for the power source circuit feeding these circuits to be independent of the power source of the rest of the equipment.

If thermal balance is not checked by measurements, a temperature stabilizing period of at least one hour, or such period as may be decided by the testing laboratory, shall be allowed. The sequence of measurements shall be chosen and the humidity content in the test chamber shall be controlled so that excessive condensation does not occur.

Before tests at the upper extreme temperature, the equipment shall be placed in the test chamber and left until thermal balance is attained. The equipment shall then be made to transmit the test data sequence (see clause 6.6) for at least one minute, followed by four minutes in the receive condition, after which the equipment shall meet the specified requirements.

For tests at the lower extreme temperature, the equipment shall be left in the test chamber until thermal balance is attained, then switched to the standby or receive condition for a period of one minute after which the equipment shall meet the specified requirements.

## 6.5 Testing of host connected equipment and plug-in radio devices

For combined equipment and for radio parts for which connection to or integration with host equipment is required to offer functionality to the radio, different alternative test approaches are permitted. The manufacturer shall declare which alternative shall be used.

Where more than one such combination is intended, testing shall not be repeated for combinations of the radio part and various host equipment where the latter are substantially similar.

Where more than one such combination is intended and the combinations are not substantially similar, one combination shall be tested against all requirements of the present document and all other combinations shall be tested separately for radiated spurious emissions only.

### 6.5.1 The use of a host or test jig for testing Plug-In radio devices

Where the radio part is a plug-in radio device which is intended to be used within a variety of combinations, the manufacturer shall supply a suitable test configuration consisting of either a test jig or a host equipment intended for normal use. This shall be representative for the range of combinations in which the device may be used. The test jig shall allow the radio equipment part to be powered and stimulated in similar way when connected to or inserted into host or combined equipment. Measurements shall be made to all requirements of the present document.

### 6.5.2 Testing of combinations

#### 6.5.2.1 Alternative A: General approach for combinations

Combined equipment or a combination of a plug-in radio device and a specific type of host equipment may be used for testing according to the full requirements of the present document.

#### 6.5.2.2 Alternative B: For host equipment with a plug-in radio device

A combination of a plug-in radio device and a specific type of host equipment may be used for testing according to the full requirements of the present document.

For radiated emission tests the most appropriate standard shall be applied to the host equipment. The plug-in radio device shall meet the radiated emissions requirements as described in clauses 7.2.5 and 7.3.2.

#### 6.5.2.3 Alternative C: For combined equipment with a plug-in radio device

Combined equipment may be used for testing according to the full requirements of the present document.

For radiated emissions the requirements of the most appropriate standard shall be applied to the non-radio equipment. The plug-in radio device shall meet the radiated emissions requirements as described in clauses 7.2.5 and 7.3.2.

#### 6.5.2.4 Alternative D: For equipment with multiple radios

For further study.

## 6.6 Test data sequence

The manufacturer shall describe and provide a test data sequence with which the transmitter is modulated during the measurements described in the present document. The test data sequence shall spread the transmitted power throughout the power envelope. Where the equipment is not capable of continuous RF transmission, the test data sequence shall be such that:

- the generated RF signal is the same for each transmission;
- transmissions occur regularly in time;

- sequences of transmissions can be repeated accurately.

The same test data sequence shall be used for all measurements on the same equipment.

For frequency hopping systems the manufacturer shall supply a means of selecting the hop frequencies required by the present document.

---

## 7 Methods of measurement

### 7.1 General

This clause describes methods of measurement for the following transmitter parameters:

- the effective radiated power;
- the peak power density;
- the frequency range(s);
- the transmitter spurious emissions.

This clause describes methods of measurement for the following receiver parameters:

- the receiver spurious emissions.

The following methods of measurement shall apply to the testing of stand-alone units and to the equipment configurations identified in clause 6.5.

### 7.2 Measurements of transmitter parameters

#### 7.2.1 Effective radiated power

The effective radiated power shall be determined and recorded in the test report.

The following shall be applied to the combination(s) of the radio device and its intended antenna(e). In the case that the RF power level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.

The following methods of measurement shall apply.

##### 7.2.1.1 Radiated measurements

This method shall only be used for integral antenna equipment that does not have a temporary antenna connector provided.

In the case of radiated measurements, using a test site as described in annex A and applicable measurement procedures as described in annex B, the effective radiated power as defined in clause 5.2.1 shall be measured and recorded in the test report.

##### 7.2.1.2 Conducted Measurements

In case of conducted measurements, the transmitter shall be connected to the measuring equipment via a suitable attenuator and the RF power as defined in clause 5.2.1 shall be measured and recorded in the test report.

The measurement shall be performed using normal operation of the equipment with modulation, using the test data sequence, applied.

The test procedure shall be as follows:

- step 1:
  - using a suitable means, the output of the transmitter shall be coupled to a diode detector;
  - the output of the diode detector shall be connected to the vertical channel of an oscilloscope;
  - the combination of the diode detector and the oscilloscope shall be capable of faithfully reproducing the envelope peaks and the duty cycle of the transmitter output signal;
  - the observed duty cycle of the transmitter (Tx on/(Tx on +Tx off)) shall be noted as  $x$ , ( $0 < x < 1$ ) and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal to or more than 0,1.
- step 2:
  - the average output power of the transmitter shall be determined using a wideband, calibrated RF power meter with a thermocouple detector or an equivalent thereof and, where applicable, with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
  - the e.i.r.p. shall be calculated from the above measured power output A, the observed duty cycle  $x$ , and the applicable antenna assembly gain "G" in dBi, according to the formula:
    - $P = A + G + 10 \log (1/x)$ ;
    - P shall not exceed the value specified in clause 5.2.1.
- step 3:
  - the measurement set up as given under step 1 shall be used to determine on the oscilloscope the peak of the envelope of the output signal of the transmitter;
  - the maximum deviation of the Y-trace of the oscilloscope shall be recorded as "B".
- step 4:
  - the transmitter shall be replaced by a signal generator. The output frequency of the signal shall be made equal to the centre of the frequency range occupied by the transmitter;
  - the signal generator shall be unmodulated. The output power of the signal generator shall be raised to a level such that the deviation of the Y-trace of the oscilloscope reaches level B, as indicated in step 3;
  - this output power level "C" (in dBm) of the signal generator shall be determined using a wideband, calibrated RF power meter with a thermocouple detector or an equivalent thereof;
  - level C shall not exceed by more than 3 dB the value specified in clause 5.2.1 minus the applicable antenna assembly gain G in dBi.

These measurements shall be performed at normal and extreme test conditions, see clause 6.4.1.

The method of measurement shall be documented in the test report.

## 7.2.2 Peak power density

The peak power density shall be measured and recorded in the test report.

In the case of radiated measurements, using a test site as described in annex A and applicable measurement procedures as described in annex B, the peak power density as defined in clause 5.2.2 shall be measured and recorded in the test report.

In case of conducted measurements, the transmitter shall be connected to the measuring equipment via a suitable attenuator and the peak power density as defined in clause 5.2.2 shall be measured and recorded in the test report.

The peak power density shall be determined using a spectrum analyser of adequate bandwidth for the type of modulation being used in combination with an RF power meter.

The equipment to be measured shall be operated as described in clause 7.2.1.

Equipment where the transmitter is on for 10  $\mu$ s or more shall be measured as follows.

Connect an RF power meter to the IF output of the spectrum analyser and correct its reading using a known reference source, e.g. a signal generator.

NOTE: The IF output of the spectrum analyser may be 20 dB or more below the input level of the spectrum analyser. Unless the power meter has adequate sensitivity, a wideband amplifier may be required.

The test procedure shall be as follows:

- step 1:
  - the measurement set-up shall be calibrated with a CW signal from a calibrated source; the reference signal should have a strength of 10 dBm;
  - the settings of the spectrum analyser shall be:
    - centre Frequency: equal to the signal source;
    - resolution BW: 100 kHz for FHSS, 1 MHz for DSSS;
    - video BW: same;
    - detector mode: positive peak;
    - averaging: off;
    - span: zero Hz;
    - amplitude: adjust for middle of the instrument's range.
- step 2:
  - the calibrating signal power shall be reduced to 0 dBm and it shall be verified that the power meter reading also reduces by 10 dB.
- step 3:
  - connect the equipment to be measured. Using the following settings of the spectrum analyser in combination with "max hold" function, find the frequency of highest power output in the power envelope:
    - centre Frequency: equal to operating frequency;
    - resolution BW: 100 kHz for FHSS, 1 MHz for DSSS;
    - video BW: same;
    - detector mode: positive peak;
    - averaging: off;
    - Span: 3 times the spectrum width;
    - amplitude: adjust for middle of the instrument's range.
  - the frequency found shall be recorded in the test report.

- step 4:
  - set the centre frequency of the spectrum analyser to the found frequency and switch to zero span. The power meter indicates the measured power density. The power density e.i.r.p. is calculated from the measured power density and the declared antenna assembly gain(s).

The above procedure shall be repeated for each of the two frequencies identified by the procedure given in clause 7.2.1.

Where the spectrum analyser bandwidth is non-Gaussian, a suitable correction factor shall be determined and applied.

Where a spectrum analyser is equipped with a facility to measure power density, this facility may be used instead of the above procedure.

For equipment where the transmitter is normally on for less than 10  $\mu$ s, the method of measurement shall be documented in the test report.

### 7.2.3 Frequency range of equipment using FHSS modulation

Using applicable measurement procedures as described in annex B the frequency range (see clause 5.2.3) of the equipment shall be measured and recorded in the test report.

During these measurements the test data sequence as specified in clause 6.6 shall be used.


These measurements shall be performed under both normal and extreme test conditions (see clauses 6.3 and 6.4).

The measurement procedure shall be as follows:

- a) place the spectrum analyser in video averaging mode with a minimum of 50 sweeps selected and activate the transmitter with modulation applied. The display will form an image like that shown in figure 2;
- b) select lowest operating frequency of the equipment under test;
- c) find lowest frequency below the operating frequency at which spectral power density drops below the level given in clause 5.2.3. See line A in figure 2. This frequency shall be recorded in the test report;
- d) select the highest operating frequency of the equipment under test;
- e) find the highest frequency at which the spectral power density drops below the level given in clause 5.2.3, see B in figure 2. This frequency shall be recorded in the test report;
- f) the difference between the frequencies measured in steps c) and e) is the frequency range; it shall be recorded in the test report.

NOTE: For equipment with a single, fixed operating frequency, steps b) and d) are omitted.

This measurement shall be repeated for each operating frequency range declared by the manufacturer.

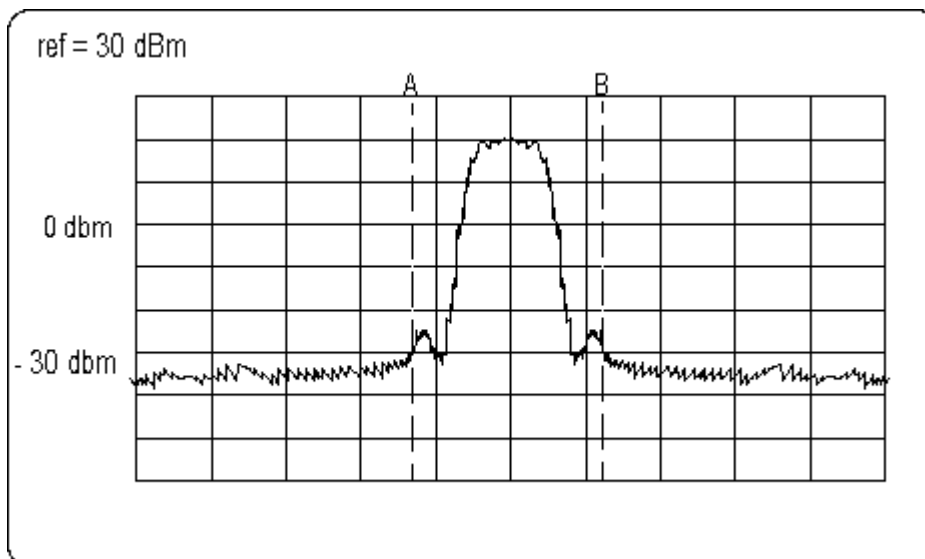

**Figure 2: Measuring the extreme frequencies of the power envelope**

This example assumes a 100 kHz resolution bandwidth.

## 7.2.4 Frequency range of equipment using other forms of modulation

Using applicable measurement procedures as described in annex B the frequency range(s) shall be measured and recorded in the test report.

During these measurements the test data sequence as specified in clause 6.6 shall be used.

These measurements shall be performed under both normal and extreme test conditions (see clause 6.4.1).

The measurement procedure shall be as follows:

- place the spectrum analyser in video averaging mode with a minimum of 50 sweeps selected and activate the transmitter with modulation applied. The RF emission of the equipment shall be displayed on the spectrum analyser. The display will form an image like that shown in figure 2;
- select lowest operating frequency of the equipment under test;
- using the marker of the spectrum analyser, find lowest frequency below the operating frequency at which spectral power density drops below the level given in clause 5.2.3. See line A in figure 2. This frequency is recorded in the test report;
- select the highest operating frequency of the equipment under test;
- find the highest frequency at which the spectral power density drops below the value given in clause 5.2.3. See line B in figure 2. This frequency shall be recorded in the test report;
- the difference between the frequencies measured in steps c) and e) is the frequency range; it shall be recorded in the test report.

NOTE: For equipment with a single, fixed operating frequency, steps b) and d) are omitted.

This measurement shall be repeated for each frequency range declared by the manufacturer.

## 7.2.5 Spurious emissions

The following method of measurement shall apply to both conducted and radiated measurements.

In the case of radiated measurements, using a test site as described in annex A and applicable measurement procedures as described in annex B, the spurious emissions as defined in clause 5.2.4 shall be measured and recorded in the test report.

In case of conducted measurements, the radio device shall be connected to the measuring equipment via a suitable attenuator.

Tests of FHSS equipment shall be carried out while the equipment is hopping on the following operating frequencies:

- the lowest operating frequency; and
- the highest operating frequency.

During this test modulation shall be applied using the test data sequence.

Where the transmitter ceases transmission between hops, during this test, the transmitter shall cease transmitting for a minimum period of time equal to or greater than that for which it ceases transmission during normal operation.

If the equipment is fitted with an automatic shut-off facility it shall be made inoperative for the duration of this test unless it has to be left operative to protect the equipment. If the shut-off facility is left operative, the status of the equipment shall be indicated.

The measurement equipment shall be set for peak hold mode of operation.

The measurement procedure shall be as follows:

- the transmitter shall be operated at the highest output power, or, in the case of equipment able to operate at more than one power level, at the lowest and highest output powers;
- the spectrum outside the declared frequency range(s) (see clauses 7.2.3 and 7.2.4) shall be searched for emissions that exceed the limit values given in clause 5.2.4 or that come to within 6 dB below the limit values given in clause 5.2.4. Each occurrence shall be noted in the test report;
- this measurement shall be made with the transmitter set to the lowest operating frequency and with the transmitter set to the highest operating frequency.

This measurement shall be repeated with the transmitter in standby mode where applicable.

Where these measurements are made with a spectrum analyser, the following settings and procedures shall be used.

For finding spurious emissions the spectrum analyser shall be set as follows:

- resolution BW: 100 kHz;
- video BW: same;
- detector mode: positive peak;
- averaging: off;
- span: 100 MHz;
- amplitude: adjust for middle of the instrument's range;
- sweep time: 1 s.

For measuring emissions that exceed the level of 6 dB below the applicable limit, the resolution bandwidth shall be switched to 30 kHz and the span shall be adjusted accordingly. If the level does not change by more than 2 dB, it is a narrowband emission; the observed value shall be recorded in the test report. If the level changes by more than 2 dB, the emission is a wideband emission and its level shall be measured and recorded in the test report.

The method of measurement for wideband emissions, if applicable, shall be documented in the test report.

NOTE: The main spectrum of the device being tested may saturate the spectrum analyser's input circuits and so cause ghost "spurious" signals. Ghosts can be distinguished from real signals by increasing the input attenuator by 10 dB. If the spurious signal disappears, it is a ghost and should be ignored.



## 7.3 Measurements of receiver parameters

### 7.3.1 General

The present document provides for the measurement of receiver spurious emissions.

### 7.3.2 Spurious emissions

The following method of measurement shall apply to both conducted and radiated measurements.

In the case of radiated measurements, using a test site as described in annex A and applicable measurement procedures as described in annex B, the spurious emissions as defined in clause 5.2.4 shall be measured under the conditions given in clause 5.3.2 and recorded in the test report.

In the case of conducted measurements, the receiver shall be connected to the measuring equipment via a suitable attenuator.

The measurement procedure shall be as follows:

- with the equipment in the receive mode, the applicable spectrum shall be searched for emissions that exceed the limit values given in clause 5.3 or that come to within 6 dB below the limit values given in clause 5.3. Each occurrence shall be recorded in the test report.

The measurements shall be performed only under the following conditions:

- for FHSS equipment the equipment shall be tested in the receive mode on frequencies as defined in clause 7.2.3. shall apply EXCEPT that the equipment shall be tested in both the receive and (where applicable) standby modes;
- for DSSS and other equipment the test shall be made in the receive mode, at the lowest and highest operating frequencies in both receive and (where applicable) standby modes.

Where these measurements are made with a spectrum analyser, the following settings and procedures shall be used for narrowband emissions:

- resolution BW: 100 kHz;
- video BW: same;
- detector mode: positive peak;
- averaging: off;
- span: 100 MHz;
- amplitude: adjust for middle of the instrument's range;
- sweep time: 1 s.

For measuring emissions that exceed the level of 6 dB below the applicable limit the resolution bandwidth shall be switched to 30 kHz and the span shall be adjusted accordingly. If the level does not change by more than 2 dB, it is a narrowband emission; the observed value shall be recorded in the test report. If the level changes by more than 2 dB, the emission is a wideband emission and its level shall be measured and recorded in the test report.

The method of measurement for wideband emissions, if applicable, shall be documented in the test report.

---

## 8 Measurement uncertainty values

The maximum values of the absolute measurement uncertainties of the measurements defined in the present document shall not exceed the values given in table 5.

**Table 5: Maximum measurement uncertainty**

Parameter	Uncertainty
radio frequency	$1 \times 10^{-5}$
total RF power, conducted	1,5 dB
RF power density, conducted	3 dB
spurious emissions, conducted	3 dB
all emissions, radiated	6 dB
temperature	1°C
humidity	5 %
DC and low frequency voltages	3 %

For the measurement methods according to the present document these uncertainty figures are valid to a confidence level of 95 % calculated according to the methods described in TR 100 028-1 [3] and TR 100 028-2 [4], on guidelines for estimating uncertainties in measuring methods.

## Annex A (normative): Test sites and arrangements for radiated measurements

### A.1 Test sites

#### A.1.1 Open air test sites

The term "open air" should be understood from an electromagnetic point of view. Such a test site may be really in open air or alternatively with walls and ceiling transparent to the radio waves at the frequencies considered.


An open air test site may be used to perform the measurements using the radiated measurement methods described in clause 7. Absolute or relative measurements may be performed on transmitters or on receivers; absolute measurements of field strength require a calibration of the test site.

A measuring distance of at least 3 m shall be used for measurements at frequencies up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used. The equipment size (excluding the antenna) shall be less than 20 % of the measuring distance. The height of the equipment or of the substitution antenna shall be 1,5 m; the height of the test antenna (transmit or receive) shall vary between 1 m and 4 m.

Sufficient precautions shall be taken to ensure that reflections from extraneous objects adjacent to the site do not degrade the measurement results, in particular:

- no extraneous conducting objects having any dimension in excess of a quarter wavelength of the highest frequency tested shall be in the immediate vicinity of the site;
- all cables shall be as short as possible; as much of the cables as possible shall be on the ground plane or preferably below; and the low impedance cables shall be screened.

The general measurement arrangement is shown in figure A.1.

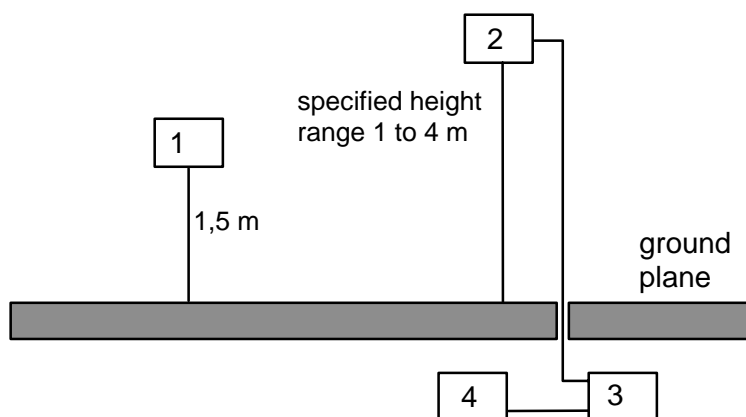

- 1) equipment under test.
- 2) test antenna.
- 3) high pass filter (as required).
- 4) spectrum analyser or measuring receiver.

**Figure A.1: Measuring arrangement**

## A.1.2 Anechoic chamber

### A.1.2.1 General

An anechoic chamber is a well shielded chamber covered inside with radio frequency absorbing material and simulating a free space environment. It is an alternative site on which to perform the measurements using the radiated measurement methods described in clause 7. Absolute or relative measurements may be performed on transmitters or on receivers. Absolute measurements of field strength require a calibration of the anechoic chamber. The test antenna, equipment under test and substitution antenna are used in a way similar to that at the open air test site, but are all located at the same fixed height above the floor.

### A.1.2.2 Description

An anechoic chamber should meet the requirements for shielding loss and wall return loss as shown in figure A.2. Figure A.3 shows an example of the construction of an anechoic chamber having a base area of 5 m by 10 m and a height of 5 m. The ceiling and walls are coated with pyramidally formed absorbers approximately 1 m high. The base is covered with special absorbers which form the floor. The available internal dimensions of the chamber are 3 m x 8 m x 3 m, so that a maximum measuring distance of 5 m in the middle axis of this chamber is available. The floor absorbers reject floor reflections so that the antenna height need not be changed. Anechoic chambers of other dimensions may be used.

### A.1.2.3 Influence of parasitic reflections


For free-space propagation in the far field, the relationship of the field strength  $E$  and the distance  $R$  is given by  $E = E_0 \times (R_0/R)$ , where  $E_0$  is the reference field strength and  $R_0$  is the reference distance. This relationship allows relative measurements to be made as all constants are eliminated within the ratio and neither cable attenuation nor antenna mismatch or antenna dimensions are of importance.

If the logarithm of the foregoing equation is used, the deviation from the ideal curve may be easily seen because the ideal correlation of field strength and distance appears as a straight line. The deviations occurring in practice are then clearly visible. This indirect method shows quickly and easily any disturbances due to reflections and is far less difficult than the direct measurement of reflection attenuation.


With an anechoic chamber of the dimensions given above at low frequencies below 100 MHz there are no far field conditions, but the wall reflections are stronger, so that careful calibration is necessary. In the medium frequency range from 100 MHz to 1 GHz the dependence of the field strength to the distance meets the expectations very well. Above 1 GHz, because more reflections will occur, the dependence of the field strength to the distance will not correlate so closely.

### A.1.2.4 Calibration and mode of use

The calibration and mode of use is the same as sfor an open air test site, the only difference being that the test antenna does not need to be raised and lowered whilst searching for a maximum, which simplifies the method of measurement.

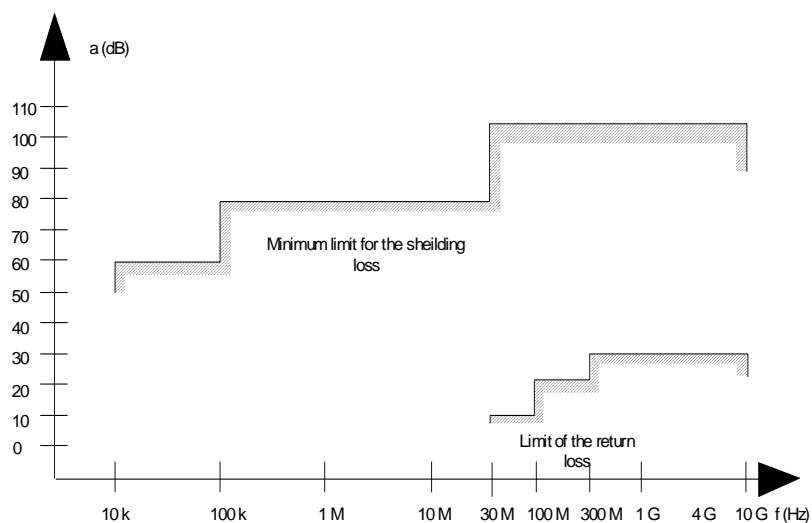

**Figure A.2: Specification for shielding and reflections**

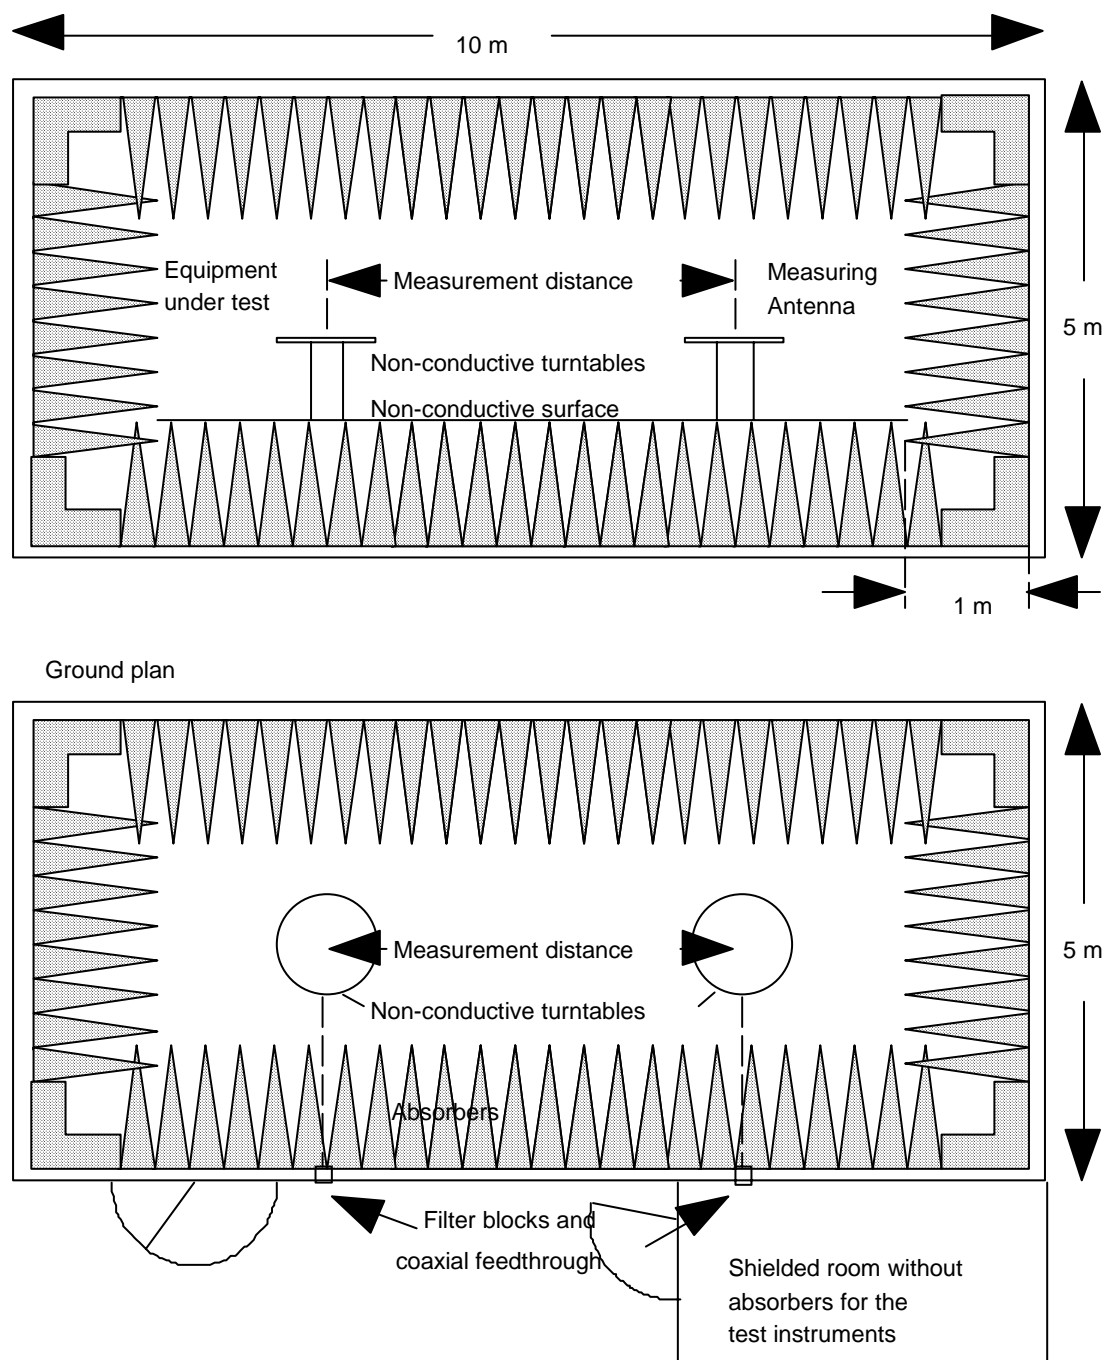

**Figure A.3: Anechoic shielded chamber for simulated free space measurements**

## A.2 Test antenna

When the test site is used for radiation measurements the test antenna shall be used to detect the field from both the test sample and the substitution antenna. When the test site is used for the measurement of receiver characteristics the antenna shall be used as a transmitting antenna. This antenna shall be mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and for the height of its centre above the ground to be varied over the specified range. Preferably test antennae with pronounced directivity should be used. The size of the test antenna along the measurement axis shall not exceed 20 % of the measuring distance.

---

## A.3 Substitution antenna

The substitution antenna shall be used to replace the equipment under test in substitution measurements. For measurements below 1 GHz the substitution antenna shall be a half wavelength dipole resonant at the frequency under consideration, or a shortened dipole, calibrated to the half wavelength dipole. For measurements between 1 GHz and 4 GHz either a half wavelength dipole or a horn radiator may be used. For measurements above 4 GHz a horn radiator shall be used. The centre of this antenna shall coincide with the reference point of the test sample it has replaced. This reference point shall be the volume centre of the sample when its antenna is mounted inside the cabinet, or the point where an outside antenna is connected to the cabinet.

The distance between the lower extremity of the dipole and the ground shall be at least 30 cm.

NOTE: The gain of a horn antenna is generally expressed relative to an isotropic radiator.

## Annex B (normative): General description of measurement

This annex gives the general methods of measurements for RF signals using the test sites and arrangements described in annex A.

### B.1 Conducted measurements and use of test fixture

In view of the low power levels of the equipment to be tested under the present document, conducted measurements may be applied to equipment provided with an antenna connector, e.g. by means of a spectrum analyser.

Where the equipment to be tested does not provide a suitable connector, a test fixture may be provided (see clause 4.2.1).

### B.2 Radiated measurements


Radiated measurements shall be performed with the aid of a test antenna and measurement instruments as described in annex A. The test antenna and measurement instrument shall be calibrated according to the procedure defined in this annex. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level. This position shall be recorded in the measurement report. The frequency range shall be measured in this position.

Preferably, radiated measurements shall be performed in an anechoic chamber. For other test sites corrections may be needed (see annex A). The following test procedure applies:

- a) a test site which fulfils the requirements of the specified frequency range of this measurement shall be used. The test antenna shall be oriented initially for vertical polarization unless otherwise stated and the transmitter under test shall be placed on the support in its standard position (clause A.1.1) and switched on;
- b) for average power measurements a non-selective voltmeter or wide band spectrum analyser shall be used. For other measurements a spectrum analyser or selective voltmeter shall be used and tuned to the measurement frequency.

In either case a) or b), the test antenna shall be raised or lowered, if necessary, through the specified height range until the maximum signal level is detected on the spectrum analyser or selective voltmeter.

The test antenna need not be raised or lowered if the measurement is carried out on a test site according to clause A.1.2.

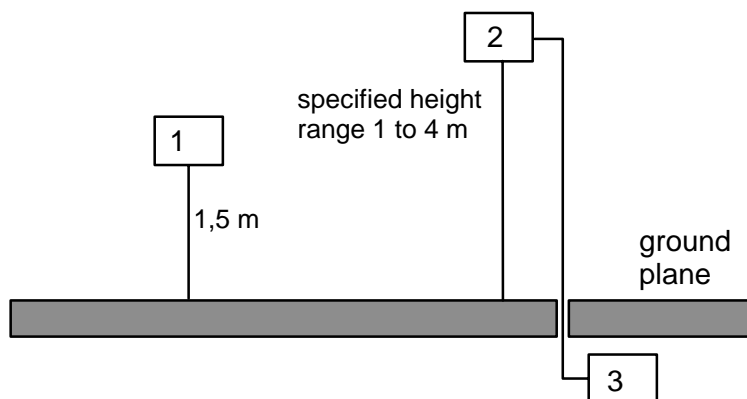

- 1) equipment under test.
- 2) test antenna.
- 3) spectrum analyser or measuring receiver.

**Figure B.1: Measurement arrangement No.1**



- c) the transmitter shall be rotated through 360° about a vertical axis until a higher maximum signal is received;
- d) the test antenna shall be raised or lowered again, if necessary, through the specified height range until a maximum is obtained. This level shall be recorded.


NOTE: This maximum may be a lower value than the value obtainable at heights outside the specified limits.

The test antenna need not be raised or lowered if the measurement is carried out on a test site according to clause A.1.2. This measurement shall be repeated for horizontal polarization.

## B.3 Substitution measurement

The actual signal generated by the measured equipment may be determined by means of a substitution measurement in which a known signal source replaces the device to be measured, see figure B.2.

Preferably, this method of measurement shall be used in an anechoic chamber. For other test sites corrections may be needed, see annex A.

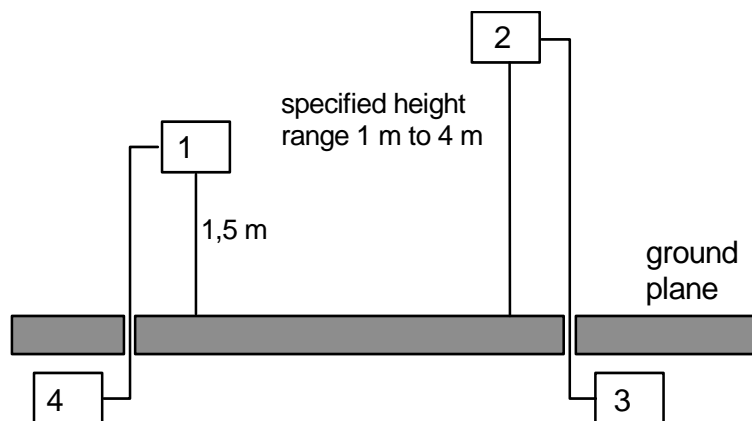

- 1) equipment under test.
- 2) substitution antenna.
- 3) spectrum analyser or selective voltmeter.
- 4) signal generator.

**Figure B.2: Measurement arrangement No.2**

- a) using measurement arrangement No.2, the substitution antenna shall replace the transmitter antenna in the same position and in vertical polarization. The frequency of the signal generator shall be adjusted to the measurement frequency. The test antenna shall be raised or lowered, if necessary, to ensure that the maximum signal is still received. The input signal to the substitution antenna shall be adjusted in level until an equal or a known related level to that detected from the transmitter is obtained in the test receiver;
  - the test antenna need not be raised or lowered if the measurement is carried out on a test site according to clause A.1.2;
  - the radiated power is equal to the power supplied by the signal generator, increased by the known relationship if necessary and after corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna;
- b) this measurement shall be repeated with horizontal polarization.

---

## Annex C (informative): Bibliography

IEC 60489-3 (Second edition (1988)): "Methods of measurement for radio equipment used in the mobile services. Part 3: Receivers for A3E or F3E emissions", Appendix F, pp. 130 to 133 and Appendix J, pp. 156 to 164.

Ketterling, H.-P.: "Verification of the performance of fully and semi-anechoic chambers for radiation measurements and susceptibility/immunity testing, 1991, Leatherhead/Surrey, ERA Report 91-0028".

EN 55022: "Limits and methods of measurement of radio disturbance characteristics of information technology equipment".

---

## History

Document history		
Edition 1	November 1994	Publication as ETS 300 328
Edition 2	November 1996	Publication as ETS 300 328
Amendment 1	July 1997	Amendment 1 to 2 <sup>nd</sup> Edition of ETS 300 328
V1.2.2	July 2000	Publication as EN 300 328-1
V1.3.1	August 2001	One-step Approval Procedure      OAP 20011130: 2001-08-01 to 2001-11-30