

# ETSI EN 301 215-1 V1.1.1 (2000-06)

---

*European Standard (Telecommunications series)*

## **Fixed Radio Systems; Point to Multipoint Antennas; Antennas for point-to-multipoint fixed radio systems in the 11 GHz to 60 GHz band; Part 1: General aspects**

---



---

**Reference**

DEN/TM-04057-1

---

**Keywords**antenna, DRRS, FWA, multipoint, radio, RLL,  
transmission**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.  
All rights reserved.

# Contents

Intellectual Property Rights .....	4
Foreword .....	4
1 Scope .....	5
2 References .....	5
3 Definitions, symbols and abbreviations .....	6
3.1 Definitions .....	6
3.2 Symbols .....	7
3.3 Abbreviations .....	7
4 Frequency bands .....	7
5 Types and classification of antennas .....	8
5.1 Antenna types .....	8
5.2 Antenna classifications .....	9
5.2.1 CS classes .....	9
5.2.2 TS classes .....	9
6 Electrical characteristics .....	9
7 Conformance tests .....	10
<b>Annex A (informative): Additional information .....</b>	<b>11</b>
A.1 Mechanical characteristics .....	11
A.1.1 Environmental characteristics .....	11
A.1.2 Antenna stability .....	11
A.2 Antenna input connectors .....	11
A.3 VSWR at the input ports .....	12
A.4 Inter-port isolation .....	12
A.5 Antenna labelling .....	12
A.6 Passive Intermodulation (PIM) performance .....	12
Bibliography .....	13
History .....	14

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Transmission and Multiplexing (TM).

The present document is part 1 of a multi-part EN covering the Fixed Radio Systems; Point to Multipoint Antennas; Antennas for point-to-multipoint fixed radio systems in the 11 GHz to 60 GHz band, as identified below:

- Part 1:** "General aspects";
- Part 2: "24 GHz to 30 GHz";
- Part 3: "40,5 GHz to 43,5 GHz".

The present document is organized in the following way. Part 1 gives general information about the scope, normative references, definitions, classification, normative and informative electrical and mechanical characteristics. Part 1 is the framework for further parts, where distinct values of normative characteristics for a given frequency sub-band are defined. Consequently, Part 1 in combination with another part forms the EN for a given sub-band.

National transposition dates	
Date of adoption of this EN:	14 January 2000
Date of latest announcement of this EN (doa):	30 April 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2000
Date of withdrawal of any conflicting National Standard (dow):	31 October 2000

---

# 1 Scope

The present document specifies the essential electrical requirements for linear polarization, fixed beam antennas to be utilized with new Point-to-Multipoint (P-MP) systems [1], including central station and terminal station applications, operating in frequency bands from 11 GHz to 60 GHz. These systems use various multiple access schemes. Electronically steerable antennas, and circularly polarized antennas are not considered in the present document.

A regulatory authority may impose tighter requirements than the minimum values given in the present document, in order to maximize the use of the scarce spectrum resources.

For some high gain, point-to-multipoint requirements, antennas may be used having performance as per the appropriate point-to-point antenna standard. For these antennas, minimum requirements are given in [2].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, subsequent revisions do apply.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] ETSI EN 301 213-1: "Fixed Radio Systems; Point-to-multipoint equipment; Point-to-multipoint digital radio systems in frequency bands in the range 24,25 GHz to 29,5 GHz using different access methods; Part 1: Basic parameters".
- [2] ETSI EN 300 833: "Fixed Radio Systems; Point to Point Antennas; Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz".
- [3] CEPT Recommendation T/R 13-02 (1993): "Preferred channel arrangements for fixed services in the range 22,0 GHz - 29,5 GHz".
- [4] ITU-R Recommendation F.746-1: "Radio-frequency channel arrangements for radio-relay systems".
- [5] Final Acts of the World Radiocommunications Conference (WARC-95), Geneva 1995.
- [6] ETSI EN 301 126-3-2: "Fixed Radio Systems; Conformance testing; Part 3-2: Point-to-Multipoint antennas - Definitions, general requirements and test procedures".
- [7] ETSI EN 301 215-2: "Fixed Radio Systems; Point to Multipoint Antennas; Antennas for point-to-multipoint fixed radio systems in the 11 GHz to 60 GHz band; Part 2: 24 GHz to 30 GHz".
- [8] ETSI ETS 300 019-1-4: "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-4: Classification of environmental conditions; Stationary use at non-weather protected locations".
- [9] IEC 60154: "Flanges for waveguides".
- [10] IEC 60169 (all parts): "Radio-frequency connectors".

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following definitions apply:

**antenna:** part of the transmitting or receiving system that is designed to radiate and/or receive electromagnetic waves.

**boresight:** axis of the main beam in a directional antenna.

**Central Station (CS):** base station which communicates each way with many terminal stations and in some cases repeater stations.

**copolar pattern:** diagram representing the radiation pattern of a test antenna when the reference antenna is similarly polarized, scaled in dBi or dB relative to the measured antenna gain.

**cross-polar discrimination (XPD):** difference in dB between the peak of the copolarized main beam and the maximum cross-polarized signal over an angle measured within a defined region.

**cross-polar pattern:** diagram representing the radiation pattern of a test antenna when the reference antenna is orthogonally polarized, scaled in dBi or dB relative to the measured antenna gain.

**fixed beam:** radiation pattern in use is fixed relative to a defined mechanical reference plane.

**gain:** ratio of the radiation intensity, in a given direction, to the radiation intensity that would be obtained if the power accepted by the antenna was radiated isotropically.

**half power beamwidth:** angle, relative to the main beam axis, between the two directions at which the measured copolar pattern is 3 dB below the value on the main beam axis.

**input port(s):** flange(s) or connector(s) through which access to the antenna is provided.

**inter-port isolation:** it is the ratio in dB of the power level applied to one port of a multi-port antenna to the power level received in any other port of the same antenna as function of frequency.

**isotropic radiator:** hypothetical, lossless antenna having equal radiation intensity in all directions.

**main beam axis:** direction for which the radiation pattern intensity is the maximum.

**main beam:** radiation lobe containing the direction of maximum radiation.

**mechanical tilt:** fixed angular shift in elevation of the antenna main beam axis by a change to the physical mounting.

**radiation pattern envelope:** envelope below which the radiation pattern shall fit.

**radiation pattern:** diagram relating power flux density at a constant distance from an antenna to direction relative to the antenna main beam axis.

**radome:** cover of dielectric material, intended for protecting an antenna from the effects of the physical environment.

**Repeater Station (RS):** Radio Station providing the connection via the air to both the Central Station and the Terminal Station(s). The Repeater Station may also provide the interfaces to the subscriber equipment, if applicable.

**sector angle:** declared angle of coverage in azimuth of a sectored antenna, defined as  $2\alpha$  in the present document.

**Terminal Station (TS):** remote (out) station which communicates with a central station.

**tilt:** fixed, angular shift of the antenna main beam axis (boresight) in the elevational plane either by electrical, electronic or mechanical means.

**zero degree (0°) reference direction:** declared direction as referenced to the antenna mechanical characteristics, used as reference for RPE.

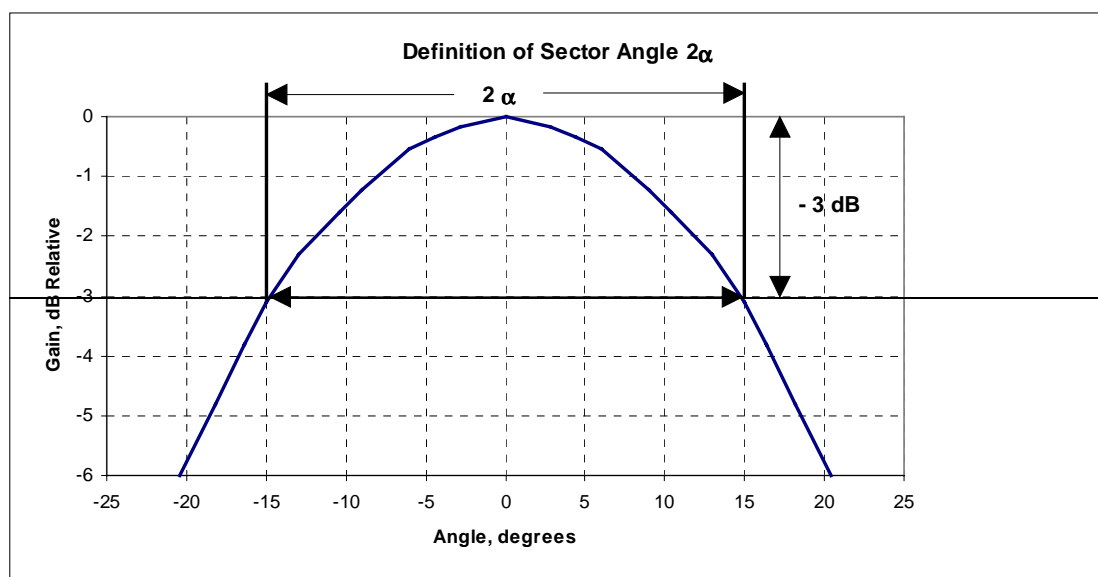


Figure 1

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

$\alpha$	Alpha (= half of the sector angle)
dB	decibel
dB <sub>i</sub>	decibels relative to an isotropic radiator
GHz	GigaHertz

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CS	Central Station
HPBW	Half Power BeamWidth
P-MP	Point-to-Multipoint
PIM	Passive InterModulation
RPE	Radiation Pattern Envelope
RS	Repeater Station
TS	Terminal Station
VSWR	Voltage Standing Wave Ratio
XPD	Cross-Polar Discrimination

---

## 4 Frequency bands


The present document applies to a number of frequency ranges within the 11 GHz to 60 GHz frequency bands as considered within CEPT/ERC and ETSI for allocation to the fixed services [3], [4] and [5].

For the purpose of the present document the overall frequency band 11 GHz to 60 GHz is divided into a number of frequency ranges, each of which are addressed in part 2 of EN 301 215-2 [7] onwards.

## 5 Types and classification of antennas

### 5.1 Antenna types

The standard addresses fixed beam antennas used in the central (CS) and terminal (TS) stations including repeaters (RS). The antennas are used in a system which can be described as in figure 2.

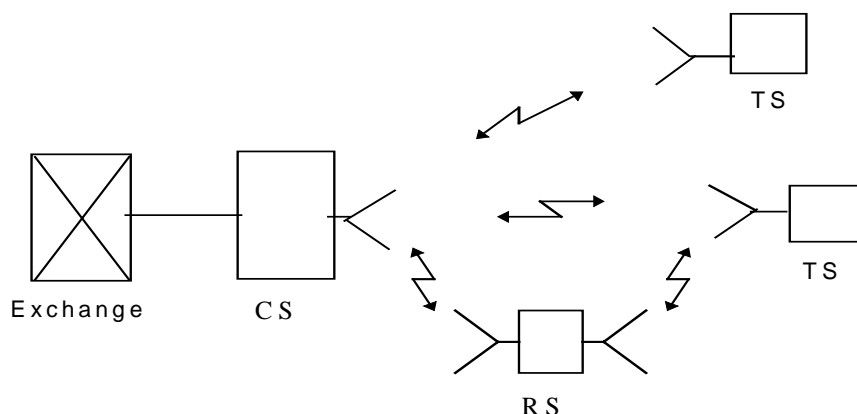

- CS:** Central Station, which is linked to all remote stations (repeater or terminal stations) by microwave transmission paths.
- TS:** Terminal Station (outstation with subscriber interfaces).
- RS:** Repeater Station (radio repeater outstation with or without subscriber interfaces). An RS may serve one or more TSs.

**Figure 2: General point-to-multipoint system architecture**

The antennas shall be grouped into the following types:

- central and repeater stations:
  - omni-directional;
  - sectored;
  - directional as per terminal stations.
- terminal stations:
  - directional.



## 5.2 Antenna classifications

### 5.2.1 CS classes

With respect to the azimuthal radiation pattern envelope (RPE), a number of Classes may be identified in different frequency sub-ranges for central station (CS) sectorized antennas:

- class CS 1;
- class CS 2;
- class CS 3;
- other classes.

These classes allow flexibility for a variety of different systems, and may be generally appropriate for lower and higher density deployments. If appropriate, the definition of antenna Classes is given in subsequent parts of the present document.

With respect to the azimuthal RPE for omnidirectional CS antennas, no requirement for separate classes has been identified.

### 5.2.2 TS classes

With respect to the radiation pattern envelope (RPE), a number of Classes may be identified in different frequency sub-ranges for terminal station (TS) directional antennas:

- class TS 1;
- class TS 2;
- class TS 3;
- other classes.

These classes allow flexibility for a variety of different systems and deployment conditions. If appropriate, the definition of antenna classes is given in subsequent parts of the present document.

---

## 6 Electrical characteristics

For the purpose of the present document, an antenna is specific to a type, class, range, the frequency range of operation and the mid-band gain. An antenna which employs a radome shall meet the requirements of the present document with the radome in place.

A 0° reference direction shall be defined for each antenna. The radiation characteristics in the present document are all referred to this 0° reference direction.

RPE(s) and gains of defined antenna Types and Classes are described in the relevant subsequent parts of the present document.

The copolar and crosspolar radiation patterns for both azimuth and elevation shall not exceed the RPE(s) defined in the distinct parts of the present document.

Specific requirements for point-to-multipoint antennas operating in the frequency band 24 GHz to 30 GHz can be found in part 2 of EN 301 215-2 [7].

---

## 7 Conformance tests

EN 301 126-3-2 [6] shall apply.

Additional parameters appropriate to system implementation may be subject to agreement between the equipment purchaser and supplier. Further guidance is provided in annex A.

## Annex A (informative): Additional information

### A.1 Mechanical characteristics

#### A.1.1 Environmental characteristics

The antennas should be designed to operate within a temperature range of  $-45^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$  with a relative humidity up to 100 % for environmental conditions specified in ETS 300 019-1-4 [8].

The temperature range could be divided in two parts where at least one of the following ranges should be covered:

- 1)  $-33^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$ ;
- 2)  $-45^{\circ}\text{C}$  to  $+45^{\circ}\text{C}$ .

The antennas should be designed to meet wind survival ratings specified in table A.1:

**Table A.1: Wind survival ratings**

Antenna type	Wind velocity m/s (km/h)	Ice load (density $7 \text{ kN/m}^3$ )
Normal duty	55 (200)	25 mm radial ice
Heavy duty	70 (252)	25 mm radial ice

#### A.1.2 Antenna stability

The antenna equipment should be stable under the most severe operational conditions at the site of intended application.

For installation purposes, the deviation of the antenna main beam axis should not be more than 0,3 times the smaller of the two azimuthal and elevation HPBW, as a general guide, under the conditions specified in table A.2:

**Table A.2: Antenna stability**

Antenna type	Wind velocity m/s (km/h)	Ice load (density $7 \text{ kN/m}^3$ )
Normal duty	30 (110)	25 mm radial ice
Heavy duty	45 (164)	25 mm radial ice

Further guidance can be obtained from ETS 300 019-1-4 [8].

### A.2 Antenna input connectors

When flanges are provided at the input port of the antenna they should be in accordance with IEC 60154 [9].

For antennas which are integrated to the radio equipment proprietary connection designs may be utilized.

For antennas using coaxial input ports the connectors should conform to IEC 60169 [10].

Other interconnection design should be agreed between the equipment supplier and purchaser in line with the overall system design requirements, in such a case a suitable test fixture should be agreed and used for test purposes.

---

## A.3 VSWR at the input ports

The maximum VSWR should be agreed between the equipment supplier and purchaser in line with the overall system design requirements. For guidance antennas with a VSWR in the range of 1,9 to 1,1 are typical.

---

## A.4 Inter-port isolation

The isolation between the input ports of a dual polarized antenna should be agreed between the equipment supplier and purchaser in line with the overall system design requirements. For guidance inter-port isolation better than 25 dB is typical.

---

## A.5 Antenna labelling

Antennas should be clearly identified with a weather-proof and permanent label(s) showing the manufacturers name, antenna type, serial number(s) and type approval reference number where appropriate. It should be noted that integrated antennas may share a common label with the outdoor equipment.

---

## A.6 Passive Intermodulation (PIM) performance

For some P-MP access methods the minimum Passive Intermodulation (PIM) performance of the antenna may need to be taken into account. In such cases a passive intermodulation performance should be agreed between the equipment supplier and purchaser in line with the overall system design requirements. For guidance PIM product limits can often exceed -100 dBc.

---

## Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- IEC 60050-712: "International Electrotechnical Vocabulary - Chapter 712: Antennas".
- DIN 45.030, Part 1, Part 2: "Definitions / concepts, antennas".
- ITU-R Recommendation F.699-4: "Reference radiation patterns for line-of-sight radio-relay system antennas for use in coordination studies and interference assessment in the frequency range from 1 to about 40 GHz".
- IEC 60835-2-2: "Methods of measurement for equipment used in digital microwave transmission systems - Part 2: Measurements on terrestrial radio-relay systems - Section 2: Antenna".
- (US -) ANSI /EIA -195 -C (1985): "Terrestrial microwave relay antennas".
- (US-) MIL -G-24.211: "Gaskets for waveguide flanges".
- IEEE Standard 145 (1993): "IEEE Standard Definitions of Terms for Antennas".
- IEEE Standard 149 (1975): "IEEE Standard Test Procedure for Antennas".
- CCIR Report 614-3 (1990): "Reference radiation patterns etc".

---

## History

Document history			
V1.1.1	July 1998	Public Enquiry	PE 9846: 1998-07-17 to 1998-11-13
V1.1.1	November 1999	Vote	V 200002: 1999-11-15 to 2000-01-14
V1.1.1	June 2000	Publication	