
ETSI EN 302 091-2 V1.1.3 (1999-11)

European Standard (Telecommunications series)

Broadband Integrated Services Digital Network (B-ISDN) and Broadband Private Integrated Services Network (B-PISN); Digital Subscriber Signalling System No. two (DSS2), Broadband Inter-Exchange Signalling (B-QSIG), and Signalling System No. 7 (SS7); Prenegotiation; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification

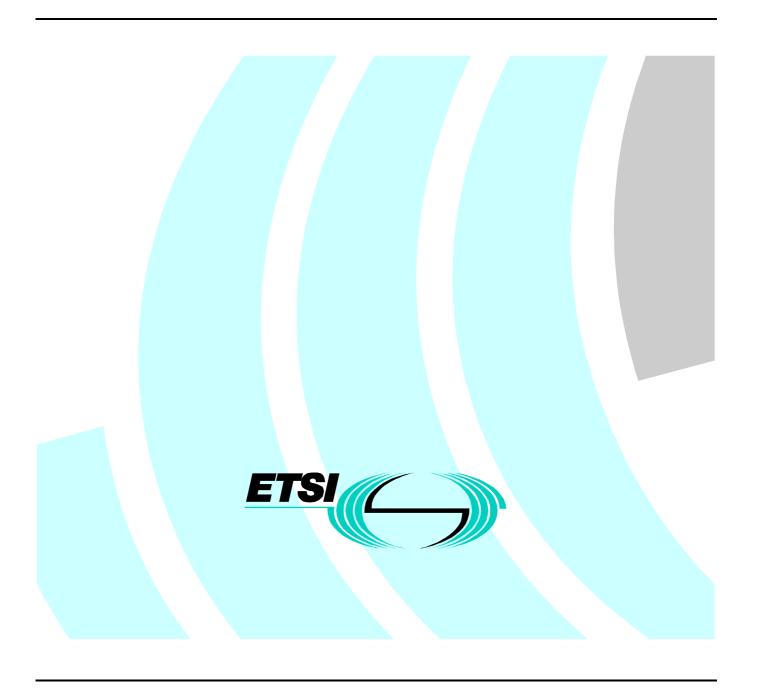

Reference

DEN/SPS-05131-2 (jd0i0ie0.PDF)

Keywords

B-ISUP, broadband, ISDN, ISPBX, PICS, QSIG, SS7, B-ISDN, DSS2, B-QSIG

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16 Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
http://www.etsi.org
If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference should be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 1999. All rights reserved.

Contents

Intelle	ectual Property Rights	4
Forev	vord	4
Introd	luction	4
1	Scope	5
2	References	5
3 3.1 3.2	Definitions and abbreviations	5
4	Conformance	6
Anne	x A (normative): PICS proforma for EN 302 091-1	7
A.1.1 A.1.2 A.1.3	Guidance for completing the PICS proforma. Purposes and structure. Abbreviations and conventions. Instructions for completing the PICS proforma.	7 7
A.2 A.2.1 A.2.2 A.2.3 A.2.4 A.2.5 A.2.6	Identification of the implementation Date of the statement Implementation Under Test (IUT) identification System Under Test (SUT) identification Product supplier Client PICS contact person	9 9 9 9
A.3	Identification of the protocol	.11
A.4	Global statement of conformance	.11
A.5	Roles	.11
A.6	Major Capabilities	.12
A.7	Application protocol data units	.12
A.8	Timers	.13
A.9	Interworking	.13
Biblio	ography	.14
Histo	ry	.15

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://www.etsi.org/ipr).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Signalling Protocols and Switching (SPS) in collaboration with ECMA TC32-TG15.

The present document is part 2 of a multi-part standard covering the Digital Subscriber Signalling System No. 2 (DSS2), Broadband Inter-Exchange Signalling (B-QSIG), and Signalling System No. 7 (SS7) protocol specification for Broadband Integrated Services Digital Network (B-ISDN) and Broadband Private Integrated Services Network (B-PISN) Prenegotiation, as described below:

Part 1: "Protocol specification";

Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";

Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification";

Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification".

National transposition dates						
Date of adoption of this EN:	5 November 1999					
Date of latest announcement of this EN (doa):	29 February 2000					
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 August 2000					
Date of withdrawal of any conflicting National Standard (dow):	31 August 2000					

Introduction

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented for a given Open Systems Interconnection (OSI) protocol. Such a statement is called a Protocol Implementation Conformance Statement (PICS).

1 Scope

This second part of EN 302 091 is applicable to the Prenegotiation protocol at the Q_B , S_B , T_B and co-incident S_B/T_B reference points within, between and at the access to Broadband Private Integrated Services Networks and within, between and at the access to public Broadband Integrated Services Digital Networks.

The present document provides the Protocol Implementation Conformance Statement (PICS) proforma for the Prenegotiation protocol as specified in EN 302 091-1 [1] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [3].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- [1] EN 302 091-1 (V1.1): "Broadband Integrated Services Digital Network (B-ISDN) and Broadband Private Integrated Services Network (B-PISN); Digital Subscriber Signalling System No. two (DSS2), Broadband Inter-Exchange Signalling (B-QSIG), and Signalling System No. 7 (SS7); Prenegotiation; Part 1: Protocol specification".
- [2] ISO/IEC 9646-1: "Information technology Open Systems Interconnection Conformance testing methodology and framework Part 1: General concepts".
- [3] ISO/IEC 9646-7: "Information technology Open Systems Interconnection Conformance testing methodology and framework Part 7: Implementation Conformance Statements".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following definitions apply, in addition to those given in EN 302 091-1 [1]:

Protocol Implementation Conformance Statement (PICS): statement made by the supplier of an Open Systems Interconnection (OSI) implementation or system, stating which capabilities have been implemented for a given OSI protocol (see ISO/IEC 9646-1 [2])

PICS proforma: document, in the form of a questionnaire, designed by the protocol specifier or conformance test suite specifier, which, when completed for an OSI implementation or system becomes the PICS (see ISO/IEC 9646-1 [2])

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ICS Implementation Conformance Statement

IUT Implementation Under Test

MC Major Capabilities
MR Messages Received
MT Messages Transmitted

PRN Prenegotiation

OSI Open Systems Interconnection

PICS Protocol Implementation Conformance Statement

R Role

SCS System Conformance Statement

SUT System Under Test

TM Timers

4 Conformance

If it claims to conform to the present document, the actual PICS proforma to be filled in by a supplier shall be technically equivalent to the text of the PICS proforma given in annex A, and shall preserve the numbering/naming and ordering of the proforma items.

A PICS which conforms to the present document shall be a conforming PICS proforma completed in accordance with the guidance for completion given in clause A.1.

Annex A (normative): PICS proforma for EN 302 091-1

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PICS proforma in this annex so that it can be used for its intended purposes and may further publish the completed PICS.

A.1 Guidance for completing the PICS proforma

A.1.1 Purposes and structure

The purpose of this PICS proforma is to provide a mechanism whereby a supplier of an implementation of the requirements defined in EN 302 091-1 may provide information about the implementation in a standardized manner.

The PICS proforma is subdivided into subclauses for the following categories of information:

- guidance for completing the PICS proforma;
- identification of the implementation;
- identification of the protocol;
- global statement of conformance;
- Roles (Rs);
- Major Capabilities (MC);
- Application protocol data units;
- Timers (T);
- Interworking.

A.1.2 Abbreviations and conventions

The PICS proforma contained in this annex is comprised of information in tabular form in accordance with the guidelines presented in ISO/IEC 9646-7.

Item column

The item column contains a number which identifies the item in the table.

Item description column

The item description column describes in free text each respective item (e.g. parameters, timers, etc.). It implicitly means "is <item description> supported by the implementation?".

Status column:

The following notations, defined in ISO/IEC 9646-7, are used for the status column:

m mandatory - the capability is required to be supported.

o optional - the capability may be supported or not.

n/a not applicable - in the given context, it is impossible to use the capability.

x prohibited (excluded) - there is a requirement not to use this capability in the given context.

o.i qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which

identifies an unique group of related optional items and the logic of their selection which is defined

immediately following the table.

c.i conditional - the requirement on the capability ("m", "o", "x" or "n/a") depends on the support of

other optional or conditional items. "i" is an integer identifying an unique conditional status

expression which is defined immediately following the table.

Reference column:

The reference column makes reference to EN 302 091-1, except where explicitly stated otherwise.

Support column:

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO/IEC 9646-7, are used for the support column:

Y or y supported by the implementation.

N or n not supported by the implementation.

N/A, n/a or - no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional

status).

If this PICS proforma is completed in order to describe a multiple-profile support in a system, it is necessary to be able to answer that a capability is supported for one profile and not supported for another. In that case, the supplier shall enter the unique reference to a conditional expression, preceded by "?" (e.g. ?3). This expression shall be given in the space for comments provided at the bottom of the table. It uses predicates defined in the SCS, each of which refers to a single profile and which takes the value TRUE if and only if that profile is to be used.

EXAMPLE: ?3: IF prof1 THEN Y ELSE N

NOTE: As stated in ISO/IEC 9646-7, support for a received PDU requires the ability to parse all valid parameters of that PDU. Supporting a PDU while having no ability to parse a valid parameter is non-conformant.

Support for a parameter on a PDU means that the semantics of that parameter are supported.

A.1.3 Instructions for completing the PICS proforma

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided. In particular, an explicit answer shall be entered, in each of the support column boxes provided, using the notation described in subclause A1.2.

If necessary, the supplier may provide additional comments in space at the bottom of the tables or separately.

More detailed instructions are given at the beginning of the different subclauses of the PICS proforma.

A.2 Identification of the implementation

Identification of the Implementation Under Test (IUT) and the system in which it resides (the System Under Test (SUT)) should be filled in so as to provide as much detail as possible regarding version numbers and configuration options.

The product supplier information and client information should both be filled in if they are different.

A person who can answer queries regarding information supplied in the ICS should be named as the contact person.

A.2.1	Date of the statement
A.2.2 IUT name:	Implementation Under Test (IUT) identification
IUT version:	
	System Under Test (SUT) identification
Hardware co	nfiguration:
Operating sy	stem:
A.2.4 Name:	Product supplier
Address:	

Telephone number:
Facsimile number:
E-mail address:
Additional information:
A.2.5 Client
Name:
Address:
Telephone number:
Facsimile number:
E-mail address:
Additional information:
A.2.6 PICS contact person
Name:
Address:

elephone number:
Facsimile number:
Additional information:

A.3 Identification of the protocol

This PICS proforma applies to the following standard:

EN 302 091-1 (V1.1): "Broadband Integrated Services Digital Network (B-ISDN) and Broadband Private Integrated Services Network (B-PISN); Digital Subscriber Signalling System No. two (DSS2), Broadband Inter-Exchange Signalling (B-QSIG), and Signalling System No. 7 (SS7); Prenegotiation; Part 1: Protocol specification".

A.4 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No) ...

NOTE:

Answering "No" to this question indicates non-conformance to the protocol specification. Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the implementation is non-conforming, on pages attached to the PICS proforma.

A.5 Roles

Table A.1: Roles

Item	Role	References	Condition	Status	Support
R1	Support of prenegotiation in terminal	5.1		0	Yes [] No []
	equipment				
	(originating or terminating CC entity)				
R2	Support of prenegotiation in a network node	5.1		0	Yes [] No []
	(transit CC entity)				

A.6 Major Capabilities

Table A.2: Major Capabilities

Item	Question/feature (Does the implementation ?)	References	Condition	Status	Support
MC1	Support signalling procedures for invocation of prenegotiation by an originating CC entity together with call establishment	9.2.1	R1	0.1	Yes [] No [] N/A []
MC2	Support signalling procedures for invocation of prenegotiation by a terminating CC entity together with the first end-to-end response to call establishment	9.2.1	R1	0.1	Yes [] No [] N/A []
MC3	Support signalling procedures for invocation of prenegotiation by an originating CC entity after the first end-to-end response to call establishment	9.2.1	R1	0.1	Yes [] No [] N/A []
MC4	Support signalling procedures for invocation of prenegotiation by a terminating CC entity after the first end-to-end response to call establishment	9.2.1	R1	0.1	Yes [] No [] N/A []
MC5	Support signalling procedures for invocation of prenegotiation independently, after call establishment	9.2.1	R1	0.1	Yes [] No [] N/A []
MC6	Support signalling procedures for prenegotiation in a transit CC entity	9.3	R2	m	Yes [] N/A []

o.1 Support of at least one of these options is required.

A.7 Application protocol data units

Table A.3: APDUs transmitted

Item	Question/feature	References	Condition	Status	Support
	(Does the implementation support ?)				
MT1	Sending of preNegotiate invoke	9.2.1	R1 OR R2	m	Yes []
MT2	Sending of prenegotiationAlert invoke	9.2.2	R1R2	o m	Yes [] No []
MT3	Sending of preNegotiate return result/error	9.2.2	R1 OR R2	m	Yes []

Table A.4: APDUs received

Item	Question/feature (Does the implementation support ?)	References	Condition	Status	Support
MR1	Receipt of preNegotiate return result/error	9.2.3	R1 OR R2	m	Yes []
MR2	Receipt of a reject ADPU correlated to a preNegotiate invoke	9.2.1	MT1	m	Yes [] N/A []
MR3	Receipt of preNegotiate invoke	9.2.2	R1 OR R2	o m	Yes []
MR4	Receipt of prenegotiationAlert invoke	9.2.3	R1 OR R2	m	Yes []
MR5	Receipt of a reject ADPU correlated to a prenegotiationAlert invoke	9.2.2	MT2	m	Yes [] N/A []

A.8 Timers

Table A.5: Timers

Item	Question/feature	References	Condition	Status	Support
	(Does the implementation ?)				
TM1	Support timer T1	9.2.1.1	MT1	0	Yes [] No [] N/A []
TM2	Support timer T2	9.2.3	MR4	0	Yes [] No [] N/A []

A.9 Interworking

Table A.6: Interworking

Item	Question/feature (Does the implementation ?)	References	Condition	Status	Support
	Support interworking procedures in case of incoming calls from other networks not supporting prenegotiation	11.1	MC6	0	Yes [] No [] N/A []
	Support interworking procedures in case of outgoing calls to other networks not supporting prenegotiation	11.2	MC6	0	Yes [] No [] N/A []

Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- ETS 300 406: "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

History

	Document history							
V1.1.1	December 1998	Public Enquiry	PE 9917:	1998-12-25 to 1999-04-23				
V1.1.2	August 1999	Vote	V 9946:	1999-08-31 to 1999-10-29				
V1.1.3	November 1999	Publication						