# Final draft ETSI EN 319 132-1 V1.1.0 (2016-02)



Electronic Signatures and Infrastructures (ESI); XAdES digital signatures; Part 1: Building blocks and XAdES baseline signatures Reference DEN/ESI-0019132-1

Keywords electronic signature, security, XAdES, XML

#### ETSI

#### 650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

The present document can be downloaded from: <u>http://www.etsi.org/standards-search</u>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: <u>https://portal.etsi.org/People/CommiteeSupportStaff.aspx</u>

#### **Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI. The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016. All rights reserved.

DECT<sup>™</sup>, PLUGTESTS<sup>™</sup>, UMTS<sup>™</sup> and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP<sup>™</sup>** and LTE<sup>™</sup> are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM**® and the GSM logo are Trade Marks registered and owned by the GSM Association.

## Contents

Intelle	ctual Property Rights	5
Forew	ord	5
Modal	verbs terminology	5
Introdu	uction	5
1	Scope	7
2	References	7
2.1	Normative references	7
2.2	Informative references	8
3	Definitions, abbreviations and terminology	9
3.1	Definitions	
3.2	Abbreviations	
3.3	Terminology	10
4	General Syntax	11
4.1	General requirements	
4.2	XML Namespaces	
4.3	The QualifyingProperties container	
4.3.1	Semantics and syntax	
4.3.2	The SignedProperties container	
4.3.3	The UnsignedProperties container	
4.3.4	The SignedSignatureProperties container	14
4.3.5	The SignedDataObjectProperties container	
4.3.6	The UnsignedSignatureProperties container	
4.3.7	The UnsignedDataObjectProperties container	
4.4	Incorporating qualifying properties into XAdES signatures	
4.4.1	General requirements	
4.4.2 4.4.3	Signing properties The QualifyingPropertiesReference element	
4.5	Managing canonicalization of XML nodesets	
	Qualifying properties semantics and syntax	
5.1 5.1.1	Auxiliary syntax The AnyType data type	
5.1.1	The ObjectIdentifierType data type	
5.1.2	The EncapsulatedPKIDataType data type	
5.1.4	Types for electronic time-stamps management	
5.1.4.1	Semantics	
5.1.4.2		
5.1.4.3	The GenericTimeStampType data type	21
5.1.4.4	The XAdESTimeStampType data type	23
5.1.4.4	· · · · · · · · · · · · · · · · · · ·	23
5.1.4.4		
5.1.4.5	The OtherTimeStampType data type	
5.2	Basic qualifying properties for XAdES signatures	
5.2.1	The SigningTime qualifying property	
5.2.2	The SigningCertificateV2 qualifying property	
5.2.3	The CommitmentTypeIndication qualifying property	
5.2.4 5.2.5	The DataObjectFormat qualifying property The SignatureProductionPlaceV2 qualifying property	
5.2.5 5.2.6	The SignerRoleV2 qualifying property	
5.2.7	Countersignatures	
5.2.7.1	Countersignatures identifier in Type attribute of ds:Reference	
5.2.7.2		
5.2.8	Time-stamps on signed data objects	

5.2.8.1	The AllDataObjectsTimeStamp qualifying property	
5.2.8.2	The IndividualDataObjectsTimeStamp qualifying property	
5.2.9	The SignaturePolicyIdentifier qualifying property	
5.2.9.1	Semantics and syntax	
5.2.9.2	Signature policy qualifiers	
5.2.10	The SignaturePolicyStore qualifying property	
5.3	The SignatureTimeStamp qualifying property	
5.4	Qualifying Properties for validation data values	
5.4.1	The CertificateValues qualifying property	
5.4.2	The RevocationValues qualifying property	
5.4.3	The AttrAuthoritiesCertValues qualifying property	
5.4.4 5.5	The AttributeRevocationValues qualifying property	
5.5.1	Qualifying properties for long term availability and integrity of validation material The TimeStampValidationData qualifying property	
5.5.1.1	Semantics and syntax	
5.5.1.2	Use of URI attribute	
5.5.2	The ArchiveTimeStamp qualifying property defined in namespace with URI	
5.5.2	"http://uri.etsi.org/01903/v1.4.1#"	
5.5.2.1	Semantics and syntax	
5.5.2.2	Not distributed case	
5.5.2.3	Distributed case	
5.5.3	The RenewedDigests qualifying property	46
<i>c</i> .	VAJES haaling signatures	47
6 2 6.1	XAdES baseline signatures Signature levels	
6.2	General requirements	
6.2.1	Algorithm requirements	
6.2.2	Notation for requirements	
6.3	Requirements on XAdES signature's elements, qualifying properties and services	
6.4	Legacy XAdES baseline signatures	
Annex	A (normative): Additional Qualifying Properties Specification	58
	Qualifying properties for validation data	
A.1.1	The CompleteCertificateRefsV2 qualifying property	
A.1.1 A.1.2	The CompleteRevocationRefs qualifying property	
A.1.2 A.1.3	The AttributeCertificateRefsV2 qualifying property	
A.1.4	The AttributeRevocationRefs qualifying property	
A.1.5	Time-stamps on references to validation data	
A.1.5.1	*	
A.1.5.1		
A.1.5.1	.2 Not distributed case	64
A.1.5.1	.3 Distributed case	64
A.1.5.2	The RefsOnlyTimeStampV2 qualifying property	65
A.1.5.2		
A.1.5.2		
A.1.5.2	.3 Distributed case	66
Annex	B (normative): Alternative mechanisms for long term availability and integra	ity of
	validation data	67
Annex	C (normative): XML Schema files	68
C.1 2	XML Schema file location for namespace http://uri.etsi.org/01903/v1.3.2#	68
C.2 2	XML Schema file location for namespace http://uri.etsi.org/01903/v1.4.1#	68
Annex	D (normative): Deprecated qualifying properties	69
	у	
misiony	,	

4

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This final draft European Standard (EN) has been produced by ETSI Technical Committee Electronic Signatures and Infrastructures (ESI), and is now submitted for the Vote phase of the ETSI standards EN Approval Procedure.

The present document is part 1 of a multi-part deliverable specifying XAdES digital signatures as identified below:

#### Part 1: "Building blocks and XAdES baseline signatures";

Part 2: "Extended XAdES signatures".

Three XML files, whose locations are detailed in clauses C.1 and C.2, and which contain XML Schema definitions, accompany the present document.

Proposed national transposition dates		
Date of latest announcement of this EN (doa):	3 months after ETSI publication	
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa	
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa	

## Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

## Introduction

Electronic commerce has emerged as a frequent way of doing business between companies across local, wide area and global networks. Trust in this way of doing business is essential for the success and continued development of electronic commerce. It is therefore important that companies using this electronic means of doing business have suitable security controls and mechanisms in place to protect their transactions and to ensure trust and confidence with their business partners. In this respect digital signatures are an important security component that can be used to protect information and provide trust in electronic business.

The present document is intended to cover digital signatures supported by PKI and public key certificates, and aims to meet the general requirements of the international community to provide trust and confidence in electronic transactions, including, amongst other, applicable requirements from Regulation (EU) No 910/2014 [i.1].

The present document can be used for any transaction between an individual and a company, between two companies, between an individual and a governmental body, etc. The present document is independent of any environment. It can be applied to any environment e.g. smart cards, SIM cards, special programs for electronic signatures, etc.

6

The present document is part of a rationalized framework of standards (see ETSI TR 119 000 [i.10]). ETSI TR 119 100 [i.11] provides guidance on how to use the present document within the aforementioned framework.

## 1 Scope

The present document specifies XAdES digital signatures. XAdES signatures build on XML digital signatures [1], by incorporation of signed and unsigned qualifying properties, which fulfil certain common requirements (such as the long term validity of digital signatures, for instance) in a number of use cases.

7

The present document specifies XML Schema definitions for the aforementioned qualifying properties as well as mechanisms for incorporating them into XAdES signatures.

The present document specifies formats for XAdES baseline signatures, which provide the basic features necessary for a wide range of business and governmental use cases for electronic procedures and communications to be applicable to a wide range of communities when there is a clear need for interoperability of digital signatures used in electronic documents.

The present document defines four levels of XAdES baseline signatures addressing incremental requirements to maintain the validity of the signatures over the long term, in a way that a certain level always addresses all the requirements addressed at levels that are below it. Each level requires the presence of certain XAdES qualifying properties, suitably profiled for reducing the optionality as much as possible.

Procedures for creation, augmentation, and validation of XAdES digital signatures are out of scope and specified in ETSI EN 319 102-1 [i.6]. Guidance on creation, augmentation and validation of XAdES digital signatures including the usage of the different properties defined in the present document is provided in ETSI TR 119 100 [i.11].

The present document aims at supporting electronic signatures in different regulatory frameworks.

NOTE: Specifically but not exclusively, XAdES digital signatures specified in the present document aim at supporting electronic signatures, advanced electronic signatures, qualified electronic signatures, electronic seals, advanced electronic seals, and qualified electronic seals as per Regulation (EU) No 910/2014 [i.1].

## 2 References

## 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <a href="http://docbox.etsi.org/Reference">http://docbox.etsi.org/Reference</a>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- W3C Recommendation (11 April 2013): "XML Signature Syntax and Processing. Version 1.1". [1] [2] W3C Recommendation Part 1 (28 October 2004): "XML Schema Part 1: Structures Second Edition". [3] W3C Recommendation Part 2 (28 October 2004): "XML Schema Part 2: Datatypes Second Edition". [4] Recommendation ITU-T X.509: "Information technology - Open Systems Interconnection - The Directory: Public-key and attribute certificate frameworks". W3C Recommendation (26 November 2008): "Extensible Markup Language (XML) 1.0". [5] IETF RFC 6960: "X.509 Internet Public Key Infrastructure Online Certificate Status Protocol -[6] OCSP".
- [7] IETF RFC 3161: "Internet X.509 Public Key Infrastructure Time Stamp Protocol (TSP)".

- [8] IETF RFC 3061: "A URN Namespace of Object Identifiers".
- [9] W3C Recommendation (15 March 2001): "Canonical XML Version 1.0".
- [10] W3C Recommendation (18 July 2002): "Exclusive XML Canonicalization Version 1.0".

8

- [11] W3C Recommendation (2 May 2008): "Canonical XML Version 1.1".
- [12] IETF RFC 3986: "Uniform Resource Identifier (URI): Generic Syntax".
- [13] W3C Recommendation (8 November 2002): "XML-Signature XPath Filter 2.0".
- [14] ISO/IEC 29500-2:2012: "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 2: Open Packaging Conventions".
- [15] IETF RFC 5280: "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile".
- [16] IETF RFC 5816: "ESSCertIDv2 Update for RFC 3161".
- [17] IETF RFC 5035: "Enhanced Security Services (ESS) Update: Adding CertID Algorithm Agility".

## 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1]	Regulation (EU) No 910/2014 of the European Parliament and of the Council on electronic identification and trust services for electronic transactions in the internal market and repealing Directive 1999/93/EC. OJ L 257, 28.08.2014, p. 73-114.
[i.2]	ETSI TS 101 903: "Electronic Signatures and Infrastructures (ESI); XML Advanced Electronic Signatures (XAdES)".
[i.3]	ETSI TS 103 171: "Electronic Signatures and Infrastructures (ESI); XAdES Baseline Profile".
[i.4]	ETSI TR 119 001: "Electronic Signatures and Infrastructures (ESI); The framework for standardization of signatures; Definitions and abbreviations".
[i.5]	Commission Decision 2009/767/EC of 16 October 2009 amended by CD 2010/425/EU of 28 July 2010, setting out measures facilitating the use of procedures by electronic means through the "points of single contact" under Directive 2006/123/EC of the European Parliament and of the Council on services in the internal market.
[i.6]	ETSI EN 319 102-1: "Electronic Signatures and Infrastructures (ESI); Procedures for Creation and Validation of AdES Digital Signatures; Part 1: Creation and Validation".
[i.7]	ETSI TS 119 172-1: "Electronic Signatures and Infrastructures (ESI); Signature Policies; Part 1: Building blocks and table of contents for human readable signature policy documents".
[i.8]	IETF RFC 6931: "Additional XML Security Uniform Resource Identifiers (URIs)".
[i.9]	OASIS Standard: "Assertions and Protocols for the OASIS Security Assertion Markup Language (SAML) V2.0".
[i.10]	ETSI TR 119 000: "Electronic Signatures and Infrastructures (ESI); The framework for standardization of signatures: overview".

[i.11] ETSI TR 119 100: "Electronic Signatures and Infrastructures (ESI); Business Driven Guidance for Signature Creation and Validation".

9

- [i.12] ETSI TS 119 612: "Electronic Signatures and Infrastructures (ESI); Trusted Lists".
- [i.13] ETSI TS 101 533-1: "Electronic Signatures and Infrastructures (ESI); Data Preservation Systems Security; Part 1: Requirements for Implementation and Management".
- [i.14] ETSI TS 119 312: "Electronic Signatures and Infrastructures (ESI); Cryptographic Suites".
- [i.15] IETF RFC 4998: "Evidence Record Syntax (ERS)".
- [i.16] ETSI EN 319 132-2: "Electronic Signatures and Infrastructures (ESI); XAdES digital signatures; Part 2: Extended XAdES signatures".

## 3 Definitions, abbreviations and terminology

## 3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI TR 119 001 [i.4] and the following apply:

**attribute certificate:** data structure, digitally signed by an attribute authority, that binds some attribute values with identification information about its holder

**certificate revocation list:** signed list indicating a set of certificates that are no longer considered valid by the certificate issuer

data object: actual binary/octet data being operated on (transformed, digested, or signed) by an application

NOTE: This definition is part of the definition of this term within XMLDSIG [1].

**digital signature:** data appended to, or a cryptographic transformation of a data unit that allows a recipient of the data unit to prove the source and integrity of the data unit and protect against forgery e.g. by the recipient

**digital signature value:** result of cryptographic transformation of a data unit that allows a recipient of the data unit to prove the source and integrity of the data unit and protect against forgery e.g. by the recipient

**electronic time-stamp:** data in electronic form which binds other electronic data to a particular time establishing evidence that these data existed at that time

NOTE: In the case of IETF RFC 3161 [7] protocol, updated by IETF RFC 5816 [16], the electronic time-stamp is referring to the timeStampToken field within the TimeStampResp element (the TSA's response returned to the requesting client).

legacy XAdES 101 903 signature: digital signature generated according to ETSI TS 101 903 [i.2]

legacy XAdES baseline signature: digital signature generated according to ETSI TS 103 171 [i.3]

legacy XAdES signature: legacy XAdES 101 903 signature or legacy XAdES baseline signature

message imprint: digest value of the data that is going to be time-stamped

NOTE: In the case of electronic time-stamps compliant with IETF RFC 3161 [7], as updated by IETF RFC 5816 [16], it corresponds to the digest value incorporated into the hashedMessage field of MessageImprint type.

**signature augmentation policy:** set of rules, applicable to one or more digital signatures, that defines the technical and procedural requirements for their augmentation, in order to meet a particular business need, and under which the digital signature(s) can be determined to be conformant

NOTE: This covers collection of information and creation of new structures that allows performing, on the long term, validations of a signature.

**signature creation policy:** set of rules, applicable to one or more digital signatures, that defines the technical and procedural requirements for their creation, in order to meet a particular business need, and under which the digital signature(s) can be determined to be conformant

10

**signature policy:** signature creation policy, signature augmentation policy, signature validation policy or any combination thereof, applicable to the same signature or set of signatures

**signature validation policy:** set of rules, applicable to one or more digital signatures, that defines the technical and procedural requirements for their validation, in order to meet a particular business need, and under which the digital signature(s) can be determined to be valid

trust anchor: entity that is trusted by a relying party and used for validating certificates in certification paths

validation data: data that is used to validate a digital signature

**XAdES signature:** digital signature that satisfies the requirements specified within the present document or ETSI EN 319 132-2 [i.16]

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation 1
BER	Basic Encoding Rules
CA	Certification Authority
CD	European Commission Decission.
CER	Canonical Encoding Rules
CRL	Certificate Revocation List
DER	Distinguished Encoding Rules
HTTP	Hyper Text Transfer Protocol
OCSP	Online Certificate Status Protocol
OID	Object IDentifier
PER	Packed Encoding Rules
PKI	Public Key Infrastructure
SAML	Security Assertion Markup Language
SIM	Subscriber Identity Module
SPO	Service Provision Option
TSA	Time-Stamping Authorities
TSL	Trust-service Status List
TSP	Trusted Service Providers
URI	Uniform Resource Identifier
URL	Uniform Resource Locator
URN	Uniform Resource Name
UTC	Coordinated Universal Time
XER	XML Encoding Rules
XML	eXtensible Markup Language
XMLDSIG	eXtensible Markup Language Digital SIGnature
XSLT	eXtensible Stylesheet Language Transformations

## 3.3 Terminology

The present document uses the term "qualifying property" for denoting a XML element that qualifies the signature, the signed data objects, or the signer.

The present document uses the term "element" exclusively for denoting XML elements.

The present document defines new XML elements that are containers of qualifying properties (for instance QualifyingProperties, SignedProperties, or UnsignedProperties). The present document uses the terms "element" or "container" when refers to them.

The present document uses the term "attribute" exclusively for denoting XML attributes of XML elements. Consequently, a qualifying property, being a XML element, can have (XML) attributes.

The present document uses the term "child element" exclusively in the context of XML content, for denoting an XML element that is a child element of another XML element.

11

The present document uses the term "XAdES components" for denoting any XAdES signature's element, and any XAdES qualifying property incorporated into the XAdES signature.

## 4 General Syntax

## 4.1 General requirements

XAdES signatures shall build on XMLDSIG as specified in [1] by incorporation of XML [5] signed and unsigned qualifying properties. These qualifying properties shall be instances of XML types using the XML Schema syntax and structures specified in [2] and [3].

The present clause defines the namespaces used in the aforementioned XML schema definitions.

The present clause also defines the types for the containers of the qualifying properties, and specifies the mechanisms for incorporating them into the XAdES signature.

## 4.2 XML Namespaces

The present document uses the URI namespaces listed below:

- <u>http://uri.etsi.org/01903/v1.3.2#</u>
- <u>http://uri.etsi.org/01903/v1.4.1#</u>
- <u>http://www.w3.org/2000/09/xmldsig#</u>
- <u>http://www.w3.org/2001/XMLSchema</u>

ETSI defines two XML Schema files for the present specification, namely: "XAdES01903v132-201601.xsd", and "XAdES01903v141-201601.xsd". See annex C for details on their locations.

Table 1 shows two prefixes that refer to the same namespaces in the two XML Schema files. These prefixes are used throughout the present document to refer to specific elements in the XAdES signature.

#### Table 1: Namespaces with constant prefixes

XML Namespace URI	Prefix
http://www.w3.org/2000/09/xmldsig#	ds
http://www.w3.org/2001/XMLSchema	xsd

NOTE 1: The present document uses other prefixes in the excerpts of the XML Schema files for referencing XML elements. The preambles of the corresponding XML Schema files clearly identify the namespace corresponding to each prefix.

Below follows a copy of the xsd:schema element of the XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and that defines the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>.

<xsd:schema targetNamespace="http://uri.etsi.org/01903/v1.3.2#"
xmlns:ds="http://www.w3.org/2000/09/xmldsig#" xmlns="http://uri.etsi.org/01903/v1.3.2#"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">

Below follows a copy of the xsd:schema element of the XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and that defines the namespace whose URI is http://uri.etsi.org/01903/v1.4.1#.

<xsd:schema targetNamespace="http://uri.etsi.org/01903/v1.4.1#" xmlns:ds="http://www.w3.org/2000/09/xmldsig#" xmlns="http://uri.etsi.org/01903/v1.4.1#" xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xades="http://uri.etsi.org/01903/v1.3.2#" elementFormDefault="qualified"> NOTE 2: The <u>http://uri.etsi.org/01903/v1.3.2#</u> URI was defined by ETSI TS 101 903 (V1.3.2) [i.2]. Most of the XML elements and types used by XAdES signatures were defined in this namespace. The present document adds new types and elements to this namespace. Additionally, ETSI TS 101 903 (V1.4.1) [i.2] defined <u>http://uri.etsi.org/01903/v1.4.1#</u> URI, where new types and elements were defined. The present document also adds new types and elements to this namespace.

12

NOTE 3: The present document is accompanied by two xml schema files, whose access details are given in annex B.

In case of discrepancies between the xml schema excerpts provided in the present document and the XML Schema files, the XML Schema files shall take precedence.

## 4.3 The QualifyingProperties container

## 4.3.1 Semantics and syntax

#### Semantics

The QualifyingProperties element shall act as a container element for all the qualifying information that is added to an XML signature.

The qualifying properties shall be split into qualifying properties that are cryptographically bound to (i.e. signed by) the XML signature, and qualifying properties that are not cryptographically bound to (i.e. not signed by) the XML signature.

#### Syntax

The QualifyingProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

The Target attribute shall refer to the Id attribute of the corresponding ds:Signature.

The value of Target attribute shall be an URI [12] with a bare-name XPointer fragment. If the XAdES signature envelops the QualifyingProperties element, its not-fragment part shall be empty. Otherwise, its not-fragment part needs not be empty.

The Id attribute shall be used to reference the QualifyingProperties container.

A XAdES signature shall not incorporate empty QualifyingProperties elements.

## 4.3.2 The SignedProperties container

#### Semantics

The SignedProperties element shall contain qualifying properties that are collectively signed by the XML signature. In consequence one of the ds:Reference children of ds:SignedInfo element in the XAdES signature shall be generated in a way that ensures that the SignedProperties element contributes to the digital signature value computation.

The SignedProperties element may contain qualifying properties that qualify the XML signature itself, the signer, or some of the signed data objects.

#### Syntax

The SignedProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

13

The SignedSignatureProperties element shall contain qualifying properties that qualify the XML signature itself or the signer. This element is specified in clause 4.3.4.

The SignedDataObjectProperties element shall contain qualifying properties that qualify some of the signed data objects. This element is specified in clause 4.3.5.

The Id attribute shall be used to reference the SignedProperties element.

A XAdES signature shall not incorporate empty SignedProperties element.

## 4.3.3 The UnsignedProperties container

#### Semantics

The UnsignedProperties element shall contain qualifying properties that are not signed by the XML signature.

The UnsignedProperties element may contain qualifying properties that qualify the XML signature itself, the signer, or some of the signed data objects.

#### Syntax

The UnsignedProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

The UnsignedSignatureProperties element shall contain qualifying properties that qualify the XML signature itself or the signer. This element is specified in clause 4.3.6.

The UnsignedDataObjectProperties element shall contain qualifying properties that qualify some of the signed data objects. This element is specified in clause 4.3.7.

The Id attribute shall be used to reference the UnsignedProperties element.

A XAdES signature shall not incorporate empty UnsignedProperties elements.

## 4.3.4 The SignedSignatureProperties container

#### Semantics

This element shall contain signed qualifying properties that qualify the XML signature.

#### Syntax

The SignedSignatureProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#"
The preamble of the XML Schema file also includes the following namespace declaration:
  xmlns:xadestsv132="http://uri.etsi.org/01903/v1.3.2#"
which assigns the prefix "xadestsv132" to the namespace whose URI is shown in the declaration.
-->
<rpre><xsd:element name="SignedSignatureProperties"</pre>
  type="SignedSignaturePropertiesType" />
<xsd:element name="SignedSignatureProperties" type="SignedSignaturePropertiesType"/>
<xsd:complexType name="SignedSignaturePropertiesType">
    <xsd:sequence>
        <xsd:element ref="SigningTime" minOccurs="0"/>
        <re><xsd:element ref="SigningCertificate" minOccurs="0"/>
        <xsd:element ref="SigningCertificateV2" minOccurs="0"/>
        <rpre><xsd:element ref="SignaturePolicyIdentifier" minOccurs="0"/>
        <xsd:element ref="SignatureProductionPlace" minOccurs="0"/>
        <rpre><xsd:element ref="SignatureProductionPlaceV2" minOccurs="0"/>
        <xsd:element ref="SignerRole" minOccurs="0"/>
<xsd:element ref="SignerRoleV2" minOccurs="0"/>
        <xsd:any namespace="##other" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="Id" type="xsd:ID" use="optional"/>
</xsd:complexType>
```

Future versions of ETSI EN 319 132 may use the any element for allowing the incorporation of additional signed signature qualifying properties. These additional signed signature qualifying properties shall be defined in a namespace whose URI is different from <a href="http://uri.etsi.org/01903/v1.3.2#">http://uri.etsi.org/01903/v1.3.2#</a>.

The SignedSignatureProperties element shall not incorporate any elements as an instantiation of xsd:any that are not specified within an ETSI EN 319 132 version.

The Id attribute shall be used to reference the SignedSignatureProperties element.

Qualifying properties SigningCertificate, SignatureProductionPlace, and SignerRole are obsoleted by SigningCertificateV2, SignatureProductionPlaceV2, and SignerRoleV2 respectively (see clauses 5.2.2, 5.2.5 and 5.2.6, respectively).

The aforementioned obsoleted qualifying properties shall not be incorporated into the signature.

A XAdES signature shall not incorporate an empty SignedSignatureProperties element.

## 4.3.5 The SignedDataObjectProperties container

#### Semantics

This element shall contain signed qualifying properties that qualify some of the signed data objects.

#### Syntax

The SignedDataObjectProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

Future versions of ETSI EN 319 132 may use the any element for allowing the incorporation of additional signed data objects qualifying properties. These additional signed data objects qualifying properties shall be defined in a namespace whose URI is different from <u>http://uri.etsi.org/01903/v1.3.2#</u>.

The SignedDataObjectProperties element shall not incorporate any element as an instantiation of xsd:any that are not specified within an ETSI EN 319 132 version.

The Id attribute shall be used to reference the SignedDataObjectProperties element.

A XAdES signature shall not incorporate an empty SignedDataObjectProperties element.

### 4.3.6 The UnsignedSignatureProperties container

#### Semantics

This element shall contain unsigned qualifying properties that qualify the XML.

The XML signature shall not cover the content of this element.

#### Syntax

The UnsignedSignatureProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

```
<xsd:element name="UnsignedSignatureProperties"</pre>
  type="UnsignedSignaturePropertiesType"/>
<xsd:complexType name="UnsignedSignaturePropertiesType">
    <xsd:choice maxOccurs="unbounded">
        <re><xsd:element ref="CounterSignature" />
        <rpre><xsd:element ref="SignatureTimeStamp" />
        <xsd:element ref="CompleteCertificateRefs"/>
        <xsd:element ref="CompleteRevocationRefs"/>
        <xsd:element ref="AttributeCertificateRefs"/>
        <xsd:element ref="AttributeRevocationRefs" />
        <re><xsd:element ref="SigAndRefsTimeStamp" />
        <xsd:element ref="RefsOnlyTimeStamp"</pre>
        <re><xsd:element ref="CertificateValues" />
        <xsd:element ref="RevocationValues"/>
        <rpre><xsd:element ref="AttrAuthoritiesCertValues" />
        <xsd:element ref="AttributeRevocationValues"/>
        <xsd:element ref="ArchiveTimeStamp" />
        <xsd:any namespace="##other"/>
    </xsd:choice>
    <rpre><xsd:attribute name="Id" type="xsd:ID" use="optional"/>
```

#### </xsd:complexType>

Future versions of ETSI EN 319 132 may use the any element for allowing the incorporation of additional signed data objects qualifying properties. These additional signed data objects qualifying properties shall be defined in a namespace whose URI is different from <a href="http://uri.etsi.org/01903/v1.3.2#">http://uri.etsi.org/01903/v1.3.2#</a>.

The UnsignedSignatureProperties element shall not incorporate any element as an instantiation of xsd:any that are not specified within an ETSI EN 319 132 version.

The Id attribute shall be used to reference the UnsignedSignatureProperties element.

Qualifying properties CompleteCertificateRefs, AttributeCertificateRefs, SigAndRefsTimeStamp, and RefsOnlyTimeStamp, defined in the namespace whose URI value <u>http://uri.etsi.org/01903/v1.3.2#</u> (XML Schema file "XAdES01903v132-201601.xsd") are obsoleted by CompleteCertificateRefsV2, AttributeCertificateRefsV2, SigAndRefsTimeStampV2, RefsOnlyTimeStampV2 (defined in the namespace whose URI value is <u>http://uri.etsi.org/01903/v1.4.1#</u>) respectively (see clauses A.1.1, A.1.3, A.1.5.1 and A.1.5.2, respectively).

Additionaly the qualifying property ArchiveTimeStamp defined in the namespace whose URI value <u>http://uri.etsi.org/01903/v1.3.2#</u> (XML Schema file "XAdES01903v132-201601.xsd") is obsoleted by ArchiveTimeStamp defined in the namespace whose URI value is <u>http://uri.etsi.org/01903/v1.4.1#</u> (XML Schema file "XAdES01903v141-201601.xsd", see clause 5.5.2).

The aforementioned obsoleted qualifying properties shall not be incorporated into the XAdES signature.

A XAdES signature shall not incorporate an empty UnsignedSignatureProperties element.

### 4.3.7 The UnsignedDataObjectProperties container

#### **Semantics**

This element shall contain qualifying properties that qualify some of the signed data objects.

The XML signature shall not cover the content of this element.

#### Syntax

The UnsignedDataObjectProperties element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

The Id attribute shall be used to reference the UnsignedDataObjectProperties element.

A XAdES signature shall not incorporate empty UnsignedDataObjectProperties element.

NOTE: The present document does not specify the usage of any unsigned qualifying property qualifying the signed data objects. It, however, defines this element for the sake of completeness and to cope with potential future needs for inclusion of such kind of qualifying properties. The schema definition leaves open the definition of the contents of this type. The type AnyType is defined in clause 5.1.1.

## 4.4 Incorporating qualifying properties into XAdES signatures

17

## 4.4.1 General requirements

The ds:Object auxiliary element from XMLDSIG [1] shall be used for incorporating the qualifying properties into the XAdES signature.

The present document specifies two different means for incorporating qualifying properties:

- direct incorporation means that a QualifyingProperties element shall be a child of the ds:Object;
- indirect incorporation means that one or more QualifyingPropertiesReference elements shall appear as children of the ds:Object. Each one shall contain information about one QualifyingProperties element that shall not be a descendant element of the ds:Signature XAdES signature root element (see clause 4.4.3).

The following restrictions apply for using ds:Object, QualifyingProperties and QualifyingPropertiesReference:

- all instances of QualifyingProperties directly incorporated into the XAdES signature, and all the instances of QualifyingPropertiesReference, shall occur within a single ds:Object element;
- at most one instance of the QualifyingProperties element may occur within this ds:Object element;
- all signed qualifying properties shall occur within a single QualifyingProperties element. This element shall either be a child of this ds:Object element (direct incorporation), or referenced by a QualifyingPropertiesReference element (see clause 4.4.2 for information how to sign qualifying properties); and
- zero or more instances of the QualifyingPropertiesReference element may occur within this ds:Object element.

XAdES signatures may contain ds:Object elements different from the ds:Object elements containing the QualifyingProperties or QualifyingPropertiesReference elements.

No restrictions apply to the relative position of the ds:Object containing the QualifyingProperties or QualifyingPropertiesReference with respect to others ds:Object elements present within ds:Signature.

NOTE: It is out of the scope of the present document to specify the mechanisms required to guarantee the correct storage of the distributed QualifyingProperties elements (i.e. that the qualifying properties are stored by the entity that has to store them and that they are not undetectably modified).

## 4.4.2 Signing properties

All the signed qualifying properties shall be children of the SignedProperties child of the QualifyingProperties element.

In order to protect the qualifying properties with the signature, a ds:Reference element shall be added to the XML signature.

This ds:Reference element shall be composed in such a way that it uses the SignedProperties element mentioned above as the input for computing its corresponding digest.

This ds:Reference element shall include the Type attribute with its value set to:

- <u>http://uri.etsi.org/01903#SignedProperties</u>.
- NOTE: This value indicates that the data used for digest computation is a SignedProperties element and therefore helps to detect the signed qualifying properties of a XAdES signature conforming to the present document.

## 4.4.3 The QualifyingPropertiesReference element

#### Semantics

This element shall contain information about one QualifyingProperties element that is not descendant of the ds:Signature XAdES signature root element (if for instance, it is stored in another XML document).

18

#### Syntax

The QualifyingPropertiesReference element shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<xsd:element name="QualifyingPropertiesReference"
    type="QualifyingPropertiesReferenceType"/>
<xsd:complexType name="QualifyingPropertiesReferenceType">
    <xsd:complexType name="QualifyingPropertiesReferenceType">
    <xsd:complexType name="QualifyingPropertiesReferenceType">
    <xsd:complexType name="QualifyingPropertiesReferenceType">
    <xsd:complexType name="QualifyingPropertiesReferenceType">
    </xsd:complexType name="QualifyingPropertiesReferenceType">
    </xsd:complexType</pre>
```

The URI attribute shall contain a bare-name XPointer fragment and shall reference an external QualifyingProperties element. Its not-fragment part shall identify the enclosing document and its bare-name XPointer fragment shall identify the aforementioned element.

The Id attribute shall be used to reference the QualifyingPropertiesReference element.

## 4.5 Managing canonicalization of XML nodesets

A number of qualifying properties specified in the present document incorporate optional means for identifying a canonicalization algorithm for computing the canonical form of a certain XML node set.

When generating new XAdES signatures, all the XAdES qualifying properties that provide optional means for indicating the canonicalization algorithm shall include the canonicalization algorithm identifier.

When augmenting a legacy XAdES signature by the generation and incorporation of a certain XAdES qualifying property specified in the present document, and whose XML Schema definition includes an optional identifier of a canonicalization algorithm, this qualifying property shall include the canonicalization algorithm identifier.

- NOTE 1: Canonical XML 1.0 [9] does not properly process the inheritance of attributes in the XML namespace (xml:id and xml:base) when canonicalizing document sub-trees. Canonical XML version 1.1 [11] (whose version omitting comments is identified by the URI <u>http://www.w3.org/2006/12/xml-c14n11</u>), specifies a variant of the former canonicalization algorithm that properly addresses these issues.
- NOTE 2: Canonical XML 1.0 [9] when applied to an XML sub-tree, includes the sub-tree's ancestor context including all of the namespace declarations and attributes in the "xml:" namespace. The exclusive XML Canonicalization algorithm [10] (whose version omitting comments is identified by the URI <a href="http://www.w3.org/2001/10/xml-exc-c14n#">http://www.w3.org/2001/10/xml-exc-c14n#</a>) completely excludes this ancestor context from the canonicalized sub-tree.

## 5 Qualifying properties semantics and syntax

## 5.1 Auxiliary syntax

5.1.1 The AnyType data type

#### Semantics

The AnyType Schema data type shall have a content model allowing a sequence of arbitrary XML elements that (mixed with text) is of unrestricted length.

The AnyType Schema data type shall have a content model allowing for text content only.

The AnyType Schema data type shall have a content model allowing an element of this data type to bear an unrestricted number of arbitrary attributes.

19

#### Syntax

The AnyType type shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

NOTE: The AnyType data type is used throughout the remaining parts of the present document wherever the content of an XML element has been left open.

### 5.1.2 The ObjectIdentifierType data type

#### Semantics

Instances of ObjectIdentifierType data type shall contain a unique and permanent identifier of one data object.

Instances of ObjectIdentifierType data type may contain a textual description of the nature of the data object qualified by the instance of the ObjectIdentifierType data type.

Instances of ObjectIdentifierType data type may contain a number of references to documents where additional information about the nature of the data object qualified by the instance of the ObjectIdentifierType data type, can be found.

#### Syntax

The ObjectIdentifierType shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<re><xsd:element name="ObjectIdentifier" type="ObjectIdentifierType"/>
<rpre><xsd:complexType name="ObjectIdentifierType">
 <xsd:sequence>
    <xsd:element name="Identifier" type="IdentifierType"/>
    <rpre><xsd:element name="Description" type="xsd:string" minOccurs="0"/>
    <xsd:element name="DocumentationReferences"</pre>
     type="DocumentationReferencesType" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="IdentifierType">
  <xsd:simpleContent>
    <rsd:extension base="xsd:anyURI">
      <rpre><xsd:attribute name="Qualifier" type="QualifierType"</pre>
       use="optional"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:simpleType name="QualifierType">
  <xsd:restriction base="xsd:string">
    <rpre><xsd:enumeration value="OIDAsURI"/>
    <rpre><xsd:enumeration value="OIDAsURN"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="DocumentationReferencesType">
 <xsd:sequence maxOccurs="unbounded">
    <xsd:element name="DocumentationReference" type="xsd:anyURI"/>
```

```
</xsd:sequence> </xsd:complexType>
```

The Identifier element shall contain a permanent identifier. Once the identifier is assigned, it shall not be re-assigned again.

20

The Identifier element supports two mechanisms for identifying objects:

- If a URI identifies the object, then the value of the Identifier element shall be this URI and the Qualifier attribute shall not be present; or
- If an Object Identifier (OID) identifies the object, then the value of the Identifier element shall be the OID value encoded either as a Uniform Resource Name (URN), or as URI that is not a URN. The following rules shall apply in this case:
  - If the OID is encoded as a URN, then:
    - the Qualifier attribute shall be present and shall have the value "OIDASURN"; and
    - the OID shall be encoded as an URN as specified by theIETF RFC 3061 [8]. Or
  - If the OID is encoded as a URI that is not a URN, then the Qualifier attribute shall be present and shall have the value "OIDAsURI".

If both an OID and a URI exist identifying one object, the URI value should be used in the Identifier element.

The Description element shall contain an informal text describing the object.

The DocumentationReferences element shall contain an arbitrary number of references pointing to further explanatory documentation of the data object.

### 5.1.3 The EncapsulatedPKIDataType data type

#### Semantics

The EncapsulatedPKIDataType shall be used to incorporate PKI objects, which can be non-XML encoded, into the XAdES signature.

NOTE 1: Examples of such PKI objects, include X.509 certificates and revocation lists, OCSP responses, attribute certificates, and electronic time-stamps.

#### Syntax

The EncapsulatedPKIDataType type shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

```
<rpre><xsd:element name="EncapsulatedPKIData" type="EncapsulatedPKIDataType"/>
```

The content of this data type shall be the PKI object, base-64 encoded as defined in [1].

The Encoding attribute value shall be a URI identifying the encoding used in the original PKI object. The following URIs shall be used:

• <u>http://uri.etsi.org/01903/v1.2.2#DER</u> for denoting that the original PKI data were ASN.1 data encoded in DER.

• <u>http://uri.etsi.org/01903/v1.2.2#BER</u> for denoting that the original PKI data were ASN.1 data encoded in BER.

21

- <u>http://uri.etsi.org/01903/v1.2.2#CER</u> for denoting that the original PKI data were ASN.1 data encoded in CER.
- <u>http://uri.etsi.org/01903/v1.2.2#PER</u> for denoting that the original PKI data were ASN.1 data encoded in PER. Or
- <u>http://uri.etsi.org/01903/v1.2.2#XER</u> for denoting that the original PKI data were ASN.1 data encoded in XER.

If the Encoding attribute is not present, then the PKI data shall be ASN.1 data encoded in DER.

NOTE 2: In some clauses of the present document, specific XAdES qualifying properties related to these data restrict the encoding options to only one certain type of the aforementioned PKI data.

The Id attribute shall be used to reference an element of this data type.

### 5.1.4 Types for electronic time-stamps management

#### 5.1.4.1 Semantics

The present document specifies qualifying properties that act as electronic time-stamps containers.

Electronic time-stamps within the aforementioned containers may time-stamp elements defined in XMLDSIG [1] and/or qualifying properties specified in the present document, and/or detached signed data objects.

#### NOTE: The present document specifies:

- a XML schema definition of an abstract base type and two concrete derived types used as containers for electronic time-stamps; and
- a number of qualifying properties of one of the aforementioned concrete types.

#### 5.1.4.2 Containers for electronic time-stamps

Below follows the list of the electronic time-stamps container qualifying properties that are defined by the present document:

- Containers for electronic time-stamps proving that some or all the signed data objects have been created before certain time instant: AllDataObjectsTimeStamp and IndividualDataObjectsTimeStamp.
- Container for electronic time-stamps proving that the SignatureValue element has been created before a certain time instant (to protect against repudiation in case of a key compromise): SignatureTimeStamp.
- Container for electronic time-stamps time-stamping the signature and validation data values, for providing long term XAdES signatures: ArchiveTimeStamp qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.4.1#</a>. And
- Annex A specifies two qualifying properties that contain electronic time-stamps on qualifying properties that contain references to validation data, namely: SigAndRefsTimeStampV2 and RefsOnlyTimeStampV2.

#### 5.1.4.3 The GenericTimeStampType data type

#### Semantics

The GenericTimeStampType type shall:

- allow encapsulating IETF RFC 3161 [7] updated by IETF RFC 5816 [16] electronic time-stamps as well as XML electronic time-stamps;
- allow encapsulating more than one electronic time-stamp generated for the same set of data objects (each one issued by different TSAs, for instance);

• provide means for managing electronic time-stamps computed on XAdES components, electronic time-stamps computed on XAdES components and detached signed data objects, or electronic time-stamps computed on external data; and

22

• specify mechanisms for explicitly identifying what is time-stamped and how to generate the input data for the computation of the message imprint to be sent to the TSA.

#### Syntax

The GenericTimeStampType type shall be the abstract base type defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<rpre><xsd:element name="Include" type="IncludeType"/>
<xsd:complexType name="IncludeType">
<xsd:attribute name="URI" type="xsd:anyURI" use="required"/>
<rpre><rsd:attribute name="referencedData" type="xsd:boolean" use="optional"/>
</xsd:complexType>
<rpre><xsd:element name="ReferenceInfo" type="ReferenceInfoType"/>
<xsd:complexType name="ReferenceInfoType">
  <xsd:sequence>
    <xsd:element ref="ds:DigestMethod"/>
    <xsd:element ref="ds:DigestValue"/>
  </xsd:sequence>
  <rpre><xsd:attribute name="Id" type="xsd:ID" use="optional"/>
  <xsd:attribute name="URI" type="xsd:anyURI" use="optional"/>
</xsd:complexTvpe>
<xsd:complexType name="GenericTimeStampType" abstract="true">
  <xsd:sequence>
    <xsd:choice minOccurs="0">
      <rpre><xsd:element ref="Include" minOccurs="0" maxOccurs="unbounded"/>
      <xsd:element ref="ReferenceInfo" maxOccurs="unbounded"/>
    </xsd:choice>
    <xsd:element ref="ds:CanonicalizationMethod" minOccurs="0"/>
    <xsd:choice maxOccurs="unbounded">
      <rpre><xsd:element name="EncapsulatedTimeStamp"</pre>
        type="EncapsulatedPKIDataType"/>
      <rpre><xsd:element name="XMLTimeStamp" type="AnyType"/>
    </xsd:choice>
  </xsd:sequence>
  <xsd:attribute name="Id" type="xsd:ID" use="optional"/>
</xsd:complexType>
```

The ds:CanonicalizationMethod element shall indicate the canonicalization algorithm used for canonicalizing XML node sets resulting after retrieving (and processing when required) the data objects time-stamped by the electronic time-stamp(s).

Clause 4.5 shall apply when dealing with the ds: CanonicalizationMethod element.

If the electronic time-stamp generated by the TSA is conformant to IETF RFC 3161[7] as updated by IETF RFC 5816 [16], it shall be included within the EncapsulatedTimeStamp element. If the electronic time-stamp generated by the TSA is encoded as XML [1] then it shall be included within XMLTimeStamp element.

Details on the different elements and supporting types are given in the clauses that define the two concrete types: XAdESTimeStampType and OtherTimeStampType.

#### 5.1.4.4 The XAdESTimeStampType data type

#### 5.1.4.4.1 Semantics and syntax

#### Semantics

Instances of XAdESTimeStampType type shall be used for incorporating electronic time-stamps on XAdES components, or electronic time-stamps on XAdES components and detached signed data objects, into XAdES signatures.

#### Syntax

The XAdESTimeStampType type shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<xsd:element name="XAdESTimeStamp" type="XAdESTimeStampType"/>
<xsd:complexType name="XAdESTimeStampType">
  <xsd:complexContent>
    <xsd:restriction base="GenericTimeStampType">
      <xsd:sequence>
        <xsd:element ref="Include" minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="ds:CanonicalizationMethod" minOccurs="0"/>
        <xsd:choice maxOccurs="unbounded">
          <rpre><xsd:element name="EncapsulatedTimeStamp" type="EncapsulatedPKIDataType"/>
          <xsd:element name="XMLTimeStamp" type="AnyType"/>
        </xsd:choice>
      </xsd:sequence>
      <rpre><xsd:attribute name="Id" type="xsd:ID" use="optional"/>
    </xsd:restriction>
  </xsd:complexContent>
</xsd:complexType>
```

This type provides two mechanisms for identifying data objects that are time-stamped by the electronic time-stamp present in the container, and for specifying how to compute the electronic time-stamp's message imprint:

- Explicit. This mechanism shall use the Include element for referencing specific data objects and for indicating their contribution to the input of the message imprint's computation. Or
- Implicit. For certain time-stamp container qualifying properties under certain circumstances, no explicit indications are required for knowing what data objects are time-stamped by the electronic time-stamps and how they contribute to the input of the message imprint's computation. The present document specifies, in the clauses defining such qualifying properties (clauses 5.2.8.1, 5.3, 5.5.2.2, A.1.5.1.2 and A.1.5.2.2), what data objects are time-stamped by the electronic time-stamps and how they contribute to the input of the message imprint's computation.

Clause 5.1.4.4.2 shows the principles that govern the explicit indication mechanism.

5.1.4.4.2 Include mechanism

5.1.4.4.2.1 Semantics and syntax

#### **Semantics**

Include elements shall explicitly reference data objects that contribute to the input of the electronic time-stamp's message imprint computation, and consequently are time-stamped by the electronic time-stamp.

The order of appearance of the Include elements shall indicate the order in which the referenced data objects contribute to the input of the electronic time-stamp's message imprint computation.

#### Syntax

The URI attribute in Include element shall reference one data object that contributes to the input of the electronic time-stamp's message imprint computation.

24

The value of URI attribute follows the rules indicated below:

- It shall have an empty non-fragment part and a bare-name XPointer fragment when the Include element and the time-stamped data object are in the same document.
- It shall have a not empty non-fragment part and a bare-name XPointer fragment when the Include element and the time-stamped data object are not in the same document.
- If not empty, its non-fragment part shall be equal to:
  - the non-fragment part of the Target attribute of the QualifyingProperties enclosing the Include element if the time-stamped data object is enveloped by the XAdES signature; or
  - the non-fragment part of the URI attribute of the QualifyingPropertiesReference element referencing the QualifyingProperties element enveloping the time-stamped data object if this QualifyingProperties element is not enveloped by the XAdES signature.

If the object referenced by the URI attribute is not a ds:Reference element, the referencedData attribute shall not be present.

If the object referenced by the URI attribute is a ds:Reference element, the referencedData attribute may be present.

NOTE: The presence and value of referencedData attribute impacts the computation of the octets that will contribute to the input of the electronic time-stamp's message imprint computation as specified below in clause 5.1.4.4.2.3.

#### 5.1.4.4.2.2 Processing model for URI attribute

The retrieved resource shall be parsed, and then the bare-name XPointer shall be processed.

The bare-name XPointer shall be processed as follows:

- 1) use as XPointer evaluation context the root node of the XML document that contains the element referenced by the not-fragment part of URI attribute's value; and
- 2) derive a XPath node-set from the resultant location-set as indicated below:
  - a) replace the element node E retrieved by the bare-name XPointer with E plus all descendants of E (text, comments, PIs, elements) and all namespace and attribute nodes of E and its descendant elements; and
  - b) delete all the comment nodes.

5.1.4.4.2.3 Processing model for Include element

Each Include element within a time-stamp container qualifying property shall be processed as detailed below:

- 1) retrieve the data object referenced in the URI attribute as specified in clause 5.1.4.4.2.2;
- 2) if the retrieved data object is a ds: Reference element and the referencedData attribute is set to the value "true", take the result of processing the retrieved ds: Reference element according to the reference processing model of XMLDSIG [1] clause 4.4.3.2; otherwise keep the retrieved data object retrieved in 1);
- 3) if the data object obtained after step 2) is an XML node set, canonicalize it as specified in clause 4.5; and
- 4) concatenate the resulting octets to the input of the electronic time-stamp's message imprint computation resulting from previous processing as indicated in the corresponding time-stamp container qualifying property.

#### 5.1.4.5 The OtherTimeStampType data type

#### Semantics

This concrete derived type shall contain electronic time-stamps computed on a collection of data objects that are not incorporated into the XAdES signature.

#### Syntax

The OtherTimeStampType type shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<rpre><xsd:element name="OtherTimeStamp" type="OtherTimeStampType"/>
<xsd:complexType name="OtherTimeStampType">
    <rsd:complexContent>
        <xsd:restriction base="GenericTimeStampType">
            <xsd:sequence>
                <rpre><xsd:element ref="ReferenceInfo" maxOccurs="unbounded"/>
                <xsd:element ref="ds:CanonicalizationMethod" minOccurs="0"/>
                <xsd:choice>
                     <rpre><xsd:element name="EncapsulatedTimeStamp"</pre>
                type="EncapsulatedPKIDataType"/>
                    <rsd:element name="XMLTimeStamp" type="AnyType"/>
            </xsd:choice>
            </xsd:sequence>
            <xsd:attribute name="Id" type="xsd:ID" use="optional"/>
        </xsd:restriction>
    </xsd:complexContent>
</xsd:complexType>
```

For this type the actual input to the computation of the message imprint shall be the concatenation (in the order of appearance) of the present ReferenceInfo elements, canonicalized as specified in clause 4.5.

Each ReferenceInfo element shall contain the digest of one external data object.

The URI attribute shall reference the data object contributing to the input of the electronic time-stamp's message imprint. As in XMLDSIG, if it is omitted, the context where the XAdES signature is used shall allow to know the identity of the referenced object.

Element ds:DigestMethod shall identify the digest algorithm applied to the external data object.

Element ds:DigestValue shall contain the base-64 encoded value of the digest of the referenced data object.

Attribute Id shall be used for referencing this element from elsewhere.

Attribute Id and elements ds: CanonicalizationMethod, EncapsulatedTimeStamp and XMLTimeStamp shall be used exactly as in XAdESTimeStampType.

## 5.2 Basic qualifying properties for XAdES signatures

## 5.2.1 The SigningTime qualifying property

#### Semantics

The SigningTime qualifying property shall be a signed qualifying property that qualifies the signature.

The SigningTime qualifying property's value shall specify the time at which the signer claims to having performed the signing process.

#### Syntax

The SigningTime qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

26

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

<rpre><xsd:element name="SigningTime" type="xsd:dateTime"/>

## 5.2.2 The SigningCertificateV2 qualifying property

#### Semantics

The SigningCertificateV2 qualifying property shall be a signed qualifying property that qualifies the signature.

The SigningCertificateV2 qualifying property shall contain one reference to the signing certificate.

The SigningCertificateV2 qualifying property may contain references to some of or all the certificates within the signing certificate path, including one reference to the trust anchor when this is a certificate.

NOTE 1: For instance, the signature validation policy can mandate other certificates to be present which can include all the certificates up to the trust anchor.

For each certificate, the SigningCertificateV2 qualifying property shall contain a digest value together with a unique identifier of the algorithm that has been used to calculate it.

The first reference in SigningCertificateV2 qualifying property shall be the reference of the signing certificate.

#### Syntax

The SigningCertificateV2 qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

<rpre><xsd:element name="SigningCertificateV2" type="CertIDListV2Type"/>

```
<xsd:complexType name="CertIDListV2Type">
    <xsd:sequence>
        <xsd:element name="Cert" type="CertIDTypeV2" maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CertIDTypeV2">
    <xsd:sequence>
        <xsd:element name="CertDigest" type="DigestAlgAndValueType"/>
        <xsd:element name="IssuerSerialV2" type="xsd:base64Binary" minOccurs="0"/>
    </xsd:sequence>
    <rpre><xsd:attribute name="URI" type="xsd:anyURI" use="optional"/>
</xsd:complexType>
<rsd:complexType name="DigestAlgAndValueType">
    <xsd:sequence>
        <rsd:element ref="ds:DigestMethod"/>
        <xsd:element ref="ds:DigestValue"/>
    </xsd:sequence>
</xsd:complexType>
```

The element CertDigest shall contain the digest of the referenced certificate.

CertDigest's children elements satisfy the following requirements:

- 1) ds:DigestMethod element shall identify the digest algorithm. And
- 2) ds:DigestValue element shall contain the base-64 encoded value of the digest computed on the DERencoded certificate.

The content of IssuerSerialV2 element shall be the base-64 encoding of one DER-encoded instance of type IssuerSerial type defined in IETF RFC 5035 [17].

NOTE 2: The information in the IssuerSerialV2 element is only a hint, that can help to identify the certificate whose digest matches the value present in the reference. But the binding information is the digest of the certificate.

27

The URI attribute shall provide an indication of where the referenced certificate can be found.

NOTE 3: It is intended that this attribute be used as a hint, as implementations can have alternative ways for retrieving the referenced certificate if it is not found at the referenced place.

## 5.2.3 The CommitmentTypeIndication qualifying property

#### Semantics

The CommitmentTypeIndication qualifying property shall be a signed qualifying property that qualifies signed data object(s).

The CommitmentTypeIndication qualifying property shall indicate one commitment made by the signer when signing.

The CommitmentTypeIndication qualifying property may indicate one commitment made by the signer for a subset of the set of signed data objects.

The CommitmentTypeIndication qualifying property may also indicate one commitment made by the signer for the complete set of signed data objects.

The CommitmentTypeIndication qualifying property shall express the commitment type with an URI.

The CommitmentTypeIndication qualifying property may contain a sequence of qualifiers providing more information about the commitment.

NOTE 1: The commitment type can be:

- defined as part of the signature policy, in which case, the commitment type has precise semantics that are defined as part of the signature policy; or
- be a registered type, in which case, the commitment type has precise semantics defined by registration, under the rules of the registration authority. Such a registration authority can be a trading association or a legislative authority.
- NOTE 2: The specification of commitment type identifiers is outside the scope of the present document. For a list of predefined commitment type identifiers, see ETSI TS 119 172-1 [i.7].

#### Syntax

The CommitmentTypeIndication qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

```
<xsd:complexType name="CommitmentTypeIndicationType">
    <xsd:sequence>
        <xsd:element name="CommitmentTypeId"</pre>
       type="ObjectIdentifierType"/>
        <xsd:choice>
             <rpre><xsd:element name="ObjectReference" type="xsd:anyURI"</pre>
         maxOccurs="unbounded"/>
            <re><xsd:element name="AllSignedDataObjects"/>
        </xsd:choice>
        <re><xsd:element name="CommitmentTypeQualifiers"</pre>
      type="CommitmentTypeQualifiersListType" minOccurs="0"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CommitmentTypeQualifiersListType">
    <xsd:sequence>
         <xsd:element name="CommitmentTypeQualifier"</pre>
      type="AnyType" minOccurs="0" maxOccurs="unbounded"/>
```

```
</xsd:sequence> </xsd:complexType>
```

The CommitmentTypeId element is an element of ObjectIdentifierType type, which fulfils the following requirements:

28

- 1) its Identifier child shall have a URI as value, uniquely identifying one commitment made by the signer; and
- 2) its Identifier child shall not have a Qualifier attribute (i.e. the aforementioned URI shall not represent an OID value).

Each ObjectReference shall reference one ds:Reference element within the ds:SignedInfo element or within a signed ds:Manifest element.

If a commitment is made only for a subset (different from the full set) of signed data objects, the CommitmentTypeIndication element shall incorporate one ObjectReference element for each one of signed data objects in the aforementioned subset.

If a certain commitment is made for all the signed data objects, the CommitmentTypeIndication qualifying property shall contain:

- one AllSignedDataObjects empty element; or
- one ObjectReference element for each one of the signed data objects except the SignedProperties element (XAdES signed qualifying properties).

The CommitmentTypeQualifiers element provides means to include additional qualifying information on the commitment made by the signer.

### 5.2.4 The DataObjectFormat qualifying property

#### Semantics

The DataObjectFormat qualifying property shall be a signed qualifying property that qualifies one specific signed data object.

The DataObjectFormat qualifying property shall contain information that describes the format of the signed data object.

#### Syntax

The DataObjectFormat qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

<rpre><xsd:element name="DataObjectFormat" type="DataObjectFormatType"/>

```
<xsd:complexType name="DataObjectFormatType">
        <xsd:sequence>
            <xsd:element name="Description" type="xsd:string" minOccurs="0"/>
            <xsd:element name="ObjectIdentifier" type="ObjectIdentifierType"
            minOccurs="0"/>
            <xsd:element name="MimeType" type="xsd:string" minOccurs="0"/>
            <xsd:element name="Encoding" type="xsd:string" minOccurs="0"/>
            <xsd:element name="Encoding" type="xsd:anyURI" minOccurs="0"/>
            </xsd:sequence>
            </xsd:sequence>
            </xsd:attribute name="ObjectReference" type="xsd:anyURI"
            use="required"/>
            </xsd:complexType>
```

Element Description shall contain textual information related to the signed data object.

Element ObjectIdentifier shall contain an identifier of the type of the signed data object, as assigned by an authority that defines that type.

Element MimeType shall contain a MIME type value indicating the format of the signed data object.

Element Encoding shall contain an indication of the encoding of the signed data object.

This qualifying property shall contain at least one of the following elements: Description, ObjectIdentifier and MimeType.

29

The ObjectReference attribute shall reference the ds:Reference child of the ds:SignedInfo or a signed ds:Manifest element referencing the signed data object qualified by this qualifying property.

If the DataObjectFormat qualifying property references a ds:Reference that in turn references a ds:Object within the XAdES signature, and if this ds:Object element has the MimeType or (and) the Encoding attribute(s), then DataObjectFormat's children MimeType and Encoding shall have exactly the same values, if they are present.

## 5.2.5 The SignatureProductionPlaceV2 qualifying property

#### Semantics

The SignatureProductionPlaceV2 qualifying property shall be a signed qualifying property that qualifies the signer.

The SignatureProductionPlaceV2 qualifying property shall specify an address associated with the signer at a particular geographical (e.g. city) location.

#### Syntax

The SignatureProductionPlaceV2 qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

<xsd:element name="SignatureProductionPlaceV2" type="SignatureProductionPlaceV2Type"/>

Empty SignatureProductionPlaceV2 qualifying properties shall not be generated.

## 5.2.6 The SignerRoleV2 qualifying property

#### Semantics

The SignerRoleV2 qualifying property shall be a signed qualifying property that qualifies the signer.

The SignerRoleV2 qualifying property shall encapsulate signer attributes (e.g. role). This qualifying property may encapsulate the following types of attributes:

- attributes claimed by the signer;
- attributes certified in attribute certificates issued by an Attribute Authority; or/and
- assertions signed by a third party.

#### Syntax

The SignerRoleV2 qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<xsd:element name="SignerRoleV2" type="SignerRoleV2Type"/>
<xsd:complexType name="SignerRoleV2Type">
    <xsd:sequence>
        <xsd:element ref="ClaimedRoles" minOccurs="0"/>
        <xsd:element ref="CertifiedRolesV2" minOccurs="0"/>
        <xsd:element ref="SignedAssertions" minOccurs="0"/>
    </xsd:sequence>
</xsd:complexType>
<rpre><xsd:element name="ClaimedRoles" type="ClaimedRolesListType"/>
<xsd:element name="CertifiedRolesV2" type="CertifiedRolesListTypeV2"/>
<xsd:element name="SignedAssertions" type="SignedAssertionsListType"/>
<rsd:complexType name="ClaimedRolesListType">
    <xsd:sequence>
        <xsd:element name="ClaimedRole" type="AnyType" maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CertifiedRolesListTypeV2">
    <xsd:sequence>
       <xsd:element name="CertifiedRole" type="CertifiedRoleTypeV2" maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CertifiedRoleTypeV2">
    <xsd:choice>
        <xsd:element ref="X509AttributeCertificate"/>
        <xsd:element ref="OtherAttributeCertificate"/>
    </xsd:choice>
</xsd:complexType>
<xsd:element name="X509AttributeCertificate" type="EncapsulatedPKIDataType"/>
<xsd:element name="OtherAttributeCertificate" type="AnyType"/>
<re><xsd:complexType name="SignedAssertionsListType">
    <xsd:sequence>
       <xsd:element ref="SignedAssertion" maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
```

<xsd:element name="SignedAssertion" type="AnyType"/>

The ClaimedRoles element shall contain a non-empty sequence of roles claimed by the signer but which are not certified.

Additional content types may be defined on a domain application basis and be part of this element.

NOTE 1: The namespaces given to the corresponding XML schemas allow their unambiguous identification in the case these attributes are expressed in XML syntax (e.g. SAML assertions [i.9] of different versions).

The CertifiedRolesV2 element shall contain a non-empty sequence of certified attributes, which shall be one of the following:

- the base-64 encoding of DER-encoded X509 attribute certificates conformant to Recommendation ITU-T X.509 [4] issued to the signer, within the X509AttributeCertificate element; or
- attribute certificates (issued, in consequence, by Attribute Authorities) in different syntax than the one specified in Recommendation ITU-T X.509 [4], within the OtherAttributeCertificate element. The definition of specific OtherAttributeCertificate is outside of the scope of the present document.

The SignedAssertions element shall contain a non-empty sequence of assertions signed by a third party.

NOTE 2: A signed assertion is stronger than a claimed attribute, since a third party asserts with a signature that the attribute of the signer is valid. However, it is less restrictive than an attribute certificate.

The definition of specific content types for SignedAssertions is outside of the scope of the present document.

31

NOTE 3: A possible content can be a signed SAML [i.9] assertion.

Empty SignerRoleV2 qualifying properties shall not be generated.

### 5.2.7 Countersignatures

#### 5.2.7.1 Countersignature identifier in Type attribute of ds:Reference

The present document defines the following URI value:

• http://uri.etsi.org/01903#CountersignedSignature.

A XAdES signature containing a ds: Reference element whose Type attribute has this value shall indicate that it is a countersignature of the signature referenced by this element.

The ds:Reference element shall be built so that the countersignature signs the ds:SignatureValue element of the countersigned signature.

All the XMLDSIG rules shall apply in the processing of the aforementioned ds:Reference element.

NOTE: The only purpose of this definition is to serve as an easy identification of a signature as being a countersignature.

# 5.2.7.2 Enveloped countersignatures: the CounterSignature qualifying property

#### Semantics

The CounterSignature qualifying property shall be an unsigned qualifying property that qualifies the signature.

The CounterSignature qualifying property shall contain one countersignature of the XAdES signature where CounterSignature is incorporated. This countersignature may also be a XAdES signature.

#### Syntax

The CounterSignature qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

NOTE 1: The Id attribute has been incorporated in the definition of CounterSignatureType for allowing this unsigned property to be referenced by a URI in case the signature uses indirect incorporation of properties and an electronic time-stamp container needs to refer to the counter-signature through an Include element.

The content of this qualifying property shall be a XMLDSIG [1] or XAdES signature whose ds:SignedInfo shall contain one ds:Reference element referencing the ds:SignatureValue element of the embedding and countersigned XAdES signature.

The content of the ds:DigestValue in the aforementioned ds:Reference element of the countersignature shall be the base-64 encoded digest of the complete (and canonicalized) ds:SignatureValue element (i.e. including the starting and closing tags) of the embedding and countersigned XAdES signature.

Other ds:Reference elements referencing other data objects may be added to the countersignature.

NOTE 2: This includes, for instance, ds:Reference elements referencing the ds:SignatureValue elements of previously existent CounterSignature elements. This allows for building arbitrarily long chains of explicit countersignatures.

32

A countersignature may itself be signed using a CounterSignature qualifying property, which shall have a ds:Reference element referencing the ds:SignatureValue of the first countersignature, built as described above.

NOTE 3: This is an alternative way of constructing arbitrarily long series of countersignatures, each one signing the ds:SignatureValue element of the one where it is directly embedded.

Figure 1 illustrates this qualifying property and its relationship with the countersigned XAdES signature.

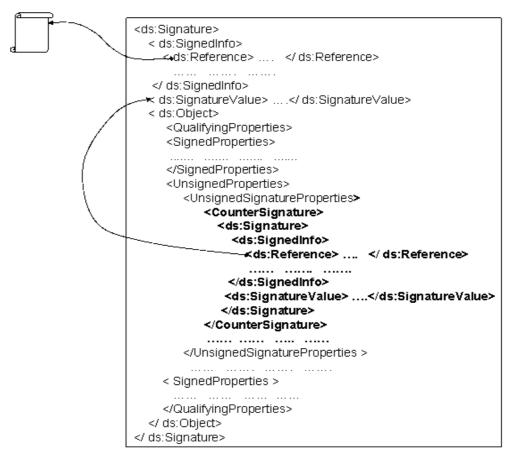


Figure 1: Use of CounterSignature element

### 5.2.8 Time-stamps on signed data objects

### 5.2.8.1 The AllDataObjectsTimeStamp qualifying property

#### Semantics

The AllDataObjectsTimeStamp qualifying property shall be a signed qualifying property that qualifies signed data objects.

The AllDataObjectsTimeStamp qualifying property shall encapsulate one or more electronic time-stamps, generated before the signature production, whose message imprint computation input is the concatenation of all the objects obtained after processing as specified in XMLDSIG [1] clause 4.4.3.2 all the ds:Reference elements within the ds:SignedInfo except the one referencing the SignedProperties element, in their order of appearance.

#### Syntax

The AllDataObjectsTimeStamp qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

33

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

<rpre><xsd:element name="AllDataObjectsTimeStamp" type="XAdESTimeStampType"/>

The Implicit mechanism (see clause 5.1.4.4.1) shall be used for generating this qualifying property.

The input to the computation of the message imprint shall be the result of processing all the ds:Reference elements within the ds:SignedInfo except the one referencing the SignedProperties element, in their order of appearance, as follows:

- 1) process the retrieved ds:Reference element according to the reference-processing model of XMLDSIG [1] clause 4.4.3.2;
- 2) if the result is a XML node set, canonicalize it as specified in clause 4.5; and
- 3) concatenate the resulting octets to those resulting from previously processed ds:Reference elements in ds:SignedInfo.
- NOTE: Values of data objects referenced by ds:Reference elements present within signed ds:Manifest do not contribute to the message imprint computation input. However, the digest values of data objects that are referenced by ds:Reference elements within ds:Manifest elements that are referenced by ds:Reference elements within ds:SignedInfo, do contribute to the message imprint computation input.

### 5.2.8.2 The IndividualDataObjectsTimeStamp qualifying property

#### Semantics

The IndividualDataObjectsTimeStamp qualifying property shall be a signed qualifying property that qualifies signed data objects.

The IndividualDataObjectsTimeStamp qualifying property shall encapsulate one or more electronic timestamps, generated before the signature production, whose message imprint computation input is the concatenation of the objects obtained after processing as specified in XMLDSIG [1] clause 4.4.3.2 some of the ds:Reference elements within the ds:SignedInfo or also signed ds:Manifest.

The set of ds:Reference elements processed shall not include the one referencing the SignedProperties element.

#### **Syntax**

The IndividualDataObjectsTimeStamp qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

<xsd:element name="IndividualDataObjectsTimeStamp" type="XAdESTimeStampType"/>

The explicit (Include) mechanism shall be used for generating this qualifying property.

The Include elements shall be composed to refer to those ds:Reference elements referencing the data objects that have to be time-stamped.

The referencedData attribute shall be present in each and every Include element, and set to "true".

The message imprint computation input shall be the result of processing the selected ds:Reference within ds:SignedInfo or also within a signed ds:Manifest as follows:

1) process the retrieved ds: Reference element according to the reference-processing model of XMLDSIG [1], clause 4.4.3.2;

- 2) if the result is a XML node set, canonicalize it as specified in clause 4.5; and
- 3) concatenate the resulting octets to those resulting from previously processed ds:Reference elements.

34

### 5.2.9 The SignaturePolicyIdentifier qualifying property

#### 5.2.9.1 Semantics and syntax

#### Semantics

The SignaturePolicyIdentifier qualifying property shall be a signed qualifying property qualifying the signature.

The SignaturePolicyIdentifier qualifying property shall contain either an explicit identifier of a signature policy or an indication that there is an implied signature policy that the relying party should be aware of.

NOTE 1: ETSI TS 119 172-1 [i.7] specifies a framework for signature policies.

#### Syntax

The SignaturePolicyIdentifier qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

<xsd:element name="SignaturePolicyIdentifier" type="SignaturePolicyIdentifierType"/>

```
<xsd:complexType name="SignaturePolicyIdentifierType">
  <xsd·choice>
    <rpre><xsd:element name="SignaturePolicyId" type="SignaturePolicyIdType"/>
    <xsd:element name="SignaturePolicyImplied"/>
  </xsd:choice>
</xsd:complexType>
<rsd:complexType name="SignaturePolicyIdType">
  <xsd:sequence>
    <xsd:element name="SigPolicyId" type="ObjectIdentifierType"/>
    <xsd:element ref="ds:Transforms" minOccurs="0"/>
    <xsd:element name="SigPolicyHash" type="DigestAlgAndValueType"/>
    <xsd:element name="SigPolicyQualifiers"</pre>
     type="SigPolicyQualifiersListType" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="SigPolicyQualifiersListType">
  <xsd:sequence>
    <rrd:element name="SigPolicyQualifier" type="AnyType"
     maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

The SignaturePolicyId element shall be used for referencing the signature policy explicitly.

The SigPolicyId element shall uniquely identify a specific version of the signature policy.

The ds:Transforms element shall contain the transformations performed on the signature policy document before computing its hash. The processing model for these transformations shall be as described in XMLDSIG [1].

The SigPolicyHash element shall contain the identifier of the hash algorithm and the hash value of the object obtained after processing SigPolicyId and ds: Transforms if present.

The present document defines a new transform, which shall be identified by setting the ds:Transform's Algorithm attribute's value to:

http://uri.etsi.org/01903/v1.3.2/SignaturePolicy/SPDocDigestAsInSpecification.

This transform shall indicate that the hash value of the signature policy document has been computed as specified in a certain technical specification.

If this transform is used, then the SignaturePolicyIdentifier shall be qualified at least by the SPDocSpecification qualifier, specified in clause 5.2.9.2, which identifies the aforementioned technical specification.

NOTE 2: This transform can be used when the technical specification defines a mechanism for computing the hash value of the signature policy document that is not easily implementable using widely used XML technologies (e.g. XPath), as can occur, for instance, when the signature policy document is DER-encoded ASN.1.

35

This transform shall not be used in elements different than SignaturePolicyId element.

The SigPolicyQualifier element may contain additional information qualifying the signature policy identifier.

The SigPolicyQualifiers element shall contain one or more qualifiers of the signature policy.

The SigPolicyQualifiers element may contain one or more qualifiers of the same type.

The SignaturePolicyImplied empty element shall indicate that the data object(s) being signed and other external data imply the signature policy.

NOTE 3: The SignaturePolicyImplied element can be used when the signature policy can be unambiguously derived from the semantics of the type of data object(s) being signed, and some other information.

#### 5.2.9.2 Signature policy qualifiers

#### **Semantics**

Three qualifiers for the signature policy have been identified so far:

- A URL where a copy of the signature policy document can be obtained (SPURI element, defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>).
- A user notice that should be displayed when the signature is validated (SPUserNotice element, defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>).
- An identifier of the technical specification that defines the syntax used for producing the signature policy document (SPDocSpecification element, defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>).

#### Syntax

The SPURI and SPUserNotice elements shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and are copied below for information.

NOTE 1: These elements are defined within the namespace whose URI is http://uri.etsi.org/01903/v1.3.2#.

```
<rpre><xsd:element name="SPURI" type="xsd:anyURI"/>
<rpre><xsd:element name="SPUserNotice" type="SPUserNoticeType"/>
<rsd:complexType name="SPUserNoticeType">
  <xsd:sequence>
    <xsd:element name="NoticeRef" type="NoticeReferenceType"</pre>
      minOccurs="0"/>
    <xsd:element name="ExplicitText" type="xsd:string"</pre>
      minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<rsd:complexType name="NoticeReferenceType">
  <xsd:sequence>
    <rpre><xsd:element name="Organization" type="xsd:string"/>
    <xsd:element name="NoticeNumbers" type="IntegerListType"/>
  </xsd:sequence>
</xsd:complexType>
<rpre><xsd:complexType name="IntegerListType">
```

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

The SPURI element shall contain a URL value where a copy of the signature policy document can be obtained.

NOTE 2: This URL can reference, for instance, a remote site (which can be managed by an entity entitled for this purpose) from where (signing/validating) applications can retrieve the signature policy document.

36

The SPUserNotice element shall contain information that is intended for being displayed whenever the signature is validated.

The ExplicitText element shall contain the text of the notice to be displayed.

NOTE 3: Other notices can come from the organization issuing the signature policy.

The NoticeRef element shall name an organization and shall identify by numbers (NoticeNumbers element) a group of textual statements prepared by that organization, so that the application could get the explicit notices from a notices file.

The SPDocSpecification shall identify the technical specification that defines the syntax used for producing the signature policy document.

The SPDocSpecification shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

NOTE 4: This element is defined within the namespace whose URI is http://uri.etsi.org/01903/v1.4.1#.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"

```
The preamble of the XML Schema file also includes the following namespace declaration:
    xmlns:xades="http://uri.etsi.org/01903/v1.3.2#",
    which assigns the prefix "xades" to the namespace whose URI is shown in the declaration.
-->
```

<xsd:element name="SPDocSpecification" type="xades:ObjectIdentifierType"/>

If the technical specification is identified using an OID, then the Identifier child shall contain a URN encoding this OID as specified in IETF RFC 3061 [8], and its QualifierType attribute shall be present with its value set to "OIDAsURN".

If the technical specification is identified using a URI, then the Identifier child shall contain this URI and its QualifierType attribute shall not be present.

NOTE 5: This qualifier allows identifying whether the signature policy document is human readable, XML encoded, or ASN.1 encoded, by identifying the specific technical specifications where these formats will be defined.

### 5.2.10 The SignaturePolicyStore qualifying property

#### Semantics

The SignaturePolicyStore qualifying property shall be an unsigned qualifying property qualifying the signature.

The SignaturePolicyStore qualifying property shall contain either:

- the signature policy document which is referenced in the SignaturePolicyIdentifier qualifying property so that the signature policy document can be used for offline and long-term validation; or
- a URI referencing a local store where the signature policy document can be retrieved.

#### Syntax

The SignaturePolicyStore shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

37

The SignaturePolicyDocument element shall contain the base-64 encoded signature policy.

The SigPolDocLocalURI element shall have as value the URI referencing a local store where the present document can be retrieved.

NOTE 1: Contrary to the SPURI, the SigPolDocLocalURI points to a local file.

The SPDocSpecification element shall identify the technical specification that defines the syntax used for producing the signature policy document.

- NOTE 2: It is the responsibility of the entity incorporating the signature policy to the signature-policy-store to make sure that the correct document is securely stored.
- NOTE 3: Being an unsigned qualifying property, it is not protected by the digital signature. If the SignaturePolicyIdentifier qualifying property is incorporated into the signature and contains the SigPolicyHash element with the digest value of the signature policy document, any alteration of the signature policy document present within SignaturePolicyStore or within a local store, would be detected by the failure of the digests comparison.

### 5.3 The SignatureTimeStamp qualifying property

#### Semantics

The SignatureTimeStamp qualifying property shall be an unsigned qualifying property qualifying the signature.

The SignatureTimeStamp qualifying property shall encapsulate one or more electronic time-stamps time-stamping the ds:SignatureValue element.

#### **Syntax**

The SignatureTimeStamp qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

<xsd:element name="SignatureTimeStamp" type="XAdESTimeStampType"/>

The Implicit mechanism shall be used for generating this qualifying property.

The input to the electronic time-stamp's message imprint computation shall be built as indicated below:

- 1) take the ds:SignatureValue element and its contents; and
- 2) canonicalize it as specified in clause 4.5.

### 5.4 Qualifying Properties for validation data values

### 5.4.1 The CertificateValues qualifying property

### Semantics

The CertificateValues qualifying property shall be an unsigned qualifying property qualifying the signature.

The CertificateValues qualifying property:

- 1) Shall contain the certificate of the trust anchor, if such certificate does exist and if it is not present within the ds:KeyInfo. If this certificate is present within the ds:KeyInfo, it should not be included.
- 2) Shall contain the CA certificates within the signing certificate path that are not present within the ds:KeyInfo. The certificates present within ds:KeyInfo element should not be included.
- 3) Shall contain the signing certificate if it is not present within the ds:KeyInfo. If this certificate is present within the ds:KeyInfo, it should not be included.
- 4) Shall contain certificates used to sign revocation status information (e.g. CRLs or OCSP responses) of certificates in 1), 2), and 3), and certificates within their respective certificate paths that are not present in the signature. Certificate values present within the signature, including certificate values within the revocation status information themselves should not be included.
- 5) Shall not contain CA certificates that pertain exclusively to the certificate paths of certificates used to sign attribute certificates or signed assertions within SignerRoleV2, or electronic time-stamps. And
- 6) May contain a set of certificates used to validate any countersignature incorporated into the XAdES signature that are not present in other elements of the XAdES signature or its countersignatures. This set may include any of the certificates listed in 1), 2), 3) and 4) referred to signing certificates of countersignatures instead of the signing certificate of the XAdES signature. The certificates present elsewhere in the XAdES signature or its countersignatures should not be included.

#### **Syntax**

The CertificateValues qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

The EncapsulatedX509Certificate element shall contain the base-64 encoding of a DER-encoded X.509 certificate.

The OtherCertificate element is a placeholder for potential future new formats of certificates.

NOTE: Should XML electronic time-stamps based in XMLDSIG be standardized and spread, this type can also be used to contain the certification chain for any TSUs providing such electronic time-stamps, if these certificates are not already present in the electronic time-stamps themselves as part of the TSUs' signatures. In this case, an element of this type can be added as an unsigned property to the XML electronic time-stamp using the incorporation mechanisms defined in the present document.

### 5.4.2 The RevocationValues qualifying property

#### Semantics

The RevocationValues qualifying property shall be an unsigned qualifying property that qualifies the signature.

The RevocationValues qualifying property:

- 1) Shall contain revocation values corresponding to CA certificates within the signing certificate path if they are not present within the ds:KeyInfo. It shall not contain a revocation value for the trust anchor. The revocation values present within ds:KeyInfo element should not be included.
- 2) Shall contain a revocation value for the signing certificate if it is not present within the ds:KeyInfo. If it is present within ds:KeyInfo element, it should not be included.
- May contain revocation values corresponding to certificates used to sign CRLs or OCSP responses of 1) and 2), and certificates within their respective certificate paths. The revocation values present within ds:KeyInfo element should not be included.
- 4) Shall not contain revocation values corresponding to CA certificates that pertain exclusively to the certificate paths of certificates used to sign attribute certificates or signed assertions within SignerRoleV2, or electronic time-stamps. And
- 5) May contain revocation values corresponding to the signing certificate of any countersignature incorporated into the XAdES signature as well as to the CA certificates in its certificate path. This set may include any of the revocation values listed in 1), 2), and 3) referred to signing certificates of countersignatures instead of the signing certificate of the XAdES signature. However, those revocation values among the aforementioned ones that are already present in other elements of the XAdES signature should not be included.

#### **Syntax**

The RevocationValues qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<rpre><xsd:element name="RevocationValues" type="RevocationValuesType"/>
<xsd:complexType name="RevocationValuesType">
  <xsd:sequence>
    <xsd:element name="CRLValues" type="CRLValuesType"</pre>
      minOccurs="0"/>
    <xsd:element name="OCSPValues" type="OCSPValuesType"</pre>
     minOccurs="0"/>
    <rpre><xsd:element name="OtherValues" type="OtherCertStatusValuesType"</pre>
      minOccurs="0"/>
  </xsd:sequence>
  <xsd:attribute name="Id" type="xsd:ID" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CRLValuesType">
  <xsd:sequence>
     <rpre><xsd:element name="EncapsulatedCRLValue"</pre>
       type="EncapsulatedPKIDataType"
       maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<rsd:complexType name="OCSPValuesType">
  <xsd:sequence>
      <xsd:element name="EncapsulatedOCSPValue"</pre>
        type="EncapsulatedPKIDataType" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

CRLValues element shall contain a sequence of encoded X.509 CRLs [15].

Each EncapsulatedCRLValue child of CRLValues element shall contain the base-64 encoding of a DER-encoded X.509 CRL [15].

Should the validation data contain one or more Delta CRLs, the CRLValues element shall contain the set of CRLs required to provide complete revocation lists.

40

OCSPValues element shall contain a sequence of encoded OCSP responses [6].

Each EncapsulatedOCSPValue child of OCSPValues element shall contain the base-64 encoding of a DER-encoded OCSPResponse defined in IETF RFC 6960 [6].

The OtherValues element provides a placeholder for other revocation information that can be used in the future. Their semantics and syntax are outside the scope of the present document.

NOTE: Should XML electronic time-stamps based in XMLDSIG be standardized and spread, this type can also serve to contain the values of revocation data including CRLs and OCSP responses for any TSUs providing such electronic time-stamps, if they are not already present in the electronic time-stamps themselves as part of the TSUs' signatures. In this case, an element of this type can be added as an unsigned property to the XML electronic time-stamp using the incorporation mechanisms defined in the present document.

### 5.4.3 The AttrAuthoritiesCertValues qualifying property

### Semantics

The AttrAuthoritiesCertValues qualifying property shall be an unsigned qualifying property that qualifies the signature.

The AttrAuthoritiesCertValues qualifying property:

- 1) shall contain the value(s) of the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature;
- 2) shall contain, if not present within the signature, the value(s) of the certificate(s) for the trust anchor(s) if such certificates exist, and the CA certificate values within path of the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. Certificate values present within the signature should not be included; and
- 3) may contain the certificate values used to sign CRLs or OCSP responses and the certificates values within their respective certificate paths, used for validating the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. Certificate values present within the signature, including certificate values within the revocation status information themselves should not be included.

#### Syntax

The AttrAuhtoritiesCertValues qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
```

```
<xsd:element name="AttrAuthoritiesCertValues" type="CertificateValuesType"/>
```

### 5.4.4 The AttributeRevocationValues qualifying property

### Semantics

The AttributeRevocationValues qualifying property shall be an unsigned qualifying property that qualifies the signature.

The AttributeRevocationValues qualifying property:

- shall contain the revocation value(s) of the certificate(s) that sign the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature;
- 2) shall contain, if not incorporated into the signature, the revocation values corresponding to CA certificates within the path(s) of the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. It shall not contain revocation values for the trust anchors. Values already incorporated into the signature should not be included; and
- 3) may contain the revocation values on certificates used to sign CRLs or OCSP responses and certificates within their respective certificate paths, which are used for validating the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. Revocation values already incorporated into the signature should not be included.

### Syntax

The AttributeRevocationValues qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

<xsd:element name="AttributeRevocationValues" type="RevocationValuesType"/>

Should the validation data contain one or more Delta CRLs, this qualifying property shall include the set of CRLs required to provide complete revocation lists.

### 5.5 Qualifying properties for long term availability and integrity of validation material

### 5.5.1 The TimeStampValidationData qualifying property

### 5.5.1.1 Semantics and syntax

#### Semantics

The TimeStampValidationData qualifying property shall be an unsigned qualifying property qualifying the signature.

The TimeStampValidationData qualifying property shall be a container for validation data required for carrying a full verification of the electronic time-stamps embedded within any of the different electronic time-stamp container qualifying properties defined in the present document.

The TimeStampValidationData qualifying property shall allow incorporating certificate values.

The TimeStampValidationData qualifying property shall allow incorporating revocation values.

#### Syntax

The TimeStampValidationData qualifying property shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"

The preamble of the XML Schema file also includes the following namespace declaration: xmlns:xades="http://uri.etsi.org/01903/v1.3.2#", which assigns the prefix "xades" to the namespace whose URI is shown in the declaration. -->

```
<xsd:element name="TimeStampValidationData" type="ValidationDataType"/>
```

The CertificateValues child element shall contain certificates used in the full verification of electronic timestamps embedded in one XAdES time-stamp container.

42

The CertificateValues child element may contain all the certificates required for a full verification of the electronic time-stamps.

The CertificateValues child element may also contain only a part of them if the rest are present in other place of the XAdES signature (for instance within the electronic time-stamp itself, or in other TimeStampValidationData created for other electronic time-stamps).

The RevocationValues child element shall contain revocation values used in the full verification of electronic time-stamps embedded in one XAdES time-stamp container.

The RevocationValues child element may contain all the revocation values required for a full verification of the electronic time-stamps.

The RevocationValues child element may also contain only a part of them if the rest are present in other place of the XAdES signature (for instance within the electronic time-stamp itself, or in other TimeStampValidationData created for other electronic time-stamps).

The Id attribute shall be used for referencing this element from elsewhere.

The URI attribute, when present, shall be used for referencing the time-stamp container of the electronic time-stamps whose validation data is contained within this element.

### 5.5.1.2 Use of URI attribute

When a XAdES signature requires including all the validation data required for a full verification of an electronic timestamp embedded in any of the following qualifying properties containing electronic time-stamps: SignatureTimeStamp, RefsOnlyTimeStampV2, SigAndRefsTimeStampV2, ArchiveTimeStamp qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, and part of that validation data is not present in other parts of the signature, then:

- 1) a new TimeStampValidationData qualifying property shall be created containing the missing validation data;
- 2) if direct incorporation as specified in clause 4.4 of the present document is used, the TimeStampValidationData qualifying property shall be added as a child of UnsignedSignatureProperties element immediately after the respective electronic time-stamp container element;
- 3) if the TimeStampValidationData qualifying property is not incorporated immediately after the respective electronic time-stamp container element (this may only happen when indirect incorporation of properties as specified in clause 4.4 is used), then the URI attribute shall be present and shall reference the specific container encapsulating the electronic time-stamps whose validation data the new TimeStampValidationData qualifying property will contain. Otherwise the URI attribute should not be present.

NOTE 1: In the case that the TimeStampValidationData qualifying property is incorporated immediately after the respective electronic time-stamp container element, the URI attribute is not needed because the identification of the related electronic time-stamp container is implicit in the relative position of both elements, the qualifying property containing the electronic time-stamp and the TimeStampValidationData qualifying property.

43

When a XAdES requires including all the validation data required for a full verification of an electronic time-stamp embedded in any of the following qualifying properties containing electronic time-stamps: IndividualDataObjectsTimeStamp or AllDataObjectTimeStamp, and part of that validation data is not present in other parts of the signature, then:

- 1) a new TimeStampValidationData qualifying property shall be created containing the missing validation data;
- 2) it shall be added as the first child of the UnsignedSignatureProperties element; and
- 3) the URI attribute element shall be present and shall reference the specific signed container encapsulating the electronic time-stamps whose validation data the new TimeStampValidationData qualifying property will contain.
- NOTE 2: The treatment is different than for the other electronic time-stamps containers because first, there can be more than one signed electronic time-stamps containers, and second IndividualDataObjectsTimeStamp and AllDataObjectTimeStamp are signed qualifying properties whereas the corresponding TimeStampValidationData qualifying properties are unsigned and they appear as children of different parents.

When validating a XAdES signature, in the case that the TimeStampValidationData qualifying property appears immediately after one of the following qualifying properties containing electronic time-stamps: SignatureTimeStamp, RefsOnlyTimeStampV2, SigAndRefsTimeStampV2, and ArchiveTimeStamp qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.4.1#</a>, regardless direct or indirect incorporation is used, if the value in URI attribute does not reference the electronic time-stamps container that precedes the TimeStampValidationData qualifying property, this URI attribute's value shall be ignored.

When validating a XAdES signature, in the case that the TimeStampValidationData qualifying property does not appear immediately after one qualifying property containing electronic time-stamps, if the value of URI attribute does not reference a qualifying property containing electronic time-stamps, then the application shall ignore this value and may try to use the validation material within the TimeStampValidationData in the validation of the different electronic time-stamps incorporated to the signature.

NOTE 3: This behaviour is coherent with the fact of considering the value of the URI attribute as a hint that may help signature validation applications to establish a correspondence between the signing certificate of a certain electronic time-stamp and part of its validation data. However, applications can also establish this correspondence without the help of such an URI, and consequently, if the value of the URI attribute is wrong, still the material may correspond to some of the electronic time-stamps incorporated into the signature, and signature validation applications would be able to successfully use that material in the validation of the aforementioned electronic time-stamps.

# 5.5.2 The ArchiveTimeStamp qualifying property defined in namespace with URI "http://uri.etsi.org/01903/v1.4.1#"

### 5.5.2.1 Semantics and syntax

### Semantics

The ArchiveTimeStamp qualifying property shall be an unsigned qualifying property qualifying the signature.

The ArchiveTimeStamp qualifying property shall encapsulate electronic time-stamps computed on all the data objects incorporated into the XAdES signature at the time of generating each electronic time-stamp.

NOTE 1: The purpose of this element is to tackle the long term availability and integrity of the validation material.

### Syntax

The ArchiveTimeStamp qualifying property shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

44

<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"

The preamble of the XML Schema file also includes the following namespace declaration: xmlns:xades="http://uri.etsi.org/01903/v1.3.2#", which assigns the prefix "xades" to the namespace whose URI is shown in the declaration. -->

<rpre><xsd:element name="ArchiveTimeStamp" type="xades:XAdESTimeStampType"/>

Should the XAdES signature incorporate a CounterSignature unsigned qualifying property, all the required material for conducting the validation of the counter-signature shall be incorporated into the XAdES signature before generating the first ArchiveTimeStamp qualifying property. This may be done within the counter-signature itself or within the containers available within the counter-signature.

The contents of the CounterSignature qualifying property should not be changed, once it has been time-stamped by the ArchiveTimeStamp.

- NOTE 2: Should a CounterSignature qualifying unsigned property be time-stamped by the ArchiveTimeStamp, any ulterior change of their contents (by addition of unsigned qualifying properties if the counter-signature is a XAdES signature, for instance) would make the validation of the ArchiveTimeStamp, and in consequence of the countersigned XAdES signature, fail.
- NOTE 3: Under these circumstances, the detached counter-signature mechanism specified in clause 5.2.7.1 can be used.
- NOTE 4: The present document allows to counter-sign a previously time-stamped countersignature with another CounterSignature qualifying property added to the embedding XAdES signature after the time-stamp container.
- NOTE 5: Once an ArchiveTimeStamp qualifying property is added to the signature, any ulterior addition of a ds:Object to the signature would make the verification of such time-stamp fail.

Depending whether all the unsigned qualifying properties time-stamped by the electronic time-stamp and the ArchiveTimeStamp qualifying property itself have the same parent or not, its contents may be different. Details are given in clauses 5.5.2.2 and 5.5.2.3.

### 5.5.2.2 Not distributed case

If ArchiveTimeStamp and all the unsigned qualifying properties time-stamped by its electronic time-stamp have the same parent, this qualifying property shall use the implicit mechanism for identifying all the time-stamped data objects.

The input to the electronic time-stamp's message imprint computation shall be built following the algorithm specified below:

- 1) Initialize the final octet stream as an empty octet stream.
- 2) Take all the ds:Reference elements in their order of appearance within ds:SignedInfo referencing whatever the signer wants to sign including the SignedProperties element. Process each one as indicated below:
  - Process the retrieved ds : Reference element according to the reference processing model of XMLDSIG [1] clause 4.4.3.2.
  - If the result is a XML node set, canonicalize it as specified in clause 4.5. And
  - Concatenate the resulting octets to the final octet stream.

3) Take the following XMLDSIG elements in the order they are listed below, canonicalize each one as specified in clause 4.5, and concatenate each resulting octet stream to the final octet stream:

45

- The ds:SignedInfo element.
- The ds:SignatureValue element.
- The ds:KeyInfo element, if present.
- 4) Take the unsigned signature qualifying properties that appear before the current ArchiveTimeStamp in the order they appear within the UnsignedSignatureProperties, canonicalize each one as specified in clause 4.5, and concatenate each resulting octet stream to the final octet stream. While concatenating, the following rules apply:
  - a) the CertificateValues qualifying property shall be incorporated into the signature if it is not already present and the signature misses some of the certificates listed in clause 5.4.1 that are required to validate the XAdES signature;
  - b) the RevocationValues qualifying property shall be incorporated into the signature if it is not already present and the signature misses some of the revocation data listed in clause 5.4.2 that are required to validate the XAdES signature;
  - c) the AttrAuthoritiesCertValues qualifying property shall be incorporated into the signature if not already present and the following conditions are true: attribute certificate(s) or signed assertions have been incorporated into the signature, and the signature misses some certificates required for their validation; and
  - d) the AttributeRevocationValues qualifying property shall be incorporated into the signature if not already present and the following conditions are true: attribute certificates or signed assertions have been incorporated into the signature, and the signature misses some revocation values required for their validation.
- 5) Take all the ds:Object elements except the one containing QualifyingProperties element, in their order of appearance. Canonicalize each one as specified in clause 4.5, and concatenate each resulting octet stream to the final octet stream.

### 5.5.2.3 Distributed case

If ArchiveTimeStamp and some of the unsigned qualifying properties covered by some of its electronic timestamps do not have the same parent, the explicit (based on Include elements) mechanism shall be used only for referencing the unsigned qualifying properties.

One Include element shall be generated for each unsigned qualifying property already incorporated into the XAdES signature, which will consequently be time-stamped by the electronic time-stamp.

These Include elements shall be added in the same order as the unsigned qualifying properties are processed for contributing to the input of the electronic time-stamp's message imprint computation.

No Include elements shall be generated for any other XMLDSIG element present in the signature.

The input to the electronic time-stamp's message imprint computation shall be built as for the not distributed case (clause 5.5.2.2) substituting step 4 by the one specified below:

- 1) Take the unsigned signature qualifying properties present in the signature, extract comment nodes, canonicalize each unsigned signature qualifying property as specified in clause 4.5, and concatenate each resulting octet stream to the final octet stream. While concatenating, the following rules apply:
  - a) The CertificateValues qualifying property shall be incorporated into the signature if it is not already present and the signature misses some of the certificates listed in clause 5.4.1 that are required to validate the XAdES signature.
  - b) The RevocationValues qualifying property shall be incorporated into the signature if it is not already present and the signature misses some of the revocation data listed in clause 5.4.2 that are required to validate the XAdES signature.

c) The AttrAuthoritiesCertValues qualifying property shall be incorporated into the signature if not already present and the following conditions are true: attribute certificate(s) or signed assertions have been incorporated into the signature, and the signature misses some certificates required for their validation. And

46

d) The AttributeRevocationValues qualifying property shall be incorporated into the signature if not already present and the following conditions are true: attribute certificates or signed assertions have been incorporated into the signature, and the signature misses some revocation values required for their validation.

### 5.5.3 The RenewedDigests qualifying property

#### Semantics

The RenewedDigests qualifying property is an unsigned qualifying property qualifying the signature.

The RenewedDigests qualifying property may be used when the XAdES signature contains one or more signed ds:Manifest referencing data objects that are detached from the signature.

The RenewedDigests qualifying property shall not be used if the XAdES signature does not contain any signed ds:Manifest referencing data objects that are detached from the signature.

The RenewedDigests qualifying property shall contain the digest values of the aforementioned indirectly signed detached data objects computed with a different digest algorithm than the one used for computing the digest values present within the ds:Manifest's ds:Reference children.

- NOTE 1: When a certain digest algorithm is becoming weak, one or more detached data objects have been indirectly signed using that algorithm with a signed ds:Manifest, and when suspected that some of the aforementioned data objects might be substituted by others with the same digest value due to the weakness of the digest algorithm, RenewedDigests element can be incorporated into the XAdES signature including the digest values of the aforementioned data objects computed with a different algorithm. This will ensure that any substitution of a detached document indirectly signed through a signed ds:Manifest, will be detected even if the digest algorithm used for computing the references within the aforementioned ds:Manifest, has been broken.
- NOTE 2: Algorithms used for computing digest values in RenewedDigests elements can also become weak. If this happens, new RenewedDigests elements can be generated incorporating digest values of the detached signed data objects computed with different algorithms.

### Syntax

The RenewedDigests qualifying property shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#" -->
```

```
<rpre><xsd:element name="RenewedDigests" type="RenewedDigestsType"/>
```

```
</rd>
```

The ds:DigestMethod child shall identify a digest algorithm (different than the algorithm used for computing the digest of the signed data objects referenced within a signed ds:Manifest element).

Each RecomputedDigestValue child shall contain the base-64 encoded digest value, computed with the digest algorithm indicated within the aforementioned ds:DigestMethod, of the result of processing, as specified by the reference processing model of XMLDSIG [1] clause 4.4.3.2, the corresponding ds:Reference element identified by the value of the attribute Order of this RecomputedDigestValue child (the input of the digest computation is one of the signed data objects referenced within a signed ds:Manifest element).

47

The RecomputedDigestValue's Order attribute shall identify the specific ds:Reference element that was referencing the data object whose digest value is recomputed with the digest algorithm identified in ds:DigestMethod.

The value of RecomputedDigestValue's Order attribute shall be an integer that identifies the order of appearance of the identified ds:Reference when the XAdES signature is serialized, where the value "1" is assigned to the first ds:Reference child of the ds:SignedInfo element.

When validating the signature, each RenewedDigests unsigned property shall be processed as follows:

- 1) Take the first RecomputedDigestValue element;
- 2) Take the ds:Reference element identified by the integer value within Order attribute of the taken RecomputedDigestValue element;
- 3) Process this ds:Reference element according to the reference-processing model of XMLDSIG [1] clause 4.4.3.2; if it is not possible to retrieve the referenced octets, then notify that it has not been possible to successfully retrieve this data object and continue with step 6);
- 4) Compute the digest value of the resulting octets using the digest algorithm identified in the ds:DigestMethod element;
- 5) If the digest value computed in step 4) is different from the digest value indicated by the content of the RecomputedDigestValue element, then notify that there is a mismatch in the digest value of the corresponding signed data object, and continue with step 6);
- NOTE 3: For comparing the aforementioned digest values, it needs to be taken into account that the content of RecomputedDigestValue element is a base-64 encoded digest value.
- 6) If there are RecomputedDigestValue elements that have not been yet processed, take the next RecomputedDigestValue element and go to step 2); else finalize the process.

## 6 XAdES baseline signatures

### 6.1 Signature levels

Clause 6 defines four levels of XAdES baseline signatures, intended to facilitate interoperability and to encompass the life cycle of XAdES signature, namely:

- a) B-B level provides requirements for the incorporation of signed and some unsigned qualifying properties when the signature is generated.
- b) B-T level provides requirements for the generation and inclusion, for an existing signature, of a trusted token proving that the signature itself actually existed at a certain date and time.
- c) B-LT level provides requirements for the incorporation of all the material required for validating the signature in the signature document. This level aims to tackle the long term availability of the validation material.
- d) B-LTA level provides requirements for the incorporation of electronic time-stamps that allow validation of the signature long time after its generation. This level aims to tackle the long term availability and integrity of the validation material.
- NOTE 1: ETSI TR 119 100 [i.11] provides a description on the life-cycle of a signature and the rationales on which level is suitable in which situation.

- NOTE 2: The levels c) to d) are appropriate where the technical validity of signature needs to be preserved for a period of time after signature creation where certificate expiration, revocation and/or algorithm obsolescence is of concern. The specific level applicable depends on the context and use case.
- NOTE 3: B-LTA level targets long term availability and integrity of the validation materiaof digital signatures over long term. The B-LTA level can help to validate the signature beyond many events that limit its validity (for instance, the weakness of used cryptographic algorithms, or expiration of validation data). The use of B-LTA level is considered an appropriate preservation and transmission technique for signed data.
- NOTE 4: Conformance to B-LT level, when combined with appropriate additional preservation techniques tackling the long term availability and integrity of the validation material is sufficient to allow validation of the signature long time after its generation. The assessment of the effectiveness of preservation techniques for signed data other than implementing the B-LTA level are out of the scope of the present document. The reader is advised to consider legal instruments in force and/or other standards (for example ETSI TS 101 533-1 [i.13] or IETF RFC 4998 [i.15]) that can indicate other preservation techniques. Annex C defines what needs to be taken into account when using other techniques for long term availability and integrity of validation data and incorporating a new unsigned property derived from these techniques into the signature.

### 6.2 General requirements

### 6.2.1 Algorithm requirements

The algorithms and key lengths used to generate and augment digital signatures should be as specified in ETSI TS 119 312 [i.14].

- NOTE 1: Cryptographic suites recommendations defined in ETSI TS 119 312 [i.14] can be superseded by national recommendations.
- NOTE 2: IETF RFC 6931 [i.8] defines a set of additional XML security URIs, which complement those ones defined in XMLDSIG [1].

In addition, MD5 algorithm shall not be used as digest algorithm.

### 6.2.2 Notation for requirements

The present clause describes the notation used for defining the requirements of the different XAdES signature levels.

The requirements on the qualifying properties and certain other signature's elements for each XAdES signature level are expressed in table 2. A row in the table either specifies requirements for a qualifying property, other signature's element, or a service.

A service can be provided by different qualifying properties, by other signature's elements, or by other mechanisms (service provision options hence forward). In these cases, the specification of the requirements for a service is provided by three or more rows. The first row contains the requirements of the service. The requirements for the qualifying properties, other signature's elements, and/or mechanisms used to provide the service are stated in the following rows.

Table 2 contains 8 columns. Below follows a detailed explanation of their meanings and contents:

- 1) Column "Elements/Qualifying properties/Services":
  - a) In the case where the cell identifies a Service, the cell content starts with the keyword "Service" followed by the name of the service.
  - b) In the case where the qualifying property or other signature's element provides a service, this cell contains "SPO" (for Service Provision Option), followed by the name of the qualifying property or the other signature's element.
  - c) Otherwise, this cell contains the name of the qualifying property or the other signature's element.
- 2) Colum "Presence in B-B-Level": This cell contains the specification of the presence of the qualifying property or other signature's element, or the provision of a service, for XAdES-B-B signatures.

3) Column "Presence in B-T level". This cell contains the specification of the presence of the qualifying property or other signature's element, or the provision of a service, for XAdES-B-T signatures.

- 4) Column "Presence in B-LT level". This cell contains the specification of the presence of the qualifying property or other signature's element, or the provision of a service, for XAdES-B-LT signatures.
- 5) Column "Presence in B-LTA level". This cell contains the specification of the presence of the qualifying property or other signature's element, or the provision of a service, for XAdES-B-LTA signatures. Below follows the values that can appear in columns "Presence in B-B", "Presence in B-T", "Presence in B-LTA":
  - "shall be present": means that the qualifying property or signature's element shall be incorporated to the signature, and shall be as specified in the document referenced in column "References", further profiled with the additional requirements referenced in column "Requirements", and with the cardinality indicated in column "Cardinality".
  - "shall not be present": means that the qualifying property or signature's element shall not be incorporated to the signature.
  - "may be present": means that the qualifying property or signature's element may be incorporated to the signature, and shall be as specified in the document referenced in column "References", further profiled with the additional requirements referenced in column "Requirements", and with the cardinality indicated in column "Cardinality".
  - "shall be provided": means that the service identified in the first column of the row shall be provided as further specified in the SPO-related rows. This value only appears in rows that contain requirements for services. It does not appear in rows that contain requirements for qualifying properties or signature's elements.
  - "conditioned presence": means that the incorporation to the signature of the item identified in the first column is conditioned as per the requirements referenced in column "Requirements" and requirements in specifications and clauses referenced by column "References", with the cardinality indicated in column "Cardinality".
  - "\*": means that the qualifying property or signature's element (service) identified in the first column should not be incorporated to the signature (provided) in the corresponding level. Upper signature levels may specify other requirements.
- NOTE: Incorporating an unsigned property that is marked with a "\*" into a signature can lead to cases where a higher level cannot be achieved, except by removing the corresponding unsigned property.
- 6) Column "Cardinality". This cell indicates the cardinality of the qualifying property or other signature's element. If the cardinality is the same for all the levels, only the values listed below appear. Otherwise the content specifies the cardinality for each level. See the example at the end of the present clause showing this situation. Below follows the values indicating the cardinality:
  - **0:** The signature shall not incorporate any instance of the qualifying property or the signature's element.
  - **1:** The signature shall incorporate exactly one instance of the qualifying property or the signature's element.
  - **0 or 1:** The signature shall incorporate zero or one instance of the qualifying property or the signature's element.
  - $\geq 0$ : The signature shall incorporate zero or more instances of the qualifying property or the signature's element.
  - $\geq$  1: The signature shall incorporate one or more instances of the qualifying property or the signature's element.
- 7) Column "References": This shall contain either the number of the clause specifying the qualifying property in the present document, or a reference to the document and clause that specifies the other signature's element.

8) Column "Additional notes and requirements". This cell contains numbers referencing notes and/or letters referencing additional requirements on the qualifying property or the other signature's element. Both notes and additional requirements are listed below the table.

50

Names of XML elements in the namespace whose URI is <u>http://www.w3.org/2000/09/xmldsig#</u> are preceded by prefix ds.

EXAMPLE: In table 2, the row corresponding to CompleteCertificateRefsV2 qualifying property has a value "\*" in the cells in columns "Presence in B-B level" and "Presence in B-T level", and "shall not be present" in cells in columns "Presence in B-LT level" and "Presence in B-LTA level". The cell in column "Cardinality" indicates the cardinality for each level as follows: "B-B, B-T: 0 or 1" indicates that XAdES-B-B and XAdES-B-T signatures can incorporate one instance of CompleteCertificateRefsV2 qualifying property; "B-LT, B-LTA: 0" indicates that XAdES-B-LTA do not incorporate the CompleteCertificateRefsV2 qualifying property.

## 6.3 Requirements on XAdES signature's elements, qualifying properties and services

The four XAdES signature levels specified in the present clause shall be built as specified in clause 4. The XAdES qualifying properties specified in clause 5 shall be incorporated into the signature using only the direct incorporation mechanism specified in clause 4.4.

NOTE 1: This means that all the XAdES qualifying properties remain within one single QualifyingProperties element, which in turn is the child of one ds:Object element within the signature, and that in consequence, no QualifyingPropertiesReference element is present.

Table 2 shows the presence and cardinality requirements on the signature elements, qualifying properties, and services indicated in the first column for the four XAdES baseline signature levels, namely: XAdES-B-B, XAdES-B-T, XAdES-B-LT, and XAdES-B-LTA). Additional requirements are detailed below the table suitably labelled with the letter indicated in the last column.

In XAdES baseline signatures the qualifying properties that act as electronic time-stamps containers shall encapsulate only IETF RFC 3161 [7] updated by IETF RFC 5816 [16] time-stamp tokens.

Elements/Qualifying properties/Services	Presence in B-B level	Presence in B-T level	Presence in B-LT level	Presence in B-LTA level	Cardinality	References	Additional requirements and notes
ds:KeyInfo/X509Data	shall be present	shall be present	shall be present	shall be present	1	XMLDSig [1] clause 4.5.4	a, b, c 3, 4, 5
ds:SignedInfo/ds:CanonicalizationMethod	shall be present	shall be present	shall be present	shall be present	1	XMLDSig [1] clause 4.4.1	d, e 6
ds:Reference	shall be present	shall be present	shall be present	shall be present	≥2	XMLDSig [1] clause 4.4.3	
ds:Reference/ds:Transforms	may be present	may be present	may be present	may be present	0 or 1	XMLDSig [1] clause 4.4.3.4	f, g
SigningTime	shall be present	shall be present	shall be present	shall be present	1	Clause 5.2.1	h
SigningCertificateV2	shall be present	shall be present	shall be present	shall be present	1	Clause 5.2.2	i, j 7
SigningCertificate	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
DataObjectFormat	conditioned presence	conditioned presence	conditioned presence	conditioned presence	≥ 0	Clause 5.2.4	k
DataObjectFormat/Description	may be present	may be present	may be present	may be present	0 or 1	Clause 5.2.4	 8
DataObjectFormat/ObjectIdentifier	may be present	may be present	may be present	may be present	0 or 1	Clause 5.2.4	1
DataObjectFormat/MimeType	shall be present	shall be present	shall be present	shall be present	1	Clause 5.2.4	I
DataObjectFormat/Encoding	may be present	may be present	may be present	may be present	0 or 1	Clause 5.2.4	I
DataObjectFormat'S ObjectReference attribute	shall be present	shall be present	shall be present	shall be present	1	Clause 5.2.4	I

Table 2: Requirements for XAdES-B-B, XAdES-B-T, XAdES-B-LT, and XAdES-B-LTA signatures

NOTE 2: XAdES-B-B signatures that incorporate only the elements/qualifying properties that are mandatory in table 2, and that implement the mandatory requirements, contain the lowest number of elements/qualifying properties, with the consequent benefits for interoperability.

Elements/Qualifying properties/Services	Presence in B-B level	Presence in B-T level	Presence in B-LT level	Presence in B-LTA level	Cardinality	References	Additional requirements and notes
SignerRole	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
SignerRoleV2	may be present	may be present	may be present	may be present	0 or 1	Clause 5.2.6	
CommitmentTypeIndication	may be present	may be present	may be present	may be present	≥ 0	Clause 5.2.3	
SignatureProductionPlaceV2	may be present	may be present	may be present	may be present	0 or 1	Clause 5.2.5	
SignatureProductionPlace	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
CounterSignature	may be present	may be present	may be present	may be present	≥ 0	Clause 5.2.7.2	
AllDataObjectsTimeStamp	may be present	may be present	may be present	may be present	≥ 0	Clause 5.2.8.2	10
IndividualDataObjectsTimeStamp	may be present	may be present	may be present	may be present	≥ 0	Clause 5.2.8.1	10
SignaturePolicyIdentifier	may be present	may be present	may be present	may be present	0 or 1	Clause 5.2.9	-
SignaturePolicyStore	conditioned presence	conditioned presence	conditioned presence	conditioned presence	0 or 1	Clause 5.2.10	m
SignatureTimeStamp	*	shall be present	shall be present	shall be present	B-B: ≥ 0 B-T, B-LT, B-LTA: ≥ 1	Clause 5.3	n, o 10
CertificateValues	*	*	conditioned presence	conditioned presence	0 or 1	Clause 5.4.1	p, q
CompleteCertificateRefsV2	*	*	shall not be present	shall not be present	B-B, B-T: 0 or 1 B-LT, B-LTA: 0	Clause A.1.1	j
CompleteCertificateRefs	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
AttrAuthoritiesCertValues	*	*	conditioned presence	conditioned presence	0 or 1	Clause 5.4.3	q, r
AttributeCertificateRefsV2	*	*	shall not be present	shall not be present	B-B, B-T: 0 or 1 B-LT, B-LTA: 0	Clause A.1.3	j, s
AttributeCertificateRefs	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
RevocationValues	*	*	conditioned presence	conditioned presence	0 or 1	Clause 5.4.2	t, u, v,
CompleteRevocationRefs	*	*	shall not be present	shall not be present	B-B, B-T: 0 or 1 B-LT, B-LTA: 0	Clause A.1.2	
AttributeRevocationValues	*	*	conditioned	conditioned	0 or 1	Clause 5.4.4	V, W
AttributeRevocationRefs	*	*	shall not be present	shall not be present	B-B, B-T: 0 or 1 B-LT, B-LTA: 0	Clause A.1.4	S
SigAndRefsTimeStampV2	*	*	shall not be present	shall not be present	B-B, B-T: ≥ 0 B-LT, B-LTA: 0	Clause A.1.5.1	
SigAndRefsTimeStamp	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
RefsOnlyTimeStampV2	*	*	shall not be present	shall not be present	B-B, B-T: ≥ 0 B-LT, B-LTA: 0	Clause A.1.5.2	

Elements/Qualifying properties/Services	Presence in B-B level	Presence in B-T level	Presence in B-LT level	Presence in B-LTA level	Cardinality	References	Additional requirements and notes
RefsOnlyTimeStamp	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
Service: Incorporation of validation data for electronic time-stamps	*	*	shall be provided	shall be provided	-	-	x, y 9
SPO: TimeStampValidationData	*	*	conditioned presence	conditioned presence	≥ 0	Clause 5.5.1	У
SPO: certificate and revocation values embedded in the electronic time-stamp itself	*	*	conditioned presence	conditioned presence	≥ 0	-	У
ArchiveTimeStamp (defined in namespace whose URI is "http://uri.etsi.org/01903/v1.4.1#")	*	*	*	shall be present	≥ 1	Clause 5.5.2	z, aa
ArchiveTimeStamp (defined in namespace whose URI is "http://uri.etsi.org/01903/v1.3.2#")	shall not be present	shall not be present	shall not be present	shall not be present	0	-	
RenewedDigest	*	*	*	conditioned presence	≥ 0	Clause 5.5.3	bb

Additional requirements:

a) Requirement for ds:KeyInfo/X509Data. The generator shall include the signing certificate as content of ds:KeyInfo/X509Data/X509Certificate element.

- b) Requirement for ds:KeyInfo/X509Data. In order to facilitate path-building, generators should include in the same ds:KeyInfo/X509Data element as in requirement a) all certificates not available to verifiers that can be used during path building.
- c) Requirement for ds: KeyInfo/X509Data. When the signature is to be validated through a Trusted List as specified in ETSI TS 119 612 [i.12], the generator should include all intermediary certificates forming a chain between the signing certificate and a CA present in the Trusted List, which are not available to verifiers.
- d) Requirement for ds:SignedInfo/ds:CanonicalizationMethod element. The Algorithm attribute of ds:SignedInfo's ds:CanonicalizationMethod child element shall have one of the following values:
  - "http://www.w3.org/2006/12/xml-c14n11". The corresponding canonicalization algorithm Canonical XML v1.1 (omits comments) [11] shall be supported.
  - "<u>http://www.w3.org/2001/10/xml-exc-c14n#</u>". The corresponding canonicalization algorithm Exclusive Canonicalization (omits comments) [10] shall be supported.
  - "http://www.w3.org/TR/2001/REC-xml-c14n-20010315". The corresponding canonicalization algorithm Canonical XML v1.0 (omits comments) [9] shall be supported.
  - "http://www.w3.org/2006/12/xml-c14n11#WithComments". The corresponding canonicalization algorithm Canonical XML v1.1 (with comments) [11] shall be supported.
  - "http://www.w3.org/2001/10/xml-exc-c14n#WithComments". The corresponding canonicalization algorithm Exclusive Canonicalization (with comments) [10] shall be supported. Or
  - "http://www.w3.org/TR/2001/REC-xml-c14n-20010315#WithComments". The corresponding canonicalization algorithm Canonical XML v1.0 (with comments) [9] shall be supported.
- e) Requirement for ds:SignedInfo/CanonicalizationMethod element. The generator should not use canonicalization algorithms "with comments". See note 6.
- f) Requirement for ds:Reference/ds:Transforms element. If the transform indicated by a ds:Reference/ds:Transforms's ds:Transform child element is a canonicalization, its Algorithm attribute shall have one of the values listed in the present clause, additional requirement d) and the generator should not use canonicalization algorithms "with comments".
- g) Requirement for ds:Reference/ds:Transforms element. If the transform indicated by a ds:Reference/ds:Transforms's ds:Transform child element is not a canonicalization, its Algorithm attribute should be one of the following values:
  - "http://www.w3.org/2000/09/xmldsig#base64". The corresponding Base 64 transform, whose usage within XML signatures is specified in clause 6.6.2 of [1], shall be supported.
  - "http://www.w3.org/TR/1999/REC-xpath-19991116". The corresponding XPath transform, whose usage within XML signatures is specified in clause 6.6.3 of [1], shall be supported.
  - "<u>http://www.w3.org/2000/09/xmldsig#enveloped-signature</u>". The corresponding Enveloped Signature transform, whose usage within XML signatures is specified in clause 6.6.4 of [1], shall be supported.
  - "http://www.w3.org/TR/1999/REC-xslt-19991116". The corresponding XSLT transform, whose usage within XML signatures is specified in clause 6.6.5 of [1], shall be supported.
  - "http://www.w3.org/2002/06/xmldsig-filter2". The corresponding XML-Signature XPath Filter 2.0, which is specified in [13], shall be supported. Or

- http://schemas.openxmlformats.org/package/2006/RelationshipTransform.
   The corresponding Relationships transform, which is specified in clause 12.2.4.26 of [14], shall be supported.
- h) Requirement for SigningTime. The generator shall include the claimed UTC time when the signature was generated as content of the SigningTime qualifying property.

- i) Requirement for SigningCertificateV2/Cert. The generator shall not generate Cert children's URI optional attribute.
- j) Requirement for SigningCertificateV2, CompleteCertificateRefsV2, and AttributeCertificateRefsV2. The references to certificates should not include the IssuerSerialV2 element.
- k) Requirement for DataObjectFormat. One DataObjectFormat shall be generated for each signed data object, except the SignedProperties element, and except if the signature is a baseline signature countersigning a signature. If the signature is a baseline signature countersigning another signature, and if it only signs its own signed properties and the countersigned signature, then it shall not include any DataObjectFormat signed property. If the signature is a baseline signature countersigning another signature and if it signs its own signed properties, the countersigned signature, and other data object(s), then it shall include one DataObjectFormat signed property for each of these other signed data object(s) aforementioned.
- Requirement for XML components within DataObjectFormat. The number of occurrences allowed of the concerned XML component within one DataObjectFormat element, shall be as indicated in column "Cardinality".
- m) Requirement for SignaturePolicyStore. This qualifying property may be incorporated into the XAdES signature only if the SignaturePolicyIdentifier is also incorporated and it contains the SigPolicyHash element with the digest value of the signature policy document. Otherwise the SignaturePolicyStore shall not be incorporated into the XAdES signature.
- n) Requirement for SignatureTimeStamp. Each SignatureTimeStamp element shall contain only one electronic time-stamp.
- o) Requirement for SignatureTimeStamp. The electronic time-stamps encapsulated within the signaturetime-stamp attributes shall be created before the signing certificate has been revoked or has expired
- p) Requirement for incorporation of CertificateValues. If a XAdES-B-LT or a XAdES-B-LTA signature is generated, the incorporation of CertificateValues shall be determined by requirements specified in clause 5.5.2.2, step 4.a of the algorithm specified for computing the input to the electronic time-stamp's message imprint.
- q) Requirement for CertificateValues and AttrAuthoritiesCertValues. Duplication of certificate values within the signature should be avoided.
- r) Requirement for incorporation of AttrAuthoritiesCertValues. If a XAdES-B-LT or a XAdES-B-LTA signature is generated, the incorporation of AttrAuthoritiesCertValues shall be determined by requirements specified in clause 5.5.2.2, step 4.c of the algorithm specified for computing the input to the electronic time-stamp's message imprint.
- s) The AttributeCertificateRefsV2 and AttributeRevocationRefs qualifying properties may be used when a at least an attribute certificate or a signed assertion is incorporated into the XAdES signature. Otherwise, AttributeCertificateRefsV2 and AttributeRevocationRefs attributes shall not be used.
- t) Requirement for incorporation of RevocationValues. If a XAdES-B-LT or a XAdES-B-LTA signature is generated, the incorporation of RevocationValues shall be determined by requirements specified in clause 5.5.2.2, step 4.b of the algorithm specified for computing the input to the electronic time-stamp's message imprint.
- u) Requirement for RevocationValues. Certificate status values should be included within RevocationValues qualifying property instead within ds:KeyInfo element.

v) Requirement for RevocationValues and AttributeRevocationValues. Duplication of revocation values within the signature should be avoided.

- w) Requirement for incorporation of AttributeRevocationValues. If a XAdES-B-LT or a XAdES-B-LTA signature is generated, , the incorporation of AttributeRevocationValues shall be determined by requirements specified in clause 5.5.2.2, step 4.d of the algorithm specified for computing the input to the electronic time-stamp's message imprint.
- x) Requirement for service "incorporation of validation data for electronic time-stamps". The validation data for electronic time-stamps shall be present within the TimeStampValidationData qualifying property or embedded in the electronic time-stamp itself.
- y) Requirement for service "incorporation of validation data for electronic time-stamps" and its two options. The validation data for electronic time-stamps should be included in the TimeStampValidationData qualifying property.
- z) Requirement for ArchiveTimeStamp defined in the namespace whose URI is "http://uri.etsi.org/01903/v1.4.1#". Each ArchiveTimeStamp qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u> may contain more than one electronic time-stamp issued by different TSAs.
- aa) Requirement for ArchiveTimeStamp defined in the namespace whose URI is "http://uri.etsi.org/01903/v1.4.1#". Before generating and incorporating a new ArchiveTimeStamp qualifying property defined in the namespace whose URI is "http://uri.etsi.org/01903/v1.4.1#", all the validation material required for validating the XAdES signature shall be included. This validation material shall include all the certificates and all certificate status information (like CRLs or OCSP responses) required for:
  - validating the signing certificate;
  - validating the signing certificate of any countersignature incorporated into the signature;
  - validating any attribute certificate or signed assertion present in the signature; and
  - validating the signing certificate of any previous electronic time-stamp already incorporated into the signature within any XAdES electronic time-stamp container qualifying property (including any ArchiveTimeStamp defined in the namespace whose URI is "<u>http://uri.etsi.org/01903/v1.4.1#</u>").
- bb) Requirement for RenewedDigest. If the XAdES signature signs external data objects through a signed ds:Manifest, and some of the digest algorithms used for computing some of the digest values within the aforementioned ds:Manifest is suspected to become weak enough as to represent a threat, the RenewedDigest element should be used to counter this threat.
- NOTE 3: On ds:KeyInfo/X509Data/X509Certificate. A certificate is considered available to the verifier if reliable information about its location is known and allows automated retrieval of the certificate (for instance through an Authority Info Access Extension or equivalent information present in a TSL).
- NOTE 4: On ds:KeyInfo/X509Data/X509Certificate. Requirement c) applies specifically but not exclusively to signing certificates that are EU qualified and supported by Trusted Lists as defined in CD 2009/767/EC amended by CD 2010/425/EU [i.5].
- NOTE 5: On ds:KeyInfo/X509Data/X509Certificate. In the general case, different verifiers can have different trust parameters and can validate the signing certificate through different chains. Therefore, generators may not know which certificates will be relevant for path building. However, in practice, generators can often clearly identify such certificates. In this case, including them in the signature is a good practice, unless verifiers can automatically retrieve them.
- NOTE 6: On ds:SignedInfo/CanonicalizationMethod. Support of canonicalization algorithms "with comments" is for residual interoperability in the signature verification process.
- NOTE 7: On SigningCertificateV2. The presence of the signing certificate within ds:KeyInfo ensures a way to locate it (on the basis of digest equality with the value within SigningCertificateV2/CertDigest) within the signature.

NOTE 8: On DataObjectFormat. Clause 5.2.4 of the present document establishes that this signed property "qualifies one specific signed data object". This is done by forcing that ObjectReference attribute refers to a ds:Reference. However the aforementioned clause does not mandate this ds:Reference to be a child of ds:SignedInfo; it actually could be a ds:Reference within a signed ds:Manifest, as the object referenced in this way is also a signed object.

57

- NOTE 9: On service "incorporation of validation data for electronic time-stamps": the incorporation of the validation material of the electronic time-stamps ensures that the XAdES signature actually contains all the validation material needed.
- NOTE 10:On SignatureTimeStamp, IndividualDataObjectsTimeStamp, AllDataObjectsTimeStamp: Several instances of these qualifying properties can be incorporated into the XAdES signature, coming from different TSAs.

### 6.4 Legacy XAdES baseline signatures

When new unsigned qualifying properties are incorporated into legacy XAdES baseline signatures, these qualifying properties shall comply with the present document.

## Annex A (normative): Additional Qualifying Properties Specification

## A.1 Qualifying properties for validation data

### A.1.1 The CompleteCertificateRefsV2 qualifying property

### Semantics

The CompleteCertificateRefsV2 qualifying property shall be an unsigned qualifying property qualifying the signature.

The CompleteCertificateRefsV2 qualifying property:

- 1) Shall contain the reference to the certificate of the trust anchor if such certificate does exist, and the references to CA certificates within the signing certificate path.
- 2) Shall not contain the reference to the signing certificate.
- 3) May contain references to certificates in the path of the certificates used for signing the electronic time-stamps already incorporated into the signature when the CompleteCertificateRefsV2 unsigned property is incorporated, including references to the electronic time-stamps' signing certificates and references to certificates of trust anchors if such certificates do exist.
- 4) May contain references to the certificates used to sign CRLs or OCSP responses for certificates referenced by references in 1) and 3), and references to certificates within their respective certificate paths. And
- 5) Shall not contain references to CA certificates that pertain exclusively to the certificate paths of certificates used to sign attribute certificates or signed assertions within SignerRoleV2.
- NOTE 1: The references to certificates exclusively used in the validation of attribute certificate or signed assertions are stored in the AttributeCertificateRefsV2 qualifying property (see clause A.1.3).

#### **Syntax**

The CompleteCertificateRefsV2 element shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"
The preamble of the XML Schema file also includes the following namespace declaration:
    xmlns:xades="http://uri.etsi.org/01903/v1.3.2#",
which assigns the prefix "xades" to the namespace whose URI is shown in the declaration.
--->
</xsd:element name="CompleteCertificateRefsV2" type="CompleteCertificateRefsTypeV2"/>
<xsd:complexType name="CompleteCertificateRefsTypeV2">
    </xsd:sequence>
        </xsd:element name="CertRefs" type="xades:CertIDListV2Type"/>
        </xsd:sequence>
        </xsd:sequence>
        </xsd:sequence>
        </xsd:attribute name="Id" type="xsd:ID" use="optional"/>
</xsd:complexType>
```

The CertRefs element is of type xades:CertIDListV2Type, already defined in clause 5.2.2.

If at least one of the following unsigned properties: CertificateValues, AttrAuthoritiesCertValues, or the ArchiveTimeStamp defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, is incorporated into the signature, all the certificates referenced in CompleteCertificateRefsV2 shall be present elsewhere in the signature.

NOTE 2: Should XML electronic time-stamps based in XMLDSIG be standardized and spread, this type can also be used to contain references to the certification chain for any TSUs providing such electronic time-stamps. In this case, an element of this type can be added as an unsigned qualifying property to the XML electronic time-stamp using the incorporation mechanisms defined in the present document.

### A.1.2 The CompleteRevocationRefs qualifying property

### Semantics

The CompleteRevocationRefs qualifying property shall be an unsigned qualifying property that qualifies the signature.

The CompleteRevocationRefs qualifying property:

- 1) Shall contain a reference to a revocation value for the signing certificate.
- 2) Shall contain the references to the revocation values (e.g. CRLs or OCSP values) corresponding to CA certificates within the signing certificate path. It shall not contain references to revocation values for the trust anchor.
- NOTE 1: A trust anchor is by definition trusted, thus no revocation information for the trust anchor is used during the validation.
- 3) May contain references to revocation values (e.g. CRLs or OCSP values) corresponding to certificates in the path of signing certificates of electronic time-stamps already incorporated into the signature when the CompleteRevocationRefs unsigned property is incorporated. It shall not contain references to revocation values for the trust anchors of these certificates.
- 4) May contain references to the revocation values corresponding to certificates used to sign CRLs or OCSP responses referenced in references from 1), 2) and 3), and to certificates within their respective certificate paths. And
- 5) Shall not contain references to the revocation values corresponding to CA certificates that pertain exclusively to the certificate paths of certificates used to sign attribute certificates or signed assertions within SignerRoleV2 qualifying properties.
- NOTE 2: The references to revocation values exclusively used in the validation of attribute certificate or signed assertions are stored in the AttributeRevocationRefs qualifying property (see clause A.1.4).

References within CompleteRevocationRefs qualifying property may be references to CRLs, OCSP responses and other type of revocation data.

#### **Syntax**

The CompleteRevocationRefs qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

```
<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->
<xsd:element name="CompleteRevocationRefs"</pre>
 type="CompleteRevocationRefsType"/>
<xsd:complexType name="CompleteRevocationRefsType">
  <xsd:sequence>
    <rpre><xsd:element name="CRLRefs" type="CRLRefsType" minOccurs="0"/>
    <xsd:element name="OCSPRefs" type="OCSPRefsType" minOccurs="0"/>
    <xsd:element name="OtherRefs" type="OtherCertStatusRefsType"</pre>
     minOccurs="0"/>
  </xsd:sequence>
  <rpre><xsd:attribute name="Id" type="xsd:ID" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CRLRefsType">
  <xsd:sequence>
    <xsd:element name="CRLRef" type="CRLRefType"</pre>
     maxOccurs="unbounded"/>
 </xsd:sequence>
</xsd:complexType>
```

```
<xsd:complexType name="CRLRefType">
 <xsd:sequence>
    <xsd:element name="DigestAlgAndValue"</pre>
      type="DigestAlgAndValueType"/>
    <xsd:element name="CRLIdentifier" type="CRLIdentifierType"</pre>
     minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<rsd:complexType name="CRLIdentifierType">
  <xsd:sequence>
    <rpre><xsd:element name="Issuer" type="xsd:string"/>
    <rpre><xsd:element name="IssueTime" type="xsd:dateTime" />
    <xsd:element name="Number" type="xsd:integer" minOccurs="0"/>
 </xsd:sequence>
  <xsd:attribute name="URI" type="xsd:anyURI" use="optional"/>
</xsd:complexType>
<xsd:complexType name="OCSPRefsType">
  <xsd:sequence>
    <rpre><xsd:element name="OCSPRef" type="OCSPRefType"</pre>
      maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="OCSPRefType">
 <xsd:sequence>
    <xsd:element name="OCSPIdentifier" type="OCSPIdentifierType"/>
    <re><xsd:element name="DigestAlgAndValue"</pre>
      type="DigestAlgAndValueType"
     minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ResponderIDType">
 <xsd:choice>
    <rpre><xsd:element name="ByName" type="xsd:string"/>
    <rpre><xsd:element name="ByKey" type="xsd:base64Binary"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="OCSPIdentifierType">
  <xsd:sequence>
    <xsd:element name="ResponderID" type="ResponderIDType"/>
    <xsd:element name="ProducedAt" type="xsd:dateTime"/>
 </xsd:sequence>
  <xsd:attribute name="URI" type="xsd:anyURI" use="optional"/>
</xsd:complexType>
<xsd:complexType name="OtherCertStatusRefsType">
  <xsd:sequence>
    <xsd:element name="OtherRef" type="AnyType"</pre>
      maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

Empty CompleteRevocationRefs qualifying properties shall not be incorporated.

The CRLRefs element shall contain a sequence of references to CRLs.

Each CRLRef child of CRLRefs shall contain one reference to one CRL.

The DigestAlgAndValue child of CRLRef element shall contain one indication of a digest algorithm, and the base-64 encoding of the digest value of the DER-encoded referenced CRL.

The CRLIdentifier child needs not to be present if the referenced CRL can be inferred from other information.

The CRLIdentifier child of CRLRef element shall include the name issuer in its Issuer element.

The value of Issuer child of CRLIdentifier element shall fulfil the requirements specified in clause 4.5.4.1 of XMLDSIG [1] for strings representing Distinguished Names.

The CRLIdentifier child of CRLRef element shall include the time when the CRL was issued in its IssueTime element.

The CRLIdentifier child of CRLRef element may include the number of the CRL in its Number element.

NOTE 3: The Number element is an optional hint helping to get the CRL whose digest matches the value present in the reference.

61

URI attribute of CRLIdentifier element shall indicate one place where the referenced CRL can be found.

NOTE 4: It is intended that this attribute be used as a hint, as implementations can have alternative ways for retrieving the referenced CRL if it is not found at the referenced place.

Should one or more of the identified CRLs be a Delta CRL, this qualifying property shall include references to the set of CRLs required to provide complete revocation lists.

The OCSPRefs element shall contain a sequence of references to OCSP responses.

Each OcspRef child of OCSPRefs shall contain one reference to one OCSP response.

The OCSPIdentifier child of OCSPRef element shall include an identifier of the responder in its ResponderID child.

If the responder is identified by its name then this name shall appear within the ByName child of ResponderID element.

The value of ByName element shall fulfil the requirements specified in clause 4.5.4.1 of XMLDSIG [1] for strings representing Distinguished Names.

If the responder is identified by the digest of the server's public key computed as mandated in IETF RFC 6960 [6], then the base-64 encoding of the DER-encoded of byKey field specified in IETF RFC 6960 [6] shall appear within the ByKey child of ResponderID element.

The OCSPIdentifier child of OCSPRef element shall include the generation time of the OCSP response in its ProducedAt child.

The value in ProducedAt child of OCSPIdentifier shall indicate the same time as the time indicated by the ProducedAt field of the referenced OCSP response.

URI attribute of OCSPIdentifier element indicates one place where the referenced OCSP response can be archived.

NOTE 5: It is intended that this attribute be used as a hint, as implementations can have alternative ways for retrieving the referenced OCSP response if it is not found at the referenced place.

The DigestAlgAndValue child of OCSPRef element shall contain one indication of a digest algorithm, and the base-64 encoding of the DER-encoded OCSPResponse field defined in IETF RFC 6960 [6].

The DigestAlgAndValue child element should be included within the OCSPRef element.

NOTE 6: The absence of the DigestAlgAndValue child of OCSPRef element makes OCSP responses substitutions attacks possible, if for instance OCSP responder keys are compromised. In this case, out-of-band mechanisms can be used to ensure that none of the OCSP responder keys have been compromised at the time of validation.

References to alternative forms of validation data may be included in this qualifying property making use of the OtherRefs element, a sequence whose items (OtherRef elements) may contain any kind of information. Their semantics and syntax are outside the scope of the present document.

If at least one of the following unsigned properties: RevocationValues, AttributeRevocationValues, or the ArchiveTimeStamp defined in namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, is incorporated into the signature, all the revocation data referenced in CompleteRevocationRefs shall be present elsewhere in the signature.

NOTE 7: Should XML electronic time-stamps based in XMLDSIG be standardized and spread, this type can also serve to contain references to the full set of CRL or OCSP responses that have been used to verify the certification chain for any TSUs providing such electronic time-stamps. In this case, an element of this type can be added as an unsigned qualifying property to the XML electronic time-stamp using the incorporation mechanisms defined in the present document.

62

### A.1.3 The AttributeCertificateRefsV2 qualifying property

### Semantics

The AttributeCertificateRefsV2 qualifying property shall be an unsigned qualifying property that qualifies the signature.

The AttributeCertificateRefsV2 qualifying property:

- 1) Shall contain, if they are not present within CompleteCertificateRefsV2 or SigningCertificateV2 qualifying properties, the references to the trust anchors if certificates exist for them, and the references to CA certificates within the path of the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. References present within CompleteCertificateRefsV2 or SigningCertificateV2 qualifying properties should not be included.
- 2) Shall contain, if they are not present within CompleteCertificateRefsV2 or SigningCertificateV2 qualifying properties, the reference(s) to the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. References present within CompleteCertificateRefsV2 or SigningCertificateV2 qualifying properties should not be included. And
- 3) May contain references to the certificates used to sign CRLs or OCSP responses and certificates within their respective certificate paths, which are used for validating the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. References present within CompleteCertificateRefsV2 or SigningCertificateV2 qualifying properties should not be included.

#### **Syntax**

The AttributeCertificateRefsV2 element shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"

The preamble of the XML Schema file also includes the following namespace declaration: xmlns:xades="http://uri.etsi.org/01903/v1.3.2#", which assigns the prefix "xades" to the namespace whose URI is shown in the declaration. -->

<xsd:element name="AttributeCertificateRefsV2" type="CompleteCertificateRefsTypeV2"/>

If at least one of the following unsigned properties: CertificateValues, AttrAuthoritiesCertValues, or the ArchiveTimeStamp defined in namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, is incorporated into the signature, all the certificates referenced in AttributeCertificateRefsV2 shall be present elsewhere in the signature.

## A.1.4 The AttributeRevocationRefs qualifying property

### Semantics

The AttributeRevocationRefs qualifying property shall be an unsigned qualifying property that qualifies the signature.

The AttributeRevocationRefs qualifying property:

- 1) Shall contain, if they are not present within the CompleteRevocationRefs qualifying property, the references to the revocation values corresponding to CA certificates within the path(s) of the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. It shall not contain a revocation value for the trust anchors. References present within CompleteRevocationRefs qualifying property should not be included.
- NOTE: A trust anchor is by definition trusted, thus no revocation information for the trust anchor is used during the validation.
- 2) Shall contain, if they are not present within the CompleteRevocationRefs qualifying property, the references to the revocation value(s) for the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. References present within CompleteRevocationRefs property should not be included. And
- 3) May contain references to the revocation values on certificates used to sign CRLs or OCSP responses and certificates within their respective certificate paths, which are used for validating the signing certificate(s) of the attribute certificate(s) and signed assertion(s) incorporated into the XAdES signature. References present within CompleteRevocationRefs property should not be included.

### Syntax

The AttributeRevocationRefs qualifying property shall be defined as in XML Schema file "XAdES01903v132-201601.xsd", whose location is detailed in clause C.1, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.3.2#" -->

<xsd:element name="AttributeRevocationRefs" type="CompleteRevocationRefsType"/>

Should one or more of the identified CRLs be a Delta CRL, this property shall include references to the set of CRLs required to provide complete revocation lists.

If at least one of the following unsigned properties: RevocationValues, AttributeRevocationValues, or the ArchiveTimeStamp defined in namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, is incorporated into the signature, all the revocation data referenced in AttributeRevocationRefs shall be present elsewhere in the signature.

### A.1.5 Time-stamps on references to validation data

A.1.5.1 The SigAndRefsTimeStampV2 qualifying property

### A.1.5.1.1 Semantics and syntax

### Semantics

The SigAndRefsTimeStampV2 qualifying property shall be an unsigned qualifying property qualifying the signature.

The SigAndRefsTimeStampV2 qualifying property shall encapsulate electronic time-stamps on the digital signature value, the signature time-stamp, if present, and the XAdES qualifying properties containing references to validation data.

#### Syntax

The SigAndRefsTimeStampV2 qualifying property shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clauseC.2, and is copied below for information.

64

<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"

```
The preamble of the XML Schema file also includes the following namespace declaration:
    xmlns:xades="http://uri.etsi.org/01903/v1.3.2#",
    which assigns the prefix "xades" to the namespace whose URI is shown in the declaration.
-->
```

<xsd:element name="SigAndRefsTimeStampV2" type="xades:XAdESTimeStampType"/>

This qualifying property shall contain an electronic time-stamp that time-stamps the following XAdES components: ds:SignatureValue element, all present SignatureTimeStamp qualifying properties, CompleteCertificateRefsV2, CompleteRevocationRefs, and when present, AttributeCertificateRefsV2 and AttributeRevocationRefs.

Depending whether all the aforementioned time-stamped unsigned qualifying properties and the SigAndRefsTimeStampV2 qualifying property itself have the same parent or not, its contents may be different. Details are given in clauses below.

### A.1.5.1.2 Not distributed case

When SigAndRefsTimeStampV2 and all the unsigned qualifying properties covered by its electronic time-stamp have the same parent, this qualifying property shall use the implicit mechanism.

The input to the electronic time-stamp's message imprint computation input shall be the result of taking in order each of the XAdES components listed below, canonicalizing each one as specified in clause 4.5, and concatenating the resulting octet streams:

- 1) The ds:SignatureValue element.
- 2) Those among the following unsigned qualifying properties that appear before SigAndRefsTimeStampV2, in their order of appearance within the UnsignedSignatureProperties element:
  - The SignatureTimeStamp qualifying properties.
  - The CompleteCertificateRefsV2 qualifying property.
  - The CompleteRevocationRefs qualifying property.
  - The AttributeCertificateRefsV2 qualifying property if it is present. And
  - The AttributeRevocationRefs qualifying property if it is present.

### A.1.5.1.3 Distributed case

When SigAndRefsTimeStampV2 and some of the unsigned qualifying properties covered by its electronic timestamp do not have the same parent, this qualifying property shall be built as indicated below:

- 1) No Include element will be added for ds:SignatureValue. It shall implicitly be assumed its contribution to the digest input (see below in this clause). And
- 2) Generate one Include element for each unsigned qualifying property that shall be covered by the electronic time-stamp in the order they appear listed below:
  - The SignatureTimeStamp qualifying properties.
  - The CompleteCertificateRefsV2 qualifying property.
  - The CompleteRevocationRefs qualifying property.
  - The AttributeCertificateRefsV2 qualifying property if it is present. And

The AttributeRevocationRefs qualifying property if it is present.

The URI attributes shall be built following the rules stated in clause 5.1.4.3.1.

The electronic time-stamp's message imprint computation input shall be built as indicated below:

- 1) Initialize the final octet stream as an empty octet stream.
- 2) Take the ds:SignatureValue element and its content. Canonicalize it as specified in clause 4.5, and put the result in the final octet stream. And
- 3) Take each unsigned qualifying property listed above in the order they have been listed above (this order shall be the same as the order the Include elements appear in the property). For each one extract comment nodes, canonicalize it as specified in clause 4.5, and concatenate the resulting octet string to the final octet stream.

### A.1.5.2 The RefsOnlyTimeStampV2 qualifying property

### A.1.5.2.1 Semantics and syntax

#### Semantics

The RefsOnlyTimeStampV2 qualifying property shall be an unsigned qualifying property qualifying the signature.

The RefsOnlyTimeStampV2 qualifying property shall encapsulate electronic time-stamps on the XAdES qualifying properties containing references to validation data.

#### Syntax

The RefsOnlyTimeStampV2 qualifying property shall be defined as in XML Schema file "XAdES01903v141-201601.xsd", whose location is detailed in clause C.2, and is copied below for information.

<!-- targetNamespace="http://uri.etsi.org/01903/v1.4.1#"

The preamble of the XML Schema file also includes the following namespace declaration: xmlns:xades="http://uri.etsi.org/01903/v1.3.2#", which assigns the prefix "xades" to the namespace whose URI is shown in the declaration. -->

<xsd:element name="RefsOnlyTimeStampV2" type="xades:XAdESTimeStampType"/>

This qualifying property shall contain an electronic time-stamp that time-stamps the following XAdES qualifying properties: CompleteCertificateRefsV2, CompleteRevocationRefs, and when present, AttributeCertificateRefsV2 and AttributeRevocationRefs.

Depending whether all the aforementioned time-stamped unsigned qualifying properties and the RefsOnlyTimeStampV2 qualifying property itself have the same parent or not, its contents may be different. Details are given in clauses below.

### A.1.5.2.2 Not distributed case

When RefsOnlyTimeStampV2 and all the unsigned qualifying properties covered by its electronic time-stamp have the same parent, this qualifying property shall use the implicit mechanism. The electronic time-stamp's message imprint computation input shall be the result of taking those of the qualifying unsigned properties listed below that appear before the RefsOnlyTimeStampV2 in their order of appearance within the UnsignedSignatureProperties element, canonicalizing each one as specified in clause 4.5, and concatenating the resulting octet streams:

- The CompleteCertificateRefsV2 qualifying property.
- The CompleteRevocationRefs qualifying property.
- The AttributeCertificateRefsV2 qualifying property if it is present. And
- The AttributeRevocationRefs qualifying property if it is present.

### A.1.5.2.3 Distributed case

When RefsOnlyTimeStampV2 and some of the unsigned qualifying properties covered by its electronic time-stamp do not have the same parent, one Include element shall be generated for each unsigned qualifying property that shall be time-stamped by the electronic time-stamp in the order they appear listed below:

66

- The CompleteCertificateRefsV2 qualifying property.
- The CompleteRevocationRefs qualifying property.
- The AttributeCertificateRefsV2 qualifying property if it is present. And
- The AttributeRevocationRefs qualifying property if it is present.

The URI attributes shall be built following the rules stated in clause 5.1.4.3.1.

The electronic time-stamp's message imprint computation input shall be built as indicated below:

- 1) Initialize the final octet stream as an empty octet stream. And
- 2) Take each unsigned qualifying property listed above in the order they have been listed above (this order shall be the same as the order the Include elements appear in the qualifying property). For each one extract comment nodes, canonicalize it as specified in clause 4.5, and concatenate the resulting octet stream to the final octet stream.

## Annex B (normative): Alternative mechanisms for long term availability and integrity of validation data

There may be mechanisms to achieve long term availability and integrity of validation data different from the ones described in clause 5.5.

If such a mechanism is incorporated into the signature using an unsigned property, then for this mechanism shall be specified:

- 1) The clear specification of the semantics and syntax of the property including its name, and namespace.
- 2) The strategy of how this mechanism guarantees that all necessary parts of the signature are protected by this property.
- 3) The strategy of how to handle signatures containing properties defined in the present document. In particular, in case ArchiveTimeStamp unsigned properties defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.4.1#</a> are already incorporated into the signature, it shall be ensured that the previous electronic time-stamps within these properties are not invalidated, and that all validation material needed to validate the signature before the incorporation of the new property is incorporated into the signature and protected by the new property.
- 4) The strategy of how to handle legacy XAdES signatures. In particular it shall be guaranteed that in case of previously incorporated properties for long term availability and integrity of validation data they are not invalidated.
- NOTE 1: Such mechanisms, defined outside of the present document, can be used to provide long term availability and integrity of validation data. However, they do not represent XAdES-B-LTA level as defined in clause 6 or XAdES-E-A levels as defined in ETSI EN 319 132-2 [i.16].
- NOTE 2: Such mechanisms might be included in future versions of the present document and assigned to a corresponding XAdES level.

## Annex C (normative): XML Schema files

## C.1 XML Schema file location for namespace http://uri.etsi.org/01903/v1.3.2#

The file at <u>http://uri.etsi.org/01903/v1.3.2/XAdES01903v132-201601.xsd</u> (XAdES01903v132-201601.xsd) contains the definitions of qualifying properties defined within the namespace whose URI value is <u>http://uri.etsi.org/01903/v1.3.2#</u>.

68

## C.2 XML Schema file location for namespace http://uri.etsi.org/01903/v1.4.1#

The file at <u>http://uri.etsi.org/01903/v1.4.1/XAdES01903v141-201601.xsd</u> (XAdES01903v141-201601.xsd) contains the definitions of qualifying properties defined within the namespace whose URI value is <u>http://uri.etsi.org/01903/v1.4.1#</u>.

## Annex D (normative): Deprecated qualifying properties

The qualifying properties, specified in ETSI TS 101 903 [i.2] (V1.4.2) and listed below, are deprecated. XAdES signatures shall not include any of these qualifying properties.

- The SigningCertificate qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the SigningCertificateV2 qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, specified in clause 5.2.2 of the present document, shall be used.
- 2) The SignatureProductionPlace qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the SignatureProductionPlaceV2 qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, specified in clause 5.2.5 of the present document, shall be used.
- 3) The SignerRole qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the SignerRoleV2 qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, specified in clause 5.2.6 of the present document, shall be used.
- The CompleteCertificateRefs qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.3.2#">http://uri.etsi.org/01903/v1.3.2#</a>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the CompleteCertificateRefsV2 qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.3.2#</a>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the CompleteCertificateRefsV2 qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.4.1#</a>, specified in clause A.1.1 of the present document, shall be used.
- The AttributeCertificateRefs qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.3.2#">http://uri.etsi.org/01903/v1.3.2#</a>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the AttributeCertificateRefsV2 qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.3.2#</a>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the AttributeCertificateRefsV2 qualifying property defined in the namespace whose URI is <a href="http://uri.etsi.org/01903/v1.4.1#">http://uri.etsi.org/01903/v1.4.1#</a>, specified in clause A.1.3 of the present document, shall be used.
- The SigAndRefsTimeStamp qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the SigAndRefsTimeStampV2 qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, specified in clause A.1.3 of the present document, shall be used. And
- The RefsOnlyTimeStamp qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u>, and specified in ETSI TS 101 903 [i.2] (V1.4.2). Instead the RefsOnlyTimeStamp V2 qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, specified in clause A.1.3 of the present document, shall be used.
- NOTE 1: The ArchiveTimeStamp qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.3.2#</u> had already been deprecated in ETSI TS 101 903 [i.2] (V1.4.2) by the ArchiveTimeStamp qualifying property defined in the namespace whose URI is <u>http://uri.etsi.org/01903/v1.4.1#</u>, which is the one defined and allowed by the current document.
- NOTE 2: For legacy XAdES baseline signatures requirements see clause 6.4.

# History

| Document history |               |                                  |              |                          |  |  |  |  |
|------------------|---------------|----------------------------------|--------------|--------------------------|--|--|--|--|
| V1.0.0           | June 2015     | EN Approval Procedure            | AP 20151028: | 2015-06-30 to 2015-10-28 |  |  |  |  |
| V1.0.1           | July 2015     | Publication as ETSI TS 119 132-1 |              |                          |  |  |  |  |
| V1.1.0           | February 2016 | Vote                             | V 20160401:  | 2015-02-01 to 2016-04-01 |  |  |  |  |
|                  |               |                                  |              |                          |  |  |  |  |
|                  |               |                                  |              |                          |  |  |  |  |