

Intelligent Transport Systems (ITS); Security; Threat, Vulnerability and Risk Analysis (TVRA)



Reference

DTR/ITS-0050005

Keywords

ITS, security

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chairecor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 The TVRA Method	9
5 The ETSI Intelligent Transport System.....	10
5.1 ITS architecture	10
5.2 The Basic Set of Applications (BSA).....	11
5.2.1 BSA use case descriptions	11
5.2.1.1 Stationary vehicle warning.....	12
5.2.1.2 Traffic condition warning	12
5.2.1.3 Signal violation warning	12
5.2.1.4 Road work warning	12
5.2.1.5 Collision risk warning from RSU.....	12
5.2.1.6 Decentralized floating car data.....	12
5.2.1.7 Regulatory/contextual speed limits	12
5.2.1.8 Traffic information & recommended itinerary.....	12
5.2.1.9 Limited access warning, detour notification	12
5.2.1.10 In-vehicle signage	12
5.2.1.11 Emergency vehicle warning.....	12
5.2.1.12 Slow vehicle warning.....	13
5.2.1.13 Motorcycle warning	13
5.2.1.14 Emergency electronic brake lights	13
5.2.1.15 Wrong way driving warning	13
5.2.1.16 Traffic light optimal speed advisory	13
5.2.1.17 Point of Interest notification.....	13
5.2.1.18 Automatic access control and parking management	13
5.2.1.19 Local electronic commerce	13
5.2.1.20 Enhanced route guidance and navigation.....	13
5.2.1.21 Media downloading.....	13
5.2.1.22 Insurance and financial services.....	13
5.2.1.23 Fleet management	14
5.2.1.24 Automatic access control/parking access	14
5.2.1.25 Vehicle software/data provisioning and update	14
5.2.1.26 Personal data synchronization.....	14
5.3 ITS communication services	14
5.3.1 Cooperative Awareness Message (CAM) service.....	16
5.3.1.1 General description	16
5.3.1.2 Outgoing information.....	17
5.3.1.3 Incoming information.....	18
5.3.1.4 Local Dynamic Map (LDM)	18
5.3.1.5 Information elements within CAM	18
5.3.1.6 Procedure for outgoing messages.....	18
5.3.1.7 Procedure for incoming messages.....	18
5.3.2 Decentralized environmental Notification Message (DNM) service	19
5.3.2.1 General description	19
5.3.2.2 Outgoing information.....	20
5.3.2.3 Incoming information.....	20
5.3.2.4 LDM.....	21

5.3.2.5	Information elements within DNM messages	21
5.3.2.6	Procedure for outgoing messages	21
5.3.2.7	Procedure for incoming messages	22
5.3.3	Local service advertisement service	22
5.3.3.1	General description	22
5.3.4	Internet-based service advertisement service	22
5.3.4.1	General description	22
6	ITS Security Objectives	22
6.1	Confidentiality	22
6.2	Integrity	23
6.3	Availability	23
6.4	Accountability	23
6.5	Authenticity	23
7	ITS Functional Security requirements	23
7.1	Confidentiality	24
7.2	Integrity	24
7.3	Availability	25
7.4	Accountability	25
7.5	Authenticity	25
8	ITS Target of Evaluation (ToE)	26
8.1	Assumptions on the ToE	28
8.2	Assumptions on the ToE environment	28
9	ITS system assets	29
9.1	ITS station functional models	29
9.2	Functional assets	30
9.2.1	ITS-S (Vehicle)	30
9.2.1.1	Protocol Control	30
9.2.1.1.1	General description	30
9.2.1.1.2	Vehicle to ITS infrastructure	31
9.2.1.1.3	Vehicle to vehicle	31
9.2.1.2	Service Control	31
9.2.1.3	ITS Applications	31
9.2.1.4	Sensor Monitor	32
9.2.1.5	Vehicle System Control	32
9.2.2	ITS-S (Roadside)	33
9.2.2.1	Protocol Control	33
9.2.2.1.1	General description	33
9.2.2.1.2	RSU to vehicle	33
9.2.2.1.3	RSU to ITS network	33
9.2.2.2	Service Control	33
9.2.2.3	ITS Applications	34
9.2.2.4	Sensor Monitor	34
9.2.2.5	Display Control	34
9.3	Data assets	35
9.3.1	ITS-S (Vehicle)	35
9.3.1.1	Local Dynamic Map	35
9.3.1.2	Local Vehicle Information	35
9.3.1.3	Service Profile	36
9.3.2	ITS-S (Roadside)	36
9.3.2.1	Local Dynamic Map (LDM)	36
9.3.2.2	Local Station Information	37
9.3.2.3	Service Profile	37
10	ITS threat analysis	37
10.1	Attack interfaces and threat agents	37
10.1.1	Attack interfaces and threat agents for ITS-S (Vehicle) ToE	37
10.1.2	Attack interfaces and threat agents for ITS-S (Roadside) ToE	38
10.2	Vulnerabilities and threats	38
10.2.1	Threats to all ITS stations	38
10.2.2	Availability	39

10.2.2.1	General threats to availability	39
10.2.3	Integrity	39
10.2.3.1	General threats to integrity.....	39
10.2.4	Authenticity	40
10.2.4.1	General threats to authenticity.....	40
10.2.5	Confidentiality	41
10.2.5.1	General threats to confidentiality	41
10.2.6	General threats to accountability	41
10.2.7	Vulnerabilities and threats	41
10.2.7.1	Determining system vulnerabilities.....	41
10.2.7.2	Threats and vulnerabilities within an ITS-S (Vehicle).....	42
10.2.7.3	Threats and vulnerabilities within an ITS-S (Roadside)	49
10.3	Security risks in an ITS system	55
10.3.1	Risks in an ITS-S (Vehicle).....	55
10.3.2	Risks in an ITS-S (Roadside).....	57
11	Countermeasures	58
11.1	List of Countermeasures.....	58
11.2	Evaluation of Countermeasures.....	59
11.3	Countermeasure Analysis.....	60
11.3.1	Reduce frequency of beaconing and other repeated messages	60
11.3.2	Add source identification (IP address equivalent) in V2V messages	60
11.3.3	Limit message traffic to V2I/I2V when infrastructure is available and implement message flow control and station registration.....	61
11.3.4	Implement frequency agility within the 5,9 GHz band.....	62
11.3.5	Implement ITS G5A as a CDMA/spread-spectrum system	62
11.3.6	Integrate 3 rd Generation mobile technology into ITS G5A communications.....	63
11.3.7	Digitally sign each message using a Kerberos/PKI-like token system	64
11.3.7.1	Kerberos-like solution.....	64
11.3.7.1.1	General requirements.....	64
11.3.7.1.2	Countermeasure analysis	65
11.3.7.2	PKI-like solution	65
11.3.7.2.1	General requirements.....	65
11.3.7.2.2	Countermeasure analysis	65
11.3.8	Include a non-cryptographic checksum of the message in each message sent.....	66
11.3.9	Remove requirements for message relay in the ITS BSA.....	67
11.3.10	Include an authoritative identity in each message and authenticate it	67
11.3.11	Use broadcast time (Universal Coordinated Time - UTC - or GNSS) to timestamp all messages	68
11.3.12	Include a sequence number in each new message	69
11.3.13	Use INS or existing dead-reckoning methods (with regular - but possibly infrequent - GNSS corrections) to provide positional data.....	70
11.3.14	Implement differential monitoring on the GNSS system to identify unusual changes in position	70
11.3.15	Encrypt the transmission of personal and private data.....	71
11.3.16	Implement a Privilege Management Infrastructure (PMI).....	72
11.3.17	Software authenticity and integrity are certified before it is installed	73
11.3.18	Use a pseudonym that cannot be linked to the true identity of either the user or the user's vehicle	73
11.3.19	Maintain an audit log of the type and content of each message sent to and from an ITS-S.....	74
11.3.20	Perform plausibility tests on incoming messages	75
11.3.21	Provide remote deactivation of misbehaving ITS-S (Vehicle)	76
11.3.22	Use hardware-based identity and protection of software on an ITS-S.....	76
11.4	Countermeasure Set.....	77
11.4.1	ITS Countermeasure Set	78
11.4.1.1	Countermeasures to Denial of Service (DoS) and availability threats	78
11.4.1.2	Countermeasures to integrity threats.....	80
11.4.1.3	Countermeasures to confidentiality and privacy threats.....	80
11.4.1.4	Countermeasures to non-repudiation and accountability threats.....	81
11.4.2	Residual risk	81
Annex A:	Cost - Benefit analysis of the selected countermeasures.....	82
History		86

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Intelligent Transport System (ITS).

1 Scope

The present document summarizes the results of a Threat, Vulnerability and Risk Analysis (TVRA) of 5,9 GHz radio communications in an Intelligent Transport System (ITS). The analysis considers vehicle-to-vehicle and vehicle-to-roadside network infrastructure communications services in the ITS Basic Set of Applications (BSA) [i.8] operating in a fully deployed ITS.

The analysis in the present document considers issues of privacy implicitly with confidentiality. It does not consider regulatory requirements for privacy

The present document was prepared using the TVRA method described in TS 102 165-1 [i.1].

NOTE: Whilst the present document is a technical report it identifies requirements for future work. In all cases these requirements are considered indicative pending their ratification in formal ETSI Technical Specifications within the ETSI ITS Work Programme.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

Not applicable.

2.2 Informative references

The following referenced documents are not essential to the use of the present document but they assist the user with regard to a particular subject area. For non-specific references, the latest version of the referenced document (including any amendments) applies.

- [i.1] ETSI TS 102 165-1: "Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN); Methods and protocols; Part 1: Method and proforma for Threat, Risk, Vulnerability Analysis".
- [i.2] ETSI TS 102 637-1: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Part 1: Functional Requirements.

- [i.3] ETSI TS 102 637-2: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Part 2: Specification of Co-operative Awareness Basic Service".
- [i.4] ETSI TS 102 637-3: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Application; Part 3: Specification of Decentralized Environmental Notification Basic Service".
- [i.5] ETSI EN 302 665: "Intelligent Transport Systems (ITS); Communications Architecture".
- [i.6] ETSI TS 102 731: "Intelligent Transportation Systems (ITS); Security; Security Services and Architecture".
- [i.7] Brown, C. (Aalborg. 2007): "Vehicles as Sensors for Cooperative Systems". Presentation on ITS in Europe..
- [i.8] ETSI TR 102 638: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Definitions".
- [i.9] IEEE 802.11 IEEE Standard for Information technology-Telecommunications and information exchange between systems-Local and metropolitan area networks-Specific requirements - Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications".
- [i.10] ITU-T Recommendation X.509: "Information technology - Open Systems Interconnection - The Directory: Public-key and attribute certificate frameworks".
- [i.11] ETSI TS 102 637-4: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic set of applications; Part 4: Operational Requirements.".
- [i.12] IETF RFC 4120: "The Kerberos Network Authentication Service (V5)".

NOTE: Available at <http://tools.ietf.org/html/rfc4120>.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

beaconing: network layer service which retransmits requested information

End user: functional agent directly representing the human user of the ITS or the ITS service provider

geo-addressing: Network layer service that enables the addressing a specific geographic region.

ITS use case: specific scenario in which ITS messages are exchanged

ITS user: any ITS application or functional agent sending, receiving or accessing ITS-related information

ITS application: entity that defines and implements an ITS use case or a set of ITS use cases

local dynamic map: dynamically maintained information on driving and environmental conditions in the vicinity of the ITS-S

restricted local ITS station data: data to be shared only with authorized parties

unrestricted local ITS station data: data that may be shared without requiring authorization from the recipient

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AA	Attribute Authority
AC	Attribute Certificate

BSA	Basic Set of Applications
CAM	Cooperative Awareness Message
CCH	Control CHannel
CDMA	Code Division Multiple Access
DNM	Decentralized environmental Notification Message
FA	Functional Asset
GNSS	Global Navigation Satellite System
I2V	Infrastructure to Vehicle
ITS	Intelligent Transport System
ITS-G5A	ITS radio signalling in the 5,875 GHz to 5,905 GHz frequency range
ITS-S	ITS Station
LDM	Local Dynamic Map
OS	Operating System
OSI	Open Systems Interconnection
PKC	Public Key Cryptography
PKI	Public Keying Infrastructure
PMI	Privilege Management Infrastructure
PMI	Privilege Management Infrastructure
RSU	Road Side Unit
SAML	Security Assertion Markup Language
SCH	Service CHannel
ToE	Target of Evaluation
TTP	Trusted Third Party
TVRA	Threat, Vulnerability and Risk Analysis
UTC	Universal Coordinated Time
V2I	Vehicle to Infrastructure
V2V	Vehicle to Vehicle
VIN	Vehicle Identification Number

4 The TVRA Method

Without an understanding of the threats posed to a system it is impossible to select or devise appropriate measures to counter these threats. The ETSI Threat, Vulnerability and Risk Analysis (TVRA) [i.1] is used to identify risks to a system by isolating the vulnerabilities of the system, assessing the likelihood of a malicious attack on that vulnerability and determining the impact that such an attack will have on the system.

The TVRA method involves the following seven steps:

- 1) Identify security objectives.
- 2) Identify security requirements.
- 3) Produce an inventory of system assets.
- 4) Classify system vulnerabilities and threats.
- 5) Quantify the likelihood and impact of attack.
- 6) Determine the risks involved.
- 7) Specify detailed security requirements (countermeasures).

The present document summarizes the results from each of these steps in the analysis of the ETSI Intelligent Transport System (ITS) standards.

5 The ETSI Intelligent Transport System

5.1 ITS architecture

Intelligent Transport Systems comprise the following communicating entities (as shown in Figure 1):

- Vehicles
- Roadside units
- A network infrastructure

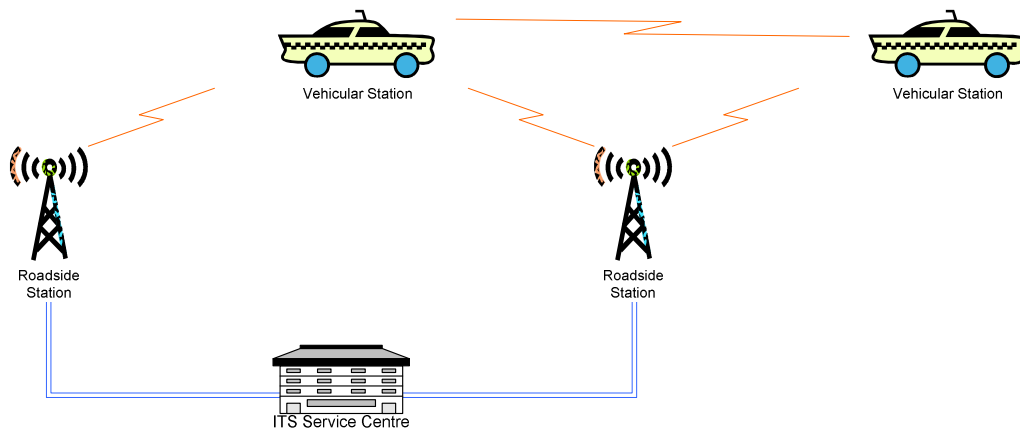


Figure 1: Communicating ITS entities

This simplified architecture can be represented in functional terms by the overlay shown in Figure 2.

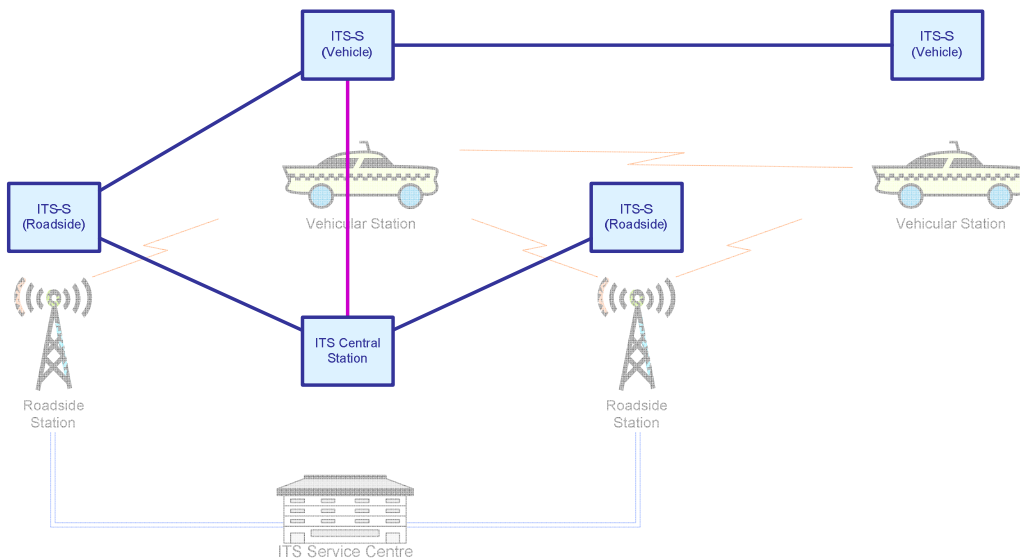


Figure 2: ITS functional entities

For the purpose of the TVRA, reference points are named and mapped to the ITS functional model as shown in Figure 3. The physical interface at reference point K may be implemented in a number of ways but, within the ITS functional model, the reference point itself represents the direct management relationship that an in-vehicle ITS station may have with the ITS infrastructure for the purpose of maintaining security parameters such as cryptographic keys.

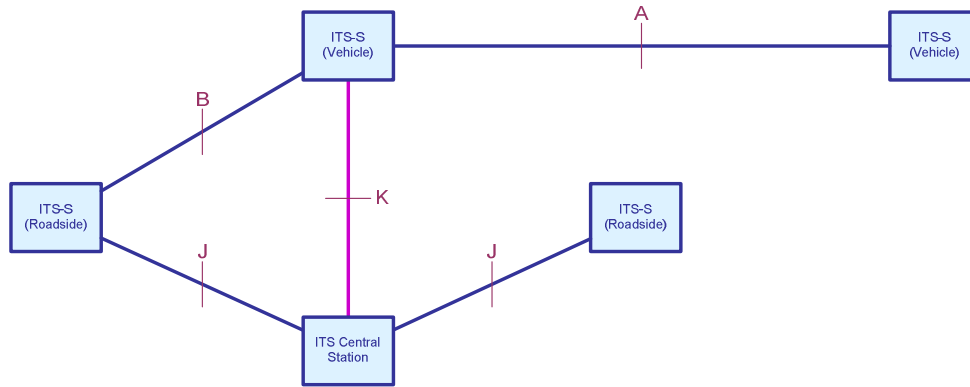


Figure 3: ITS functional model with reference points

The reference points indicated in Figure 3 are defined as follows:

- A describes the temporary relationship between two vehicles.
- B describes the temporary relationship between a vehicle and a roadside station.
- J describes the relationship between an ITS roadside station and the ITS network infrastructure.
- K describes the relationship between an ITS vehicle station and the ITS network infrastructure.

For the purpose of this TVRA, the interfaces at A and B are assumed to use communications in the 5,9 GHz band. It is also assumed that the interface at K could be routed to the ITS infrastructure indirectly through a roadside station, also in the 5,9 GHz band.

5.2 The Basic Set of Applications (BSA)

The Basic Set of Applications (BSA) [i.1] represents the mandatory set of services to be deployed in an ITS station. The BSA is described as a collection of traffic and transport use cases. For the purposes of the TVRA, these have been re-specified in clause 5.3 as a much smaller set of communications services.

The use cases in the BSA and, thus, included in the TVRA are as follows:

- 1) Stationary vehicle warning - accident/vehicle problem.
- 2) Traffic condition warning (includes traffic jam ahead warning).
- 3) Signal violation warning (includes stop sign violation).
- 4) Road work warning.
- 5) Collision Risk Warning from RSU.
- 6) Decentralized Floating Car Data - Precipitations/Road Adhesion/Visibility/Wind.
- 7) Regulatory/Contextual speed limits.
- 8) Traffic information & Recommended itinerary.
- 9) Limited access, detour notification.
- 10) In-vehicle signage.

5.2.1 BSA use case descriptions

The following clauses provide a brief description of the use cases within the BSA. Communication patterns and message repetition rates are specified in TS 102 637-1 [i.2] and TS 102 637-4 [i.11].

5.2.1.1 Stationary vehicle warning

A stationary vehicle at a potentially dangerous location periodically sends out a warning to other vehicles. The information may also be forwarded by available Road-Side Units (RSU) to a traffic management centre.

5.2.1.2 Traffic condition warning

Warning other vehicles about a detected potentially dangerous traffic condition.

5.2.1.3 Signal violation warning

When a signal violation is detected, all potentially affected vehicles are warned. The detection is done in the road side unit.

NOTE: Use cases 5.2.1.3 and 5.2.1.5 are similar

5.2.1.4 Road work warning

A mobile road infrastructure component distributes messages to warn affected vehicles about road works.

5.2.1.5 Collision risk warning from RSU

Detect potential collisions of vehicles that cannot directly communicate and warn the drivers.

NOTE: Use cases 5.2.1.3 and 5.2.1.5 are similar

5.2.1.6 Decentralized floating car data

Detect potential local dangers and send out warning message to potentially affected vehicles. Different warning reasons can be precipitation, road adhesion, visibility, or wind.

5.2.1.7 Regulatory/contextual speed limits

Road side infrastructure broadcasts speed limits that can be

- regulatory, i.e. set by an authority; or
- contextual, e.g. reduced limit due to rain.

NOTE: Use cases 5.2.1.7 and 5.2.1.10 are the same.

5.2.1.8 Traffic information & recommended itinerary

Broadcast traffic conditions. May also cause vehicles to download the recommended itinerary over a different channel.

5.2.1.9 Limited access warning, detour notification

Broadcast access restrictions, e.g. due to road works. May also provide detour advice in the same messages.

5.2.1.10 In-vehicle signage

Traffic sign information is broadcasted to be displayed in the vehicle.

NOTE: Use cases 5.2.1.7 and 5.2.1.10 are the same.

5.2.1.11 Emergency vehicle warning

An emergency vehicle periodically broadcasts its position, speed and heading as well as whether it has its siren on and/or its blue light (or equivalent) in use.

5.2.1.12 Slow vehicle warning

A slow vehicle periodically broadcasts its presence and thus encourages other vehicles to overtake. The broadcast information contains an indication that this is a special type of vehicle, called "slow vehicle".

5.2.1.13 Motorcycle warning

A motorcycle periodically broadcasts its presence. If other vehicles detect the imminent danger of collision, a warning is issued. The information broadcast contains an indication that this is a special type of vehicle, called "motorcycle".

5.2.1.14 Emergency electronic brake lights

Warn vehicles behind of a sudden slowdown. Broadcast respective message.

5.2.1.15 Wrong way driving warning

Warn vehicles in front of a detected violation of a one-way road. Broadcast respective message.

5.2.1.16 Traffic light optimal speed advisory

A traffic light to broadcasts timing data associated with its current state (e.g. time remaining before switching between green, amber and red).

5.2.1.17 Point of Interest notification

Road side unit periodically sends information about local services. The vehicle may establish a unicast connection to request more information.

NOTE: Use cases 5.2.1.17 through 5.2.1.19 are similar and mainly distinguished by the protocols used over the transparent communication channel.

5.2.1.18 Automatic access control and parking management

A road side unit periodically broadcasts the presence of an access controlled area. Vehicles requiring access provide credentials authorizing the access in unicast communications.

5.2.1.19 Local electronic commerce

A road side unit periodically broadcasts the presence of local electronic commerce. Vehicles requiring access provide credentials authorizing the access in unicast communications.

5.2.1.20 Enhanced route guidance and navigation

Road side unit periodically sends service announcements containing links to "known navigation support servers".

NOTE: Use cases 5.2.1.20 through 5.2.1.26 are similar and mainly distinguished by the type of service advertised and the respective service protocols.

5.2.1.21 Media downloading

A road side unit periodically broadcasts the presence of the possibility to download media files. Vehicles establish a unicast connection and download required media data.

5.2.1.22 Insurance and financial services

A road side unit periodically broadcasts the presence of the insurance and financial services. Vehicles establish a unicast connection and uses the services.

5.2.1.23 Fleet management

A road side unit periodically broadcasts the presence of fleet management service access. Vehicles establish a unicast connection and uses the services.

5.2.1.24 Automatic access control/parking access

Upon signalization of an access controlled area (e.g. a private or public parking), a concerned vehicle entitled to access this area will supply its identity to the road side unit to obtain the right to access the area.

5.2.1.25 Vehicle software/data provisioning and update

A road side unit periodically broadcasts the presence of vehicle software access. Vehicles establish a unicast connection and uses the services.

5.2.1.26 Personal data synchronization

A road side unit which has internet access capabilities being capable to insure the transparent data exchange between vehicles (passing by or parked) and their driver/passengers distant system (e.g. home, professional).

5.3 ITS communication services

The ITS BSA use cases send and receive two fundamental message types which are:

- Cooperative Awareness Message (CAM):
 - periodically transmitted containing transient data on the vehicle status.
- Decentralized environmental Notification Message (DNM):
 - generated upon detecting an event and contain information about this event. DNM messages are typically relevant for a defined geographic area.

For the purpose of analysis, it is important to know what information is passed across each of the reference points defined in clause 5.1.

The following communications patterns can be identified in the BSA use cases (clause 5.2):

- V2V, DNM, geo-addressed;
- I2V, DNM, geo-addressed;
- V2V, CAM, in network layer beacons;
- I2V, CAM, in network layer beacons;
- V2I, CAM, in network layer beacons.

The following major ITS communication services are defined regardless of originator or receiver type (vehicle or infrastructure):

- a periodic status update service (CAM);
- an event notification service (DNM);
- a local service announcement service;
- an internet-based service announcement service;
- a transparent communication service.

NOTE: The transparent communication service is not specified in EN 302 665 [i.5] and is not included in the scope of the present document.

EN 302 665 [i.5] describes a layered model for ITS communications as shown in Figure 4.

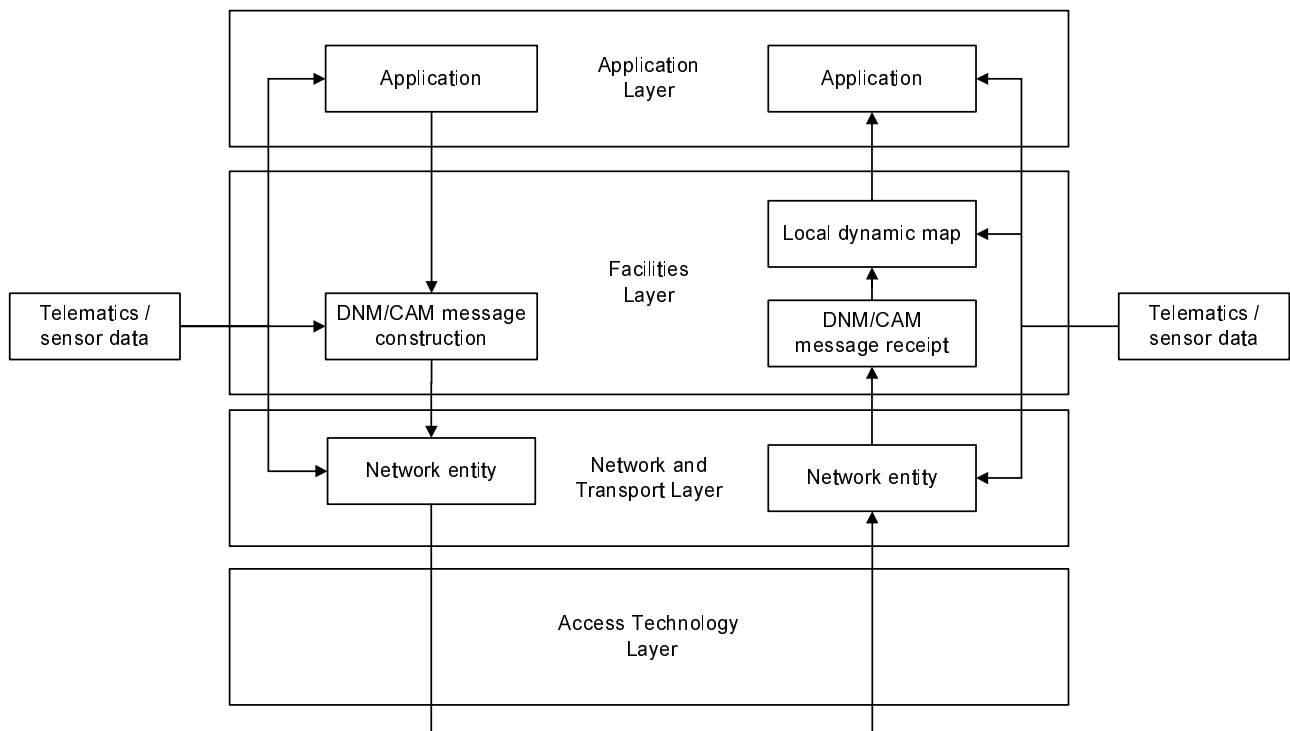


Figure 4: ITS architectural model from EN 302 665

This model ascribes functional capabilities to the layers which would not be permitted in an OSI model. As an example, it would not normally be possible for application-specific message contents to be interpreted or modified by a lower layer in the stack.

Such capabilities represent a significant security vulnerability to an ITS station in that the integrity of the higher layer message cannot be fully assured.

Security can be improved by using the combined processing and protocol model shown in Figure 5 and, consequently, this is the one that is assumed in the TVRA. This shows the relationships between the ITS protocol stack, the ITS applications and the data sources and also maps these to the ITS layers described in EN 302 665 [i.5].

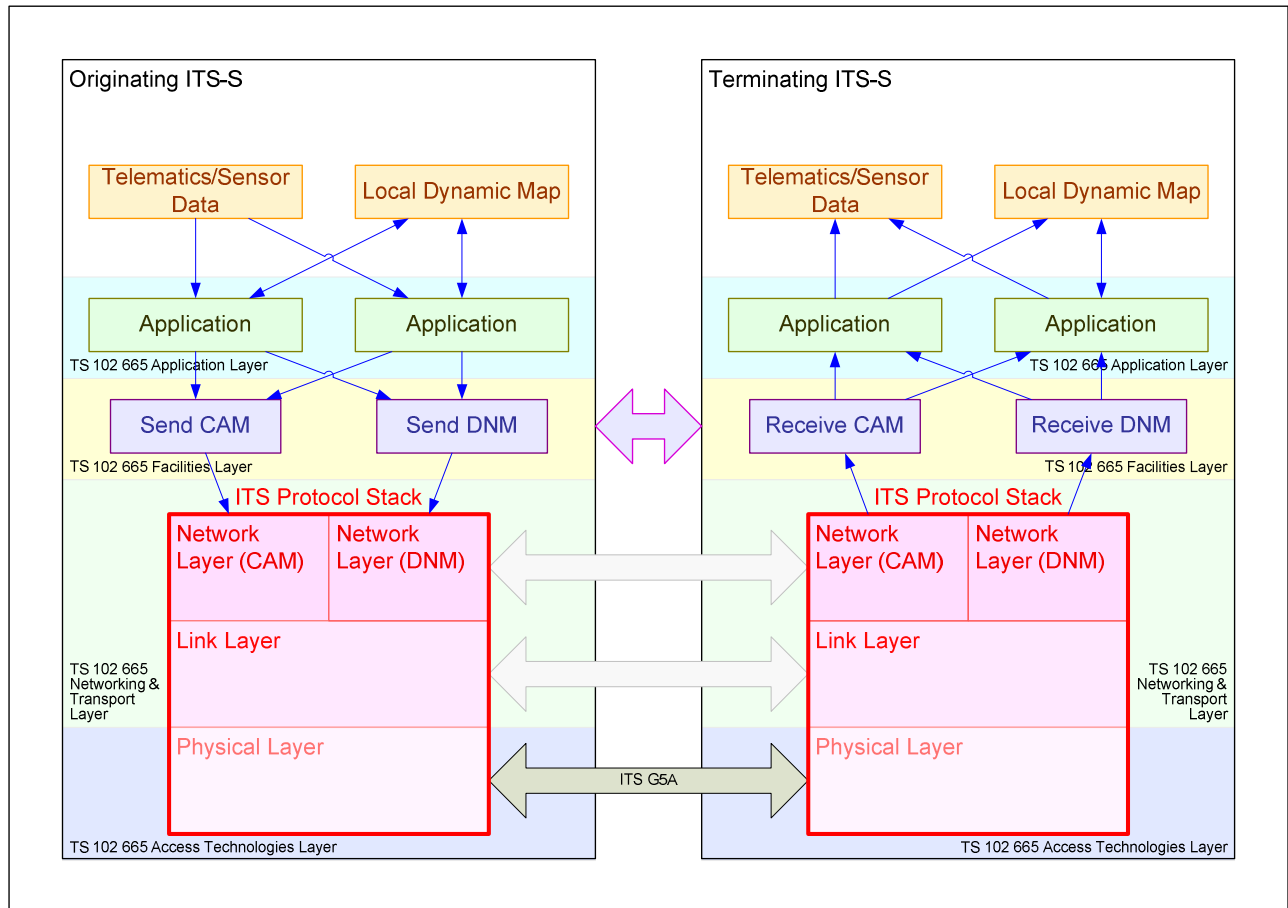


Figure 5: Relationships between ITS functional entities and the ITS protocol stack

ITS CAM and DNM messages are assembled by the Send CAM and Send DNM entities based entirely upon information received from an application. Any information required from sensors, the LDM or other data sources is collected by the relevant application and provided to the message transmission entity prior to the assembled message being passed to the appropriate Network Layer in the ITS protocol stack. This should include any requirements for message repetition (beaconing) and the vehicle position data necessary for determining its current geo-address.

The information in a received CAM or DNM message is extracted by either the Receive CAM or Receive DNM entity and passed directly to the appropriate application(s) where it is processed. The application is then responsible for making any resultant changes to the LDM and for adjusting the associated display and control devices.

5.3.1 Cooperative Awareness Message (CAM) service

5.3.1.1 General description

The Cooperative Awareness Message service is an ITS application which periodically broadcasts information about the ITS station to other nodes in the vicinity.

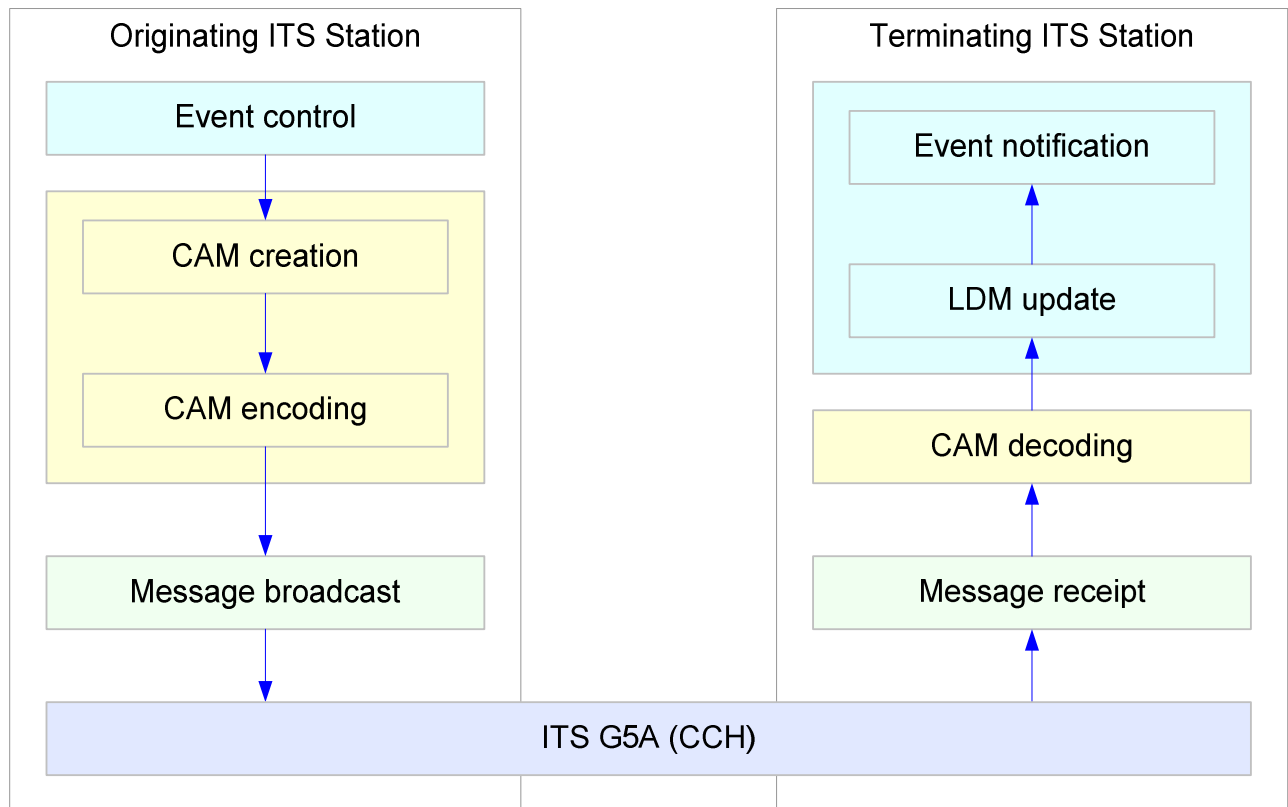


Figure 6: ITS CAM functions

Figure 6 shows the steps involved in generating a CAM in an originating ITS station and in processing that message in the associated terminating ITS station.

5.3.1.2 Outgoing information

When preparing to send an outgoing CAM message, an ITS station determines the following parameters [i.3]:

- information element(s) to be included in the optional part of the CAM;
- frequency of transmission of the CAM (for this particular information elements).

Optional information elements may be included within the CAM dependant on the current situation of a vehicle or the state that it is in. These optional elements include but are not limited to:

- blue light (or equivalent) in use, siren in use;
- braking activity;
- vehicle length.

These information elements have been chosen to show that use cases may differ in the roles attached to the information. Clearly, only emergency vehicles should be able to assert "Siren In Use".

Optional information elements can be classified into:

- safety critical information;
- non-safety relevant information;
- information for special purpose vehicles.

5.3.1.3 Incoming information

The ITS station determines how to react to a received CAM message based on information available in the LDM and data collected from on-board sensors.

5.3.1.4 Local Dynamic Map (LDM)

The Local Dynamic Map (LDM) is a database containing the following information [i.7]:

- static (semi-permanent) maps;
- similar static information not yet part of the above maps;
- temporary and dynamic information, such as weather and traffic conditions;
- dynamic information concerning moving objects, e.g. other vehicles.

The LDM is the only source of information on the traffic and safety related circumstances available to ITS applications.

The LDM is updated from information received in CAM and DNM messages and from data acquired from its own sensors.

5.3.1.5 Information elements within CAM

A CAM includes both mandatory and optional information. Information elements in the mandatory part of the CAM are [i.3]:

- protocol version;
- generation time - the time, when the CAM was generated;
- RSU/vehicle awareness data - fixed data about a vehicle or a roadside;
- position (including a confidence measure);
- speed (including a confidence measure);
- heading (including a confidence measure).

5.3.1.6 Procedure for outgoing messages

As each outgoing CAM message may include different optional information elements and may use a different transmission frequency, the following procedure is followed when preparing to send such a message [i.3]:

- 1) Determine the information to be included in the CAM;
- 2) Obtain the information to be included in the CAM;
- 3) Encode the CAM;
- 4) Submit the CAM to the ITS protocol stack.

5.3.1.7 Procedure for incoming messages

Incoming CAM messages are processed as follows:

- 1) Decode the CAM, parse it into information elements;
- 2) Determine which information can be used to update the LDM;
- 3) Update the LDM.

5.3.2 Decentralized environmental Notification Message (DNM) service

5.3.2.1 General description

The Decentralized Environmental Notification service describes the processing of messages that may be relevant for a specific target area [i.4].

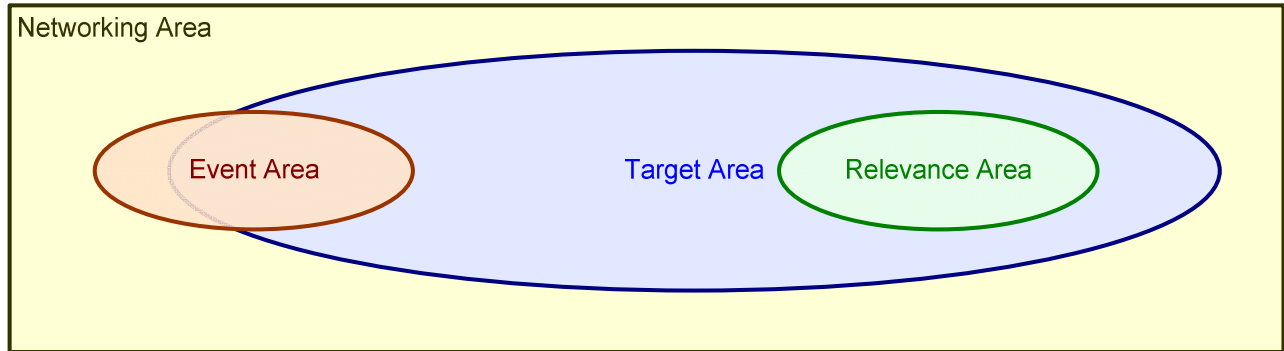


Figure 7: Graphic representation of DNM areas

Figure 7 identifies the following distinct areas that can be described for DNM [i.5]:

- event area:
The area where an event happened, i.e. where the originator is situated.
- target area:
The area, where information about an event should be distributed to;
- relevance area:
The area within the target area where the receivers deem a message relevant;
- networking area:
The area in which an event notification is re-broadcast (using geo-networking or infrastructure) but ignored by the local ITS applications.

NOTE: It is highly likely that the event area and target area will overlap.

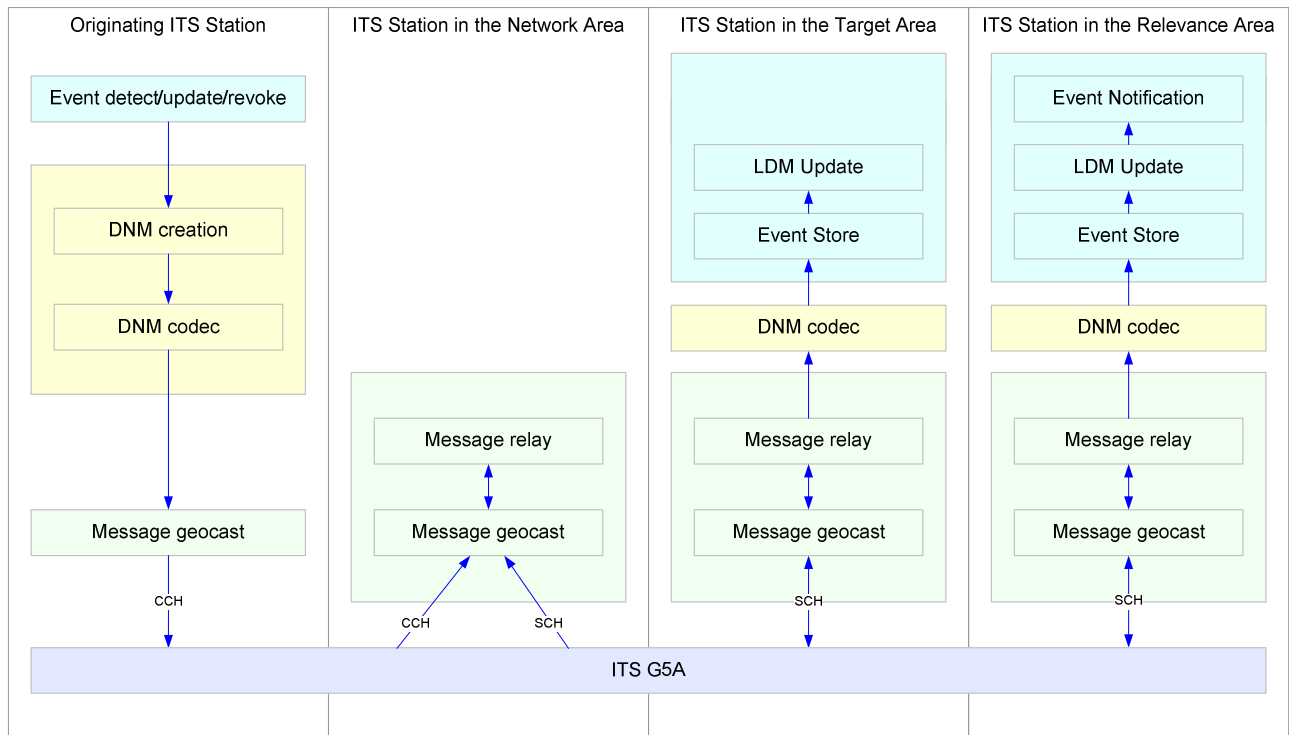


Figure 8: ITS DNM functions

Figure 8 shows the steps involved in generating a DNM message in an originating ITS station and in processing that message in other ITS stations.

5.3.2.2 Outgoing information

An ITS station is responsible for detecting an event which requires notification and transmitting it as a single DNM message unless the same event is already present within its LDM.

The event information contained in a DNM message includes [i.4]:

- use case identifier/priority;
- event identifier/severity/reference location;
- target region/validity time.

An ITS station can indicate the following conditions in an outgoing DNM message:

- event detected (event information);
- event updated (event information);
- event revoked/negated (event information).

NOTE: Having multiple vehicles generating a DNM about the same incident may lead to availability problems.

5.3.2.3 Incoming information

An ITS station determines how to react to a received DNM message based on information available in the LDM and data collected from on-board sensors.

Received event details will only be stored in the LDM if the vehicle is within the target area of that event.

5.3.2.4 LDM

The LDM is described in clause 5.3.1.4.

5.3.2.5 Information elements within DNM messages

A DNM message consists of the following parts:

- message management:
 - information common to all events, including:
 - general information:
 - protocol version;
 - generation time;
 - priority;
 - event management information;
 - action ID;

NOTE: The action ID is unique for each event and contains information about the originator. The proposed way of concatenating the Vehicle Identification Number (VIN) and a sequence number to obtain this ID may be problematic with respect to privacy protection.

- data version (for event updates);
 - is negation (event termination);
 - expiry time.
 - security data to protect authenticity and integrity.
- situation:
 - information regarding the situation itself. For example:
 - the type of event;
 - the severity of the event;
 - the reliability of its detection; and
 - a human readable description of the event.
- location:
 - information regarding:
 - the event area in the form of reference coordinates; and
 - the target area in the form of a shape;
 - additional information, such as location reference information, may be included to describe the event area in more detail.

5.3.2.6 Procedure for outgoing messages

When preparing a DNM message for transmission, an ITS station performs the following actions:

- 1) Obtain the relevant information to fill the DNM message structure (detect/update/terminate);
- 2) Encode the DNM message;

- 3) Submit the DNM message to the Network layer.

5.3.2.7 Procedure for incoming messages

Information contained in DNM messages are stored in the LDM for further use by applications. Upon receipt of a DNM message, an ITS station performs the following steps:

- 1) Decode the DNM message;
- 2) If the ITS station is within target area or event area:
 - a. add "announce" messages to the LDM;
 - b. update the appropriate entry in the LDM when an "update" message is received;
 - c. delete the appropriate entry from the LDM when a "delete" message is received.
- 3) If the ITS station is within the network area:
 - a. relay the message to the ITS network.

5.3.3 Local service advertisement service

5.3.3.1 General description

Local service advertisement service provides information about the availability of a local service provided by an ITS roadside station.

This is done by periodically broadcasting service information.

A suitably authorized ITS station receiving this information is able to invoke the identified service over a unicast connection using the transparent communication channel.

5.3.4 Internet-based service advertisement service

5.3.4.1 General description

Internet-based service advertisement service provides information about the availability of a service provided by an ITS roadside station, that can be accessed using an Internet connection.

This is done by periodically broadcasting service information.

A suitably authorized ITS station receiving this information is able to invoke the identified service over a unicast connection to the Internet.

6 ITS Security Objectives

6.1 Confidentiality

The following security objectives related to the confidentiality of stored and transmitted ITS information are specified:

- Co1. Information sent to or from an authorized ITS user should not be revealed to any party not authorized to receive the information.
- Co2. Information held within the ITS-S should be protected from unauthorized access.
- Co3. Details relating to the identity and service capabilities of an ITS user should not be revealed to any unauthorized 3rd party.

- Co4. Management Information sent to or from an ITS-S should be protected from unauthorized access.
- Co5. Management Information held within an ITS-S should be protected from unauthorized access.
- Co6. It should not be possible for an unauthorized party to deduce the location or identity of an ITS user by analyzing communications traffic flows to and from the ITS user's vehicle.
- Co7. It should not be possible for an unauthorized party to deduce the route taken by an ITS end-user by analyzing communications traffic flows to and from the ITS end-user's vehicle.

6.2 Integrity

The following security objectives related to the integrity of stored and transmitted ITS information are specified:

- In1. Information held within an ITS-S should be protected from unauthorized modification and deletion.
- In2. Information sent to or from a registered ITS user should be protected against unauthorized or malicious modification or manipulation during transmission.
- In3. Management Information held within a ITS-S should be protected from unauthorized modification and deletion.
- In4. Management Information sent to or from an ITS-S should be protected against unauthorized or malicious modification or manipulation during transmission.

6.3 Availability

The following security objectives related to the availability of ITS services are specified:

- Av1. Access to and the operation of ITS services by authorized users should not be prevented by malicious activity within the ITS-S environment.

6.4 Accountability

The following security objectives related to the accountability of ITS users are specified:

- Ac1. It should be possible to audit all changes to security parameters and applications (updates, additions and deletions).

6.5 Authenticity

The following security objectives related to the authenticity of ITS users and transmitted information are specified:

- Au1. It should not be possible for an unauthorized user to pose as an ITS-S when communicating with another ITS-S.
- Au2. It should not be possible for an ITS-S to receive and process management and configuration information from an unauthorized user.
- Au3. Restricted ITS services should be available only to authorized users of the ITS.

7 ITS Functional Security requirements

NOTE: Whilst the present document is a technical report it identifies requirements for future work. In all cases these requirements are considered indicative pending their ratification in formal ETSI Technical Specifications within the ETSI ITS Work Programme. The tables in this clause identify security requirements and are worded for direct application in the relevant future ETSI Technical Specifications within the ETSI ITS Work Programme.

7.1 Confidentiality

The functional security requirements specified in Table 1 together meet the confidentiality objectives identified in clause 6.1.

Table 1: Functional security requirements associated with confidentiality

Objective		Functional Security Requirements
ID	Text	
Co1	Information sent to or from an authorized ITS user should not be revealed to any party not authorized to receive the information.	An ITS system shall provide a means of designating certain information as restricted
		Restricted information sent to and from an authorized ITS user shall be encrypted
		Before transmitting restricted information to another user, an ITS user shall authenticate itself to the recipient
		Before receiving restricted information from another user, an ITS user shall be required to authenticate itself to the sender
Co2	Information held within an ITS-S should be protected from unauthorized access	An ITS-S shall permit only authorized ITS applications to access its security parameter information
		An ITS-S shall permit only authorized ITS users to access its restricted information
Co3	Details relating to the identity and service capabilities of an ITS user should not be revealed to any unauthorized 3 rd party	The functional security requirements specified for objective Co2 satisfy the needs of objective Co3
Co4	Management Information sent to or from an ITS-S should be protected from unauthorized access	An ITS-S shall permit only authorized ITS users to install management information such as service profile data and software updates
		An ITS-S shall only accept management information from an authorized source
		An ITS-S shall restrict access to transmitted management information to authorized ITS users
Co5	Management Information held within an ITS-S should be protected from unauthorized access	An ITS-S shall restrict access to stored management information such as service profile data and software updates, to authorized ITS users
		An ITS-S shall provide a means designating an ITS user as authorized to access to stored management information
Co6	It should not be possible for an unauthorized party to deduce the location and identity of an ITS end-user by analyzing communications traffic flows to and from the ITS end-user's vehicle	An ITS-S shall not include a persistent user identity with location data to an unlimited multicast address
		An ITS-S may include a persistent user identity with location data sent to a unicast or limited multicast address
		An ITS-S shall have the means to protect location and identity information during transmission
Co7	It should not be possible for an unauthorized party to deduce the route taken by an ITS end-user by analyzing communications traffic flows to and from the ITS end-user's vehicle	An ITS-S shall have the means to use multiple identifiers
		Where multiple identifiers are used, an ITS-S shall provide a means of ensuring that no mathematical or syntactical link shall exist between identifiers

7.2 Integrity

The functional security requirements specified in Table 2 together meet the integrity objectives identified in clause 6.2.

Table 2: Functional security requirements associated with integrity

Objective		Functional Security Requirements
ID	Text	
In1	Information held within an ITS-S should be protected from unauthorized modification and deletion	An ITS-S shall permit only authorized ITS applications to modify or delete its security parameter and LDM information
		An ITS-S shall permit only authorized ITS applications and authorized ITS users to modify or delete Service profile information
In2	Information sent to or from an registered ITS user should be protected against unauthorized or malicious modification or manipulation during transmission	An ITS-S shall implement one or more methods to enable it, if requested by an ITS user, to detect en route modification or manipulation of received data
		An ITS-S shall implement one or more methods for preventing the modification or manipulation of data that it transmits or receives
In3	Management Information held within a ITS-S should be protected from unauthorized modification and destruction	The functional security requirements specified for objective In1 satisfy the needs of objective In3
In4	Management Information sent to or from an ITS-S should be protected against unauthorized or malicious modification or manipulation during transmission	The functional security requirements specified for objective In2 satisfy the needs of objective In4

7.3 Availability

The functional security requirements specified in Table 3 together meet the availability objectives identified in clause 6.3.

Table 3: Functional security requirements associated with availability

Objective		Functional Security Requirements
ID	Text	
Av1	Access to and the operation of ITS services by authorized users should not be prevented by malicious activity within the ITS-S environment	An ITS-S should be able to detect easily recognizable Denial of Service attack patterns.

7.4 Accountability

The functional security requirements specified in Table 4 together meet the accountability objectives identified in clause 6.4.

Table 4: Functional security requirements associated with accountability

Objective		Functional Security Requirements
ID	Text	
Ac1	It should be possible to audit all changes to security parameters and applications (updates, additions and deletions).	An ITS-S shall record all requests for changes to security parameter information and ITS applications.
		An ITS-S shall record the results of all requests for changes to security parameter information and ITS applications

7.5 Authenticity

The functional security requirements specified in Table 5 together meet the authenticity objectives identified in clause 6.5.

Table 5: Functional security requirements associated with authenticity

Objective		Functional Security Requirements
ID	Text	
Au1	It should not be possible for an unauthorized ITS user to pose as an ITS-S when communicating with other ITS-Ss	Only an authorized ITS-S shall have access to emergency vehicle services
		An ITS-S shall have the means to validate the identity of an authorized emergency vehicle
		It shall be possible for an ITS-S installed in a private vehicle to be given authority to access emergency vehicle services on a temporary basis
		An ITS-S installed in an emergency vehicle (permanent or temporary) shall have the means to positively identify itself as such
		An ITS-S shall be permitted to send an ITS message only if suitably authorized
		An ITS-S shall reject an incoming ITS message received from an unauthorized source
Au2	It should not be possible for an ITS-S to receive and process management and configuration information from an unauthorized user	The functional security requirements specified for objective In1 satisfy the needs of objective Au2
Au3	Restricted ITS services (Emergency Vehicle Warning) should be available only to authorized ITS users	An ITS-S shall permit only currently authorized ITS users to transmit messages identifying the vehicle as an emergency vehicle
		An ITS user's authorization to transmit messages identifying the vehicle as an emergency vehicle may be time limited by expiry or explicit removal

8 ITS Target of Evaluation (ToE)

From the architectural descriptions in clause 5 it is possible to identify two potential Targets of Evaluation (ToE) for security analysis purposes:

- a single ITS-S (Vehicle) as shown in Figure 9;
- a single ITS-S (Roadside) as shown in Figure 10.

A ToE is defined such that all potential attack interfaces are exposed; i.e. each interface has one end-point inside the ToE and one end-point outside of the ToE boundaries. A ToE can only be attacked through its exposed interfaces and the presence of a threat agent is necessary to launch an attack. This means that the assets (most often the functional entities) associated with the exposed interfaces are potential threat agents, and that the ToE environment should include all exposed interfaces and all assets associated with the end-points of these interfaces that are outside the ToE.

The scope of this analysis is communication over 5,9 GHz (ITS G5A). This means that only the interfaces at A and B are within scope. In the ITS-S (Vehicle) case (see Figure 9), the interfaces at both A and B are exposed and the ToE environment includes the two interfaces and their end-points in other ITS-S (Vehicle)s and ITS-S (Roadside)s within range at any given point in time. Only the assets associated with the ITS-S (Vehicle) and ITS-S (Roadside) are potential threat agents or can be used as attack proxies.

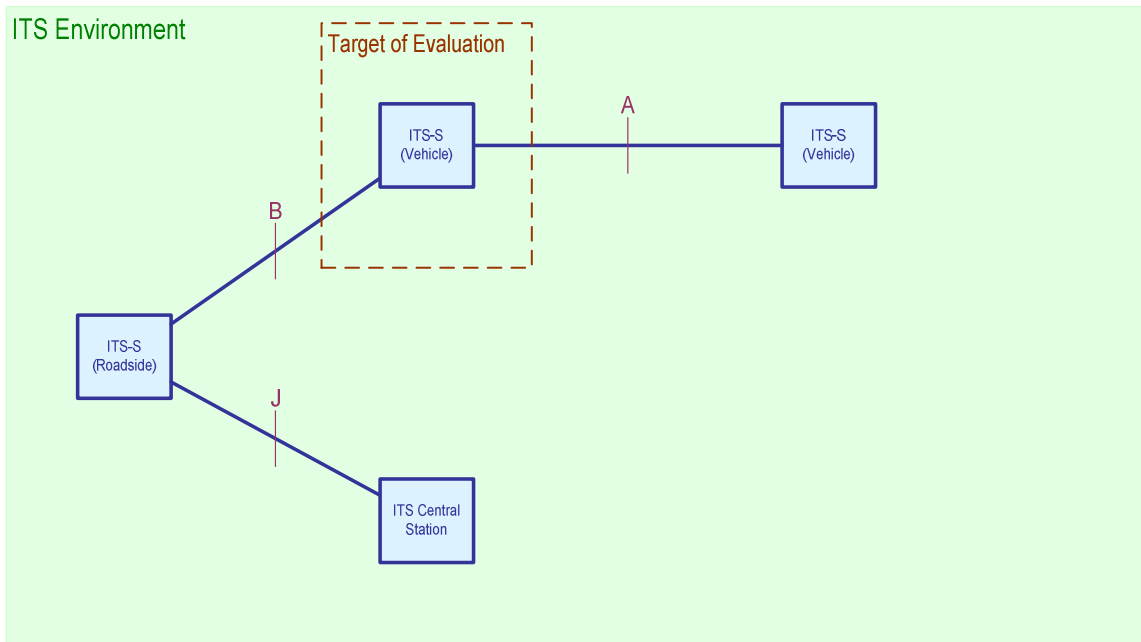


Figure 9: ITS-S (Vehicle) as the TOE

In the ITS-S (Roadside) case (Figure 10), only the interface at B is exposed and the ToE environment includes all ITS-S (Vehicle) units within range at any given point in time. This means that only the assets associated with the ITS-S (Vehicle) are potential threat agents or can be used as attack proxies. Although the interface at J is also exposed, it represents a fixed (rather than ITS G5A) connection to the ITS network infrastructure and it is assumed that this is secured by the ITS operator.

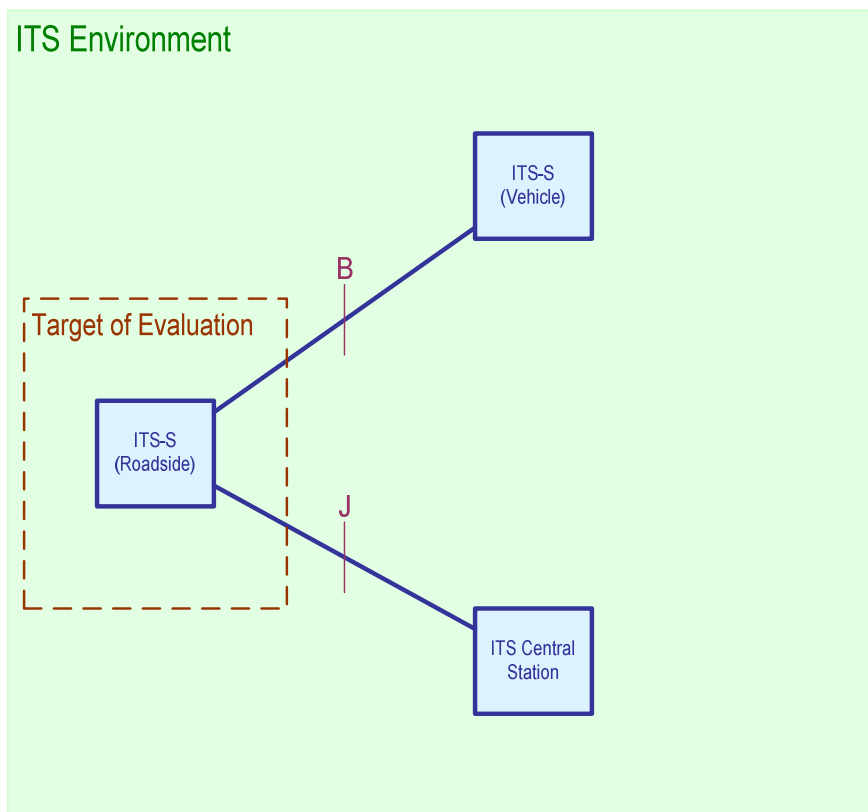


Figure 10: ITS-S (Roadside) as the TOE

8.1 Assumptions on the ToE

The following assumptions have been made for the purposes of this TVRA:

- 1) The ITS-S (Vehicle) and ITS-S (Roadside) are two distinct functional units although, in practice, they may be manufactured as a single physical device comprising both functionalities.
- 2) All communication and actions within the ToE are performed within the boundaries of a trust domain and are, therefore, secure.
- 3) ITS services are those defined in the ITS BSA [i.8].
- 4) All ITS stations have access to 5,9 GHz spectrum for sending.
- 5) All ITS stations have access to 5,9 GHz spectrum for receiving.
- 6) All ITS stations have the ability to determine trustworthiness of received information (i.e. the correctness of information).
- 7) All vehicles always know on which logical channel safety messages should be sent and received at any given point in time.
- 8) Restricted station data is only transmitted to authorized parties. Consequently, an ITS station must have the ability to validate the identity and authority of the recipient before sending restricted data.

8.2 Assumptions on the ToE environment

The following assumptions on the ToE environment have been made for the purposes of this TVRA:

- 1) The ITS network is not completely resistant to masquerade attacks and as a result attacks against ITS stations may originate from within the ITS network.
- 2) Communication over the interfaces at reference points J and K are considered to be secure.
- 3) There is no 5,9 GHz communication between two ITS-S (Roadside) units or between the ITS network and one or more ITS-S (Roadside) units.
- 4) There is no 5,9 GHz communication between the ITS network and an ITS-S (Vehicle).
- 5) Although it is possible that a physical and direct interface may exist at reference point K (for example, a maintenance access point directly connected to the vehicle at a service centre), it is also possible for K to be coincident with reference point B. Consequently, application and security parameter updates to ITS-S (Vehicle) can be made either directly over the fixed interface at K or indirectly over the ITS G5A interface at B (coincident with K).
- 6) All communication directly over the interfaces at K and J is secure.
- 7) Broadcast messages are not protected and assumed always to carry non-sensitive information (and as a consequence never carries personal data).
- 8) All communication between an ITS station and an end-user are considered to be part of a single trusted domain and, thus, out of scope of the TVRA.

9 ITS system assets

9.1 ITS station functional models

Two similar functional entities exist within the ITS 5,9 GHz model. These are the ITS Station (ITS-S) associated with a vehicle and the ITS-S associated with a roadside unit. Both of these can be represented by a number of functional and data elements (assets) as shown in Figure 11 and Figure 12. The assets shown are only those required to provide ITS services. Other security-specific assets are identified in the ITS threat analysis (clause 10).

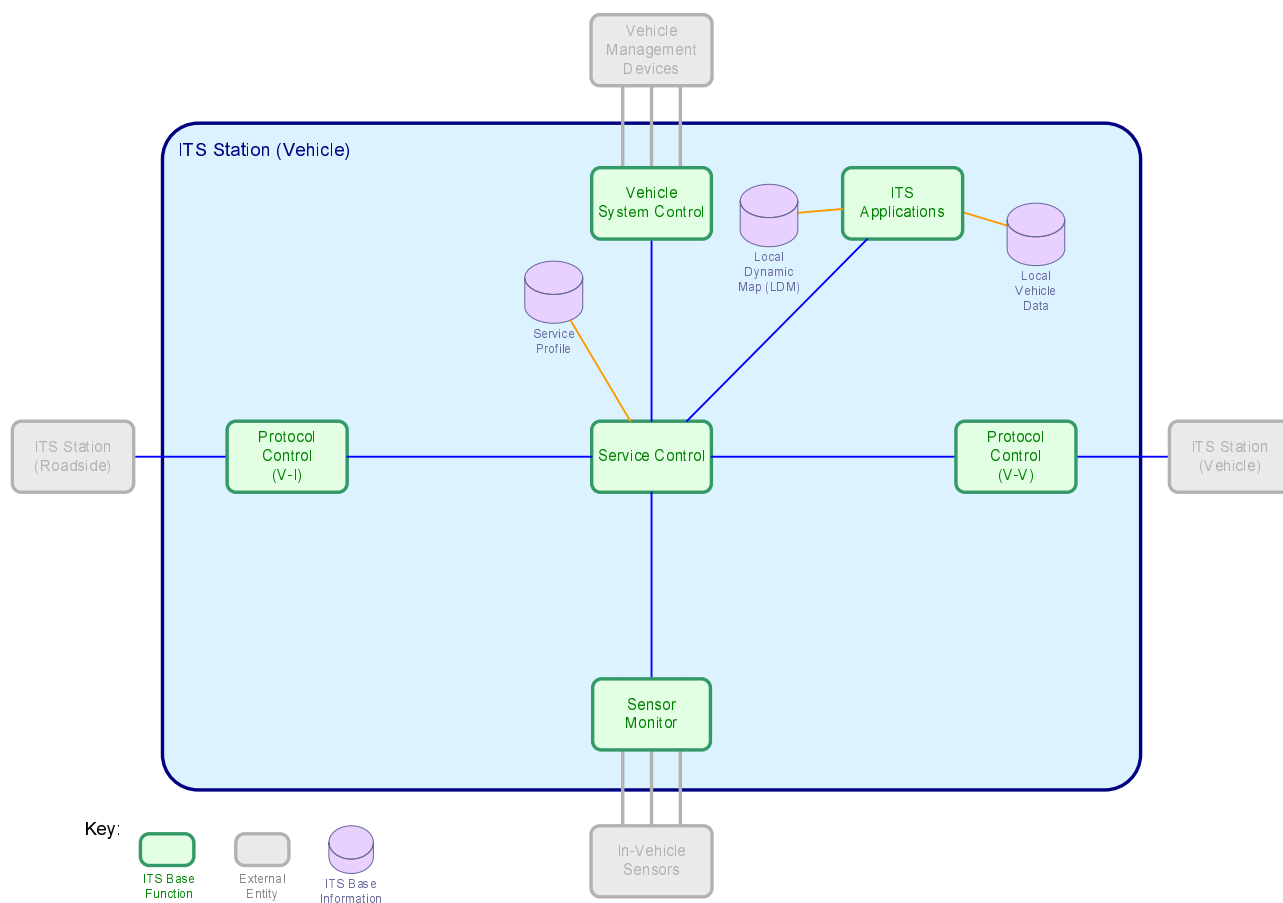


Figure 11: In-vehicle ITS Station assets

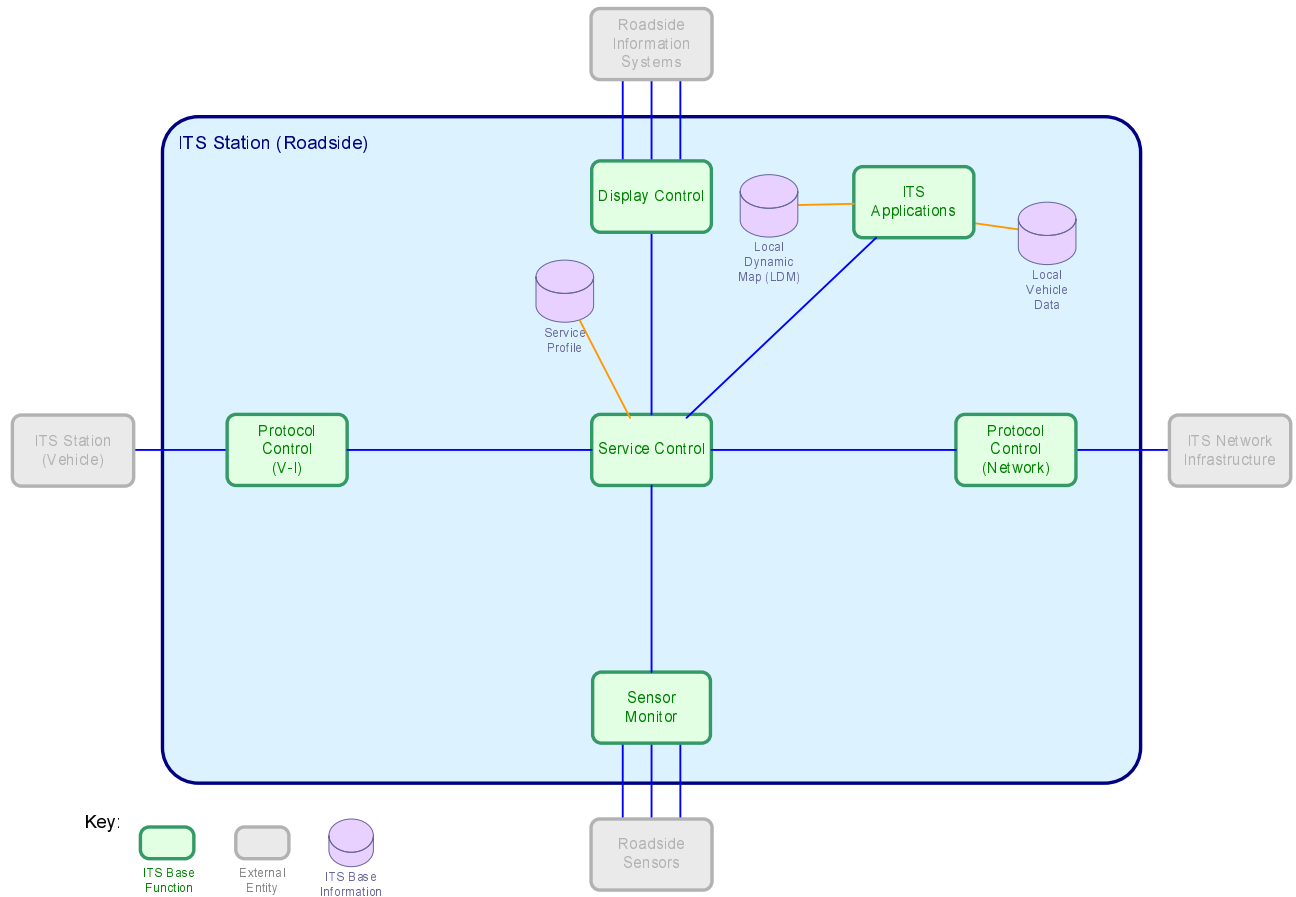


Figure 12: Roadside ITS station assets

9.2 Functional assets

9.2.1 ITS-S (Vehicle)

The functional assets that provide the base ITS capabilities in an in-vehicle ITS station include:

- Protocol Control:
 - vehicle to ITS infrastructure;
 - vehicle to vehicle;
- ITS Applications;
- Service control;
- on-board Sensor Monitor; and
- vehicle system control.

9.2.1.1 Protocol Control

9.2.1.1.1 General description

The protocol control assets select an appropriate message transfer protocol for an outgoing message request and sends the message to the lower layers of the protocol stack in a format that can be processed by those layers. Incoming messages are converted into a format that can be handled within the ITS station and passed to the relevant functional asset for further processing.

9.2.1.1.2 Vehicle to ITS infrastructure

The vehicle to ITS infrastructure (V2I) protocol control asset controls messages at reference point B between the vehicle and the ITS infrastructure.

9.2.1.1.3 Vehicle to vehicle

The vehicle to vehicle (V2V) protocol control asset controls messages at reference A between the vehicle and other vehicles.

9.2.1.2 Service Control

The Service Control functional asset enables information exchange between the other functional assets on the ITS station. It manages inter-process communications between those assets without altering the content of the communications. State information required to manage these communications, if it exists, is maintained and managed by Service Control and stored in the Service Profile data asset.

Service Control is responsible for invoking ITS applications and managing information about ITS application configuration, including:

- the list of applications installed and activated for transmission;
- the list of applications installed and activated for receipt;
- the list of applications installed and not activated.

This information is stored in the Service Profile.

Service Control may originate messages for transmission across the 5,9 GHz interface if those messages are necessary to maintain the Service Profile. However, no such instances have been identified in the ITS BSA.

9.2.1.3 ITS Applications

The ITS applications functional assets process ITS data for local use and determine when to initiate communications with other stations.

Examples of the functions that ITS applications may perform are:

- maintaining information such as the Local Dynamic Map (LDM).
- processing ITS-relevant information which may be received from both in-vehicle and external sources.
- initiating actions including but not limited to:
 - notifying the driver or passengers of relevant information;
 - sending ITS messages to other parties;
 - passing commands through Service Control to request other functional assets to take direct action on the vehicle by, for example:
 - activating non-driving related vehicular components such as the air conditioning;
 - activating driving-related components such as the turn indicators;
 - reconfiguring the vehicle to reduce crash impact; and
 - taking direct driving actions such as steering, braking or accelerating.

Information is made available to the ITS applications via the Service Control functional asset. This information includes telematics data from the Sensor Monitor and Vehicle System Control and received ITS messages from the two Protocol Control assets.

An ITS application may originate messages for transmission across the 5,9 GHz interface in response to, for example:

- changes in the LDM;
- input from the Sensor Monitor; or
- decisions made by itself.

9.2.1.4 Sensor Monitor

The Sensor Monitor functional asset provides environmental data to Service Control for distribution to the other functional assets on the station. The environmental data provided may include:

- GNSS data
- local telematics data such as current speed and bearing;
- external environmental data such as temperature, rain data and ambient light level;
- any ITS-relevant data other than the messages received over a 5,9 GHz wireless connection;
- human input received from a user interface.

Different vehicles will contain different implementations of the sensor monitor. Consequently, different Vehicle ITS Stations may have different collections of environmental data available to them.

The end-user of a vehicle may originate messages for transmission across the 5,9 GHz interface using the Sensor Monitor. However, no such instances have been identified in the ITS BSA.

9.2.1.5 Vehicle System Control

The Vehicle System Control functional asset allows other functional assets to access the vehicle control systems via Service Control. Access to the vehicle control systems allows the ITS-S to control vehicle behaviour. Examples of this may include:

- providing information to the driver only, to the passengers only or to both driver and passengers;
- playing a sound;
- operating the air-conditioning/heating system;
- changing the volume on the car entertainment system;
- activating or deactivating voice communications;
- locking/unlocking/opening/closing doors;
- reconfiguring the vehicle to reduce the damage caused by an imminent collision;
- taking direct control of certain driving actuators.

Not all vehicles will support all of these operations, particularly in the early days of deployment of ITS. However, it is assumed that Vehicle System Control will have access to a Human-Machine Interface (HMI) component which it can use to provide pertinent notifications to the driver.

This FA also includes transmission of messages over interfaces other than the 5,9 GHz interface.

Vehicle System Control is assumed to implement all vehicle control requests from other functional assets without regard to the specific contents of those requests.

Although it is likely that Vehicle System Control will transmit messages over a range of internal interfaces, it should not originate messages for transmission over the 5,9 GHz interface.

9.2.2 ITS-S (Roadside)

The functional assets that provide the base ITS capabilities in a roadside ITS station include:

- Protocol Control:
 - RSU to vehicle;
 - RSU to ITS network.
- ITS Applications;
- Service Control;
- roadside Sensor Monitor; and
- roadside Display Control.

9.2.2.1 Protocol Control

9.2.2.1.1 General description

The Protocol Control assets select an appropriate message transfer protocol for an outgoing message request and sends the message to the lower layers of the protocol stack in a format that can be processed by those layers. Incoming messages are converted into a format that can be handled within the ITS station and passed to the relevant functional asset for further processing.

9.2.2.1.2 RSU to vehicle

The vehicle to ITS infrastructure (V2I) Protocol Control asset controls messages at reference point B between the roadside unit and vehicles.

9.2.2.1.3 RSU to ITS network

The vehicle to vehicle (V2V) protocol control asset controls messages at reference point J between the RSU and the ITS Service Centre.

The roadside-to-network interface will not be a 5,9 GHz connection and so attacks on the RSU using this interface are not considered in the analysis. However, it is conceivable that forged Service Centre messages could enter the RSU at this point and be forwarded to vehicles. This Protocol Control asset is, therefore, considered to be capable of originating messages to be passed across the 5,9 GHz interface.

9.2.2.2 Service Control

The Service Control functional asset enables information exchange between the other functional assets on the ITS station. It manages inter-process communications between those assets without altering the content of the communications. State information required to manage these communications, if it exists, is maintained and managed by Service Control and stored in the Service Profile data asset.

Service Control is responsible for invoking ITS applications and managing information about ITS application configuration, including:

- the list of applications installed and activated for transmission;
- the list of applications installed and activated for receipt;
- the list of applications installed and not activated.

This information is stored in the Service Profile.

Service Control may originate messages for transmission across the 5,9 GHz interface if those messages are necessary to maintain the Service Profile. However, no such instances have been identified in the ITS BSA.

9.2.2.3 ITS Applications

The ITS applications functional assets process ITS data for local use and determine when to initiate communications with other stations.

Examples of the functions that ITS applications may perform are:

- maintaining information such as the Local Dynamic Map (LDM).
- processing ITS-relevant information which may be received from both in-vehicle and external sources.
- initiating actions including but not limited to:
 - sending ITS messages to other parties;
 - sending information to the Display Control asset to be presented on roadside matrix units;
 - sending information to the ITS Service Centre.

Information is made available to the ITS applications via the Service Control functional asset. This information includes telematics data from the Sensor Monitor and Vehicle System Control and received ITS messages from the two Protocol Control assets.

An ITS application may originate messages for transmission across the 5,9 GHz interface in response to, for example:

- changes in the LDM;
- input from the Sensor Monitor; or
- decisions made by itself.

9.2.2.4 Sensor Monitor

The Sensor Monitor functional asset provides environmental data to Service Control for distribution to the other functional assets on the station. The environmental data provided may include:

- GNSS data;
- external environmental data such as temperature, rain data and ambient light level;
- any ITS-relevant data other than the messages received over a 5,9 GHz wireless connection;
- human input received from a user interface.

Different vehicles will contain different implementations of the sensor monitor. Consequently, different Roadside ITS Stations may have different collections of environmental data available to them.

The end-user of an RSU may originate messages for transmission across the 5,9 GHz interface using the Sensor Monitor. However, no such instances have been identified in the ITS BSA.

9.2.2.5 Display Control

The Display Control functional asset manages the information sent to external presentation devices such as electronic road signs and smaller displays intended for use by a human operator. Data Control may be used by the ITS Applications, the ITS network via the ITS Network Protocol Control, a human operator via the Sensor Monitor FA and Service Control. When requested to display a message, Display Control will pass the information to the presentation device without regard to the contents of the message.

Display Control does not originate message for transmission over the 5,9 GHz interface.

9.3 Data assets

9.3.1 ITS-S (Vehicle)

9.3.1.1 Local Dynamic Map

The Local Dynamic Map (LDM) is an in-vehicle ITS station's dynamically updated repository of data relating to local driving conditions. It includes information received from on-board sensors and from CAM and DNM messages.

Data from sensors includes the following:

- vehicle's current position;
- data that has been made public regarding the vehicle's current status. For example:
 - breaking information;
 - traction information;
 - status of external indicators.
- data that has not yet been made public regarding the vehicle's current status but might be in the future. For example:
 - tyre tread state
- data that will not be shared regarding the vehicle's current status but which is relevant to driving decisions. For example:
 - amount of fuel remaining;
 - current fuel consumption.

Data resulting from received messages includes the following:

- current known positions and types of other vehicles;
- current hazards, alerts, and other DNM-related information.

Some data may be updated as a result of either sensor input or received messages, such as:

- local weather conditions;
- local road surface conditions;
- other information about the physical (as opposed to simply ITS) environment.

9.3.1.2 Local Vehicle Information

Local vehicle information comprises data relating to the vehicle that may not be immediately relevant to real-time driving decisions but may be used for maintenance or may influence driving strategy. There is an overlap between this information and the "data that will not be shared" in the LDM. Although there is no definitive list of what might be included in the Local Vehicle Information repository, the following items are potential candidates:

- Vehicle Identification Number (VIN);
- license plate number;
- vehicle manufacturer;
- model of vehicle;
- known physical damage;

- inventory of components on the vehicle:
 - component manufacturer;
 - date of manufacture.

Additionally, an owner may store personal information on the vehicle (this is not required for any of the ITS applications in the BSA but, again, may facilitate obvious next-generation applications). This information would generally relate to the owner or operator of the vehicle and may include:

- name;
- address;
- telephone number;
- credit card number (to allow on-road e-commerce);
- toll road subscriber identity.

9.3.1.3 Service Profile

A service profile in an in-vehicle ITS station will include:

- the list of applications installed and activated for transmission;
- the list of applications installed and activated for receipt;
- the list of applications installed and not activated.

In addition, references to specific security parameters and other characterization data may be stored for each application.

NOTE: The term "application" may not map exactly to an application in the sense of CAM or DNM. An application here is a set of messages that the vehicle is permitted to send or is willing to receive. These messages may be a subset of the CAM or DNM messages or they may be other messages entirely from outside the BSA.

9.3.2 ITS-S (Roadside)

9.3.2.1 Local Dynamic Map (LDM)

The Local Dynamic Map (LDM) is a roadside ITS station's dynamically updated repository of data relating to local driving conditions. It includes information received from roadside sensors, the ITS infrastructure network and from CAM and DNM messages.

Data acquired from sensors or received from the ITS infrastructure network includes the following:

- current position.

Data resulting from messages received from other vehicles includes the following:

- current known positions and types of other vehicles.

Some data may be updated as a result of input over either 5,9 GHz or non-5,9 GHz interfaces, such as:

- local weather conditions;
- local road surface conditions;
- other information about the physical (as opposed to simply ITS) environment;
- current hazards, alerts, and other DNM-type information.

9.3.2.2 Local Station Information

Local station information contains information about the RSU that may be relevant for service management. This category includes the following:

- RSU serial number;
- networking information;
- current operational status of the RSU;
- ITS operator;
- maintenance schedule.

9.3.2.3 Service Profile

The service profile in an RSU ITS station includes:

- the list of applications installed and activated for transmission;
- the list of applications installed and activated for receipt;
- the list of applications installed and not activated.

In addition, references to specific security parameters and other characterization data may be stored for each application.

NOTE: The term "application" may not map exactly to an application in the sense of CAM or DNM. An application here is a set of messages that the RSU is permitted to send or is willing to receive. These messages may be a subset of the CAM or DNM messages or they may be other messages entirely from outside the BSA.

10 ITS threat analysis

10.1 Attack interfaces and threat agents

10.1.1 Attack interfaces and threat agents for ITS-S (Vehicle) ToE

The ITS-S (Vehicle) ToE accesses its environment across ITS G5A interfaces at the three reference points A, B and K (coincident with B). These interfaces are all exposed which means that they are accessible from outside of the ToE and may, therefore, be exploited as attack interfaces.

The interface at reference point A can be exploited as an attack interface by another valid ITS-S (Vehicle) causing undesired actions or events due to, for example:

- design flaws as a result of poorly specified requirements;
- malicious or mischievous use of an ITS-S (Vehicle) as an attack proxy by a remote agent; or
- malicious or mischievous use as an ITS-S (Vehicle) providing false or misleading information to other vehicles.

The interface at reference point B can be exploited as an attack interface by a valid ITS-S (Roadside) unit causing undesired actions or events due to, for example:

- design flaws as a result of poorly specified requirements;
- malicious or mischievous use as an attack proxy by a remote agent; or
- malicious or mischievous use as an ITS-S (Roadside) providing false or misleading information to passing vehicles.

The interface at reference point K cannot be directly exploited when it is implemented as a wired and controlled interface. However, it can be exploited as an attack interface when coincident with reference point B implemented as a 5,9 GHz interface. In this case it is possible for an attack on an ITS-S (Vehicles) to be mounted from the ITS network.

Any security attack can in principle originate from any logical entity in the ToE environment and may target any of the assets of a target ITS-S (Vehicle). Furthermore, any layer in the protocol stack used by the relevant reference point can be exploited as an attack interface.

10.1.2 Attack interfaces and threat agents for ITS-S (Roadside) ToE

The ITS-S Roadside unit accesses its environment across the ITS G5A interface at reference point B. This interface is exposed and may, therefore, be exploited as an attack interface into the ToE. Attacks originate either from within the ToE environment or from within the ToE itself. Roadside units communicate with each other through the ITS core network without using 5,9 GHz communication links. However, the interface at reference point J between the ITS-S roadside unit and the ITS network can be used to carry an attack, such as the installation of malware, from the ITS network. This interface is, therefore, also defined as an exposed interface of the ITS-S (Roadside) unit.

The interface at reference point B can be used by a number of threat agents in order to mount an attack. These threat agents may include:

- a valid ITS-S (Vehicle) causing undesired actions or events due to, for example:
 - design flaws as a result of poorly specified requirements;
 - malicious or mischievous use as an attack proxy by a remote agent; or
 - malicious or mischievous use as an ITS-S (Vehicle) providing false or misleading information to other vehicles;
- an entity posing as a valid ITS-S (Vehicle) causing undesired actions or events due to, for example:
 - malicious or mischievous use as an attack proxy by a remote agent; or
 - malicious or mischievous use as an ITS-S (Vehicle) providing false or misleading information to other vehicles;
- an entity within the ITS-S (Roadside) itself providing false or misleading information to passing vehicles.

When an attack originates from within the roadside unit, the interface at B may be used to propagate the attack into the ToE environment.

The interface at reference point J is not expected to be an ITS G5A interface and assumed to be secured against direct attack. However, it can be used to carry an accidental or malicious attack from within the ITS network.

Any security attack on an ITS-S (Roadside) ToE could originate in any logical entity in the ToE environment and may target any of the assets of a target ITS-S (Roadside). Furthermore, any layer in the protocol stack can be exploited as an attack interface.

10.2 Vulnerabilities and threats

10.2.1 Threats to all ITS stations

The identification and analysis of ITS security considered threats in the following categories:

- Availability threats:
 - Denial of Service (DoS)
- Integrity threats:
 - Manipulation
 - Masquerade

- Replay
- Insertion of information
- Authenticity threats
 - Manipulation
 - Masquerade
- Confidentiality threats
 - Eavesdropping
 - Traffic analysis
- Non-repudiation/Accountability threats
 - Repudiation

10.2.2 Availability

10.2.2.1 General threats to availability

Threats to the availability and continuous behaviour of an ITS system include Denial of Service (DoS) attacks as a result of, for example:

- the introduction of malicious software (malware);
- a high volume of messages introduced intentionally through spamming; and
- a high volume of messages introduced as a consequence of using multi-hop broadcast messaging:
 - this may pose a threat to the system because time is a critical component in traffic safety messages and the design of an ITS-S may not allow sufficient time to check for the authenticity of relay messages when large numbers are received in a very short time.

DoS is a category of attack that is difficult to protect against. Such attacks may result in an ITS station failing to receive, respond to, relay, produce and send traffic safety messages or to perform its normal function or prevent other ITS stations from performing their normal functions. Methods of attack include:

- maliciously and artificially generating a high volume of false messages;
- malware manipulating the sending or receiving capabilities of an ITS station. Injecting malware is made possible by exploiting the capability of an ITS-S to receive periodic software and firmware updates and security parameter information updates;
- formation of "black holes" when a number of adjacent ITS stations are configured (either accidentally or maliciously) not to propagate messages. The impact of having a black hole is that ITS messages are not relayed to all users in a target area. There is also the possibility that an ITS-S (Vehicle) may be manipulated such that when it enters a particular area (given by GNSS coordinates) it stops relaying messages. Such an attack creates a vehicle local "black hole" at a particular location.
- accidentally generating a high volume of false outgoing messages or unsolicited incoming message queue entries as a result of flaws in the product design.

10.2.3 Integrity

10.2.3.1 General threats to integrity

Threats to the integrity of an ITS-S include:

- unauthorized access to restricted information;

- loss of information;
- manipulation of information; and
- corruption of information.

Unauthorized access to restricted information can be gained by means of a masquerade attack or by the use of malware injected into an ITS station. Restricted information includes all information which would not be included in broadcast messages and which is specifically associated with a particular ITS station or its end-users.

Loss of information can be a consequence of unauthorized access to restricted information. An attacker could insert malware that deletes service information, security parameters, local station data or information stored in the LDM.

Information can be manipulated or corrupted either at one of the ITS G5A interfaces or within the sending and receiving ITS stations. Malware could be used to change a message before it is sent or to interfere with the protocol such that information is corrupted in transit.

10.2.4 Authenticity

10.2.4.1 General threats to authenticity

Authenticity is a major security challenge in ITS as all ITS stations have the ability to send, receive and replay all types of messages defined in the BSA except those which are specific to emergency vehicles.

Ensuring the authenticity of information received and processed by an ITS-S involves some or all of the following:

- protection of legitimate ITS stations from masquerade attacks:
 - carried out by an agent posing as a legitimate ITS station, application or service. An attacker can then insert false messages into the network and deceive users and authorities into believing that another node was responsible for sending these messages.
- identification of the unplanned replay of previous legitimate message interchanges:
 - carried out by capturing and subsequently resending valid received messages. Replay attacks can take two general forms:
 - replay of messages at a similar location but a different time. Such attacks would include the replay of emergency vehicle messages when the specific emergency situation no longer exists;
 - replay of messages at a different location and a different time, the so called "wormhole attack". Such attacks can be used to cause confusion among recipients who are unable to resolve the received location data with their own actual location and may, consequently, send messages which could reveal their identity or other private information.
- exposure of false GNSS signals:
 - A GNSS satellite simulator can generate radio signals that are stronger than those received from a genuine GNSS satellite. This enables an attacker to provide false location information to ITS stations and thus, potentially, causing traffic accidents. If an ITS-S synchronizes its internal clock to GNSS time, a simulator can be used to set an inaccurate current time and this can result in it accepting expired messages received in a replay attack.
- protection against broadcast messages carrying misinformation:
 - carried out by broadcasting valid but false ITS messages in order to misinform the message recipients. The motivation for this attack may be to clear a chosen route for personal or criminal purposes.

10.2.5 Confidentiality

10.2.5.1 General threats to confidentiality

Threats to the confidentiality of information associated with an ITS station include the illicit collection of transaction data by eavesdropping and the collection of location information through the analysis of message traffic.

The messages associated with the BSA services considered in this analysis are those transmitted over the 5,9 GHz radio interface. As G5A is an open interface, messages transmitted over this interface may be intercepted and information extracted. Information that is of particular concern in this context includes personal data and data that can later be used to launch a direct attack (replay, for example). ITS broadcast messages are transmitted indiscriminately and so can be received by any ITS-S within range of the radio signal. Consequently, these messages are of little interest to an eavesdropper.

An attacker may also construct a profile of a given ITS-S (Vehicle) or end-user by observing which services are used regularly, at what times and at which location. Such traffic analysis might be used to gain information on private vehicles which are used as emergency vehicles thus enabling the attacker to carry out an emergency vehicle masquerade attack.

The ITS system requirement of being able to track vehicles for traffic flow and safety purposes can be misused by an attacker to gain information about the whereabouts of a particular vehicle. In this way, the attacker is able to stalk the user or build a profile of the ITS station for potentially malicious purposes.

10.2.6 General threats to accountability

ITS end-users may be able to avoid prosecution for motoring offences or for mounting security attacks on other ITS users by denying that:

- particular ITS messages were sent by an ITS station;
- particular ITS messages were received by an ITS station;
- specific ITS services were uploaded, deleted or otherwise modified;
- specific ITS data were uploaded, deleted or otherwise modified.

For law enforcement authorities to be able to prosecute such actions, it is necessary to record all message and service activity within the an ITS station.

10.2.7 Vulnerabilities and threats

10.2.7.1 Determining system vulnerabilities

Within a ToE, a vulnerability is considered to be a combination of an identified system weakness with one or more threats that are able to exploit that weakness.

10.2.7.2 Threats and vulnerabilities within an ITS-S (Vehicle)

Table 6 identifies the threats and associated weaknesses that define the vulnerabilities within an ITS-S (Vehicle).

Table 6: List of Vulnerabilities for ITS-S (Vehicle) ToE

ID	Threat	ITS-S Problem Area	Weaknesses	Threat Agent	Attack interface
V-V1	- Message saturation	Intrinsic high density of ITS message traffic due to broadcasting and beaconing in V2V systems	<p>The time taken by an ITS-S (Vehicle) to process a high volume of real or spurious messages or fabricated queue entries could:</p> <ol style="list-style-type: none"> (1) cause it to miss important incoming ITS messages (2) cause it to delay or miss the sending of outgoing ITS messages or relaying of incoming ITS messages (3) leave it with no resources free for other essential tasks such as monitoring sensors and updating driver-displays (4) leave it with no resources free for other essential tasks such as monitoring sensors and updating driver-displays 	<p>Malware installed on target ITS-S (Vehicle) filling the incoming message queue with spurious but valid messages</p> <p>Malicious ITS-S broadcasting a high level of ITS message traffic</p>	A, B (also on behalf of K)
		Lack of flow control in V2V broadcast messaging			
		Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected by the application, not at the network layer in the ITS stack			
		The random re-attempt period in the "Listen before send" message transmission method does not make optimum use of the available bandwidth			

ID	Threat	ITS-S Problem Area	Weaknesses	Threat Agent	Attack interface
V-V2	- Jamming of radio signals	Inability of the ITS-S (Vehicle) to quickly detect and isolate interference on radio channels	Transmissions to and from an ITS-S (Vehicle) can be lost while interference is detected and mitigated	External jammer equipment	A, B
V-V3	- Injection of false messages - Manipulation of ITS messages en route	Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected at the application layer, not at the network layer in the ITS stack	An ITS-S (Vehicle) is unable to determine quickly whether a received message is valid and from a legitimate user and then acts on information received in the message Relayed messages are open to manipulation in an ITS-S en route. Received messages that are intended for relaying can be withheld	Malware on ITS-S (Vehicle or Roadside) within range Equipment posing as a genuine ITS-S (Vehicle) or as an RSU sending valid but irrelevant ITS messages	A, B
V-V4	- Masquerade as ITS-S (Vehicle or Roadside) or ITS network	CAM and DNM messages do not include any form of identification information	An ITS-S (Vehicle) is unable to determine quickly whether a received message is valid and from a legitimate user and then acts on information received in the message The contents of the LDM can be incorrectly modified by received messages containing false time, position or status information or by maliciously planted software	Equipment posing as a genuine ITS-S (Vehicle) or as an RSU sending false information in ITS messages that are otherwise valid	A, B (also on behalf of K)
		Vehicle-to-Vehicle messages include no validation or legitimacy checks			
V-V5	- Masquerade for fabrication of messages	CAM and DNM messages do not include any form of identification information	An ITS-S (Vehicle) is able to perform only basic checks on the validity of a received message and its contents The contents of the LDM can be incorrectly modified by received messages containing false time, position or status information or by maliciously planted software	Equipment posing as a genuine ITS-S (Vehicle) or as an RSU sending false information in ITS messages that are otherwise valid Malicious application in the ITS network sending false information in ITS messages that are otherwise valid	A, B
		Vehicle-to-Vehicle messages include no validation or legitimacy checks			

ID	Threat	ITS-S Problem Area	Weaknesses	Threat Agent	Attack interface
V-V6	<ul style="list-style-type: none"> - Replay of "expired" (old) messages - Wormhole attacks - GNSS spoofing 	Uncertainty regarding how timestamps are created and how to use them to check the validity of messages	An ITS-S (Vehicle) is unable to validate when or where a received message was originally generated	<p>Equipment posing as a genuine ITS-S (Vehicle) or as an RSU sending "expired" information in ITS messages that are otherwise valid</p> <p>Equipment posing as a genuine ITS-S (Vehicle) or as an RSU sending information in ITS messages that are valid except for the source location</p>	A, B
V-V7	- Malicious isolation of one or more ITS-S (Vehicle) (black hole)	ITS-S (Vehicle) memory is can be modified by information received over the air interface	Malware can be initiated, accessed or installed over the air	Malware on ITS stations that disables some or all functionality of one or more of the ability to create, process, receive and send ITS messages	A, B
V-V8	<ul style="list-style-type: none"> - Eavesdropping - Traffic analysis - Location tracking 	Broadcast messages are in general intended for all ITS-S within range.	<p>All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver</p> <p>Some ITS BSA messages reveal the geographic location of the sending ITS-S</p>	Equipment posing as a genuine ITS-S (Vehicle) or as an RSU receiving information for malicious analysis of content and recording on message patterns etc.	A, B
		Absence of addressing in broadcast messages meaning that non-ITS-S equipment can also receive ITS messages			

ID	Threat	ITS-S Problem Area	Weaknesses	Threat Agent	Attack interface
V-V9	- Denial of transmission	CAM and DNM messages do not include any form of identification information	There is no requirement for an ITS-S (Vehicle) to maintain an auditable log of all messages sent and received by it. Such a log would quickly become very large due to the high density of ITS messages.	Equipment posing as a genuine ITS-S (Vehicle) or as an RSU sending false information in ITS messages that are otherwise valid Malware installed on target ITS-S (Vehicle) creating and sending false information in ITS messages that are otherwise valid	A, B (also on behalf of K)
		Vehicle-to-Vehicle messages include no validation or legitimacy checks			
		ITS-S (Vehicle) cannot positively identify relevant information to maintain record of the originator of ITS messages causing harm to the ITS-S (Vehicle)			

A successful attack on each vulnerability in an ITS-S (Vehicle) may result in a number of undesirable consequences. These are listed in Table 7 to Table 11.

Table 7: Consequences of threats to availability in an ITS-S (Vehicle)

Threat Group		Threat Type	Weakness	Undesirable Consequences
DoS:	Denial of access to incoming messages	- Message saturation - Radio jamming - Injection of false messages - Internal malware	An ITS-S (Vehicle) is unable to quickly determine whether a received message is valid and from a legitimate user and acts on information received in the message The time taken by an ITS-S (Vehicle) to process a high volume of real or spurious messages could cause it to miss important incoming ITS messages	Accidents if collision warnings are not received and processed by the attacked ITS-S (Vehicle) General compromise of traffic management applications which depend on the reliable and timely receipt of ITS messages
DoS	Denial of access to outgoing messages	- Message saturation - Radio jamming - Internal malware - Black hole creation	The time taken by an ITS-S (Vehicle) to process a high volume of real or spurious messages or fabricated queue entries could cause it to delay or miss the sending of outgoing ITS messages or relaying of incoming ITS messages Transmissions to and from an ITS-S (Vehicle) can be lost while interference is detected and mitigated	Accidents if collision warnings are not delivered by the attacked ITS-S (Vehicle) General compromise of traffic management applications which depend on the reliable and timely delivery of ITS messages to all affected vehicles
DoS	Denial of access to ITS-S (Vehicle) internal resources	- Message saturation - Internal malware	The time taken by an ITS-S (Vehicle) to process a high volume of real or spurious messages or fabricated queue entries could leave it with no resources free for other essential tasks such as monitoring sensors and updating driver-displays	Accidents if driver is not warned immediately of critical events or significant environmental changes General compromise of traffic management applications which depend on the reliable and timely processing of changes in vehicle and ITS-S (Vehicle) environment status

Table 8: Consequences of threats to integrity in an ITS-S (Vehicle)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Modification and deletion of stored information	<ul style="list-style-type: none"> - Internal malware - Message replay - GNSS spoofing - ITS-S masquerade - Injection of false ITS messages 	<p>An ITS-S (Vehicle) is unable to validate when a received message was originally generated</p> <p>The contents of the LDM can be incorrectly modified by received messages containing false time, position or status information or by maliciously planted software</p>	General compromise of traffic management applications which depend on the LDM for accurate and up-to-date information
Modification and deletion of transmitted information	<ul style="list-style-type: none"> - Relay modification - Black hole 	<p>Relayed messages are open to manipulation in an ITS-S en route. Received messages that are intended for relaying can be withheld.</p> <p>An ITS-S (Vehicle) is unable to determine quickly whether a received message is valid and from a legitimate user and then acts on information received in the message</p>	<p>Accidents if collision warnings are not received and processed by the attacked ITS-S</p> <p>General compromise of traffic management applications which depend on the reliable and timely receipt of ITS messages</p>

Table 9: Consequences of threats to authenticity in an ITS-S (Vehicle)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Masquerade	<ul style="list-style-type: none"> - Emergency vehicle masquerade - Message replay - Wormhole attack - GNSS spoofing - ITS-S masquerade - Injection of false ITS messages 	An ITS-S (Vehicle) is able to perform only basic checks on the validity of a received message and its contents	<p>Accidents and general driver confusion if the source and contents of received messages cannot be relied upon</p> <p>General compromise of traffic management applications which depend on the reliable and timely receipt of ITS messages</p>

Table 10: Consequences of threats to confidentiality in an ITS-S (Vehicle)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Acquisition of personal information	- Eavesdropping	All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver	Without protection, any personal information exchanged in a unicast transaction could be intercepted and used by an attacker to gain illicit access to subscription services.
Acquisition of behavioural details	<ul style="list-style-type: none"> - Eavesdropping - Traffic analysis 	All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver	Analysis of message traffic can reveal which subscription services are being used by individual users. This information can be used to launch direct attacks on a particular ITS-S (Vehicle) and user.
Acquisition of location information	<ul style="list-style-type: none"> - Traffic analysis - Location tracking 	Some ITS BSA messages reveal the geographic location of the sending ITS-S	Location information gained in an unauthorized way can be used to effectively launch other directed attacks against particular ITS-S (Vehicle)s and users.

Table 11: Consequences of threats to accountability in an ITS-S (Vehicle)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Denial of transmission	- Repudiation	There is no requirement for an ITS-S (Vehicle) to maintain an auditable log of all messages sent by it. Such a log would quickly become very large due to the high density of ITS messages.	Malicious and mischievous messages can be sent with impunity by a legitimate ITS-S (Vehicle) as no proof exists that any particular message was ever sent by that particular ITS-S.
Denial of data receipt	- Repudiation	There is no requirement for an ITS-S (Vehicle) to maintain an auditable log of all messages received by it. Such a log would quickly become very large due to the high density of ITS messages.	Traffic safety and traffic management messages can be ignored so that, in the event of prosecution (for a speeding offence, for example), a vehicle owner can claim that the message was not received.

10.2.7.3 Threats and vulnerabilities within an ITS-S (Roadside)

Table 12 identifies the threats and associated weaknesses that define the vulnerabilities within an ITS-S (Roadside).

Table 12: List of Vulnerabilities for ITS-S (Roadside)

ID	Threat	ITS-S Problem Area	Weakness	Threat Agent	Attack interface
V-R1	- Injection of a high volume of false emergency vehicle warning messages	CAM and DNM messages do not include any form of identification information	An RSU is unable to quickly determine whether a received message contains accurate information and is from a legitimate emergency services vehicle and acts by relaying the message. An RSU can only check whether the message is valid and comes from a valid source	Equipment posing as a genuine Emergency Vehicle sending false information in ITS messages that are otherwise valid Equipment replaying "expired" emergency vehicle warnings	B
		Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected on the application layer, not at the network layer in the ITS stack	The time taken by an RSU to process a high volume of real or spurious messages could cause it to miss important incoming ITS messages		
V-R2	- Message saturation	CAM and DNM messages do not include any form of identification information	The time taken by an ITS-S (Vehicle) to process a high volume of real or spurious messages or fabricated queue entries could cause it to miss important incoming ITS messages	Malware installed on target RSU filling the incoming message queue with spurious but valid messages	B
		Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected on the application layer, not at the network layer in the ITS stack	The time taken by an RSU to process a high volume of real or spurious messages or fabricated queue entries could leave it with no resources free for other essential tasks such as relaying and acting upon emergency vehicle warnings or other safety-related messages	Malicious ITS-S broadcasting a high level of ITS message traffic	
		Uncertainty regarding identification, authentication and authorization of ITS application and information on an RSU			

ID	Threat	ITS-S Problem Area	Weakness	Threat Agent	Attack interface
V-R3	- Radio jamming	Inability of an RSU to quickly detect and isolate interference on radio channels	Transmissions to and from an RSU can be lost while interference is detected and mitigated	External jammer equipment	B
V-R4	- Injection of false messages	<p>Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected on the application layer, not at the network layer in the ITS stack</p> <p>Uncertainty regarding how timestamps are created and how to use them to check the validity of messages</p>	<p>An RSU is unable to quickly determine whether a received message contains accurate information and is from a legitimate user and acts by relaying the message. An RSU can only check whether the message is valid and comes from a valid source</p> <p>The time taken by an RSU to process a high volume of real or spurious messages could cause it to miss important incoming ITS messages</p> <p>An RSU is unable to validate when a received message was originally generated</p>	Equipment posing as a genuine ITS-S (Vehicle) sending false information in ITS messages that are otherwise valid	B
V-R5	<ul style="list-style-type: none"> - Replay of "expired" (old) messages - Wormhole attack - GNSS spoofing 	Uncertainty regarding how timestamps are created and how to use them to check the validity of messages	An RSU is unable to validate when a received message was originally generated	<p>Equipment posing as a genuine ITS-S sending "expired" information in ITS messages that are otherwise valid</p> <p>GNSS spoofing equipment</p>	B
V-R6	- Emergency vehicle masquerade	CAM and DNM messages do not include any form of identification information	An RSU is unable to quickly determine whether a received message contains accurate	ITS-S masquerading as Emergency Vehicle	B

ID	Threat	ITS-S Problem Area	Weakness	Threat Agent	Attack interface
		Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected on the application layer, not at the network layer in the ITS stack	information and is from a legitimate emergency services vehicle and acts by relaying the message. An RSU can only check whether the message is valid and comes from a valid source	Equipment posing as a genuine Emergency Vehicle	
V-R7	- Eavesdropping - Traffic analysis - Location tracking	Broadcast messages are in general intended for all ITS-S within range Absence of addressing in broadcast messages meaning that non-ITS-S equipment can also receive ITS messages	All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver Some ITS BSA messages reveal the geographic location of the sending ITS-S	Equipment posing as a genuine ITS-S (Vehicle) or RSU recording information in ITS messages for malicious analysis of content, behavioural patterns, etc.	B, J
V-R8	- Transaction tampering	Broadcast messages are in general intended for all ITS-S within range Absence of addressing in broadcast messages meaning that non-ITS-S equipment can also receive ITS messages Uncertainty regarding how timestamps are created and how to use them to check the validity of messages	All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver An RSU is unable to validate either when a received message was originally generated or whether any subscription information in the messages is valid	Equipment posing as a valid ITS-S (Vehicle)	B
V-R9	- Denial of transmission	CAM and DNM messages do not include any form of identification information	There is no requirement for an RSU to maintain an auditable log of all and specific types of messages sent and	Equipment posing as a genuine RSU or ITS-S (Vehicle) sending false	B, J

ID	Threat	ITS-S Problem Area	Weakness	Threat Agent	Attack interface
		RSU cannot positively identify relevant information to maintain record of the originator of ITS messages causing harm to the RSU	received by it. Such a log should be maintainable for an RSU.	<p>information in ITS messages that are otherwise valid</p> <p>Malware installed on target RSU creating and sending false information in ITS messages that are otherwise valid</p> <p>Valid ITS-S (Vehicle) with motivation to deny sending or receiving ITS messages, such as ITS messages from authorities</p>	

A successful attack on each vulnerability in an ITS-S (Roadside) may result in a number of undesirable consequences. These are listed in Table 13 to Table 17.

Table 13: Consequences of threats to availability in an ITS-S (Roadside)

Threat Group	Threat Type	Weakness	Undesirable Consequences
DoS: Forgery of emergency vehicle warning message	- Injection of high volume of false emergency vehicle warning messages	<p>An RSU is unable to validate either the accuracy of the contents of a message or whether it originated in a vehicle authorized to send emergency vehicle warning message and, so, relays the message</p> <p>An RSU can only check whether the message is valid and comes from a valid source</p> <p>The time taken by an RSU to process a high volume of real or spurious messages could cause it to miss important incoming ITS messages</p>	<p>Temporary blocking of emergency vehicle warning message from a particular originator if RSU discover that similar messages are sent from multiple locations</p> <p>Accidents due to general driver confusion</p> <p>Delay of actual emergency vehicle warning messages</p>
DoS: Denial of access to incoming messages	<ul style="list-style-type: none"> - Message saturation - Radio jamming - Injection of false messages - Internal malware 	<p>An RSU is unable to validate either the accuracy of the contents of a message or whether it originated in a vehicle authorized to send emergency vehicle warning message and, so, relays the message</p> <p>An RSU can only check whether the message is valid and comes from a valid source.</p> <p>Transmissions to and from an RSU can be lost while interference is detected and mitigated</p> <p>The time taken by an RSU to process a high volume of real or spurious messages could cause it to miss important incoming ITS messages</p>	<p>Accidents if collision warnings are not received and processed by the attacked RSU</p> <p>General compromise of traffic management applications which depend on the reliable and timely receipt of ITS messages</p>

Table 14: Consequences of threats to integrity in an ITS-S (Roadside)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Modification and deletion of transmitted information	<ul style="list-style-type: none"> - Transaction tampering - Internal malware - Replay of "expired" (old) messages - GNSS spoofing 	<p>All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver</p> <p>An RSU is unable to validate when a received message was originally generated or if any subscription information in the messages is valid.</p>	<p>Vehicles within range of the ITS-S (Roadside) receive and install compromised or illicit services</p> <p>Vehicles within range of the ITS-S (Roadside) are denied access to subscribed services</p>
Masquerade as emergency vehicle	<ul style="list-style-type: none"> - Forgery of emergency vehicle warning message 	<p>An RSU is unable to validate either the accuracy of the contents of a message or whether it originated in a vehicle authorized to send emergency vehicle warning message</p>	<p>General driver confusion upon reception of false emergency vehicle warning. Accident may happen as a consequence of several vehicles adjusting their driving to give way to a non-existing emergency vehicle</p>

Table 15: Consequences of threats to authenticity in an ITS-S (Roadside)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Masquerade	<ul style="list-style-type: none"> - Emergency vehicle masquerade - Masquerade 	<p>An RSU is unable to validate either the accuracy of the contents of a message or whether it originated in a vehicle authorized to send emergency vehicle warning message and, so, relays the message</p> <p>An RSU can only check whether the message is valid and comes from a valid source</p>	<p>Temporary blocking of emergency vehicle warning and other ITS messages from masqueraded emergency vehicle</p> <p>Accidents and general driver confusion if the source and contents of received messages cannot be relied upon</p> <p>General compromise of traffic management applications which depend on the reliable and timely receipt of ITS messages</p>

Table 16: Consequences of threats to confidentiality in an ITS-S (Roadside)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Acquisition of personal information	- Eavesdropping	All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver Some ITS BSA messages reveal the geographic location of the sending ITS-S	Without protection, any personal information exchanged in a unicast transaction could be intercepted and used by an attacker to gain illicit access to subscription services
Acquisition of behavioural details	- Eavesdropping - Traffic analysis	All ITS messages (even those associated with subscription services) are broadcast in the 5,9 GHz band and can, therefore, be intercepted by any capable receiver Some ITS BSA messages reveal the geographic location of the sending ITS-S	Analysis of message traffic can reveal which subscription services are being used by individual users. This information can be used to launch direct attacks on a particular ITS-S (Vehicle), such as an emergency vehicle. Analysis can also reveal behavioural information that can be used to launch a direct attack against an RSU (e.g. block the next RSU from services that use hand-over between RSUs).

Table 17: Consequences of threats to accountability in an ITS-S (Roadside)

Threat Group	Threat Type	Weakness	Undesirable Consequences
Denial of transmission	- Repudiation	There is no requirement for an RSU to maintain an auditable log of all or specific types of messages sent and received by it. Such a log should be maintainable for an RSU	Malicious and mischievous messages can be sent with impunity by a legitimate RSU as no proof exists that any particular message was ever sent by that particular RSU. Internal malware can be the cause of such behaviour
Denial of data receipt	- Repudiation	There is no requirement for an RSU to maintain an auditable log of all or specific types of messages sent and received by it. Such a log should be maintainable for an RSU	Errors in service delivery cannot be traced back to the originating RSU. If the problematic RSU is not fixed, service errors may quickly affect a substantial amount of ITS-S (Vehicle)s

10.3 Security risks in an ITS system

The method described in TS 102 165-1 [i.1] can be used to determine risk factors based upon the likelihood of a particular attack being successful and the impact that a successful attack would have on the system.

NOTE 1: The TVRA method specified in TS 102 165-1 [i.1] assigns the values of 1, 2 and 3 from the product of the derived threat impact and the likelihood of occurrence, to a risk level of "Minor" and only the value 4 to a risk of "Major". Use of the risk assessment algorithms in the ITS TVRA have shown that, in this particular application, a more even spread of values gives better results. Consequently, in this analysis the values 1 and 2 are assigned to a risk level of "Minor" while the values 3 and 4 are assigned to "Major".

NOTE 2: Risk estimations may change as a consequence of changes to the functional specifications. This means that the risk estimates in Tables 18 and 19 are based on the functional descriptions that were available at the time of the estimation.

10.3.1 Risks in an ITS-S (Vehicle)

Table 18 identifies the risk of a successful attack on an ITS-S (Vehicle) in each threat group and various factors that are used in the formulation of that risk.

Table 18: Risk determination in an ITS-S (Vehicle)

Threat Group	Attack			Potential	Likelihood	Impact	Risk
	Factor	Range	Value				
DoS: Denial of access to incoming messages	Time	≤ 1 week	1	11 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Easy	1				
	Equipment	Specialized	3				
DoS: Denial of access to outgoing messages	Time	≤ 1 week	1	8 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Easy	1				
	Equipment	Specialized	3				
DoS: Denial of access to internal resources	Time	≤ 1 week	1	11 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Specialized	3				
Modification and deletion of stored information	Time	≤ 1 week	1	14 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Specialized	3				
Modification and deletion of transmitted information	Time	≤ 1 week	1	14 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Specialized	3				
Masquerade	Time	≤ 1 week	1	11 (Moderate)	2 (Possible)	2 (Medium)	4 (Major)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Standard	0				
Acquisition of personal information	Time	≤ 1 day	0	12 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Standard	0				
Acquisition of behavioural details	Time	≤ 1 day	0	18 (High)	1 (Possible)	2 (Medium)	2 (Major)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Difficult	12				
	Equipment	Specialized	3				
Acquisition of location information	Time	≤ 1 day	0	18 (High)	1 (Possible)	2 (Medium)	2 (Major)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Difficult	12				
	Equipment	Specialized	3				
Denial of transmission	Time	≤ 1 day	0	1 (No Rating)	3 (Likely)	1 (Low)	6 (Major)
	Expertise	Layman	0				
	Knowledge	Public	0				
	Opportunity	Easy	1				
	Equipment	Standard	0				
Denial of data receipt	Time	≤ 1 day	0	1 (No Rating)	3 (Likely)	2 (Low)	6 (Major)
	Expertise	Layman	0				
	Knowledge	Public	0				
	Opportunity	Easy	1				
	Equipment	Standard	0				

10.3.2 Risks in an ITS-S (Roadside)

Table 19 identifies the risk of a successful attack on an ITS-S (Roadside) in each threat group and various factors that are used in the formulation of that risk.

Table 19: Risk determination in an ITS-S (Roadside)

Threat Group	Attack			Potential	Likelihood	Impact	Risk
	Attack	Range	Value				
DoS: Forgery of emergency vehicle warning	Time	≤ 1 week	1	11 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Sensitive	4				
	Opportunity	Easy	1				
	Equipment	Standard	0				
DoS: Denial of access to incoming messages	Time	≤ 1 week	1	8 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Easy	1				
	Equipment	Standard	0				
Modification and deletion of stored information	Time	≤ 1 week	1	14 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Proficient	2				
	Knowledge	Sensitive	4				
	Opportunity	Moderate	4				
	Equipment	Specialized	3				
Masquerade as an emergency vehicle	Time	≤ 1 week	1	11 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Standard	0				
Masquerade	Time	≤ 1 week	1	13 (Moderate)	2 (Possible)	3 (High)	6 (Critical)
	Expertise	Expert	5				
	Knowledge	Restricted	1				
	Opportunity	Moderate	4				
	Equipment	Standard	0				
Acquisition of personal information	Time	≤ 1 day	0	7 (Basic)	3 (Likely)	3 (High)	9 (Critical)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Easy	1				
	Equipment	Standard	0				
Acquisition of behavioural details	Time	≤ 1 day	0	18 (High)	1 (Possible)	2 (Medium)	2 (Major)
	Expertise	Proficient	2				
	Knowledge	Restricted	1				
	Opportunity	Difficult	1				
	Equipment	Specialized	0				
Denial of transmission	Time	≤ 1 day	0	1 (No Rating)	3 (Likely)	1 (Low)	3 (Major)
	Expertise	Layman	0				
	Knowledge	Public	0				
	Opportunity	Easy	1				
	Equipment	Standard	0				
Denial of data receipt	Time	≤ 1 day	0	1 (No Rating)	3 (Likely)	1 (Low)	3 (Major)
	Expertise	Layman	0				
	Knowledge	Public	0				
	Opportunity	Easy	1				
	Equipment	Standard	0				

11 Countermeasures

11.1 List of Countermeasures

For each of the threats identified in the ITS TVRA it is necessary to consider what measures could be implemented to reduce the risk of an attack being successfully mounted on an ITS-S. Table 20 specifies a range of options to be evaluated as potential ITS countermeasures.

Table 20: Potential countermeasures to threats in an ITS system

Countermeasure	Threats	Risk
Reduce frequency of beaconing and other repeated messages	Message saturation	Critical
Add source identification (IP address equivalent) in V2V messages	Message saturation	Critical
Limit message traffic to V2I/I2V and implement station registration	Message saturation	Critical
	Injection of false messages	Major
	Manipulation of relayed ITS messages en route	Critical
	Masquerade as ITS-S (Vehicle or Roadside) or ITS network	Major
	Replay of "expired" (old) messages	Critical
	GNSS spoofing	Major
	Wormhole attacks	Major
	GNSS spoofing	Major
	Malicious isolation of one or more ITS-S (Vehicle) (black hole)	Critical
Implement frequency agility within the 5,9 GHz band	Jamming of radio signals	Critical
Implement ITS G5A as a CDMA/spread-spectrum system or base ITS on 3 rd Generation mobile	Jamming of radio signals	Critical
Digitally sign each message using a Kerberos/PKI-like token system	Injection of false messages	Major
	Manipulation of relayed ITS messages en route	Critical
	Masquerade as ITS-S (Vehicle or Roadside) or ITS network	Major
	Replay of "expired" (old) messages	Critical
	Wormhole attacks	Major
	Malicious isolation of one or more ITS-S (Vehicle) (black hole)	Critical
Include a non-cryptographic checksum of the message in each message sent	Manipulation of relayed ITS messages en route	Critical
Remove requirements for message relay in the ITS BSA	Manipulation of relayed ITS messages en route	Critical
Include an authoritative identity in each message and authenticate it	Masquerade as ITS-S (Vehicle or Roadside) or ITS network	Major
Use broadcast time (Universal Coordinated Time - UTC - or GNSS) to timestamp all messages	Replay of "expired" (old) messages	Critical
	Wormhole attacks	Major
Include a sequence number in each new message	Replay of "expired" (old) messages	Critical
Use INS or existing dead-reckoning methods (with regular - but possibly infrequent - GNSS corrections) to provide positional data	Wormhole attacks	Major
	GNSS spoofing	Major
Implement differential monitoring on the GNSS system to identify unusual changes in position	Wormhole attacks	Major
	GNSS spoofing	Major
Encrypt the transmission of personal and private data	Eavesdropping	Critical
Implement a Privileged Management Infrastructure (PMI).	Installation of malware	Critical
Software quality and integrity are certified before it is installed	Installation of malware	Critical

Countermeasure	Threats	Risk
Use a pseudonym that cannot be linked to the true identity of either the user or the user's vehicle	Traffic analysis	Minor
	Location tracking	Minor
Maintain an audit log of the type and content of each message sent from and received by an ITS-S	Denial of transmission	Critical
	Denial of data receipt	Critical
Include a source identity in each ITS message	Denial of transmission	Critical
Implement a non-repudiation framework	Denial of transmission	Critical
	Denial of data receipt	Critical
Plausibility checks on incoming messages	Injection of false messages	Major
	Manipulation of relayed ITS messages en route	Critical
	Masquerade as ITS-S (Vehicle or Roadside) or ITS network	Major
	Wormhole attacks	Major
Hardware-based protection of software and hardware configuration on ITS-S	Installation of malware	Critical
	Denial of transmission	Critical
	Denial of data receipt	Critical

11.2 Evaluation of Countermeasures

This evaluation of potential ITS security countermeasure makes the consequences of each countermeasure on the ITS architecture and the BSA explicit and identifies the security services needed to protect against the analysed security threats. The TVRA identified a number of problem areas in the ITS architecture, the communication protocols used for the ITS application in the BSA (CAM and DNM) and the underlying communication processes (e.g. beaconing and beaconing rate). The problem areas lead to a number of weaknesses in the ITS and these were also identified in the TVRA.

TS 102 165-1 [i.1] defines three levels of risk, *Minor*, *Major* and *Critical*, which are derived from a qualitative combination of likelihood and impact. The *Minor* risk level is the only one considered to be acceptable and, therefore, countermeasures should be introduced in order to reduce all *Major* or *Critical* risks to *Minor*.

There are two countermeasure strategies defined in the TVRA method, as follows:

- i) asset redesign:
 - removal of identified problem areas and weaknesses through fundamental design changes in the ITS standards specifying the architecture, protocols and communications processes;
 - viability depends a number of factors which include the maturity of the affected ITS standards and the relative cost of removing the problem area as opposed to the simpler approach of masking it;
 - can reduce both the likelihood and the overall impact of a successful attack.
- ii) asset hardening:
 - specification of additions to the ITS system that will mask the effects of a problem area rather than remove it completely;
 - likely to be used in cases where:
 - the cost of asset redesign is unacceptable;
 - the change itself is unnecessarily complex; or
 - redesign does not reduce the risk level to *Minor*.
 - can only affect the likelihood of a successful attack, not the impact.

11.3 Countermeasure Analysis

11.3.1 Reduce frequency of beaconing and other repeated messages

The use of beaconing (heartbeat) messages in V2V ITS and the repetition of some non-beacon messages generates considerable background radio traffic in high-density road-traffic environments. This countermeasure proposes to reduce the frequency of the beacon and other safety-of-life messages from 10 Hz to a lower number to reduce congestion. An alternative solution is to use adaptive frequency control where messages would be sent at different frequencies depending upon the nature of the message, the availability of 5,9 GHz bandwidth, and potentially other local conditions.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - Intrinsic saturation in ITS V2V is reduced.
- Disadvantages:
 - Safety-critical messages may not be received quickly enough by affected vehicles.
- Implications on ITS Architecture:
 - May affect the communication protocols for DNM and CAM.
- Implications on BSA:
 - Affects the communication frequency used to send ITS messages.
- Ability to remove relevant ITS problem areas:
 - Reduces the problem area of intrinsic high density of ITS messages traffic due to broadcasting and beaconing in V2V systems.

11.3.2 Add source identification (IP address equivalent) in V2V messages

A source address added to a V2V message must be identifiable by the ITS receiving station and non-forgable so that the receiving station can trust that the source address has not been modified between the time of message origination and the time the message was received.

- Countermeasure strategy:
 - Asset hardening and redesign.
- Advantages:
 - Saturation messages can be identified and rejected within the ITS stack without the need to be processed by the associated application.
- Disadvantages:
 - The desired principles of anonymity within ITS are breached.
 - May not be available in the existing stack.
- Implications on ITS Architecture:
 - Changes to protocol stack for DNM and CAM.
- Implications on BSA:
 - None.

- Ability to remove relevant ITS problem areas:
 - Removes the problem of absence of addressing in broadcast messages meaning that the source of a message cannot be identified so malicious and irrelevant messages can only be rejected by the application, not on the network layer in the ITS stack.

11.3.3 Limit message traffic to V2I/I2V when infrastructure is available and implement message flow control and station registration

An ITS-S is required to register (and authenticate) to the ITS infrastructure either when it enters an administrative region or at each roadside unit that comes into range if the roadside infrastructure is not extensive. Once registered, the vehicle accepts and processes only messages received from the ITS infrastructure while it is in radio range. When no roadside unit is in range then the ITS-S will receive and process ITS messages from other vehicles.

- Countermeasure strategy:
 - Asset redesign:
 - The countermeasure will require redesign of the ITS architecture, the fundamental concept of V2V communications and the ITS protocols.
- Advantages:
 - RSU can issue "stop sending" command to saturating station.
 - The resources of the ITS network and information from other RSUs can be used to detect an attack and to formulate an integrated response to it (i.e. propagation and extent of warnings).
 - A registered offending station can be identified and removed from the system.
 - Messages can only be sent to and from registered, authenticated ITS stations.
 - The resources of the ITS network and information from other ITS stations can be used to detect an attack and to formulate an integrated response to it.
- Disadvantages:
 - It would be necessary to implement identity-based registration procedures between the vehicle and the ITS infrastructure.
 - The coverage of the ITS infrastructure would have to be extensive.
 - The speed of response to an incident would deteriorate (however, response times would be deterministic).
 - Registration requires a high density of roadside units at the borders between registration areas.
 - Current IEEE 802.11 [i.9] technologies do not support flow control.
- Implications on ITS Architecture:
 - May require separate frequency allocations for uplink and downlink.
 - Need to augment the architecture to support the ability to switch between V2I/I2V when available and purely V2V when infrastructure is not available.
 - The ITS system needs to ensure that a registration procedure should not disable an ITS-S (Vehicle) if it is interrupted by the vehicle passing out of range of the ITS-S (Roadside) to which it is registering.
- Implications on BSA:
 - Has implications on all V2V communication in the BSA.
- Ability to remove relevant ITS problem areas:
 - Removes the problem of lack of flow control in V2V broadcast messages.

- Partly addresses the problem area of intrinsic high density of ITS messages traffic due to broadcasting and beaconing in V2V systems.
- Partly addresses the absence of addressing in broadcast messages.

11.3.4 Implement frequency agility within the 5,9 GHz band

A radio transmission broadcast at the same frequency at all times can easily be overwhelmed by a higher-power signal at the same frequency. However, it is much more difficult to jam a transmission in which the radio frequency changes frequently within its defined band. If the changes in frequency and the intervals between changes are both determined on pseudo-random basis, it becomes even more difficult to jam the signal. There needs to be synchronization between the legitimate transmitter and the receiver and both must use the same algorithms for determining frequency steps and the intervals between changes in frequency.

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - Jamming equipment must be able to follow the shifts in frequency exactly. Without this facility they are unable to ensure continuous jamming.
- Disadvantages:
 - The ITS G5A frequency band is too narrow to support the number of frequencies required to make agility effective.
 - The cost of implementation is high as there is considerable added complexity in the radio subsystem.
 - As the algorithms for switching frequencies are embedded in each ITS-S, they will be publically available and, therefore, available for an attacker to acquire.
- Implications on ITS Architecture:
 - Additional hardware units would be required in an ITS-S to manage the frequency tuning of both the radio transmitter and the radio receiver.
 - No additional software entities would be required.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - The narrow band of frequencies available to the ITS radio system would make it difficult for an ITS-S to resist a sustained jamming attack for very long.

11.3.5 Implement ITS G5A as a CDMA/spread-spectrum system

Although considerably more complex than the narrowband radio proposed for ITS G5A, spread spectrum transmission of radio signals is naturally more resistant to both jamming and eavesdropping. As the Code Division Multiple Access (CDMA) schema used by spread spectrum transmission systems is based upon a pseudo-random sequence of codes, it is necessary for each ITS-S to have knowledge of this sequence.

- Countermeasure strategy:
 - Asset redesign:
 - The countermeasure will require a redesign of the appropriate ITS or IEEE standards.
- Advantages:
 - Spread spectrum radio transmissions automatically counter a narrowband jamming attack.

- Spread spectrum transmissions are difficult to intercept for eavesdropping purposes.
- CDMA would make duplex communication possible between a vehicle and the infrastructure and between vehicles.
- Disadvantages:
 - The cost of implementation is high as there is considerable added complexity in the radio subsystem.
 - CDMA cannot be used for V2V messaging.
- Implications on ITS Architecture:
 - Additional hardware units would be required in an ITS-S to manage the spreading of transmission frequencies and reception of spread signals.
 - No additional software entities would be required.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - Spread spectrum transmission would remove the susceptibility to jamming of 5,9 GHz narrowband radio.

11.3.6 Integrate 3rd Generation mobile technology into ITS G5A communications

3rd Generation mobile communications (3G) already include comprehensive security functions and capabilities. A 3G connection to each vehicle will provide an alternative path for reporting a suspected 5,9 GHz jamming attack. It will also offer a secure route for any key and certificate management communications that may be required.

- Countermeasure strategy:
 - Asset redesign:
 - The countermeasure will require a redesign of the appropriate ITS standards.
- Advantages:
 - As a CDMA radio technology, 3G is automatically resilient to a narrowband jamming attack.
 - 3G transmissions are difficult to intercept for eavesdropping purposes.
 - 3G provides a secure communications path for reporting jamming attacks.
 - 3G provides a secure communications path for key and certificate management.
 - 3G provides fully duplex communications.
- Disadvantages:
 - Although the cost of implementation is not prohibitively high as the radio systems can be kept separate and 3G is a well established technology, the additional cost per user may not be acceptable.
- Implications on ITS Architecture:
 - Additional hardware units would be required in an ITS-S to handle 3G signalling but this would require only off-the-shelf items.
 - Software would need to distinguish between 5,9 GHz transmissions and 3G transmissions.
- Implications on BSA:
 - None.

- Ability to remove relevant ITS problem areas:
 - 3G would remove the susceptibility to jamming of some 5,9 GHz radio transmissions.
 - It will be possible for jamming attacks, once detected, to be reported to the ITS authority.

11.3.7 Digitally sign each message using a Kerberos/PKI-like token system

The recipient of a message can gain confidence in the message's origin, the permissions of the originator, and its integrity against changes in transit if the message includes a digital signature or other form of cryptographic checksum and the recipient has the means to check that the checksum is valid.

There are a two ways of cryptographically signing ITS messages:

- Symmetric (Kerberos-like):
 - Senders and receivers authenticate to a common server which issues both with sufficient credentials to establish the authority of the sender to transmit and the receiver to act upon messages exchanged subsequently between them.
 - Symmetric keys have a lifetime and are automatically invalidated when the lifetime expires and may be replaced.
- Public key (PKI-like):
 - Senders sign messages with a digital certificate issued by a Certification Authority (CA) and containing a public key. The recipient uses the public key from the certificate to verify the signature on the message. It also checks that the certificate is valid by, for example:
 - ensuring that it was issued by a known CA;
 - ensuring that it has not expired or been revoked; and
 - ensuring that the permissions it grants are consistent with the permissions the message sender is claiming in the certificate.

These checks may be performed online or, if the receiver is not within radio range of an ITS-S (Roadside), using cached information.

In the event that a known, valid ITS-S (Vehicle) is detected to be providing misleading information to other vehicles (either by malfunction or malicious intent), a CA may prevent other units from processing its messages by one or all of the following methods:

- using a revocation process to distribute information about compromised units;
- providing on-line status queries by message recipients;
- issuing sender certificates with a limited lifetime, renewing them frequently, and not reissuing certificates to devices that are known to be compromised.

11.3.7.1 Kerberos-like solution

11.3.7.1.1 General requirements

A secure implementation of a system based on Kerberos (RFC 4120 [i.12]) depends on the availability of:

- keying material on the ITS-S to allow it to authenticate to the key server;
- access to the key server by a persistent communications mechanism;
- protection of the authentication keying material and other, transient keying material on an ITS-S; and
- access controls and software quality mechanisms to ensure that malicious software on the ITS-S cannot make use of the keys without extracting them.

11.3.7.1.2 Countermeasure analysis

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - A unit that is discovered to be compromised can be removed from the system immediately.
 - Symmetric key operations are very efficient and would not consume much processor power.
- Disadvantages:
 - Requires an always-on connection to avoid legitimate vehicles being locked out of the system. The management of keys and tokens greatly increases message traffic which may cause congestion if it is sent over 5,9 GHz but will require an additional communications medium if it is not sent over 5,9 GHz.
 - The system requires the infrastructure to detect a malfunctioning or malicious device and disable it. The device can continue to misbehave for the time that it takes identify it and remove it from the system.
 - Jurisdiction of key server may be complex.
- Implications on ITS Architecture:
 - There must be an always-on, always-available key server.
 - An ITS-S must be able to authenticate to a key server even when it is outside its country of origin.
- Implications on BSA:
 - Adds header information to BSA but does not affect the contents or use of BSA messages.
- Ability to remove relevant ITS problem areas:
 - Removes the problem of false message insertion.
 - Enables ITS-Ss that are sources for forged or otherwise inaccurate messages to be removed efficiently.
 - Does not on its own address acquisition of behavioural details or acquisition of personal information.

11.3.7.2 PKI-like solution

11.3.7.2.1 General requirements

A secure implementation of a system based on a Public Key Infrastructure (PKI) depends on the availability of:

- a secure provisioning system to allow an ITS-S to obtain certificates from the CA;
- timely; access to revocation information provided by the CA
- protection of the authentication keying material and other, transient keying material on the ITS-S; and
- access controls and software quality mechanisms to ensure that malicious software on the ITS-S cannot make use of the keys without extracting them.

11.3.7.2.2 Countermeasure analysis

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - A unit that is discovered to be compromised can be removed from the system.

- The authorization system continues to operate even when there is no access to infrastructure.
- Disadvantages:
 - Public key operations are slower than symmetric key operations and may require specialized acceleration hardware.
 - Jurisdiction of CA may be complex.
 - With no access to infrastructure required, there may be a delay between the detection of a misbehaving ITS-S and its removal from the system.
 - The system requires the infrastructure to detect a malfunctioning device and disable it. The device can continue to misbehave for the time that it takes to identify it and remove it from the system.
 - Distributing revocation information will cause congestion if it is sent over 5,9 GHz, and will require an additional communications medium if it is not sent over 5,9 GHz.
- Implications on ITS Architecture:
 - There must be a CA that can distribute keys.
 - There must be a process for an ITS-S to receive an initial set of keys and certificates.
- Implications on BSA:
 - Adds header information to BSA but does not affect the contents or use of BSA messages.
- Ability to remove relevant ITS problem areas:
 - Removes the problem of false message insertion.
 - Enables ITS-Ss that are sources for forged or otherwise inaccurate messages to be removed efficiently.
 - Does not on its own address acquisition of behavioural details or acquisition of personal information.

11.3.8 Include a non-cryptographic checksum of the message in each message sent

A simple approach to protecting the contents of a transmitted ITS message is to include a checksum computed from the original contents. The receiving ITS-S is then able to calculate the checksum itself and compare it with the value included in the incoming message. If the checksum values do not match, the received message can be rejected. A simple longitudinal parity check would probably be insufficient for the purpose of establishing the integrity of a received ITS message but the more reliable Fletcher or Adler algorithms would provide the necessary protection. These algorithms, unfortunately, require more processing resources in both the sending and receiving ITS-S.

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - Accidental modification of the contents of a message en route can be detected.
- Disadvantages:
 - A subverted legitimate ITS-S possess all of the necessary algorithms to compute a valid checksum for a maliciously modified message.
- Implications on ITS Architecture:
 - Checksum creation and validation are provided as application layer security services.
- Implications on BSA:
 - None.

- Ability to remove relevant ITS problem areas:
 - Reduces the risk that messages will be accidentally modified en route.

11.3.9 Remove requirements for message relay in the ITS BSA

The propagation of ITS messages to emulate a wide-area broadcast (particularly in an emergency situation) is achieved by allowing an ITS-S (Vehicle) to re-broadcast any received message that has not reached the edge of its relevance area. Removing this capability makes it impossible for a message to be modified en route. This can only be achieved if the roadside infrastructure is sufficient to receive the original message and to transmit it across the whole of the relevance area.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - Messages are not re-transmitted so there is no opportunity for a message to be modified.
 - Message propagation does not depend on a particular density of vehicular traffic.
- Disadvantages:
 - Extensive roadside infrastructure would be necessary to ensure that messages reach the full extent of their relevance area.
- Implications on ITS Architecture:
 - None.
- Implications on BSA:
 - All messages which might have relevance outside the immediate radio coverage area of an ITS-S (Vehicle) would need to be sent V2I rather than V2V.
- Ability to remove relevant ITS problem areas:
 - Completely removes the possibility that a message could be modified en route between the originator and the receiver.

11.3.10 Include an authoritative identity in each message and authenticate it

An authoritative identity is produced and distributed by a commonly trusted entity in the ITS system. Such an identity is needed for an ITS station to verify the authenticity of the messages that it receives. This enables an ITS-S to verify that received messages come from valid and trustable sources. The authoritative identity is authenticated by the receiving station verifying the issuer of the authoritative identity. This means that the source itself is not authenticated but the fact that it was issued by a verifiable and commonly trusted authority.

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - Authenticity of V2V ITS messages can be checked.
 - Authenticity of ITS messages can be verified in real-time and directly.

NOTE: There is a design decision that must be made and that is related to the trust period, meaning the frequency of updates of the common trusted authority and the credentials that this authority has issued and which are included in the message.

- It becomes impossible for an attacker to masquerade as a legitimate ITS station.

- Disadvantages:
 - Authenticity of messages cannot be 100 % guaranteed as the authoritative identity is pre-issued which means that the source of an ITS message can be under attack even though the messages it sends includes a valid authoritative identity.
 - Requires regular updates and revocation of authoritative identity information.
 - It would be necessary to implement identity-based registration procedures between the vehicle and the ITS infrastructure.
 - The coverage of the ITS infrastructure would have to be extensive or we would need to accept a relative large time period that vehicles possibly can be under attack.
 - The speed of response to an incident would deteriorate.
- Implications on ITS Architecture:
 - Addition of authoritative entity and distribution and management of authoritative identities.
- Implications on BSA:
 - Addition of authority identity information to ITS messages (CAM and DNM).
- Ability to remove relevant ITS problem areas:
 - Including authoritative identity in ITS messages enables an ITS-S to check the authenticity of messages that it receives on lower levels in the protocol stack (network level).
 - The presence of an authoritative identity enables an ITS-S to check whether a received message comes from a source that the commonly trusted authority has approved and, from this information, it deduces that the information in the message is authentic and from an authentic source.
 - An ITS station can record information that later can be presented to an authority that knows the real identity of the authoritative identity included in the ITS message.

11.3.11 Use broadcast time (Universal Coordinated Time - UTC - or GNSS) to timestamp all messages

Including a timestamp in all messages makes it easier for a receiving ITS-S to judge whether a message is valid or not. If the time is derived from an external source such as Universal Coordinated Time (UTC) or GNSS ensures that each ITS-S uses the same time source as every other ITS-S. Consequently, it is quite simple for the plausibility of the timestamp in a message to be validated:

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - Both UTC and GNSS can be used across all time zones without confusion and is broadcast on public FM radio channels (UTC) or satellite (GNSS).
 - ITS-S system time is derived from an independent source.
 - UTC and GNSS time spoofing attacks can be detected by differential monitoring.
- Disadvantages:
 - Neither broadcast UTC nor GNSS are well protected and may be easy to spoof.
 - Additional equipment is required in the ITS-S although this is likely to be either a GNSS receiver (which is required for other ITS capabilities) or a low-cost consumer radio controlled clock mechanism (which is available in many modern vehicles already).

- Implications on ITS Architecture:
 - None.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - The uncertainty about when a message was created is addressed. However, if the timestamp is not cryptographically bound to the message, the timestamp can be manipulated and replay is just as easy.

11.3.12 Include a sequence number in each new message

The validity of received messages can, in part, be established if each sender includes a sequence number in each message sent. Messages received out of sequence can be discarded as potentially false.

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - It is possible to detect messages that are out of sequence.
- Disadvantages:
 - In an ITS system there is no guarantee that the integrity of a sequence will be maintained at the receiver, even in the absence of an attack.
 - It is difficult to coordinate sequence numbers between multiple sources of broadcast messages and associating sequences with specific sources may compromise privacy.
 - Sequence numbering does not prevent the replay of messages from a source that the receiver has never seen before.
 - Use of sequence numbers is impractical in V2V applications.
- Implications on ITS Architecture:
 - None.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - The uncertainty about when a message was created (in relation to previously messages received from the same source) is addressed. However, if the sequence number is not cryptographically bound to the message, it can be manipulated in a replay attack.

11.3.13 Use INS or existing dead-reckoning methods (with regular - but possibly infrequent - GNSS corrections) to provide positional data

GNSS is expected to be the only source of location information within ITS-S (Vehicle). As an external source of information it is possible for this to be mimicked such that the ITS-S is given incorrect data regarding its position. By using an onboard Inertial Navigation System (INS) or dead-reckoning derived from simple accelerometers such as those found in modern mobile phones it is possible for the ITS-S to determine its position from purely internal sources with only brief and infrequent references to GNSS for waypoint corrections.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - An ITS-S (Vehicle) can have greater confidence in its location so that it can resist, in particular, wormhole attacks.
 - Current position coordinates can be determined in the absence of a GNSS signal.
 - From an initial location fix, INS can provide a very accurate and ongoing determination of the vehicle's position over a long period.
 - Accelerometers for dead-reckoning add little to the cost of the ITS-S.
- Disadvantages:
 - INS equipment adds a considerable amount to the cost of the ITS-S.
 - Dead-reckoning requires considerable processing resources.
 - Dead-reckoning is not as accurate as either GNSS or INS.
 - Both INS and dead-reckoning require access to GNSS for mid-course corrections.
- Implications on ITS Architecture:
 - INS is installed as a data source external to the ITS-S.
 - Dead-reckoning may require a processing entity to calculate current location from accelerometer inputs.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - Significantly removes the possibility of GNSS spoofing attacks. Even in the presence of a such an attack, the ITS-S would be able to determine whether its mid-course GNSS corrections were plausible or not.

11.3.14 Implement differential monitoring on the GNSS system to identify unusual changes in position

A GNSS system determines the position of a vehicle by reference to three different GNSS satellites.

Differential GNSS is a way of correcting various inaccuracies in a GNSS system and, thus, providing more accurate position information. It involves the cooperation of one normal receiver and a reference receiver which is used to measure timing errors. From this it is able to provide correction information to the normal receiver. The reference receiver is placed and maintained in a known location so that its position is always known. It receives the same GNSS signals as the roving receiver but instead of working like a normal GNSS receiver it analyses the received data by applying the position solving equations backwards. Instead of using timing signals to calculate its position, it uses its known position to calculate timing. From this information it deduces what the travel time of the GNSS signals should be, and compares it with what they actually are. The difference is called an error correction factor.

The benefit of differential GNSS is that it is capable of positioning things very precisely and this feature can be used to detect even small abnormalities in position errors. A successful GNSS spoofing attack can then only alter a vehicle's true position within the acceptable error space. Differential GNSS monitoring can also detect very small and marginal abnormal changes within the normal error space. The principles of differential GNSS can be implemented in an ITS-S as a software solution which can detect errors in GNSS location information in real-time for both vehicles and RSUs. This solution requires reference points with known locations that communicate with the differential monitoring module in a vehicle. For example, all RSUs have a known location and can aid vehicles in real-time in cases where a vehicle has contact with one or more RSUs.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - Improves accuracy of on-board GNSS data.
 - Does not involve large costs (less costly than INS).
 - Easily implemented in simple software.
- Disadvantages:
 - Not as accurate as INS and may not be sufficient to detect all attacks.
 - May need to use RSU or other stationary ITS units as the reference receiver to maximize the accuracy.
- Implications on ITS Architecture:
 - Addition of differential monitoring module for the GNSS system in vehicles.
 - Addition of reference receiver capabilities.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - The reference receiver can be used to aid vehicles in checking validity of messages and to synchronize the source of timestamp creation.

11.3.15 Encrypt the transmission of personal and private data

Personal and private data covers all pieces of information in ITS messages that can be used to positively identify a vehicle, an ITS user, the location and behaviour of a particular vehicle or its route. By encrypting personal and private data it is possible to ensure that traffic analysis and eavesdropping alone cannot reveal sufficient information to directly extract or indirectly deduce private information.

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - Personal and private information is not sent in clear text over the air.
 - Behaviour of particular vehicles cannot easily be deduced.
 - Transmitted data can only be understood by a receiving station equipped with the necessary keys (it has to know the key used to encrypt the personal data) and decryption facilities.
- Disadvantages:
 - Encryption is a realistic option only on non-broadcast transmissions.

- The implementation of encryption capabilities is both expensive and resource-consuming.
- Cryptographic separation must be applied at the higher layers of the protocol stack.
- Implications on ITS Architecture:
 - May affect the size of ITS messages depending on whether compression is combined with encryption.
 - Adds key distribution and management services to the ITS architecture.
 - Adds encryption capabilities to ITS stations.
 - Introduces delay upon reception and sending of messages with personal content.
- Implications on BSA:
 - No direct implications.
- Ability to remove relevant ITS problem areas:
 - Encryption of data within an ITS message is only effective as a countermeasure on messages that are directed to a specific location (i.e. V2I or I2V). Its effect on broadcast messages is negligible as all ITS stations possess the keys required to decrypt encrypted messages.

11.3.16 Implement a Privilege Management Infrastructure (PMI).

A Privilege Management Infrastructure (PMI) is a cryptographic certificate-based approach to asserting the rights of a user or application to access or modify data or executables within a system. Examples of PMIs are ITU-T Recommendation X.509 [i.10] or the OASIS Security Assertion Markup Language (SAML).

Any attempt to modify ITS-S configuration information or to insert new or revised software must be accompanied by a certificate that establishes the user's right to make such a change.

A PMI carries user privileges in the form of attributes in an Attribute Certificate (AC). A Source of Authority (SoA) and an Attribute Authority (AA) issue Acs to users in much the same way that a Certification Authorities (CA) issues PKCs to users. PMIs usually rely on an underlying PKI as Acs need to be digitally signed by the issuing AA and the PKI is used to validate the AA's signature.

- Countermeasure strategy:
 - Asset redesign and asset hardening.
- Advantages:
 - Configuration changes can only be made by authorized users or applications.
 - Software updates and extensions can only be installed by authorized users or applications.
- Disadvantages:
 - PMI adds a further level of key management to an ITS system.
 - All of the same issues related to certificate maintenance and revocation that have been identified for PKI (clause 11.3.7.2) also exist in PMI.
- Implications on ITS Architecture:
 - PMI is implemented as an application layer security service.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - PMI protects an ITS-S against the installation of malware.

- PMI protects an ITS-S against malicious modification of its configuration data.

11.3.17 Software authenticity and integrity are certified before it is installed

By certifying the authenticity and integrity of ITS-S software it is possible to ensure that only authorized updates and extensions can be downloaded to the ITS-S. Mechanisms for restricting the applications that can be installed on a system ITS-S must be in place. An example of such a mechanism is the Java Code Signing which only permits software that has been digitally signed by a trusted third party to run within its virtual machine to. In general, a signature is included over the application package together with a certificate of the signing trusted third party.

- Countermeasure strategy:
 - Asset hardening.
- Advantages:
 - Only software known to the ITS operator is installed on an ITS-S.
 - Certification of software integrity prevents the installation of malware on an ITS-S.
- Disadvantages:
 - Certification process and infrastructure can be extensive and complex to implement for suppliers.
- Implications on ITS Architecture:
 - Certificate management infrastructure is necessary.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - Restricting which applications can run on a particular platform covers many threats related to denial of service and the modification and deletion of stored information.
 - The level of protection depends on the rules in place to check software authenticity and restrict access to the ITS station. Hardware based security is significantly better than a pure software based solution but also more expensive.

11.3.18 Use a pseudonym that cannot be linked to the true identity of either the user or the user's vehicle

Messages originating from an ITS-S may contain different identifiers at each layer of the ITS protocol stack. Particularly at the application layer, such identifiers may carry information that can identify the user or vehicle. Examples of this information include driver's name, driver's address, vehicle license plate or VIN. To prevent an eavesdropper from acquiring this personal information, an ITS-S can use identifiers, generally referred to as "pseudonyms", that are not directly linked to the user's true identity. The use of pseudonyms can only be considered effective if the method used is able to guarantee that:

- the user's true identity is hidden from all other users;
- the user's true identity cannot be derived from observation of that user's behaviour (use of ITS services).

This does not prevent an attacker from visually identifying a vehicle and getting its license plate number (or recognizing the driver). However, the use of pseudonyms ensures that linking must involve some activity outside the 5,9 GHz band.

- Countermeasure strategy:
 - Asset redesign.

- Advantages:
 - An eavesdropper's cannot identify a vehicle's owner without making an observation outside the 5,9 GHz band.
- Disadvantages:
 - Pseudonyms make it more difficult to identify and remove a misbehaving ITS-S. It is, therefore, necessary for an ITS authority to be able to resolve a pseudonym back to a true identity.
 - Managing pseudonyms, especially those issued by a Trusted Third Party (TTP), is complex and expensive when compared with existing non-pseudonym based solutions.
- Implications on ITS Architecture:
 - An ITS-S requires a means of obtaining or deriving a pseudonym.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - The use of pseudonyms means that users cannot be directly identified by analysis of received ITS messages.
 - It is difficult to associate the use of specific ITS services with specific users.

11.3.19 Maintain an audit log of the type and content of each message sent to and from an ITS-S

An ITS-S records in memory details of all messages sent and received by the ITS-S. Although this cannot be considered to be a definitive record, it can provide useful information in the event of a dispute or a road traffic incident. The contents of the audit log cannot be modified or deleted retrospectively by the ITS-S (Vehicle) operator; it is only available to ITS and law enforcement authorities.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - The audit log records the receipt of all incoming messages.
 - The audit log records the transmission of all outgoing messages.
- Disadvantages:
 - The integrity of the audit log requires protection.
 - Sufficient additional memory is required within an ITS-S to maintain an audit log for the duration of the period between servicing of the vehicle.
- Implications on ITS Architecture:
 - Increases storage space requirements for ITS station units.
 - Add audit log protection and maintenance.
- Implications on BSA:
 - None.

- Ability to remove relevant ITS problem areas:
 - The presence of an audit log limits the ability of a vehicle operator to repudiate the transmission or receipt of specific ITS messages in the event of a dispute.

11.3.20 Perform plausibility tests on incoming messages

Plausibility checks are non-cryptographic measures which use rules and other mechanisms to determine the likelihood that received data is correct. These rules and mechanisms range from simple heuristics to quite sophisticated, and more complex, methods.

An ITS-S receives messages at regular and frequent intervals from ITS-equipped vehicles which are within radio range of it. These messages contain information regarding the senders position and status and, potentially, the time at which the message was sent. By correlating this information with data previously received from the same source as well as data received from other vehicles, it is possible for the receiving ITS-S to detect any anomalies (for example, implausible shifts in time or position) and reduce the level of trust it associates with the sending ITS-S.

- Countermeasure strategy:
 - Asset redesign and asset hardening.
- Advantages:
 - No cost for infrastructure, little cost for integration.
 - Low resource requirements.
 - May provide sufficient assurance that data is correct - depending on the application.
 - May need to be part of many applications (as relevance check) anyway.
 - Detects malicious attacks as well as malfunctioning ITS-Ss.
- Disadvantages:
 - Will not detect sophisticated attacks where time, position and status data are modified gradually over a longer period of time.
- Implications on ITS Architecture:
 - Validation of plausibility is provided as security services at the application and lower layers of the ITS stack.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - Restricts the values an attacker could use to inject a false message or manipulate a message en route.
 - Does not remove the threat of masquerading except where the attacker assumes properties the faked unit could not possibly have (such as a moving RSU).
 - Reduces the risk of wormhole attacks.

11.3.21 Provide remote deactivation of misbehaving ITS-S (Vehicle)

By collecting and collating information provided by ITS-S (Vehicle)s and other sources, the ITS infrastructure deduces that a particular ITS-S (Vehicle) is misbehaving either maliciously or through a system failure. To avoid continuing disruption to other vehicles, the infrastructure is able to remotely deactivate transmissions from the misbehaving ITS-S (Vehicle) while leaving able to receive transmissions from other stations.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - An ITS-S (Vehicle) can be remotely shut down if it is causing problems to other ITS users.
 - In times of heavy vehicular and communications traffic, a proportion of the broadcasting ITS stations can be temporarily prevented from sending messages (a basic form of flow control).
- Disadvantages:
 - The detection of a misbehaving ITS-S (Vehicle) requires cooperation between the infrastructure and other vehicles and may not be timely or definitive.
 - It will not be possible to deactivate special equipment designed specifically for an attack on the ITS system.
- Implications of ITS Architecture:
 - Adds the requirement for the control of transmission hardware in the ITS-S.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - Makes it possible for the ITS infrastructure to disable an ITS-S once it has detected that it is misbehaving.
 - Provides a measure of flow control which can be used to reduce excessive message densities in times of overload.

11.3.22 Use hardware-based identity and protection of software on an ITS-S

Hardware-based protection allows for secure storage and maintenance of software, OS and platform configuration of ITS-S. This is of particular importance for software updates to ITS applications in the BSA or security parameter updates over the air (and not on location at the vehicle manufacturer). In this context, hardware-based encryption seeds (keying generation information and keys) are stored locally and not sent over the air link and are therefore never exposed to outsiders. Immutable persistent units are not changeable after card production and represent the strongest possible storage of encryption seeding information. Hardware-based identity can be used to derive temporary identities that can be used for communication without revealing the real identity of an ITS station. This identity can also be used as a basis for pseudonym generation and to derive addressing information suitable for checking the authenticity of a message originator.

- Countermeasure strategy:
 - Asset redesign.
- Advantages:
 - Hardware-based protection parameters cannot easily be accessed and changed (if stored in immutable persistent unit, such information can never be changed after production of the hardware chip).
 - Hardware-based protection parameters are never transmitted over the air.

- Hardware-based identity (preferably an immutable persistence stored identity) can be used in an IAAA schema.
- Hardware-based identity adds addressing capabilities that can be used in DNM and CAM messages without revealing the true identity of an ITS station.
- Disadvantages:
 - An additional hardware chip containing identity and encryption information is required.
 - An additional trust relationship must be maintained between the card issuer and the vehicle manufacturer.
- Implications on ITS Architecture:
 - Changes lower layers of the ITS architecture.
 - Adds hardware-based identification and addressing information to CAM and DNM messages.
- Implications on BSA:
 - None.
- Ability to remove relevant ITS problem areas:
 - The true identity of an ITS station stored in an immutable persistent unit can easily be protected and used to derive temporary identity and addressing information. This can then be added to CAM and DNM messages without exposing the true identity of a vehicle or any private and sensitive information on the whereabouts, behaviour or characteristics of a vehicle.
 - An ITS-S (Roadside) can resolve the hardware-based temporary identity of an offending ITS-S (Vehicle) to its true identity by reference to an authoritative entity within the ITS infrastructure.
 - Hardware-based identity can be used as the basis of the identification, authentication and authorization schema in ITS in addition to hardware-based protection of software, OS and platform configuration information.
 - Address information can be added to broadcast messages so that the originator can be identified without revealing the its true identity. Malicious and irrelevant messages can then be rejected at the network layer in the ITS stack rather than within applications.

11.4 Countermeasure Set

Countermeasures can have two purposes in a system. They can remove one or more of the identified ITS problem areas or they can protect against one or more of the identified threats. Some countermeasures address both purposes.

The problem areas identified in ITS (Table 6 and Table 12) are:

- Intrinsic high density of ITS message traffic due to broadcasting and beaconing in V2V systems.
- Lack of flow control in V2V broadcast messaging.
- Absence of addressing in broadcast messages meaning source cannot be identified so malicious and irrelevant messages can only be rejected by the application, not at the network layer in the ITS stack.
- The sub-optimal use of the available bandwidth caused by the random re-attempt period in the "Listen before send" message transmission method.
- Inability of the ITS-S (Vehicle) to quickly detect and isolate interference on radio channels.
- CAM and DNM messages do not include any form of identification information.
- Vehicle-to-Vehicle messages include no validation or legitimacy checks.
- Uncertainty regarding how timestamps are created and how to use them to check the validity of messages.

- ITS-S (Vehicle) memory can be modified by information received over the air interface.
- Broadcast messages are in general intended for all ITS-S within range.

The threats identified in ITS are:

- denial of service and availability threats:
 - message saturation;
 - jamming of radio signals;
 - injection of false messages;
 - wormhole attacks.
- integrity and masquerade threats:
 - manipulation of relayed its messages en route;
 - masquerade as its station or its network;
 - replayed of "expired" (old) messages;
 - GNSS spoofing;
 - malicious isolation of one or more ITS-S (Vehicle) (black hole);
 - installation of malware.
- confidentiality and privacy threats:
 - eavesdropping;
 - traffic analysis;
 - location tracking.
- Accountability and non-repudiation threats:
 - Denial of transmission;
 - Denial of data receipt.

11.4.1 ITS Countermeasure Set

11.4.1.1 Countermeasures to Denial of Service (DoS) and availability threats

The following countermeasures address threats to DoS and availability:

- 1) Limit message traffic to V2I/I2V when infrastructure is available and implement message flow control and station registration:
 - removes the problem of lack of flow control in V2V broadcast messages;
 - removes the problem that broadcast messages are intended for all ITS-Ss within range;
 - addresses the absence of addressing in broadcast messages. Without any address, the source of a message cannot be identified so malicious and irrelevant messages can only be rejected by the application, not at the network layer in the ITS stack;
 - addresses the problem that broadcast messages are in general intended for all ITS-Ss within range;
 - partly addresses the "Listen before send" problem in the message transmission method;
 - Provides protection against masquerade, wormhole attacks and message saturation to some extent.

- 2) Include a sequence number in each new message:
 - removes the problem area of lack of flow control in V2V broadcast messages when implemented together with the V2I/I2V countermeasure;
 - when used together with V2I/I2V this countermeasure provides protection against the replay of "expired" old messages and therefore provides protection against the 'Injection of false messages' and 'Manipulation of relayed ITS messages en route'.
- 3) Reduce the frequency of beacon and other repeated messages when flow control is not available:
 - removes the problem of the intrinsic high density of ITS messages traffic due to broadcasting and beaconing in V2V systems;
 - reduces the problem of limited bandwidth associated with the "Listen before send" message transmission method;
 - provides protection against message saturation.
- 4) Add source identification across the stack in ITS messages:
 - removes the problem of lack of flow control in V2V broadcast messages;
 - removes the problem of absence of addressing in broadcast messages. Without any address, the source of a message cannot be identified so malicious and irrelevant messages can only be rejected by the application, not at the network layer in the ITS stack;
 - removes the problem that CAM and DNM messages do not include any form of identification information.
- 5) Provide remote deactivation of misbehaving devices capability (includes capability of detecting misbehaving devices):

NOTE: This countermeasure assumes the existence of functions capable of detecting misbehaving devices and must be used together with an alternative communication path to remove misbehaving devices.

- protects against:
 - malicious isolation of one or more ITS-S (Vehicle);
 - message saturation;
 - injection of false messages;
 - replay of old messages; and
 - wormhole attacks.
- 6) Alternative communication path to remove misbehaving devices and to download security management information:
 - works together with remote deactivation of misbehaving devices to protect against:
 - installation of malware;
 - manipulation of relayed ITS messages en route;
 - DoS attacks (partially); and
 - manipulation attacks (partially).
- 7) Implement frequency agility within the G5A:
 - removes the problem of the inability of an ITS-S (Vehicle) to quickly detect and isolate interference on radio channels;
 - provides protection against jamming of radio signals.

11.4.1.2 Countermeasures to integrity threats

The following countermeasures address threats to integrity:

- 1) Include a non-cryptographic checksum of the message in each message sent with forward error correction:
 - addresses the problem that Vehicle-to-Vehicle messages include no checks on the integrity or legitimacy of the content of the message;
 - provides protection against manipulation of relayed ITS messages en route and replay of "expired" old messages.
- 2) Include an authoritative identity in each message and authenticate it:
 - enables the receiver to check the source and authenticity of a message thus removing the problem that Vehicle-to-Vehicle messages include no integrity or legitimacy checks;
 - provides protection against manipulation of relayed ITS messages en route and replay of "expired" old messages.
- 3) Implement plausibility validation on incoming messages:
 - removes the problem that Vehicle-to-Vehicle messages include no integrity or legitimacy checks;
 - provides protection against GNSS spoofing and manipulation of relayed ITS messages en route.
- 4) Use broadcast time (Universal Coordinated Time (UTC) or GNSS) to timestamp all messages:
 - removes the problem of uncertainty regarding how timestamps are created and how to use them to check the validity of messages;
 - provides protection against GNSS spoofing and replay of "expired" old messages.
- 5) Hardware-based protection of software and hardware configuration on ITS-S:
 - provides protection against installation of malware.
- 6) Software authenticity and integrity are certified before it is installed
 - removes the problem that ITS-S (Vehicle) memory can be modified by information received over the air interface;
 - provides protection against installation of malware.

11.4.1.3 Countermeasures to confidentiality and privacy threats

The following countermeasures address threats to confidentiality and privacy:

- 1) Digitally sign each message using a Kerberos/PKI-like token system:
 - addresses the problem that CAM and DNM messages do not include any form of identification information;
 - addresses the problem that Vehicle-to-Vehicle messages include no integrity or legitimacy checks;
 - provides protection against masquerade and spoofing attacks depending on its implementation and the management of security information (security information should be distributed over the alternative communication path).
- 2) To identify the sender or receiver of a message, use a pseudonym that cannot be linked to either the user's true identity or the identity of the user's vehicle:
 - provides protection against traffic analysis and location tracking.

- 3) Encrypt the transmission of personal and private data:
 - provides protection against:
 - eavesdropping;
 - traffic analysis;
 - acquisition of behavioural details;
 - acquisition of personal information; and
 - location tracking.

11.4.1.4 Countermeasures to non-repudiation and accountability threats

The following countermeasures address threats to non-repudiation and accountability:

- 1) Add an audit log to ITS stations to store the type and content of each message sent to and from an ITS-S:
 - the presence of an audit log limits the ability of a vehicle operator to repudiate the transmission or receipt of specific ITS messages in the event of a dispute;
 - provides protection against denial of transmission and data receipt.
- 2) Include source identity in each ITS message:
 - enables the receiver to check the source of a message and therefore removes part of the problem that Vehicle-to-Vehicle messages include no integrity or legitimacy checks;
 - provides protection against denial of transmission and data receipt when used together with the audit log countermeasure.

11.4.2 Residual risk

The countermeasure set described in clause 11.4.1 removes all of the problem areas identified in Table 6 and Table 12 and provides protection against all identified threats. However, countermeasures against misbehaving units depend on those units being identified immediately and the nature of the ITS system makes this almost impossible to achieve. With this exception, there are no residual risks provided that the countermeasure set are deployed according to TS 102 731 [i.6].

- NOTE: As all identified threats can be countered with the measures described in clause 11.4.1, any countermeasures described in clause 11.3 but not included in the countermeasures set are not considered further in the present document or in TS 102 731 [i.6].

Annex A: Cost - Benefit analysis of the selected countermeasures

As a guide to the value of implementing each of the countermeasures described in clause 11.3, a simple Cost-Benefit analysis was performed on each of them. The analysis took the following factors into consideration:

- Costs:
 - the extent to which the ITS standards would require modification and extension;
 - the extent to which the implementation of the countermeasure would require additional engineering development and special test equipment;
 - the extent to which the ongoing costs of manufacture of the ITS-S and the costs of managing and maintaining the ITS infrastructure would be extended by the existence of the countermeasure;
 - an estimation of any negative impact that the countermeasure would have on the ITS system's ability to comply with regulatory requirements;
 - an estimation of any negative impact that the countermeasure would have on market acceptance of ITS as a whole.
- Benefits:
 - the extent to which implementation of the countermeasure reduces the evaluated risk level associated with each threat group affected by the countermeasure;
 - an estimation of any positive impact that the countermeasure would have on the ITS system's ability to comply with regulatory requirements;
 - an estimation of any positive impact that the countermeasure would have on market acceptance of ITS as a whole.

The results of the Cost-Benefit analysis, as it applies to the countermeasures included in the countermeasure set described in clause 11.4.1, is shown in Table A.1.

Table A.1: Summary of Cost-Benefit analysis on the selected ITS countermeasures

Countermeasure	Cost		Benefit			Result
	Category	Value	Risk Level	Original Count	Revised Count	
Reduce frequency of repeated messages	Standards design	Low Impact	Minor	0	0	9
	Implementation	No Impact	Major	0	2	
	Operation	No Impact	Critical	3	1	
	Regulatory Impact			No Impact		
	Market Acceptance			No Impact		
Include source address in all V2V messages	Standards design	Medium Impact	Minor	0	1	14
	Implementation	Medium Impact	Major	1	3	
	Operation	No Impact	Critical	3	0	
	Regulatory Impact			Positive Impact		
	Market Acceptance			No Impact		
Limit message traffic to V2I/I2V	Standards design	Major Impact	Minor	0	5	17
	Implementation	Major Impact	Major	2	1	
	Operation	Major Impact	Critical	4	0	
	Regulatory Impact			Significant Positive Impact		
	Market Acceptance			No Impact		
Implement frequency agility within the 5,9 GHz band	Standards design	Major Impact	Minor	0	0	-21
	Implementation	Major Impact	Major	0	2	
	Operation	Medium Impact	Critical	2	0	
	Regulatory Impact			Severe Negative Impact		
	Market Acceptance			No Impact		
Alternative communications path for security management purposes	Standards design	Medium Impact	Minor	0	3	19
	Implementation	Medium Impact	Major	0	0	
	Operation	Low Impact	Critical	3	0	
	Regulatory Impact			Positive Impact		
	Market Acceptance			No Impact		
Implement plausibility validation on incoming information	Standards design	Medium Impact	Minor	0	3	25
	Implementation	Medium Impact	Major	1	2	
	Operation	No Impact	Critical	4	0	
	Regulatory Impact			No Impact		
	Market Acceptance			Positive Impact		
Include a non cryptographic checksum of the message in each message sent	Standards design	Low Impact	Minor	0	0	3
	Implementation	Low Impact	Major	0	1	
	Operation	No Impact	Critical	1	0	
	Regulatory Impact			No Impact		
	Market Acceptance			No Impact		
Use broadcast time (Universal Coordinated Time - UTC - or GNSS) to timestamp all messages	Standards design	Low Impact	Minor	0	2	6
	Implementation	Medium Impact	Major	1	1	
	Operation	Low Impact	Critical	2	0	
	Regulatory Impact			Negative Impact		
	Market Acceptance			No Impact		

Countermeasure	Cost		Benefit			Result
	Category	Value	Risk Level	Original Count	Revised Count	
Include a sequence number in each new message	Standards design	Low Impact	Minor	0	0	7
	Implementation	Low Impact	Major	1	3	
	Operation	Low Impact	Critical	2	0	
	Regulatory Impact			No Impact		
	Market Acceptance			No Impact		
Software authenticity and integrity are certified before it is installed	Standards design	Medium Impact	Minor	0	4	23
	Implementation	Major Impact	Major	0	0	
	Operation	Medium Impact	Critical	4	0	
	Regulatory Impact			Positive Impact		
	Market Acceptance			Positive Impact		
Include an authoritative identity in each message and authenticate it	Standards design	Medium Impact	Minor	0	2	11
	Implementation	Major Impact	Major	1	2	
	Operation	Low Impact	Critical	3	0	
	Regulatory Impact			Positive Impact		
	Market Acceptance			No Impact		
Encrypt the transmission of personal and private data	Standards design	Major Impact	Minor	0	0	-1
	Implementation	Major Impact	Major	0	1	
	Operation	Low Impact	Critical	1	0	
	Regulatory Impact			Significant Positive Impact		
	Market Acceptance			Positive Impact		
Use hardware-based identity and protection of software on an ITS-S	Standards design	Low Impact	Minor	0	2	12
	Implementation	Medium Impact	Major	0	1	
	Operation	Medium Impact	Critical	3	0	
	Regulatory Impact			No Impact		
	Market Acceptance			No Impact		
Add an audit log to ITS stations to store the type and content of each message sent to and from an ITS-S	Standards design	Low Impact	Minor	0	2	8
	Implementation	Low Impact	Major	2	0	
	Operation	Low Impact	Critical	0	0	
	Regulatory Impact			Significant Positive Impact		
	Market Acceptance			Negative Impact		
Digitally sign each message using a Kerberos/PKI-like token	Standards design	Medium Impact	Minor	0	1	9
	Implementation	Major Impact	Major	1	4	
	Operation	Major Impact	Critical	4	0	
	Regulatory Impact			Positive Impact		
	Market Acceptance			Positive Impact		
Use a pseudonym that cannot be linked to the true identity of either the user or the user's vehicle	Standards design	Medium Impact	Minor	0	2	5
	Implementation	No Impact	Major	2	0	
	Operation	Low Impact	Critical	0	0	
	Regulatory Impact			Positive Impact		
	Market Acceptance			No Impact		
Allow remote activation and	Standards design	Medium Impact	Minor	0	4	9
	Implementation	Major Impact	Major	1	0	

Countermeasure deactivation of ITS-S	Cost		Benefit		Result	
	Category	Value	Risk Level	Original Count		Revised Count
	Operation	Major Impact	Critical	3	0	
	Regulatory Impact		Positive Impact			
	Market Acceptance		No Impact			

History

Document history		
V1.1.1	March 2010	Publication