


**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Conformance testing for the Digital Mobile Radio (DMR);
Part 1: Protocol Implementation Conformance
Statement (PICS) proforma**

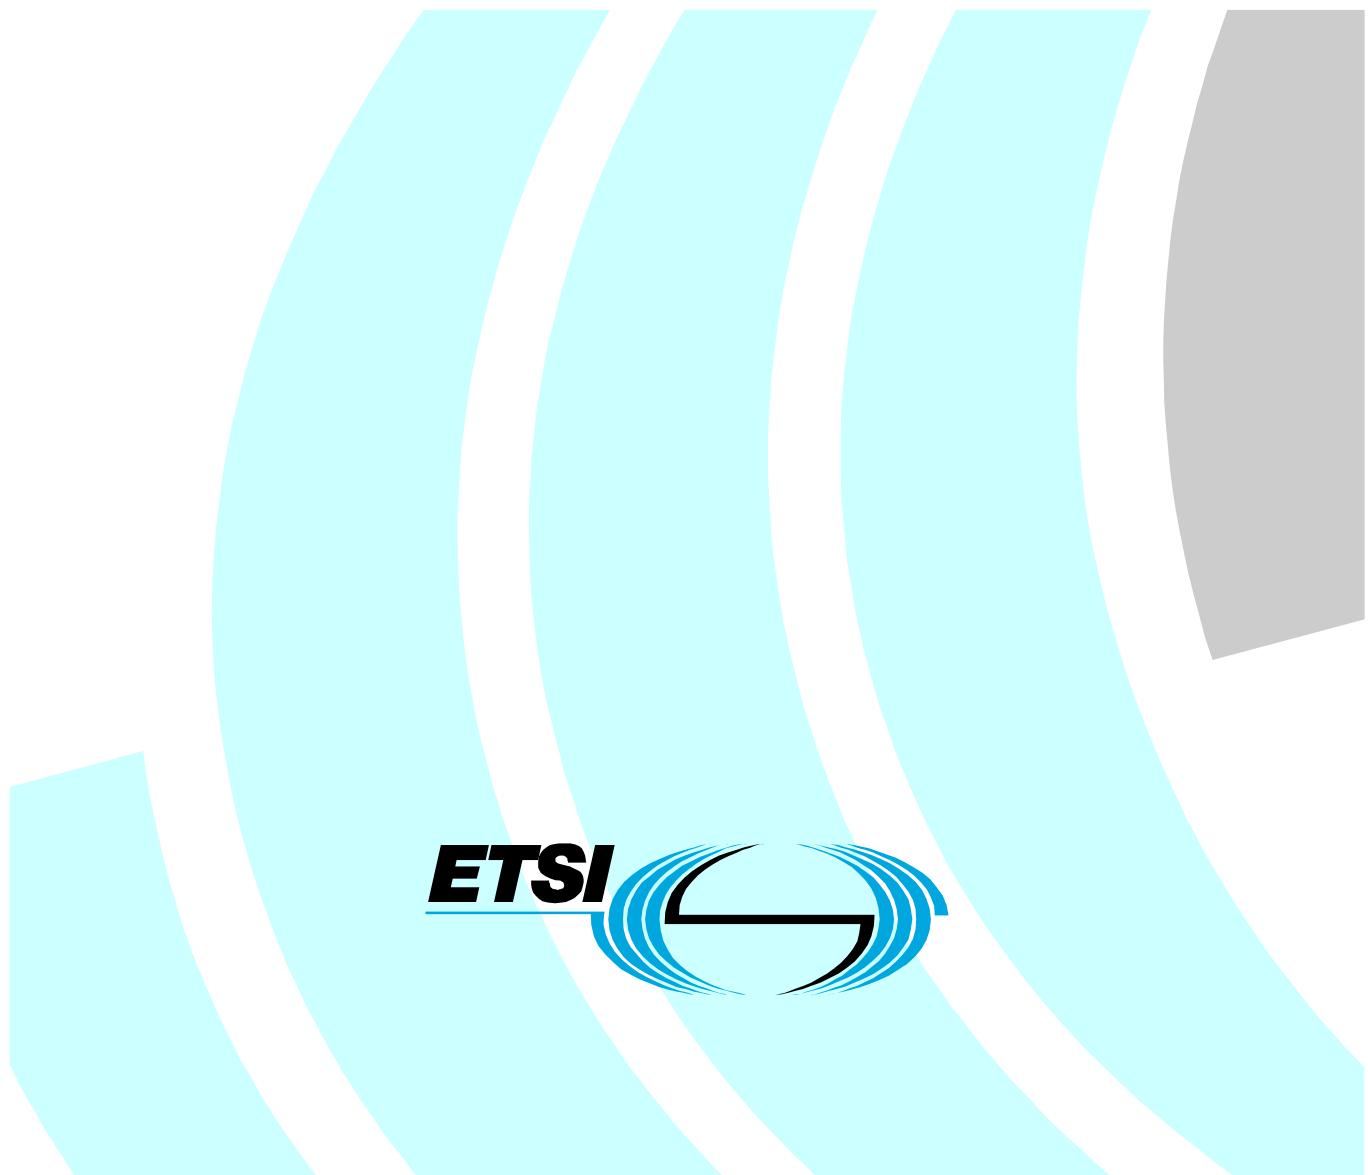

Reference

DTS/ERM-TGDMR-053-1

Keywords

digital, PICS, PMR, radio

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	5
Foreword.....	5
Introduction	5
1 Scope	6
2 References	6
3 Definitions and abbreviations.....	6
3.1 Definitions.....	6
3.2 Abbreviations	7
4 Conformance to the present document.....	7
Annex A (normative): Protocol ICS proforma for TS 102 361-1 and TS 102 361-2	8
A.1 Guidance for completing the PICS proforma	8
A.1.1 Purposes and structure.....	8
A.1.2 Abbreviations and conventions	8
A.1.3 Instructions for completing the PICS proforma.....	10
A.2 Identification of the implementation	11
A.2.1 Date of the statement.....	11
A.2.2 Implementation Under Test (IUT) identification	11
A.2.3 System Under Test (SUT) identification	11
A.2.4 Product supplier.....	11
A.2.5 Client (if different from product supplier).....	12
A.2.6 ICS contact person.....	12
A.3 Identification of the protocol	13
A.4 Global statement of conformance.....	13
A.5 Release	13
A.6 Tier	14
A.7 Roles.....	14
A.8 Mobile Station	15
A.8.1 MS CCL	15
A.8.1.1 MS CCL capabilities and functionalities	15
A.8.1.1.1 MS CCL group call service.....	16
A.8.1.1.2 MS CCL individual speech call service	17
A.8.1.2 MS CCL PDUs	19
A.8.1.3 MS CCL timers.....	19
A.8.2 MS DLL	20
A.8.2.1 MS DLL capabilities and functionalities	20
A.8.2.1.1 MS DLL channel types	20
A.8.2.1.2 MS DLL channel timing	21
A.8.2.1.3 MS DLL channel access.....	21
A.8.2.1.4 MS DLL channel burst format	22
A.8.2.1.5 MS DLL DMR signalling	23
A.8.2.2 MS DLL PDUs	24
A.8.2.2.1 MS DLL PDU descriptions, seen from MS	24
A.8.2.2.2 MS DLL SYNC PDU patterns.....	25
A.8.2.3 MS DLL timers.....	26
A.9 Base Station.....	26
A.9.1 BS Repeater mode.....	27
A.9.1.1 BS CCL repeater mode	27

A.9.1.1.1	BS CCL capabilities and functionalities	27
A.9.1.1.2	BS CCL PDUs	28
A.9.1.1.3	BS CCL timers	28
A.9.1.2	BS DLL repeater mode	29
A.9.1.2.1	BS DLL capabilities and functionalities	29
A.9.1.2.1.1	BS DLL channel timing	29
A.9.1.2.1.2	BS DLL channel operation mode	30
A.9.1.2.1.3	BS DLL channel access	31
A.9.1.2.1.4	BS DLL channel burst format	31
A.9.1.2.1.5	BS DLL DMR signalling	32
A.9.1.2.2	BS DLL PDUs	32
A.9.1.2.2.1	BS DLL PDU descriptions, seen from BS	33
A.9.1.2.2.2	BS DLL SYNC PDU patterns	34
A.9.1.2.3	BS DLL timers	35
History		36

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document is part 1 of a multi-part deliverable covering the Electromagnetic compatibility and Radio spectrum Matters (ERM); Conformance testing for the Digital Mobile Radio (DMR), as identified below:

- Part 1: "Protocol Implementation Conformance Statement (PICS) proforma";**
- Part 2: "Test Suite Structure and Test Purposes (TSS&TP) specification";
- Part 3: "Abstract Test Suite (ATS) specification".

Introduction

To evaluate conformance of a particular implementation, it is necessary to have a statement of which capabilities and options have been implemented for a telecommunication specification. Such a statement is called a Protocol Implementation Conformance Statement (PICS).

1 Scope

The present document provides the Protocol Implementation Conformance Statement (PICS) proforma for the Data Link Layer (DLL) and Call Control Layer (CCL) of Digital Mobile Radio (DMR) as defined in TS 102 361-1[1] and TS 102 361-2 [2] in compliance with the relevant requirements, and in accordance with the relevant guidance given in ISO/IEC 9646-7 [4] and ETS 300 406 [5].

The present document details in tabular form the implementation options, i.e. the optional functions additional to those which are mandatory to implement.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] ETSI TS 102 361-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Technical Requirements for Digital Mobile Radio (DMR); Part 1: Air Interface (AI) protocol".
- [2] ETSI TS 102 361-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Technical Requirements for Digital Mobile Radio (DMR); Part 2: DMR voice and generic services and facilities".
- [3] ISO/IEC 9646-1: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [4] ISO/IEC 9646-7: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".
- [5] ETSI ETS 300 406 (1995): "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions defined in TS 102 361-1 [1], TS 102 361-2 [2], ISO/IEC 9646-1 [3], ISO/IEC 9646-7 [4] and the following apply:

Implementation Conformance Statement (ICS): statement made by the supplier of an implementation or system claimed to conform to a given specification, stating which capabilities have been implemented

NOTE: The ICS can take several forms: protocol ICS, profile ICS, profile specific ICS, information object ICS, etc.

ICS proforma: document, in the form of a questionnaire, which when completed for an implementation or system becomes an ICS

Protocol ICS (PICS): ICS for an implementation or system claimed to conform to a given protocol specification

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BOC	Beginning of Call
BOT	Beginning of Transmission
BS	Base Station
CCL	Call Control Layer
C-DATA	Confirmed packet - DATA
C-HEAD	Confirmed packet - HEADer
C-LDATA	Confirmed - Last DATA block
C-RDATA	Confirmed - Response packet DATA
C-RHEAD	Confirmed - Response packet HEADER
CSBK	Control Signalling BlocK
DLL	Data Link Layer
DMR	Digital Mobile Radio
EMB	EMBedded signalling
EOC	End of Call
EOT	End of Transmission
IUT	Implementation Under Test
LC	Link Control
MS	Mobile Station
OACSU	Off Air Call SetUp
PATCS	Press And Talk Call Setup
PDU	Protocol Data Unit
P-HEAD	Proprietary - HEADer
PICS	Protocol Implementation Conformance Statement
PR FILL	Pseudo Random FILL bit
RC	Reverse Channel
Rx	Receive
SLOT	SLOT type
SUT	System Under Test
SYNC	SYNChronisation
TACT	TDMA Access Channel Type
Tx	Transmission
U-DATA	Unconfirmed - packet DATA
U-HEAD	Unconfirmed - data packet HEADer
U-LDATA	Unconfirmed - Last DATA block

4 Conformance to the present document

If it claims to conform to the present document, the actual PICS proforma to be filled in by a supplier shall be technically equivalent to the text of the PICS proforma given in annex A, and shall preserve the numbering/naming and ordering of the proforma items.

A PICS, which conforms to the present document, shall be a conforming PICS proforma completed in accordance with the guidance for completion given in clause A.1.

Annex A (normative): Protocol ICS proforma for TS 102 361-1 and TS 102 361-2

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PICS proforma in this annex so that it can be used for its intended purposes and may further publish the completed PICS.

A.1 Guidance for completing the PICS proforma

A.1.1 Purposes and structure

The purpose of this PICS proforma is to provide a mechanism whereby a supplier of an implementation of the requirements defined in TS 102 361-1 [1] and TS 102 361-2 [2] may provide information about the implementation in a standardized manner.

The PICS proforma is subdivided into clauses for the following categories of information:

- guidance for completing the PICS proforma;
- identification of the implementation;
- identification of the TS 102 361-1 [1] and TS 102 361-2 [2];
- global statement of conformance;
- release and Tier;
- roles;
- Mobile Station MS:
 - capabilities;
 - PDUs;
 - PDU parameters;
 - timers;
- Base Station BS:
 - capabilities;
 - PDUs;
 - PDU parameters;
 - timers.

A.1.2 Abbreviations and conventions

The PICS proforma contained in this annex is comprised of information in tabular form in accordance with the guidelines presented in ISO/IEC 9646-7 [4].

Item column

The item column contains a number which identifies the item in the table.

Item description column

The item description column describes in free text each respective item (e.g. parameters, timers, etc.). It implicitly means "is <item description> supported by the implementation?".

Status column

The following notations, defined in ISO/IEC 9646-7 [4], are used for the status column:

- m mandatory - the capability is required to be supported.
- o optional - the capability may be supported or not.
- n/a not applicable - in the given context, it is impossible to use the capability.
- x prohibited (excluded) - there is a requirement not to use this capability in the given context.
- o.i qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which identifies an unique group of related optional items and the logic of their selection which is defined immediately following the table.
- ci conditional - the requirement on the capability ("m", "o", "x" or "n/a") depends on the support of other optional or conditional items. "i" is an integer identifying an unique conditional status expression which is defined immediately following the table.
- i irrelevant (out-of-scope) - capability outside the scope of the reference specification. No answer is requested from the supplier.

NOTE 1: This use of "i" status is not to be confused with the suffix "i" to the "o" and "c" statuses above.

Reference column

The reference column makes reference to TS 102 361-1 [1] or TS 102 361-2 [2], except where explicitly stated otherwise.

Support column

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO/IEC 9646-7 [4], are used for the support column:

- | | |
|---------------|---|
| Y or y | supported by the implementation. |
| N or n | not supported by the implementation. |
| N/A, n/a or - | no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional status). |

If this PICS proforma is completed in order to describe a multiple-profile support in a system, it is necessary to be able to answer that a capability is supported for one profile and not supported for another. In that case, the supplier shall enter the unique reference to a conditional expression, preceded by "?" (e.g. ?3). This expression shall be given in the space for comments provided at the bottom of the table. It uses predicates defined in the SCS, each of which refers to a single profile and which takes the value TRUE if and only if that profile is to be used.

EXAMPLE 1: ?3: IF prof1 THEN Y ELSE N

NOTE 2: As stated in ISO/IEC 9646-7 [4], support for a received PDU requires the ability to parse all valid parameters of that PDU. Supporting a PDU while having no ability to parse a valid parameter is non-conformant. Support for a parameter on a PDU means that the semantics of that parameter are supported.

Values allowed column

The values allowed column contains the type, the list, the range, or the length of values allowed. The following notations are used:

- range of values: <min value> .. <max value>

EXAMPLE 2: 5 .. 20.

- list of values: <value1>, <value2>, ..., <valueN>

EXAMPLE 3: 2 ,4 ,6 ,8, 9

EXAMPLE 4: '1101'B, '1011'B, '1111'B

EXAMPLE 5: '0A'H, '34'H, '2F'H

- list of named values: <name1>(<val1>), <name2>(<val2>), ..., <nameN>(<valN>)

EXAMPLE 6: reject(1), accept(2)

- length: size (<min size> .. <max size>)

EXAMPLE 7: size (1 .. 8)

Values supported column

The values supported column shall be filled in by the supplier of the implementation. In this column, the values or the ranges of values supported by the implementation shall be indicated.

References to items

For each possible item answer (answer in the support column) within the PICS proforma a unique reference exists, used, for example, in the conditional expressions. It is defined as the table identifier, followed by a solidus character "/", followed by the item number in the table. If there is more than one support column in a table, the columns are discriminated by letters (a, b, etc.), respectively.

EXAMPLE 8: A.5/4 is the reference to the answer of item 4 in table 5 of annex A.

EXAMPLE 9: A.6/3b is the reference to the second answer (i.e. in the second support column) of item 3 in table 6 of annex A.

Prerequisite line

A prerequisite line takes the form: Prerequisite: <predicate>.

A prerequisite line after a clause or table title indicates that the whole clause or the whole table is not required to be completed if the predicate is FALSE.

A.1.3 Instructions for completing the PICS proforma

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided. In particular, an explicit answer shall be entered, in each of the support or supported column boxes provided, using the notation described in clause A.1.2.

However, the tables containing in "Mobile Station (MS)" clause shall only be completed for MS implementations, and the tables containing in "Base Station (BS)" clause shall only be completed for BS implementations.

If necessary, the supplier may provide additional comments in space at the bottom of the tables or separately.

More detailed instructions are given at the beginning of the different clauses of the PICS proforma.

A.2 Identification of the implementation

Identification of the Implementation Under Test (IUT) and the system in which it resides (the System Under Test (SUT)) should be filled in so as to provide as much detail as possible regarding version numbers and configuration options.

The product supplier information and client information should both be filled in if they are different.

A person who can answer queries regarding information supplied in the PICS should be named as the contact person.

A.2.1 Date of the statement

A.2.2 Implementation Under Test (IUT) identification

IUT name:

IUT version:

A.2.3 System Under Test (SUT) identification

SUT name:

Hardware configuration:

Operating system:

A.2.4 Product supplier

Name:

Address:

Telephone number:

.....

Facsimile number:

.....

E-mail address:

.....

Additional information:

.....
.....
.....

A.2.5 Client (if different from product supplier)

Name:

.....

Address:

.....
.....
.....

Telephone number:

.....

Facsimile number:

.....

E-mail address:

.....
.....
.....

A.2.6 ICS contact person

(A person to contact if there are any queries concerning the content of the ICS)

Name:

.....

Telephone number:

.....

Facsimile number:

.....

E-mail address:

.....

Additional information:

.....

.....

.....

A.3 Identification of the protocol

This PICS proforma applies to the following standards:

- ETSI TS 102 361-1 [1] (V.1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Digital Mobile Radio Systems; Part 1: Air interface protocol".
- ETSI TS 102 361-2 [2] (V.1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Digital Mobile Radio Systems; Part 2: DMR services and facilities interface".

A.4 Global statement of conformance

Are all mandatory capabilities implemented? (Yes/No)

NOTE: Answering "No" to this question indicates non-conformance to the <reference specification type> specification. Non-supported mandatory capabilities are to be identified in the PICS, with an explanation of why the implementation is non-conforming, on pages attached to the PICS proforma.

A.5 Release

Table A.1: Release

Item	Release	Reference	Status	Support
1	Release 1	[1], clause 1, [2], clause 1	o.1	
2	Release 2	[1], clause 1, [2], clause 2	o.1	

o.1: It is mandatory to support exactly one of these items.

Comments:

.....

.....

A.6 Tier

This clause contains the PICS proforma table related to the Tier type.

Prerequisite: A.1/1 -- Release 1

Table A.2: Tier type

Item	Tier type	Reference	Status	Support
1	Tier I	[1], clause 1, [2], clause 1	o.2	
2	Tier II	[1], clause 1, [2], clause 1	o.2	
3	Tier III	[1], clause 1, [2], clause 1	o.2	

o.2: It is mandatory to support at least one of these items.

Comments:

.....

.....

A.7 Roles

Prerequisite: A.1/1 -- Release 1

Table A.3: Roles

Item	Role	Reference	Status	Support
1	Mobile Station MS	[1], clause 1, [2], clause 1	o.3	
2	Base Station BS	[1], clause 1, [2], clause 1	o.3	

o.3: It is mandatory to support at least one of these items.

Comments:

.....

.....

A.8 Mobile Station

This clause contains the PICS proforma tables related to the Mobile Station MS. They need to be completed for description of MS implementations only.

Prerequisite: A.1/1 and A.3/1 -- Release 1 and MS.

Table A.4: MS modes, Tier 1

Prerequisite: A.2/1 -- Tier 1 product				
Item	Mode	Reference	Status	Support
1	Direct mode	[1], clause 1, [2], clause 1	m	

Comments:

.....

.....

Table A.5: MS modes, Tier 2 and 3

Prerequisite: A.2/2 OR A.2/3 -- Tier 2 or 3 product				
Item	Mode	Reference	Status	Support
1	Direct mode	[1], clause 1, [2], clause 1	0.5	
2	Repeater mode	[1], clause 1, [2], clause 1	0.5	

0.5: It is mandatory to support at least one of these items.

Comments:

.....

.....

A.8.1 MS CCL

A.8.1.1 MS CCL capabilities and functionalities

Table A.6: MS feature sets

Item	MS feature sets	Reference	Status	Support
1	Standard feature set	[2], clause 4.2	m	
2	Manufacturers feature set	[2], clause 4.2	o	

Comments:

.....

.....

Table A.7: MS standard feature set

Item	MS feature	Reference	Status	Support
1	BS activation	[2], clause 4.1.3, [1], clause 5.2.2.2	c701	
2	Late entry procedure	[2], clause 4.1.3, [2], clause 5.2.1.3.3.5	o	
3	Pre-emption procedure	[2], clause 4.1.3	o	
4	Emergency signalling	[2], clause 4.1.3	o	
5	Feature not supported signalling	[2], clause 4.2, [2], clause 5.1.2	m	
6	Individual call service	[2], clause 5.2.2, [2], clause 4.2	o	
7	Group call service	[2], clause 5.2.1, [2], clause 4.2	o	
8	Unaddressed voice call service	[2], clause 5.3.1, [2], clause 4.2	o	
9	All call service	[2], clause 5.3.2, [2], clause 4.2	o	
10	Broadcast voice call service	[2], clause 5.3.3, [2], clause 4.2	o	
11	Open voice channel call service	[2], clause 5.3.4, [2], clause 4.2	o	
12	Transmit timeout	[2], clause 4.2, [2], clause 6.1	o	

c701: IF A.2/1 THEN n/a ELSE o -- if Tier 1 product then not applicable else optional (for Tier 2, 3).

Comments:

A.8.1.1.1 MS CCL group call service

Table A.8: MS group call mode

Prerequisite: A.7/7 -- Group call service				
Item	Group call mode	Reference	Status	Support
1	Peer to peer mode	[2], clause 5.2.1.2.1	c801	
2	Repeater mode	[2], clause 5.2.1.2.2	c802	

c801: IF (A.4/1 OR A.5/1) THEN m ELSE n/a -- if direct mode supported then mandatory else not applicable.

c802: IF A.5/2 THEN m ELSE n/a -- if repeater mode then mandatory else not applicable.

Comments:

Table A.9: MS group call service elements

Prerequisite: A.7/7 -- Group call service				
Item	Group call facility element	Reference	Status	Support
1	Tx Beginning of Call (BOC)	[2], clauses 5.2.1.1, 5.2.1.3.3.1, 5.2.1.3.3.2 and 5.2.1.3.3.3	m	
2	Tx Beginning of Transmission (BOT)	[2], clauses 5.2.1.1 and 5.2.1.3.3.3	m	
3	Rx Beginning of Transmission (BOT)	[2], clauses 5.2.1.1 and 5.2.1.3.3.4	m	
4	Tx End of Transmission (EOT)	[2], clauses 5.2.1.1 and 5.2.1.3.3.6	m	
5	Rx End of Transmission (EOT)	[2], clauses 5.2.1.1 and 5.2.1.3.3.7	m	
6	Rx End of Call (EOC)	[2], clauses 5.2.1.1 and 5.2.1.3.3.8	c901	
7	Tx Late entry support	[2], clause 5.2.1.1, [1], clause 5.2.1.3.3.9	m	
8	Rx Late entry support	[2], clause 5.2.1.1, [2], clause 5.2.1.3.3.5	m	

c901: IF A.5/2 THEN m ELSE n/a -- if repeater mode supported then mandatory else not applicable.

Comments:

.....

.....

A.8.1.1.2 MS CCL individual speech call service

Table A.10: MS individual call mode

Prerequisite: A.7/6 -- Individual call service				
Item	Individual call mode	Reference	Status	Support
1	Peer to peer mode	[2], clause 5.2.2.2.1	c1001	
2	Repeater mode	[2], clause 5.2.2.2.2	c1002	

c1001: IF (A.4/1 OR A.5/1) THEN m ELSE n/a -- if direct mode then mandatory else not applicable.

c1002: IF A.5/2 THEN m ELSE n/a -- if repeater mode then mandatory else not applicable.

Comments:

.....

.....

Table A.11: MS individual call service elements

Prerequisite: A.7/6 -- Individual call service				
Item	Individual call service element	Reference	Status	Support
1	Tx Beginning of Transmission (BOT)	[2], clauses 5.2.2.1, 5.2.2.3, 5.2.2.4 and 5.2.1.3.3.3	m	
2	Rx Beginning of Transmission (BOT)	[2], clauses 5.2.2.1, 5.2.2.3, 5.2.2.4 and 5.2.1.3.3.4	m	
3	Tx End of Transmission (EOT)	[2], clauses 5.2.2.1, 5.2.2.3, 5.2.2.4 and 5.2.1.3.3.6	m	
4	Rx End of Transmission (EOT)	[2], clauses 5.2.2.1, 5.2.2.3, 5.2.2.4 and 5.2.1.3.3.7	m	
5	Rx End of Call (EOC)	[2], clauses 5.2.2.1, 5.2.2.3, 5.2.2.4 and 5.2.1.3.3.8	c1101	
6	Tx Late entry support	[2], clauses 5.2.2.1, 5.2.2.3 and 5.2.2.4, [1], clause 7.1.3.2	m	
7	Rx Late entry support	[2], clauses 5.2.2.1, 5.2.2.3, 5.2.2.4 and 5.2.1.3.3.5	m	

c1101: A.5/2 THEN m ELSE n/a -- if MS supports repeater mode then mandatory else not applicable.

Comments:

Table A.12: MS individual call initiation

Prerequisite: A.7/6 -- Individual speech call service				
Item	Individual call initiation method	Reference	Status	Support
1	Press And Talk Call Setup (PATCS)	[2], clauses 5.2.2.1, 5.2.2.4, 5.2.1.3.3.1, 5.2.1.3.3.2 and 5.2.1.3.3.3	m	
2	Off Air Call SetUp (OACSU)	[2], clause 5.2.2.1	o	

Comments:

Table A.13: MS Off Air Call Setup (OACSU)

Prerequisite: A.11/2 -- OACSU supported				
Item	OACSU procedure	Reference	Status	Support
1	Channel access request procedure	[2], clause 5.2.2.3.1	m	
2	Channel access response procedure	[2], clause 5.2.2.3.2	m	
3	Presence check procedure	[2], clause 5.2.2.4	m	

Comments:

A.8.1.2 MS CCL PDUs

Table A.14: MS CCL PDUs (Layer 3 PDUs)

Item	CCL PDU	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Grp_V_Ch_Usr	[2], clause 7.1.1.1	c1401		[2], clause 7.1.1.1	c1401	
2	UU_V_Ch_Usr	[2], clause 7.1.1.2	c1402		[2], clause 7.1.1.2	c1402	
3	BS_Dwn_Act	[2], clause 7.1.2.1	c1403		[2], clause 7.1.2.1	n/a	
4	UU_V_Req	[2], clause 7.1.2.2	c1404		[2], clause 7.1.2.2	c1404	
5	UU_Ans_Rsp	[2], clause 7.1.2.3	c1404		[2], clause 7.1.2.3	c1404	
6	NACK_Rsp	[2], clause 7.1.2.4	m		[2], clause 7.1.2.4	m	
7	Pre_CSBK	[2], clause 7.1.2.5	o		[2], clause 7.1.2.5	o	
8	Nul_Msg	[2], clause 7.1.3.1	n/a		[2], clause 7.1.3.1	c1405	
9	Act_Updt	[2], clause 7.1.3.2	n/a		[2], clause 7.1.3.2	c1405	

- c1401: IF A.7/7 THEN m ELSE n/a -- if group call service then mandatory else not applicable.
 c1402: IF A.7/6 THEN m ELSE n/a -- if individual call service then mandatory else not applicable.
 c1403: IF A.7/1 THEN m ELSE n/a -- if BS activation then mandatory else not applicable.
 c1404: IF A.11/2 THEN m ELSE n/a -- if OACSU then mandatory else not applicable.
 c1405: IF A.5/2 THEN m ELSE n/a -- if repeater mode then mandatory else not applicable.

Comments:

.....

.....

A.8.1.3 MS CCL timers

Table A.15: MS CCL timers

Item	CCL Timer	Reference	Status	Support	Values	
					Allowed	Supported
1	T_AckWait	[2], clause A.1	c1501		max. 720 ms	
2	T_TO	[2], clause A.1	c1502		180 s for Tier 1, 0 to 180 s for Tier 2, 3	

- c1501: IF A.11/2 THEN m ELSE n/a -- if OACSU then mandatory else not applicable.
 c1502: IF A.7/12 THEN m ELSE n/a -- if transmit timeout supported then mandatory else not applicable.

Comments:

.....

.....

A.8.2 MS DLL

A.8.2.1 MS DLL capabilities and functionalities

Table A.16: MS major DLL functionalities

Item	MS DLL functionalities	Reference	Status	Support
1	Basic channel types	[1], clause 4.6	m	
2	Channel Timing	[1], clause 5.1	m	
3	Channel Access	[1], clause 5.2	m	
4	Burst format	[1], clause 6	m	
5	DMR signalling	[1], clause 7	m	
6	Packet data protocol	[1], clause 8	c1601	

c1601: IF A.1/1 THEN n/a -- if Release 1 then not applicable.

Comments:

A.8.2.1.1 MS DLL channel types

Table A.17: MS DLL basic channel types

Item	MS DLL channel type	Reference	Status	Support
1	Traffic channel with CACH	[1], clause 4.6.1	c1701	
2	Traffic channel with guard time	[1], clause 4.6.2	c1701	
3	Bidirectional channel	[1], clause 4.6.3	c1702	

c1701: IF A.5/2 THEN m ELSE n/a -- if repeater mode supported then mandatory else not applicable.

c1702: IF (A.4/1 OR A.5/1) THEN m ELSE n/a -- if direct mode supported then mandatory else not applicable.

Comments:

A.8.2.1.2 MS DLL channel timing

Table A.18: MS DLL channel timing capabilities

Item	MS DLL timing capability	Reference	Status	Support
1	Voice superframe	[1], clause 5.1.2.1	c1801	
2	Voice initiation	[1], clause 5.1.2.2	c1801	
3	Voice termination	[1], clause 5.1.2.3	c1801	
4	Data timing	[1], clause 5.1.3	c1802	
5	Direct mode timing	[1], clause 5.1.4.3	c1803	
6	Standalone inbound RC timing	[1], clause 5.1.5.3	c1804	
7	Direct mode RC timing	[1], clause 5.1.5.4	c1805	
8	Continuous transmission mode	[1], clause 5.1.4.5	c1806	

- c1801: IF (A.7/6 OR A.7/7) THEN m ELSE n/a -- if individual or group call then mandatory else not applicable.
 c1802: IF A.1/1 THEN n/a -- if Release 1 then not applicable.
 c1803: IF (A.4/1 OR A.5/1) THEN m ELSE n/a -- if direct mode supported then mandatory else not applicable.
 c1804: IF A.5/2 THEN o ELSE n/a -- if repeater mode then optional else not applicable.
 c1805: IF A.5/1 THEN o ELSE n/a -- if direct mode (Tier 2, 3) then optional else not applicable.
 c1806: IF (A.4/1 OR A.5/1) THEN o ELSE n/a -- if direct mode then optional else not applicable.

Comments:

.....

.....

A.8.2.1.3 MS DLL channel access

Table A.19: MS DLL channel access capabilities

Item	Channel access capability	Reference	Status	Support
1	Transmit admit criteria	[1], clauses 5.2.1.6 and 5.2	c1901	
2	Retry transmission	[1], clause 5.2.1.7	c1902	
3	Peer to peer mode channel access	[1], clause 5.2.2.1	c1903	
4	Repeater mode channel access	[1], clause 5.2.2.2	c1904	
5	CSBK ACK/NACK channel access	[1], clause 5.2.2.3	m	

- c1901: IF A.2/1 THEN o ELSE m -- if Tier 1 product then optional else mandatory (for Tier 2 and 3).
 c1902: IF A.12/2 THEN m ELSE n/a -- if OACSU supported then mandatory else not applicable (note).
 c1903: IF (A.4/1 OR A.5/1) THEN m ELSE n/a -- if direct mode supported then mandatory else not applicable.
 c1904: IF A.5/2 THEN m ELSE n/a -- if repeater mode then mandatory else not applicable.

NOTE: This condition is valid in Release 1, but may need to be modified in future releases.

Comments:

.....

.....

Table A.20: MS DLL Transmit admit criteria

Prerequisite: A.19/1 -- Transmit admit criteria supported				
Item	MS DLL channel access policy	Reference	Status	Support
1	Polite to all	[1], clause 5.2.1.6	m	
2	Polite to Colour Code	[1], clause 5.2.1.6	m	
3	Impolite	[1], clause 5.2.1.6	m	

Comments:

.....

.....

A.8.2.1.4 MS DLL channel burst format

Table A.21: MS DLL Channel burst formats

Item	Channel burst	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Voice burst	[1], clause 6.1	c2101		[1], clause 6.1	c2101	
2	Control burst	[1], clause 6.2	m		[1], clause 6.2	m	
3	Data burst	[1], clause 6.2	c2102		[1], clause 6.2	c2102	
4	CACH burst	[1], clause 6.3	c2103		[1], clause 6.3	c2104	
5	Standalone inbound RC burst	[1], clause 6.4.1	c2105		[1], clause 6.4.1	c2105	
6	Outbound RC burst	[1], clause 6.5.1	n/a		[1], clause 6.5.1	c2104	

- c2101: IF A.18/1 THEN m ELSE n/a -- if voice superframe supported then mandatory else not applicable.
 c2102: IF A.1/1 THEN n/a -- if Release 1 then not applicable.
 c2103: IF A.18/8 THEN m ELSE n/a -- if continuous transmission mode supported then mandatory else not applicable.
 c2104: IF A.2/1 THEN o ELSE m -- if Tier 1 product then optional else mandatory (for Tier 2 and 3).
 c2105: IF A.2/1 THEN n/a ELSE o -- if Tier 1 product then not applicable else optional (for Tier 2 and 3).

Comments:

.....

.....

A.8.2.1.5 MS DLL DMR signalling

Table A.22: MS Link control signalling

Item	MS link control message	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Voice LC header	[1], clause 7.1.1	c2201		[1], clause 7.1.1	c2201	
2	Voice LC terminator	[1], clause 7.1.2	c2202		[1], clause 7.1.2	c2202	
3	Embedded LC signalling with RC outbound channel	[1], clause 7.1.3.1	n/a		[1], clause 7.1.3.1	c2203	
4	Embedded LC signalling inbound channel	[1], clause 7.1.3.2	c2201		[1], clause 7.1.3.2	c2204	
5	Short LC in CACH	[1], clause 7.1.4	c2205		[1], clause 7.1.4	c2206	

- c2201: IF A.18/2 THEN m ELSE n/a -- if voice initiation supported then mandatory else not applicable.
 c2202: IF A.18/3 THEN m ELSE n/a -- if voice termination supported then mandatory else not applicable.
 c2203: IF (A.18/2 AND A.5/2) THEN m ELSE n/a -- if voice and repeater mode then mandatory else not applicable.
 c2204: IF (A.18/2 AND (A.4/1 OR A.5/1)) THEN m ELSE n/a -- if voice and direct mode supported then mandatory -- else not applicable.
 c2205: IF A.18/8 THEN m ELSE n/a -- if continuous transmission mode then mandatory else not applicable.
 c2206: IF A.21/11 THEN m ELSE n/a -- if receiving CACH burst supported then mandatory -- else not applicable.

Comments:

.....

.....

Table A.23: MS CSBK and Idle signalling

Item	DMR signalling	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	CSBK message structure	[1], clause 7.2	m		[1], clause 7.2	m	
2	Idle burst	[1], clause 7.3	n/a		[1], clause 7.3	c2301	

- c2301: IF A.5/2 THEN m ELSE o -- if repeater mode supported then mandatory else optional.

Comments:

.....

.....

A.8.2.2 MS DLL PDUs

Table A.24: DLL PDU types

Item	DLL PDU type	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Voice burst PDU	[1], clauses 9.1 and 6.1	c2401		[1], clauses 9.1 and 6.1	c2401	
2	General data and control PDUs	[1], clause 9.1	m		[1], clause 9.1	m	
3	Data related PDUs	[1], clause 9.2	c2402		[1], clause 9.2	c2402	

c2401: IF A.18/1 THEN m ELSE n/a -- if voice superframe supported then mandatory else not applicable.

c2402: IF A.1/1 THEN n/a -- if release 1 then not applicable.

Comments:

.....

.....

A.8.2.2.1 MS DLL PDU descriptions, seen from MS

Table A.25: DLL general data and control PDUs

Item	DLL general data or control PDU	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Synchronization (SYNC)	[1], clause 9.1.1	m		[1], clause 9.1.1	m	
2	Embedded signalling (EMB)	[1], clause 9.1.2	c2501		[1], clause 9.1.2	c2501	
3	Slot Type (SLOT)	[1], clause 9.1.3	m		[1], clause 9.1.3	m	
4	TACT	[1], clause 9.1.4	c2502		[1], clause 9.1.4	c2503	
5	Reverse Channel (RC)	[1], clause 9.1.5	c2504		[1], clause 9.1.5	c2505	
6	Full Link Control (FULL LC)	[1], clause 9.1.6	c2506		[1], clause 9.1.6	c2507	
7	Short Link Control (SHORT LC)	[1], clause 9.1.7	n/a		[1], clause 9.1.7	c2503	
8	Control Signalling Block (CSBK)	[1], clause 9.1.8	m		[1], clause 9.1.8	m	
9	Pseudo Random Fill Bit (PR FILL)	[1], clause 9.1.9	n/a		[1], clause 9.1.9	c2508	

c2501: IF (A.7/6 OR A.7/7) THEN m ELSE n/a-- if individual or group call then mandatory else not applicable.

c2502: IF A.18/8 THEN m ELSE n/a -- if continuous transmission mode supported then mandatory else not applicable.

c2503: IF A.5/2 THEN m ELSE o -- if repeater mode supported then mandatory else optional.

c2504: IF A.21/5a THEN m ELSE n/a -- if transmission of standalone inbound reverse channel burst supported then mandatory else not applicable.

c2505: IF A.21/5b THEN m ELSE n/a -- if receiving standalone inbound reverse channel burst supported then mandatory else not applicable.

c2506: IF A.21/1a THEN m ELSE n/a -- if transmission of voice burst supported then mandatory else not applicable.

c2507: IF A.21/1b THEN m ELSE n/a -- if receiving voice burst supported then mandatory else not applicable.

c2508: IF A.23/2b THEN m ELSE n/a -- if receiving idle burst supported then mandatory else not applicable.

Comments:

.....

.....

Table A.26: DLL data PDU types

Item	DLL Data PDU	MS sending			MS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Confirmed packet Header (C-HEAD)	[1], clause 9.2.1	c2601		[1], clause 9.2.1	c2601	
2	Confirmed packet Data (C-DATA)	[1], clause 9.2.2	c2601		[1], clause 9.2.2	c2601	
3	Confirmed Last Data Block (C-LDATA)	[1], clause 9.2.3	c2601		[1], clause 9.2.3	c2601	
4	Confirmed Response packet Header (C-RHEAD)	[1], clause 9.2.4	c2601		[1], clause 9.2.4	c2601	
5	Confirmed Response packet Data (C-RDATA)	[1], clause 9.2.5	c2601		[1], clause 9.2.5	c2601	
6	Unconfirmed data packet Header (U-HEAD)	[1], clause 9.2.6	c2601		[1], clause 9.2.6	c2601	
7	Unconfirmed packet Data (U-DATA)	[1], clause 9.2.7	c2601		[1], clause 9.2.7	c2601	
8	Unconfirmed Last Data Block (U-LDATA)	[1], clause 9.2.8	c2601		[1], clause 9.2.8	c2601	
9	Proprietary Header (P-HEAD)	[1], clause 9.2.9	c2601		[1], clause 9.2.9	c2601	

c2601: IF A.1/1 THEN n/a -- if Release 1 then not applicable.

Comments:

A.8.2.2.2 MS DLL SYNC PDU patterns

Table A.27: DLL SYNC PDU patterns

Item	DLL SYNC pattern	Sending			Receiving		
		Reference	Status	Support	Reference	Status	Support
1	BS sourced voice	[1], clause 9.1.1	n/a		[1], clause 9.1.1	c2701	
2	BS sourced data	[1], clause 9.1.1	n/a		[1], clause 9.1.1	c2702	
3	MS sourced voice	[1], clause 9.1.1	c2703		[1], clause 9.1.1	c2701	
4	MS sourced data	[1], clause 9.1.1	m		[1], clause 9.1.1	m	
5	MS sourced RC sync	[1], clause 9.1.1	c2704		[1], clause 9.1.1	c2705	

c2701: IF ((A.2/2 OR A.2/3) AND A.21/1b) THEN m ELSE n/a

-- if Tier 2 or Tier 3 and receiving voice burst
-- supported then mandatory else not applicable.

c2701: IF (A.2/2 OR A.2/3) THEN m ELSE n/a -- if Tier 2 or Tier 3 then mandatory else not applicable.

c2703: IF A.21/1a THEN m ELSE n/a -- if transmission of voice burst supported then mandatory else not applicable.

c2704: IF A.21/5a THEN m ELSE n/a -- if transmission of standalone inbound RC burst
-- supported then mandatory else not applicable.

c2705: IF A.21/5b THEN m ELSE n/a -- if receiving standalone inbound RC burst
-- supported then mandatory else not applicable.

Comments:

A.8.2.3 MS DLL timers

Table A.28: MS DLL timers

Item	DLL Timer	Reference	Status	Support	Values	
					Allowed	Supported
1	T_ChMonTo	[1], clause F.1	m		min. 40 ms	
2	T_ChSyncTo	[1], clause F.1	m		min 400 ms	
3	T_Monitor	[1], clause F.1	m		max 720 ms	
4	T_TxCC	[1], clause F.1	c2801		max 360 ms	
5	T_SyncWu	[1], clause F.1	c2802		max 360 ms	
6	T_TxCCSlot	[1], clause F.1	c2802		max 720 ms	
7	T_IdleSrch	[1], clause F.1	c2802		max 540 ms	
8	T_Holdoff	[1], clause F.1	m		Random value, 0 .. 1 - s (see note)	

NOTE: The upper limit value is a recommended value only.

c2801: IF (A.4/1 OR A.5/1) THEN m ELSE n/a -- if direct mode supported then mandatory else not applicable.
 c2802: IF A.5/2 THEN m ELSE n/a -- if repeater mode then mandatory else not applicable.

Comments:

.....

.....

A.9 Base Station

Prerequisite: A.2/2 OR A.2/3 -- Tier 2 or Tier 3 product

Table A.29: BS capability

Item	BS type	Reference	Status	Support
1	Repeater mode	[1], clause 5.2.2.2	m	
2	Fixed end mode	[1], clauses 5.1.1.2 and 5.2	c2901	

c2901: IF A.1/1 THEN n/a -- If release 1 then not applicable.

Comments:

.....
.....

A.9.1 BS Repeater mode

Prerequisite: A.29/1 -- BS repeater mode

Table A.30: BS repeater mode type

Item	BS frequency type	Reference	Status	Support
1	Single frequency	[1], clause 4.6	o.30	
2	Two frequency	[1], clause 4.6	o.30	

o.30: It is mandatory to support at least one of these items.

Comments:

.....
.....

A.9.1.1 BS CCL repeater mode

A.9.1.1.1 BS CCL capabilities and functionalities

Table A.31: BS standard feature set - repeater

Prerequisite: A.29/1 -- repeater mode				
Item	BS repeater standard feature set	Reference	Status	Support
1	BS activation	[2], clause 4.2, 5.1.1.1, [1], clause 5.2.2.2	o	
2	BS de-activation	[2], clauses 4.2 and 5.1.1.5	c3101	
3	Voice call repeating	[2], clauses 4.2 and 5.1.1.2	m	
4	Voice call hangtime	[2], clauses 4.2 and 5.1.1.3	m	
5	CSBK repeating	[2], clauses 4.2 and 5.1.1.4	m	
6	BS All Call Control	[2], clauses 4.2 and 5.3.2.1	m	
7	BS Broadcast Call Control	[2], clauses 4.2 and 5.3.3.1	m	

c3101: IF A.31/1 THEN m ELSE n/a -- if BS activation then mandatory else not applicable.

Comments:

.....
.....

A.9.1.1.2 BS CCL PDUs

Table A.32: BS CCL PDUs (Layer 3 PDUs) - repeater

Prerequisite: A.29/1 -- Repeater mode							
Item	CCL PDU	BS sending (repeat)			BS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Grp_V_Ch_Usr	[2], clause 7.1.1.1	m		[2], clause 7.1.1.1	m	
2	UU_V_Ch_Usr	[2], clause 7.1.1.2	m		[2], clause 7.1.1.2	m	
3	BS_Dwn_Act	[2], clause 7.1.2.1	n/a		[2], clause 7.1.2.1	m	
4	UU_V_Req	[2], clause 7.1.2.2	m		[2], clause 7.1.2.2	m	
5	UU_Ans_Rsp	[2], clause 7.1.2.3	m		[2], clause 7.1.2.3	m	
6	NACK_Rsp	[2], clause 7.1.2.4	m		[2], clause 7.1.2.4	m	
7	Pre_CSBK	[2], clause 7.1.2.5	c3201		[2], clause 7.1.2.5	c3201	
8	Nul_Msg	[2], clause 7.1.3.1	m		[2], clause 7.1.3.1	n/a	
9	Act_Updt	[2], clause 7.1.3.2	m		[2], clause 7.1.3.2	n/a	

c3201: IF A.1/1 THEN n/a -- if Release 1 then not applicable

Comments:

A.9.1.1.3 BS CCL timers

Table A.33: BS CCL timers - repeater mode

Prerequisite: A.29/1 -- Repeater mode						
Item	CCL Timer	Reference	Status	Support	Values	
					Allowed	Supported
1	T_MSInactiv	[1], clause A.1	m		default 5 s	
2	T_CallHt	[1], clause A.1	m		default 3 s	
3	T_ChHt	[1], clause A.1	m			

Comments:

A.9.1.2 BS DLL repeater mode

A.9.1.2.1 BS DLL capabilities and functionalities

Table A.34: BS major DLL functionalities

Item	BS DLL functionality	Reference	Status	Support
1	Traffic channel with CACH	[1], clause 4.6.1	c3401	
2	Traffic channel with guard time	[1], clause 4.6.2	c3402	
3	Channel timing	[1], clause 5.1	m	
4	Traffic channel mode operation	[1], clause 5.2.1.5	c3401	
5	Channel access	[1], clause 5.2	m	
6	Burst format	[1], clause 6	m	
7	DMR signalling	[1], clause 7	m	
8	Packet data protocol	[1], clause 8	c3403	

c3401: IF A.30/2 THEN m ELSE n/a -- if two frequency mode then mandatory else not applicable.
 c3402: IF A.30/1 THEN m ELSE n/a -- if single frequency mode then mandatory else not applicable.
 c3403: IF A.1/1 THEN n/a -- if Release 1 then not applicable.

Comments:

A.9.1.2.1.1 BS DLL channel timing

Table A.35: BS DLL channel timing - repeater mode

Prerequisite: A.29/1 -- repeater mode				
Item	BS DLL channel timing	Reference	Status	Support
1	Channel timing relationship	[1], clause 5.1.1	c3501	
2	Voice superframe	[1], clause 5.1.2.1	m	
3	Voice initiation	[1], clause 5.1.2.2	m	
4	Voice termination	[1], clause 5.1.2.3	m	
5	Single frequency BS timing	[1], clause 5.1.4.2	c3502	
6	Tx outbound RC	[1], clauses 5.1.5.1 and 5.1.5.2	m	
7	Rx Standalone inbound RC	[1], clause 5.1.5.3	c3501	

c3501: IF A.30/2 THEN m ELSE n/a -- if two frequency mode then mandatory else not applicable.
 c3502: IF A.30/1 THEN m ELSE n/a -- if single frequency mode then mandatory else not applicable.

Comments:

Table A.36: BS DLL channel timing relationship

Prerequisite: A.35/1 -- channel timing relationship				
Item	Channel timing alignment	Reference	Status	Support
1	Aligned channel timing	[1], clauses 5.1.1.1 and 5.1.4.1	o.36	
2	Offset channel timing	[1], clauses 5.1.1.2 and 5.1.4.1	o.36	

o.36: It is mandatory to support at least one of these items.

Comments:

Table A.37: BS DLL outbound RC transmission - repeater mode

Item	BS DLL outbound RC	Reference	Status	Support
1	Tx embedded outbound RC	[1], clause 5.1.5.1	o.37	
2	Tx dedicated outbound RC	[1], clause 5.1.5.2	o.37	

o.37: It is mandatory to support at least one of these items.

Comments:

A.9.1.2.1.2 BS DLL channel operation mode

Table A.38: BS DLL channel modes

Prerequisite: A.30/2 -- Two frequency BS				
Item	Channel access mode	Reference	Status	Support
1	Single traffic channel mode (1:1)	[1], clause 5.2.1.5	c3801	
2	Two traffic channel mode (2:1)	[1], clause 5.2.1.5	c3802	

c3801: IF A.37/2 THEN m ELSE o -- if Tx dedicated outbound RC then mandatory else optional.

c3802: IF A.38/1 THEN o ELSE m -- if single traffic channel mode supported then optional else mandatory.

Comments:

A.9.1.2.1.3 BS DLL channel access

Table A.39: BS DLL channel access - repeater mode

Item	BS DLL channel access	Reference	Status	Support
1	Timing master outbound channel	[1], clause 5.2.1.3	c3901	
2	Call hang time signalling	[1], clause 5.2.1.4	c3901	
3	Channel hang time signalling	[1], clause 5.2.1.4	c3902	
4	Transmit admit criteria	[1], clause 5.2.1.6	n/a	
5	Retry transmission	[1], clause 5.2.1.7	n/a	
6	Peer to peer mode channel access	[1], clause 5.2.2.1	n/a	
7	Repeater mode channel access	[1], clause 5.2.2.2	n/a	
8	CSBK ACK/NACK channel access	[1], clause 5.2.2.3	n/a	

c3901: IF A.30/2 THEN m ELSE n/a -- if two frequency mode then mandatory else not applicable.
 c3902: IF A.30/2 THEN o ELSE n/a -- if two frequency mode then optional else not applicable.

Comments:

.....

.....

A.9.1.2.1.4 BS DLL channel burst format

Table A.40: BS DLL Channel burst formats - repeater mode

Prerequisite: A.29/1 -- repeater mode							
Item	Channel burst	BS sending (repeat)			BS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Voice burst	[1], clause 6.1	m		[1], clause 6.1	m	
2	Control burst	[1], clause 6.2	m		[1], clause 6.2	m	
3	Data burst	[1], clause 6.2	c4001		[1], clause 6.2	c4001	
4	CACH burst	[1], clause 6.3	c4002		[1], clause 6.3	n/a	
5	Standalone inbound RC burst	[1], clause 6.4.1	n/a		[1], clause 6.4.1	m	
6	Outbound RC burst	[1], clause 6.5.1	m		[1], clause 6.5.1	n/a	

c4001: IF A.1/1 THEN n/a -- if Release 1 then not applicable.
 c4002: IF A.30/1 THEN m ELSE n/a -- if two frequency mode then mandatory else not applicable.

Comments:

.....

.....

A.9.1.2.1.5 BS DLL DMR signalling

Table A.41: BS Link control signalling - Repeater mode

Prerequisite: A.29/1 -- Repeater mode								
Item	BS link control message	BS sending			BS receiving			
		Reference	Status	Support	Reference	Status	Support	
1	Voice LC header	[1], clause 7.1.1	m		[1], clause 7.1.1	m		
2	Voice LC terminator	[1], clause 7.1.2	m		[1], clause 7.1.2	m		
3	Embedded LC signalling with RC outbound channel	[1], clause 7.1.3.1	m		[1], clause 7.1.3.1	n/a		
4	Embedded LC signalling inbound channel	[1], clause 7.1.3.2	n/a		[1], clause 7.1.3.2	m		
5	Short LC in CACH	[1], clause 7.1.4	c4104		[1], clause 7.1.4	n/a		

c4104: IF A.30/2 THEN m ELSE n/a -- if two frequency supported then mandatory else not applicable.

Comments:

.....

.....

Table A.42: BS CSBK and Idle signalling - Repeater mode

Prerequisite: A.29/1 -- Repeater mode								
Item	DMR signalling	BS sending			BS receiving			
		Reference	Status	Support	Reference	Status	Support	
1	Standalone CSBK	[1], clause 7.2	m		[1], clause 7.2	m		
2	Idle burst	[1], clause 7.3	c4201		[1], clause 7.3	n/a		

c4201: IF A.30/2 THEN m ELSE n/a -- if two frequency then mandatory else not applicable.

Comments:

.....

.....

A.9.1.2.2 BS DLL PDUs

Table A.43: DLL PDU types - repeater mode

Prerequisite: A.29/1 -- Repeater mode								
Item	DLL PDU type	BS sending (repeat)			BS receiving			
		Reference	Status	Support	Reference	Status	Support	
1	Voice burst PDU	[1], clauses 9.1 and clause 6.1	m		[1], clause 9.1 and clause 6.1	m		
2	General data and control PDUs	[1], clause 9.1	m		[1], clause 9.1	m		
3	Data PDUs	[1], clause 9.2	c4301		[1], clause 9.2	c4301		

c4301: IF A.1/1 THEN n/a -- if Release 1 then not applicable.

Comments:

.....

.....

A.9.1.2.2.1 BS DLL PDU descriptions, seen from BS

Table A.44: BS DLL general data and control PDUs - repeater mode

Prerequisite: A.29/1 -- Repeater mode							
Item	DLL General data or control PDU	BS sending (repeat)			BS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Synchronization (SYNC)	[1], clause 9.1.1	m		[1], clause 9.1.1	m	
2	Embedded signalling (EMB)	[1], clause 9.1.2	m		[1], clause 9.1.2	m	
3	Slot Type (SLOT)	[1], clause 9.1.3	m		[1], clause 9.1.3	m	
4	Reverse Channel (RC)	[1], clause 9.1.5	m		[1], clause 9.1.5	m	
5	Full Link Control (FULL LC)	[1], clause 9.1.6	m		[1], clause 9.1.6	m	
6	Short Link Control (SHORT LC)	[1], clause 9.1.7	c4401		[1], clause 9.1.7	n/a	
7	Control Signalling Block (CSBK)	[1], clause 9.1.8	m		[1], clause 9.1.8	m	

c4401: IF A.30/2 THEN m ELSE n/a -- if two frequency supported then mandatory else not applicable.

Comments:

.....

.....

Table A.45: DLL BS sourced PDUs - repeater mode

Prerequisite: A.29/1 -- Repeater mode							
Item	DLL BS sourced PDU	BS sending			BS receiving		
		Reference	Status	Support	Reference	Status	Support
1	TACT	[1], clause 9.1.4	c4501		[1], clause 9.1.4	n/a	
2	Pseudo Random Fill Bit (PR FILL)	[1], clause 9.1.9	c4502		[1], clause 9.1.9	n/a	

c4501: IF A.30/2 THEN m ELSE n/a -- if two frequency supported then mandatory else not applicable.

c4502: IFA.42/2a THEN m ELSE n/a -- if transmission of idle burst then mandatory else not applicable.

Comments:

.....

.....

Table A.46: DLL data PDU types - repeater mode

Prerequisite: A.29/1 -- Repeater mode							
Item	DLL Data PDU	BS sending (repeat)			BS receiving		
		Reference	Status	Support	Reference	Status	Support
1	Confirmed packet Header (C-HEAD)	[1], clause 9.2.1	c4601		[1], clause 9.2.1	c4601	
2	Confirmed packet Data (C-DATA)	[1], clause 9.2.2	c4601		[1], clause 9.2.2	c4601	
3	Confirmed Last Data Block (C-LDATA)	[1], clause 9.2.3	c4601		[1], clause 9.2.3	c4601	
4	Confirmed Response packet Header (C-RHEAD)	[1], clause 9.2.4	c4601		[1], clause 9.2.4	c4601	
5	Confirmed Response packet Data (C-RDATA)	[1], clause 9.2.5	c4601		[1], clause 9.2.5	c4601	
6	Unconfirmed data packet Header (U-HEAD)	[1], clause 9.2.6	c4601		[1], clause 9.2.6	c4601	
7	Unconfirmed packet Data (U-DATA)	[1], clause 9.2.7	c4601		[1], clause 9.2.7	c4601	
8	Unconfirmed Last Data Block (U-LDATA)	[1], clause 9.2.8	c4601		[1], clause 9.2.8	c4601	
9	Proprietary Header (P-HEAD)	[1], clause 9.2.9	c4601		[1], clause 9.2.9	c4601	

c4601: IF A.1/1 THEN n/a -- if Release 1 then not applicable.

Comments:

.....

.....

A.9.1.2.2.2 BS DLL SYNC PDU patterns

Table A.47: DLL SYNC PDU patterns - repeater mode

Prerequisite: A.29/1 -- Repeater mode							
Item	DLL SYNC pattern	Sending			Receiving		
		Reference	Status	Support	Reference	Status	Support
1	BS sourced voice	[1], clause 9.1.1	m		[1], clause 9.1.1	n/a	
2	BS sourced data	[1], clause 9.1.1	m		[1], clause 9.1.1	n/a	
3	MS sourced voice	[1], clause 9.1.1	n/a		[1], clause 9.1.1	m	
4	MS sourced data	[1], clause 9.1.1	n/a		[1], clause 9.1.1	m	
5	MS sourced RC sync	[1], clause 9.1.1	n/a		[1], clause 9.1.1	c4701	

c4701: IF A.30/2 THEN m ELSE n/a -- if two frequency BS then mandatory else not applicable.

Comments:

.....

.....

A.9.1.2.3 BS DLL timers

Table A.48: BS DLL timers - repeater mode

Item	DLL Timer	Reference	Status	Support	Values	
					Allowed	Supported
1	T_ChMonTo	[1], clause F.1	n/a		min. 40 s	
2	T_ChSyncTo	[1], clause F.1	n/a		min 400 s	
3	T_MSInactiv	[1], clause F.1	m		default 5 s	
4	T_CallHt	[1], clause F.1	m		default 3 s	
5	T_ChHt	[1], clause F.1	m			
6	T_Monitor	[1], clause F.1	n/a		max 720 ms	
7	T_TxCC	[1], clause F.1	n/a		max 360 ms	
8	T_SyncWu	[1], clause F.1	n/a		max 360 ms	
9	T_TxCCSlot	[1], clause F.1	n/a		max 720 ms	
10	T_IdleSrch	[1], clause F.1	n/a		max 540 ms	
11	T_Holdoff	[1], clause F.1	n/a		Random value, 0 .. 1 - s (see note)	

NOTE: The upper limit value is a recommended value only.

Comments:

History

Document history		
V1.1.1	June 2005	Publication