


**Universal Mobile Telecommunications System (UMTS);
Physical channels and mapping of transport channels
onto physical channels (TDD)
(3G TS 25.221 version 3.1.1 Release 1999)**

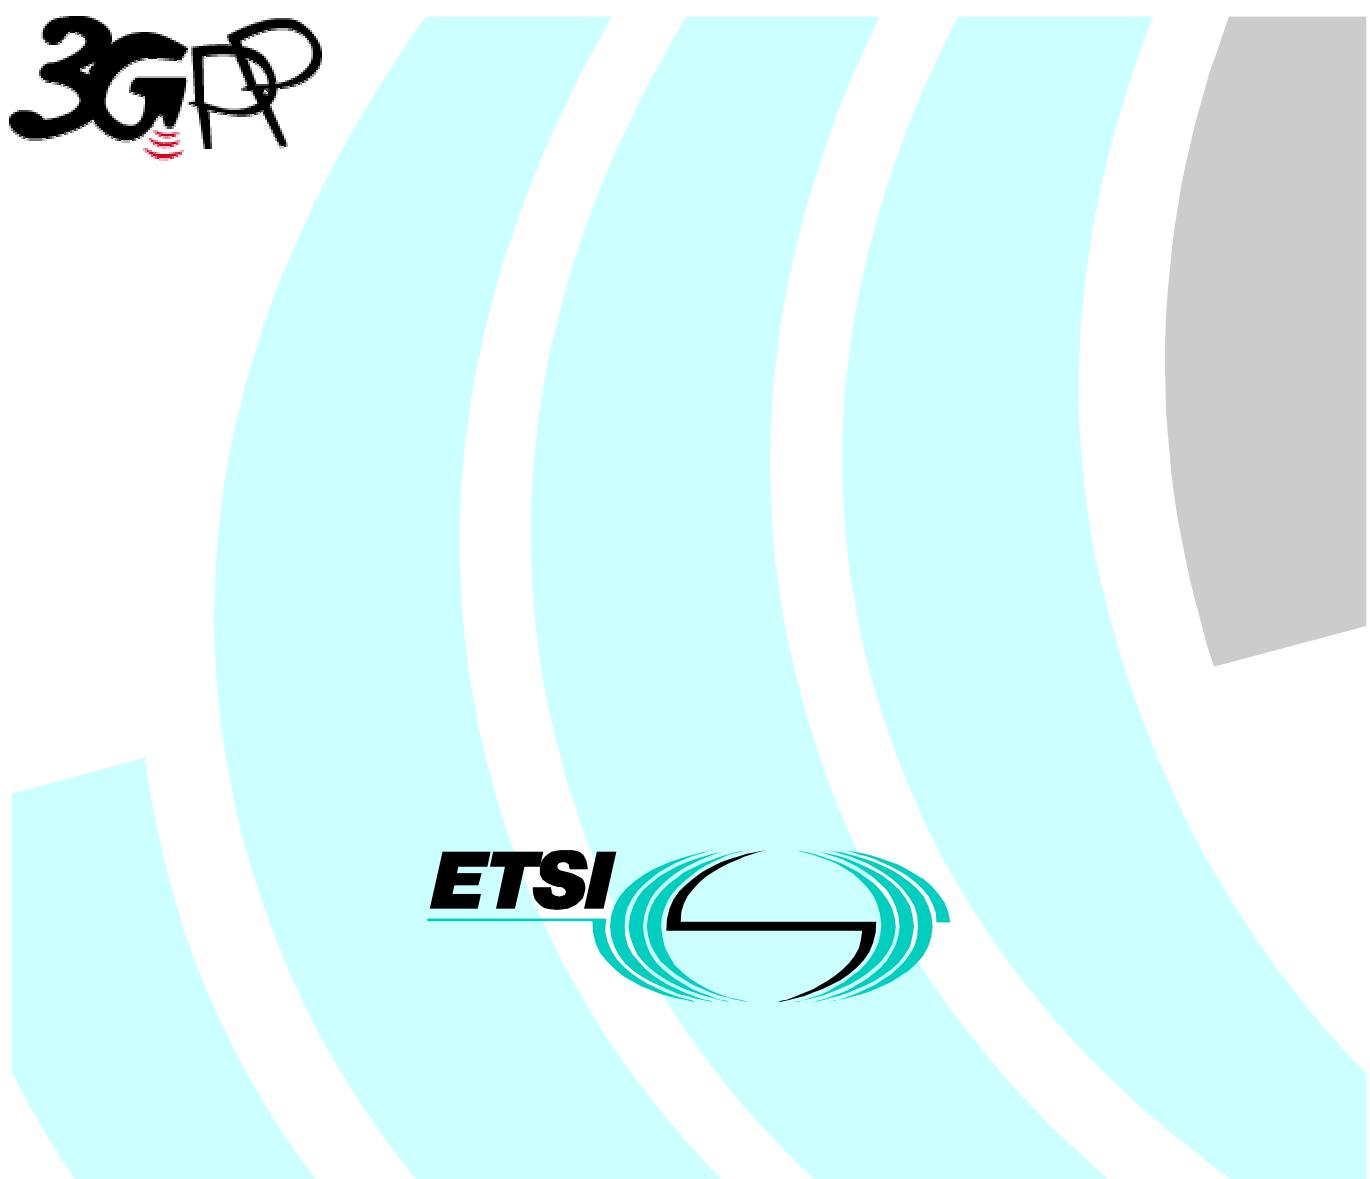

Reference

DTS/TSGR-0125221U

Keywords

UMTS

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCETel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables. The mapping of document identities is as follows:

For 3GPP documents:

3G TS | TR nn.nnn "<title>" (with or without the prefix 3G)

is equivalent to

ETSI TS | TR 1nn nnn "[Digital cellular telecommunications system (Phase 2+) (GSM);] Universal Mobile Telecommunications System; <title>

For GSM document identities of type "GSM xx.yy", e.g. GSM 01.04, the corresponding ETSI document identity may be found in the Cross Reference List on www.etsi.org/key

Contents

Foreword	5
1 Scope.....	6
2 References.....	6
3 Abbreviations.....	6
4 Transport channels.....	7
4.1 Transport channels.....	7
4.1.1 Dedicated transport channels.....	7
4.1.2 Common transport channels.....	7
5 Physical channels.....	8
5.1 Frame structure	9
5.2 Dedicated physical channel (DPCH)	10
5.2.1 Spreading	11
5.2.1.1 Spreading for Downlink Physical Channels	11
5.2.1.2 Spreading for Uplink Physical Channels	11
5.2.2 Burst Types	11
5.2.2.1 Transmission of TFCI.....	12
5.2.2.2 Transmission of TPC	14
5.2.2.3 Timeslot formats.....	14
5.2.2.3.1 Downlink timeslot formats.....	14
5.2.2.3.2 Uplink timeslot formats	15
5.2.2.3.3 Training sequences for spread bursts	18
5.2.2.3.4 Midamble Transmit Power	19
5.2.4 Beamforming and Transmit Diversity.....	19
5.3 Common physical channels	20
5.3.1 Primary common control physical channel (P-CCPCH).....	20
5.3.1.1 P-CCPCH Spreading	20
5.3.1.2 P-CCPCH Burst Types	20
5.3.1.3 P-CCPCH Training sequences.....	20
5.3.1.4 Block STTD antenna diversity for P-CCPCH	20
5.3.2 Secondary common control physical channel (S-CCPCH).....	20
5.3.2.1 S-CCPCH Spreading	20
5.3.2.2 S-CCPCH Burst Types	20
5.3.2.3 S-CCPCH Training sequences.....	20
5.3.3 The physical random access channel (PRACH).....	21
5.3.3.1 PRACH Spreading.....	21
5.3.3.2 PRACH Burst Types	21
5.3.3.3 PRACH Training sequences	21
5.3.3.4 Association between Training Sequences and Channelisation Codes	22
5.3.4 The physical synchronisation channel (PSCH)	23
5.3.5 Physical Uplink Shared Channel (PUSCH)	24
5.3.6 Physical Downlink Shared Channel (PDSCH).....	24
5.3.7 The Page Indicator Channel (PICH)	25
5.4 Beacon function of physical channels.....	25
5.4.1 Location of physical channels with beacon function.....	25
5.4.2 Physical characteristics of the beacon function.....	26
5.5 Midamble Allocation for Physical Channels	26
5.5.1 Midamble Allocation for DL Physical Channels	26
5.5.1.1 Midamble Allocation by signalling	26
5.5.1.1.1 DL Physical Channels without TxDiversity/Beamforming	26
5.5.1.1.2 DL Physical Channels with TxDiversity/Beamforming	27
5.5.1.2 Midamble Allocation by default.....	27
5.5.2 Midamble Allocation for UL Physical Channels	27

6	Mapping of transport channels to physical channels	27
6.1	Dedicated Transport Channels.....	28
6.2	Common Transport Channels	28
6.2.1	The Broadcast Channel (BCH).....	28
6.2.2	The Paging Channel (PCH).....	28
6.2.3	The Forward Channel (FACH).....	28
6.2.4	The Random Access Channel (RACH).....	28
6.2.5	The Synchronisation Channel (SCH)	29
6.2.6	Common Transport Channels for ODMA networks	29
6.2.7	The Uplink Shared Channel (USCH)	29
6.2.8	The Downlink Shared Channel (DSCH)	29
Annex A (Normative): Basic Midamble Codes.....		30
A.1	Basic Midamble Codes for Burst Type 1 and PRACH Burst Type	30
A.2	Basic Midamble Codes for Burst Type 2.....	35
A.3	Association between Midambles and Channelisation Codes.....	40
A.3.1	Association for Burst Type 1 and K=16 Midambles.....	40
A.3.2	Association for Burst Type 1 and K=8 Midambles.....	41
A.3.3	Association for Burst Type 1 and K=4 Midambles	41
A.3.4	Association for Burst Type 2 and K=6 Midambles	42
A.3.5	Association for Burst Type 2 and K=3 Midambles	43
Annex B (Informative): CCPCH Multiframe Structure		44
Annex C (informative): Change history.....		46
History.....		47

Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification;

1 Scope

The present document describes the characteristics of the physical channels and the mapping of the transport channels to physical channels in the TDD mode of UTRA.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.201: "Physical layer - general description"
- [2] 3G TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)"
- [3] 3G TS 25.212: "Multiplexing and channel coding (FDD)"
- [4] 3G TS 25.213: "Spreading and modulation (FDD)"
- [5] 3G TS 25.214: "Physical layer procedures (FDD)"
- [6] 3G TS 25.215: "Physical layer – Measurements (FDD)"
- [7] 3G TS 25.222: "Multiplexing and channel coding (TDD)"
- [8] 3G TS 25.223: "Spreading and modulation (TDD)"
- [9] 3G TS 25.224: "Physical layer procedures (TDD)"
- [10] 3G TS 25.225: "Physical layer – Measurements (TDD)"
- [11] 3G TS 25.301: "Radio Interface Protocol Architecture"
- [12] 3G TS 25.302: "Services Provided by the Physical Layer"
- [13] 3G TS 25.401: "UTRAN Overall Description"
- [14] 3G TS 25.402: "Synchronisation in UTRAN, Stage 2"

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BCH	Broadcast Channel
CCPCH	Common Control Physical Channel
CCTrCH	Coded Composite Transport Channel
CDMA	Code Division Multiple Access
DPCH	Dedicated Physical Channel
DSCH	Downlink Shared Channel
FACH	Forward Access Channel
FDD	Frequency Division Duplex
FEC	Forward Error Correction
GP	Guard Period

GSM	Global System for Mobile Communication
NRT	Non-Real Time
ODCH	ODMA Dedicated Transport Channel
ODMA	Opportunity Driven Multiple Access
ORACH	ODMA Random Access Channel
OVSF	Orthogonal Variable Spreading Factor
P-CCPCH	Primary CCPCH
PCH	Paging Channel
PDSCH	Physical Downlink Shared Channel
PDU	Protocol Data Unit
PICH	Page Indicator Channel
PRACH	Physical Random Access Channel
PSCH	Physical Synchronisation Channel
PUSCH	Physical Uplink Shared Channel
RACH	Random Access Channel
RLC	Radio Link Control
RF	Radio Frame
RT	Real Time
S-CCPCH	Secondary CCPCH
SCH	Synchronisation Channel
SFN	Cell System Frame Number
TCH	Traffic Channel
TDD	Time Division Duplex
TDMA	Time Division Multiple Access
USCH	Uplink Shared Channel

4 Transport channels

4.1 Transport channels

Transport channels are the services offered by layer 1 to the higher layers. A transport channel is defined by how and with what characteristics data is transferred over the air interface. A general classification of transport channels is into two groups:

- common channels (where there is a need for in-band identification of the UEs when particular UEs are addressed) and
- dedicated channels (where the UEs are identified by the physical channel)

General concepts about transport channels are described in 3GPP RAN TS25.302 (L2 specification).

4.1.1 Dedicated transport channels

The Dedicated Channel (DCH) is an up- or downlink transport channel that is used to carry user or control information between the UTRAN and a UE.

Two types of dedicated transport channels have been identified:

- 1) Dedicated Channel (DCH)
- 2) ODMA Dedicated Transport Channel (ODCH)

4.1.2 Common transport channels

Common transport channels are:

- 1) Broadcast Channel (BCH)

The Broadcast Channel (BCH) is a downlink transport channel that is used to broadcast system- and cell-specific information.

2) Paging Channel (PCH)

The Paging Channel (PCH) is a downlink transport channel that is used to carry control information to a mobile station when the system does not know the location cell of the mobile station.

3) Forward Access Channel(s) (FACH)

The Forward Access Channel (FACH) is a downlink transport channel that is used to carry control information to a mobile station when the system knows the location cell of the mobile station. The FACH may also carry short user packets.

4) Random Access Channel(s) (RACH)

The Random Access Channel (RACH) is an up link transport channel that is used to carry control information from mobile station. The RACH may also carry short user packets.

5) ODMA Random Access Channel (ORACH)

6) Synchronisation Channel (SCH)

7) Uplink Shared Channel (USCH)

The uplink shared channel (USCH) is a uplink transport channel shared by several UEs carrying dedicated control or traffic data.

8) Downlink Shared Channel (DSCH)

The downlink shared channel (DSCH) is a downlink transport channel shared by several UEs carrying dedicated control or traffic data.

5 Physical channels

All physical channels take three-layer structure with respect to timeslots, radio frames and system frame numbering (SFN), see [14]. Depending on the resource allocation, the configuration of radio frames or timeslots becomes different. All physical channels need guard symbols in every timeslot. The time slots are used in the sense of a TDMA component to separate different user signals in the time and the code domain. The physical channel signal format is presented in figure 1.

A physical channel in TDD is a burst, which is transmitted in a particular timeslot within allocated Radio Frames. The allocation can be continuous, i.e. the time slot in every frame is allocated to the physical channel or discontinuous, i.e. the time slot in a subset of all frames is allocated only. A burst is the combination of a data part, a midamble and a guard period. The duration of a burst is one time slot. Several bursts can be transmitted at the same time from one transmitter. In this case, the data part must use different OVSF channelisation codes, but the same scrambling code. The midamble part has to use the same basic midamble code, but can use different midambles.

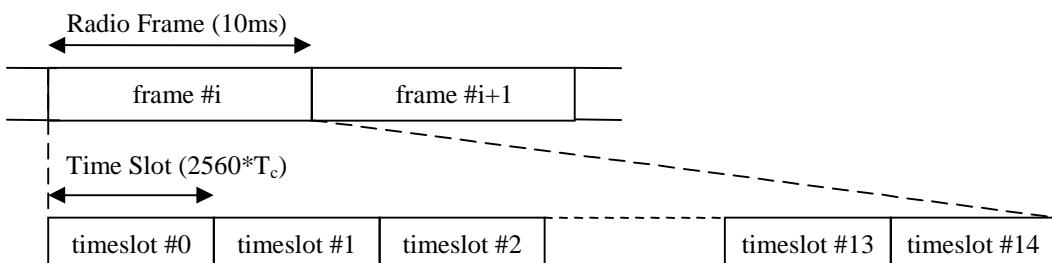


Figure 1: Physical channel signal format

The data part of the burst is spread with a combination of channelisation code and scrambling code. The channelisation code is a OVSF code, that can have a spreading factor of 1, 2, 4, 8, or 16. The data rate of the physical channel is depending on the used spreading factor of the used OVSF code.

The midamble part of the burst can contain two different types of midambles: a short one of length 256 chips, or a long one of 512 chips. The data rate of the physical channel is depending on the used midamble length.

So a physical channel is defined by frequency, timeslot, channelisation code, burst type and Radio Frame allocation. The scrambling code and the basic midamble code are broadcast and may be constant within a cell. When a physical channel is established, a start frame is given. The physical channels can either be of infinite duration, or a duration for the allocation can be defined.

5.1 Frame structure

The TDMA frame has a duration of 10 ms and is subdivided into 15 time slots (TS) of $2560*T_c$ duration each. A time slot corresponds to 2560 chips. The physical content of the time slots are the bursts of corresponding length as described in section 5.2.2.

Each 10 ms frame consists of 15 time slots, each allocated to either the uplink or the downlink (figure 2). With such a flexibility , the TDD mode can be adapted to different environments and deployment scenarios. In any configuration at least one time slot has to be allocated for the downlink and at least one time slot has to be allocated for the uplink.

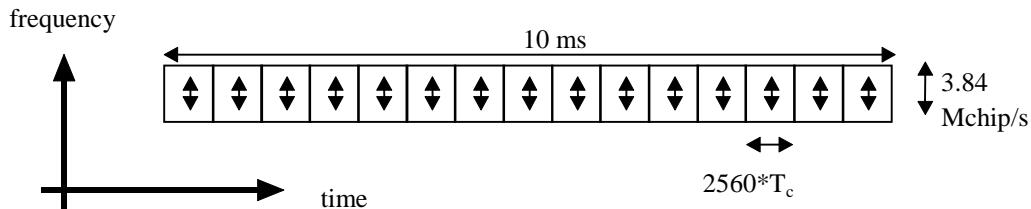
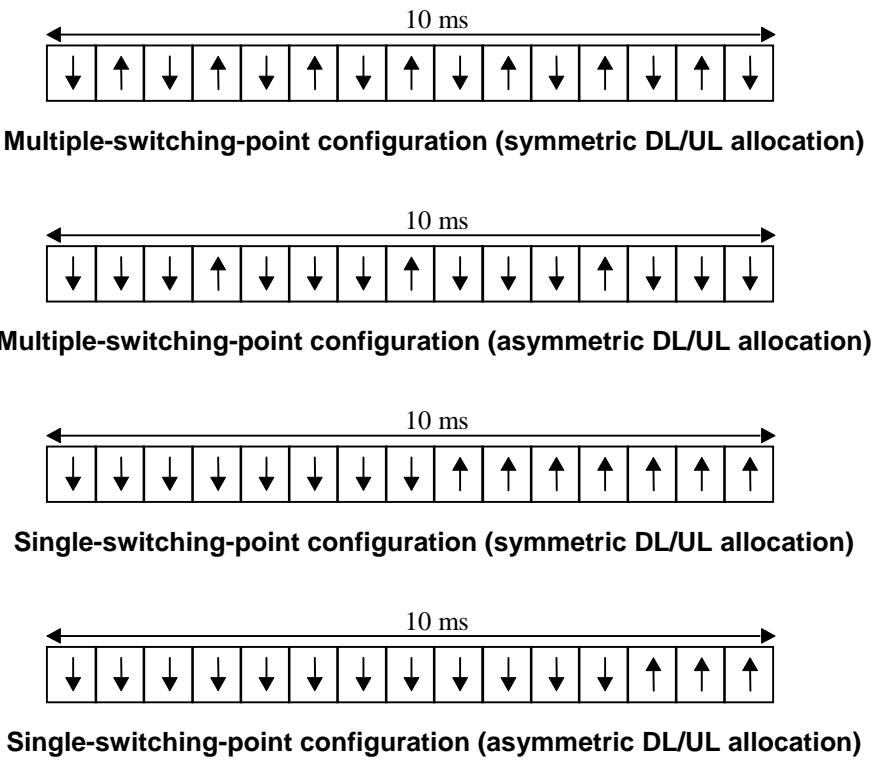



Figure 2: The TDD frame structure

Examples for multiple and single switching point configurations as well as for symmetric and asymmetric UL/DL allocations are given in figure 3.

**Figure 3: TDD frame structure examples**

When operating ODMA at least one common timeslot has to be allocated for the ORACH. If large quantities of information have to be transferred between ODMA nodes then it is normal to use at least one timeslot for the ODCH (figure 4). As figure 4 shows, any timeslot in the TDD frame may potentially be used by the ODCH.

A common timeslot indicates a carrier-timeslot combination which can be used for transmission and reception by a group of mobiles operating ODMA.

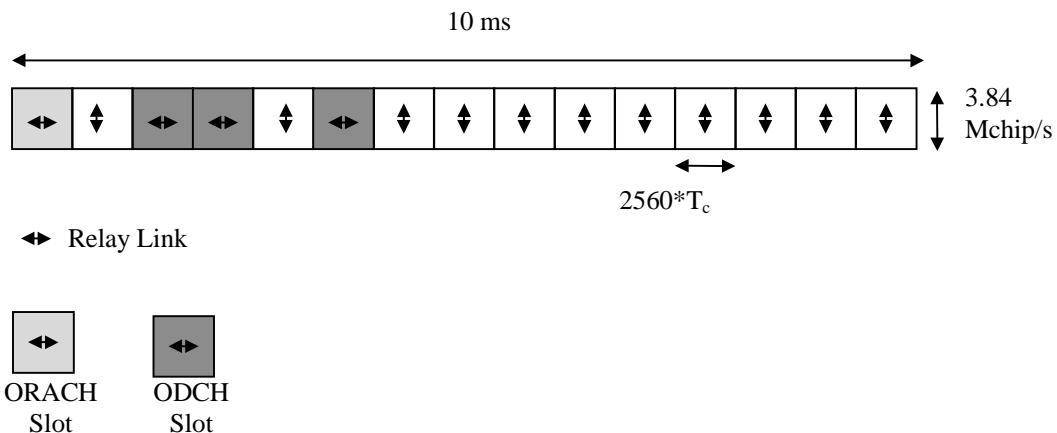**Figure 4: TDD frame structure example for ODMA operation**

5.2 Dedicated physical channel (DPCH)

The DCH or in case of ODMA networks the ODCH as described in section 4.1.1 are mapped onto the dedicated physical channel.

5.2.1 Spreading

Spreading is applied to the data part of the physical channels and consists of two operations. The first is the channelisation operation, which transforms every data symbol into a number of chips, thus increasing the bandwidth of the signal. The number of chips per data symbol is called the Spreading Factor (SF). The second operation is the scrambling operation, where a scrambling code is applied to the spread signal. Details on channelisation and scrambling operation can be found in [8].

5.2.1.1 Spreading for Downlink Physical Channels

Downlink physical channels shall use SF =16. Multiple parallel physical channels can be used to support higher data rates. These parallel physical channels shall be transmitted using different channelisation codes, see [8]. These codes with SF =16 are generated as described in [8].

Operation with a single code with spreading factor 1 is possible for the downlink physical channels.

5.2.1.2 Spreading for Uplink Physical Channels

The range of spreading factor that may be used for uplink physical channels shall range from 16 down to 1.

For multicode transmission a UE shall use a maximum of two physical channels per timeslot simultaneously. These two parallel physical channels shall be transmitted using different channelisation codes, see [8].

5.2.2 Burst Types

Two types of bursts for dedicated physical channels are defined: The burst type 1 and the burst type 2. Both consist of two data symbol fields, a midamble and a guard period. The bursts type 1 has a longer midamble of 512 chips than the burst type 2 with a midamble of 256 chips. Sample sets of midambles are given in section 5.2.3.1.

Because of the longer midamble, the burst type 1 is suited for the uplink, where up to 16 different channel impulse responses can be estimated. The burst type 2 can be used for the downlink and, if the bursts within a time slot are allocated to less than four users, also for the uplink.

Thus the burst type 1 can be used for

- uplink, independent of the number of active users in one time slot
- downlink, independent of the number of active users in one time slot

The burst type 2 can be used for

- uplink, if the bursts within a time slot are allocated to less than four users
- downlink, independent of the number of active users in one time slot

The data fields of the burst type 1 are 976 chips long, whereas the data fields length of the burst type 2 are 1104 chips long. The corresponding number of symbols depends on the spreading factor, as indicated in table 1 below. The guard period for the burst type 1 and type 2 is 96 chip periods long.

The bursts type 1 and type 2 are shown in figure 5 and figure 6. The contents of the burst fields are described in table 2 and table 3.

Table 1: number of symbols per data field in bursts 1 and 2

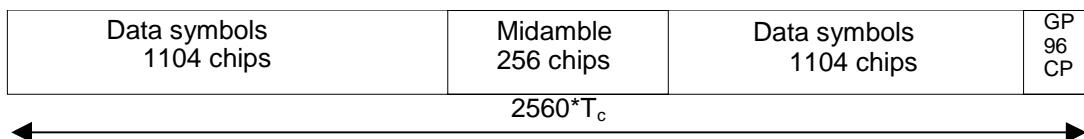
Spreading factor (Q)	Number of symbols (N) per data field in Burst 1	Number of symbols (N) per data field in Burst 2
1	976	1104
2	488	552
4	244	276
8	122	138
16	61	69

Table 2: The contents of the burst type 1 fields

Chip number (CN)	Length of field in chips	Length of field in symbols		Contents of field
0-975	976	cf table 1		Data symbols
976-1487	512	-		Midamble
1488-2463	976	cf table 1		Data symbols
2464-2559	96	-		Guard period

**Figure 5: Burst structure of the burst type 1. GP denotes the guard period and CP the chip periods****Table 3: The contents of the burst type 2 fields**

Chip number (CN)	Length of field in chips	Length of field in symbols		Contents of field
0-1103	1104	cf table 1		Data symbols
1104-1359	256	-		Midamble
1360-2463	1104	cf table 1		Data symbols
2464-2559	96	-		Guard period

**Figure 6: Burst structure of the burst type 2. GP denotes the guard period and CP the chip periods**

The two different bursts defined here are well-suited for the different applications mentioned above. It may be possible to further optimise the burst structure for specific applications, for instance for unlicensed operation.

5.2.2.1 Transmission of TFCI

Both burst types 1 and 2 provide the possibility for transmission of TFCI both in up- and downlink.

The transmission of TFCI is negotiated at call setup and can be re-negotiated during the call. For each CCTrCH it is indicated by higher layer signalling, which TFCI format is applied. Additionally for each allocated timeslot it is signalled individually whether that timeslot carries the TFCI or not. If a time slot contains the TFCI, then it is always transmitted using the first allocated channelisation code in the timeslot, according to the order in the higher layer allocation message.

The transmission of TFCI is done in the data parts of the respective physical channel, this means TFCI and data bits are subject to the same spreading procedure as depicted in [8]. Hence the midamble structure and length is not changed. The TFCI information is to be transmitted directly adjacent to the midamble, possibly after the TPC. Figure 7 shows the position of the TFCI in a traffic burst, if no TPC is transmitted. Figure 8 shows the position of the TFCI in a traffic burst, if TPC is transmitted.

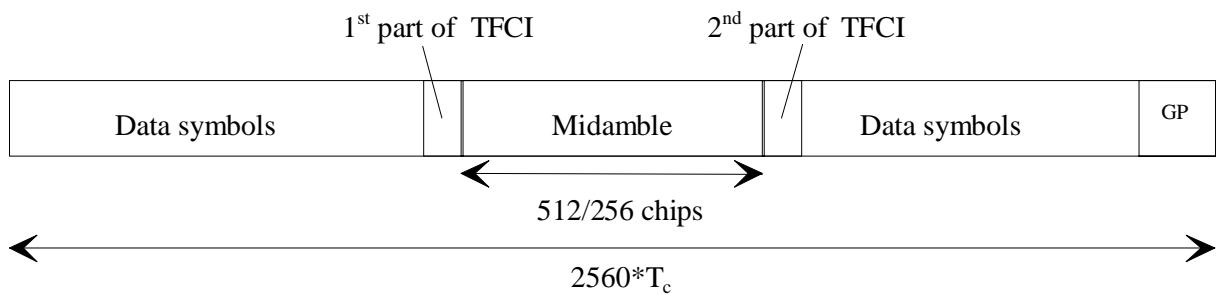


Figure 7: Position of TFCI information in the traffic burst in case of no TPC

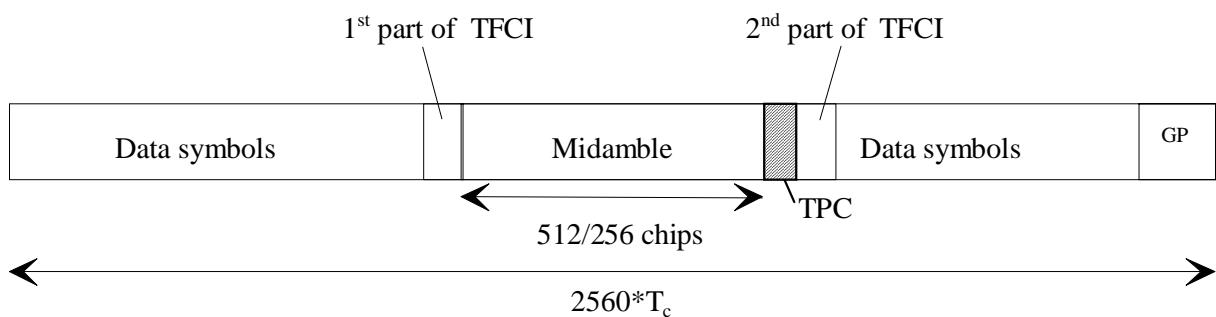


Figure 8: Position of TFCI information in the traffic burst in case of TPC

Two examples of TFCI transmission in the case of multiple DPCHs used for a connection are given in the figure 9 and figure 10 below. Combinations of the two schemes shown are also applicable. It should be noted that the SF can vary for the DPCHs not carrying TFCI information.

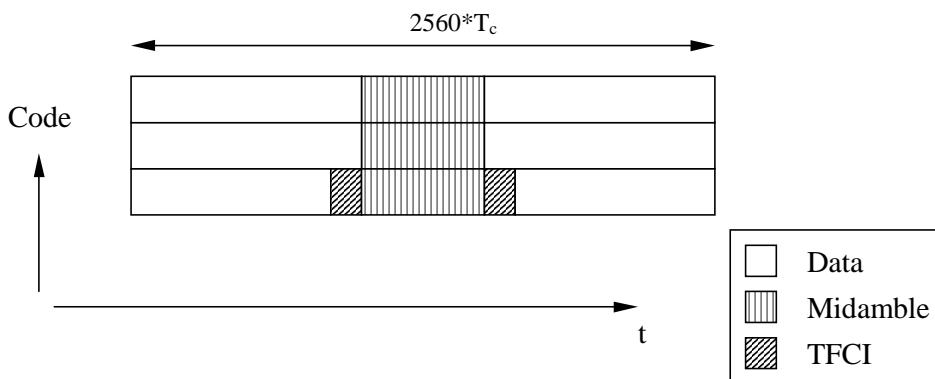


Figure 9: Example of TFCI transmission with physical channels multiplexed in code domain

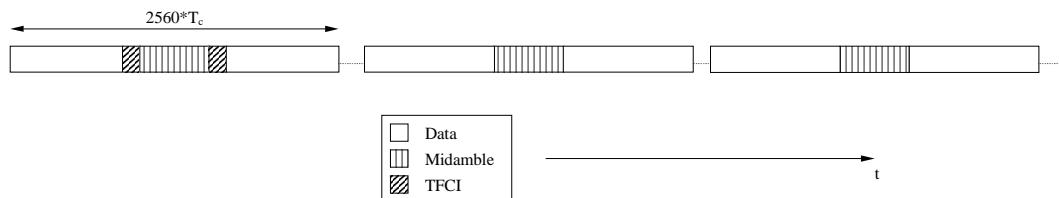


Figure 10: Example of TFCI transmission with physical channels multiplexed in time domain

5.2.2.2 Transmission of TPC

Both burst types 1 and 2 for dedicated channels provide the possibility for transmission of TPC in uplink.

The transmission of TPC is negotiated at call setup and can be re-negotiated during the call. If applied, transmission of TPC is done in the data parts of the traffic burst. Hence the midamble structure and length is not changed. The TPC information is to be transmitted directly after the midamble. Figure 11 shows the position of the TPC in a traffic burst.

For every user the TPC information is to be transmitted once per frame. If the TPC is applied, then it is always transmitted using the first allocated channelisation code and the first allocated timeslot, according to the order in the higher layer allocation message. The TPC is spread with the same spreading factor (SF) and spreading code as the data parts of the respective physical channel.

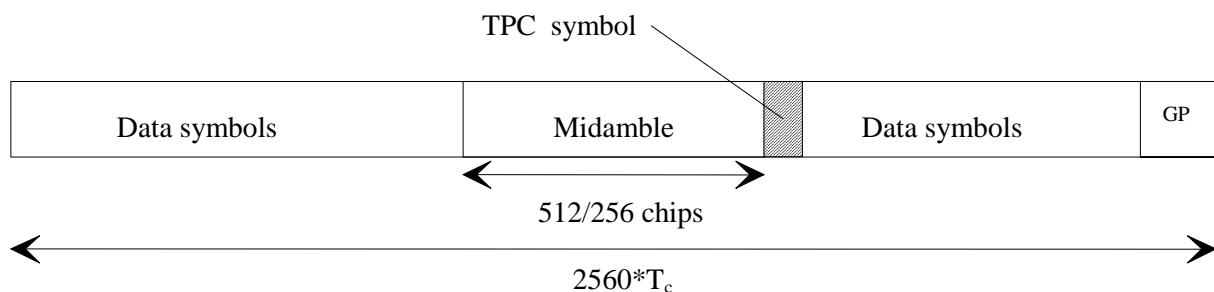


Figure 11: Position of TPC information in the traffic burst

5.2.2.3 Timeslot formats

5.2.2.3.1 Downlink timeslot formats

The downlink timeslot format depends on the spreading factor, midamble length and on the number of the TFCI bits, as depicted in the table 4a.

Table 4a: Time slot formats for the Downlink

Slot Format #	Spreading Factor	Midamble length (chips)	N _{TFCI} (bits)	Bits/slot	N _{Data/Slot} (bits)	N _{data/data field} (bits)
0	16	512	0	244	244	122
1	16	512	4	244	240	120
2	16	512	8	244	236	118
3	16	512	16	244	228	114
4	16	512	32	244	212	106
5	16	256	0	276	276	138
6	16	256	4	276	272	136
7	16	256	8	276	268	134
8	16	256	16	276	260	130
9	16	256	32	276	244	122
10	1	512	0	3904	3904	1952
11	1	512	4	3904	3900	1950
12	1	512	8	3904	3896	1948
13	1	512	16	3904	3888	1944
14	1	512	32	3904	3872	1936
15	1	256	0	4416	4416	2208
16	1	256	4	4416	4412	2206
17	1	256	8	4416	4408	2204
18	1	256	16	4416	4400	2200
19	1	256	32	4416	4384	2192

5.2.2.3.2 Uplink timeslot formats

The uplink timeslot format depends on the spreading factor, midamble length, the TPC presence and on the number of the TFCI bits. In the case that TPC is used, different amount of bits are mapped to the two data fields. The timeslot formats are depicted in the table 4b.

Table 4b: Timeslot formats for the Uplink

Slot Format #	Spreading Factor	Midamble length (chips)	N _{TFCI} (bits)	N _{TPC} (bits)	Bits/slot	N _{Data/Slot} (bits)	N _{data/data field(1)} (bits)	N _{data/data field(2)} (bits)
0	16	512	0	0	244	244	122	122
1	16	512	4	0	244	240	120	120
2	16	512	8	0	244	236	118	118
3	16	512	16	0	244	228	114	114
4	16	512	32	0	244	212	106	106
5	16	512	0	2	244	242	122	120
6	16	512	4	2	244	238	120	118
7	16	512	8	2	244	234	118	116
8	16	512	16	2	244	226	114	112
9	16	512	32	2	244	210	106	104
10	16	256	0	0	276	276	138	138
11	16	256	4	0	276	272	136	136
12	16	256	8	0	276	268	134	134
13	16	256	16	0	276	260	130	130
14	16	256	32	0	276	244	122	122
15	16	256	0	2	276	274	138	136
16	16	256	4	2	276	270	136	134
17	16	256	8	2	276	266	134	132
18	16	256	16	2	276	258	130	128
19	16	256	32	2	276	242	122	120
20	8	512	0	0	488	488	244	244
21	8	512	4	0	488	484	242	242
22	8	512	8	0	488	480	240	240
23	8	512	16	0	488	472	236	236
24	8	512	32	0	488	456	228	228
25	8	512	0	2	488	486	244	242
26	8	512	4	2	488	482	242	240
27	8	512	8	2	488	478	240	238
28	8	512	16	2	488	470	236	234
29	8	512	32	2	488	454	228	226
30	8	256	0	0	552	552	276	276
31	8	256	4	0	552	548	274	274
32	8	256	8	0	552	544	272	272
33	8	256	16	0	552	536	268	268
34	8	256	32	0	552	520	260	260
35	8	256	0	2	552	550	276	274
36	8	256	4	2	552	546	274	272
37	8	256	8	2	552	542	272	270
38	8	256	16	2	552	534	268	266
39	8	256	32	2	552	518	260	258
40	4	512	0	0	976	976	488	488
41	4	512	4	0	976	972	486	486
42	4	512	8	0	976	968	484	484
43	4	512	16	0	976	960	480	480
44	4	512	32	0	976	944	472	472
45	4	512	0	2	976	974	488	486
46	4	512	4	2	976	970	486	484
47	4	512	8	2	976	966	484	482

Slot Format #	Spreading Factor	Midamble length (chips)	N _{TFCI} (bits)	N _{TPC} (bits)	Bits/slot	N _{Data/Slot} (bits)	N _{data/data field(1)} (bits)	N _{data/data field(2)} (bits)
48	4	512	16	2	976	958	480	478
49	4	512	32	2	976	942	472	470
50	4	256	0	0	1104	1104	552	552
51	4	256	4	0	1104	1100	550	550
52	4	256	8	0	1104	1096	548	548
53	4	256	16	0	1104	1088	544	544
54	4	256	32	0	1104	1072	536	536
55	4	256	0	2	1104	1102	552	550
56	4	256	4	2	1104	1098	550	548
57	4	256	8	2	1104	1094	548	546
58	4	256	16	2	1104	1086	544	542
59	4	256	32	2	1104	1070	536	534
60	2	512	0	0	1952	1952	976	976
61	2	512	4	0	1952	1948	974	974
62	2	512	8	0	1952	1944	972	972
63	2	512	16	0	1952	1936	968	968
64	2	512	32	0	1952	1920	960	960
65	2	512	0	2	1952	1950	976	974
66	2	512	4	2	1952	1946	974	972
67	2	512	8	2	1952	1942	972	970
68	2	512	16	2	1952	1934	968	966
69	2	512	32	2	1952	1918	960	958
70	2	256	0	0	2208	2208	1104	1104
71	2	256	4	0	2208	2204	1102	1102
72	2	256	8	0	2208	2200	1100	1100
73	2	256	16	0	2208	2192	1096	1096
74	2	256	32	0	2208	2176	1088	1088
75	2	256	0	2	2208	2206	1104	1102
76	2	256	4	2	2208	2202	1102	1100
77	2	256	8	2	2208	2198	1100	1098
78	2	256	16	2	2208	2190	1096	1094
79	2	256	32	2	2208	2174	1088	1086
80	1	512	0	0	3904	3904	1952	1952
81	1	512	4	0	3904	3900	1950	1950
82	1	512	8	0	3904	3896	1948	1948
83	1	512	16	0	3904	3888	1944	1944
84	1	512	32	0	3904	3872	1936	1936
85	1	512	0	2	3904	3902	1952	1950
86	1	512	4	2	3904	3898	1950	1948
87	1	512	8	2	3904	3894	1948	1946
88	1	512	16	2	3904	3886	1944	1942
89	1	512	32	2	3904	3870	1936	1934
90	1	256	0	0	4416	4416	2208	2208
91	1	256	4	0	4416	4412	2206	2206
92	1	256	8	0	4416	4408	2204	2204
93	1	256	16	0	4416	4400	2200	2200
94	1	256	32	0	4416	4384	2192	2192
95	1	256	0	2	4416	4414	2208	2206
96	1	256	4	2	4416	4410	2206	2204
97	1	256	8	2	4416	4406	2204	2202

Slot Format #	Spreading Factor	Midamble length (chips)	N _{TFCI} (bits)	N _{TPC} (bits)	Bits/slot	N _{Data/Slot} (bits)	N _{data/data field(1)} (bits)	N _{data/data field(2)} (bits)
98	1	256	16	2	4416	4398	2200	2198
99	1	256	32	2	4416	4282	2192	2190

5.2.3 Training sequences for spread bursts

As explained in the section 5.2.1, two options are being considered for the spreading. The training sequences presented here are common to both options.

The training sequences, i.e. midambles, of different users active in the same time slot are time shifted versions of one single periodic basic code. Different cells use different periodic basic codes, i.e. different midamble sets. In this way a joint channel estimation for the channel impulse responses of all active users within one time slot can be done by one single cyclic correlation. The different user specific channel impulse response estimates are obtained sequentially in time at the output of the correlator. Following this principle it is shown hereafter how to derive the midambles from the periodic basic code.

Section 5.2.2 contains a description of the spread speech/data bursts. These bursts contain L_m midamble chips, which are also termed midamble elements. The L_m elements $\underline{m}_i^{(k)}$; i=1,...,L_m; k=1,...,K; of the midamble codes $\underline{m}^{(k)}$; k=1,...,K; are taken from the complex set

$$\underline{V}_m = \{1, j, -1, -j\} \quad (1)$$

K is the maximum number of users, i.e. the available number of spreading codes per time slot.

The elements $\underline{m}_i^{(k)}$ of the complex midamble codes $\underline{m}^{(k)}$ fulfil the relation

$$\underline{m}_i^{(k)} = (j)^i \cdot m_i^{(k)} \quad m_i^{(k)} \in \{1, -1\}, i = 1, \dots, L_m; k = 1, \dots, K. \quad (2)$$

Hence, the elements $\underline{m}_i^{(k)}$ of the complex midamble codes $\underline{m}^{(k)}$ of the K users are alternating real and imaginary.

With W being the number of taps of the impulse response of the mobile radio channels, the L_m binary elements $m_i^{(k)}$; i=1,...,L_m; k=1,...,K; of (2) for the complex midambles $\underline{m}^{(k)}$; k=1,...,K; of the K users are generated according to the following method from a single periodic basic code

$$\mathbf{m} = (m_1, m_2, \dots, m_{L_m + (K'-1)W + \lfloor P/K \rfloor})^T \quad m_i \in \{1, -1\}, i = 1, \dots, (L_m + (K'-1)W + \lfloor P/K \rfloor). \quad (3)$$

$\lfloor x \rfloor$ denotes the largest integer smaller or equal to x, K' = K/2.

The elements m_i ; i=1,...,(L_m + (K'-1)W + $\lfloor P/K \rfloor$), of (3) fulfil the relation

$$m_i = m_{i-P} \text{ for the subset } i = (P+1), \dots, (L_m + (K'-1)W + \lfloor P/K \rfloor). \quad (4)$$

The P elements m_i ; i=1,...,P, of one period of m according to (3) are contained in the vector

$$\mathbf{m}_P = (m_1, m_2, \dots, m_P)^T. \quad (5)$$

With \mathbf{m} according to (3) the L_m binary elements $m_i^{(k)}$; i=1,...,L_m; k=1,...,K; of (2) for the midambles of the first K' users are generated based on the following formula

$$m_i^{(k)} = m_{i+(K'-k)W} \quad i = 1, \dots, L_m; k = 1, \dots, K'. \quad (6)$$

The midambles for the second K' users are generated based on a slight modification of this formula introducing intermediate shifts

$$m_i^{(k)} = m_{i+(K-k)W+\lfloor P/K \rfloor} \quad i=1, \dots, L_m; k=K'+1, \dots, K. \quad (7)$$

Whether intermediate shifts are allowed in a cell is broadcast on the BCH.

In the following the term 'a midamble code set' or 'a midamble code family' denotes K specific midamble codes $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$. Different midamble code sets $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$; are specified based on different periods \mathbf{m}_p according to (5).

In adjacent cells of the cellular mobile radio system, different midamble codes sets $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$; should be used to guarantee a proper channel estimation.

As mentioned above a single midamble code set $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$; consisting of K midamble codes is based on a single period \mathbf{m}_p according to (5).

In the Annex A the periods \mathbf{m}_p according to (5), i.e. the Basic Midamble Codes, which shall be used to generate different midamble code sets $\underline{\mathbf{m}}^{(k)}$; $k=1, \dots, K$; are listed in tables in a hexadecimal representation. As shown in table 5 always 4 binary elements m_i are mapped on a single hexadecimal digit.

Table 5: Mapping of 4 binary elements m_i on a single hexadecimal digits

4 binary elements m_i	Mapped on hexadecimal digit
-1 -1 -1 -1	0
-1 -1 -1 1	1
-1 -1 1 -1	2
-1 -1 1 1	3
-1 1 -1 -1	4
-1 1 -1 1	5
-1 1 1 -1	6
-1 1 1 1	7
1 -1 -1 -1	8
1 -1 -1 1	9
1 -1 1 -1	A
1 -1 1 1	B
1 1 -1 -1	C
1 1 -1 1	D
1 1 1 -1	E
1 1 1 1	F

As different Basic Midamble Codes are required for different burst formats, the Annex A shows the codes m_{PL} for burst type 1 and m_{PS} for burst type 2. It should be noted that the different burst types must not be mixed in the same timeslot of one cell.

5.2.3.1 Midamble Transmit Power

If in the downlink all users in one time slot have a common midamble, the transmit power of this common midamble is such that there is no power offset between the data part and the midamble part of the transmit signal within the time slot.

In the case of user specific midambles, the transmit power of the user specific midamble is such that there is no power offset between the data parts and the midamble part for this user within one slot.

5.2.4 Beamforming and Transmit Diversity

When DL beamforming or TX Diversity is used, at least that user to which beamforming/Tx Diversity is applied and which has a dedicated channel shall get one individual midamble according to chapter 5.2.3, even in DL.

5.3 Common physical channels

5.3.1 Primary common control physical channel (P-CCPCH)

The BCH as described in section 4.1.2 is mapped onto the Primary Common Control Physical Channel (P-CCPCH). The position (time slot / code) of the P-CCPCH is known from the Physical Synchronisation Channel (PSCH), see section 5.3.4.

5.3.1.1 P-CCPCH Spreading

The P-CCPCH uses fixed spreading with a spreading factor SF = 16 as described in section 5.2.1.1. The P-CCPCH always uses channelisation code $a_{Q=16}^{(k=1)}$.

5.3.1.2 P-CCPCH Burst Types

The burst type 1 as described in section 5.2.2 is used for the P-CCPCH. No TFCI is applied for the P-CCPCH.

5.3.1.3 P-CCPCH Training sequences

The training sequences, i.e. midambles, as described in section 5.2.3 are used for the P-CCPCH. For those timeslots in which the P-CCPCH is transmitted, the midambles $m^{(1)}$, $m^{(2)}$, $m^{(9)}$ and $m^{(10)}$ are reserved for P-CCPCH in order to support Block STTD antenna diversity and the beacon function, see 5.3.1.4 and 5.4. The use of midambles depends on whether Block STTD is applied to P-CCPCH, see 5.3.1.4.

5.3.1.4 Block STTD antenna diversity for P-CCPCH

Block STTD antenna diversity can be optionally applied for the P-CCPCH. Its support is mandatory for the UE. Two possibilities exist :

- If no antenna diversity is applied to P-CCPCH, $m^{(1)}$ is used and $m^{(2)}$ is left unused.
- If Block STTD antenna diversity is applied to P-CCPCH, $m^{(1)}$ is used for the first antenna and $m^{(2)}$ is used for the diversity antenna.

5.3.2 Secondary common control physical channel (S-CCPCH)

PCH and FACH as described in section 4.1.2 are mapped onto one or more secondary common control physical channels (S-CCPCH). In this way the capacity of PCH and FACH can be adapted to the different requirements.

5.3.2.1 S-CCPCH Spreading

The S-CCPCH uses fixed spreading with a spreading factor SF = 16 as described in section 5.2.1.1.

5.3.2.2 S-CCPCH Burst Types

The burst types 1 or 2 as described in section 5.2.2 are used for the S-CCPCHs. TFCI may be applied for S-CCPCHs.

5.3.2.3 S-CCPCH Training sequences

The training sequences, i.e. midambles, as described in section 5.2.3 are used for the S-CCPCH.

5.3.3 The physical random access channel (PRACH)

The RACH or in case of ODMA networks the ORACH as described in section 4.1.2 are mapped onto one or more uplink physical random access channels (PRACH). In such a way the capacity of RACH and ORACH can be flexibly scaled depending on the operators need.

This description of the physical properties of the PRACH also applies to bursts carrying other signaling or user traffic if they are scheduled on a time slot which is (partly) allocated to the RACH or ORACH.

5.3.3.1 PRACH Spreading

The uplink PRACH uses either spreading factor SF=16 or SF=8 as described in section 5.2.1.1. The set of admissible spreading codes for use on the PRACH and the associated spreading factors are broadcast on the BCH (within the RACH configuration parameters on the BCH).

5.3.3.2 PRACH Burst Types

The mobile stations send the uplink access bursts randomly in the PRACH. The PRACH burst consists of two data symbol fields, a midamble and a guard period. The second data symbol field is shorter than the first symbol data field by 96 chips in order to provide additional guard time at the end of the PRACH time slot.

The precise number of collision groups depends on the spreading codes (i.e. the selected RACH configuration. The access burst is depicted in figure 10, the contents of the access burst fields are listed in table 8 and table 9.

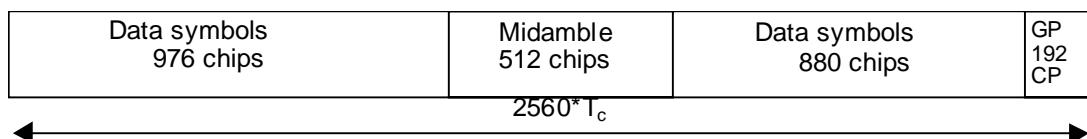


Figure 12: PRACH burst, GP denotes the guard period

Table 8: number of symbols per data field in PRACH burst

Spreading factor (Q)	Number of symbols in data field 1	Number of symbols in data field 2
8	122	110
16	61	55

Table 9: The contents of the PRACH burst field

Chip number (CN)	Length of field in chips	Length of field in symbols	Contents of field
0-975	976	cf table 1	Data symbols
976-1487	512	-	Midamble
1488-2367	880	cf table 1	Data symbols
2368-2559	192	-	Guard period

5.3.3.3 PRACH Training sequences

The training sequences, i.e. midambles, of different users active in the same time slot are time shifted versions of a single periodic basic code. The basic midamble codes used for PRACH bursts are the same as for burst type 1 and are shown in Annex A. The necessary time shifts are obtained by choosing either *all k=1,2,3,...,K'* (for cells with small radius) or *uneven k=1,3,5,...≤K'* (for cells with large radius). Different cells use different periodic basic codes, i.e. different midamble sets.

For cells with large radius additional midambles may be derived from the time-inverted Basic Midamble Sequence. Thus, the second Basic Midamble Code m_2 is the time inverted version of Basic Midamble Code m_1 .

In this way, a joint channel estimation for the channel impulse responses of all active users within one time slot can be performed by a maximum of two cyclic correlations (in cells with small radius, a single cyclic correlator suffices). The

different user specific channel impulse response estimates are obtained sequentially in time at the output of the cyclic correlators.

5.3.3.4 Association between Training Sequences and Channelisation Codes

For the PRACH there exists a fixed association between the training sequence and the channelisation code. The generic rule to define this association is based on the order of the channelisation codes $\mathbf{a}_Q^{(k)}$ given by k and the order of the midambles $\mathbf{m}_j^{(k)}$ given by k , firstly, and j , secondly, with the constraint that the midamble for a spreading factor Q is the same as in the upper branch for the spreading factor $2Q$. The index $j=1$ or 2 indicates whether the original Basic Midamble Sequence ($j=1$) or the time-inverted Basic Midamble Sequence is used ($j=2$).

- For the case that all k are allowed and only one periodic basic code \mathbf{m}_1 is available for the RACH, the association depicted in figure 13 is straightforward.
- For the case that only odd k are allowed the principle of the association is shown in figure 14. This association is applied for one and two basic periodic codes.

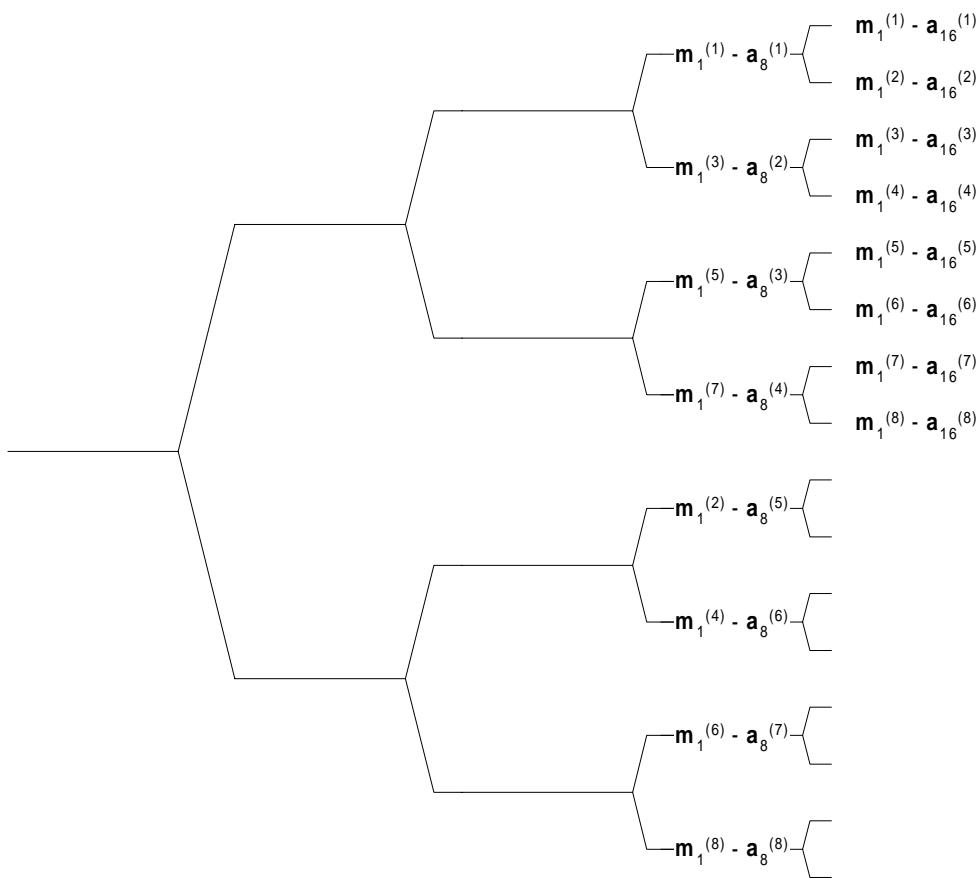


Figure 13: Association of Midambles to Channelisation Codes in the OVSF tree for all k

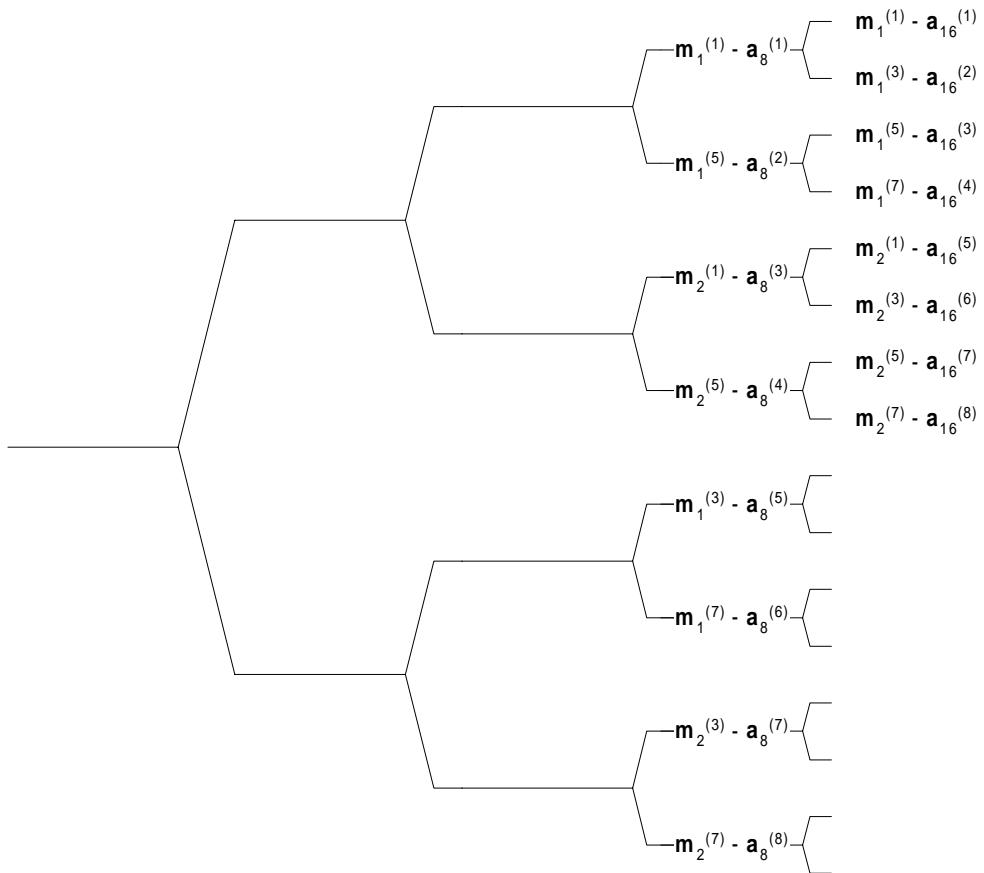


Figure 14: Association of Midambles to Channelisation Codes in the OVSF tree for odd k

5.3.4 The physical synchronisation channel (PSCH)

In TDD mode code group of a cell can be derived from the synchronisation channel. Additional information, received from higher layers on SCH transport channel, is also transmitted to the UE in PSCH in case 3 from below. In order not to limit the uplink/downlink asymmetry the PSCH is mapped on one or two downlink slots per frame only.

There are three cases of PSCH and P-CCPCH allocation as follows:

- Case 1) PSCH and P-CCPCH allocated in TS# k , $k=0\dots14$
- Case 2) PSCH allocated in two TS: TS# k and TS# $k+8$, $k=0\dots6$; P-CCPCH allocated in TS# k .
- Case 3) PSCH allocated in two TS, TS# k and TS# $k+8$, $k=0\dots6$, and the P-CCPCH allocated in TS# i , $i=0\dots6$, pointed by PSCH. Pointing is determined via the SCH from the higher layers.

These three cases are addressed by higher layers using the SCCH in TDD Mode. The position of PSCH (value of k) in frame can change on a long term basis in any case.

Due to this PSCH scheme, the position of PCCPCH is known from the PSCH.

Figure 15 is an example for transmission of PSCH, $k=0$, of Case 2 or Case 3.

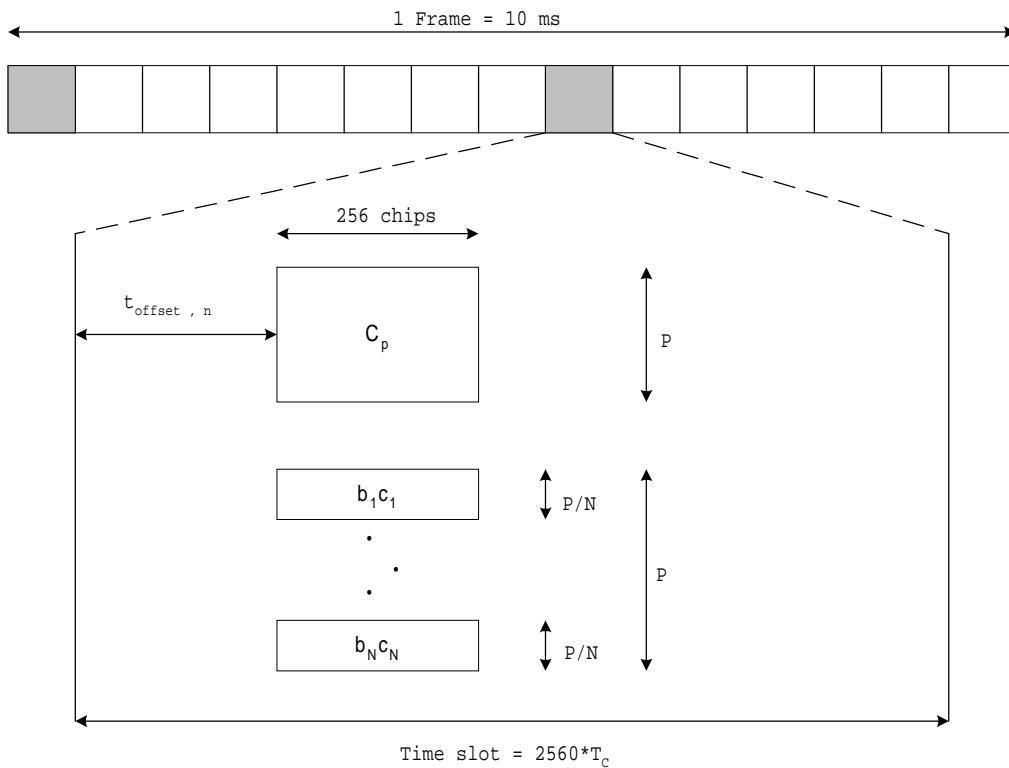


Figure 15: Scheme for Physical Synchronisation channel PSCH consisting of one primary sequence C_p and N=3 parallel secondary sequences in slot k and k+8

(example for k=0 in Case 2 or Case 3)

As depicted in figure 15, the PSCH consists of a primary and three secondary code sequences with 256 chips length. The primary and secondary code sequences are defined in [8] chapter 7 'Synchronisation codes'. The secondary codes are transmitted either in the I channel or the Q channel, depending on the code group.

Due to mobile to mobile interference, it is mandatory for public TDD systems to keep synchronisation between base stations. As a consequence of this, a capture effect concerning PSCH can arise. The time offset t_{offset} enables the system to overcome the capture effect.

The time offset t_{offset} is one of 32 values, depending on the cell parameter, thus on the code group of the cell, cf. 'table 7 Mapping scheme for Cell Parameters, Code Groups, Scrambling Codes, Midambles and t_{offset} ' in [8]. The exact value for t_{offset} , regarding column 'Associated t_{offset} ' in table 7 in [8] is given by:

$$\begin{aligned} t_{\text{offset},n} &= n \cdot T_c \left\lfloor \frac{2560 - 96 - 256}{31} \right\rfloor \\ &= n \cdot 71T_c ; \quad n = 0, \dots, 31 \end{aligned}$$

Please note that $\lfloor x \rfloor$ denotes the largest integer number less or equal to x and that T_c denotes the chip duration.

5.3.5 Physical Uplink Shared Channel (PUSCH)

For Physical Uplink Shared Channel (PUSCH) the burst structure of DPCH as described in section 5.2 shall be used. User specific physical layer parameters like power control, timing advance or directive antenna settings are derived from the associated channel (FACH or DCH). PUSCH provides the possibility for transmission of TFCI in uplink.

5.3.6 Physical Downlink Shared Channel (PDSCH)

For Physical Downlink Shared Channel (PDSCH) the burst structure of DPCH as described in section 5.2 shall be used. User specific physical layer parameters like power control or directive antenna settings are derived from the associated channel (FACH or DCH). PDSCH provides the possibility for transmission of TFCI in downlink.

To indicate to the UE that there is data to decode on the DSCH, three signalling methods are available:

- 1) using the TFCI field of the associated channel or PDSCH
- 2) using on the DSCH user specific midamble derived from the set of midambles used for that cell
- 3) using higher layer signalling.

When the midamble based method is used, the UE shall decode the PDSCH if the PDSCH was transmitted with the midamble indicated for the UE by UTRAN.

5.3.7 The Page Indicator Channel (PICH)

The Page Indicator Channel (PICH) is a physical channel used to carry the Page Indicators (PI). The PICH substitutes one or more paging sub-channels that are mapped on a S-CCPCH, see 6.2.2. The page indicator indicates a paging message for one or more UEs that are associated with it.

The page indicators of length $L_{PI}=2$, $L_{PI}=4$ or $L_{PI}=8$ symbols are transmitted in a normal burst (type 1 or 2) as seen in figure 16. The number of page indicators N_{PI} per time slot is given by the number L_{PI} of symbols for the page indicators and the burst type. In Table 5 this number is shown for the different possibilities of burst types and PI lengths.

Table 5 Number N_{PI} of PI per time slot for the different burst types and PI lengths L_{PI}

	$L_{PI}=2$	$L_{PI}=4$	$L_{PI}=8$
Burst Type 1	61	30	15
Burst Type 2	69	34	17

The same burst type is used for the PICH in every cell. In case of $L_{PI}=4$ or $L_{PI}=8$, one symbol in each data part adjacent to the midamble is left over. These symbols are filled by dummy bits that are transmitted with the same power as the PI. Figure 16 shows examples for the transmission of page indicators in the different burst types for $L_{PI}=4$.

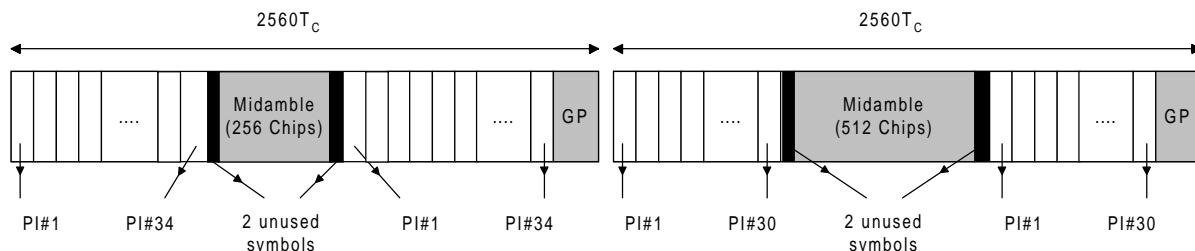


Figure 16: Example of PI Transmission in PICH bursts of different types for $L_{PI}=4$

5.4 Beacon function of physical channels

For the purpose of measurements, a beacon function shall be provided by particular physical channels.

5.4.1 Location of physical channels with beacon function

The location of the physical channels with beacon function is determined by the PSCH and depends on the PSCH allocation case, see 5.3.4:

- Case 1) All physical channels that are allocated to channelisation code $a_{Q=16}^{(k=1)}$ and in TS#k, k=0....14 shall provide the beacon function.

Case 2) All physical channels that are allocated to channelisation code $a_{Q=16}^{(k=1)}$ and in TS#k and TS#k+8, k=0...6, shall provide the beacon function.

Case 3) All physical channels that are allocated to channelisation code $a_{Q=16}^{(k=1)}$ and in TS#i and TS#i+8, i=0...6, pointed by PSCH, shall provide the beacon function.

Note that by this definition the P-CCPCH always provides the beacon function.

5.4.2 Physical characteristics of the beacon function

The physical channels providing the beacon function

- are transmitted with reference power,
- are transmitted without beamforming,
- use burst type 1,
- use midamble $m^{(1)}$ and $m^{(2)}$ exclusively in this time slot and
- midambles $m^{(9)}$ and $m^{(10)}$ are always left unused in this time slot, if 16 midambles are allowed in that cell.

The reference power corresponds to the sum of the power allocated to both midambles $m^{(1)}$ and $m^{(2)}$. Two possibilities exist:

- If no Block STTD antenna diversity is applied to P-CCPCH, all the reference power of any physical channel providing the beacon function is allocated to $m^{(1)}$.
- If Block STTD antenna diversity is applied to P-CCPCH, for any physical channel providing the beacon function midambles $m^{(1)}$ and $m^{(2)}$ are each allocated half of the reference power. Midamble $m^{(1)}$ is used for the first antenna and $m^{(2)}$ is used for the diversity antenna. Block STTD encoding is used for the data in P-CCPCH, see [9]; for all other physical channels identical data sequences are transmitted on both antennas.

5.5 Midamble Allocation for Physical Channels

In general, midambles are part of the physical channel configuration which is performed by higher layers.

Optionally, if no midamble is allocated by higher layers, a default midamble allocation shall be used. This default midamble allocation is given by a fixed association between midambles and channelisation codes, see annex A.3, and shall be applied individually to all channelisation codes within one time slot. Different associations apply for different burst types and cell configurations with respect to the maximum number of midambles.

5.5.1 Midamble Allocation for DL Physical Channels

For DL physical channels the midamble allocation depends on whether the midambles are signalled by higher layers or by default and whether TxDiversity/Beamforming is used.

5.5.1.1 Midamble Allocation by signalling

5.5.1.1.1 DL Physical Channels without TxDiversity/Beamforming

If the midamble is part of the physical channel configuration, a common midamble shall be assigned to all physical channels in one time slot, except for physical channels providing the beacon function, see 5.4. When PDSCH physical layer signalling based on the midamble is used, each UE that may share the PDSCH shall get an individual midamble, see 5.3.6.

5.5.1.1.2 DL Physical Channels with TxDiversity/Beamforming

When DL beamforming or TX Diversity is used, each user to which TxDiversity/Beamforming is applied and which has a dedicated channel shall get one individual midamble, see 5.2.4.

5.5.1.2 Midamble Allocation by default

If no midamble is allocated by signalling, the UE shall derive the midamble from the associated channelisation code and shall use an individual midamble for each channelisation code, except for physical channels providing the beacon function, see 5.4. For each association between midambles and channelisation codes in annex A.3, there is one primary channelisation code associated to each midamble. A set of secondary channelisation codes is associated to each primary channelisation code. All the secondary channelisation codes within a set use the same midamble as the primary channelisation code to which they are associated.

Higher layers shall allocate the channelisation codes in a particular order. Primary channelisation codes shall be allocated prior to associated secondary channelisation codes. If midambles are reserved for the beacon function, all primary and secondary channelisation codes that are associated with the reserved midambles shall not be used.

Primary and its associated secondary channelisation codes shall not be allocated to different UE's.

In the case that secondary channelisation codes are used, secondary channelisation codes of one set shall be allocated in ascending order, with respect to their numbering.

5.5.2 Midamble Allocation for UL Physical Channels

If the midamble is part of the physical channel configuration, an individual midamble shall be assigned to all UE's in one time slot.

If no midamble is allocated by higher layers, the UE shall derive the midamble from the assigned channelisation code as for DL physical channels. If the UE changes the SF according to the data rate, it shall always vary the channelisation code along the lower branch of the OVSF tree.

6 Mapping of transport channels to physical channels

This section describes the way in which transport channels are mapped onto physical resources, see figure 17.

Transport Channels	Physical Channels
DCH	Dedicated Physical Channel (DPCH)
ODCH*	
BCH	Primary Common Control Physical Channel (P-CCPCH)
FACH	Secondary Common Control Physical Channel (S-CCPCH)
PCH	
RACH	Physical Random Access Channel (PRACH)
ORACH*	
SCH	Physical Synchronisation Channel (PSCH)
USCH	Physical Uplink Shared Channel (PUSCH)
DSCH	Physical Downlink Shared Channel (PDSCH)
	Page Indicator Channel (PICH)

* in case of ODMA networks

Figure 17: Transport channel to physical channel mapping

6.1 Dedicated Transport Channels

A dedicated transport channel is mapped onto one or more physical channels. An interleaving period is associated with each allocation. The frame is subdivided into slots that are available for uplink and downlink information transfer. The mapping of transport blocks on physical channels is described in TS25.222 ("multiplexing and channel coding").

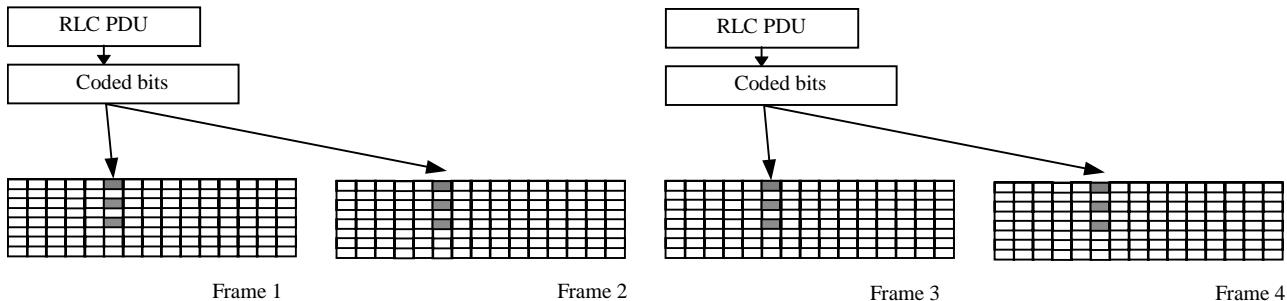


Figure 19: Mapping of PDU onto the physical bearer

For NRT packet data services, shared channels (USCH and DSCH) can be used to allow efficient allocations for a short period of time.

An ODCH is also mapped onto one or more sets of slots and codes within a TDD frame as shown in figure 4. The actual transmission mode (i.e. combination of slots, codes, TX power, interleaving depth etc.) chosen for a relay link will be negotiated between nodes prior to transmission. Several of these transmission mode parameters can be adapted during transmission due to changes in propagation and data traffic.

6.2 Common Transport Channels

6.2.1 The Broadcast Channel (BCH)

The BCH is mapped onto the P-CCPCH. The secondary SCH indicates in which timeslot a mobile can find the P-CCPCH containing BCH. If the broadcast information requires more resources than provided by the P-CCPCH, the BCH in P-CCPCH will comprise a pointer to additional S-CCPCH resources for FACH in which this additional broadcast information shall be sent.

6.2.2 The Paging Channel (PCH)

The PCH is mapped onto one or several S-CCPCHs so that capacity can be matched to requirements. The location of the PCH is indicated on the BCH. It is always transmitted at a reference power level.

To allow an efficient DRX, the PCH is divided into several paging sub-channels within the allocated multiframe structure. Examples of multiframe structures are given in the Annex B of this document. Each paging sub-channel is mapped onto 2 consecutive frames that are allocated to the PCH on the same S-CCPCH. Layer 3 information to a particular paging group is transmitted only in the associated paging sub-channel. The assignment of UEs to paging groups is independent of the assignment of UEs to page indicators.

6.2.3 The Forward Channel (FACH)

The FACH is mapped onto one or several S-CCPCHs. The location of the FACH is indicated on the BCH and both, capacity and location can be changed, if required. FACH may or may not be power controlled.

6.2.4 The Random Access Channel (RACH)

The RACH has intraslot interleaving only and is mapped onto PRACH. The same slot may be used for PRACH by more than one cell. Multiple transmissions using different spreading codes may be received in parallel. More than one slot per frame may be administered for the PRACH. The location of slots allocated to PRACH is broadcast on the BCH. The PRACH uses open loop power control. The details of the employed open loop power control algorithm may be different from the corresponding algorithm on other channels.

6.2.5 The Synchronisation Channel (SCH)

The SCH is mapped onto the PSCH as described in section 5.4.

6.2.6 Common Transport Channels for ODMA networks

The ORACH is used to transfer short probes or short protocol data units (PDU) between one or more nodes for routing and resource allocation control.

To limit the transmission time of short probe PDUs on the ORACH then this data should be transmitted as one burst on one code. That is, one probe burst should be transmitted on one $2560*T_c$ timeslot (which as described in section 5.1 would be configured as an ORACH slot).

Since the ORACH is a common control channel used to transfer probes between one or more nodes a common fixed spreading factor should be adopted.

6.2.7 The Uplink Shared Channel (USCH)

The uplink shared channel is mapped on one or several PUSCH, see section 5.5.

6.2.8 The Downlink Shared Channel (DSCH)

The downlink shared channel is mapped on one or several PDSCH, see section 5.6.

Annex A (Normative): Basic Midamble Codes

A.1 Basic Midamble Codes for Burst Type 1 and PRACH Burst Type

In the case of burst type 1 (see section 5.2.2) or in the case of PRACH burst the midamble has a length of $L_m=512$, which is corresponding to:

$K'=8$; $W=57$; $P=456$.

Depending on the possible delay spread cells are configured to use midambles which are generated from the Basic Midamble Codes (see table A-1)

- for all $k=1,2,\dots,K$; $K=2K'$ or
- for $k=1,2,\dots,K'$, only, or
- for odd $k=1,3,5,\dots,\leq K'$, only.

Depending on the cell size midambles for PRACH are generated from the Basic Midamble Codes (see table A-1)

- for $k=1,2,\dots,K'$ or
- for odd $k=1,3,5,\dots,\leq K'$, only.

The cell configuration is broadcast on BCH.

The mapping of these Basic Midamble Codes to Cell Parameters is shown in TS25.223.

Table A-1: Basic Midamble Codes m_p according to equation (5) from section 5.2.3 for case of burst type 1

Code ID	Basic Midamble Codes m_{PL} of length $P=456$
m_{PL0}	8DF65B01E4650910A4BF89992E48F43860B07FE55FA0028E454EDCD1F0A09A6F029668F55427 253FB8A71E5EF2EF360E539C489584413C6DC4
m_{PL1}	4C63F9BC3FD7B655D5401653BE75E1018DC26D271AADA1CF13FD348386759506270F2F953E9 3A44468E0A76605EAE8526225903B1201077602
m_{PL2}	8522611FFCAEB55A5F07D966036C852E7B15B893B3ABA9672C327380283D168564B8E1200F0E 2205AF1BB23A5867989785CFA2A6C131CFDC4
m_{PL3}	F58107E6B777C221999BDE9340E192DC6C31AB8AE85E70AA9BBEB39727435412A5A27C0EF7 3AB453ED0D28E5B032B94306EC1304736C91E922
m_{PL4}	89670985013DFD2223164B68A63BD58C7867E97316742D3ABD6CBDA4FC4E08C0B0CBE44451 575C72F887507956BD1F27C466681800B4B016EE
m_{PL5}	FCDEF63500D6745CDB962594AF171740241E982E9210FC238C4DD85541F08C1A010F7B3161A 7F4DF19BAD916FD308AB1CED2A32538C184E92C
m_{PL6}	DB04CE77A5BA7C0E09B6D3551072B11A7A43B6A355C1D6FDCF725D587874999895748DD098 32ABC35CEC3008338249612E6FE5005E13B03103
m_{PL7}	D2F61A622D0BA9E448CD29587D398EF8CDC3B6582B6CDD50E9E20BF5FE2B3258041E14D608 21DC6725132C22D787CD5D497780D4241E3B420D
m_{PL8}	7318524E62D806FA149ECC5435058A2B74111524B84727FE9A7923B4A1F0D8FCD89208F34BE E5CADEB90130F9954BB30605A98C11045FF173D
m_{PL9}	8E832B4FA1A11E0BF318E84F54725C8052E0D099EF0AF54BC342BEE44976C9F38DE701623C7 BF6474DF90D2E2222A4915C8080E7CD3EC84DAC
m_{PL10}	CFA5BAC90780876C417933C43103B55699A8AD51164E590AF9DA6AF0C18804E1F74862F00CE 7ECC899C85B6ABB0CAD5E50836AD7A39878FE2F
m_{PL11}	AD539094A19858A75458F1B98E286A4F7DC3A117083D04724CBE83F34102817C5531329CDB43 7FFF712241B644BDF0C1FEC8598A63C2F21BD7
m_{PL12}	BEB8483139529BDE23E42DA6AB8170DD0BFBB30CE28A4502FAF3C8EDA219B9A6D5B849D9C 9E4451F74E2408EA046061201E0C1D69CF48F3A94
m_{PL13}	C482462CA7846266060D21688BA00B72E1EC84A3D5B7194C8DA39E21A3CE12BF512C8AAB6A 7079F73C0D3E4F40AC55A4BCC453F1DFE3F6C82
m_{PL14}	9663373935FD5C213AC58C0670206683D579D2526C05B0A81030DDF61A221D8A68EAD8D6F7A A0D662C07C6DCD0115A54D39F03F7122B0675AC
m_{PL15}	387397AE5CD3F2B3912C26B8F87CE82CEFEC55507DB08FB0C4CF2FD6858896201ACA726428 1D0298440DD3481E5E9DBB24C16F30EB7A22948A
m_{PL16}	AFe9266843C892571B6230D808788C63B9065EA3BDF687B92B8734A8D7099559FEA22C94165 76D0C087EB4503E87E356471B330182A24A3E6
m_{PL17}	6E6C550A4CB74010F6C3E0328651DF421C456D9A5E8AE9D3946C10189D72B579184552EE3E7 99970969C870FE8A37B6C4BA890992103486DC0
m_{PL18}	D803CA71B6F99CFB3105D40F4695D61EB0B62E803F79302EE3D2A6BF12EA70D304B181E8B3 8B3B74F5022B67EB8109808C62532688C563D4BE
m_{PL19}	E599ED48D01772055DBE9D343A4EA5EABE643DA38F06904FC7523B08C4101F021B199AF759A 00D9AC298881D79413A77470992A75C771492D0
m_{PL20}	9F30AC4162CE5D185953705F3D45F026F38E9B5721AEFE07370214D526A2C4B344B508B57BF B2492320C05903C79CBEE08C6E7F218B57E14D6
m_{PL21}	B5971060DA84685B4D042ED0189FAF13C961B2EF61CC164E363B22AAB14AC8AF607906C1C6 E04F2054C687AA6741A9E70639857DA02B6FFFFFA
m_{PL22}	97135FC2226C4B4A5CBA5FCA3732763B87455F73A1148006F3DF214BD4C936D061E04045160 E2CE33B9CD09D08FDE2A37F4E998322B4401D27
m_{PL23}	4D256D57C861B9791151A78D5299C56D116B6178B2A2D04BB95FB76540AF28341DC6EC4E7E D3BF9E508478D9C8F44914805DA82429E1CF320E
m_{PL24}	858EF5C84CE32D18D9ABA110EEA7474CF0CD70254D2928C3F4DFF6BB3A518587CADA190290 78AC90A8336C8178203BE3289E601F07D089CB64
m_{PL25}	920A8796A511650AEF32F93DD3C39C624E07AE03CE8C96139973F54DCB9803C5164ADB502D 4FF561564D607037FCD172921F1982B102C3312C
m_{PL26}	485C5DAE76B360A9C56E20B8422EA3E6ACF07CB093B5587CB0E6A5498A4714081EA98DBCD B0482B26E0D097C0344473D233BEF3C8E440DEBF
m_{PL27}	565A9D54EA789892B024F97E728E8EE112411942C48BD0C5BC8AA457D8DC9941F0F7424B386 43FFE6521CD306FBC56FE10F1428D4C245B5606
m_{PL28}	5AEF2C0C2C378179A1AC36242E6B3EDB72C42D3624437674F8D51260C0898C201837CBA14E9 E23D1EF6451C4ACF27AB031F457A8A1BFD148AE
m_{PL29}	87D8FE685417822A23D925307E6C11081ADAC4702BCCD9BE448E78984D109B50DEF5B7C58B C71EA1F0A6826BA8AD1978843E7697F3E416AADA
m_{PL30}	84802B72AF27B5BE724D1FB629E0E627BDB0D9061292562F98350C1D0C9D4B9D8E2BF71123C

Code ID	Basic Midamble Codes m_{PL} of length $P=456$
	82EBB161003AE9829E07244D78F19926F8847A2
m _{PL31}	8CCB5128238BCB088E30972D62792AEF02B9BBDDCAD68C9916C00BF91CBE788B0F03851FA AF88605534FD73436C259D270B1013CB14226F658
m _{PL32}	62F4E6FAC2BF1979CE6854AA2D33534BFB2F946519101A6589131C3640707D40E67ED804AF8 736AD213CAF5935741900061967E8285C27E34C
m _{PL33}	4095E5B4EEAFCDF68A34B267EEA28D8444FA533900F41499E260D2E65C256A52E1DD5861F52 27C98E00687D107233F51A1167BCF72FB184654
m _{PL34}	5630E9A79FCAD303404D9E5A802299162657AAC734761C6E90DA8BCE4F61A763E0BB48D3FE B3F78468C828ABA4828DAD06E0F904CFD40421DC
m _{PL35}	CD12B24C0BCA8AAC1FCBF0500A3BC684A180E863D888F2506B48C68ECF17F76CB285991FB A18EB6397211FAD002F482D57A258CD45DE3FF1A6
m _{PL36}	AFC2F2A50877286CD3405442730C45514F082D9EC296B367C0F64F04C4E0007DCA9E50BEED5 C102126E319ACBC64F1729272F2F72C9397029FE
m _{PL37}	18F89EE8589D20882A72A44DCCDF0050F0A3D88DBA6531614973D26905FDF41E3F779FF0648 E8AF1540928511BCF4C25D9C64AF34AC31B8965
m _{PL38}	F890D550F33F032ECDA3A51FED427D634F64EB29AF1332A23CD961258E4BAED040E7B33691 8E250EC272A12816B9EBFFA1E0AE401185F08C10
m _{PL39}	ACE5DD61506047E80FB7D41BD3992DF4D7F18EB46CC145C0E9105428C2F8F299141F5D6669 1904A7DC2513A3B83994ACB1292246B32818FE9D
m _{PL40}	150680FF900C9B46E1E24D54BE2238CB950A934E5CCDE9BC3939EB51CB0AE202B7D339EEC 2018B33A0AB9B63DA5D512D64FB58C0E51A1C82C2
m _{PL41}	51A579EED2663A002D32D10A0753173612F4D5BA167D1807C61F25C4D42C063682E8E9DD019 F79D446A046EB3F75E50FEB228DC52F08E694B6
m _{PL42}	CDC644FE4C0C6897604F9D14D714123BF16FFF0E49F35F674908CA60653702FE27BCCA2A470 98453AF8661055C8C549EB6A951A8396AD4B94D
m _{PL43}	750A10366C595373C5001CA3E4239764B1409D602CF6052B39BC6A3255A15FE06C782C4C5F8 47026A7E79838A2933A61C77BB6CBF5915B2DA5
m _{PL44}	B7490686D78E409082C4C48FE18D4C35429C20AADF96076B92FC4E85490664753DB0891A0B2 7FD849BB7FCA99E3B38F22F8C662852C0D35AA6
m _{PL45}	D86E1B575B47D23DA811806A54C231281F03317830E7BD305D3CAA7D6382A5233104CFD54D2 2DF9F34535E5B390D9040CF1375FEA44CEC29E2
m _{PL46}	828655960C026EC67B683480992AC2ED2C43ABC606F5220C2945F373470BE7ED5BCCF7C1AA 0986BBCCC84F11F1658AA568FAA0A60C5F0B5BFA
m _{PL47}	D76230E02C8533653AAB99B288AA2ADE25A1C1BF28516C04239240EAF1EFC0B98974B51F886 861D8A1E9F5D62CFFEC309F071A9716B325101B
m _{PL48}	EA207662865B8A07D69648964DED818EE474A90B94473408871880E63EF0596B9FCFEC3C06B 86EA6AD2B06C91672EFB33C70241A5450B59B8A
m _{PL49}	9CB5459549909835FAB22F0D99298C120ACF479F814CCE749079D40688F28101037762F125C7 76DA9C5FA1FCE0E76E452F8185354FDCDE94E2
m _{PL50}	227506304AEC1D6F93569B51FDC3405A0F38194F65BE17163A3CB9827A35AECEA757D020FE2 49377ECD561428A38FEED004EC859C272563185
m _{PL51}	96B9AEC9938910F0E533422A3977519B05CD4AD3909BC15A7502D48D49C124FA192A8E57027 CFEB11DF542010603CE5C9FDF8E626D4FBF8CF4
m _{PL52}	A6AAD06E095A9BE0BD9F8A2ED40C3CBDBAE91C700CBB778C8696CC06F3A675C16BDB2918 E5F2111005A8727206DC6A9684E05655185C398EEB
m _{PL53}	CD168D384A78DA172991AD333EE2A9880905AFE59E2A2A4AC4414C40F82874F98A3CBE7B44 F4C7F4710B35FD88AFC0399FAEB070EB9CA4D30A
m _{PL54}	22016CA87AD1549174A8699DD65599697871091457E83E0912E7E77A06531C209394D283D18A 38662B73681DD9C5BF330FED978BDA7D487CA8
m _{PL55}	B9401B0843AA6F7827A13BD66C92287E8886C31EB5B90B82B472CCD6DA3D8D4FBF78B8F84 96DFA8252B06429D5DD17142F1C908ACCD70EA0C
m _{PL56}	E42B9EFDC5D09AC27B3C7DA28D02493A70521223B9D7A76A9D13E9C171017964D16A70C08E AD02C3DC948889C23E365AFCF01BF20B89B0BF5C
m _{PL57}	9DA0180168DB915E9F3597B59312198E1B5CC00D743C2ECB0DBAADA3E35A2465ED1EAA9D7 4734D49A313CE4DFF020D0760E3153DC485603943
m _{PL58}	B6C966619ECB98191D719C187C07BD503425650CAA3A2D1F2DF5212B1441D7A0C1D36A4C9C 2550240AD17CA43BB3943DFFFBF1E283D81299CC
m _{PL59}	DB0E8C41F08A03D477C1AA548799274C4BF3EB68F2636166FDC8D4B1E7132539930297E228B A232BB5C279FA5ECA3AC10E24361AF050A453B8
m _{PL60}	89BCE2DE2974EEBA833CF32F224C85A2891484478527DB48FA6ECEA84C5E288CC3914CB54A DA0476278750187F68FBEA41017E1E58DF1A5A3D
m _{PL61}	70A457D1314A278625443EEB52520815EC92CEF17417B97440DCB531BC1CE83212F63270418 D0FBDE71F6DB9E0EA8772E1E4535B6633E4425
m _{PL62}	C388460AD54B36C4452CF0433BD347100ACCC24C79C535AD3E1F23FE0425E93A044C553BFA

Code ID	Basic Midamble Codes m_{PL} of length $P=456$
	116E09AA4BB32F13CFA76FBA1BC17520F45EFD44
m_{PL63}	0BAFCADCDF9AA2846681782CD3B90CA036A863C78EE1507620BC394D0C6804B4C97A15BC9C0D7B79E6892EA1BFF1A0DD9573A9213AB140D0D2
m_{PL64}	833B0226789A62882FCD27A30885E67872B1A1C2FA484AD498011599DD57E8E2A07A560B47167AA5F60EF47177DBB1632D5387A2896348640B
m_{PL65}	8F52820323ABA5E6C6B465821B621600B980E59F53A599DA5646BA103214336836CF17E3386CE4FB2BC5F25CCB30CF7F500546828EC8786B8E
m_{PL66}	E2E9A29C3C8207B9A4508FD2F667A159F068EEE8D00686F46EA904C3692C1D79DFF1B32E5103720D47B4B58AC35384A26087027E141B3126A8
m_{PL67}	70E7C39FD2D3AE1DCE341699A544D801A8688A6EE47C5CB3630022147DDC06241FC5337A348A462B2472DEC5E104DD520ADA5114DB065D4B0D
m_{PL68}	9E3483CAB164BD053C4971D4D87494CC689033D589EF80E5453376E4A8DCC02183B98C36B0FF7DDC0AD07FCE8B4D5164371BD03A2110AD1247
m_{PL69}	04DA1C649B0608938DAADD3FE920A4F681690C54505429DBDCDCF10067AB5714BCDDFE1F28692710F794765781C1D233344E119BEE8A8416DC
m_{PL70}	7A18D6D30BDF44410714C3DCA27D8F9EA8A542D87122205640B98313C91AD9A0B993A5A7BC3E035F93B88BBE6D4204BC82A9FA8D4C1A7618CF
m_{PL71}	EB9525E10265A48733C8E0E77E459310112A71DCA680F68AC044B64BC0A31D02EEA0F7ACAAAB7F1E574E94FEA2D1301CB14B03263DA8122B76
m_{PL72}	E706C6ED2D6F89153835079BE0C6D45310845EF2F9F6C6AE91B7419810508BA501C0148BF09955BAD90D6391BA8EBA5CEFBD23221CC75143D7
m_{PL73}	DF071A10AC4120CD1431590BEDCFF9483CA7047B19590D035D309240BDB4264E9A3A2761402EC97FD8BC51B4AF32E37FBC47162A2357D18751
m_{PL74}	F0F952B2238139F46D8254D1A2C1C22A16BA71EC0C0C900ED1442452D7F44C798BC65FF40671B88074BA0B74C6510996EEAC495C5B49C37DEB
m_{PL75}	1C86BD82EDA81FD65418D3837B5552A853791456D93B06C62C650D86CFBEC269AFFD772763064062C03751B9428C6DA2E60383025F9E404B70
m_{PL76}	B390978DD2552C88AABA7838489A6F5A8E9C41E95FFA2215819BF8A5BFE39C8A706CC658E549E966611B843A1468406C41C09D1560BEDA4F1B
m_{PL77}	1A69EC9D053C7E84BAE7A48CCC71857D0C6B06D1065E3EA4633B133AA022B8104F6EE7C69B6184B746C8822958B0A16686F27C8A0E3B4FEAD
m_{PL78}	C95B2070816DC97C6D8DD2583263E73F9AAAFD13F0548D2EBD835824418F11E54111005FB713AB234BE412347358281C7DE331EDD21B8BEA52
m_{PL79}	56D6408399F23C2ED85EE0F68111D69A91A3AD9A732AC57CA08F86CC28B3CF4E4B02EBBA0BCE5CAE5BACC4D52004070797C04093A84BB18DBA
m_{PL80}	E662E7043867BE250764DA0596D34A582A619B408B505E6211DD6286E93A37F95B1EA680C0C5F3E777E3F71E8D75495D59043217FC0E222E16
m_{PL81}	27D5E681C222297AD478A079EF12F1A98F744B66335303322EF8880B931FEBF8322F4302944E80BED468A0A516D410B183D863795992DA7DDB
m_{PL82}	5100336C05F9E5BF35201906C1C588858E0DAF56130DF5554B9AB21CA15311A90290624CD63E03F5EDA49DB7A0C32AB5F1CA427A2D5635FDA5
m_{PL83}	C696DC993BFAEA9A61B781B9C5C3F5CFAA4C8339D8B03A9B0387883D0482A41AC78D6522425959846E561D26A30FF79A205C801A85889736B2
m_{PL84}	D562297561AFF42D3168296C1153E4E39BE7B2EB0348BC704625AA08391235075EE0DE0A79AB03222FEDB27218C56F96EAC2F91CC8FCE64B12
m_{PL85}	DD0B6768FC01CC0A551F8ACC36907129623E975AB8B3FF58037F1859E2FA8C62C2D9D1E8506916029A2C3F8CAD9A26AE2CC652F48800859F5C
m_{PL86}	923920696EB3AB413786C4185482228BB83F6900D33A232D470BE198BBF086067B72613300C593B74251E2F079857ADBBCD86583A9DCAA6DC
m_{PL87}	B8EF30C797D8D2C4EF11244F137D806E556A436626D0115A621C92C34D166A68BCEDFA0040DA8FD6F987B1CD5C2AA1C1B045E64475F0F8DABD
m_{PL88}	E1887001D414405ED6419E9EE1D1D346D924ED57ADF04B31B7948099976B2D1501A60DFFB287AD44C8783DF0C1EA5AA5D273D1389C8EA22DCC
m_{PL89}	8C2E379A58AA96748141CA84C35987905F984A49D3AD9BFF7807AC244C16C1DF74343C2E1F25514F5A0954CFBB3C92E25EF783136844998AC5
m_{PL90}	78F8A99E0A54E27F51C0726FE7A11EB26B1E29FE65F55AC8AC58011465900B958488A90F6DF614A58431DC8B6C6B9A6F032EE0E0B1306EC4B4
m_{PL91}	88F7A31B7B20E0F05CA26E729B4F8A1933962D7BD7BE3E1EB130B28C794C0B4D01CADE09006FF97E80117509733F3A9DC225413A0AE08CA662
m_{PL92}	BE4DFCEAC18905AC8D5DA27A794F88A4D3058D2EFA3B075A819DEAE688EAF8940A653ED7104E7B403D490F0A9030264E1F12B8922C75775E61
m_{PL93}	5BA4B79FC4550234D8922963BF3537485E3C8745A5DB90D3E2E454B30FF61112F508155B7C2B3C4C628AF846240C2021ACDE547E5A41F666B8
m_{PL94}	00556D35649F7610AB24A43C4F16D6AC0571FD126F11880C5CD72100D730E4D6BB73C33F8

Code ID	Basic Midamble Codes m_{PL} of length $P=456$
	37FAF1072743B249ADA2E09598B1EB23F1180A7
m _{PL95}	7A0CC9F21BD69CF3023E944545C2176EF0D4F450B765C28359FB8A32137D043D0E5713E67B3F61320985D2C6106605081F87D2296321468A2F
m _{PL96}	DA669880995B0671201172BABFF141D5854A245E211879EF3038A7C84170DADBD368455F24653161E7886E15B253F93E3A3C568EFB17CDEB1A
m _{PL97}	4E294E53D1661C1F6F748302A7723DA951C00FDB8BEBBF67A68710BA0F1A255DFB1627059D41A23D3961726DE6FEB10E5D209CC4505B209812
m _{PL98}	73385DF701414E144768A67EF72924B1653479E962FB1554B7E54BC5284D9B3E41C0C133F878972230721918AA425501B920B204FECE0C7F8A
m _{PL99}	F4492160805F258CE592DF4D1200566F81D173458D78EA3ABED79A14AF88170DB1D4A9A5931D2B80C58C27FE17D806E3E6A66CDAAD09F118D4
m _{PL100}	44D562D9012D8B07B8F44596467C11A163982BB7EAEC184078B6B8CE46B5D7E17C39CEF576A025491183017FA09931D070B307B86524B03FF
m _{PL101}	FCAEEFCC49A13B4FFA12C0CC6A2B90CF4F57D78B1E98294B04675C2F0991661FDC61A452A247F8C29E0284AA21026F368307375AA2C3F1E12C
m _{PL102}	C486DF0510DCAD5AB86E178A686D398E11A0ECFAC5A326C10129257E5456B22FB8E147E9190D9929A5DFFE44715FA47D62F04CFC9B1C201414
m _{PL103}	C10AF383DC708E257E15A8AB337BCE684A2F4AC7A22DC2C25C277F8E8D0858E79317CDDD9AA2EA6CBE604D24AC0945026103E7B4126FD361A4
m _{PL104}	A5C60A181148D9A931B2DDDB9D169648BA54F366B4EFAE88F6861909EE0F07C037EE349D0EC59A823286E366CA3943589EEA7F828C3728085F
m _{PL105}	96136AEBD5E28462B0421DF292BA899FFA660D80EA01620D2C7490E5347127884AA3C3D1FF44BCEE6C29EC589CDEF200C5742C5964F8B2B52
m _{PL106}	40F63C04ACAD986255D1E16B769A6D4C11A1D075E804BDC0AC61923E9A67F5D7417756328072455F6E22B1C64E06F367D1B0808295C2D90E22
m _{PL107}	F4B82D413578C4888C5F002CF6D0E03778134A860436551FD57537E4CED334B3C9CEBACE615238271717AA762448B86FA53D2074BCE35658A7
m _{PL108}	BCCC92D72C920E685530591FC351743D1E23DE044BF81D32650406113E23ECC757FDE4E386B6E2E7195EE4969717A7BD0812AC312B33A54308
m _{PL109}	6ED59DE0D44370A861CE2B42CF5E578E764A682AB5777905EE027D7160490EDC6C28989B23805AA697FCD215CB401BC5E4D430624C01B16192
m _{PL110}	DE80C0E273B92CC3C5034F7A20DB3914643C430B425C8B9249EAF73ACE8C3BCF17957242CF534D87A67D4DC0252275262E737F4095450CFA14
m _{PL111}	9505C4FEF2A397D5059F4729D013292A8321FFFA929ACB0A210D0A13E13061227C44A68FBD8CE6B66CE3D783363CD039AB35EE52603E09B758
m _{PL112}	E8BE90D7F954B14D8002A4CAC20765ABEED80634498C836D79B0F9338DBC17B28F05CF4E79136779E1C55AA30B6215F890882887B3B53C23E2
m _{PL113}	9F4B622C1358AE5468DC31E4B2CA320E5E20458C1DE5405BF4F9AD7D45A5BCAA39EC0626FFFC698C16A009CCCB7A18A64E85E70BA71731BA24
m _{PL114}	B91B2624843CF48299AFC2B1442570B41F28F578530D1E322E0B54282372131C71ACB924E70768A243EEC3200E7A5EBFA77111D9FB07FEA8AE
m _{PL115}	965F42DDA3A4650FE2F5103932B68F166FA424B9F0F7045311D962C2A9F66B9BC6C66FB480F9800354E0C54A72251071422CF1DFC44F94C00C
m _{PL116}	08ADCE48699FC30FA0788073BDAADB9177BBB4C1CED41F93085218364B8BAD8488561EF0FE1B0DDAA403C602494CB35697D62AA0A2B93A64CF
m _{PL117}	9A313BED80B1220D77C8ADA4B2E0B3D284A5120A94B741380923C78D3AD32BC3E71EC6EEA520E9D447D8727697598BB987F17506F482003ABD
m _{PL118}	24C9AD4C14EFEC002A3473FCAB04E492F2E269161A2960BA8AF09FD710B444A40C4E8B138418E62301E91FBA97AFDC58759A76D00F676736C7
m _{PL119}	6514C7733711CE4942CD2123AB37186EB7FECB7E78ABB28744864942FCF4C0F810054AF55B1042EB53064F0857C61D85B2CF0D2DC5826AF22F
m _{PL120}	B2C80CDC83E48C36BC6FDAB8661208EAD392F3A0571BE41DFAD765E744932ADEA50061E66C05498A5381B2A1F1B446587089DC4E4A2DF03D82
m _{PL121}	639368BA75CC709A3D9F28EDA237E32C2017A9BF1E382045B9426AEE0A4049DCB4E1D7EBE4647B855212824557497CFA039885A3BA42F98F63
m _{PL122}	6A70DDC17D0C8024B1C853F0C1948561EF32510151BE0C63BCA9171F20217891D1021EE72586CAFF557F8973336913A94A2A699B8740B054B8
m _{PL123}	2E32E3A35CCD001172CE310B63B4E406126045A0FA3795BE3E3D9B56F72405FC94FD89946818BAECD24A61BABBBE2D23052AB01EF73CA0CF4A
m _{PL124}	829395C35205A480AC1351C25E234BF52D384A3DE1C5138A650A6F82F739757D812D9C38231AB9FD81AA0648B11F6F6113F9312C57624FC746
m _{PL125}	D98FFE19C0AAAAB0571A9075ECDFD3E7373F5255DC669116A8C6913F0123E598F930934C5F6A601C37C529C371A0C391B59AC5A9E286D04011
m _{PL126}	C1A108192BCE96C2430A63C189BB33856BE6B8B524703FCB205DAEF37EF544CD43CA09B618

Code ID	Basic Midamble Codes m_{PL} of length $P=456$
	1B417398083FF2F781BA4AE89A5CA291DB928D71
m_{PL127}	42568DF9F61849BF9E7DEE750604BE2E0BC16CC464B1CDE15015E01D6498E9F3E6D6950E58 24651F212BA0057CE9529B9CCAB88D8136B8545E

A.2 Basic Midamble Codes for Burst Type 2

In the case of burst type 2 (see section 5.2.2) the midamble has a length of $Lm=256$, which is corresponding to:

$K'=3$; $W=64$; $P=192$.

Depending on the possible delay spread cells are configured to use midambles which are generated from the Basic Midamble Codes (see table A-2)

- for all $k=1,2,\dots,K$; $K=2K'$ or
- for $k=1,2,\dots,K'$, only.

The cell configuration is broadcast on BCH.

The mapping of these Basic Midamble Codes to Cell Parameters is shown in TS25.223.

Table A-2: Basic Midamble Codes m_p according to equation (5) from section 6.2.3 for case of burst type 2

Code ID	Basic Midamble Codes m_{ps} of length $P=192$
m_{PS0}	5D253744435A24EF0ECC21F43AA5B8144FBDB348C746080C
m_{PS1}	9D7174187201B5CE0136B7A6D85D39A9DD8D4B00E23835E4
m_{PS2}	AE90B477C294E55D28467476C6011029CDE29B7325DF0683
m_{PS3}	BC8A44125F823E51E568641EC12A6C68EAFCFA2350E3233C
m_{PS4}	898B7317B830D207C9BC7B521D5715680824DC08347B2943
m_{PS5}	466C7482C8827655BC13F479C7C1417290679A9841297C4A
m_{PS6}	AC0734C27C7DC1B818A8492744290DFE866B0EBA62B0B56E
m_{PS7}	0A92106325B15A8C15FC3764724CE67A5056D50A77F9360E
m_{PS8}	AE69F62E23035083E6094B89493D33E06FDB6532D473A280
m_{PS9}	B485D4E3614C9C373EA1365FA6FA890E9844084EBA90EB0C
m_{PS10}	66182885E2D28360D2FEAB842C65304FFC956CE8DC8A90C7
m_{PS11}	CC30A9B0A742FCC1E9A408415368391F1299AE3CB6509FE
m_{PS12}	673928915886947F464FDDAAD29A07D182328EBC5839089A
m_{PS13}	4418861C14D62B46EE6D70D4BF05A3ED801A01BD6CDC5235
m_{PS14}	DAD62DC88F52F2D140062C2330BE6540E6F86192322AFB04
m_{PS15}	A2122BAF24529CEA9855FB43CE40923E7CA7B30D92E40702
m_{PS16}	6C44AB41E11F54B0929DF65673BD231F92A380132D9F1712
m_{PS17}	1DC2742E756CDA6421340D0087DD087A615E4B8688CB2F75
m_{PS18}	2E0105328B56E9E07D9B5A62F38B08AF8D8C2817B54F3302
m_{PS19}	88315EC30A94CA4EDB2C77079D9BD810A2E280B50DABB213
m_{PS20}	440E0093D28CB2B2B0A95D18CEB4AB934C33FA45C1CFC7B0
m_{PS21}	CC9BF85D41A96A6EC314F9611D5E1C0672556C8850801BB4
m_{PS22}	1ABEA04C99BC26972715F01957C0B6B959CC71CD88120817
m_{PS23}	EC5A33DA0BA4470442C5CB324A8E47B0A9F7968FC8108EE8
m_{PS24}	F82086290271DB446B5B1DC15D9BE96414B19B3D5E0F540C
m_{PS25}	11A1A790D6958FD3A9157DF1E05D1378248CA201EBCC7592
m_{PS26}	AA8564882231907BCE78092DC6C9DD4F5A0E4A34AFCFB809
m_{PS27}	912EE2238212F87BC7CDA7F30441ED184A6AA954EC4D20C8
m_{PS28}	2D200D8B8891B804673E380A1AF5AB875986E29D37D3FDC9
m_{PS29}	75E086B6C818423491BF9D6365C52FD1C5E42A576E268170
m_{PS30}	50ABDF27DA2A3701470186B699118E16DDB0D10F705607B1
m_{PS31}	656C0692B4E22023590A906D2A74DFD471C883A7B1E0B3A2
m_{PS32}	C21FDACD09A3CDCE74C4794010A3E45769B142505C56A0E6
m_{PS33}	CD9392A87C2D4D7CE5801CDDA8A76339B6F900F008B290E2
m_{PS34}	956426FEFD8B8D52073E87984E10C4D255064E1372C04A24
m_{PS35}	C4F4D6DF1B754AD6063FD10C331C1428ABB27B0700134B94
m_{PS36}	B65548082B34E9FAF43F33C4070F79099758CFD41B491A11
m_{PS37}	C8317EA111A82B04E78B88B864B1EF5D711BBEB4A0527036
m_{PS38}	8FB7AD1188E8D1A5219845013672560FD38904E70537403B
m_{PS39}	B41A324E0D80AA0598A8D391C1D7FFC82B4A075218E98EC3
m_{PS40}	49A6350A62E208B011E86528B9A481A0E76D723F6675FF82

Code ID	Basic Midamble Codes m_{PS} of length $P=192$
m _{PS} 41	C344C8C23C42A7B7442E6022E95AE4B08A4BFA786F35F911
m _{PS} 42	28F430CF67D69C9DF60E25656413BC5F932A022DB1406C44
m _{PS} 43	2FA5D70CF0FED4213F32116051450391C2A627D9B670C428
m _{PS} 44	959537D988FDD4F1360B4E84701AE5409229C30EDF8BC404
m _{PS} 45	CDD2E0450F9EC12F81391AD4633CB29F315B4A0A890A9A22
m _{PS} 46	158776A20B4B82C563EC08F086830EA66DBD2DCCB4DF6026
m _{PS} 47	431FCACBE48208975950342709D11F19AD5FB047F3B440C9
m _{PS} 48	86B141AC571BA6B42653B12FF04D4F0E6C81F3EB608660A2
m _{PS} 49	86D297ABD34E8510F6CDB0EA617F1F1051C8799117B02211
m _{PS} 50	80B2D9530B34E781311D95CFA3857F277CC07014D324AF5A
m _{PS} 51	2B607B93FD8B45601C1E574E14CFC6912C22AEC1045ADC49
m _{PS} 52	D234C5C45E105A837E6DD74BC4E534523A20317BA0625A29
m _{PS} 53	768CCDB3E2A7A2B863128382590946B25472BE2BFFC40641
m _{PS} 54	3DA38212E0A987EE1F665D4E13C2AA4446E00A76C948A073
m _{PS} 55	09173135E4A2CFC8F2678750AB5257110906F013587BDE82
m _{PS} 56	522E070B266F35E99C1F3C42D2017F8E415550492B72F086
m _{PS} 57	D63E4BD805262A3DEF05C7D86C422E5048921E5531784132
m _{PS} 58	564AF806E28131611E5F884229265D446A50E1E488EAFBBA
m _{PS} 59	A2603E009D3D30147727B750C35C62299AF754D3E4A54E1C
m _{PS} 60	938504B02599D33E28246E4271C375AE81A3BBE8D3F8A920
m _{PS} 61	461516B2CAC6FC42A4B707CC6073BBE573C014892C811776
m _{PS} 62	29186DE4CCAAB2CD0100BB19EA595879D63F0F0CFA881AA5
m _{PS} 63	A064B449CB784A91B803369CDC5EF61A670AAC044BA3E68
m _{PS} 64	8719C454D88FF5149DB943CB6CADA01D0B9664B357A18203
m _{PS} 65	A27EC68720F00A714AA2C45A7EF232286984D7B193F5C916
m _{PS} 66	AC8361676AB424E48F0789082B0CD2EFB8D2E627D041DD66
m _{PS} 67	ABA1BEB0064733A0620906BF2B29C95883F069D7E4C35D39
m _{PS} 68	9E22EEDED47D92CA1D0B7530EC6062287BD83A04874AE00C
m _{PS} 69	0BADEF288B20F5686C5DE3A71219AC2172054326BE831696
m _{PS} 70	953801EB2AF58C2F80E49A6CC46085CB554243E3B3BBC8C
m _{PS} 71	333A504C51C8FAC5025994565C3F600F154F64FAEF4EA484
m _{PS} 72	A6583E19647662005474153A6F8DD88A473853E94B720CE7
m _{PS} 73	90ACAF707D18AF34F5848C58166830AF620ACDC1B2DFDDA8
m _{PS} 74	39C5C598A374EA82F3F83378258248DAD3808812DD0E74BB
m _{PS} 75	F79525DE694629346D73F6256CC0F140F82603197AAA1844
m _{PS} 76	B8C2A8F139097699A693022E78588D4058DB0A65FF52F813
m _{PS} 77	449B50C2A52996FA5A828A907F30F9F460EE3D99930DF890
m _{PS} 78	62CEC9574D30184BCB4F94EECF0CC23D2D2A8D0003F0AA33
m _{PS} 79	B56D258889703F76A0738EE3A7D355994159A4851833E198
m _{PS} 80	65894AA54C0F6C9A206521C9FC379A8AAF6E621C03CF849C
m _{PS} 81	2D47F3414E30CC02C6835D95C9BA204488F0FFCB4852677D
m _{PS} 82	12BE4DD8B906B584010F8A330AB67B278E8642FA33D51B68
m _{PS} 83	BC928A90A4B10906CAEE638BF768E08542F48F1676006DF0

Code ID	Basic Midamble Codes m_{PS} of length $P=192$
m _{PS} 84	30C544E437C8ADA143566CD1BC4E9E7BA84139A08505C2F4
m _{PS} 85	84FD5B05506192B753FBA2C719B584E0EDA01814999867D2
m _{PS} 86	191F14DD00034E03AB5BB4342F1138B2CD33784E60CFD75A
m _{PS} 87	B8ACE7990B6A98A80A61162C4D2D5F88F24E8F7DE4207590
m _{PS} 88	EC1DBE72E8EED0C61054FC2695422AC0AD2D888265B21AB0
m _{PS} 89	9A1B4CA467AB7E082AF4278E44D177EA78424508C23E8B08
m _{PS} 90	999EE541C608164AC975214F3A37A677FC2CA03E2C2A4B20
m _{PS} 91	1BDCC20265031432917A2EB828FB356A22DF9CB609C0F8F3
m _{PS} 92	EB4A81859C93338B8A1B87C02C815AE09D765F6F2249B958
m _{PS} 93	E6A5D1629F4CF09A1F280DE0C480D4C73B26ADE321A50AEE
m _{PS} 94	BAAB7286DD24C80B15A7958039B904F1CA83C310C8C7AFF2
m _{PS} 95	12220F72619E983717C68FFE1C4148F2354B7B1955B65620
m _{PS} 96	A198706E24FAA08BD09EE392414816038E667BB34307D6B2
m _{PS} 97	30B3493B4C035881A7A722E4546527AAE787FA2C0893AC46
m _{PS} 98	5A7318126522843DCB7F00A2D9F9BA8F88963E4152BC923C
m _{PS} 99	844844B0CACAB702C332CE2692B4166F4B0C63E62BF151BF
m _{PS} 100	B8297389526410313692F861DC60DA86A23607F7DDE24755
m _{PS} 101	6C1144CF8BC01538D655D29ED62DE6E74A3180EC905BF1E0
m _{PS} 102	E9DB3221FACFC5C88691A7013EF09672A130D52C3413AAE2
m _{PS} 103	2FD0508615EC4CD4BF18ADD46D777078869130C8921A4F0E
m _{PS} 104	40911B4E0525AC874228F6EF642E59154730CB187C7E417A
m _{PS} 105	2034C6A027D4D850F5184AA64C3153231F4651B616BBFCF9
m _{PS} 106	57833235451525A1DFA213FCE0B419B6494BC7B99F488410
m _{PS} 107	6DC3D57F2E39158D036825F8804810D77CA1ECA610ECD894
m _{PS} 108	F5C50DE43AA7B731CAB7683524021701F97650499A7070E4
m _{PS} 109	F2184D2699785442E09FA22CC2D60A5A13FFF22AE660A470
m _{PS} 110	EF0029DE0D79207205458CF4D7328E81A93518D93C9A74BD
m _{PS} 111	9D6D8992482FB885AA5E878C3BA2045538B09886C23CDC2D
m _{PS} 112	C0A5AB67D1CEA126F6476C75443F0A11CBE749412EF03104
m _{PS} 113	1853A5C20CDF968C5A180D8EB5E72BF15517D06680D98412
m _{PS} 114	8CEA1223227ADF37D0DAAB320906E1C79029F480D25181A7
m _{PS} 115	5561038E96A658EF3EC665612FF92B064065D1ACC1F54812
m _{PS} 116	C55A6263F08D664A1E53584560DFF5E611640D8281D9A843
m _{PS} 117	4386A8EA59124D043F29056A4598735A4FC7BC1119B90C1
m _{PS} 118	D6571B20668BED50BD7C80388C162632BCB069AA67C7FC22
m _{PS} 119	4F9F09ABBC1391EC2CCA5359FB52250E533BF04324154106
m _{PS} 120	662659F42188C9453F6E6DF00C579627045DA1461A3A0EA5
m _{PS} 121	8DCC9274C0C2A9BA6096BF27FACA542CD01CA8653D60A80F
m _{PS} 122	5C1210A1E50E505F6B73C90156C9D9F19AE2310BBD820DF0
m _{PS} 123	B1E0A7CE26202E223D4FC06D5C9BBA4E5F6D98204D2D5286
m _{PS} 124	DB506776958E34552F7E60E4B400D836153218F918E22FA6
m _{PS} 125	ECAA60300439B2360B2AC3C43FB6241ACDE5055B295FA71C
m _{PS} 126	BF1E6D9AA9CA4AC092BE60500C77D0DC7A6A236520F86722

Code ID	Basic Midamble Codes m_{PS} of length $P=192$
m_{PS127}	051C5FA122845A30B4EC306B38016B45667C7754F92F13A0

A.3 Association between Midambles and Channelisation Codes

The following mapping schemes apply for the association between midambles and channelisation codes if no midamble is allocated by higher layers. Secondary channelisation codes are marked with a (*). These associations apply both for UL and DL.

A.3.1 Association for Burst Type 1 and K=16 Midambles

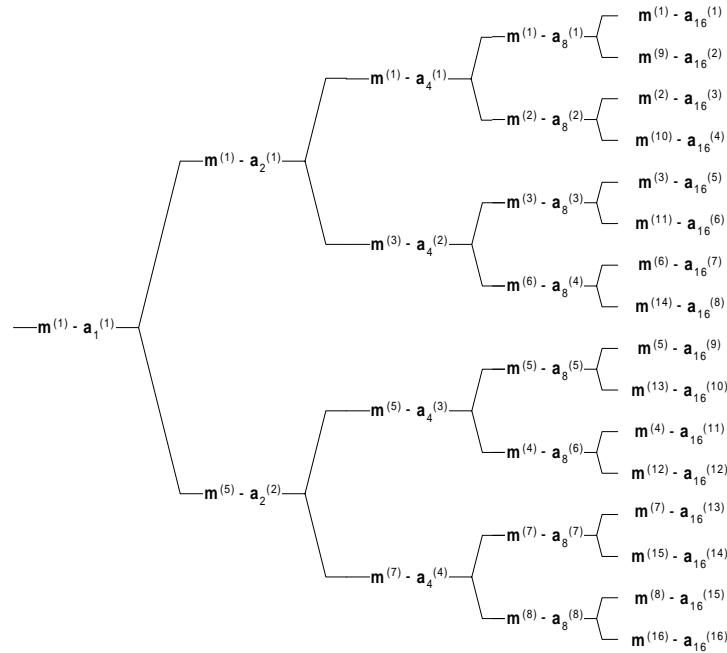


Figure A-1 Association of Midambles to Spreading Codes for Burst Type 1 and K=16

A.3.2 Association for Burst Type 1 and K=8 Midambles

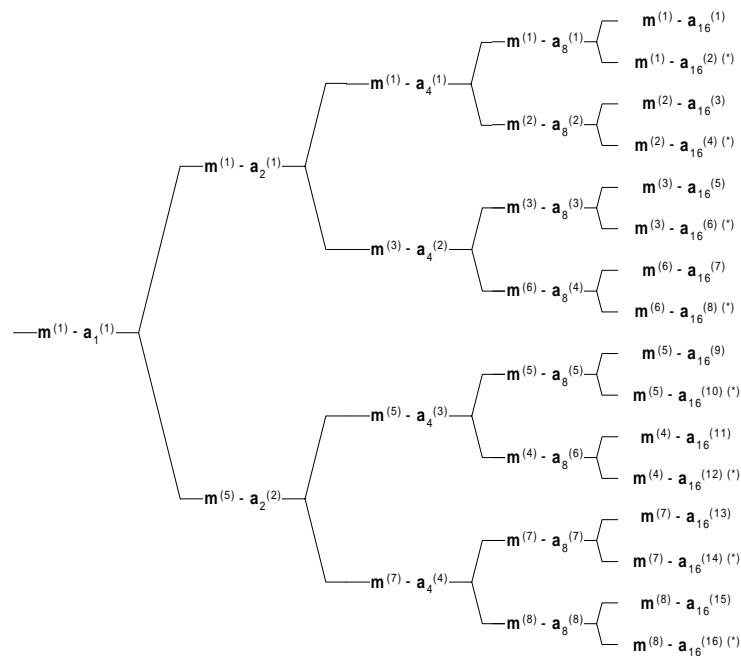


Figure A-2 Association of Midambles to Spreading Codes for Burst Type 1 and K=8

A.3.3 Association for Burst Type 1 and K=4 Midambles

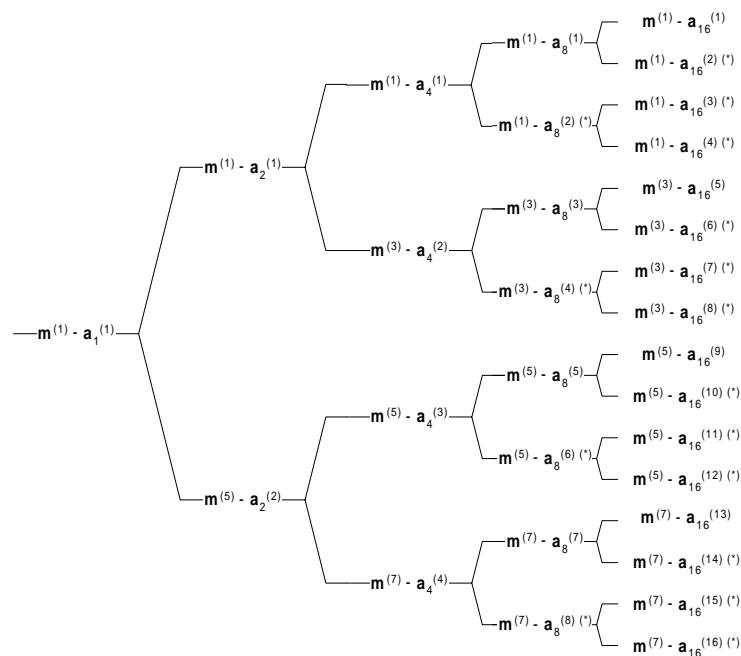


Figure A-3 Association of Midambles to Spreading Codes for Burst Type 1 and K=4

A.3.4 Association for Burst Type 2 and K=6 Midambles

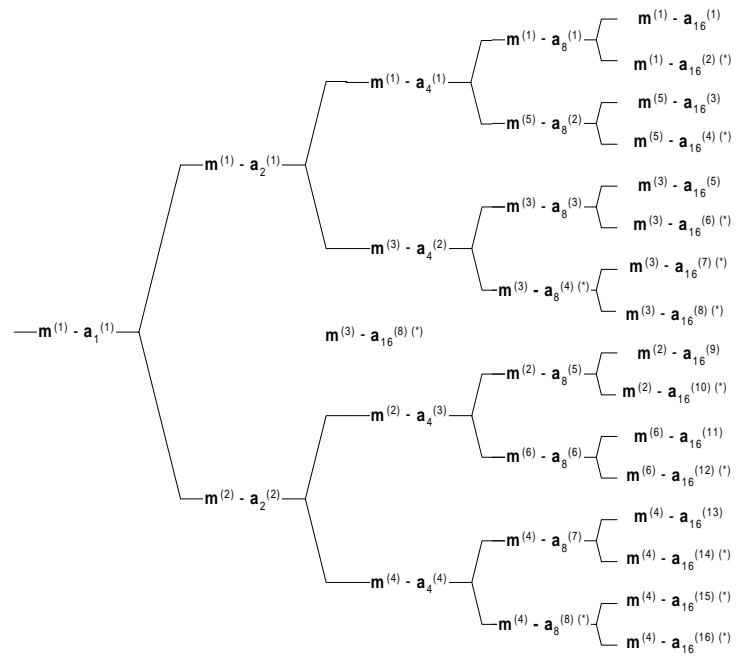


Figure A-4 Association of Midambles to Spreading Codes for Burst Type 2 and K=6

A.3.5 Association for Burst Type 2 and K=3 Midambles

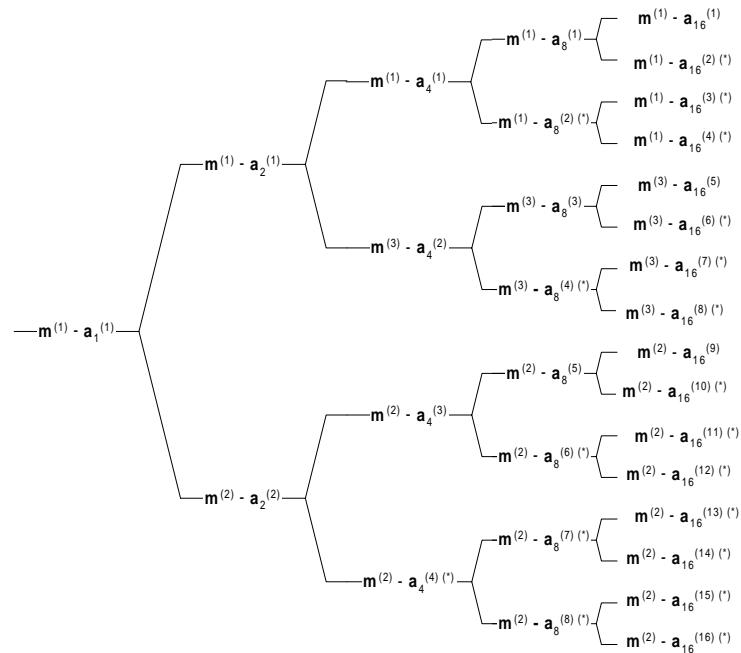


Figure A-5 Association of Midambles to Spreading Codes for Burst Type 2 and K=3

Note that the association for burst type 2 can be derived from the association for burst type 1, using the following table:

Burst Type 1	m(1)	m(2)	m(3)	m(4)	m(5)	m(6)	m(7)	m(8)
Burst Type 2	m(1)	m(5)	m(3)	m(6)	m(2)	m(4)	-	-

Annex B (Informative): CCPCH Multiframe Structure

In the following figures B.1 to B.3 some examples for Multiframe Structures on Primary and Secondary CCPCH are given. The figures show the placement of Common Transport Channels on the Common Control Physical Channels. Additional S-CCPCH capacity can be allocated on other codes and timeslots of course, e.g. FACH capacity is related to overall cell capacity and can be configured according to the actual needs. Channel capacities in the annex are derived using bursts with long midambles (Burst format 1). Every TrCH-box in the figures is assumed to be valid for two frames (see row 'Frame #'), i.e. the transport channels in CCPCHs have an interleaving time of 20msec.

The actual CCPCH Multiframe Scheme used in the cell is described and broadcast on BCH. Thus the system information structure has its roots in this particular transport channel and allocations of other Common Channels can be handled this way, i.e. by pointing from BCH.

Physical channels ... (TDD)

45

TS 25.221 V1.0.1

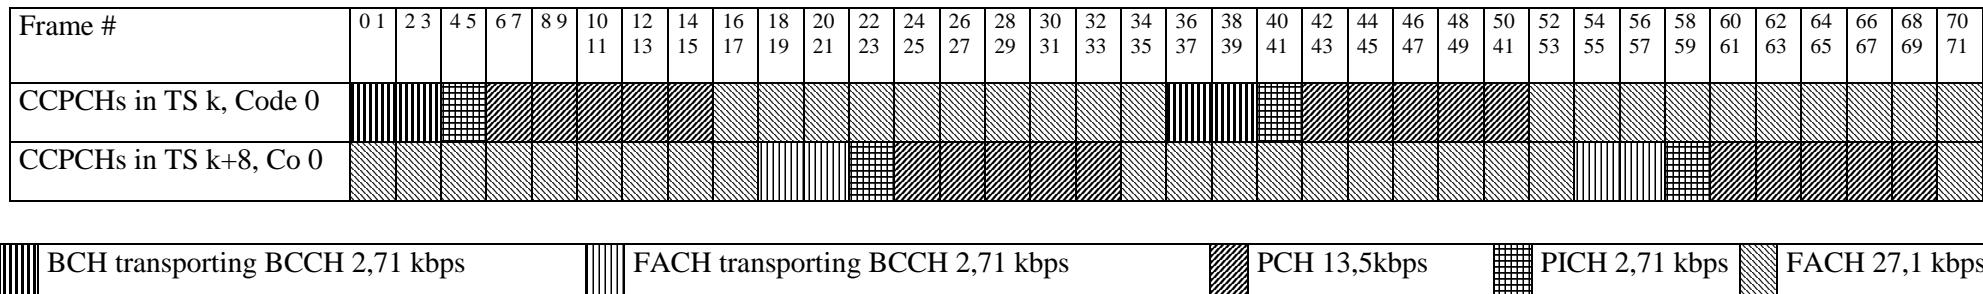


Figure B.1: Example for a multiframe structure for CCPCHs that is repeated every 72th frame.

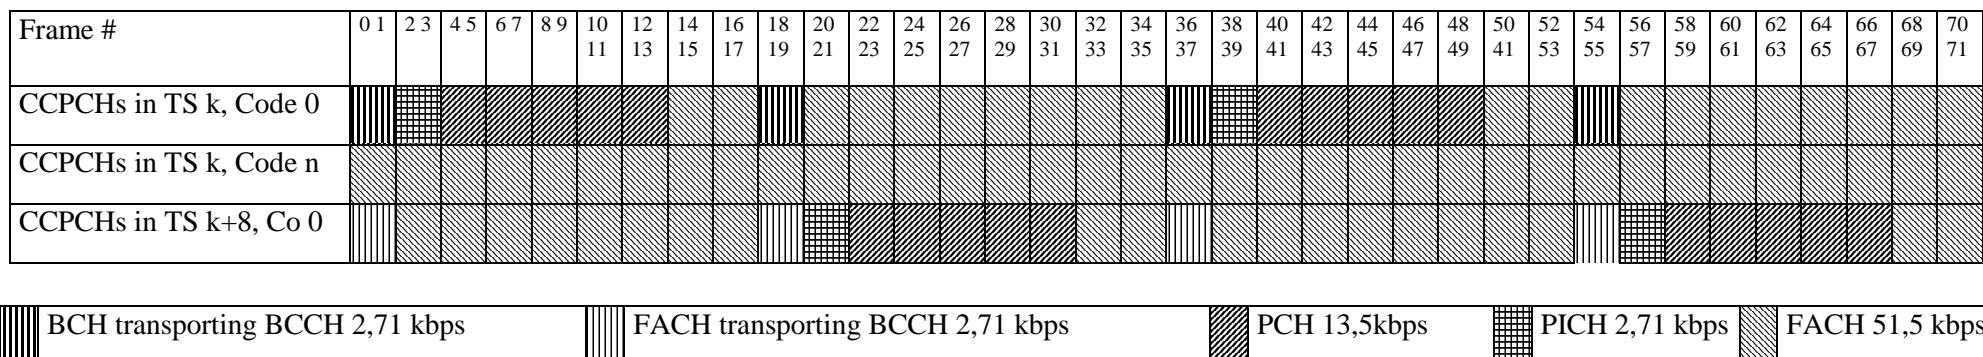


Figure B.2: Example for a multiframe structure for CCPCHs that is repeated every 72th frame, n=1...7

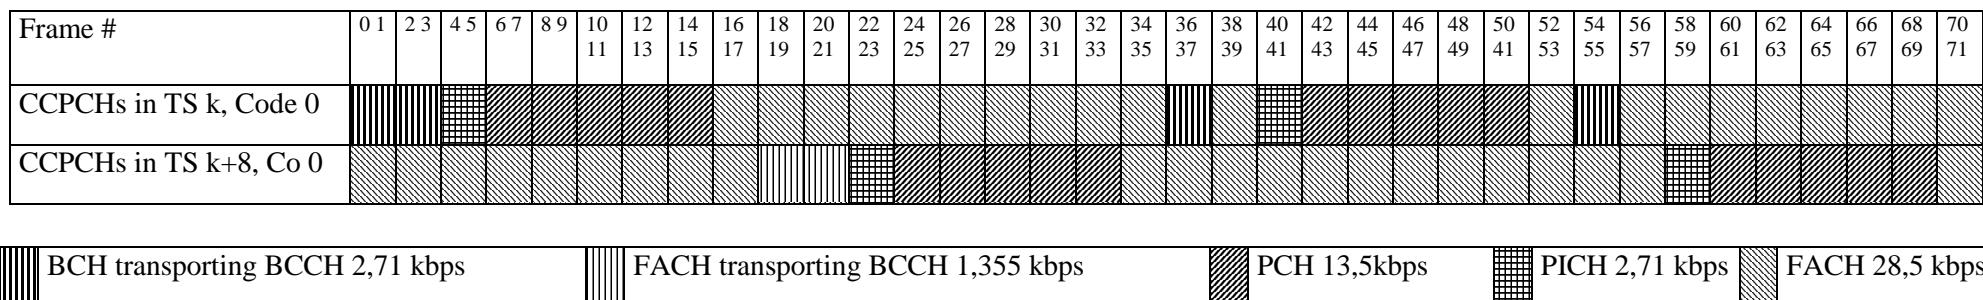


Figure B.3: Example for a multiframe structure for CCPCHs that is repeated every 72th frame.

Annex C (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_05	-	-	RP-99591	3.0.0	Approved at TSG RAN #5 and placed under Change Control
RAN_06	3.0.0	001	RP-99691	3.1.0	Primary and Secondary CCPCH in TDD
RAN_06	3.0.0	002	RP-99691	3.1.0	Removal of Superframe for TDD
RAN_06	3.0.0	006	RP-99691	3.1.0	Corrections to TS25.221
RAN_06	3.0.0	007	RP-99691	3.1.0	Clarifications for Spreading in UTRA TDD
RAN_06	3.0.0	008	RP-99691	3.1.0	Transmission of TFCI bits for TDD
RAN_06	3.0.0	009	RP-99691	3.1.0	Midamble Allocation in UTRA TDD
RAN_06	3.0.0	010	RP-99690	3.1.0	Introduction of the timeslot formats to the TDD specifications
-	3.1.0	-	-	3.1.1	Change history was added by the editor

History

Document history		
V3.1.1	January 2000	Publication