

ETSI TS 131 101 V13.1.0 (2016-01)



**Universal Mobile Telecommunications System (UMTS);
LTE;
UICC-terminal interface;
Physical and logical characteristics
(3GPP TS 31.101 version 13.1.0 Release 13)**



Reference

RTS/TSGC-0631101vd10

Keywords

LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	6
Introduction	6
1 Scope	7
2 References	7
3 Definitions, symbols, abbreviations and coding.....	8
4 General 3GPP platform requirements	8
4.1 GSM/USIM application interaction and restrictions	8
4.2 3GPP platform overview	8
4.3 TS 102 221 UICC/terminal interface.....	9
4.4 TS 102 600 Inter-Chip USB UICC/terminal interface	9
4A Physical Characteristics.....	9
5 Physical and logical characteristics	9
5.1 Transmission speed	9
5.2 Voltage classes	9
5.3 File Control Parameters (FCP).....	10
5.3.1 Minimum application clock frequency	10
5.4 Interface protocol	10
5A Electrical specifications of the UICC – Terminal interface	10
5A.1 Class A operating conditions.....	10
5A.2 Class B operating conditions	10
5A.3 Class C operating conditions	10
6 Application protocol.....	10
6A Initial communication establishment procedures	10
6A.1 UICC activation and deactivation.....	10
6A.2 Supply voltage switching	10
6A.3 Answer To Reset content	11
6A.3.1 Coding of historical bytes	11
6A.3.2 Speed enhancement.....	11
6A.3.3 Global Interface bytes.....	11
6A.4 PPS procedure	11
6A.5 Reset procedures	11
6A.6 Clock stop mode.....	11
6A.7 Bit/character duration and sampling time.....	11
6A.8 Error handling	11
6A.9 Compatibility.....	11
7 User verification and file access conditions	12
7A Transmission protocols.....	12
7A.1 Physical layer	12
7A.2 Data link layer	12
7A.3 Transport layer	12
7A.4 Application layer	12
8 Application and file structure	13
8.0 General	13
8.1 Contents of the EFs at the MF level	13

	File types	13
8.3	File referencing	13
8.4	Methods for selecting a file	13
8.5	Application characteristics	13
8.6	Reservation of file IDs	14
8.7	Logical channels.....	14
8.8	Shareable versus not-shareable files.....	14
8.9	Secure channels.....	14
9	Security features.....	14
9.1	Supported security features	14
9.2	Security architecture.....	14
9.3	Security environment	14
9.4	PIN definitions	14
9.5	PIN and key reference relation ship	14
9.6	User verification and file access conditions	14
10	Structure of commands and responses	15
10.1	Command APDU structure.....	15
10.1.1	Coding of Class Byte	15
10.1.2	Coding of Instruction Byte	15
10.1.3	Coding of parameter bytes.....	16
10.1.4	Coding of Lc byte	16
10.1.5	Coding of data part	16
10.1.6	Coding of Le byte	16
10.2	Response APDU structure.....	16
10.2.1	Status conditions returned by the UICC	16
10.2.1.1	Normal processing	16
10.2.1.2	Postponed processing.....	16
10.2.1.3	Warnings	16
10.2.1.4	Execution errors	16
10.2.1.5	Checking errors	16
10.2.1.5.1	Functions in CLA not supported	16
10.2.1.5.2	Command not allowed.....	16
10.2.1.5.3	Wrong parameters	16
10.2.1.6	Application errors	17
10.2.2	Status words of the commands	17
10.3	Logical channels.....	18
11	Commands.....	18
11.1	Generic commands	18
11.1.1	SELECT.....	18
11.1.1.1	Functional description.....	18
11.1.1.2	Command parameters and data	18
11.1.1.3	Response Data.....	18
11.1.1.4	File control parameters.....	18
11.1.1.4.1	File size.....	18
11.1.1.4.2	Total file size	18
11.1.1.4.3	File Descriptor.....	18
11.1.1.4.4	File identifier	18
11.1.1.4.5	DF name	18
11.1.1.4.6	Proprietary information	18
	Security attributes.....	19
11.1.1.4.8	Short file identifier	19
11.1.1.4.9	Life cycle status integer.....	19
11.1.1.4.10	PIN status template DO	19
11.1.2	STATUS	19
11.1.3	READ BINARY	19
11.1.4	UPDATE BINARY	19
11.1.5	READ RECORD	19
11.1.6	UPDATE RECORD	19
11.1.7	SEARCH RECORD	19
11.1.8	INCREASE.....	19

11.1.9	VERIFY PIN	19
11.1.10	CHANGE PIN	20
11.1.11	DISABLE PIN	20
11.1.12	ENABLE PIN	20
11.1.13	UNBLOCK PIN.....	20
11.1.14	DEACTIVATE FILE.....	20
11.1.15	ACTIVATE FILE.....	20
11.1.16	AUTHENTICATE.....	20
11.1.17	MANAGE CHANNEL.....	20
11.1.18	GET CHALLENGE.....	20
11.1.19	TERMINAL CAPABILITY	20
11.1.20	MANAGE SECURE CHANNEL.....	20
11.1.21	TRANSACT DATA	20
11.2	CAT commands.....	21
11.3	Data Oriented commands	21
12	Transmission oriented commands	21
13	Application independent files.....	21
14	Application independent protocol	21
14.1	Application independent protocol	21
14.2	CAT commands.....	21
15	Support of APDU-based UICC applications over USB	21
Annex A (normative):	UCS2 coding of Alpha fields for files residing on the UICC	22
Annex B (informative):	Main states of a UICC	23
Annex C (informative):	APDU protocol transmission examples.....	24
Annex D (informative):	ATR examples	25
Annex E (informative):	Security attributes mechanisms and examples.....	26
Annex F (informative):	Example of contents of EF_{ARR} '2F06'	27
Annex G (informative):	Access Rules Referencing (ARR).....	27
Annex H (normative):	List of SFI Values.....	28
Annex I (informative):	Resets and modes of operation	29
Annex J (informative):	Example of the use of PINs	30
Annex K (informative):	Examples of the PIN state transition on multi verification capable UICC	31
Annex L (informative):	Examples of SET DATA and RETRIEVE DATA usage.....	32
Annex M (informative):	Examples of ODD AUTHENTICATE instruction code usage	33
Annex N (informative):	Change history	34
History		35

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document defines a generic Terminal/Integrated Circuit Card (ICC) interface for 3GPP applications. The present document is based on ETSI TS 102 221 [1], which defines a generic platform for any IC card application. The functionality provided by this platform may be operated either over the electrical interface specified in ETSI TS 102 221 [1], or by transporting APDUs over the Inter-Chip USB Terminal/ICC interface specified in ETSI TS 102 600 [7].

Requirements that are common to all 3GPP smart card based applications are also listed in this specification.

The aim of the present document is to ensure interoperability between an ICC and a terminal independently of the respective manufacturer, card issuer or operator. The present document does not define any aspects related to the administrative management phase of the ICC. Any internal technical realisation of either the ICC or the terminal is only specified where these are reflected over the interface.

Application specific details for applications residing on an ICC are specified in the respective application specific documents.

1 Scope

The present document specifies the interface between the UICC and the Terminal for 3G telecom network operation.

The present document specifies:

- the requirements for the physical characteristics of the UICC;
- the electrical interface between the UICC and the Terminal;
- the initial communication establishment and the transport protocols;
- the model which serves as a basis for the logical structure of the UICC;
- the communication commands and the procedures;
- the application independent files and protocols.

The administrative procedures and initial card management are not part of the present document.

For the avoidance of doubt, references to clauses of ETSI TS 102 221 [1] include all the subclauses of that clause, unless specifically mentioned.

The target specification ETSI TS 102 221 [1] contains material that is outside of the scope of 3GPP requirements and the present document indicates which parts are in the scope and which are not.

A 3GPP ME may support functionality that is not required by 3GPP, but the requirements to do so are outside of the scope of 3GPP.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ETSI TS 102 221 V13.0.0: "Smart Cards; UICC-Terminal interface; Physical and logical characteristics".
- [2] 3GPP TS 31.102: "Characteristics of the USIM Application".
- [3] ETSI TS 101 220: "Smart cards; ETSI numbering system for telecommunication application providers".
- [4] Void.
- [5] ITU-T Recommendation T.50: "International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) - Information technology - 7-bit coded character set for information interchange".
- [6] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols; Stage 3".
- [7] ETSI TS 102 600 V7.6.0: "Smart cards; UICC-Terminal interface; Characteristics of the USB interface".

[8] 3GPP TS 31.111: "USIM Application Toolkit (USAT)".

3 Definitions, symbols, abbreviations and coding

All definitions, symbols, abbreviations applicable to the terminal are specified in ETSI TS 102 221 [1] and ETSI TS 102 600 [7].

The coding of Data Objects in the present document is according to ETSI TS 102 221 [1].

'XX': Single quotes indicate hexadecimal values. Valid elements for hexadecimal values are the numbers '0' to '9' and 'A' to 'F'.

Within the context of the present document, the term "terminal" used in ETSI TS 102 221 [1] refers to the Mobile Equipment (ME).

Within the context of the present document, the term "NAA" used in ETSI TS 102 221 [1] refers to the (U)SIM or the ISIM.

4 General 3GPP platform requirements

4.1 GSM/USIM application interaction and restrictions

Activation of a USIM session excludes the activation of a GSM session. In particular, this implies that once a USIM application session has been activated, commands sent to the UICC with CLAss byte set to 'A0' shall return SW1SW2 '6E 00' (class not supported) to the terminal.

Similarly, activation of a GSM session excludes the activation of a USIM session.

At most one USIM session can be active at the same time.

4.2 3GPP platform overview

The UICC/terminal interface shall support the interface specified in ETSI TS 102 221 [1]. In addition, the UICC/terminal interface may support the Inter-Chip USB interface defined in ETSI TS 102 600 [7].

3GPP ICC based applications (e.g. USIM, USIM Application Toolkit, ISIM, SIM) are supported over both interfaces (see figure 1).

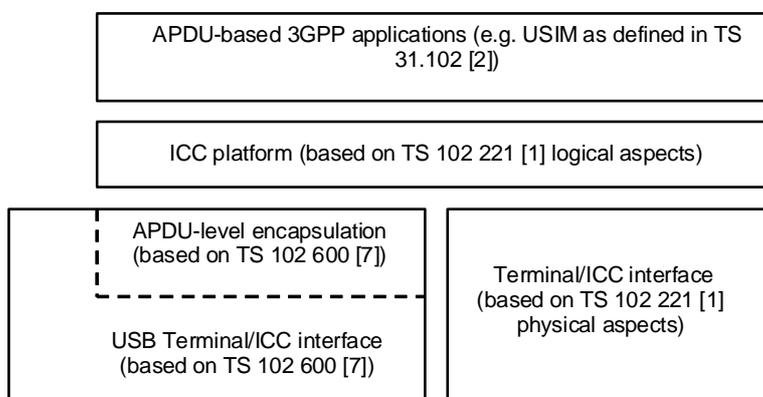


Figure 1: Terminal/UICC interface

4.3 TS 102 221 UICC/terminal interface

The UICC/terminal interface shall comply with all requirements stated in ETSI TS 102 221 [1]. Where options are indicated in ETSI TS 102 221 [1], the present document specifies which options are to be used for a TS 102 221 UICC/terminal interface where the UICC supports a 3GPP application.

4.4 TS 102 600 Inter-Chip USB UICC/terminal interface

If the Inter-Chip USB UICC/terminal interface is supported, it shall comply with ETSI TS 102 600 [7]. Where options are indicated in ETSI TS 102 600 [7], the present document specifies which options are to be used for an Inter-Chip USB UICC/terminal interface where the UICC supports a 3GPP application.

The protocol stack for APDU-level exchanges that are described in ETSI TS 102 600 [7] allow the transmission of APDUs. USB UICCs and USB UICC-enabled terminals shall comply with the functionality of the TS 102 221 interface. Where options are indicated in ETSI TS 102 221 [1], the present document specifies which options are to be used for APDU-based applications where the UICC supports a 3GPP application.

The mapping of APDU into TPDU (see ETSI TS 102 221 [1] clause 7.3.1.1) and transmission oriented commands (see ETSI TS 102 221 [1] clause 12) do not apply in the USB context as the APDU commands and responses are transmitted over USB as encoded at the application layer (i.e. C-APDU and R-APDU are directly encapsulated).

In the context of UICC applications running over USB, the card activation and deactivation process, the cold and warm reset procedures and the request for additional processing time as described in ETSI TS 102 221 [1] shall be performed by USB commands as described in ETSI TS 102 600 [7]. Any reference to the above procedures shall be interpreted in a USB context according to ETSI TS 102 600 [7]. When an ATR is received then the corresponding provisions and error handling procedures of ETSI TS 102 221 [1] apply.

4A Physical Characteristics

The provisions of ETSI TS 102 221 [1] clause 4 apply.

The usage of contact C6 for contactless as defined in ETSI 102 221 [1] is not required by 3GPP. This impacts the following sub-clauses:

ETSI TS 102 221 [1] sub-clause 4.5.1.1

ETSI TS 102 221 [1] sub-clause 4.5.1.2

ETSI TS 102 221 [1] sub-clause 4.5.2.1

ETSI TS 102 221 [1] sub-clause 4.5.2.2

ETSI TS 102 221 [1] sub-clause 4.5.3

5 Physical and logical characteristics

5.1 Transmission speed

See clause 6A.3.2.

5.2 Voltage classes

See clause 6A.2.

5.3 File Control Parameters (FCP)

See clause 11.1.1.4.

5.3.1 Minimum application clock frequency

See clause 11.1.1.4.6.

5.4 Interface protocol

See clause 6A.3.

5A Electrical specifications of the UICC – Terminal interface

The provisions of ETSI TS 102 221 [1] clause 5 apply.

5A.1 Class A operating conditions

Class A operating conditions as specified in ETSI TS 102 221 [1] clause 5.1 is not required by 3GPP.

3G MEs shall not support class A operating conditions as specified in ETSI TS 102 221 [1] clause 5.1 on the ME – UICC interface.

5A.2 Class B operating conditions

The provisions of ETSI TS 102 221 [1] clause 5.2 apply.

5A.3 Class C operating conditions

The provisions of ETSI TS 102 221 [1] clause 5.3 apply.

6 Application protocol

See clause 7A.4.

6A Initial communication establishment procedures

6A.1 UICC activation and deactivation

The provisions of ETSI TS 102 221 [1] clause 6.1 apply.

6A.2 Supply voltage switching

The provisions of ETSI TS 102 221 [1] clause 6.2 apply.

In addition, a UICC holding a 3GPP application shall support at least two consecutive voltage classes as defined in ETSI TS 102 221 [1] clause 6.2.1, e.g. AB or BC. If the UICC supports more than two classes, they shall all be consecutive, e.g. ABC

6A.3 Answer To Reset content

The provisions of ETSI TS 102 221 [1] clause 6.3 apply.

In addition, no extra guard time, indicated in TC1 in the ATR, needs to be supported when sending characters from the terminal to the card. The terminal may reject a UICC indicating values other than 0 or 255 in TC1.

6A.3.1 Coding of historical bytes

The provisions of ETSI TS 102 221 [1] clause 6.3.1 apply.

6A.3.2 Speed enhancement

The provisions of ETSI TS 102 221 [1] clause 6.3.2 apply.

In addition, cards and terminals supporting an application based on the present specification shall support the transmission factor $(F,D)=(512,32)$.

It is recommended that terminals and cards supporting Multimedia Message storage functionality (see TS 31.102 [2]) support the transmission factor $(F,D)=(512,64)$ in addition to those specified in the present document.

6A.3.3 Global Interface bytes

The provisions of ETSI TS 102 221 [1] clause 6.3.3 apply.

6A.4 PPS procedure

The provisions of ETSI TS 102 221 [1] clause 6.4 apply.

6A.5 Reset procedures

The provisions of ETSI TS 102 221 [1] clause 6.5 apply.

6A.6 Clock stop mode

The provisions of ETSI TS 102 221 [1] clause 6.6 apply.

6A.7 Bit/character duration and sampling time

The provisions of ETSI TS 102 221 [1] clause 6.7 apply.

6A.8 Error handling

The provisions of ETSI TS 102 221 [1] clause 6.8 apply.

6A.9 Compatibility

The provisions of ETSI TS 102 221 [1] clause 6.9 are not required by 3GPP.

7 User verification and file access conditions

See clause 9.6.

7A Transmission protocols

The provisions of ETSI TS 102 221 [1] clause 7 apply.

7A.1 Physical layer

The provisions of ETSI TS 102 221 [1] clause 7.1 apply.

7A.2 Data link layer

The provisions of ETSI TS 102 221 [1] clause 7.2 apply.

7A.3 Transport layer

The provisions of ETSI TS 102 221 [1] clause 7.3 apply.

7A.4 Application layer

The provisions of ETSI TS 102 221 [1] clause 7.4 apply.

In addition, when involved in administrative management operations, a 3GPP application interfaces with appropriate equipment. These operations are outside the scope of the present document.

When involved in network operations a 3GPP application interfaces with a terminal with which messages are exchanged. A message can be a command or a response.

- A 3GPP Application command/response pair is a sequence consisting of a command and the associated response.
- A 3GPP Application procedure consists of one or more 3GPP Application command/response pairs which are used to perform all or part of an application-oriented task. A procedure shall be considered as a whole, that is to say that the corresponding task is achieved if and only if the procedure is completed. The terminal shall ensure that, when operated according to the manufacturer's manual, any unspecified interruption of the sequence of command/response pairs which realise the procedure, leads to the abortion of the procedure itself.
- A 3GPP application session is the interval of time starting at the completion of the 3GPP application initialisation procedure and ending either with the start of the 3GPP session termination procedure, or at the first instant the link between the UICC and the terminal is interrupted.

During the 3GPP network operation phase, the terminal plays the role of the master and the 3GPP application plays the role of the slave.

A 3GPP application specification may specify some commands defined in ETSI TS 102 221 [1] as optional or define additional commands. The 3GPP application shall execute all applicable commands in such a way as not to jeopardise, or cause suspension, of service provisioning to the user. This could occur if, for example, execution of the AUTHENTICATE is delayed in such a way which would result in the network denying or suspending service to the user.

8 Application and file structure

8.0 General

This clause specifies general requirements for EFs for 3GPP applications.

EFs contain data items. A data item is a part of an EF which represents a complete logical entity. The 3GPP application specification defines the access conditions, data items and coding for each file.

EFs or data items having an unassigned value, or which are cleared by the terminal, shall have their bytes set to 'FF'. After the administrative phase all data items shall have a defined value or have their bytes set to 'FF', unless specified otherwise in other 3GPP specifications. For example, for a deleted LAI in the EF_{LOCI} file defined in TS 31.102 [2], the last byte takes the value 'FE' (refer to TS 24.008 [6]). If a data item is modified by the allocation of a value specified in another 3GPP TS, then this value shall be used and the data item is not unassigned.

EFs are mandatory (M), optional (O), or conditional (C). A conditional file is mandatory if required by a supported feature, as defined by the 3GPP application (e.g. PBR in TS 31.102 [2]). The file size of an optional EF may be zero. All implemented EFs with a file size greater than zero shall contain all mandatory data items. Optional data items may either be filled with 'F', or, if located at the end of an EF, need not exist.

When the coding is according to ITU-T Recommendation T.50 [5], bit 8 of every byte shall be set to 0.

8.1 Contents of the EFs at the MF level

See clause 13.

8.1A UICC application structure

The provisions of ETSI TS 102 221 [1] clause 8.1 apply.

File types

The provisions of ETSI TS 102 221 [1] clause 8.2 apply.

8.3 File referencing

The provisions of ETSI TS 102 221 [1] clause 8.3 apply.

8.4 Methods for selecting a file

The provisions of ETSI TS 102 221 [1] clause 8.4 apply.

8.5 Application characteristics

The provisions of ETSI TS 102 221 [1] clause 8.5 apply.

8.6 Reservation of file IDs

The provisions of ETSI TS 102 221 [1] clause 8.6 apply.

8.7 Logical channels

The provisions of ETSI TS 102 221 [1] clause 8.7 apply.

8.8 Shareable versus not-shareable files

The provisions of ETSI TS 102 221 [1] clause 8.8 apply.

8.9 Secure channels

The provisions of ETSI TS 102 221 [1] clause 8.9 apply.

9 Security features

The provisions of ETSI TS 102 221 [1] clause 9 apply.

9.1 Supported security features

The provisions of ETSI TS 102 221 [1] clause 9.1 apply.

9.2 Security architecture

The provisions of ETSI TS 102 221 [1] clause 9.2 apply.

9.3 Security environment

The provisions of ETSI TS 102 221 [1] clause 9.3 apply.

9.4 PIN definitions

The provisions of ETSI TS 102 221 [1] clause 9.4 apply.

9.5 PIN and key reference relation ship

The provisions of ETSI TS 102 221 [1] clause 9.5 apply.

9.6 User verification and file access conditions

A 3GPP application uses 2 PINs for user verification, PIN and PIN2. PIN2 is used only in the ADF. The PIN and PIN2 are mapped into key references as defined in ETSI TS 102 221 [1] clause 9.5.1. The Universal PIN shall be associated with a usage qualifier, and other key references may also be associated with a usage qualifier as defined in ETSI TS 102 221 [1] clause 9.5.2. The PIN status is indicated in the PS_DO, which is part of the FCP response when an ADF/DF is selected. The coding of the PS_DO is defined in ETSI TS 102 221 [1] clause 9.5.2.

PIN and PIN2 are coded on 8 bytes. Only (decimal) digits (0-9) shall be used, coded in ITU-T T.50 [5] with bit 8 set to zero. The minimum number of digits is 4. If the number of digits presented by the user is less than 8 then the ME shall pad the presented PIN with 'FF' before sending it to the 3GPP application.

The coding of the UNBLOCK PINs is identical to the coding of the PINs. However, the number of (decimal) digits is always 8.

The security architecture as defined in ETSI TS 102 221 [1] clause 9 applies to 3GPP applications with the following definitions and additions:

- A 3GPP application may reside on either a single-verification capable UICC or a multi-verification capable UICC.
- A 3GPP application residing on a multi-verification capable UICC shall support the replacement of its application PIN with the Universal PIN, key reference '11', as defined in ETSI TS 102 221 [1] clause 9.4.1. Only the Universal PIN is allowed as a replacement.
- A multi-verification capable UICC holding a 3GPP application shall support the referenced format using SEID as defined in ETSI TS 102 221 [1] clause 9.2.7.
- Every file related to a 3GPP application shall have a reference to an access rule stored in EF_{ARR}.
- Disabling of PIN2 is allowed if supported by the 3GPP application, unless indicated otherwise.

The security architecture as defined in ETSI TS 102 221 [1] clause 9 applies to terminals supporting 3GPP applications with the following definitions and requirements:

- A terminal shall support the use of level 1 and level 2 user verification requirements as defined in ETSI TS 102 221 [1] clause 9.1.
- A terminal shall support the multi-application capabilities as defined in ETSI TS 102 221 [1] clause 9.1.
- A terminal shall support the replacement of a 3GPP application PIN with the Universal PIN, key reference '11', as defined in ETSI TS 102 221 [1] clause 9.4.1.
- A terminal shall support the security attributes defined using tag's '8C', 'AB' and '8B' as defined in ETSI TS 102 221 [1] clause 9.2.4. In addition both the referencing methods indicated by tag '8B' shall be supported as defined in ETSI TS 102 221 [1] clause 9.2.7.

The access rule is referenced in the FCP using tag '8B'. The TLV object contains the file ID (the file ID of EF_{ARR}) and record number, or file ID (the file ID of EF_{ARR}), SEID and record number, pointer to the record in EF_{ARR} where the access rule is stored. Each SEID refers to a record number in EF_{ARR}. EFs having the same access rule use the same record reference in EF_{ARR}. For an example EF_{ARR}, see ETSI TS 102 221 [1] clause 13.4.

10 Structure of commands and responses

The provisions of ETSI TS 102 221 [1] clause 10 apply.

10.1 Command APDU structure

The provisions of ETSI TS 102 221 [1] clause 10.1 apply.

10.1.1 Coding of Class Byte

The provisions of ETSI TS 102 221 [1] clause 10.1.1 apply.

10.1.2 Coding of Instruction Byte

The provisions of ETSI TS 102 221 [1] clause 10.1.2 apply except for the coding of the Instruction byte of the following commands which are not required by 3GPP:

- GET CHALLENGE

10.1.3 Coding of parameter bytes

The provisions of ETSI TS 102 221 [1] clause 10.1.3 apply.

10.1.4 Coding of Lc byte

The provisions of ETSI TS 102 221 [1] clause 10.1.4 apply.

10.1.5 Coding of data part

The provisions of ETSI TS 102 221 [1] clause 10.1.5 apply.

10.1.6 Coding of Le byte

The provisions of ETSI TS 102 221 [1] clause 10.1.6 apply.

10.2 Response APDU structure

The provisions of ETSI TS 102 221 [1] clause 10.2 apply.

10.2.1 Status conditions returned by the UICC

The provisions of ETSI TS 102 221 [1] clause 10.2.1 apply.

10.2.1.1 Normal processing

The provisions of ETSI TS 102 221 [1] clause 10.2.1.1 apply.

10.2.1.2 Postponed processing

The provisions of ETSI TS 102 221 [1] clause 10.2.1.2 apply.

10.2.1.3 Warnings

The provisions of ETSI TS 102 221 [1] clause 10.2.1.3 apply.

10.2.1.4 Execution errors

The provisions of ETSI TS 102 221 [1] clause 10.2.1.4 apply.

10.2.1.5 Checking errors

The provisions of ETSI TS 102 221 [1] clause 10.2.1.5 apply.

10.2.1.5.1 Functions in CLA not supported

The provisions of ETSI TS 102 221 [1] clause 10.2.1.5.1 apply.

10.2.1.5.2 Command not allowed

The provisions of ETSI TS 102 221 [1] clause 10.2.1.5.2 apply.

10.2.1.5.3 Wrong parameters

The provisions of ETSI TS 102 221 [1] clause 10.2.1.5.3 apply.

10.2.1.6 Application errors

The provisions of ETSI TS 102 221 [1] clause 10.2.1.6 apply.

10.2.2 Status words of the commands

The provisions of ETSI TS 102 221 [1] clause 10.2.2 apply with the following exceptions which are not required by 3GPP:

- column 'GET CHALLENGE' of table 10.16

10.3 Logical channels

The provisions of ETSI TS 102 221 [1] clause 10.3 apply.

11 Commands

11.1 Generic commands

The provisions of ETSI TS 102 221 [1] clause 11.1 apply.

11.1.1 SELECT

11.1.1.1 Functional description

The provisions of ETSI TS 102 221 [1] clause 11.1.1.1 apply.

11.1.1.2 Command parameters and data

The provisions of ETSI TS 102 221 [1] clause 11.1.1.2 apply.

11.1.1.3 Response Data

The provisions of ETSI TS 102 221 [1] clause 11.1.1.3 apply.

11.1.1.4 File control parameters

This clause defines the contents of the data objects which are part of the FCP information where there is a difference compared to the values as specified in ETSI TS 102 221 [1] clause 11.1.1.4. Where options are indicated in ETSI TS 102 221 [1] clause 11.1.1.4, this clause specifies the values to be used in the FCP related to 3GPP applications.

11.1.1.4.1 File size

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.1 apply.

11.1.1.4.2 Total file size

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.2 apply.

11.1.1.4.3 File Descriptor

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.3 apply.

11.1.1.4.4 File identifier

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.4 apply.

11.1.1.4.5 DF name

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.5 apply.

11.1.1.4.6 Proprietary information

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.6 apply, with the exception of provisions relative to 'Platform to Platform CAT Secured APDU' and clause 11.1.1.4.6.10.

The Minimum application clock frequency data object is indicated by tag '82' in the proprietary constructed data object in the FCP information, identified by tag 'A5', as defined in ETSI TS 102 221 [1] clause 11.1.1.4.6. This data object specifies the minimum clock frequency to be provided by the terminal during the 3GPP application session. The value indicated in this data object shall not exceed 3 MHz, corresponding to '1E'. The terminal shall use a clock frequency between the value specified by this data object and the maximum clock frequency for the UICC as defined in ETSI TS 102 221 [1] clause 11.1.1.4.6.3. If this data object is not present in the FCP response or the value is 'FF' then the terminal shall assume that the minimum clock frequency is 1 MHz.

Security attributes

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.7 apply.

11.1.1.4.8 Short file identifier

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.8 apply.

11.1.1.4.9 Life cycle status integer

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.9 apply.

11.1.1.4.10 PIN status template DO

The provisions of ETSI TS 102 221 [1] clause 11.1.1.4.10 apply.

11.1.2 STATUS

The provisions of ETSI TS 102 221 [1] clause 11.1.2 apply.

11.1.3 READ BINARY

The provisions of ETSI TS 102 221 [1] clause 11.1.3 apply.

11.1.4 UPDATE BINARY

The provisions of ETSI TS 102 221 [1] clause 11.1.4 apply.

11.1.5 READ RECORD

The provisions of ETSI TS 102 221 [1] clause 11.1.5 apply.

11.1.6 UPDATE RECORD

The provisions of ETSI TS 102 221 [1] clause 11.1.6 apply.

11.1.7 SEARCH RECORD

The provisions of ETSI TS 102 221 [1] clause 11.1.7 apply.

11.1.8 INCREASE

The provisions of ETSI TS 102 221 [1] clause 11.1.8 apply.

11.1.9 VERIFY PIN

The provisions of ETSI TS 102 221 [1] clause 11.1.9 apply.

11.1.10 CHANGE PIN

The provisions of ETSI TS 102 221 [1] clause 11.1.10 apply.

11.1.11 DISABLE PIN

The provisions of ETSI TS 102 221 [1] clause 11.1.11 apply.

11.1.12 ENABLE PIN

The provisions of ETSI TS 102 221 [1] clause 11.1.12 apply.

11.1.13 UNBLOCK PIN

The provisions of ETSI TS 102 221 [1] clause 11.1.13 apply.

11.1.14 DEACTIVATE FILE

The provisions of ETSI TS 102 221 [1] clause 11.1.14 apply.

11.1.15 ACTIVATE FILE

The provisions of ETSI TS 102 221 [1] clause 11.1.15 apply.

11.1.16 AUTHENTICATE

The provisions of ETSI TS 102 221 [1] clause 11.1.16 apply.

11.1.17 MANAGE CHANNEL

The provisions of ETSI TS 102 221 [1] clause 11.1.17 apply.

11.1.18 GET CHALLENGE

The provisions of ETSI TS 102 221 [1] clause 11.1.18 are not required by 3GPP.

11.1.19 TERMINAL CAPABILITY

The provisions of ETSI TS 102 221 [1] clause 11.1.19 apply.

11.1.20 MANAGE SECURE CHANNEL

The provisions of ETSI TS 102 221 [1] clause 11.1.20 apply.

11.1.21 TRANSACT DATA

The provisions of ETSI TS 102 221 [1] clause 11.1.21 apply.

11.2 CAT commands

The provisions of ETSI TS 102 221 [1] clause 11.2 apply.

11.3 Data Oriented commands

The provisions of ETSI TS 102 221 [1] clause 11.3 apply.

12 Transmission oriented commands

The provisions of ETSI TS 102 221 [1] clause 12 apply.

13 Application independent files

There are five EFs at the Master File (MF) level specified in ETSI TS 102 221 [1] clause 13 (EF_{ICCID}; EF_{DIR}, EF_{PL}, EF_{ARR} and EF_{UMPC}), which are all mandatory for 3GPP.

The DF_{CD} at the Master File (MF) level specified in ETSI TS 102 221 [1] clause 13.5 is optional for 3GPP.

The EF_{DIR} file contains the Application Identifiers (AIDs) and the Application Labels of the 3GPP applications present on the card as mandatory elements. The AIDs of 3GPP applications are defined in ETSI TS 101 220 [3]. The 3GPP applications can only be selected by means of the AID selection. The EF_{DIR} entry shall not contain a path object for application selection. It is recommended that the application label does not contain more than 32 bytes.

14 Application independent protocol

14.1 Application independent protocol

The provisions of ETSI TS 102 221 [1] clause 14 apply with the following exceptions:

- clause 14.6.2 of ETSI TS 102 221 [1] is replaced by clause 14.2.

14.2 CAT commands

During idle mode the terminal shall send STATUS commands to the UICC at intervals no longer than:

- when the extended DRX cycle bit in the EF_{AD} is set to 1: the maximum between the interval negotiated with the UICC (see TS 31.111 [8]) and the extended idle mode DRX cycle received from the network (see TS 24.008 [6])
- in all other cases: the interval negotiated with the UICC (see TS 31.111 [8])

During a call the UICC presence detection applies. The default value for the proactive polling is the same as for the presence detection procedure.

15 Support of APDU-based UICC applications over USB

The provisions of ETSI TS 102 221 [1] clause 15 apply taking into account clauses 6A.3, 7A.4, 8, 9, 10, 11, 13 and 14 in the present document.

Annex A (normative): UCS2 coding of Alpha fields for files residing on the UICC

The provisions of ETSI TS 102 221 [1] annex A apply.

Annex B (informative): Main states of a UICC

The provisions of ETSI TS 102 221 [1] annex B apply.

Annex C (informative): APDU protocol transmission examples

The provisions of ETSI TS 102 221 [1] annex C apply.

Annex D (informative): ATR examples

The provisions of ETSI TS 102 221 [1] annex D apply.

Annex E (informative): Security attributes mechanisms and examples

The provisions of ETSI TS 102 221 [1] annex E apply.

Annex F (informative): Example of contents of EF_{ARR} '2F06'

The provisions of ETSI TS 102 221 [1] annex F apply.

Annex G (informative): Access Rules Referencing (ARR)

The provisions of ETSI TS 102 221 [1] annex G apply.

Annex H (normative): List of SFI Values

The provisions of ETSI TS 102 221 [1] annex H apply.

Annex I (informative): Resets and modes of operation

The provisions of ETSI TS 102 221 [1] annex I apply.

Annex J (informative): Example of the use of PINs

The provisions of ETSI TS 102 221 [1] annex J apply.

Annex K (informative): Examples of the PIN state transition on multi verification capable UICC

The provisions of ETSI TS 102 221 [1] annex K apply.

Annex L (informative): Examples of SET DATA and RETRIEVE DATA usage

The provisions of ETSI TS 102 221 [1] annex L apply.

Annex M (informative): Examples of ODD AUTHENTICATE instruction code usage

The provisions of ETSI TS 102 221 [1] annex M apply.

Annex N (informative): Change history

Change history								
Date	Meeting	TSG Doc.	CR	Rev	Cat	Subject/Comment	Old	New
2002-12	TP-18	TP-020279	0027	-	D	Gather all 3GPP-specific card platform requirements in TS 31.101.	6.0.0	6.1.0
2003-06	TP-20	TP-030120	0028	-	F	Clarification on the support of extra guardtime	6.1.0	6.2.0
2004-09	TP-25	TP-040180	0029	-	B	Requirement for higher UICC/Terminal interface speed	6.2.0	6.3.0
		TP-040180	0030	-	B	Move "GSM/USIM application interactions and restrictions" from ETSI TS 102 221	6.2.0	6.3.0
2004-12	TP-26	TP-040255	0033	-	F	Correction of non specific references	6.3.0	6.4.0
2004-12	TP-26					Reinstatement of original bullets in reference clause	6.4.0	6.4.1
2005-06	CT-28	CP-050136	0034	-	F	ISO/IEC 7816-Series Revision	6.4.1	6.5.0
2006-01						Correction of CR-number from CP-28	6.5.0	6.5.1
2007-06	CT-36	CP-070480	0037	7	B	Introduction of the new High Speed ME-UICC Interface	6.5.1	7.0.0
2007-06	-	-	-	-	-	MCC correction of implementation of CR0037R7, clause 4.3	7.0.0	7.0.1
-----	-	-	-	-	-	Upgrade to copyright, keywords and logo for LTE	7.0.1	8.0.0
2009-12	CT-46	CP-091011	0040	2	F	References update	8.0.0	8.1.0
2009-12	CT-46	-	-	-	-	Upgrade of the specification to Rel-9	8.1.0	9.0.0
2010-06	CT-48	CP-090390	0049	2	F	Restructuration of the specification to map the sections of ETSI TS 102 221	9.0.0	9.1.0
2011-01						Editorial release: formatting of clause 13 header corrected	9.1.0	9.1.1
2011-04	CT-51	CP-110235	0065	1	B	Introduction of Secure Channel for relay nodes	9.1.1	10.0.0
2011-06						Editorial release: Unnumbered reference corrected	10.0.0	10.0.1
2012-09	SP-57					Automatic upgrade of the specification to Rel-11	10.0.0	11.0.0
2014-10	SP-65					Automatic upgrade of the specification to Rel-12	11.0.0	12.0.0
2014-12	CT-66	CP-140986	0078	1	F	Update reference to ETSI TS 102 221 version 12.0.0 for execution time	12.0.0	12.1.0
2015-06	CT-68	CP-150388	0081	1	F	Update of reference to ETSI TS 102 221	12.1.0	12.2.0
2015-06	CT-69	CP-150563	0082	1	C	Replacement of EF LAUNCH SCWS with EF LAUNCH PAD	12.2.0	13.0.0
2015-12	CT-70	CP-150833	0083	5	C	Alignment of UICC polling interval with eDRX cycle	13.0.0	13.1.0

History

Document history		
V13.1.0	January 2016	Publication