ETSITS 132 773 V9.0.0 (2010-04)

Technical Specification

Universal Mobile Telecommunications System (UMTS);

LTE;

Telecommunication management;


Home Node B Subsystem (HNS) Network Resource Model (NRM)

Integration Reference Point (IRP);

Common Object Request Broker Architecture (CORBA)

Solution Set (SS)

(3GPP TS 32.773 version 9.0.0 Release 9)

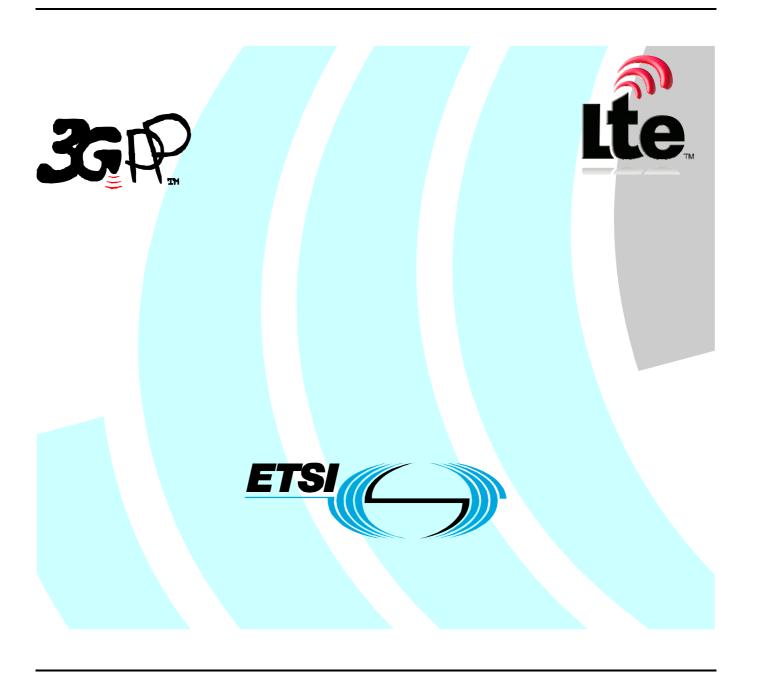

Reference DTS/TSGS-0532773v900 Keywords LTE. UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2010. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intelle	lectual Property Rights	2
Forev	word	2
	word	
	duction	
muoc		
1	Scope	5
2	References	5
3	Definitions and abbreviations	
3.1 3.2	Definitions	
3.2		
4	Architectural features	6
5	Mapping	6
5.1	General mappings	
5.2	Information Object Class (IOC) mapping	6
5.2.1	IOC HNBGWFunction	
5.2.2		
5.2.3		
5.2.4	IOC IuhSignLinkTp	7
5.2.5	IOC EP_Iuh	7
Anne	ex A (normative): IDL specifications	8
Anne	ex B (informative): Change history	10
Histo	nrv	11

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project: Technical Specification Group Services and System Aspects; Telecommunication management; Configuration Management (CM); as identified below:

32.771:	Telecommunication management; Home Node B Subsystem (HNS) Network Resource Model (NRM) Integration Reference Point (IRP): Requirements
32.772:	Telecommunication management; Home Node B Subsystem (HNS) Network Resource Model (NRM) Integration Reference Point (IRP): Information Service (IS)
32.773:	Telecommunication management; Home Node B Subsystem (HNS) Network Resource Model (NRM) Integration Reference Point (IRP): Common Object Request Broker Architecture (CORBA) Solution Set (SS)
32.775:	Telecommunication management; Home Node B Subsystem (HeNS) Network Resource Model (NRM) Integration Reference Point (IRP): Bulk CM eXtensible Markup Language (XML) file format definition

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and Network Resources (NRs), and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

1 Scope

The present document is part of an Integration Reference Point (IRP) named HNS Network Resource Model (NRM) IRP, through which an IRPAgent can communicate configuration management information to one or several IRPManagers concerning HNS resources. The HNS NRM IRP comprises a set of specifications defining Requirements, a protocol neutral Information Service and one or more Solution Set(s).

The present document specifies the HNS Network Resources IRP: CORBA Solution Set, which defines the mapping of the IRP information model (see TS 32.772 [5]) to the protocol specific details necessary for implementation of this IRP in a CORBA/IDL environment.

References 2

The following documents contain provisions which, through reference in this text, constitute provisions of the present

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.
- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications". [2] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements". [3] 3GPP TS 32.102: "Telecommunication management; Architecture". [4] 3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements". [5] 3GPP TS 32.772: "Telecommunication management; Home Node B Subsystem (HNS) Network
- Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".

Definitions and abbreviations 3

3.1 **Definitions**

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

For terms and definitions please refer to 3GPP TS 32.101 [2], 32.102 [3], 32.600 [4] and 32.772 [5].

3.2 **Abbreviations**

For the purposes of the present document, the following abbreviations apply:

CORBA Common Object Request Broker Architecture Distinguished Name DN IS Information Service

IDL Interface Definition Language **IRP Integration Reference Point**

MO Managed Object

MOC	Managed Object Class
NRM	Network Resource Model
OMG	Object Management Group

SS Solution Set

HNS Home Node B Subsystem

4 Architectural features

The overall architectural feature of HNS Network Resources IRP is specified in 3GPP TS 32.772 [5]. This clause specifies features that are specific to the CORBA SS.

5 Mapping

5.1 General mappings

Attributes modelling associations as defined in the NRM (here also called "reference attributes") are in this SS mapped to attributes.

The names of the reference attributes in the NRM are mapped to the corresponding attribute names in the MOC. When the cardinality for an association is 0..1 or 1..1 the datatype for the reference attribute is defined as an MOReference. The value of an MO reference contains the distinguished name of the associated MO. When the cardinality for an association allows more than one referred MO, the reference attribute will be of type MOReferenceSet, which contains a sequence of MO references.

5.2 Information Object Class (IOC) mapping

This SS supports reference attributes for relations other than containment relations between objects. Reference attributes are therefore introduced in each MOC where needed.

5.2.1 IOC HNBGWFunction

NRM Attributes of IOC HNBGWFunction in TS 32.772 [5]	SS Attributes	SS Type	Support Qualifier	Read	Write
id	hnbgwFunctionId	string	M	М	-
hnbgwld	hnbgwld	string	M	М	-
userLabel	userLabel	string	M	M	М
ipConfigInfo	ipConfigInfo	string	M	M	-
maxNbrHNBRegistered	maxNbrHNBRegistered	Integer	M	М	-
maxPacketCapability	maxPacketCapability	integer	M	М	-

5.2.2 IOC HNBProfile

NRM Attributes of IOC HNBProfile in TS 32.772 [5]	SS Attributes	SS Type	Support Qualifier	Read	Write
id	hnbProfileId	string	M	M	1
userLabel	userLabel	string	M	М	М
configuration	configuration	string	M	М	-
criterion	criterion	string	0	M	-

5.2.3 IOC HMSFunction

NRM Attributes of IOC HMSFunction in TS 32.772 [5]	SS Attributes	SS Type	Support Qualifier	Read	Write
userLabel	userLabel	string	M	М	М

5.2.4 IOC luhSignLinkTp

NRM Attributes of IOC	SS Attributes	SS Type	Support	Read	Write
luhSignLinkTp in TS 32.772 [5]			Qualifier		
id	iuhSignLinkTpId	string	M	М	-
userLabel	userLabel	string	0	М	M
farEndEntity	farEndEntity	string	0	М	-
sctpAssocLocalAddr	sctpAssocLocalAddr	string	M	М	-
sctpAssocRemoteAddr	sctpAssocRemoteAddr	string	M	M	-

5.2.5 IOC EP_luh

NRM Attributes of IOC EP_luh in TS 32.772 [5]	SS Attributes	SS Type	Support Qualifier	Read	Write
id	epluhld	string	M	М	-
userLabel	userLabel	string	0	М	М
farEndEntity	farEndEntity	string	0	М	-
farEndNEIPAddr	farEndNEIPAddr	string	0	M	CM

Annex A (normative): IDL specifications

```
//File: HnsNetworkResourcesNRMDefs.idl
#ifndef _HNSNETWORKRESOURCESNRMDEFS_IDL #define HNSNETWORKRESOURCESNRMDEFS_IDL
#include "GenericNetworkResourcesNRMDefs.idl"
#pragma prefix "3gppsa5.org"
* This module defines constants for each MO class name and
 \boldsymbol{\ast} the attribute names for each defined MO class.
module HnsNetworkResourcesNRMDefs
       * Definitions for MO class HnbgwFunction
      interface HNBGWFunction : GenericNetworkResourcesNRMDefs::ManagedFunction
         const string CLASS = "HNBGWFunction";
         // Attribute Names
         //
         const string hnbgwFunctionId = "hnbgwFunctionId";
         const string hnbgwId = "hnbgwId";
         const string ipConfigInfo = "ipConfigInfo";
         const string maxNbrHNBRegistered = "maxNbrHNBRegistered";
         const string maxPacketCapability = "maxPacketCapability";
      };
       * Definitions for MO class IuhSignLinkTp
      interface IuhSignLinkTp : GenericNetworkResourcesNRMDefs::EP_RP
         const string CLASS = "IuhSignLinkTp";
         // Attribute Names
         const string sctpAssocLocalAddr = "sctpAssocLocalAddr";
         const string sctpAssocRemoteAddr = "sctpAssocRemoteAddr";
       * Definitions for MO class EP_Iuh
         interface EP_Iuh : GenericNetworkResourcesNRMDefs::EP RP
         const string CLASS= "EP_Iuh";
         // Attribute Names
         const string farEndNEIPAddr= "farEndNEIPAddr";
      };
       * Definitions for MO class HNBProfile
      interface HNBProfile : GenericNetworkResourcesNRMDefs::ManagedFunction
         const string CLASS= "HNBProfile";
         // Attribute Names
         const string hnbProfileId = "hnbProfileId";
         const string configuration = "configuration";
         const string criterion = "criterion";
      };
       * Definitions for MO class HMSFunction
      interface HMSFunction : GenericNetworkResourcesNRMDefs::ManagedFunction
```

Annex B (informative): Change history

Change history									
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New		
Mar 2010	SA#47	SP-100061			Presentation to SA for information and approval		1.0.0		
Mar 2010					Publication of SA approved version	1.0.0	9.0.0		

History

Document history						
V9.0.0 April 2010 Publication						