


**Integrated Services Digital Network (ISDN);  
Digital Subscriber Signalling System No. one (DSS1) protocol;  
Application of the Bearer Capability (BC),  
High Layer Compatibility (HLC) and  
Low Layer Compatibility (LLC) information elements;  
Part 1: Test Suite Structure and Test Purposes (TSS&TP)  
specification**

---

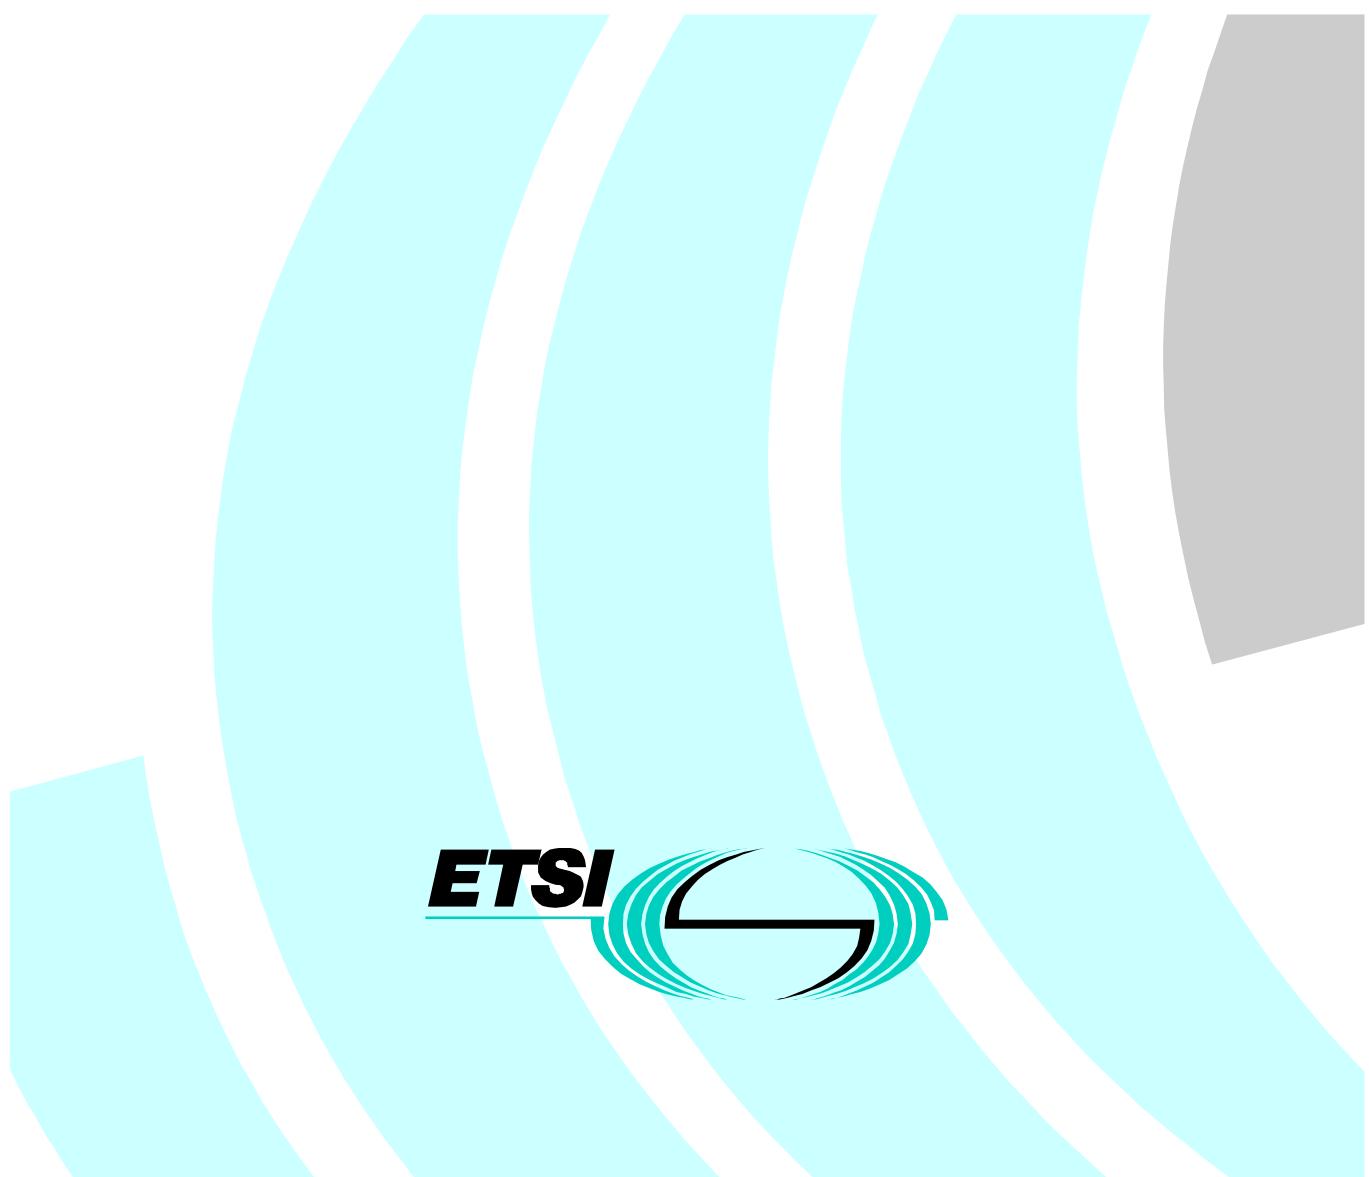

---

Reference

REG/SPS-05181-1 (9vc90iq2.PDF)

---

Keywords

ISDN, DSS1, BC, LLC, HLC, terminal, TSS&amp;TP

***ETSI***

---

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

---

Office address650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCETel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16  
Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable  
can be downloaded from  
<http://www.etsi.org>If you find errors in the present document, send your  
comment to: editor@etsi.fr

---

***Copyright Notification***

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.  
All rights reserved.

---

# Contents

Intellectual Property Rights .....	6
Foreword .....	6
Introduction.....	6
1    Scope.....	7
2    References .....	7
3    Definitions and abbreviations.....	8
3.1    Definitions .....	8
3.2    Abbreviations.....	9
4    Test Suite Structure (TSS).....	12
5    Test Purposes (TP) .....	15
5.1    Introduction .....	15
5.1.1    Test Purpose (TP) naming convention .....	15
5.1.2    Source of TP definition .....	15
5.1.3    Test purpose structure .....	16
5.1.4    Test strategy .....	16
5.2    Test Purposes .....	17
5.2.1    Compatibility checking .....	17
5.2.1.1    Circuit mode bearer service speech .....	17
5.2.1.1.1    Outgoing call.....	17
5.2.1.1.2    Incoming call, compatible.....	17
5.2.1.1.3    Incoming call, incompatible.....	18
5.2.1.2    Circuit mode bearer service 64 kbit/s unrestricted digital information.....	19
5.2.1.2.1    Outgoing call.....	19
5.2.1.2.2    Incoming call, compatible.....	20
5.2.1.2.3    Incoming call, incompatible.....	21
5.2.1.3    Circuit mode bearer service 3,1 kHz audio.....	22
5.2.1.3.1    Outgoing call.....	22
5.2.1.3.2    Incoming call, compatible.....	22
5.2.1.3.3    Incoming call, incompatible.....	23
5.2.1.4    Circuit mode bearer service multiple-rate unrestricted digital information .....	25
5.2.1.4.1    Outgoing call.....	25
5.2.1.4.2    Incoming call, compatible.....	25
5.2.1.4.3    Incoming call, incompatible.....	26
5.2.1.5    Packet mode virtual call bearer service over the B-channel .....	28
5.2.1.5.1    Outgoing call.....	28
5.2.1.5.2    Incoming call, compatible.....	28
5.2.1.5.3    Incoming call, incompatible.....	29
5.2.1.6    Packet mode virtual call bearer service over the D-channel .....	30
5.2.1.6.1    Incoming call, compatible.....	30
5.2.1.6.2    Incoming call, incompatible.....	31
5.2.1.7    Telephony 3,1 kHz teleservice .....	33
5.2.1.7.1    Outgoing call.....	33
5.2.1.7.2    Incoming call, compatible.....	33
5.2.1.7.3    Incoming call, incompatible.....	34
5.2.1.8    Telephony 7 kHz teleservice .....	35
5.2.1.8.1    Outgoing call, fallback not allowed .....	35
5.2.1.8.2    Outgoing call, fallback allowed .....	35
5.2.1.8.3    Incoming call, compatible, fallback not allowed.....	35
5.2.1.8.4    Incoming call, compatible, fallback allowed.....	36
5.2.1.8.5    Incoming call, incompatible, fallback not allowed.....	38
5.2.1.8.6    Incoming call, incompatible, fallback allowed.....	39
5.2.1.9    Videotelephony teleservice.....	40

5.2.1.9.1	Outgoing call, fallback not allowed .....	40
5.2.1.9.2	Outgoing call, fallback allowed .....	41
5.2.1.9.3	Incoming call, compatible, fallback not allowed.....	42
5.2.1.9.4	Incoming call, compatible, fallback allowed.....	44
5.2.1.9.5	Incoming call, incompatible, fallback not allowed.....	47
5.2.1.9.6	Incoming call, incompatible, fallback allowed.....	49
5.2.1.10	Videoconference teleservice.....	51
5.2.1.10.1	Outgoing call, fallback not allowed .....	51
5.2.1.10.2	Outgoing call, fallback allowed .....	52
5.2.1.10.3	Incoming call, compatible, fallback not allowed.....	53
5.2.1.10.4	Incoming call, compatible, fallback allowed.....	55
5.2.1.10.5	Incoming call, incompatible, fallback not allowed.....	58
5.2.1.10.6	Incoming call, incompatible, fallback allowed.....	61
5.2.1.11	Audiographic conference teleservice.....	62
5.2.1.11.1	Outgoing call, fallback not allowed .....	62
5.2.1.11.2	Outgoing call, fallback allowed .....	64
5.2.1.11.3	Incoming call, compatible, fallback not allowed.....	65
5.2.1.11.4	Incoming call, compatible, fallback allowed.....	68
5.2.1.11.5	Incoming call, incompatible, fallback not allowed.....	70
5.2.1.11.6	Incoming call, incompatible, fallback allowed.....	74
5.2.1.12	Telefax G2/3 teleservice.....	75
5.2.1.12.1	Outgoing call.....	75
5.2.1.12.2	Incoming call, compatible.....	75
5.2.1.12.3	Incoming call, incompatible.....	76
5.2.1.13	Telefax G4 teleservice .....	77
5.2.1.13.1	Outgoing call.....	77
5.2.1.13.2	Incoming call, compatible.....	77
5.2.1.13.3	Incoming call, incompatible.....	78
5.2.1.14	Syntax based videotex teleservice .....	79
5.2.1.14.1	Outgoing call.....	79
5.2.1.14.2	Incoming call, compatible.....	79
5.2.1.14.3	Incoming call, incompatible.....	81
5.2.1.15	File Transfer & Access management (FTAM) teleservice .....	82
5.2.1.15.1	Outgoing call.....	82
5.2.1.15.2	Incoming call, compatible.....	82
5.2.1.15.3	Incoming call, incompatible.....	83
5.2.1.16	Eurofile transfer teleservice .....	84
5.2.1.16.1	Outgoing call.....	84
5.2.1.16.2	Incoming call, compatible.....	84
5.2.1.16.3	Incoming call, incompatible.....	85
5.2.1.17	Teletex teleservice .....	86
5.2.1.17.1	Outgoing call.....	86
5.2.1.17.2	Incoming call, compatible.....	86
5.2.1.17.3	Incoming call, incompatible.....	89
5.2.1.18	Specific user applications using different rate adaptions .....	91
5.2.1.18.1	Outgoing call.....	92
5.2.1.18.2	Incoming call, compatible.....	111
5.2.1.18.3	Incoming call, incompatible.....	133
5.2.1.19	Interworking with networks supporting BS 64 kbit/s restricted digital information .....	158
5.2.1.19.1	Outgoing call.....	158
5.2.1.19.2	Incoming call, compatible.....	159
5.2.1.19.3	Incoming call, incompatible.....	159
5.2.1.20	Multimedia teleservice.....	160
5.2.1.20.1	Outgoing call, fallback not allowed .....	160
5.2.1.20.2	Outgoing call, fallback allowed .....	161
5.2.1.20.3	Incoming call, compatible, fallback not allowed.....	162
5.2.1.20.4	Incoming call, compatible, fallback allowed.....	164
5.2.1.20.5	Incoming call, incompatible, fallback not allowed.....	167
5.2.1.20.6	Incoming call, incompatible, fallback allowed.....	170
5.2.2	Address checking .....	171

5.2.2.1	Called party number .....	171
5.2.2.1.1	Incoming, compatible.....	171
5.2.2.1.2	Incoming, incompatible.....	175
5.2.2.1.3	Incoming, omitted .....	176
5.2.2.2	Called party subaddress .....	177
5.2.2.2.1	Incoming, compatible.....	177
5.2.2.2.2	Incoming, incompatible.....	179
5.2.2.2.3	Incoming, omitted .....	180
5.2.3	Checking using user-to-user information.....	181
5.2.3.1	Incoming, compatible .....	181
5.2.3.2	Incoming, incompatible .....	181
5.2.3.3	Incoming, omitted.....	183
History.....		184

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This ETSI Guide (EG) has been produced by ETSI Technical Committee Signalling Protocols and Switching (SPS).

The present document is part 1 of a multi-part EG covering Digital Subscriber Signalling System No. one (DSS1) protocol; Application of the Bearer Capability (BC), High Layer Compatibility (HLC) and Low Layer Compatibility (LLC) information elements; as identified below:

**Part 1: "Test Suite Structure and Test Purposes (TSS&TP) specification";**

Part 2: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification".

---

## Introduction

The present document contains the Test Suite Structure and Test Purposes (TSS&TP) developed to verify a terminal equipment's ability to perform compatibility and address checking.

This TSS&TP defines TPs for an additional test suite (to mandatory and voluntary test suites checking user side layer 3 protocol conformance which allows to check the above ability of terminal equipment's for each basic service provided by ISDN implementations based on ETSI standards and considered in EG 201 018 [1].

---

## 1 Scope

The present document specifies the Test Suite Structure and Test Purposes (TSS&TP) for the User side of the T reference point or coincident S and T reference point (as defined in CCITT Recommendation I.411 [3]) of implementations conforming to EG 201 018 [1] for application of the Bearer Capability (BC), High Layer Compatibility (HLC), and Low Layer Compatibility (LLC) information elements by terminals supporting ISDN services.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
  - For a specific reference, subsequent revisions do not apply.
  - For a non-specific reference, the latest version applies.
  - A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- [1] EG 201 018 (V1.5): "Integrated Services Digital Network (ISDN); Application of the Bearer Capability (BC), High Layer Compatibility (HLC) and Low Layer Compatibility (LLC) information elements by terminals supporting ISDN services".
- [2] ISO/IEC 9646-1: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [3] CCITT Recommendation I.411 (1988): "ISDN user-network interfaces - Reference configurations".
- [4] EN 300 403-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [5] EN 300 267-1: "Integrated Services Digital Network (ISDN); Telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [6] CCITT Recommendation I.112 (1988): "Vocabulary and terms for ISDNs".
- [7] CCITT Recommendation E.164 (1988): "Numbering plan for the ISDN era".
- [8] CCITT Recommendation I.210 (1988): "Principles of the telecommunication services supported by an ISDN and the means to describe them".
- [9] ETS 300 007 (1991): "Integrated Services Digital Network (ISDN); Support of packet-mode terminal equipment by an ISDN".
- [10] CCITT Recommendation V.110 (1992): "Support Of Data Terminal Equipments With V-Series Type Interfaces By An Integrated Services Digital Network".
- [11] ITU-T Recommendation X.30 (1993): "Support of X.21, X.21 bis and X.20 bis based Data Terminal Equipments (DTEs) by an Integrated Services Digital Network (ISDN)".
- [12] ITU-T Recommendation Q.850 (1993): "Usage of cause and location in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN user part".

- [13] ISO/IEC 7776: "Information technology - Telecommunications and information exchange between systems - High-level data link control procedures - Description of the X.25 LAPB-compatible DTE data link procedures".
- [14] ISO/IEC 8208: "Information technology - Data communications - X.25 Packet Layer Protocol for Data Terminal Equipment".

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following definitions apply:

**abstract test case:** refer to ISO/IEC 9646-1 [2]

**abstract test suite:** refer to ISO/IEC 9646-1 [2]

**active test:** test case where the IUT is required to send a particular message, but not in reaction to a received message. This would usually involve the use of PIXIT information to see how this message can be generated and quite often is specified in an Abstract Test Suite (ATS) using an Implicit Send event

**basic service:** see CCITT Recommendation I.210 [8] subclause 2.4

**bearer service:** see CCITT Recommendation I.112 [6], subclause 2.2 definition 202 and CCITT Recommendation I.210 [8] subclause 5.2.1

**implementation under test:** refer to ISO/IEC 9646-1 [2]

**Integrated Services Digital Network (ISDN):** see CCITT Recommendation I.112 [6], subclause 2.2 definition 308

**international number:** ISDN number structured as specified in subclause 3.2 (in the subclauses relating to international number) of CCITT Recommendation E.164 [7]

**ISDN number:** number conforming to the numbering and structure specified in CCITT Recommendation E.164 [7].

**lower tester:** refer to ISO/IEC 9646-1 [2]

**national number; national significant number:** ISDN number structured as specified in subclause 3.2 (in the subclauses relating to national significant number) of CCITT Recommendation E.164 [7]

**passive test:** test case where the IUT is required to respond to a protocol event (e.g. received message) with another protocol event (sends message) and normally does not require any special operator intervention such as is associated with the Implicit Send event

**PICS proforma:** refer to ISO/IEC 9646-1 [2]

**PIXIT proforma:** refer to ISO/IEC 9646-1 [2]

**point of control and observation:** refer to ISO/IEC 9646-1 [2]

**protocol implementation conformance statement:** refer to ISO/IEC 9646-1 [2]

**protocol implementation extra information for testing:** refer to ISO/IEC 9646-1 [2]

**service:** telecommunications service: see CCITT Recommendation I.112 [6], subclause 2.2 definition 201

**subscriber number:** ISDN number structured as specified in subclause 3.2 (in the subclauses relating to subscriber number) of CCITT Recommendation E.164 [7]

**system under test:** refer to ISO/IEC 9646-1 [2]

**Teleservice (telecommunication Service):** see CCITT Recommendation I.112 [6], subclause 2.2 definition 203 and CCITT Recommendation I.210 [8] subclause 5.2.1

**TP:** refer to ISO/IEC 9646-1 [2]

**User (S/T):** DSS1 protocol entity at the User side of the user-network interface where a coincident S and T reference point applies

**User (T):** DSS1 protocol entity at the User side of the user-network interface where a T reference point applies (User is the Private ISDN)

**user:** DSS1 protocol entity at the User side of the user-network interface where a T reference point or coincident S and T reference point applies

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ATS	Abstract Test Suite
BC	Bearer Capability information element
BS	Bearer Service
CdPN	Called Party Number information element
CdPS	Called Party Subaddress information element
DSS1	Digital Subscriber Signalling System No. one
FTAM	File Transfer Access and Management
HDLC	Hierarchical Data Link Control
HLC	High Layer Compatibility information element
IDU	Interface Data Unit
IE	Information Element
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
LLC	Low Layer Compatibility information element
NPI	the "Numbering Plan Identification" field of the Calling/Called party number information element
PI	the Progress Indicator information element
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PSPDN	Packet Switched Public Data Network
RPN	Private network serving the remote user (see ITU-T Recommendation Q.850 [12])
TON	the "Type Of Number" field of the Calling/Called party number information element
TOS	the "Type Of Subaddress" field of the Calling/Called party subaddress information element
TP	Test Purpose
TS	TeleService
TSS	Test Suite Structure
TSS&TP	Test Suite Structure and Test Purposes
U	User (see ITU-T Recommendation Q.850 [12])
U00	Null call state
UDI	Unrestricted Digital Information
VC	The packet mode Virtual Call (bearer service)

Abbreviations related to information elements:

BC speech	A bearer capability information element coded according to EG 201 018 [1] subclause 6.1.1.1 a)
BC 3,1 kHz audio	A bearer capability information element coded according to EG 201 018 [1] subclause 6.1.3.1 a)
BC 64 kbit/s UDI	A bearer capability information element coded according to EG 201 018 [1] subclause 6.1.2.1 a)
BC multiple-rate UDI	A bearer capability information element coded according to EG 201 018 [1] subclause 6.1.4.1 a)
BC 64 kbit/s UDI-TA	A bearer capability information element coded according to EG 201 018 [1] subclause 6.3.4.1 a)

BC 64 kbit/s UDI, H.221 & H.242	A bearer capability information element coded according to EG 201 018 [1] subclause 6.3.5.1.2.1 a)
BC 64 kbit/s UDI-TA, H.221 & H.242	A bearer capability information element coded according to EG 201 018 [1] subclause 6.3.4.1 a)
BC 56 kbit/s rate adaption	A bearer capability information element coded according to EG 201 018 [1] subclause 8.1 a)
BC packet mode, B-channel	A bearer capability information element coded according to EG 201 018 [1] subclause 6.2.1.1.1 a)
BC packet mode, D-channel	A bearer capability information element coded according to EG 201 018 [1] subclause 6.2.1.2.1 a)
BC V.120 rate adaptation	A bearer capability information element with its information transfer capability field set to "Unrestricted digital information", and its user information layer one protocol field set to "V.120 adaptation"
BC HDLC rate adaptation	A bearer capability information element with its information transfer capability field set to "Unrestricted digital information", and its user information layer one protocol field set to "X.31 adaptation"
HLC telephony	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.1.1 b)
HLC videotelephony	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.5.2.1 b1), note 2 enforced
HLC videotelephony, initial channel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.5.1.1.1 b)
HLC videotelephony, subsequent channel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.5.1.2.1 b)
HLC audiographic conferencing	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.10.2.1 b1), note 2 enforced
HLC audiographic conferencing, initial channel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.10.1.1.1 b)
HLC audiographic conferencing, subsequent channel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.10.1.2.1 b)
HLC videoconferencing	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.9.2.1 b1), note 2 enforced
HLC videoconferencing, initial channel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.9.1.1.1 b)
HLC videoconferencing, subsequent channel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.9.1.2.1 b)
HLC multimedia	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.11.1.1.1 b1), note 2 enforced
HLC multimedia, initial cannel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.11.1.1.1 b)
HLC multimedia, subsequent cannel	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.5.1.2.1 b)
HLC facsimile G2/3	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.6.1 b)
HLC facsimile G4	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.2.1 b)
HLC syntax based videotex	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.3.1.1 b)
HLC FTAM	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.7.1 b)
HLC eurofile transfer	A high layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.8.1 b)
HLC teletex basic mode	A high layer compatibility information element coded according to EG 201 018 [1] subclause 7.1.3.1 b)

HLC teletex mixed mode	A high layer compatibility information element coded according to EG 201 018 [1] subclause 7.1.3.1 b)
HLC teletex processable mode	A high layer compatibility information element coded according to EG 201 018 [1] subclause 7.1.3.1 b)
HLC OSI application	A high layer compatibility information element, which contains the following fields codings: Coding standard: "CCITT standardized coding", Interpretation: "First high layer characteristics identification to be used", Presentation method: "High layer protocol profile", High layer characteristics identification: " OSI application", Extended high layer characteristics identification: not present.
LLC speech	A low layer compatibility information element, in which octets 3, 4 and 5 are coded identically to BC speech, octets 4.1 and 5a to 7c are not present.
LLC 3,1 kHz audio	A low layer compatibility information element in which octets 3 to 5 are coded according to EG 201 018 [1] subclause 7.2.1.1 c), and octets 5a to 7c are not present.
LLC 64 kbit/s UDI	A low layer compatibility information element, in which octets 3 and 4 are coded identically to BC 64 kbit/s UDI, octets 4.1 to 5d are not present, octets 6 to 6b and 7 to 7c, if present, coded according to the capabilities of the IUT.
LLC 64 kbit/s UDI-TA	A low layer compatibility information element, in which octets 3 and 4 are coded identically to BC 64 kbit/s UDI-TA, octets 4.1 to 7c are not present.
LLC multiple rate UDI	A low layer compatibility information element, in which octets 3, 4 and 4.1 are coded identically to BC multiple-rate UDI, octets 5 to 5d are not present, octets 6 to 6b and 7 to 7c, if present, coded according to the capabilities of the IUT.
LLC 64 kbit/s UDI, H.221 & H.242	A low layer compatibility information element, in which octets 3 and 4 are coded identically to BC 64 kbit/s UDI, octet 5 is coded as "Recommendations H.221 and H.242". octets 4.1 and 5a to 7c are not present.
LLC ISO/IEC 7776-ISO/IEC 8206	A low layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.2.1 c).
LLC packet mode, B-channel	A low layer compatibility information element coded identically as "BC packet mode, B-channel".
LLC packet mode, D-channel	A low layer compatibility information element coded identically as "BC packet mode, D-channel".
LLC X.25	A low layer compatibility information element coded according to EG 201 018 [1] subclause 6.3.3.2.1 c).
LLC V.110/X.30 asynchronous, n kbit/s	A low layer compatibility information element coded according to EG 201 018 [1] subclause 7.1.1.2.1 c), in which the synchron/asynchron field coded as "asynchronous" and the user rate field coded as "n kbit/s".
LLC V.110/X.30 synchronous, n kbit/s	A low layer compatibility information element coded according to EG 201 018 [1] subclause 7.1.1.1.1 c), in which the synchron/asynchron field coded as "synchronous" and the user rate field coded as "n kbit/s".
LLC V.110/X.30 n kbit/s for X.25	A low layer compatibility information element coded according to EG 201 018 [1] subclause 7.1.2.2.1 c), in which the user rate field coded as "n kbit/s".
LLC asynchronous voice band modem, n kbit/s	A low layer compatibility information element coded according to EG 201 018 [1] subclause 7.2.1.1 c), in which the synchron/asynchron field coded as "asynchronous" and the user rate field coded as "n kbit/s".

LLC synchronous voice band modem, n kbit/s	A low layer compatibility information element coded according to EG 201 018 [1] subclause 7.2.1.1 c), in which the synchron/asynchron field coded as "synchronous" and the user rate field coded as "n kbit/s".
B-channel identification	A channel identification information element with fields codings as follows: Interface identifier present: "interface implicitly identified"; interface type: "basic interface" for basic rate interface, "other interface" for primary rate interface; D-channel indicator: "the channel identified is not the D-channel"; Preferred/exclusive, Information channel selection, Coding standard, Number/map, Channel type/map element type, Channel number and Slot map field, if present, coded according to test case needs
D-channel identification	A channel identification information element with fields codings as follows: preferred/exclusive: "exclusive, only the indicated channel is acceptable"; D-channel indicator: "the channel identified is the D-channel", Information channel selection: "no channel": other field are coded as given for the B-channel identification IE.

## 4 Test Suite Structure (TSS)

• EG 201 018		
• Compatibility checking (1)		
• BS speech (01)		
• outgoing (1)		TP10110xx
• incoming (2)		
• compatible (1)		TP10121xx
• incompatible (2)		TP10122xx
• BS 64 kbit/s UDI (02)		
• outgoing (1)		TP10210xx
• incoming (2)		
• compatible (1)		TP10221xx
• incompatible (2)		TP10222xx
• BS 3,1 kHz audio (03)		
• outgoing (1)		TP10310xx
• incoming (2)		
• compatible (1)		TP10321xx
• incompatible (2)		TP10322xx
• BS multiple-rate UDI (04)		
• outgoing (1)		TP10410xx
• incoming (2)		
• compatible (1)		TP10421xx
• incompatible (2)		TP10422xx
• BS packet mode B-channel (05)		
• outgoing (1)		TP10510xx
• incoming (2)		
• compatible (1)		TP10521xx
• incompatible (2)		TP10522xx
• BS packet mode D-channel (06)		
• incoming (1)		
• compatible (1)		TP10611xx
• incompatible (2)		TP10612xx

• TS telephony 3,1 kHz (07)		
• outgoing (1)	TP10710xx	
• incoming (2)	TP10721xx	
• compatible (1)	TP10722xx	
• incompatible (2)		
• TS telephony 7 kHz (08)		
• outgoing (1)	TP10811xx	
• fallback not allowed (1)	TP10812xx	
• fallback allowed (2)		
• incoming (2)	TP10821xx	
• compatible, fallback not allowed (1)	TP10822xx	
• compatible, fallback allowed (2)	TP10823xx	
• incompatible, fallback not allowed (3)	TP10824xx	
• incompatible, fallback allowed (4)		
• TS videotelephony (09)		
• outgoing (1)	TP10911xx	
• fallback not allowed (1)	TP10912xx	
• fallback allowed (2)		
• incoming (2)	TP10921xx	
• compatible, fallback not allowed (1)	TP10922xx	
• compatible, fallback allowed (2)	TP10923xx	
• incompatible, fallback not allowed (3)	TP10924xx	
• incompatible, fallback allowed (4)		
• TS videoconference (10)		
• outgoing (1)	TP11011xx	
• fallback not allowed (1)	TP11012xx	
• fallback allowed (2)		
• incoming (2)	TP11021xx	
• compatible, fallback not allowed (1)	TP11022xx	
• compatible, fallback allowed (2)	TP11023xx	
• incompatible, fallback not allowed (3)	TP11024xx	
• incompatible, fallback allowed (4)		
• TS audiographic conference (11)		
• outgoing (1)	TP11111xx	
• fallback not allowed (1)	TP11112xx	
• fallback allowed (2)		
• incoming (2)	TP11121xx	
• compatible, fallback not allowed (1)	TP11122xx	
• compatible, fallback allowed (2)	TP11123xx	
• incompatible, fallback not allowed (3)	TP11124xx	
• incompatible, fallback allowed (4)		
• TS telefax G2/3 (12)		
• outgoing (1)	TP11210xx	
• incoming (2)	TP11221xx	
• compatible (1)	TP11222xx	
• incompatible (2)		
• TS telefax G4 (13)		
• outgoing (1)	TP11310xx	
• incoming (2)	TP11321xx	
• compatible (1)	TP11322xx	
• incompatible (2)		

• TS syntax-based videotex (14)		
• outgoing (1)	TP11410xx	
• incoming (2)	TP11421xx	
• compatible (1)	TP11422xx	
• incompatible (2)		
• TS FTAM (15)		
• outgoing (1)	TP11510xx	
• incoming (2)	TP11521xx	
• compatible (1)	TP11522xx	
• incompatible (2)		
• TS eurofile transfer (16)		
• outgoing (1)	TP11610xx	
• incoming (2)	TP11621xx	
• compatible (1)	TP11622xx	
• incompatible (2)		
• TS teletex (17)		
• outgoing (1)	TP11710xx	
• incoming (2)	TP11721xx	
• compatible (1)	TP11722xx	
• incompatible (2)		
• User applications using rate adaptions (18)		
• outgoing (1)	TP11810xx	
• incoming (2)	TP11821xx	
• compatible (1)	TP11822xx	
• incompatible (2)		
• Interworking with networks supporting BS 64 kbit/s RDI (19)		
• outgoing (1)	TP11910xx	
• incoming (2)	TP11921xx	
• compatible (1)	TP11922xx	
• incompatible (2)		
• TS multimedia services (20)		
• outgoing (1)	TP12011xx	
• fallback not allowed (1)	TP12012xx	
• fallback allowed (2)		
• incoming (2)	TP12021xx	
• compatible, fallback not allowed (1)	TP12022xx	
• compatible, fallback allowed (2)	TP12023xx	
• incompatible, fallback not allowed (3)	TP12024xx	
• incompatible, fallback allowed (4)		
• Address checking (2)		
• Called party number (01)		
• incoming (2)	TP20121xx	
• compatible (1)	TP20122xx	
• incompatible (2)	TP20123xx	
• omitted (3)		
• Called party subaddress (02)		
• incoming (2)	TP20221xx	
• compatible (1)	TP20222xx	
• incompatible (2)	TP20223xx	
• omitted (3)		

• Checking of UUI (3)		
• incoming (2)		
• compatible (1)	TP30021xx	
• incompatible (2)	TP30022xx	
• omitted (3)	TP30023xx	

NOTE: Numbers in brackets represent group numbers and are used in Test Purpose identifiers.

## 5 Test Purposes (TP)

### 5.1 Introduction

Test purposes are grouped in several steps. In the first step TPs are grouped according to the type of the test (compatibility checking, address checking or checking based on UUI). Test purposes for compatibility checking are further grouped according to basic services to be tested, the direction of the call, does the IUT support or does not support the given basic service (compatible or incompatible with the type of the call) and if appropriate according to additional capabilities (e.g. support of the fallback function). At the outgoing call direction for a given terminal equipment is tested for each service in the set of basic services and applications (e.g. rate adaption) supported by the Terminal Equipment (TE) for outgoing calls. At the incoming call direction each basic service and application considered by the base document(s) are tested. For services and applications supported by the TE the "compatible" subgroup shall be selected, for services and applications not supported by the TE the "incompatible" subgroup shall be chosen.

Test purposes in the "address checking" and "checking of UUI" groups are basic service independent and selected based on the terminal equipment capability to support these optional functions.

#### 5.1.1 Test Purpose (TP) naming convention

Test Purposes are numbered, starting at 001, within each group. Groups are organized according to the TSS (see table 1).

**Table 1: TP Identifier naming convention scheme**

<b>Identifier:</b>	<b>TP&lt;Checking&gt;&lt;Group&gt;&lt;Call type&gt;&lt;Test type&gt;&lt;n&gt;</b>
<Checking>	1 digit field representing the type of the test 1 = compatibility checking 2 = address checking 3 = checking of UUI
<Group>	2 digit field representing group reference according to TSS (basic service for compatibility checking and the type address information for address checking)
<Call type>	1 digit field representing the type of the call 1 = outgoing call 2 = incoming call
<Test type>	1 digit field representing the type of the test
<n> =	sequential number (01-99)

#### 5.1.2 Source of TP definition

The TPs are based on EG 201 018 [1], EN 300 403-1 [4] and EN 300 267-1 [5].

EG 201 018 [1] describes the combinations of codings for the BC, LLC and HLC information elements to be used by terminal equipment's at the calling side and expected at the called side. The codings of the BC, HLC and LLC information elements used in TPs are based on these combinations; and the decision regarding TE conformance to different basic services is based on these combinations.

The principles and procedures of compatibility and address checking is defined in EN 300 403-1 [4], subclauses 5.2.2 and B.3.3 for circuit mode calls and in ETS 300 007 [9], subclause 4.3 for packet mode calls. Compatibility checking consists of the capability of the TE to use the correct BC, HLC and LLC information elements when requesting different basic telecommunication services from the network and the capability to check its own compatibility based on the BC, HLC and LLC information elements with the instance of a call offered by the network. In TPs for compatibility checking only subclause of EG 201 018 containing the relevant codings is referenced. Address checking is an optional procedure for TEs at the called user side to increase mutual compatibility based on the content(s) of the Called party number and/or the Called party subaddress information elements. The TE may optionally implement an additional checking of the User-to-user information element advancing mutual compatibility. This TSS&TP contains TPs for compatibility checking, address checking and checking of UUI.

EN 300 403-1 [4] describes also the procedures for basic telecommunication service identification and selection which includes two harmonized procedures: bearer capability selection and high layer compatibility selection, known as the signalling fallback function and taken into account in the relevant TPs.

Layer 3 procedures for packet mode calls are given in ETS 300 007 [9], which is used in TPs for packet mode bearer services.

### 5.1.3 Test purpose structure

Each TP has been written in a manner which is consistent with all other TPs. The intention of this is to make the TPs more readable and checkable. A particular structure has been used and this is illustrated in table 2. This table should be read in conjunction with any TP i.e. use a TP as an example to fully understand the table.

**Table 2: Structure of a single Test Purpose**

<Identifier>	<Paragraph number in base documents>		
<b>TSS group ref.:</b>	<Test Suite Structure group reference>		
<b>Selection criteria:</b>	<Selection criteria in order to select the relevant test case for execution> IUT supports / does not support <service> <additional capabilities> for outgoing / incoming calls (note)		
<b>Test Purpose:</b>	<Description of the purpose of the test> Ensure that that the IUT in <basic call state> <action, e.g. request the service, accepts incoming SETUP, ignores or rejects the incoming call> <next action, e.g. using ...message, ...cause value, ...location>		
<b>Parameter values:</b>	<b>BC value(s):</b> < BC value(s) to be expected or sent >	<b>LLC value:</b> <LLC value to be expected or sent >	<b>HLC value(s):</b> < HLC value(s) to be expected or sent >
	<b>CdPN:</b> < Called party number IE to be sent >	<b>CdPS:</b> < Called party subaddress IE to be sent >	<b>UUI:</b> < user-to-user IE to be sent >
<b>Comments:</b>	Any relevant comment and reference		
NOTE:	The selection criteria "supports" or "does not support" may be related to the given TP only; i.e. some terminals may need operational action(s) only to consider itself compatible or incompatible with the given service (e.g. a videotelephony terminal supporting fallback may offer the choice to accept the incoming videotelephony call the type "fallback allowed" as a videotelephony, 7 kHz telephony or 3,1 kHz telephony terminal).		

### 5.1.4 Test strategy

As EG 201 018 [1] contains no explicit requirements for testing, the TPs were generated as a result of an analysis of the base documents. The criteria applied included the following:

- only the requirements from the point of view of the T or S/T reference point are considered;
- whether or not a test case can be built from the TP is not considered.

## 5.2 Test Purposes

### 5.2.1 Compatibility checking

#### 5.2.1.1 Circuit mode bearer service speech

##### 5.2.1.1.1 Outgoing call

TP1011001	EG 201 018 subclause 6.1.1.1		
TSS group ref.:	EG 201 018/Compatibility_checking/Speech/Outgoing		
Selection criteria:	IUT supports BS speech for outgoing calls		
Test Purpose:	Ensure that the IUT in call state U00 requesting the speech bearer service uses correct BC, LLC and HLC in the outgoing SETUP message.		
Parameter values:	BC value(s): speech CdPN: to be ignored	LLC value: none or speech CdPS: to be ignored	HLC value(s): none UUI: to be ignored
Comments:			

##### 5.2.1.1.2 Incoming call, compatible

TP1012101	EG 201 018 subclause 6.1.1.2		
TSS group ref.:	EG 201 018/Compatibility_checking/Speech/Incoming/Compatible		
Selection criteria:	IUT supports BS speech for incoming calls		
Test Purpose:	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
Parameter values:	BC value(s): speech CdPN: none or compatible	LLC value: none CdPS: none or compatible	HLC value(s): none UUI: none or compatible
Comments:			

TP1012102	EG 201 018 subclause 6.1.1.2		
TSS group ref.:	EG 201 018/Compatibility_checking/Speech/Incoming/Compatible		
Selection criteria:	IUT supports BS speech for incoming calls		
Test Purpose:	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
Parameter values:	BC value(s): speech CdPN: none or compatible	LLC value: speech CdPS: none or compatible	HLC value(s): none UUI: none or compatible
Comments:			

<b>TP1012103</b>	EG 201 018 subclause 6.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Speech/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS speech for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the conflicting LLC, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> speech	<b>LLC value:</b> 64 kbit/s UDI	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1012104</b>	EG 201 018 subclause 6.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Speech/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS speech for incoming calls; IUT does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> speech	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.1.3 Incoming call, incompatible

<b>TP1012201</b>	EG 201 018 subclause 6.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Speech/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS speech for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> speech	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1012202</b>	EG 201 018 subclause 6.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Speech/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS speech for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> speech	<b>LLC value:</b> speech	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1012203</b>	EG 201 018 subclause 6.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Speech/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS speech for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> speech	<b>LLC value:</b> compatible with IUT(1)	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from speech, otherwise the test case shall be deselected.		

<b>TP1012204</b>	EG 201 018 subclause 6.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Speech/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS speech for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> speech	<b>LLC value:</b> compatible with IUT or none(1)	<b>HLC value(s):</b> compatible with IUT(2)
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from speech, otherwise none. 2 - shall be different from telephony, otherwise the test case shall be deselected.		

## 5.2.1.2 Circuit mode bearer service 64 kbit/s unrestricted digital information

### 5.2.1.2.1 Outgoing call

<b>TP1021001</b>	EG 201 018 subclause 6.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbits_UDI/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 64 kbit/s UDI bearer service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

## 5.2.1.2.2 Incoming call, compatible

<b>TP1022101</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1022102</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> 64 kbit/s UDI	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1022103</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1022104</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI for incoming calls; IUT does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.1.2.3 Incoming call, incompatible

<b>TP1022201</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1022202</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> 64 kbit/s UDI	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1022203</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT1	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI, otherwise the test case shall be deselected.		

<b>TP1022204</b>	EG 201 018 subclause 6.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/64kbit/s_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 64 kbit/s UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT or none1	<b>HLC value(s):</b> telephony or facsimile G2/31
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI, otherwise none. 2 - which is supported by the IUT, otherwise the test case shall be deselected.		

### 5.2.1.3 Circuit mode bearer service 3,1 kHz audio

#### 5.2.1.3.1 Outgoing call

<b>TP1031001</b>	EG 201 018 subclause 6.1.3.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1 kHz_audio/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports voice band modem for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio bearer service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none or 3,1 kHz audio	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.3.2 Incoming call, compatible

<b>TP1032101</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio without PI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message (without a PI IE) and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032102</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio with PI containing progress description #1 or #3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a PI with progress description #1 or #3 and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032103</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for voice band modem for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032104</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> 64 kbit/s UDI	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032105</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.3.3 Incoming call, incompatible

<b>TP1032201</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 3,1 kHz audio without PI containing progress description #1 or #3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message not containing a PI with progress description #1 or #3 or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032202</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 3,1 kHz audio with PI containing progress description #1 or #3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a PI with progress description #1 or #3 or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032203</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 3,1 kHz audio for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1032204</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 3,1 kHz audio for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> compatible with IUT1	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 3,1 kHz audio or voice band modem, otherwise test is deselected.		

<b>TP1032205</b>	EG 201 018 subclause 6.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/3,1kHz_audio/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 3,1 kHz audio for incoming calls; IUT does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> compatible with the IUT or none 1	<b>HLC value(s):</b> compatible with the IUT1
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 3,1 kHz audio or voice band modem, otherwise none. 2 - shall be different from facsimile G2/3, otherwise test deselected.		

## 5.2.1.4 Circuit mode bearer service multiple-rate unrestricted digital information

### 5.2.1.4.1 Outgoing call

<b>TP1041001</b>	EG 201 018 subclause 6.1.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Outgoing		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the multiple-rate UDI bearer service uses correct BC, LLC and HLC in the outgoing SETUP message; if the IUT includes LLC, multiplier values in the BC and in the LLC shall be equal.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI	<b>LLC value:</b> none or multiple rate UDI	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	test shall be executed for each supported multiplier value		

### 5.2.1.4.2 Incoming call, compatible

<b>TP1042101</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	test shall be executed for each supported multiplier value		

<b>TP1042102</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI	<b>LLC value:</b> multiple rate UDI, multiplier value is equal to multiplier value in BC	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	test shall be executed for each supported multiplier value		

<b>TP1042103</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI	<b>LLC value:</b> multiple rate UDI, multiplier value is different from the multiplier value in BC	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	test shall be executed for each supported multiplier value		

<b>TP1042104</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for incoming calls; IUT does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	test shall be executed for each supported multiplier value		

### 5.2.1.4.3 Incoming call, incompatible

<b>TP1042201</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI, multiplier value equals 2	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1042202</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI, multiplier value equals 2	<b>LLC value:</b> multiple rate UDI, multiplier value equals 2	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1042203</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI, multiplier value equals 2	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - if no compatible LLC exist the test case shall be deselected.		

<b>TP1042204</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI, multiplier value equals 2	<b>LLC value:</b> compatible with the IUT or none(1)	<b>HLC value(s):</b> compatible with the IUT or none(2)
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - if no supported value exist than none. 2 - if no supported value exist, the test case shall be deselected.		

<b>TP1042205</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI, multiplier value is not supported by IUT	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	test shall be executed for each multiplier value not supported by IUT		

<b>TP1042206</b>	EG 201 018 subclause 6.1.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multiple-rate_UDI/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS multiple-rate UDI for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> multiple rate UDI, multiplier value is not supported by IUT	<b>LLC value:</b> multiple rate UDI, multiplier value is supported by IUT	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	test shall be executed for each multiplier value not supported by IUT		

### 5.2.1.5 Packet mode virtual call bearer service over the B-channel

#### 5.2.1.5.1 Outgoing call

<b>TP1051001</b>	EG 201 018 subclause 6.2.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B-channel/Outgoing		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using B-channel for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the packet mode through the B-channel bearer service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.5.2 Incoming call, compatible

<b>TP1052101</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1052102</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> packet mode, B-channel	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1052103</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> packet mode, D-channel	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1052104</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1052105</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.5.3 Incoming call, incompatible

<b>TP1052201</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1052202</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> packet mode, B-channel	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1052203</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	1 - if no supported value exists, test is deselected.		

<b>TP1052204</b>	EG 201 018 subclause 6.2.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_B /Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode virtual call BS VC through the B-channel for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, B-channel	<b>LLC value:</b> compatible with the IUT or none(1)	<b>HLC value(s):</b> compatible with the IUT(2)
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	1 - if no supported value exists than none. 2 - if no supported value exists, test is deselected.		

## 5.2.1.6 Packet mode virtual call bearer service over the D-channel

### 5.2.1.6.1 Incoming call, compatible

<b>TP1061101</b>	EG 201 018 subclause 6.2.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using D-channel and notification for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a D-channel identification IE and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1061102</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using D-channel and notification for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a D-channel identification IE and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> packet mode, D-channel	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1061103</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using D-channel and notification for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message containing a D-channel identification IE and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> packet mode, B-channel	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1061104</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using D-channel and notification for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message containing a D-channel identification IE and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1061105</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports packet mode VC BS using D-channel and notification for incoming calls; IUT does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message containing a D-channel identification IE and responds by sending a CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.6.2 Incoming call, incompatible

<b>TP1061201</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using BS using D-channel for incoming calls; IUT supports packet mode virtual call BS through the D-channel for incoming calls but does not support notification.		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1061202</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using D-channel for incoming calls; IUT supports packet mode VC BS using D-channel for incoming calls but does not supports notification.		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> packet mode, D-channel	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1061203</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using D-channel for incoming calls; IUT supports packet mode VC BS using D-channel for incoming calls but does not supports notification		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - if no supported value exists, test is deselected.		

<b>TP1061204</b>	EG 201 018 subclause 6.2.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Packet_D/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support packet mode VC BS using D-channel for incoming calls; IUT supports packet mode VC BS using D-channel for incoming calls but does not supports notification		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> packet mode, D-channel	<b>LLC value:</b> compatible with the IUT or none(1)	<b>HLC value(s):</b> compatible with the IUT(2)
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - if no supported value exists than none. 2 - if no supported value exists, test is deselected.		

### 5.2.1.7 Telephony 3,1 kHz teleservice

#### 5.2.1.7.1 Outgoing call

<b>TP1071001</b>	EG 201 018 subclause 6.3.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Outgoing		
<b>Selection criteria:</b>	IUT supports TS telephony 3,1 kHz for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the telephony 3,1 kHz teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	none or speech	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	to be ignored	to be ignored	to be ignored
<b>Comments:</b>			

#### 5.2.1.7.2 Incoming call, compatible

<b>TP1072101</b>	EG 201 018 subclause 6.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	none	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>			

<b>TP1072102</b>	EG 201 018 subclause 6.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	speech	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>			

<b>TP1072103</b>	EG 201 018 subclause 6.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the conflicting LLC and accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	64 kbit/s UDI	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>			

## 5.2.1.7.3 Incoming call, incompatible

<b>TP1072201</b>	EG 201 018 subclause 6.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	none	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>			

<b>TP1072202</b>	EG 201 018 subclause 6.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	speech	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>			

<b>TP1072203</b>	EG 201 018 subclause 6.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_3,1kHz/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	speech	compatible with the IUT(1)	telephony
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	1 - shall be different from speech, otherwise test deselected.		

### 5.2.1.8 Telephony 7 kHz teleservice

#### 5.2.1.8.1 Outgoing call, fallback not allowed

<b>TP1081101</b>	EG 201 018 subclause 6.3.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz and does not support fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the telephony 7 kHz teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI-TA	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1081102</b>	EG 201 018 subclauses 6.3.4 and 6.3.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz and supports short term procedure for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the telephony 7 kHz teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

#### 5.2.1.8.2 Outgoing call, fallback allowed

<b>TP1081201</b>	EG 201 018 subclauses 6.3.4 and 6.3.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the telephony 7 kHz teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

#### 5.2.1.8.3 Incoming call, compatible, fallback not allowed

<b>TP1082101</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1082102</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1082103</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1082104</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

#### 5.2.1.8.4 Incoming call, compatible, fallback allowed

<b>TP1082201</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"supports" may mean the IUT accepts the call as a telephony 7 kHz terminal due to operator action		

<b>TP1082202</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> speech	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"supports" may mean the IUT accepts the call as a telephony 7 kHz terminal due to operator action		

<b>TP1082203</b>	EG 201 018 subclause 6.3.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS telephony 7 kHz and supports fallback for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> OSI application
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"supports" may mean the IUT accepts the call as a telephony 7 kHz terminal due to operator action		

<b>TP1082204</b>	EG 201 018 subclauses 6.1.1.2 and 6.3.4		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz with fallback and supports BS speech for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT optionally may include BC=speech but shall not include an HLC into the CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a 7 kHz telephony terminal based on operator action.		

<b>TP1082205</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz with fallback and supports TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message and if included, it may also include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a 7 kHz telephony terminal based on operator action		

### 5.2.1.8.5 Incoming call, incompatible, fallback not allowed

<b>TP1082301</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1082302</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1082303</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with IUT(1)	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1082304</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC and the HLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with IUT or none(1)	<b>HLC value(s):</b> compatible with IUT(2)
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise none. 2 - if no supported value exists, the test case shall be deselected.		

#### 5.2.1.8.6 Incoming call, incompatible, fallback allowed

<b>TP1082401</b>	EG 201 018 subclause 6.3.4.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz with fallback and does not support TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1082402</b>	EG 201 018 subclause 6.3.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telephony_7kHz/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS telephony 7 kHz with fallback and does not support TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> speech	<b>HLC value(s):</b> telephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.1.9 Videotelephony teleservice

### 5.2.1.9.1 Outgoing call, fallback not allowed

<b>TP1091101</b>	EG 201 018 subclause 6.3.5.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and does not support fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI-TA	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	"does not support" may mean that the IUT does not initiate the given type of call instance due to operator action on a call-by-call or on a permanent basis		

<b>TP1091102</b>	EG 201 018 subclause 6.3.5.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1091103</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports the short term procedure using the "user layer 1 protocol" field of the BC the for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221& H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> videotelephony or video-telephony, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1091104</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports the short term procedure not using the "user layer 1 protocol" field of the BC the for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> videotelephony or video-telephony, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1091105</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports the short term procedure using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> videotelephony or videotelephony, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1091106</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports the short term procedure not using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> videotelephony or videotelephony, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

### 5.2.1.9.2 Outgoing call, fallback allowed

<b>TP1091201</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videotelephony teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second connection refer to TP1091102		

<b>TP1091202</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videotelephony teleservice (fallback allowed to telephony 7 kHz only) uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second connection refer to TP1091102		

## 5.2.1.9.3 Incoming call, compatible, fallback not allowed

<b>TP1092101</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092102</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092103</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092104</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092105</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092106</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>second</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092107</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092108</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092109</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092110</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

#### 5.2.1.9.4 Incoming call, compatible, fallback allowed

<b>TP1092201</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=videotelephony, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1092104-1092106		

<b>TP1092202</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the LLC, accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=videotelephony, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092203</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=videotelephony, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092204</b>	EG 201 018 subclauses 6.1.1.2 and 6.3.5.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and TS telephony 7 kHz with fallback and supports BS speech for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring HLCs accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message but shall not include an HLC.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a videotelephony or a 7 kHz telephony terminal based on operator action		

<b>TP1092205</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and TS telephony 7 kHz with fallback and supports TS telephony 3,1 kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message and if included, it may also include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a videotelephony or a 7 kHz telephony terminal based on operator action		

<b>TP1092206</b>	EG 201 018 subclause 6.3.4.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and supports TS telephony 7 kHz with fallback and does not support telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message and may optionally include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a videotelephony or 3,1 kHz telephony terminal based on operator action		

<b>TP1092207</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videotelephony and supports fallback		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain HLC=videotelephony, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1092104-1092106		

<b>TP1092208</b>	EG 201 018 subclause 6.3.5.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony and supports TS telephony 7kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message may contain HLC= telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1092104-1092106; "support" may mean the IUT accepts the call as a telephony 7 kHz terminal due to operator action		

## 5.2.1.9.5 Incoming call, incompatible, fallback not allowed

<b>TP1092301</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092302</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092303</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise test deselected.		

<b>TP1092304</b>	EG 201 018 subclause 6.3.5.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony for incoming calls or IUT supports TS videotelephony for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092305</b>	EG 201 018 subclause 6.3.5.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony for incoming calls or IUT supports TS videotelephony for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092306</b>	EG 201 018 subclause 6.3.5.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony for incoming calls or IUT supports TS videotelephony for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> videotelephony, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1092307</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videotelephony or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092308</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videotelephony or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092309</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videotelephony or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221& H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092310</b>	EG 201 018 subclause 6.3.5.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videotelephony or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221& H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.9.6 Incoming call, incompatible, fallback allowed

<b>TP1092401</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs 1092304-1092306		

<b>TP1092402</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1092403</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1092404</b>	EG 201 018 subclause 6.3.5.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotelephony/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videotelephony with fallback and TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videotelephony, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs 1092304-1092306		

### 5.2.1.10 Videoconference teleservice

#### 5.2.1.10.1 Outgoing call, fallback not allowed

<b>TP1101101</b>	EG 201 018 subclause 6.3.9.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and does not support fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI-TA	<b>HLC value(s):</b> Videoconferencing, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1101102</b>	EG 201 018 subclause 6.3.9.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> and <b>subsequent</b> connections for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1101103</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports the short term procedure using the "user layer 1 protocol" field of the BC for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> videoconference or videoconference, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1101104</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports the short term procedure not using the "user layer 1 protocol" field of the BC for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> videoconference or videoconference, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1101105</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports the short term procedure using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> videoconference or videoconference, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1101106</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports the short term procedure not using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> videoconference or videoconference, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

### 5.2.1.10.2 Outgoing call, fallback allowed

<b>TP1101201</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videoconference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second and subsequent connections refer to TP1101102		

<b>TP1101202</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the videoconference teleservice (fallback allowed to telephony 7 kHz only) uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second connection refer to TP1101102		

### 5.2.1.10.3 Incoming call, compatible, fallback not allowed

<b>TP1102101</b>	EG 201 018 subclause 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102102</b>	EG 201 018 subclause 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102103</b>	EG 201 018 subclause 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102104</b>	EG 201 018 subclause 6.3.9.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102105</b>	EG 201 018 subclause 6.3.9.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102106</b>	EG 201 018 subclause 6.3.9.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>second</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102107</b>	EG 201 018 subclause 6.3.9.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102108</b>	EG 201 018 subclause 6.3.9.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102109</b>	EG 201 018 subclause 6.3.9.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102110</b>	EG 201 018 subclause 6.3.9.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

#### 5.2.1.10.4 Incoming call, compatible, fallback allowed

<b>TP1102201</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message of the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=videoconferencing, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second and subsequent connections refer to TPs 1102104-1102106		

<b>TP1102202</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message of the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=videoconferencing, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102203</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message of the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=videoconferencing, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102204</b>	EG 201 018 subclauses 6.1.1.2 and 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 7 kHz with fallback and supports BS speech for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores HLCs, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message but shall not include an HLC.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a videoconference or a 7 kHz telephony terminal based on operator action		

<b>TP1102205</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 7 kHz with fallback and supports TS telephony 3,1 kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message and if included, it may also include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a videoconference or a 7 kHz telephony terminal based on operator action		

<b>TP1102206</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Videoconference /Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 3,1 kHz and supports TS telephony 7 kHz with fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message and may optionally include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a videoconference or a 3,1 kHz telephony terminal based on operator action		

<b>TP1102207</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS videoconference and supports fallback		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain HLC=videoconference, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1102104-1102106		

<b>TP1102208</b>	EG 201 018 subclause 6.3.9.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference and supports TS telephony 7kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message may contain HLC= telephony; The IUT shall presume the telephony 7 kHz teleservice.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1102104-1102106; "does not support" may mean that the IUT does not accept the call as a videoconference terminal based on operator action		

### 5.2.1.10.5 Incoming call, incompatible, fallback not allowed

<b>TP1102301</b>	EG 201 018 subclause 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102302</b>	EG 201 018 subclause 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102303</b>	EG 201 018 subclause 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise test deselected.		

<b>TP1102304</b>	EG 201 018 subclause 6.3.9.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference for incoming calls or IUT supports TS videoconference for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102305</b>	EG 201 018 subclause 6.3.9.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference for incoming calls or IUT supports TS videoconference for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102306</b>	EG 201 018 subclause 6.3.9.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference for incoming calls or IUT supports TS videoconference for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> videoconferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1102307</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videoconference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102308</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videoconference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102309</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videoconference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102310</b>	EG 201 018 subclause 6.3.9.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS videoconference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.10.6 Incoming call, incompatible, fallback allowed

<b>TP1102401</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.9.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102402</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.9.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1102403</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> first: telephony second: videoconferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1102404</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.9.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videoconference/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS videoconference with fallback and TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: videoconference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs 1102304-1102306		

### 5.2.1.11 Audiographic conference teleservice

#### 5.2.1.11.1 Outgoing call, fallback not allowed

<b>TP1111101</b>	EG 201 018 subclause 6.3.10.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and does not support fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI-TA	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1111102</b>	EG 201 018 subclause 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> and <b>subsequent</b> connections for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1111103</b>	EG 201 018 subclause 6.3.10.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports the short term procedure using the "user layer 1 protocol" field of the BC the for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> audiographic conference or audiographic conference, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1111104</b>	EG 201 018 subclause 6.3.10.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports the short term procedure not using the "user layer 1 protocol" field of the BC the for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> audiographic conference or audiographic conference, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1111105</b>	EG 201 018 subclause 6.3.10.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports the short term procedure using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> audiographic conference or audiographic conference, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1111106</b>	EG 201 018 subclause 6.3.10.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports the short term procedure not using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> audiographic conference or audiographic conference, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

### 5.2.1.11.2 Outgoing call, fallback allowed

<b>TP1111201</b>	EG 201 018 subclause 6.3.10.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the audiographic conference teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second and subsequent connections refer to TP1111102		

<b>TP1111202</b>	EG 201 018 subclause 6.3.10.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the audiographic conference teleservice (fallback allowed to telephony 7 kHz only) uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second connection refer to TP1111102		

## 5.2.1.11.3 Incoming call, compatible, fallback not allowed

<b>TP1112101</b>	EG 201 018 subclause 6.3.10.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112102</b>	EG 201 018 subclause 6.3.10.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112103</b>	EG 201 018 subclause 6.3.10.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>first</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112104</b>	EG 201 018 subclause 6.3.10.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112105</b>	EG 201 018 subclause 6.3.10.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112106</b>	EG 201 018 subclause 6.3.10.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>second</b> connection and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112107</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112108</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112109</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112110</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.1.11.4 Incoming call, compatible, fallback allowed

<b>TP1112201</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second and subsequent connections refer to TPs 1112104-1112106		

<b>TP1112202</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112203</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112204</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not supports TS audiographic conference with fallback and TS telephony 7 kHz with fallback and supports BS speech for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring the HLCs accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message but shall not include an HLC.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as an audiographic conference or a 7 kHz telephony terminal based on operator action		

<b>TP1112205</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1.		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not supports TS audiographic conference with fallback and TS telephony 7 kHz with fallback and supports TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message and if included, it may also include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as an audiographic conference or a 7 kHz telephony terminal based on operator action		

<b>TP1112206</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not supports TS audiographic conference with fallback and TS telephony 3,1 kHz and supports TS telephony 7 kHz with fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message and may optionally include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as an audiographic conference or a 3,1 kHz telephony terminal based on operator action		

<b>TP1112207</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Compatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS audiographic conference and supports fallback		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain HLC= audiographic conference, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1112104-1112106		

<b>TP1112208</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_telephony/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference and supports TS telephony 7kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message may contain HLC= telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1112104-1112106; "does not support" may mean that the IUT does not accept the call as an audiographic conference terminal based on operator action		

### 5.2.1.11.5 Incoming call, incompatible, fallback not allowed

<b>TP1112301</b>	EG 201 018 subclause 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112302</b>	EG 201 018 subclause 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112303</b>	EG 201 018 subclause 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112304</b>	EG 201 018 subclause 6.3.10.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference for incoming calls or IUT supports TS audiographic conference for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112305</b>	EG 201 018 subclause 6.3.10.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference for incoming calls or IUT supports TS audiographic conference for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112306</b>	EG 201 018 subclause 6.3.10.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference for incoming calls or IUT supports TS audiographic conference for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> audiographic conferencing, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112307</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS audiographic conference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112308</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS audiographic conference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112309</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS audiographic conference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112310</b>	EG 201 018 subclause 6.3.10.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS audiographic conference or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.1.11.6 Incoming call, incompatible, fallback allowed

<b>TP1112401</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second and subsequent connections refer to TPs 1112304-1112306		

<b>TP1112402</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1112403</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> first: telephony second: audiographic conferencing, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1112404</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.10.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Audiographic_conference/Incoming/Incompatible-/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS audiographic conference with fallback and TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: audiographic conference, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs 1102304-1102306		

### 5.2.1.12 Telefax G2/3 teleservice

#### 5.2.1.12.1 Outgoing call

<b>TP1121001</b>	EG 201 018 subclause 6.3.6.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Outgoing		
<b>Selection criteria:</b>	IUT supports TS facsimile G2/3 for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the facsimile G2/3 teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.12.2 Incoming call, compatible

<b>TP1122101</b>	EG 201 018 subclause 6.3.6.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS facsimile G2/3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1122102</b>	EG 201 018 subclause 6.3.6.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS facsimile G2/3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message discarding the LLC and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1122103</b>	EG 201 018 subclause 6.3.6.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS facsimile G2/3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message discarding the conflicting LLC, and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> 64 kbit/s UDI	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.12.3 Incoming call, incompatible

<b>TP1122201</b>	EG 201 018 subclause 6.3.6.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS facsimile G2/3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> none	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1122202</b>	EG 201 018 subclause 6.3.6.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS facsimile G2/3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1122203</b>	EG 201 018 subclause 6.3.6.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G3/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS facsimile G2/3 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> facsimile G2/3
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 3,1 kHz audio, otherwise test deselected.		

### 5.2.1.13 Telefax G4 teleservice

#### 5.2.1.13.1 Outgoing call

<b>TP1131001</b>	EG 201 018 subclause 6.3.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Telefax_G4/Outgoing		
<b>Selection criteria:</b>	IUT supports TS facsimile G4 for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the facsimile G4 teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.13.2 Incoming call, compatible

<b>TP1132101</b>	EG 201 018 subclause 6.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Telefax_G4/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS telefax G4 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1132102</b>	EG 201 018 subclause 6.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Telefax_G4/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS telefax G4 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1132103</b>	EG 201 018 subclause 6.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Telefax_G4/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS telefax G4 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.13.3 Incoming call, incompatible

<b>TP1132201</b>	EG 201 018 subclause 6.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Telefax_G4/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS telefax G4 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1132202</b>	EG 201 018 subclause 6.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Telefax_G4/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS telefax G4 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1132203</b>	EG 201 018 subclause 6.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/ Telefax_G4/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS telefax G4 for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> facsimile G4
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

### 5.2.1.14 Syntax based videotex teleservice

#### 5.2.1.14.1 Outgoing call

<b>TP1141001</b>	EG 201 018 subclause 6.3.3.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Outgoing		
<b>Selection criteria:</b>	IUT supports TS syntax based videotex for outgoing calls; access via end-to-end circuit-mode connection		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the syntax based videotex teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1141002</b>	EG 201 018 subclause 6.3.3.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Outgoing		
<b>Selection criteria:</b>	IUT supports TS syntax based videotex for outgoing calls; access via PSPDN AU		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the syntax based videotex teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> X.25	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

NOTE: Access to the syntax based videotex teleservice using a packet mode switched connection through the B-channel uses the packet mode virtual bearer service via the B-channel (see subclause 5.2.1.5).

#### 5.2.1.14.2 Incoming call, compatible

<b>TP1142101</b>	EG 201 018 subclause 6.3.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS syntax based videotex via end-to-end circuit-mode connection for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1142102</b>	EG 201 018 subclause 6.3.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS syntax based videotex via end-to-end circuit-mode connection for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1142103</b>	EG 201 018 subclause 6.3.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS syntax based videotex via end-to-end circuit-mode connection for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1142104</b>	EG 201 018 subclause 6.3.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS syntax based videotex via PSPDN AU for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> X.25	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

NOTE: Access to the syntax based videotex teleservice using a packet mode switched connection through the B-channel or D-channel uses the packet mode virtual bearer services (see subclauses 5.2.1.5 and 5.2.1.6).

## 5.2.1.14.3 Incoming call, incompatible

<b>TP1142201</b>	EG 201 018 subclause 6.3.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS syntax based videotex via end-to-end circuit-mode connection for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1142202</b>	EG 201 018 subclause 6.3.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS syntax based videotex via end-to-end circuit-mode connection for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1142203</b>	EG 201 018 subclause 6.3.3.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS syntax based videotex via end-to-end circuit-mode connection for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> syntax-based videotex
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

<b>TP1142204</b>	EG 201 018 subclause 6.3.3.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Videotex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS syntax based videotex via PSPDN AU for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> X.25	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

NOTE: Access to the syntax based videotex teleservice using a packet mode switched connection through the B-channel or D-channel uses the packet mode virtual bearer services (see subclauses 5.2.1.5 and 5.2.1.6).

### 5.2.1.15 File Transfer & Access management (FTAM) teleservice

#### 5.2.1.15.1 Outgoing call

<b>TP1151001</b>	EG 201 018 subclause 6.3.7.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Outgoing		
<b>Selection criteria:</b>	IUT supports TS FTAM for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the FTAM teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> FTAM
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.15.2 Incoming call, compatible

<b>TP1152101</b>	EG 201 018 subclause 6.3.7.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS FTAM for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> FTAM
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1152102</b>	EG 201 018 subclause 6.3.7.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS FTAM for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> FTAM
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1152103</b>	EG 201 018 subclause 6.3.7.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS FTAM for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI <b>CdPN:</b> none or compatible	<b>LLC value:</b> compatible with the IUT(1) <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> FTAM <b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise the test case shall be deselected.		

### 5.2.1.15.3 Incoming call, incompatible

<b>TP1152201</b>	EG 201 018 subclause 6.3.7.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS FTAM for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI <b>CdPN:</b> none or compatible	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208 <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> FTAM <b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1152202</b>	EG 201 018 subclause 6.3.7.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS FTAM for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI <b>CdPN:</b> none or compatible	<b>LLC value:</b> none <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> FTAM <b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1152203</b>	EG 201 018 subclause 6.3.7.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/FTAM/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS FTAM for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI <b>CdPN:</b> none or compatible	<b>LLC value:</b> compatible with the IUT(1) <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> FTAM <b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

### 5.2.1.16 Eurofile transfer teleservice

#### 5.2.1.16.1 Outgoing call

<b>TP1161001</b>	EG 201 018 subclause 6.3.8.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Outgoing		
<b>Selection criteria:</b>	IUT supports TS Eurofile transfer for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the Eurofile transfer teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.16.2 Incoming call, compatible

<b>TP1162101</b>	EG 201 018 subclause 6.3.8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS Eurofile transfer for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1162102</b>	EG 201 018 subclause 6.3.8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS Eurofile transfer for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1162103</b>	EG 201 018 subclause 6.3.8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS Eurofile transfer for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

## 5.2.1.16.3 Incoming call, incompatible

<b>TP1162201</b>	EG 201 018 subclause 6.3.8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS Eurofile transfer for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1162202</b>	EG 201 018 subclause 6.3.8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS Eurofile transfer for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1162203</b>	EG 201 018 subclause 6.3.8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Eurofile/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS Eurofile transfer for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> Eurofile transfer
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

### 5.2.1.17 Teletex teleservice

#### 5.2.1.17.1 Outgoing call

<b>TP1171001</b>	EG 201 018 subclause 7.1.3.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Outgoing		
<b>Selection criteria:</b>	IUT supports TS teletex in basic mode for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the teletex teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1171002</b>	EG 201 018 subclause 7.1.3.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Outgoing		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and mixed modes for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the teletex teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1171003</b>	EG 201 018 subclause 7.1.3.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Outgoing		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and processable modes for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the teletex teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

#### 5.2.1.17.2 Incoming call, compatible

<b>TP1172101</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1172102</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1172103</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

<b>TP1172104</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and mixed modes for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1172105</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and mixed modes for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1172106</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and mixed modes for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

<b>TP1172107</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and processable modes for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1172108</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and processable modes for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1172109</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports TS teletex in basic and processable modes for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT1	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

## 5.2.1.17.3 Incoming call, incompatible

<b>TP1172201</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1172202</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in basic mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1172203</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in basic mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> teletex, basic mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise the test case shall be deselected.		

<b>TP1172204</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in mixed mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1172205</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in mixed mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1172206</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in mixed mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> teletex, mixed mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

<b>TP1172207</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in processable mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> ISO/IEC 7776 - ISO/IEC 8208	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1172208</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in processable mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1172209</b>	EG 201 018 subclause 7.1.3.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Teletex/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support TS teletex in processable mode for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> teletex, processable mode
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from ISO/IEC 7776 - ISO/IEC 8208, otherwise test deselected.		

### 5.2.1.18 Specific user applications using different rate adaptions

In this subclause, TPs for specific applications using data transmission speed less than 64 kbit/s are given. The user rates considered are given in the table below (access to PSPDN using HDLC flag stuffing does not signal user rate, therefore not included into table 3).

**Table 3: User rate values for different applications**

User rate [kbit/s]	V110/X.30 asynchronous	V110/X.30 synchronous	access to PSPDN using V.110/X.30	voice band modem asynchronous	voice band modem synchronous
0,05	X				
0,75	X				
0,11	X				
0,15	X				
0,2	X				
0,3	X				
0,6	X	X		X	X
1,2	X	X		X	X
2,4	X	X	X	X	X
3,6	X			X	X
4,8	X	X	X	X	X
7,2	X	X		X	X
8		X			X
9,6	X	X	X	X	X
12	X	X		X	X
14,4	X	X		X	X
16		X			X
19,2	X	X		X	X
28,8	X	X		X	X
32		X			X
38,4	X	X		X	X
48		X	X		X
56		X			X
57,6	X	X		X	X
64		X	X		X

## 5.2.1.18.1 Outgoing call

<b>TP1181001</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,05 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,05 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181002</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,075 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,075 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181003</b>	EG 201 018 subclause 7.1.2.1. 1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,11 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,11 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181004</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,15 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,15 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181005</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181006</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,3 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,3 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181007</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181008</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 1,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 1,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181009</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 2,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 2,4 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181010</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 3,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 3,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181011</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 4,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 4,8 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181012</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 7,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 7,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181013</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 9,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 9,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181014</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 12 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 12 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181015</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 14,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 14,4 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181016</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 19,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 19,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181017</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 28,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 28,8 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181018</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 38,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 38,4 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181019</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 57,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service with uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 57,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181020</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 0,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 0,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181021</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 1,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 1,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181022</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 2,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 2,4 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181023</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 4,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 4,8 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181024</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 7,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 7,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181025</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 8 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181026</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 9,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 9,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181027</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 12 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 12 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181028</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 14,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 14,4 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181029</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 16 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 16 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181030</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 19,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 19,2 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181031</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 28,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 28,8 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181032</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 32 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 32 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181033</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 38,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 38,4 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181034</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 48 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 48 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181035</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 56 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 56 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181036</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 57,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 57,6 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181037</b>	EG 201 018 subclause 7.1.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 64 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> synchronous V.110/X.30, 64 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181038</b>	EG 201 018 subclause 7.1.2.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 2,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 2,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181039</b>	EG 201 018 subclause 7.1.2.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 4,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 4,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181040</b>	EG 201 018 subclause 7.1.2.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 9,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 9,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181041</b>	EG 201 018 subclause 7.1.2.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 48 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 48 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181042</b>	EG 201 018 subclause 7.1.2.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 64 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 64 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.1.2.2.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181043</b>	EG 201 018 subclause 7.1.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using HDLC flag stuffing for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> X.25	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1181044</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 0.6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 0,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181045</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 1,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 1,2 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181046</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 2,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 2,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181047</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 3,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 3,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181048</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 4,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 4,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181049</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 7,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 7,2 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181050</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 9,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 9,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181051</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 12 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 12 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181052</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 14,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 14,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181053</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 19,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 19,2 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181054</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 28,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 28,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181055</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 38,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 38,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181056</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and asynchronous voice band modem at user rate 57,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> asynchronous voice band modem, 57,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181057</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 0,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 0,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181058</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 1,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 1,2 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181059</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 2,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 2,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181060</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 3,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 3,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181061</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 4,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 4,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181062</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 7,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 7,2 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181063</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181064</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 9,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 9,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181065</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 12 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 12 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181066</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 14,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 14,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181067</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 16 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 16 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181068</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 19,2 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 19,2 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181069</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 28,8 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 28,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181070</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 32 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 32 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181071</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 38,4 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 38,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181072</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 48 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 48 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181073</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 56 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 56 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181074</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 57,6 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 57,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

<b>TP1181075</b>	EG 201 018 subclause 7.2.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and synchronous voice band modem at user rate 64 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the 3,1 kHz audio BS uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> synchronous voice band modem, 64 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	Other fields of the LLC (see EG 201 018 subclause 7.2.1.1 c)) shall be coded according to capabilities of the IUT.		

## 5.2.1.18.2 Incoming call, compatible

<b>TP1182101</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,05 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,05 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182102</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,075 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,075 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182103</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,11 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous, 0,11 kbit/s	<b>HLC value(s):</b> none or set according to IUT capabilities
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182104</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,15 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 0,15 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182105</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 0,2 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182106</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,3 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 0,3 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182107</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 0,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 0,6 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182108</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 1,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 1,2 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182109</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 2,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 2,4 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182110</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 3,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 3,6 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182111</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 4,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 4,8 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182112</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 7,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 7,2 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182113</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 9,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 9,6 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182114</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 12 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 12 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182115</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 14,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 14,4 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182116</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 19,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 19,2 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182117</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 28,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 28,8 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182118</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 38,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 38,4 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182119</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports asynchronous V.110/X.30 rate adaption at user rate 57,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous, 57,6 kbit/s	none or set according to IUT capabilities
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	compatible with the IUT or none
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.2.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182120</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 0,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 0,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182121</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 1,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 1,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182122</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 2,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 2,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182123</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 4,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 4,8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182124</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 7,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 7,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182125</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182126</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 9,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 9,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182127</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 12 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 12 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182128</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 14,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 14,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182129</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 16 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 16 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182130</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 19,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 19,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182131</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 28,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 28,86 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182132</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 32 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 32 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182133</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 38,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 38,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182134</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 48 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 48 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182135</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 56 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182136</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 57,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 57,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182137</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports synchronous V.110/X.30 rate adaption at user rate 64 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 64 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.1.1.2 c)) shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182138</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 2,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 for X.25, 2,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.2.2.2 c)), shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182139</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 4,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 for X.25, 4,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.2.2.2 c)), shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182140</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 9,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 for X.25, 9,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.2.2.2 c)), shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182141</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 48 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 for X.25, 48 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.2.2.2 c)), shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182142</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption at user rate 64 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 for X.25, 64 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.1.2.2.2 c)), shall be coded according to capabilities of the IUT (valid combination of parameters).		

<b>TP1182143</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports access to a PSPDN AU (X.31 Case A) using HDLC flag stuffing for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	X.25	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>			

<b>TP1182144</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 0,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 0,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182145</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 1,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 1,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182146</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 2,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 2,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182147</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 3,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 3,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182148</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 4,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 4,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182149</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 7,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 7,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182150</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 9,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 9,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182151</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 12 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 12 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182152</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 14,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 14,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182153</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 19,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 19,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182154</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 28,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 28,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182155</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 38,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 38,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182156</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for asynchronous voice band modem at user rate 57,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 57,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182157</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 0,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 0,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182158</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 1,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 1,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182159</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 2,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 2,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182160</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 3,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 3,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182161</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 4,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 4,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182162</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 7,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 7,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182163</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182164</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 9,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 9,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182165</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 12 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 12 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182166</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 14,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 14,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182167</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 16 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 16 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182168</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 19,2 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 19,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182169</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 28,8 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 28,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182170</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 32 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 32 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182171</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 38,4 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 38,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182172</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 48 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 48 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182173</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 56 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182174</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 57,6 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem; synchronous, 57,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

<b>TP1182175</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio for synchronous voice band modem at user rate 64 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem; synchronous, 64 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	Other fields of the LLC if exist (see EG 201 018 subclause 7.2.1.2) shall be coded according to capabilities of the IUT.		

### 5.2.1.18.3 Incoming call, incompatible

<b>TP1182201</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,05 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 asynchronous 0,05 kbit/s	<b>HLC value(s):</b> compatible with the IUT or none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182202</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,075 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCallion: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCallion: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 0,075 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182203</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,11 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCallion: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCallion: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 0,11 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182204</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,15 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCallion: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCallion: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 0,15 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182205</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 0,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182206</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,3 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 0,3 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182207</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 0,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 0,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182208</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 1,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 1,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182209</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 2,4 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 2,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182210</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 3,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 3,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182211</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 4,8 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 4,8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182212</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 7,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 7,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182213</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 9,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 9,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182214</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 12 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 12 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182215</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 14,4 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 14,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182216</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 19,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 19,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182217</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 28,8 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCallion: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCallion: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 28,8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182218</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 38,4 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCallion: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCallion: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 38,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182219</b>	EG 201 018 subclause 7.1.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support asynchronous V.110/X.30 rate adaption or user rate 57,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCallion: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCallion: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 asynchronous 57,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182220</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 0,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 0,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182221</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 1,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 1,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182222</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 2,4 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 2,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182223</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 4,8 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 4,8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182224</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 7,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 7,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182225</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 8 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182226</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 9,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 9,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182227</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 12 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 12 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182228</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 14,4 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 14,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182229</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 16 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 16 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182230</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 19,2 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 19,2 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182231</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 28,8 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 28,8 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182232</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 32 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 32 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182233</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 38,4 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 38,4 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182234</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 48 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 48 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182235</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 56 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 56 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182236</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 57,6 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 57,6 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182237</b>	EG 201 018 subclause 7.1.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support synchronous V.110/X.30 rate adaption or user rate 64 kbit/s or supports the rate adaption and the user rate but does not support other parameters in LLC for incoming call; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOcation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI	V.110/X.30 synchronous, 64 kbit/s	compatible with the IUT or none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous V.110/X.30 rate adaption and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.1.1.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182238</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption or user rate 2,4 kbit/s or supports V.110/X.30 rate adaption for X.25 access and the user rate but does not support other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 2,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports V.110/X.30 rate adaption for X.25 access and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182239</b>	EG 201 018 subclause 7.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption or user rate 4,8 kbit/s or supports V.110/X.30 rate adaption for X.25 access and the user rate but does not support other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 4,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports V.110/X.30 rate adaption for X.25 access and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182240</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption or user rate 9,6 kbit/s or supports V.110/X.30 rate adaption for X.25 access and the user rate but does not support other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 9,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports V.110/X.30 rate adaption for X.25 access and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.2.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182241</b>	EG 201 018 subclause 7.1.2.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption or user rate 48 kbit/s or supports V.110/X.30 rate adaption for X.25 access and the user rate but does not support other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 48 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports V.110/X.30 rate adaption for X.25 access and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182242</b>	EG 201 018 subclause 7.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support access to a PSPDN AU (X.31 Case A) using V.110/X.30 rate adaption or user rate 64 kbit/s or supports V.110/X.30 rate adaption for X.25 access and the user rate but does not support other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> V.110/X.30 for X.25, 64 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports V.110/X.30 rate adaption for X.25 access and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.1.2.2 c)) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182243</b>	EG 201 018 subclause 7.1.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support access to a PSPDN AU (X.31 Case A) using HDLC flag stuffing for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCation: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCation: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> X.25	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1182244</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 0,6 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 0,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182245</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 1,2 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 1,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182246</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 2,4 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 2,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182247</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 3,6 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 3,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182248</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 4,8 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 4,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182249</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 7,2 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 7,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182250</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 9,6 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 9,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182251</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 12 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem asynchronous, 12 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182252</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 14,4 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 14,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182253</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 19,2 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 19,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182254</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 28,8 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 28,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182255</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 38,4 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 38,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182256</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports asynchronous voice band modem or user rate 57,6 kbit/s or supports asynchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; asynchronous, 57,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports asynchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182257</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 0,6 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 0,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182258</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 1,2 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 1,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182259</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 2,4 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem; synchronous, 2,4 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182260</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 3,6 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and LOCall: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, LOCall: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem; synchronous, 3,6 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182261</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 4,8 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 3,1 kHz audio	<b>LLC value:</b> voice band modem; synchronous, 4,8 kbit/s	<b>HLC value(s):</b> none
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182262</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 7,2 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 7,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182263</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 8 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182264</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 9,6 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 9,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182265</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 12 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 12 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182266</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 14,4 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 14,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182267</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 16 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 16 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182268</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 19,2 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 19,2 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182269</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 28,8 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 28,8 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182270</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 32 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 32 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182271</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 38,4 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 38,4 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182272</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 48 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 48 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182273</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 56 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 56 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182274</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 57,6 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 57,6 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

<b>TP1182275</b>	EG 201 018 subclause 7.2.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Rate_adaption/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports BS 3,1 kHz audio and not supports synchronous voice band modem or user rate 64 kbit/s or supports synchronous voice band modem and the user rate but not supports other parameters in LLC for incoming calls; IUT checks LLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	3,1 kHz audio	voice band modem; synchronous, 64 kbit/s	none
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	If the IUT supports synchronous voice band modem and the user rate, at least one of the other fields of the LLC checked by the IUT (see ETS 018 subclause 7.2.1.2) shall be unsupported by the IUT; if no incompatible coding exists the test case shall be deselected.		

## 5.2.1.19 Interworking with networks supporting BS 64 kbit/s restricted digital information

### 5.2.1.19.1 Outgoing call

TP1191001	EG 201 018 subclause 8.1		
<b>SS group ref.:</b>	EG 201 018/Compatibility_checking/56kbts/Outgoing		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI with synchronous rate adaption to 56 kbit/s for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the service uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	56 kbit/s rate adaption	none or 56 kbit/s rate adaption	none or any valid codings
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	to be ignored	to be ignored	to be ignored
<b>Comments:</b>			

### 5.2.1.19.2 Incoming call, compatible

<b>TP1192101</b>	EG 201 018 subclause 8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/56kbits/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI with synchronous rate adaption to 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	56 kbit/s rate adaption	none	compatible with the IUT(1)
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	1 - if no supported value exists than none.		

<b>TP1192102</b>	EG 201 018 subclause 8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/56kbits/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI with synchronous rate adaption to 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	56 kbit/s rate adaption	56 kbit/s rate adaption	compatible with the IUT(1)
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	1 - if no supported value exists than none.		

<b>TP1192103</b>	EG 201 018 subclause 8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/56kbits/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports BS 64 kbit/s UDI with synchronous rate adaption to 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discarding the conflicting LLC accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	56 kbit/s rate adaption	3,1 kHz audio	compatible with the IUT(1)
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	1 - if no supported value exists than none.		

### 5.2.1.19.3 Incoming call, incompatible

<b>TP1192201</b>	EG 201 018 subclause 8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/56kbits/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 64 kbit/s UDI with synchronous rate adaption to 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	56 kbit/s rate adaption	none	compatible with the IUT(1)
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	1 - if no supported value exists than none.		

<b>TP1192202</b>	EG 201 018 subclause 8.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/56kbits/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT does not support BS 64 kbit/s UDI with synchronous rate adaption to 56 kbit/s for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 56 kbit/s rate adaption	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> compatible with the IUT(2)
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - if no supported value exists, the test case shall be deselected. 2 - if no supported value exists than none.		

### 5.2.1.20 Multimedia teleservice

#### 5.2.1.20.1 Outgoing call, fallback not allowed

<b>TP1201101</b>	EG 201 018 subclause 6.3.11.1.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and does not support fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI-TA	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	"does not support" may mean that the IUT does not initiate the given type of call instance due to operator action on a call-by-call or on a permanent basis		

<b>TP1201102</b>	EG 201 018 subclause 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1201103</b>	EG 201 018 subclause 6.3.11.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports the short term procedure using the "user layer 1 protocol" field of the BC the for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> multimedia or multimedia, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1201104</b>	EG 201 018 subclause 6.3.11.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports the short term procedure not using the "user layer 1 protocol" field of the BC for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> multimedia or multimedia, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1201105</b>	EG 201 018 subclause 6.3.11.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports the short term procedure using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none or 64 kbit/s UDI, H.221 & H.242	<b>HLC value(s):</b> multimedia or multimedia, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

<b>TP1201106</b>	EG 201 018 subclause 6.3.11.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports the short term procedure not using the "user layer 1 protocol" field of the BC and supports two or more B-channels for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>second</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none or 64 kbit/s UDI	<b>HLC value(s):</b> multimedia or multimedia, subsequent channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>			

### 5.2.1.20.2 Outgoing call, fallback allowed

<b>TP1201201</b>	EG 201 018 subclause 6.3.11.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the multimedia teleservice uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second connection refer to TP1201102		

<b>TP1201202</b>	EG 201 018 subclause 6.3.11.1.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Outgoing/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports fallback for outgoing calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 requesting the <b>first</b> connection for the multimedia teleservice (fallback allowed to telephony 7 kHz only) uses correct BC, LLC and HLC in the outgoing SETUP message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> to be ignored	<b>CdPS:</b> to be ignored	<b>UUI:</b> to be ignored
<b>Comments:</b>	for test case for the second connection refer to TP2091102		

### 5.2.1.20.3 Incoming call, compatible, fallback not allowed

<b>TP1202101</b>	EG 201 018 subclause 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202102</b>	EG 201 018 subclause 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202103</b>	EG 201 018 subclause 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202104</b>	EG 201 018 subclause 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202105</b>	EG 201 018 subclause 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>second</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202106</b>	EG 201 018 subclause 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>second</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202107</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202108</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202109</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202110</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221 & H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.1.20.4 Incoming call, compatible, fallback allowed

<b>TP1202201</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=multimedia, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1202104-1202106		

<b>TP1202202</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the LLC, accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=multimedia, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202203</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports fallback for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message the CONNECT message shall contain BC=64 kbit/s UDI-TA and HLC=multimedia, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 3,1 kHz audio	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202204</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and TS telephony 7 kHz with fallback and supports BS speech for incoming calls and does not check HLC		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignoring HLCs accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message but shall not include an HLC.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a multimedia or a 7 kHz telephony terminal based on operator option		

<b>TP1202205</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and TS telephony 7 kHz with fallback and supports TS telephony 3,1 kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT may optionally include BC=speech into the CONNECT message and if included, it may also include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a multimedia or a 7 kHz telephony terminal based on operator option		

<b>TP1202206</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and supports TS telephony 7 kHz with fallback and does not support telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the IUT shall include BC=64 kbit/s UDI-TA into the CONNECT message and may optionally include HLC=telephony.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	"does not support" may mean that the IUT does not accept the call as a multimedia or 3,1 kHz telephony terminal based on operator action		

<b>TP1202207</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT supports TS multimedia and supports fallback		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message shall contain HLC=multimedia, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1202104-1202106		

<b>TP1202208</b>	EG 201 018 subclauses 6.3.4.2 and 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Compatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia and supports TS telephony 7kHz		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message for the <b>first</b> call and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message; the CONNECT message may contain HLC=multimedia, initial channel.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs1202104-1202106; "does not support" may mean that the IUT does not accept the call as a multimedia or 3,1 kHz telephony terminal based on operator action		

#### 5.2.1.20.5 Incoming call, incompatible, fallback not allowed

<b>TP1202301</b>	EG 201 018 subclause 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202302</b>	EG 201 018 subclause 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202303</b>	EG 201 018 subclause 6.3.11.1.2.1		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise test deselected.		

<b>TP1202304</b>	EG 201 018 subclause 6.3.11.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia for incoming calls or IUT supports TS multimedia for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202305</b>	EG 201 018 subclause 6.3.11.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia for incoming calls or IUT supports TS multimedia for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202306</b>	EG 201 018 subclause 6.3.11.1.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia for incoming calls or IUT supports TS multimedia for incoming calls but no first connection exists		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI-TA	<b>LLC value:</b> compatible with the IUT(1)	<b>HLC value(s):</b> multimedia, subsequent channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1202307</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS multimedia or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202308</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS multimedia or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202309</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS multimedia or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221& H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202310</b>	EG 201 018 subclause 6.3.11.2.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_not_allowed		
<b>Selection criteria:</b>	IUT does not support either TS multimedia or short term procedures for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> 64 kbit/s UDI, H.221& H.242	<b>LLC value:</b> none	<b>HLC value(s):</b> multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

#### 5.2.1.20.6 Incoming call, incompatible, fallback allowed

<b>TP1202401</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> none	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs 1202304-1202306		

<b>TP1202402</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b> first: speech second: 64 kbit/s UDI-TA	<b>LLC value:</b> 64 kbit/s UDI-TA	<b>HLC value(s):</b> first: telephony second: multimedia, initial channel
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP1202403</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and TS telephony 7 kHz with fallback and TS telephony 3,1 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 discards the conflicting LLC, ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	first: speech second: 64 kbit/s UDI-TA	compatible with the IUT(1)	first: telephony second: multimedia, initial channel
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	1 - shall be different from 64 kbit/s UDI-TA, otherwise the test case shall be deselected.		

<b>TP1202404</b>	EG 201 018 subclauses 6.3.1.2 and 6.3.11.1.1.2		
<b>TSS group ref.:</b>	EG 201 018/Compatibility_checking/Multimedia/Incoming/Incompatible/Fb_allowed		
<b>Selection criteria:</b>	IUT does not support TS multimedia with fallback and TS telephony 7 kHz for incoming calls		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming call or rejects it by sending a RELEASE COMPLETE message with cause value #88 and location: U or RPN or by sending a DISCONNECT message (if the first response has been sent before) with cause value #88, location: RPN.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	64 kbit/s UDI-TA	none	first: telephony second: multimedia, initial channel
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	none or compatible	none or compatible	none or compatible
<b>Comments:</b>	for test cases for the second connection refer to TPs 1202304-1202306		

## 5.2.2 Address checking

### 5.2.2.1 Called party number

#### 5.2.2.1.1 Incoming, compatible

<b>TP2012101</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN of equal length and content to the number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b>	<b>LLC value:</b>	<b>HLC value(s):</b>
	any compatible	none or compatible	none or compatible
	<b>CdPN:</b>	<b>CdPS:</b>	<b>UUI:</b>
	TNO: subscriber number, NPI: E.164, compatible number	none or compatible	none or compatible
<b>Comments:</b>			

<b>TP2012102</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN of equal length and content to the number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: subscriber number, NPI: unknown, compatible number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012103</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN of equal length and content to the number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: national number, NPI: E.164, compatible number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012104</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN of equal length and content to the number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: national number, NPI: unknown, compatible number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012105</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN if no number is assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: subscriber number, NPI: E.164, any number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012106</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN if no number is assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: subscriber number, NPI: unknown, any number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012107</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN if no number is assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: national number, NPI: E.164, any number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012108</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN if no number is assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: national number, NPI: unknown, any number	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012109</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information; IUT accepts partial number		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a one digit CdPN identical to the last digit of the number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TON: unknown, NPI: unknown, one digit, compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012110</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information; IUT accepts partial number		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a one digit CdPN identical to the last digit of the number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TON: unknown, NPI: E.164 one digit, compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012111</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information; IUT accepts partial number		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN, the last digit of which is identical to the one digit number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TON: unknown, NPI: unknown, more than one digit, compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012112</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information; IUT accepts partial number		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPN, the last digit of which is identical to the one digit number assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TON: unknown, NPI: E.164 more than one digit, compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.2.1.2 Incoming, incompatible

<b>TP2012201</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a CdPN of an equal length but different at the first digit from the number assigned to the IUT.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: subscriber number, NPI: E.164, full length, first digit different	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012202</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a CdPN of an equal length but different at the first digit from the number assigned to the IUT.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: subscriber number, NPI: unknown, full length, first digit different	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012203</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a CdPN of an equal length but different at the first digit from the number assigned to the IUT.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: national number, NPI: E.164, full length, first digit different	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012204</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a CdPN of an equal length but different at the first digit from the number assigned to the IUT.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> TNO: national number, NPI: unknown, full length, first digit different	<b>CdPS:</b> none or compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012205</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information; IUT accepts partial number		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a one digit CdPN identical to the first digit but different from the last digit of the number assigned to the IUT.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible <b>CdPN:</b> TNO: unknown, NPI: E.164 one digit, incompatible	<b>LLC value:</b> none or compatible <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> none or compatible <b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2012206</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information; IUT accepts partial number		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a one digit CdPN identical to the first digit but different from the last digit of the number assigned to the IUT.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible <b>CdPN:</b> TNO: unknown, NPI: unknown one digit, incompatible	<b>LLC value:</b> none or compatible <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> none or compatible <b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.2.1.3 Incoming, omitted

<b>TP2012301</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPN/Incoming/Omitted		
<b>Selection criteria:</b>	IUT supports address checking based on called party number information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message not containing a CdPN if the IUT has an assigned number.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible <b>CdPN:</b> not present	<b>LLC value:</b> none or compatible <b>CdPS:</b> none or compatible	<b>HLC value(s):</b> none or compatible <b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.2.2 Called party subaddress

### 5.2.2.2.1 Incoming, compatible

<b>TP2022101</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS of equal length and content to the subaddress assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: NSAP full length, compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022102</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS of equal length and content to the subaddress assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: User specified full length, compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022103</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS if no subaddress is assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: NSAP, any correct content	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022104</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS if no subaddress is assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: User specified any correct content	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022105</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information; IUT accepts partial subaddress		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS the content of which is identical to the last digit of the subaddress assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: NSAP, content is one digit length, compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022106</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information; IUT accepts partial subaddress		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS the content of which is identical to the last digit of the subaddress assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: User specified, content is one digit length, compatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022107</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information; IUT accepts partial subaddress		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS the last digit of which is identical to the one digit subaddress assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: NSAP, more than one digit, last digit is equal	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022108</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information; IUT accepts partial subaddress		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing a CdPS the last digit of which is identical to the one digit subaddress assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: User specified, more than one digit, last digit is equal	<b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.2.2.2 Incoming, incompatible

<b>TP2022201</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a CdPS of an equal length but different at the first digit of its content from the subaddress assigned to the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: NSAP, full length, incompatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022202</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a CdPS of an equal length but different at the first digit of its content from the subaddress assigned to the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> TOS: User specified, full length, incompatible	<b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022203</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information; IUT accepts partial subaddress		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a one digit CdPS identical to the first digit but different from the last digit of the subaddress assigned to the IUT (the IUT has no assigned number)		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible <b>CdPN:</b> none or compatible	<b>LLC value:</b> none or compatible <b>CdPS:</b> TOS: NSAP, one digit, incompatible	<b>HLC value(s):</b> none or compatible <b>UUI:</b> none or compatible
<b>Comments:</b>			

<b>TP2022204</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information; IUT accepts partial subaddress		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing a one digit CdPS identical to the first digit but different from the last digit of the subaddress assigned to the IUT (the IUT has no assigned number)		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible <b>CdPN:</b> none or compatible	<b>LLC value:</b> none or compatible <b>CdPS:</b> TOS: User specified, one digit, incompatible	<b>HLC value(s):</b> none or compatible <b>UUI:</b> none or compatible
<b>Comments:</b>			

### 5.2.2.2.3 Incoming, omitted

<b>TP2022301</b>	EN 300 403-1 subclauses 5.2.2.2 and B.3.1		
<b>TSS group ref.:</b>	EG 201 018/Address_checking/CdPS/Incoming/Omitted		
<b>Selection criteria:</b>	IUT supports address checking based on called party subaddress information		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message not containing a CdPS if the IUT has an assigned subaddress		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible <b>CdPN:</b> none or compatible	<b>LLC value:</b> none or compatible <b>CdPS:</b> not present	<b>HLC value(s):</b> none or compatible <b>UUI:</b> none or compatible
<b>Comments:</b>			

## 5.2.3 Checking using user-to-user information

### 5.2.3.1 Incoming, compatible

<b>TP3002101</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUI_checking/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports checking of the UUI		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing an UUI of equal length and content to that assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> type: IA5 characters, compatible
<b>Comments:</b>			

<b>TP3002102</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUI_checking/Incoming/Compatible		
<b>Selection criteria:</b>	IUT supports checking of the UUI		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 accepts the incoming SETUP message containing an UUI of equal length and content to that assigned to the IUT and responds by sending a SETUP ACKNOWLEDGE, CALL PROCEEDING, ALERTING or CONNECT message.		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> type: user specific prot., compatible
<b>Comments:</b>			

### 5.2.3.2 Incoming, incompatible

<b>TP3002201</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUI_checking/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports checking of the UUI		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing an UUI of equal length but different at the last character from that assigned to the IUT; the assigned UUI shall have the maximal length supported by the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> type: IA5 characters, full length, incompatible
<b>Comments:</b>			

<b>TP3002202</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUID_checking/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports checking of the UUID		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing an UUID of equal length but different at the last character from that assigned to the IUT; the assigned UUID shall have the maximal length supported by the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUID:</b> type: user specific prot., full length, incompatible
<b>Comments:</b>			

<b>TP3002203</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUID_checking/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports checking of the UUID		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing an UUID of equal length but different at the last character from that assigned to the IUT; the assigned UUID shall have a length less than the maximal length supported by the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUID:</b> type: IA5 characters, full length, incompatible
<b>Comments:</b>			

<b>TP3002204</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUID_checking/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports checking of the UUID		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing an UUID of equal length but different at the last character from that assigned to the IUT; the assigned UUID shall have a length less than the maximal length supported by the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUID:</b> type: user specific prot., full length, incompatible
<b>Comments:</b>			

<b>TP3002205</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUID_checking/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports checking of the UUID; IUT supports UUID length less than 131 octets		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing an UUID of the length more than supported by the IUT (n) but the first n octets of the user information field having the same content than the UUID assigned to the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUID:</b> type: IA5 characters, longer than supported by the IUT
<b>Comments:</b>			

<b>TP3002206</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUI_checking/Incoming/Incompatible		
<b>Selection criteria:</b>	IUT supports checking of the UUI; IUT supports UUI length less than 131 octets		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message containing an UUI of the length more than supported by the IUT (n) but the first n octets of the user information field having the same content than the UUI assigned to the IUT		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> type: user specific prot., longer than supported by the IUT
<b>Comments:</b>			

### 5.2.3.3 Incoming, omitted

<b>TP3002301</b>	EN 300 403-1 subclause B.3.3		
<b>TSS group ref.:</b>	EG 201 018/UUI_checking/Incoming/Omitted		
<b>Selection criteria:</b>	IUT supports checking of the UUI		
<b>Test Purpose:</b>	Ensure that the IUT in call state U00 ignores the incoming SETUP message not containing an UUI if the IUT has an assigned UUI		
<b>Parameter values:</b>	<b>BC value(s):</b> any compatible	<b>LLC value:</b> none or compatible	<b>HLC value(s):</b> none or compatible
	<b>CdPN:</b> none or compatible	<b>CdPS:</b> none or compatible	<b>UUI:</b> not present
<b>Comments:</b>			

---

## History

<b>Document history</b>		
V1.1.2	October 1997	Publication
V1.2.2	January 1999	Membership Approval Procedure MV 9912: 1999-01-19 to 1999-03-19
V1.2.3	April 1999	Publication