



**Environmental Engineering (EE);  
Environmental conditions and environmental tests  
for telecommunications equipment;  
Part 2-3: Specification of environmental tests;  
Stationary use at weatherprotected locations**

Reference
REN/EE-01050

Keywords
environment, testing

***ETSI***

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

***Important notice***

---

Individual copies of the present document can be downloaded from:  
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.  
Information on the current status of this and other ETSI documents is available at  
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:  
[http://portal.etsi.org/chaircor/ETSI\\_support.asp](http://portal.etsi.org/chaircor/ETSI_support.asp)

---

***Copyright Notification***

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2012.  
All rights reserved.

**DECT™, PLUGTESTS™, UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.  
**3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and  
of the 3GPP Organizational Partners.

**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

---

## Contents

Intellectual Property Rights .....	4
Foreword.....	4
1 Scope .....	5
2 References .....	5
2.1 Normative references .....	5
2.2 Informative references.....	6
3 Environmental test specifications.....	6
3.1 Specifications T 3.1 and T 3.1E: Temperature-controlled locations .....	7
3.2 Specification T 3.2: Partly temperature-controlled locations .....	10
3.3 Specification T 3.3: Not temperature-controlled locations.....	13
3.4 Specification T 3.4: Sites with heat-trap .....	16
3.5 Specification T 3.5: Sheltered locations .....	19
3.6 Specifications T 3.6: Control room locations .....	22
4 Earthquake test specification.....	25
4.1 Vibration response investigation .....	25
4.2 Test conditioning.....	26
5 Notes to tables .....	27
5.1 General note .....	27
5.2 Notes to tables 1 to 12 .....	28
<b>Annex A (informative):      Bibliography.....</b>	<b>30</b>
History .....	31

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This draft European Standard (EN) has been produced by ETSI Technical Committee Environmental Engineering (EE), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document is part 2, sub-part 3 of a multi-part deliverable. Full details of the entire series can be found in part 2, sub-part 0 [3].

<b>Proposed national transposition dates</b>	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

---

# 1 Scope

The present document specifies test severities and methods for the verification of the required resistibility of equipment according to the relevant environmental class.

The tests in the present document apply to stationary use of equipment at weatherprotected locations covering the environmental conditions stated in EN 300 019-1-3 [1].

---

## 2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

### 2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 300 019-1-3: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-3: Classification of environmental conditions; Stationary use at weatherprotected locations".
- [2] IEC 60068-2-1 (03/2007): "Environmental testing, Part 2-1: Tests - Test A: Cold".
- [3] ETSI EN 300 019-2-0: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 2-0: Specification of environmental tests; Introduction".
- [4] IEC 60721-3-3: "Classification of environmental conditions - Part 3: Classification of groups of environmental parameters and their severities - Section 3: Stationary use at weatherprotected locations".
- [5] Void.
- [6] IEC 60068-2-2 (07/2007): "Environmental testing, Part 2-2: Tests - Test B: Dry heat".
- [7] IEC 60068-2-14 (01/2009): "Environmental testing - Part 2-14: Tests - Test N: Change of temperature".
- [8] IEC 60068-2-78 (08/2001): "Environmental testing - Part 2-78: Tests - Test Cab: Damp heat, steady state".
- [9] IEC 60068-2-30 (08/2005): "Environmental testing - Part 2-30: Tests - Test Db: Damp heat, cyclic (12 h + 12 h cycle)".
- [10] IEC 60068-2-64 (04/2008): "Environmental testing - Part 2-64: Tests - Test Fh: Vibration, broadband random and guidance".
- [11] IEC 60068-2-27 (02/2008): "Environmental testing - Part 2-27: Tests - Test Ea and guidance: Shock".
- [12] IEC 60068-2-6 (12/2007): "Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal)".

- [13] IEC 60068-2-57 (11/1999): "Environmental testing - Part 2-57: Tests - Test Ff: Vibration - Time-history method".
- [14] IEC 60068-2-68 (8/1994): "Environmental testing - Part 2: Tests - Test L: Dust and sand".

## 2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

---

## 3 Environmental test specifications

The detailed descriptions of the environmental conditions are in clauses 4 and 5 of EN 300 019-1-3 [1].

EN 300 019-2-0 [3] forms a general overview of part 2 of the present document.

The equipment under test is assumed to be in its operational state throughout the test conditions described in this part unless otherwise stated. The required performance before, during and after the test needs to be specified in the product specification. Input and load conditions of the equipment shall be chosen to obtain full utilization of the equipment under test. The heat dissipation shall be maximized, except for the steady state, low temperature test, where it shall be minimized.

### 3.1 Specifications T 3.1 and T 3.1E: Temperature-controlled locations

#### Specification T 3.1: Temperature-controlled locations - normal operating conditions.

This specification applies to permanently temperature-controlled enclosed locations where humidity is usually not controlled. See tables 1 and 2.

**Table 1: Test specification T 3.1: Temperature-controlled locations - climatic tests**

Environmental parameter			Environmental Class 3.1	Environmental test specification T3.1: In-use, Temperature-controlled locations				
Type	Parameter	Detail parameter		Characteristic severity	Test severity	Duration	Reference	Method
Air temperature	Low	(°C)	+5	+5	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+40	+40 or +50	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C) (°C/min)	0,5	+25/+40 0,5	half cycle $t_1 = 3 \text{ h}$	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	5	none				4
		high (%) (°C)	85	85 +30	4 d	IEC 60068-2-78 [8]	Cab: Damp heat steady state	5
		condensation	no					
	Absolute	low (g/m <sup>2</sup> )	1	none				4
		high (g/m <sup>2</sup> )	25					7
Air	Pressure	low (kPa)	70	none				8
		high (kPa)	106	none				8
	Speed	(m/s)	5,0	none				4
Water	Rain	intensity	no					
		low temperature	no					
	Other sources		no					
	Icing & frosting		no					
Radiation	Solar	(W/m <sup>2</sup> )	700					10
	Heat	(W/m <sup>2</sup> )	600					11

Environmental parameter			Environmental Class 3.1	Environmental test specification T3.1: In-use, Temperature-controlled locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes (see clause 5)
Chemically active substances	Sulphur	SO <sub>2</sub> (mg/m <sup>3</sup> )	0,3/1,0	none				12
		H <sub>2</sub> S (mg/m <sup>3</sup> )	0,1/0,5	none				12
	Chlorine	salt mist	sea and road salt	none				12
		Cl (mg/m <sup>3</sup> )	0,1/0,3	none				12
	Nitrogen	HCl (mg/m <sup>3</sup> )	0,1/0,5	none				12
		NO <sub>x</sub> (mg/m <sup>3</sup> )	0,5/1,0	none				12
	Hydrogen fluoride HF	NH <sub>3</sub> (mg/m <sup>3</sup> )	1,0/3,0	none				12
		(mg/m <sup>3</sup> )	0,01/0,03	none				12
	Ozone O <sub>3</sub>	(mg/m <sup>3</sup> )	0,05/0,1	none				12
Mechanically active substances	Dust	sedimentation (mg/(m <sup>2</sup> h))	1,5	none				12
		suspension (mg/m <sup>3</sup> )	0,2	none				13
	Sand	(mg/m <sup>3</sup> )	30	none				13
Flora and fauna		Micro organisms	negligible					
		Rodents, insects	negligible					
NOTE 1: no = this condition does not occur in this class. NOTE 2: none = verification is required only in special cases. NOTE 3: n = number of note, see clause 5.								

Table 2: Test specification T 3.1: Temperature-controlled locations - mechanical tests

Environmental parameter			Environmental Class 3.1	Environmental test specification T 3.1: In-use, Temperature-controlled locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Vibration	Sinusoidal	displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	0,3 2-9	1,0 9-200	none			15
Shocks	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks direction of shocks	Type L 22 40	half sine 11 30 6	3 in each direction	IEC 60068-2-27 [11]	Ea: Shock	18

NOTE 1: none = verification is required only in special cases.  
 NOTE 2: n = number of note, see clause 5.

**Specification T 3.1E: Temperature-controlled locations - exceptional operating conditions.**

This specification applies to permanently temperature-controlled locations where humidity is usually not controlled. The reference class is the same as for T 3.1, but the test specification relates to reduced performance requirements. See table 3.

**Table 3: Test specification T 3.1E: Temperature-controlled locations, exceptional operating conditions - climatic tests**

Environmental parameter			Environmental Condition 3.1E	Environmental test specification T 3.1E: In-use, Temperature-controlled locations - Exceptional.				
Type	Parameter	Detail parameter		Characteristic severity	Test severity	Duration	Reference	Method
Air temperature	Low	(°C)	-5	-5	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+45	+45 or +55	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C) (°C/min)	0,5	+25/+45 0,5	half cycle $t_1 = 3 \text{ h}$	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	5	none				4
		high (%) (°C)	90	93 +30	4 d	IEC 60068-2-78 [8]	Cab: Damp heat steady state	5
		condensation	no					
	Absolute	low (g/m³)	1	none				4
Radiation	high (g/m³)	25						7
	Solar (W/m²)	700						10
Heat (W/m²)	600							11

NOTE 1: no = this condition does not occur in this class.  
 NOTE 2: none = verification is required only in special cases.  
 NOTE 3: n = number of note, see clause 5.

### 3.2 Specification T 3.2: Partly temperature-controlled locations

This specification applies to enclosed locations having neither temperature nor humidity control, but where heating may be used to avoid low temperatures. The building construction avoids extremely high temperatures. See tables 4 and 5.

**Table 4: Test specification T 3.2: Partly temperature-controlled locations - climatic tests**

Environmental parameter			Environmental Class 3.2	Environmental test specification T3.2: In-use, Partly temperature-controlled locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Air temperature	Low	(°C)	-5	-5	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+45	+45 or +55	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C)		+25/+55 or +25/+45	half cycle $t_1 = 3$ h	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	5	none				4
		high (%)	95	93	4 d steady state	IEC 60068-2-78 [8]	Cab: Damp heat	5
		(°C)		+30				
	Absolute	condensation (°C)	yes	+30° 90-100	1 cycle	IEC 60068-2-30 [9]	Db: Damp heat cyclic Variant 1	6
		(g/m³)	1	none				4
Air	Pressure	low (kPa)	70	none				8
		high (kPa)	106	none				8
	Speed	(m/s)	5,0	none				4
Water	Rain	intensity	no					
		low temperature	no					
	Other sources		no					
Radiation	Icing & frosting		yes					4
	Solar	(W/m²)	700					10
	Heat	(W/m²)	600					11

Environmental parameter			Environmental Class 3.2	Environmental test specification T3.2: In-use, Partly temperature-controlled locations						
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes		
Chemically active substances	Sulphur	SO <sub>2</sub> (mg/m <sup>3</sup> )	0,3/1,0	none				12		
		H <sub>2</sub> S (mg/m <sup>3</sup> )	0,1/0,5	none				12		
	Chlorine	salt mist	sea and road salt	none				12		
		Cl (mg/m <sup>3</sup> )	0,1/0,3	none				12		
	Nitrogen	HCl (mg/m <sup>3</sup> )	0,1/0,5	none				12		
		NO <sub>x</sub> (mg/m <sup>3</sup> )	0,5/5,0	none				12		
	Hydrogen fluoride HF	NH <sub>3</sub> (mg/m <sup>3</sup> )	1,0/3,0	none				12		
		(mg/m <sup>3</sup> )	0,01/0,03	none				12		
	Ozone O <sub>3</sub>	(mg/m <sup>3</sup> )	0,05/0,1	none				12		
Mechanically active substances	Dust	sedimentation (mg/(m <sup>2</sup> h))	15					13		
		suspension (mg/m <sup>3</sup> )	0,4					13		
	Sand	(mg/m <sup>3</sup> )	300					13		
Flora and fauna	Micro organisms		mould, fungus, etc.	none				14		
	Rodents, insects		rodents, etc.	none				14		
NOTE 1: no = this condition does not occur in this class.										
NOTE 2: none = verification is required only in special cases.										
NOTE 3: n = number of note, see clause 5.										

**Table 5: Test specification T 3.2: Partly temperature-controlled locations - mechanical tests**

Environmental parameter			Environmental Class 3.2	Environmental test specification T 3.2: In-use, Partly temperature-controlled locations							
Type	Parameter	Detail parameter	Characteristic severity	Test severity			Duration	Reference	Method	Notes	
Vibration	Sinusoidal	velocity displacement acceleration frequency range axes of vibration	1,5 2-9	5 5 9-200 5-62	2 62-200 3		3 x 5 sweep cycles	IEC 60068-2-6 [12]	Fc: Vibration (sinusoidal)	16	
	Random	ASD frequency range axes of vibration	no	+12 5-10	0,02 10-50 50-100 3	-12	3 x 30 minutes	IEC 60068-2-64 [10]	Fh: Vibration, broad-band random (digital control)	17	
Shocks	Shocks	shock spectrum duration acceleration number of shocks directions of shocks	Type L 22 40		half sine 11 30 6		3 in each direction	IEC 60068-2-27 [11]	Ea: Shock	18	

NOTE: n = number of note, see clause 5.

### 3.3 Specification T 3.3: Not temperature-controlled locations

This specification applies to weatherprotected or partially weatherprotected locations having neither temperature nor humidity control. See tables 6 and 7.

**Table 6: Test specification T 3.3: Not temperature-controlled locations - climatic tests**

Environmental parameter			Environmental Class 3.3	Environmental test specification T3.3: In-use, Not temperature-controlled locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Air temperature	Low	(°C)	-25	-25	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+55	+55 or +70	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C) (°C/min)	0,5	-5/+45 0,5	1 cycle $t_1 = 3 \text{ h}$	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	10	none				4
		high (%) (°C)	100	93 +30	4 d	IEC 60068-2-78 [8]	Cab: Damp heat steady state	5
		condensation (%) (°C)	yes	90-100 +30	2 cycles	IEC 60068-2-30 [9]	Db: Damp heat cyclic Variant 1	6
	Absolute	low (g/m³)	0,5	none				4
		high (g/m³)	29					7
Air	Pressure	low (kPa)	70	none				8
		high (kPa)	106	none				8
	Speed	(m/s)	5,0	none				4
Water	Rain	intensity	wind driven					9
		low temperature	no					
	Other sources		dripping water					4
	Icing & frosting		yes					4
Radiation	Solar	(W/m²)	1 200					10
	Heat	(W/m²)	600					11

Environmental parameter			Environmental Class 3.3	Environmental test specification T3.3: In-use, Not temperature-controlled locations						
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes		
Chemically active substances	Sulphur	SO <sub>2</sub> (mg/m <sup>3</sup> )	0,3/1,0	none				12		
		H <sub>2</sub> S (mg/m <sup>3</sup> )	0,1/0,5	none				12		
	Chlorine	salt mist	sea and road salt	none				12		
		Cl (mg/m <sup>3</sup> )	0,1/0,3	none				12		
		HCl (mg/m <sup>3</sup> )	0,1/0,5	none				12		
	Nitrogen	NO <sub>x</sub> (mg/m <sup>3</sup> )	0,5/1,0	none				12		
		NH <sub>3</sub> (mg/m <sup>3</sup> )	1,0/3,0	none				12		
	Hydrogen fluoride HF	(mg/m <sup>3</sup> )	0,01/0,03	none				12		
	Ozone O <sub>3</sub>	(mg/m <sup>3</sup> )	0,05/0,1	none				12		
Mechanically active substances	Dust	sedimentation (mg/(m <sup>2</sup> h))	15					13		
		suspension (mg/m <sup>3</sup> )	0,4					13		
	Sand	(mg/m <sup>3</sup> )	300					13		
Flora and fauna	Micro organisms		mould, fungus, etc.	none				14		
	Rodents, insects		rodents, etc.	none				14		
NOTE 1: no = this condition does not occur in this class.										
NOTE 2: none = verification is required only in special cases.										
NOTE 3: n = number of note, see clause 5.										

Table 7: Test specification T 3.3: Not temperature-controlled locations - mechanical tests

Environmental parameter			Environmental Class 3.3	Environmental test specification T 3.3: In-use, Not temperature-controlled locations							
Type	Parameter	Detail parameter	Characteristic severity	Test severity			Duration	Reference	Method	Notes	
Vibration	Sinusoidal	velocity (mm/s) displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	1,5 2-9	5 5-62	2 62-200	3	3 x 5 sweep cycles	IEC 60068-2-6 [12]	Fc: Vibration (sinusoidal)	16	
	Random	ASD (m <sup>2</sup> /s <sup>3</sup> ) (dB/oct) frequency range (Hz) axes of vibration	no	+12 5-10	0,02 10-50	-12 50-100	3 x 30 minutes	IEC 60068-2-64 [10]	Fh: Vibration, broad-band random (digital control)	17	
Shocks	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks directions of shocks	Type L 22 40	half sine 11 30 6		3 in each direction	IEC 60068-2-27 [11]	Ea: Shock	18		

NOTE: n = number of note, see clause 5.

### 3.4 Specification T 3.4: Sites with heat-trap

This specification applies to weatherprotected or partially weatherprotected locations having neither temperature nor humidity control. Solar radiation and heat-trap conditions may cause high temperatures. See tables 8 and 9.

**Table 8: Test specification T 3.4: Sites with heat-trap - climatic tests**

Environmental parameter			Environmental Class 3.4	Environmental test specification T3.4: In-use, Sites with heat trap				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Air temperature	Low	(°C)	-40	-40	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+70	+70 or +85	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C) (°C/min)	0,5	-5/+45 0,5	2 cycles $t_1 = 3$ h	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	10	none				4
		high (%) (°C)	100	93 +35	4 d	IEC 60068-2-78 [8]	Cab: Damp heat steady state	5
		condensation (%) (°C)	yes	90-100 +30	2 cycles	IEC 60068-2-30 [9]	Db: Damp heat cyclic Variant 1	6
	Absolute	low (g/m³)	0,1	none				4
		high (g/m³)	35					7
Air	Pressure	low (kPa)	70	none				8
		high (kPa)	106	none				8
	Speed	(m/s)	5,0	none				4
Water	Rain	intensity	wind driven					9
		low temperature	no					
	Other sources		dripping and spraying water					4
	Icing & frosting		yes					4
Radiation	Solar	(W/m²)	1 200					10
	Heat	(W/m²)	600					11

Environmental parameter			Environmental Class 3.4	Environmental test specification T3.4: In-use, Sites with heat trap						
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes		
Chemically Active substances	Sulphur	SO <sub>2</sub> (mg/m <sup>3</sup> )	0,3/1,0	none				12		
		H <sub>2</sub> S (mg/m <sup>3</sup> )	0,1/0,5	none				12		
	Chlorine	salt mist	sea and road salt	none				12		
		Cl (mg/m <sup>3</sup> )	0,1/0,3	none				12		
		HCl (mg/m <sup>3</sup> )	0,1/0,5	none				12		
	Nitrogen	NO <sub>x</sub> (mg/m <sup>3</sup> )	0,5/1,0	none				12		
		NH <sub>3</sub> (mg/m <sup>3</sup> )	1,0/3,0	none				12		
	Hydrogen fluoride HF	(mg/m <sup>3</sup> )	0,01/0,03	none				12		
	Ozone O <sub>3</sub>	(mg/m <sup>3</sup> )	0,05/0,1	none				12		
Chemically active substances	Dust	sedimentation (mg/(m <sup>2</sup> h))	15					13		
		suspension (mg/m <sup>3</sup> )	0,4					13		
	Sand	(mg/m <sup>3</sup> )	300					13		
Flora and fauna	Micro organisms		mould, fungus, etc.	none				14		
	Rodents, insects		rodents, etc.	none				14		
NOTE 1: no = this condition does not occur in this class.										
NOTE 2: none = verification is required only in special cases.										
NOTE 3: n = number of note, see clause 5.										

Table 9: Test specification T 3.4: Sites with heat-trap - mechanical tests

Environmental parameter			Environmental Class 3.4	Environmental test specification T 3.4: Stationary use, Sites with heat-trap								
Type	Parameter	Detail parameter	Characteristic severity	Test severity			Duration	Reference	Method	Notes		
Vibration IEC 60721-3-3 [4] Class 3M5	Sinusoidal	displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	3,0 2-9	1,2 10 9-200 5-9	4 9-200 3		3 x 5 sweep cycles	IEC 60068-2-6 [12]	Fc: Vibration (sinusoidal)	16, 19		
	Random	ASD (m <sup>2</sup> /s <sup>3</sup> ) (dB/oct) frequency range (Hz) axes of vibration	no	+12 5-10	0,04 -12 10-50 50-100 3	3 x 30 minutes	IEC 60068-2-64 [10]	Fh: Vibration, broad-band random (digital control)	17, 19			
Shocks IEC 60721-3-3 [4] Class 3M5	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks directions of shocks	Type II 6 250		half sine 11 50 6	100 in each direction	IEC 60068-2-27 [11]	Ea: Shocks	18, 19			
	Sinusoidal	velocity (mm/s) displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	1,5 2-9	5 5 9-200 5-62	2 62-200 3	3 x 5 sweep cycles	IEC 60068-2-6 [12]	Fc: Vibration (sinusoidal)	16, 19			
Shocks IEC 60721-3-3 [4] Class 3M3	Random	ASD (m <sup>2</sup> /s <sup>3</sup> ) (dB/oct) frequency range (Hz) axes of vibration	no	+12 5-10	0,02 -12 10-50 50-100 3	3 x 30 minutes	IEC 60068-2-64 [10]	Fh: Vibration, broad-band random (digital control)	17, 19			
	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks directions of shocks	Type L 22 70		half sine 11 30 6	3 in each direction	IEC 60068-2-27 [11]	Ea: Shock	18, 19			

NOTE: n = number of note, see clause 5.

### 3.5 Specification T 3.5: Sheltered locations

This specification applies to sheltered locations where direct solar radiation and heat-trap conditions do not exist. See tables 10 and 11.

**Table 10: Test specification T 3.5: Sheltered locations - climatic tests**

Environmental parameter			Environmental Class 3.5	Environmental test specification T3.5: In-use, Sheltered locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Air temperature	Low	(°C)	-40	-40	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+40	+40	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C) (°C/min)	1,0	-40/+40 1,0	2 cycles $t_1 = 3$ h	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	10	none				4
		high (%) (°C)	100	93 +35	4 d	IEC 60068-2-78 [8]	Cab: Damp heat steady state	5
		condensation (%) (°C)	yes	90-100 +35	2 cycles	IEC 60068-2-30 [9]	Db: Damp heat cyclic Variant 1	6
	Absolute	low (g/m³)	0,1	none				4
		high (g/m³)	35					7
Air	Pressure	low (kPa)	70	none				8
		high (kPa)	106	none				8
	Speed	(m/s)	30	none				4
Water	Rain	intensity	wind driven					9
		low temperature	no					
	Other sources		dripping and spraying water					9
	Icing & frosting		yes					4
Radiation	Solar	(W/m²)	no					
	Heat	(W/m²)	600	none				

Environmental parameter			Environmental Class 3.5	Environmental test specification T3.5: In-use, Sheltered locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Chemically Active substances	Sulphur	SO <sub>2</sub> (mg/m <sup>3</sup> )	0,3/1,0	none				12
		H <sub>2</sub> S (mg/m <sup>3</sup> )	0,1/0,5	none				12
	Chlorine	salt mist	sea and road salt	none				12
		Cl (mg/m <sup>3</sup> )	0,1/0,3	none				12
		HCl (mg/m <sup>3</sup> )	0,1/0,5	none				12
	Nitrogen	NO <sub>x</sub> (mg/m <sup>3</sup> )	0,5/1,0	none				12
		NH <sub>3</sub> (mg/m <sup>3</sup> )	1,0/3,0	none				12
	Hydrogen fluoride HF	(mg/m <sup>3</sup> )	0,01/0,03	none				12
	Ozone O <sub>3</sub>	(mg/m <sup>3</sup> )	0,05/0,1	none				12
Mechanical active substances	Dust	sedimentation (mg/(m <sup>2</sup> h))	15					13
		suspension (mg/m <sup>3</sup> )	0,4					13
	Sand	(mg/m <sup>3</sup> )	300					13
Flora and fauna	Micro organisms		mould, fungus, etc.	none				14
	Rodents, insects		rodents, etc.	none				14
NOTE 1: no = this condition does not occur in this class. NOTE 2: none = verification is required only in special cases. NOTE 3: n = number of note, see clause 5.								

Table 11: Test specification T 3.5: Sheltered locations - mechanical tests

Environmental parameter			Environmental Class 3.5	Environmental test specification T 3.5: In-use, Sheltered locations							
Type	Parameter	Detail parameter	Characteristic severity	Test severity		Duration		Reference	Method	Notes	
Vibration IEC 60721-3-3 [4] Class 3M5	Sinusoidal	displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	3,0 2-9	1,2 10 9-200	4 9-200 3	3 x 5 sweep cycles			IEC 60068-2-6 [12]	Fc: Vibration (sinusoidal)	16, 19
	Random	ASD (m <sup>2</sup> /s <sup>3</sup> ) frequency range (dB/oct) axes of vibration (Hz)	no	+12 5-10	0,04 10-50 50-100 3	3 x 30 minutes			IEC 60068-2-64 [10]	Fh: Vibration, broad-band random (digital control)	17, 19
Shocks IEC 60721-3-3 [4] Class 3M5	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks directions of shocks	Type II 6 250	half sine 11 50 6		100 in each direction			IEC 60068-2-27 [11]	Ea: Shocks	18, 19
	Sinusoidal	velocity (mm/s) displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	1,5 2-9	5 5 9-200	2 62-200 3	3 x 5 sweep cycles			IEC 60068-2-6 [12]	Fc: Vibration (sinusoidal)	16, 19
Shocks IEC 60721-3-3 [4] Class 3M3	Random	ASD (m <sup>2</sup> /s <sup>3</sup> ) (dB/oct) frequency range (Hz) axes of vibration	no	+12 5-10	0,02 -12 10-50 50-100 3	3 x 30 minutes			IEC 60068-2-64 [10]	Fh: Vibration, broad-band random (digital control)	17, 19
	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks directions of shocks	Type L 22 70	half sine 11 30 6		3 in each direction			IEC 60068-2-27 [11]	Ea: Shock	18, 19

NOTE: n = number of note, see clause 5.

## 3.6 Specifications T 3.6: Control room locations

### Specification T 3.6: Control room locations - normal operating conditions.

This specification applies to permanently temperature-controlled enclosed locations where humidity is usually not controlled. See table 12.

**Table 12: Test specification T 3.6: Control room locations - climatic tests**

Environmental parameter			Environmental Class 3.6	Environmental test specification T3.6: In-use, Temperature-controlled locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Air temperature	Low	(°C)	+15	+15	16 h	IEC 60068-2-1 [2]	Ab/Ad: Cold	1
	High	(°C)	+30	+30 or +40	16 h	IEC 60068-2-2 [6]	Bb/Bd: Dry heat	2
	Change	(°C) (°C/min)	0,5	+25/+30 0,5	half cycle $t_1 = 3$ h	IEC 60068-2-14 [7]	Nb: Change of temperature	3
Humidity	Relative	low (%)	10	none				4
		high (%) (°C)	75	85 +30	4 d	IEC 60068-2-78 [8]	Cab: Damp heat steady state	5
		condensation	no					
	Absolute	low (g/m³)	2	none				4
		high (g/m³)	22					7
Air	Pressure	low (kPa)	70	none				8
		high (kPa)	106	none				8
	Speed	(m/s)	5,0	none				4
Water	Rain	intensity	no					
		low temperature	no					
	Other sources		no					
	Icing & frosting		no					
Radiation	Solar	(W/m²)	700					10
	Heat	(W/m²)	600					11

Environmental parameter			Environmental Class 3.6	Environmental test specification T3.6: In-use, Control room locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Chemically active substances	Sulphur	SO <sub>2</sub> (mg/m <sup>3</sup> )	0,3/1,0	none				12
		H <sub>2</sub> S (mg/m <sup>3</sup> )	0,1/0,5	none				12
	Chlorine	salt mist	sea and road salt	none				12
		Cl (mg/m <sup>3</sup> )	0,1/0,3	none				12
		HCl (mg/m <sup>3</sup> )	0,1/0,5	none				12
		Nitrogen	NO <sub>x</sub> (mg/m <sup>3</sup> )	0,5/1,0	none			12
			NH <sub>3</sub> (mg/m <sup>3</sup> )	1,0/3,0	none			12
	Hydrogen fluoride HF	(mg/m <sup>3</sup> )	0,01/0,03	none				12
	Ozone O <sub>3</sub>	(mg/m <sup>3</sup> )	0,05/0,1	none				12
Mechanically active substances	Dust	sedimentation (mg/(m <sup>2</sup> h))	1,5	none				12
		suspension (mg/m <sup>3</sup> )	0,2	none				13
	Sand	(mg/m <sup>3</sup> )	30	none				13
Flora and fauna	Micro organisms		negligible					
	Rodents, insects		negligible					
NOTE 1: no = this condition does not occur in this class. NOTE 2: none = verification is required only in special cases. NOTE 3: n = number of note, see clause 5.								

Table 13: Test specification T 3.6: Control room locations - mechanical tests

Environmental parameter			Environmental Class 3.6	Environmental test specification T 3.6: In-use, Control room locations				
Type	Parameter	Detail parameter	Characteristic severity	Test severity	Duration	Reference	Method	Notes
Vibration	Sinusoidal	displacement (mm) acceleration (m/s <sup>2</sup> ) frequency range (Hz) axes of vibration	0,3 2-9	1,0 9-200	none			15
Shocks	Shocks	shock spectrum duration (ms) acceleration (m/s <sup>2</sup> ) number of shocks direction of shocks	Type L 22 40	half sine 11 30 6	3 in each direction	IEC 60068-2-27 [11]	Ea: Shock	18

NOTE 1: none = verification is required only in special cases

NOTE 2: n = number of note, see clause 5.

## 4 Earthquake test specification

If earthquake conditions are specified by the customer, the earthquake test requirements stated below shall be applied.

The test specification is applicable to classes 3.1 to 3.6.

### 4.1 Vibration response investigation

A preliminary vibration response investigation shall be carried out to determine the lowest resonant frequency of the mounted test specimen.

The vibration response investigation can be carried out by means of *sine sweep testing* or *random testing*.

When using the *sine sweep testing*, the vibration response investigation shall be carried out as specified in IEC 60068-2-6 [12] (test Fc), with the following parameter severities:

<b>Frequency range:</b>	1 Hz to 35 Hz
<b>Vibration amplitude:</b>	2 m/s <sup>2</sup>
<b>Sweep rate:</b>	≤ 1 octave/min

NOTE 1: The vibration amplitude may be reduced to 1 m/s<sup>2</sup> or less in case of sharp resonances.

If a *random test* is used this shall be performed in accordance with the requirements of IEC 60068-2-64 [10], using the following severities:

<b>Frequency range:</b>	1 Hz to 20 Hz	20 Hz to 35 Hz
<b>ASD:</b>	0,5 m <sup>2</sup> /s <sup>3</sup>	-3 dB/octave
<b>Duration:</b>	3 minutes	

NOTE 2: The Acceleration Spectral Density (ASD) value may be reduced to 0,3 m<sup>2</sup>/s<sup>3</sup> or less in case of sharp resonances.

The time-history stated in table 14 can be omitted if, after the vibration response investigation, the equipment does not exhibit any resonance below 5 Hz and has passed the sinusoidal vibration test reported in table 9 (class 3.4) or in table 11 (class 3.5) for class 3M5. This test is sufficient to prove compliance with earthquake conditions given in EN 300 019-1-3 [1].

## 4.2 Test conditioning


See table 14.

The extent to which the equipment under test has to function during tests or merely to survive conditions of test shall be stated in the product specification.

**Table 14: Test specification T 3.1 to T 3.6: Earthquake test**

Environmental parameter			Environmental class 3.x	Environmental test specification T3.x: Earthquake test					
Type	Parameter	Detail parameter		Characteristic severity	Test severity	Duration	Reference	Method	Notes
Earthquake	Time-history	RRS	see part 1-3	figure 1, table 15			IEC 60068-2-57 [13]	Ff: time-history method	20
		frequency range (Hz)	0,3 - 50	1 - 35					
		ZPA (m/s <sup>2</sup> )	15	15					
		axes		3	30 s				
		damping ratio (%)		2					

NOTE: n = number of note, see clause 5.

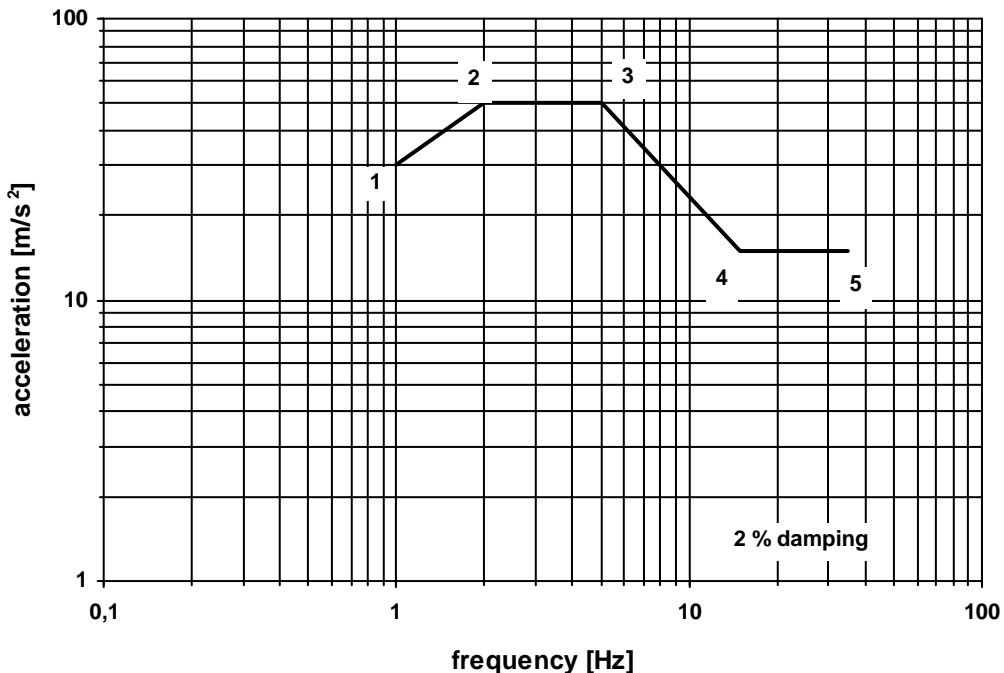

**Figure 1: Earthquake Required Response Spectrum**

**Table 15: Acceleration co-ordinates for the Required Response Spectrum in figure 1**

Co-ordinate point	Frequency [Hz]	Values for upper floor acceleration [m/s <sup>2</sup> ]
1	1	30
2	2	50
3	5	50
4	15	15
5	35	15

## 5 Notes to tables

### 5.1 General note

The present document applies to the use of stationary equipment at weather protected locations covered by the environmental conditions stated in EN 300 019-1-3 [1].

The relevant test specification should specify when, during the environmental test programme, the equipment is in its operational state, and which performance requirements should be measured before, during and after the test, together with the appropriate pass/fail criteria.

## 5.2 Notes to tables 1 to 12

NOTE 1: (Air temperature, low).

The characteristic severity can be used as a cold start up temperature, but it may be modified by the product specification. The equipment under test shall remain operational throughout this test, except for the cold start up test which shall commence once low temperature stability is achieved.

NOTE 2: (Air temperature, high).

If two test temperatures are given, the lower test temperature applies if the equipment is protected against solar and heat radiation or the equipment is ventilated (natural or forced). The higher test temperature includes the heating effects of solar and/or heat radiation. The characteristic severity can be used as a high start up temperature, but it may be modified by the product specification. The equipment under test shall remain operational throughout this test, except for the high temperature start up test which shall commence once high temperature stability is achieved.

NOTE 3: (Air temperature, change).

The change of temperature test is normally used to check design tolerance. IEC 60068-2-14 [7] Test Nb is recommended. For change of temperature of 0,5°C/min, the cooling gradient may be reduced to 0,2°C/min where test chamber restrictions preclude a gradient of 0,5°C/min.

NOTE 4: (Relative humidity, low).

There is no IEC 60068-2 series test method for this parameter.

NOTE 5: (Humidity, relative, high).

IEC 60068-2-78 [8] Test Cab is recommended with test values not higher than climatogram limits for this class.

NOTE 6: (Condensation).

IEC 60068-2-30 [9] Test Db is recommended with test values not higher than climatogram limits for this class.

NOTE 7: (Humidity, absolute, high).

This effect is considered to be partly included in the damp heat test IEC 60068-2-78 [8] Test Cab.

NOTE 8: (Air pressure, low and high).

No test is recommended for normal applications, because the effect of air pressure is evaluated at the component level.

NOTE 9: (Water, rain).

The effect of wind driven rain outside to the equipment in the weatherprotected or partly weatherprotected locations is included in IEC 60068-2-30 [9] Test Db. No test is recommended.

NOTE 10:(Radiation, solar).

The higher test temperature as described in note 2 includes the heating effect of solar radiation. Photochemical tests can be made separately for components and materials.

NOTE 11:(Radiation, heat).

The higher test temperature as described in note 2 includes the heating effect.

NOTE 12:(Chemically active substances).

The characteristic severities are given as mean/maximum values. These severities should be considered when designing the equipment and when choosing components and materials. No test is recommended in the present document.

NOTE 13:(Mechanically active substances).

The characteristic severities are much lower than lowest test severity in IEC 60068-2-68 [14] Test L and therefore no test is recommended. This condition should be considered when designing the equipment and when choosing components and materials.

NOTE 14:(Flora, fauna).

The characteristic severity should be considered when choosing components and materials.

NOTE 15:(Vibration, sinusoidal).

No test is recommended as the characteristic severities represent insignificant levels of vibration. The severities are given as peak values.

NOTE 16:(Vibration, sinusoidal).

The severities are given as peak values. The characteristic severity given is considered to be too severe for this class. Test severity values not specified in IEC 60068-2 series. Equipment under test shall be mounted in the "in-use" position. The equipment function shall be monitored throughout the test.

NOTE 17:(Vibration, random).

ASD (Acceleration Spectral Density) random vibration testing method may be used instead of the sinusoidal vibration test. The test severity values are not specified in IEC 60068-2 series. The maximum test frequency has been reduced has been reduced to 100 Hz, because between 100 Hz and 200 Hz the contribution is insignificant. Also at low and high frequency ends the ASD is reduced by 12dB/oct.

	<b>classes: 3.2/3.3/3.4 (3M3)/3.5 (3M3)</b>	<b>classes: 3.4 (3M5)/3.5 (3M5)</b>
Acceleration RMS (for information only)	1,06 m/s <sup>2</sup>	1,5 m/s <sup>2</sup>

Equipment under test shall be mounted in the "in-use" position. The equipment function shall be monitored throughout the test.

NOTE 18:(Shocks).

The values for test severity are not specified in IEC 60068-2 series. The severities are given as peak values. The energy content and the SRS of the shock given as test severity have been considered more appropriate than that given by the characteristic severity.

Equipment under test shall be mounted in the "in-use" position. The equipment function shall be monitored throughout the test.

NOTE 19:(Environmental parameter).

In this table two IEC 60721-3-3 [4] classes are given, Class 3M3 may be chosen for equipment to be installed in locations where the mechanical conditions are equivalent to those given for partly- and not-temperature controlled locations or where the probability of high mechanical stresses are rare. In all other cases IEC 60721-3-3 [4] class 3M5 should be used.

NOTE 20:(Earthquake).

RRS (Required Response Spectrum). ZPA (Zero Period Acceleration).

Equipment under test shall be mounted in the "in use" position. The testing configuration shall be worst case in terms of weight and stiffness. The influence of connections, piping, cables, etc. shall be taken into account when mounting the specimen. The normal "in service" mounting structure of the specimen should be included in the test.

Single-axis excitation is recommended; simultaneous multi-axis excitation is also acceptable, but it is not recommended since, in general, multi-axis testing gives less reproducible test results.

The three testing axes can be reduced to two horizontal axes if the equipment, after the vibration response investigation in the vertical axis, does not exhibit any resonance below 20 Hz.

The strong part of the time-history should be at least 15 s. The duration of each time-history signal shall be 30 s. One time-history shall be applied along each axis.

---

## Annex A (informative): Bibliography

IEC 60068-1: "Environmental testing Part 1: General and guidance".

ETSI ETR 035: "Equipment Engineering (EE); Environmental engineering Guidance and terminology".

---

## History

<b>Document history</b>		
Edition 1	May 1994	Publication as ETS 300 019-2-3
Amendment 1	June 1997	Amendment 1 to 1 <sup>st</sup> Edition of ETS 300 019-2-3
Amendment 2	May 1998	Amendment 2 to 1 <sup>st</sup> Edition of ETS 300 019-2-3
V2.1.2	September 1999	Publication
V2.2.1	March 2003	Publication
V2.2.2	April 2003	Publication
V2.3.1	December 2012	EN Approval Procedure AP 20130409: 2012-12-10 to 2013-04-09