

Draft **ETSI EN 300 086-2** V1.1.1 (2000-02)

Candidate Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Land Mobile Service;
Radio equipment with an internal or external RF
connector intended primarily for analogue speech;
Part 2: Harmonized EN covering essential requirements
under article 3.2 of the R&TTE Directive**



ReferenceREN/ERM-RP02-41-2

Keywordsanalogue, mobile, radio, regulation, speech

ETSI

Postal addressF-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>
If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	5
1 Scope	7
2 References	7
3 Definitions, symbols and abbreviations	8
3.1 Definitions	8
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Technical requirements specifications	8
4.1 Transmitter requirements.....	8
4.1.1 Frequency error.....	8
4.1.2 Carrier power (conducted)	8
4.1.3 Effective radiated power	8
4.1.4 Maximum frequency deviation	8
4.1.5 Adjacent channel power.....	8
4.1.6 Spurious emissions	8
4.1.7 Intermodulation attenuation	9
4.1.8 Transient frequency behaviour of the transmitter	9
4.2 Receiver parameters	9
4.2.1 Maximum usable sensitivity	9
4.2.2 Maximum usable sensitivity (field strength)	9
4.2.3 Co-channel rejection.....	9
4.2.4 Adjacent channel selectivity	9
4.2.5 Spurious response rejection	9
4.2.6 Intermodulation response rejection.....	9
4.2.7 Blocking or desensitization.....	9
4.2.8 Spurious radiations	9
4.2.9 Desensitization and sensitivity (duplex)	10
4.2.10 Spurious response rejection (duplex).....	10
5 Testing for compliance with technical requirements.....	10
5.1 Essential radio test suites.....	10
5.1.1 Environmental conditions for testing	10
5.1.1.1 Normal and extreme test-conditions.....	10
5.1.1.2 Test power source	10
5.1.2 Choice of samples for test suites.....	10
5.1.3 Transmitter test suites	10
5.1.3.1 Frequency error	10
5.1.3.2 Carrier power (conducted)	10
5.1.3.3 Effective radiated power	10
5.1.3.4 Maximum frequency deviation	10
5.1.3.5 Adjacent channel power	10
5.1.3.6 Spurious emissions.....	11
5.1.3.7 Intermodulation attenuation	11
5.1.3.8 Transient frequency behaviour of the transmitter	11
5.2 Other test specifications	11
History	12

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document is part 2 of a multi-part EN covering the Electromagnetic compatibility and radio Spectrum Matters (ERM); Land mobile service; Radio equipment with an internal or external RF connector intended primarily for analogue speech, as identified below:

Part 1: "Technical characteristics and test conditions";

Part 2: "Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive".

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive. Each standard is a module in the structure. The modular structure is shown in figure 1.

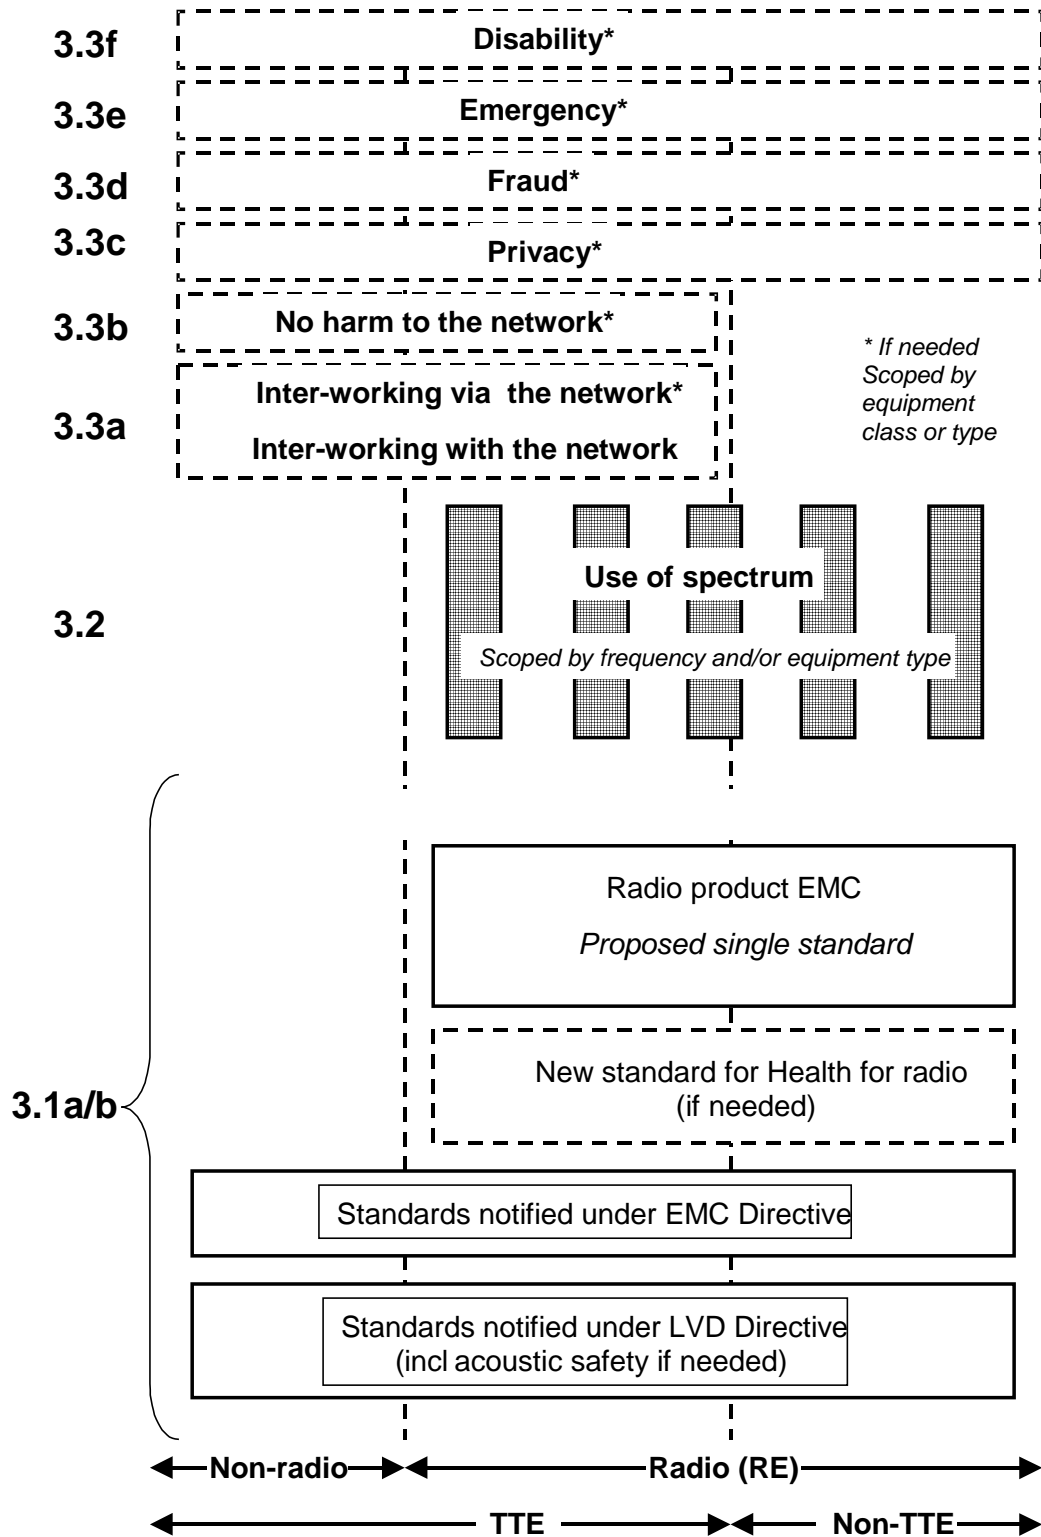


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different subclauses of article 3 of the Directive.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.3 various horizontal boxes are shown. Their dotted lines indicate that essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. The General Standard will always apply to it, and a radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement is adopted by the Commission and if the equipment in question lies within the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the Directive may be covered in just the General Standard or in a set of standards that includes the General Standard.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards under articles 3.2 and 3.3 to be added when new frequency bands are agreed or when the Commission takes decisions under article 3 without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

1 Scope

The present document applies to angle modulation systems for use in the land mobile service, operating on radio frequencies between 30 MHz and 1000 MHz, with channel separations of 12,5 kHz, 20 kHz and 25 kHz, and is intended primarily for analogue speech.

In the present document different requirements are given for the different radio frequency bands, channel separations, environmental conditions and types of equipment, where appropriate.

The types of equipment covered by the present document are as follows:

- base station: equipment fitted with an antenna socket;
- mobile station: equipment fitted with an antenna socket;
- handportable stations:
 - a) fitted with an antenna socket; or
 - b) without an external antenna socket (integral antenna equipment) but fitted with a permanent internal or a temporary internal 50 Ω R.F. connector which allows access to the transmitter output and the receiver input.

Handportable equipment without an external or internal RF connector and without the possibility of having a temporary internal 50 Ω RF connector is not covered by this standard.

The present document is intended to cover the provisions of article 3.2, of Directive 1999/5/EC [1] (R&TTE Directive), which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference."

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive may apply to equipment within the scope of the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

[1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).

[2] EN 300 086-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Land Mobile Service; Radio equipment with an internal or external RF connector intended primarily for analogue speech; Part 1: Technical characteristics and methods of measurement".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions in the R&TTE Directive, and EN 300 086-1 [2] apply.

3.2 Symbols

For the purposes of the present document, the symbols defined in EN 300 086-1 [2] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations defined in EN 300 086-1 [2] apply.

4 Technical requirements specifications

4.1 Transmitter requirements

4.1.1 Frequency error

The frequency error, as defined in EN 300 086-1 [2] subclause 8.1.1, shall not exceed the limits in EN 300 086-1 [2], table 1.

4.1.2 Carrier power (conducted)

The carrier power (conducted), as defined in EN 300 086-1 [2] subclause 8.2.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.1.2.

4.1.3 Effective radiated power

The effective radiated power, as defined in EN 300 086-1 [2] subclause 8.3.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.1.3.

4.1.4 Maximum frequency deviation

The frequency deviation, as defined in EN 300 086-1 [2] subclause 8.4, shall not exceed the limits in EN 300 086-1 [2], subclause 5.1.4.1 and subclause 5.1.4.2.

4.1.5 Adjacent channel power

The adjacent channel power, as defined in EN 300 086-1 [2] subclause 8.5.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.1.5.

4.1.6 Spurious emissions

The spurious emissions, as defined in EN 300 086-1 [2] subclause 8.6.1, shall not exceed the limits in EN 300 086-1 [2], tables 3 and 4.

4.1.7 Intermodulation attenuation

The intermodulation attenuation, as defined in EN 300 086-1 [2] subclause 8.7.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.1.7.

4.1.8 Transient frequency behaviour of the transmitter

The transient periods, as defined in EN 300 086-1 [2] subclause 8.8.1, shall not exceed the limits in EN 300 086-1 [2], table 5.

4.2 Receiver parameters

4.2.1 Maximum usable sensitivity

The maximum usable sensitivity, as defined in EN 300 086-1 [2] subclause 9.1.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.2.1.

4.2.2 Maximum usable sensitivity (field strength)

The maximum useable sensitivity (field strength), as defined in EN 300 086-1 [2] subclause 9.2.1, shall not exceed the limits in EN 300 086-1 [2], table 6.

4.2.3 Co-channel rejection

The co-channel rejection, as defined in EN 300 086-1 [2] subclause 9.4.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.2.4.

4.2.4 Adjacent channel selectivity

The adjacent channel selectivity, as defined in EN 300 086-1 [2] subclause 9.5.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.2.5.

4.2.5 Spurious response rejection

The spurious response rejection, as defined in EN 300 086-1 [2] subclause 9.6.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.2.6.

4.2.6 Intermodulation response rejection

The intermodulation response rejection, as defined in EN 300 086-1 [2] subclause 9.7.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.2.7.

4.2.7 Blocking or desensitization

The blocking or desensitization, as defined in EN 300 086-1 [2] subclause 9.8.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.2.8.

4.2.8 Spurious radiations

The spurious radiations, as defined in EN 300 086-1 [2] subclause 9.9.1, shall not exceed the limits in EN 300 086-1 [2], table 7 and table 8.

4.2.9 Desensitization and sensitivity (duplex)

The receiver desensitization, as defined in EN 300 086-1 [2] subclause 10.1.1, shall not exceed the limits in EN 300 086-1 [2], subclause 5.3.1.

4.2.10 Spurious response rejection (duplex)

The spurious response rejection, as defined in EN 300 086-1 [2] subclause 10.2, shall not exceed the limits in EN 300 086-1 [2], subclause 5.3.2.

5 Testing for compliance with technical requirements

5.1 Essential radio test suites

5.1.1 Environmental conditions for testing

5.1.1.1 Normal and extreme test-conditions

Type tests shall be made under normal test conditions, and also, where stated, under extreme test conditions.

The test conditions and procedures shall be as specified in EN 300 086-1 [2] subclauses 6.3, 6.4 and 6.5.

5.1.1.2 Test power source

The test power source shall meet the requirements of EN 300 086-1 [2] subclause 6.2.

5.1.2 Choice of samples for test suites

Measurement shall be performed, according to the present document, on samples of equipment defined in EN 300 086-1 [2], subclause 4.1.

5.1.3 Transmitter test suites

5.1.3.1 Frequency error

The test specified in EN 300 086-1 [2], subclause 8.1.2 shall be carried out.

5.1.3.2 Carrier power (conducted)

The test specified in EN 300 086-1 [2], subclause 8.2.2 shall be carried out.

5.1.3.3 Effective radiated power

The tests specified in EN 300 086-1 [2], subclause 8.3.2 shall be carried out.

5.1.3.4 Maximum frequency deviation

The tests specified in EN 300 086-1 [2], subclause 8.4.1.2 and subclause 8.4.2.2 shall be carried out.

5.1.3.5 Adjacent channel power

The tests specified in EN 300 086-1 [2], subclause 8.5.2 shall be carried out.

5.1.3.6 Spurious emissions

The tests specified in EN 300 086-1 [2]:

- subclause 8.6.2 and subclause 8.6.3; or
- subclause 8.6.4

shall be carried out.

5.1.3.7 Intermodulation attenuation

The tests specified in EN 300 086-1 [2], subclause 8.7.2 shall be carried out.

5.1.3.8 Transient frequency behaviour of the transmitter

The tests specified in EN 300 086-1 [2], subclause 8.8.2 shall be carried out.

5.2 Other test specifications

The requirements in subclause 4.2 have been set on the assumption that the test specifications in table 1 will be used to verify the performance of equipment.

Table 1: Receiver test specifications

Subclause	Performance requirement	Subclause on EN 300 086-1 [2] containing the test method
4.2.1	Maximum usable sensitivity	9.1.2
4.2.2	Maximum usable sensitivity (field strength)	9.2.2
4.2.3	Co-channel rejection	9.4.2
4.2.4	Adjacent channel selectivity	9.5.2
4.2.5	Spurious response rejection	9.6.2
4.2.6	Intermodulation response rejection	9.7.2
4.2.7	Blocking or desensitization	9.8.2
4.2.8	Spurious radiations	9.9.2 and 9.9.3; or 9.9.4
4.2.9	Desensitization and sensitivity (duplex)	10.1.2 or 10.1.3
4.2.10	Spurious response rejection (duplex)	10.2

History

Document history			
V1.1.1	February 2000	Public Enquiry	PE 200024: 2000-02-16 to 2000-06-16