

Draft **EN 300 093-1** V1.2.3 (1998-02)

---

*European Standard (Telecommunications series)*

**Integrated Services Digital Network (ISDN);  
Calling Line Identification Restriction (CLIR)  
supplementary service;  
Digital Subscriber Signalling System No. one (DSS1) protocol;  
Part 1: Protocol specification**

---



*European Telecommunications Standards Institute*

---

---

**Reference**

REN/SPS-05145-D-1 (0v090iq0.PDF)

---

**Keywords**

ISDN, CLIR, DSS1, supplementary service

***ETSI Secretariat***

---

**Postal address**

F-06921 Sophia Antipolis Cedex - FRANCE

---

**Office address**

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16  
Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**X.400**

c= fr; a=atlas; p=etsi; s=secretariat

---

**Internet**

secretariat@etsi.fr  
<http://www.etsi.fr>

---

***Copyright Notification***

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

---

# Contents

Intellectual Property Rights.....	4
Foreword .....	4
1 Scope.....	6
2 Normative references .....	6
3 Definitions.....	7
4 Abbreviations.....	7
5 Description.....	7
6 Operational requirements.....	8
6.1 Provision and withdrawal.....	8
6.2 Requirements on the originating network side.....	8
6.3 Requirements on the destination network side.....	8
7 Coding requirements .....	8
8 State definitions .....	8
9 Signalling procedures at the coincident S and T reference point .....	8
9.1 Activation, deactivation and registration .....	8
9.2 Actions at the originating user .....	8
9.2.1 Normal operation .....	8
9.2.2 Exceptional procedures .....	8
9.3 Actions at the originating local exchange .....	9
9.3.1 Normal operation .....	9
9.3.2 Exceptional procedures .....	9
9.4 Actions at the destination local exchange .....	9
9.4.1 Normal operation .....	9
9.4.2 Exceptional procedures .....	9
10 Procedures for interworking with private ISDNs .....	9
11 Interaction with other networks .....	9
12 Interaction with other supplementary services.....	9
13 Parameter values (timers).....	10
14 Dynamic description (SDL diagrams) .....	10
<b>Annex A (informative): Signalling flows .....</b>	<b>11</b>
<b>Annex B (informative): Terminal interchangeability between public and private ISDNs .....</b>	<b>12</b>
<b>Annex C (informative): Changes with respect to the previous ETS 300 093-1 .....</b>	<b>13</b>
<b>Annex D (informative): Bibliography.....</b>	<b>14</b>
History .....	15

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETR 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.fr/ipr>).

Pursuant to the ETSI Interim IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETR 314 (or the updates on <http://www.etsi.fr/ipr>) which are, or may be, or may become, essential to the present document.

---

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Signalling Protocols and Switching (SPS), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document is part 1 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Calling Line Identification Restriction (CLIR) supplementary service, as described below:

**Part 1: "Protocol specification";**

Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";

Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";

Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";

Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";

Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".

In accordance with CCITT Recommendation I.130, the following three level structure is used to describe the supplementary telecommunications services as provided by European public telecommunications operators under the pan-European Integrated Services Digital Network (ISDN):

- Stage 1: is an overall service description, from the user's standpoint;
- Stage 2: identifies the functional capabilities and information flows needed to support the service described in stage 1; and
- Stage 3: defines the signalling system protocols and switching functions needed to implement the service described in stage 1.

The present document details the stage three aspects (signalling system protocols and switching functions) needed to support the Calling Line Identification Restriction (CLIR) supplementary service. The stage one and stage two aspects are detailed in ETS 300 090 and ETS 300 091, respectively.

The present version updates the references to the basic call specifications.

**Proposed national transposition dates**

Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

---

# 1 Scope

This first part of EN 300 093 specifies the stage three of the Calling Line Identification Restriction (CLIR) supplementary service for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point or coincident S and T reference point (as defined in CCITT Recommendation I.411 [1]) by means of the Digital Subscriber Signalling System No. one (DSS1). Stage three identifies the protocol procedures and switching functions needed to support a telecommunications service (see CCITT Recommendation I.130 [2]).

In addition the present document specifies the protocol requirements at the T reference point where the service is provided to the user via a private ISDN.

The present document does not specify the additional protocol requirements where the service is provided to the user via a telecommunications network that is not an ISDN.

The CLIR supplementary service enables the calling party to prevent presentation of its ISDN number to the called party.

The CLIR supplementary service is applicable to all telecommunication services.

Further parts of the present document specify the method of testing required to identify conformance to the present document.

The present document is applicable to equipment supporting the CLIR supplementary service, to be attached at either side of a T reference point or coincident S and T reference point when used as an access to the public ISDN.

---

# 2 Normative references

References may be made to:

- a) specific versions of publications (identified by date of publication, edition number, version number, etc.), in which case, subsequent revisions to the referenced document do not apply; or
- b) all versions up to and including the identified version (identified by "up to and including" before the version identity); or
- c) all versions subsequent to and including the identified version (identified by "onwards" following the version identity); or
- d) publications without mention of a specific version, in which case the latest version applies.

A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] CCITT Recommendation I.411 (1988): "ISDN user-network interfaces Reference configurations".
- [2] CCITT Recommendation I.130 (1988): "Method for characterisation of telecommunications services supported by an ISDN and network capabilities of an ISDN".
- [3] CCITT Recommendation I.112: "Vocabulary of terms for ISDNs".
- [4] CCITT Recommendation E.164: "Numbering plan for the ISDN era".
- [5] EN 300 403-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [6] EN 300 195-1: "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [7] ETS 300 090 (1992): "Integrated Services Digital Network (ISDN); Calling Line Identification Restriction (CLIR) supplementary service; Service description".

- [8] EN 300 092-1: "Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [9] CCITT Recommendation I.210: "Principles of telecommunication services supported by an ISDN and the means to describe them".
- [10] CCITT Recommendation Z.100 (1988): "Functional Specification and Description Language (SDL)".

## 3 Definitions

For the purpose of the present document, the following definitions apply:

**Integrated Services Digital Network (ISDN):** See CCITT Recommendation I.112 [3], § 2.3, definition 308.

**service; telecommunications service:** See CCITT Recommendation I.112 [3], § 2.2, definition 201.

**supplementary service:** See CCITT Recommendation I.210 [9], § 2.4.

**network:** The DSS1 protocol entity at the network side of the user-network interface.

**user:** The DSS1 protocol entity at the user side of the user-network interface.

**served user:** It is the user of a particular ISDN number who has subscribed to the restriction of the calling line identification information (on a permanent or on a per-call basis) in association with outgoing calls. The served user is also known as the calling user.

**called user:** It is the receiver of a call, initiated by the served user, on which the CLIR supplementary service has been activated.

**ISDN number:** A number conforming to the numbering plan and structure specified in CCITT Recommendation E.164 [4].

**subaddress:** See CCITT Recommendation E.164 [4], § 11.2.

## 4 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
DSS1	Digital Subscriber Signalling System No. one
ISDN	Integrated Services Digital Network

## 5 Description

The CLIR supplementary service is a supplementary service offered to the calling user. It restricts presentation of the calling user's ISDN number and subaddress to the called user.

When the CLIR supplementary service is applicable and activated, the originating network shall provide the destination network with the indication that the calling user's ISDN number and subaddress information (if provided by the calling user) are not allowed to be presented to the called user. In this case no calling user number shall be included in the call offered to the called user.

The presentation restriction function shall not influence the forwarding of the calling user number within the network as part of the basic service procedures.

---

## 6 Operational requirements

### 6.1 Provision and withdrawal

See ETS 300 090 [7], subclause 6.1.

### 6.2 Requirements on the originating network side

Any information pertaining to the CLIR supplementary service shall be inserted in the SETUP message sent as part of the basic call procedures according to EN 300 403-1 [5], clause 5.

### 6.3 Requirements on the destination network side

See subclause 9.4.

---

## 7 Coding requirements

EN 300 403-1 [5] subclause 4.5.10 gives the coding for the calling party number information element.

---

## 8 State definitions

No specific state definitions are required.

---

## 9 Signalling procedures at the coincident S and T reference point

### 9.1 Activation, deactivation and registration

Not applicable.

### 9.2 Actions at the originating user

#### 9.2.1 Normal operation

If the CLIR supplementary service is requested by a user on a per-call basis and the user wishes to override the default setting, the user shall include the calling party number information element in the SETUP message sent to the network, with the presentation indicator set to "presentation restricted" or "presentation allowed".

#### 9.2.2 Exceptional procedures

Not applicable.



## 9.3 Actions at the originating local exchange

### 9.3.1 Normal operation

If the calling user has subscribed to the CLIR supplementary service permanent mode, then the network shall ignore the presentation indicator received in the SETUP message. The network shall set the presentation indicator to "presentation restricted".

The number digits, if included, shall be treated according to tables 1 and 2 of EN 300 092-1 [8].

If the CLIR supplementary service is requested by the user on a per-call basis, and the calling party number information element containing a presentation indicator is included in the SETUP message, then the originating network shall set the presentation indicator according to that in the received calling party number information element.

If the CLIR supplementary service is requested by the user on a per-call basis, and no presentation indicator is included in the SETUP message, then the originating network shall set the presentation indicator according to the subscribed default value.

The presentation indicator shall be forwarded to the destination in association with the basic call request.

### 9.3.2 Exceptional procedures

Not applicable.

## 9.4 Actions at the destination local exchange

### 9.4.1 Normal operation

The actions to be performed at the destination local exchange are specified in EN 300 092-1 [8], subclause 9.5.1.

### 9.4.2 Exceptional procedures

Not applicable.

---

## 10 Procedures for interworking with private ISDNs

The procedures specified in clause 9 shall be used.

---

## 11 Interaction with other networks

On calls to or via non-ISDNs, it cannot be assured that a restriction indication can be carried to the destination network. As a network option, the originating network may restrict any information identifying the calling user from being forwarded to the destination network when the CLIR supplementary service is applicable. For further information see Clause 11 of EN 300 092-1 [8].

---

## 12 Interaction with other supplementary services

The interaction of the CLIR supplementary service with other supplementary services shall be as specified in EN 300 195-1 [6].

## 13 Parameter values (timers)

No specific timers are required.

## 14 Dynamic description (SDL diagrams)

The dynamic description is specified in figure 1 according to CCITT Recommendation Z.100 [10].

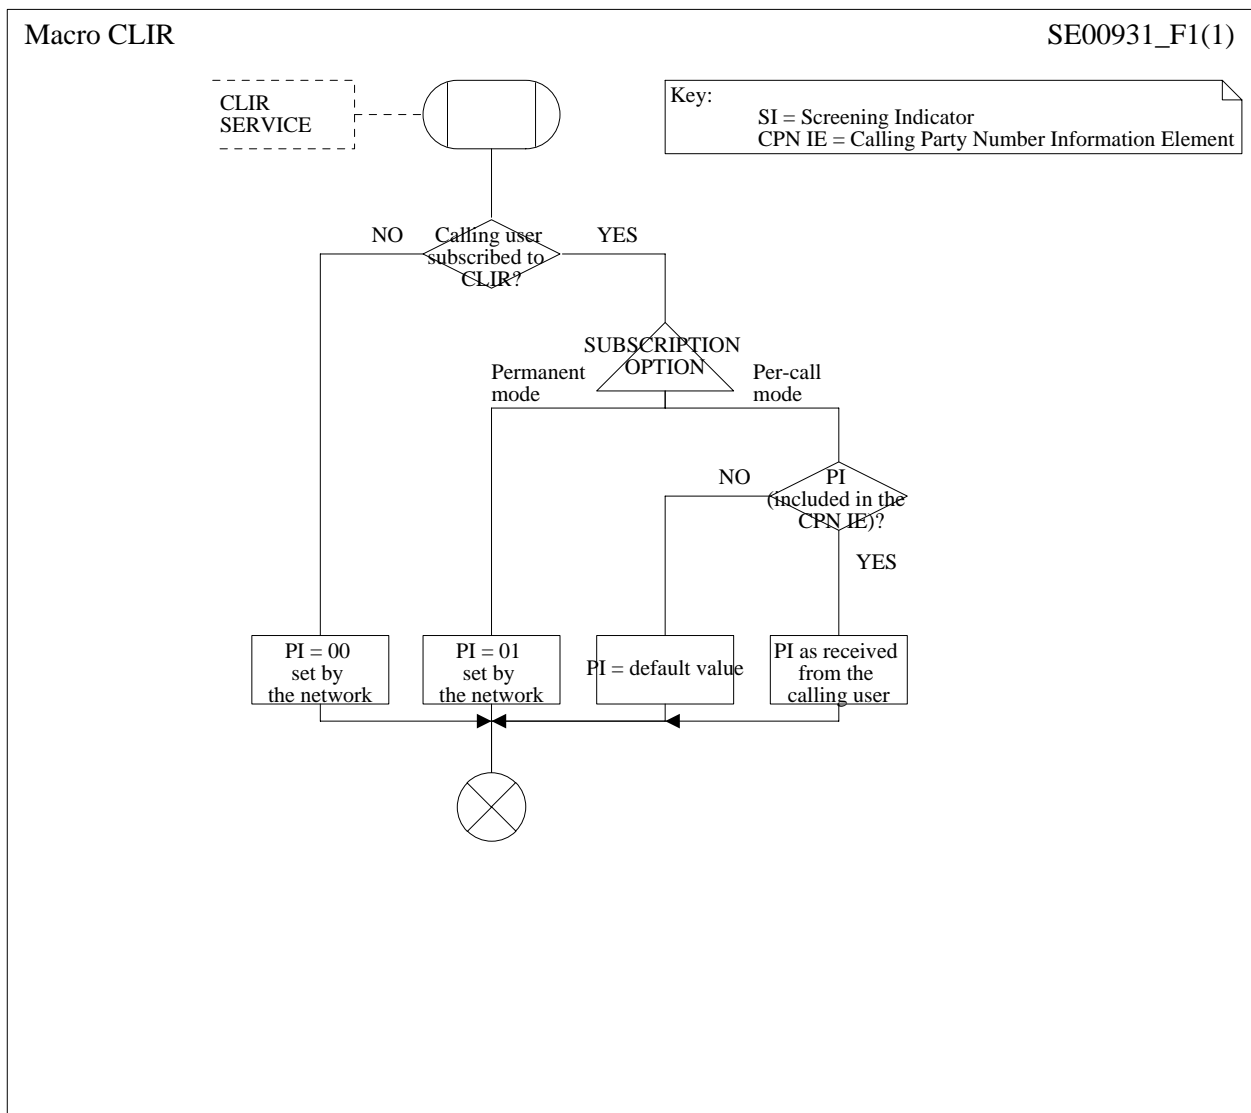


Figure 1: Originating network side dynamic description

---

## Annex A (informative): Signalling flows

No CLIR supplementary service specific information flow is necessary in addition to basic call control according to EN 300 403-1 [5].

---

## Annex B (informative): Terminal interchangeability between public and private ISDNs

Terminals conforming to the present document are also compatible with private ISDNs offering interfaces conforming to the Calling Line Identification Restriction (CLIR) aspects of ETS 300 191.

NOTE: To prevent presentation of the calling user's subaddress to the called user, the terminal equipment should not include the calling party subaddress information element in the SETUP message sent to a private ISDN. Presentation of the subaddress is not subject to restrictions in a private network.

Terminals conforming to the Calling Line Identification Restriction (CLIR) supplementary service and Connected Line Identification Restriction (COLR) supplementary service aspects of ETS 300 191 are also compatible with public ISDNs offering interfaces conforming to the present document.

---

## Annex C (informative): Changes with respect to the previous ETS 300 093-1

The following changes have been done:

- conversion to EN layout;
- replacement of references to ETS 300 102 with EN 300 403;
- substitution of non-specific references to basic standards where the intention is to refer to the latest version.

---

## Annex D (informative): Bibliography

- ETS 300 191: "Private Telecommunication Networks (PTN); Signalling protocol at the S-reference point; Identification supplementary services".

---

## History

<b>Document history</b>		
Edition 1	April 1992	Publication as ETS 300 093-1
V1.2.3	February 1998	One-step Approval Procedure      OAP 9824: 1998-02-13 to 1998-06-12