

Draft **ETSI EN 300 761-2** V1.1.1 (2000-07)

Candidate Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Short Range Devices (SRD);
Automatic Vehicle Identification (AVI) for railways
operating in the 2,45 GHz frequency range;
Part 2: Harmonized standard covering essential requirements
under article 3.2 of the R&TTE Directive**



Reference

REN/ERM-RP08-0411-2

Keywords

radio, regulation, UIC

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	5
1 Scope	7
2 References	8
3 Definitions, symbols and abbreviations	8
3.1 Definitions	8
3.2 Symbols.....	9
3.3 Abbreviations	9
4 Technical requirements specifications	9
4.1 Transmitter requirements	9
4.1.1 Effective radiated power	9
4.1.2 Permitted range of operating frequencies	9
4.1.3 Transmitter spectrum mask.....	9
4.1.4 Spurious emissions	9
4.1.5 Duty cycle.....	9
4.2 Receiver requirements	9
4.2.1 Co-channel rejection	9
4.2.2 Adjacent band selectivity	10
4.2.3 Spurious response rejection	10
4.2.4 Intermodulation response rejection.....	10
4.2.5 Spurious radiations	10
5 Testing for compliance with technical requirements.....	10
5.1 Essential radio test suites.....	10
5.1.1 Environmental conditions for testing	10
5.1.1.1 Normal and extreme test-conditions.....	10
5.1.1.2 Test power source	10
5.1.2 Choice of samples for test suites.....	10
5.1.3 Transmitter test suites	10
5.1.3.1 Effective radiated power	10
5.1.3.2 Frequency error	11
5.1.3.3 Transmitter spectrum mask	11
5.1.3.4 Spurious emissions.....	11
5.1.4 Receiver test suites.....	11
5.1.4.1 Spurious radiations.....	11
5.2 Other test specifications	11
6 Interpretation of measurement results	11
Annex A (normative): Subclauses of the present document relevant for compliance with the essential requirements EC Council Directives	13
A.1 Compliance with 99/5/EC (R&TTE Directive) article 3.3e	13
A.2 Compliance with 99/5/EC (R&TTE Directive) article 3.3f	13
History	14

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase for the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [5] laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive") [1].

The present document is part 2 of a multi-part deliverable covering the Short Range Devices; Automatic Vehicle Identification (AVI) for railways operating in the 2,45 GHz frequency range, as identified below:

Part 1: "Technical characteristics and methods of measurement";

Part 2: "Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive [1]. Each standard is a module in the structure. The modular structure is shown in figure 1.

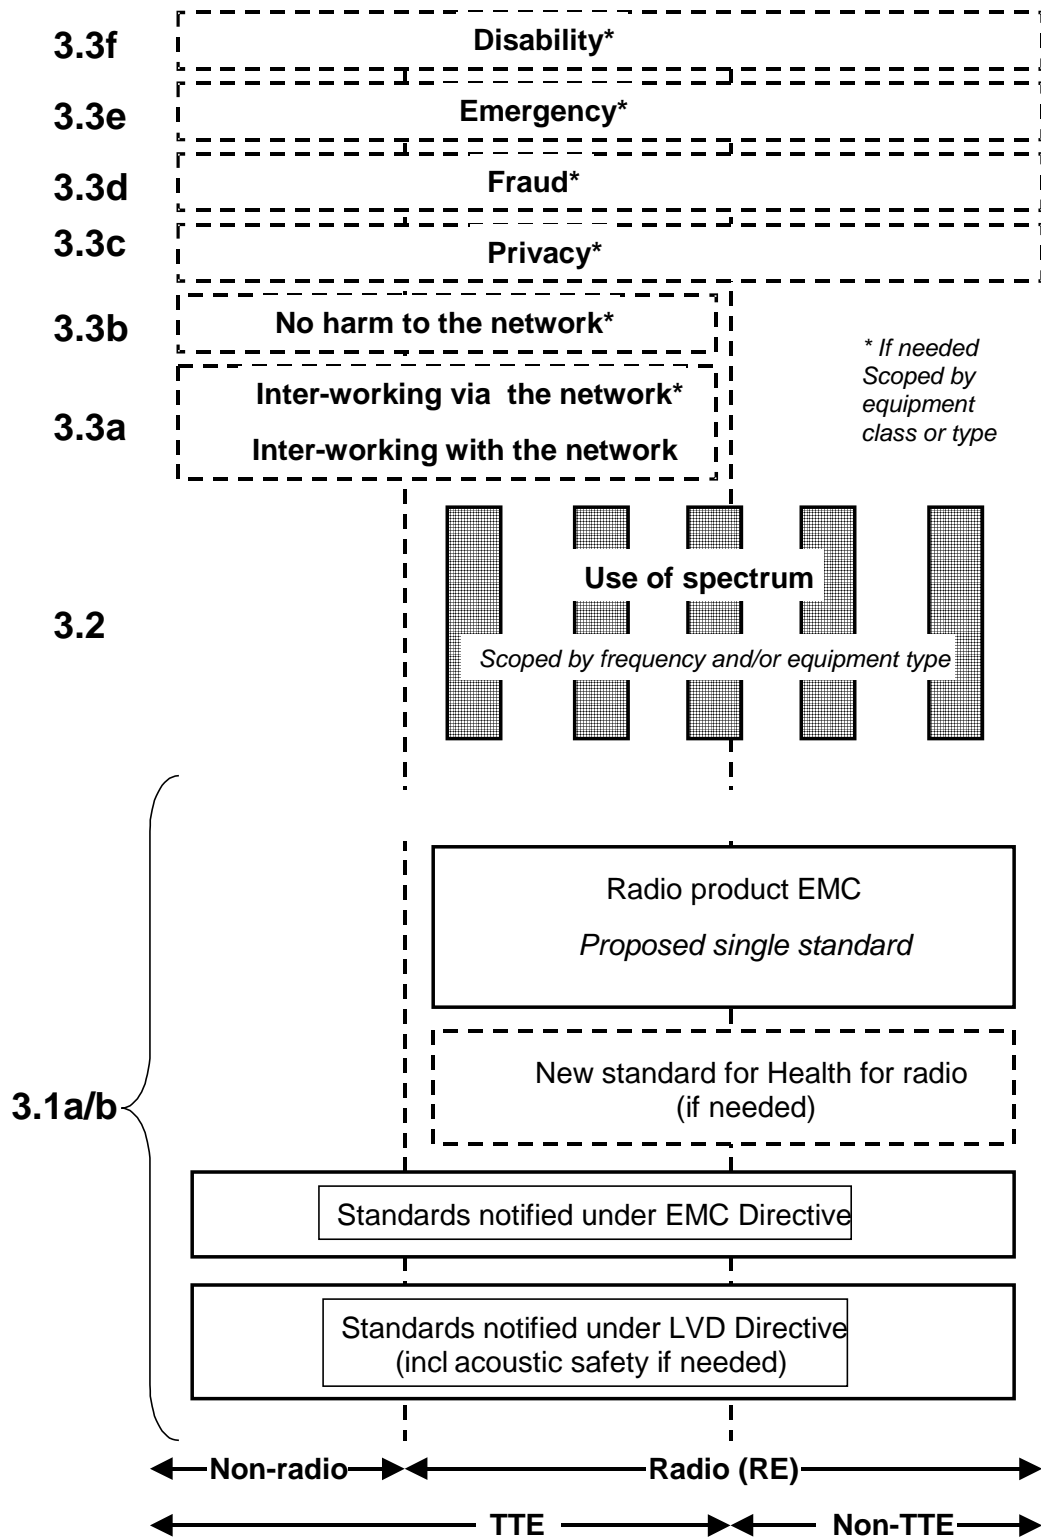


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure shows the different subclauses of Article 3 of the Directive.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.3 various horizontal boxes are shown. Their dotted lines indicate that essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. The General Standard will always apply to it, and a radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement is adopted by the Commission and if the equipment in question lies within the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the Directive may be covered in just the General Standard or in a set of standards that includes the General Standard.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards under articles 3.2 and 3.3 to be added when new frequency bands are agreed or when the Commission takes decisions under article 3 without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

1 Scope

The present document applies to a dedicated 2,45 GHz Short Rang Device (SRD) microwave link intended for a European wide data communication system for Railway applications, Automatic Vehicle Identification (AVI) which fulfil the Union Internationale des Chemins de fer (UIC) specifications (annex E) and are interoperable with the current UIC system except for the interrogator (Track Units (TU)) bandwidth.

The present document contains the technical characteristics for radio equipment and is referencing by CEPT/ERC Recommendation T/R 70-03 [4].

The Interrogator bandwidth is limited to 8 MHz shared within five channels:

- with a Radio Frequency (RF) output connection and specified antenna or with an integral antenna;
- for data transmission only;
- operating on radio frequencies in the 2,446 GHz to 2,454 GHz Industrial, Scientific and Medical (ISM) band, with power levels up to 500 mW e.i.r.p

The present document is a product standard covering various Railway applications where the data transmission of the system will be active only during the presence of the train.

The present document covers fixed installed interrogators (TUs) and transponders (mobile stations). For certain measurements the transponders are measured together with the whole interrogating system.

The in-track base station (interrogator) transmit and receive modulations are a combination of Amplitude Shift Keying (ASK) and Frequency Shift Keying (FSK) respectively.

The present document supports the necessary transmitter and receiver data rates between 192 kbit/s and 384 kbit/s according to the type of transaction.

It covers the minimum characteristics considered necessary in order to make the best use of the available frequencies. It does not necessarily include all the characteristics which may be required by a user, nor does it necessarily represent the optimum performance achievable.

The present document includes specifications for methods of measurement for equipment fitted with antenna sockets and/or integral antenna.

Additional standards or specifications may be required for equipment such as that intended for connection to the Public Switched Telephone Network (PSTN).

The present document is intended to cover the provisions of Article 3.2 of Directive 1999/5/EC [1] (R&TTE Directive), see annex C of EN 300 761-1 [2], which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference."

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of Article 3 of the R&TTE Directive [1] may apply to equipment within the scope of the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] ETSI EN 300 761-1 (V 1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD); Technical characteristics and test methods for data transmission equipment for railway identification system operating in the 2.45 GHz ISM band (Rail AVI); Part 1: Transmitter and receiver parameters".
- [3] ETSI ETR 028: "Radio Equipment and Systems (RES); Uncertainties in the measurement of mobile radio equipment characteristics".
- [4] CEPT/ERC Recommendation T/R 70-03: "Relating to the use of Short Range Devices (SRD)".
- [5] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions in the R&TTE Directive [1], and EN 300 761-1 [2] apply.

3.2 Symbols

For the purposes of the present document, the symbols defined in EN 300 761-1 [2] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations defined in EN 300 761-1 [2] apply.

4 Technical requirements specifications

4.1 Transmitter requirements

4.1.1 Effective radiated power

The effective radiated power, as defined in EN 300 761-1 [2] subclause 7.1.1, shall not exceed the limits in EN 300 761-1 [2] subclause 7.1.3.

This requirement applies to transmitters with an integral or dedicated antenna.

4.1.2 Permitted range of operating frequencies

The permitted range of operation frequencies, as defined in EN 300 761-1 [2] subclause 7.2.1, shall not exceed the limits in EN 300 761-1 [2] subclause 7.2.4.

4.1.3 Transmitter spectrum mask

The transmitter spectrum mask, as defined in EN 300 761-1 [2] subclause 7.3.1, shall not exceed the limits in EN 300 761-1 [2] subclause 7.3.3 table2

4.1.4 Spurious emissions

The spurious emissions, as defined in EN 300 761-1 [2] subclause 7.6.1, shall not exceed the limits in EN 300 761-1 [2] subclause 7.3.6 table 5.

This requirement applies to all transmitters.

4.1.5 Duty cycle

The duty cycle, as defined in EN 300 761-1 [2] subclause 7.7.1, shall not exceed the limits in EN 300 761-1 [2] subclause 7.7.3, table 6.

This requirement applies to all transmitters.

4.2 Receiver requirements

4.2.1 Co-channel rejection

The co-channel rejection, as defined in EN 300 761-1 [2] subclauses 8.3.1 and 8.3.3.1, shall not exceed the limits in EN 300 761-1 [2] subclauses 8.2.3 and 8.3.3.3.

4.2.2 Adjacent band selectivity

The adjacent band selectivity, as defined in EN 300 761-1 [2] subclauses 8.3.1 and 8.3.4.1, shall not exceed the limits in EN 300 761-1 [2] subclauses 8.2.3 and 8.3.4.3.

4.2.3 Spurious response rejection and desensitization

The blocking or desensitization, as defined in EN 300 761-1 [2] subclauses 8.3.1 and 8.3.5.1, shall not exceed the limits in EN 300 761-1 [2] subclauses 8.2.3 and 8.3.3.3 table 7.

4.2.4 Intermodulation response rejection

The intermodulation response rejection, as defined in EN 300 761-1 [2] subclauses 8.3.1 and 8.3.6.1, shall not exceed the limits in EN 300 761-1 [2] subclause 8.2.3 and 8.3.6.3.

4.2.5 Spurious radiations

The spurious radiations, as defined in EN 300 761-1 [2] subclauses 8.4.1, shall not exceed the limits in EN 300 761-1 [2] subclause 8.4.5 and 8.3.6.3.

This requirement applies to all receivers.

5 Testing for compliance with technical requirements

5.1 Essential radio test suites

5.1.1 Environmental conditions for testing

5.1.1.1 Normal and extreme test-conditions

Type tests shall be made under normal test conditions, and also, where stated, under extreme test conditions.

The test conditions and procedures shall be as specified in EN 300 761-1 [2] subclauses 5.3 to 5.4.

5.1.1.2 Test power source

The test power source shall meet the requirements of EN 300 761-1 [2] subclause 5.2.

5.1.2 Choice of samples for test suites

Measurement shall be performed, according to the present document, on samples of equipment defined in EN 300 761-1 [2], subclauses 4.2.1 to 4.2.3.2.

5.1.3 Transmitter test suites

5.1.3.1 Effective radiated power

Either:

The test specified in EN 300 761-1 [2], subclauses 7.1.2 shall be carried out;

This test suite applies to transmitters with an integral or dedicated antenna.

5.1.3.2 Frequency error

The test specified in EN 300 761-1 [2], subclause 7.2.2 shall be carried out;

This test suite applies to all transmitters.

5.1.3.3 Transmitter spectrum mask

The test specified in EN 300 761-1 [2], subclause 7.3.2 shall be carried out;

5.1.3.4 Spurious emissions

Either:

- the tests specified in EN 300 761-1 [2], subclause 7.6.3 and EN 300 761-1 [2], subclause 7.6.4 shall be carried out; or
- the test specified in EN 300 761-1 [2], subclause 7.6.5 shall be carried out.

5.1.4 Receiver test suites

5.1.4.1 Spurious radiations

Either:

- the tests specified in EN 300 761-1 [2], subclause 8.4.2 and EN 300 761-1 [2], subclause 8.4.3 shall be carried out; or
- the test specified in EN 300 761-1 [2], subclause 8.4.4 shall be carried out.

5.2 Other test specifications

The requirements in subclause 4.2 have been set on the assumption that the test specifications in table 1 will be used to verify the performance of equipment.

Table 1: Receiver test specifications

Subclause	Performance requirement	Subclause on EN 300 761-1 [2] containing the test method
4.2.1	Co-channel rejection	8.3.3.2
4.2.2	Adjacent channel selectivity	8.3.4.2
4.2.3	Spurious response rejection and desensitization	8.3.5.2
4.2.3	Intermodulation response rejection	8.3.6.2
4.2.4	Spurious radiations	8.4.2 and 8.4.3; or 8.4.4

6 Interpretation of measurement results

The interpretation of the results recorded in the test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit shall be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be separately included in the test report;

- the value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 2.

Table 2: Measurement uncertainty

RF frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 4 dB
Adjacent channel power	± 3 dB
Conducted emission of transmitter, valid up to 12,75 GHz	± 4 dB
Conducted emission of receivers	± 3 dB
Radiated emission of transmitter, valid up to 12,75 GHz	± 6 dB
Radiated emission of receiver, valid up to 12,75 GHz	± 6 dB

For the test methods, according to the present document the uncertainty figures shall be calculated according to the methods described in the ETR 028 [3] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 2 is based on such expansion factors.

The particular expansion factor used for the evaluation of the measurement uncertainty shall be stated.

Annex A (normative): Subclauses of the present document relevant for compliance with the essential requirements EC Council Directives

A.1 Compliance with 99/5/EC (R&TTE Directive) article 3.3e

The subclauses noted are necessary to ensure access to emergency services. At the time of publication, this has not been invoked as an essential requirement of the R&TTE Directive for equipment covered by the present document.

Table A.1: Subclauses of the present document relevant to ensure access to emergency services

Clause/subclause number and title		Corresponding article of the R&TTE Directive	Qualifying remarks
4.2.1	Co-channel rejection	3.3 e	Applies to receivers
4.2.2	Adjacent channel selectivity	3.3 e	Applies to receivers
4.2.3	Spurious response rejection and desensitization	3.3 e	Applies to receivers
4.2.4	Intermodulation response rejection	3.3 e	Applies to receivers

A.2 Compliance with 99/5/EC (R&TTE Directive) article 3.3f

The subclauses noted are necessary to facilitate the use of equipment by users with a disability. At the time of publication, this has not been invoked as an essential requirement of the R&TTE Directive for equipment covered by the present document.

Table A.2: Subclauses of the present document relevant in order to facilitate the use of equipment by users with a disability

Clause/subclause number and title		Corresponding article of the R&TTE Directive	Qualifying remarks
4.2.1	Co-channel rejection	3.3 e	Applies to receivers
4.2.2	Adjacent channel selectivity	3.3 e	Applies to receivers
4.2.3	Spurious response rejection and desensitization	3.3 e	Applies to receivers
4.2.4	Intermodulation response rejection	3.3 e	Applies to receivers

History

Document history			
V1.1.1	July 2000	Public Enquiry	PE 20001124: 2000-07-26 to 2000-11-24