

ETSI EN 300 957 V7.0.1 (2000-01)

European Standard (Telecommunications series)

**Digital cellular telecommunications system (Phase 2+);
Unstructured Supplementary Service Data (USSD);
Stage 3
(GSM 04.90 version 7.0.1 Release 1998)**

GSM®
GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS



Reference

REN/SMG-030490Q7

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications (GSM)

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>
If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
1 Scope	5
2 References	5
3 Abbreviations	5
4 Cross phase compatibility	5
5 Network initiated unstructured supplementary service data operations	6
5.1 Unstructured supplementary service data request.....	6
5.1.1 Normal operation	6
5.2 Unstructured supplementary service data notification	8
5.2.1 Normal operation	8
6 Mobile initiated unstructured supplementary service data operations.....	10
6.1 Normal operation.....	10
6.2 Cross phase compatibility.....	12
6.2.1 Network only supports protocol version 1 of unstructured supplementary service data operations.....	12
6.2.2 Mobile station only supports protocol version 1 of unstructured supplementary service data operations.....	12
Annex A (informative): Change Request History	13
History	14

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by the Special Mobile Group (SMG).

The present document specifies the stage 3 description of the Unstructured Supplementary Service Data (USSD) operations within the digital cellular telecommunications system.

The specification from which the present document has been derived was originally based on CEPT documentation, hence the presentation of the present document may not be entirely in accordance with the ETSI/PNE rules.

The contents of the present document is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will be re-released with an identifying change of release date and an increase in version number as follows:

Version 7.x.y

where:

- 7 indicates Release 1998 of GSM Phase 2+.
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

National transposition dates	
Date of adoption of this EN:	31 December 1999
Date of latest announcement of this EN (doa):	31 March 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 September 2000
Date of withdrawal of any conflicting National Standard (dow):	30 September 2000

1 Scope

The present document gives the stage 3 description of the Unstructured Supplementary Service Data (USSD) operations.

The group of unstructured supplementary service data operations is divided into two different classes:

- Network initiated unstructured supplementary service data operations (clause 5);
- Mobile initiated unstructured supplementary service data operations (clause 6).

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- For this Release 1998 document, references to GSM documents are for Release 1998 versions (version 7.x.y).

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 04.08: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [3] GSM 04.80: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 supplementary services specification; Formats and coding".

3 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

4 Cross phase compatibility

For the mobile initiated USSD operations, a number of changes exist between the present document and the protocol version 1 specification. For these operations the main body of the present document assumes that all network entities comply with this version of the service. In this case an additional subclause defines the additional requirements for when one or more network entities or the Mobile Station (MS) complies with the protocol version 1 specifications for the USSD operations.

5 Network initiated unstructured supplementary service data operations

5.1 Unstructured supplementary service data request

5.1.1 Normal operation

The network invokes an USSD request by sending a REGISTER message containing a UnstructuredSS-Request invoke component to the MS.


The MS shall respond to the request by sending a FACILITY message containing the user's mobile subscriber's response in a return result component. The network shall pass the data received in the response to the application handling USSD operations and shall wait for the response of the application. The application may either continue or terminate the dialogue.

When the application continues the dialogue, it may initiate another USSD operation by sending a FACILITY message (see figure 5.2). The operation may either be an USSD request or notification (see subclause 5.1.2).

When the application terminates the dialogue, the network shall clear the transaction by sending a RELEASE COMPLETE message. The MS may also clear the transaction at any time by sending a RELEASE COMPLETE message upon the request of the user.


If the MS is unable to process the request received from the network, it shall return an error indication by sending a FACILITY message containing a return error component. Error values are specified in GSM 04.80.

When the MS receives an USSD operation in parallel to any call independent supplementary service transaction, it shall respond with a return error component in a RELEASE COMPLETE message, containing the "USSD-Busy" error as specified in GSM 04.80, to indicate the failure in handling a parallel USSD operation. However, the network is allowed to initiate USSD operations in parallel to call related transactions.

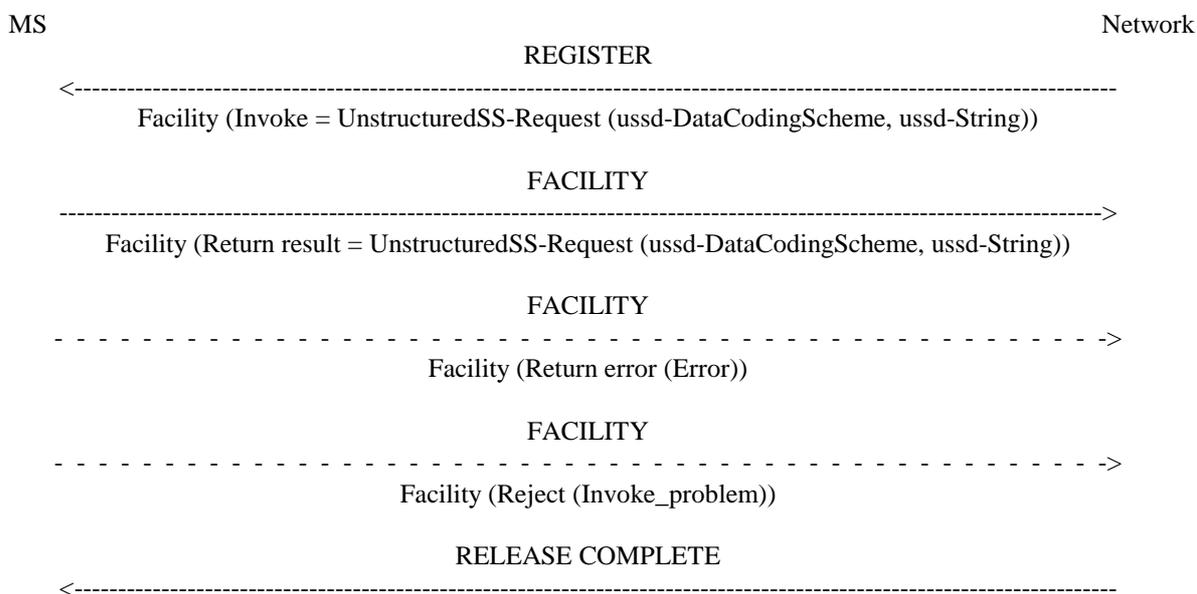

NOTE: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

Figure 5.1: Single network initiated USSD request

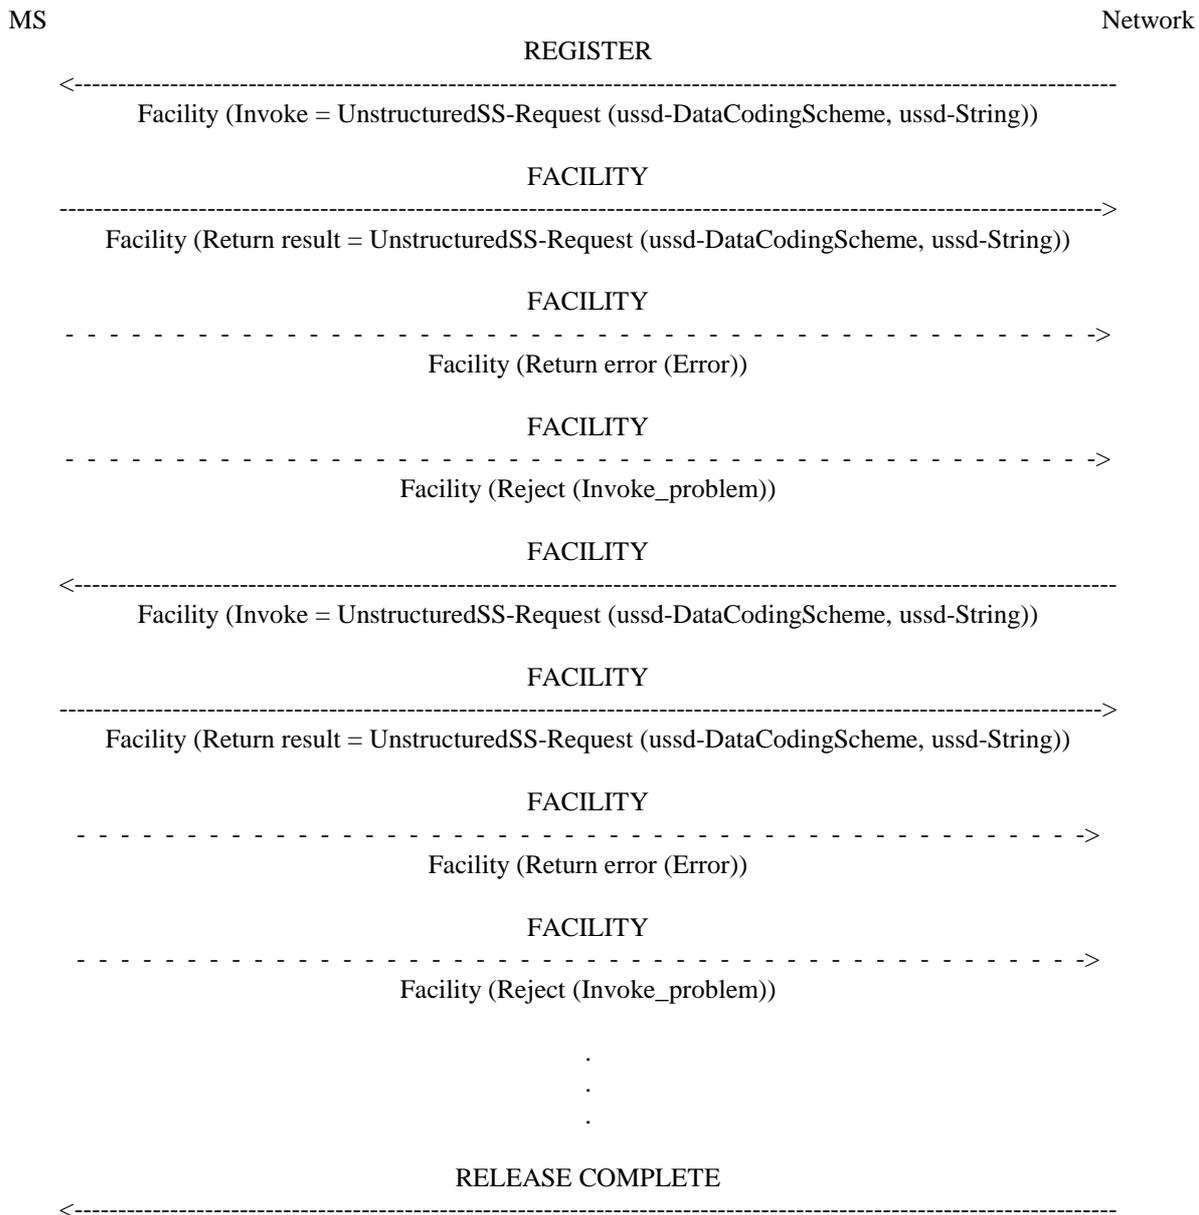

NOTE 1: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

NOTE 2: The second USSD operation may also be an USSD notification. The network may use the on-going transaction for sending further USSD operations. Only one additional USSD request is shown.

Figure 5.2: Multiple network initiated USSD request

5.2 Unstructured supplementary service data notification

5.2.1 Normal operation

The network invokes an USSD notification by sending a REGISTER message to the MS containing a UnstructuredSS-Notify invoke component.


The MS shall acknowledge the operation by sending a FACILITY message containing an empty result component to the network. The application may either continue or terminate the dialogue.

When the application continues the dialogue, it may initiate another USSD operation by sending a FACILITY message (see figure 5.4). The operation may either be an USSD request (see subclause 5.1.1) or notification.

When the application terminates the dialogue, the network shall clear the transaction by sending a RELEASE COMPLETE message. The MS may also clear the transaction at any time by sending a RELEASE COMPLETE message upon request of the user.


If the MS is unable to process the request received from the network, it shall return an error indication by sending a FACILITY message containing a return error component. Error values are specified in GSM 04.80.

When the MS receives an USSD operation in parallel to any call independent supplementary service transaction, it shall respond with a return error component in a RELEASE COMPLETE message, containing the "USSD-Busy" error as specified in GSM 04.80, to indicate the failure in handling a parallel USSD operation. However, the network is allowed to initiated USSD operations in parallel to call related transactions.

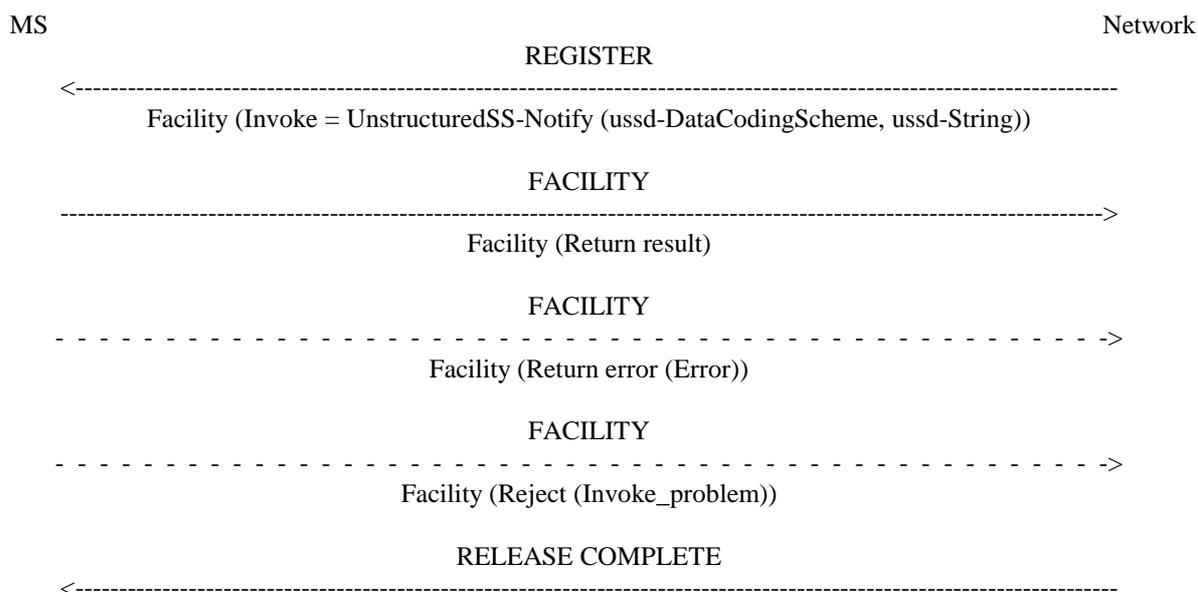

NOTE: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

Figure 5.3: Single network initiated USSD notification

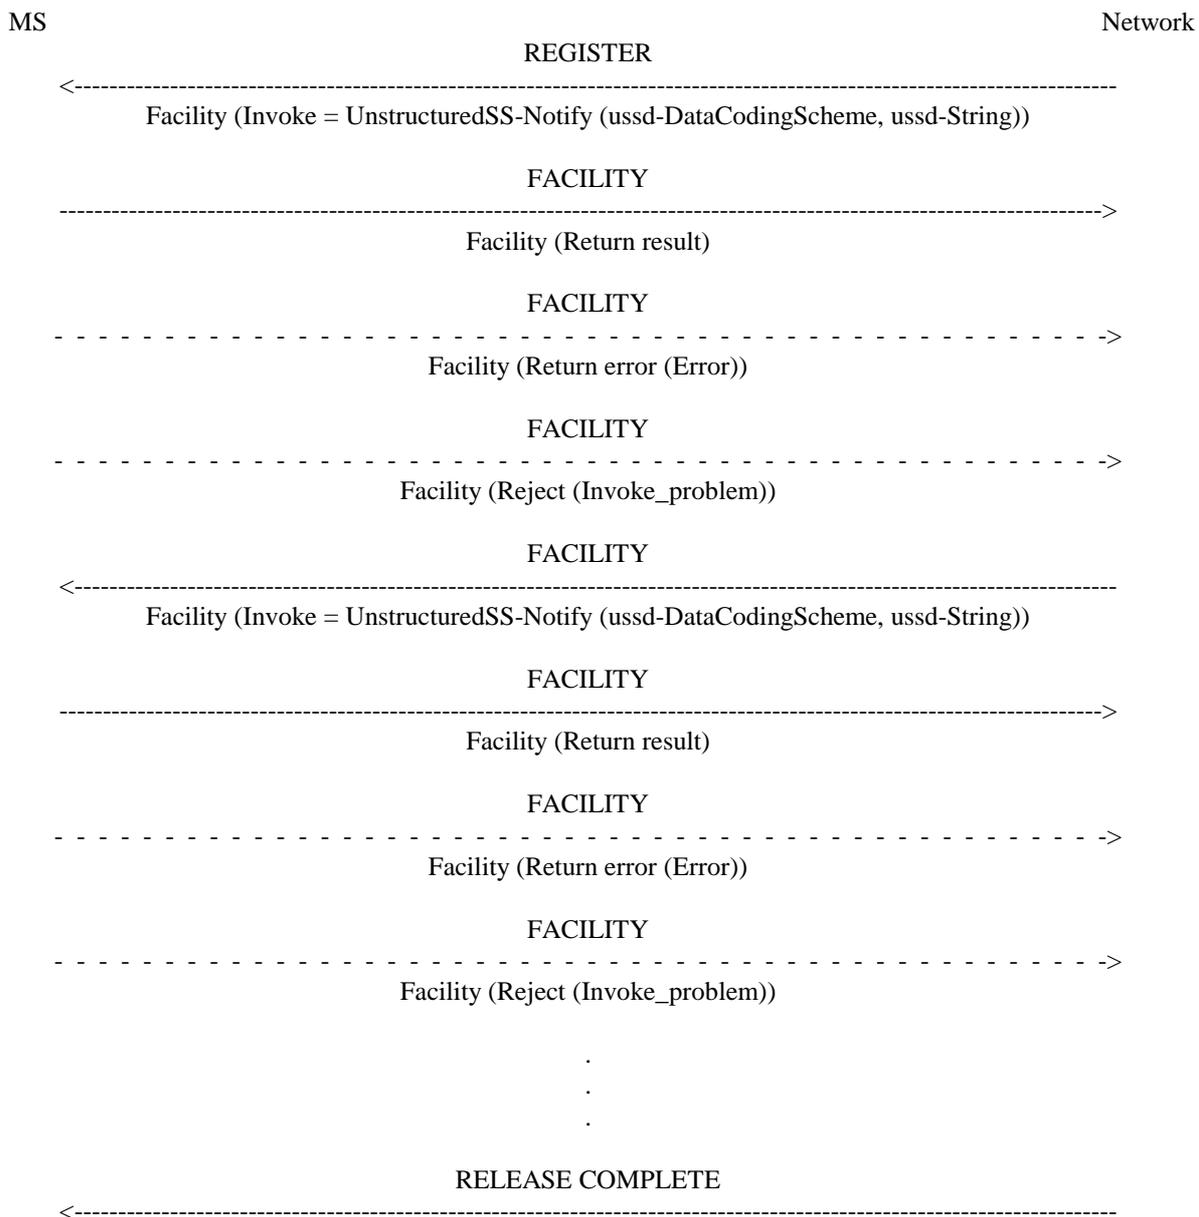

NOTE 1: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

NOTE 2: The second USSD operation may also be an USSD request. The network may use the on-going transaction for sending further USSD operations. Only one additional USSD notification is shown.

Figure 5.4: Multiple network initiated USSD notification

6 Mobile initiated unstructured supplementary service data operations

6.1 Normal operation

The MS invokes an USSD request by sending a REGISTER message to the network containing a ProcessUnstructuredSS-Request invoke component.


The receiving network entity shall pass the data received in the request to the application handling USSD operations and shall wait for the response of the application. The application may either terminate the dialogue or may request several times further information in order to perform the requested operation (see figures 6.1 and 6.2).

When the application requests more information to process the request, the network shall initiate an USSD request (see subclause 5.1.1), using the on-going transaction (see figure 6.2). The MS shall return the user's response in a FACILITY message containing a return result component. The network shall pass the data received in the response to the application. If the MS is unable to process the request received from the network, it shall return an error indication by sending a FACILITY message containing a return error component.

When the application terminates the dialogue, the network shall clear the transaction by sending a RELEASE COMPLETE message containing a return result component. The MS may also clear the transaction at any time by sending a RELEASE COMPLETE message upon request of the user.


If the network is unable to process the request received from the MS, it shall clear the transaction by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in GSM 04.80.

The MS shall not initiate USSD operations in parallel to any call independent supplementary service transaction. Only one transaction for USSD operations per user is allowed at a time. However, the MS is allowed to initiate USSD operations in parallel to call related transactions.

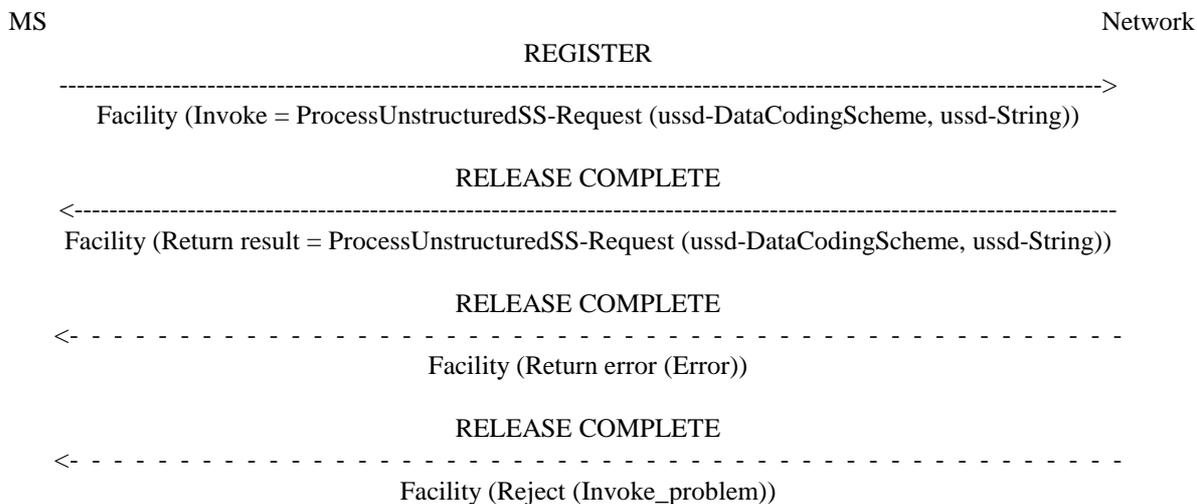

NOTE: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.

Figure 6.1: Mobile initiated USSD operation, network does not request further information

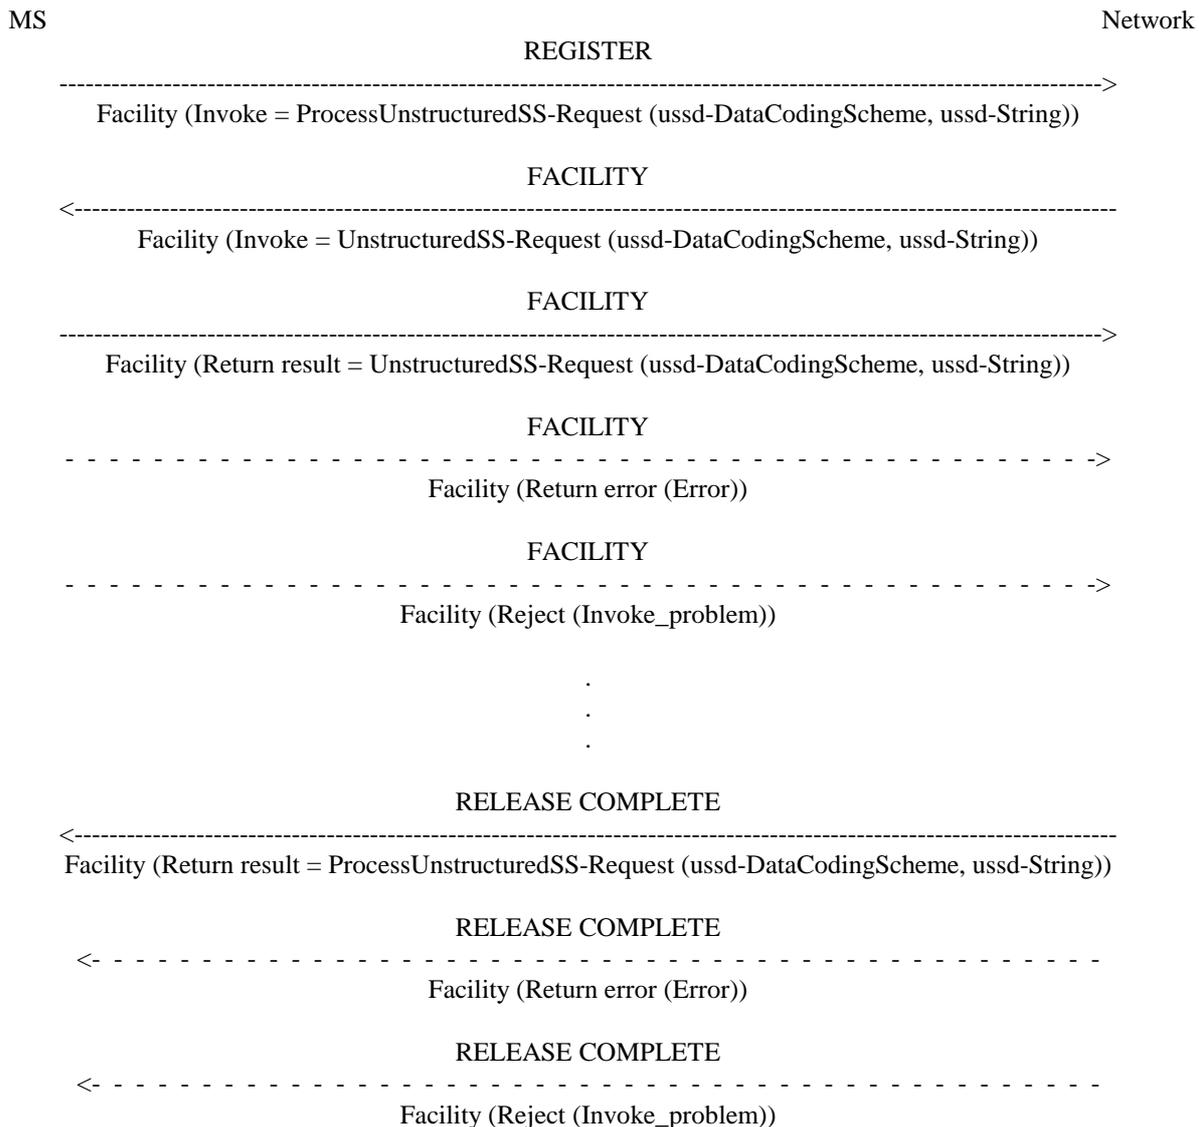

- NOTE 1: The MS may clear the transaction at any time by sending a RELEASE COMPLETE upon request of the user.
- NOTE 2: The network may request further information several times. Only one information request is shown. The network initiated USSD operation may also be an USSD notification. Only a network initiated USSD request is shown.

Figure 6.2: Mobile initiated USSD operation, network requests further information

6.2 Cross phase compatibility

6.2.1 Network only supports protocol version 1 of unstructured supplementary service data operations

If a mobile initiated USSD request using protocol version 2 is rejected by the network, and the reason for the rejection is indicated either by the problem code "unrecognized operation" or a cause "Facility rejected", the MS shall assume that the network only supports protocol version 1 of USSD operations. The MS shall re-attempt the request by using the appropriate protocol version 1 USSD operation without a SS version indicator if the unstructured data entered by the user can be coded as an IA5 string.

6.2.2 Mobile station only supports protocol version 1 of unstructured supplementary service data operations

A MS supporting only protocol version 1 invokes an USSD request by sending a REGISTER message to the network containing a ProcessUnstructuredSsData invoke component without a SS version indicator. In this situation the network is not allowed to start a network initiated USSD operation. If the application requires such an operation for its proper function, the USSD operation sent by the MS shall be rejected by the application. The network shall terminate the transaction by sending a RELEASE COMPLETE message with cause "Facility rejected" (see GSM 04.08).

Annex A (informative): Change Request History

Status of Technical Specification GSM 04.90		
Date	Version	Remarks
		No phase 1 version
October 1993	version 4.0.0	TS approved by SMG#08
January 1994	version 4.0.1	TS frozen for phase 2 by SMG#09 TS changed to draft prETS 300 572
October 1994	version 4.1.0	CR 04.90-01 (category F) approved by SMG#12 TS changed to final draft prETS 300 572
January 1995	version 4.1.1	TS changed to ETS 300 572 First edition July 1996 file converted from word5 to word6
December 1996	version 5.0.0	GTS converted to draft prETS 300 957 for Release 96
May 1997	version 5.0.1	ETS 300 957 first edition
January 1999	version 6.0.0	Release 1997 version
July 1999	version 7.0.0	Specification version 6.0.0 upgrade to Release 1998 version 7.0.0
January 2000	version 7.0.1	Version update to 7.0.1 for Publication
Text and Figures: WinWord 6.0 Stylesheet: etsiw_70.dot		

History

Document history		
V7.0.0	August 1999	One-step Approval Procedure OAP 9956: 1999-08-25 to 1999-12-24
V7.0.1	January 2000	Publication