

ETSI EN 301 060-6 V1.1.4 (1999-11)

European Standard (Telecommunications series)

**Integrated Services Digital Network (ISDN);
Digital Subscriber Signalling System No. one (DSS1) protocol;
Basic call control; Enhancement at the "b" service entry point
for Virtual Private Network (VPN) applications;
Part 6: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT) proforma
specification for the network**



Reference

DEN/SPS-05109-6 (9tdi0ieo.PDF)

Keywords

ATS, ISDN, DSS1, basic, PIXIT, network, VPN

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>
If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference should be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword	5
1 Scope	6
2 References	6
3 Definitions and abbreviations	7
3.1 Definitions	7
3.1.1 Definitions related to conformance testing	7
3.1.2 Definitions related to EN 301 060-1	8
3.2 Abbreviations	8
4 Abstract Test Method	9
4.1 Description of ATM used	9
4.2 Conventions for test components and PCOs	9
5 Untestable test purposes	10
6 ATS conventions	11
6.1 Declarations part	11
6.1.1 Type definitions	11
6.1.1.1 Simple type definitions	11
6.1.1.2 Structured type definitions	11
6.1.1.2.1 TTCN structured type definitions	11
6.1.1.2.2 ASN.1 structured type definitions	11
6.1.1.3 ASP type definitions	11
6.1.1.3.1 TTCN ASP type definitions	11
6.1.1.3.2 ASN.1 ASP type definitions	12
6.1.1.4 PDU type definitions	12
6.1.1.4.1 TTCN PDU type definitions	12
6.1.1.4.2 ASN.1 PDU type definitions	12
6.1.2 Test suite constants	12
6.1.3 Test suite parameters	12
6.1.4 Variables	12
6.1.4.1 Test suite variables	12
6.1.4.2 Test case variables	13
6.1.5 Test suite operation definitions	13
6.2 Constraints part	13
6.2.1 Structured type constraint declaration	13
6.2.2 ASN.1 type constraint declaration	13
6.2.3 ASP type constraint declaration	13
6.2.3.1 ASN.1 ASP type constraint declaration	13
6.2.3.2 TTCN ASP type constraint declaration	14
6.2.4 PDU type constraint declaration	14
6.2.4.1 ASN.1 PDU type constraint declaration	14
6.2.4.2 TTCN PDU type constraint declaration	14
6.2.4.3 Special coding	14
6.2.5 Derived constraints	14
6.2.6 Parameterized constraints	14
6.2.7 Value assignment	14
6.2.7.1 Specific values	14
6.2.7.2 Matching values	15
6.3 Dynamic part	15
6.3.1 Test cases	15
6.3.2 Test steps	15
6.3.3 Defaults	15

7	ATS to TP map.....	15
8	PCTR conformance	15
9	PIXIT conformance	16
10	ATS Conformance	16
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma.....		17
A.1	Identification summary	17
A.1.1	Protocol conformance test report.....	17
A.1.2	IUT identification	17
A.1.3	Testing environment	17
A.1.4	Limits and reservations.....	18
A.1.5	Comments	18
A.2	IUT Conformance status	18
A.3	Static conformance summary	18
A.4	Dynamic conformance summary.....	19
A.5	Static conformance review report	19
A.6	Test campaign report.....	19
A.7	Observations.....	32
Annex B (normative): Partial PIXIT proforma.....		33
B.1	Identification summary	33
B.2	Abstract test suite summary	33
B.3	Test laboratory	34
B.4	Client (of the Test laboratory).....	34
B.5	SUT	35
B.6	Protocol information	35
B.6.1	Protocol identification	35
B.6.2	Configuration to be tested	36
B.6.3	Configuration options.....	36
B.6.4	Test management timers	37
B.6.5	Sending of messages by IUT	37
B.6.6	Parameter values.....	38
Annex C (normative): Abstract Test Suite (ATS).....		40
C.1	The TTCN Graphical form (TTCN.GR).....	40
C.2	The TTCN Machine Processable form (TTCN.MP)	40
Annex D (normative): Void		41
Annex E (informative): General structure of ATS.....		42
Annex F (informative): "TTCN.MP and TTCN.GR" version history.....		43
Bibliography		44
History		45

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Signalling Protocol and Switching (SPS).

The present document is part 6 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Basic call control extensions at the "b" service entry point for VPN applications, as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".**

National transposition dates	
Date of adoption of this EN:	12 November 1999
Date of latest announcement of this EN (doa):	29 February 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 August 2000
Date of withdrawal of any conflicting National Standard (dow):	31 August 2000

1 Scope

This sixth part of EN 301 060 is applicable to the Basic call control extensions at the "b" service entry point for VPN applications for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point (as defined in ITU-T Recommendation I.411 [8]) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol. Stage three identifies the protocol procedures and switching functions needed to support a telecommunications service (see CCITT Recommendation I.130 [7]).

The present document specifies the Abstract Test Suite (ATS), and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the user side of the T reference point or coincident S and T reference point of implementation conforming to EN 301 060-1 [2] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646 [3] to [6].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] EN 300 403-1 (V1.3): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [2] EN 301 060-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Basic call control; Enhancement at the "b" service entry point for Virtual Private Network (VPN) applications; Part 1: Protocol specification".
- [3] ISO/IEC 9646-1: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [4] ISO/IEC 9646-3: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The Tree and Tabular Combined Notation (TTCN)".
- [5] ISO/IEC 9646-4: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 4: Test realization".
- [6] ISO/IEC 9646-5: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process".
- [7] CCITT Recommendation I.130 (1988): "Method for the characterization of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [8] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
- [9] EN 301 060-2 (V1.1): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Basic call control; Enhancement at the "b" service entry point for Virtual Private Network (VPN) applications; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".

- [10] EN 301 060-3 (V1.1): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Basic call control; Enhancement at the "b" service entry point for Virtual Private Network (VPN) applications; Part 3: Test Suite Structure and Test Purposes (TSS&TP) specification for the user".
- [11] ITU-T Recommendation I.112 (1993): "Vocabulary of terms for ISDNs".
- [12] ITU-T Recommendation I.210 (1993): "Principles of telecommunication services supported by an ISDN and the means to describe them".
- [13] ITU-T Recommendation E.164 (1997): "The international public telecommunication numbering plan".
- [14] ISO/IEC 9646-2: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 2: Abstract test suite specification".
- [15] EN 301 060-4 (V1.1): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Basic call control; Enhancement at the "b" service entry point for Virtual Private Network (VPN) applications; Part 4: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user".
- [16] EN 301 060-5 (V1.1): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Basic call control; Enhancement at the "b" service entry point for Virtual Private Network (VPN) applications; Part 5: Test Suite Structure and Test Purposes (TSS&TP) specification for the network".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

3.1.1 Definitions related to conformance testing

abstract test case: refer to ISO/IEC 9646-1 [3]

Abstract Test Suite (ATS): refer to ISO/IEC 9646-1 [3]

active test: test case where the IUT is required to send a particular message, but not in reaction to a received message. This would usually involve the use of PIXIT information to see how this message can be generated and quite often is specified in an ATS using an implicit send event

Implementation Under Test (IUT): refer to ISO/IEC 9646-1 [3]

implicit send event: refer to ISO/IEC 9646-3 [4]

lower tester: refer to ISO/IEC 9646-1 [3]

passive test: test case where the IUT is required to respond to a protocol event (e.g. received message) with another protocol event (e.g. send message) which normally does not require any special operator intervention as associated with the implicit send event

point of control and observation: refer to ISO/IEC 9646-1 [3]

Protocol Implementation Conformance Statement (PICS): refer to ISO/IEC 9646-1 [3]

PICS proforma: refer to ISO/IEC 9646-1 [3]

Protocol Implementation eXtra Information for Testing (PIXIT): refer to ISO/IEC 9646-1 [3]

PIXIT proforma: refer to ISO/IEC 9646-1 [3]

system under test: refer to ISO/IEC 9646-1 [3]

Test Purpose (TP): refer to ISO/IEC 9646-1 [3]

3.1.2 Definitions related to EN 301 060-1

Dummy call reference: see EN 300 403-1 [1], subclause 4.3

Integrated Services Digital Network (ISDN): see ITU-T Recommendation I.112 [11], definition 308

ISDN number: number conforming to the numbering and structure specified in ITU-T Recommendation E.164 [13]

service; telecommunication service: see ITU-T Recommendation I.112 [11], definition 201

supplementary service: see ITU-T Recommendation I.210 [12], subclause 2.4

T: DSS1 protocol entity at the User side of the user-network interface where a T reference point applies (User is a Private ISDN)

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
BA	Basic Access
CES	Connection Endpoint Suffix
CM	Co-ordination Message
DSS1	Digital Subscriber Signalling System No. one
ExTS	Executable Test Suite
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing
MTC	Main Test Component
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PRA	Primary Rate Access
PTC	Parallel Test Components
SUT	System Under Test
TP	Test Purpose
TSS	Test Suite Structure
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester
VPN	Virtual Private Network

4 Abstract Test Method

4.1 Description of ATM used

The requirement for testing the network IUT is to focus on the behaviour of the network IUT at the user-network interface where a T reference point or coincident S and T reference point applies. Thus the IUT is the network DSS1 protocol entity at a particular user-network interface and is not the whole network.

It is possible to specify an ATS based on a Single party (remote) test method for such an IUT. However, it is considered that an ATS based on such an approach is of limited use as the only way to specify IUT generated PDUs is to use the "implicit send" statement. Many users of such an ATS would replace the "implicit send" statements with descriptions of the behaviour at other interfaces.

An ATS based on a multi-party test method is considered to be more useful in that it is closer to how a real test suite would be constructed. Such a test method specifies behaviour at multiple network interfaces. One very important limitation here is that tests are focussed on one particular interface. Thus the test system is made up one Main Test Component (MTC) and one or more Parallel Test Components (PTC), see figure 1.

4.2 Conventions for test components and PCOs

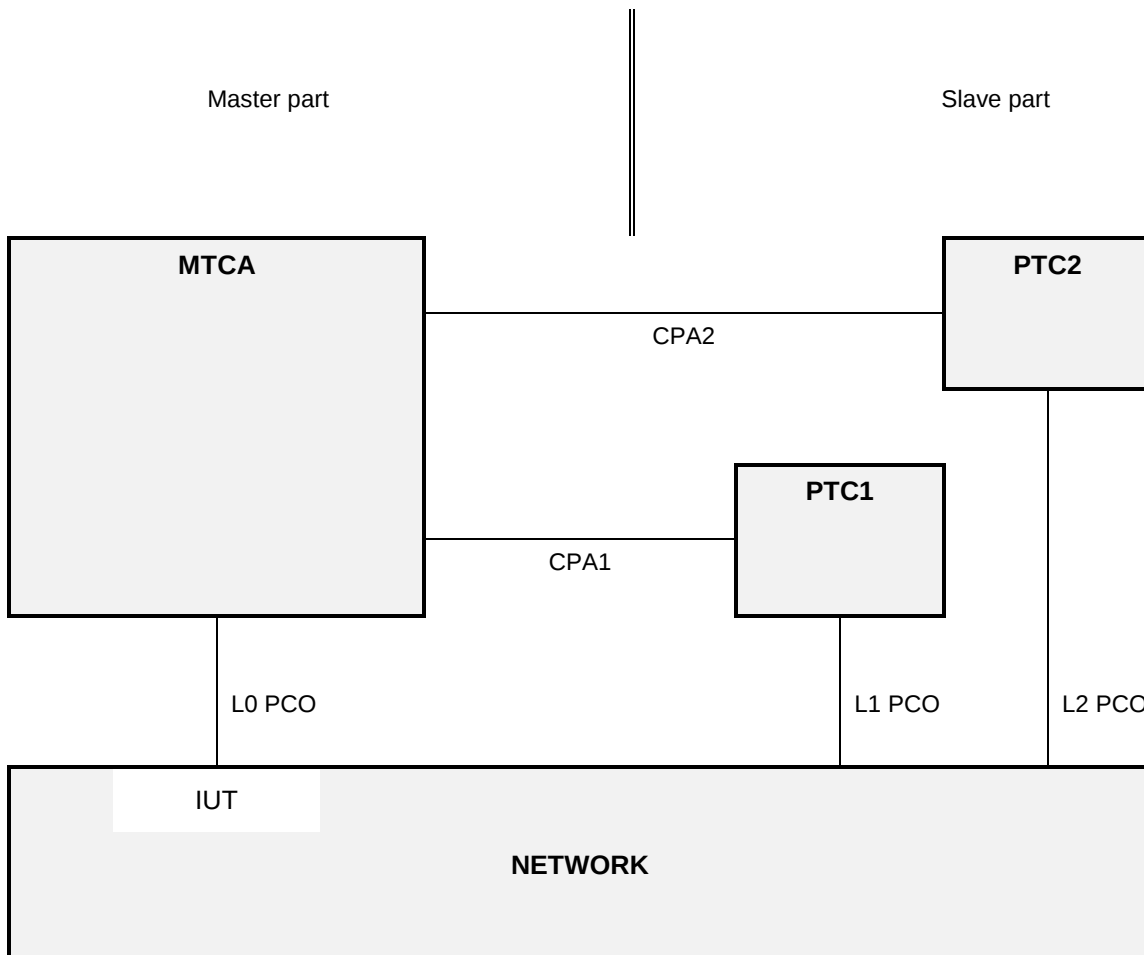


Figure 1: Multi-party test method

In a master/slave arrangement, the MTC is considered to be the master while the PTCs are the slaves. The "slave" testers are only an explicit description of how to deal with the "other" interfaces during the testing process, i.e. "how to make the IUT send the required message".

This means, in particular, that the verdict will only be assigned from the protocol aspects observed on *the* interface under test (i.e. by the "master" tester), as it would be observed by a terminal connected to this interface. A failure in the correlation between the protocol at the different interfaces to which the different testers are connected, i.e. in the mechanism of the functional service itself, will not cause a FAIL verdict. For instance, if the IUT fails to send a message on the tested interface after another interface has received the proper stimulus, the verdict will be INCONCLUSIVE.

The MTC MTCA has two functions in this configuration. Firstly, it has the MTC function of controlling the one or more PTCs. Thus it is responsible for starting the PTCs and afterwards coordinates activities by exchanging Co-ordination Messages (CM) with the PTCs. Secondly it is responsible for the behaviour of the Lower Tester (LT) at PCO L0.

A combination of the remote and multi-party test methods is applied. As can be seen from figure 1, several PCOs are used. All PCOs reside at the service access points between layers 2 and 3.

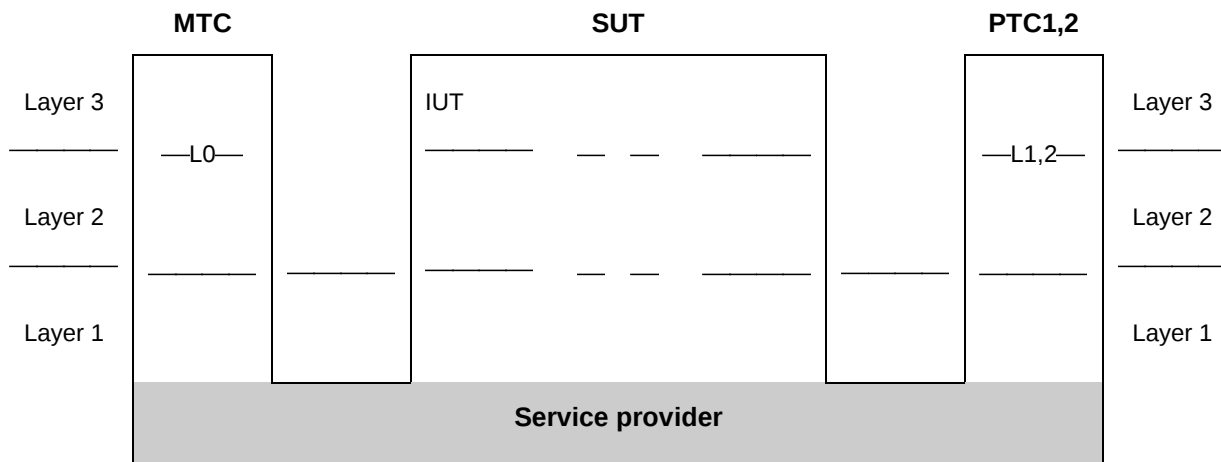


Figure 2: Combination of the remote and multi-party test methods

The MTC PCO is named "L0" ("L" for Lower). The L0 PCO is used to control and observe the behaviour of the IUT and test case verdicts are assigned depending on the behaviour observed at this PCO. The PTCs PTC1, PTC2 etc. use PCOs L1, L2 etc. These PCOs are used to control and, in a limited way, observe the behaviour of the network equipment at interfaces other than the one under test. No verdicts are assigned at these PCOs.

As stated in a previous paragraph, the non-receipt of network generated messages at L0, which are stimulated by events at the L1, L2 etc., will result in INCONCLUSIVE rather than FAIL verdicts being assigned.

PTC2 is only activated in a small set of test cases that test the handling of two calls at one time. In test cases which verify that the IUT rejects invalid or unacceptable SETUP messages, no PTC is activated at all, as these rejection procedures are considered local to the access between IUT and MTC.

The capability of the IUT to send INFORMATION and PROGRESS messages is tested in different call states. Implicit send events have to be used in this small set of test cases, as the sending of those messages cannot be triggered via a PTC. Separate PIXIT questions are asked for each call state, if and how it is possible for the test operator to cause the sending of the messages.

5 Untestable test purposes

There are no untestable test purposes in this ATS. See EN 301 060-5 [16].

6 ATS conventions

This clause is structured similarly to the structure of a TTCN ATS. However, the names of the subclauses are arranged in a way more suitable to the present document.

6.1 Declarations part

6.1.1 Type definitions

6.1.1.1 Simple type definitions

Where appropriate, simple types have a length, a value list or a range restriction attached.

Simple types defined as being of some string type (e.g. BIT STRING, OCTET STRING), have a length restriction or a value list attached.

Simple types, defined as being of INTEGER type, have a value list or a range restriction attached.

6.1.1.2 Structured type definitions

6.1.1.2.1 TTCN structured type definitions

All structured type definitions are provided with a full name.

All elements in every structured type definition, defined as being of some string type (e.g. BIT STRING, OCTET STRING), have a length restriction attached.

If an element in a structured type definition is defined as being of a referenced type, the (possible) restriction is defined in that referenced type.

For information elements the identifier, which is unique for each element, has its type defined as a simple type where the value list is restricted to the single value which is the identifier itself. This has the advantage that it allows a test system derived from this ATS to easily identify information elements embedded in messages. An ATS where information element identifiers are represented as unrestricted types can present difficulties for a derived test system in the case where it needs to find one information element embedded in a number of others and the constraints for the other elements have the any-or-omit value. In such a case the test system cannot easily find the beginning of each information element.

6.1.1.2.2 ASN.1 structured type definitions

There are no ASN.1 structured type definitions in the ATS.

6.1.1.3 ASP type definitions

6.1.1.3.1 TTCN ASP type definitions

TTCN ASP type definitions only contain one PDU or no PDU at all.

All TTCN ASP type definitions are provided with a full identifier.

Some ASPs are not parameterized as shown in the example in table 1. Such ASPs are only used for requesting or receiving service from the lower layer.

Table 1: TTCN ASP type definition DL_REL_IN

TTCN ASP Type Definition		
ASP NAME : DL_REL_IN(DL_RELEASE_INDICATION)		
PCO Type : SAP		
Comments :		
Parameter Name	Parameter Type	Comments
Detailed Comments :		

Table 2 shows an example of a parameterized ASP. All ASPs containing PDUs contain only that PDU and no other parameters.

Table 2: TTCN ASP type definition DL_DATA_RQ

TTCN ASP Type Definition		
ASP NAME : DL_DATA_RQ(DL_DATA_REQUEST)		
PCO Type : SAP		
Comments :		
Parameter Name	Parameter Type	Comments
mun (MessageUnit)	PDU	
Detailed Comments :		

6.1.1.3.2 ASN.1 ASP type definitions

There are no ASN.1 ASP type definitions in the ATS.

6.1.1.4 PDU type definitions

6.1.1.4.1 TTCN PDU type definitions

The TTCN PDU type reflects the actual data being transferred or received. All PDUs are embedded in ASPs.

If a specific PDU type definition contains elements defined in terms of a pre-defined type, that element has a restriction attached to it.

6.1.1.4.2 ASN.1 PDU type definitions

There are no ASN.1 PDU type definitions in the ATS.

6.1.2 Test suite constants

Each test suite constant is defined in terms of a predefined type or a referenced type. The values given in the value column will remain unchanged throughout the test suite.

6.1.3 Test suite parameters

Each test suite parameter is defined in terms of a predefined type or a referenced type. A referenced type is used when it is necessary to attach restrictions to these type definitions (it is not allowed to include restrictions directly in the test suite parameter table). The referenced type can have a length or value restriction attached to it in its declaration table.

6.1.4 Variables

6.1.4.1 Test suite variables

No Test Suite Variables are used or defined in this ATS.

6.1.4.2 Test case variables

Each test case variable is defined in terms of a predefined type or a referenced type. A referenced type is used when it is necessary to attach restrictions to these type definitions (it is not allowed to include restrictions directly in the test case variable table). The referenced type can have a length or value restriction attached to it in its declaration table.

Where test case variables are used in constraints, they are passed as formal parameters.

6.1.5 Test suite operation definitions

The description part of a test suite operation definition uses either natural language or meta C.

Table 3: Test suite operation definition ASSIGN_CHI

Test Suite Operation Definition	
Operation Name	: ASSIGN_CHI(basic, primary : CHI; basic_flag : BOOLEAN)
Result Type	: CHI
Comments	: This operation is used to assign a correct Channel identification information element to PDUs dependent on the type of access that is tested.
Description	
CHI ASSIGN_CHI(basic,primary,basic_flag)	
If the value of the basic_flag is set to TRUE, the result of the operation ASSIGN_CHI will be the value represented by the parameter basic which is of type CHI. Else the operation results in the value represented by the parameter primary.	
Examples: ASSIGN_CHI(CHI1b_R1, CHI1p_R1, TRUE) = CHI1b_R1 ASSIGN_CHI(CHI1b_R1, CHI1p_R1, FALSE) = CHI1p_R1	
Detailed comments :	

The test suite operation definition shown in table 3 is used in the constraints part when assigning an element of type CHI a value. The CHI type can be defined in two ways depending on whether the ATS is testing basic or primary rate access. To avoid duplicate types and thereby duplicate test cases this operation is used to assign a value to an element of CHI type. It takes three parameters:

```
primary:    a constraint of type CHI valid for Primary-rate access;
basic:      a constraint of type CHI valid for Basic access;
basic_flag: a Boolean value: TRUE if basic access is applicable, FALSE otherwise.
```

This operation returns the correct constraint according to the Boolean flag basic_flag. That constraint will then be assigned to the specific element of type CHI.

6.2 Constraints part

6.2.1 Structured type constraint declaration

For every structured type definition there exists one or more structured type constraint.

6.2.2 ASN.1 type constraint declaration

There are no ASN.1 type constraint declarations in the ATS.

6.2.3 ASP type constraint declaration

6.2.3.1 ASN.1 ASP type constraint declaration

There are no ASN.1 ASP type constraint declarations in the ATS.

6.2.3.2 TTCN ASP type constraint declaration

The PDUs to be sent or received are passed to the TTCN ASP constraint declarations Ms and Mr as parameters of meta type **PDU**. Only if values inside a specific PDU have to be referenced, the use of the meta type **PDU** is not allowed according to ISO/IEC 9646-3 [4]. In such cases different TTCN ASP constraint declarations are used, that are defined to carry only a specific type of PDU (e.g. SETUP). Table 4 shows an example of such a TTCN ASP constraint declaration.

Table 4: TTCN ASP constraint declaration Sr

TTCN ASP Constraint Declaration		
Constraint Name : Sr(PARAM: SETUP_PDU)		
ASP Type : DL_DAT_IN_SETUP		
Derivation Path :		
Comments : ASP to indicate the receipt of SETUP messages.		
Parameter Name	Parameter Value	Comments
mun	PARAM	
Detailed Comments :		

All ASP constraints have a specific value for its parameter. No matching symbols are used in ASPs.

6.2.4 PDU type constraint declaration

6.2.4.1 ASN.1 PDU type constraint declaration

There are no ASN.1 PDU type constraint declarations in the ATS.

6.2.4.2 TTCN PDU type constraint declaration

PDU constraints are used for assigning values or patterns to the data being sent or received.

6.2.4.3 Special coding

The information element transit counter, present in the SETUP PDU, shall be defined in codeset 4, for this purpose the ATS is coding this IE with a locking shift (codeset 4) at the end of the PDU SETUP.

6.2.5 Derived constraints

Derived constraints are used in this ATS only for SETUP and ERROR PDUs.

6.2.6 Parameterized constraints

Parameterized constraints are used in this ATS.

6.2.7 Value assignment

6.2.7.1 Specific values

For specific value assignment both explicit values and references to explicit values are used.

6.2.7.2 Matching values

As matching values the following mechanisms are used:

Instead of Value:

AnyOrOmit "*"

AnyValue "?"

Omit "-"

Inside value:

AnyOne "?"

AnyOrNone "*"

6.3 Dynamic part

6.3.1 Test cases

Each test case contains the test purpose text from EN 301 060-3 [10]. To be able to read and understand the test case dynamic behaviour it is recommended that the test steps are understood first.

6.3.2 Test steps

Much use has been made of test steps to avoid needless repetition of dynamic behaviour.

6.3.3 Defaults

Note the use of the RETURN statement which is defined in DAM1 of ISO/IEC 9646-3 [4]. This allows valid background behaviour to be handled in the default tree with a possibility to return to the original set of alternatives in the test case.

7 ATS to TP map

The identifiers used for the TPs are reused as test case names. Thus there is a straightforward one-to-one mapping.

8 PCTR conformance

A test laboratory, when requested by a client to produce a PCTR, is required, as specified in ISO/IEC 9646-5 [6], to produce a PCTR conformant with the PCTR template given in annex B of ISO/IEC 9646-5 [6].

Furthermore, a test laboratory, offering testing for the ATS specification contained in annex C, when requested by a client to produce a PCTR, is required to produce a PCTR conformant with the PCTR proforma contained in annex A of the present document.

A PCTR which conforms to this PCTR proforma specification shall preserve the content and ordering of the clauses contained in annex A. Clause A.6 of the PCTR may contain additional columns. If included, these shall be placed to the right of the existing columns. Text in *italics* may be retained by the test laboratory.

9 PIXIT conformance

A test realizer, producing an executable test suite for the Abstract Test Suite (ATS) specification contained in annex C, is required, as specified in ISO/IEC 9646-4 [5], to produce an augmented partial PIXIT proforma conformant with this partial PIXIT proforma specification.

An augmented partial PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The augmented partial PIXIT proforma may contain additional questions that need to be answered in order to prepare the Means Of Testing (MOT) for a particular Implementation Under Test (IUT).

A test laboratory, offering testing for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-5 [6], to further augment the augmented partial PIXIT proforma to produce a PIXIT proforma conformant with this partial PIXIT proforma specification.

A PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The PIXIT proforma may contain additional questions that need to be answered in order to prepare the test laboratory for a particular IUT.

10 ATS Conformance

The test realizer, producing a Means Of Testing (MOT) and Executable Test Suite (ExTS) for this Abstract Test Suite (ATS) specification, shall comply with the requirements of ISO/IEC 9646-4 [5]. In particular, these concern the realization of an Executable Test Suite (ExTS) based on each ATS. The test realizer shall provide a statement of conformance of the MOT to this ATS specification.

An ExTS which conforms to this ATS specification shall contain test groups and test cases which are technically equivalent to those contained in the ATS in annex C. All sequences of test events comprising an abstract test case shall be capable of being realized in the executable test case. Any further checking which the test system might be capable of performing is outside the scope of this ATS specification and shall not contribute to the verdict assignment for each test case.

Test laboratories running conformance test services using this ATS shall comply with ISO/IEC 9646-5 [6].

A test laboratory which claims to conform to this ATS specification shall use an MOT which conforms to this ATS.

Annex A (normative):

Protocol Conformance Test Report (PCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

A.1 Identification summary

A.1.1 Protocol conformance test report

PCTR number:	
PCTR Date:	
Corresponding SCTR number:	
Corresponding SCTR date:	
Test Laboratory identification:	
Test Laboratory Manager:	
Signature:	

A.1.2 IUT identification

Name:	
Version:	
Protocol specification:	EN 301 060-1
PICS:	
Previous PCTRs (if any)	

A.1.3 Testing environment

PIXIT Reference number:	
ATS Specification:	EN 301 060-6
Abstract Test Method:	Multy-Party test method (see ISO/IEC 9646-2)
Means of Testing identification:	
Dates of testing:	
Conformance Log reference(s):	
Retention Date for Log reference(s):	

A.1.4 Limits and reservations

Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

A.1.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

A.2 IUT Conformance status

This IUT has or has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause A.3 of this report) and there are no "FAIL" verdicts to be recorded (in clause A.6) strike the words "has or", otherwise strike the words "or has not".

A.3 Static conformance summary

The PICS for this IUT is or is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

A.4 Dynamic conformance summary

The test campaign did or did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded (in clause A.6 of this report) strike the words "did or", otherwise strike the words "or did not".

Summary of the results of groups of tests:

A.5 Static conformance review report

If clause A.3 indicates non-conformance, this subclause itemizes the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

A.6 Test campaign report

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N00				
L3N_N00_V_001				
L3N_N00_V_002				
L3N_N00_V_003				
L3N_N00_V_004				
L3N_N00_V_005				
L3N_N00_V_006				
L3N_N00_V_007				
L3N_N00_V_008				
L3N_N00_V_009				
L3N_N00_V_010				
L3N_N00_V_011				
L3N_N00_V_012				
L3N_N00_V_013				
L3N_N00_V_014				
L3N_N00_V_015				
L3N_N00_V_016				
L3N_N00_V_017				
L3N_N00_V_018				
L3N_N00_V_019				
L3N_N00_V_020				
L3N_N00_V_021				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
L3N N00 V 022				
L3N N00 V 023				
L3N N00 V 024				
L3N N00 V 025				
L3N N00 V 026				
L3N N00 V 027				
L3N N00 V 028				
L3N N00 V 029				
L3N N00 V 030				
L3N N00 V 031				
L3N N00 V v01				
L3N N00 V v02				
L3N N00 V v03				
L3N N00 V v04				
L3N N00 V v05				
L3N N00 V v06				
L3N N00 V v07				
L3N N00 V v08				
L3N N00 V 032				
L3N N00 V 033				
L3N N00 V 034				
L3N N00 V 035				
L3N N00 V 036				
L3N N00 V 037				
L3N N00 V 038				
L3N N00 V 039				
L3N N00 V 040				
L3N N00 V v09				
L3N N00 V v10				
L3N N00 V v11				
L3N N00 V v12				
L3N N00 V v13				
L3N N00 V v14				
L3N N00 V v15				
L3N N00 I 001				
L3N N00 I 002				
L3N N00 I 003				
L3N N00 I 004				
L3N N00 I 005				
L3N N00 I 007				
L3N N00 I 008				
L3N N00 I 009				
L3N N00 I 010				
L3N N00 I 011				
L3N N00 I 012				
L3N N00 S 001				
L3N N00 S 002				
L3N N00 S 003				
L3N N00 S 004				
L3N N00 S 005				
L3N N00 S 006				
L3N N00 S 007				
L3N N00 S 008				
L3N N00 S 009				
L3N N00 S 010				
L3N N00 S 011				
L3N N00 S 012				
L3N N00 S v16				
L3N N00 S v17				
L3N N00 S v18				
L3N N00 S v19				

ATS Reference	Selected ? (Y/N)	Run ? (Y/N)	Verdict	Observations
Call state N02				
L3N_N02_V_001				
L3N_N02_V_002				
L3N_N02_V_003				
L3N_N02_V_004				
L3N_N02_V_005				
L3N_N02_V_006				
L3N_N02_V_007				
L3N_N02_V_008				
L3N_N02_V_009				
L3N_N02_V_010				
L3N_N02_V_011				
L3N_N02_V_012				
L3N_N02_V_013				
L3N_N02_I_001				
L3N_N02_I_002				
L3N_N02_I_003				
L3N_N02_I_004				
L3N_N02_I_005				
L3N_N02_I_006				
L3N_N02_I_007				
L3N_N02_I_008				
L3N_N02_I_009				
L3N_N02_I_011				
L3N_N02_S_001				
L3N_N02_S_002				
L3N_N02_S_003				
L3N_N02_S_004				
L3N_N02_S_005				
L3N_N02_S_006				
L3N_N02_S_007				
L3N_N02_S_008				
L3N_N02_S_009				
L3N_N02_S_010				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N03				
L3N N03 V 001				
L3N N03 V 002				
L3N N03 V 003				
L3N N03 V 004				
L3N N03 V 005				
L3N N03 V 006				
L3N N03 V 007				
L3N N03 V 008				
L3N N03 V 009				
L3N N03 V 010				
L3N N03 V 011				
L3N N03 V v20				
L3N N03 V v21				
L3N N03 V v22				
L3N N03 V v23				
L3N N03 V v24				
L3N N03 I 001				
L3N N03 I 002				
L3N N03 I 003				
L3N N03 I 004				
L3N N03 I 005				
L3N N03 I 006				
L3N N03 I 007				
L3N N03 I 008				
L3N N03 I 010				
L3N N03 S 001				
L3N N03 S 002				
L3N N03 S 003				
L3N N03 S 004				
L3N N03 S 005				
L3N N03 S 006				
L3N N03 S 007				
L3N N03 S 008				
L3N N03 S 009				
L3N N03 S 010				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N04				
L3N N04 V 001				
L3N N04 V 002				
L3N N04 V 003				
L3N N04 V 004				
L3N N04 V 005				
L3N N04 V 006				
L3N N04 V 007				
L3N N04 V 008				
L3N N04 V 009				
L3N N04 V v25				
L3N N04 V v26				
L3N N04 V v27				
L3N N04 V v28				
L3N N04 V v29				
L3N N04 I 001				
L3N N04 I 002				
L3N N04 I 003				
L3N N04 I 004				
L3N N04 I 005				
L3N N04 I 006				
L3N N04 I 007				
L3N N04 I 008				
L3N N04 I 010				
L3N N04 S 001				
L3N N04 S 002				
L3N N04 S 003				
L3N N04 S 004				
L3N N04 S 005				
L3N N04 S 006				
L3N N04 S 007				
L3N N04 S 008				
L3N N04 S 009				
L3N N04 S 010				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N06				
L3N N06 V 001				
L3N N06 V 002				
L3N N06 V 003				
L3N N06 V 004				
L3N N06 V 005				
L3N N06 V 006				
L3N N06 V 007				
L3N N06 V 008				
L3N N06 V 009				
L3N N06 V 010				
L3N N06 V 011				
L3N N06 V 012				
L3N N06 V 013				
L3N N06 V 014				
L3N N06 V 015				
L3N N06 V 016				
L3N N06 V 017				
L3N N06 V 018				
L3N N06 V 019				
L3N N06 V 020				
L3N N06 V 021				
L3N N06 V 022				
L3N N06 V 023				
L3N N06 V 024				
L3N N06 V 025				
L3N N06 V 026				
L3N N06 V 027				
L3N N06 V 028				
L3N N06 V 029				
L3N N06 V 030				
L3N N06 V 031				
L3N N06 V 032				
L3N N06 V 033				
L3N N06 V v30				
L3N N06 V v31				
L3N N06 V v32				
L3N N06 V v33				
L3N N06 V v34				
L3N N06 V v35				
L3N N06 V 040				
L3N N06 V 041				
L3N N06 I 001				
L3N N06 I 002				
L3N N06 I 003				
L3N N06 I 004				
L3N N06 I 005				
L3N N06 I 006				
L3N N06 I 009				
L3N N06 S 001				
L3N N06 S 002				
L3N N06 S 003				
L3N N06 S 004				
L3N N06 S 005				
L3N N06 S 006				
L3N N06 S 007				
L3N N06 S 008				
L3N N06 S 009				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N07				
L3N N07 V 001				
L3N N07 V 002				
L3N N07 V 003				
L3N N07 V 004				
L3N N07 V 005				
L3N N07 V 006				
L3N N07 V 007				
L3N N07 V 008				
L3N N07 V v36				
L3N N07 V v37				
L3N N07 V v38				
L3N N07 I 001				
L3N N07 I 002				
L3N N07 I 003				
L3N N07 I 004				
L3N N07 I 005				
L3N N07 I 006				
L3N N07 I 007				
L3N N07 I 011				
L3N N07 I 015				
L3N N07 I 021				
L3N N07 S 001				
L3N N07 S 002				
L3N N07 S 003				
L3N N07 S 004				
L3N N07 S 005				
L3N N07 S 006				
L3N N07 S 007				
L3N N07 S 008				
L3N N07 S 009				
L3N N07 S 010				
L3N N07 S 011				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N09				
L3N N09 V 001				
L3N N09 V 002				
L3N N09 V 003				
L3N N09 V 004				
L3N N09 V 005				
L3N N09 V 006				
L3N N09 V 007				
L3N N09 V 008				
L3N N09 V 009				
L3N N09 V v39				
L3N N09 V v40				
L3N N09 V v41				
L3N N09 I 001				
L3N N09 I 002				
L3N N09 I 003				
L3N N09 I 004				
L3N N09 I 005				
L3N N09 I 006				
L3N N09 I 010				
L3N N09 I 014				
L3N N09 I 020				
L3N N09 S 001				
L3N N09 S 002				
L3N N09 S 003				
L3N N09 S 004				
L3N N09 S 005				
L3N N09 S 006				
L3N N09 S 007				
L3N N09 S 008				
L3N N09 S 009				
L3N N09 S 010				
L3N N09 S 011				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N10, incoming call				
L3N N10I V 007				
L3N N10I V 008				
L3N N10I V 009				
L3N N10I V 010				
L3N N10I V 011				
L3N N10I V 012				
L3N N10I V 013				
L3N N10I V 014				
L3N N10I V 015				
L3N N10I V 016				
L3N N10I V 017				
L3N N10I V 018				
L3N N10I V 019				
L3N N10I V 020				
L3N N10I V 021				
L3N N10I I 001				
L3N N10I I 002				
L3N N10I I 003				
L3N N10I I 004				
L3N N10I I 005				
L3N N10I I 006				
L3N N10I I 007				
L3N N10I I 008				
L3N N10I I 010				
L3N N10I S 001				
L3N N10I S 002				
L3N N10I S 003				
L3N N10I S 004				
L3N N10I S 005				
L3N N10I S 006				
L3N N10I S 007				
L3N N10I S 008				
L3N N10I S 009				
L3N N10I S 010				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N10, outgoing call				
L3N N100 V 007				
L3N N100 V 008				
L3N N100 V 009				
L3N N100 V 010				
L3N N100 V 011				
L3N N100 V 012				
L3N N100 V 013				
L3N N100 V 014				
L3N N100 V 015				
L3N N100 V 016				
L3N N100 V 017				
L3N N100 V 018				
L3N N100 V 019				
L3N N100 V 020				
L3N N100 I 001				
L3N N100 I 002				
L3N N100 I 003				
L3N N100 I 004				
L3N N100 I 005				
L3N N100 I 006				
L3N N100 I 007				
L3N N100 I 008				
L3N N100 I 009				
L3N N100 I 011				
L3N N100 I 012				
L3N N100 S 001				
L3N N100 S 002				
L3N N100 S 003				
L3N N100 S 004				
L3N N100 S 005				
L3N N100 S 006				
L3N N100 S 007				
L3N N100 S 008				
L3N N100 S 009				
L3N N100 S 010				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N12, incoming call				
L3N N12I V 001				
L3N N12I V 002				
L3N N12I V 003				
L3N N12I V 004				
L3N N12I V 005				
L3N N12I V 006				
L3N N12I V 007				
L3N N12I I 001				
L3N N12I I 002				
L3N N12I I 003				
L3N N12I I 004				
L3N N12I I 005				
L3N N12I I 006				
L3N N12I I 010				
L3N N12I S 001				
L3N N12I S 002				
L3N N12I S 003				
L3N N12I S 004				
L3N N12I S 005				
L3N N12I S 006				
L3N N12I S 007				
L3N N12I S 008				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N12, outgoing call				
L3N_N12O_V_001				
L3N_N12O_V_002				
L3N_N12O_V_003				
L3N_N12O_V_004				
L3N_N12O_V_005				
L3N_N12O_V_006				
L3N_N12O_V_007				
L3N_N12O_I_001				
L3N_N12O_I_002				
L3N_N12O_I_003				
L3N_N12O_I_004				
L3N_N12O_I_005				
L3N_N12O_I_006				
L3N_N12O_I_007				
L3N_N12O_I_009				
L3N_N12O_S_001				
L3N_N12O_S_002				
L3N_N12O_S_003				
L3N_N12O_S_004				
L3N_N12O_S_005				
L3N_N12O_S_006				
L3N_N12O_S_007				
L3N_N12O_S_008				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N19, incoming call				
L3N_N19I_V_001				
L3N_N19I_V_002				
L3N_N19I_V_003				
L3N_N19I_V_004				
L3N_N19I_V_005				
L3N_N19I_V_006				
L3N_N19I_I_001				
L3N_N19I_I_002				
L3N_N19I_I_003				
L3N_N19I_I_004				
L3N_N19I_I_005				
L3N_N19I_I_007				
L3N_N19I_I_008				
L3N_N19I_S_001				
L3N_N19I_S_002				
L3N_N19I_S_003				
L3N_N19I_S_004				
L3N_N19I_S_005				
L3N_N19I_S_006				
L3N_N19I_S_007				
L3N_N19I_S_008				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state U19, outgoing call				
L3N N19O V 001				
L3N N19O V 002				
L3N N19O V 003				
L3N N19O V 004				
L3N N19O V 005				
L3N N19O V 006				
L3N N19O I 001				
L3N N19O I 002				
L3N N19O I 003				
L3N N19O I 004				
L3N N19O I 005				
L3N N19O I 006				
L3N N19O I 008				
L3N N19O I 009				
L3N N19O S 001				
L3N N19O S 002				
L3N N19O S 003				
L3N N19O S 004				
L3N N19O S 005				
L3N N19O S 006				
L3N N19O S 007				
L3N N19O S 008				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state N25				
L3N N25 V 001				
L3N N25 V 002				
L3N N25 V 003				
L3N N25 V 004				
L3N N25 V 005				
L3N N25 V 006				
L3N N25 V 007				
L3N N25 V 008				
L3N N25 V 009				
L3N N25 V 010				
L3N N25 I 001				
L3N N25 I 002				
L3N N25 I 003				
L3N N25 I 004				
L3N N25 I 005				
L3N N25 I 009				
L3N N25 I 012				
L3N N25 I 018				
L3N N25 S 001				
L3N N25 S 002				
L3N N25 S 003				
L3N N25 S 004				
L3N N25 S 005				
L3N N25 S 006				
L3N N25 S 007				
L3N N25 S 008				
L3N N25 S 009				
L3N N25 S 010				
L3N N25 S 011				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state R00, incoming call				
L3N_R00I_V_001				
L3N_R00I_V_002				
L3N_R00I_V_003				
L3N_R00I_V_004				
L3N_R00I_V_005				
L3N_R00I_V_006				
L3N_R00I_V_007				
L3N_R00I_V_008				
L3N_R00I_I_001				
L3N_R00I_I_002				
L3N_R00I_I_003				
L3N_R00I_S_001				
L3N_R00I_S_002				
L3N_R00I_S_003				
L3N_R00I_S_004				
L3N_R00I_S_005				
L3N_R00I_S_006				
L3N_R00I_S_007				
L3N_R00I_S_008				
L3N_R00I_S_009				
L3N_R00I_S_010				
L3N_R00I_S_011				
L3N_R00I_S_012				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state R00, outgoing call				
L3N_R00O_V_001				
L3N_R00O_V_002				
L3N_R00O_V_003				
L3N_R00O_V_004				
L3N_R00O_V_005				
L3N_R00O_V_006				
L3N_R00O_V_007				
L3N_R00O_V_008				
L3N_R00O_I_001				
L3N_R00O_I_002				
L3N_R00O_I_003				
L3N_R00O_S_001				
L3N_R00O_S_002				
L3N_R00O_S_003				
L3N_R00O_S_004				
L3N_R00O_S_005				
L3N_R00O_S_006				
L3N_R00O_S_007				
L3N_R00O_S_008				
L3N_R00O_S_009				
L3N_R00O_S_010				
L3N_R00O_S_011				
L3N_R00O_S_012				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Call state R01				
L3N_R01_V_001				
L3N_R01_V_002				
L3N_R01_V_003				
L3N_R01_I_001				
L3N_R01_I_002				
L3N_R01_I_003				
L3N_R01_I_004				
L3N_R01_I_005				
L3N_R01_I_006				
L3N_R01_S_001				
L3N_R01_S_002				
L3N_R01_S_003				
L3N_R01_S_004				
L3N_R01_S_005				
L3N_R01_S_006				
L3N_R01_S_007				
L3N_R01_S_008				
L3N_R01_S_009				
L3N_R01_S_010				
L3N_R01_S_011				

ATS Reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
Message Segmentation				
L3N_SEG_V_001				
L3N_SEG_V_002				
L3N_SEG_I_001				
L3N_SEG_I_002				
L3N_SEG_I_003				
L3N_SEG_I_005				
L3N_SEG_I_006				
L3N_SEG_I_007				
L3N_SEG_S_001				

A.7 Observations

Additional information relevant to the technical content of the PCTR are given here.

Annex B (normative): Partial PIXIT proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.
--

B.1 Identification summary

PIXIT Number:

Test laboratory name:

Date of issue:

Issued to:

B.2 Abstract test suite summary

Protocol specification: EN 301 060-1

ATS specification: EN 301 060-4

Abstract test method: Remote test method (see ISO/IEC 9646-2)

B.3 Test laboratory

Test Laboratory Identification:

Accreditation status of the test service:

Accreditation reference:

Test laboratory manager:

Test laboratory contact:

Means of Testing:

Test Laboratory instructions for Completion:

B.4 Client (of the Test laboratory)

Client Identification:

Client Test manager:

Client contact:

Test Facilities required:

B.5 SUT

Name:

Version:

SCS Reference:

Machine configuration:

Operating System Identification:

IUT Identification:

PICS (all layers):

Limitations of the SUT:

Environmental Conditions:

B.6 Protocol information

B.6.1 Protocol identification

Specification reference: EN 301 060-1

Protocol Version:

PICS Reference:

NOTE: The PICS Reference should reference a completed PICS which is conformant with the PICS proforma contained in EN 301 060-2.

B.6.2 Configuration to be tested

Table B.1: Configuration to be tested

Item	Configuration Is the access to be tested...	Supported Y/N
1.1	sending a RESTART message after the establishment of the multiple frame operation?	
1.2	releasing the multiple frame established operation (i.e. sending of a DISC frame) after entering the state N00?	

B.6.3 Configuration options

Table B.2: Configuration options

Item	Configuration What actions, if possible, have to be taken to configure the IUT to...	Supported Y/N	Stimulus (action taken)
2.1	send a RESTART message after the second timeout of timer T308?		
2.2	accept two calls on one CES?		
2.3	be in an all channels busy condition (i.e. send a RELEASE COMPLETE message indicating cause value 34 in response to a compatible SETUP message)?		
2.4	be in an all channels unavailable condition (i.e. send a RELEASE COMPLETE message indicating cause value 34 or 44 in response to a compatible SETUP message)?		
2.5	have a specific channel (as given in PIXIT item 5.25) unavailable?		
2.6	have a specific bearer service (as given in PIXIT item 5.11) unavailable or not authorized?		
2.7	remain in call state N02, but to route the call to the called user (called user's number as given in PIXIT item 5.22)?		
2.8	accept a SETUP message indicating a bearer service (as given in PIXIT item 5.12) but reject it after entering state N02?		
2.9	send a SETUP message indicating in the Channel identification information element "exclusive: only the indicated channel is acceptable"? (for point-to-point configuration only)		
2.10	send a SETUP message indicating in the Channel identification information element "indicated channel is preferred"? (for point-to-point configuration only)		
2.11	send a SETUP message indicating in the Channel identification information element "any channel"? (for point-to-point configuration only)		
2.12	have the access under test not subscribed to the call rearrangement procedures?		
2.13	send a DISCONNECT message including the Progress indicator information element (see PIXIT item 5.28)?		
2.14	send a DISCONNECT message NOT including the Progress indicator information element?		

B.6.4 Test management timers

Table B.3: Timer values

Item	Timer Give a value for the timer that is used to...	Value (in seconds)
3.1	wait for the test operator to perform an implicit send action or to wait for a PTC to react (T_WAIT).	
3.2	wait for the IUT to respond to a stimulus sent by the tester (T_AC).	
3.3	control that the IUT does not respond to a stimulus sent by the tester (T_NOAC).	
3.4	wait for RESTART messages after establishment of the multiple frame operation (T_RESTART; only if 1.1 is supported).	
NOTE: The IUT provider may fill in a value range rather than a fixed value for the test management timers. During test execution the test laboratory will choose specific values for the timers dependant on the means of testing used. These specific values may even be beyond the range given by the IUT provider, if this is necessary for achieving satisfactory test results.		

B.6.5 Sending of messages by IUT

Table B.4: Actions required to stimulate IUT to send messages

Item	Action What actions, if possible, have to be taken to cause the IUT to send a...	Supported Y/N	Stimulus (action taken)
4.1	INFORMATION message in call state N02?		
4.2	INFORMATION message in call state N03?		
4.3	INFORMATION message in call state N04?		
4.4	INFORMATION message in call state N07?		
4.5	INFORMATION message in call state N09?		
4.6	INFORMATION message in call state N10?		
4.7	INFORMATION message in call state N12?		
4.8	NOTIFY message in call state N10?		
4.9	PROGRESS message in call state N02?		
4.10	PROGRESS message in call state N03?		
4.11	PROGRESS message in call state N04?		
4.12	RESTART message in call state N10?		
4.13	DISCONNECT message with a length exceeding N201 (default value 260 octets) in call state N10?		
4.14	STATUS ENQUIRY message in call state N10?		
4.15	INFORMATION message in call state N25?		

B.6.6 Parameter values

Table B.5: Parameter values

Item	Parameter values Give a...	Allowed Values	Value
5.1	value for the maximum number of STATUS ENQUIRY retransmissions, if no STATUS message is received.	N/A	
5.2	value for an erroneous protocol discriminator, coded other than '00001000'B.	any other than '00001000'B	
5.3	value for an unrecognized message type.	N/A	
5.4	value for the supported length of the call reference value.	BA: 1 PRA: 2	
5.5	value for a length of the call reference value that is higher than the supported length.	BA: > 1 PRA: > 2	
5.6	a coding of a Bearer capability information element, which the IUT is compatible with, for the purpose of accepting outgoing calls.	N/A	
5.7	a coding of a Bearer capability information element (information transfer capability = "speech") for the purpose of accepting outgoing calls.	N/A	
5.8	a coding of a Bearer capability information element (information transfer capability = "unrestricted digital information") for the purpose of accepting outgoing calls.	N/A	
5.9	a coding of a Bearer capability information element (information transfer capability = "3,1kHz Audio") for the purpose of accepting outgoing calls.	N/A	
5.10	a coding of a Bearer capability information element (information transfer capability = "unrestricted digital information with tones/announcements") for the purpose of accepting outgoing calls.	N/A	
5.11	a coding of a Bearer capability information element indicating a service that is accepted in a SETUP message but that will be rejected in N02 (see PIXIT item 2.6).	N/A	
5.12	a coding of a Bearer capability information element indicating a service that is not authorized or not available for the purpose of rejecting outgoing calls.	N/A	
5.13	a coding of a Bearer capability information element, for which fallback is allowed.	N/A	
5.14	a coding of a High layer compatibility information element, which the IUT is compatible with, for the purpose of accepting outgoing calls.	N/A	
5.15	a coding of a High layer compatibility information element, for which fallback is allowed.	N/A	
5.16	a coding of a Low layer compatibility information element, which the IUT is compatible with, for the purpose of accepting outgoing calls.	N/A	
5.17	a coding of a Called party number information element including the number digits of the access related to the PTC1.	N/A	
5.18	a coding of a Called party number information element including the number digits of the access related to the PTC2.	N/A	
5.19	a coding of a Called party number information element including the number digits of the access related to the MTC.	N/A	
5.20	the coding of a Called party number information element that will be sent by the IUT to the MTC in a en-bloc SETUP message.	N/A	

Item	Parameter values Give a...	Allowed Values	Value
5.21	a coding of a Called party number information element, which contains number information that is incomplete (insufficient to route the call to its destination).	N/A	
5.22	a coding of a Called party number information element, which contains number information that is incomplete so that the IUT remains in state N02 but that is sufficient for the IUT to route the call to its destination (see PIXIT item 2.7).	N/A	
5.23	a coding of a Called party number information element, which contains invalid number information for the purpose of rejecting outgoing calls.	N/A	
5.24	a value for the preferred channel number (used in Channel identification information element) to be used for outgoing calls.	BA: 1..2 PRA: 1..30	
5.25	a value for the preferred channel number (used in Channel identification information element) to be used for a second outgoing call on the same CES (if PIXIT item 2.2 is supported).	BA: 1..2 PRA: 1..30	
5.26	a value for the a channel number (used in Channel identification information element), which is not available (see PIXIT item 2.5).	N/A	
5.27	a value for the a channel number (used in Channel identification information element), which is not subscribed. Tested only for primary rate access.	N/A	
5.28	a cause value that, when sent in a DISCONNECT message to the IUT will result in the sending of a DISCONNECT message including a Progress indicator information element at the remote user (see PIXIT item 2.13).	N/A	

Table B.6: VPN parameter values

Item	Parameter values Give a...	Allowed Values	Value
6.1	length of Business group identification (including octet 3).	N/A	
6.2	Business group identifier (bitstring[3]).	N/A	
6.3	a value for the business group identification.	[0..12]	
6.4	a value for a transit counter.	N/A	
6.5	a coding of a connected party number information element at the MTC side.	N/A	
6.6	a coding of a default connected party number information element at the MTC side.	N/A	
6.7	a coding of a connected party number information element at the PTC side.	N/A	
6.8	a coding of a default connected party number information element at the PTC side.	N/A	
6.9	a coding of a calling party number information element used at the MTC side.	N/A	
6.10	a coding of a calling party number information element used at the PTC side.	N/A	
6.11	a coding of a default calling party number information element used at the MTC side.	N/A	
6.12	a coding of a default calling party number information element used at the PTC side.	N/A	

Annex C (normative): Abstract Test Suite (ATS)

This ATS has been produced using the Tree and Tabular Combined Notation (TTCN) according to ISO/IEC 9646-3 [4].

The ATS was developed on a separate TTCN software tool and therefore the TTCN tables are not completely referenced in the table of contents. The ATS itself contains a test suite overview part which provides additional information and references.

C.1 The TTCN Graphical form (TTCN.GR)

The TTCN.GR representation of this ATS is contained in an Adobe Portable Document Format™ file (sp510963.PDF contained in archive 9tdi0ieo.ZIP) which accompanies the present document.

C.2 The TTCN Machine Processable form (TTCN.MP)

The TTCN.MP representation corresponding to this ATS is contained in an ASCII file (sp510963.MP contained in archive 9tdi0ieo.ZIP) which accompanies the present document.

Annex D (normative):
Void

Annex E (informative): General structure of ATS

This informative annex gives a simple listing of the order of types of tables which appear in a typical supplementary service ATS. This is intended as an aid in helping readers find particular sections quickly.

Test Suite Overview

Test Suite Structure

Test Case Index

Test Step Index

Default Index

Declarations Part

Simple Type Definitions

Structured Type Definitions

ASN.1 Type Definitions

Test Suite Operation Definitions

Test Suite Parameter Declarations

Test Case Selection Expression Definitions

Test Suite Constant Declarations

Test Case Variable Declarations

PCO Declarations

Coordination Point Declarations

Timer Declarations

Test Component Declarations

Test Components Configuration Declarations

TTCN ASP Type Definition

TTCN PDU Type Definition

TTCN CM Type Definition

Alias Definitions

Constraints Part

Structured Type Constraint Declarations

ASN.1 Type Constraint Declarations

TTCN ASP Constraint Declarations

TTCN PDU Constraint Declarations

TTCN CM Constraint Declarations

Dynamic Part

Test Case Dynamic Behaviour

Test Step Dynamic Behaviour

Default Dynamic Behaviour

Annex F (informative): "TTCN.MP and TTCN.GR" version history

This annex describes all the modifications which occurred for each version of the TTCN files (MP and GR) against the previous one.

Version 1: First Edition.

Item Nr	Description

Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- EN 300 195-1: "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- EN 300 195-2: "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- EN 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- ETS 300 196-2: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- EN 300 403-3: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 3: Protocol Implementation Conformance Statement (PICS) proforma specification".
- ISO/IEC 9646-7: "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".
- ETS 300 403-4: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 4: Test Suite Structure and Test Purposes (TSS&TP) specification for the user".
- ETS 300 406: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

History

Document history				
V1.1.2	November 1998	Public Enquiry	PE 9913:	1998-11-27 to 1999-03-26
V1.1.3	September 1999	Vote	V 9947:	1999-09-07 to 1999-11-05
V1.1.4	November 1999	Publication		