

**Fixed Radio Systems;
Point-to-multipoint equipment;
Point-to-multipoint digital radio systems
in frequency bands in the range 24,25 GHz to 29,5 GHz
using different access methods;
Part 3: Time Division Multiple Access (TDMA) methods**



Reference

REN/TM-04123

Keywords

DRRS, multipoint, RLL, TDMA, transmission

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions, symbols and abbreviations	7
3.1 Definitions.....	7
3.2 Symbols.....	7
3.3 Abbreviations	7
4 General characteristics	7
4.1 General system architecture	7
4.2 Frequency bands and channel arrangements	7
4.2.1 Channel plan	7
4.2.2 Channel arrangements.....	7
4.3 Compatibility requirements	8
4.4 Environmental conditions.....	8
4.5 Power supply	8
4.6 Electromagnetic compatibility conditions.....	9
4.7 TMN interfaces	9
4.8 Synchronization of interface bit rates.....	9
4.9 Branching/feeder/antenna requirements	9
5 System parameters for TDMA P-MP systems	9
5.1 System capacity.....	9
5.2 Round trip delay	9
5.3 Transparency	9
5.4 Voice coding methods	9
5.5 Transmitter characteristics.....	9
5.5.1 Transmitter output power.....	9
5.5.2 Transmitter nominal output power.....	9
5.5.3 Transmitter power and frequency control.....	10
5.5.4 RF spectrum mask	10
5.5.4.1 RF spectrum density mask for the central radio station	10
5.5.4.2 RF-spectrum density mask for the terminal station and the repeater station.....	13
5.5.4.3 Discrete CW components exceeding the spectrum density mask limit (all stations)	13
5.5.5 Tx local oscillator frequency arrangements	14
5.5.6 Spurious emissions (external)	14
5.5.7 Radio frequency tolerance	14
5.6 Receiver characteristics	14
5.6.1 Rx local oscillator frequency arrangements.....	14
5.6.2 Spurious emissions (external)	14
5.6.3 Receiver IF.....	14
5.7 System performance	15
5.7.1 Dynamic level range	15
5.7.2 BER as a function of Receiver input Signal Level (RSL).....	15
5.7.3 Equipment residual BER (RBER)	15
5.7.4 Interference sensitivity.....	16
5.7.4.1 Co-channel interference (external).....	16
5.7.4.2 Adjacent channel interference (external)	16
5.7.4.3 CW interference	16
5.7.5 Distortion sensitivity.....	16
6 Types of interfaces at the user equipment and the network node.....	16
Annex A (normative): System type codes for regulatory procedures	17

Annex B (informative):	Bibliography.....	19
History		21

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/legal/home.htm>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Transmission and Multiplexing (TM), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document contains the minimum technical requirements to ensure compatibility of products and conformance with radio regulations across ETSI member states. Radio terminals from different manufacturers are not required to interwork at radio frequency (i.e. no common air interface).

The present document defines the requirements of radio terminal and radio-relay equipment and associated interfaces.

The present document is part 3 of a multipart deliverable covering Fixed Radio Systems; Point-to-multipoint equipment; Point-to-multipoint digital radio systems in frequency bands in the range 24,25 GHz to 29,5 GHz using different access methods, as identified below:

- Part 1: "Basic parameters";
- Part 2: "Frequency Division Multiple Access (FDMA) methods";
- Part 3: "Time Division Multiple Access (TDMA) methods";**
- Part 4: "Direct Sequence Code Division Multiple Access (DS-CDMA) methods";
- Part 5: "Multi-Carrier Time Division Multiple Access (TDMA) methods".

The present version of the document takes into account that, with the final publication of EN 301 213-5 [4], information and requirements relative to multicarrier systems are now more organically reported there. Therefore similar information for multicarrier systems has been removed from the present document being redundant and superseded by EN 301 213-5 [4].

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

1 Scope

The present document describes the TDMA access method used in Point-to-Multipoint (P-MP) Radio Relay Systems. (P-MP) Radio Relay Systems may use different access methods. As some technical parameters are different for the various access methods, the standard is divided in four parts.

A basic description of the different access methods and a comparison among them is provided in TR 101 274 [2].

The present document (Time Division Multiple Access Methods, TDMA) is to be used in conjunction with EN 301 213-1 [1], describing the basic parameters common to all access methods.

The present document is related to characteristics of system operating with transmitters delivering to antenna port one single carrier; multicarrier systems (where more than one carrier is passed through the same final power amplifier or active antenna are considered in EN 301 213-5 [4]).

The present document specifies the minimum requirements for system parameters of Time Division Multiple Access (TDMA) Point-to-Multipoint (P-MP) Radio Systems in the terrestrial fixed services operating in the band 24,5 GHz to 29,5 GHz (see ERC/REC T/R 13-02 [3]). Only sections specific to TDMA are described in respect to the paragraphs stated in EN 301 213-1 [1].

Time Division Multiple Access (TDMA) is an alternative to FDMA and CDMA covered in other parts of the present document. In TDMA point to Multipoint (P-MP) systems, a central station broadcasts information to terminal stations in a continuous Time Division Multiplex (TDM) or in a burst TDMA mode. The Terminal stations transmit in TDMA mode. The users may have access to the spectrum by sharing it through time multiplexing.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, subsequent revisions do apply.

- [1] ETSI EN 301 213-1: "Fixed Radio Systems; Point-to-multipoint equipment; Point-to-multipoint digital radio systems in frequency bands in the range 24,25 GHz to 29,5 GHz using different access methods; Part 1: Basic parameters".
- [2] ETSI TR 101 274: "Transmission and Multiplexing (TM); Digital Radio Relay Systems (DRRS); Point-to-multipoint DRRS in the access network: Overview of different access techniques".
- [3] ERC/REC T/R 13-02: "Preferred channel arrangements for the fixed services in the range 22,0 GHz to 29,5 GHz".
- [4] ETSI EN 301 213-5: "Fixed Radio Systems; Point-to-multipoint equipment; Point-to-multipoint digital radio systems in frequency bands in the range 24,25 GHz to 29,5 GHz using different access methods; Part 5: Multi-Carrier Time Division Multiple Access (MC-TDMA) methods".
- [5] ERC/REC 00-05: "Use of the band 24.5 - 26.5 GHz for fixed wireless access".
- [6] ERC/REC 01-03: "Use of parts of the band 27.5-29.5 GHz for Fixed Wireless Access (FWA)".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document the terms and definitions given in EN 301 213-1 [1] and the following apply:

gross bit rate: defined as the transmission bit rate over the air

NOTE: In the case of a transmitter working in burst mode, the gross bit rate is the instantaneous maximum bit rate during the burst. The gross bit rate has a unique relation to the symbol rate through the implemented modulation format.

3.2 Symbols

For the purposes of the present document the symbols given in EN 301 213-1 [1] apply.

3.3 Abbreviations

For the purposes of the present document the abbreviations defined in EN 301 213-1 [1] and the following apply:

CSmin Minimum practical Channel Separation (for a given radio-frequency channel arrangement)

4 General characteristics

4.1 General system architecture

Refer to EN 301 213-1 [1], clause 4.1.

4.2 Frequency bands and channel arrangements

4.2.1 Channel plan

Bands allocated to the Fixed Service in the range 24,5 GHz to 29,5 GHz shall be used according to ERC/REC T/R 13-02 [3], annexes B and C.

Regulatory bodies may choose appropriate parts of the above mentioned frequency bands for the application for Point-to-Multipoint systems.

4.2.2 Channel arrangements

The system shall meet at least one or more of the channel arrangements listed in table 1.

Table 1: Channel arrangement

Channel Spacing [MHz]	3,5 MHz	7 MHz	14 MHz	28 MHz	56 MHz	112 MHz
System Type A						
Minimum CRS bit rate for transmission and reception (Mbit/s)	4 Mbit/s	8 Mbit/s	16 Mbit/s	32 Mbit/s	64 Mbit/s	128 Mbit/s
System Type B						
Minimum CRS bit rate for transmission and reception (Mbit/s)	8 Mbit/s	16 Mbit/s	32 Mbit/s	64 Mbit/s	128 Mbit/s	256 Mbit/s
System Type C						
Minimum CRS bit rate for transmission and reception (Mbit/s)	12 Mbit/s	24 Mbit/s	48 Mbit/s	96 Mbit/s	192 Mbit/s	384 Mbit/s
System Type HC						
Minimum CRS bit rate for transmission and reception (Mbit/s)	4 Mbit/s	8 Mbit/s	16 Mbit/s	32 Mbit/s	64 Mbit/s	128 Mbit/s
NOTE 1: The minimum bit rate for transmission and reception is defined as the gross bit rate, defined in clause 3.1. The manufacturer shall declare the actual system traffic carrying capacity, the gross bit rate and the System Type. NOTE 2: Systems may offer a combination of Type A, Type B, Type C and Type HC on a per Terminal Station basis, provided that such a system, when operating in mixed mode, complies with: - the most stringent spectral mask for the types offered when co-ordination between different operators operating on first adjacent channels is envisaged; - with the mask declared by the manufacturer when block of channels are assigned according to ERC/REC 00-05 [5] and ERC/REC 01-03 [6]. NOTE 3: The present document defines four System Types A, B C and HC. These systems represent different spectral efficiency in term of gross-bit-rate/Hz; the gross bit rate, defined in clause 3.1, has a unique relation to the symbol rate through the implemented modulation format as follows: - A: lower complexity modulation formats (e.g. 4 states or equivalent); - HC: lower complexity modulation formats as System Type A (e.g. 4 states or equivalent), but with higher requirements for receiver sensitivity and tolerance to interference; - B: medium complexity modulation formats (e.g. 16 states or equivalent); - C: higher complexity modulation formats (e.g. 64 states or equivalent). NOTE 4: For regulatory purposes in national procedures for licensing radio equipments according to the present document, the above system types shall be identified by the "system type codes" reported in annex A.						

The CRS transmission, defined as the "downstream" direction, may be continuous, i.e. TDM (Time Division Multiplex). The CRS may transmit in the downstream direction even if there are no active calls, for the purpose of synchronization of the Terminal Stations.

The Terminal Stations (TS) may transmit only in timeslots allocated by control signals from the CS, or on a fixed basis. The TS transmission direction is defined as "upstream". TS may transmit in a TDMA basis. A TS may transmit control, bandwidth requests or signalling information even during the absent of users activities. TS transmissions consist of bursts of fixed or variable duration, usually an integer multiple of a fundamental timeslot duration.

4.3 Compatibility requirements

Refer to EN 301 213-1 [1], clause 4.3.

4.4 Environmental conditions

Refer to EN 301 213-1 [1], clause 4.4.

4.5 Power supply

Refer to EN 301 213-1 [1], clause 4.5.

4.6 Electromagnetic compatibility conditions

Refer to EN 301 213-1 [1], clause 4.6.

4.7 TMN interfaces

Refer to EN 301 213-1 [1], clause 4.7.

4.8 Synchronization of interface bit rates

Refer to EN 301 213-1 [1], clause 4.8.

4.9 Branching/feeder/antenna requirements

Refer to EN 301 213-1 [1], clause 4.9.

5 System parameters for TDMA P-MP systems

NOTE: Where a reference is made to the number of states of a modulation scheme or to the system type class, an equivalent modulation scheme may be applied, provided the system parameters are met.

5.1 System capacity

Refer to EN 301 213-1 [1], clause 5.1.

5.2 Round trip delay

Refer to EN 301 213-1 [1], clause 5.2.

5.3 Transparency

Refer to EN 301 213-1 [1], clause 5.3.

5.4 Voice coding methods

Refer to EN 301 213-1 [1], clause 5.4.

5.5 Transmitter characteristics

Refer to EN 301 213-1 [1], clause 5.5

5.5.1 Transmitter output power

Refer to EN 301 213-1 [1], clause 5.5.1.

The maximum mean transmitter output power (average, for CRS, RS and TS) for system type HC shall not exceed +27 dBm.

5.5.2 Transmitter nominal output power

Refer to EN 301 213-1 [1], clause 5.5.2.

The power output of the transmitter at point C and C' (see figure 2 of EN 301 213-1 [1]) shall be appropriate to the mode of use:

- CRS, or TS "broadcast mode". The power output shall be in conformance with EN 301 213-1 [1];
- CRS, or TS operating in TDMA burst mode. The power output during a burst shall be in conformance with EN 301 213-1 [1]. The power may be controlled by ATPC;
- The power setting shall have a maximum tolerance of ± 2 dB for environmentally protected locations, ± 3 dB for equipment in non-protected locations and shall not exceed the maximum allowed transmitter output power.

5.5.3 Transmitter power and frequency control

Refer to EN 301 213-1 [1], clause 5.5.3.

5.5.4 RF spectrum mask

The 0 dB level shown on the spectrum masks is the maximum of the modulated spectrum disregarding any residual carrier (resulting from modulation imperfection).

The masks do not include frequency tolerances.

5.5.4.1 RF spectrum density mask for the central radio station

General test load conditions to measure the spectrum mask for the CRS transceiver:

- the CRS transmitter shall work under full capacity load.

The RF spectrum masks shown in figures 1, 2 and 3 and table 2 apply.

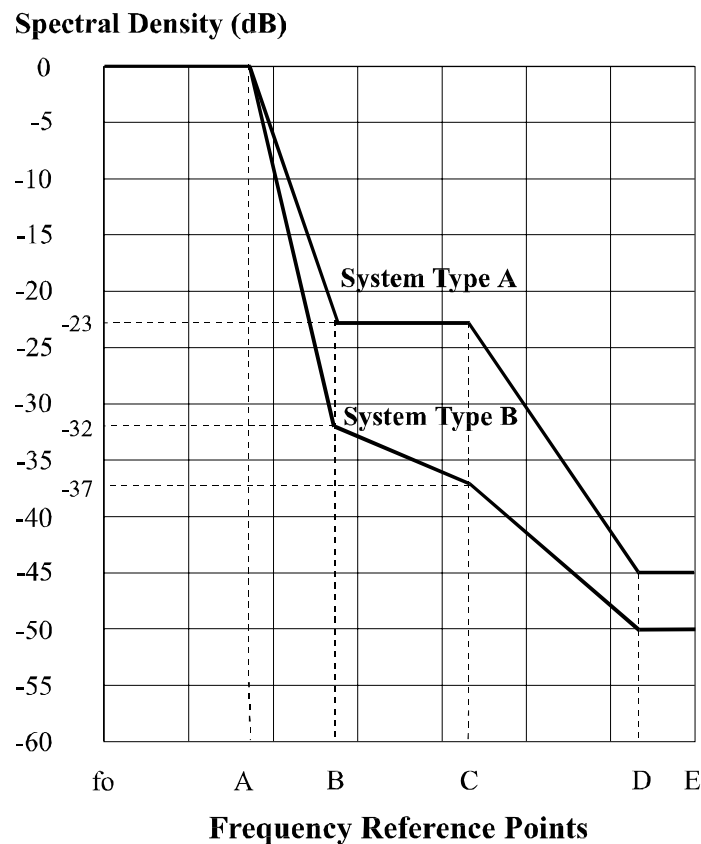


Figure 1: Spectrum masks, types A and B (fo = actual carrier frequency)

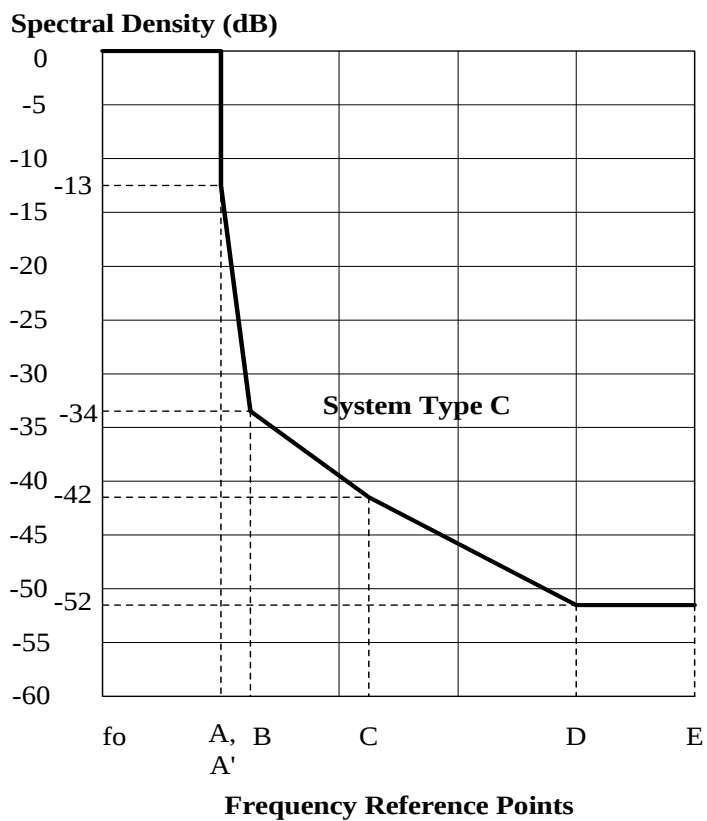
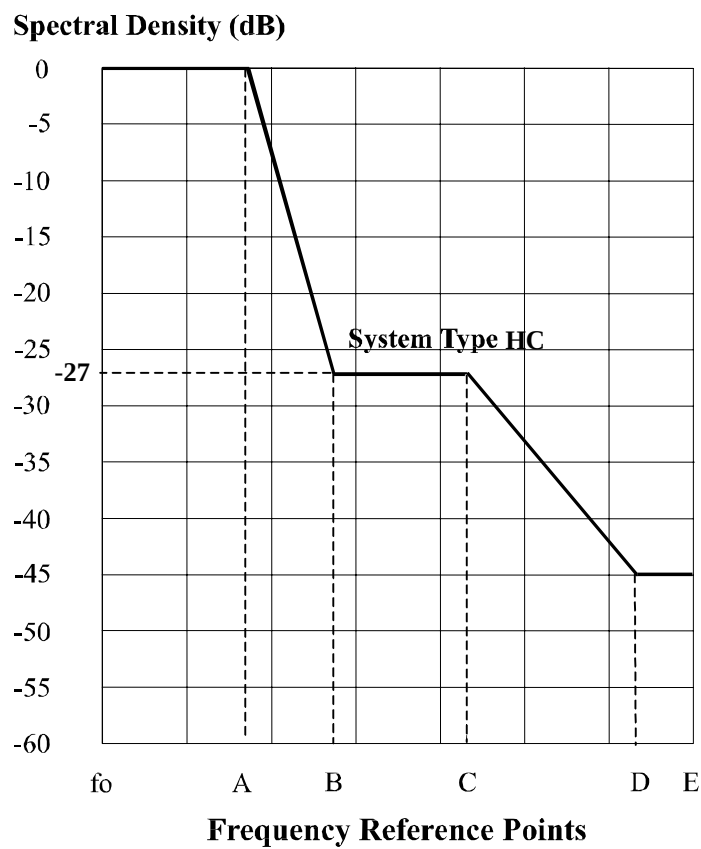
Figure 2: Spectrum mask, type C (f_o = actual carrier frequency)Figure 3: Spectrum mask, type HC (f_o = actual carrier frequency)

Table 2: Spectrum masks

System Type A						
Co-polar channel spacing Points in figure 1	0 dB Point A		-23 dB Point B	-23 dB Point C	-45 dB Point D	-45 dB Point E
3,5 MHz	1,5 MHz		2,8 MHz	3,7 MHz	7 MHz	8,75 MHz
7 MHz	2,8 MHz		5,6 MHz	7 MHz	14 MHz	17,5 MHz
14 MHz	5,6 MHz		11,2 MHz	14 MHz	28 MHz	35 MHz
28 MHz	11,2		22,4	28	56	70
56 MHz	22,5		45	56	112	140
112 MHz	45		90	112	224	280
System Type B						
Co-polar channel spacing Points in figure 1	0 dB Point A		-32 dB Point B	-37 dB Point C	-50 dB Point D	-50 dB Point E
3,5 MHz	1,5 MHz		2,8 MHz	3,7 MHz	7 MHz	8,75 MHz
7 MHz	2,8 MHz		5,6 MHz	7 MHz	14 MHz	17,5 MHz
14 MHz	5,6 MHz		11,2 MHz	14 MHz	28 MHz	35 MHz
28 MHz	11,2 MHz		22,4 MHz	28 MHz	56 MHz	70 MHz
56 MHz	22,5 MHz		45 MHz	56 MHz	112 MHz	140 MHz
112 MHz	45 MHz		90 MHz	112 MHz	224 MHz	280 MHz
System Type C						
Co-polar channel spacing Points in figure 2	0 dB Point A	-13 dB Point A'	-34 dB Point B	-42 dB Point C	-52 dB Point D	-52 dB Point E
3,5 MHz	1,75 MHz	1,75 MHz	2,8 MHz	3,7 MHz	7 MHz	8,75 MHz
7 MHz	3,5 MHz	3,5 MHz	5,6 MHz	7 MHz	14 MHz	17,5 MHz
14 MHz	7 MHz	7 MHz	11,2 MHz	14 MHz	28 MHz	35 MHz
28 MHz	14 MHz	14 MHz	22,4 MHz	28 MHz	56 MHz	70 MHz
56 MHz	28 MHz	28 MHz	45 MHz	56 MHz	112 MHz	140 MHz
112 MHz	56 MHz	56 MHz	90 MHz	112 MHz	224 MHz	280 MHz
System Type HC						
Co-polar channel spacing Points in figure 3	0 dB Point A		-27 dB Point B	-27 dB Point C	-45 dB Point D	-45 dB Point E
3,5	1,5		2,8	3,7	7	8,75
7	2,8		5,6	7	14	17,5
14	5,6		11,2	14	28	35
28	11,2		22,4	28	56	70
56	22,5		45	56	112	140
112	45		90	112	224	280

The spectrum analyser settings for measuring the RF-spectrum masks are listed in table 3.

Table 3: Spectrum analyser settings for RF power spectrum measurement

	Central Stations (CRS) and Repeater Stations						Terminal Stations
RF channel spacing. (MHz)	3,5	7	14	28	56	112	any
Centre frequency	actual	actual	actual	actual	actual	actual	actual
Sweep width (MHz)	20	40	80	160	320	640	see corresponding CRS
Scan time	auto	auto	auto	auto	auto	auto	auto
IF bandwidth (kHz)	30	30	30	100	100	300	(see note)
Video bandwidth (kHz)	0,1	0,3	0,3	0,3	0,3	1,0	
NOTE: The spectrum analyser settings for RF power Spectrum Measurement for TDMA Terminal Stations (TS) are depending on the burst duration. For a burst duration of $\approx 50 \mu\text{s}$ the recommended settings are IF bandwidth $\approx 30 \text{ kHz}$ and video bandwidth $\approx 10 \text{ kHz}$. For other burst durations, the recommended settings are as following: - if bandwidth $\approx 30 \text{ kHz} \times 50 \mu\text{s}/(\text{burst duration in } \mu\text{s})$; - video bandwidth $\approx 10 \text{ kHz} \times 50 \mu\text{s}/(\text{burst duration in } \mu\text{s})$. The manufacturer shall declare the burst duration and agree the spectrum analyser settings with the administration concerned.							

5.5.4.2 RF-spectrum density mask for the terminal station and the repeater station

The RF spectrum masks for the TS and RS shall comply with the spectrum mask of the CRS (see figures 1, 2 and 3).

5.5.4.3 Discrete CW components exceeding the spectrum density mask limit (all stations)

In case some CW components exceed the spectrum mask, an additional allowance is given.

Those lines shall not:

- exceed the mask by a factor more than $\{10 \log (\text{CSmin}/\text{IFbw}) - 10\}$ dB;
- be spaced each other in frequency by less than CSmin.


Where:

CSmin is the minimum practical channel separation for the given radio frequency channel arrangement.

CSmin = 1 750 kHz for both 26 GHz and 28 GHz bands.

IFbw is the recommended resolution IF bandwidth, expressed in kHz, reported in table 3.

Figure 4 shows a typical example of this requirement.

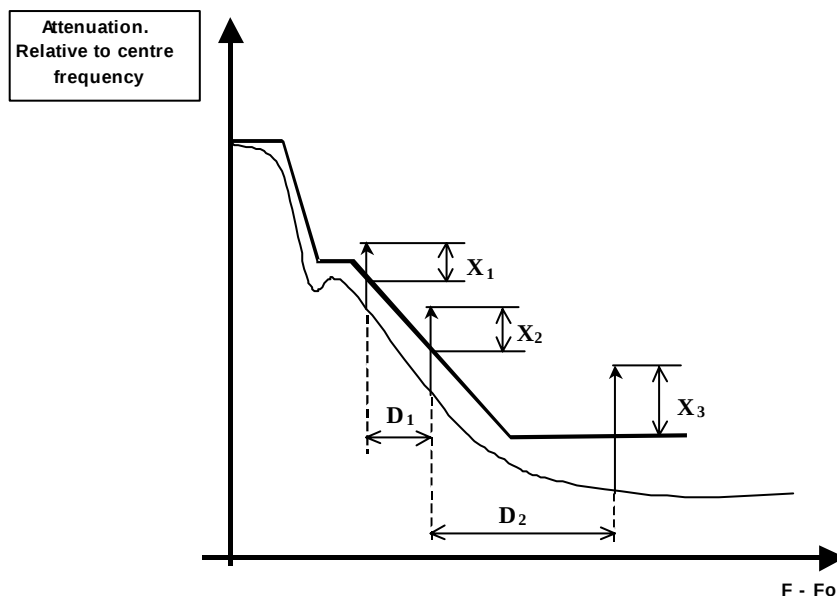

$$X_1, X_2, X_3 \text{ [dB]} \leq 10 \log(\text{CSmin} / \text{IFbw}) - 10$$

$$D_1, D_2 \geq \text{CSmin}$$

Figure 4: CW lines exceeding the spectrum mask (typical example)

5.5.5 Tx local oscillator frequency arrangements

Refer to EN 301 213-1 [1], clause 5.5.5.

5.5.6 Spurious emissions (external)

Refer to EN 301 213-1 [1], clause 5.5.6.

5.5.7 Radio frequency tolerance

Refer to EN 301 213-1 [1], clause 5.5.7.

5.6 Receiver characteristics

Refer to EN 301 213-1 [1], clause 5.6.

5.6.1 Rx local oscillator frequency arrangements

Refer to EN 301 213-1 [1], clause 5.6.1.

5.6.2 Spurious emissions (external)

Refer to EN 301 213-1 [1], clause 5.6.2.

5.6.3 Receiver IF

Refer to EN 301 213-1 [1], clause 5.6.3.

5.7 System performance

All parameters are referred to reference points B or C of figure 2 of EN 301 213-1 [1]. All measurements shall be carried out with the test signals defined in clause 5.5 of EN 301 213-1 [1] and under full load conditions.

5.7.1 Dynamic level range

The BER shall be less than 10^{-3} for a dynamic level range which shall exceed 50 dB. The dynamic level range shall be declared by the manufacturer.

5.7.2 BER as a function of Receiver input Signal Level (RSL)

The input signal level presented to the receiver under test is adjusted to the levels described in table 4. The BER shall be less than or equal to the values defined in table 4. For the purposes of testing, the transmitter is operated at its maximum rated power level.

Table 4: BER Performance thresholds

System Type A						
Co-polar channel spacing	3,5 MHz	7 MHz	14 MHz	28 MHz	56 MHz	112 MHz
Channel bit rate (Mbit/s)	4 Mbit/s	8 Mbit/s	16 Mbit/s	32 Mbit/s	64 Mbit/s	128 Mbit/s
1×10^{-3}	-83 dBm	-80 dBm	-77 dBm	-74 dBm	-71 dBm	-68 dBm
1×10^{-6}	-79 dBm	-76 dBm	-73 dBm	-70 dBm	-67 dBm	-64 dBm
System Type B						
Co-polar channel spacing	3,5 MHz	7 MHz	14 MHz	28 MHz	56 MHz	112 MHz
Channel bit rate (Mbit/s)	8 Mbit/s	16 Mbit/s	32 Mbit/s	64 Mbit/s	128 Mbit/s	256 Mbit/s
1×10^{-3}	-75 dBm	-72 dBm	-69 dBm	-66 dBm	-63 dBm	-60 dBm
1×10^{-6}	-71 dBm	-68 dBm	-65 dBm	-62 dBm	-59 dBm	-56 dBm
System Type C						
Co-polar channel spacing	3,5 MHz	7 MHz	14 MHz	28 MHz	56 MHz	112 MHz
Channel bit rate (Mbit/s)	12 Mbit/s	24 Mbit/s	48 Mbit/s	96 Mbit/s	192 Mbit/s	384 Mbit/s
1×10^{-3}	-68 dBm	-65 dBm	-62 dBm	-59 dBm	-56 dBm	-53 dBm
1×10^{-6}	-65 dBm	-62 dBm	-59 dBm	-56 dBm	-53 dBm	-50 dBm
System Type HC						
Co-polar channel spacing	3,5 MHz	7 MHz	14 MHz	28 MHz	56 MHz	112 MHz
Channel bit rate (Mbit/s)	4 Mbit/s	8 Mbit/s	16 Mbit/s	32 Mbit/s	64 Mbit/s	128 Mbit/s
1×10^{-3}	-88 dBm	-85 dBm	-82 dBm	-79 dBm	-76 dBm	-73 dBm
1×10^{-6}	-85 dBm	-82 dBm	-79 dBm	-76 dBm	-73 dBm	-70 dBm
NOTE: The channel bit rate is the minimum bit rate during a burst. For (1+1) HSB systems the thresholds above for system type HC must be degraded by 3 dB.						

5.7.3 Equipment residual BER (RBER)

See EN 301 213-1 [1], clause 5.7.3.

5.7.4 Interference sensitivity

5.7.4.1 Co-channel interference (external)

The limits of co-channel interference (external) shall be as in table 5, giving maximum S/I values for 1 dB and 3 dB degradation of the 10^{-6} BER limits specified in clause 5.7.2.

Table 5: Co-channel interference sensitivity

Description	BER = 10^{-6}	
	1 dB	3 dB
Threshold degradation	S/I [dB]	S/I [dB]
System Type A	23	19
System Type B	30	26,5
System Type C	36	32,5
System Type HC	19	16

5.7.4.2 Adjacent channel interference (external)

The limits of adjacent channel interference (external) shall be as given in table 6 for like modulated signals, giving maximum S/I values for 1 dB and 3 dB degradation of the 10^{-6} BER limits specified in clause 5.7.2.

Table 6: Adjacent channel interference sensitivity

Description	BER = 10^{-6}	
	1 dB	3 dB
Threshold degradation	S/I [dB]	S/I [dB]
System Type A	0	-4
System Type B	0	-4
System Type C	0	-4
System Type HC	-10	-13

5.7.4.3 CW interference

See EN 301 213-1 [1], clause 5.7.4.3.

5.7.5 Distortion sensitivity

See EN 301 213-1 [1], clause 5.7.5.

6 Types of interfaces at the user equipment and the network node

See EN 301 213-1 [1], clause 6.

Annex A (normative): System type codes for regulatory procedures

System types reported in the present document shall be identified with the codes reported in table A.1.

Table A.1: System type codes for radio equipments reported in EN 301 213-3, relevant to regulatory procedures for national licensing

System type ↓	Channel spacing [MHz] ↓	CRS Bit-rate [Mbit/s] ↓	Frequency band (see note) ↓	System type codes ↓
A	3,5	4	B1	01
			B2	02
	7	8	B1	03
			B2	04
	14	16	B1	05
			B2	06
	28	32	B1	07
			B2	08
	56	64	B1	09
			B2	10
112	128	B1	11	
		B2	12	
B	3,5	8	B1	13
			B2	14
	7	16	B1	15
			B2	16
	14	32	B1	17
			B2	18
	28	64	B1	19
			B2	20
	56	128	B1	21
			B2	22
112	256	B1	23	
		B2	24	
C	3,5	12	B1	25
			B2	26
	7	24	B1	27
			B2	28
	14	48	B1	29
			B2	30
	28	96	B1	31
			B2	32
	56	192	B1	33
			B2	34
112	384	B1	35	
		B2	36	
HC	3,5	4	B1	37
			B2	38
	7	8	B1	39
			B2	40
	14	16	B1	41
			B2	42
	28	32	B1	43
			B2	44
	56	64	B1	45
			B2	46
112	128	B1	47	
		B2	48	
NOTE: Option B1 refers to systems operating in frequency band 24 500-26 500 MHz (ERC/REC T/R 13-02 [3], annex B. Option B2 refers to systems operating in frequency band 27 500-29 500 MHz (ERC/REC T/R 13-02 [3], annex C.				

Annex B (informative): Bibliography

- ETSI ETS 300 019: "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment".
- ETSI EN 300 339: "Electromagnetic compatibility and Radio spectrum Matters (ERM); General ElectroMagnetic Compatibility (EMC) for radio communications equipment".
- ETSI ETS 300 385: "Radio Equipment and Systems (RES); ElectroMagnetic Compatibility (EMC) standard for digital fixed radio links and ancillary equipment with data rates at around 2 Mbit/s and above".
- ETSI ETS 300 833: "Fixed Radio Systems; Point to Point Antennas; Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz".
- ETSI EN 301 021: "Transmission and Multiplexing (TM); Digital Radio Relay Systems (DRRS); Time Division Multiple Access (TDMA); Point-to-multipoint DRRS in Frequency Division Duplex (FDD) bands in the range 3 GHz to 11 GHz".
- ETSI EN 301 132: "Integrated Services Digital Network (ISDN); Security tools (SET) for use within telecommunication services".
- ETSI EN 301 215: "Fixed Radio Systems; Point to Multipoint Antennas; Antennas for point-to-multipoint fixed radio systems in the 11 GHz to 60 GHz band".
- ETSI EN 301 390: "Fixed Radio Systems; Point-to-point and Point-to-Multipoint Systems; Spurious emissions and receiver immunity at equipment/antenna port of Digital Fixed Radio Systems".
- IEC 60154-2: "Flanges for waveguides. Part 2: Relevant specifications for flanges for ordinary rectangular waveguides".
- ITU-R Recommendation F.1249-1: "Maximum equivalent isotropically radiated power of transmitting stations in the fixed service operating in the frequency band 25,25 - 27,5 GHz shared with the inter-satellite service".
- ITU-T Recommendation G.131: "Control of talker echo".
- ITU-T Recommendation G.711: "Pulse code modulation (PCM) of voice frequencies".
- ITU-T Recommendation G.726: "40, 32, 24, 16 kbit/s adaptive differential pulse code modulation (ADPCM)".
- ITU-T Recommendation G.728: "Coding of speech at 16 kbit/s using low-delay code excited linear prediction".
- ITU-T Recommendation G.729: "Coding of speech at 8 kbit/s using conjugate-structure algebraic-code-excited linear-prediction (CS-ACELP)".
- ITU-T Recommendation G.773: "Protocol suites for Q-interfaces for management of transmission systems".
- ITU-T Recommendation G.810: "Definitions and terminology for synchronization networks".
- ITU-T Recommendation G.812: "Timing requirements of slave clocks suitable for use as node clocks in synchronization networks".
- ITU-T Recommendation G.813: "Timing characteristics of SDH equipment slave clocks (SEC)".
- ITU-T Recommendation G.823: "The control of jitter and wander within digital networks which are based on the 2 048 kbit/s hierarchy".
- ITU-T Recommendation G.825: "The control of jitter and wander within digital networks which are based on the synchronous digital hierarchy (SDH)".
- ITU-T Recommendation O.151: "Error performance measuring equipment operating at the primary rate and above".
- ITU-T Recommendation O.181: "Equipment to assess error performance on STM-N interfaces".

- ETSI EN 301 213-2: "Fixed Radio Systems; Point-to-multipoint equipment; Point-to-multipoint digital radio systems in frequency bands in the range 24,25 GHz to 29,5 GHz using different access methods; Part 2: Frequency Division Multiple Access (FDMA) methods".

History

Document history		
V1.1.1	April 2000	Publication
V1.2.1	September 2000	Publication
V1.3.1	September 2001	Publication
V1.4.1	October 2001	One-step Approval Procedure OAP 20020208: 2001-10-10 to 2002-02-08