
# Draft ETSI EN 301 357-2 V1.4.1 (2007-12)

Harmonized European Standard (Telecommunications series)

Electromagnetic compatibility and Radio spectrum Matters (ERM); Cordless audio devices in the range 25 MHz to 2 000 MHz; Part 2: Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive

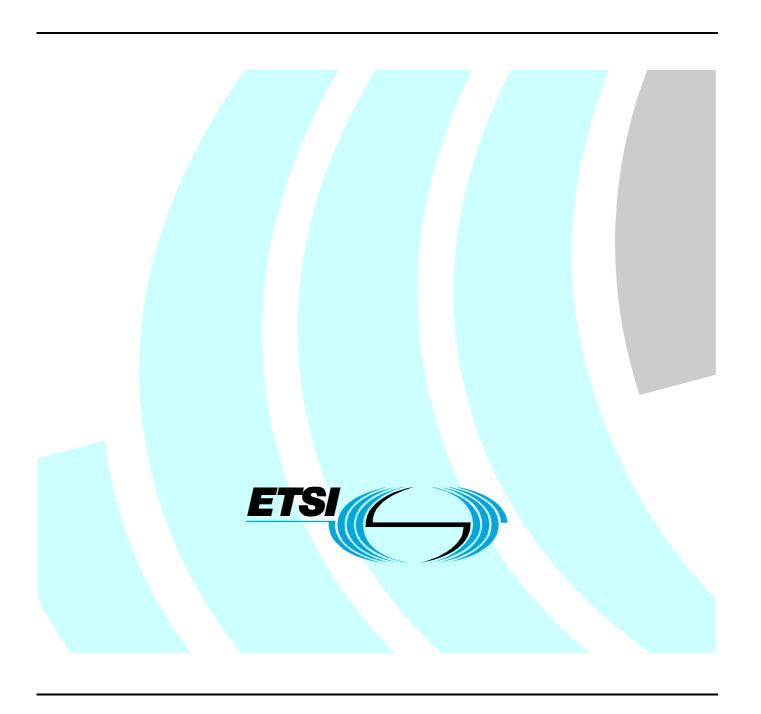

#### Reference

#### REN/ERM-TG17WG3-261-2

Keywords audio, radio, radio MIC, testing

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="http://portal.etsi.org/tb/status/status.asp">http://portal.etsi.org/tb/status/status.asp</a></a>

#### **Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2007.
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup> and **UMTS**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members. **TIPHON**<sup>TM</sup> and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members. **3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

## Contents

Foreword	ntellectual Property Rights			
ntroduction				
References				
2 References				
Definitions, symbols and abbreviations	•			
Definitions, symbols and abbreviations  1 Definitions  2 Symbols  3 Abbreviations  4 Technical requirements specifications  4 Technical requirements specifications  5 Technical requirements specifications  6 Technical requirements specifications  7 Technical requirements specifications  8 Technical requirements specifications  8 Technical requirements specifications  8 Technical requirements  9 Technical properties  10 Technical properties  11 Technical properties  12 Technical properties  13 Technical properties  14 Technical properties  15 Technical properties  16 Technical properties  17 Technical properties  18 Technical properties  19 Technical properties  10 Technical properties  10 Technical properties  10 Technical properties  10 Technical properties  11 Technical properties  12 Technical properties  13 Technical properties  14 Technical				
Significance of the measurement results  Significance of the measurement space of the measurement results  Testing for compliance with technical requirements  Testing for compliance with technical requirements  Significance of the measurement space of the measurement results  Significance of the measurement results  Signifi	2.1 Normative references		c	
Abbreviations	3 Definitions, symbols ar	nd abbreviations	6	
Abbreviations	3.1 Definitions		<i>6</i>	
Technical requirements specifications	3.2 Symbols			
Environmental profile	3.3 Abbreviations			
Environmental profile	1 Technical requirements	s specifications	7	
Conformance requirements 1.2.1 Transmitter requirements for Band II LPD. 1.2.1.1 Basic requirements for Band II LPB. 1.2.1.2 Effective radiated power 1.2.1.3 Occupied bandwidth. 1.2.1.4 Frequency step size. 1.2.1.5 Frequency error 1.2.1.6 Transmitter timeout. 1.2.1.7 Radiated spurious emissions 1.2.2 Frequency error 1.2.2 Frequency error 1.2.3 Carrier power 1.2.4 Channel bandwidth 1.2.5 Spurious emissions and cabinet radiation 1.2.6 Cordless audio transmitter shutoff 1.2.7 Receiver spurious emissions and cabinet radiation 1.2.7 Receiver spurious emissions and cabinet radiation 1.2.8 Testing for compliance with technical requirements 1.2.9 Interpretation of the measurement results 1.2.0 Interpretation of the measurement results 1.2.1 Frequency error 1.2.2 Frequency error 1.2.3 Carrier power 1.2.3 Carrier power 1.3.4 Channel bandwidth 1.4 Carrier power 1.5 Rediated spurious emissions and cabinet radiation 1.5 Rediated spurious emissions and cabinet radiation 1.5 Rediated spurious emissions and cabinet radiation 1.6 Cordless audio transmitter test unites for Band II LPD 1.5 Rediated spurious emissions and cabinet radiation 1.6 Cordless audio transmitter shutoff 1.7 Carrier power 1.8 Rediated spurious emissions and cabinet radiation 1.9 Carrier power 1.0 Cordless audio transmitter shutoff 1.0 Carrier power spurious emissions and cabinet radiation 1.0 Carrier power spurious emiss	•	•		
1.2.1 Transmitter requirements for Band II LPD. 1.2.1.1 Basic requirements for Band II LPB. 1.2.1.2 Effective radiated power 1.2.1.3 Occupied bandwidth. 1.2.1.4 Frequency step size. 1.2.1.5 Frequency error. 1.2.1.6 Transmitter timeout. 1.2.1.7 Radiated spurious emissions 1.2.2 Frequency error. 1.2.3 Carrier power. 1.2.3 Carrier power. 1.2.4 Channel bandwidth. 1.2.5 Spurious emissions and cabinet radiation. 1.2.6 Cordless audio transmitter shutoff. 1.2.7 Receiver spurious emissions and cabinet radiation. 1.2.8 Environmental conditions for testing. 1.2.9 Interpretation of the measurement results. 1.2.1 Environmental conditions for testing. 1.2.2 Interpretation of the measurement results. 1.2.3 Essential radio test suites. 1.2.4 Channel bandwidth. 1.2.5 Spurious emissions and cabinet radiation. 1.2.6 Cordless audio transmitter shutoff. 1.2.7 Receiver spurious emissions and cabinet radiation. 1.2.8 Environmental conditions for testing. 1.2.9 Interpretation of the measurement results. 1.3.1 Environmental conditions for testing. 1.3.2 Frequency error. 1.3.3 Essential radio test suites. 1.3.3 Essential radio test suites. 1.3.4 Channel bandwidth. 1.3.5 Radiated spurious emissions and cabinet radiation. 1.3.6 Cordless audio transmitter shutoff. 1.3.7 Receiver spurious emissions and cabinet radiation. 1.4 Annex A (normative): 1.5 HS Requirements and conformance Test specifications Table (HS-RTT).  1.5 Annex B (informative): The EN title in the official languages.				
4.2.1.1 Basic requirements for Band II LPB 4.2.1.2 Effective radiated power 4.2.1.3 Occupied bandwidth. 4.2.1.4 Frequency step size 4.2.1.5 Frequency error 4.2.1.6 Transmitter timeout 4.2.1.7 Radiated spurious emissions 4.2.2 Frequency error 4.2.3 Carrier power 4.2.4 Channel bandwidth 4.2.5 Spurious emissions and cabinet radiation 4.2.6 Cordless audio transmitter shutoff 4.2.7 Receiver spurious emissions and cabinet radiation 5. Testing for compliance with technical requirements 5.1 Environmental conditions for testing 5.2 Interpretation of the measurement results 5.3 Essential radio test suites 5.3 Essential radio test suites 5.3 Especial radio test suites 5.3 Frequency error 5.3.2 Frequency error 5.3.3 Carrier power 5.3.4 Channel bandwidth 5.3.5 Radiated spurious emissions and cabinet radiation 5.3 Frequency error 5.3.6 Cordless audio transmitter shutoff 5.3.7 Receiver spurious emissions and cabinet radiation 5.3 Frequency error 5.3 Essential radio test suites 5.3 Essential radio test suites 5.3 Frequency error 5.3.3 Carrier power 5.3.4 Channel bandwidth 5.3.5 Radiated spurious emissions and cabinet radiation 5.3 Receiver spurious emissions and cabinet radiation 5.3 Receiver spurious emissions and cabinet radiation 6.3.4 Channel bandwidth 6.3.5 Radiated spurious emissions and cabinet radiation 6.3.6 Cordless audio transmitter shutoff 6.3.7 Receiver spurious emissions and cabinet radiation 6.3 Receiver spurious emissions and cabinet radiation 7.4 Annex A (normative): 7.5 HS Requirements and conformance Test specifications Table (HS-RTT) 7.5 Annex B (informative): 7.6 The EN title in the official languages				
1.2.1.2 Effective radiated power 1.2.1.3 Occupied bandwidth. 1.2.1.4 Frequency step size 1.2.1.5 Frequency error 1.2.1.6 Transmitter timeout 1.2.1.7 Radiated spurious emissions 1.2.2 Frequency error 1.2.3 Carrier power 1.2.4 Channel bandwidth 1.2.5 Spurious emissions and cabinet radiation 1.2.6 Cordless audio transmitter shutoff 1.2.7 Receiver spurious emissions and cabinet radiation 1.2.8 Testing for compliance with technical requirements 1.2.9 Interpretation of the measurement results 1.2.1 Environmental conditions for testing 1.2.2 Interpretation of the measurement results 1.2.3 Essential radio test suites 1.2.4 Interpretation of the measurement results 1.2.5 Interpretation of the measurement results 1.2.6 Interpretation of the measurement results 1.2.7 Erequency error 1.2.8 Essential radio test suites 1.3.1 Transmitter test suites for Band II LPD 1.3.2 Frequency error 1.4 Channel bandwidth 1.5 Radiated spurious emissions and cabinet radiation 1.5 R				
4.2.1.3 Occupied bandwidth	1			
4.2.1.4 Frequency step size 4.2.1.5 Frequency error 5.4.2.1.6 Transmitter timeout 4.2.1.7 Radiated spurious emissions 5.2.2 Frequency error 5.4.2.3 Carrier power 6.4.2.4 Channel bandwidth 6.4.2.5 Spurious emissions and cabinet radiation 6.4.2.6 Cordless audio transmitter shutoff 6.5 Testing for compliance with technical requirements 6.6 Interpretation of the measurement results 6.7 Interpretation of the measurement results 6.8 Essential radio test suites 6.9 Interpretation of the measurement results 6.1 Environmental conditions for testing 6.2 Interpretation of the measurement results 6.3.1 Transmitter test suites for Band II LPD 6.3.2 Frequency error 6.3.3 Carrier power 6.3.4 Channel bandwidth 6.3.5 Radiated spurious emissions and cabinet radiation 6.3.6 Cordless audio transmitter shutoff 6.3.7 Receiver spurious emissions and cabinet radiation 6.3.8 Receiver spurious emissions and cabinet radiation 7.9 Annex A (normative): 7.0 HS Requirements and conformance Test specifications Table (HS-RTT) 7.1 Radiated Spurious Table in the official languages 7.2 Annex B (informative): 7.3 The EN title in the official languages				
4.2.1.5 Frequency error				
4.2.1.6 Transmitter timeout	1 1			
4.2.1.7 Radiated spurious emissions				
4.2.2 Frequency error				
4.2.3 Carrier power				
4.2.4 Channel bandwidth				
4.2.5 Spurious emissions and cabinet radiation	1			
4.2.6 Cordless audio transmitter shutoff 4.2.7 Receiver spurious emissions and cabinet radiation 5 Testing for compliance with technical requirements 5.1 Environmental conditions for testing 5.2 Interpretation of the measurement results 5.3 Essential radio test suites 5.3.1 Transmitter test suites for Band II LPD 5.3.2 Frequency error 5.3.3 Carrier power 5.3.4 Channel bandwidth 5.3.5 Radiated spurious emissions and cabinet radiation 5.3.6 Cordless audio transmitter shutoff 6.3.7 Receiver spurious emissions and cabinet radiation 6.3.8 Requirements and conformance Test specifications Table (HS-RTT) 6.3.9 Requirements and conformance Test specifications Table (HS-RTT) 6.3.10 Transmitter in the official languages 6.3.3 Carrier power 6.3.4 Channel bandwidth 6.3.5 Radiated spurious emissions and cabinet radiation 6.3.6 Cordless audio transmitter shutoff 6.3.7 Receiver spurious emissions and cabinet radiation 6.3.8 Requirements and conformance Test specifications Table (HS-RTT) 6.3.9 The EN title in the official languages 6.3.1 Transmitter shutoff 6.3.4 Channel bandwidth 6.3.5 Requirements and conformance Test specifications Table (HS-RTT) 6.3.7 Receiver spurious emissions and cabinet radiation 6.3.8 Requirements and conformance Test specifications Table (HS-RTT) 6.3.9 Requirements and conformance Test specifications Table (HS-RTT)				
Testing for compliance with technical requirements.  Environmental conditions for testing.  Interpretation of the measurement results.  Essential radio test suites.  Essential radio test suites for Band II LPD.  Frequency error				
5.1 Environmental conditions for testing 5.2 Interpretation of the measurement results 5.3 Essential radio test suites 5.3.1 Transmitter test suites for Band II LPD 5.3.2 Frequency error 5.3.3 Carrier power 5.3.4 Channel bandwidth 5.3.5 Radiated spurious emissions and cabinet radiation 5.3.6 Cordless audio transmitter shutoff 5.3.7 Receiver spurious emissions and cabinet radiation 5.3.7 Receiver spurious emissions and cabinet radiation 5.3.8 Annex A (normative):  HS Requirements and conformance Test specifications Table (HS-RTT)  Annex B (informative): The EN title in the official languages 13				
5.1 Environmental conditions for testing 5.2 Interpretation of the measurement results 5.3 Essential radio test suites 5.3.1 Transmitter test suites for Band II LPD 5.3.2 Frequency error 5.3.3 Carrier power 5.3.4 Channel bandwidth 5.3.5 Radiated spurious emissions and cabinet radiation 5.3.6 Cordless audio transmitter shutoff 5.3.7 Receiver spurious emissions and cabinet radiation 5.3.7 Receiver spurious emissions and cabinet radiation 5.3.8 Annex A (normative):  HS Requirements and conformance Test specifications Table (HS-RTT)  Annex B (informative): The EN title in the official languages 13	Testing for compliance	with technical requirements	9	
Interpretation of the measurement results  Essential radio test suites  Es				
5.3.1 Transmitter test suites for Band II LPD				
5.3.1 Transmitter test suites for Band II LPD	5.3 Essential radio test su	ites	9	
Carrier power	5.3.1 Transmitter test su	ites for Band II LPD	9	
Channel bandwidth	Frequency error		10	
Annex B (informative):  Radiated spurious emissions and cabinet radiation	5.3.3 Carrier power		10	
Annex B (informative):  Cordless audio transmitter shutoff	5.3.4 Channel bandwidt	h	10	
Annex B (informative):  Receiver spurious emissions and cabinet radiation	5.3.5 Radiated spurious	emissions and cabinet radiation	10	
Annex A (normative):  HS Requirements and conformance Test specifications Table (HS-RTT)				
Annex B (informative): The EN title in the official languages	Receiver spurious	emissions and cabinet radiation	10	
Annex B (informative): The EN title in the official languages13	Annex A (normative):	HS Requirements and conformance Test specifications Table (I	HS-	
		RTT)	11	
Annex C (informative): Bibliography14	Annex B (informative):	The EN title in the official languages	13	
· · · · · · · · · · · · · · · · · · ·	Annex C (informative):	Bibliography	14	
History 14	History		15	

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC(as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC are given in annex A.

The present document is part 2 of a multi-part deliverable covering cordless audio devices in the range 25 MHz to 2 000 MHz, as identified below:

Part 1: "Technical characteristics and test methods";

Part 2: "Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive".

Proposed national transposition dates				
Date of latest announcement of this EN (doa):	3 months after ETSI publication			
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa			
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa			

## Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive. The modular structure is shown in EG 201 399.

## 1 Scope

The present document covers Cordless audio devices considered by definition short-range devices.

- the present document applies to cordless audio consumer radio microphones, in ear monitoring equipment using either 300 kHz bandwidth analogue modulation; or
- 300 kHz, 600 kHz; or
- 1 200 kHz digital FDMA modulation; and
- Band II LPD (low power devices) using 200 kHz bandwidth and analogue modulation.

The frequency bands for this equipment may differ from country to country as specified in their national regulations. All equipment is intended to be used with integral antennas.

The types of equipment covered by the present document are as follows:

- cordless headphones;
- cordless loudspeakers;
- consumer radio microphones;
- in-ear monitoring;
- in-vehicle cordless;
- personal cordless;
- broadband multi channel audio systems;
- Band II LPD.

The present document is intended to cover the provisions of Directive 1999/5/EC (R&TTE Directive), article 3.2, which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of Article 3 of the R&TTE Directive may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <a href="http://www.newapproach.org">http://www.newapproach.org</a>.

## 2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
  - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
  - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <a href="http://docbox.etsi.org/Reference">http://docbox.etsi.org/Reference</a>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

#### 2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI EN 301 357-1 (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Cordless audio devices in the range 25 MHz to 2 000 MHz; Part 1: Technical characteristics and test methods".
- [2] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".

## 3 Definitions, symbols and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

artificial antenna: tuned reduced-radiating dummy load equal to the nominal impedance specified by the applicant

**integral antenna:** antenna, with or without a connector, designed as, and declared as by the manufacturer, an indispensable part of the equipment

**integral antenna for Band II LPD only:** permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment

**necessary bandwidth:** for a given class of emission, the width of the frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions

NOTE: However, the necessary bandwidths of most digital modulation formats are presently not referred to ITU-R Recommendations of SM series.

**port:** any connection point on or within the Equipment Under Test (EUT) intended for the connection of cables to or from that equipment

radiated measurements: measurements that involve the absolute measurement of a radiated electromagnetic field

**spurious emission:** emission on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information

NOTE: Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products.

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

 $\begin{array}{ll} \mu W & \text{micro Watt} \\ \Omega & \text{ohm} \end{array}$ 

dBc dB relative to the carrier level

E field strength
GHz Giga Hertz
kHz kilo Hertz
MHz Mega Hertz
mW milli Watt
nW nano Watt

#### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

EUT Equipment Under Test

FDMA Frequency Division Multiple Access

LPD Low Power Device

## 4 Technical requirements specifications

## 4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

## 4.2 Conformance requirements

## 4.2.1 Transmitter requirements for Band II LPD

#### 4.2.1.1 Basic requirements for Band II LPB

The Band II LPD shall meet the basic requirements according to EN 301 357-1 [1], clause 8.1.

#### 4.2.1.2 Effective radiated power

The effective radiated power, as defined in EN 301 357-1 [1], clause 8.2.3, shall not exceed the limits in EN 301 357-1 [1], clause 8.2.3.3.

#### 4.2.1.3 Occupied bandwidth

The occupied bandwidth, as defined in EN 301 357-1 [1], clause 8.2.4, shall not exceed the limits in EN 301 357-1 [1], clause 8.2.4.3.

#### 4.2.1.4 Frequency step size

The frequency step size, as defined in EN 301 357-1 [1], clause 8.2.5, shall not exceed the limits in EN 301 357-1 [1], clause 8.2.5.3.

#### 4.2.1.5 Frequency error

The frequency error, as defined in EN 301 357-1 [1], clause 8.2.6, shall not exceed the limits in EN 301 357-1 [1], clause 8.2.6.3.

#### 4.2.1.6 Transmitter timeout

The transmitter timeout, as defined in EN 301 357-1 [1], clause 8.2.7, shall not exceed the limits in EN 301 357-1 [1], clause 8.2.7.3.

#### 4.2.1.7 Radiated spurious emissions

The radiated spurious emissions as defined in EN 301 357-1 [1], clause 8.2.1.6, shall not exceed the limits in EN 301 357-1 [1], clause 8.2.1.6.3.

NOTE: For combined equipment such as Band II LPD implemented in cellular phones or in other telecommunication equipment falling under the R&TTE Directive, the ERP measurement of spurious emissions may be made according to the matching EN standards for the main equipment. Refer to EN 301 357-1 [1], clause 8.2.1.6.4.

#### 4.2.2 Frequency error

The frequency error, as defined in EN 301 357-1 [1], clause 8.3.1, shall not exceed the limits in EN 301 357-1 [1], clause 8.3.3, table 3.

This clause does not apply to Band II LPD.

#### 4.2.3 Carrier power

The carrier power, as defined in EN 301 357-1 [1], clause 8.4.1, shall not exceed the limits in EN 301 357-1 [1], clause 8.4.3, table 5.

This clause does not apply to Band II LPD.

#### 4.2.4 Channel bandwidth

The channel bandwidth, as defined in EN 301 357-1 [1], clause 8.5.1, shall not exceed the limits in EN 301 357-1 [1], clause 8.5.4, table 7, figures 3 and 4.

This clause does not apply to Band II LPD.

## 4.2.5 Spurious emissions and cabinet radiation

The spurious emissions and cabinet radiation, as defined in EN 301 357-1 [1], clause 8.6, shall not exceed the limits in EN 301 357-1 [1], clause 8.6.3, table 9.

This clause does not apply to Band II LPD.

#### 4.2.6 Cordless audio transmitter shutoff

The transmitter shutoff time, as defined in EN 301 357-1 [1], clause 8.7, shall not exceed the limits in EN 301 357-1 [1], clause 8.7.3.

This clause does not apply to Band II LPD.

#### 4.2.7 Receiver spurious emissions and cabinet radiation

The spurious emissions and cabinet radiation, as defined in EN 301 357-1 [1], clause 9.1, shall not exceed the limits in EN 301 357-1 [1], clause 9.1.5.

This clause does apply to cordless audio devices with integrated receiver and to combined equipments such as Band II LPD integrated into a receiver.

## 5 Testing for compliance with technical requirements

## 5.1 Environmental conditions for testing

Tests defined in the present document shall be carried out at representative points within the boundary limits of the declared operational environmental profile.

Where technical performance varies subject to environmental conditions, tests shall be carried out under a sufficient variety of environmental conditions (within the boundary limits of the declared operational environmental profile) to give confidence of compliance for the affected technical requirements.

## 5.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit will be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 1.

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028 [2] and shall correspond to an expansion factor (coverage factor) k = 1,96 or k = 2 (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 1 is based on such expansion factors.

Table 1: Maximum measurement uncertainty

Parameter	Uncertainty
Radiated spurious emissions	< ±6 dB
Spurious emissions and cabinet radiation	< ±6 dB
Receiver spurious emissions and cabinet radiation	< ±6 dB

#### 5.3 Essential radio test suites

#### 5.3.1 Transmitter test suites for Band II LPD

All tests specified in EN 301 357-1 [1], clause 8.2 shall be carried out for Band II LPD.

These tests cover the following transmitter test suites for Band II LPD.

Effective radiated power, occupied bandwidth, frequency step size, frequency error, transmitter timeout and radiated spurious emissions.

### 5.3.2 Frequency error

The test specified in EN 301 357-1 [1], clause 8.3 shall be carried out for general cordless audio devices.

#### 5.3.3 Carrier power

The test specified in EN 301 357-1 [1], clause 8.4 shall be carried out for general cordless audio devices.

#### 5.3.4 Channel bandwidth

The test specified in EN 301 357-1 [1], clause 8.5 shall be carried out for general cordless audio devices.

#### 5.3.5 Radiated spurious emissions and cabinet radiation

The test specified in EN 301 357-1 [1], clause 8.6 shall be carried out for general cordless audio devices.

#### 5.3.6 Cordless audio transmitter shutoff

The test specified in EN 301 357-1 [1], clause 8.7 shall be carried out for general cordless audio devices.

#### 5.3.7 Receiver spurious emissions and cabinet radiation

The test specified in EN 301 357-1 [1], clause 9.1 shall be carried out for general cordless audio devices.

## Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT)

The HS Requirements and conformance Test specifications Table (HS-RTT) in table A.1 serves a number of purposes, as follows:

- it provides a statement of all the essential requirements in words and by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it provides a statement of all the test procedures corresponding to those essential requirements by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it qualifies each requirement to be either:
  - Unconditional: meaning that the requirement applies in all circumstances; or
  - Conditional: meaning that the requirement is dependent on the manufacturer having chosen to support optional functionality defined within the schedule;
- in the case of Conditional requirements, it associates the requirement with the particular optional service or functionality;
- it qualifies each test procedure to be either:
  - Essential: meaning that it is included with the Essential Radio Test Suite and therefore the requirement shall be demonstrated to be met in accordance with the referenced procedures;
  - Other: meaning that the test procedure is illustrative but other means of demonstrating compliance with the requirement are permitted.

Table A.1: HS Requirements and conformance Test specifications Table (HS-RTT)

	Harmonized Standard EN 301 357-2 The following essential requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of the R&TTE Directive					
	Essential Requireme	nt	Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
1	Transmitter requirements for Band II LPD	4.2.1	С	For Band II LPD and combined devices	Е	5.3.1
2	Frequency error	4.2.2	С	For cordless audio devices in the range 25 MHz to 2 000 MHz	Е	5.3.2
3	Carrier power	4.2.3	С	For cordless audio devices in the range 25 MHz to 2 000 MHz	Е	5.3.3
4	Channel bandwidth	4.2.4	С	For cordless audio devices in the range 25 MHz to 2 000 MHz	Е	5.3.4
5	Spurious emissions and cabinet radiation	4.2.5	С	For cordless audio devices in the range 25 MHz to 2 000 MHz	Е	5.3.5
6	Cordless audio transmitter shutoff	4.2.6	С	For cordless audio devices in the range 25 MHz to 2 000 MHz	Е	5.3.6
7	Receiver spurious emissions and cabinet radiation	4.2.7	С	For cordless audio devices in the range 25 MHz to 2 000 MHz	Е	5.3.7

#### **Key to columns:**

#### **Essential Requirement:**

**No** A unique identifier for one row of the table which may be used to identify a requirement or its test

specification.

**Description** A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another

document is referenced explicitly.

#### **Requirement Conditionality:**

U/C Indicates whether the requirement is to be *unconditionally* applicable (U) or is *conditional* upon

the manufacturers claimed functionality of the equipment (C).

**Condition** Explains the conditions when the requirement shall or shall not be applicable for a technical

requirement which is classified "conditional".

#### **Test Specification:**

**E/O** Indicates whether the test specification forms part of the Essential Radio Test Suite (E) or whether

it is one of the Other Test Suite (O).

NOTE: All tests whether "E" or "O" are relevant to the requirements. Rows designated "E" collectively make up the Essential Radio Test Suite; those designated "O" make up the Other Test Suite; for those designated

"X" there is no test specified corresponding to the requirement. The completion of all tests classified "E" as specified with satisfactory outcomes is a necessary condition for a presumption of conformity. Compliance with requirements associated with tests classified "O" or "X" is a necessary condition for presumption of conformity, although conformance with the requirement may be claimed by an equivalent

test or by manufacturer's assertion supported by appropriate entries in the technical construction file.

Clause Number Identification of clause(s) defining the test specification in the present document unless another document is referenced explicitly Where no test is specified (that is, where the previous field is

"X") this field remains blank.

# Annex B (informative): The EN title in the official languages

Language	EN title			
Bulgarian				
Czech	Elektromagnetická kompatibilita a rádiové spektrum (ERM) – Bezšňůrová zvuková zařízení v rozsahu 25 MHz až 2 000 MHz – Část 2: Harmonizovaná EN pokrývající základní požadavky článku 3.2 Směrnice R&TTE			
Danish				
Dutch				
English	Electromagnetic compatibility and Radio spectrum Matters (ERM); Cordless audio devices in the range 25 MHz to 2 000 MHz; Part 2: Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive			
Estonian	Elektromagnetilise ühilduvuse ja raadiospektri küsimused (ERM); Raadiosagedusalas 25 MHz kuni 2000 MHz töötavad juhtmeta audioseadmed; Osa 2: Harmoneeritud EN R&TTE direktiivi artikli 3.2 põhinõuete alusel			
Finnish	Sähkömagneettinen yhteensopivuus ja radiospektriasiat (ERM); Taajuusalueella 25 MHz - 2000 MHz toimivat langattomat audiolaitteet; Osa 2: Yhdenmukaistettu standardi (EN), joka kattaa R&TTE-direktiivin artiklan 3.2 mukaiset olennaiset vaatimukset			
French				
German				
Greek				
Hungarian				
Icelandic	Þættir sem varða rafsegulsviðssamhæfi og fjarskiptatíðni (ERM); Hliðræn snúrulaus víðbandshljómtæki sem búin eru innbyggðum loftnetum og starfa á tíðnisviðinu 25 MHz til 2000 MHz; 2. hluti: Samræmdur Evrópustaðall skv. 2. mgr. 3. gr. í tilskipun 1999/5/EC um fjarskiptabúnað og endabúnað til fjarskipta			
Italian				
Latvian	Elektromagnētiskā saderība un radiofrekvenču spektra jautājumi (ERM). Bezvadu skaņas iekārtas diapazonā no 25 MHz līdz 2000 MHz. 2.daļa: Harmonizēts Eiropas standarts (EN), kas atbilst R&TTE Direktīvas 3.2.punktam			
Lithuanian	Elektromagnetinio suderinamumo ir radijo dažnių spektro dalykai. Belaidžiai garsiniai įtaisai, veikiantys nuo 25 MHz iki 2 000 MHz dažnių juostoje. 2 dalis. Darnusis Europos standartas, apimantis esminius 1999/5/EC* direktyvos 3.2 straipsnio reikalavimus			
Maltese	Kompatibilità elettromanjetika u materji relatati ma' spettru radjofoniku (ERM); Apparati awdjo bla wajers fil-medda 25 MHz sa 2 000 MHz; Parti 2: EN armonizzat taħt l-artiklu 3.2 tad-Direttiva R&TTE			
Norwegian	Elektromagnetisk kompatibilitet og Radiospektrum spørsmål (ERM); Snorløst lydutstyr i området 25 MHz til 2000 MHz; Del2: Harmonisert EN som dekker de grunnleggende krav i R&TTE-direktivets erikkel 3.2			
Polish				
Portuguese				
Romanian				
Slovak	Elektromagnetická kompatibilita a záležitosti rádiového spektra (ERM). Bezšnúrové zariadenia na prenos zvuku v rozsahu od 25 MHz do 2 000 MHz. Časť 2: Harmonizovaná EN vzťahujúca sa na základné požiadavky podľa článku 3.2 smernice R&TTE			
Slovenian	Elektromagnetna združljivost in zadeve v zvezi z radijskim spektrom (ERM) – Brezvrvične avdio naprave, delujoče v območju od 25 MHz do 2000 MHz – 2. del: Harmonizirani EN, ki zajema bistvene zahteve člena 3.2 direktive R&TTE			
Spanish				
Swedish	Elektromagnetisk kompatibilitet och radiospektrumfrågor (ERM); Sladdlösa audioapparater i området 25 MHz till 2000 MHz; Del 2: Harmoniserad EN omfattande väsentliga krav enligt artikel 3.2 i R&TTE-direktivet			

# Annex C (informative): Bibliography

ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".

Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).

Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.

# History

Document history						
V1.1.1	August 2000	Publication				
V1.2.1	June 2001	Publication				
V1.3.1	July 2006	Publication				
V1.4.1	December 2007	Public Enquiry	PE 20080418: 2007-12-19 to 2008-04-18			