



**Satellite Earth Stations and Systems (SES);
Harmonised Standard for NGSO Mobile Earth Stations (MESs)
including handheld earth stations, for Satellite
Personal Communications Networks (S-PCN)
operating in the 1 980 MHz to
2 010 MHz (earth-to-space) and 2 170 MHz to
2 200 MHz (space-to-earth) frequency bands under the Mobile Satellite
Service (MSS) covering the essential requirements
of article 3.2 of the Directive 2014/53/EU**

Reference

REN/SES-00384

Keywords

earth station, MES, MSS, regulation, satellite,
S-PCN

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
Modal verbs terminology.....	6
Introduction	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	8
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	10
4 Technical requirements specifications	10
4.1 Environmental profile.....	10
4.1.1 General.....	10
4.1.2 Temperature.....	10
4.1.3 Voltage.....	11
4.1.4 Vibration.....	11
4.2 Conformance requirements	11
4.2.1 Unwanted emissions outside the band 1 980,1 MHz to 2 009,9 MHz (carrier-on).....	11
4.2.1.1 Justification	11
4.2.1.2 Technical Requirement	11
4.2.1.3 Conformance Test.....	12
4.2.2 Unwanted emissions within the bands 1 980,1 MHz to 2 009,9 MHz, 1 978,1 MHz to 1 980,1 MHz and 2 009,9 MHz to 2 011,9 MHz (carrier-on).....	12
4.2.2.1 Justification	12
4.2.2.2 Technical Requirement	12
4.2.2.3 Conformance Test.....	13
4.2.3 Unwanted emissions in carrier-off state.....	13
4.2.3.1 Justification	13
4.2.3.2 Technical Requirement	13
4.2.3.3 Conformance Test	13
4.2.4 MES Control and Monitoring Functions (CMF)	14
4.2.4.1 Self-monitoring functions / Processor monitoring	14
4.2.4.1.1 Justification	14
4.2.4.1.2 Technical Requirement.....	14
4.2.4.1.3 Conformance Test	14
4.2.4.2 Self-monitoring functions / Transmit frequency generation sub-system monitoring.....	14
4.2.4.2.1 Justification	14
4.2.4.2.2 Technical Requirement.....	14
4.2.4.2.3 Conformance Test	14
4.2.4.3 Network control authorization	14
4.2.4.3.1 Justification	14
4.2.4.3.2 Technical Requirement.....	14
4.2.4.3.3 Conformance Test	15
4.2.4.4 Network control reception.....	15
4.2.4.4.1 Transmit frequency control	15
4.2.4.5 Fellow radio stations in a dual-mode or multi-mode terminal	15
4.2.4.5.1 Justification	15
4.2.4.5.2 Technical Requirement.....	15
4.2.4.5.3 Conformance Test	15
4.2.5 Equipment identity.....	15
4.2.5.1 Justification	15
4.2.5.2 Technical Requirement	15
4.2.5.3 Conformance Test	15

4.2.6	Receiver Adjacent Channel Selectivity.....	16
4.2.6.1	Justification	16
4.2.6.2	Technical Requirement	16
4.2.6.3	Conformance Test.....	16
4.2.7	Receiver Blocking Characteristics.....	16
4.2.7.1	Justification	16
4.2.7.2	Technical Requirement	16
4.2.7.3	Conformance Test.....	16
5	Testing for compliance with technical requirements.....	17
5.1	Environmental conditions for testing	17
5.1.1	Specification of the environmental test conditions	17
5.1.2	Tests under extreme voltage conditions.....	17
5.2	Essential radio test suites.....	17
5.2.1	General.....	17
5.2.1.1	Presentation of equipment for testing purposes.....	17
5.2.1.2	Description of equipment.....	17
5.2.1.3	Testing of host-connected equipment and plug-in modules	18
5.2.1.3.1	Alternative approaches	18
5.2.1.3.2	Alternative A: combined equipment.....	18
5.2.1.3.3	Alternative B: use of a test jig	19
5.2.1.4	CMF / Special Test Equipment (STE)	19
5.2.1.5	General test requirements.....	19
5.2.1.5.1	MES test modes	19
5.2.1.5.2	Special Test Equipment	19
5.2.1.5.3	Laboratory Test Equipment (LTE).....	20
5.2.1.5.4	Method of test for MES RF emissions according to equipment type	21
5.2.1.5.5	Procedures for measurement of MES RF radiated emissions.....	21
5.2.1.5.6	Procedures for measurement of MES RF conducted emissions	25
5.2.1.5.7	Interpretation of the measurement results.....	27
5.2.1.5.8	Test report.....	27
5.2.2	Unwanted emissions outside the band 1 980,1 MHz to 2 009,9 MHz (carrier-on).....	27
5.2.2.1	Method of test	27
5.2.2.2	Peak measurement.....	27
5.2.2.3	Average measurement.....	28
5.2.2.4	Test requirements	28
5.2.3	Unwanted emissions within the bands 1 980,1 MHz to 2 009,9 MHz, 1 978,1 MHz to 1 980,1 MHz and 2 009,9 MHz to 2 011,9 MHz (carrier-on).....	28
5.2.3.1	Method of test	28
5.2.3.2	Measurement method	29
5.2.3.3	Test requirements.....	29
5.2.4	Unwanted emissions in carrier-off state.....	29
5.2.4.1	Method of test	29
5.2.4.2	Measurement method	29
5.2.4.3	Test requirements.....	30
5.2.5	MES Control and Monitoring Functions (CMF)	30
5.2.5.1	Self-monitoring functions / Processor Monitoring	30
5.2.5.2	Self-monitoring functions / Transmit frequency generation sub-system monitoring.....	30
5.2.5.3	Network control authorization	30
5.2.5.3.1	Method of test.....	30
5.2.5.3.2	Test procedure	30
5.2.5.3.3	Test requirement	31
5.2.5.4	Network control reception.....	31
5.2.5.4.1	Transmit frequency control	31
5.2.5.5	Fellow radio stations in a dual-mode or multi-mode terminal	31
5.2.5.5.1	Method of test.....	31
5.2.5.5.2	Test procedure	32
5.2.5.5.3	Test requirements	32
5.2.6	Equipment identity.....	32
5.2.6.1	Method of test	32
5.2.6.2	Test procedure.....	32
5.2.6.3	Test requirements	32

5.2.7	Receiver Adjacent Channel Selectivity.....	32
5.2.7.1	General	32
5.2.7.2	Test set-up	32
5.2.7.3	Test procedure.....	33
5.2.8	Receiver Blocking Characteristics	33
5.2.8.1	General	33
5.2.8.2	Test set-up	33
5.2.8.3	Test procedure.....	33
Annex A (normative):	Relationship between the present document and the essential requirements of Directive 2014/53/EU	35
Annex B (informative):	Explanation of nominated bandwidth.....	37
B.1	Introduction	37
B.2	Interpretation of Parameters $[B_n, f_C, a, b]$	37
B.3	Choice of nominated bandwidth.....	37
B.4	Maximum value for nominated bandwidth	39
Annex C (informative):	Bibliography.....	41
History		42

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Satellite Earth Stations and Systems (SES), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.2] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [7].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive and associated EFTA regulations.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the Directive 2014/53/EU [7]. The modular structure is shown in ETSI EG 201 399 [i.1].

1 Scope

The present document applies to Mobile Earth Station (MES) radio equipment which have the following characteristics:

- these MES operate in a non-geostationary orbit (NGSO) mobile-satellite system;
- these MES have both transmit and receive capabilities and operate in a Satellite-Personal Communications Network (S-PCN). An S-PCN MES may be handheld, portable, vehicle-mounted, host connected, semi-fixed or fixed equipment, or may be an element in a multi-mode terminal. It may consist of a number of modules with associated connections and user interface, or may be a self-contained single unit;
- these LMESs are controlled and monitored by a Network Control Facility (NCF). The NCF is outside the scope of the present document;
- if the MES is an element in a multi-mode terminal, unless otherwise stated in the present document, its requirements apply only to the S-PCN MES element of the terminal operating in the MSS frequency bands given in table 1;
- these MES are capable in operating in all or part of the frequency bands shown in table 1.

Table 1: Mobile Satellite Service (MSS) frequency bands

MES	MSS frequency bands
Transmit (earth to space)	1 980 MHz to 2 010 MHz
Receive (space to earth)	2 170 MHz to 2 200 MHz

The present document is intended to cover the provisions of Directive 2014/53/EU [7] (RE Directive) article 3.2 which states that "...radio equipment shall be so constructed that it both effectively uses and supports the efficient use of radio spectrum in order to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of Article 3 of the Directive 2014/53/EU [7] may apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the ETSI web site.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] Void.
- [2] Recommendation ITU-T O.153 (1992): "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [3] IEC 60068-2-1 (March 2007): "Environmental testing - Part 2-1: Tests - Test A: Cold".
- [4] IEC 60068-2-2 (July 2007): "Environmental testing - Part 2-2: Tests - Test B: Dry heat".

- [5] IEC 60068-2-64 (April 2008) Ed. 2.0: "Environmental testing - Part 2-64: Tests - Test Fh: Vibration, broadband random and guidance".
- [6] Void.
- [7] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EG 201 399 (V3.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of Harmonized Standards for application under the Radio & Telecommunication Terminal Equipment Directive 1999/5/EC (R&TTE) and a first guide on the impact of the Radio Equipment Directive 2014/53/EU (RED) on Harmonized Standards".
- [i.2] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the Directive 2014/53/EU [7] and the following apply:

applicant: manufacturer or his representative within the European Community or the person responsible for placing the apparatus on the market

carrier-off state (idle mode): state in which the MES is not transmitting a carrier

carrier-on state (allocated a channel): state in which the MES is transmitting a carrier

conducted measurement: measurement of emissions from an antenna port of the MES made by direct wired connection to the port

environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document

Equivalent Isotropically Radiated Power (EIRP): product of transmitter power and maximum antenna gain, equivalent to an isotropic source radiating uniformly in all directions

handheld: state in which the MES is transmitting a carrier PE MES which is self-contained and is small enough and light enough to be carried and used during a call with one hand

host-connected: state in which the MES is transmitting a carrier MES for which connection to or integration with host equipment is necessary to offer functionality

host equipment: any equipment which has a complete user functionality when not connected to the MES, and to which the MES provides additional functionality, and to which connection is necessary for the MES to offer functionality

in-band signals: signals which are located in the operating band plus an offset of 10 MHz outside this operating band

Installable Equipment (IE), Internally Mounted Equipment (IME) and Externally Mounted Equipment (EME):

Installable Equipment (IE) is an equipment which is intended to be installed in a vehicle

NOTE: An IE may consist of one or several interconnected modules. The IE is composed of modules intended to be externally mounted as declared by the applicant, and defined as Externally Mounted Equipment (EME) and the remaining modules(s) as Internally Mounted Equipment (IME).

Laboratory Test Equipment (LTE): logical grouping that contains the standard test equipment provided by a test laboratory

MSS band: continuous range of frequencies allocated by the ITU to the MSS

multi-mode: equipment that accommodates radio stations of different radio networks

narrow-band system: narrow band system is one in which the nominal carrier frequency spacing for MESs in the earth-to-space direction is less than 300 kHz

NCF control message: message, normally originating from a network, to a specified terminal or set of terminals of the network which indicates to the terminal or set of terminals that it/they should carry out some specific action or should enter or maintain some specific state

NOTE: For test purposes NCF control messages may originate from Special Test Equipment (STE).

network control channel: channel by which an MES receives general control information from the NCF of its S-PCN

nominated bandwidth (Bn): Bn of the Mobile Earth Station (MES) radio frequency transmission is wide enough to encompass all spectral elements of the transmission which have a level greater than the specified levels of unwanted emissions

NOTE 1: The Bn is defined relative to the MES actual carrier frequency f_c .

Bn is the width of the frequency interval ($f_c - a$, $f_c + b$), where a and b, which should be specified by the applicant, may vary with f_c .

The frequency interval ($f_c - a$, $f_c + b$) should not encompass more than either:

- i) when $a = b$, 4 nominal carrier frequencies for narrow-band systems;
- ii) when $a \neq b$, 1 nominal carrier frequency for narrow-band systems; or
- iii) 1 nominal carrier frequency for wide-band systems.

The frequency interval ($f_c - a$, $f_c + b$) should be within the operational band of the MES.

NOTE 2: Explanation of nominated bandwidth is presented in annex B.

operational band: sub-portion of the band 1 980 MHz to 2 010 MHz which has been assigned in the earth-to-space direction to the MSS network, within which the MES is operating

Portable Equipment (PE): Portable Equipment (PE) is generally intended to be self-contained, free standing and portable

NOTE: A PE would normally consist of a single module, but may consist of several interconnected modules.

radiated measurement: measurement of an actual radiated field

Special Test Equipment (STE): equipment which allows a test laboratory to control the MES so that the tests required by the present document can be performed

test laboratory: laboratory which performs the conformance testing of the MES against the present document. The test laboratory may be the applicant's laboratory

test load: test load is a substantially non-reactive, non-radiating power attenuator which is capable of safely dissipating the power from the transmitter(s)

unwanted emissions: unwanted emissions are those falling outside the nominated bandwidth in the carrier-on state and those generated in the carrier-off state

wide-band system: wide-band system is one in which the nominal carrier frequency spacing for MESs in the earth-to-space direction is equal or greater than 300 kHz

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASD	Acceleration Spectral Density
BE _L	Lower Band Edge of the operating band
BE _U	Upper Band Edge of the operating band
B _n	nominated Bandwidth
BW	Bandwidth
CDMA	Code Division Multiple Access
CMF	Control and Monitoring Functions
CW	Continuous Wave
EFTA	European Free Trade Association
EIRP	Equivalent Isotropically Radiated Power
EMC	Electro-Magnetic Compatibility
EME	Externally Mounted Equipment
EU	European Union
EUT	Equipment Under Test
IE	Installable Equipment
IEC	International Electrotechnical Commission
IME	Internally Mounted Equipment
ITU	International Telecommunications Union
ITU-T	ITU Telecommunication Standardization Sector
LTE	Laboratory Test Equipment
LTE	Long Term Evolution
MES	Mobile Earth Station
MIC	MES unique Identification Code (within its S-PCN)
MSS	Mobile Satellite Service
NCF	Network Control Facility
NGSO	Non GeoStationary Orbit
PCN	Personal Communications Network
PE	Portable Equipment
R&TTE	Radio and Telecommunications Terminal Equipment
RE	Radio Equipment
RED	Radio Equipment Directive
RF	Radio Frequency
SNR	Signal to Noise Ratio
S-PCN	Satellite Personal Communications Network
STE	Special Test Equipment
TDMA	Time Division Multiple Access

4 Technical requirements specifications

4.1 Environmental profile

4.1.1 General

The technical requirements of the present document apply under the environmental profile specified below for operation of the equipment. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the specified operational environmental profile.

4.1.2 Temperature

The MES shall fulfil all the requirements in the full temperature ranges of:

- -10 °C to +55 °C;

Taken from IEC publications 60068-2-1 [3] and 60068-2-2 [4].

4.1.3 Voltage

The applicant shall declare the nominal, lower and the higher extreme voltages.

The MES shall fulfil all the requirements in the full voltage range between the extreme voltages.

4.1.4 Vibration

The MES shall fulfil all the requirements when vibrated at the frequency/amplitudes given in table 2.

Table 2: Vibration characteristics

Frequency range	ASD (Acceleration Spectral Density) random vibration
5 Hz to 20 Hz	0,96 m ² /s ³ (+0/-5 %)
20 Hz to 500 Hz	0,96 m ² /s ³ (+ 0/-5 %) at 20 Hz, thereafter -3 dB/Octave (+0/-5 %) (taken from IEC Publication 60068-2-64 [5])

4.2 Conformance requirements

4.2.1 Unwanted emissions outside the band 1 980,1 MHz to 2 009,9 MHz (carrier-on)

4.2.1.1 Justification

Protection of other radio services operating outside the band 1 980 MHz to 2 010 MHz from emissions caused by S-PCN MESs operating within the band 1 980,1 MHz to 2 009,9 MHz.

4.2.1.2 Technical Requirement

The maximum EIRP density of the unwanted emissions from the MES outside the band 1 980,1 MHz to 2 009,9 MHz shall not exceed the limits in table 3.

In table 3, whenever a change of limit between adjacent frequency bands occurs, the lower of the two limits shall apply at the transition frequency.

Table 3: Unwanted emissions outside the band 1 980,1 MHz to 2 009,9 MHz

Frequency (MHz)	Carrier - on		
	EIRP (dBW)	Measurement bandwidth	Measurement method
0,1 to 30	-66	10 kHz	Peak hold
30 to 1 000	-66	100 kHz	Peak hold
1 000 to 1 559	-60	3 MHz	Average
1 559 to 1 626,5	-70	1 MHz	Average (over 20 ms)
1 626,5 to 1 950	-60	3 MHz	Average
1 950 to 1 960	-60	1 MHz	Average
1 960 to 1 970	-60	300 kHz	Average
1 970 to 1 975	-60	100 kHz	Average
1 975 to 1 978,1	-60	30 kHz	Average
1 978,1 to 1 980,1	The levels in table 4 for the frequency offset 0 to 2 MHz shall apply from 1 980,1 MHz to 1 978,1 MHz		
1 980,1 to 2 009,9	Not applicable	Not applicable	Not applicable
2 009,9 to 2 011,9	The levels in table 4 for the frequency offset 0 to 2 MHz shall apply from 2 009,9 MHz to 2 011,9 MHz		
2 011,9 to 2 015	-60	30 kHz	Average
2 015 to 2 020	-60	100 kHz	Average
2 020 to 2 030	-60	300 kHz	Average
2 030 to 2 040	-60	1 MHz	Average
2 040 to 2 600	-60	3 MHz	Average
2 600 to 12 750	-60	3 MHz	Peak hold

The conformance requirements apply for the full range of environmental conditions corresponding to the type of equipment as specified in clause 4.1.

4.2.1.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.2.

4.2.2 Unwanted emissions within the bands 1 980,1 MHz to 2 009,9 MHz, 1 978,1 MHz to 1 980,1 MHz and 2 009,9 MHz to 2 011,9 MHz (carrier-on)

4.2.2.1 Justification

Protection of radio services and systems operating within the frequency band 1 978,1 MHz to 2 011,9 MHz from unwanted emissions caused by S-PCN MESs operating in the band 1 980,1 MHz to 2 009,9 MHz.

4.2.2.2 Technical Requirement

The maximum EIRP spectral density of the unwanted emissions from the MES within the band 1 978,1 MHz to 2 011,9 MHz shall not exceed the limits in tables 4 or 5, as applicable.

In tables 4 and 5, whenever a change of limit between adjacent frequency bands occurs, the lower of the two limits shall apply at the transition frequency.

When conflicts between multiple requirements exist, the more stringent requirement applies.

Table 4: Maximum unwanted emissions within the bands 1 980,1 MHz to 2 009,9 MHz from a TDMA carrier, and maximum unwanted emissions within the bands 1 978,1 MHz to 1 980,1 MHz and 2 009,9 MHz to 2 011,9 MHz from any carrier

Frequency offset (kHz) (note 1)	Carrier - on		
	EIRP (dBW)	Measurement bandwidth (kHz)	Measurement method
0 to 166	0 - (offset × 55/166)	3 kHz	Average
166 to 575	-55	3 kHz	Average
575 to 1 175	-60	3 kHz	Average
1 175 to 1 525	-50 - ((offset - 1 175) × 5/350)	30 kHz (note 2)	Average
1 525 to 32 000	-55	30 kHz (note 2)	Average

NOTE 1: Frequency offset is determined from edge of nominated bandwidth.
NOTE 2: The measurement bandwidth used may be 3 kHz if the unwanted EIRP limits are reduced correspondingly.

Table 5: Maximum unwanted emissions within the band 1 980,1 MHz to 2 009,9 MHz from a CDMA carrier

Frequency offset (kHz) (note)	Carrier - on		
	EIRP (dBW)	Measurement bandwidth (kHz)	Measurement method
0 to 160	-35	30	Average
160 to 2 300	-35 - ((offset - 160) × 21 / 2 140)	30	Average
2 300 to 32 000	-56	30	Average

NOTE: Frequency offset is determined from the edge of nominated bandwidth.

The conformance requirements apply for the full range of environmental conditions corresponding to the type of equipment as specified in clause 4.1.

4.2.2.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.3.

4.2.3 Unwanted emissions in carrier-off state

4.2.3.1 Justification

Protection of other radio services and systems from unwanted emissions caused by MESs in the carrier-off state.

4.2.3.2 Technical Requirement

The maximum EIRP of the unwanted emissions from the MESs in the carrier-off state shall not exceed the limits in table 6.

In table 6, whenever a change of limit between adjacent frequency bands occurs, the lower of the two limits shall apply at the transition frequency.

Table 6: Maximum EIRP of the unwanted emissions in the carrier-off state

Frequency (MHz)	EIRP (dBW)	Measurement bandwidth	Measurement method
0,1 to 30	-87	10 kHz	peak hold
30 to 1 000	-87	100 kHz	peak hold
1 000 to 12 750	-77	100 kHz	peak hold

The conformance requirements apply for the full range of environmental conditions corresponding to the type of equipment as specified in clause 4.1.

4.2.3.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.4.

4.2.4 MES Control and Monitoring Functions (CMF)

4.2.4.1 Self-monitoring functions / Processor monitoring

4.2.4.1.1 Justification

Protection of radio services and systems from uncontrolled RF transmissions from the MES.

4.2.4.1.2 Technical Requirement

The MES shall incorporate a processor monitoring function for each of its processors involved in the manipulation of traffic and in control and monitoring functions.

The processor monitoring function shall detect failure of the processor hardware and software.

Not later than 1 s after any detectable fault condition occurs, the transmissions shall be suppressed (carrier-off) until the processor monitoring function has determined that all fault conditions have been cleared.

The fault conditions which cause transmission shutdown shall be specified by the applicant and declared by the applicant.

The conformance requirements apply for the environmental conditions as specified in clause 4.1.

4.2.4.1.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.5.1.

4.2.4.2 Self-monitoring functions / Transmit frequency generation sub-system monitoring

4.2.4.2.1 Justification

Protection of radio services and systems from uncontrolled RF transmissions from the MES.

4.2.4.2.2 Technical Requirement

The MES shall incorporate a transmit frequency generation sub-system monitoring function.

Not later than 5 s after any detectable failure of the transmit frequency generation sub-system occurs, the transmissions shall be suppressed (carrier-off) until the transmit frequency generation sub-system monitoring function has determined that all fault conditions have been cleared.

The fault conditions which cause transmission shutdown shall be specified by the applicant and declared by the applicant.

The conformance requirements apply for the environmental conditions as specified in clause 4.1.

4.2.4.2.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.5.2.

4.2.4.3 Network control authorization

4.2.4.3.1 Justification

Protection of radio services and systems from uncontrolled RF transmissions from the MES.

4.2.4.3.2 Technical Requirement

During POWER-ON no transmissions shall occur from the MES.

Following POWER-ON the MES shall enter a controlled, non-transmitting (carrier-off) state. This state shall be maintained whilst the MES is not synchronized with the appropriate network control channel(s).

Without synchronizing to the appropriate network control channel(s), it shall not be possible to initiate carrier-on state.

Within 30 s of having lost the appropriate network control channel(s) the MES shall suppress transmissions (carrier-off).

The conformance requirements apply for the environmental conditions as specified in clause 4.1.

4.2.4.3.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.5.3.

4.2.4.4 Network control reception

4.2.4.4.1 Transmit frequency control

4.2.4.4.1.1 Justification

Protection of radio services and systems from uncontrolled RF transmissions from the MES.

4.2.4.4.1.2 Technical Requirement

The MES shall set the carrier frequency of its transmission according to the command of the NCF. The carrier frequency has to be controlled such, that the entire nominated bandwidth of the terminal falls completely within the operational frequency band(s) specified by the applicant and declared by the applicant.

The conformance requirements apply for the environmental conditions as specified in clause 4.1.

4.2.4.4.1.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.5.4.1.

4.2.4.5 Fellow radio stations in a dual-mode or multi-mode terminal

4.2.4.5.1 Justification

Protection of radio services and systems from uncontrolled RF transmissions from the MES.

4.2.4.5.2 Technical Requirement

Any fellow radio station in a multi-mode MES shall not transmit without reception of a network control channel for the system for which it is designed.

The conformance requirements apply for the environmental conditions as specified for the fellow radio station.

4.2.4.5.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.5.5.

4.2.5 Equipment identity

4.2.5.1 Justification

Protection of radio services and systems from uncontrolled RF transmissions from the MES.

4.2.5.2 Technical Requirement

Each MES shall have a unique MES Identification Code (MIC) within its S-PCN.

It shall not be possible for the user to alter the MIC using any normally accessible procedure.

The MES shall be capable of transmitting its identification code upon reception of an appropriate NCF command addressed to it.

The conformance requirements apply for the environmental conditions as specified in clause 4.1.

4.2.5.3 Conformance Test

Conformance tests shall be carried out in accordance with clause 5.2.6.

4.2.6 Receiver Adjacent Channel Selectivity

4.2.6.1 Justification

To enable reception of a wanted signal in presence of other signals in the adjacent channel.

Adjacent channel selectivity is a measure of a receiver's ability to receive a signal at its assigned channel frequency in the presence of a signal in the adjacent channel at a given frequency offset from the centre frequency of the assigned channel.

4.2.6.2 Technical Requirement

The frequency offset and relative power level of the adjacent signal compared to the wanted signal shall take the values given in table 7. The adjacent signal shall occupy the same bandwidth as the wanted signal where BW is the wanted signal occupied bandwidth. There shall be no more than 0,5 dB degradation in the receiver signal to noise ratio under these conditions.

Table 7: Adjacent Channel frequency and power level

Signal	Centre frequency offset from wanted signal	Power level relative to wanted signal
Adjacent signal	BW	12 dB

4.2.6.3 Conformance Test

Conformance tests described in clause 5.2.7 shall be carried out.

4.2.7 Receiver Blocking Characteristics

4.2.7.1 Justification

To prevent high power signals outside the receive frequency band from blocking the reception of signals inside the receive frequency band.

The blocking characteristic is a measure of the receiver's ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the spurious response or the adjacent channels, without this unwanted input signal causing a degradation of the performance of the receiver beyond a specified limit. Receiver blocking is specified for in-band signals. In-band signals are signals in the range:

$$BE_L - 10 \text{ MHz to } BE_U + 10 \text{ MHz,}$$

where BE_L and BE_U are the lower and upper edges of the operating band respectively.

4.2.7.2 Technical Requirement

The receiver performance degradation, in terms of signal to noise ratio, shall not exceed 1 dB when the unwanted signal as specified in table 8 is present.

Table 8: Test parameters for in-band blocking characteristics

Interfering Signal	In-band Frequency Range (MHz)	Frequency offset from wanted carrier (MHz)	Level (dBm)
CW	$BE_L - 10 \text{ MHz to } BE_U + 10 \text{ MHz}$	5	-40 (note)
NOTE: This limit was set based on current MSS terminals receiver blocking performances using CW as blocking interferer. It is critical to note that a CW blocker does not represent a real operation interference scenario, and that terminals will experience much more harmful interference from a broadband signal interferer such as LTE, compared to a CW interferer with the same power level.			

4.2.7.3 Conformance Test

Conformance tests described in clause 5.2.8 shall be carried out.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

5.1.1 Specification of the environmental test conditions

The tests in clauses 5.2.2, 5.2.3 and 5.2.4 shall be performed under the conditions given in table 9.

Table 9: Environmental test conditions

Equipment Category	Temperature	Voltage
Handheld	Normal	Normal condition voltage (± 1 %)
other than handheld	Normal	Higher extreme voltage (+0/-2 %)
other than handheld	Normal	Lower extreme voltage (-0/+2 %)

Normal temperature shall be between +15 °C and +35 °C.

All other tests shall be performed under normal conditions for temperature and voltage, and without vibration.

5.1.2 Tests under extreme voltage conditions

During tests under extreme voltage conditions, the power source of the equipment shall be replaced by a test power source, capable of producing extreme test voltages as specified in clause 5.1.1. The internal impedance of the test power source shall be low enough for its effect on the test results to be negligible. For the test purposes, the voltage of the power source shall be measured at the input terminals of the equipment.

If the equipment is provided with a permanently connected power cable, the test voltage shall be measured at the point of connection of the power cable to the equipment.

In equipment with incorporated batteries, the test power source shall be applied as close to the battery terminals as is practical. In each case connections shall be made readily available by the applicant.

During tests, the power source voltages shall be maintained within a tolerance of ± 3 % relative to the voltage at the beginning of each test.

5.2 Essential radio test suites

5.2.1 General

5.2.1.1 Presentation of equipment for testing purposes

The applicant may provide to a test laboratory one or more preliminary or production models of the MES equipment, as appropriate, for testing for conformance against the technical requirements of the present document.

If the MES is intended for use with an active antenna, this shall be provided as part of the MES.

If a statement of conformance with the present document is given by the test laboratory on the basis of tests on a preliminary model, then the statement of conformance shall apply to corresponding production models only if they are identical in all technical respects with the preliminary model tested.

5.2.1.2 Description of equipment

The applicant shall provide to the test laboratory a statement which contains all of the information related to the MES and its testing environment which will enable the test laboratory to run an appropriate test suite against the MES.

This shall include:

- self-contained or host-connected;
- single-mode or multi-mode;

- antenna:
 - active; or
 - passive, with an antenna port available; or
 - passive, no antenna port available.

NOTE 1: If the MES has an active antenna, the antenna is regarded as an integral part of the MES.

NOTE 2: If the MES is intended for use with a passive antenna, the maximum gain of any antenna intended to be used with the equipment is to be stated.

- the method by which the equipment can be switched into its test modes;

NOTE 3: If Special Test Equipment (STE) is required see clause 5.2.1.4 and clause 5.2.1.5.2.

- the fault conditions which cause transmission shut-down;
- the nominal, the lower extreme and the higher extreme operational voltages;
- in the case of a multi-mode MES, the other modes of operation;
- if the conducted emission measurements are to be performed:
 - the gain at the frequency of the measured spurious emission, according to the choice of the applicant.
- in an information leaflet, for each S-PCN for which the MES is designed to operate:
 - 1) the name of the S-PCN;
 - 2) the maximum value of nominated bandwidth for that S-PCN, as defined by the network operator;
 - 3) the a and b values of the nominated bandwidth for each nominal carrier frequency of the MES;
 - 4) the operating frequency range(s) of the MES;
 - 5) the frequency sub-bands and operating conditions for which the different EIRP density limits apply;
 - 6) the maximum gross data rate at which the MES is designed to operate;
 - 7) the agreement of the network operator to the above information.

5.2.1.3 Testing of host-connected equipment and plug-in modules

5.2.1.3.1 Alternative approaches

For equipment for which connection to or integration with host equipment is required to offer functionality, two alternative approaches are permitted. The applicant shall decide which alternative shall be used.

5.2.1.3.2 Alternative A: combined equipment

Under alternative A, a combination of MES and a specific type of host equipment shall be used for testing according to the present document.

Where more than one such combination is intended, testing shall not be repeated for combinations of MES and other host equipment where the latter are substantially similar, in particular such that the host models are unlikely to significantly influence the emissions of the MES.

Where more than one such combination is intended and host equipment are not substantially similar, one combination shall be tested against the full set of requirements of the present document; other combinations shall be tested separately for radiated emissions only.

5.2.1.3.3 Alternative B: use of a test jig

Under alternative B, where the MES is intended for use with a variety of host equipment, the applicant shall supply a suitable test jig that is representative of the range of host equipment in which the MES may be used. In particular, the test jig shall be designed such that any alteration of the MES's emissions is minimized. The test jig shall allow the MES part to be powered and stimulated in a way similar to the way it would be powered and stimulated when connected to or inserted into the host equipment.

The MES shall be tested against the full set of requirements of the present document.

5.2.1.4 CMF / Special Test Equipment (STE)

The STE shall provide the necessary facilities for tests which require that the MES be operated in its normal operating manner, situated in an environment where receipt of a network control channel and of NCF commands is under the control of the test laboratory.

This STE shall provide the means to generate and to communicate to the MES, either radiated via its antenna or conducted via direct connection to its antenna port, the network control channel and the required NCF commands, under the control of the test laboratory.

The STE shall also provide means for the test laboratory to interface its test equipment with the MES for the purpose of monitoring the MES responses.

For other tests, where the required test mode cannot be, or is not, provided by a special test facility within the MES, then STE shall also provide the facility to put the MES into these required test modes.

This will require the provision either by the applicant, or the manufacturer, of Special Test Equipment.

5.2.1.5 General test requirements

5.2.1.5.1 MES test modes

The MES is required to be placed in a number of different test modes in order for the various tests specified within the present document to be carried out:

- 1) power-off;
- 2) power-on (applies to all the following test modes);
- 3) carrier-off;
- 4) carrier-on, maximum transmit power, in a specified channel in an operational band, modulated with the test modulating signal;
- 5) carrier-on, maximum transmit power, in a specified channel in an operational band, set by NCF command, modulated with the test modulating signal;

NOTE: If this is available for all tests, mode 4 is not required separately.

- 6) carrier-on (detectable).

The MES may be placed into test modes 4 and 5 either by means of a special facility existing internally in the MES, or by means of a Special Test Equipment (STE).

If the MES has been modified by the applicant for these tests, then full documentation showing such modification(s) shall be provided to demonstrate that the modification(s) will not cause the test results to deviate from normal operational performance.

5.2.1.5.2 Special Test Equipment

5.2.1.5.2.1 Use of STE for control and monitoring functions tests

The test arrangement shall be as shown in figure 1 for radiated and conducted measurements.

This test arrangement assumes that the STE is responsible for simulating for the MES the NCF commands or network control channel in the same way as they are received by the MES in normal operating mode. The response received by the STE from the MES shall be routed to the LTE without modification that would significantly affect the measurement.

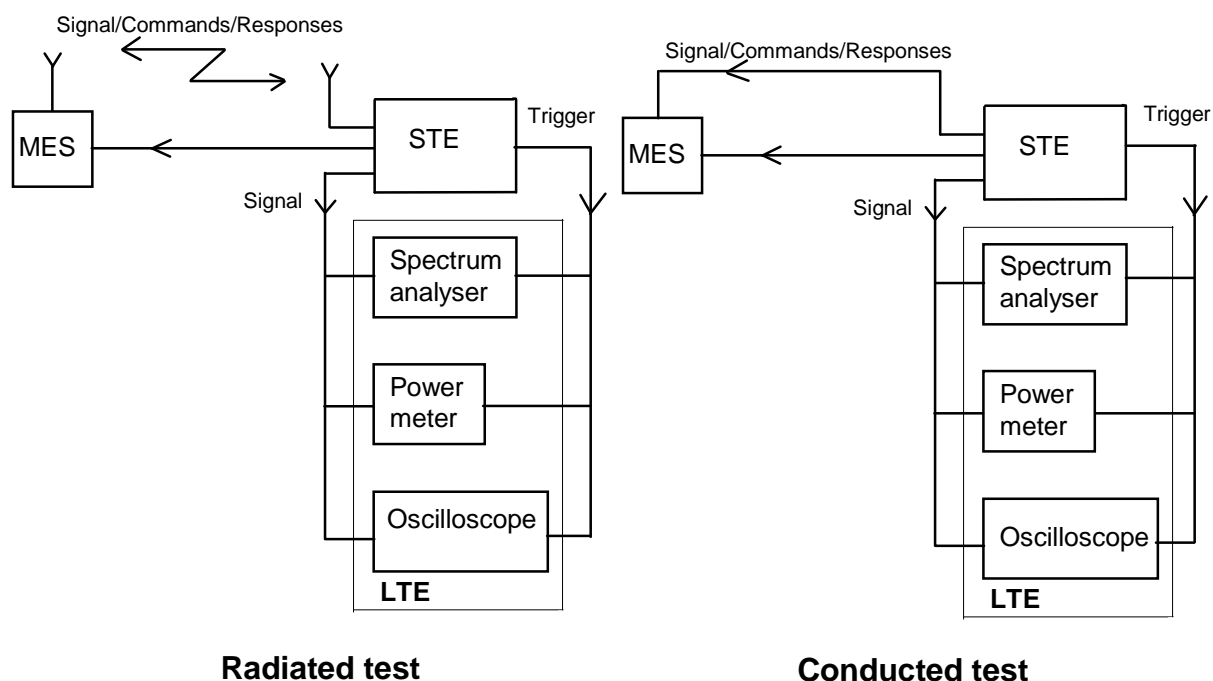


Figure 1: General test arrangement for control and monitoring tests

The dual trace storage oscilloscope, or other suitable method, may be used to monitor the response of the MES to the simulated events by measuring the time difference between the event or command reception, and the compliance with that event.

The power meter and spectrum analyser shall be used to monitor the MES output signal during all the test procedure.

5.2.1.5.2.2 Test modulating signal

The test modulating signal is a baseband signal which modulates the carrier of the MES and is dependent upon the type of equipment under test. It is a signal representing a pseudorandom bit sequence of at least 511 bits in accordance with Recommendation ITU-T O.153 [2]. This sequence shall be continuously repeated and shall be at the maximum bit rate declared by the applicant at which the MES is able to operate.

If not internally generated by the MES, this test modulating signal shall be provided by the STE.

5.2.1.5.3 Laboratory Test Equipment (LTE)

The Laboratory Test Equipment (LTE) is a logical grouping that contains the measurement equipment provided by the test laboratory.

It shall be verified that the responses of the LTE, including any test antenna, to a constant amplitude sine wave signal remain within ± 1 dB of calibration across the frequency range of interest.

The maximum values of measurement uncertainty for the LTE associated with each measurement parameter given in table 10 for a 95 % confidence level, shall apply as appropriate to the test cases described in the present document.

Table 10: Measurement uncertainties

Measured parameter	Measurement uncertainty
Radio Frequency above 1 MHz	± 1 part in 10^7
EIRP density within the operational band	$\pm 0,75$ dB
Unwanted radiated emissions	± 6 dB
Unwanted conducted emissions	± 4 dB

5.2.1.5.4 Method of test for MES RF emissions according to equipment type

Measurements shall be performed according to the equipment type.

Table 11: Options for testing

Equipment with passive antenna port available (external, internal or temporary)	Radiated from cabinet from 30 MHz to 4 GHz (passive antenna port connected to a dummy load), and conducted from the passive antenna port, from 100 kHz to 12,75 GHz
Equipment with no passive antenna port available	Radiated from complete MES, including its antenna, from 30 MHz to 12,75 GHz

The methods of measurement for radiated emissions are described in clause 5.2.1.5.5.

The methods of measurement for conducted emissions are described in clause 5.2.1.5.6.

5.2.1.5.5 Procedures for measurement of MES RF radiated emissions

5.2.1.5.5.1 General

Clause 5.2.1.5.5 contains methods for tests involving the measurement of a radiated field. This field may be radiated by an antenna and/or by the cabinet of the equipment itself.

It is recognized that for some parameters, alternative test methods may exist. It is the responsibility of the test laboratory to ensure that any alternative test method used yields results identical to those described in the present document.

5.2.1.5.5.1.1 Test site

The standard test site shall be a calibrated open air test site, whose dimensions are appropriate to the frequency range of measurements.

All radiated measurement tests shall be conducted in such a way as to ensure that there is no interference to operational satellite and terrestrial systems. In some cases operating on a test site may produce electromagnetic perturbation or, conversely, external radiation may disturb the measurement. For these reasons, and also in order to reduce the space required, or to perform tests under extreme environmental conditions, other arrangements may be used, such as:

- anechoic chamber;
- indoor test site.

In addition, it shall be verified that the test site shall be suitable with respect to ambient noise which shall be at least 6 dB lower than the lowest specification value being measured.

The methods of measurement described in this clause are based on an open air test site. If an anechoic chamber or an indoor test site are used, some changes may apply to the method of measurement. For each radiated measurement, the nature and the dimensions of the test arrangement used shall be recorded in the test report.

5.2.1.5.5.1.2 Test set up for radiated emissions of the MES

The tests shall be carried out with the MES at the specified environmental conditions and for the specified power supply voltages.

For IE, EME and IME it shall be installed with a separation of approximately 0,5 m. Between the two equipment, the maximum length connection cable specified by the applicant shall be installed. The height of the cable shall be between 0,5 m and 1 m. The cable shall be maintained in that position by non-metallic means. The EME shall be set, in its normal operating configuration on a non-conducting support at a height between 0,5 m and 1 m. The IME shall be set on a non-conducting support at a height between 0,5 m and 1 m. Any associated equipment, if required for normal operation of the MES, shall be placed next to, and at the same height as the IME.

For PE, the equipment shall be arranged in its normal operating configuration as recommended by the applicant on a non-metallic table at a height between 0,5 m and 1 m.

The MES under test shall be placed on the support in its standard position and shall be switched-on.

Each antenna (MES antenna and test antenna) shall be positioned to be outside the near field of the other antenna.

The spectrum analyser noise floor shall be at least 6 dB below the minimum value to be measured.


5.2.1.5.5.1.3 Reference position of the MES

During radiated measurements, the MES is required to be oriented specifically in relation to the test antenna connected to the LTE. This position is called the reference position and is determined as follows:

- the MES shall be placed in a mode whereby it is transmitting;
- the MES shall be rotated in both horizontal and vertical planes in order to locate the direction of maximum field strength that is detected by the test antenna. This orientation shall be called the reference position.

5.2.1.5.5.2 Measurement procedure for radiated emissions (peak)

5.2.1.5.5.2.1 Measurement procedure for peak radiated emissions of the MES

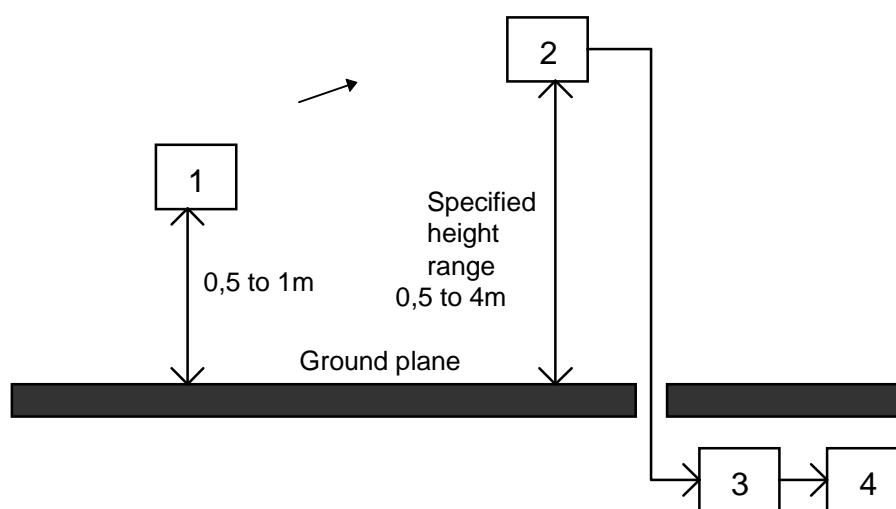


- 1) MES under test (with antenna).
- 2) Test antenna.
- 3) Input filter (if necessary).
- 4) Spectrum analyser.

Figure 2: Measurement arrangement number 1

Measurement arrangement number 1 of figure 2 shall be used.

- For each measurement bandwidth, the following actions shall be performed:
 - the MES shall be placed in the reference position as described in clause 5.2.1.5.5.1.3;
 - the test antenna shall have the same polarization as the MES and connected to a spectrum analyser, eventually through a suitable entry filter to avoid overloading of the spectrum analyser;
 - precautions may be required to ensure that the filter does not attenuate the harmonics of the carrier;
 - the test antenna and the entry filter shall be suitable for the measured frequency band, and replaced by other each time it will be necessary;
 - the spectrum analyser shall be tuned to the measurement bandwidth to analyse;
 - the resolution bandwidth of the spectrum analyser shall be set to a suitable value to correctly perform the measurement, and the peak hold function shall be activated. The video bandwidth shall be set to at least 3 times the resolution bandwidth.

- b) Only the discrete signals having a level equal or greater than 6 dB below the specified limit shall be precisely measured:
- the test antenna shall be raised or lowered through the specified height range to look for the maximum signal on the spectrum analyser (this may not be necessary if the test site is an anechoic chamber or an in-door test site);
 - the maximum measured value shall be recorded.
- c) The procedure is repeated from a) to b) with the other measurement bandwidths to cover all the frequency range to be analysed.
- d) In the case where the test site has been calibrated before, the absolute measurement is sufficient to determine the actual value of EIRP of the radiated emissions. The precise knowledge of distance between the MES and the test antenna, and the characteristics of the test antenna and the input filter allow the determination of the EIRP radiated by the MES.
- e) In the case where the test site cannot be calibrated, a relative measurement can be done according to the following procedure:

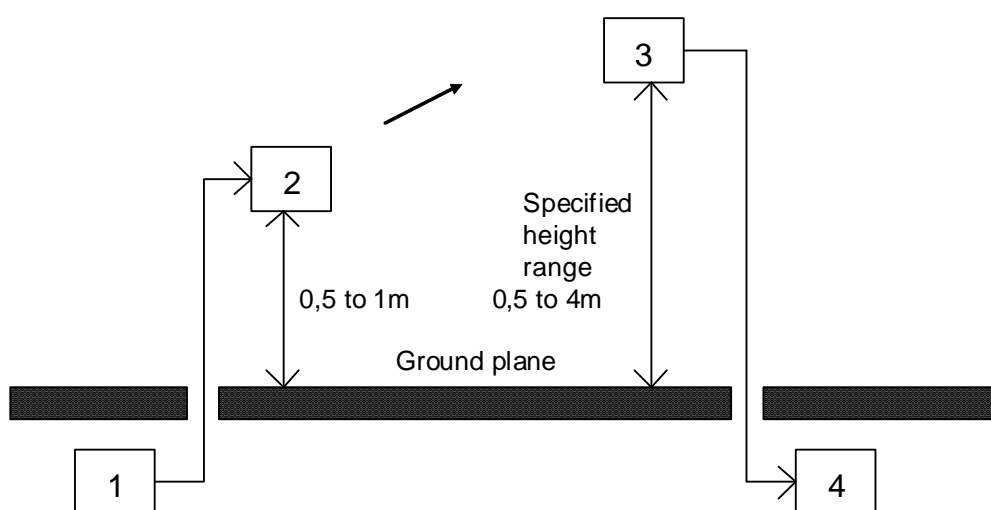

- 1) Sinusoidal RF signal generator.
- 2) Substitution antenna.
- 3) Test antenna.
- 4) Spectrum analyser.


Figure 3: Measurement arrangement number 2

- using measurement arrangement number 2 of figure 3, a substitution antenna shall replace the MES in the same position where was the MES antenna. It shall be connected to the signal generator.
- f) The signal generator shall be tuned to each frequency at which an emission has been detected in the case of unwanted emissions measurement, or to the frequency at the middle of each measurement bandwidth in the case of EIRP density measurement, The substitution antenna shall be suitable for this frequency:
- the spectrum analyser shall be tuned to the measurement bandwidth to analyse and put in the same conditions as for the measurement with the MES, with the peak hold function activated;
 - the level of the signal generator shall be adjusted to give the same signal level on the spectrum analyser as in b);
 - the output level of the signal generator shall be recorded. This value, after corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna, is the radiated emission level of the MES.
- g) The f) procedure is repeated with the other measurement bandwidths to cover the whole frequency range to be analysed.

- h) a) to g) shall be repeated with test antennas of the opposite polarization for the unwanted emission measurements.

5.2.1.5.5.2.2 Measurement procedure for peak radiated emissions of the cabinet

This method of measurement applies to transmitters having an antenna socket and has to be performed in addition to conducted measurements of the MES in the case of unwanted emissions.

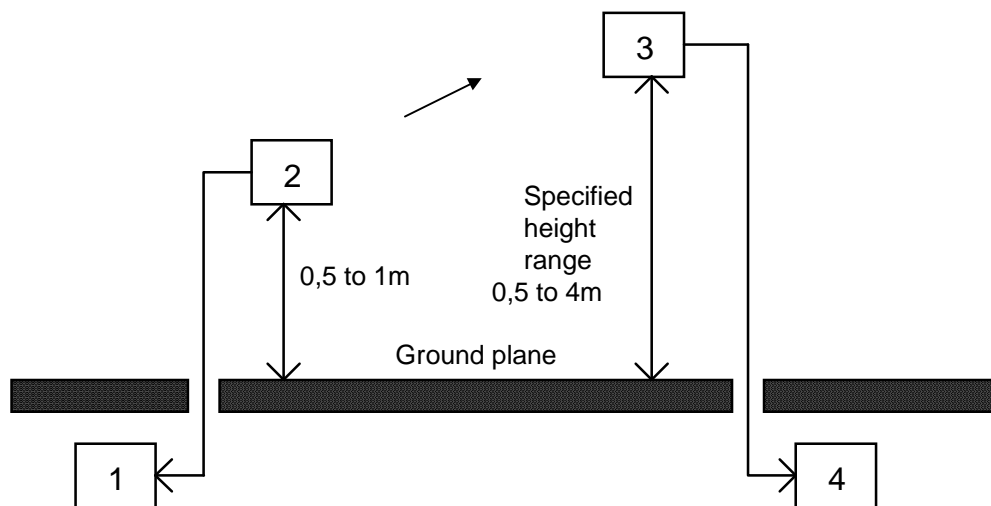

- 1) Test load.
- 2) MES under test (antenna port connected to the test load).
- 3) Test antenna.
- 4) Spectrum analyser.

Figure 4: Measurement arrangement number 3

Measurement arrangement number 3 of figure 4 shall be used for measurement of radiated emissions of the cabinet.

The procedure is a peak measurement as in clause 5.2.1.5.5.2.1.

The same method as in clause 5.2.1.5.5.2.1 shall be applied with the exception that measurement arrangement number 3 replaces measurement arrangement number 1 (measurement arrangement number 2 remains the same for the relative measurement).

5.2.1.5.5.3 Measurement procedure for radiated emissions (average)

5.2.1.5.5.3.1 Measurement procedure for average radiated emissions of the MES

Measurement arrangement number 1 of figure 2 shall be used.

- a) For each measurement bandwidth, the following actions shall be performed:
- the MES shall be placed in the reference position as described in clause 5.2.1.5.5.1.3;
 - the test antenna shall have the same polarization as the MES and connected to a spectrum analyser, eventually through a suitable entry filter to avoid overloading of the spectrum analyser;
 - precautions may be required to ensure that the filter does not attenuate the harmonics of the carrier;
 - the test antenna and the entry filter shall be suitable for the measured frequency band, and replaced by other each time it will be necessary;
 - the spectrum analyser shall be tuned to the measurement bandwidth to analyse;
 - the resolution bandwidth of the spectrum analyser shall be set to a suitable value to correctly perform the measurement, and the average function shall be activated. The video bandwidth shall be set to the same value as the resolution bandwidth.

- b) The test antenna shall be raised or lowered through the specified height range to look for the maximum received signal on the spectrum analyser (this step may not be necessary if the test site is an anechoic chamber or an indoor test site):
 - the EIRP shall be averaged until the variance over the measured bandwidth is less than 1 dB. The averaged value shall be recorded.
- c) The procedure shall be repeated from a) to b) with the other measurement bandwidths to cover the whole frequency range to be analysed.
- d) In the case where the test site has been calibrated before, the absolute measurement is sufficient to determine the actual value of EIRP of the radiated emissions. The precise knowledge of distance between the MES and the test antenna, the characteristics of the test antenna and the input filter allow the determination of the EIRP radiated by the MES.
- e) In the case where the test site cannot be calibrated, a relative measurement can be done according to the following procedure:
 - using measurement arrangement number 2 of figure 3, a substitution antenna shall replace the MES in the same position where was the MES antenna. It shall be connected to the signal generator.
- f) The signal generator shall be tuned to the centre frequency of each measurement bandwidth. The substitution antenna shall be suitable for this frequency:
 - the spectrum analyser shall be tuned to the measurement bandwidth to analyse and put in the same conditions as for the measurement with the MES with the average function activated;
 - the level of the signal generator shall be adjusted to give the same signal level on the spectrum analyser as in b) when averaged until the variance over the measured bandwidth is less than 1 dB. The output level of the signal generator shall be recorded;
 - this value, after corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna, is the radiated emission level of the MES.
- g) The f) procedure shall be repeated with the other measurement bandwidths to cover the whole frequency range to be analysed.
- h) a) to g) shall be repeated with test antennas of the opposite polarization for the unwanted emission measurements.

5.2.1.5.5.3.2 Measurement procedure for average radiated emissions of the cabinet

This method of measurement applies to transmitters having an antenna socket and has to be performed in addition to conducted measurements of the MES for unwanted emissions.

Measurement arrangement number 3 of figure 4 shall be used for measurement of radiated emissions of the cabinet.

The procedure is an average measurement as in clause 5.2.1.5.5.3.1.

The same method as in clause 5.2.1.5.5.3.1 shall be applied with the exception that measurement arrangement number 3 replaces measurement arrangement number 1 (measurement arrangement number 2 remains the same for the relative measurement).

5.2.1.5.6 Procedures for measurement of MES RF conducted emissions

5.2.1.5.6.1 General

Clause 5.2.1.5.6 contains the procedure for conducted emission measurements.

It is recognized that for some parameters, alternative test methods may exist. It is the responsibility of the test laboratory to ensure that any alternative test method used yields results identical to those described in the present document.

5.2.1.5.6.1.1 Test site

There are no specific requirements for the test site for conducted measurements except that they shall be performed in such a way as to ensure that there is no interference to operational satellite and terrestrial systems.

5.2.1.5.6.1.2 Test set-up

Measurement arrangement of figure 5 shall be used.

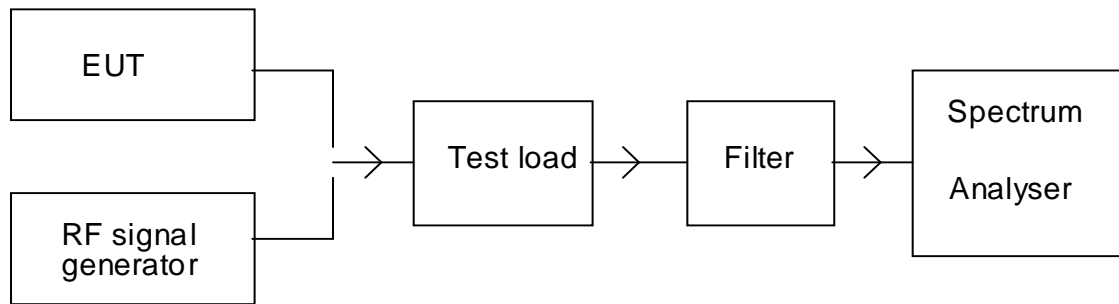


Figure 5: Measurement arrangement for conducted emissions

The antenna port of the MES shall be connected to a spectrum analyser through a test load and eventually an appropriate filter to avoid overloading of the spectrum analyser.

Precautions may be required to ensure that the test load does not generate or that the filter does not attenuate, the harmonics of the carrier. The entry filter shall be suitable for the measured frequency band, and replaced by another each time it will be necessary.

The spectrum analyser noise floor shall be at least 6 dB below the minimum value to be measured.

5.2.1.5.6.2 Measurement procedure for conducted emissions (peak)

- a) For each measurement bandwidth, the following actions shall be performed:
 - the spectrum analyser shall be tuned to the measurement bandwidth to analyse;
 - the resolution bandwidth of the spectrum analyser shall be set to a suitable value to correctly perform the measurement, and the peak hold function shall be activated. The video bandwidth shall be set to at least 3 times the resolution bandwidth.
- b) The peak power detected value of each discrete signal having a level equal or greater than 6 dB below the specified limit shall be recorded.
- c) The procedure shall be repeated from a) to b) with the other measurement bandwidths to cover all the spectrum band which is required to be measured.
- d) The actual value of EIRP of the equivalent radiated emissions in each measurement bandwidth shall be derived by adding either the MES maximum antenna gain or the declared gain at the spurious emission frequency to the power value read from the spectrum analyser.

5.2.1.5.6.3 Measurement procedure for conducted emissions (average)

- a) For each measurement bandwidth, the following actions shall be performed:
 - the resolution bandwidth of the spectrum analyser shall be set to a suitable value to correctly perform the measurement, and the average function shall be activated. The video bandwidth shall be set to the same value as the resolution bandwidth;
 - the measurement time should be such that the difference of the measured levels, averaged over subsequent measurement samples, is less than 1 dB, or a measurement time of 100 ms may be used if the measured values comply with the applicable limits.
- b) The averaged power density value within the measured bandwidth shall be recorded.
- c) The procedure shall be repeated from a) to b) with the other measurement bandwidths to cover the whole frequency range to be analysed.
- d) The actual value of EIRP of the radiated emissions in each measurement bandwidth shall be derived by adding the MES maximum antenna gain measured at the normal operating frequency to the power spectral density value read from the spectrum analyser.

5.2.1.5.7 Interpretation of the measurement results

The interpretation of the results for the measurements described in the present document shall be as follows:

- a) the measured value related to the corresponding limit shall be used to decide whether an equipment meets the minimum requirements of the standard;
- b) the actual measurement uncertainty of the test laboratory carrying out the measurement, for each particular measurement, shall be included in the test report;
- c) the values of the actual measurement uncertainty shall be, for each measurement, equal to or lower than the figures in clause 5.2.1.5.3.

5.2.1.5.8 Test report

All results of the tests performed shall be recorded in a test report.

For each test, the test report shall also include the test conditions (status of the MES, frequency of operation), the measurement uncertainties and the environmental test conditions.

5.2.2 Unwanted emissions outside the band 1 980,1 MHz to 2 009,9 MHz (carrier-on)

5.2.2.1 Method of test

This test shall be carried out for the minimum and for the maximum MES transmit frequencies for which the MES is designed to operate, as specified by the applicant.

The environmental test conditions are given in clause 5.1.

For each test, the MES shall be set to transmit (carrier-on) on one of the specified transmitting frequencies to be tested at its maximum power for that transmit frequency, by means of the STE or by another test facility provided by the applicant.

If there is a handover function in the MES (to allow change of frequency channel during a call), this function shall be disabled.

The transmitted carrier shall be modulated by a test signal at maximum rate as specified in clause 5.2.1.5.2.2.

In the test equipment, the spectrum analyser noise floor shall be at least 6 dB below the appropriate limits given in table 3.

The measurements are performed with the radiated or with the conducted method according to the cases defined in clause 5.2.1.5.4.

For measurements of radiated unwanted emissions, clause 5.2.1.5.5 applies.

For measurements of conducted unwanted emissions, clause 5.2.1.5.6 applies.

5.2.2.2 Peak measurement

In the case of peak measurement, the spectrum analyser shall be set in sweep mode and shall be operated under the following conditions:

- | | |
|-----------------------|---|
| frequency sweep: | as required for frequency range to be assessed; |
| resolution bandwidth: | measurement bandwidth specified in table 3; |
| display bandwidth: | at least three times the measurement bandwidth; |
| averaging: | no; |
| peak hold: | yes. |

The sweep time shall be the shortest possible time consistent with proper calibration and ease of operation.

The spectrum analyser shall be stepped over the frequency ranges specified in table 3 for peak measurement.

5.2.2.3 Average measurement

In the case of average measurement, the spectrum analyser shall be set in sweep mode and shall be operated under the following conditions:

frequency sweep:	as required for frequency range to be assessed;
resolution bandwidth:	measurement bandwidth specified in table 3;
display bandwidth:	equal to the measurement bandwidth;
averaging:	yes;
peak hold:	no.

The measurement time shall be such that the difference of the measured levels, averaged over subsequent measurement samples, is less than 1 dB, or a measurement time of 100 ms may be used if the measured values comply with the applicable limits.

For a MES operating in a non-continuous carrier mode, the measurement shall be performed over the active part of the transmitted bursts. The total sample time used for measurement shall be not less than 40 % of the duration of the active part of the transmitted burst. The measurement shall be made over the random part of the burst, excluding any preambles or synchronization sequences.

The spectrum analyser shall be stepped over the frequency ranges specified in table 3 for average measurement.

5.2.2.4 Test requirements

For measurements of radiated unwanted emissions of the MES, the measured values shall in no case exceed the limits given in table 3.

For measurements of conducted unwanted emissions of the MES, the measured values plus the maximum antenna gain shall in no case exceed the limits given in table 3.

5.2.3 Unwanted emissions within the bands 1 980,1 MHz to 2 009,9 MHz, 1 978,1 MHz to 1 980,1 MHz and 2 009,9 MHz to 2 011,9 MHz (carrier-on)

5.2.3.1 Method of test

This test shall be carried out for the minimum and for the maximum MES transmit frequency for which the MES is designed to operate, as specified by the applicant.

The transmit frequencies used for the test shall be entered in the test report.

The environmental test conditions are given in clause 5.1.

For each test, the MES shall be set to transmit (carrier-on) on one of the specified transmit frequencies to be tested, at its maximum power for that transmit frequency, by means of the STE or by another test facility provided by the applicant.

If there is a handover function in the MES (to allow change of frequency channel during a call), this function shall be disabled.

The transmitted carrier shall be modulated by a test signal at maximum rate as specified in clause 5.2.1.5.2.2.

In the test equipment, the spectrum analyser noise floor shall be at least 6 dB below the appropriate limits given in tables 4 or 5, as applicable.

The measurements are performed with the radiated or with the conducted method according to the cases defined in clause 5.2.1.5.4.

For measurements of radiated unwanted emissions, clause 5.2.1.5.5 applies.

For measurements of conducted unwanted emissions, clause 5.2.1.5.6 applies.

5.2.3.2 Measurement method

The spectrum analyser shall be set in sweep mode and shall be operated under the following conditions:

frequency sweep:	as required for frequency range to be assessed;
resolution bandwidth:	measurement bandwidth specified in tables 4 or 5, as applicable;
display bandwidth:	equal to the measurement bandwidth;
averaging:	yes;
peak hold:	no.

The measurement time should be such that the difference of the measured levels, averaged over subsequent measurement samples, is less than 1 dB, or a measurement time of 100 ms may be used if the measured values comply with the applicable limits.

For a MES operating in a non-continuous carrier mode, the measurement shall be performed over the active part of the transmitted bursts. The total sample time used for measurement shall be not less than 40 % of the duration of the active part of the transmitted burst. The measurement shall be made over the random part of the burst, excluding any preambles or synchronization sequences.

For each of the transmit frequencies to be used for the test, measurements shall be made over the frequency ranges from 1 978,1 MHz to $f_c - a$ and from $f_c + b$ to 2 011,9 MHz, $f_c - a$ being the lower boundary frequency of the nominated bandwidth for the transmit frequency being tested, and $f_c + b$ being the upper boundary frequency of the nominated bandwidth for the transmit frequency being tested.

5.2.3.3 Test requirements

For measurements of radiated unwanted emissions of the MES, the measured values shall in no case exceed the limits given in tables 4 or 5, as applicable, over the frequency range 1 978,1 MHz to 2 011,9 MHz.

For measurements of conducted unwanted emissions, the measured values plus the maximum antenna gain, shall in no case exceed the limits given in tables 4 or 5, as applicable, over the frequency range 1 978,1 MHz to 2 011,9 MHz.

5.2.4 Unwanted emissions in carrier-off state

5.2.4.1 Method of test

The MES shall be switched-on and set in a non-transmitting (carrier-off) mode.

If there is a periodic automatic transmission of bursts (e.g. for location updating), the STE shall provide a means to inhibit it, or to trigger the measurement in order to analyse only the non-transmitting periods.

The environmental test conditions are given in clause 5.1.

In the test equipment, the spectrum analyser noise floor shall be at least 6 dB below the appropriate limits given in table 6.

The measurements are performed with the radiated or with the conducted method according to the cases defined in clause 5.2.1.5.4.

For measurements of radiated unwanted emissions, clause 5.2.1.5.5 applies.

For measurements of conducted unwanted emissions, clause 5.2.1.5.6 applies.

5.2.4.2 Measurement method

The spectrum analyser shall be set in sweep mode and shall be operated under the following conditions:

frequency sweep:	as required for frequency range to be assessed;
resolution bandwidth:	measurement bandwidth specified in table 6;

display bandwidth:	at least 3 times the measurement bandwidth;
averaging:	no;
peak hold:	yes.

The sweep time shall be the shortest possible time consistent with proper calibration and ease of operation.

The spectrum analyser shall be stepped over the frequency ranges specified.

5.2.4.3 Test requirements

For measurements of radiated unwanted emissions of the MES, the measured values shall in no case exceed the limits given in table 6.

For measurements of conducted unwanted emissions of the MES, the measured values plus the maximum antenna gain shall in no case exceed the limits given in table 6.

5.2.5 MES Control and Monitoring Functions (CMF)

5.2.5.1 Self-monitoring functions / Processor Monitoring

As it is considered impracticable to artificially induce processor faults in an MES, no test is given for the processor monitoring function.

5.2.5.2 Self-monitoring functions / Transmit frequency generation sub-system monitoring

As it is considered impracticable to artificially induce transmit frequency generation sub-system faults in an MES, no test is given for the transmit frequency generation sub-system monitoring function.

5.2.5.3 Network control authorization

5.2.5.3.1 Method of test

The MES shall be cycled through its power-on and power-off states. Attempts shall be made to initiate calls using normal user operational procedures. The transmitting state of the MES shall be monitored to ensure compliance with the test requirements.

The environmental test conditions are given in clause 5.1.

5.2.5.3.2 Test procedure

The MES shall be situated in an environment where receipt of the appropriate network control channel(s) is controlled by the test laboratory:

- a) The MES shall be in a power-off state, situated such that it is not in receipt of a network control channel.
- b) The MES shall be powered-on.
- c) An attempt shall be made, using normal user operational procedures, to initiate a call.
- d) A network control channel shall be activated and a call shall be initiated using normal user operational procedures.
- e) The network control channel shall then be deactivated.
- f) An attempt shall be made, using normal user operational procedures, to initiate a call.
- g) The network control channel shall be reactivated and a call shall be initiated using normal user operational procedures.

Throughout this procedure, the transmission state of the MES shall be monitored.

5.2.5.3.3 Test requirement

During and after test procedure step a), the MES shall be in power-off state.

During and after test procedure step b), no transmissions shall occur (carrier-off).

During and after test procedure step c), no transmissions shall occur (carrier-off).

After test procedure step d), the MES shall be transmitting (carrier-on).

Within 30 seconds of test procedure step e), MES transmissions shall cease (carrier-off).

During and after test procedure step f), no transmissions shall occur (carrier-off).

After test procedure step g), the MES shall be transmitting (carrier-on).

5.2.5.4 Network control reception

5.2.5.4.1 Transmit frequency control

5.2.5.4.1.1 Method of test

The nominated bandwidth of the MES shall be monitored relative to the carrier frequency commanded, and relative to the operational frequency bands for the MES specified by the applicant.

The environmental test conditions are given in clause 5.1.

5.2.5.4.1.2 Test procedure

This test shall be carried out at least twice, once for the minimum and once for the maximum MES transmit frequency for which the MES is designed to operate, as specified by the applicant.

Where available, two additional transmit frequencies shall also be tested. These frequencies shall be equally spaced between the minimum and maximum frequencies. The commanded transmit frequencies used for the test shall be entered in the test report.

The MES shall be situated in an environment where receipt of a network control channel and of NCF commands is controlled by the test laboratory:

- a) A network control channel shall be activated and the MES powered-on.
- b) An appropriate NCF control message shall be sent, commanding the MES to set its carrier frequency to one of the transmit frequencies to be tested.
- c) The test shall be repeated for the other transmit frequencies to be tested.

The carrier mask for the transmit frequency under test shall be monitored on a spectrum analyser, using the procedures given in clause 5.2.3.1.

5.2.5.4.1.3 Test requirement

The MES shall set the centre frequency of its transmission according to the NCF command.

The entire nominated bandwidth for each transmit frequency tested shall be contained completely within the operational frequency band(s) specified by the applicant.

5.2.5.5 Fellow radio stations in a dual-mode or multi-mode terminal

5.2.5.5.1 Method of test

The MES shall be placed in a suitable environment which isolates the MES from the networks of its fellow modes. It shall be verified that no transmissions are made from that mode.

5.2.5.5.2 Test procedure

The MES shall be placed in an environment where the receipt of network control channel(s) of supporting networks of the fellow modes is prevented. For each fellow mode radio station, an attempt shall be made, using normal user operational procedures, to initiate a call. Throughout this procedure, the transmission state of the MES shall be monitored.

5.2.5.5.3 Test requirements

Throughout the test procedure, no transmission shall occur.

5.2.6 Equipment identity

5.2.6.1 Method of test

It is impracticable to test that each MES has a unique MES Identification Code (MIC) within its S-PCN, and that it is not possible for the user to alter the MIC using any normally accessible procedure. Consequently, no tests are given for these requirements.

The transmissions of the MES in response to an NCF command to send its identification code shall be monitored and the identification code received shall be verified.

The environmental test conditions are given in clause 5.1.

5.2.6.2 Test procedure

The MES shall be situated in an environment where receipt of a network control channel and of NCF commands is controlled by the test laboratory:

- a) A network control channel shall be activated and the MES powered-on.
- b) An appropriate NCF control message shall be sent, commanding the MES to transmit its identification code.
- c) The message sent by the MES shall be analysed.

5.2.6.3 Test requirements

The MES identification code in the message sent in step c) shall be verified against that supplied by the applicant for the MES.

5.2.7 Receiver Adjacent Channel Selectivity

5.2.7.1 General

If the EUT is a MES that has been modified by the applicant for these tests then full documentation of such modification(s) shall be provided to prove that the modification(s) will simulate the required test condition.

For the purpose of this test, the EUT is the MES without its antenna connected.

5.2.7.2 Test set-up

The equipment should be set-up as shown in figure 6.

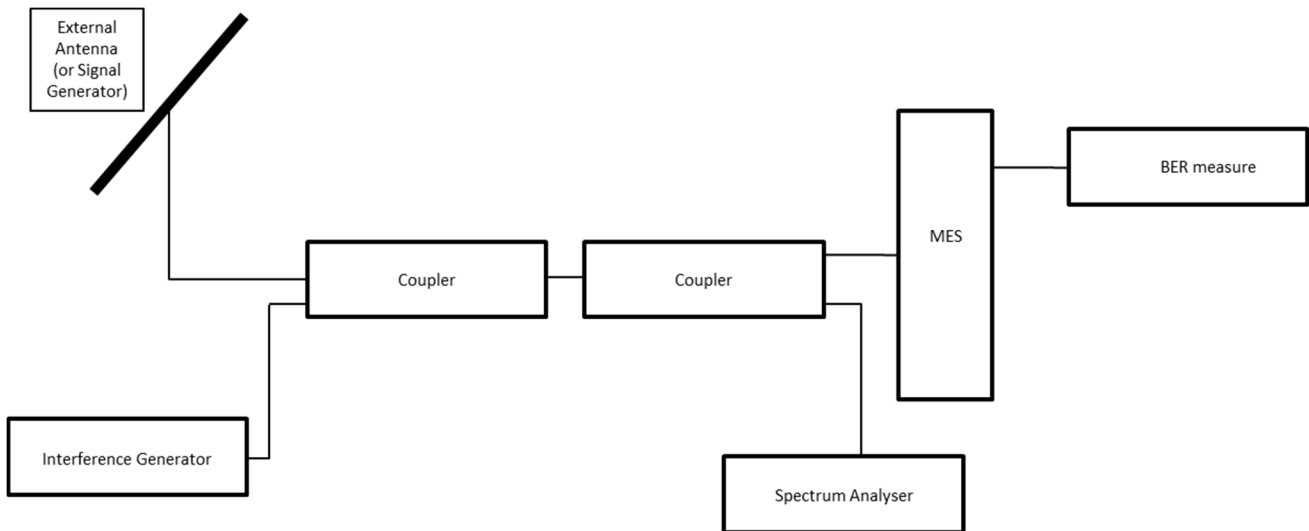


Figure 6: Measuring system set-up for Adjacent Channel Selectivity and Blocking Characteristics

5.2.7.3 Test procedure

The procedure basics are illustrated below:

- 1) The wanted signal power is adjusted such that the SNR (at the receiver input) is set to the reference level plus 1 dB. The reference level is the minimum SNR required to achieve the target performance level for a given bearer type.
- 2) Measure the SNR of the receiver, where SNR of the receiver means the SNR determined by the receiver demodulator.
- 3) Set the parameters of the interference signal generator as shown in table 7 in clause 4.2.6.2.
- 4) Add the interference signal and measure the SNR of the receiver.
- 5) The SNR achieved in step 4 shall not exceed 0,5 dB degradation compared to the SNR measured in step 2.

5.2.8 Receiver Blocking Characteristics

5.2.8.1 General

If the EUT is a MES that has been modified by the applicant for these tests then full documentation of such modification(s) shall be provided to prove that the modification(s) will simulate the required test condition.

For the purpose of this test, the EUT is the MES without its antenna connected.

5.2.8.2 Test set-up

The equipment should be set-up as shown in figure 6.

5.2.8.3 Test procedure

The procedure basics are illustrated below:

- 1) The wanted signal power is adjusted such that the SNR (at the receiver input) is set to the reference level plus 2 dB. The reference level is the minimum SNR required to achieve the target performance level for a given bearer type.
- 2) Measure the SNR of the receiver, where SNR of the receiver means the SNR determined by the receiver demodulator.
- 3) Generate CW with the parameters as shown in table 8 in clause 4.2.7.2.
- 4) Apply the interference CW and measure the receiver SNR.

- 5) The SNR achieved in step 4 shall not exceed 1 dB degradation compared to the SNR measured in step 2.

Annex A (normative): Relationship between the present document and the essential requirements of Directive 2014/53/EU

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.2] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [7].

The present document is therefore intended to cover the provisions of Directive 2014/53/EU [7] (RE Directive) Article 3.2 which states that "...radio equipment shall be so constructed that it both effectively uses and supports the efficient use of radio spectrum in order to avoid harmful interference".

Recital 10 of Directive 2014/53/EU [7] states that "In order to ensure that radio equipment uses the radio spectrum effectively and supports the efficient use of radio spectrum, radio equipment should be constructed so that: in the case of a transmitter, when the transmitter is properly installed, maintained and used for its intended purpose it generates radio waves emissions that do not create harmful interference, while unwanted radio waves emissions generated by the transmitter (e.g. in adjacent channels) with a potential negative impact on the goals of radio spectrum policy should be limited to such a level that, according to the state of the art, harmful interference is avoided; and, in the case of a receiver, it has a level of performance that allows it to operate as intended and protects it against the risk of harmful interference, in particular from shared or adjacent channels, and, in so doing, supports improvements in the efficient use of shared or adjacent channels."

Recital 11 of Directive 2014/53/EU [7] states that "Although receivers do not themselves cause harmful interference, reception capabilities are an increasingly important factor in ensuring the efficient use of radio spectrum by way of an increased resilience of receivers against harmful interference and unwanted signals on the basis of the relevant essential requirements of Union harmonisation legislation."

As a consequence, the present document includes both transmitting and receiving parameters to maximize the efficient use of radio spectrum.

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

**Table A.1: Relationship between the present document and
the essential requirements of Directive 2014/53/EU**

Harmonised Standard ETSI EN 301 442				
The following requirements are relevant to the presumption of conformity under the article 3.2 of Directive 2014/53/EU [7]				
Requirement			Requirement Conditionality	
No	Description	Reference: Clause No	U/C	Condition
1	Unwanted emissions outside the band 1 980,1 MHz to 2 009,9 MHz	4.2.1	U	
2	Unwanted emissions within the bands 1 980,1 MHz to 2 009,9 MHz, 1 978,1 MHz to 1 980,1 MHz and 2 009,9 MHz to 2 011,9 MHz	4.2.2	U	
3	Unwanted emissions in carrier-off state	4.2.3	U	
4	Self-monitoring functions / Processor monitoring	4.2.4.1	U	
5	Self-monitoring functions / Transmit frequency generation subsystem monitoring	4.2.4.2	U	
6	Network control authorization	4.2.4.3	U	
7	Transmit frequency control	4.2.4.4	U	
8	Fellow radio stations in a dual-mode or multi- mode terminal	4.2.4.5	U	
9	Equipment identity	4.2.5	U	
10	Receiver Adjacent Channel Selectivity	4.2.6	U	
11	Receiver Blocking Characteristics	4.2.7	U	

Key to columns:**Requirement:**

- No** A unique identifier for one row of the table which may be used to identify a requirement.
- Description** A textual reference to the requirement.
- Clause Number** Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

- U/C** Indicates whether the requirement shall be unconditionally applicable (U) or is conditional upon the manufacturers claimed functionality of the equipment (C).
- Condition** Explains the conditions when the requirement shall or shall not be applicable for a requirement which is classified "conditional".

Presumption of conformity stays valid only as long as a reference to the present document is maintained in the list published in the Official Journal of the European Union. Users of the present document should consult frequently the latest list published in the Official Journal of the European Union.

Other Union legislation may be applicable to the product(s) falling within the scope of the present document.

Annex B (informative): Explanation of nominated bandwidth

B.1 Introduction

This annex contains a graphical representation of the nominated bandwidth definition given in clause 3.1.

B.2 Interpretation of Parameters $[B_n, f_c, a, b]$

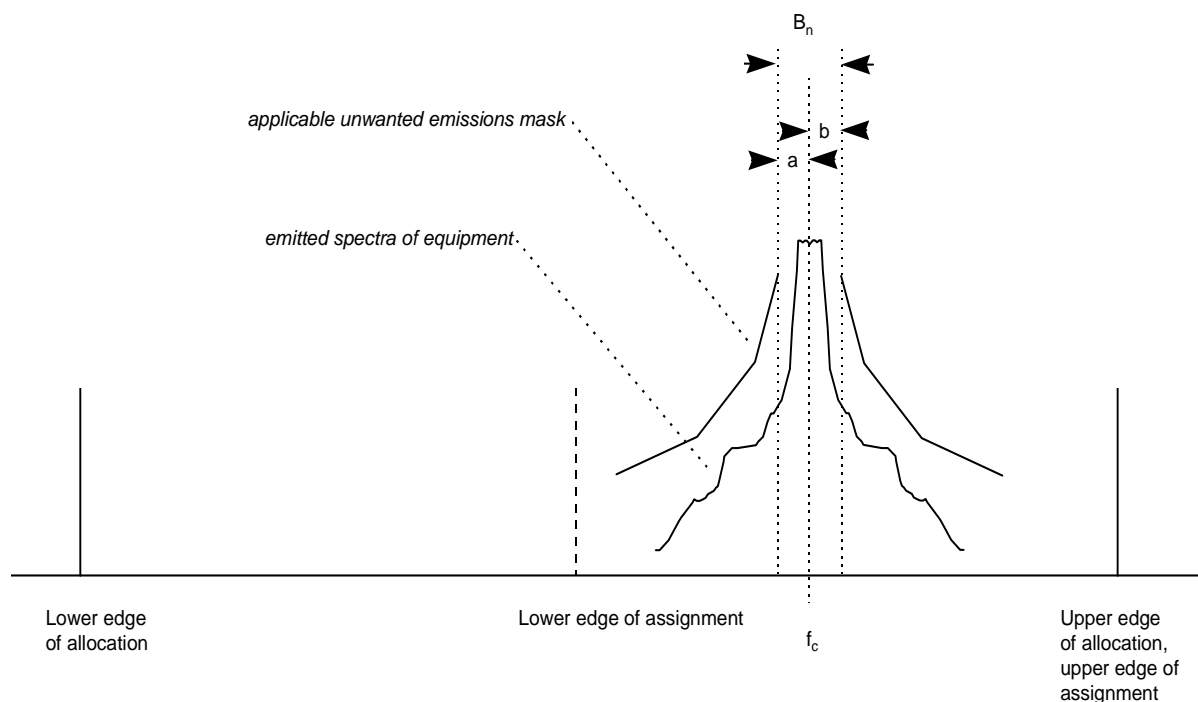


Figure B.1: Nominated bandwidth and Unwanted Emissions Mask

The centre frequency of the emitted spectra has been defined as f_c ; the values of a and b define the *nominated bandwidth* B_n . The value of B_n is chosen, such that the unwanted emissions mask is not exceeded by the emitted spectra - in this example, it can be seen that the nominated bandwidth could be reduced without exceeding the limits of the mask.

B.3 Choice of nominated bandwidth

The choice of the nominated bandwidth is made by the applicant according to the bandwidth and shape of the spectral emission of the equipment. The optimum choice of nominated bandwidth will maximize the available operating frequency range of the MES, and this is achieved by selecting nominated bandwidth as narrow as possible without exceeding the applicable unwanted emissions masks. To illustrate this, two examples are given in figure B.2. The figures show occupied channels represented by carrier frequency (f_1, f_2) and the unwanted emission mask.

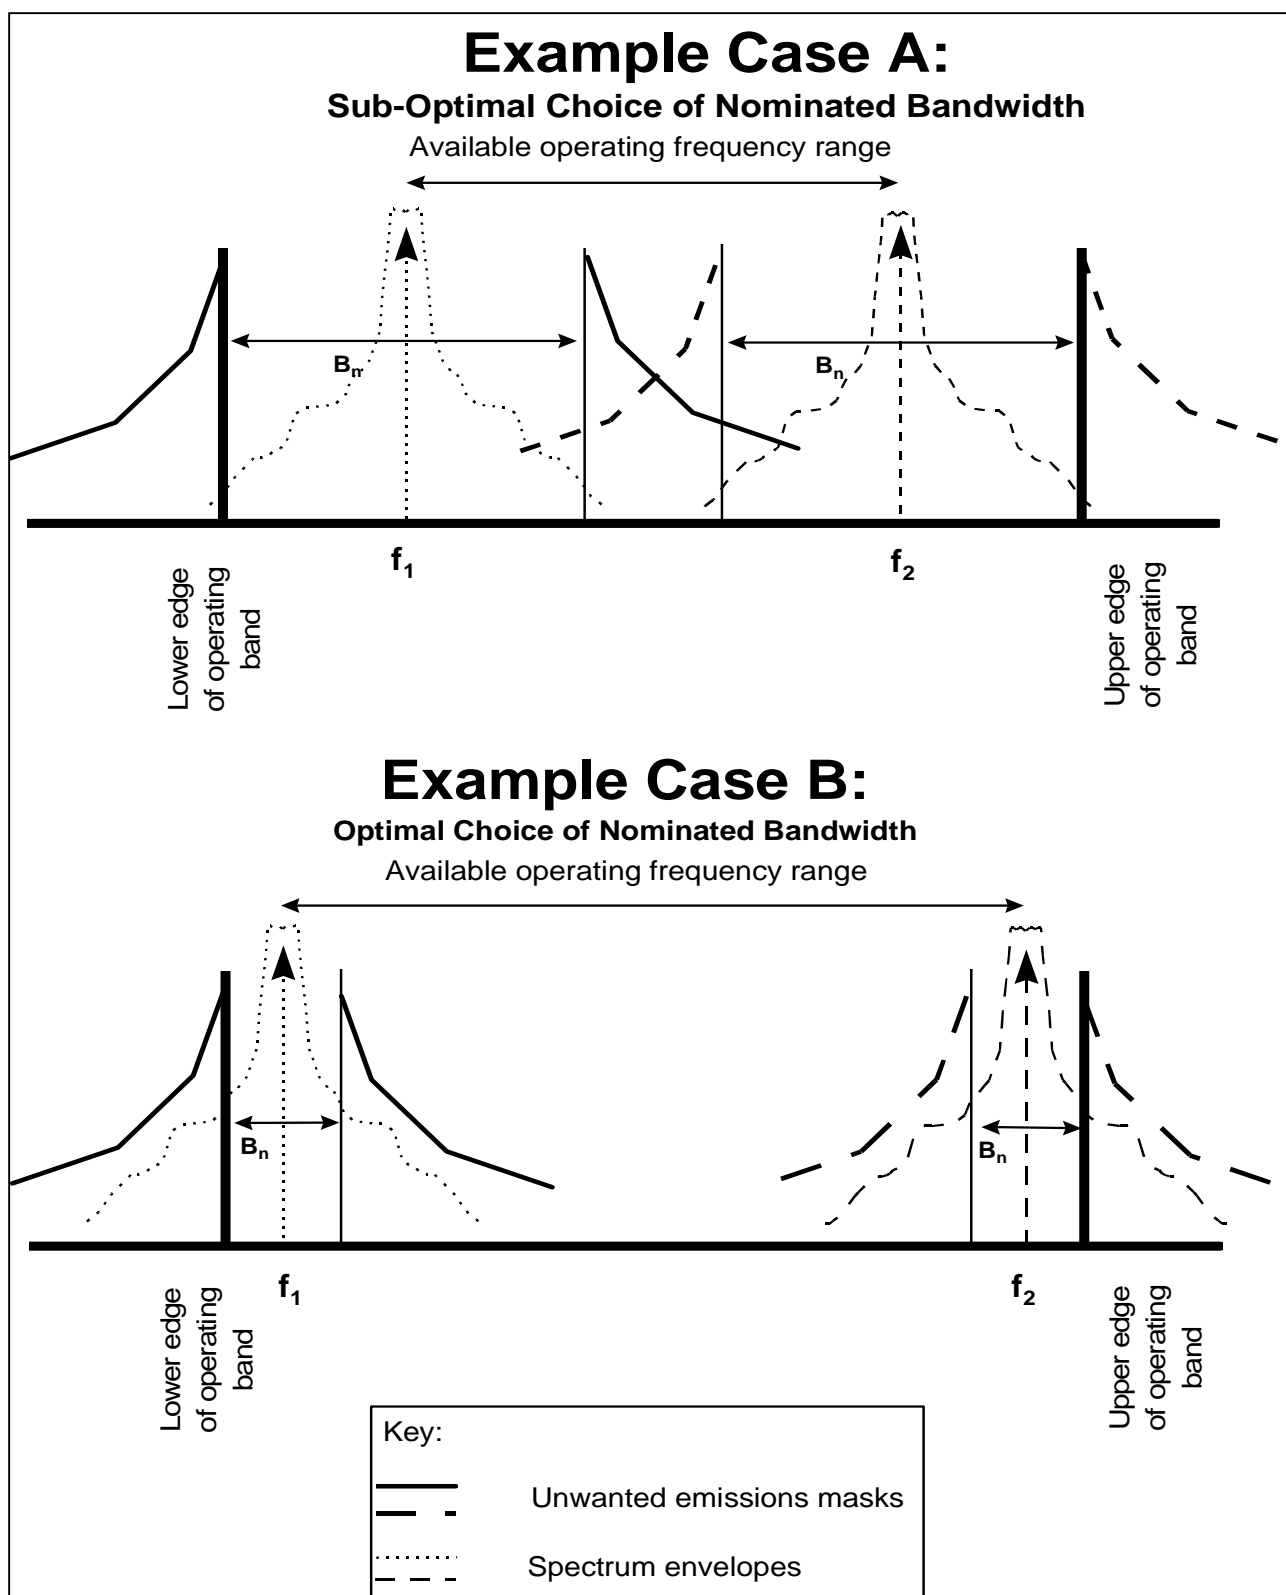


Figure B.2: Choice of nominated bandwidth

In case A, the lower carrier (centre frequency f_1) is shown operating at its lowest allowable frequency, with the nominated bandwidth adjacent to the edge of the assignment. Similarly, the upper carrier is shown in the highest allowable frequency, centre frequency f_2 . The available tuning range for the carrier is shown.

In case B, a similar situation is shown, but with a smaller nominated bandwidth. The uppermost and lowermost channels are operating closer to the band edges, and thus the available tuning range is greater.

B.4 Maximum value for nominated bandwidth

The maximum value for the nominated bandwidth (B_n) is defined in clause 3.1 so that the frequency interval ($f_c - a, f_c + b$) should not encompass more than either:

- i) when $a = b$, 4 nominal carrier frequencies (i.e. five channel spacing) for narrow-band systems;
- ii) when $a \neq b$, 1 nominal carrier frequency (i.e. two channel spacing) for narrow-band systems; or
- iii) 1 nominal carrier frequency (i.e. two channel spacing) for wide-band systems.

NOTE: In the following diagrams, f_c represents the actual frequency of transmission.

For case i), the maximum value for the value of B_n is thus:

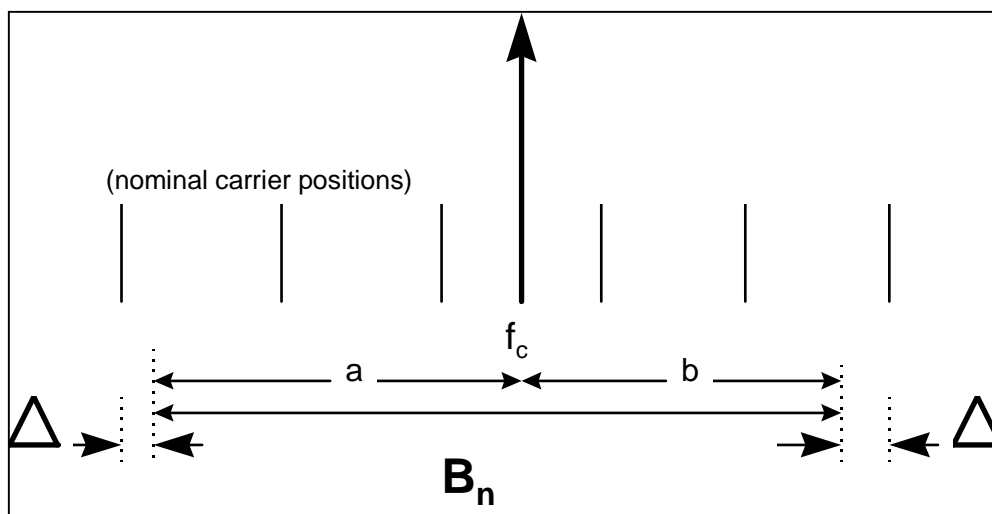


Figure B.3: Maximum value of nominated bandwidth for Case (i)

(When Δ is very small, B_n approaches 5 channel spacing and contains only 4 nominal carriers).

For case ii), the maximum value for the value of B_n is thus:

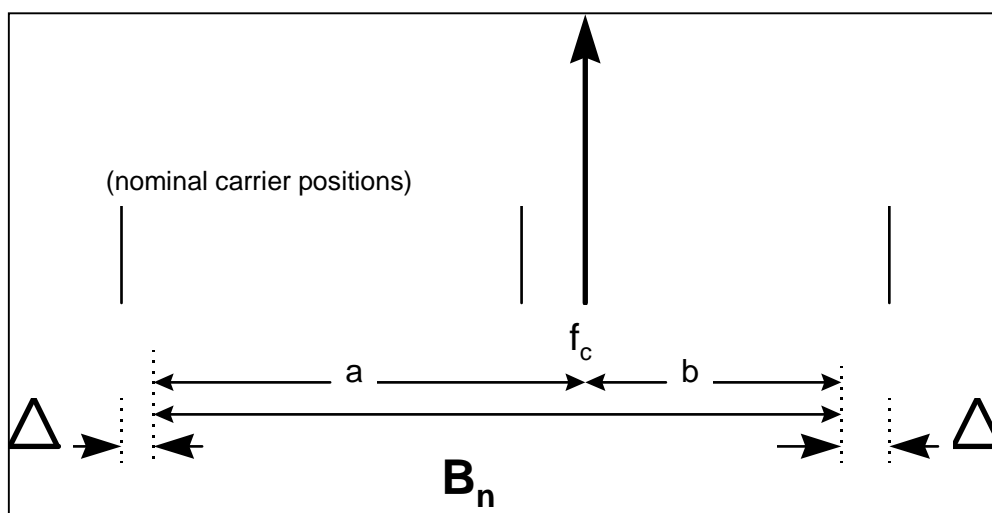


Figure B.4: Maximum value of nominated bandwidth for Case (ii)

(When Δ is very small, B_n approaches 2 channel spacing and contains only 1 nominal carrier).

For case iii), where the values of a and b are equal, the maximum value for the value of B_n is thus:

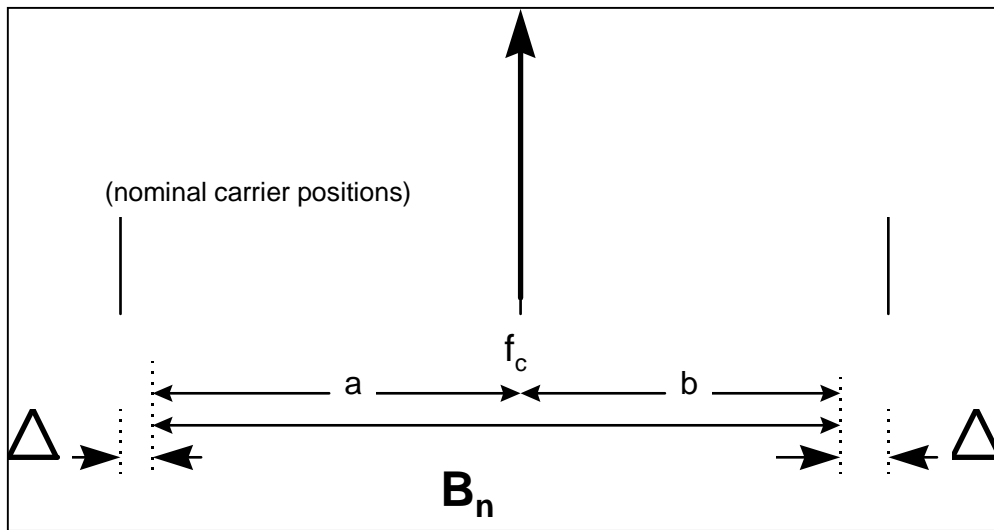


Figure B.5: Maximum value of nominated bandwidth for Case (iii)

(When Δ is very small, B_n approaches 2 channel spacing and contains only 1 nominal carrier).

For case iii), where the values of a and b are not equal, the maximum value for the value of B_n is thus:

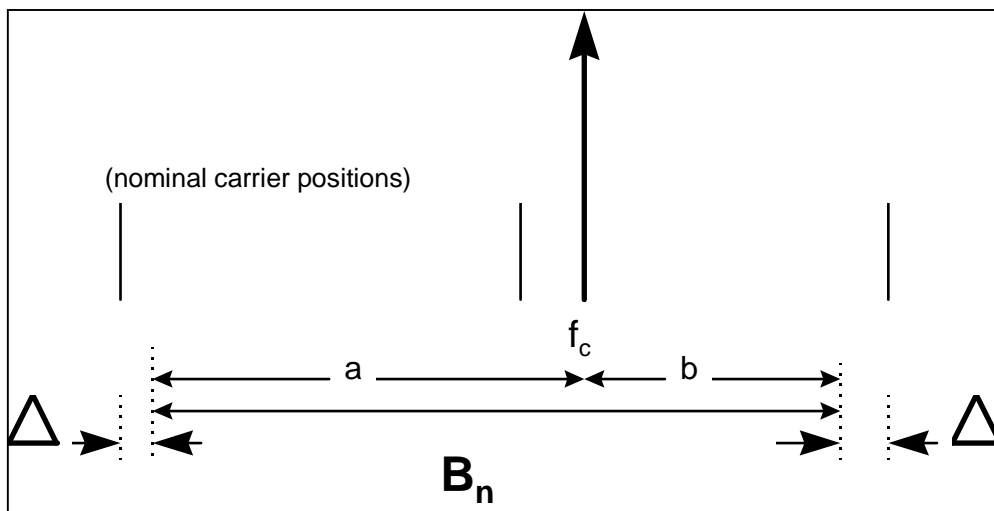


Figure B.6: Maximum value of nominated bandwidth for Case (iii)

(When Δ is very small, B_n approaches 2 channel spacing and contains only 1 nominal carrier).

Annex C (informative): Bibliography

- ETSI EN 300 831: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) for Mobile Earth Stations (MES) used within Satellite Personal Communications Networks (S-PCN) operating in the 1,5/1,6/2,4 GHz and 2 GHz frequency bands".
- CENELEC EN 55022: "Limits and methods of measurement of radio disturbance characteristics of information technology equipment".
- Construction of an Anechoic Chamber: Technical Report ZVEI AK-R 90/20.
- ETSI TBR 042 (April 2000): "Satellite Personal Communications Networks (S-PCN); Mobile Earth Stations (MES), including handheld earth stations, for S-PCN in the 2,0 GHz bands under the Mobile Satellite Service (MSS); Terminal essential requirements".
- ETSI ETS 300 735 (October 1997): "Satellite Personal Communications Networks (S-PCN); Network Control Facilities (NCF) for Mobile Earth Stations (MES), including handheld earth stations, for S-PCN in the 1,6/2,4 GHz and the 2,0 GHz bands, providing voice and/or data communications under the Mobile Satellite Service (MSS)".
- Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive)

History

Document history		
V1.1.1	May 2000	Publication
V1.2.1	August 2010	Publication
V2.1.0	February 2016	EN Approval Procedure AP 20160512: 2016-02-12 to 2016-05-12