

Draft **ETSI EN 301 489-26** V1.1.1 (2000-12)

---

*Candidate Harmonized European Standard (Telecommunications series)*

**Electromagnetic compatibility and  
Radio spectrum Matters (ERM);  
ElectroMagnetic Compatibility (EMC) standard for radio  
equipment and services;  
Part 26: Specific conditions for IMT-2000 CDMA  
Multi-carrier Base Stations and ancillary equipment**

---



---

**Reference**

REN/ERM-EMC-228-2

---

**Keywords**EMC, cdma2000, IMT-2000, radio, regulation,  
Base Station**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.  
All rights reserved.

# Contents

Intellectual Property Rights .....	4
Foreword.....	4
1 Scope.....	6
2 References.....	6
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations.....	7
4 Test conditions .....	7
4.1 General .....	7
4.2 Arrangements for test signals.....	8
4.2.1 Arrangements for test signals at the input of transmitters.....	8
4.2.2 Arrangements for test signals at the output of transmitters.....	8
4.2.3 Arrangements for test signals at the input of receivers.....	8
4.2.4 Arrangements for test signals at the output of receivers.....	8
4.3 Exclusion bands .....	8
4.4 Narrowband responses of receivers.....	8
4.5 Normal test modulation .....	9
5 Performance assessment .....	9
5.1 General .....	9
5.2 Equipment which can provide a continuous communication link.....	9
5.2.1 Assessment of FER in Forward Link (Downlink).....	9
5.2.2 Assessment of FER in Reverse Link (Uplink).....	9
5.3 Equipment which does not provide a continuous communication link.....	9
5.4 Ancillary equipment.....	9
5.5 Equipment classification.....	9
6 Performance criteria.....	10
6.1 Performance criteria for continuous phenomena applied to Base Stations (BS) .....	10
6.2 Performance criteria for transient phenomena for Base Stations (BS).....	10
6.3 Performance criteria for ancillary equipment tested on a stand alone basis.....	10
6.3.1 Performance criteria for continuous phenomena for ancillary equipment.....	10
6.3.2 Performance criteria for transient phenomena for ancillary equipment.....	10
7 Applicability overview tables.....	11
7.1 Emission .....	11
7.1.1 General.....	11
7.1.2 Special conditions.....	11
7.2 Immunity .....	11
7.2.1 General.....	11
7.2.2 Special conditions.....	11
<b>Annex A (informative): Examples of base station radio equipment for digital cellular radio telecommunications systems within the scope of the present document.....</b>	<b>12</b>
A.1 Base station equipment for the IMT-2000 CDMA Multi-carrier system.....	12
<b>Annex C (informative): Bibliography.....</b>	<b>13</b>
History .....	14

---

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under the Council Directive 98/34/EC [4] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulation.

The present document is intended to become a Harmonized EMC Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Council Directive on the approximation of the laws of the Member States relating to electromagnetic compatibility (the "EMC Directive" 89/336/EEC [3] as amended), and the Council Directive on the approximation of the laws of the Member States relating to radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (the "R&TTE Directive" 1999/5/EC [2]).

The present document is part 26 of a multi-part deliverable, covering the ElectroMagnetic Compatibility (EMC) standard, as identified below:

- Part 1: "Common technical requirements";
- Part 2: "Specific conditions for radio paging equipment";
- Part 3: "Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 40 GHz";
- Part 4: "Specific conditions for fixed radio links and ancillary equipment and services";
- Part 5: "Specific conditions for Private land Mobile Radio (PMR) and ancillary equipment (speech and non-speech)";
- Part 6: "Specific conditions for Digital Enhanced Cordless Telecommunications (DECT) equipment";
- Part 7: "Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS)";
- Part 8: "Specific conditions for GSM base stations";
- Part 9: "Specific conditions for wireless microphones and similar Radio Frequency (RF) audio link equipment";
- Part 10: "Specific conditions for First (CT1 and CT1+) and Second Generation Cordless Telephone (CT2) equipment";
- Part 11: "Specific conditions for terrestrial broadcasting transmitters";
- Part 12: "Specific conditions for Very Small Aperture Terminal, Satellite Interactive Earth Stations operated in the frequency ranges between 4 GHz and 30 GHz in the Fixed Satellite Service (FSS)";
- Part 13: "Specific conditions for Citizens' Band (CB) radio and ancillary equipment (speech and non-speech)";

- Part 15: "Specific conditions for commercially available amateur radio equipment";
- Part 16: "Specific conditions for analogue cellular radio communications equipment, mobile and portable";
- Part 17: "Specific conditions for Wideband data and HIPERLAN equipment";
- Part 18: "Specific conditions for Terrestrial Trunked Radio (TETRA) equipment";
- Part 19: "Specific conditions for Receive Only Mobile Earth Stations (ROMES) operating in the 1,5 GHz band providing data communications";
- Part 20: "Specific conditions for Mobile Earth Stations (MES) used in the Mobile Satellite Services (MSS)";
- Part 22: "Specific conditions for ground based VHF aeronautical mobile and fixed radio equipment";
- Part 23: "Specific conditions for IMT-2000 CDMA Direct Spread (UTRA) for Base Station (BS) radio and ancillary equipment";
- Part 24: "Specific conditions for IMT-2000 CDMA Direct Spread (UTRA) for Mobile and portable (UE) radio and ancillary equipment";
- Part 25: "Specific conditions for IMT-2000 CDMA Multi-carrier Mobile Stations and ancillary equipment";
- Part 26: "Specific conditions for IMT-2000 CDMA Multi-carrier Base Stations and ancillary equipment".**

<b>Proposed national transposition dates</b>	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

---

# 1 Scope

The present document, together with EN 301 489-1 [1], covers the assessment of 3rd Generation" digital cellular (IMT-2000 Multi-carrier) base station equipment and associated ancillary equipment in respect of ElectroMagnetic Compatibility (EMC).

Technical specifications related to the antenna port and emissions from the enclosure port of radio equipment (base station (BS), and repeaters) are not included in the present document. Such technical specifications are found in the relevant product standards for the effective use of the radio spectrum.

The present document specifies the applicable test conditions, performance assessment and performance criteria of "3rd Generation" digital cellular (IMT-2000 Multi-carrier) base station radio equipment and associated ancillary equipment.

Examples of base station equipment covered by the present document are given in annex A.

In case of differences (for instance concerning special conditions, definitions, abbreviations) between the present document and EN 301 489-1 [1], the provisions of the present document take precedence.

The environmental classification and the emission and immunity requirements used in the present document are as stated in the part 1 of this standard, except for any special conditions included in the present document.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, subsequent revisions do apply.

- [1] ETSI EN 301 489-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements".
- [2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.
- [3] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility.
- [4] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [5] 3GPP2 C.S0002-A (2000-06): "Mobile Station-Base Station - Compatibility Standard for Spread Spectrum Systems".
- [6] 3GPP2 C.S0010-A (2000): "Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations".
- [7] 3GPP2 C.S0013-A: "Loopback Service Options (LSO) for cdma2000 Spread Spectrum Systems".
- [8] 3GPP2 C.S0026: "Test Data Service Option (TDSO) for cdma2000 Spread Spectrum Systems".
- [9] 3GPP2 C.S0025: "Markov Service Option (MSO) for cdma2000 Spread Spectrum Systems".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in EN 301 489-1 [1], clause 3 and the following apply:

**forward CDMA channel:** CDMA channel from a base station to mobile stations. The Forward CDMA Channel contains one or more code channels that are transmitted on a CDMA frequency assignment using a particular pilot PN offset

**International Mobile Telecommunications-2000 (IMT-2000):** third generation mobile systems which provide access, by means of one or more radio links, to a wide range of telecommunications services supported by the fixed telecommunication networks (e.g. PSTN, ISDN, or IP), and to other services which are specific to mobile users

**Radio Configuration (RC):** set of Forward Traffic Channel and Reverse Traffic Channel transmission formats that are characterized by physical layer parameters such as transmission rates, modulation characteristics, and spreading rate

**Reverse CDMA Channel:** CDMA channel from the mobile station to the base station. From the base station's perspective, the Reverse CDMA Channel is the sum of all mobile station transmissions on a CDMA frequency assignment

**Signal and control port:** port which carries information or control signals, except from antenna and telecommunication ports

**Traffic Channel:** communication path between a mobile station and a base station used for user and signalling traffic. The term Traffic Channel implies a Forward Traffic Channel and Reverse Traffic Channel pair. See also Forward Traffic Channel and Reverse Traffic Channel

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

FER	Frame Error Rate
BS	Base Station
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
PN	pseudorandom number
RC	Radio Configuration
RF	Radio Frequency

---

## 4 Test conditions

For the purpose of the present document, the test conditions of EN 301 489-1 [1], clause 4, shall apply as appropriate. Further product related test conditions for base station equipment are specified in the present document.

### 4.1 General

The equipment shall be tested in normal test environment defined in 3GPP2 C.S0010-A [6]. The test conditions shall be recorded in the test report.

For emission and immunity tests, the test arrangements, etc., as specified in the present document, clauses 4.2 to 4.5, shall apply.

For an EUT which contains more than one BS, it is sufficient to perform tests relating to connectors of each representative type of port forming part of the EUT.

Precautions should be taken to ensure that the cables connecting antenna connectors to test equipment or termination do not influence the test results.

## 4.2 Arrangements for test signals

The provisions of EN 301 489-1 [1], clause 4.2 shall apply with the following modifications.

The wanted RF signal nominal frequency shall be selected by setting the CDMA channel to an appropriate number. A communication link shall be set up with a suitable mobile station simulator (hereafter called "the test system") according to the Radio Configuration (RC) supported by the base station (see clause 1.3 in 3GPP2 C.S0010-A [6]) using full data rate only. The test system shall be located outside of the test environment.

When the EUT is required to be in the transmit/receive mode, the following conditions shall be met:

- the transmitter part of the EUT shall be commanded to operate at maximum rated transmit power;
- adequate measures shall be taken to avoid the effect of the immunity test RF signal on the measuring equipment.

### 4.2.1 Arrangements for test signals at the input of transmitters

The provisions of EN 301 489-1 [1], clause 4.2.1 shall apply.

### 4.2.2 Arrangements for test signals at the output of transmitters

The provisions of EN 301 489-1 [1], clause 4.2.2 shall apply.

### 4.2.3 Arrangements for test signals at the input of receivers

The provisions of EN 301 489-1 [1], clause 4.2.3 shall apply with the following modification.

For immunity testing the wanted RF input signal level shall be set to no more than 40 dB above the reference sensitivity level as defined in 3GPP2 C.S0010-A [6], to provide a stable communications link. The input signal level used in the test shall be noted in the test report.

For emission testing the wanted RF input signal level shall be set to no more than 15 dB above the reference sensitivity level as defined in 3GPP2 C.S0010-A [6], to ensure that the performance of the measuring receiver is operating within its dynamic range. The input signal level used in the test shall be noted in the test report.

### 4.2.4 Arrangements for test signals at the output of receivers

The provisions of EN 301 489-1 [1], clause 4.2.4 shall apply.

## 4.3 Exclusion bands

The provisions of EN 301 489-1 [1], clause 4.3 shall apply.

## 4.4 Narrowband responses of receivers

Responses on receivers or duplex transceivers occurring during the immunity test at discrete frequencies which are narrow band responses (spurious responses), are identified by the following method:

- if during an immunity test the quantity being monitored goes outside the specified tolerances (see clause 6.1), it is necessary to establish whether the deviation is due to a narrow band response or to a wide band (EMC) phenomenon. Therefore, the test shall be repeated with the unwanted signal frequency increased, and then decreased by 10 MHz;
- if the deviation disappears in either or both of the above 10 MHz offset cases, then the response is considered as a narrow band response;



- if the deviation does not disappear, this may be due to the fact that the offset has made the frequency of the unwanted signal correspond to the frequency of another narrow band response. Under these circumstances the procedure is repeated with the increase and decrease of the frequency of the unwanted signal set to 12,5 MHz;
- if the deviation still does not disappear with the increased and/or decreased frequency, the phenomenon is considered wide band and therefore an EMC problem and the equipment fails the test.

For immunity tests, narrow band responses shall be disregarded.

## 4.5 Normal test modulation

A communication link shall be set up with a suitable base station system test equipment. The normal test modulation should be setup according to the Radio Configuration (RC) supported by the base station under test using full data rate only (see clause 1.3 in 3GPP2 C.S0010-A [6]).

---

# 5 Performance assessment

## 5.1 General

The provision of EN 301 489-1 [1], clause 5.1 shall apply with the following modification.

The information about the bandwidth of the IF filter immediately preceding the demodulator as set out in EN 301 489-1 [1], clause 5.1 is not applicable to radio equipment in the scope of the present document.

## 5.2 Equipment which can provide a continuous communication link

The provision of EN 301 489-1 [1], clause 5.2 shall apply.

### 5.2.1 Assessment of FER in Forward Link (Downlink)

For immunity testing, the output of the transmitter shall be connected to a test system which meets the requirements for the FER assessment in accordance with 3GPP2 C.S0002-A [5] and 3GPP2 C.S0010-A [6]. The level of the signal supplied to the equipment should be within the range for which the assessment of FER is not impaired. Power control shall be off during the immunity testing.

### 5.2.2 Assessment of FER in Reverse Link (Uplink)

The value of the FER at the output of the receiver reported by the BS shall be monitored using a suitable test system.

## 5.3 Equipment which does not provide a continuous communication link

The provision of EN 301 489-1 [1], clause 5.3 shall apply.

## 5.4 Ancillary equipment

The provision of EN 301 489-1 [1], clause 5.4 shall apply.

## 5.5 Equipment classification

The provision of EN 301 489-1 [1], clause 5.5 shall apply.

---

## 6 Performance criteria

### 6.1 Performance criteria for continuous phenomena applied to Base Stations (BS)

During the immunity test, the observed Frame Error Rate (FER) of the BS forward link and reverse link shall not exceed 1,0 % with 95 % confidence (see clause 6.8 in 3GPP2 C.S0010-A [6]), and the BS shall operate as intended. After each test case, the BS shall operate as intended with no loss of user control function, or stored data, the communication link shall be maintained.

### 6.2 Performance criteria for transient phenomena for Base Stations (BS)

During each individual exposure in the test sequence, the observed Frame Error Rate (FER) of the BS forward link and reverse link may temporarily exceed 1,0% with 95% confidence.

After each test case, the BS shall operate as intended with no loss of user control function, or stored data, the communication link shall be maintained.

### 6.3 Performance criteria for ancillary equipment tested on a stand alone basis

The provision of EN 301 489-1 [1], clause 6.4 shall apply. In addition, the provisions of clauses 6.3.1 and 6.3.2 of the present document shall apply.

#### 6.3.1 Performance criteria for continuous phenomena for ancillary equipment

The EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below the performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible performance loss. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

#### 6.3.2 Performance criteria for transient phenomena for ancillary equipment

The EUT shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below the performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible performance loss. During the test, degradation of performance is however allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

## 7 Applicability overview tables

### 7.1 Emission

#### 7.1.1 General

EN 301 489-1 [1], table 2 contains the applicability of EMC emission measurements to the relevant ports of radio and/or associated ancillary equipment.

#### 7.1.2 Special conditions

No special conditions for EMC emission measurements shall apply to Base Station equipment in the scope of the present document.

### 7.2 Immunity

#### 7.2.1 General


EN 301 489-1 [1], table 3, contains the applicability of EMC immunity tests to the relevant ports of radio and/or associated ancillary equipment.

#### 7.2.2 Special conditions

The following special conditions set out in table 2, relate to the immunity test methods and performance criteria used in EN 301 489-1 [1] clause 9.1.

**Table 2: Special conditions for EMC immunity measurements**

Reference to clauses in EN 301 489-1 [1]	Special product-related conditions, additional to or modifying the test configuration in EN 301 489-1 [1], clause 9.1
9.1 Test configuration	Immunity tests on the entire base station shall be performed by establishing communication links at the air-interface, e.g. with the mobile simulator and the base station controller/simulator, see figure 1. Immunity tests shall be performed on both the forward link and reverse link. The tests shall also include both the air-interface and base station controller interface. FER evaluation may be carried out at either interface, where appropriate, and the measurements for the forward link and reverse link may be carried out as a single path looped at either the air-interface or base station controller interface. In the case of looping, care should be taken to ensure that the FER information is not compromised.

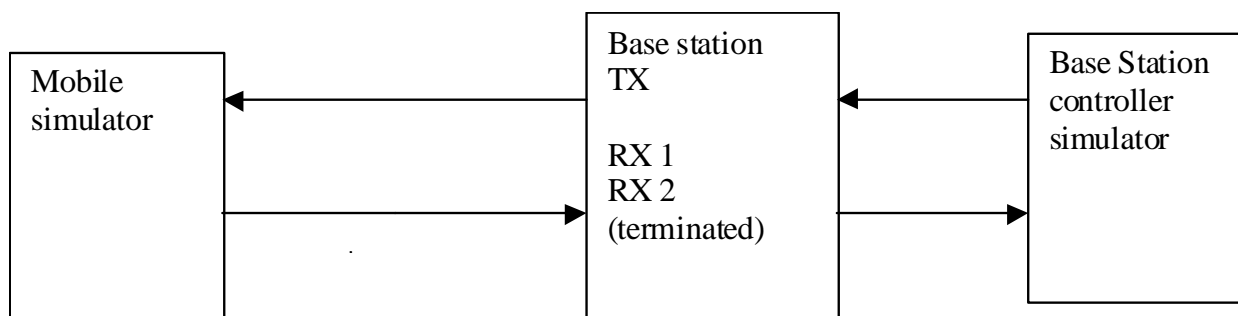

**Figure 1: Communication link set up for BS immunity measurement**

---

## Annex A (informative): Examples of base station radio equipment for digital cellular radio telecommunications systems within the scope of the present document

The present document covers types of base stations for digital cellular radio telecommunications systems as set out below.

---

### A.1 Base station equipment for the IMT-2000 CDMA Multi-carrier system

The present document applies to the IMT-2000 CDMA Multi-carrier digital cellular mobile and portable radio equipment. Definitions for base station equipment within the scope of the present document are found in the following functional radio specification:

- 3GPP2 C.S0010-A: "Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations, 2000".

---

## Annex C (informative): Bibliography

3GPP2 C.S0010-A: "Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Base Stations, 2000".

---

## History

<b>Document history</b>			
V1.1.1	December 2000	Public Enquiry	PE 20010427: 2000-12-27 to 2001-04-27