

Final draft **ETSI EN 302 018-1** V1.1.1 (2002-07)

European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Transmitting equipment for the
Frequency Modulated (FM)
sound broadcasting service;
Part 1: Technical characteristics and test methods**



Reference

DEN/ERM-TG17-005-1

Keywords

audio, broadcasting, FM, radio, terrestrial,
transmitter

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	6
Foreword.....	6
Introduction	6
1 Scope	7
2 References	7
3 Definitions, symbols and abbreviations	8
3.1 Definitions	8
3.2 Symbols.....	9
3.3 Abbreviations	9
4 Technical requirements specifications	9
4.1 Transmitter input configuration.....	9
4.2 Transmitter output characteristics	9
4.2.1 Rated output power.....	9
4.2.1.1 Definition	9
4.2.1.2 Method	9
4.2.1.3 Limit.....	9
4.2.2 Frequency stability.....	10
4.2.2.1 Definition	10
4.2.2.2 Method of measurement.....	10
4.2.2.3 Limit.....	10
4.2.3 Transmitter muting during frequency shift.....	10
4.2.3.1 Definition	10
4.2.3.2 Method of measurement.....	10
4.2.3.3 Limit.....	10
4.2.4 Deviation sensitivity stability	10
4.2.4.1 Definition	10
4.2.4.2 Method of measurement.....	10
4.2.4.3 Limit.....	10
4.2.5 Residual AM (Hum and noise).....	10
4.2.5.1 Definition	10
4.2.5.2 Method of measurement.....	10
4.2.5.3 Limit.....	11
4.2.6 Synchronous AM (AM due to FM)	11
4.2.6.1 Definition	11
4.2.6.2 Method of measurement.....	11
4.2.6.3 Limit.....	11
4.2.7 Modulator performance	11
4.2.7.1 Definition	11
4.2.7.2 Method	11
4.2.7.3 Limit.....	11
4.2.8 FM Signal to noise ratio (SNR)	11
4.2.8.1 Definition	11
4.2.8.2 Method of measurement.....	12
4.2.8.3 Limit.....	12
4.2.9 Spurious emissions	12
4.2.9.1 Definition	12
4.2.9.2 Method of measurement.....	12
4.2.9.3 Limit.....	12
4.2.10 Out-of-band emissions.....	13
4.2.10.1 Definition	13
4.2.10.2 Method of measurement.....	13
4.2.10.3 Limit.....	13
4.3 Enclosure port measurements (radiated emissions).....	14

4.3.1	Cabinet radiation.....	14
4.3.1.1	Definition	14
4.3.1.2	Method	14
4.3.1.3	Limits	15
5	Testing for compliance with technical requirements.....	16
5.1	Measurement Uncertainties	16
5.2	Essential radio test suites.....	16
5.2.1	Rated output power	16
5.2.1.1	Method of test	16
5.2.1.1.1	Initial conditions	16
5.2.1.1.2	Procedure.....	16
5.2.1.1.3	Test requirements	16
5.2.2	Frequency stability.....	16
5.2.2.1	Method of test	17
5.2.2.1.1	Initial conditions	17
5.2.2.1.2	Procedure.....	17
5.2.2.1.3	Test requirements	17
5.2.3	Transmitter muting during frequency shift	17
5.2.3.1	Method of test	17
5.2.3.1.1	Initial conditions	17
5.2.3.1.2	Procedure.....	17
5.2.3.1.3	Test requirements	18
5.2.4	Deviation sensitivity stability	18
5.2.4.1	Method of test	18
5.2.4.1.1	Initial conditions	18
5.2.4.1.2	Procedure.....	18
5.2.4.1.3	Test requirements	18
5.2.5	Residual AM (Hum and noise)	18
5.2.5.1	Method of test	18
5.2.5.1.1	Initial conditions	18
5.2.5.1.2	Test requirements	18
5.2.6	Synchronous AM	19
5.2.6.1	Method of test	19
5.2.6.1.1	Initial conditions	19
5.2.6.1.2	Test requirements	19
5.2.7	Modulator performance	19
5.2.7.1	Method of test	19
5.2.7.1.1	Initial conditions	19
5.2.7.1.2	Procedure.....	19
5.2.7.1.3	Test requirements	19
5.2.8	FM Signal to noise ratio (SNR)	20
5.2.8.1	Method of test	20
5.2.8.1.1	Initial conditions	20
5.2.8.1.2	Procedure.....	20
5.2.8.1.3	Test requirements	20
5.2.9	Spurious emissions	20
5.2.9.1	Method of test	20
5.2.9.1.1	Initial conditions	20
5.2.9.1.2	Procedure.....	21
5.2.9.1.3	Test requirements	21
5.2.10	Out-of-band emissions	21
5.2.10.1	Method of test	21
5.2.10.1.1	Initial conditions	21
5.2.10.1.2	Procedure.....	21
5.2.10.1.3	Test requirements	21
5.2.11	Cabinet radiation.....	22
5.2.11.1	Method of test	22
5.2.11.1.1	Initial conditions	22
5.2.11.1.2	Procedure.....	22
5.2.11.1.3	Test requirements	22

Annex A (normative): Typical measuring arrangements	23
A.1 Test frequency range	23
A.2 Test Suite	23
A.3 Test modulating signal	24
A.4 Testing arrangements for radiated measurements	24
A.5 Test load characteristics	24
Annex B (informative): Bibliography	25
History	26

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Vote phase of the ETSI standards Two-step Approval Procedure.

The present document is part 1 of a multi-part deliverable covering transmitting equipment for the Frequency Modulated (FM) sound broadcasting service, as identified below:

Part 1: "Technical characteristics and test methods";

Part 2: "Harmonized EN under article 3.2 of the R&TTE Directive".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Introduction

The present document covers a set of non-mandatory technical parameters that are considered to be the minimum requirement for the design and operation of an FM sound broadcasting service.

Other documents directly associated with the present document:

- EN 302 018-2 [5];
- EN 301 489-11 [6].

1 Scope

The present document applies to Transmitting equipment for the frequency-modulated sound broadcasting service.

The types of equipment covered by the present document are as follows:

- Transmitting equipment for frequency modulated sound broadcasting service operating in both Monophonic and Stereophonic operating in the frequency range 68 MHz to 108 MHz.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] ITU-R Recommendation BS.412: "Planning standards for terrestrial FM sound broadcasting at VHF".
- [3] EN 60244-13: "Methods of measurement for radio transmitters - Part 13: Performance characteristics for FM sound broadcasting".
- [4] EN 55011: "Industrial, scientific and medical (ISM) radio-frequency equipment - Radio disturbance characteristics - Limits and methods of measurement".
- [5] ETSI EN 302 018-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Transmitting equipment for the Frequency Modulated (FM) radio broadcast service; Part 2: Harmonized EN under article 3.2 of the R&TTE Directive".
- [6] ETSI EN 301 489-11: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 11: Specific conditions for terrestrial sound broadcasting service transmitters".
- [7] ITU- R Recommendation BS.468-4: "Measurement of audio-frequency noise voltage level in sound broadcasting".
- [8] ITU-R Recommendation SM.329: "Spurious emissions".
- [9] IEC 60489-1: "Methods of measurements for radio equipment used in the mobile services; Part 1: General definitions and standard conditions of measurement".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

broadcasting service: radio communication service in which the transmissions are intended for direct reception by the general public

NOTE: This service may include sound transmissions, television transmissions or other types of transmission.

carrier power: average power supplied to the antenna transmission line by a transmitter during one cycle taken under the condition of no modulation

class of emission: set of characteristics of an emission, designated by standard symbols, e.g. type of modulation of the main carrier, modulating signal, type of information to be transmitted, and also, if appropriate, any additional signal characteristics

composite: See 'Multiplex (MPX) signal'.

difference signal: signal theoretically equal to half the difference between the left and right stereophonic signals, and in practice proportional to this difference

enclosure port: physical boundary of the apparatus through which electromagnetic fields may radiate or impinge

NOTE: In the case of integral antenna equipment, this port is inseparable from the antenna port.

mean power: average power supplied to the antenna transmission line by a transmitter during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation envelope taken under normal operating conditions

MultiPlex (MPX) signal: contains all information, including the pilot tone and any supplementary signal which is used to frequency modulate the VHF FM transmitter

necessary bandwidth: for a given class of emission, the width of the frequency band which is sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions

out-of-band emissions: emission on a frequency or frequencies immediately outside the necessary bandwidth which results from the modulation process, but excluding spurious emissions

pilot tone: 19 kHz tone used to recover the stereo subcarrier in the stereo-receiver

Radio Data System (RDS): signal containing information on programmes and broadcasting network as defined in EN 50067

NOTE: This signal is carried by a subcarrier at 57 kHz, amplitude modulated by the encoded data with suppressed carrier in a frequency band of $\pm 2,4$ kHz.

reference bandwidth: bandwidth in which the emission level is specified

spurious emissions: emission on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information

NOTE: Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but exclude out of band emissions.

stereo subcarrier: 38 kHz subcarrier used to carry the difference signal

sum signal: signal theoretically equal to half of the sum of the left and right stereophonic signals, and in practice proportional to this sum

unwanted emissions: consist of spurious emissions and out of band emissions

3.2 Symbols

For the purposes of the present document, the following symbols apply:

Ω	ohms (unit of resistance)
μ	micro, 10^{-6}
dBc	decibels relative to the unmodulated carrier power of the emission
V	Volts

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

a.c.	alternating current
AF	Audio Frequency
EMC	Electro-Magnetic Compatibility
EUT	Equipment Under Test
FM	Frequency Modulation
LV	Low Voltage
MPX	MultiPleX
R&TTE	Radio equipment and Telecommunications Terminal Equipment
RDS	Radio Data System
rms	root mean square
S/N	Signal to Noise
VHF	Very High Frequency

4 Technical requirements specifications

4.1 Transmitter input configuration

If the transmitter does not incorporate a stereo encoder and is intended for stereo operation then a suitable test encoder shall be used.

4.2 Transmitter output characteristics

4.2.1 Rated output power

4.2.1.1 Definition

The rated output power is the carrier power that the transmitter or transposer shall deliver at its antenna port under manufacturers specified conditions of operation.

4.2.1.2 Method

The test defined in clause 5.2.1 should be applied.

4.2.1.3 Limit

The carrier output power shall be within $\pm 1,0$ dB of the rated output power under normal operating conditions as defined by the manufacturer.

4.2.2 Frequency stability

4.2.2.1 Definition

The frequency stability of an emission is the variation of frequency against a predetermined time scale.

4.2.2.2 Method of measurement

The test defined in clause 5.2.2 should be applied.

4.2.2.3 Limit

For a period of not less than ninety days, the frequency of the transmitter shall stay within the tolerance of ± 2 kHz.

4.2.3 Transmitter muting during frequency shift.

4.2.3.1 Definition

The suppression of emissions during the retuning of transmitters, or the loss of carrier frequency control. This is particularly relevant to frequency agile transmitters incorporating frequency control loops.

4.2.3.2 Method of measurement

The test defined in clause 5.2.3 should be applied.

4.2.3.3 Limit

The Muting shall be as defined in table 2 and additionally shown in figure 1.

4.2.4 Deviation sensitivity stability

4.2.4.1 Definition

Required Audio or MPX input level to the transmitter to achieve desired deviation.

4.2.4.2 Method of measurement

The test defined in clause 5.2.4 should be applied.

4.2.4.3 Limit

The deviation sensitivity of the transmitter shall remain within ± 3 % of the declared value under the manufacturers declared operating conditions. However for frequency-agile transmitters the deviation sensitivity shall remain within ± 5 % of the declared value under the manufacturers declared operating conditions.

4.2.5 Residual AM (Hum and noise)

4.2.5.1 Definition

The amplitude modulated hum and noise level is the peak voltage at the output of a linear envelope detector, in the absence of any modulation signal. The result is expressed as a percentage of the D.C. component of the envelope detector output.

4.2.5.2 Method of measurement

The test defined in clause 5.2.5 should be applied.

4.2.5.3 Limit

The permitted level of residual AM in the absence of modulation shall not exceed 1 % when measured in a bandwidth of 20 Hz to 20 kHz (unweighted).

4.2.6 Synchronous AM (AM due to FM)

4.2.6.1 Definition

Synchronous amplitude modulation is evaluated by measuring the peak voltage of the a.c. component at the output of a linear envelope detector due to presence of a specified modulating signal. The result is expressed as a percentage of the d.c component corresponding to the unmodulated carrier.

4.2.6.2 Method of measurement

The test defined in clause 5.2.6 should be applied.

4.2.6.3 Limit

The permitted level of AM due to FM shall not exceed 2 % for a peak deviation of ± 40 kHz at a modulation frequency of 500 Hz.

4.2.7 Modulator performance

4.2.7.1 Definition

The amplitude and phase performance required for the transmitter to ensure compliance with maximum frequency deviation.

4.2.7.2 Method

The test defined in clause 5.2.7 should be applied.

4.2.7.3 Limit

The deviation limits in the following table shall apply.

Table 1: Deviation limits

Frequency	Sine-wave	Clipped sine-wave
40 Hz	75 kHz \pm 3 %	75 kHz \pm 10 %
10 kHz	75 kHz \pm 3 %	75 kHz \pm 10 %

NOTE: In the case of monophonic transmitters, the "clipped sine wave" limits do not apply.

4.2.8 FM Signal to noise ratio (SNR)

4.2.8.1 Definition

The FM noise level is the voltage (see note) of the AC components at the output of the demodulator in absence of a modulation signal expressed in dB relative to a reference level corresponding to 100% modulation (75 kHz) at a modulation frequency of 400 Hz.

NOTE: Unweighted noise ratio; Voltage measured in rms;

Weighted noise ratio; Voltage filtered and measured as quasi peak according to ITU- R Recommendation BS.468-4 [7].

4.2.8.2 Method of measurement

The test defined in clause 5.2.8 should be applied.

4.2.8.3 Limit

The S/N ratio, measured on both decoded outputs and related to full output level (0 dBr) at 400 Hz, shall be:

- unweighted ≤ -72 dB
- weighted ≤ -72 dB

4.2.9 Spurious emissions

4.2.9.1 Definition

Emission on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but exclude out of band emissions.

4.2.9.2 Method of measurement

The test defined in clause 5.2.9 shall be applied.

4.2.9.3 Limit

Spurious emissions shall not exceed the values set out in table 2, shown additionally in figure 1 for the frequency range 9 kHz to 1 GHz.

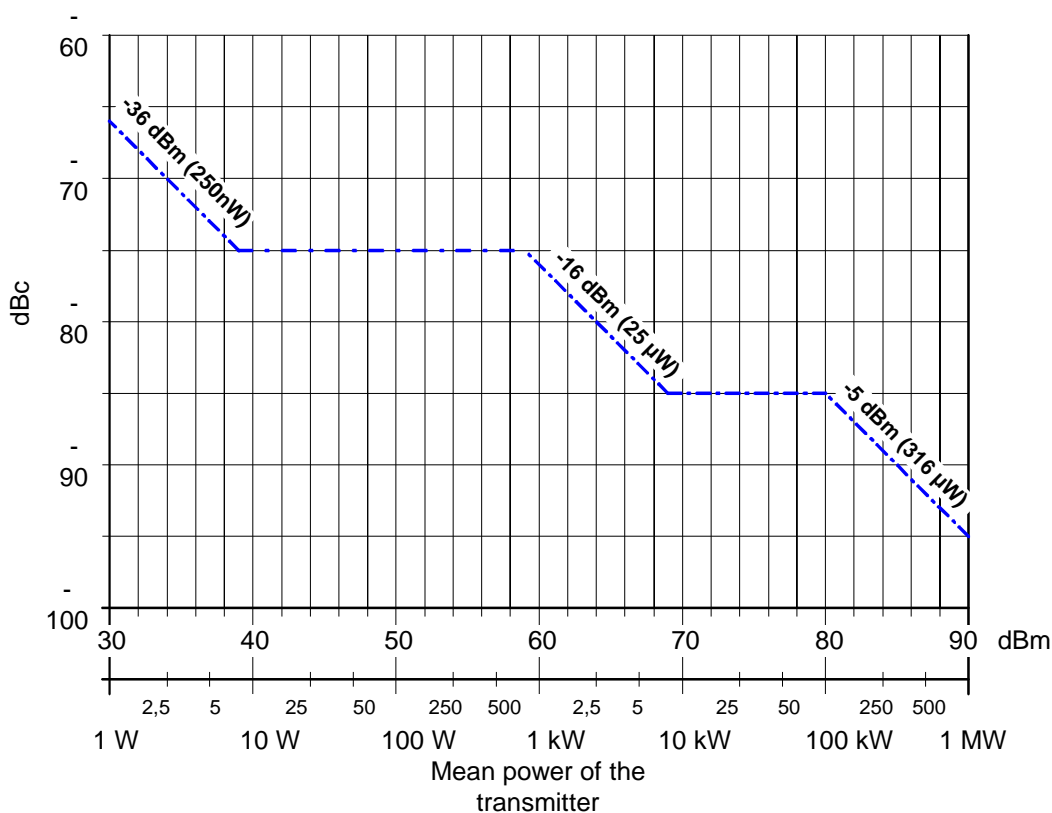


Figure 1: Spurious Emission limits for FM sound broadcasting transmitters

Table 2: Spurious Emission limits for FM sound broadcasting transmitters

Mean power of the transmitter	Limits Mean power absolute levels (dBm) or relative levels (dBc) below the power supplied to the antenna port in the reference bandwidth (see annex A)
$P < 9$ dBW	-36 dBm
$9 \text{ dBW} \leq P < 29$ dBW	75 dBc
$29 \text{ dBW} \leq P < 39$ dBW	-16 dBm
$39 \text{ dBW} \leq P < 50$ dBW	85 dBc
$50 \text{ dBW} \leq P$	-5 dBm

NOTE: Within the band 108 MHz to 137 MHz the absolute limit of 25 μ W (-16 dBm) shall apply.

4.2.10 Out-of-band emissions

4.2.10.1 Definition

Emission on a frequency or frequencies immediately outside the necessary bandwidth, which results from the modulation process, but excludes spurious emissions.

4.2.10.2 Method of measurement


The test defined in clause 5.2.10 shall be applied.

4.2.10.3 Limit

The spectrum limit mask for VHF FM sound broadcasting is shown in figure 2. The related break points are given in table 3.

Power level is measured in a 1 kHz bandwidth.

The limits shown in figure 2 apply.

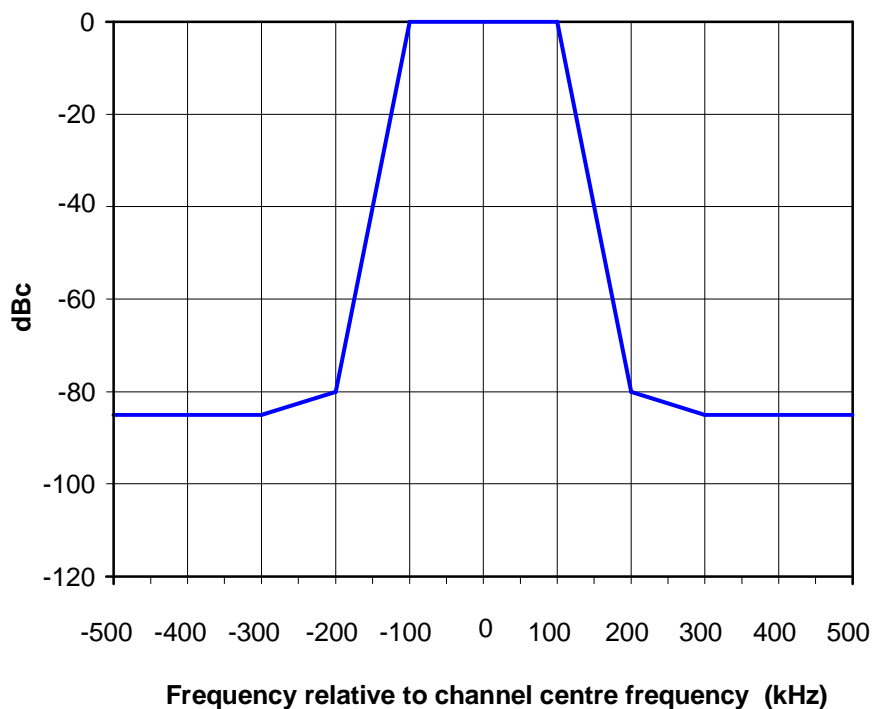

NOTE: Within the band 108 to 137 the absolute limit of 25 μ W shall apply.

Figure 2: Out-of-Band Emission limits for FM sound broadcasting transmitters

Table 3: Break points of spectrum limit mask for VHF FM sound broadcasting

Frequency relative to the centre of the channel (kHz)	Relative level (dB)
-500	-85
-300	-85
-200	-80
-110	0
110	0
200	-80
300	-85
500	-85

4.3 Enclosure port measurements (radiated emissions)

4.3.1 Cabinet radiation


4.3.1.1 Definition

Emissions from the equipment, radiated from the enclosure port, other than those present at the antenna port.

4.3.1.2 Method

The test defined in clause 5.2.11 shall be applied.

4.3.1.3 Limits

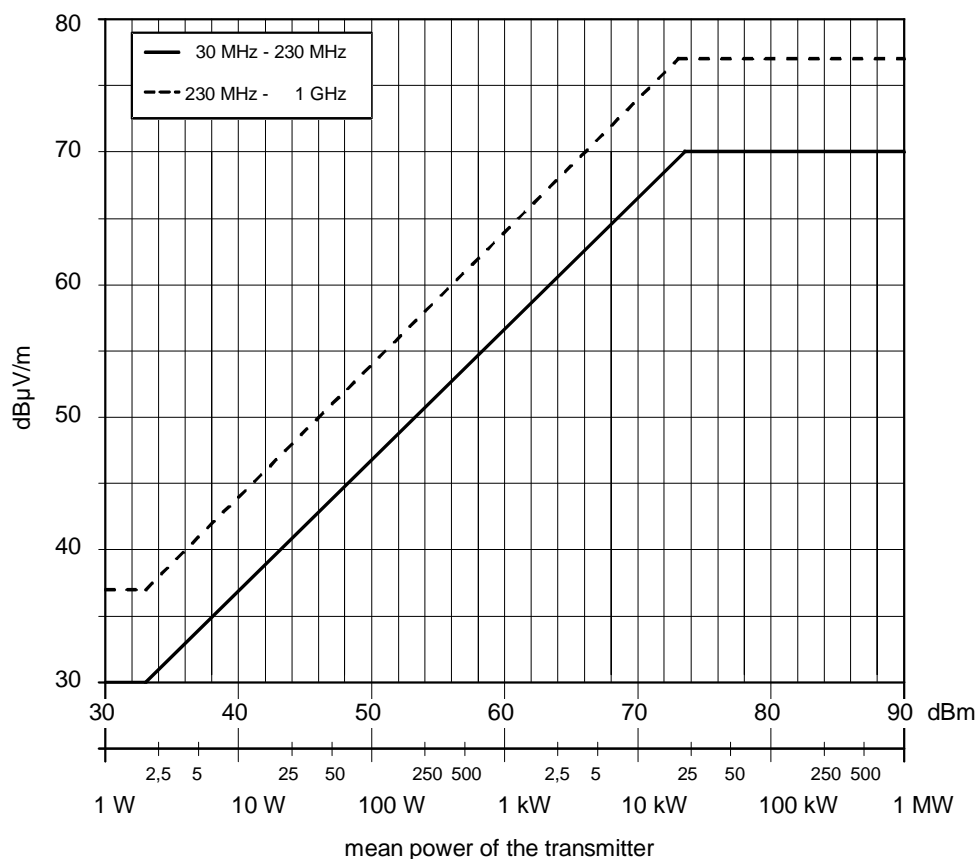

This test shall be performed at a distance of 10 m, where feasible. When size and/or power requirements necessitate testing in a manufacturing facility, other distances may be used (see notes 1, 2 and 3). Tests shall not be carried out in the exclusion band (2).

Figure 3: Cabinet radiation limits for sound broadcasting transmitters

Table 4: Limits for radiated unwanted emissions

Quasi-peak limits (dBµV/m) at 10m (see notes 1 and 2)	Frequency range
$30 \text{ dB}\mu\text{V/m} \leq 60 + 10 \log_{10} (P_0/2\,000) \leq 70 \text{ dB}\mu\text{V/m}$	30 MHz - 230 MHz
$37 \text{ dB}\mu\text{V/m} \leq 67 + 10 \log_{10} (P_0/2\,000) \leq 77 \text{ dB}\mu\text{V/m}$	> 230 MHz - 1 GHz
NOTE 1: P_0 = RF output power in watts.	
NOTE 2: The exclusion band for the transmitter extends from $F_c - 300 \text{ kHz}$ to $F_c + 300 \text{ kHz}$, where F_c is the operating frequency in MHz.	

NOTE 1: The measurements can be carried out at other distances. In that case limits are modified according to the relation:

$$L(xm) = L(10m) + 20 \log (10/x)$$

where x = distance.

NOTE 2: Care should be taken if measuring at test distances below 10 m as this may be in the near field.

NOTE 3: In cases of dispute the measurement distance of 10 m shall take precedence.

5 Testing for compliance with technical requirements

5.1 Measurement Uncertainties

Measurement uncertainty should be calculated and techniques employed to minimize its range. This uncertainty should be applied to the limit and any measurement falling below the range is deemed acceptable (ITU-R Recommendation BS.412 [2]).

5.2 Essential radio test suites

5.2.1 Rated output power

5.2.1.1 Method of test

5.2.1.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- 1)
 - 1) connect the EUT to the Test Load, via the Coupling Device;
 - 2) connect the Spectrum Analyser or power meter to the Coupling Device.

NOTE: AF Signal Generator and Voltage measuring equipment are not required for this test.

5.2.1.1.2 Procedure

- 2)
 - 1) operate the EUT at each of the test frequencies as defined in clause 5.2.1.1.1;
 - 2) measure the results on the Spectrum Analyser or power meter.

5.2.1.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.1.3 in order to demonstrate compliance.

5.2.2 Frequency stability

Measurements should be made at intervals, which are short enough to reveal the presence of superimposed periodical variations (see annex A).

5.2.2.1 Method of test

5.2.2.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequency:

Any one frequency within the tuning range of the EUT.

Test arrangement (see figure A.1):

3)

- 1) connect the EUT to the Test Load, via the Coupling Device;
- 2) connect a frequency recorder to the Coupling Device.

NOTE: AF Signal Generator and Voltage measuring equipment are not required for this test.

5.2.2.1.2 Procedure

- 1) operate the exciter of the EUT at the test frequency as defined in clause 5.2.2.1.1;
- 2) measure the results on the frequency recorder.

5.2.2.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.2.3 in order to demonstrate compliance.

5.2.3 Transmitter muting during frequency shift

5.2.3.1 Method of test

5.2.3.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- Present frequency to desired frequency.

Test arrangement (see figure A.1):

- 1) connect the EUT to the Test Load, via the Coupling Device;
- 2) connect the Spectrum Analyser to the Coupling Device.

NOTE: AF Signal Generator and Voltage measuring equipment are not required for this test.

5.2.3.1.2 Procedure

- 1) operate the EUT at the present frequency as defined in clause 5.2.3.1.1;
- 2) initiate frequency change;
- 3) measure the results on the Spectrum Analyser.

5.2.3.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.3.3 in order to demonstrate compliance.

5.2.4 Deviation sensitivity stability

5.2.4.1 Method of test

5.2.4.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- 1) connect the AF Signal Generator to the EUT;
- 2) connect the EUT to the Test Load, via the Coupling Device;
- 3) connect deviation recording equipment to the Coupling Device.

5.2.4.1.2 Procedure

- 1) set the AF Signal Generator to deliver a test signal as defined in clause A.3;
- 2) operate the EUT at each of the test frequencies as defined in clause 5.2.4.1.1;
- 3) measure the results on the deviation recording equipment.

5.2.4.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.4.3 in order to demonstrate compliance.

5.2.5 Residual AM (Hum and noise)

5.2.5.1 Method of test

The measurement shall be carried out in accordance with EN 60244-13 [3], clause 8.3.1.

5.2.5.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

5.2.5.1.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.5.3 in order to demonstrate compliance.

5.2.6 Synchronous AM

5.2.6.1 Method of test

The measurement shall be carried out in accordance with EN 60244-13 [3], clause 8.3.2.

5.2.6.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

5.2.6.1.2 Test requirements

The results obtained shall be compared to the limits in clause 4.2.6.3 in order to demonstrate compliance.

5.2.7 Modulator performance

5.2.7.1 Method of test

Two sine wave test waveforms with frequencies of 10 Hz and 10 kHz and distortion $< 1\%$ will be required. Two further test waveforms shall be generated from these and should be symmetrically clipped by 12 dB. All four test waveforms must have identical peak levels, which shall be equal to the level declared by the manufacturer to give 75 kHz deviation.

The manufacturer may alternatively declare the performance specifications for frequency response and stereo separation, using a suitable stereo encoder.

5.2.7.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- 1) connect the AF Signal Generator to the EUT;
- 2) connect the EUT to the Test Load, via the Coupling Device;
- 3) connect deviation recording equipment to the Coupling Device.

5.2.7.1.2 Procedure

- 1) set the AF Signal Generator to deliver a test signal as defined in clause 5.2.7.1;
- 2) operate the EUT at each of the test frequencies as defined in clause 5.2.7.1.1;
- 3) measure the results on the deviation recording equipment.

5.2.7.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.7.3 in order to demonstrate compliance.

5.2.8 FM Signal to noise ratio (SNR)

5.2.8.1 Method of test

5.2.8.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- 1) connect the AF Signal Generator to the EUT;
- 2) connect the EUT to the Test Load, via the Coupling Device;
- 3) connect the Spectrum Analyser to the Coupling Device.

5.2.8.1.2 Procedure

- 1) connect a suitable test detector to the MPX output (with a quasi peak detector as in ITU- R Recommendation BS.468-4 [7] with pre-emphasis and de-emphasis in);
- 2) set the AF Signal Generator to deliver a test signal of 400 Hz, sine wave, at a level to achieve 100% modulation (75 kHz deviation);
- 3) measure the reference voltage;
- 4) disconnect the AF signal generator from the EUT;
- 5) measure the weighted and unweighted voltage and compare to the reference voltage;
- 6) repeat the above procedure at each of the test frequencies as defined in clause 5.2.8.1.1;

5.2.8.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.8.3 in order to demonstrate compliance.

5.2.9 Spurious emissions

5.2.9.1 Method of test

5.2.9.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- 1) connect the AF Signal Generator to the EUT;
- 2) connect the EUT to the Test Load, via the Coupling Device;
- 3) connect the Spectrum Analyser to the Coupling Device.

5.2.9.1.2 Procedure

- 1) set the AF Signal Generator to deliver a test signal as defined in clause A.3;
- 2) operate the EUT at each of the test frequencies as defined in clause 5.2.9.1.1;
- 3) measure the results on the Spectrum Analyser.

5.2.9.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.9.3 in order to demonstrate compliance.

5.2.10 Out-of-band emissions

5.2.10.1 Method of test

5.2.10.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT; the highest operating frequency of the EUT;
- b) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- 1) connect the AF Signal Generator to the EUT;
- 2) connect the EUT to the Test Load, via the Coupling Device;
- 3) connect the Spectrum Analyser to the Coupling Device.

5.2.10.1.2 Procedure

- 1) set the AF Signal Generator to deliver a test signal as defined in clause A.3;
- 2) operate the EUT at each of the test frequencies as defined in clause 5.2.10.1.1;
- 3) measure the results on the Spectrum Analyser.

5.2.10.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.10.3 in order to demonstrate compliance.

5.2.11 Cabinet radiation

5.2.11.1 Method of test

5.2.11.1.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- 1) the lowest operating frequency of the EUT;
- 2) the highest operating frequency of the EUT;
- 3) a frequency mid-way between a) and b) above.

Test arrangement :

- 1) connect the AF Signal Generator to the EUT;
- 2) connect the EUT to the Test Load;
- 3) connect the Spectrum Analyser to the measuring antenna.

5.2.11.1.2 Procedure

- 1) set the AF Signal Generator to deliver a test signal as defined in clause A.3;
- 2) operate the EUT at each of the test frequencies as defined in clause 5.2.11.1.1;
- 3) measure the results on the Spectrum Analyser;

NOTE: Testing shall be carried out at a suitably calibrated test site, unless physical size is a restriction, in which case the test method shall be in accordance with EN 55011 [4]:

- measurements shall be made outside ± 250 % of the necessary bandwidth of the transmission;
- measurements shall be made in the operational mode producing the largest emission in the frequency band being investigated consistent with normal applications;
- the equipment shall be configured in a manner which is representative of a normal/typical operation, where practical;
- an attempt shall be made to maximize the detected radiated emission, e.g. by moving the cables of the equipment;
- the configuration and mode of operation during measurements shall be precisely noted in the test report;
- RF input/output ports shall be correctly terminated;
- the tests shall be carried out at a point within the specified normal operating environmental range and at the rated supply voltage for the equipment.

5.2.11.1.3 Test requirements

The results obtained shall be compared to the limits in clause 4.3.1.3 in order to demonstrate compliance.

Annex A (normative): Typical measuring arrangements

A.1 Test frequency range

Limits on unwanted emissions for radio equipments are considered to be applicable to the range 9 kHz to 300 GHz. However, for practical measurement purposes, the frequency range of spurious emissions may be restricted. As guidance for practical purposes, the following measurement parameters in table A.1 are recommended.

Table A.1

Transmitter fundamental frequency range	Unwanted emission frequency measurement range	
	lower frequency	upper frequency
68 MHz - 108 MHz	9 kHz	1 GHz

The following reference bandwidths are to be used:

- for spurious emissions:
 - 1 kHz between 9 kHz and 150 kHz;
 - 10 kHz between 150 kHz and 30 MHz;
 - 100 kHz between 30 MHz and 1 GHz
- for out of band emissions:
 - 1 kHz.

For definition of reference bandwidth, see ITU-R Recommendation SM.329 [8].

A.2 Test Suite

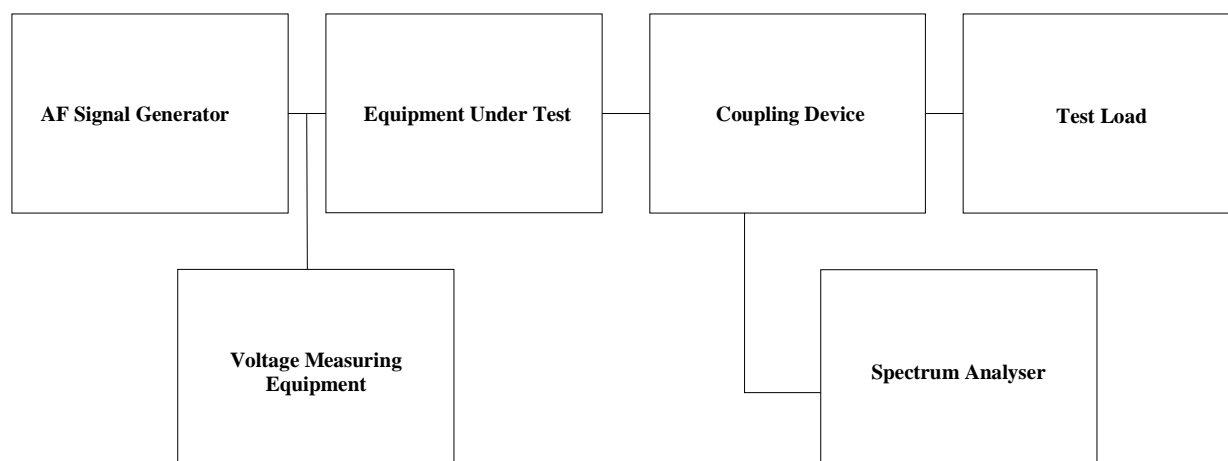


Figure A.1

A.3 Test modulating signal

A Modulating signal sufficient to achieve Maximum modulation as declared by the manufacturer.

A.4 Testing arrangements for radiated measurements

Guidance on methods of measurement can be found in IEC 60489-1 [9].

A.5 Test load characteristics

The transmitter may be required to operate into a precision load with return loss of >26 dB in the frequency band in which the transmitter is designed to operate.

Annex B (informative): Bibliography

- ITU-R Recommendation SM.328: "Spectra and bandwidth of emission".
- CISPR 16-1: "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1: Radio disturbance and immunity test".
- CISPR 16-2: "Specification for radio disturbance and immunity measuring apparatus and methods - Part 2: "Methods of measurement of disturbances and immunity".
- Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).
- International Telecommunication Union (ITU) Radio regulations Edition of 1998.
- CEPT/ERC Recommendation 74-01: "Spurious emissions".
- ITU-R Recommendation BS.450-1 (1982): "Transmission standards for FM sound broadcasting at VHF".
- EN 60244-1 (2000): "Methods of measurements for radio transmitters - Part 1: General characteristics for broadcast transmitters".
- IEC 60244-2 (1969-01): "Methods of measurement for radio transmitters. Part 2: Bandwidth, out-of-band power and power of non-essential oscillations".
- EN 50067: "Specification of the radio data system (RDS) for VHF/FM sound broadcasting in the frequency range from 87,5 to 108,0 MHz".
- EN 60244-12-1 (1993): "Methods of measurements for radio transmitters - Part 12-1: Guideline for drawing up descriptive leaflets for transmitters and transposers for sound and television broadcasting - Characteristics to be specified".
- EN 60244-12-2 (1993): "Methods of measurements for radio transmitters - Part 12-2: Guideline for drawing up descriptive leaflets for transmitters and transposers for sound and television broadcasting - Specification sheets".
- ETSI ETR 132: "Radio broadcasting systems; Code of practice for site engineering Very High Frequency (VHF), frequency modulated, sound broadcasting transmitters".
- ETSI TR 100 028 (all parts): "ElectroMagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".

History

Document history			
V1.1.1	November 2001	Public Enquiry	PE 20020329: 2001-11-28 to 2002-03-29
V1.1.1	July 2002	Vote	V 20020913: 2002-07-15 to 2002-09-13