

Final draft **ETSI EN 302 217-1** V1.1.2 (2004-09)

European Standard (Telecommunications series)

**Fixed Radio Systems;
Characteristics and requirements for point-to-point
equipment and antennas;
Part 1: Overview and system-independent
common characteristics**



Reference

DEN/TM-04131-1

Keywords

antenna, DFRS, digital, DRRS, FWA,
point-to-point, radio, transmission

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

DECT™, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

| | |
|-------------------------------------------------------------------------------------------------------------|-----------|
| Intellectual Property Rights | 4 |
| Foreword..... | 4 |
| Introduction | 4 |
| Generality4 | |
| Cross references to previous relevant ENs | 6 |
| User's guide | 10 |
| 1 Scope | 12 |
| 2 References | 12 |
| 3 Definitions, symbols and abbreviations | 15 |
| 3.1 Definitions | 15 |
| 3.2 Symbols..... | 18 |
| 3.3 Abbreviations | 19 |
| 4 General characteristics | 21 |
| 4.1 Performance and availability requirements | 21 |
| 4.2 Environmental profiles | 21 |
| 4.2.1 Environmental profile declared under the R&TTE Directive..... | 21 |
| 4.2.2 Voluntary ETSI environmental profile | 22 |
| 4.2.2.1 Equipment within weather-protected locations (indoor locations)..... | 22 |
| 4.2.2.2 Equipment for not-weather-protected locations (outdoor locations)..... | 22 |
| 4.2.3 Test environment profiles | 22 |
| 4.3 Power supply | 22 |
| 4.3.1 Power supply profile declared under the R&TTE Directive..... | 23 |
| 4.3.2 Voluntary ETSI power supply profile..... | 23 |
| 4.4 System block diagram | 23 |
| 5 Baseband interfaces and parameters..... | 24 |
| 5.1 Plesiochronous interfaces | 24 |
| 5.2 ISDN interfaces | 24 |
| 5.3 Synchronous digital hierarchy interfaces | 24 |
| 5.4 Other baseband data interfaces..... | 24 |
| Annex A (informative): Miscellaneous characteristics..... | 25 |
| A.1 Telecommunications Management Network (TMN) interface | 25 |
| A.2 Mechanical characteristics | 25 |
| Annex B (informative): Notification of interfaces under Article 4.1 of the R&TTE Directive | 26 |
| B.1 Applicability of TCAM-RIG format of radio interface specifications to Fixed Services | 26 |
| B.2 Proposed list of radio interface specifications for Fixed Services..... | 27 |
| Annex C (informative): Bibliography..... | 28 |
| History | 31 |

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Transmission and Multiplexing (TM), and is now submitted for the Vote phase of the ETSI standards Two-step Approval Procedure.

The present document is part 1, of a multi-part deliverable covering the Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas, as identified below:

Part 1: "Overview and system-independent common characteristics".

Part 2-1: "System-dependent requirements for digital systems operating in frequency bands where frequency co-ordination is applied".

Part 2-2 "Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for digital systems operating in frequency bands where frequency co-ordination is applied".

Part 3: "Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for equipment operating in frequency bands where no frequency co-ordination is applied".

Part 4-1: "System-dependent requirements for antennas".

Part 4-2: "Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for antennas".

| Proposed national transposition dates | |
|----------------------------------------------------------------------------------------|---------------------------------|
| Date of latest announcement of this EN (doa): | 3 months after ETSI publication |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 6 months after doa |
| Date of withdrawal of any conflicting National Standard (dow): | 24 months after doa |

Introduction

Generality

Digital Fixed Radio Systems (DFRS), used in European countries, have been specified up to now in a relatively large number of specific European Norms produced by ETSI.

Previous documents, to be replaced by EN 302 217 series, contained both essential requirements, cross-referenced in EN 301 751 (see bibliography), and other requirements that, even if not considered essential under the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (hereafter mentioned as the R&TTE Directive) [1], may be applicable.

Existing standards for point-to-point systems, including antennas, cover a very large range of traffic capacities, channel separations, modulation formats and applications over a very wide range of frequency bands that are summarized in table 1.

Table 1: Digital Fixed Radio Systems (DFRS) parameters

| Parameter | Range |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency bands | from 1 GHz to 58 GHz |
| Traffic capacities | from 9,6 kbit/s to 622 Mbit/s |
| Channel separations | from 25 kHz to 112 MHz |
| Modulation formats | from 2 to 512 states (amplitude and/or phase and/or frequency modulated states) |
| Typical applications | <p>POINT-TO-POINT (P-P) CONNECTIONS: rural and urban low/medium/high capacity links for mobile infrastructure, transport/trunk (long haul), FWA/BFWA backhaul, access, governmental (non-military) links, private fixed networks, SAP/SAB P to P audio and video links</p> <p>STAND ALONE ANTENNAS: for all of the above applications when integral antennas are not employed</p> |

The new regulatory framework for placing radio systems on the market, established by the R&TTE Directive [1] also requires the availability of Harmonized ENs covering the essential requirements under article 3.2 of the R&TTE Directive [1]. This was achieved in the first instance by the harmonized EN 301 751 (see bibliography), which cross-references to the relevant clauses of the ENs in table 2, dealing with those essential requirements. However, as a long-term solution, an EN 302 217 series including stand-alone harmonized ENs containing all necessary information and avoiding as much as is practical cross-references, better suits regulatory and market requirements.

EN 302 217 series (see bibliography) meets this demand by providing a rational subdivision of requirements into general, system dependent "not essential" and "essential" requirements from the perspective of the R&TTE Directive [1].

Part 1 includes system-independent common characteristics; these requirements are not essential under article 3.2 of the R&TTE Directive [1].

EN 302 217-2-2, EN 302 217-3 and EN 302 217-4-2 (see bibliography) relevant to essential requirements under article 3.2 of the R&TTE Directive [1] replicate, within the scope and applicability of the R&TTE Directive [1], the requirements set out in harmonized EN 301 751 (see bibliography).

NOTE 1: It is proposed that the date of cessation of presumption of conformity to the R&TTE Directive [1] with reference to harmonized EN 301 751 (see bibliography) be kept two years after the date of publication in the OJ EC of the present document.

EN 302 217 series introduces, for systems (equipment and antennas) already covered by EN 301 751 (see bibliography), only technically equivalent or less stringent requirements (see note 2). Care has been taken so that such variations will not affect any frequency planning assumption for already deployed networks. Therefore, from a strictly technical point of view, it is expected that equipment already conforming to EN 301 751 (see bibliography), would not need a new test report for re-assessment of essential requirements according EN 302 217 series (see note 1). Legal implications with respect to declaration of conformity and equipment labelling are outside the scope of the present document.

NOTE 2: The only exception is with respect to class 5A equipment for system D.7 (see annex D of EN 302 217-2-2) and for systems E.1, E.2 and E.3 (see annex E of EN 302 217-2-2) for which a previous design objective has here been transformed into a more stringent RSL versus BER. In this case a supplementary test report might be required (e.g. in case the technical construction file, made for declaration of conformity to EN 301 751 (see bibliography), does not give evidence of enough margin to fulfil the requirements of the present document).

In the present document, the equipment subject of the former standards is grouped into families of either similar frequency bands or applications. Five families are identified for frequency bands where frequency co-ordination is applied, corresponding, in both EN 302 217-2-1 and EN 302 217-2-2 (see bibliography), to annexes referenced from A to E and one family associated with applications of packet data and combination of other signals mapped into proprietary transport modules, detailed in annex F.

- A frequency bands from 1,4 GHz to 2,7 GHz;
- B frequency bands from 3 GHz to 11 GHz (channel separation up to around 30 MHz);
- C frequency bands from 3 GHz to 11 GHz (channel separation 40 MHz);
- D frequency bands 13 GHz, 15 GHz and 18 GHz;
- E frequency bands from 23 GHz to 55 GHz;
- F transmission of Packet Data and combination of other signals.

Cross references to previous relevant ENs

The EN 302 217 series will replace and supersede, after a suitable transition period, the standards that are listed in table 2 (sorted by ascending EN number). Table 2 provides also an overview of the correspondence between equipment considered in those ENs and part/annexes in the present document.

Requirements in the previous ENs have been rationalized and redistributed in the present document according to a logic subdivision dictated by the coming into force of the R&TTE Directive [1]:

- requirements considered essential under article 3.2 of the R&TTE Directive [1] have been placed in the relevant harmonized ENs EN 302 217-2-2, EN 302 217-3 and EN 302 217-4-2 (see bibliography);
- other requirements that, even if not considered essential under the R&TTE Directive [1], may be applicable, on a voluntary basis, as a common basis for maintaining performance and operability of DFRS in typical deployment, have been placed in the relevant ENs, EN 302 217-1, EN 302 217-2-1 and EN 302 217-4-1 (see bibliography).

Table 2: List of ETSI standards that will be replaced and superseded by the EN 302 217 series

| Equipment and antenna standards (see note 3) | | | | | |
|----------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|--------------------------------------------------------------|
| ETSI Reference number | Version | Title | Fixed Service frequency bands of operation (see note 1) | Channel separation (MHz) | Relevant parts and annexes of EN 302 217 series (see note 2) |
| EN 300 197 | V1.6.x | Parameters for radio systems for the transmission of digital signals operating at 32 GHz and 38 GHz | 32 GHz and 38 GHz | 3,5 to 56 | Annex E EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 198 | V1.5.x | Parameters for radio systems for the transmission of digital signals operating at 23 GHz | 23 GHz | 3,5 to 56 | Annex E EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 234 | V1.3.x | High capacity digital radio systems carrying 1 x STM-1 signals and operating in frequency bands with about 30 MHz channel spacing and alternated arrangements | any from 4 GHz to 15 GHz | 28 to 30 | Annexes B and D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 407 | V1.3.x | Parameters for digital radio systems for the transmission of digital signals operating at 55 GHz | 55 GHz | 3,5 to 56 | Annex E EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 408 | V1.3.x | Parameters for digital radio systems for the transmission of digital signals and analogue video signals operating at around 58 GHz, which do not require co-ordinated frequency planning | 58 GHz | 50 and 100 | EN 302 217-3 |

| Equipment and antenna standards (see note 3) | | | | | |
|----------------------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|--------------------------------------------------------------|
| ETSI Reference number | Version | Title | Fixed Service frequency bands of operation (see note 1) | Channel separation (MHz) | Relevant parts and annexes of EN 302 217 series (see note 2) |
| EN 300 430 | V1.4.x | Parameters for radio systems for the transmission of STM-1 digital signals operating in the 18 GHz frequency band with channel spacing of 55 MHz and 27,5 MHz | 18 GHz | 27,5 and 55 | Annex D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 431 | V1.4.x | Parameters for radio system for the transmission of digital signals operating in the frequency range 24,5 GHz to 29,5 GHz | 26 GHz and 28 GHz | 3,5 to 56 | Annex E EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 630 | V1.3.x | Low capacity point-to-point digital radio systems in the 1,4 GHz frequency band | 1,4 GHz | 0,025 to 3,5 | Annex A EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 631 | V1.2.x | Antennas for point-to-point fixed radio systems in the 1 GHz to 3 GHz band | any from 1 GHz to 3 GHz | n.a. | EN 302 217-4-1 and EN 302 217-4-2 |
| EN 300 633 | V1.3.x | Low and medium capacity point-to-point digital radio systems operating in the frequency range 2,1 GHz to 2,6 GHz | any from 2,1 GHz to 2,6 GHz | 0,5 to 14 | Annex A EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 639 | V1.3.x | Sub STM-1 digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 28 MHz co-polar and 14 MHz cross-polar channel spacing | 13 GHz, 15 GHz and 18 GHz | 14 and 28 | Annex D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 786 | V1.3.x | Sub STM-1 digital radio systems in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 14 MHz co-polar channel spacing | 13 GHz, 15 GHz and 18 GHz | 14 | Annex D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 300 833 | V1.4.x | Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz | any from 3 GHz to 60 GHz | n.a. | EN 302 217-4-1 and EN 302 217-4-2 |
| EN 301 127 | V1.3.x | High capacity digital radio systems carrying SDH signals (2 x STM-1) in frequency bands with about 30 MHz channel spacing and using Co-Channel Dual-Polarized (CCDP) operation | any from 4 GHz to 15 GHz | 28 to 30 | Annexes B and D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 128 | V1.2.x | PDH low and medium capacity digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands | 13 GHz, 15 GHz and 18 GHz | 1,75 to 28 | Annex D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 216 | V1.2.x | PDH low and medium capacity and STM-0 digital radio systems operating in the frequency bands in the range 3 GHz to 11 GHz | any from 3 GHz to 11 GHz | 1,75 to 30 | Annex B EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 277 | V1.2.x | High capacity digital radio systems transmitting STM-4 or 4 x STM-1 in a 40 MHz radio frequency channel using Co-Channel Dual Polarized (CCDP) operation | any from 4 GHz to 11 GHz | 40 | Annex C EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 387 | V1.2.x | PDH low and medium capacity digital radio systems operating in the frequency band 48,5GHz to 50,2 GHz | 50 GHz | 3,5 to 28 | Annex E EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 461 | V1.3.x | High capacity fixed radio systems carrying SDH signals (2 x STM-1) in frequency bands with 40 MHz channel spacing and using Co-Channel Dual-Polarized (CCDP) operation | any from 4 GHz to 11 GHz | 40 | Annex C EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 669 | V1.2.x | High capacity digital radio systems carrying STM-4 in two 40 MHz channels or 2 x STM-1 in a 40 MHz channel with alternate channel arrangement | any from 4 GHz to 11 GHz | 40 | Annex C EN 302 217-2-1 and EN 302 217-2-2 |

| Equipment and antenna standards (see note 3) | | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------------------------|--------------------------------------------------------------|
| ETSI Reference number | Version | Title | Fixed Service frequency bands of operation (see note 1) | Channel separation (MHz) | Relevant parts and annexes of EN 302 217 series (see note 2) |
| EN 301 785 | V1.2.x | Parameters for packet data radio systems for transmission of digital signals operating in the frequency range 7, 8, 13, 15, 18, 23, 26, 28, 32, 38, 52 to 55 GHz | 7 GHz to 55 GHz | 1,75 to 56 | Annex F EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 786 | V1.2.x | Parameters for digital radio systems for the transmission of digital signals operating at 52 GHz | 52 GHz | 3,5 to 56 | Annex E EN 302 217-2-1 and EN 302 217-2-2 |
| EN 301 787 | V1.1.x | Parameters for radio systems for the transmission of Sub-STM-0 digital signals operating in the 18 GHz frequency band | 18GHz | 3,5 | Annex D EN 302 217-2-1 and EN 302 217-2-2 |
| EN 302 062 | V.1.1.x | High capacity digital radio systems carrying 2 x STM-1, 4 x STM-1 or STM-4 signals in frequency bands with 55/56 MHz channel spacing | 15 GHz, 18 GHz, 23 GHz, 26 GHz, 32 GHz and 38 GHz | 55/56 and 110/112 | Annexes D and E EN 302 217-2-1 and EN 302 217-2-2 |
| NOTE 1: The frequency band identification is taken from the approximate centre frequency as commonly used in Fixed Service ITU-R Recommendations; it also includes national frequency bands that may slightly differ from each other but are commonly referred to by the same term. | | | | | |
| NOTE 2: The reference of the annex where system specific requirements and characteristics are introduced is the same for EN 302 217-2-1 and EN 302 217-2-2 (see bibliography), respectively. | | | | | |
| NOTE 3: All references in this table are found in the bibliography. | | | | | |

The characteristics of equipment considered in those ENs have also been rationalized, recompact and resubdivided into different annexes and sub-annexes/systems in the various sub-parts of this EN 302 217 series (see bibliography).

Table 3 summarizes the relevant cross-reference between radio frequency and other requirements of equipment in various Fixed Service frequency bands and the relevant sub-parts and annexes of this EN 302 217 series (see bibliography).

Table 3: Cross reference of equipment requirements, parts, sub-parts and annexes

| EN 302 217 | | | | | | | | | | | | | | | | | | | | | |
|------------------------------------------------|-----------------------------------------------|-------------|-----------------------------------------------------|-------------------|------------|-------------------|------------|------------|-------------------|-----------------------------------------------|-------------------|------------|---------------------------------------------|------------|-----|------------|------------|-----|-----|--------|-----|
| System independent common characteristics | Part 1 | | | | | | | | | | | | | | | | | | | | |
| Antenna characteristics | EN 302 217-4-1 and EN 302 217-4-2 | | | | | | | | | | | | | | | | | | | | |
| Sub-systems in relevant annexes and EN parts ⇨ | Sub-systems in annexes A of parts 2-1 and 2-2 | | Sub-systems in annexes B and C of parts 2-1 and 2-2 | | | | | | | Sub-systems in annexes D of parts 2-1 and 2-2 | | | Sub-systems in annex E of parts 2-1 and 2-2 | | | | | | | Part 3 | |
| Frequency band (GHz)⇨ | 1,4 | 2,1/ 2,6 | 3,5/4 | 5 | L6 | U6 | 7/8 | 10,5 | 11 | 13 | 15 | 18 | 23 | 26/28 | 31 | 32 | 38 | 50 | 52 | 55 | 58 |
| System capacity (payloads) ↓ | | | | | | | | | | | | | | | | | | | | | |
| PDH systems | A.1 | A.2 | B.1 | – | B.1 | B.1 | B.1 | B.1 | – | D.1 | D.1 | D.1 | E.1 | E.2 | E.3 | E.3 | E.3 | E.5 | E.6 | E.7 | Any |
| STM-0 | – | – | B.1 | – | B.1 | B.1 | B.1 | B.1 | – | D.3 D.4 | D.3 D.4 | D.3 D.4 | E.1 | E.2 | E.3 | E.3 | E.3 | – | E.6 | E.7 | |
| SubSTM-0 | – | – | – | – | – | – | – | – | – | – | – | D.2 | – | – | – | – | – | – | – | – | |
| STM-1 NxSTM-1 STM-4 | – | – | B.2 B.3 C.1 C.2 C.3 | C.1 C.2 C.3 | B.2 B.3 | C.1 C.2 C.3 | B.2 B.3 | B.2 B.3 | C.1 C.2 C.3 | D.5 D.6 | D.5 D.6 D.8 | D.7 D.8 | E.1 E.4 | E.2 E.4 | E.3 | E.3 E.4 | E.3 E.4 | – | E.6 | E.7 | |
| Packet data and mixed interfaces | Annex F of parts 2-1 and 2-2 | | | | | | | | | | | | | | | | | | | | |

User's guide

With reference to the former standards listed in table 2, the present EN series provides the same set of characteristics and requirements, with the same values. However, this information is presented differently, spread across six parts corresponding to three categories.

The first category (the present document) corresponds to characteristics which are either common to the whole family of equipment or are provided in a comprehensive list, i.e. performance and availability, environmental profiles, power supply, system block diagram, TMN interface, mechanical characteristics and baseband interfaces and parameters. The symbols and abbreviations, which apply to the EN 302 217 series, are listed in the present document. The present document defines those requirements and characteristics set out in the other parts of this EN 302 217 series.

The second category (EN 302 217-2-1 and EN 302 217-4-1 in the bibliography) corresponds to characteristics and requirements, which are not relevant to article 3.2 of the R&TTE Directive [1]. Nevertheless, compliance to all or some of these requirements is mandatory in order to claim compliance with the relevant part of the EN 302 217 series. Requirements are either "main requirements" or "complementary requirements". Even though compliance to these parts is not mandatory for the R&TTE Directive [1] conformity, compliance may be claimed to all or some requirements of these parts.

EN 302 217-2-1 and EN 302 217-4-1 (see bibliography) provide a description of the main and complementary requirements, for equipment operating in co-ordinated frequency bands and for antennas.

Main requirements are requirements that are also related to the "essential requirements" under article 3.2 of the R&TTE Directive [1] and are further detailed in EN 302 217-2-2 and EN 302 217-4-2 (see bibliography) of this EN 302 217 series; for equipment operating in co-ordinated frequency bands (part 2-2) and for antennas (part 4-2), respectively.

Complementary requirements are requirements that are not related to essential requirements under article 3.2 of the R&TTE Directive [1]. Nevertheless they are considered, having been commonly agreed for proper system operation and deployment when specific deployment conditions or compatibility requirements are present. Compliance to all or some of these requirements is made on a voluntary basis.

The limiting values for main and complementary requirements that are not common to all of the equipment covered by one part, but specific to one frequency range, one hierarchy (PDH or SDH), one capacity, etc, are located in annexes which may be further divided into sub-annexes. A sub-annex, when created, is dedicated to one system, described by the association of the range of capacities, the range of frequencies and the range of channel separations.

The third category (EN 302 217-2-2, EN 302 217-3 and EN 302 217-4-2) corresponds to essential phenomena, with respect to article 3.2 of the R&TTE Directive [1] and are consequently candidate-harmonized standards. The requirements are provided in the same way as in EN 302 217-2-1 and EN 302 217-4-1. The limiting values associated with the essential requirements which are not common to all of the equipment covered by one part, but specific to one frequency range, one hierarchy (PDH or SDH), one capacity, etc, are located in annexes which may be further divided into sub-annexes. Reference to each annex is the same for EN 302 217-2-1 as in EN 302 217-2-2. An EN-RT (requirements table) summarizes those requirements to be addressed in order to claim compliance.

To conclude, this EN 302 217 series shall be used as a decision tree, from part 1 down to the relevant annexes/sub-annexes of parts X-1 and X-2. At every level, a check of compliance shall be performed.

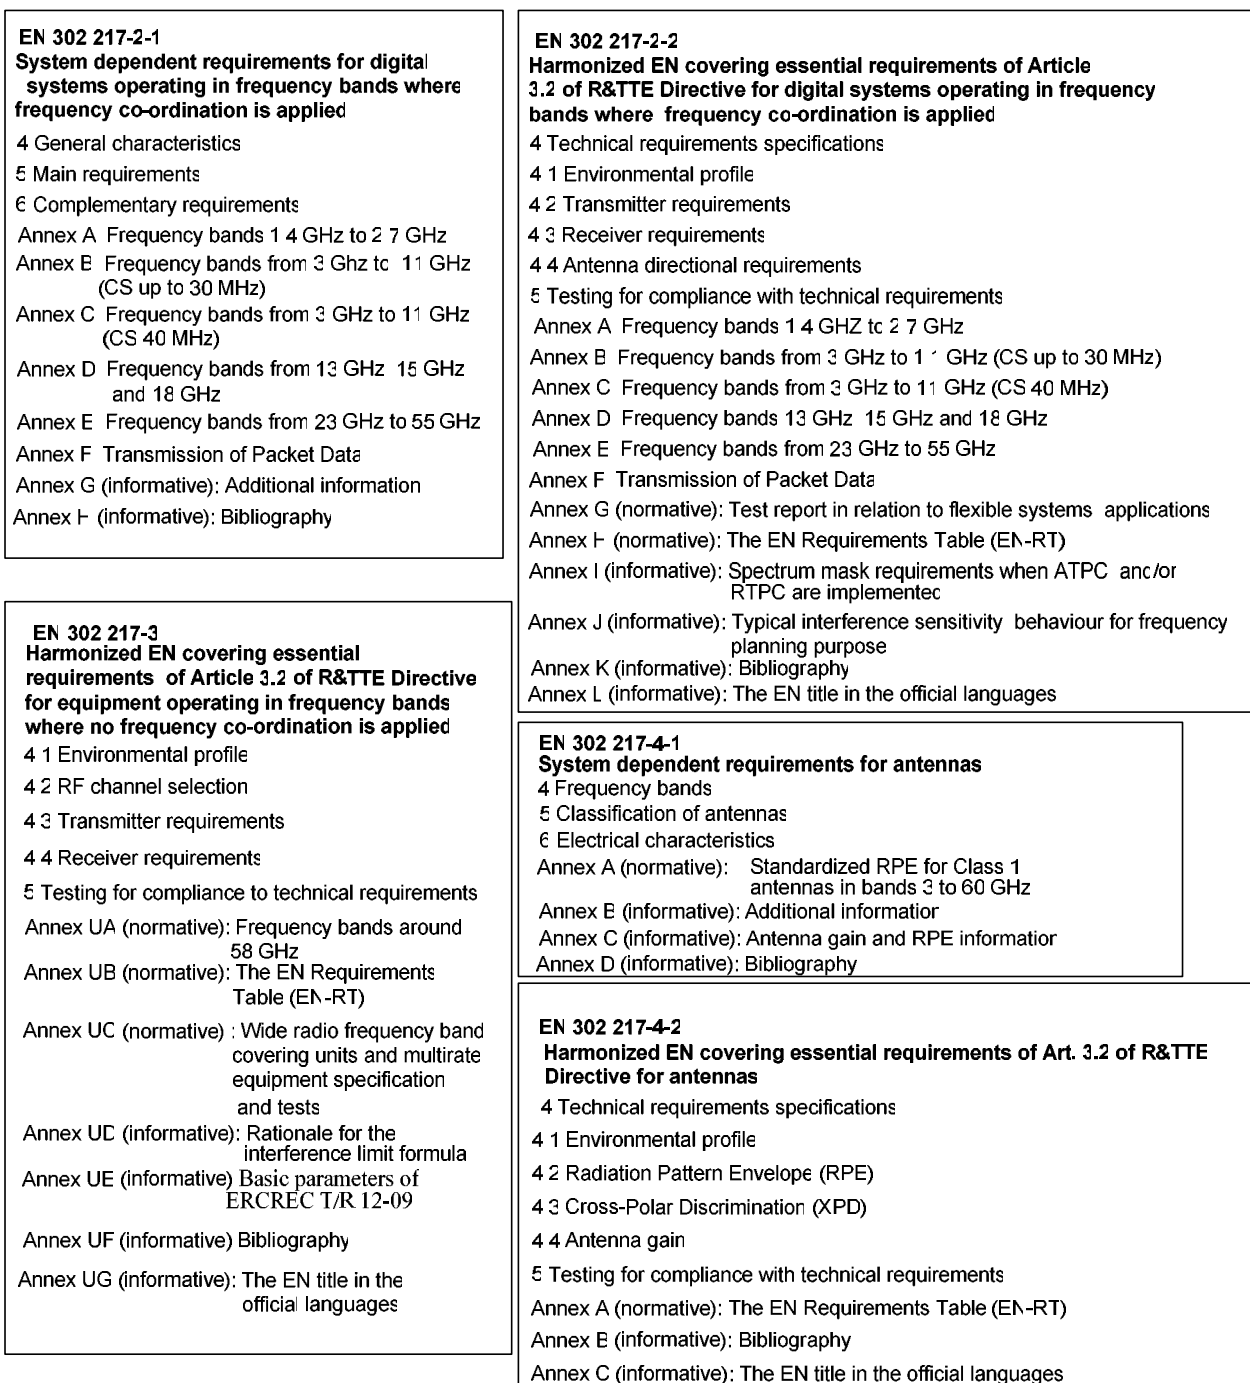


Figure 0: Structure of this EN 302 217 series

1 Scope

The present document applies to the following digital fixed radio systems (DFRS), including equipment with integral antenna, and antenna types:

- point-to-point systems intended for operation in frequency bands that require co-ordination;
- point-to-point systems intended for operation in frequency bands that do not require co-ordination;
- antennas for point-to-point operation.

The present document summarizes all characteristics, principles and definitions that are common to all P-P equipment and antennas, EN 302 217- 2-1 and EN 302 217-4-1 (see bibliography) summarize the other system dependent characteristics and include limits for "non-essential" requirements, EN 302 217-2-2, EN 302 217-3 and EN 302 217-4-2 (see bibliography) contain the whole description and limits of "essential" requirements under article 3.2 of the R&TTE Directive [1].

Health and safety requirements, relevant to article 3.1a of the R&TTE Directive [1] are not considered in any part of this EN 302 217 series.

EMC conditions and requirements, relevant to article 3.1b of the R&TTE Directive [1] and any other essential requirement relevant to article 3.3 of the R&TTE Directive [1] are not in the scope of any part of this EN 302 217 series.

However, for reader information, EG 201 752 (see bibliography) gives guidance in the selection of other ETSI and CENELEC standards for the assessment of essential requirements under article 3.1 of the R&TTE Directive [1] for any Fixed Radio System.

NOTE: A list of such ENs is available on the web site <http://www.newapproach.org>.

For administration's guidance when notifying their regulated interfaces in accordance with article 4.1 of the R&TTE Directive [1], annex B provides explanatory considerations on the applicability of the TCAM-RIG format for P-P fixed links. An example of such a notification is also provided. Annex B has been elaborated in co-ordination with the CEPT ECC WG SE.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] ETSI EN 300 019-1-0: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-0: Classification of environmental conditions; Introduction".
- [3] ETSI EN 300 019-2-0: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 2-0: Specification of environmental tests; Introduction".

- [4] ETSI EN 300 019-1-1: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-1: Classification of environmental conditions; Storage".
- [5] ETSI EN 300 019-2-1: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 2-1: Specification of environmental tests; Storage".
- [6] ETSI EN 300 019-1-2: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-2: Classification of environmental conditions; Transportation".
- [7] ETSI EN 300 019-2-2: "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 2-2: Specification of environmental tests; Transportation".
- [8] ETSI EN 300 019-1-3: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-3: Classification of environmental conditions; Stationary use at weatherprotected locations".
- [9] ETSI EN 300 019-2-3: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 2-3: Specification of environmental tests; Stationary use at weatherprotected locations".
- [10] ETSI EN 300 019-1-4: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 1-4: Classification of environmental conditions; Stationary use at non-weatherprotected locations".
- [11] ETSI EN 300 019-2-4: "Environmental Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment; Part 2-4: Specification of environmental tests; Stationary use at non-weatherprotected locations".
- [12] ETSI EN 300 132-2: "Environmental Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)".
- [13] ETSI ETS 300 132-1: "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources".
- [14] ETSI ETS 300 233: "Integrated Services Digital Network (ISDN); Access digital section for ISDN primary rate".
- [15] ETSI EN 301 126-1: "Fixed Radio Systems; Conformance testing; Part 1: Point-to-Point equipment - Definitions, general requirements and test procedures".
- [16] ETSI EN 301 126-3-1: "Fixed Radio Systems; Conformance testing; Part 3-1: Point-to-Point antennas; Definitions, general requirements and test procedures".
- [17] ETSI TR 101 035: "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH) aspects regarding Digital Radio Relay Systems (DRRS)".
- [18] IEEE 802.3ak: "IEEE Standard for IT - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications Amendment: Physical Layer and Management Parameters for 10Gb/s Operation, Type 10GBASE-CX4".
- [19] ISO/IEC 8802-3: "Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications".
- [20] ITU-R Recommendation F.557: "Availability objective for radio-relay systems over a hypothetical reference circuit and a hypothetical reference digital path".

- [21] ITU-R Recommendation F.634: "Error performance objectives for real digital radio-relay links forming part of the high-grade portion of international digital connections at a bit rate below the primary rate within an integrated services digital network".
- [22] ITU-R Recommendation F.695: "Availability objectives for real digital radio-relay links forming part of a high grade circuit within an integrated services digital network".
- [23] ITU-R Recommendation F.696: "Error performance and availability objectives for hypothetical reference digital sections forming part or all of the medium-grade portion of an ISDN connection at a bit rate below the primary rate utilizing digital radio-relay systems".
- [24] ITU-R Recommendation F.697: "Error performance and availability objectives for the local-grade portion at each end of an ISDN connection at a bit rate below the primary rate utilizing digital radio-relay systems".
- [25] ITU-R Recommendation F.746: "Radio-frequency arrangements for fixed service systems".
- [26] ITU-R Recommendation F.750: "Architectures and functional aspects of radio-relay systems for synchronous digital hierarchy (SDH)-based network".
- [27] ITU-R Recommendation F.752: "Diversity techniques for radio-relay systems".
- [28] ITU-R Recommendation F.1093: "Effects of multipath propagation on the design and operation of line-of-sight digital radio-relay systems".
- [29] ITU-R Recommendation F.1101: "Characteristics of digital fixed wireless systems below about 17 GHz".
- [30] ITU-R Recommendation F.1102: "Characteristics of fixed wireless systems operating in frequency band above about 17 GHz".
- [31] ITU-R Recommendation F.1397: "Error performance objectives for real digital radio links used in the international portion of a 27 500 km hypothetical reference path at or above the primary rate".
- [32] ITU-R Recommendation F.1491: "Error performance objectives for real digital radio links used in the national portion of a 27 500 km hypothetical reference path at or above the primary rate".
- [33] ITU-R Recommendation F.1492: "Availability objectives for real digital radio-relay links forming part of international portion constant bit rate digital path at or above the primary rate".
- [34] ITU-R Recommendation F.1493: "Availability objectives for real digital radio-relay links forming part of national portion constant bit rate digital path at or above the primary rate".
- [35] ITU-R Recommendation P.530: "Propagation data and prediction methods required for the design of terrestrial line-of-sight systems".
- [36] ITU-T Recommendation G.703: "Physical/electrical characteristics of hierarchical digital interfaces".
- [37] ITU-T Recommendation G.704: "Synchronous frame structures used at 1544, 6312, 2048, 8448 and 44 736 kbit/s hierarchical levels".
- [38] ITU-T Recommendation G.707: "Network node interface for the synchronous digital hierarchy (SDH)".
- [39] ITU-T Recommendation G.708: "Sub STM-0 network node interface for the synchronous digital hierarchy (SDH)".
- [40] ITU-T Recommendation G.821: "Error performance of an international digital connection operating at a bit rate below the primary rate and forming part of an integrated Services Digital Network".
- [41] ITU-T Recommendation G.826: "End-to-end error performance parameters and objectives for international, constant bit-rate digital paths and connections".

- [42] ITU-T Recommendation G.828: "Error performance parameters and objectives for international, constant bit rate synchronous digital paths".
- [43] ITU-T Recommendation G.829: "Error performance events for SDH multiplex and regenerator sections".
- [44] ITU-T Recommendation G.957 : "Optical interfaces for equipments and systems relating to the synchronous digital hierarchy".
- [45] ITU-T Recommendation I.356: "B-ISDN ATM layer cell transfer performance".
- [46] ITU-T Recommendation I.357: "B-ISDN semi-permanent connection availability".
- [47] ITU-T Recommendation I.412: "ISDN user-network interfaces - Interface structures and access capabilities".
- [48] ITU-T Recommendation V.11: "Electrical characteristics for balanced double-current interchange circuits operating at data signalling rates up to 10 Mbit/s".
- [49] ITU-T Recommendation V.24: "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE)".
- [50] ITU-T Recommendation V.28: "Electrical characteristics for unbalanced double-current interchange circuits".
- [51] ITU-T Recommendation Y.1540: "Internet protocol data communication service - IP packet transfer and availability performance parameters".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

allocated radio frequency band: derived from "allocation (of a frequency band)": entry in the Table of Frequency Allocations of a given frequency band for the purpose of its use by one or more terrestrial or space radiocommunication services or the radio astronomy service under specific conditions.

NOTE: This term shall also be applied to the frequency band concerned (Radio Regulations, Geneva 1998 article S1.16). From the regulatory point of view two different applications might be envisaged:

- **Frequency band where frequency co-ordination is applied:** in these bands, in the licensing process, regulatory bodies enforce co-ordination rules to ensure that all links work on an "acceptable interference" bases.
- **Frequency band where frequency co-ordination is not applied:** in these bands, irrespective of any licensing process or with no licensing at all, the deployment is freely made by the user on a "first on-first served" bases without any warrantee of "acceptable interference" from the regulatory body.

antenna: part of the transmitting or receiving system that is designed to radiate and/or receive electromagnetic waves

NOTE: Antenna directional characteristics are part of essential requirements under article 3.2 of the R&TTE Directive [1].

Automatic Transmit Power Control (ATPC): function implemented to offer a dynamic power control that delivers maximum power only during deep fading; in this way for most of the time the interference is reduced and the transmitter operates in a higher linearity mode

NOTE 1: When this function is used, the transmit power is dynamically changed with respect to the propagation conditions. In principle, when ATPC is implemented, three different level of power may be identified:

- **maximum available power** (delivered only in conditions of deep fading);

- **maximum nominal power** (useable on a permanent basis when ATPC is disabled); it should be noted that this power is "nominal for the equipment" and is not to be confused with the "nominal level set link by link" by the frequency co-ordinating body. This is achieved through passive RF attenuators or use of the RTPC function;
- **minimum power** (delivered in unfaded conditions).

NOTE 2: Maximum nominal and maximum available power levels may be coincident or, in case of multi-state modulation formats, the maximum available power may be used to overdrive the transmitter (losing linearity but gaining fade margin when the fade conditions have already impaired the expected RBER). Performance prediction are usually made with the maximum "available power".

conformity assessment procedure: See R&TTE Directive [1] annexes II to V.

co-polar pattern: diagram representing the radiation pattern of a test antenna when the reference antenna is similarly polarized, scaled in dBi or dB relative to the measured antenna gain

cross-Polar Discrimination (XPD): difference in dB between the co-polarized main beam gain and the cross-polarized one, measured within a defined angular region

cross-polar pattern: diagram representing the radiation pattern of a test antenna when the reference antenna is orthogonally polarized, scaled in dBi, or dB relative to the measured antenna gain

environmental profile: range of environmental conditions under which equipment within the scope of the EN 302 217 series is required to comply with the provisions of the EN 302 217 series

essential phenomenon: radio frequency phenomenon related to the essential requirements under article 3.2 of the R&TTE Directive [1] that is capable of expression in terms of quantifiable technical parameters

frequency band: band of frequencies over which the performance characteristics of the equipment/antenna are set within specified limits

gain (of an antenna): ratio of the radiation intensity, in a given direction, to the radiation intensity that would be obtained if the power accepted by the antenna was radiated isotropically

NOTE: Value measured in dBi.

half power beamwidth (of an antenna): angle, relative to the main beam axis, between the two directions at which the measured co-polar pattern is 3 dB below the value on the main beam axis

harmonized radio frequency band: commonly referred to as a portion of the frequency spectrum that CEPT/ECC (formerly CEPT/ERC) allocates to a specific service through a CEPT/ECC Decision (proper definition is currently under study by CEPT/ECC)

NOTE: Presently, radio frequency bands allocated to the Fixed Service are not harmonized.

input port(s): flange(s) or connector(s) through which access to the antenna system is provided. These are shown in the following figure 1 at points D and D'

NOTE: The points in figure 1 are reference points only; points B, C and D, B', C' and D' may coincide.

integral antenna: antenna which is declared as part of the radio equipment by the supplier

NOTE: Even when equipment with integral antenna is concerned, it might still be possible to separate the antenna from the equipment using a special tool. In such cases the assessment of the radio equipment and of the antenna against requirements of this EN 302 217 series could be done separately by the actual supplier(s).

inter port isolation (IPI) (of an antenna): ratio in dB of the power level applied to one port of a multi-port antenna (e.g. dual polarization ports or multi-band ports) to the power level received in any other port of the same antenna as a function of frequency

isotropic radiator: hypothetical, lossless antenna having equal radiation intensity in all directions

main beam (of an antenna): radiation lobe containing the direction of maximum radiation

main beam axis (of an antenna): direction for which the radiation intensity is the maximum

maximum available power: See Automatic Transmit Power Control (ATPC).

maximum nominal power: See Automatic Transmit Power Control (ATPC).

national radio frequency channel arrangement: predefined centre frequencies raster for a number of radio frequency channels, covered by a national regulation in a non harmonized frequency band and used on a national basis

NOTE: May all or in part overlap with other national or recommended radio frequency channel arrangements.

Network Interface Capacity (NIC): sum of the maximum bit rates of the implemented base band interfaces at reference point X/X'

operating frequency range: range(s) of radio frequency channels covered by the Equipment Under Test (EUT) without any change of HardWare (HW) units

radiation pattern (of an antenna): diagram relating power flux density at a constant distance from the antenna at off-axis angles (non intentional antenna radiation) relative to a direction of the antenna main beam axis (intentional antenna radiation)

Radiation Pattern Envelope (RPE) (of an antenna): envelope below which the radiation pattern shall fit; diagrams representing the radiation pattern of a test antenna measured with a reference antenna, scaled in dBi or dB relative to the measured antenna gain

NOTE: For linearly polarized antennas, two different RPE are generally identified:

- **co-polar radiation pattern envelope:** diagram representing the radiation pattern of a test antenna when the reference antenna is similarly polarized, scaled in dBi or dB relative to the measured antenna gain;
- **cross-polar radiation pattern envelope:** diagram representing the radiation pattern of a test antenna when the reference antenna is orthogonally polarized, scaled in dBi, or dB relative to the measured antenna gain.

radio equipment: (as defined in the R&TTE Directive [1]): product, or relevant component thereof, capable of communication by means of the emission and/or reception of radio waves utilizing the spectrum allocated to terrestrial/space radiocommunication

radio frequency channel arrangement: predefined (centre frequencies) raster for a number of radio frequency channels, as defined by ITU-R Recommendation F.746 [25]

NOTE: Used by administrations for co-ordination in the same geographical area.

radio frequency channel: portion of a radio frequency band, where a radio frequency channel arrangement has been established, dedicated to one fixed radio link

radio interface capacity (RIC): maximum user capacity that can be transmitted over the radio interface defined at reference point C'

NOTE: RIC is defined at Z/Z' reference points and includes additional capacity added for framing and multiplexing/demultiplexing different baseband signals (at X/X' points) into a transport module, eventually integrated in the baseband processing of the radio system, virtually defined at the Z/Z' reference points (e.g. the STM-N for the standardized SDH case or the higher level PDH frames for the transport of N x 2 Mbit/s or similar declared proprietary multiplexing frames of different signals). It does not include other additional proprietary algorithms and signals used for specific radio systems purposes (typically error correction codes and radio system service channels).

radome (of an antenna): cover of dielectric material, intended to protect an antenna from the effects of its physical environment

recommended radio frequency channel arrangement: predefined centre frequencies raster for a number of radio frequency channels, covered by a CEPT/ECC Recommendation in a non harmonized frequency band (not used for the same purpose by all administrations) that is recommended to the member countries where they use the relevant frequency band for the Fixed Service

Remote Frequency Control (RFC): many fixed digital radio systems offer this functionality as a qualifying aid to deployment

NOTE: When this function is used, the transmit centre frequency/channel can be set either by a local control unit, connected to the system control unit, or by a remote network management terminal. The frequency variation is static and usually made at the activation or re-commissioning of links in order to easily obtain the licensed frequency assigned by the co-ordinating body to the network operator for that link, in order to control network interference in the same geographical area.

Remote Transmit Power Control (RTPC): many fixed digital radio systems offer this functionality as a qualifying aid to the deployment

NOTE: When this function is used, the transmit power can be set either by a local control unit, connected to the system control unit, or by a remote network management terminal. The power variation is static and usually made at the activation or re-commissioning of links in order to easily obtain the EIRP required by the frequency co-ordinating body for that link, to control co-channel and adjacent channel interference in the same geographical area. In principle, this function is equivalent to the requirement power regulation capability (e.g. by fixed attenuators) commonly required in fixed systems.

stand-alone antenna: antenna delivered independently from the fixed radio equipment, by the same or a different supplier and connected to the radio equipment on the field

sub-STM-1: old terminology for medium capacity Synchronous Transport Module at 51,84 Mbit/s defined as STM-0 by ITU-T Recommendation G.707 [38] and ITU-R Recommendation F.750 [26]

sub-STM-0: set of SDH transmission interfaces, defined in ITU-T Recommendation G.708 [39] which transport one or more TU Group(s)-2 (sSTM-2n interface) or one or more TU-12 (sSTM-1k interface) as defined by ITU-T Recommendation G.707 [38], with Section OverHead (9 bytes per frame)

NOTE: The sSTM-2n interfaces may be defined for optical, electrical or radio transport technologies. The sSTM-1k interfaces are defined for radio transport technologies; the sSTM-11 interface may also be used for reduced functionality, intra-station cable connections for VC11/VC12 payloads. The number (k) of TU-12 in sSTM-1k interfaces provided by ITU-T Recommendation G.708 [39] is limited to k = 1, 2, 4, 8 and 16.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

| | |
|-------------------|----------------------------------------------------------------------------------------|
| ° | degree |
| Ω | Ohm |
| CS _{min} | minimum practical Channel Separation (for a given radio-frequency channel arrangement) |
| dB | deciBel |
| dBc | deciBel relative to mean carrier power |
| dB _i | deciBel relative to an isotropic radiator |
| dB _m | deciBel relative to 1 mW |
| dB _u | deciBel relative to 1 microVolt |
| dBW | deciBel relative to 1 Watt |
| GHz | GigaHertz |
| kg | kilogramme |
| kHz | kiloHertz |
| km | kilometre |
| kN | kiloNewton |
| m/s | metres per second |
| Mbit/s | Mega-bits per second |
| MHz | MegaHertz |
| mW | milliWatt |
| ns | nanosecond |
| ppm | parts per million |
| V | Volts |
| W/m ² | Watts per square metre |

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|----------------|----------------------------------------------------------------------------------------|
| AC | Alternating Current |
| ACAP | Adjacent Channel Alternate Polarization |
| ACCP | Adjacent Channel Co-Polarization |
| ACDP | Adjacent Channel Dual Polarized |
| ARQ | Automatic Repeat Request |
| ATPC | Automatic Transmit Power Control |
| AU | Administrative Unit |
| BB | Base Band |
| BBER | Background Block Error Ratio |
| BER | Bit Error Ratio |
| BFWA | Broadband Fixed Wireless Access |
| BW | equivalent noise BandWidth |
| BWe | evaluation BandWidth (resolution bandwidth in which spectrum components are measured) |
| C/I | Carrier to Interference ratio |
| CCDP | Co-Channel Dual Polarized |
| CEPT | Conférence des administrations Européennes des Postes et Télécommunications |
| CMI | Coded Mark Inversion |
| CS | Channel Separation, sometimes referred as Channel Spacing |
| CSmin | minimum practical Channel Separation (for a given radio-frequency channel arrangement) |
| CW | Continuous Wave |
| DC | Direct Current |
| DFRS | Digital Fixed Radio System |
| DRRS | Digital Radio Relay System |
| DTE | Data Terminal Equipment |
| ECC | Electronic Communication Committee of the CEPT |
| EIRP | Equivalent Isotropically Radiated Power |
| EMC | ElectroMagnetic Compatibility |
| EN-R | European Standard - Requirement |
| EN-RT | European Standard - Requirements Table |
| ERC | European Radiocommunications Committee of the CEPT, presently become ECC |
| ES | Errored Seconds |
| ESR | Errored Second Ratio |
| EUT | Equipment Under Test |
| F _c | Cut-off Frequency |
| FDD | Frequency Division Duplex |
| FER | Frame Error Ratio |
| FRS | Fixed Radio Systems |
| FS | Fixed Service |
| F _s | Symbol Rate |
| FSK | Frequency-Shift Keying (modulation) |
| FSS | Fixed Satellite Service |
| FWA | Fixed Wireless Access |
| GMSK | Gaussian Minimum Shift Keying (modulation) |
| HDB | High Density Bipolar |
| HDFS | High Density Fixed Service |
| HEN | Harmonized European Standard |
| IEC | International Electrotechnical Committee |
| IF | Intermediate Frequency |
| IPI | Inter-Port Isolation |
| ISDN | Integrated Services Digital Network |
| ITU-R | International Telecommunication Union - Radiocommunications standardization sector |
| ITU-T | International Telecommunication Union - Telecommunications standardization sector |
| L6 | Lower 6 (GHz frequency band) |
| LO | Local Oscillator |
| n.a. | not applicable |
| NFD | Net Filter Discrimination |
| NIC | Network Interface Capacity |

| | |
|-----------|--------------------------------------------------------------------------------------------------------------------------------|
| NNI | Network Node Interface |
| NRZ | Non Return to Zero |
| OJEC | Official Journal of the European Communities |
| PDH | Plesiochronous Digital Hierarchy |
| PFD | Power Flux Density |
| Pi | interference Power |
| P-P | Point-to-Point |
| PRBS | Pseudo Random Binary Sequence |
| PSD | Power Spectral Density |
| PSTN | Public Switched Telecommunication Network |
| QAM | Quadrature Amplitude Modulation |
| R&TTE | Radio equipment and Telecommunications Terminal Equipment |
| RBER | Residual BER |
| RCSOH | Radio Complementary Section Overhead |
| RES | Radio Equipment and Systems (ETSI Technical Committee) |
| RF | Radio Frequency |
| RFC | Remote Frequency Control |
| RFCOH | Radio Frame Complementary OverHead |
| RFER | Residual FER |
| RIC | Radio Interface Capacity |
| RL | Return Loss |
| RPE | Radiation Pattern Envelope |
| RSL | Receive Signal Level |
| RTPC | Remote Transmit Power Control |
| Rx | Receive or Receiver |
| S/I | Signal to Interference ratio |
| S/XPI | Signal to Cross-Polar Interference ratio |
| SAB | Services Auxiliary to Broadcasting |
| SAP | Services Auxiliary to Programme making |
| SDH | Synchronous Digital Hierarchy |
| SOH | Section OverHead |
| SRL | Spectrum Reference Level |
| sSTM-1k | Synchronous Transport Module of k times VC-12 equivalent payload (k = 1, 2, 4, 8, 16) |
| sSTM-2n | Synchronous Transport Module of n times VC2 equivalent payload (n = 1, 2, 4) |
| STM | Synchronous Transfer Module |
| STM-0 | Synchronous Transport Module Level 0 (51,840 Mbit/s AU-3 equivalent payload) |
| STM-1 | Synchronous Transport Module Level 1 (155,520 Mbit/s) |
| STM-4 | Synchronous Transport Module Level 4 (622,080 Mbit/s) |
| STM-N | Synchronous Transport Module, level N |
| Sub-STM-0 | generic term for a number of low capacity SDH transport modules (sSTM-1kor sSTM-2n) defined by ITU-T Recommendation G.708 [39] |
| Sub-STM-1 | old terminology for STM-0 module before its formal adoption in ITU-T Recommendation G.707 [38] |
| t.c. | telephony channel |
| TC | ETSI Technical Committee |
| TDD | Time Division Duplex |
| TFA | Table of Frequency Allocation |
| TM | ETSI TC-Transmission and Multiplexing |
| TMN | Telecommunications Management Network |
| TU | Tributary Unit |
| TUG | Tributary Unit Group |
| Tx | Transmit or Transmitter |
| U6 | Upper 6 (GHz frequency band) |
| VC | Virtual Container |
| VC-n | Virtual Container - n |
| VSWR | Voltage Standing Wave Ratio |
| W/U | Wanted to Unwanted signal ratio |
| WG | Working Group |
| XIF | Cross-polarization Improvement Factor due to XPIC operation |
| XPD | Cross-Polar Discrimination |
| XPI | Cross-Polar Interference |
| XPIC | Cross-Polar Interference Canceller |

4 General characteristics

4.1 Performance and availability requirements

Equipment shall be designed in order to meet network performance and availability requirements appropriate for the type of traffic carried in a multimedia network. These network requirements (see note) are foreseen by ITU-T Recommendations G.821 [40], for capacities below the primary rate, ITU-T Recommendations G.826 [41] and G.828 [42] for capacities at or above the primary rate, by ITU-T Recommendations I.356 [45] and I.357 [46] for ATM transmission and Y.1540 [51] for IP transmission. For transmission of Ethernet frames, network performance requirements of ISO/IEC 8802-3 [19] for 10 Mbit/s Medium Attachment Units and IEEE 802.3 [18] for 100 Mbit/s and 1 000 Mbit/s Physical Layer Devices shall be referred to.

The events for SDH multiplex and regenerator sections have to be measured according to ITU-T Recommendation G.829 [43].

The performance and availability objectives for any overall radio connection operating at capacities below the primary rate, in the high, medium or local grade portions of the network, have to be based on the criteria defined in ITU-R Recommendations F.634 [21], F.695 [22], F.696 [23], F.697 [24] and F.557 [20].

The performance and availability objectives for any overall radio connections operating at capacities at or above the primary rate, used in the international or national portion of the digital path, have to be based on the criteria defined in ITU-R Recommendations F.1397 [31], F.1491 [32], F.1492 [33] and F.1493 [34].

The effect of the link design on performance is recognized and the general design criteria specified in ITU-R Recommendations F.752 [27], F.1093 [28], F.1101 [29] and F.1102 [30] are to be applied to the digital connection with respect to the propagation scenarios set out in ITU-R Recommendation P.530 [35].

NOTE: An exhaustive list of recommendations for network performance and availability requirements is not in the scope of the present document. The Recommendations referred in this clause are the basic ones for the most common applications in the fixed networks. Due to continuous evolution of the communication technology, other payloads/network applications might require different or new requirements that should be taken into due account in the equipment and link design for such applications.

4.2 Environmental profiles

There are three environmental profiles to be considered:

- environmental profile declared under the R&TTE Directive [1];

NOTE: With the generic term of environmental profile, it is here intended any variation of the "external" conditions (e.g. climatic and external primary/secondary power supply sources feeding the equipment to be assessed) that might affect the system parameters relevant to the "essential requirements" of Art 3.2 of the R&TTE Directive [1].

- voluntary ETSI environmental profile;
- test environmental profiles.

4.2.1 Environmental profile declared under the R&TTE Directive

From the point of view of the R&TTE Directive [1], the essential requirements of EN 302 217-2-2, EN 302 217-3 and EN 302 217-4-2 (see bibliography) apply under the environmental profile for intended operation of the equipment and antennas, which shall be declared by the supplier.

4.2.2 Voluntary ETSI environmental profile

The radio equipment shall be required to meet the environmental conditions set out in the appropriate part(s) of the multipart standard EN 300 019-1-0 [2] to EN 300 019-2-4 [11] mentioned below, which defines weather protected and non-weather protected locations, classes and test severity.

Environmental conditions for antennas are not generally included in EN 300 019-1-0 [2] to EN 300 019-2-4 [11] scope, environmental profiles are left to supplier declaration only; however annex A of EN 302 217-4-1 (see bibliography) gives some generic guidance.

The equipment shall comply with all of the requirements of the EN 302 217 series at all times when operating within the boundary limits of the operational environmental profile of the equipment.

The fulfilment of and the selection of a class of EN 300 019-1-0 [2] to EN 300 019-2-4 [11] environmental profiles is voluntary and not essential from the point of view of the R&TTE Directive [1].

4.2.2.1 Equipment within weather-protected locations (indoor locations)

Equipment intended for operation within temperature controlled locations or partially temperature controlled locations should meet the requirements of EN 300 019-1-0 [2] to EN 300 019-2-4 [11] classes 3.1 and 3.2 respectively.

Optionally, the more stringent requirements of EN 300 019-1-0 [2] to EN 300 019-2-4 [11] classes 3.3 (non-temperature controlled locations), 3.4 (sites with heat trap) and 3.5 (sheltered locations) may be applied.

4.2.2.2 Equipment for not-weather-protected locations (outdoor locations)

Equipment intended for operation within not-weather protected locations should meet the requirements of EN 300 019-1-0 [2] to EN 300 019-2-4 [11], class 4.1 or 4.1E.

Class 4.1 applies to many European countries and class 4.1E applies to all European countries.

4.2.3 Test environment profiles

In the case of the R&TTE Directive [1], any test, carried out to generate the test report and/or declaration of conformity, required to fulfil any conformity assessment procedure set out by the R&TTE Directive [1] for radio equipment, shall be carried-out with the same principles and procedures, for reference and extreme conditions, specified in clause 4.4 of EN 301 126-1 [15] for climatic conditions and in table 1 of EN 301 126-1 [15] and relevant sections of EN 302 217- 2-2 and EN 302 217-3 for power supply conditions. Requirements for testing at reference or extreme conditions, specified in relevant clauses of the EN 302 217 series, are set out according to the principles for similar requirements in EN 301 126-1 [15].

In the case of voluntary ETSI environmental profiles, the technical requirements of the EN 302 217 series apply under the environmental profile for operation of the equipment, which shall be determined by the environmental class of the equipment according to clause 4.4 of EN 301 126-1 [15].

Any test, carried out to generate the test report and/or declaration of conformity, required to fulfil any conformity assessment procedure specification by the R&TTE Directive [1] for integral or stand-alone DFRS antennas (directional phenomena of EN 302 217-4-2), shall be carried-out at reference environmental conditions at the test field according to clause 4.1 of EN 301 126-3-1 [16].

The test report shall be produced according to the procedure specified by article 10 of the Directive 1999/5/EC [1].

4.3 Power supply

There are two power supply profiles to be considered:

- power supply profile declared under the R&TTE Directive [1];
- voluntary ETSI power supply profile.

4.3.1 Power supply profile declared under the R&TTE Directive

From the point -of-view of the R&TTE Directive [1], the essential requirements of EN 302 217-2-2, EN 302 217-3 and EN 302 217-4-2 (see bibliography) apply under the limits of any primary/secondary power supply external to the equipment under assessment, in accordance with the environment profile for intended operation of the equipment, which shall be declared by the supplier. See clauses 4.2.1 and 4.2.3.


4.3.2 Voluntary ETSI power supply profile

The power supply interface shall be in accordance with the characteristics of one or more of the secondary voltages specified in ETS 300 132-1 [13] and EN 300 132-2 [12].

NOTE: Other secondary voltages are not subject of standardization; however EMC and safety requirements according to the R&TTE Directive [1] article 3.1, not in the scope of this EN 302 217 series, still applies.

4.4 System block diagram

The reference points of the system block diagram below will be used in the descriptions of requirements and of test points in the other parts of EN 302 217 series (see bibliography).

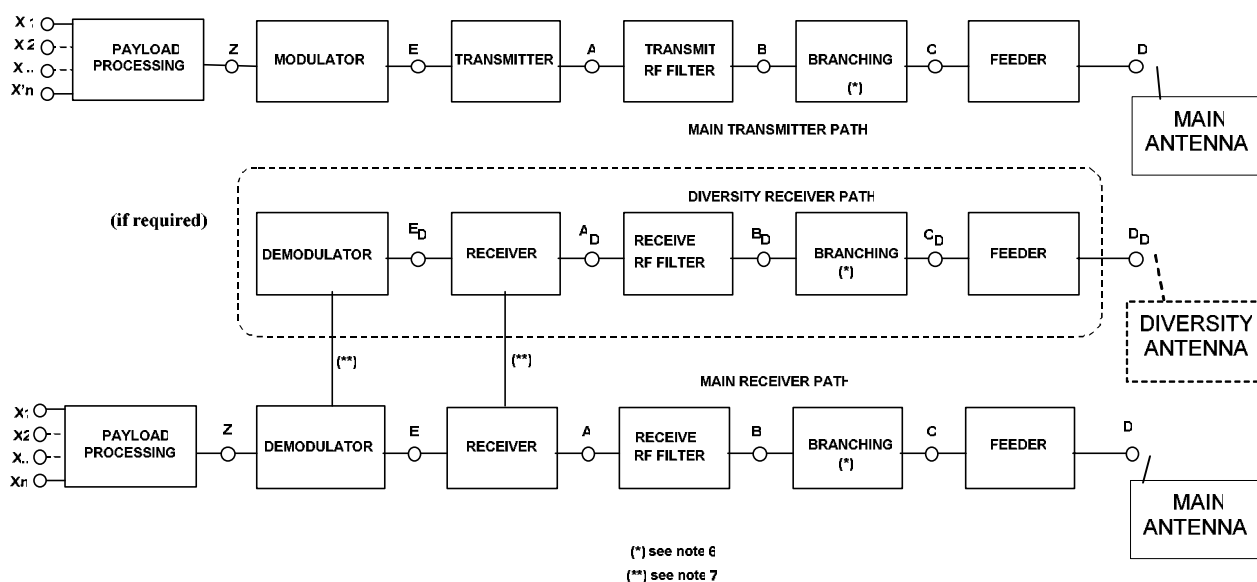

NOTE 1: For the purpose of defining the measurement points, the branching network does not include a combiner.

NOTE 2: The points shown above are reference points only and do not mandate any implementation; points C and C', D and D' in general coincide.

NOTE 3: Points B, C, B' and C' may coincide when a simple duplexer is used.

NOTE 4: Points X1, X2, ..., Xn and points X'1, X'2, ..., X'n correspond to one or more digital or analogue signal input reference points. They are generically referred to as X and X'.

NOTE 5: The subdivision of "Payload processing" and the "Modulator/demodulator" blocks is functional and not physical. The first functionally contains the payload processing needed for building up the transport module (e.g. framing, multiplexing and or concentration), the latter functionally contains mo-demodulation, coding-decoding and service signals processing needed for transmission (e.g. error correction algorithms and service channels). Points Z and Z', that might not be physically available, represent the virtual points where the radio interface capacity (RIC), referred in the provisions of annexes F of EN 302 217-2-1 and EN 302 217-2-2, shall be defined.

NOTE 6: No filtering included.

NOTE 7: Alternative connection AT, RF, IF or Baseband.

Figure 1: System block diagram

5 Baseband interfaces and parameters

The baseband parameters, specified in following clauses, refer to point X and X' of figure 1. Parameters for service channels and wayside traffic channels are outside the scope of the EN 302 217 series.

One or more of the following clauses will be applicable.

5.1 Plesiochronous interfaces

If applicable, Plesiochronous interfaces at 2 Mbit/s, 8 Mbit/s, 34 Mbit/s and 140 Mbit/s shall comply with ITU-T Recommendation G.703 [36]. Parameters for service channels and wayside traffic channels are outside the scope of this EN 302 217 series.

5.2 ISDN interfaces

If applicable, the transmission of 2 Mbit/s signals using the structure and functions of ISDN primary multiplex signals is to be in accordance with ITU-T Recommendations G.703 [36], G.704 [37], I.412 [47] and ETS 300 233 [14].

5.3 Synchronous digital hierarchy interfaces

If applicable, the SDH baseband interface shall be in accordance with ITU-T Recommendations G.703 [36], G.707 [38], G.708 [39], G.783 (see bibliography), G.784 (see bibliography) and G.957 [44].

The following STM-N physical interfaces are possible:

- sSTM-1k (ITU-T Recommendation G.708 [39]);
- STM-0 CMI, HDB2, HDB3 electrical (ITU-T Recommendation G.703 [36]);
- STM-1 CMI electrical (ITU-T Recommendation G.703 [36]);
- STM-N optical (ITU-T Recommendation G.957 [44]).

The use of reserved bytes contained in the Section OverHead (SOH), and their termination shall be in accordance with ITU-R Recommendation F.750 [26]. Further details on the possible use of the SOH bytes including additional RFCOH or RCSOH are given in ETSI TR 101 035 [17].

5.4 Other baseband data interfaces

Other standardized base band data interfaces are possible; for equipment assessment when other base band interfaces are foreseen see annexes F in EN 302 217-2-1 and EN 302 217-2-2. Those annexes provide the conditions under which current PDH/SDH specifications can be used for systems with traffic interface combinations other than those mentioned in the PDH/SDH specifications.

Examples of most common such interfaces are:

- low speed data interfaces in accordance to ITU-T Recommendations V.11 [48], V.24 [49] and/or V.28 [50];
- ethernet data interface: 10 Mbit/s, 100 Mbit/s and 1 000 Mbit/s interfaces in accordance with the OSI physical layer requirements of ISO/IEC 8802-3 [19] and IEEE 802.3 [18] respectively.

The data interface offered by the equipment shall be declared by the supplier together with the relevant set of applicable international standards in agreement with the network operator.

Annex A (informative): Miscellaneous characteristics

A.1 Telecommunications Management Network (TMN) interface

If provided, the Telecommunications Management Network (TMN) interface should be in accordance with ITU-T Recommendations G.773 (see bibliography) and G.784 (see bibliography).

NOTE 1: ITU-R Recommendations, ETSI ETSs and ENs may also be relevant; the complete list is outside the scope of the present document.

NOTE 2: For SDH equipment the general requirements for TMN interface and functionality are given by:

- EN 300 417 (series) (see bibliography), EN 301 167 (see bibliography), ETS 300 635 (see bibliography) and EN 300 645 (see bibliography);
- ITU-T Recommendations G.784 (see bibliography) and G.773 (see bibliography);
- ITU-R Recommendations F.750 [26] and F.751 (see bibliography).

NOTE 3: The standardization of TMN interface functionalities is not under the responsibility of ETSI TC-TM; new TMN standards may become applicable with respect to the fixed digital radio systems considered in this EN 302 217 series.

A.2 Mechanical characteristics

The mechanical dimensions for indoor installations should be in agreement with ETS 300 119 (see bibliography).

For outdoor installations each of the outdoor units should be weatherproof or weather protected.

NOTE: The following parameters should be taken into account in the design of equipment incorporating an external unit:

- a) maximum weight of external unit;
- b) size of external unit for wind loading considerations;
- c) maximum weight of replaceable units;
- d) ease of access of replaceable units.

Annex B (informative): Notification of interfaces under Article 4.1 of the R&TTE Directive

This informative annex provides in table B.1 explanations on the applicability of the TCAM-RIG format to the notification of the regulated P-P fixed links Interfaces by the Administrations. Table B.2 gives an illustrative example of such a notification.

B.1 Applicability of TCAM-RIG format of radio interface specifications to Fixed Services

Table B.1 : Compliance of TCAM-RIG format for P-P fixed links

| Nr. | TCAM-RIG proposed parameter | CEPT ECC WGSE conclusions on applicability to FS |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Frequency band | Applicable, for FS should mean limits of allocated band, which e.g. may include guard bands of the channel plan and duplex centre gap. |
| 2 | Radio service (some countries put this only in a separate allocation table) | Applicable, should be set to "Fixed Service" in this case. |
| 3 | Application | Applicable, for FS should specify whether this frequency band is assigned for PP, PMP, MPMP; for infrastructure, access or other, or combination. |
| 4 | Channelling/modulation | Channelling only - the channelling arrangements should be specified, e.g. ref. to CEPT/ITU recommendation/annex and/or National (the latter to be explained or attached). National restrictions/modifications to CEPT/ITU plans to be described. Modulation for FS is technology specific, so should not be mentioned as a requirement, but suitable modulations may be derived from channel arrangements/EN classes, see also "Channel occupation rules". |
| 5 | Transmit power limit | Applicable, depends on type of FS application, etc. Actual meaning (output power and/or EIRP) may vary. |
| 6 | Channel occupation rules | Applicable in some cases (not for block assignments), may mean transmission capacity, minimum hop length, etc. |
| 7 | Duplex direction/separation | Applicable, for FS should read "Duplex type/spacing", in some cases reference to the specified channel arrangement may be sufficient, in other - should be explained, for FDD MP systems the uplink/downlink bands could be specified. |
| 8 | Licensing regime | Applicable, for FS could be Individual licence, block assignment, general licence. Other peculiarities should be mentioned if any (e.g. geographical limitations). |
| 9 | Additional essential requirements (article 3.3) | Not applicable for FS for the time being. |
| 10 | Frequency planning assumptions | Applicable, for FS could be expanded into: Antenna radiation pattern (ref EN), Emission spectrum mask (ref EN), Receiver parameters (ref EN) Minimum antenna gain, ATPC. |
| 11 | Reference | Applicable. |
| 12 | Remarks | Applicable. |
| 13 | Notification number (might help to trace back to the notification procedure and it is a requirement to give this reference number in the published regulation). | Applicable. |

B.2 Proposed list of radio interface specifications for Fixed Services

It should be noted that the proposed below list of radio interface specifications should be used in the framework of R&TTE Directive [1], that is when deciding on eligibility of FS equipment to be placed on the market and brought into service.

The list of parameters that are relevant to national spectrum management functions (e.g. for frequency assignment process) is wider/different, as e.g. described in ECC Recommendation ECC/REC 01-05 (see bibliography) "List of parameters of digital point-to-point fixed links used for national planning". Administrations may request those parameters from the applicant/licensee during the licensing procedure.

It is understood that the proposed FS radio interface requirements provide a list of parameters, allowing individual Administrations to select those parameters necessary to the case, depending on the information in the European harmonized standards and the level of detail in their national frequency allocation tables.

Table B.2 : Example of interface requirements for P-P fixed links notification

| Parameter | Value (examples) | Filling instructions |
|--------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency band (GHz) | (17.7-19.7) | Limits of FS allocated band. |
| Radio service | Fixed Service | |
| Application/ System type | (Infrastructure) (PP) | Infrastructure, access or other, or combination, etc; PP, PMP, MPMP. |
| Channelling | (ERC/REC 12-03) (27.5 MHz channels only) | Either reference to CEPT/ITU recommendation/annex and/or National plan (the latter to be explained or attached). National restrictions/modifications to CEPT/ITU plans to be described. |
| Transmit power limit | (XX dBm EIRP) | Should be specified whether it is an output power and/or EIRP; in accordance with RR provisions. For block assignment it may be complemented by additional provisions (e.g. border PFD limits). |
| Channel occupation rules | (Min hop 10 km) | May mean transmission capacity (possibly linked to channel width), minimum hop length, equipment class, etc. |
| Duplex type / spacing | (ERC/REC 12-03) (FDD) | Either reference to the specified channel arrangement or explained, for FDD MP systems the uplink/downlink bands could be specified. |
| Licensing regime | (Link-by-link assignment) | Could be Link-by-link assignment, block assignment, and general licence. Other specifics should be mentioned, if any (e.g. geographical limitations). |
| Frequency planning assumptions | (ATPC: XX dB) | Could include requirements in accordance with articles 3.2 and 7.2 of the R&TTE Directive [1]: Antenna radiation pattern (ref EN), Emission spectrum mask (ref EN), Receiver parameters (ref EN), Minimum antenna gain, ATPC. For block assignment additional/alternative provisions may be set: PFD masks/limits, inter-operator co-ordination procedures, block edge mask, etc. |
| Reference | (EN 301 751) | Reference to harmonized standard, selected equipment class, etc. |
| Remarks | | Any relevant remarks, additional info. |
| Notification number | | For administrative reference purposes. |
| NOTE: References in the table are found in the bibliography. | | |

Annex C (informative): Bibliography

CEPT/ECC/REC 01-05: "List of parameters of digital point-to-point fixed radio links used for national planning".

CEPT/ERC/REC 12-03: "Harmonised radio frequency channel arrangements for digital terrestrial fixed systems operating in the band 17,7 GHz to 19,7 GHz".

ETSI EG 201 752: "Fixed Radio Systems; Point-to-Point and Point-to-Multipoint Equipment and Antennas; Identification of European standards (EN), applicable to fixed radio systems, for the essential requirements under the article 3.1 of the 1999/5/EC Directive".

ETSI EN 300 197 : "Fixed Radio Systems; Point-to-point equipment; Parameters for radio systems for the transmission of digital signals operating at 32 GHz and 38 GHz".

ETSI EN 300 198 : "Fixed Radio Systems; Point-to-point equipment; Parameters for radio systems for the transmission of digital signals operating at 23 GHz".

ETSI EN 300 234: "Fixed Radio Systems; Point-to-point equipment; High capacity digital radio systems carrying 1 x STM-1 signals and operating in frequency bands with about 30 MHz channel spacing and alternated arrangements".

ETSI EN 300 407: "Fixed Radio Systems; Point-to-point equipment; Parameters for digital radio systems for the transmission of digital signals operating at 55 GHz".

ETSI EN 300 408: "Fixed Radio Systems; Point-to-point equipment; Parameters for digital radio systems for the transmission of digital signals and analogue video signals operating at around 58 GHz, which do not require co-ordinated frequency planning".

ETSI EN 300 417 (series): "Transmission and Multiplexing (TM); Generic requirements of transport functionality of equipment".

ETSI EN 300 430: "Fixed Radio Systems; Point-to-point equipment; Parameters for radio systems for the transmission of STM-1 digital signals operating in the 18 GHz frequency band with channel spacing of 55 MHz and 27,5 MHz".

ETSI EN 300 431: "Fixed Radio Systems; Point-to-point equipment; Parameters for radio system for the transmission of digital signals operating in the frequency range 24,50 GHz to 29,50 GHz".

ETSI EN 300 630: "Fixed Radio Systems; Point-to-point equipment; Low capacity point-to-point digital radio systems operating in the 1,4 GHz frequency band".

ETSI EN 300 631: "Fixed Radio Systems; Point-to-point Antennas; Antennas for point-to-point fixed radio systems in the 1 GHz to 3 GHz band".

ETSI EN 300 633: "Fixed Radio Systems; Point-to-point equipment; Low and medium capacity point-to-point digital radio systems operating in the frequency range 2,1 GHz to 2,6 GHz".

ETSI EN 300 639: "Fixed Radio Systems; Point-to-point equipment; Sub-STM-1 digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 28 MHz co-polar and 14 MHz cross-polar channel spacing".

ETSI EN 300 786: "Fixed Radio Systems; Point-to-point equipment; Sub-STM-1 digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands with about 14 MHz co-polar channel spacing".

ETSI EN 300 833: "Fixed Radio Systems; Point to point antennas; Antennas for point-to-point fixed radio systems operating in the frequency band 3 GHz to 60 GHz".

ETSI EN 301 127: "Fixed Radio Systems Point-to-point equipment; High capacity digital radio systems carrying SDH signals (up to 2 x STM-1) in frequency bands with about 30 MHz channel spacing and using co-polar arrangements or Co-Channel Dual Polarized (CCDP) operation".

ETSI EN 301 128: "Fixed Radio Systems Point-to-point equipment; Plesiochronous Digital Hierarchy (PDH); Low and medium capacity digital radio systems operating in the 13 GHz, 15 GHz and 18 GHz frequency bands".

ETSI EN 301 167: "Transmission and Multiplexing (TM); Management of Synchronous Digital Hierarchy (SDH) transmission equipment; Fault management and performance monitoring; Functional description".

ETSI EN 301 216: "Fixed Radio Systems; Point-to-point equipment; Plesiochronous Digital Hierarchy (PDH); Low and medium capacity and STM-0 digital radio system operating in the frequency bands in the range 3 GHz to 11 GHz".

ETSI EN 301 277: "Fixed Radio Systems; Point-to-point equipment; High capacity digital radio systems transmitting STM-4 or 4 x STM-1 in a 40 MHz radio frequency channel using Co-Channel Dual Polarized (CCDP) operation".

ETSI EN 301 387: "Fixed Radio Systems; Point-to-point equipment; Plesiochronous Digital Hierarchy (PDH); Low and medium capacity digital radio systems operating in the frequency band 48,5 GHz to 50,2 GHz".

ETSI EN 301 461: "Fixed Radio Systems; Point-to-point equipment; High capacity fixed radio systems carrying SDH signals (2 x STM-1) in frequency bands with 40 MHz channel spacing and using Co-Channel Dual Polarized (CCDP) operation".

ETSI EN 301 669: "Fixed Radio Systems; Point-to-point equipment; High capacity digital radio systems carrying STM-4 in two 40 MHz channels or 2 x STM-1 in a 40 MHz channel with alternate channel arrangement".

ETSI EN 301 751: "Fixed Radio Systems; Point-to-Point equipments and antennas; Generic harmonized standard for Point-to-Point digital fixed radio systems and antennas covering the essential requirements under article 3.2 of the 1999/5/EC Directive".

ETSI EN 301 785: "Fixed Radio Systems; Point-to-point packet data equipment; Parameters for radio systems with packet data interfaces for transmission of digital signals operating in the frequency range 7, 8, 13, 15, 18, 23, 26, 28, 32, 38, 52 to 55 GHz".

ETSI EN 301 786: "Fixed Radio Systems; Point-to-point equipment; Parameters for digital radio systems for the transmission of digital signals operating at 52 GHz".

ETSI EN 301 787: "Fixed Radio Systems; Point-to-Point equipment; Parameters for radio systems for the transmission of Sub-STM-0 digital signals operating in the 18 GHz frequency band".

ETSI EN 302 062: "Fixed Radio Systems; Point-to-point equipment; High capacity digital radio relay systems carrying STM-4, 4 x STM-1 or 2 x STM-1 signals in bands with 55/56 MHz channel spacing".

ETSI EN 302 217-1: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 1: Overview and system-independent common characteristics".

ETSI EN 302 217-2-1: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 2-1: System-dependent requirements for digital systems operating in frequency bands where frequency co-ordination is applied".

ETSI EN 302 217-2-2: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 2-2: Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for digital systems operating in frequency bands where frequency co-ordination is applied".

ETSI EN 302 217-3: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 3: Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for equipment operating in frequency bands where no frequency co-ordination is applied".

ETSI EN 302 217-4-1: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 4-1: System-dependent requirements for antennas".

ETSI EN 302 217-4-2: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 4-2: Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for antennas".

ETSI EN 300 119 (series): "Equipment Engineering (EE);European telecommunication standard for equipment practice".

ETSI ETS 300 635: "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH); Radio specific functional blocks for transmission of $M \times$ STM-N".

ETSI EN 300 645: "Telecommunications Management Network (TMN); Synchronous Digital Hierarchy (SDH) radio relay equipment; Information model for use on Q interfaces".

ETSI TR 101 506: "Fixed Radio Systems; Generic definitions, terminology and applicability of essential requirements under the article 3.2 of 99/05/EC Directive to Fixed Radio Systems".

ITU-R Recommendation F.751: "Transmission characteristics and performance requirements of radio-relay systems for SDH-based networks".

ITU-T Recommendation G.773: "Protocol suites for Q-interfaces for management of transmission systems".

ITU-T Recommendation G.783: "Characteristics of synchronous digital hierarchy (SDH) equipment functional blocks".

ITU-T Recommendation G.784: "Synchronous digital hierarchy (SDH) management".

History

| Document history | | | | |
|-------------------------|----------------|----------------|--------------|--------------------------|
| V1.1.1 | August 2003 | Public Enquiry | PE 20031205: | 2003-08-06 to 2003-12-05 |
| V1.1.2 | September 2004 | Vote | V 20041119: | 2004-09-20 to 2004-11-19 |
| | | | | |
| | | | | |
| | | | | |