

Draft **ETSI EN 302 297** V1.1.1 (2004-04)

Candidate Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Transmitting equipment for the
analogue television broadcasting service;
Harmonized EN under article 3.2
of the R&TTE Directive**



Reference

DEN/ERM-TG17-002

Keywords

analogue, broadcasting, radio, regulation,
terrestrial, TV

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

DECT™, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	5
Foreword.....	5
Introduction	6
1 Scope	8
2 References	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Technical requirements specifications	10
4.1 Environmental profile.....	10
4.2 Antenna port measurements	11
4.2.1 Spurious emissions	11
4.2.1.1 Definition	11
4.2.1.2 Method of measurement (essential test suite)	11
4.2.1.2.1 Initial conditions.....	11
4.2.1.2.2 Procedure.....	11
4.2.1.2.3 Test requirements	11
4.2.1.3 Limit.....	11
4.2.2 Out-of-band emissions.....	12
4.2.2.1 Definition	12
4.2.2.2 Method of measurement (essential test suite)	12
4.2.2.2.1 Initial conditions	12
4.2.2.2.2 Procedure.....	13
4.2.2.2.3 Test requirements	13
4.2.2.3 Limit.....	13
4.2.2.3.1 Spectrum masks for 7 MHz and 8 MHz analogue television systems.....	13
4.2.3 Transmitter muting during frequency shift	17
4.2.3.1 Definition	17
4.2.3.2 Method of measurement (essential test suite)	17
4.2.3.2.1 Initial conditions	17
4.2.3.2.2 Procedure.....	18
4.2.3.2.3 Test requirements	18
4.2.3.3 Limit.....	18
4.3 Enclosure port measurements (radiated emissions).....	18
4.3.1 Cabinet radiation.....	18
4.3.1.1 Definition	18
4.3.1.2 Method	18
4.3.1.2.1 Initial conditions.....	18
4.3.1.2.2 Procedure.....	19
4.3.1.2.3 Test requirements	19
4.3.1.3 Limits	19
4.4 Measurement uncertainties.....	20
Annex A (normative): General measuring arrangements.....	21
A.1 Testing arrangements for antenna port measurements	21
A.1.1 Spurious and out-of-band emissions	21
A.1.2 Test frequency range	21
A.1.3 Test modulating signal	22
A.2 Testing arrangements for enclosure port (radiated emissions) measurements	22
Annex B (informative): The EN title in the official languages	23

Annex C (informative): Bibliography.....24
History26

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC are given in annex A.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive. Each standard is a module in the structure. The modular structure is shown in figure 1.

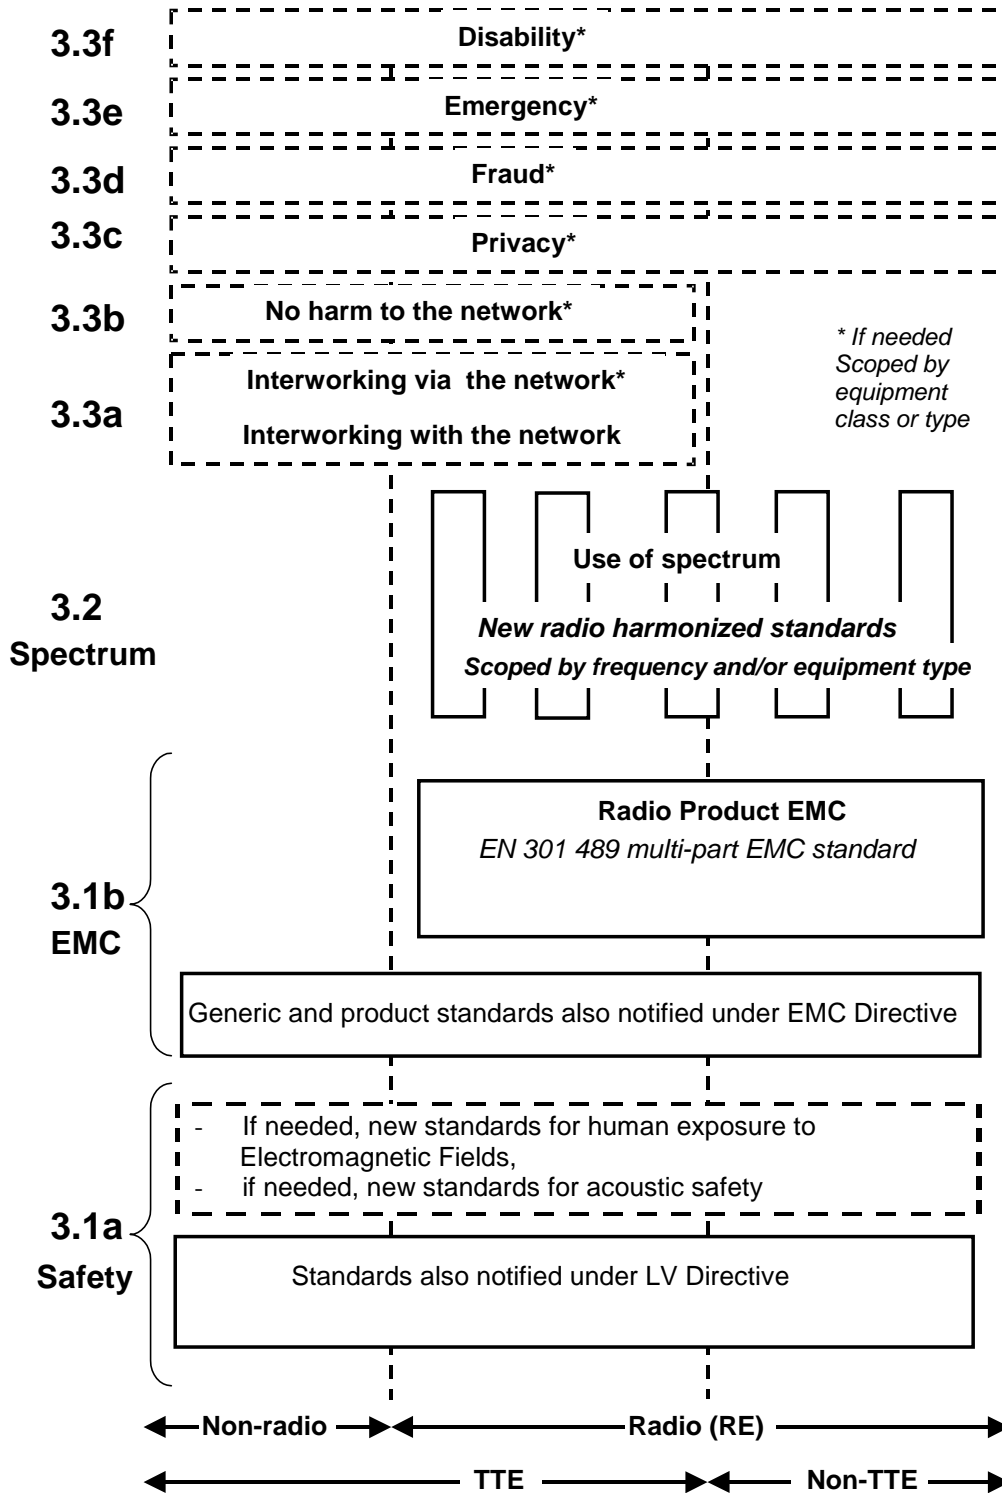


Figure 1: Modular structure for the various standards used under the R&TTE Directive [1]

The left hand edge of the figure 1 shows the different clauses of Article 3 of the R&TTE Directive [1].

For article 3.3 various horizontal boxes are shown. Dotted lines indicate that at the time of publication of the present document essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum by radio equipment. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1b the diagram shows EN 301 489, the multi-part product EMC standard for radio used under the EMC Directive [2].

For article 3.1a the diagram shows the existing safety standards currently used under the LV Directive [3] and new standards covering human exposure to electromagnetic fields. New standards covering acoustic safety may also be required.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. A radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement under the R&TTE Directive is adopted by the Commission and if the equipment in question is covered by the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the R&TTE Directive may be covered in a set of standards.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decisions without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

Other documents directly associated with the present document:

- EN 301 489-14 [5].

1 Scope

The present document applies to transmitting equipment for the analogue television broadcasting service.

The types of equipment covered by the present document are as follows:

Television transmitter equipment for analogue television broadcasting service, with 7 MHz and 8 MHz RF channel bandwidths, operating in the CEPT harmonized frequency bands. These frequencies are currently within the television Bands I, III, IV and V.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org>.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- [3] Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of the Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).
- [4] Council Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [5] ETSI EN 301 489-14: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 14: Specific conditions for analogue and digital terrestrial TV broadcasting service transmitters".
- [6] CENELEC EN 55011 (1998): "Industrial, scientific and medical (ISM) radio-frequency equipment - Electromagnetic disturbance characteristics - Limits and methods of measurement.
- [7] IEC 60489-1 + Am1 (1996) + Am2 (1999): "Methods of measurement for radio equipment used in the mobile services. Part 1: General definitions and standard conditions of measurement".
- [8] CENELEC EN 55022 (1998): "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

analogue signal : signal in which the characteristic quantity representing information may at any instant assume any value within a continuous interval

analogue television: television in which picture information is represented by an analogue signal. Sound information can be represented by an analogue and/or digital signal

broadcasting service: radiocommunication service in which the transmissions are intended for direct reception by the general public. This service may include sound transmissions, television transmissions or other types of transmission

cabinet radiation: radiation from an enclosure containing equipment, excluding radiation from connected antennas or cables

carrier power: average power supplied to the antenna transmission line by a transmitter during one radio frequency cycle taken under the condition of no modulation

class of emission: set of characteristics of an emission designated by standard symbols, e.g. type of modulation of the main carrier, modulating signal, type of information to be transmitted, and also, if appropriate, any additional signal characteristics

dBc: decibels relative to the unmodulated carrier power of the emission

NOTE: In the cases which do not have a carrier, for example in some digital modulation schemes where the carrier is not accessible for measurement, the reference level equivalent to dBc is decibels relative to the mean power.

digital signal: discretely timed signal in which information is represented by a finite number of well defined discrete values that its characteristic quantities may take in time

enclosure port: physical boundary of the apparatus through which electromagnetic fields may radiate or impinge

NOTE: In the case of integral antenna equipment, this port is inseparable from the antenna port.

exclusion band: band of radio frequencies where no measurements are made

harmonic: component of order greater than 1 of the fourier series of a periodic quantity

harmonic number: integral number given by the ratio of the frequency of a harmonic to the fundamental frequency

EXAMPLE: (2nd harmonic = 2 x fundamental frequency).

intermodulation products: unwanted frequencies resulting from intermodulation between carriers or harmonics of emission or between any oscillations generated to produce the carrier

mean power: average power supplied to the antenna transmission line by a transmitter during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation taken under normal operating conditions

NOTE: For analogue television transmissions, the mean power level is defined with a specified video signal modulation. This video signal has to be chosen in such a way that the maximum mean power level (e.g. at the video signal blanking level for PAL) is provided to the antenna transmission line.

necessary bandwidth: for a given class of emission, the width of the frequency band which is sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions

out-of-band emissions: emission on a frequency or frequencies immediately outside the necessary bandwidth which results from the modulation process, but excluding spurious emissions

rated output power: rated output power is the power that the transmitter or transposer shall deliver at its output under specified conditions of operation

reference bandwidth: bandwidth in which the emission level is specified

Spurious emissions: emission on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but exclude out-of-band emissions

television transmitter: used in EN 302 297 to refer to that equipment with a video input and one or more audio inputs and a combined vision and sound radio frequency output

unwanted emissions: consist of spurious emissions and out-of-band emissions

letterbox operation: transmission of a picture format with an aspect ratio greater than 1,33, in such a way that empty (black) lines are added to conform to a 4:3 transmission format

3.2 Symbols

For the purposes of the present document, the following symbols apply:

F_s	Clock frequency
FM	Frequency Modulation
HDTV	High definition television
μ	Micro
T_d	Data bit period
T_s	Sampling period

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

DQPSK	Differential Quadrature Phase Shift Keying
EMC	Electro Magnetic Compatibility
EUT	Equipment Under Test
LV	Low Voltage
NICAM	Near Instantaneous Companded Audio Multiplex
PAL	Phase Alternating on the Line
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
SECAM	SEquential Couleur Avec Memoire
TV	TeleVision
VSB	Vestigial Side Band

4 Technical requirements specifications

4.1 Environmental profile

The environmental profile for operation of the equipment shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the required operational environmental profile.

4.2 Antenna port measurements

4.2.1 Spurious emissions

4.2.1.1 Definition

Emission on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but exclude out of band emissions.

4.2.1.2 Method of measurement (essential test suite)

4.2.1.2.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- a) connect the Test Signal Generator to the EUT;
- b) connect the EUT to the Test Load, via the Coupling Device;
- c) connect the Spectrum Analyser to the Coupling Device.

4.2.1.2.2 Procedure

- a) set the Test Signal Generator to deliver a test signal;
- b) operate the EUT at each of the test frequencies as defined in clause 4.2.1.2.1;
- c) measure the results on the Spectrum Analyser.

4.2.1.2.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.1.3 in order to demonstrate compliance.

4.2.1.3 Limit

Spurious emissions shall not exceed the values set out in table 4.1, shown additionally in figure 4.1 for the frequency range 9 kHz to 4,5 GHz.

Table 4.1: Spurious emission limits for analogue television broadcast transmitters

Mean power of the transmitter	Limits mean power absolute levels (dBm) or relative levels (dBc) below the power supplied to the antenna port in the reference bandwidth (see annex A)
P < 9 dBW	-36 dBm
9 dBW < P < 29 dBW	75 dBc
29 dBW < P < 39 dBW	-16 dBm
39 dBW < P < 50 dBW	85 dBc
50 dBW < P	-5 dBm

NOTE: Within the band 108 MHz to 137 MHz the absolute limit of 25 μ W (-16 dBm) shall apply.

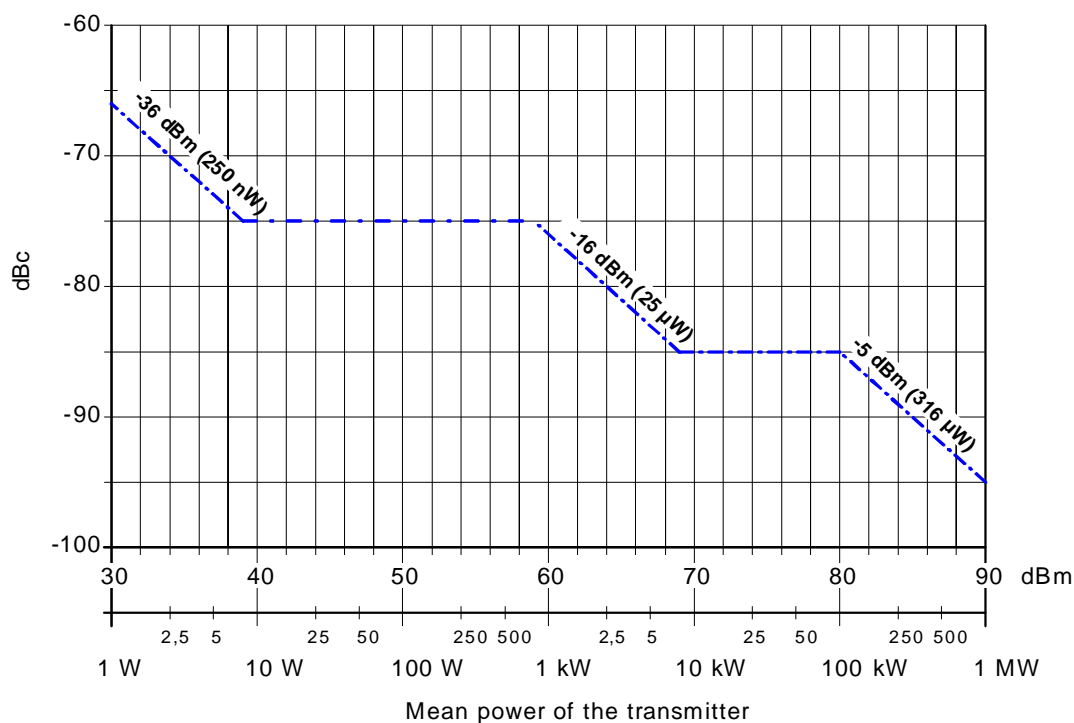


Figure 4.1: Spurious emission limits for analogue television broadcast transmitters

4.2.2 Out-of-band emissions

4.2.2.1 Definition

Emission on a frequency or frequencies immediately outside the necessary bandwidth which results from the modulation process, but excludes spurious emissions.

NOTE: All the spectrum masks presented are overall emission masks inclusive of out-of band emission limits.

4.2.2.2 Method of measurement (essential test suite)

4.2.2.2.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement (see figure A.1):

- a) connect the Test Signal Generator to the EUT;
- b) connect the EUT to the Test Load, via the Coupling Device;
- c) connect the Spectrum Analyser to the Coupling Device.

4.2.2.2.2 Procedure

- a) set the Test Signal Generator to deliver a test signal;
- b) operate the EUT at each of the test frequencies as defined in clause 4.2.2.2.1;
- c) measure the results on the Spectrum Analyser.

4.2.2.2.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.2.3 in order to demonstrate compliance.

4.2.2.3 Limit

Out-of-band emissions shall not exceed the values set out in tables 4.2, 4.4, 4.6, shown additionally in figures 4.2, 4.3, 4.4.

4.2.2.3.1 Spectrum masks for 7 MHz and 8 MHz analogue television systems

Spectrum limit masks for analogue television are shown in figures 4.2, 4.3, 4.4 . A generic approach is used to cover the following types of system:

- 7 MHz analogue television, negative modulation, 0,75 MHz VSB;
- 8 MHz analogue television, negative modulation, 0,75 MHz and 1,25 MHz VSB;
- 8 MHz analogue television, positive modulation, 0,75 MHz and 1,25 MHz VSB.

Each graph is drawn to represent the spectrum limits for transmitters in the output power range 39 dBW to 50 dBW. Associated with each graph is a table of break points and a table of end point values, together with the corresponding spurious levels, for a range of transmitter output powers.

For 7 MHz analogue television, the Out-Of-Band domain extends from $\pm 3,5$ MHz (i.e. $\pm 0,5 \times 7$ MHz) to $\pm 17,5$ MHz (i.e. $\pm 2,5 \times 7$ MHz).

For 8 MHz analogue television, the Out-Of-Band domain extends from ± 4 MHz (i.e. $\pm 0,5 \times 8$ MHz) to ± 20 MHz (i.e. $\pm 2,5 \times 8$ MHz).

For both 7 MHz and 8 MHz analogue television, a 50 kHz measurement bandwidth is used. The 0 dB reference level corresponds to the peak sync power for negative modulation television systems, or the peak white power for positive modulation television systems. The highest mean power for negative modulation is assumed to be 2,5 dB below peak sync power, and for positive modulation it is assumed to be 1,2 dB below peak white power.

Table 4.2 provides break points corresponding to the graph shown in figure 4.2 for 7 MHz analogue television, negative modulation, 0,75 MHz VSB.

Table 4.2: Break points for 7 MHz analogue television, negative modulation, 0,75 MHz VSB

Frequency relative to the vision carrier frequency	Frequency relative to the centre of the 7 MHz channel	Relative level (dB) in 50 kHz reference bandwidth
-15,25	-17,5	-90,5
-8,25	-10,5	-65,5
-5,5	-7,75	-56
-5	-7,25	-36
-1,25	-3,5	-36
-0,75	-3	-16
-0,18	-2,43	-16
0	-2,25	0
0,18	-2,07	-16
5	2,75	-16
5 435	3 185	-10
5 565	3 315	-10
6.1	3,85	-20
6.28	4,03	-50
11	8,75	-56
12,75	10,5	-65,5
19,75	17,5	-90,5

Table 4.3 provides end point values to be used in conjunction with table 4.2 and figure 4.2, applicable to a range of transmitter output powers, for 7 MHz analogue television, negative modulation, 0,75 MHz VSB.

Table 4.3: End point values for 7 MHz analogue television, negative modulation, 0,75 MHz VSB

End point value (see NOTE) (50 kHz measurement bandwidth) (dB)	Power range (dBW)	Corresponding spurious level (in 100 kHz measurement bandwidth)
$-80,5 - (P - 9)$	$P \leq 9$	-36 dBm
-80,5	$9 < P \leq 29$	75 dBc
$-80,5 - (P - 29)$	$29 < P \leq 39$	-16 dBm
-90,5	$39 < P \leq 50$	85 dBc
$-90,5 - (P - 50)$	$50 < P$	-5 dBm

NOTE: The end point value is subject to an upper limit of 65,5 dB.

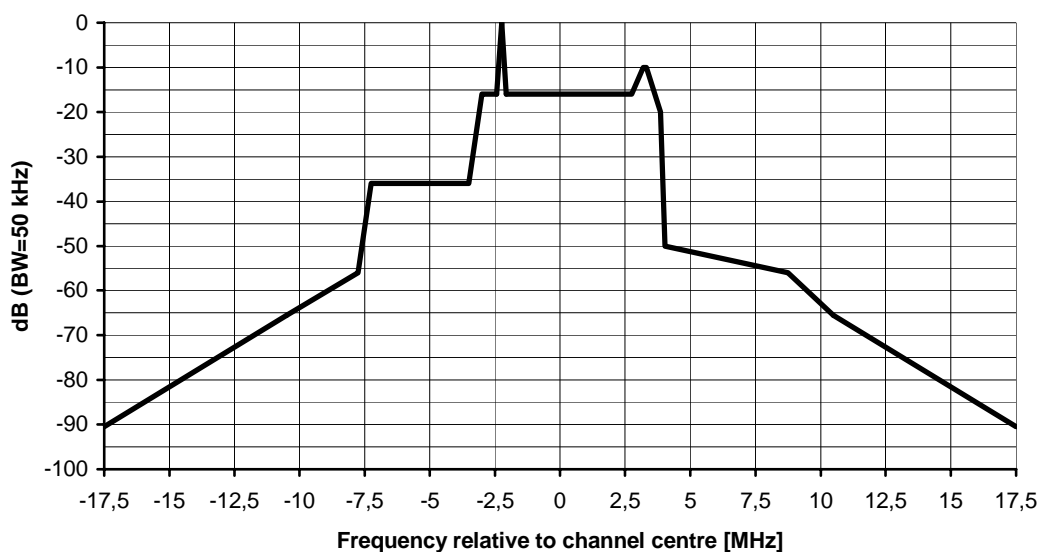


Figure 4.2: Spectrum limit mask for 7 MHz analogue television, negative modulation 0,75 VSB (for $P = 39$ dBW to 50 dBW)

Table 4.4 provides break points corresponding to the graph shown in figure 4.3, for 8 MHz analogue television, negative modulation, 0,75 MHz and 1,25 MHz VSB.

Table 4.4: Break points for 8 MHz analogue television, negative modulation, 0,75 MHz and 1,25 MHz VSB

Frequency relative to the vision carrier frequency	Frequency relative to the centre of the 8 MHz channel	Relative level (dB) in 50 kHz reference bandwidth 0,75 MHz VSB	Relative level (dB) in 50 kHz reference bandwidth 1,25 MHz VSB
-17,25	-20	-90,5	-90,5
-9,25	-12	-65,5	-65,5
-6,5	-9,25	-56	-56
-6	-8,75	-36	-36
-3	-5,75	-36	-36
-1,25	-4	-36	-16
-0,75	-3,5	-16	-16
-0,18	-2,93	-16	-16
0	-2,75	0	0
0,18	-2,57	-16	-16
5	2,25	-16	-16
5,435	2,685	-10	-10
6,565	3,815	-10	-10
6,802	4,052	-25	-25
6,94	4,19	-50	-50
13	10,25	-56	-56
14,75	12	-65,5	-65,5
22,75	20	-90,5	-90,5

Table 4.5 provides end point values to be used in conjunction with table 4.4 and figure 4.3, applicable to a range of transmitter output powers, for 8 MHz analogue television, negative modulation.

Table 4.5: End point values for 8 MHz analogue television, negative modulation

End point value (see note) (50 kHz measurement bandwidth) (dB)	Power range (dBW)	Corresponding spurious level (in 100 kHz measurement bandwidth)
-80,5 - ($P - 9$)	$P \leq 9$	-36 dBm
-80,5	$9 < P \leq 29$	75 dBc
-80,5 - ($P - 29$)	$29 < P \leq 39$	-16 dBm
-90,5	$39 < P \leq 50$	85 dBc
-90,5 - ($P - 50$)	$50 < P$	-5 dBm

NOTE: The end point value is subject to an upper limit of 65,5 dB.

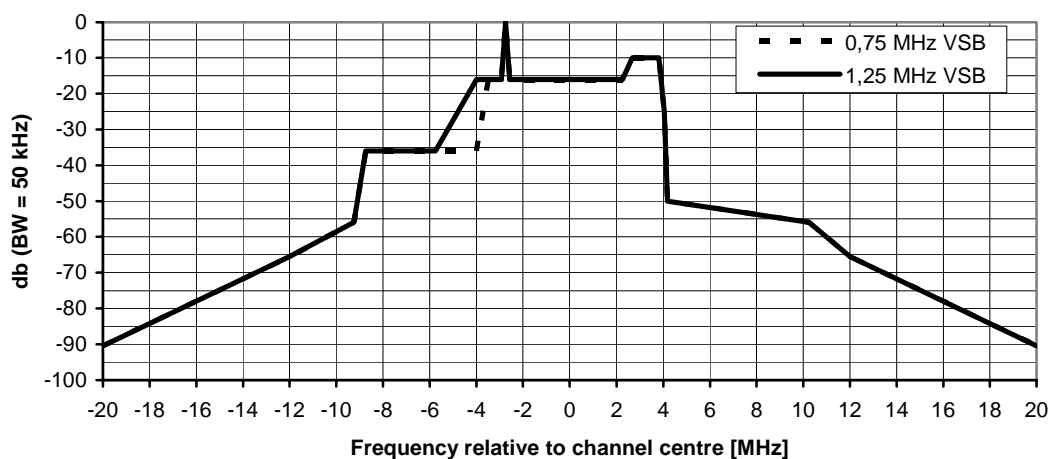


Figure 4.3: Spectrum limit mask for 8 MHz analogue television, negative modulation (for P = 39 dBW to 50 dBW)

Table 4.6 provides break points corresponding to the graph shown in figure 4.4, for 8 MHz analogue television, positive modulation, 0,75 MHz and 1,25 MHz VSB.

Table 4.6: Break points for 8 MHz analogue television, positive modulation, 0,75 MHz and 1,25 MHz VSB

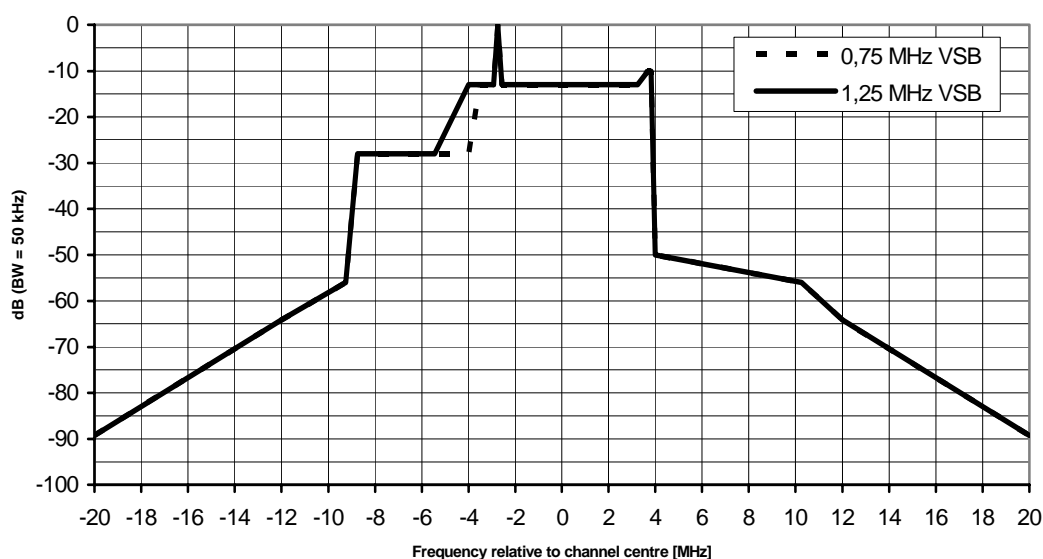
Frequency relative to the vision carrier frequency	Frequency relative to the centre of the 8 MHz channel	Relative level (dB) in 50 kHz reference bandwidth 0,75 MHz VSB	Relative level (dB) in 50 kHz reference bandwidth 1,25 MHz VSB
-17,25	-20	-89,2	-89,2
-9,25	-12	-64,2	-64,2
-6,5	-9,25	-56	-56
-6	-8,75	-28	-28
-2,7	-5,45	-28	-28
-1,25	-4	-28	-13
-0,75	-3,5	-13	-13
-0,18	-2,93	-13	-13
0	-2,75	0	0
0,18	-2,57	-13	-13
6	3,25	-13	-13
6,435	3 685	-10	-10
6,565	3 815	-10	-10
6,75	4	-50	-50
13	10,25	-56	-56
14,75	12	-64,2	-64,2
22,75	20	-89,2	-89,2

Table 4.7 provides end point values to be used in conjunction with table 4.6 and figure 4.4, applicable to a range of transmitter output powers, for 8 MHz analogue television, positive modulation.

Table 4.7: End point values for 8 MHz analogue television, positive modulation

End point value (see note) (50 kHz measurement bandwidth) (dB)	Power range (dBW)	Corresponding spurious level (in 100 kHz measurement bandwidth)
$-79,2 - (P - 9)$	$P \leq 9$	-36 dBm
-79,2	$9 < P \leq 29$	75 dBc
$-79,2 - (P - 29)$	$29 < P \leq 39$	-16 dBm
-89,2	$39 < P \leq 50$	85 dBc
$-89,2 - (P - 50)$	$50 < P$	- 5 dBm

NOTE: The end point value is subject to an upper limit of 64,2 dB.

Figure 4.4: Spectrum limit mask for 8 MHz analogue television, positive modulation (for $P = 39$ dBW to 50 dBW)

4.2.3 Transmitter muting during frequency shift

4.2.3.1 Definition

The suppression of emissions during the retuning of transmitters, or the loss of carrier frequency control. This is particularly relevant to frequency agile transmitters incorporating frequency control loops.

4.2.3.2 Method of measurement (essential test suite)

4.2.3.2.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- present frequency to desired frequency.

Test arrangement (see figure A.1):

- a) connect the EUT to the Test Load, via the Coupling Device;
- b) connect the Spectrum Analyser to the Coupling Device.

NOTE: Test Signal Generator and Voltage measuring equipment are not required for this test.

4.2.3.2.2 Procedure

- a) operate the EUT at the present frequency as defined in clause 4.2.3.2.1;
- b) initiate frequency change;
- c) measure the results on the Spectrum Analyser.

4.2.3.2.3 Test requirements

The results obtained shall be compared to the limits in clause 4.2.3.3 in order to demonstrate compliance.

4.2.3.3 Limit

The Muting shall be as defined in table 4.1 and additionally shown in figure 4.1.

4.3 Enclosure port measurements (radiated emissions)

4.3.1 Cabinet radiation

4.3.1.1 Definition

Emissions from the equipment, radiated from the enclosure port, other than those present at the antenna port.

4.3.1.2 Method

4.3.1.2.1 Initial conditions

Test environment:

- the normal operating environment, as declared by the equipment manufacturer.

Test frequencies:

- a) the lowest operating frequency of the EUT;
- b) the highest operating frequency of the EUT;
- c) a frequency mid-way between a) and b) above.

Test arrangement: (see figure A.2)

- a) connect the Test Signal Generator to the EUT;
- b) connect the EUT to the Test Load;
- c) connect the Spectrum Analyser to the measuring antenna.

4.3.1.2.2 Procedure

The test method shall be in accordance with EN 55022 [8], unless physical size is a restriction, in which case the test method shall be in accordance with EN 55011 [6].

- Measurements shall be made outside $\pm 250\%$ of the necessary bandwidth of the transmission;
- measurements shall be made in the operational mode producing the largest emission in the frequency band being investigated consistent with normal applications;
- the equipment shall be configured in a manner which is representative of a normal/typical operation, where practical;
- an attempt shall be made to maximize the detected radiated emission, e.g. by moving the cables of the equipment;
- the configuration and mode of operation during measurements shall be precisely noted in the test report;
- RF input/output ports shall be correctly terminated;
- the tests shall be carried out at a point within the specified normal operating environmental range and at the rated supply voltage for the equipment.

4.3.1.2.3 Test requirements

The results obtained shall be compared to the limits in clause 4.3.1.3 in order to demonstrate compliance.

4.3.1.3 Limits

Radiated emissions shall not exceed the values set out in table 4.8, shown additionally in figure 4.5, for the frequency range 9 kHz to 4,5 GHz.

This test shall be performed at a distance of 10 m, where feasible. When size and/or power requirements necessitate testing in a manufacturing facility, other distances may be used (see notes 2 and 3 in table 4.8).

Table 4.8: Limits for radiated unwanted emissions

Quasi-peak limits (dB μ V/m) at 10m (see note 1 and 2)	Frequency range
$30 \text{ dB}\mu\text{V/m} \leq 60 + 10 \log (P_0/2000) \leq 70 \text{ dB}\mu\text{V/m}$	30 MHz - 230 MHz
$37 \text{ dB}\mu\text{V/m} \leq 67 + 10 \log (P_0/2000) \leq 77 \text{ dB}\mu\text{V/m}$	>230 MHz - 4,5 GHz
P0 = RF output power in watts. The exclusion band for the transmitter extends from Fc -24 MHz to Fc +24 MHz, where Fc is the channel centre frequency in MHz.	
NOTE 1: The measurements can be carried out at other distances. In that case limits are modified according to the relation: $L(x\text{m}) = L(10\text{m}) + 20 \log (10/x)$ Where x = distance.	
NOTE 2: Care should be taken if measuring at test distances below 10 m as this may be in the near field.	
NOTE 3: In cases of dispute the measurement distance of 10m shall take precedence.	

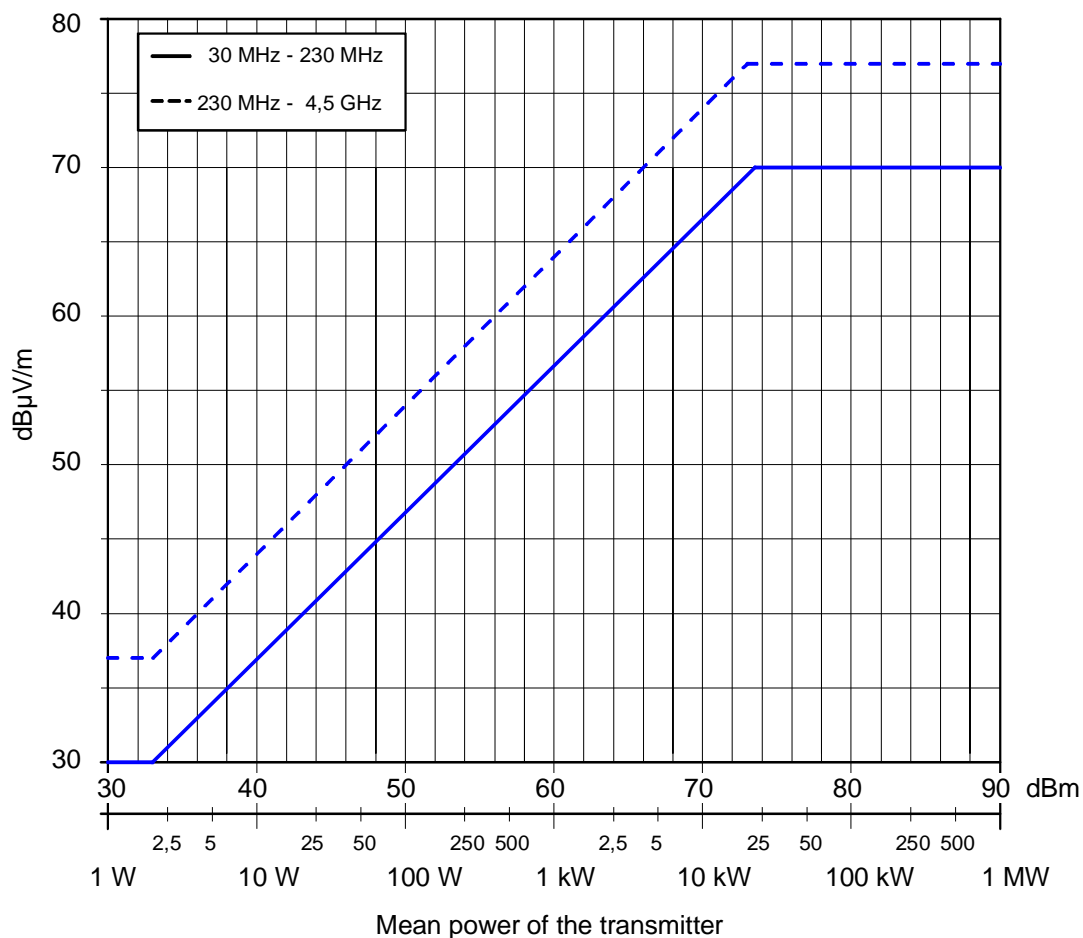


Figure 4.5: Cabinet radiation limits for analogue television transmitter

4.4 Measurement uncertainties

Measurement uncertainty should be calculated and techniques employed to minimize its range. This uncertainty should be applied to the limit and any measurement falling below the range is deemed acceptable.

Annex A (normative): General measuring arrangements

A.1 Testing arrangements for antenna port measurements

For test arrangements for unwanted emissions see figure A.1.

A.1.1 Spurious and out-of-band emissions

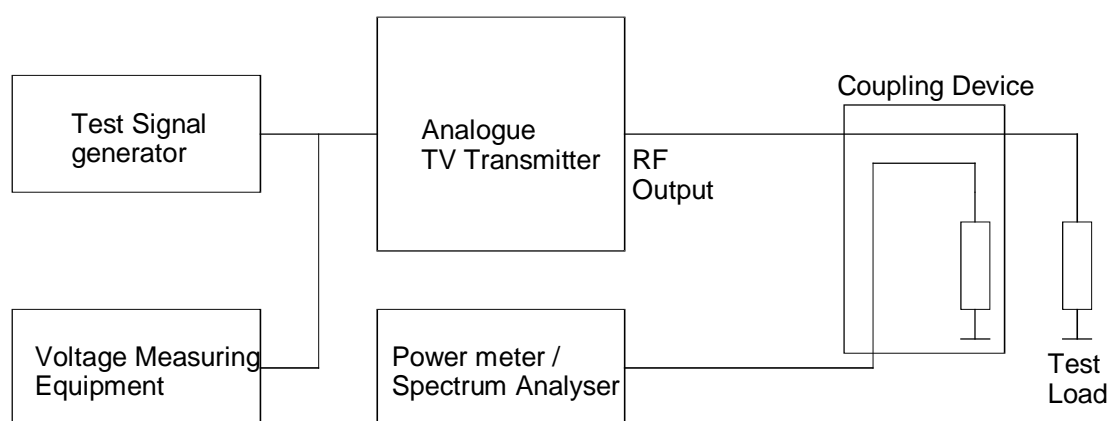


Figure A.1: Unwanted emissions

A.1.2 Test frequency range

Limits on unwanted emissions for radio equipments are considered to be applicable to the range 9 kHz to 300 GHz. However, for practical measurement purposes, the frequency range of spurious emissions may be restricted. As guidance for practical purposes, the following measurement parameters in table A.1 are recommended.

Table A.1: Unwanted emission frequency measurement range

Lower frequency	Upper frequency
9 kHz	4,5 GHz

The following reference bandwidths are to be used:

For spurious emissions

- 1 kHz between 9 and 150 kHz;
- 10 kHz between 150 kHz and 30 MHz;
- 100 kHz between 30 MHz and 1 GHz;
- 1 MHz above 1 GHz.

For out-of-band emissions

- 50 kHz.

A.1.3 Test modulating signal

The Vision carrier shall be amplitude modulated with composite sync pulses and a 350 mV luminance bar with a superimposed, full amplitude, signal swept in frequency between 0,2 and 5,2 MHz (B,G) and 5,5 MHz (I), the Sound 1 (mono) carrier shall be frequency modulated with a 1 kHz sinusoidal signal at a level to cause a frequency deviation of 50kHz and the sound 2 (NICAM) carrier shall be DQPSK modulated with a pseudo random bit sequence.

A.2 Testing arrangements for enclosure port (radiated emissions) measurements

Guidance of methods of measurement can be found in IEC 60489-1 amendment 2 [7].

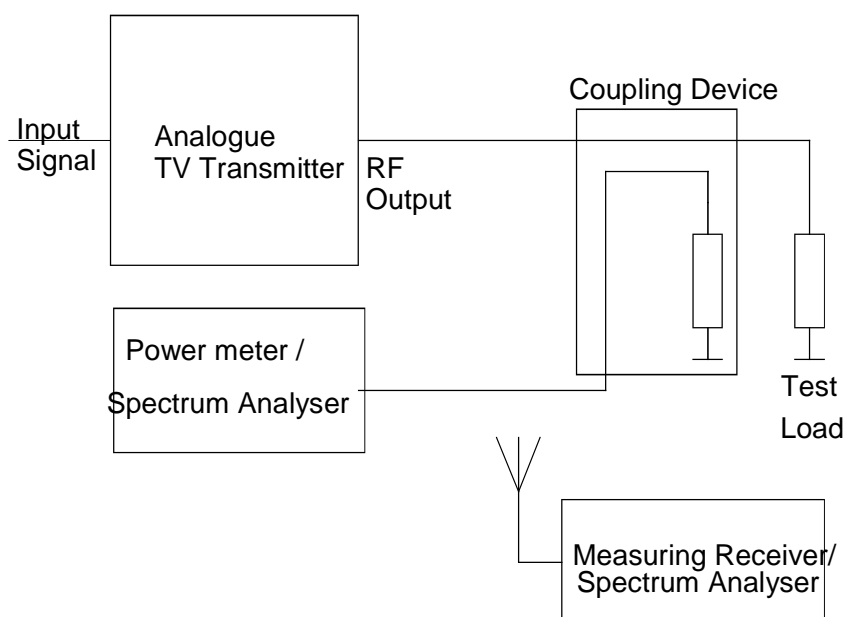


Figure A.2: Cabinet radiation

Annex B (informative): The EN title in the official languages

Language	EN title
Czech	
Danish	
Dutch	
English	Electromagnetic compatibility and Radio spectrum matters (ERM); Transmitting equipment for analogue television broadcast service; Harmonized EN under article 3.2 of the R&TTE Directive
Estonian	
Finnish	
French	
German	
Greek	
Hungarian	
Icelandic	
Italian	
Latvian	
Lithuanian	
Maltese	
Polish	
Portuguese	
Slovak	
Slovenian	
Spanish	
Swedish	

Annex C (informative): Bibliography

CEPT/ERC/Rec 74-01: "Spurious emissions."

CEPT/ERC/Rec T/R 25-06 (Odense 1986); Planning parameters to assist in the efficient and effective utilisation of shared frequency bands which are allocated to the broadcasting service (television) and the land mobile service using assignments which overlap a television channel (television bands I and III only).

Chester 1997 Multilateral Co-ordination Agreement Relating to Technical Criteria, Co-ordination principles and Procedures for the introduction of Terrestrial Digital Video Broadcasting (DVB-T), Chester 25 July 1997, Resolution 5.

ETSI EN 300 163 (V1.2.1) : "Television systems;NICAM 728: transmission of two-channel digital sound with terrestrial television systems B, G, H, I, K1 and L."

ETSI EN 300 294 (V1.3.2) : "Television systems; 625 line television Wide Screen Signalling (WSS)."

ETSI ETR 287 (1996): "Television systems;Code of practice for enhanced Teletext."

ETSI ETS 300 163 (1994) : "Television systems;NICAM 728: Specification for transmission of two-channel digital sound with terrestrial television systems B, G, H, I and L."

ETSI ETS 300 231 (1996) : "Television systems;Specification of the domestic video Programme Delivery Control system (PDC).

ETSI ETS 300 708 (1997) : "Television systems;Data transmission within Teletext."

ETSI ETS 300 731 (1997) : "Television systems;Enhanced 625-line Phased Alternate Line (PAL) television;PALplus."

ETSI ETS 300 732 (1997) : "Television systems;Enhanced 625-line PAL/SECAM television;Ghost Cancellation Reference (GCR) signals."

ETSI TR 101 231 (V1.1.1) : "Television systems;Register of Country and Network Identification (CNI) and of Video Programming System (VPS) codes."

ETSI TR 101 231 (V1.2.1) : "Television systems;Register of Country and Network Identification (CNI) and of Video Programming System (VPS) codes."

ETSI TR 101 231 (V1.2.2) : "Television systems;Register of Country and Network Identification (CNI) and of Video Programming System (VPS) codes."

ETSI TR 101 231 (V1.2.3) : "Television systems;Register of Country and Network Identification (CNI) and of Video Programming System (VPS) codes."

ETSI TR 101 233 (V1.1.1) : "Television systems;Code of practice for allocation of services in the Vertical Blanking Interval (VBI)."

IEC 60244-1: "Methods of measurement for radio transmitters - Part 1: General characteristics for broadcast transmitters."

IEC 60244-10: "Methods of measurement for radio transmitters Part 10: Methods of measurement for television transmitters and transposers employing insertion test signals."

IEC 60244-12-1: "Methods of measurement for radio transmitters - Part 12: Guideline for drawing up descriptive leaflets for transmitters and transposers for sound and television broadcasting -Characteristics to be specified."

IEC 60244-12-2: "Methods of measurement for radio transmitters Part 12: Guideline for drawing up descriptive leaflets for transmitters and transposers for sound and television broadcasting - Specification sheets."

IEC 60244-5: "Methods of measurement for radio transmitters Part 5: Performance characteristics of television transmitters."

IEC 60244-6: "Methods of measurement for radio transmitters Part 6: Cabinet radiation at frequencies between 130 kHz and 1 GHz."

IEC 60244-8: "Methods of measurement for radio transmitters Part 8: Performance characteristics of vestigial sideband demodulators used for testing television transmitters and transposers."

IEC 60244-9: "Methods of measurement for radio transmitters Part 9: Performance characteristics for television transposers."

IEC 60574-1: "Audiovisual, video and television equipment and systems Part 1 General."

IEC 60574-2: "Audiovisual, video and television equipment and systems Part 2 Definition of general terms."

IEC 60574-3: "Audiovisual, video and television equipment and systems Part 3 Connectors for the interconnection of equipment in audiovisual systems."

IEC 60574-5: "Audiovisual, video and television equipment and systems Part 5 Control, synchronisation and address codes clause 1: Synchronised tape/visual operating practice."

IEC 60574-5: "Audiovisual, video and television equipment and systems Part 5 Control, synchronisation and address codes clause 2: Control systems for two still projectors - Operating practice."

IEC 60574-7: "Audiovisual, video and television equipment and systems Part 7 Safe handling and operation of audiovisual equipment."

IEC 61000-4-3/A1 (1998/12): Part 4: "Testing and measurement techniques, Section 3: Radiated, radio frequency, electromagnetic field immunity test."

ITU-Recommendation BT.1119-2: "Wide-screen signalling for broadcasting (Signalling for wide-screen and other enhanced television parameters)."

ITU-Recommendatio BT.1299 10-1997: "The basic elements of a worldwide common family of systems for digital terrestrial television broadcasting."

ITU-Recommendation BT.1362 02-1998: "Interfaces for digital component video signals in 525- and 625-line progressive scan television systems."

ITU-Recommendation BT.470-6 11-1998: "Conventional television systems."

ITU-Recommendation SM. 329-9: "Spurious emissions."

ITU-Recommendation SM.1541: "Unwanted emissions in the out-of-band domain."

ITU- Recommendation SM.328-10: "Spectra and bandwidth of emissions."

History

Document history			
V1.1.1	April 2004	Public Enquiry	PE 20040827: 2004-04-28 to 2004-08-27