

Final draft **ETSI EN 302 636-1** V1.2.1 (2014-02)



**Intelligent Transport Systems (ITS);
Vehicular Communications;
GeoNetworking;
Part 1: Requirements**

Reference

REN/ITS-0030032

Keywords

autonomic networking, ITS, network, safety

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	5
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	8
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 Design guidelines	8
5 Functional requirements	9
5.1 Communication mode	9
5.2 GeoNetworking addressing	9
5.3 Geographical routing	9
5.4 Status information signalling.....	9
5.5 Priority and buffering	9
5.6 Decentralized congestion control	10
5.7 Security and privacy	10
5.8 Cross-layer signalling.....	10
5.9 GeoNetworking and IPv6.....	10
5.10 Transport layer functions.....	11
6 Performance requirements.....	11
Annex A (informative): Bibliography.....	12
History	14

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This final draft European Standard (EN) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS), and is now submitted for the Vote phase of the ETSI standards EN Approval Procedure.

The present document is part 1 of a multi-part deliverable covering Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking, as identified below:

Part 1: "Requirements";

Part 2: "Scenarios";

Part 3: "Network architecture";

Part 4: "Geographical addressing and forwarding for point-to-point and point-to-multipoint communications";

Part 5: "Transport Protocols";

Part 6: "Internet Integration".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Introduction

Wireless communication is a cornerstone of future Intelligent Transport Systems (ITS). Many ITS applications require the dissemination of information with a rapid and direct communication, which can be achieved by ad hoc networking. GeoNetworking is a network-layer protocol for mobile ad hoc communication based on wireless technology, such as ITS-G5. It provides communication in mobile environments without the need for a coordinating infrastructure. GeoNetworking utilizes geographical positions for dissemination of information and transport of data packets. It offers communication over multiple wireless hops, where nodes in the network forward data packets on behalf of each other to extend the communication range. Originally proposed for general mobile ad hoc networks, variants of GeoNetworking have been proposed for other network types, such as vehicular ad hoc networks (VANETs), mesh networks and wireless sensor networks. Therefore, GeoNetworking can also be regarded as a family of network protocols based on the usage of geographical positions for addressing and transport of data packets in different types of networks.

In VANETs, GeoNetworking provides wireless communication among vehicles and among vehicles and fixed stations along the roads. GeoNetworking works connectionless and fully distributed based on ad hoc network concepts, with intermittent or even without infrastructure access. The principles of GeoNetworking meet the specific requirements of vehicular environments: It is well suited for highly mobile network nodes and frequent changes in the network topology. Moreover, GeoNetworking flexibly supports heterogeneous application requirements, including applications for road safety, traffic efficiency and infotainment. More specifically, it enables periodic transmission of safety status messages at high rate, rapid multi-hop dissemination of packets in geographical regions for emergency warnings, and unicast packet transport for Internet applications.

GeoNetworking basically provides two, strongly coupled functions: *geographical addressing* and *geographical forwarding*. Unlike addressing in conventional networks, in which a node has a communication name linked to its identity (e.g. a node's IP address), GeoNetworking can send data packets to a node by its position or to multiple nodes in a geographical region. For forwarding, GeoNetworking assumes that every node has a partial view of the network topology in its vicinity and that every packet carries a geographical address, such as the geographical position or geographical area as the destination. When a node receives a data packet, it compares the geo-address in the data packet and the node's view on the network topology, and makes an autonomous forwarding decision. As a result, packets are forwarded "on the fly", without need for setup and maintenance of routing tables in the nodes.

The most innovative method for distribution of information enabled by geographical routing is to target messages to certain geographical areas. In practise, a vehicle can select and specify a well-delimited geographic area to which messages should be delivered. Intermediate vehicles serve as message relays and only the vehicles located within the target area process the message and further send it to corresponding applications. In this way, only vehicles that are actually affected by a dangerous situation or a traffic notification are notified, whereas vehicles unaffected by the event are not targeted.

Basically, geographical routing comprises the following forwarding schemes:

- **GeoUnicast:** figure 1 shows a possible method of packet delivery between two nodes via multiple wireless hops. When a node wishes to send a unicast packet, it first determines the destination's position and then forwards the data packet to a node towards the destination, which in turn re-forwards the packet along the path until the packet reaches the destination.

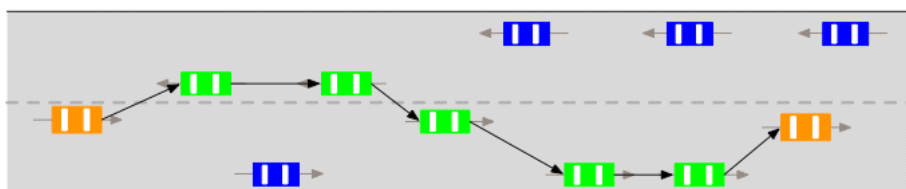


Figure 1: GeoUnicast

- GeoBroadcast: figure 2 shows a possible method of geographical broadcast. A packet is forwarded hop-by-hop until it reaches the destination area determined by the packet, and nodes rebroadcast the packet if they are located inside the destination area. GeoAnycast is different from geographical broadcast in that a node within the destination area will not re-broadcast any received packets.

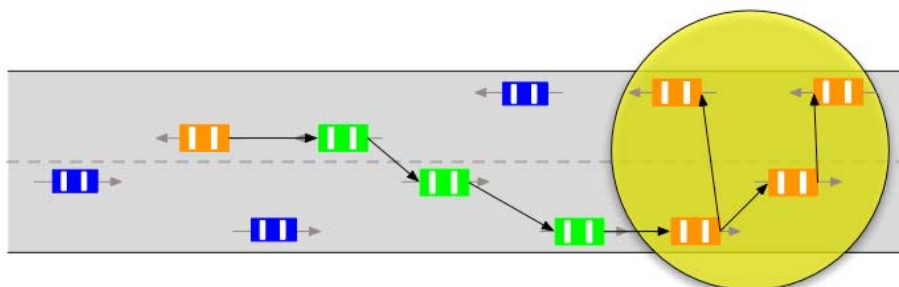


Figure 2: GeoBroadcast

- Topologically-scoped broadcast: figure 3 shows rebroadcasting of a data packet from a source to all nodes in the n-hop neighbourhood. Single-hop broadcast is a specific case of topologically-scoped broadcast, which is used to send packets only to one-hop neighbourhood.

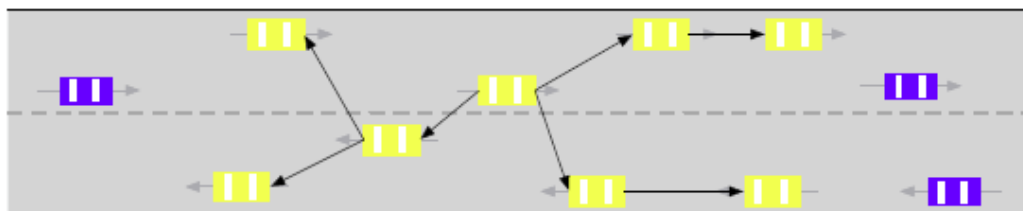


Figure 3: Topologically-scoped broadcast

1 Scope

The present document specifies, at an abstract level, the general, functional and performance requirements that apply to the GeoNetworking protocols (EN 302 636-4 [i.1], EN 302 636-5 [i.2] and EN 302 636-6 [i.3]) for use in ETSI ITS G5 access technology (EN 302 663 [i.4]).

The present document is applicable to ITS stations implementing ETSI ITS G5 access technology (EN 302 663 [i.4]) and the GeoNetworking protocols (EN 302 636-4 [i.1], EN 302 636-5 [i.2] and EN 302 636-6 [i.3]) for both single hop and multi-hop communications.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 302 665: "Intelligent Transport Systems (ITS); Communications Architecture".
- [2] ETSI TS 101 539-1: "Intelligent Transport Systems (ITS); V2X Applications; Part 1: Road Hazard Signalling (RHS) application requirements specification".
- [3] ETSI TS 102 637-1: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Part 1: Functional Requirements".
- [4] ETSI TS 102 687: "Intelligent Transport Systems (ITS); Decentralized Congestion Control Mechanisms for Intelligent Transport Systems operating in the 5 GHz range; Access layer part".
- [5] ETSI EN 302 636-2: "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 2: Scenarios".
- [6] ETSI TS 102 636-3: "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 3: Network architecture".
- [7] IETF RFC 4861: "Neighbor Discovery for IP version 6 (IPv6)".
- [8] IETF RFC 4862: "IPv6 Stateless Address Autoconfiguration".
- [9] IETF RFC 3775: "Mobility Support in IPv6".
- [10] IETF RFC 3963: "Network Mobility (NEMO) Basic Support Protocol".
- [11] IETF RFC 5648: "Multiple Care-of Addresses Registration".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EN 302 636-4 (all parts): "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 4: Geographical addressing and forwarding for point-to-point and point-to-multipoint communications".
- [i.2] ETSI EN 302 636-5 (all parts): "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 5: Transport Protocols".
- [i.3] ETSI EN 302 636-6 (all parts): "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 6: Internet Integration".
- [i.4] ETSI EN 302 663: "Intelligent Transport Systems (ITS); Access layer specification for Intelligent Transport Systems operating in the 5 GHz frequency band".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 102 636-3 [6] and the following apply:

ad hoc communication: communication in an ad hoc network

Transmission Power Control (TPC): mechanisms to adjust transmission power on wireless channel

Transmission Rate Control (TRC): mechanisms to adjust the rate of sending messages via the wireless channel

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TS 102 636-3 [6], TS 102 687 [4] and the following apply:

MCoA	Multiple Care-of Addresses Registration
NEMO	NETwork MObility
TPC	Transmission Power Control
TRC	Transmission Rate Control
VANET	Vehicular Ad hoc NETwork

4 Design guidelines

The GeoNetworking protocols as defined in this multi-part deliverable shall be designed to:

- efficiently disseminate safety and traffic efficiency messages considering functional requirements on applications as specified in TS 102 637-1 [3];
- support all communication scenarios specified in EN 302 636-2 [5];
- transparently transport IPv6 packets with minimum changes to IPv6;
- support privacy and security functions;
- support different communication media and interfaces as specified in EN 302 665 [1].

5 Functional requirements

5.1 Communication mode

The GeoNetworking protocols as defined in this multi-part deliverable shall support self-organized communication among vehicle ITS stations without assistance from an infrastructure network, and also allow communication with assistance from an infrastructure network. These GeoNetworking protocols shall also support self-organized communication between vehicle ITS stations and roadside ITS stations.

For safety applications that have stringent requirement on the latency of message delivery, these GeoNetworking protocols shall support communication without the need to exchange any signalling messages beforehand.

5.2 GeoNetworking addressing

An ITS station implementing the GeoNetworking protocol shall have at least one unique address at the ITS-S networking & transport layer. The address may be based on each individual ITS stations' identity or geographical position.

NOTE: Details of the address are out of scope of the present document and will be specified in other standards.

The GeoNetworking protocols as defined in this multi-part deliverable shall support at least circular, rectangular and ellipsoidal geographical target areas and may support other types of geographical target areas needed by applications.

The GeoNetworking protocols as defined in this multi-part deliverable shall support automatic address configuration, which does not require any manual configuration from human beings. These GeoNetworking protocols shall also allow manual address configuration.

5.3 Geographical routing

Routing functions of the GeoNetworking protocols as defined in this multi-part deliverable shall support all communication scenarios specified in EN 302 636-2 [5].

5.4 Status information signalling

The status information of ITS stations for the GeoNetworking protocols as defined in this multi-part deliverable shall include each ITS station's network address, position, speed, heading, time stamp and their accuracy, and may also include other information such as altitude. The GeoNetworking protocols as defined in this multi-part deliverable shall have access to these data.

Exchange of status information for the GeoNetworking protocols as defined in this multi-part deliverable shall be carried out by at least one of the following means:

- explicit status information exchange protocol, e.g. location resolution of an ITS station by means of a location service;
- implicit status information signalling by periodically sending packets including status information.

The GeoNetworking protocols as defined in this multi-part deliverable shall support status information signalling that will not cause congestion in the network.

5.5 Priority and buffering

The GeoNetworking protocols as defined in this multi-part deliverable shall support packets with different priorities. These GeoNetworking protocols shall treat packets with different priorities such that that high priority packets have preferred access to communication channel(s).

The GeoNetworking protocols as defined in this multi-part deliverable shall be able to temporarily buffer packets and either drop them or send them to the lower layer at a later time. Such buffering functions are necessary in certain conditions, for example in case the location of the destination is unknown or there is no direct neighbour to forward packets to the destination.

5.6 Decentralized congestion control

The GeoNetworking protocol as defined in this multi-part deliverable shall support decentralized congestion control (DCC) functions in order to keep the network load at an acceptable level, for example by means of Transmit Rate Control (TRC), Transmit Power Control (TPC), reducing packet size, efficient routing and forwarding protocol, etc.

Depending on the type of packet, one or a combination of several mechanisms shall be applied for decentralized congestion control.

The decentralized congestion control of these GeoNetworking protocols shall be compliant to the DCC framework specified in TS 102 687 [4].

5.7 Security and privacy

The GeoNetworking protocols as defined in this multi-part deliverable shall support security objectives for both single-hop and multi-hop communication. Security objectives particularly include integrity, privacy and non-repudiation. The security measures shall protect the GeoNetworking protocol header. These GeoNetworking protocols shall also protect privacy, i.e. provide confidentiality to personal data such as ITS station's ID and location.

5.8 Cross-layer signalling

The GeoNetworking protocol as defined in this multi-part deliverable shall support information exchange between different layers, and entities at each layer may select the required information to be received. The information exchange shall be bi-directional, structured and efficient in terms of processing and data overhead.

5.9 GeoNetworking and IPv6

The GeoNetworking protocols as defined in this multi-part deliverable shall allow legacy IPv6 applications to run on top of the GeoNetworking protocols and support transparent routing of IPv6 packets. The following functions shall be supported by the ITS-S networking & transport layer implementing these GeoNetworking protocols:

- Efficient methods to support IPv6 Neighbor Discovery function (RFC 4861 [7]).
- IPv6 Stateless Address Autoconfiguration (RFC 4862 [8]).
- Interfaces and method to support IPv6 unicast.
- Interfaces and method to support IPv6 multicast.
- IPv6 mobility protocols (RFC 3775 [9]) if the ITS station represents a single IPv6 node.
- IPv6 Network Mobility (NEMO) Basic Support Protocol (RFC 3963 [10]) if the ITS station represents an IPv6 mobile network.

The following functions may be supported by the ITS-S networking & transport layer implementing the GeoNetworking protocols:

- Multiple Care-of Addresses Registration (MCoA) (RFC 5648 [11]).

5.10 Transport layer functions

The transport protocols as defined in this multi-part deliverable and used together with GeoNetworking shall support multiplexing and de-multiplexing of data from upper layers.

6 Performance requirements

In general, the GeoNetworking protocols as defined in this multi-part deliverable shall:

- provide low-latency communications;
- provide reliable communications with the highest reliability for safety messages;
- keep signalling, routing and packet forwarding overhead low;
- be fair among different ITS stations with respect to bandwidth usage considering the type of messages;
- be robust against security attack, mal-function in ITS stations;
- be able to work in scenarios with low and high density of GeoNetworking-enabled ITS stations.

These GeoNetworking protocols shall meet the performance requirements specified in TS 101 539-1 [2].

Annex A (informative): Bibliography

ETSI ES 202 663: "Intelligent Transport Systems (ITS); European profile standard for the physical and medium access control layer of Intelligent Transport Systems operating in the 5 GHz frequency band".

ETSI EN 302 931: "Intelligent Transport Systems (ITS); Vehicular Communications; Geographical Area Definition".

ETSI EN 302 636-4-1: "Intelligent Transport System (ITS); Vehicular communications; GeoNetworking; Part 4: Geographical addressing and forwarding for point-to-point and point-to-multipoint communications; Sub-part 1: Media-Independent Functionality".

ETSI EN 302 636-5-1: "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 5: Transport Protocols; Sub-part 1: Basic Transport Protocol".

ETSI EN 302 636-6-1: "Intelligent Transport Systems (ITS); Vehicular Communications; GeoNetworking; Part 6: Internet Integration; Sub-part 1: Transmission of IPv6 Packets over GeoNetworking Protocols".

M. Mauve, J. Widmer, and H. Hartenstein: "A Survey on Position-Based Routing in Mobile Ad-Hoc Networks", IEEE Network, 15(6):30-39, November/December 2001.

G. Finn: "Routing and Addressing Problems in Large Metropolitan-Scale Internetworks", ISI Research Report ISI/EE-87-180, University of Southern California, March 1987.

B.N. Karp and H.T. Kung: "GPSR: Greedy Perimeter Stateless Routing for Wireless Networks". In Proceedings of the 6th Annual ACM/IEEE International Conference on Mobile Computing and Networking (MobiCom'00), pages 243-254, Boston, MA, USA, August 2000.

A. Festag, H. Füßler, H. Hartenstein, A. Sarma, and R. Schmitz: "FleetNet: Bringing Car-to-Car Communication into the Real World". In Proceedings of 11th ITS World Congress and Exhibition, October 2004.

A. Festag, G. Noecker, M. Strassberger, A. Lübke, B. Bochow, M. Torrent-Moreno, S. Schnauffer, R. Eigner, C. Catrinescu, and J. Kunisch: "NoW - Network on Wheels: Project Objectives, Technology and Achievements". In Proceedings of 5th International Workshop on Intelligent Transportation (WIT), March 2008.

B.N. Karp and H.T. Kung: "GPSR: Greedy Perimeter Stateless Routing for Wireless Networks". In Proceedings of the 6th Annual ACM/IEEE International Conference on Mobile Computing and Networking (MobiCom'00), pages 243-254, Boston, MA, USA, August 2000.

C. Maihöfer, T. Leinmüller, and E. Schoch: "Abiding Geocast: Time-Stable Geocast for Ad Hoc Networks". In Proceedings of the 2nd ACM international workshop on Vehicular Ad Hoc Networks, 2005.

W. Zhang, A. Festag, R. Baldessari, and L. Le: "Congestion Control for Safety Messages in VANETs: Concepts and Frameworks". In Proceedings of the 8th International Conference on ITS Telecommunications (ITST), pp. 199-203, Phuket, Thailand, October 2008.

ETSI TR 102 698 (V1.1.1): "Intelligent Transport Systems (ITS); Vehicular Communications; C2C-CC Demonstrator 2008; Use Cases and Technical Specifications".

Car-to-Car Communication Consortium: "C2C-CC Manifesto". Version 1.1, August 2007. <http://www.car-to-car.org>.

J. Choi, Y. Khaled, M. Tsukada, and T. Ernst: "IPv6 support for VANET with Geographical Routing". In Proceedings of the 8th International Conference on ITS Telecommunications (ITST), 2008.

X. Hong, K. Xu, and M. Gerla: "Scalable Routing Protocols for Mobile Ad Hoc Networks". IEEE Network, 16(4):11-21, August 2002.

T. Imielinski and J. Navas: "GPS-Based Addressing and Routing". RFC 2009, November 1996.

Y. B. Ko and H. T. Kung: "Location-Aided Routing (LAR) in Mobile Ad Hoc Networks". Wireless Networks, 6(4):307-321, 2000.

Y. B. Ko and N. H. Vaidya: "GeoTORA: A Protocol for Geocasting in Mobile Ad Hoc Networks". In Proceedings of the 8th International Conference on Network Protocols (ICNP), November 2000.

K. C. Lee, J. Haerri, U. Lee, and M. Gerla: "Enhanced Perimeter Routing for Geographic Forwarding Protocols in Urban Vehicular Scenarios". In Proceedings of the IEEE Globecom Workshops, 2007.

J. Li, J. Jannotti, D. S. J. D. Couto, D. R. Karger, and R. Morris: "A Scalable Location Service for Geographic Ad Hoc Routing". In Proceedings of the 6th Annual International conference on Mobile Computing and Networking, 2000.

W. Liao, Y. C. Tseng, K. L. Lo, and J. P. Sheu: "GeoGrid: A Scalable Location Service Network". In Proceedings of 27th International Conference on Distributed Computing Systems (ICDCS), December 2009.

W. H. Liao, J. P. Sheu, and Y. C. Tseng: "GRID: A Fully Location-Aware Routing Protocol for Mobile Ad Hoc Networks". Telecommunications Systems, 18(1):37-60, September 2001.

J. Navas and T. Imielinski: "GeoCast - Geographic Addressing and Routing". In Proceedings of the 3rd Annual ACM/IEEE International Conference on Mobile Computing and Networking, 1997.

Q. Yu and G. Heijenk: "Abiding Geocast for Warning Message Dissemination in Vehicular Ad Hoc Networks". In Proceedings of the IEEE International Conference on Communications Workshops, May 2008.

History

Document history		
V1.1.1	March 2010	Publication as TS 102 636-1
V1.2.0	August 2013	EN Approval Procedure AP 20131130: 2013-08-02 to 2013-12-02
V1.2.1	February 2014	Vote V 20140426: 2014-02-25 to 2014-04-28