

**Public Switched Telephone Network (PSTN);
2-wire analogue voice band switched interfaces;
Timed break recall (register recall);
Specific requirements for terminals**



Reference

DES/ATA-005085 (g0c00icp.PDF)

Keywords

2-wire, access, analogue, PSTN, signalling,
terminal

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>
If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference should be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
Introduction	4
1 Scope	5
2 References	5
3 Definitions and abbreviations.....	5
3.1 Definitions	5
3.2 Abbreviations	6
4 Technical requirements	6
4.1 Break period duration.....	6
4.2 Break period current.....	6
4.3 Pulse Shape	6
Annex A (normative): Measurement principle.....	8
A.1 Preamble.....	8
A.2 Test state.....	8
A.3 Test configuration	8
A.4 DC feeding arrangement	8
A.4.1 Voltage	8
A.4.2 Resistance.....	8
Bibliography	9
History	10

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Project Analogue Terminals and Access (ATA), and is now submitted for the ETSI standards Membership Approval Procedure.

Introduction

Register Recall is the ability of the network to accept a command from terminal equipment at any time during a call (except during the call set-up phase):

- either initiating association of the subscriber's line with register logic which will receive, store and act upon processing and address information; or
- initiating a switching order.

The network must be capable of recognizing a register recall signal indicating that the subscriber has pressed the button for which the recall function has been allocated, and then, of accepting possible further instructions from the subscriber. This feature is required for both terminating and originating calls.

Terminal equipment generates a register recall signal by breaking the normal DC loop for a specific period.

Previously another register recall signalling method using an additional wire connected to earth was used. This signalling method still exists in some private installations and is not described in the present document.

- NOTE: A large number of networks accept the signal representing number one of loop disconnect dialling as a valid signal. This was considered an additional facility from the network and precluded in the present document, which is intended to be a harmonizing document covering the largest possible market.

1 Scope

The present document specifies the technical characteristics (electrical interface requirements) to be provided by Terminal Equipment (TE) to be connected to a 2-wire analogue interface of the PSTN or equivalent interfaces at which network register recall facility is intended to be performed by means of a timed break recall signal, insofar as they are particular to this signalling function.

2 References

Void.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply, they should be considered together with the figure 1.

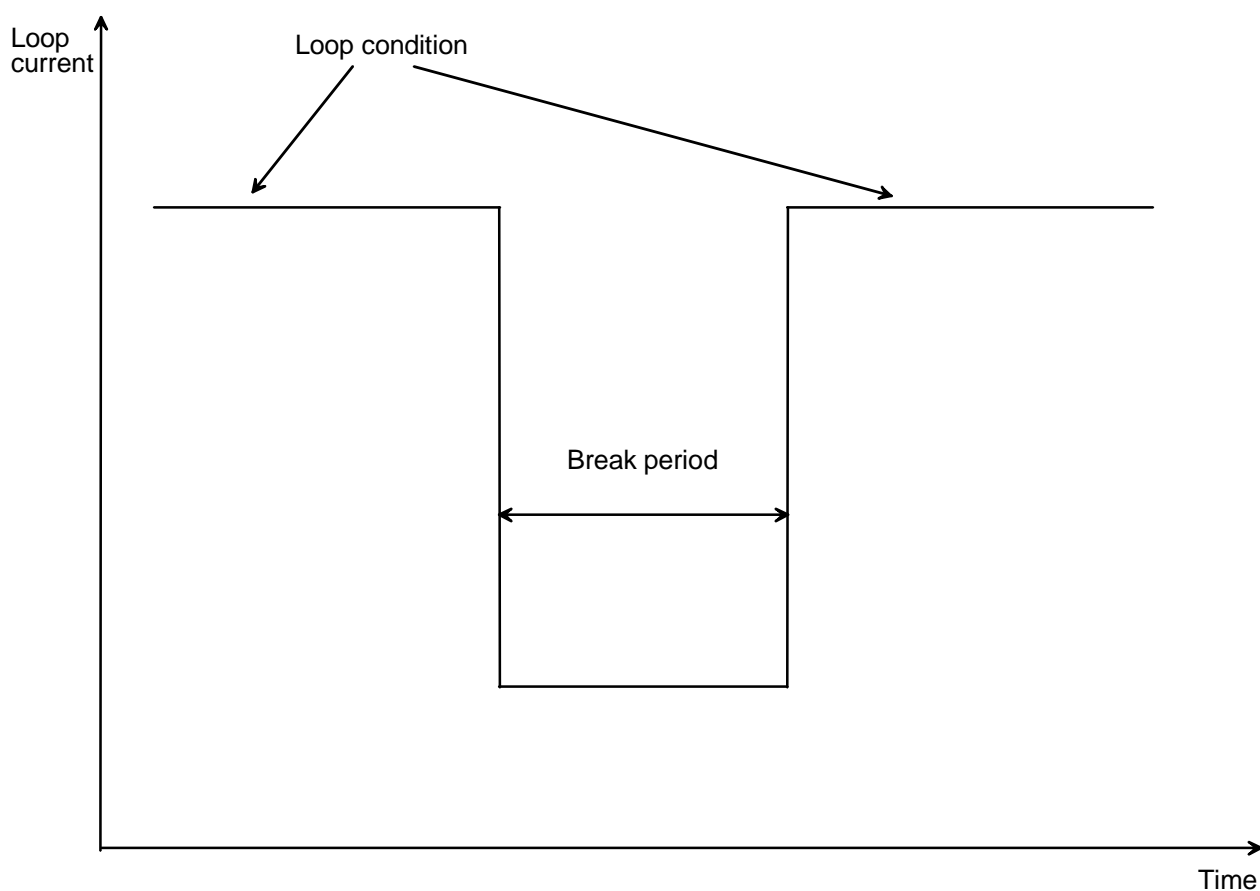


Figure 1

break period: period during which the loop current is reduced to indicate a register recall signal

loop condition: loop current in the off-hook state, during the normal loop condition or during a possible pre- or post break period

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

PSTN	Public Switched Telephone Network
TE	Terminal Equipment

4 Technical requirements

4.1 Break period duration

Requirement:

The break period duration shall be:

- a) 90 ms to 120 ms; or
- b) 220 ms to 300 ms.

NOTE: For new designs the first option a) 90 ms to 120 ms is recommended.

Test: The measurement arrangement is based on annex A. This requirement shall be tested at $R_f = 1000 \Omega$ and $U = 50$ VDC. The break period shall be measured from the point where the current has fallen to 10 % below the loop condition current (beginning of the exponential fall) to the point where the break current has increased to above 1 mA from its lowest value (start of the exponential rise).

4.2 Break period current

Requirement: The break period current shall be ≤ 1 mA. Once this level of current has been reached, the current shall remain ≤ 1 mA for the remainder of the break period.

NOTE: This requirement defines a value selected to ensure the positive detection of a valid break condition.

Test: The measurement arrangement is based on annex A. This requirement shall be tested at $R_f = 500 \Omega$ and $U = 50$ VDC. The measurement is performed while the terminal is sending a register recall signal, and the current during the break period is monitored.

4.3 Pulse Shape

Requirement: When tested with a voltage of 50 VDC and a feed resistor of 1 000 Ω , the make to break transition shall fall within the mask specified below. It must be noted that the t_0 reference point ($t = 0$ ms) is the instant when the current falls below the steady loop condition current value.

The transition from break to make (1 mA to the steady loop condition current value) shall be completed within 2 ms.

Table 1: Pulse shape limits

Loop current [mA]	Upper limit [ms]
15	2,9
4	6,1
2	7,8
1	9,5

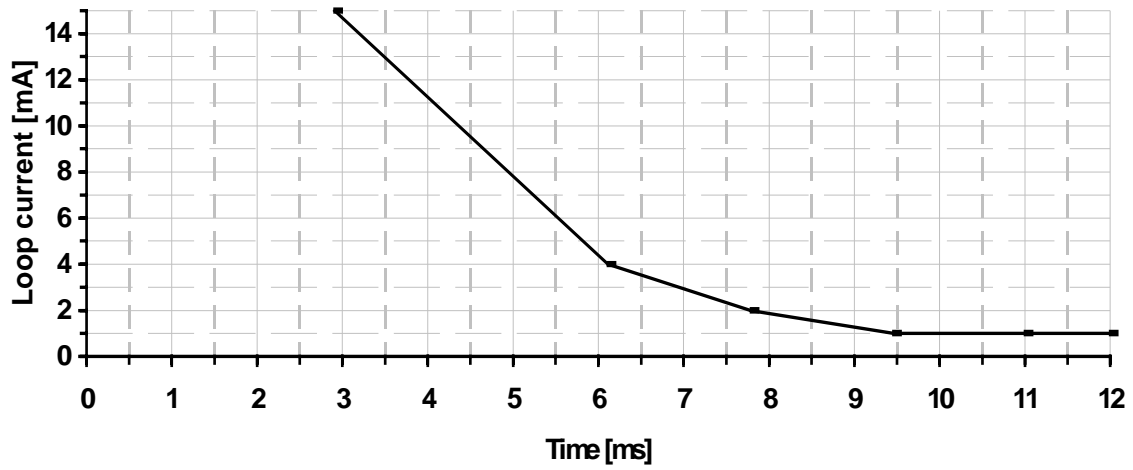


Figure 2

Test: The measurement arrangement is based on annex A. This requirement shall be tested at $R_f = 1\ 000\ \Omega$ and $U = 50\ \text{VDC}$.

Annex A (normative): Measurement principle

A.1 Preamble

Set the TE in loop steady state.

A.2 Test state

During the generation of a register recall signal.

A.3 Test configuration

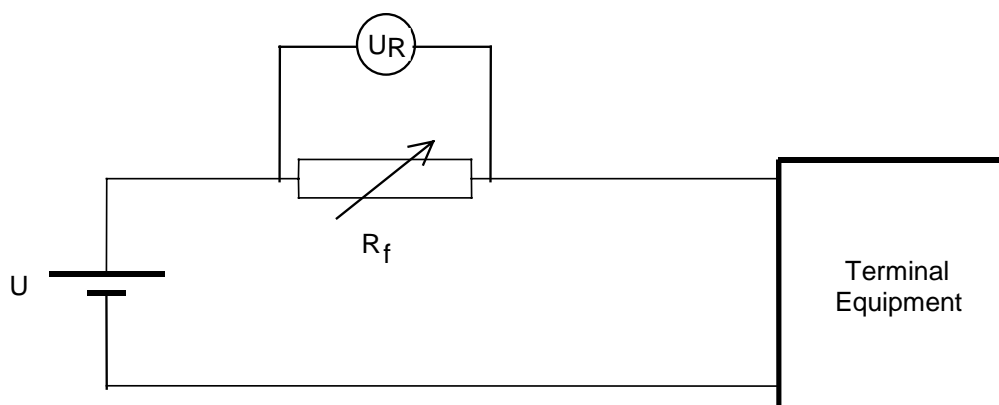


Figure A.1

A.4 DC feeding arrangement

A.4.1 Voltage

$U = 50$ VDC.

A.4.2 Resistance

According to clause specific designation R_f will have one of the following values: 1 k Ω or 500 Ω .

Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- TBR 21: "Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signalling".
- EN 300 001: "Attachments to the Public Switched Telephone Network (PSTN); General technical requirements for equipment connected to an analogue subscriber interface in the PSTN".
- ETR 201: "Public Switched Telephone Network (PSTN); Register-recall [CEPT Recommendation T/CS 20-09 E (1980)]".

History

Document history			
V1.1.1	November 1999	Membership Approval Procedure	MV 200003: 1999-11-23 to 2000-01-21