



**ETSI
TECHNICAL
REPORT**

ETR 055-8

December 1992

Source: ETSI TC-NA

Reference: DTR/NA-70207

ICS: 33.080

Key words: UPT, MMI

**Universal Personal Telecommunication (UPT);
The service concept
Part 8: Man-machine interface aspects**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1992. All rights reserved.

Blank page

Foreword

ETSI Technical Reports (ETRs) are informative documents resulting from ETSI studies which are not appropriate for European Telecommunication Standard (ETS) or Interim-European Telecommunication Standard (I-ETS) status. An ETR may be used to publish material which is either of an informative nature, relating to the use or application of ETSs or I-ETSs, or which is immature and not yet suitable for formal adoption as an ETS or I-ETS.

This ETR specifies the requirements for the Man-Machine Interface (MMI) for the Universal Personal Telecommunication (UPT) service, involving the UPT user, terminals and UPT access devices. It gives general requirements on MMI and associated procedures.

This ETR constitutes Part 8 of a multi-part ETR, with the following titles:

- ETR 055-1: "Universal Personal Telecommunication (UPT); The service concept Part 1: Principles and objectives".
- ETR 055-2: "Universal Personal Telecommunication (UPT); The service concept Part 2: General service description".
- ETR 055-3: "Universal Personal Telecommunication (UPT); The service concept Part 3: Service aspects of charging, billing and accounting".
- ETR 055-4: "Universal Personal Telecommunication (UPT); The service concept Part 4: Service requirements on security mechanisms".
- ETR 055-5: "Universal Personal Telecommunication (UPT); The service concept Part 5: UPT terminals and UPT access devices".
- ETR 055-6: "Universal Personal Telecommunication (UPT); The service concept Part 6: UPT subscription and service profile".
- ETR 055-7: "Universal Personal Telecommunication (UPT); The service concept Part 7: User procedures and user states".
- ETR 055-8: "Universal Personal Telecommunication (UPT); The service concept Part 8: Man-machine interface aspects".
- ETR 055-9: "Universal Personal Telecommunication (UPT); The service concept Part 9: Service requirements on numbering, addressing and identification".
- ETR 055-10: "Universal Personal Telecommunication (UPT); The service concept Part 10: Supplementary services".

An additional part (Part 11) which details the requirements on the protection of third parties, is due for publication in 1993.

Blank page

1 Scope

This ETSI Technical Report (ETR) specifies the requirements for the Man-Machine Interface (MMI) for the Universal Personal Telecommunication (UPT) service, involving the UPT user, terminals and UPT access devices. It gives general requirements on MMI and associated procedures.

The MMI of the UPT service involves direct contact for the UPT user with terminals and the UPT access devices. The MMI discussed here, however, defines only the functional requirements for UPT-specific interactions. In addition, the MMI of the UPT service will involve the MMI given by any standard terminals used.

2 References

For the purposes of this ETR, the following reference is used:

- [1] ETR 055-7: "Universal Personal Telecommunication (UPT); The service concept Part 7: User procedures and user states".

3 Abbreviations

For the purposes of this ETR, the following abbreviations apply:

ARA	Access Registration Address
CLI	Calling Line Identity
DTMF	Dual Tone Multi Frequency
HF	Human Factors
ISDN	Integrated Services Digital Network
LPIN	Local Personal Identification Number
MMI	Man-Machine Interface
PIN	Personal Identification Number
PSTN	Public Switched Telephone Network
PUI	Personal User Identity
UPT	Universal Personal Telecommunication
UPT-AC	UPT Access Code
UPT-AN	UPT Access Number
VAC	Variable Authentication Code

4 General requirements

UPT facilities should be easy to use and should be consistent across terminal types, geographic boundaries and network boundaries so as not to deter the users from using UPT.

Therefore, the users should not have to manually enter a large amount of information to use basic UPT features, and the UPT procedures and authentication protocol must be consistent, regardless of the local UPT service provider used.

Subclause 4.1 provides guidelines for the design of basic procedures for the use UPT phase 1 interactive services using Dual Tone Multi Frequency (DTMF) input and voice response. The UPT services are

accessible from any DTMF telephone, or from pulse-dialling telephones with the use of an adjunct DTMF dialling device. Consequently, the user's control of the service must be accomplished solely by the use of the 12 buttons of the DTMF dial (0-9, * and #). Recorded spoken messages, called "prompts," are used to provide choice, guidance and feedback to users, and to ask for input of data such as telephone numbers, account numbers, time of day, etc. Choices are provided in the form of spoken "menus" that indicate which response (DTMF button) is associated with each available choice.

If these guidelines are carefully observed, and good human factors design practice are followed, users should find UPT services easy to use, enhancing user satisfaction with them.

4.1 General guidelines

Menus should be kept short, in order to avoid exceeding the capacity of the user's short-term memory. At the most, six choices should be presented on a single menu.

EXAMPLE 1: Use: For the sales department, press 1; for the service department, press 2; for general enquiries, press 3.

Not: For the clothing sales department, press 1; for appliance sales, press 2; for the parts department, press 3; for appliance service, press 4; for information on new shipments, press 5; for schedule information, press 6; for general enquiries, press 7.

When stating choices in a menu, always present the choice first, then the action to achieve it.

EXAMPLE 2: Use: To send a message, press 1.

Not: Press 1 to send a message.

The benefits-to-cost ratio of the user access procedure should be optimised. In particular, for common and frequent procedures, like call setup and call release, entering long strings of digits or codes and performing steps in a long sequence should be avoided or limited. The use of default modes and values, of logical or easily remembered codes, or of user-tailored menus are possible solutions. For example, the default limit on the length of incoming messages could be set to five minutes unless explicitly specified by the subscriber to an automatic telephone answering service.

The user procedures should be easy to learn. The design should make use of the users' familiarity with other similar services that already exist.

Users should be permitted to dial through prompts to indicate the desired choice as soon as it is presented, without waiting for the entire menu to be presented. This helps speed up the use of the service, and minimise user frustration.

Users should be permitted to dial ahead, providing the input that is needed without listening to the prompts at all. This permits experienced users to complete familiar procedures as quickly as possible.

EXAMPLE 3: Upon reaching the remote call forwarding facility, the user dials the following digits in sequence, without stopping then hears a confirmation tone or message and hangs up:

238641567186312

Here, "238641567" is the account number, "1863" is the Personal Identification Number (PIN), "1" chooses "forward calls" from the first menu, and "2" chooses "terminate" from the second menu.

Messages should be provided in the language, or languages, preferred by the majority of users. If more than one language is provided, selection of the preferred language should be easy.

Help should always be available, and should be appropriate for the particular situation of the user when help is requested. For example, a user requesting help after reaching "leave a message" in a voice mail service, should be given specific information about leaving messages, and not general information about

the service. Help should also be provided in the case of apparent user difficulties (e.g. no user action for 5 seconds after a system prompt).

User-friendly error recovery procedures should be available to help the user go through new or complex procedures. For example, upon entering invalid information, the user should be asked to repeat just the last step, not to start the entire procedure from the beginning.

Status information should be available to users where appropriate to avoid the need for users to hold more information than necessary in memory.

Prompts should be as brief as possible, to speed up the service, without sacrificing understandability.

EXAMPLE 4: Use: "Welcome to ABC. Please enter account number, followed by hash."

Not: "Welcome to the Automatic Billing and Collection service. Please enter your account number, then press the hash button."

Provide immediate feedback to confirm user input. Feedback can take many forms; for example, if the user dials through a prompt, the prompt should be terminated at once to inform the user that the input was received.

Provide verification of critical data.

EXAMPLE 5: "Your calls will be sent to 123 45 67 until 17:35. If this is correct, press 1; if incorrect, press 2."

The speed of the interactive dialogue should meet the user requirements in the different circumstances.

EXAMPLE 6: The system response time to PIN validation should be short.

EXAMPLE 7: The timeout between digits when entering long strings should not be so short as to create anxiety in the user.

Provide a way to re-hear the options in the current menu.

Provide a way to return to the main menu from any point in the service.

Provide a way to reach an attendant or operator (if available), for assistance, from any point in the service.

Consistency within the interface (procedures, messages, commands, vocabulary, codes) is very important. Therefore, the same command should always be used to access help; the same delimiter should be used to indicate the end of input, etc. The same terminology (vocabulary) should be used throughout all the features of the service.

The command names should be meaningful, unambiguous, and easy to recall or remember.

Set usability objectives for the service. For example, one usability objective might be that the average user should be able to complete registration, 95% of the time, within 2 minutes after pressing the first key for entry.

Conduct usability tests on prototypes of the service, and modify prompts and call flows accordingly.

EXAMPLE 8 (from UPT):

Use: For InCall, press 1.

Not: Press 1 for InCall.

5 Specification principles

The standardised MMI of the UPT service specifies the minimum level of requirements, with emphasis on items which are seen as important from aspects of service and terminal independence, or from a global roaming point of view. Any additional MMI aspects are left to the equipment manufacturers for innovation.

This means, that the requirements mainly deal with standardised control procedures for access to the UPT service, i.e. the MMI aspects of the UPT procedures. This also includes standard UPT-specific announcements to the UPT users. Any call control procedures of the specific networks and services used are outside the scope of the UPT MMI specification.

As far as possible, the standardised MMI is restricted to the sequences of logical actions and events. Physical implementations of these are, as far as possible, left to the equipment manufacturers for innovation.

6 MMI aspects of the UPT procedures

The MMI aspects of the UPT procedures may vary physically to some extent, e.g. in terms of authentication and the use of UPT access devices. They will also depend on the services and terminals used, with different inputs and outputs. However, logically, the UPT procedures should all follow the same general pattern, as illustrated in figure 1 and the following text.

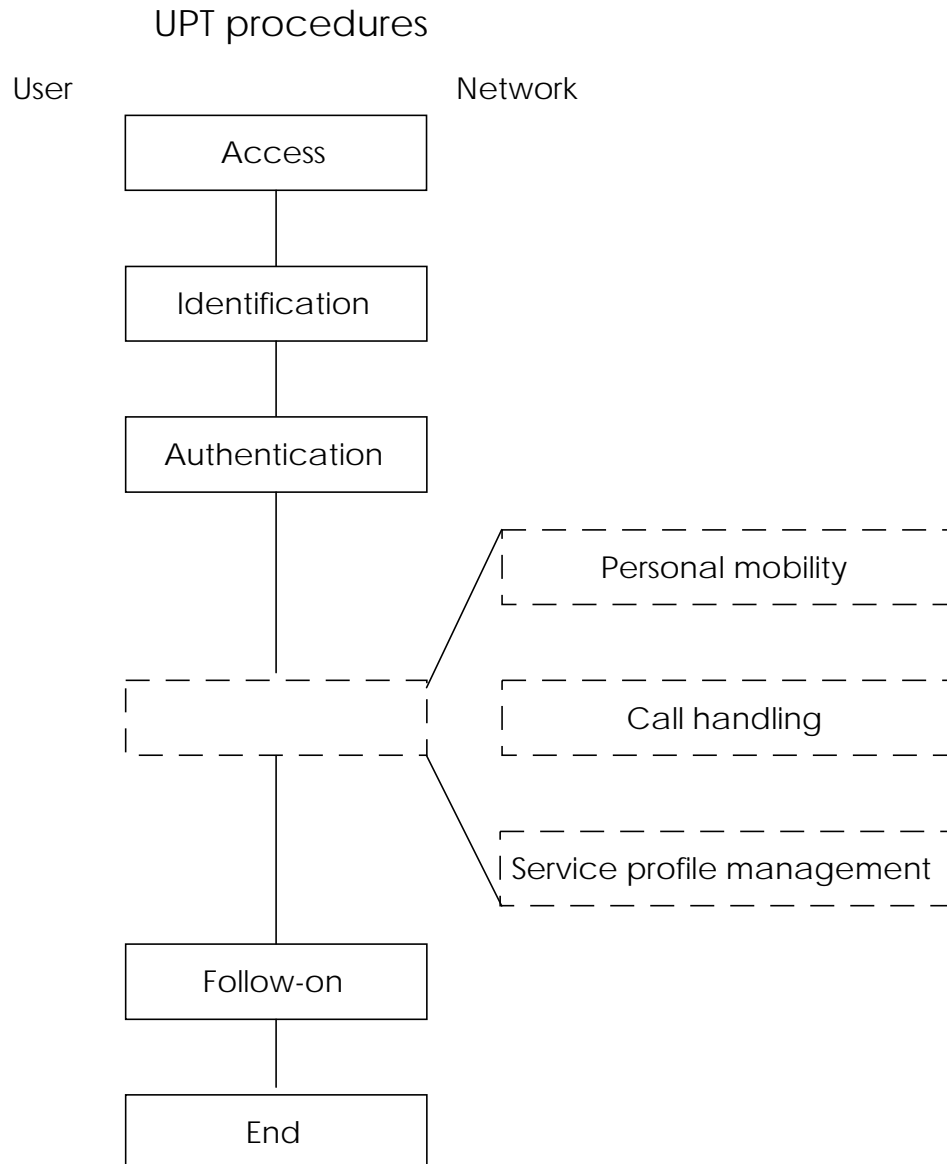


Figure 1

A elementary procedures

The elementary procedures are generally common and precursor for all the main UPT procedures and they comprise of the following:

- 1) the UPT user accesses the UPT facilities;
- 2) the UPT user identifies himself;
- 3) the UPT user is authenticated, if required;

B UPT procedure specification

- 4) the required UPT procedure is specified by the UPT user.

The realisation of the main UPT procedures are described in four categories:

- personal mobility;
- UPT call handling;
- UPT service profile management;
- exceptional UPT procedures.

The sequencing of the main UPT procedures is variable, depending upon previous actions;

C UPT procedure termination

- 5) the UPT user terminates UPT procedure or indicates the following:

- global follow-on;
- OutCall follow-on.

6.1 MMI description of UPT procedures

6.1.1 Realisation of elementary procedures

Before, or as part of, any of the normal UPT procedures, a set of elementary procedures may be carried out. These procedures may include access, identification and authentication, as well as follow-on. These procedures are generically described in Part 7 of this ETR [1], subclause 2.1.

The UPT user may, however, have a choice between various security levels and UPT access devices for these procedures, and the implementation of the various scenarios depends on the services and networks used. This is to be decided by the UPT service provider for each implementation phase.

This subclause, therefore, defines three sets of distinct types of elementary procedures:

- 1) simple one-way authentication protocol with fixed PIN;
- 2) advanced one-way authentication protocol with Variable Authentication Code (VAC);
- 3) two-way authentication protocol with challenge/response procedures.

6.1.1.1 Type 1 elementary procedures (simple one-way protocol)

The procedures for type 1 (simple one-way protocol) have been included for completeness, even though they may not be specified.

The type 1 elementary procedures are characterised by an authentication protocol which uses one-way transmission with fixed PINs and number of access attempt limitations.

The type 1 elementary procedures may be realised in various ways, for example:

- without UPT access device and manual dialling (intended for any terminal with a DTMF-type key pad, and for communication in any network);
- a simple sending non-personalised DTMF-type UPT access device (intended for most voice terminals with a key pad, and communication in Public Switched Telephone Networks (PSTNs), Integrated Services Digital Networks (ISDNs) or similar networks). DTMF-type UPT access devices of this kind may include a key pad;

- a simple sending non-personalised modem-type UPT access device (intended for most voice terminals with a key pad, and communication in PSTN, ISDN or similar networks). Modem-type UPT access devices of this kind may include a key pad;
- a magnetic strip-card (intended for terminals with a key pad and magnetic strip-card readers, and communication in any network);
- etc.

The UPT service provider and the UPT user both know the UPT user's public identity, which is the UPT number. In addition, the UPT user's Personal User Identity (PUI) may be known to the UPT service provider. The PUI does not need to be known to the UPT user. Depending on whether the UPT number or the PUI is used for user-network signalling, one or the other is stored as permanent information in the UPT access device, if used.

The UPT user and the UPT service provider also share a secret PIN, which is stored only in the network.

The procedures work as follows:

Access

- a) the UPT user prepares the terminal for communication (off-hook);
- b) the UPT user couples the UPT access device, if used, to the terminal. For a DTMF-type or modem-type device, this is carried out acoustically, and for a magnetic strip-card magnetically by sliding the card through the card reader, and for a smart-card by inserting the card into the card reader;
- c) the UPT user accesses the UPT service. For DTMF-type and modem-type UPT access devices, and if no UPT access device is used, this is, by default, carried out manually by dialling a UPT Access Code (UPT-AC), or UPT Access Number (UPT-AN), on the terminal. If a DTMF-type device is used, and the voice network uses DTMF signalling, this may also be carried out through the UPT access device, either manually or automatically by using default information stored in the UPT access device upon activation of the SEND function in the UPT access device. For a magnetic strip-card or smart-card, this is carried out automatically when coupled to the terminal;

Identification

- d) the UPT user identifies himself. If a UPT access device is used, the identification information maybe stored permanently in the UPT access device, and is passed to the UPT service provider. This is carried out automatically when coupled to the terminal in the case of a magnetic card or smart-card, and by activation of a SEND function in the UPT access device in the case of a DTMF-type or modem-type device;

Authentication

- e) the network requests authentication of the user. This is carried out by manually entering a PIN on the terminal. In the case of a DTMF-type or a modem-type device, this may also be carried out through the UPT access device, manually or by activating a SEND function, provided the PIN had been entered on the UPT access device first. In this case, the PIN must be erased from memory in the UPT access device upon activation of the SEND function;
- f) the network authenticates the UPT user. This is carried out by comparing the identities and PINs and feeding back appropriate information tones or announcements to the UPT user to indicate the result of the authentication;
- g) if the input identities and PINs equal the corresponding information in the network, then the authentication is successful, and a positive response is provided to the UPT user. Otherwise, this is an authentication failure, and a negative response is given;
- h) in case of a successful authentication, the UPT user may proceed with the UPT procedure specification. This may be carried out manually on the DTMF terminal by dialling the UPT procedure code, or manually through the UPT access device upon activation of the SEND function, if the UPT access device includes a key pad;

- i) if the UPT user fails to authenticate N times, the UPT service profile is blocked, and no further UPT procedures from the UPT user are accepted. The UPT user will have to contact the UPT service provider for the unblocking of the UPT user's UPT service profile;
- j) when terminating the UPT procedure which has been carried out, the UPT user may terminate completely (on-hook), or, may wish to indicate follow-on. This may be carried out manually on the terminal by dialling a follow-on code followed by the UPT procedure code, or manually through the UPT access device upon activation of the SEND function, if the UPT access device includes a key pad.

It should be noted that the use of the temporary storage and the SEND function in the UPT access device in the various points above may be combined as appropriate.

6.1.1.2 Type 2 elementary procedures (advanced one-way protocol)

The type 2 elementary procedures are characterised by an authentication protocol which uses one-way transmission, but with a VAC. In addition, a Local Personal Identification Number (LPIN) is used between the UPT user and the UPT access device. The number of access attempts is unlimited.

The type 2 elementary procedures always require a UPT access device and may be realised in various ways like, for example:

- an advanced sending DTMF-type UPT access device (intended for most voice terminals with a key pad, and communication in PSTNs, ISDNs, or similar networks). DTMF-type UPT access devices of this type must include a key pad;
- an advanced sending modem-type device (intended for most voice terminals with a key pad, and communication in PSTNs, ISDNs, or similar networks). Modem-type UPT access devices of this kind must include a key pad;
- etc.

The UPT service provider and the UPT user both know the UPT user's public identity, which is the UPT number. In addition, the UPT user's PUI may be known to the UPT service provider. The PUI does not need to be known to the UPT user. Depending on whether the UPT number or the PUI is used for user-network signalling, one or the other is stored as permanent information in the UPT access device.

The UPT user and the UPT access device also share a secret LPIN, which is stored in the UPT access device. In addition, the UPT service provider and the UPT access device share a common cryptological algorithm, a secret key and a sequence number for authentication.

The procedures work as follows:

Access

- a) the UPT user prepares the terminal for communication (off-hook);
- b) the UPT user couples the UPT access device to the terminal. For the DTMF-type or modem-type device applicable to these procedures, this is carried out acoustically;
- c) the UPT user accesses the UPT service. This is by default carried out manually by dialling a UPT-AC on the terminal. If a DTMF-type device is used, and the voice network uses DTMF signalling, this may also be carried out through the UPT access device, either manually or automatically by using default information stored in the UPT access device upon activation of a SEND function in the UPT access device. This will connect the UPT user to the appropriate device in the network (e.g. modem-device or DTMF-device);

Identification

- d) the UPT user self-identifies himself. The identification information is stored permanently in the UPT access device, and is passed to the UPT service provider. This is carried out by activation of a SEND function in the UPT access device;

Authentication

- e) the UPT system requests authentication. This is carried out by the user through manually entering a PIN on the UPT access device and activating the SEND function. As a result, a VAC is passed to the network transparently through the terminal. This VAC varies according to a common algorithm in synchronisation between the UPT service provider and the UPT access device;
- f) the network authenticates the UPT user. This is carried out by comparing the identities and VACs. As a result, the network will feed back appropriate information tones or announcements to the UPT user to indicate the results of the authentication;
- g) if the input identities and VACs equal the corresponding information in the network, then the authentication is successful, and a positive response is provided to the UPT user. Otherwise, this is an authentication failure, and a repetition request is fed back to the user;
- h) in case of a successful authentication, the UPT user may proceed with the UPT procedure specification. This may be carried out manually on the terminal by dialling the UPT procedure code, or manually through the UPT access device upon activation of the SEND function;
- i) if the sequence number is out of range, the UPT user has to contact the service provider in order to re-synchronise;
- j) when terminating the UPT procedure which has been carried out, the UPT user may terminate completely (on-hook), or, may wish to indicate follow-on. This may be carried out manually on the terminal by dialling a follow-on code followed by the UPT procedure code, or manually through the UPT access device upon activation of the SEND function;

It should be noted that the use of the temporary storage and the SEND function in the UPT access device in the various points above may be combined as appropriate.

6.1.1.3 Type 3 elementary procedures (two-way protocol)

The type 3 elementary procedures are characterised by an authentication protocol which uses two-way transmission, thus enabling advanced cryptological algorithms. A LPIN is also used between the UPT user and the UPT access device. The number of access attempts is also unlimited.

The type 3 elementary procedures always require a UPT access device and may most easily be realised in the following way:

- a smart-card including authentication algorithms (intended for most terminals with a key pad and smart-card readers, and communication in any network).

The UPT service provider and the UPT user both know the UPT user's public identity, which is the UPT number. In addition, the UPT user's PUI may be known to the UPT service provider. The PUI does not need to be known to the UPT user. Depending on whether the UPT number or the PUI is used for user-network signalling, one or the other is stored as permanent information in the UPT access device.

The UPT user and the UPT access device also share a secret LPIN, which is stored only in the UPT access device. In addition, the UPT service provider and the UPT access device share a common cryptological algorithm and secret key for authentication.

The procedures work as follows:

Access

- a) the UPT user prepares the terminal for communication (off-hook);
- b) the UPT user couples the UPT access device to the terminal. This is carried out electrically when inserting the card into the card reader;
- c) the UPT user accesses the UPT service. This is carried out automatically when the UPT access device is coupled to the terminal;

Identification

- d) the UPT user identifies himself. The identification information is stored permanently in the UPT access device, and is passed to the UPT service provider automatically when the UPT access device is coupled to the terminal;

Authentication

- e) the UPT service provider requests authentication. This is carried out automatically by the network by sending a challenge to the UPT access device;
- f) the UPT user responds to the authentication request. This is carried out by the UPT user by manually entering a PIN on the terminal. As a result, an authentication response is passed to the network automatically from the UPT access device;
- g) the network authenticates the UPT user. This is carried out by comparing the authentication response to corresponding information derived in the network, or by comparing information derived from the response with information stored in the network. The result of the authentication is fed back to the UPT user as appropriate information tones or announcements to the UPT user;
- h) if there is match in the authentication comparison, then the authentication is successful, and a positive response is provided to the UPT user. Otherwise, this is an authentication failure, and a negative response is given;
- i) in case of a successful authentication, the UPT user may proceed with the UPT procedure specification. This must be carried out manually on the terminal by dialling the UPT procedure code;
- k) when terminating the UPT procedure carried out, the UPT user may terminate completely (on-hook), or, may wish to indicate follow-on. This is carried out manually on the terminal by dialling a follow-on code followed by the UPT procedure code.

6.1.2 Realisation of the UPT procedure specification

Following a successful set of elementary procedures (access, identification and authentication procedures), the actual UPT procedure required will have to be specified by the UPT user. In these procedures, the UPT user will have to specify the mandatory and optional UPT procedure parameters.

If no parameters are specified, then default parameters from the service profile are assumed.

For a definitive reference to the optional and mandatory information than can be supplied, refer to Part 7 of this ETR [1].

Common procedure format

The following sequence is common to all the procedures:

- a) on successful completion of the access, identification and authentication procedures, the network prompts the user for the UPT procedure required;
- b) the UPT user enters the procedure code for the required UPT procedure. The UPT user does not have to wait for the network prompt, but can specify the wanted procedure without delay;
- c) if no information is returned to the network in a specified time, the prompt is repeated N times, or for a certain duration. If no information is returned by the UPT user within a specified time, the UPT user is presented with the table of available UPT procedures. If still no response from the UPT user is received within a specified time, the connection is cleared down;
- d) on verification that the wanted UPT procedure is allowed, the network prompts the user to specify the parameters for the wanted UPT procedure.

All UPT user input in this part of the UPT procedures is normally carried out manually on the terminal. However, if the UPT user uses a UPT access device and the UPT access device has a key pad, it may also be carried out manually through the UPT access device, upon activation of the SEND function, if any.

6.1.2.1 Personal mobility procedures

6.1.2.1.1 InCall registration (registration for incoming calls)

Registration for incoming calls is a means for a UPT user to indicate where incoming calls shall be presented. Such a registration will override any previous registration:

- a) on verification that the incall registration for incoming call procedure is allowed, the network prompts the user for optional information, such as duration of registration, number of incoming calls, one or more Access Registration Address (ARA), if needed, for registration, etc. (for a complete list of optional information refer to Part 7 of this ETR [1]);
- b) if no identity or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity. If the identity is obtained automatically, the network prompts the user for another procedure, the identity may be obtained by the network automatically in some cases, i.e. Calling Line Identity (CLI);
- c) on receipt of the terminal identity, the network prompts the user to verify or confirm the number;
- d) the user responds either positively or negatively by entering the appropriate digits;
- e) the network confirms InCall registration. The procedure is terminated. The user is allowed to activate the follow-on procedure;
- f) if no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

NOTE: Default parameters need to be considered when no information is supplied.

6.1.2.1.2 InCall deregistration (deregistration for incoming calls)

The various ways that a deregistration for incoming calls can occur are described in Part 7 of this ETR [1]. This procedure only refers to explicit deregistration by the user.

A user who has registered to receive incoming calls can deregister (cancel) his registration in the following way:

- a) on verification that the InCall deregistration procedure is allowed, the network prompts the user to enter the optional information: one or more ARAs to be deregistered for example (refer to Part 7 of this ETR [1] for a full list of optional information);
- b) if no identity, or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity. If no address is specified, the address currently registered is deregistered, and the default is assumed. If no service is specified, all services for which the registration applied are assumed;
- c) on receipt of the optional parameters, the network may prompt the user to verify or confirm the number(s);
- d) the user responds either positively or negatively by entering the appropriate codes, if requested;
- e) the network confirms Incall deregistration for incoming calls. The procedure is terminated;
- f) the user may activate the follow-on procedure. If no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.1.3 OutCall registration

The UPT user may register for outgoing calls to a particular terminal access to initiate a session.

- a) one verification that the OutCall registration procedure is allowed, the network prompts the user to enter the optional information, such as: one or more ARAs to be registered; telecommunications services for registration; duration of registration/number of outgoing calls; whether a PIN code is required at each call set-up, etc. (a full list is given in Part 7 of this ETR [1]);
- b) if no identity, or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity. If no identity is supplied, then the terminal access which the user is on, is assumed;
- c) on receipt of the terminal identity, the network prompts the user to verify or confirm the number;
- d) the user responds either positively or negatively by entering the appropriate digits;
- e) the network confirms OutCall registration. The procedure is terminated. The user is allowed to activate the follow-on procedure;
- f) if no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.1.4 OutCall deregistration

The various way a deregistration can occur are described in Part 7 of this ETR [1]. This procedure only refers to explicit deregistration by the user.

A user who has registered to make outgoing calls can deregister (cancel) his registration in the following way:

- a) on verification that the OutCall deregistration procedure is allowed, the network prompts the user to enter the optional information, such as: the access registration address, if needed; telecommunications services for deregistration; etc.;
- b) if no identity, or insufficient digits are supplied the network prompts the user N times, or for a certain duration, the identity of the terminal previously registered is assumed and the procedure is terminated;
- c) on receipt of the identity for the terminal to be deregistered, the network may prompt the user to verify or confirm the number;
- d) the user responds either positively or negatively by entering the appropriate codes, if requested;
- e) the network confirms OutCall deregistration. The procedure is terminated;
- f) the user may activate the follow-on procedure. If no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.1.5 Linked registration

The linked registration procedure is used not only to combine the InCall and OutCall registrations into one single procedure, but also to link the InCall and OutCall registrations to each other and to the same terminal access:

- a) on verification that the linked registration procedure is allowed, the network prompts the user to enter optional information, such as the ARAs to be registered, if necessary, duration of the registration, the telecommunication services to which registration applies, whether a PIN code is required for each call setup (for a full list, refer to Part 7 of this ETR [1]);

- b) if no identity or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity. If no identity is supplied, then the terminal access the user is on is assumed;
- c) on receipt of the terminal identity, the network prompts the user to verify or confirm the number;
- d) the user responds either positively or negatively by entering the appropriate digits;
- e) the network confirms linked registration for incoming and outgoing calls. The procedure is terminated. The user is allowed to activate the follow-on procedure;
- f) if no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.1.6 Linked deregistration

The various ways which a linked registration can be deregistered (cancelled) are described in Part 7 of this ETR [1]. This procedure only refers to explicit deregistration of linked procedure by the user:

- a) on verification that the linked deregistration procedure is allowed, the network prompts the user to enter optional information, such as: the ARAs to be deregistered (if necessary); the telecommunication services to which deregistration applies (for a full list, refer to Part 7 of this ETR [1]);
- b) if no identity or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity. If no identity is supplied, the terminal access which the user is on, is assumed;
- c) on receipt of the terminal identity, the network prompts the user to verify or confirm the number. This may not be necessary if the CLI is obtained automatically;
- d) the user responds either positively or negatively by entering the appropriate digits;
- e) the network confirms linked deregistration. The procedure is terminated. The user is allowed to activate the follow-on procedure;
- f) if no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.1.7 AllCall registration

This procedure is a combination of a registration for InCall and OutCall. However, it is restricted to the same terminal access:

- a) on verification that the AllCall registration procedure is allowed, the network prompts the user to enter optional information, such as: the ARAs to be registered (if necessary); duration of registration; the telecommunications to which the registration applies (a full list of information that can be supplied is given in Part 7 of this ETR [1]);
- b) if no identity, or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity. If no identity is supplied, the terminal access which the user is on, is assumed;
- c) on receipt of the terminal identity, the network prompts the user to verify or confirm the number;
- d) the user responds either positively or negatively by entering the appropriate digits;
- e) the network confirms AllCall registration for incoming and outgoing calls. The procedure is terminated. The user is allowed to activate the follow-on procedure;

- f) if no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.1.8 AllCall deregistration

The various way a combined registration for incoming and outgoing calls can be deregistered (cancelled) is described in Part 7 of this ETR [1]. This procedure only refers to explicit deregistration of AllCall by the user:

- a) on verification that the AllCall deregistration procedure is allowed, the network prompts the user to enter the optional information, such as the ARAs to be deregistered (if necessary);
- b) if no identity, or insufficient digits are supplied the network prompts the user N times, or for a certain duration, before terminating the activity. If no identity is supplied, the terminal access the user is on is assumed;
- c) on receipt of the terminal identity, the network prompts the user to verify or confirm the number;
- d) the user responds either positively or negatively by entering the appropriate digits;
- e) the network confirms AllCall deregistration for incoming and outgoing calls. The procedure is terminated. The user is allowed to activate the follow-on procedure;
- f) if no response is received, the network terminates the activity;
- g) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.2 UPT call handling procedures

6.1.2.2.1 Outgoing UPT call setup

This procedure may be used by a UPT user in order to make a single outgoing UPT call independent of any previous registrations by that UPT user or any other UPT user for incoming and/or outgoing calls on the used terminal:

- a) on receipt of the desired procedure prompt, the UPT user enters the procedure code for outgoing UPT call setup and B-party address;
- b) if no number, or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity;
- c) on receipt of the B-party address, the network commences the establishment of the call;
- d) on completion of the call. The user may activate the follow-on procedure;
- e) if no response is received, the network terminates the activity;
- f) alternatively, the user terminates the activity (e.g. going on-hook).

6.1.2.2.2 UPT registered outgoing call setup

This procedure is used to setup calls from a terminal access to which a UPT user has registered for outgoing UPT calls. The outgoing calls will be charged to the UPT number:

- a) on receipt of the desired procedure prompt, the UPT user enters the procedure code for registered outgoing UPT call and B-party address;
- b) if no number, or insufficient digits are supplied, the network prompts the user N times, or for a certain duration, before terminating the activity;
- c) on receipt of the B-party address, the network commences the establishment of the call;

- d) on completion of the call by either the UPT user or called party, the UPT user may activate another procedure;
- e) if no response is received, the network terminates the activity.

Use of the terminal by another user whilst it is in this state, is for further study.

6.1.2.2.3 Incoming UPT calls

6.1.2.2.3.1 Altering for incoming UPT calls

This procedure is used by the UPT service for incoming calls to a UPT user:

- a) the UPT user is alerted on the arrival of an incoming call;
- b) the procedure is terminated by explicit actions from the calling party, by a successful answering of incoming UPT calls procedure or by expiry of a timer.

6.1.2.2.3.2 Answering of incoming UPT calls

Having registered for incoming calls, this procedure is used by the UPT user to answer incoming UPT calls indicated to him by the alerting for incoming UPT calls procedure:

- a) on successful completion of alerting for Incoming UPT call procedure, the UPT user may receive an announcement to indicate that the call is a UPT call, and may be prompted to specify the desired procedure;
- b) if previously specified, the UPT user may be requested to carry out the identification and authentication processes;
- c) on receipt of calling party identity the UPT user may answer the UPT call;
- d) the procedure is terminated by explicit actions from the calling party, by a successful answering of the call or by activation of ongoing call redirection procedure, or by the expiry of a timer.

6.1.2.2.3.3 Ongoing call redirection

This procedure is used by a UPT user to transfer an ongoing UPT call to another access of his choice:

- a) on successful completion of alerting for incoming UPT call procedure, the UPT user may receive an announcement to indicate that the call is a UPT call, and may be prompted to specify the desired procedure;
- b) the user specifies that ongoing call redirection is desired;
- c) the UPT user will be requested to carry out the identification and authentication processes as part of the choice for new terminal access;
- d) the procedure is terminated by explicit actions from the calling party, by a successful answering of the call, by activation of ongoing call redirection procedure, or by the expiry of a timer.

6.1.2.3 UPT service profile management

The UPT users will be allowed to manage their own profile data. The two procedures for service profile management are given in subclauses 6.1.2.3.1 and 6.1.2.3.2.

6.1.2.3.1 UPT service profile interrogation

- a) On verification that the UPT service profile management interrogation procedure is allowed, the network prompts the user to enter the optional parameters, the exact choice of parameters is a service provider's choice;
- b) if no code, or inappropriate information is supplied, the network may guide the user through the available options;
- c) on completion of the procedure, the user may activate the follow-on procedure;
- d) if no information is received in the network on the completion of the procedure, the network terminates the activity;
- e) alternatively, the user terminates the activity (e.g. going on-hook).

The detailed process for service profile interrogation will be left to the operator/service provider to specify.

6.1.2.3.2 UPT service profile modification

- a) On verification that the UPT service profile modification procedure is allowed, the network prompts the user to enter the optional parameters, the exact choice of optional parameters is a choice of the service provider;
- b) if no code, or inappropriate information, is supplied the network may guide the user through the available options;
- c) on completion of the procedure, the user may activate the follow-on procedure;
- d) if no information is received in the network on the completion of the procedure, the network terminates the activity;
- e) alternatively, the user terminates the activity (e.g. going on-hook).

The detailed process for service profile modification will be left to the operator/service provider to specify.

6.1.2.4 UPT procedures for third parties

6.1.2.4.1 Reset of registrations for incoming UPT calls

A third party may explicitly deregister all UPT users which have registered to receive incoming calls at the third party's terminal. The procedure for third parties to reset, is as follows:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that reset of registration for incoming UPT calls is desired;
- c) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated;
- d) the network may not accept the reset request where there is no registration for incoming calls at that terminal access.

6.1.2.4.2 Blocking of registrations for incoming UPT calls

The blocking of registrations for incoming UPT calls is a means for third parties to prohibit UPT users to register for incoming calls to a specific terminal access:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that blocking of registrations for incoming UPT calls is desired;

- c) the network will assume the address of the terminal access used for the blocking;
- d) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated.

6.1.2.4.3 Deblocking of registrations for incoming UPT calls

The deblocking of registrations for incoming UPT calls is a means for a third party to open a terminal access for subsequent registrations for incoming UPT calls:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that deblocking of registrations for incoming UPT calls is desired;
- c) the network will assume the address of the terminal access used for the deblocking;
- d) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated.

6.1.2.4.4 Blocking of incoming UPT calls

The blocking of incoming UPT calls is a means for third parties to block all incoming UPT calls to a specific terminal access:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that blocking of incoming UPT calls is desired;
- c) the network will assume the address of the terminal access used for the blocking;
- d) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated.

6.1.2.4.5 Deblocking of incoming UPT calls

The deblocking of incoming UPT calls is a means for third parties to open a terminal access for subsequent incoming UPT calls:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that deblocking of incoming UPT calls is desired;
- c) the network will assume the address of the terminal access used for the deblocking;
- d) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated.

6.1.2.4.6 Reset of registrations for outgoing UPT calls

The reset of registration for outgoing UPT calls is a means for a third party to explicitly deregister the UPT user who has registered for outgoing calls to a specific terminal access:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that reset of registrations for outgoing UPT calls is desired;
- c) the network will assume the address of the terminal access used for the deblocking;

- d) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated.

6.1.2.4.7 Suspension of registrations for outgoing UPT calls

The suspension of registration for outgoing UPT calls is a means for a third party to temporarily override a registration for outgoing UPT calls to a specific terminal access:

- a) the third party establishes communication with the network, no identification or authentication is necessary;
- b) the third party informs the network that suspension of registration for outgoing UPT calls is desired;
- c) the network will assume the address of the used terminal access for the deblocking;
- d) the network will indicate to the third party whether or not the request has been accepted and the procedure is terminated.

6.2 Standard UPT announcements

6.2.1 Types of standard UPT announcements

The presentation of UPT-specific standard announcements will depend on the terminal, network or service used. However, the presentation of these announcements can only be given in one of three forms:

- 1) as an alphanumeric message in an appropriate language;
- 2) as a voice message in an appropriate language;
- 3) as non-alphanumeric symbols.

The choice of presentation may vary, but the contents of the announcement should be the same in at least the two first cases. As far as possible, the announcements should be given in a language of the UPT user's choice.

6.2.2 List of standard UPT announcements

ETSI Human Factors (HF) Technical Committee is responsible for guidelines to be used in the specification of UPT announcements.

6.3 UPT procedure

ETSI HF Technical Committee is responsible for the development of UPT procedures.

History

Document history	
December 1992	First Edition
February 1996	Converted into Adobe Acrobat Portable Document Format (PDF)