



**E**TSI  
**T**ECHNICAL  
**R**EPORT

**ETR 076**

March 1993

---

Source: ETSI IMCC

Reference: DTR/IMCC-0001

ICS: 33.080

**Key words:** ISDN, PTN

**Integrated Services Digital Network (ISDN);  
Standards guide**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1993. All rights reserved.



## Contents

Foreword .....	7
1 Scope .....	9
2 Background to the ISDN - CCITT Recommendations .....	9
3 Abbreviations.....	10
4 The Memorandum of Understanding (MoU) and the ETSI work programme .....	11
5 Commonality between public and private ISDN standardisation.....	12
6 Attachment testing.....	13
7 Open Network Provision (ONP) .....	13
8 General organisation of ETSs/ETRs and numbering scheme for ETSs .....	14
8.1 Numbering .....	14
8.2 Fields of application .....	14
8.3 Other application areas.....	15
8.4 Other annexes .....	16
9 Key to annexes.....	16
Annex A: ISDN services .....	17
A.1 Introduction.....	17
A.2 Key to tables in Annex A .....	17
A.3 Notes to tables in Annex A.....	19
A.4 Bearer services .....	21
A.4.1 Circuit-mode 3,1 kHz audio .....	21
A.4.2 Circuit-mode 64 kbit/s unrestricted .....	22
A.4.3 Circuit-mode speech.....	23
A.4.4 Frame Mode Bearer Service (FMBS) .....	24
A.4.5 Multirate bearer service .....	24
A.4.6 Packet mode (X.31 case B) B- and D- channel.....	25
A.4.7 User Signalling Bearer Service (USBS).....	25
A.5 Teleservices .....	26
A.5.1 File transfer .....	26
A.5.1.1 Euro file transfer .....	26
A.5.1.2 FTAM file transfer.....	27
A.5.2 Syntax-based videotex.....	28
A.5.2.1 Circuit-mode .....	28
A.5.2.2 Packet mode .....	29
A.5.3 Teleaction .....	29
A.5.4 Telefax G4 .....	30
A.5.5 Telephony 3,1 kHz .....	31
A.5.6 Telephony 7 kHz.....	32
A.5.7 Videotelephony .....	33
A.6 Terminal applications of bearer services.....	34
A.6.1 Channel aggregation (n*64 kbit/s) .....	34

A.6.2	Teletex.....	34
A.6.3	V.110 terminal adaptation .....	34
A.6.4	X.31 case A .....	35
A.6.5	Telefax G3.....	35
A.7	Supplementary services .....	35
A.7.1	Additional Information Presentation (AIP) .....	35
A.7.2	Advice Of Charge - at call set up time (AOC-S).....	36
A.7.3	Advice Of Charge - at the end of the call (AOC-E) .....	36
A.7.4	Advice Of Charge - during the call (AOC-D) .....	37
A.7.5	Call Deflection (CD).....	37
A.7.6	Call Distribution to Attendant (CDA).....	38
A.7.7	Call Forwarding Busy (CFB).....	38
A.7.8	Call Forwarding No Reply (CFNR) .....	39
A.7.9	Call Forwarding Unconditional (CFU).....	39
A.7.10	Call Hold (HOLD) .....	40
A.7.11	Call Offer (CO) .....	40
A.7.12	Call Waiting (CW) .....	41
A.7.13	Calling Line Identification Presentation (CLIP).....	41
A.7.14	Calling Line Identification Restriction (CLIR).....	42
A.7.15	Calling Name Identification Presentation (CNIP) .....	42
A.7.16	Calling/Connected Name Identification Restriction (CNIR).....	43
A.7.17	Charge Card Calling (CCC).....	43
A.7.18	Closed User Group (CUG) .....	43
A.7.19	Completion of Calls on No Reply (CCNR).....	44
A.7.20	Completion of Calls to Busy Subscriber (CCBS) .....	44
A.7.21	Conference Call Add On (CONF).....	45
A.7.22	Connected Line Identification Presentation (COLP) .....	45
A.7.23	Connected Line Identification Restriction (COLR) .....	46
A.7.24	Connected Name Identification Presentation (CONP) .....	46
A.7.25	Controlled Diversion (CDIV) .....	47
A.7.26	Controlled Diversion Consult (CDIVC) .....	47
A.7.27	Direct Dialling In (DDI).....	48
A.7.28	Do Not Disturb (DND) .....	48
A.7.29	Do Not Disturb Override (DNDO).....	49
A.7.30	Explicit Call Transfer (ECT).....	49
A.7.31	Freephone (FPH) .....	50
A.7.32	In-call Modification (IM) .....	50
A.7.33	Intrusion (INTR).....	51
A.7.34	Line Hunting/Trunk Hunting (LHTH).....	51
A.7.35	Malicious Call Identification (MCID) .....	52
A.7.36	Meet Me Conference (MMC).....	52
A.7.37	Multi Private ISDN Attendant (MPA) .....	52
A.7.38	Multiple Subscriber Number (MSN) .....	53
A.7.39	Network Interception (NINT) .....	53
A.7.40	Night Service (NS).....	54
A.7.41	Outgoing Call Barring (OCB).....	54
A.7.42	Premium Rate (PRM).....	55
A.7.43	Recall (RE) .....	55
A.7.44	Remote Control of Supplementary Services (RCSS).....	56
A.7.45	Reverse Charging - at call set up time (REV-S).....	56
A.7.46	Selective Call Forwarding Busy (SCFB).....	57
A.7.47	Selective Call Forwarding No Reply (SCFNR) .....	57
A.7.48	Selective Call Forwarding Unconditional (SCFU).....	57
A.7.49	Serial Call (SC).....	58
A.7.50	Subaddressing (SUB).....	58
A.7.51	Supervisory Information Presentation (SIP) .....	59
A.7.52	Support of Private Numbering Plan (SPNP) .....	59
A.7.53	Televoting (VOT).....	60
A.7.54	Terminal Portability (TP).....	60
A.7.55	Three Party (3PTY) .....	61
A.7.56	Unconditional Reverse Charging (REV-U).....	61
A.7.57	Universal Access Number (UAN).....	61

A.7.58	User-to-user Signalling (UUS) .....	62
A.7.59	Virtual Card Calling (VCC) .....	62
A.8	Additional Network Features .....	63
A.8.1	ANF Alternate Routing Indication (ANF-ARI) .....	63
A.8.2	ANF Common Information (ANF-CI) .....	63
A.8.3	ANF Path Replacement (ANF-PR) .....	63
A.8.4	ANF Route Restriction (ANF RR) .....	64
A.8.5	ANF Source Routing (ANF-SR) .....	64
Annex B:	ISDN physical interfaces .....	65
B.1	Introduction .....	65
B.2	Identification of interfaces .....	65
B.3	Notes to tables in Annex B .....	66
B.4	ISDN interfaces .....	67
B.4.1	Basic access .....	67
B.4.1.1	Basic access layer 1 .....	67
B.4.1.2	Basic access layer 2 .....	67
B.4.1.3	Basic access signalling network application .....	68
B.4.2	Primary rate access .....	68
B.4.2.1	Primary rate access layer 1 .....	69
B.4.2.2	Primary rate access layer 2 .....	69
B.4.2.3	Primary rate access signalling network application .....	70
B.4.3	Primary rate leased-line .....	70
B.4.4	ISDN interconnection .....	71
B.5	Digital cross-connect network .....	72
B.6	Transmission network providing ONP digital leased-lines .....	72
B.6.1	64 kbit/s unstructured digital leased-line interface .....	72
B.6.2	2048 kbit/s structured digital leased-line interface .....	72
B.6.3	2048 kbit/s unstructured digital leased-line interface .....	73
Annex C:	Private ISDN network scenarios .....	74
C.1	Introduction .....	74
C.2	Notes to tables in Annex C .....	74
C.3	Guide to network scenarios .....	74
C.4	Network scenarios .....	79
C.4.1	Explanation of tables in Clause C.4 .....	79
C.4.2	Dedicated physical link .....	79
C.4.3	Primary rate leased line .....	80
C.4.4	ONP leased line .....	80
C.4.5	Digital cross-connect .....	81
C.4.6	ISDN (circuit-mode) semi-permanent .....	81
C.4.7	ISDN (circuit-mode) switched .....	82
C.4.8	ISDN (circuit-mode) UUS 3 .....	82
C.4.8	Packet Mode Bearer Service (PMBS) X.31 case B semi-permanent .....	83
C.4.9	Packet Mode Bearer Service (PMBS) X.31 case B switched .....	83
C.4.10	ISDN with User Signalling Bearer Service (USBS) semi-permanent .....	84
C.4.11	ISDN with User Signalling Bearer Service (USBS) switched .....	84
Annex D:	Terminal interchangeability .....	85
D.1	Definition .....	85

D.2	Purpose .....	85
D.3	Achieving terminal interchangeability in the standardisation process.....	86
Annex E:	Principles for standardisation alignment between public and private ISDNs .....	88
History	.....	89

## Foreword

ETSI Technical Reports (ETRs) are informative documents resulting from ETSI studies which are not appropriate for European Telecommunications Standard (ETS) or Interim-European Telecommunications Standard (I-ETS) status. An ETR may be used to publish material which is either of an informative nature, relating to the use or application of ETs or I-ETs, or which is immature and not yet suitable for formal adoption as an ETS or I-ETS.

This ETR has been produced by the ISDN standards Management and Co-ordination Committee (IMCC) of the European Telecommunications Standards Institute (ETSI).

Blank page



## 1 Scope

The purpose of this document is to provide a guide to the standards (and work items for standards) for the European ISDN. ETSI has published or will publish both European Telecommunication Standards (ETSS) or ETSI Technical Reports (ETRs) to specify or provide guidance on the services and standards for the European public ISDN and for Private Telecommunication Networks (PTNs) based on ISDN concepts (Private ISDNs), including terminal related specifications. This document identifies standards available and work items in progress. It provides an overview of the structure and inter-relationship of the ETSS, ETRs, and work items. It does not indicate their status.

This document does not cover all the standardisation work done by ETSI in the field of PTNs. It only covers PTN standardisation work based upon ISDN concepts and ISDN related concepts. PTNs based upon such concepts are termed "Private ISDNs". Standards relating to private networks based on other concepts (e.g. analogue networks) are excluded.

This document does not cover the standardisation work done by ETSI in the area of radio communications, satellite applications or CENTREX for ISDN.

ETR 010 "The ETSI basic guide on the European integrated services digital network" covers services and standards for the public ISDN. It is related to, and is a subset of, this ETR.

## 2 Background to the ISDN - CCITT Recommendations

An ISDN is a network providing end-to-end digital connectivity to support a wide range of telecommunication services. These services include voice and non-voice services to which customers have access by a small set of standard user-network interfaces by direct attachment of terminal equipment to the public network, or by the same type of interfaces provided at an exchange being part of a PTN and connected to the public network. The European ISDN standards include services which are offered in public ISDNs only, or in private ISDNs only, or in both public and private ISDNs.

The CCITT has prepared, in the I-Series, Recommendations which provide principles and guidelines on the ISDN concept, as well as detailed specifications. Information about the ISDN concept can be found in the following CCITT Recommendations:

- |         |                                                                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I.112   | defines those terms that are considered essential to the understanding and application of the principles of an ISDN.                                                                       |
| I.120   | describes the concept, principles and structure of an ISDN.                                                                                                                                |
| I.130   | provides a method for describing telecommunication services (Three stage methodology).                                                                                                     |
| I.210.2 | includes the description of the principles for defining telecommunication services supported by an ISDN including the concept of bearer services, teleservices and supplementary services. |
| I.310   | describes the ISDN network functional principles.                                                                                                                                          |
| I.410   | describes general aspects and principles relating to the user-network interface.                                                                                                           |

Based on these principles the European Commission is encouraging the co-ordinated introduction of ISDN in Europe.

The European ISDN standards referred to in this document include:

- standards applying to public and private ISDNs;
- standards applying to public ISDNs only;
- standards applying to private ISDNs only.

### 3 Abbreviations

The following abbreviations are used throughout this document:

ANF	Additional Network Feature
ATS	Abstract Test Suite
CCITT	Comité Consultatif International Télégraphique et Téléphonique
CTR	Common Technical Regulation
DECT	Digital European Cordless Telecommunications
EC	European Community
ECMA	European Computer Manufacturers Association
EMC	Electro-Magnetic Compatibility
EN	Européennes Normes
ETR	ETSI Technical Report
ETS	ETSI Telecommunications Standard
ETSI	European Telecommunications Standards Institute
FMBS	Frame Mode Bearer Service
FTAM	File Transfer Access and Management
GSM	Global System for Mobile communications
NOTE:	The abbreviation "GSM" also stands for "Groupe Spéciale Mobile"
ISDN	Integrated Services Digital Network
ISM	ISDN Standards Management
ISPBX	ISDN Private Branch Exchange
ISUP	ISDN User Part of CCITT Signalling System No. 7
ITAEGT	Information Technology Advisory (and Co-ordination) Expert Group for private Telecommunication networks
ITU	International Telecommunication Union
IVN	Intervening Network
MOU	Memorandum of Understanding
MTP	Message Transfer Part of CCITT Signalling System No. 7
MTUP	MTP Testing User Part of CCITT Signalling System No. 7
NET	Normes Européennes de Télécommunications
ONP	Open Network Provision
PICS	Protocol Implementation Conformance Statement

PIXIT	Protocol Implementation Extra Information for Testing
PMBS	Packet Mode Bearer Service
PSPDN	Packet Switched Public Data Network
PSTN	Public Switched Telephone Network
PTN	Private Telecommunication Network
PTNX	Private Telecommunication Network Exchange
SC	Signalling Connection
SCCP	Signalling Connection Control Part of CCITT Signalling System No. 7
SRC	Strategic Review Committee (on ISDN)
TBR	Technical Basis for Regulation
TC BT	Technical Committee Business Telecommunications
TCAP	Transaction Capabilities of CCITT Signalling System No. 7
TCRTR	Technical Committee Reference Technical Report
TE	Terminal Equipment
TRAC	Technical Regulations Application Committee
UIC	User information connection
UUS	User-to-user signalling supplementary service
USBS	User Signalling Bearer Service
VPN	Virtual Private Network

#### **4 The Memorandum of Understanding (MoU) and the ETSI work programme**

In 1989 a MoU was agreed and signed between European Network Operators to enable common ISDN services to be offered across Europe from 1992 onwards. This includes a minimum set of services that all signatories will provide (indicated by an asterisk (\*) in Table 1). This MoU requires:

- standards for a common range of services that all signatories will comply with.
- standards for user-network interfaces and protocols having the objective of enabling any customer equipment implemented to the required standards to be connected to and operated with the ISDN provided by each party (terminal interchangeability, unique attachment specifications for Integrated Services Private Branch Exchanges (ISPBXs)).
- standards for interconnecting national systems in order to provide international services.

Recognising the needs of the MoU, thereby taking into account the requirements of private networks, but also bearing in mind the limited resources available, ETSI's Strategic Review Committee Number 1 (SRC1) proposed a set of services and standards that would need to be established for the launching of the European ISDN in 1992 (see table 1).

Table 1: Services and standards

<b>Bearer Services</b> Circuit-mode 64 kbit/s unrestricted * Circuit-mode 3,1 kHz audio * Packet mode (X.31 case B) B- and D-channel Circuit-mode speech
<b>Teleservices</b> Telephony 3,1 kHz Facsimile group 4 class 1 Teletex Telephony 7 kHz Syntax-based videotex Videotelephony
<b>Supplementary Services</b> Calling Line Identification Presentation (CLIP) * Calling Line Identification Restriction (CLIR) * Direct Dialling In (DDI) * Multiple Subscriber Number * Terminal Portability * Call Waiting (CW) Completion of Calls to Busy Subscriber (CCBS) Closed User Group (CUG) User-User Signalling (UUS) Subaddressing (SUB) Three Party (3PTY) Advice of Charge (AOC) Connected Line Identification Presentation (COLP) Connected Line Identification Restriction (COLR) Malicious Call Identification (MCID) Add On Conference Call (CONF) Meet Me Conference (MMC) Freephone (FPH) Explicit Call Transfer (ECT) Call Forwarding Busy (CFB) Call Forwarding No Reply (CFNR) Call Forwarding Unconditional (CFU) Call Deflection (CD) Call Hold (HOLD)
<b>Basic access and Primary rate access user-network interfaces</b>
<b>ISDN interconnection interfaces for the services identified above</b>
<b>End-to-end protocols for the services mentioned above</b>
<b>Network capabilities for the services mentioned above</b>

NOTE 1: Since this list was compiled, ETSI has decided that Teletex is no longer considered to be a teleservice, but an application of a bearer service. This is reflected in this ETR.

## 5 Commonality between public and private ISDN standardisation

As a basic objective, the ISDN standards, in particular those covering service descriptions, have been designed to be common to both public and private ISDNs.

The principle of terminal interchangeability is to ensure that a terminal equipment shall be (as far as possible) capable of participating in services independent of the actual network to which it is attached, i.e. different national ISDNs, private ISDNs, etc.

However, the ETSS describing a European ISDN include options that:

- cover historical variants of services and their usage in individual countries;

- allow for innovation.

Interworking between networks is assured. Where differences between the service definitions might affect terminal interchangeability this is listed in an annex to the relevant ETS.

The ETSs also cover interworking of the European ISDN with private ISDNs that support services identical or similar to those of the public ISDN.

Again, whenever terminal interchangeability between public and private ISDNs might be affected, appropriate listings can be found in annexes to the private ISDN standards.

For the definition of terminal interchangeability and for the guidance on achieving terminal interchangeability see Annex D.

For the alignment of standardisation principles between public and private ISDNs see Annex E.

## **6 Attachment testing**

An EC Council Directive (86/361/EEC) implemented a harmonised attachment testing regime in EEC countries. The principles of this Directive have also been adopted by the EFTA countries. The foundation for testing under this regime was Normes Européennes de Télécommunications (NETs), based upon ETSs produced by ETSI.

On 6th November 1992, a new EC Council Directive (91/263/EEC) replacing Directive 86/361/EEC came into force. The harmonised attachment testing regime continues to exist throughout Europe, but the basis for testing is now Common Technical Regulations (CTRs). The technical content of the CTRs is being developed by ETSI as Technical Basis for Regulations (TBRs). A TBR forms the technical basis of a CTR; the CTR also contains regulatory aspects added by TRAC (Technical Regulations Application Committee).

Relevant work items on TBRs have been identified as NOTES to the tables that form Annex A of this ETR, or appear in the tables in Annex B.

With regard to ISDNs implemented on the basis of ETSs referred to in the present Guide, an approval regime based on the ETSs developed by ETSI as Candidate NETs will be adopted by the competent national authorities until individual CTRs are formally adopted.

A number of Technical Basis for Regulation (TBR) have been produced for "ONP leased lines". These are identified by the appropriate tables in Annex B.

## **7 Open Network Provision (ONP)**

Open Network Provision (ONP) is intended to ensure "harmonised conditions for open and efficient access to and use of public telecommunications networks and, where applicable, public telecommunications services." The general principles of ONP are contained in Council Directive 90/387/EEC, the "ONP Framework Directive". These principles are applied to a number of areas of telecommunications, including ISDN and leased lines. ISDN is covered by Council Recommendation 92/383/EEC. Leased lines are covered by Council Directive, 92/44/EEC.

The CEC does not regard ETSs drawn up under an ONP mandate as different from ETSs drawn up in the normal way. However, a specific ONP directive can require ETSs drawn up under an ONP mandate to be implemented in all Member States. The precise wording of the directive needs to be consulted to ascertain the exact nature of the obligation.

European Telecommunications Standards (ETS) have been produced to support "ONP leased lines".

For ISDN, ETSI has identified existing standards and work items that may fall within the scope of ONP applied to ISDN, and has notified the European Commission about the status of these.

A number of the standards listed in this ETR may therefore constitute a basis for harmonised access and/or service features in the context of ONP.


## 8 General organisation of ETSs/ETRs and numbering scheme for ETSs

### 8.1 Numbering

Numbers for public and private ISDN related ETSs (and all other ETSs) commence from 300 001 and are allocated by ETSI on a consecutive basis. ETSs with such numbers can be purchased from the appropriate National Standards Organisation or directly from ETSI. No gaps are left in the ETS numbering scheme, therefore numbers do not relate to any organisational structure. Until such numbers are allocated by ETSI (when the document is ready for public enquiry) a temporary code is given that uniquely identifies the draft ETS or ETR. The unique code used is the ETSI work item number.

### 8.2 Fields of application

The ETSs listed in this ETR are grouped in a number of annexes, according to their field of application. This subclause provides a structured overview of the annexes for understanding the inter-relationships between the ISDN standards. Figure 1 provides an overview of the reference points referred to in the matrices in the various annexes.

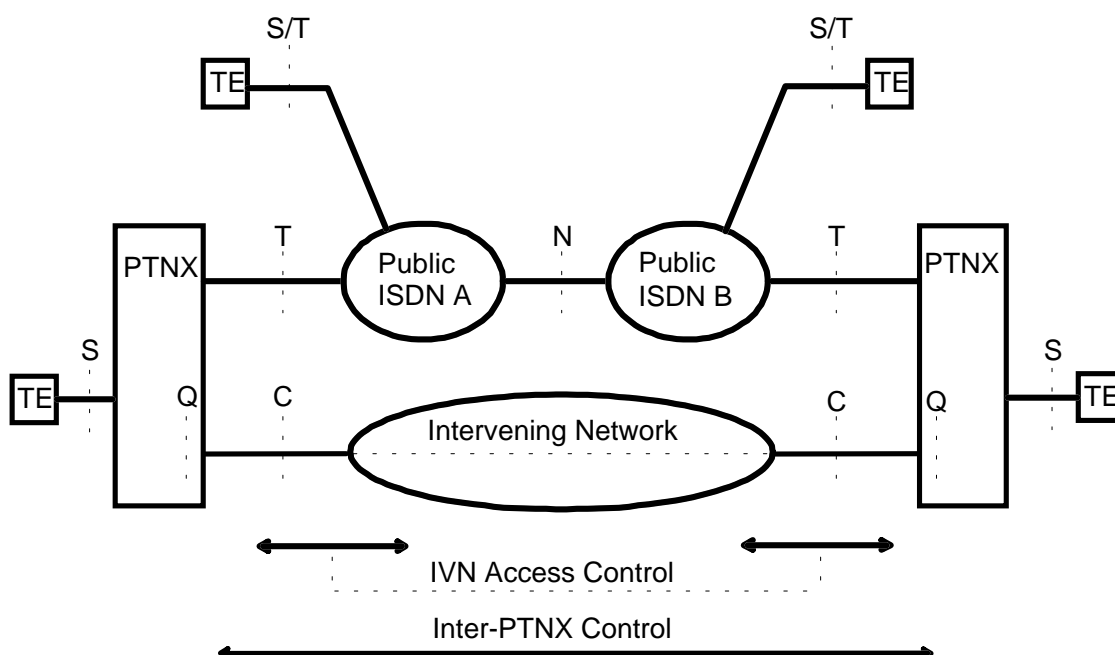

NOTE: The notation "S/T" should be read as "coincident S and T".

**Figure 1: Overview of reference points for public ISDN and private ISDN**

An explanation of the reference points illustrated in figure 1 is given in CCITT Recommendations I.324 and I.411, and in ENV 41004.

The annexes of this ETR are as follows:

#### Annex A ISDN services

According to the definitions given in CCITT Recommendation I.210.2, supplementary services are distinguished from basic services, which in turn can be separated into bearer services and teleservices. For all services the following description methodology applies:

- a) Stage 1 descriptions. Provide an overall description from the user's viewpoint;
- b) Stage 2 descriptions. Identifies the functional capabilities and the information flows needed to support the service described in stage 1;

- c) Stage 3 descriptions. The user-network interface protocol standards in this group provide the specification of the signalling protocol at the user-network access to the public ISDN, as well as to private ISDNs for interworking with an attached private ISDN. The network control protocol standards in this group provide the specification of the signalling protocol at the international gateway between two public networks.

The logical context between the individual stage descriptions for the numerous services is given in Annex A.

### **Annex B ISDN physical interfaces**

Annex B contains matrices for interfaces at each of the reference points shown in figure 1 (i.e. at the C reference point, the N reference point, the S reference point, the coincident S and T reference point, and the T reference point). These matrices identify ETSs for signalling and information transmission. The physical interface aspects described in Annex B also include service independent characteristics, such as safety, protection, electromagnetic compatibility and maintenance.

### **Annex C PTN network scenarios**

At the C reference point a variety of service independent interfaces can occur, depending on the type of Intervening Network (IVN). Some of them are controllable by the PTNX (such as public ISDN when it is employed as an Intervening Network), others are not, e.g. leased lines. Although the Intervening Networks themselves need not be ISDNs, they are used in the context of establishing private ISDNs, and thus fall into the scope of this document.

Standards on scenarios applicable at the C reference point are listed in Annex C. (For the interfaces themselves, Annex C refers back to Annex B).

## **8.3 Other application areas**

The annexes described in 8.2 above cover the main application areas for ISDN standards. There are two other application areas where ETSs and ETRs have been developed. These areas are:

### **Terminal specifications**

Service dependent terminal specifications are listed together with the corresponding service specifications in Annex A. They are categorised in three groups. The first group covers ETSs for protocols that operate on a terminal equipment to terminal equipment basis; these are listed in the matrix row labelled "end-to-end protocol". The second group covers ETSs for other terminal functions necessary to implement the service; these are listed in the matrix row labelled "terminal functions". ETSs for special terminal functions e.g. for the hard of hearing are listed in the matrix row labelled "special terminal functions"

### **Attachment requirements**

Clause 6 briefly describes the attachment testing regime within Europe.

Conformance testing specifications are appropriate to all standards except Stage 1 and Stage 2 descriptions; conformance to Stage 1 and Stage 2 is met by conformance to the Stage 3 standard and the end-to-end protocol standard if appropriate. Standards for the fields of application described above may contain conformance testing specifications either as an integral part or a separate ETS. Where separate standards for conformance testing have been produced these are listed in the same matrix as the standard defining the requirements.

## 8.4 Other annexes

There are a number of supplementary annexes as follows:

### Annex D

Terminal interchangeability

### Annex E

Principles for standardisation alignment between public and private ISDNs

## 9 Key to annexes

The following key applies to the matrices contained in Annexes A - C :

<b>N/A</b>	Not applicable. No ETSI standard, ETR, (or ECMA or CCITT equivalent) is appropriate to this entry.
- -	None; no ETSI standard, ETR or work item (or equivalent in ECMA or CCITT) currently exists for this entry. This does not preclude their existence in the future. Where this applies for a complete table row, the row may be omitted from the matrix.
<b>300 aaa</b>	ETS 300 aaa is relevant.
<b>300 aaa/Ax</b>	ETS 300 aaa Amendment x is relevant.
<b>300 aaa _ 1.1</b>	ETS 300 aaa Clause 1.1 is relevant.
<b>(ECMA-xxx)</b>	Identifies the ECMA equivalent to the preceding ETSI standard or work item.
<b>xx/bbb-cccc</b>	No relevant ETS currently exists but work item xx/bbb-cccc is applicable. The work item number may be suffixed with a further field indicating a sub-division of the work item. This field can have the form ".nn" where nn is a number e.g. ".29", or "-an" where an is an alphabetic character following by a numeral e.g. "-J2".
<b>ETR ddd</b>	ETR ddd is relevant.
<b>see table A.y</b>	Table A.y in this ETR lists relevant standards.



## **Annex A: ISDN services**

### **A.1 Introduction**

The tables contained in this Annex list all the ETSs required for defining basic services (i.e. bearer and teleservices), specific applications within the terminal for bearer services, supplementary services, and network features additional to those required for a basic implementation.

These groups of services and other features are classified in sub-clauses as follows:

#### **bearer services (A.4)**

A bearer service consists of a connection (as identified by a bearer capability), and the network provision of subscription arrangements;

#### **teleservices (A.5)**

A teleservice consists of a connection or set of connections (as identified by a bearer capability), the network provision of subscription arrangements, and a set of higher layer terminal functions;

#### **terminal applications of bearer services (A.6)**

For this class the network provides a bearer service (see above), with no distinctive operation for a particular type of application. The terminal equipment may use one or more bearer service instances in providing a tailored application to meet user needs. The application is not a specific basic telecommunications service in its own right, although in some circumstances, it may appear so to the user. From the standards point of view, the distinguishing characteristic of an application of a bearer service is that the stage 1, stage 2, and stage 3 descriptions of the bearer service require no modification for the application to work.

#### **supplementary services (A.7)**

Supplementary Services are any services provided by a network in addition to its basic service or services.

#### **additional network features (A.8)**

An Additional Network Feature (ANF) is a capability, over and above that of a basic service, provided by a PTN, but not directly to a PTN user.

### **A.2 Key to tables in Annex A**

Each service, or other feature, is described in a separate sub-clause. Each sub-clause states the type of the service, and whether the service is applicable to the public ISDN, to the private ISDN, or to both. A table is used to identify the set of standards that exist for the service. The horizontal rows in each table are as follows:

#### **Stage 1**

This part is an overall description from the user's standpoint. The contents of the entry can vary as follows:

- where the service is only applicable to the public ISDN or only to the private ISDN, then the appropriate standard or work item for the stage 1 description of the service is given;
- where the service is applicable to both the public ISDN and to the private ISDN, and a common stage 1 description exists, this is listed;
- where the service is applicable to both the public ISDN and to the private ISDN, and different stage 1 descriptions exist for each case, each stage 1 description is identified. The stage 1 description for the public ISDN is listed before the stage 1 description for the private ISDN;

A stage 1 description may exist for the public ISDN case and not the private ISDN case, or vice versa. In this case, the existing description is listed and the non-existent description is indicated by use of the "none" symbol, (- -). As above, the public ISDN case is listed first.

## **Stage 2**

This part is an overall description of the organisation of the network functions and the information flows between them to map service requirements into network capabilities.

The format of the matrix entry follows the same rules as for stage 1 descriptions.

## **Stage 3S**

This part is the definition of switching and signalling capabilities needed to support services at the access to a private network (S stands for S reference point). This entry is not included for tables where the service relates only to the public ISDN.

## **Stage 3S/T**

This part is the definition of switching and signalling capabilities needed to support services at the access to a public ISDN used by a terminal (S/T stands for coincident S and T reference point) This entry is not included for tables where the service relates only to Private ISDNs.

## **Stage 3T**

This part is the definition of switching and signalling capabilities needed to support services at the access to a public ISDN used by private network (S stands for S reference point). This entry is not included for tables where the service relates only to Private ISDNs.

## **Stage 3Q**

This part is the definition of switching and signalling capabilities needed to support services within a private network (Q stands for Q reference point). This entry is not included for tables where the service relates only to the public ISDN.

## **Stage 3N**

This part is the definition of switching and signalling capabilities needed to support services within or between public ISDNs (N stands for network). This entry is not included for tables where the service relates only to Private ISDNs.

## **End-to-end protocol**

Under this item only user-plane protocol specifications are listed. This item is only included for bearer services, teleservices and terminal application of bearer services.

## **Terminal functions**

Under this part, standards appropriate to terminals that implement this service or feature, but that are not included in the previous entries, are covered. This entry is only included for teleservices, terminal application of bearer services, and some relevant supplementary services.

## **Special terminal functions**

Under this part, standards appropriate to some terminals designed for special purposes, that implement this service or feature are covered. Note that in some cases, these are listed only for the service or feature for which they were primarily intended; they may be of secondary application to other services or features. This part is only included when appropriate.

For each of the rows there is a column entry giving the relevant ETSs that specify the requirements, conformance testing, and attachment testing. ETRs are also included where relevant, and there is a column for equivalent CCITT recommendations.

In addition to the services identified in this Annex, studies are taking place for other services e.g. DTR/TE-04012 (Audiotex) and I-ETS 300 101 (Audiographic Teleconference).

### A.3 Notes to tables in Annex A

The tables in Annex A reference some notes contained in this subclause. These references are of the form "(NOTE x)". The notes are as follows:

NOTE 1: Generic procedures for supplementary services at stage 3S/T are included in ETS 300 122 (see DE/SPS-5040 for PICS) and ETS 300 196 (see DE/SPS-5039 for PICS). Conformance tests are contained in DE/SPS-5004 and DE/SPS-5005 respectively.

NOTE 2: Generic procedures for supplementary services at stage 3T are included in ETS 300 196 (see DE/SPS-5039 for PICS). Conformance tests are contained in DE/SPS-5005.

NOTE 3: Generic procedures for supplementary services at stage 3S are included in ETS 300 190, ETS 300 240 and DE/ECMA-0026. Conformance tests for these standards have not yet been identified. Interactions of supplementary services at stage 3S have not been specified.

Priority for Private ISDN protocol work is being given to standards applicable at the Q reference point. Work items have not yet been created for standards applicable at the S reference point to avoid standstill being applied.

The generic procedures specified in ETS 300 190, ETS 300 240 and DE/ECMA-0026 may be used as the basis of proprietary implementation.

NOTE 4: Generic procedures for supplementary services at stage 3Q are included in ETS 300 239. Conformance tests for these standards have not yet been identified.

NOTE 5: For identification of appropriate PICS and PIXIT proformas, see Annex B subclauses B.4.1 and B.4.2.

NOTE 6: Interactions of supplementary services at stage 3S/T and at stage 3T are covered in ETS 300 195 (see DE/SPS-5028-Z for PICS proforma; DE/SPS-5029-Z for PIXIT proforma; T/S46-34Z for ATS).

NOTE 7: Interactions of supplementary services at stage 3Q are covered in DE/ECMA-0063.

NOTE 8: General principles for the provision of telecommunication services to private networks at the T reference point are covered in DE/NA-12243.

NOTE 9: References are given to standards for both Signalling System No. 7 ISUP version 1 and ISUP version 2.

NOTE 10: Work item DTR/NA-25101 deals with possible enhancements required to the Packet Mode Bearer Service.

NOTE 11: This service is defined as a service subject to "special or exclusive rights" under Commission Directive 90/388/EEC. Regulatory requirements and testing are covered in a TBR being produced under work item DTBR/TE-04121 (TBR 008). ETS 300 085 (Candidate NET 33) may apply in the interim.

NOTE 12: For all other requirements for this application, see circuit-mode 64 kbit/s unrestricted bearer service (table A.2).

NOTE 13: For all other requirements for this application, see circuit-mode 3,1 kHz audio bearer service (table A.1).

- NOTE 14: ETS 300 242 is a PSTN standard, but it may be used at the ISDN user-network interface.
- NOTE 15: Information to support the call hold supplementary service needs to be transferred across an interface at the Q reference point; this is taken care of in the notification indicators defined in ETS 300 239.
- NOTE 16: Information to support the call waiting supplementary service needs to be transferred across an interface at the Q reference point; this is taken care of in the notification indicators defined in ETS 300 239.
- NOTE 17: There are no additional requirements over and above the basic call control requirements specified in ETS 300 102-1.
- NOTE 18: From the private ISDN viewpoint the Multiple Subscriber Number supplementary service is considered to be an integral part of the basic call description; no separate supplementary service ETSs exist in this case.
- NOTE 19: From the private ISDN viewpoint the Subaddressing supplementary service is considered to be an integral part of the basic call description; no separate supplementary service ETSs exist in this case.
- NOTE 20: From the private ISDN viewpoint the Terminal Portability supplementary service is considered to be an integral part of the basic call description; no separate supplementary service ETSs exist in this case.
- NOTE 21: Information to support the Terminal Portability supplementary service needs to be transferred across an interface at the Q reference point; this is taken care of in the notification indicators defined in ETS 300 239.
- NOTE 22: In private ISDNs, the functionality provided by this supplementary service is offered by the Conference Call Add On (CONF) supplementary service.

## A.4 Bearer services

### A.4.1 Circuit-mode 3,1 kHz audio

Type: Bearer

Applicable to: Public ISDN, Private ISDN

**Table A.1: Circuit-mode 3,1 kHz audio bearer service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
<b>Stage 1</b>	ETS 300 110 ETS 300 171 (ECMA-142)	N/A	I.231.3
<b>Stage 2</b>	T/S 23-01 ETS 300 171 (ECMA-142)	N/A	Q.71.1
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	- -	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931  Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018	DI/SPS-5002 DE/SPS5038	Q.931  Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	- -	- -
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	ETS 300 084	ETS 300 084	G.711

**A.4.2 Circuit-mode 64 kbit/s unrestricted**

Type: Bearer                                          Applicable to:                          Public ISDN, Private ISDN

**Table A.2: Circuit-mode 64 kbit/s unrestricted bearer service**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	ETS 300 108 ETS 300 171 (ECMA-142)	N/A	I.231.1
<b>Stage 2</b>	T/S 23-01 ETS 300 171 (ECMA-142)	N/A	Q.71.1
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931  Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931  Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	--	--
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	N/A	N/A	--

**A.4.3 Circuit-mode speech**

Type: Bearer

Applicable to: Public ISDN, Private ISDN

**Table A.3: Circuit-mode speech bearer service**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	ETS 300 109 ETS 300 171 (ECMA-142)	N/A	I.231.2
<b>Stage 2</b>	T/S 23-01 ETS 300 171 (ECMA-142)	N/A	Q.71.1
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931  Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931  Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	--	--
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	ETS 300 083	ETS 300 083	G.711

#### A.4.4 Frame Mode Bearer Service (FMBS)

Type: Bearer                          Applicable to:      Public ISDN, Private ISDN

**Table A.4: Frame Mode Bearer Service (FMBS) bearer service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	-- MI/ECMA-0023	N/A	I.233
Stage 2	-- MI/ECMA-0023	N/A	Q.71.3
Stage 3S	MI/ECMA-0043	--	Q.933
Stage 3S/T	DE/SPS-5032	DE/SPS-5033	Q.933
Stage 3T (NOTE 8)	DE/SPS-5032	DE/SPS-5033	Q.933
Stage 3Q	MI/ECMA-0068	--	--
Stage 3N (NOTE 9)	--	--	--
End-to-end protocol	DE/SPS-5030	DE/SPS-5031	Q.922

#### A.4.5 Multirate bearer service

Type: Bearer                          Applicable to:      Public ISDN, Private ISDN

**Table A.5: Multirate bearer service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	-- --	N/A	I.231.10
Stage 2	T/S 23-01 --	N/A	Q.71.1
Stage 3S	--	--	Q.931 Q.939
Stage 3S/T	DE/SPS-5034-1 DE/SPS-5034-2 (NOTE 5)	--	Q.931 Q.939
Stage 3T (NOTE 8)	DE/SPS-5034-1 DE/SPS-5034-2 (NOTE 5)	--	Q.931 Q.939
Stage 3Q	--	--	--
Stage 3N (NOTE 9)	--	--	Q.761, Q.762, Q.763, Q.764
End-to-end protocol	N/A	N/A	--



**A.4.6 Packet mode (X.31 case B) B- and D- channel**

Type: Bearer                                  Applicable to:          Public ISDN, Private ISDN

**Table A.6: Packet mode (X.31 case B) B- and D- channel bearer service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
<b>Stage 1</b>	ETS 300 048 ETS 300 049 --	N/A	I.232.1
<b>Stage 2</b>	T/S 23-03 --	N/A	Q.71.2
<b>Stage 3S</b>	--	--	--
<b>Stage 3S/T</b>	ETS 300 007	DE/SPS-5003	Q.931/X.31
<b>Stage 3T (NOTE 8)</b>	DE/SPS-5041	DE/SPS-5003	Q.931/X.31
<b>Stage 3Q</b>	--	--	--
<b>Stage 3N (NOTE 9)</b>	--	--	--
<b>End-to-end protocol</b>	ETS 300 007	DE/SPS-5003	X.31

See NOTE 10.

**A.4.7 User Signalling Bearer Service (USBS)**

Type: Bearer                                  Applicable to:          Public ISDN, Private ISDN

**Table A.7: User signalling bearer service (USBS) bearer service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
<b>Stage 1</b>	DE/NA-10005	N/A	Q.232.2
<b>Stage 2</b>	--	N/A	--
<b>Stage 3S</b>	--	--	Q.931 _ 7.2
<b>Stage 3S/T (NOTE 8)</b>	--	--	Q.931 _ 7.2
<b>Stage 3T</b>	--	--	Q.931 _ 7.2
<b>Stage 3Q</b>	--	--	--
<b>Stage 3N (NOTE 9)</b>	--	--	--
<b>End-to-end protocol</b>	--	--	Q.931 _ 7.2

## A.5 Teleservices

### A.5.1 File transfer

#### A.5.1.1 Euro file transfer

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

**Table A.8: Euro file transfer teleservice**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/TE-01042.1	N/A	--
Stage 2	--	N/A	--
Stage 3S	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
Stage 3S/T	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
Stage 3T (NOTE 8)	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
Stage 3Q	ETS 300 172 (ECMA-143)	ETS 300 172 (ECMA-143)	N/A
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
End-to-end protocol	ETS 300 075 ETS 300 080 DE/TE-1042	ETS 300 155 DE/TE-1044	T.90
Terminal functions	DE/TE-1043	--	--
Special terminal functions	--	--	--

**A.5.1.2 FTAM file transfer**

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

**Table A.9: FTAM file transfer teleservice**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	DE/TE-01042.2	N/A	--
<b>Stage 2</b>	--	N/A	--
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	ETS 300 172 (ECMA-143)	N/A
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	DE/TE-01042	DE/TE-01044	--
<b>Terminal functions</b>	DE/TE-01043	--	--
<b>Special terminal functions</b>	--	--	--

**A.5.2 Syntax-based videotex**

Type: Teleservice                      Applicable to:      Public ISDN, Private ISDN

**A.5.2.1 Circuit-mode**

**Table A.10: Circuit-mode syntax-based videotex teleservice**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	ETS 300 262	N/A	I.241.5
<b>Stage 2</b>	N/A	N/A	Q.71
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	ETS 300 172 (ECMA-143)	--
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	ETS 300 080 ETS 300 079	DE/TE-02024-2 ETS 300 236	T.90 --
<b>Terminal functions</b>	ETS 300 222 DE/TE-01016 ETS 300 072 ETS 300 073 ETS 300 074 ETS 300 075 ETS 300 076 ETS 300 149 ETS 300 177	--	--

A.5.2.2 Packet mode

Table A.11: Packet mode syntax-based videotex teleservice

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 262	N/A	I.241.5
Stage 2	N/A	N/A	Q.71
Stage 3S	--	--	Q.931 X.31
Stage 3S/T	ETS 300 007	DE/SPS-5003	Q.931 X.31
Stage 3T (NOTE 8)	DE/SPS-5041	DE/SPS-5003	N/A
Stage 3Q	--	--	N/A
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
End-to-end protocol	ETS 300 218 ETS 300 223	-- ETS 300 236	T.90 N/A
Terminal functions	ETS 300 222 DE/TE-01016 ETS 300 072 ETS 300 073 ETS 300 074 ETS 300 075 ETS 300 076 ETS 300 149 ETS 300 177	--	--

A.5.3 Teleaction

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

Table A.12: Teleaction teleservice

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-12240	N/A	--
Stage 2	--	N/A	--
Stage 3S	--	--	--
Stage 3S/T	--	--	--
Stage 3T (NOTE 8)	--	--	--
Stage 3Q	--	--	--
Stage 3N (NOTE 9)	--	--	--
End-to-end protocol	--	--	--
Terminal functions	--	--	--

**A.5.4 Telefax G4**

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

**Table A.13: Telefax G4 teleservice**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	ETS 300 120	N/A	I.241.1
<b>Stage 2</b>	N/A	N/A	Q.71
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR 018 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931 Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	ETS 300 172 (ECMA-143)	N/A
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	ETS 300 080 ETS 300 112	DE/TE-02024-2 ETS 300 155	T.90
<b>Terminal functions</b>	ETS 300 087	ETS 300 280	--
<b>Special terminal functions</b>	ETS 300 154 DE/TE-2015.1	DE/TE-2015.2	--

**A.5.5 Telephony 3,1 kHz**

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

**Table A.14: Telephony 3,1 kHz teleservice**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	ETS 300 111	N/A	I.241.1
<b>Stage 2</b>	N/A	N/A	Q.71
<b>Stage 3S</b>	ETS 300 192 (ECMA-106)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR-018 (NOTE 5) NOTE 11	DI/SPS-5002 DE/SPS-5038 (NOTE 5) NOTE 11	Q.931 Q.939
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETR-018 (NOTE 5) NOTE 11	DI/SPS-5002 DE/SPS-5038 (NOTE 5) NOTE 11	Q.931 Q.939
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	--	N/A
<b>Stage 3N (NOTE 9)</b>	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
<b>End-to-end protocol</b>	ETS 300 082	ETS 300 082	G.711
<b>Terminal functions</b>	ETS 300 245-1 ETS 300 245-2	ETS 300 245-1 ETS 300 245-2	--
<b>Special terminal functions</b>	T/TE 04-91 T/TE 10-07 (C) T/TE 10-07 (D) T/TE 10-07 (G) DI/TE-04115	--	--

**A.5.6 Telephony 7 kHz**

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

**Table A.15: Telephony 7 kHz teleservice**

<b>Aspect</b>	<b>Base standard</b>	<b>Conformance test standard</b>	<b>Equivalent CCITT Recommendation</b>
<b>Stage 1</b>	ETS 300 263	N/A	--
<b>Stage 2</b>	ETS 300 265	N/A	--
<b>Stage 3S</b>	ETS 300 192 (ECMA-106)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 ETS 300 267 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 DE/SPS-5010 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	ETS 300 172 (ECMA-143)	N/A
<b>Stage 3N (NOTE 9)</b>	DE/SPS-6001.17	DE/SPS-6007	Q.761/62 Q.763/64
<b>End-to-end protocol</b>	ETS 300 281 ETS 300 144 ETS 300 143	T/TE 12-06B	G.722 G.725 H.221 H.242
<b>Terminal functions</b>	ETS 300 245-1 ETS 300 245-2	ETS 300 245-1 ETS 300 245-2	--
<b>Special terminal functions</b>	T/TE 10-07 (D) T/TE 10-07 (E) T/TE 10-07 (F) T/TE 10-07 (G)	--	--



**A.5.7 Videotelephony**

Type: Teleservice

Applicable to: Public ISDN, Private ISDN

**Table A.16: Videotelephony teleservice**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
<b>Stage 1</b>	ETS 300 264	N/A	F.121
<b>Stage 2</b>	ETS 300 266	N/A	--
<b>Stage 3S</b>	ETS 300 192 (ECMA-106) (NOTE 5)	--	Q.931
<b>Stage 3S/T</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-1/A2 ETS 300 102-2 DE/SPS-5010 (NOTE 5)	DI/SPS-5002 DE/SPS-5038  (NOTE 5)	Q.931
<b>Stage 3T (NOTE 8)</b>	ETS 300 102-1 ETS 300 102-1/A1 ETS 300 102-2/A2 ETS 300 102-2 DE/SPS-5010 (NOTE 5)	DI/SPS-5002 DE/SPS-5038 (NOTE 5)	Q.931
<b>Stage 3Q</b>	ETS 300 172 (ECMA-143)	ETS 300 172 (ECMA-143)	N/A
<b>Stage 3N (NOTE 9)</b>	DE/SPS-6001.07	DE/SPS-6004 DE/SPS-6007	Q.763/64 Q.761/62
<b>End-to-end protocol</b>	ETS 300 142 ETS 300 143 ETS 300 144 ETS 300 145 ETS 300 146	T/TE 06-11 DE/TE-04120	H.221 H.230 H.261 H.242 H.320
<b>Terminal functions</b>	DTR/HF-1008 DE/TE-04111 DE/TE-04112 DI/TE-04008.1 DI/TE-04008.3 DI/TE-04008.5 DI/TE-04008.7 DTR/TE-04008.8 DTR/TE-04113	--	--
<b>Special terminal functions</b>	DI/TE-04008.2 DI/TE-04008.4 DI/TE-04114	--	--

## A.6 Terminal applications of bearer services

### A.6.1 Channel aggregation (n\*64 kbit/s)

Type: Application                      Applicable to:      Public ISDN, Private ISDN

**Table A.17: Channel aggregation (n\*64 kbit/s) terminal application**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
End-to-end protocol	D/TE-?	--	--
Terminal	--	--	--

See NOTE 12.

### A.6.2 Teletex

Type: Teleservice                      Applicable to:      Public ISDN, Private ISDN

**Table A.18: Teletex teleservice**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	Q.767
End-to-end protocol	ETS 300 080 ETS 300 081 ETS 300 112	DE/TE-02024-2 ETS 300 081	T.90
Terminal functions	ETS 300 015	ETS 300 017	--
Special terminal functions	ETS 300 154 DE/TE-2015.1	DE/TE-2015.2	--

See NOTE 13.

### A.6.3 V.110 terminal adaptation

Type: Application                      Applicable to:      Public ISDN, Private ISDN

**Table A.19: V.110 terminal adaptation terminal application**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
End-to-end protocol	ETS 300 103	--	V.110/X.30
Terminal	--	--	--

See NOTE 12.

**A.6.4 X.31 case A**

Type: Application                      Applicable to:      Public ISDN, Private ISDN

**Table A.20: X.31 case A terminal application**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
End-to-end protocol	ETS 300 007	DE/SPS-5003	X.31
Terminal	--	--	--

See NOTE 12.

**A.6.5 Telefax G3**

Type: Application                      Applicable to:      Public ISDN, Private ISDN

**Table A.21: Telefax Group 3 application**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
End-to-end protocol	ETS 300 242 (NOTE 14) RE/TE-02020	ETS 300 242 (NOTE 14) RE/TE-02020	X.31
Terminal	--	--	--
Special terminal functions	DE/TE-2015.1	DE/TE-2015.2	--

See NOTE 13.

**A.7 Supplementary services**

**A.7.1 Additional Information Presentation (AIP)**

Type: Supplementary                      Applicable to:      Private ISDN

**Table A.22: Additional Information Presentation (AIP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0079 (ECMA-AIPSD-1)	N/A	--
Stage 2	DE/ECMA-0080 (ECMA-AIPSD-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--

**A.7.2 Advice Of Charge - at call set up time (AOC-S)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.23: Advice Of Charge - at call set up time (AOC-S) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 178 DE/ECMA-0009 (ECMA-ACSD)	N/A	I.256.2
Stage 2	ETS 300 181 DE/ECMA-0009 (ECMA-ACSD)	N/A	Q.86.2
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 182 DE/SPS-5028-K	T/S 46-34K DE/SPS-5029-K	Q.956.2
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 182 DE/SPS-5028-K	T/S 46-34K DE/SPS-5029-K	Q.956.2
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0051 (ECMA-QSIG-AC)	--	--
Stage 3N (NOTE 9)	N/A	N/A	N/A

**A.7.3 Advice Of Charge - at the end of the call (AOC-E)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.24: Advice Of Charge - at the end of the call (AOC-E) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 180 DE/ECMA-0009 (ECMA-ACSD)	N/A	I.256.2
Stage 2	ETS 300 181 DE/ECMA-0009 (ECMA-ACSD)	N/A	Q.86.2
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1)(NOTE 6)	ETS 300 182 DE/SPS-5028-K	T/S 46-34K DE/SPS-5029-K	Q.956.2
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 182 DE/SPS-5028-K	T/S 46-34K DE/SPS-5029-K	Q.956.2
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0051 (ECMA-QSIG-AOC)	--	--
Stage 3N (NOTE 9)	N/A	N/A	--

**A.7.4 Advice Of Charge - during the call (AOC-D)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.25: Advice Of Charge - during the call (AOC-D) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 179 DE/ECMA-0009 (ECMA-ACSD)	N/A	I.256.2
Stage 2	ETS 300 181 DE/ECMA-0009 (ECMA-ACSD)	N/A	Q.86.2
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 182 DE/SPS-5028-K	T/S 46-34K DE/SPS-5029-K	Q.956.2
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 182 DE/SPS-5028-K	T/S 46-34K DE/SPS-5029-K	Q.956.2
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0051 (ECMA-QSIG-AOC)	--	--
Stage 3N (NOTE 9)	N/A	N/A	--

**A.7.5 Call Deflection (CD)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.26: Call Deflection (CD) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 202 DE/ECMA-0071 (ECMA-DIVSD)	N/A	I.252.5
Stage 2	ETS 300 206 DE/ECMA-0071 (ECMA-DIVSD)	N/A	Q.82.5
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0061 (ECMA-QSIG-CD)	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.24	DE/SPS-6007	--

**A.7.6 Call Distribution to Attendant (CDA)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.27: Call Distribution to Attendant (CDA) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0081 (ECMA-CDASD-1)	N/A	--
Stage 2	DE/ECMA-0082 (ECMA-CDASD-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--

**A.7.7 Call Forwarding Busy (CFB)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.28: Call Forwarding Busy (CFB) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 199 ETS 300 256 (ECMA-173)	N/A	I.252.2
Stage 2	ETS 300 203 ETS 300 256 (ECMA-173)	N/A	Q.82.2
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 257 (ECMA-257)	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.23	DE/SPS-6007	Q.730

### A.7.8 Call Forwarding No Reply (CFNR)

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.29: Call Forwarding No Reply (CFNR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 201 ETS 300 256 (ECMA-173)	N/A	I.252.3
Stage 2	ETS 300 205 ETS 300 256 (ECMA-173)	N/A	Q.82.3
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 257 (ECMA-174)	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.23	DE/SPS-6007	Q.730

### A.7.9 Call Forwarding Unconditional (CFU)

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.30: Call Forwarding Unconditional (CFU) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 200 ETS 300 256 (ECMA-173)	N/A	I.252.4
Stage 2	ETS 300 204 ETS 300 256 (ECMA-256)	N/A	Q.82.4
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 207 DE/SPS-5028-R	T/S 46-34R DE/SPS-5029-R	Q.952.2-5
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 257 (ECMA-174)	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.23	DE/SPS-6007	Q.730

**A.7.10 Call Hold (HOLD)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.31: Call Hold (HOLD) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 139	N/A	I.253.2
Stage 2	ETS 300 140	N/A	Q.83.2
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 141 DE/SPS-5028-S	T/S 46-34S DE/SPS-5029-S	Q.953.2
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 141 DE/SPS-5028-S	T/S 46-34S DE/SPS-5029-S	Q.953.2
Stage 3Q (NOTE 4) (NOTE 7)	NOTE 15	N/A	--
Stage 3N (NOTE 9)	DE/SPS-6001.25	DE/SPS-6007	--

**A.7.11 Call Offer (CO)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.32: Call Offer (CO) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0008 (ECMA-COSD)	N/A	--
Stage 2	DE/ECMA-0008 (ECMA-COSD)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0052 (ECMA-QSIG-CO)	--	--



**A.7.12 Call Waiting (CW)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.33: Call Waiting (CW) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 056	N/A	I.253.1
Stage 2	ETS 300 057	N/A	Q.83.1
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 058 DE/SPS-5028-F	T/S 46-34F DE/SPS-5029-F	Q.953.1
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 058 DE/SPS-5028F	T/S 46-34F DE/SPS-5029F	Q.953.1
Stage 3Q (NOTE 4) (NOTE 7)	NOTE 16	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.26	DE/SPS-6007	--

**A.7.13 Calling Line Identification Presentation (CLIP)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.34: Calling Line Identification Presentation (CLIP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 089 ETS 300 173 (ECMA-148)	N/A	I.251.3
Stage 2	ETS 300 091 ETS 300 173 (ECMA-148)	N/A	Q.81.3
Stage 3S (NOTE 3)	ETS 300 191 (ECMA-157)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 092 DE/SPS-5028-C	T/S 46-34C DE/SPS-5029-C	Q.951.3
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 092 DE/SPS-5028-C	T/S 46-34C DE/SPS-5029-C	Q.951.3
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 192 (ECMA-143)	--	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.08	DE/SPS-6004 DE/SPS-6007	Q.767

**A.7.14 Calling Line Identification Restriction (CLIR)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.35: Calling Line Identification Restriction (CLIR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 090 ETS 300 173 (ECMA-148)	N/A	I.251.4
Stage 2	ETS 300 091 ETS 300 173 (ECMA-148)	N/A	Q.81.4
Stage 3S (NOTE 3)	ETS 300 191 (ECMA-157)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 093 DE/SPS-5028-D	T/S 46-34D DE/SPS-5029-D	Q.951.4
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 093 DE/SPS-5028-D	T/S 46-34D DE/SPS-5029-D	Q.951.4
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 192 (ECMA-143)	--	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.09	DE/SPS-6004 DE/SPS-6007	Q.767

**A.7.15 Calling Name Identification Presentation (CNIP)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.36: Calling Name Identification Presentation (CNIP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 237 (ECMA-163)	N/A	--
Stage 2	ETS 300 237 (ECMA-163)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 238 (ECMA-164)	--	--

### A.7.16 Calling/Connected Name Identification Restriction (CNIR)

Type: Supplementary                      Applicable to:      Private ISDN

**Table A.37: Calling/Connected Name Identification Restriction (CNIR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 237 (ECMA-163)	N/A	--
Stage 2	ETS 300 237 (ECMA-163)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 238 (ECMA-164)	--	--

### A.7.17 Charge Card Calling (CCC)

Type: Supplementary                      Applicable to:      Public ISDN

**Table A.38: Charge Card Calling (CCC) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10012	N/A	--
Stage 2		N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

### A.7.18 Closed User Group (CUG)

Type: Supplementary                      Applicable to:      Public ISDN

**Table A.39: Closed User Group (CUG) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 136	N/A	I.255.1
Stage 2	ETS 300 137	N/A	Q.85.1
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 138 DE/SPS-5028-H	T/S 46-34H DE/SPS-5029-H	Q.955.1
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 138 DE/SPS-5028-H	T/S 46-34H DE/SPS-5029-H	Q.955.1
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.14	DE/SPS 6004	Q.767

**A.7.19 Completion of Calls on No Reply (CCNR)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.40: Completion of Calls on No Reply (CCNR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0007 (ECMA-CCSD)	N/A	--
Stage 2	DE/ECMA-0007 (ECMA-CCSD)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0049) (ECMA-QSIG-CC)	--	--

**A.7.20 Completion of Calls to Busy Subscriber (CCBS)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.41: Completion of Calls to Busy Subscriber (CCBS) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-12211 DE/ECMA-0007 (ECMA-CCSD)	N/A	I.253.3
Stage 2	T/S 22-08 DE/ECMA-0007 (ECMA-CCSD)	N/A	Q.83.3
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	T/S 46-33G DE/SPS-5028.G	T/S 46-34G DE/SPS-5029.G	Q.953.3
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	T/S 46-33G DE/SPS-5028-G	T/S 46-34G DE/SPS-5029-G	Q.953.3
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0049 (ECMA-QSIG-CC)	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.27	DE/SPS-6007	--

**A.7.21 Conference Call Add On (CONF)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.42: Conference Call Add On (CONF) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 183 DE/ECMA-0011 (ECMA-CONFSD)	N/A	I.254.1
Stage 2	ETS 300 184 DE/ECMA-0011 (ECMA-CONFSD)	N/A	Q.84.1
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 185 DE/SPS-5028-J1	T/S 46-34J1 DE/SPS-5029-J1	Q.954.1
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 185 DE/SPS-5028-J1	T/S 46-34J1 DE/SPS-5029-J1	Q.954.1
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0050 (ECMA-QSIG-CONF)	--	--
Stage 3N (NOTE 9)	DE/SPS 6001.20	DE/SPS-6007	--

**A.7.22 Connected Line Identification Presentation (COLP)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.43: Connected Line Identification Presentation (COLP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 094 ETS 300 173 (ECMA-148)	N/A	I.252.5
Stage 2	ETS 300 096 ETS 300 173 (ECMA-148)	N/A	Q.81.5
Stage 3S (NOTE 3)	ETS 300 191 (ECMA-157)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 097 DE/SPS-5028-L	T/S 46-34L DE/SPS-5029-L	Q.951.5
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 097 DE/SPS-5028-L	T/S 46-34L DE/SPS-5029-L	Q.951.5
Stage 3Q	ETS 300 192 (ECMA-143)	--	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.10	DE/SPS-6004 DE/SPS-6007	Q.767

**A.7.23 Connected Line Identification Restriction (COLR)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.44: Connected Line Identification Restriction (COLR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 095 ETS 300 173 (ECMA-148)	N/A	I.251.6
Stage 2	ETS 300 096 ETS 300 173 (ECMA-148)	N/A	Q.81.6
Stage 3S (NOTE 3)	ETS 300 191 (ECMA-157)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 098 DE/SPS-5028-M	T/S 46-34M DE/SPS-5029-M	Q.951.6
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 098 DE/SPS-5028-M	T/S 46-34M DE/SPS-5029-M	Q.951.6
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 192 (ECMA-143)	--	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.11	DE/SPS-6004 DE/SPS-6007	Q.767

**A.7.24 Connected Name Identification Presentation (CONP)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.45: Connected Name Identification Presentation (CONP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 237 (ECMA-163)	N/A	--
Stage 2	ETS 300 237 (ECMA-163)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 238 (ECMA-164)	--	--

**A.7.25 Controlled Diversion (CDIV)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.46: Controlled Diversion (CDIV) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	RE/ECMA-0019 (ECMA-173)	N/A	--
Stage 2	RE/ECMA-0019 (ECMA-173)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	RE/ECMA-0058 (ECMA-174)	--	--

**A.7.26 Controlled Diversion Consult (CDIVC)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.47: Controlled Diversion Consult (CDIVC) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	RE/ECMA-0019 (ECMA-173)	N/A	--
Stage 2	RE/ECMA-0019 (ECMA-173)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	RE/ECMA-0058	--	--

**A.7.27 Direct Dialling In (DDI)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.48: Direct Dialling In (DDI) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 062	N/A	I.251.1
Stage 2	ETS 300 063	N/A	Q.81.1
Stage 3S (NOTE 3)	N/A	N/A	N/A
Stage 3S/T (NOTE 1) (NOTE 6)	N/A	N/A	N/A
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 064 DE/SPS-5028-A	T/S 46-34A DE/SPS-5029-A	Q.951.1
Stage 3Q (NOTE 4) (NOTE 7)	N/A	N/A	N/A
Stage 3N (NOTE 9)	N/A	N/A	N/A

**A.7.28 Do Not Disturb (DND)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.49: Do Not Disturb (DND) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0013 (ECMA-DND(O)SD)	N/A	--
Stage 2	DE/ECMA-0013 (ECMA-DND(O)SD)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0054 (ECMA-QSIG-DND)	--	--



**A.7.29 Do Not Disturb Override (DNDO)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.50: Do Not Disturb Override (DNDO) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0013 (ECMA-DND(O)SD)	N/A	--
Stage 2	DE/ECMA-0013 (ECMA-DND(O)SD)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0054 (ECMA-QSIG-DND)	--	--

**A.7.30 Explicit Call Transfer (ECT)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.51: Explicit Call Transfer (ECT) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	T/NA1 (89) 22.1 ETS 300 260 (ECMA-177)	N/A	I.252.1
Stage 2	T/S 22-21,1 ETS 300 260 (ECMA-177)	N/A	Q.82.1
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	T/S 46-33Q1 DE/SPS-5028-Q1	T/S 46-34Q DE/SPS-5029-Q1	Q.952.1
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	T/S 46-33Q1 DE/SPS-5028-Q1	T/S 46-34Q DE/SPS-5029-Q1	Q.952.1
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 261 (ECMA-178)	--	--
Stage 3N (NOTE 9)	DE/SPS-6001.22	DE/SPS-6007	--

**A.7.31 Freephone (FPH)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.52: Freephone (FPH) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 208	N/A	--
Stage 2	ETS 300 209	N/A	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 210 DE/SPS-5028-P	T/S 46-34P DE/SPS-5029-P	--
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 210 DE/SPS-5028-P	T/S 46-34P DE/SPS-5029-P	--
Stage 3N (NOTE 9)	DE/SPS-6001.21	DE/SPS-6007	--

**A.7.32 In-call Modification (IM)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.53: In-Call Modification (IM) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10002 DE/ECMA-0018 (ECMA-IMSD)	N/A	--
Stage 2	-- DE/ECMA-0018 (ECMA-IMSD)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0057 (ECMA-QSIG-IM)	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.33 Intrusion (INTR)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.54: Intrusion (INTR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0010 (ECMA-INTR-1)	N/A	--
Stage 2	DE/ECMA-0099 (ECMA-INTR-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q	DE/ECMA-0053 (ECMA-QSIG-INTR)	--	--

**A.7.34 Line Hunting/Trunk Hunting (LHTH)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.55: Line Hunting/Trunk Hunting (LHTH) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10003	N/A	--
Stage 2	--	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--
Stage 3N (NOTE 9)	--	--	--



**A.7.38 Multiple Subscriber Number (MSN)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.59: Multiple Subscriber Number (MSN) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 050 ETS 300 171 (NOTE 18) (ECMA-142)	N/A	I.251.2
Stage 2	ETS 300 051 ETS 300 171 (NOTE 18) (ECMA-142)	N/A	Q.81.2
Stage 3S (NOTE 3)	ETS 300 192 (NOTE 18) (ECMA-106)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 052 DE/SPS-5028-B	T/S 46-34B DE/SPS-5029-B	Q.951.2
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	N/A	N/A	N/A
Stage 3Q (NOTE 4) (NOTE 7)	N/A	N/A	N/A
Stage 3N (NOTE 9)	N/A	N/A	N/A

**A.7.39 Network Interception (NINT)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.60: Network Interception (NINT) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0089 (ECMA-NISD-1)	N/A	--
Stage 2	DE/ECMA-0090 (ECMA-NISD-2)	N/A	--
Stage 3S	--	--	--
Stage 3Q	DE/ECMA-0103 (ECMA-NISD-3)	--	--

**A.7.40 Night Service (NS)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.61: Night Service (NS) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0085 (ECMA-NSSD-1)	N/A	--
Stage 2	DE/ECMA-0086 (ECMA-NSSD-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0059 (ECMA-QSIG-NS)	--	--

**A.7.41 Outgoing Call Barring (OCB)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.62: Outgoing Call Barring (OCB) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10006	N/A	--
Stage 2	--	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.42 Premium Rate (PRM)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.63: Premium Rate (PRM) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10009	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.43 Recall (RE)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.64: Recall (RE) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0100 (ECMA-RESD-1)	N/A	--
Stage 2	DE/ECMA-0101 (ECMA-RESD-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0102 (ECMA-RESD-3)	--	--

**A.7.44 Remote Control of Supplementary Services (RCSS)**

Type: Supplementary                      Applicable to:      Public ISDN, Private ISDN

**Table A.65: Remote Control of Supplementary Services (RCSS) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10009	N/A	--
Stage 2	--	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.45 Reverse Charging - at call set up time (REV-S)**

Type: Supplementary                      Applicable to:      Public ISDN

**Table A.66: Reverse Charging At Call Set Up Time (REV-S) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10016	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--



#### A.7.46 Selective Call Forwarding Busy (SCFB)

Type: Supplementary                      Applicable to:     Public ISDN

**Table A.67: Selective Call Forwarding Busy (SCFB) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10008	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

#### A.7.47 Selective Call Forwarding No Reply (SCFNR)

Type: Supplementary                      Applicable to:     Public ISDN

**Table A.68: Selective Call Forwarding No Reply (SCFNR) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10008	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

#### A.7.48 Selective Call Forwarding Unconditional (SCFU)

Type: Supplementary                      Applicable to:     Public ISDN

**Table A.69: Selective Call Forwarding Unconditional (SCFU) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10008	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.49 Serial Call (SC)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.70: Serial Call (SC) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0075 (ECMA-SESD-1)	N/A	--
Stage 2	DE/ECMA-0076 (ECMA-SESD-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--

**A.7.50 Subaddressing (SUB)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.71: Subaddressing (SUB) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 059 ETS 300 171 (NOTE 19) (ECMA-142)	N/A	I.251.8
Stage 2	ETS 300 060 ETS 300 171 (NOTE 19) (ECMA-142)	N/A	Q81.8
Stage 3S (NOTE 3)	ETS 300 192 (NOTE 19) (ECMA-106)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 061 DE/SPS-5028-I	T/S 46-34I DE/SPS-5029-I	Q.951.8
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 061 DE/SPS-5028-I	T/S 46-34I DE/SPS-5029-I	Q.951.8
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 172 (NOTE 19) (ECMA-143)	--	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.15	DE/SPS-6004 DE/SPS-6007	Q.767

**A.7.51 Supervisory Information Presentation (SIP)**

Type: Supplementary

Applicable to: Private ISDN

**Table A.72: Supervisory information presentation (SIP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0077 (ECMA-SIPSD-1)	N/A	--
Stage 2	DE/ECMA-0078 (ECMA-SIPSD-2)	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--

**A.7.52 Support of Private Numbering Plan (SPNP)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.73: Support of Private Numbering Plan (SPNP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10004	N/A	--
Stage 2	--	N/A	--
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.53 Televoting (VOT)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.74: Televoting (VOT) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10015	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.54 Terminal Portability (TP)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.75: Terminal Portability (TP) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 053 ETS 300 171 (NOTE 20) (ECMA-142)	N/A	--
Stage 2	ETS 300 054 ETS 300 171 (NOTE 20) (ECMA-142)	N/A	--
Stage 3S (NOTE 3)	ETS 300 192 (NOTE 20) (ECMA-106)	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 055 DE/SPS-5028-E	T/S 46-34E DE/SPS-5029-E	Q.931 _ 5.6
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 055 DE/SPS-5028-E	T/S 46-34E DE/SPS-5029-E	Q.931 _ 5.6
Stage 3Q (NOTE 4) (NOTE 7)	(NOTE 21)	N/A	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.12	DE/SPS-6004 DE/SPS-6007	Q.767

**A.7.55 Three Party (3PTY)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.76: Three Party (3PTY) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 186 NOTE 22	N/A	I.254.2
Stage 2	ETS 300 187	N/A	Q.84.2
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 188 DE/SPS-5028-J2	T/S 46-34J2 DE/SPS-5029-J2	Q.954.2
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 188 DE/SPS-5028-J2	T/S 46-34J2 DE/SPS-5029-J2	Q.954.2
Stage 3N (NOTE 9)	DE/SPS 6001.29	DE/SPS 6007	--

**A.7.56 Unconditional Reverse Charging (REV-U)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.77: Unconditional Reverse Charging (REV-U) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10017	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.57 Universal Access Number (UAN)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.78: Universal Access Number (UAN) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10011	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 1)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

**A.7.58 User-to-user Signalling (UUS)**

Type: Supplementary

Applicable to: Public ISDN, Private ISDN

**Table A.79: User-user Signalling (UUS) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 284 DE/ECMA-0021 (ECMA-UUSD)	N/A	I.257.1
Stage 2	ETS 300 285 DE/ECMA-0021 (ECMA-UUSD)	N/A	Q.87.1
Stage 3S (NOTE 3)	--	--	--
Stage 3S/T (NOTE 1) (NOTE 6)	ETS 300 286 DE/SPS-5028-T	T/S 46-34T DE/SPS-5029-T	Q.931 _ 7 Q.957.1
Stage 3T (NOTE 2) (NOTE 6) (NOTE 8)	ETS 300 286 DE/SPS-5028-T	T/S 46-34T DE/SPS-5029-T	Q.931 _ 7 Q.957.1
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0074 (ECMA-QSIG-UU)	--	--
Stage 3N (NOTE 9)	ETS 300 121 DE/SPS-6001.13 DE/SPS-6001.28	DE/SPS 6004	Q.767

**A.7.59 Virtual Card Calling (VCC)**

Type: Supplementary

Applicable to: Public ISDN

**Table A.80: Virtual Card Calling (VCC) supplementary service**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/NA-10013	N/A	--
Stage 2	--	N/A	--
Stage 3S/T (NOTE 3)	--	--	--
Stage 3T (NOTE 2) (NOTE 8)	--	--	--
Stage 3N (NOTE 9)	--	--	--

## A.8 Additional Network Features

### A.8.1 ANF Alternate Routing Indication (ANF-ARI)

Type: ANF                      Applicable to:      Private ISDN

**Table A.81: ANF Alternate Routing Indication (ANF-ARI)**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0069 (ECMA-RISD)	N/A	--
Stage 2	DE/ECMA-0069 (ECMA-RISD)	N/A	--
Stage 3S	--	--	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--

### A.8.2 ANF Common Information (ANF-CI)

Type: ANF                      Applicable to:      Private ISDN

**Table A.82: ANF Common Information (ANF-CI)**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0070 (ECMA-CISD)	N/A	--
Stage 2	DE/ECMA-0070 (ECMA-CISD)	N/A	--
Stage 3Q (NOTE 4) (NOTE 7)	--	--	--

### A.8.3 ANF Path Replacement (ANF-PR)

Type: ANF                      Applicable to:      Private ISDN

**Table A.83: ANF Path Replacement (ANF-PR)**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	ETS 300 258 (ECMA-175)	N/A	--
Stage 2	ETS 300 258 (ECMA-175)	N/A	--
Stage 3Q (NOTE 4) (NOTE 7)	ETS 300 259 (ECMA-176)	--	--

#### A.8.4 ANF Route Restriction (ANF RR)

Type: ANF                      Applicable to:      Private ISDN

**Table A.84: ANF Route Restriction (ANF RR)**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0017 (ECMA-RRSD)	N/A	--
Stage 2	DE/ECMA-0017 (ECMA-RRSD)	N/A	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0056 (ECMA-QSIG-RR)	--	--

#### A.8.5 ANF Source Routing (ANF-SR)

Type: ANF                      Applicable to:      Private ISDN

**Table A.85: ANF Source Routing (ANF-SR)**

Aspect	Base standard	Conformance test standard	Equivalent CCITT Recommendation
Stage 1	DE/ECMA-0015 (ECMA-RISD)	N/A	--
Stage 2	DE/ECMA-0015 (ECMA-RISD)	N/A	--
Stage 3Q (NOTE 4) (NOTE 7)	DE/ECMA-0060 (ECMA-QSIG-SR)	--	--



## Annex B: ISDN physical interfaces

### B.1 Introduction

The tables contained in this Annex list all the ETSs required for defining interfaces, for a number of transmission networks, independent of the telecommunications service.

The interfaces are defined in B.4 onwards. Each interface is described in a matrix. The rows define a particular layer, or aspect of a layer, in the ISDN protocol stack.

For each of these rows a column entry gives the relevant ETSs specifying the requirements, conformance testing and regulatory requirements. Each entry includes ETRs where relevant, and there is a column for the CCITT Recommendations related to the requirement's ETS.

### B.2 Identification of interfaces

Table B.1 gives an overview of the information within this Annex. This matrix identifies the desired transmission network in the vertical direction. The horizontal entries define:

- a) **Access interfaces:** the tables within Annex B which define interfaces which may be used to access that transmission network;
- b) **Interconnection interfaces:** the tables within Annex B which define interfaces for interconnection of like transmission networks. This only covers the ISDN; all other interconnection interfaces are outside the scope of this document;
- c) **Services:** an identification of the services available from the transmission network using the identified interface.

**Table B.1: Overview of interfaces**

<b>Transmission network</b>	<b>Access interfaces</b>	<b>Interconnection interfaces</b>	<b>Telecommunication services</b>
<b>ISDN (private or public)</b>	Basic see subclause B.4.1	see subclause B.4.4	see Annex A
	Primary rate see subclause B.4.2		
	Dedicated primary rate see subclause B.4.3		
<b>Digital cross connect</b>	2048 kbit/s see subclause B.5	Outside the scope of this ETR	circuit-mode 64 kbit/s digital unrestricted with 8 kHz integrity (permanent)
<b>Transmission network providing ONP digital leased lines</b>	64 kbit/s unstructured see subclause B.6.1	Outside the scope of this ETR	circuit-mode 64 kbit/s digital unrestricted with 8 kHz integrity (permanent)
	2048 kbit/s structured see subclause B.6.2	Outside the scope of this ETR	circuit-mode 1984 kbit/s digital unrestricted with 8 kHz integrity (permanent)
	2048 kbit/s unstructured see subclause B.6.3	Outside the scope of this ETR	circuit-mode 2048 kbit/s digital unrestricted (permanent)

**B.3 Notes to tables in Annex B**

The tables in Annex B reference some notes contained in this subclause. These references are of the form "(NOTE x)". The notes are as follows:

- NOTE 1: Where ETS 300 153 (NET 3 part 1) is cited as containing the regulatory requirements, it should be noted that this ETS will be replaced by TBR 003 (work item DTBR/TE-05003) when this is published.
- NOTE 2: There are currently no ETSs specifying EMC requirements to be applied to this interface. However, generic EMC requirements contained in ENs supporting the EMC Directive (89/336/EEC) apply.
- NOTE 3: Work item DE/SPS-5035 is in progress to produce a revised standard covering both public ISDN access and private ISDN access and interconnection.
- NOTE 4: Where ETS 300 104 (NET 3 part 2) is cited as containing the regulatory requirements, it should be noted that this ETS will be replaced by TBR 003 (work item DTBR/TE-05003) when this is published.
- NOTE 5: Where ETS 300 156 (NET 5) is cited as containing the regulatory requirements, it should be noted that this ETS will be replaced by TBR 004 (work item DTBR/BT-2035) when this is published.
- NOTE 6: ETR 012 gives guidance concerning safety categories and protection levels for telecommunications equipment in customer premises.

## B.4 ISDN interfaces

### B.4.1 Basic access

This covers the basic access for application at the T reference point, S reference point, and coincident S and T reference point.

#### B.4.1.1 Basic access layer 1

Table B.2: Layer 1 for public ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 012	ETS 300 012	ETS 300 153 (NOTE 1)	I.430
<b>Safety and protection (NOTE 6)</b>	ETS 300 047-1 ETS 300 047-2 ETS 300 047-3 ETS 300 047-4 ETS 300 047-5	ETS 300 047-1 ETS 300 047-2 ETS 300 047-3 ETS 300 047-4 ETS 300 047-5	ETS 300 153 (NOTE 1)	K.22
<b>Maintenance</b>	ETR 001	N/A	N/A	I.601 I.603
<b>EMC</b>	(NOTE 2)	--	ETS 300 153 (NOTE 1)	--

Table B.3: Layer 1 for private ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 012	ETS 300 012	N/A	I.430
<b>Safety and protection (NOTE 6)</b>	ETS 300 047-1 ETS 300 047-2 ETS 300 047-3 ETS 300 047-4 ETS 300 047-5	ETS 300 047-1 ETS 300 047-2 ETS 300 047-3 ETS 300 047-4 ETS 300 047-5	N/A	K.22
<b>Maintenance</b>	--	N/A	N/A	I.601 I.603
<b>EMC</b>	(NOTE 2)	--	N/A	--

#### B.4.1.2 Basic access layer 2

Table B.4: Layer 2 (control plane) for public ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 125 I-ETS 300 305 I-ETS 300 307 (NOTE 3)	I-ETS 300 313 DE/SPS-5037 I-ETS 300 309 I-ETS 300 311	ETS 300 153 (NOTE 1)	Q.920 Q.921

**Table B.5: Layer 2 (control plane) for private ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	I-ETS 300 169 (ECMA-105) (NOTE 3)	(NOTE 3)	N/A	Q.920 Q.921

**B.4.1.3 Basic access signalling network application**

**Table B.6: Signalling network application (control plane) for public ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description - basic call</b>	ETS 300 102-1 ETS 300 102-1/A 1 ETS 300 102-1/A 2 ETS 300 102-2 I-ETS 300 314 I-ETS 300 316	I-ETS 300 322 DE/SPS-5038 I-ETS 300 318 I-ETS 300 320	ETS 300 104 (NOTE 4) (NOTE 7)	Q.931
<b>Description - generic mechanisms for supplementary services</b>	ETS 300 122 DE/SPS-5040 ETS 300 196 DE/SPS-5039	DE/SPS-5004 DE/SPS-5029 DE/SPS-5005 DE/SPS-5029	N/A	Q.932

**Table B.7: Signalling network application (control plane) for private ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description - basic call</b>	ETS 300 192 (ECMA-106) DE/ECMA-0025	--	N/A	Q.931
<b>Description - generic mechanisms for supplementary services</b>	ETS 300 190 (ECMA-156) DE/ECMA-0026 ETS 300 240 (ECMA-161)	--	N/A	Q.932

**B.4.2 Primary rate access**

This covers the primary rate access for application at the T reference point, S reference point, and coincident S and T reference point.

B.4.2.1 Primary rate access layer 1

Table B.8: Layer 1 for public ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 011	ETS 300 011	ETS 300 156 (NOTE 5)	I.431
<b>Safety and protection (NOTE 6)</b>	ETS 300 046-1 ETS 300 046-2 ETS 300 046-3 ETS 300 046-4 ETS 300 046-5	ETS 300 046-1 ETS 300 046-2 ETS 300 046-3 ETS 300 046-4 ETS 300 046-5	ETS 300 156 (NOTE 5)	K.22
<b>Maintenance</b>	--	N/A	N/A	I.601 I.603
<b>EMC</b>	(NOTE 2)	--	ETS 300 156 (NOTE 5)	--

Table B.9: Layer 1 for private ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 011	ETS 300 011	N/A	I.431
<b>Safety and protection (NOTE 6)</b>	ETS 300 046-1 ETS 300 046-2 ETS 300 046-3 ETS 300 046-4 ETS 300 046-5	ETS 300 046-1 ETS 300 046-2 ETS 300 046-3 ETS 300 046-4 ETS 300 046-5	N/A	K.22
<b>Maintenance</b>	--	N/A	N/A	I.601 I.603
<b>EMC</b>	(NOTE 2)	--	N/A	--

B.4.2.2 Primary rate access layer 2

Table B.10: Layer 2 (control plane) for public ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 125 I-ETS 300 306 I-ETS 300 308 (NOTE 3)	I-ETS 300 313 DE/SPS-5037 I-ETS 300 310 I-ETS 300 312	ETS 300 156 (NOTE 5)	Q.920 Q.921

Table B.11: Layer 2 (control plane) for private ISDN

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	I-ETS 300 169 (ECMA-105) (NOTE 3)	(NOTE 3)	N/A	Q.920 Q.921

**B.4.2.3 Primary rate access signalling network application**

**Table B.12: Signalling network application (control plane) for public ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 102-1 ETS 300 102-1/A 1 ETS 300 102-1/A 2 ETS 300 102-2 I-ETS 300 315 I-ETS 300 317	I-ETS 300 322 DE/SPS-5038 I-ETS 300 319 I-ETS 300 321	ETS 300 156 (NOTE 5)	Q.931
<b>Description - generic mechanisms for supplementary services</b>	ETS 300 122 DE/SPS-5040 ETS 300 196 DE/SPS-5039	DE/SPS-5004 DE/SPS-5029 DE/SPS-5005 DE/SPS-5029	N/A	Q.932

**Table B.13: Signalling network application (control plane) for private ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description - basic call</b>	ETS 300 192 (ECMA-106) DE/ECMA-0025	--	N/A	Q.931
<b>Description - generic mechanisms for supplementary services</b>	ETS 300 190 (ECMA-156) DE/ECMA-0026 ETS 300 240 (ECMA-161)	--	N/A	Q.932

**B.4.3 Primary rate leased-line**

This covers interfaces for application to the scenarios described in Annex C.

**Table B.14: Layer 1**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 011 Annex A	ETS 300 011 Annex A	--	--
<b>Safety and protection (NOTE 6)</b>	ETS 300 046-1 ETS 300 046-2 ETS 300 046-3 ETS 300 046-4 ETS 300 046-5	ETS 300 046-1 ETS 300 046-2 ETS 300 046-3 ETS 300 046-4 ETS 300 046-5	--	K.22
<b>Maintenance</b>	--	N/A	N/A	I.601 I.603
<b>EMC</b>	(NOTE 2)	--	--	--

**B.4.4 ISDN interconnection**

This covers interfaces for application at the N reference point and at the Q reference point.

**Table B.15: Interconnection interface (control plane) for public ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Message transfer part (MTP)</b>	ETS 300 008 ETS 300 008/A1 T/S 43-04	T/S 43-17  T/S 43-04	N/A	Q.701, Q.709
<b>Signalling connection control part (SCCP)</b>	ETS 300 009 DE/SPS-2003	T/S 43-18 DE/SPS-2003	N/A	Q.711, Q.714, Q.716
Integrated services user part (ISUP)	ETS 300 121 DE/SPS-6001	DE/SPS-6004 DE/SPS-6007	N/A	Q.767 Q.761, Q.762, Q.763, Q.764, Q.768
<b>Transaction capabilities application part (TCAP)</b>	ETS 300 134 ETS 300 287	DE/SPS-6005 ETS 300 287	N/A	--

**Table B.16: Interconnection interface (control plane) for private ISDN**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Layer 1</b>	See Annex C: Private ISDN network scenarios			
<b>Layer 2</b>	ETS 300 170 (ECMA-141)	--	N/A	Q.920 Q.921
<b>Layer 3 - basic call</b>	ETS 300 172 (ECMA-143) DE/ECMA-0044	--	N/A	Q.931
<b>Layer 3 - generic mechanisms for supplementary services</b>	ETS 300 239 (ECMA-165)	--	N/A	Q.932

## B.5 Digital cross-connect network

This covers interfaces for application to the scenarios described in Annex C.

**Table B.17: Layer 1**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 010-1 DE/TM-1014-2	--	--	--
<b>Safety and protection (NOTE 6)</b>	--	--	--	--
<b>Maintenance</b>	--	N/A	N/A	--
<b>EMC</b>	(NOTE 2)	--	--	--

## B.6 Transmission network providing ONP digital leased-lines

This covers interfaces for application to the scenarios described in Annex C.

### B.6.1 64 kbit/s unstructured digital leased-line interface

**Table B.18: Layer 1**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	ETS 300 288 ETS 300 290	ETS 300 288 ETS 300 290	ETS 300 288 TBR 014	G.703
<b>Safety and protection</b>	ETS 300 288 ETS 300 290	ETS 300 288 ETS 300 290	ETS 300 288 TBR 014	--
<b>Maintenance</b>	--	--	--	--
<b>EMC</b>	ETS 300 288 ETS 300 290	ETS 300 288 ETS 300 290	ETS 300 288 TBR 014	--

### B.6.2 2048 kbit/s structured digital leased-line interface

**Table B.19: Layer 1**

Items	ETS/ETR	Conformance	Regulatory requirements	Related CCITT Recommendation
<b>Description</b>	DE/BT-2021 DE/BT-2023	DE/BT-2021 DE/BT-2023	DE/BT-2021 DTBR/BT-2037	G.703
<b>Safety and protection</b>	DE/BT-2021 DE/BT-2023	DE/BT-2021 DE/BT-2023	DE/BT-2021 DTBR/BT-2037	--
<b>Maintenance</b>	--	--	--	--
<b>EMC</b>	DE/BT-2021 DE/BT-2023	DE/BT-2021 DE/BT-2023	DE/BT-2021 DTBR/BT-2037	--



**B.6.3 2048 kbit/s unstructured digital leased-line interface**

**Table B.20: Layer 1**

<b>Items</b>	<b>ETS/ETR</b>	<b>Conformance</b>	<b>Regulatory requirements</b>	<b>Related CCITT Recommendation</b>
<b>Description</b>	ETS 300 246 ETS 300 248	ETS 300 246 ETS 300 248	ETS 300 246 TBR 012	G.703
<b>Safety and protection</b>	ETS 300 246 ETS 300 248	ETS 300 246 ETS 300 248	ETS 300 246 TBR 012	--
<b>Maintenance</b>	--	--	--	--
<b>EMC</b>	ETS 300 246 ETS 300 248	ETS 300 246 ETS 300 248	ETS 300 246 TBR 012	--

## Annex C: Private ISDN network scenarios

### C.1 Introduction

The tables in this Annex list the standards (or point to other tables listing standards) required to define overlay network scenarios for the interconnection of Private Telecommunication Network Exchanges (PTNXs) to construct private telecommunication networks (private ISDNs).

The scenario matrices appear in Clauses C.4 onwards.

### C.2 Notes to tables in Annex C

The tables in Annex C reference some notes contained in this sub-clause. These references are of the form "(NOTE x)". The notes are as follows:

NOTE 1: For the case where this bearer service intersects with the row for "ONP leased line", NOTE 2 below applies.

NOTE 2: No bearer service definition of the kind used for ISDN formally exists for this service. The description indicated is the best description available of the service offered. This service is only offered by a specific type of ONP leased line.

NOTE 3: No packet mode user information connection types are currently specified.

NOTE 4: There are currently no signalling connection types specified for use by direct connection to X.25 PSPDN (i.e. CCITT Recommendation X.32 and X.31 case A).

NOTE 5: There is currently no work item in the ETSI work programme for the development of a functional standard at the C reference point for the case where User signalling bearer service is used for signalling connections.

NOTE 6: The physical interface to be used in this scenario is left unspecified as it may vary from case to case. It can be selected from a number of possibilities, including Primary Rate Interface, ONP leased line interface, optical fibre interface, etc.

NOTE 7: When the UUS 3 supplementary service is used as a signalling connection it is in association with one of the bearer services used for the establishment of the user information connection(s).

### C.3 Guide to network scenarios

Each network scenario is described in a scenario matrix. A network scenario is comprised of a combination of "Signalling Connections" (SC) and "User Information Connections" (UIC) provided via the infrastructure of public telecommunications networks, the "Intervening Network" (IVN). Further information on network scenarios and connections for interconnecting PTNXs can be found in ENV 41006 "Scenarios for interconnections between exchanges of private telecommunication networks" and TCR-TR 010 "Business Telecommunications (BT); Provision of connections for interconnecting Private Telecommunication Network Exchanges (PTNX)".

NOTE: ENV 41006 will be superseded by a new ETS entitled "Business Telecommunications (BT); PTN functional requirements; Part 3: Overlay scenarios - principles and classification". This ETS is currently being prepared by ETSI under work item DE/BT-1028.

Various bearer services can be used as a basis for a signalling connection or a user information connection. Multiple combinations of these lead to many different types of network scenario. For simplification in this annex, tables are only given for scenarios where the Intervening Network type is the same for both signalling connection and user information connection. This does not, however, preclude other combinations from being offered by the public telecommunications network or from being used by private telecommunications network operators.

Table C.1 shows the bearer services that can be supported by different types of Intervening Network. Intervening network types are listed down the table and bearer services are listed across the table. For each bearer service, a reference is given in brackets to a table in Annex A or Annex B, where the definition of the service can be found.

**Table C.1: Bearer services supported by different Intervening Networks**

IVN type	Bearer service type								
	Circuit-mode 3,1 kHz audio (A.1)	Circuit-mode 64 kbit/s digital unrestricted with 8 kHz integrity (A.2) (NOTE 1)	Circuit-mode 1984 kbit/s digital unrestricted with 8 kHz integrity (B.19) (NOTE 2)	Circuit-mode 2048 kbit/s digital unrestricted (B.20) (NOTE 2)	Circuit-mode speech (A.3)	Frame mode bearer service (A.4)	Multi-rate bearer service (A.5)	Packet mode (X.31 case B) B- and D-channel (A.6)	User signalling bearer service (A.7)
Dedicated physical links	No	Yes	Yes	Yes	No	No	No	No	No
Primary rate leased line	Yes	Yes	Yes	Yes	Yes	No	No	No	No
ONP leased line	No	Yes (NOTE 2) (B.18)	Yes	Yes	No	No	No	No	No
Digital cross-connect	No	Yes	No	No	No	No	No	No	No
ISDN (circuit-mode)	Yes	Yes	No	No	Yes	No	Yes	Yes	No
ISDN (packet mode)	No	No	No	No	No	Yes	No	Yes	No
ISDN with USBS	Yes	Yes	No	No	Yes	Yes	Yes	Yes	Yes
X.25 PSPDN	No	No	No	No	No	No	No	No	No

Tables C.2 and C.3 relate bearer service types to scenario connection types (signalling connection and user information connection types). For each bearer service, a reference is given in brackets to a table in Annex A or Annex B, where the definition of the service can be found.

**Table C.2: Relation of bearer service types to signalling connection types**

SC type	Bearer service type								
	Circuit-mode 3,1 kHz audio (A.1)	Circuit-mode 64 kbit/s digital un-restricted with 8 kHz integrity (A.2)	Circuit-mode 1984 kbit/s digital un-restricted unstruct. with 8 kHz integrity (B.19) (NOTE 2)	Circuit-mode 2048 kbit/s digital un-restricted unstruct. (B.20) (NOTE 2)	Circuit-mode speech (A.3)	Frame mode bearer service (A.4)	Multi-rate bearer service (A.5)	Packet mode (X.31 case B) B- and D-channel (A.6)	User signalling bearer service (A.7)
Circuit-mode dedicated	No	Yes	No	No	No	No	No	No	No
Circuit-mode semi-permanent	No	Yes	No	No	No	No	No	No	No
Circuit-mode switched	No	Yes	No	No	No	No	No	No	No
Signalling bearer service semi-permanent	No	No	No	No	No	No	No	No	Yes
Signalling bearer service switched	No	No	No	No	No	No	No	No	Yes
UUS service 3	No	No	No	No	No	No	No	No	No
PMBS X.31 case B semi-permanent	No	No	No	No	No	No	No	Yes	No
PMBS X.31 case B switched	No	No	No	No	No	No	No	Yes	No

**Table C.3: Relation of bearer service types to user information connection types**

UIC type	Bearer service type								
	Circuit-mode 3,1 kHz audio  (A.1)	Circuit-mode 64 kbit/s digital un- restricted with 8 kHz integrity  (A.2)	Circuit-mode 1984 kbit/s digital un- restricted unstruct. with 8 kHz integrity  (B.19) (NOTE 2)	Circuit-mode 2048 kbit/s digital un- restricted unstruct.  (B.20) (NOTE 2)	Circuit-mode speech  (A.3)	Frame mode bearer service  (A.4) (NOTE 3)	Multi-rate bearer service  (A.5) (NOTE 3)	Packet mode (X.31 case B) B- and D- channel  (A.6) (NOTE 3)	User signalling bearer service  (A.7) (NOTE 3)
<b>(NOTE 3)</b>									
Dedicated circuit-mode	No	Yes	Yes	Yes	No	No	No	No	No
Semi- permanent circuit-mode	Yes	Yes	Yes	Yes	Yes	No	No	No	No
Switched circuit-mode	Yes	Yes	Yes	Yes	Yes	No	No	No	No

Table C.4 points to the scenario matrices from the point of view of scenario connection types. For each combination of Intervening Network and connection type the table points to the relevant scenario matrix. Each entry points to the relevant scenario matrix in Clause C.4. Blank entries indicate combinations that cannot occur. References in brackets ( ) indicate the relevant scenario class from ENV 41006.

**Table C.4: Pointers to scenario matrices**

<b>Intervening network type:</b>		Dedicated physical links	Primary rate leased line	ONP leased line	Digital cross-connect	ISDN (circuit-mode)	ISDN (packet mode)	ISDN with USBS	X.25 PSPDN (NOTE 4)
<b>SC type:</b>	Circuit-mode dedicated	C.5 (1.1)	C.6 (1.2)	C.7 (1.2)					
	Circuit-mode semi-permanent				C.8 (1.2)	C.9 (2.1)			
	Circuit-mode switched					C.10 (3.1)			
	Signalling bearer service semi-permanent							C.14 (2.2)	
	Signalling bearer service switched							C.15 (3.2)	
	UUS service 3					C.11			
	PMBS X.31 case B semi-permanent						C.12 (2.3)		
	PMBS X.31 case B switched						C.13 (3.3)		
<b>UIC type:</b>	Dedicated circuit-mode	C.5 (1.1)	C.6 (1.2)	C.7 (1.2)					
	Semi-permanent circuit-mode				C.8 (1.2)	C.9 (2.1)	C.12 (2.3)	C.14 (2.2)	
	Switched circuit-mode					C.10 C.11 (2.1)	C.13 (2.3)	C.15 (3.2)	

## C.4 Network scenarios

### C.4.1 Explanation of tables in Clause C.4

This Clause contains the scenario matrices for the combinations of signalling connection type and user information connection type through various kinds of Intervening Network.

For the two classes of connection (signalling, and user information) a number of aspects are defined by the rows of the table. These aspects are:

**Connection &**

**control:** the definition of service, switching and signalling capabilities for the exchange of information between a PTN and the public telecommunications network at the access to that network, in order to establish and control "signalling" and/or "user information" connections through the public telecommunications network.

**Physical interface:** the definition of the physical interface structure applicable at the C reference point.

**Scenario control:** the definition of switching and signalling capabilities for the exchange of "control" information between two PTNXs in order to manage inter-PTNX connections (e.g. to establish the distinction between signalling and user information connections, or to uniquely identify user information connections) prior to the use of such connections for PTN calls.

For each of these aspects there is a column entry containing relevant ETSs specifying the requirements. Alternatively, the entry contains a pointer to another relevant table elsewhere in this ETR. Similar columns specifying the relevant conformance test standard and regulatory requirements are also defined.

The remaining subclauses contain the scenario matrices themselves.

### C.4.2 Dedicated physical link

**Table C.5: Dedicated physical link scenario**

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	DE/BT-1018		
	Physical interface	-- (NOTE 6)		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	DE/BT-1018		
	Physical interface	-- (NOTE 6)		
	Scenario control	DE/BT-1003	DE/BT-1003	--

C.4.3 Primary rate leased line

Table C.6: Primary Rate leased line scenario

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	DE/BT-1018		
	Physical interface	Primary rate leased line: see table B.14		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	DE/BT-1018		
	Physical interface	Primary rate leased line: see table B.14		
	Scenario control	DE/BT-1003	DE/BT-1003	--

C.4.4 ONP leased line

Table C.7: ONP leased line scenario

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	64 kbit/s unstructured: ETS 300 289 2048 kbit/s structured: DE/BT-2022 2048 kbit/s unstructured: ETS 300 247		
	Physical interface	64 kbit/s unstructured: see table B.18 2048 kbit/s structured: see table B.19 2048 kbit/s unstructured: see table B.20		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	64 kbit/s unstructured: ETS 300 289 2048 kbit/s structured: DE/BT-2022 2048 kbit/s unstructured: ETS 300 247		
	Physical interface	64 kbit/s unstructured: see table B.18 2048 kbit/s structured: see table B.19 2048 kbit/s unstructured: see table B.20		
	Scenario control	DE/BT-1003	DE/BT-1003	--



C.4.5 Digital cross-connect

Table C.8: Digital cross-connect scenario

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	DE/BT-1020		
	Physical interface	Digital cross connect: see table B.17		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	DE/BT-1020		
	Physical interface	Digital cross connect: see table B.17		
	Scenario control	DE/BT-1003	DE/BT-1003	--

C.4.6 ISDN (circuit-mode) semi-permanent

Table C.9: ISDN (circuit-mode) semi-permanent scenario

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	Circuit-mode 64 kbit/s unrestricted: A.2 DE/BT-1019		
	Physical interface	Basic user-network interfaces: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

C.4.7 ISDN (circuit-mode) switched

Table C.10: ISDN (circuit-mode) switched scenario

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	Circuit-mode 64 kbit/s unrestricted: see table A.2 DE/BT-1019 Basic user-network interfaces: see tables B.4 & B.6 Primary rate user-network interface: see tables B.10 & B.12		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interfaces: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019 Basic user-network interface: see tables B.4 & B.6 Primary rate user-network interface: see tables B.10 & B.12		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

C.4.8 ISDN (circuit-mode) UUS 3

Table C.11: ISDN (circuit-mode) UUS 3 scenario

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	User-user signalling: see table A.79 (NOTE 7) DE/BT-1019 Basic user-network interface: see tables B.4 & B.6 Primary rate user-network interface: see table B.10 & B.12		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019 Basic user-network interface: see tables B.4 & B.6 Primary rate user-network interface: see table B.10 & B.12		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

**C.4.8 Packet Mode Bearer Service (PMBS) X.31 case B semi-permanent**

**Table C.12: PMBS X.31 case B semi-permanent scenario**

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	Packet mode (X.31 case B) B- and D- channel: see table A.6 DE/BT-1021		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

**C.4.9 Packet Mode Bearer Service (PMBS) X.31 case B switched**

**Table C.13: PMBS X.31 case B switched scenario**

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	Packet mode (X.31 case B) B- and D- channel: see table A.3.6 DE/BT-1021 Basic user-network interface: see tables B.4 & B.6 Primary rate user-network interface: see tables B.10 & B.12		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

**C.4.10 ISDN with User Signalling Bearer Service (USBS) semi-permanent**

**Table C.14: ISDN with USBS semi-permanent scenario**

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	User signalling bearer service: see table A.7 (NOTE 5)		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

**C.4.11 ISDN with User Signalling Bearer Service (USBS) switched**

**Table C.15: ISDN with USBS switched scenario**

Connection type	Aspect	Applicable table or base standard	Conformance test standard	Regulatory requirements
Signalling connection	Connection & control	User signalling bearer service: see table A.7 (NOTE 5) Basic user-network interface: see tables B.4 & B.6 Primary rate user-network interface: see tables B.10 & B.12		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--
User information connection	Connection & control	Circuit-mode 3,1 kHz audio: see table A.1 Circuit-mode 64 kbit/s unrestricted: see table A.2 Circuit-mode speech: see table A.3 DE/BT-1019		
	Physical interface	Basic user-network interface: see table B.2 Primary rate user-network interface: see table B.8		
	Scenario control	DE/BT-1003	DE/BT-1003	--

## Annex D: Terminal interchangeability

### D.1 Definition

The ability of a Terminal Equipment (TE) to be attached to any two network(s) accesses, A and B, if at least one interface of the terminal equipment, and all interface and network access related functions, can satisfy the functional requirements, or a subset of, applicable to network access A and the functional requirements, or a subset of, applicable to network access B, with minimal modification or re-configuration.

A functional subset of a standard provides a particular set of functions (e.g. call answering capabilities on terminal equipment). It shall be sufficient for a terminal equipment or network access to conform to functional subsets only.

Minimal modification or re-configuration is that amount of modification or re-configuration that could be expected to be performed by an unskilled user of that piece of terminal equipment. It therefore includes the possibility of software and hardware modifications simply implementable by unskilled users, but excludes re-configurations or modifications that would normally be performed by the terminal equipment supplier.

NOTE: The definition given above does not consider administrative and regulatory aspects pertinent to individual networks. In addition, the actual connection of a terminal to a network may require the action of the network operator, e.g. allocation of terminal identification, subscription to the relevant service, etc.

Further to the definition, in the ISDN environment, the network accesses are the terminal-to-public-ISDN accesses at the coincident S and T reference point and the terminal-to-private-ISDN accesses at the S reference point.

Terminal interchangeability can be achieved, even if constrained to certain bearer services and/or teleservices and/or supplementary services. This depends upon the ability of the terminals and networks to provide the functions necessary to support those services. It therefore requires both the terminal and the network to provide, and to conform to, the functions standardised for the support of these services.

Terminals are expected to be interchanged between network(s) accesses that do not support particular bearer services, teleservices or supplementary services in a standardised manner. The user shall be able to determine which services are or are not supported when the terminal equipment is used on a particular network access.

### D.2 Purpose

The ISDN provides a standard set of interfaces and services. The ISDN MoU defines a basic kernel set of ISDN service which all public ISDNs are expected to provide. It also allows for additional services to be provided as options. However, when these optional services are provided, they shall be provided in the standardised manner<sup>1)</sup>. Thus when a terminal equipment is connected to an ISDN network access any service which is:

- a) provided by the network; and,
- b) provided by the terminal equipment,

it will operate correctly.

The only reason why a service will not operate is if either:

- a) the service is not provided by the network; or,
- b) the service is not provided by the terminal equipment.

---

<sup>1)</sup> Any network operator/terminal provider may provide non-standardised services (and this is expected to be the norm in the early stages of ISDN implementation). However, Terminal Interchangeability cannot provide the user with a guaranteed operation of these non-standardised services.

A terminal equipment which supports standardised services may therefore be connected to any ISDN (public or private) at the access points X1, X2, X3 or X4 of figure D.1.

Terminal interchangeability includes interchanging terminal equipments between two accesses:

1. on one public network;
2. on two different public networks;
3. on one private network;
4. on two different private networks;
5. one on a public network and one on a private network.

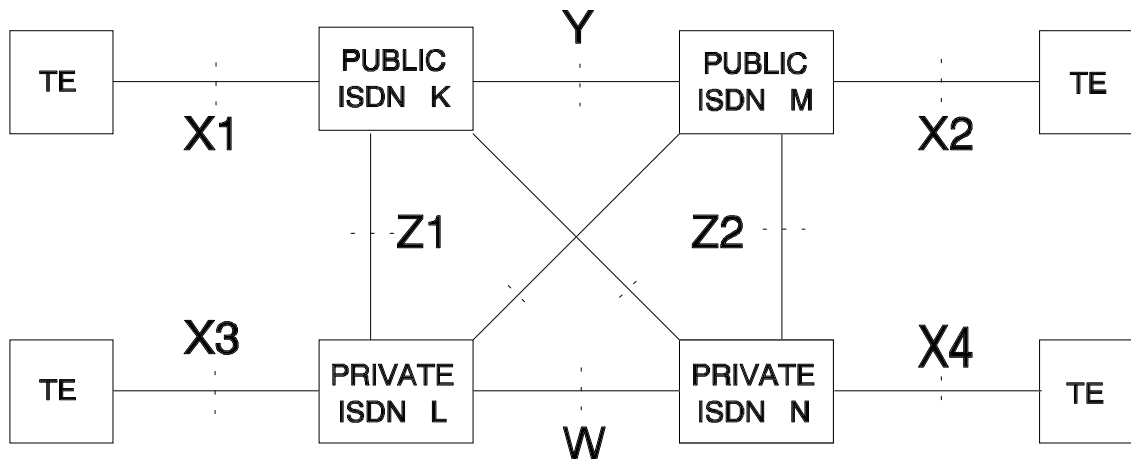


Figure D.1<sup>1)</sup> : Access and interconnection points in ISDN concept

### D.3 Achieving terminal interchangeability in the standardisation process

Practical terminal interchangeability requires that the standards defining the services of the ISDN are written in a manner which prevents deliberate (or accidental) selection of options within a standard which will prevent two implementations of a service, each of which conform to the standard, failing to interwork.

However, the definition should not prevent terminal equipment or network suppliers from choosing to support only a limited set of the options of a service.

Terminal interchangeability is prevented by ambiguity within Standards.

In order to create apparatus that will allow terminal interchangeability, it is necessary for terminal and network equipment suppliers that:

- 1) all parts of standards related to network accesses and services be written in a manner that prevents misinterpretation and unintentional equipment differences;
- 2) all optional parts of standards related to network accesses and services be clearly identified as options, when they will affect the ability of terminals to be interchangeable or the network to support interchangeable terminal equipment;
- 3) on the basis of the options identified within the standard, the network operators explicitly define which options they support at which time and, when more than one option supported, how the options are defined. This will provide a "profile" of the network accesses and services;

---

1) The interconnections W, Y and Z of figure D.1 are not relevant to the subject of terminal interchangeability. Standardisation of the services and interfaces at point W is the subject of work currently being undertaken by ECMA. Standardisation of the interface at point Y is the subject of work currently being undertaken by ETSI. The public ISDN access points Z1 and Z2 may be different to the access points X1 and X2. Standardisation of the interfaces and services at the access points Z1 and Z2 would allow for ISPBX interchangeability. It is assumed that an unskilled user would not perform the reconfigurations or modifications necessary to achieve ISPBX interchangeability.

- 4) on the basis of the options identified within the standards, terminal manufacturers explicitly define which options they support and, when more than one option is supported, how the options are to be used. This will provide a "profile" of the terminal equipment in respect of all standards supported.

The users/purchasers of terminal equipment can then use the "profiles" of the terminal equipment and of the network(s) accesses to determine whether a satisfactory level of terminal interchangeability can be achieved.

When creating Protocol Implementation Conformance Specifications (PICS) for an existing standard, the revised standard shall identify the obvious and hidden options.

## **Annex E: Principles for standardisation alignment between public and private ISDNs**

### **Joint ITAEGT (Information Technology Advisory Expert Group for private Telecommunications) and ISM (ISDN Standards Management) statement**

ITAEGT and ISM have considered, in particular, the need for common service descriptions for public and private ISDN. Already ISM has produced stage 1 service descriptions, taking into account requirements from private ISDNs (presented by ECMA and ETSI TC-BT). As a general aim, a single service description document covering both public and private ISDNs is desirable.

To enhance the aim of producing a single service description document, there should be a single base standard and with conformance statements for both the public and private ISDNs.

It is further considered that this aim should be applied to all the standards being produced for public and private ISDNs. However, the time constraints of both the ISM and ITAEGT programmes of work made this difficult in the short term, but this should not constrain the long term aims.

Therefore, ITAEGT and ISM recommend that the following principles should be adopted for future standardisation activities in the areas of public and private ISDNs:

- 1) Where European Standards for corresponding services are being developed concurrently in the public and private ISDN domain, the standardisation bodies concerned declare:
  - that, while recognising that some differences in the standards may be essential, unnecessary differences shall be avoided;
  - a common format and layout should be used for both public and private network standards;
  - there shall be, following ITAEGT procedures, a timely exchange of information;
  - European ISDN Standards should indicate the differences between public and private applications.
- 2) Where a European Standard exists for a service for the public ISDN but not for the private ISDN, and it is decided to develop a standard for the private ISDN, the public ISDN standard shall form the core for a common ISDN standard, so that the user's perception of the service shall be kept the same as far as possible.

Necessary differences between the requirements of public and private networks shall be explicitly indicated by conformance statements.

- 3) Where a European Standard exists for a service for the private ISDN but not for the public ISDN, and it is decided to develop a standard for the public ISDN, the private ISDN standard shall form the core for a common ISDN standard, so that the user's perception of the service shall be kept the same as far as possible.

Necessary differences between the requirements of public and private networks shall be explicitly indicated by conformance statements.

- 4) Co-ordination is required to prevent unnecessary duplication of the development of standards.
- 5) It should be noted that it is possible that some standards and services may only be applicable to either public ISDNs or private ISDNs. When separate, stand-alone documents are necessary, then those parts of the two specifications which are the same should be identical; i.e. rewriting of a section using different words or a different format for whatever reason should be avoided.



## History

Document history	
March 1993	First Edition
April 1996	Converted into Adobe Acrobat Portable Document Format (PDF)

**Printing and production notes**

- 1 Don't forget to modify the contents list for B.4.1.1 - B.4.1.3 and B.4.2.1 - B.4.2.3.  
(remove some tabs).
- 2 Don't forget to modify the contents list for Annex E title (remove some tabs).