



GROUP SPECIFICATION

Mobile Edge Computing (MEC); Mobile Edge Management; Part 1: System, host and platform management

Disclaimer

The present document has been produced and approved by the Mobile Edge Computing (MEC) ETSI Industry Specification Group (ISG) and represents the views of those members who participated in this ISG.
It does not necessarily represent the views of the entire ETSI membership.

Reference

DGS/MEC-0010-1SysHosPlatfMgmnt

Keywords

management, MEC

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	7
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	7
4 Overview	8
5 Specification level requirements	8
5.1 Requirements.....	8
5.1.1 Requirements for reference point Mm2	8
5.1.1.1 Requirements related to the mobile edge host.....	8
5.1.1.1.1 Configuration Management requirements	8
5.1.1.1.2 Fault Management requirements	8
5.1.1.2 Requirements related to the mobile edge applications	9
5.1.1.2.1 Configuration Management requirements	9
5.1.1.2.2 State Management requirements	9
6 Information flows	9
6.1 Configuration management flows	9
6.1.1 Creation and deletion of managed objects representing application instances	9
6.1.2 Configuration of DNS rules	11
6.1.3 Activation of DNS rules	11
6.1.4 Deactivation of DNS rules	12
6.1.5 Configuration of traffic rules	12
6.1.6 Activation of traffic rules.....	12
6.1.7 Deactivation of traffic rules	12
6.2 Fault management flows	12
7 Information models and interfaces	12
7.1 Applicable reference points	12
7.2 Information models	13
7.2.1 Mobile edge host information model.....	13
7.2.1.1 Imported information entities and local labels	13
7.2.1.2 Class diagram	13
7.2.1.2.1 Relationships	13
7.2.1.2.2 Inheritance	15
7.2.1.3 Information Object Class definitions	15
7.2.1.3.1 CoveredENB	15
7.2.1.3.2 ServedENB	16
7.2.1.3.3 MobileEdgeHostFunction	16
7.2.1.3.4 MobileEdgePlatform.....	16
7.2.1.3.5 MobileEdgeApplication.....	17
7.2.1.3.6 MobileEdgePlatformService	18
7.2.1.3.7 MobileEdgeApplicationService	18
7.2.1.3.8 RNIService.....	18
7.2.1.3.9 LocationService	19
7.2.1.3.10 TrafficRule.....	19
7.2.1.3.11 DNSRule	20
7.2.1.4 Attribute definitions	20
7.2.1.5 Common notifications.....	24

7.2.1.5.1	Alarm notifications	24
7.2.1.5.2	Configuration notifications	24
7.3	Interfaces	25
7.3.1	Fault Management interface	25
7.3.2	Configuration Management interface (passive part)	25
7.3.3	Configuration Management interface (active part)	25
8	Data models and interface protocols	25
8.1	Data models	25
8.2	Interface protocols	25
History	26

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Mobile Edge Computing (MEC).

The present document is part 1 of a multi-part deliverable covering Mobile Edge Management, as identified below:

Part 1: "System, host and platform management";

Part 2: "Application lifecycle, rules and requirements management".

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document defines the management of the mobile edge system, mobile edge hosts and mobile edge platforms. This includes platform configuration, performance and fault management, application monitoring, remote service configuration and service control, information gathering regarding the platform features, available services, and available virtualised resources.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 132 302: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.302)".
- [2] ETSI TS 132 602: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.602)".
- [3] ETSI TS 132 662: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Configuration Management (CM); Kernel CM Information Service (IS) (3GPP TS 32.662)".
- [4] ETSI TS 132 111-2: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.111-2)".
- [5] ETSI TS 132 332: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Notification Log (NL) Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.332)".
- [6] ETSI TS 128 622: "Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS) (3GPP TS 28.622)".
- [7] ETSI TS 136 300: "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2 (3GPP TS 36.300)".
- [8] ETSI GS MEC 010-2: "Mobile Edge Computing (MEC); Mobile Edge Management; Part 2: Application lifecycle, rules and requirements management".
- [9] ETSI TS 136 413: "LTE; Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP) (3GPP TS 36.413)".

- [10] ETSI TS 132 103: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Integration Reference Point (IRP) overview and usage guide (3GPP TS 32.103)".
- [11] ETSI TS 132 150: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Integration Reference Point (IRP) Concept and definitions (3GPP TS 32.150)".
- [12] ETSI TS 132 151: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Integration Reference Point (IRP) Information Service (IS) template (3GPP TS 32.151)".
- [13] ETSI TS 132 152: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Integration Reference Point (IRP) Information Service (IS) Unified Modelling Language (UML) repertoire (3GPP TS 32.152)".
- [14] ETSI TS 132 153: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Integration Reference Point (IRP) technology specific templates, rules and guidelines (3GPP TS 32.153)".
- [15] ETSI TS 132 157: "Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Integration Reference Point (IRP) Information Service (IS) template (3GPP TS 32.157)".
- [16] ETSI TS 132 156: "Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Fixed Mobile Convergence (FMC) model repertoire (3GPP TS 32.156)".
- [17] ETSI TS 132 300: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Configuration Management (CM); Name convention for Managed Objects (3GPP TS 32.300)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI GS MEC 001: "Mobile Edge Computing (MEC) Terminology".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI GS MEC 001 [i.1] apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI GS MEC 001 [i.1] and the following apply:

CM	Configuration Management
DN	Distinguished Name

DNS	Domain Name System
FQDN	Fully Qualified Domain Name
GS	Group Specification
IOC	Information Object Class
IP	Internet Protocol
IRP	Integration Reference Point
IS	Information Service
ISG	Industry Specification Group
MEC	Mobile Edge Computing
MEPM	Mobile Edge Platform Manager
NL	Notification Log
NM	Network Manager
OSS	Operations Support System
PLMN	Public Land Mobile Network
RAB	Radio Access Bearer
UE	User Equipment
UMTS	Universal Mobile Telecommunications System

4 Overview

The management interfaces are designed according to the IRP methodology defined in [10], [11], [12], [13], [14], [15] and [16]. Naming conventions for managed object instances are specified in [17].

5 Specification level requirements

5.1 Requirements

5.1.1 Requirements for reference point Mm2

5.1.1.1 Requirements related to the mobile edge host

5.1.1.1.1 Configuration Management requirements

REQ-MM2-MEH-CM-1: The Mm2 reference point shall support a capability allowing the OSS to retrieve the information model of the mobile edge host, or parts thereof, from the mobile edge platform manager.

REQ-MM2-MEH-CM-2: The Mm2 reference point shall support a capability allowing the mobile edge platform manager to notify changes related to the information model of the mobile edge host to the OSS.

REQ-MM2-MEH-CM-3: The Mm2 reference point shall support a capability allowing the OSS to configure the mobile edge host.

REQ-MM2-MEH-CM-4: The Mm2 reference point shall support a capability allowing the OSS to configure the DNS rules.

REQ-MM2-MEH-CM-5: The Mm2 reference point shall support a capability allowing the OSS to configure the traffic rules.

5.1.1.1.2 Fault Management requirements

REQ-MM2-MEH-FM-1: The Mm2 reference point shall support a capability allowing the mobile edge platform manager to send mobile edge platform related alarms to the OSS.

REQ-MM2-MEH-FM-2: The Mm2 reference point shall support a capability allowing the OSS to retrieve and manage alarms from the mobile edge platform manager.

5.1.1.2 Requirements related to the mobile edge applications

5.1.1.2.1 Configuration Management requirements

REQ-MM2-MEA-CM-1: The Mm2 reference point shall support a capability allowing the OSS to create managed object instances representing mobile edge application instances in the mobile edge platform manager.

REQ-MM2-MEA-CM-2: The Mm2 reference point shall support a capability allowing the OSS to delete managed object instances representing mobile edge application instances in the mobile edge platform manager.

REQ-MM2-MEA-CM-3: The Mm2 reference point shall support a capability allowing the OSS to activate and deactivate the DNS rules related to a certain mobile edge application instance.

REQ-MM2-MEA-CM-4: The Mm2 reference point shall support a capability allowing the OSS to activate and deactivate the traffic rules related to a certain mobile edge application instance.

REQ-MM2-MEA-CM-5: The Mm2 reference point shall support a capability allowing the mobile edge platform manager to notify changes of managed object instances representing mobile edge application instances to the OSS.

REQ-MM2-MEA-CM-6: The Mm2 reference point shall support a capability allowing the mobile edge platform manager to notify object creation and deletion events of managed object instances representing mobile edge application instances to the OSS.

NOTE: The configuration management of the application functionality as such is out of scope.

5.1.1.2.2 State Management requirements

REQ-MM2-MEA-SM-1: The Mm2 reference point shall support a capability allowing the mobile edge platform manager to expose the operational state of instantiated mobile edge applications to the OSS.

6 Information flows

6.1 Configuration management flows

6.1.1 Creation and deletion of managed objects representing application instances

There are two ways for the creation and deletion of managed objects representing application instances:

- 1) The managed object instances representing on Mm2 application instances are created and deleted automatically by the MEPM. MEPM sends automatically object creation/deletion notifications to the OSS carrying the application instance identifier.
- 2) The managed object instances representing on Mm2 application instances are created and deleted by the OSS.

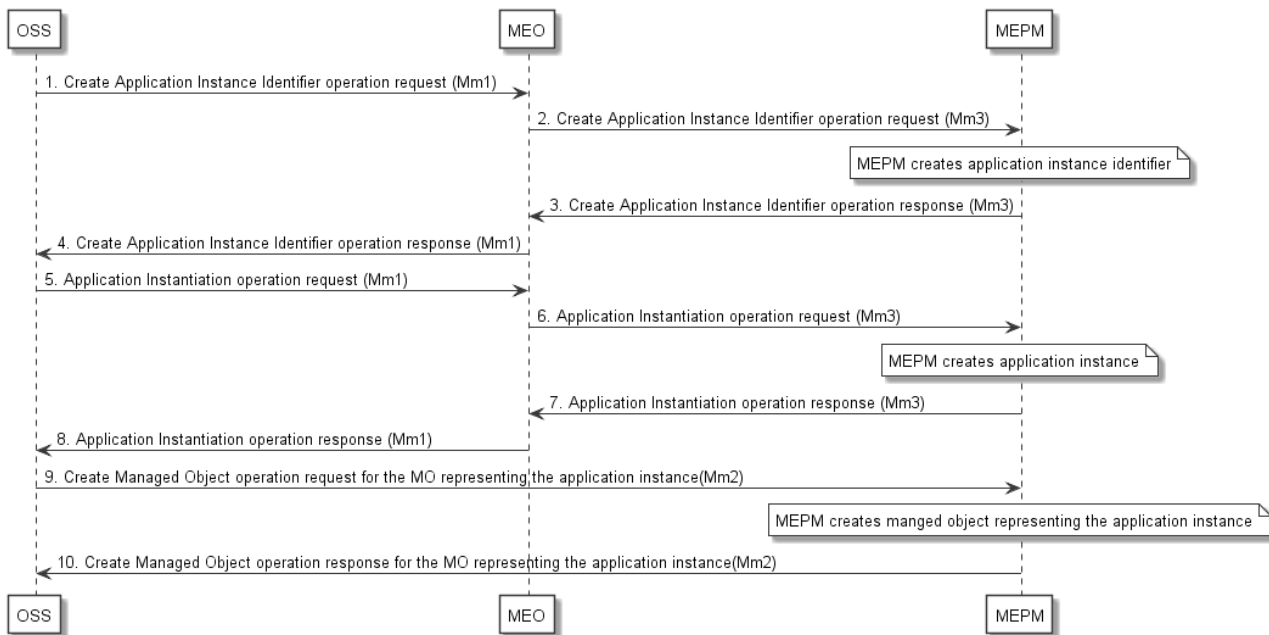


Figure 6.1.1-1: Managed object creation by the OSS flow

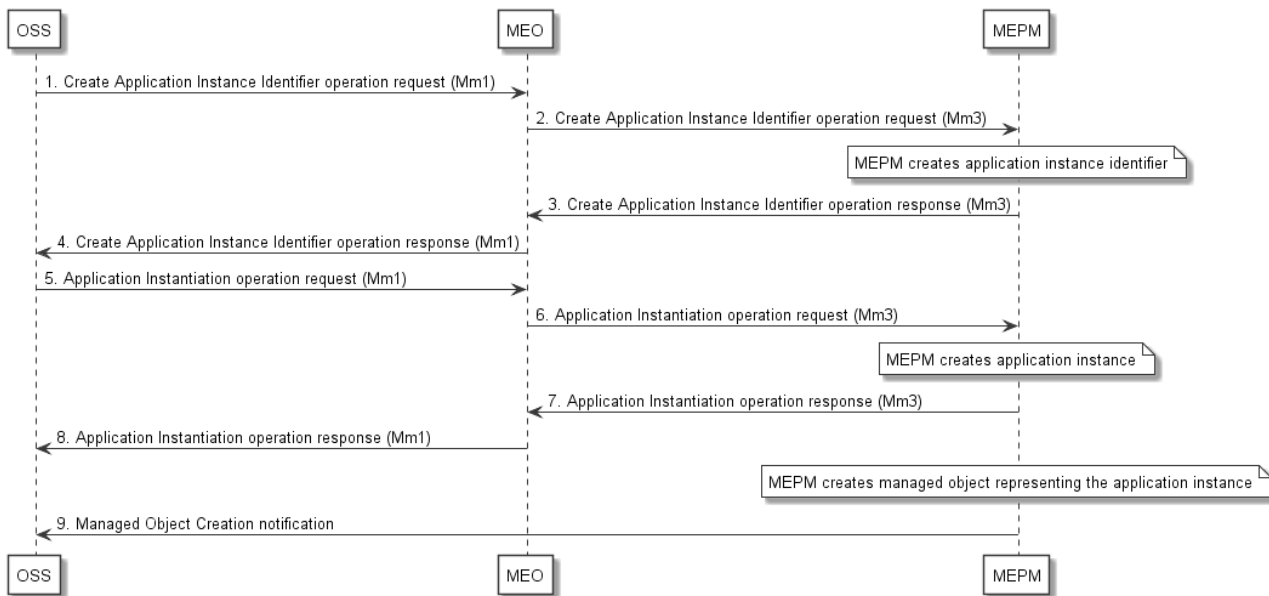


Figure 6.1.1-2: Managed object creation by the MEPM flow

6.1.2 Configuration of DNS rules

The DNS rules can be configured by the NM.

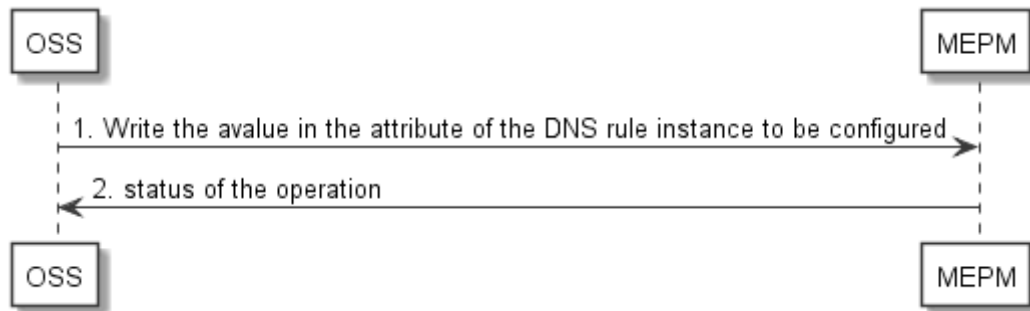


Figure 6.1.2-1: Configuration of DNS rules flow

The configuration procedure is as follows:

- 1) The NM sends a request to the MEPM to configure the DNS rule. This is done by writing the value in the attribute of the DNS rule to be configured.
- 2) The MEPM indicates in the response the status of the operation.

6.1.3 Activation of DNS rules

The DNS rules serving a particular application instance can be activated by the NM.

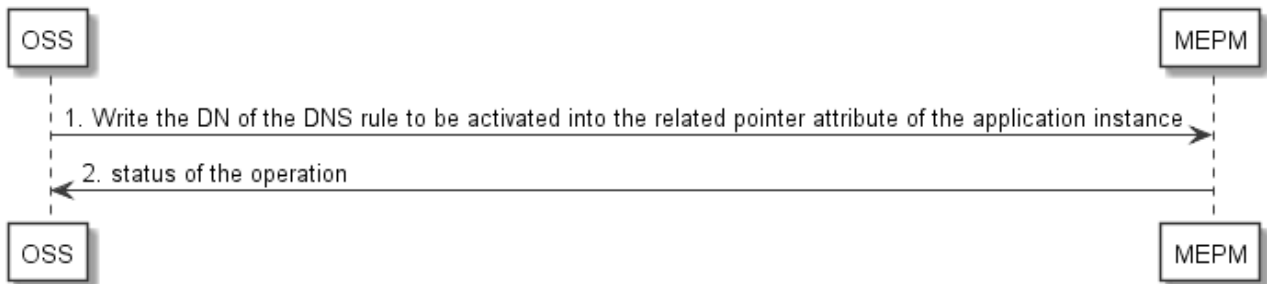


Figure 6.1.3-1: Activation and deactivation of DNS rules flow

The activation procedure is as follows:

- 1) The NM sends a request to the MEPM to activate a DNS rule for a specific application instance. This is done by configuring the DN of the DNS rule to be activated into the pointer attribute of the application instance.
- 2) The MEPM indicates in the response the status of the operation.

6.1.4 Deactivation of DNS rules

The DNS rules serving a particular application instance can be deactivated by the NM.

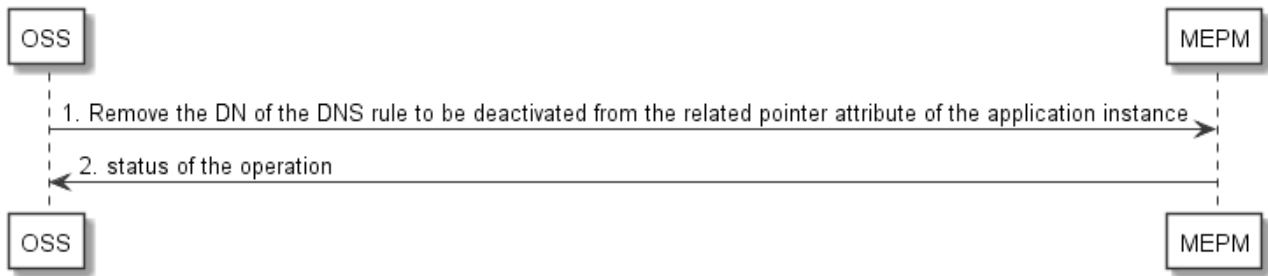


Figure 6.1.4-1: Flow: deactivation of DNS rules

The deactivation procedure is as follow:

- 1) The NM sends a request to the MEPM to deactivate a DNS rule for a specific application instance. This is done by removing the DN of the DNS rule to be deactivated from the pointer attribute of the application instance.

6.1.5 Configuration of traffic rules

Same as clause 6.1.2.

6.1.6 Activation of traffic rules

Same as clause 6.1.3.

6.1.7 Deactivation of traffic rules

Same as clause 6.1.4.

6.2 Fault management flows

The functionality is given by the Alarm IRP as specified in ETSI TS 132 111-2 [4].

7 Information models and interfaces

7.1 Applicable reference points

Table 7.1-1

	Mm1	Mm2		
Mobile edge host information model	--	X		
Fault Management interface	--	X		
Configuration Management interface (active part)	--	X		
Configuration Management interface (passive part)	--	X		

7.2 Information models

7.2.1 Mobile edge host information model


7.2.1.1 Imported information entities and local labels

Table 7.2.1.1-1

Label reference	Local label
ETSI TS 128 622 [6], IOC, ManagedElement	ManagedElement
ETSI TS 128 622 [6], IOC, ManagedFunction	ManagedFunction

7.2.1.2 Class diagram

7.2.1.2.1 Relationships

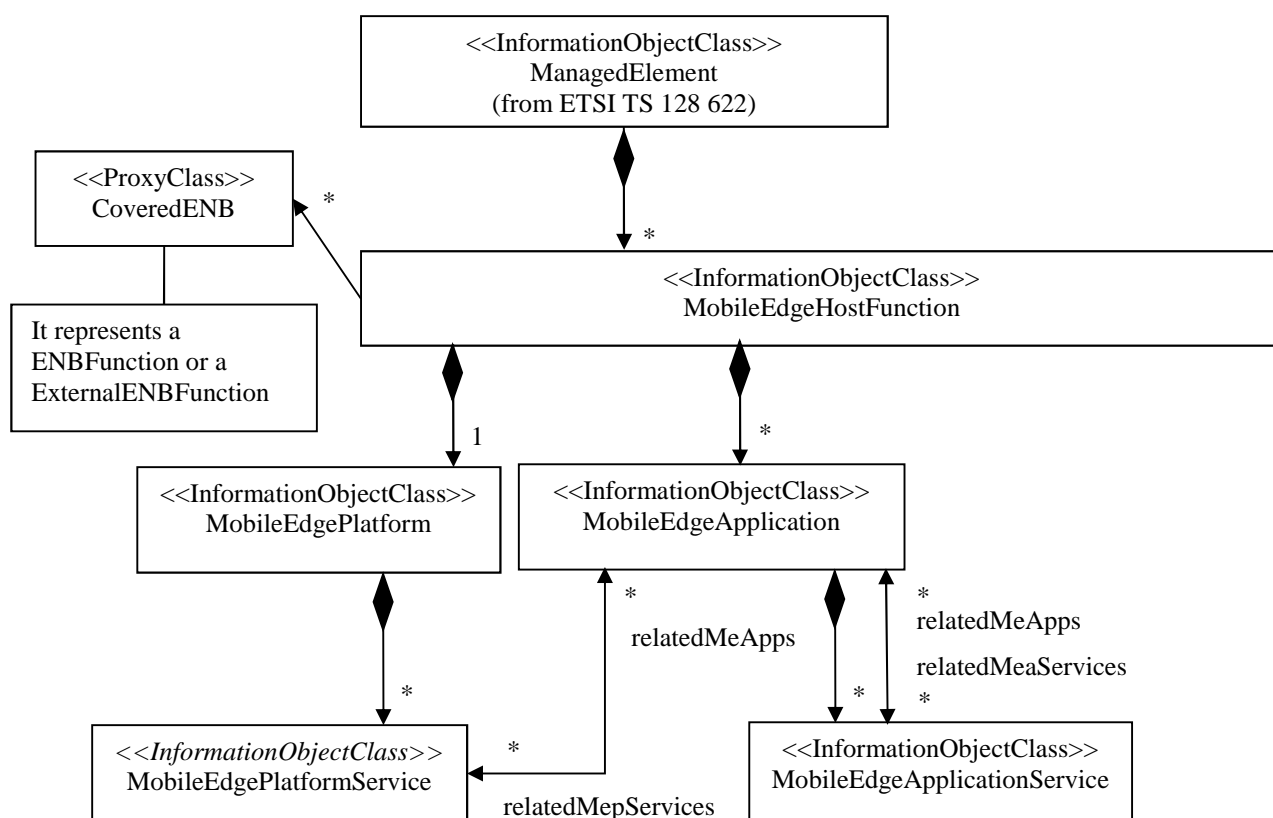

NOTE 1: A service producing MobileEdgeApplication instance contains at least one MobileEdgeApplicationService instance. A non-service producing MobileEdgeApplication instance does not contain any MobileEdgeApplicationService instances.

NOTE 2: A service producing MobileEdgeApplication instance containing a MobileEdgeApplicationService instance cannot have a relationship with that MobileEdgeApplicationService instance.

Figure 7.2.1.2.1-1: Information Model of the Mobile Edge Host - Part 1

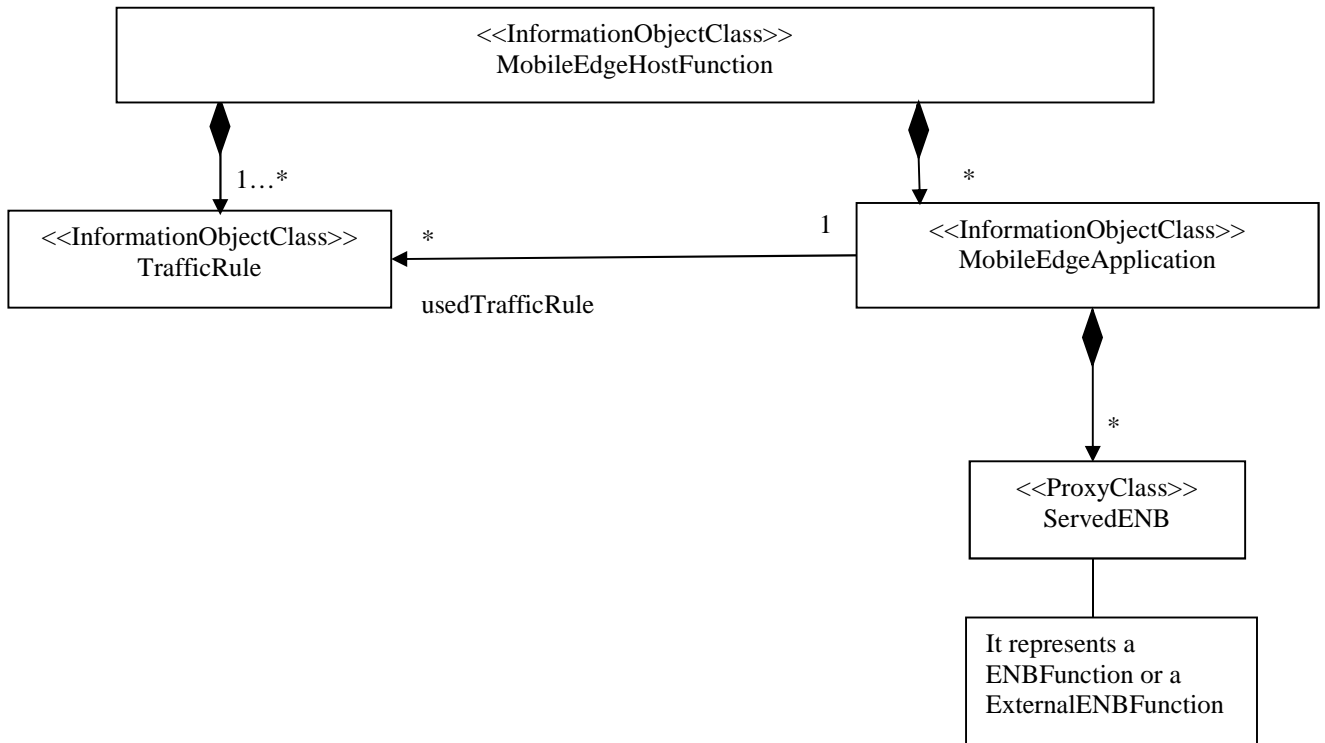


Figure 7.2.1.2.1-2: Information Model of the Mobile Edge Host - Part 2

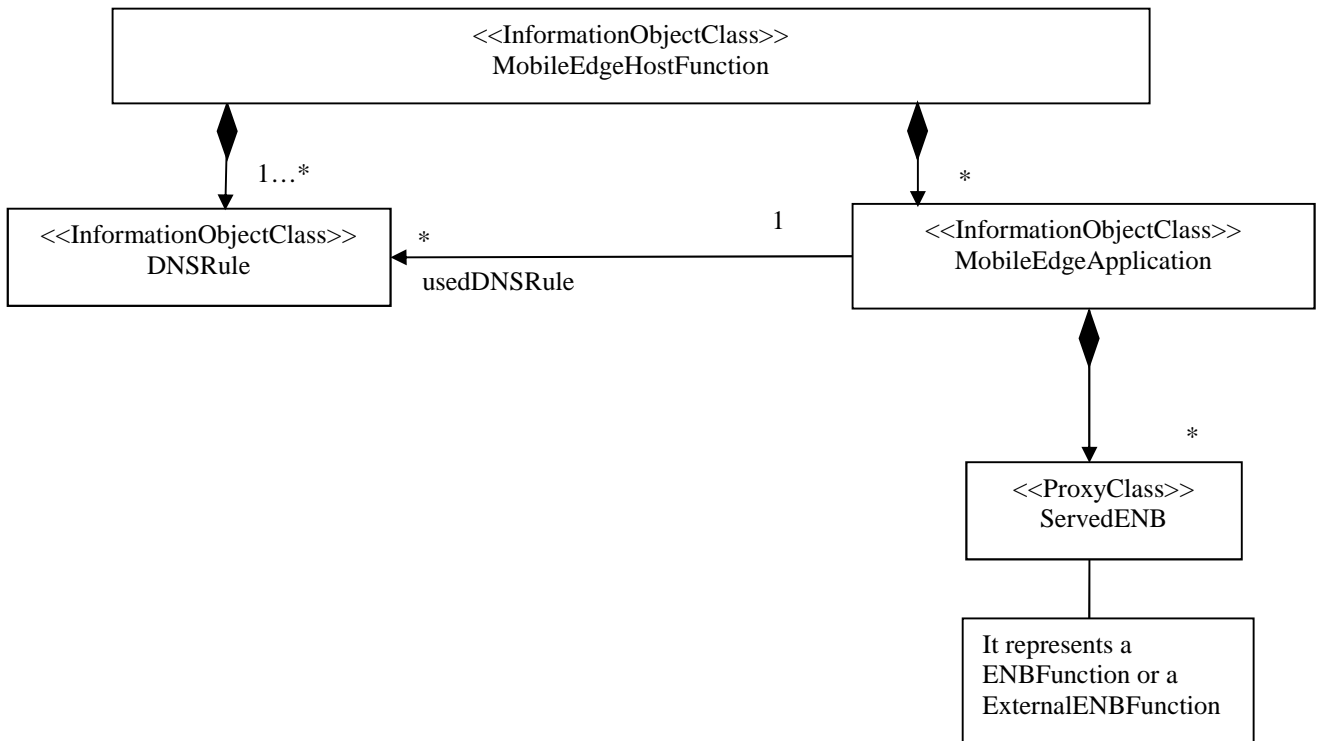


Figure 7.2.1.2.1-3: Information Model of the Mobile Edge Host - Part 3

7.2.1.2.2 Inheritance

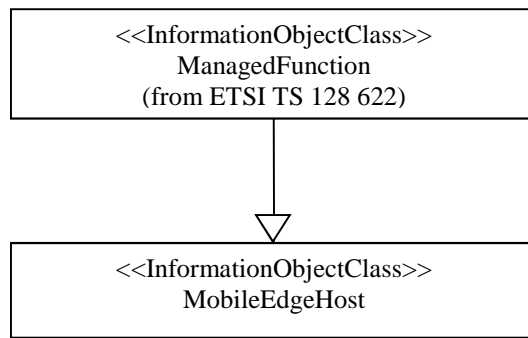


Figure 7.2.1.2.2-1: Inheritance hierarchy - Part 1

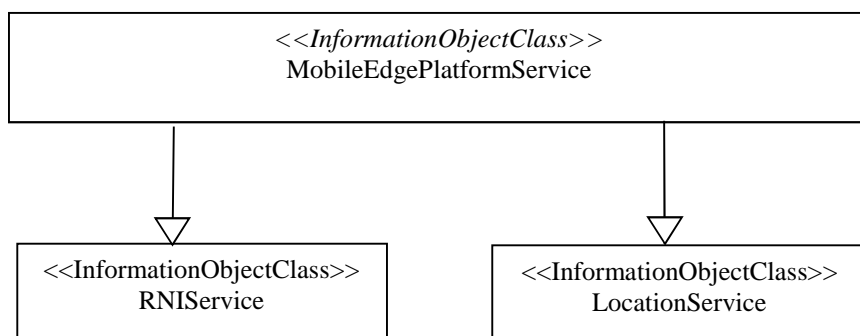


Figure 7.2.1.2.2-2: Inheritance hierarchy - Part 2

7.2.1.3 Information Object Class definitions

7.2.1.3.1 CoveredENB

7.2.1.3.1.1 Definition

This Proxy Object Class represents an eNB that can be served by a MobileEdgeApplication in the MobileEdgeHost.

7.2.1.3.1.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
eNBId	M	M	M	-	M

7.2.1.3.1.3 Attribute constraints

None.

7.2.1.3.1.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.2 ServedENB

7.2.1.3.2.1 Definition

This Proxy Object Class represents an eNB that is served by the related MobileEdgeApplication in the MobileEdgeHost. The ServedENB instances may or may not be a subset of the CoveredENB instances.

7.2.1.3.2.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
eNBId	M	M	M	-	M

7.2.1.3.2.3 Attribute constraints

None.

7.2.1.3.2.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.3 MobileEdgeHostFunction

7.2.1.3.3.1 Definition

This Information Object Class represents a mobile edge host function.

7.2.1.3.3.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
supportedFeatures	M	M	-	-	M
version	M	M	-	-	M

7.2.1.3.3.3 Attribute constraints

None.

7.2.1.3.3.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.4 MobileEdgePlatform

7.2.1.3.4.1 Definition

This Information Object Class represents a mobile edge platform.

7.2.1.3.4.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable

7.2.1.3.4.3 Attribute constraints

None.

7.2.1.3.4.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.5 MobileEdgeApplication

7.2.1.3.5.1 Definition

This Information Object Class represents a mobile edge platform.

7.2.1.3.5.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifyable
appId	M	M	-	-	M
appName	M	M	-	-	M
appProvider	M	M	-	-	M
appSoftVersion	M	M	-	-	M
appVersion	M	M	-	-	M
appInfoName	M	M	-	-	M
appDescription	M	M	-	-	M
appState	M	M	-	-	M
instantiationState	M	M	-	-	M
operationalState	M	M	-	-	M
appInstanceId	M	M	-	-	M

7.2.1.3.5.3 Attribute constraints

None.

7.2.1.3.5.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.5.5 State diagram

Applications have three states: instantiationState, appState, operationalState. The state diagram is shown in figure 7.2.1.3.5.5-1. Four different state combinations are possible.

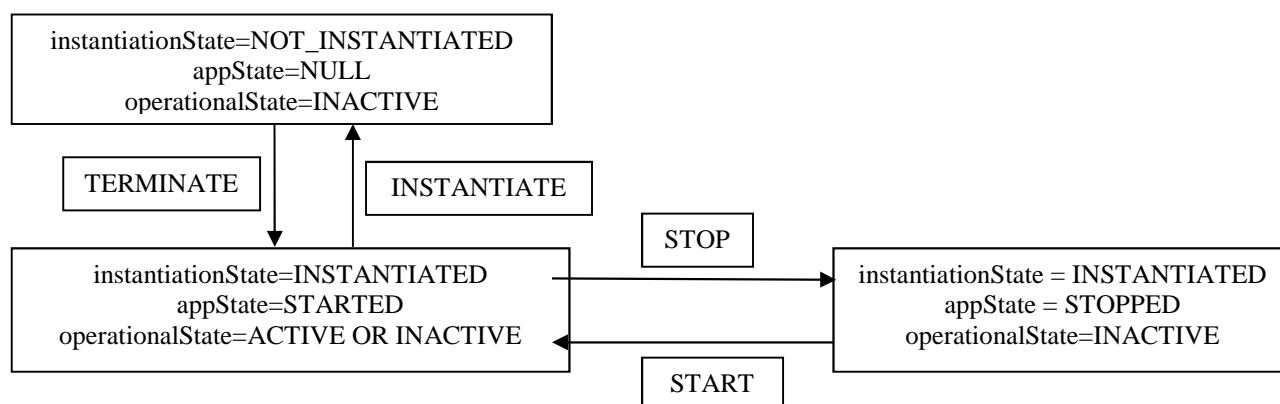


Figure 7.2.1.3.5.5-1: State diagram

7.2.1.3.6 MobileEdgePlatformService

7.2.1.3.6.1 Definition

This abstract Information Object Class represents a mobile edge service provided by the mobile edge platform.

7.2.1.3.6.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
address	M	M	-	-	M
operationalState	M	M	-	-	M
serName	M	M	-	-	M
serCategory	M	M	-	-	M
serVersion	M	M	-	-	M
serDataFormat	M	M	-	-	M

7.2.1.3.6.3 Attribute constraints

None.

7.2.1.3.6.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.7 MobileEdgeApplicationService

7.2.1.3.7.1 Definition

This Information Object Class represents a mobile edge service provided by a mobile edge application.

7.2.1.3.7.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
address	M	M	-	-	M
operationalState	M	M	-	-	M
serName	M	M	-	-	M
serCategory	M	M	-	-	M
serVersion	M	M	-	-	M
transportsSupported	M	M	-	-	M

7.2.1.3.7.3 Attribute constraints

None.

7.2.1.3.7.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.8 RNIService

7.2.1.3.8.1 Definition

This Information Object Class represents a radio network information service.

NOTE: This IOC does not have attributes in Phase 1.

7.2.1.3.8.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable

7.2.1.3.8.3 Attribute constraints

None.

7.2.1.3.8.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.9 LocationService

7.2.1.3.9.1 Definition

This Information Object Class represents a location service.

NOTE: This IOC does not have attributes in Phase 1.

7.2.1.3.9.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable

7.2.1.3.9.3 Attribute constraints

None.

7.2.1.3.9.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.10 TrafficRule

7.2.1.3.10.1 Definition

This Information Object Class represents a filter rule, specifying which IP packets shall be redirected to the associated application.

Each instance of `MobiledgeApplication` has a relationship to zero or many instances of `TrafficRule`. The relationship does exist only for rules that are active regarding the `MobiledgeApplication` instance. A relationship to inactive rules does not exist.

7.2.1.3.10.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
<code>trafficRuleId</code>	M	M	M	-	M
<code>filterType</code>	M	M	M	-	M
<code>priority</code>	M	M	M	-	M
<code>trafficFilter</code>	M	M	M	-	M
<code>action</code>	M	M	M	-	M
<code>dstInterface</code>	M	M	M	-	M

7.2.1.3.10.3 Attribute constraints

None.

7.2.1.3.10.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.3.11 DNSRule

7.2.1.3.11.1 Definition

This Information Object Class represents DNS rules, specifying which IP packets shall be redirected to an MobileEdgeApplication.

Each instance of MobileEdgeApplication has a relationship to zero or many instances of DNSRule. The relationship does exist only for rules that are active regarding the MobileEdgeApplication instance. A relationship to inactive rules regarding the MobileEdgeApplication instance does not exist. DNS rules without any relationship are completely inactive.

7.2.1.3.11.2 Attributes

Attribute name	Support Qualifier	isReadable	isWritable	isInvariant	isNotifiable
dnsRuleId	M	M	M	-	M
domainName	M	M	M	-	M
iPAddressType	M	M	M	-	M
iPAddress	M	M	M	-	M
timeToLive	O	M	M	-	M

7.2.1.3.11.3 Attribute constraints

None.

7.2.1.3.11.4 Notifications

The common notifications defined in clause 7.2.1.5 are valid for this Information Object Class, without exceptions or additions.

7.2.1.4 Attribute definitions

Attribute Name	Documentation and Allowed Values	Properties
action	The action to be applied to a packet in case it matches the traffic rule or RAB filter rule, the same as the attribute priority of the TrafficRuleDescriptor information element (table 6.2.1.9.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: DROP, FORWARD, DECAPSULATED, FORWARD_AS_IS, PASSTHROUGH, DUPLICATED_DECAPSULATED, DUPLICATE_AS_IS	type: Enumerated multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
address	The IP address where mobile edge services can be accessed. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appDescription	Human readable description of the mobile edge application, the same as the attribute appld of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False

Attribute Name	Documentation and Allowed Values	Properties
appDId	Identifier of the mobile edge application descriptor, the same as the attribute appDId of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appDVersion	Identifies the version of the application descriptor, the same as the attribute appDVersion of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appInfoName	Human readable name for the application product, it can change during the application product lifetime, the same as the attribute appInfoName of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appInstanceId	Application instance identifier. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
appName	Human readable name of the mobile edge application, the same as the attribute appName of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appProvider	Provider of the mobile edge application, the same as the attribute appProvider of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appSoftVersion	Version of the mobile edge application, the same as the attribute appSoftVersion of the AppD information element (table 7.2.2.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
appState	The state of the application. allowedValues: STARTED, STOPPED.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: TRUE
dnsRuleId	The DNS rule id, the same as the attribute dnsRuleId of the DnsRuleDescriptor information element (table 6.2.1.13.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	
domainName	The FQDN of the DNS rule, the same as the attribute domainName of the DnsRuleDescriptor information element (table 6.2.1.13.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: FALSE
eNBId	Unambiguously identifies an eNodeB within a PLMN. allowedValues: See ETSI TS 136 413 [9], ETSI TS 136 300 [7].	type: Integer multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True

Attribute Name	Documentation and Allowed Values	Properties
filterType	Definition of filter type, the same as the attribute priority of the TrafficRuleDescriptor information element (table 6.2.1.9.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: FLOW, PACKET	type:Enumerated multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
instantiationState	The instantiation state of the application. allowedValues: NOT_INSTANTIATED, INSTANTIATED.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: FALSE
iPAddress	The IP address to which the domain name is resolved. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: FALSE
iPAddressType	The IP address type, the same as the attribute iPAddressType of the DnsRuleDescriptor information element (table 6.2.1.13.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: IPv4, IPv6.	type:Enumerated multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
nWIPAdress	The IP address of the network. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
nWSubNetMask	The sub network mask of the network. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
operationalState	It indicates the operational state of the object instance. This attribute is READ-ONLY. allowedValues:ACTIVE, INACTIVE.	type:Enumerated multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
priority	The priority of the associated traffic rule, the same as the attribute priority of the TrafficRuleDescriptor information element (table 6.2.1.9.2-1 in ETSI GS MEC 010-2 [8]). If traffic rule conflicts, the one with higher priority take precedence. allowedValues: N/A.	type: Integer multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
serCategory	The category of the service, the same as the attribute serCategory of the ServiceDescriptor information element (table 6.2.1.7.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 0...* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
serName	The name of the service, the same as the attribute serName of the ServiceDescriptor information element (table 6.2.1.7.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
serVersion	The version of the service, the same as the attribute version of the ServiceDescriptor information element (table 6.2.1.7.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False

Attribute Name	Documentation and Allowed Values	Properties
supportedFeatures	The features supported by the MobileEdgeHostFunction. allowedValues: The value {None}, or any combination of {UserApps, SmartRelocation, RadioNetworkInformation, LocationService, BandwidthManager, UEIdentity}.	type: String multiplicity: 1...6 isOrdered: False isUnique: True defaultValue: None isNullable: True
timeToLive	The time to life of the resolved IP address, the same as the attribute timeToLive of the DnsRuleDescriptor information element (table 6.2.1.13.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: Integer multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
trafficFilter	The traffic filter used to identify specific flow/packets that need to be handled by the MEC host, the same as the attribute trafficFilter of the TrafficRuleDescriptor information element (table 6.2.1.9.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: STRUCT multiplicity: 1...* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
trafficRuleId	The identifier of the traffic rule. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
transportsSupported	Indicates transports and serialization formats supported made available to the service-consuming application, the same as the attribute transportsSupported of the ServiceDescriptor information element (table 6.2.1.7.2-1 in ETSI GS MEC 010-2 [8]). allowedValues: N/A.	type: STRUCT multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
uEIpAddress	The IP address of the UE. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
uESubNetMask	The sub network mask of the UE. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
version	Version of the MEC system. allowedValues: N/A.	type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False
Attribute related to a role		
relatedMepServices	The mobile edge platform services related to a mobile edge application, i.e. the services used by a mobile edge application. allowedValues: N/A.	type: DN multiplicity: 0..* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
relatedMeaServices	The mobile edge application services related to a mobile edge application, i.e. the services used by a mobile edge application. allowedValues: N/A.	type: DN multiplicity: 0..* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
usedDNSRule	The DNSRule used by a MobileEdgeApplication. allowedValues: N/A.	type: DN multiplicity: 0..* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True

Attribute Name	Documentation and Allowed Values	Properties
usedTrafficRule	The TrafficRule used by a MobileEdgeApplication. allowedValues: N/A.	type: DN multiplicity: 0..* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
usedRABFilterRule	The RABFilterRule used by a MobileEdgeApplication. allowedValues: N/A.	type: DN multiplicity: 0..* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True
relatedMeApps	The mobile edge applications related to a mobile edge platform service or a mobile edge application service, i.e. the applications using a mobile edge service. allowedValues: N/A.	type: DN multiplicity: 0..* isOrdered: N/A isUnique: N/A defaultValue: None isNullable: True

7.2.1.5 Common notifications

7.2.1.5.1 Alarm notifications

This clause presents a list of notifications, defined in ETSI TS 132 111-2 [4], that IRPManager can receive. The notification header attribute `objectClass/objectInstance`, defined in ETSI TS 132 302 [1], would capture the DN of an instance of an IOC defined in this IRP specification.

Name	Qualifier	Notes
notifyAckStateChanged	See Alarm IRP (ETSI TS 132 111-2 [4])	
notifyChangedAlarm	See Alarm IRP (ETSI TS 132 111-2 [4])	
notifyClearedAlarm	See Alarm IRP (ETSI TS 132 111-2 [4])	
notifyNewAlarm	See Alarm IRP (ETSI TS 132 111-2 [4])	
notifyComments	See Alarm IRP (ETSI TS 132 111-2 [4])	
notifyAlarmListRebuilt	See Alarm IRP (ETSI TS 132 111-2 [4])	
notifyPotentialFaultyAlarmList	See Alarm IRP (ETSI TS 132 111-2 [4])	

7.2.1.5.2 Configuration notifications

This clause presents a list of notifications, defined in ETSI TS 132 662 [3], that IRPManager can receive. The notification header attribute `objectClass/objectInstance`, defined in ETSI TS 132 302 [1], would capture the DN of an instance of an IOC defined in this IRP specification.

Name	Qualifier	Notes
notifyAttributeValueChange	O	
notifyObjectCreation	O	
notifyObjectDeletion	O	

7.3 Interfaces

7.3.1 Fault Management interface

For Alarm Management, the following 3GPP defined IRPs are used:

- ETSI TS 132 111-2 [4]: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.111-2)".
- ETSI TS 132 332 [5]: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Notification Log (NL) Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.332)".

7.3.2 Configuration Management interface (passive part)

For Configuration Management (passive part), the following 3GPP defined IRPs are used:

- ETSI TS 132 662 [3]: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Configuration Management (CM); Kernel CM Information Service (IS) (3GPP TS 32.662)".
- ETSI TS 132 332 [5]: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Notification Log (NL) Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.332)".

7.3.3 Configuration Management interface (active part)

For Configuration Management (active part), the following 3GPP defined IRPs are used:

- ETSI TS 132 602 [2]: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP); Information Service (IS) (3GPP TS 32.602)".

8 Data models and interface protocols

8.1 Data models

Data models are not part of Phase 1.

8.2 Interface protocols

Interface protocols are not part of Phase 1.

History

Document history		
V1.1.1	October 2017	Publication