



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 061-1**

October 1991

---

Source: ETSI TC-SPS

Reference: T/S 46-33I

ICS: 33.080

**Key words:** ISDN, supplementary service

**Integrated Services Digital Network (ISDN);  
Subaddressing (SUB) supplementary service;  
Digital Subscriber Signalling System No. one (DSS1) protocol;  
Part 1: Protocol specification**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1991. All rights reserved.



## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions.....	8
4 Symbols and abbreviations.....	8
5 Description .....	8
6 Operational requirements.....	9
6.1 Provision and withdrawal .....	9
6.2 Requirements on the originating network side.....	9
6.3 Requirements on the destination network side.....	9
7 Coding requirements.....	9
8 State definitions .....	9
9 Signalling procedures at the coincident S and T reference point .....	9
9.1 Activation, deactivation and registration.....	9
9.2 Delivery of called party subaddress .....	9
9.2.1 Normal operation.....	9
9.2.2 Exceptional procedures.....	9
10 Procedures for interworking with private ISDNs .....	10
11 Interactions with other networks .....	10
12 Interactions with other supplementary services .....	10
13 Parameter values (timers).....	10
14 Dynamic description (SDLs) .....	10
Annex A (informative): Signalling flows .....	11
Annex B (informative): Relation of address information elements.....	12
History .....	13

Blank page

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 1 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Subaddressing (SUB) supplementary service, as described below:

- Part 1: "Protocol specification";**
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "TSS&TP specification for the network";
- Part 6: "ATS and partial PIXIT proforma specification for the network".

In accordance with CCITT Recommendation I.130, the following three level structure is used to describe the supplementary telecommunications services as provided by European public telecommunications operators under the pan-European Integrated Services Digital Network (ISDN):

- Stage 1: is an overall service description, from the user's standpoint;
- Stage 2: identifies the functional capabilities and information flows needed to support the service described in stage 1; and
- Stage 3: defines the signalling system protocols and switching functions needed to implement the service described in stage 1.

This ETS details the stage 3 aspects (signalling system protocols and switching functions) needed to support the Subaddressing (SUB) supplementary service. The stage 1 and stage 2 aspects are detailed in ETS 300 059 (1991) and ETS 300 060 (1991), respectively.

This reprint includes all previous Corrigenda as shown in the History box at the last page.

Blank page

## 1 Scope

This first part of ETS 300 061 specifies the stage three of the Subaddressing (SUB) supplementary service for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point or coincident S and T reference point (as defined in CCITT Recommendation I.411 [1]) by means of the Digital Subscriber Signalling System No. one (DSS1). Stage 3 identifies the protocol procedures and switching functions needed to support a telecommunications service (see CCITT Recommendation I.130 [2]).

In addition, this standard specifies the protocol requirements at the T reference point where the service is provided to the user via a private ISDN.

This standard does not specify the additional protocol requirements where the service is provided to the user via a telecommunications network that is not an ISDN.

The SUB supplementary service allows the called (served) user to expand his addressing capacity beyond the one given by the ISDN number.

The SUB supplementary service is applicable to all telecommunication services.

Further parts of this standard specify the method of testing required to identify conformance to this standard.

This standard is applicable to equipment supporting the SUB supplementary service, to be attached at either side of a T reference point or coincident S and T reference point when used as an access to the public ISDN.

## 2 Normative references

This ETS incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications listed hereafter. For dated references, subsequent amendments to, or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] CCITT Recommendation I.411 (1988): "ISDN user-network interfaces - Reference configurations".
- [2] CCITT Recommendation I.130 (1988): "Method for the characterisation of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [3] CCITT Recommendation E.164 (1988): "Numbering plan for the ISDN era".
- [4] ETS 300 102-1 (1990): "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specifications for basic call control.
- [5] ETS 300 102-2 (1990): "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specifications for basic call control; Specification Description Language (SDL) diagrams".
- [6] ETS 300 195-1: "Integrated Services Digital Network (ISDN); Supplementary service interactions; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [7] CCITT Recommendation I.112 (1988): "Vocabulary of terms for ISDNs".
- [8] CCITT Recommendation I.210 (1988): "Principles of telecommunication services supported by an ISDN and the means to describe them".

### 3 Definitions

For the purposes of this standard, the following definitions apply:

**Integrated Services Digital Network (ISDN):** see CCITT Recommendation I.112 [7], § 2.3, definition 308.

**Service; telecommunications service:** see CCITT Recommendation I.112 [7], § 2.2, definition 201.

**Supplementary service:** see CCITT Recommendation I.210 [8], § 2.4.

**ISDN number:** A number conforming to the numbering plan and structure specified in CCITT Recommendation E.164 [3].

**Network:** the DSS1 protocol entity at the network side of the user-network interface.

**User:** the DSS1 protocol entity at the user side of the user-network interface.

**Served user:** The served user for the SUB supplementary service is the called user or other private installation on the destination side of the network. Only this served user defines the significance of the subaddress information.

### 4 Symbols and abbreviations

DSS1	Digital Subscriber Signalling System No. one.
ISDN	Integrated Services Digital Network.
PSTN	Public Switched Telephone Network.
SUB	Subaddressing.

### 5 Description

The SUB supplementary service shall offer an additional addressing capacity beyond that of the ISDN number of the called user. The functions offered by the SUB supplementary service can be used to identify a particular endpoint of a call beyond the ISDN access .

If a calling user wants to transfer called party subaddress information to the called user, the calling user shall insert the called party subaddress information into the SETUP message as part of the basic service (see figure B.1).

The subaddress information shall be transferred transparently through the network from the originating to the destination user-network interface. At the called user side, the called party subaddress shall be offered to the served user within the SETUP message, if the SUB supplementary service is provided to the called user.

NOTE 1: Other subaddress information elements, e.g. Calling party subaddress or Connected party subaddress information elements are not the subject of the SUB supplementary service and hence are described in the appropriate supplementary service specifications (e.g. in the calling line identification presentation and connected line identification presentation supplementary services specifications).

NOTE 2: The maximum size of the subaddress is 20 octets. However, for a certain period of time, the size of the subaddress can be limited to a maximum of four octets either within certain networks or between networks.



## **6 Operational requirements**

The SUB supplementary service shall use the incoming call and call offering procedures described in ETS 300 102-1 [4], Clause 5. The Called party subaddress information element shall be carried by the SETUP message sent to the called user.

### **6.1 Provision and withdrawal**

The SUB supplementary service may be available without prior arrangement or it may be provided after subscription agreement between the user and the service provider.

If the subscription option is required, the user shall subscribe to the SUB supplementary service in order to receive called party subaddress information in incoming SETUP messages.

The SUB supplementary service shall be withdrawn on the subscriber's request or for administrative reasons.

### **6.2 Requirements on the originating network side**

The basic call control procedures according to ETS 300 102-1 [4], subclause 5.1, shall apply.

### **6.3 Requirements on the destination network side**

The basic call control procedures according to ETS 300 102-1 [4], subclause 5.2, shall apply.

## **7 Coding requirements**

For the SUB supplementary service the calling user shall use the Called party subaddress information element defined in ETS 300 102-1 [4], subclause 4.5.9.

## **8 State definitions**

The states associated with basic call control according to ETS 300 102-1 [4] shall apply.

## **9 Signalling procedures at the coincident S and T reference point**

### **9.1 Activation, deactivation and registration**

Not applicable.

### **9.2 Delivery of called party subaddress**

#### **9.2.1 Normal operation**

The Called party subaddress information element shall be delivered from the network to the served user in the SETUP message according to the procedures of ETS 300 102-1 [4], subclause 5.2, if the calling user has provided the subaddress information.

#### **9.2.2 Exceptional procedures**

If the SUB supplementary service is not provided to the called user or the length of the Called party subaddress information element exceeds the authorised length, the network shall discard the Called party subaddress information element. No indication shall be given to the calling user.

If the SUB supplementary service is provided to the called user but no subaddress information has been included by the calling user in the Called party subaddress information element, the SUB supplementary service cannot be provided and the call shall be offered to the called user without the Called party subaddress information element.

If a subaddress is assigned to a terminal and a SETUP message without subaddress is received, the terminal shall handle the call according to ETS 300 102-1 [4], subclause 5.2.

## **10 Procedures for interworking with private ISDNs**

The procedures specified in subclause 9.2 shall be used.

## **11 Interactions with other networks**

If the call is not supported by the ISDN for the whole connection, the SUB supplementary service need not be applicable.

## **12 Interactions with other supplementary services**

The interactions of the SUB supplementary service with other supplementary services shall be as specified in ETS 300 195-1 [6].

## **13 Parameter values (timers)**

No specific timers are required.

## **14 Dynamic description (SDLs)**


See ETS 300 102-2 [5].

**Annex A (informative): Signalling flows**

No SUB supplementary service specific signalling flow is necessary in addition to basic call control according to ETS 300 102-1 [4].

### Annex B (informative): Relation of address information elements

The correlation of address information elements to the basic call control or supplementary service are shown in figure B.1.

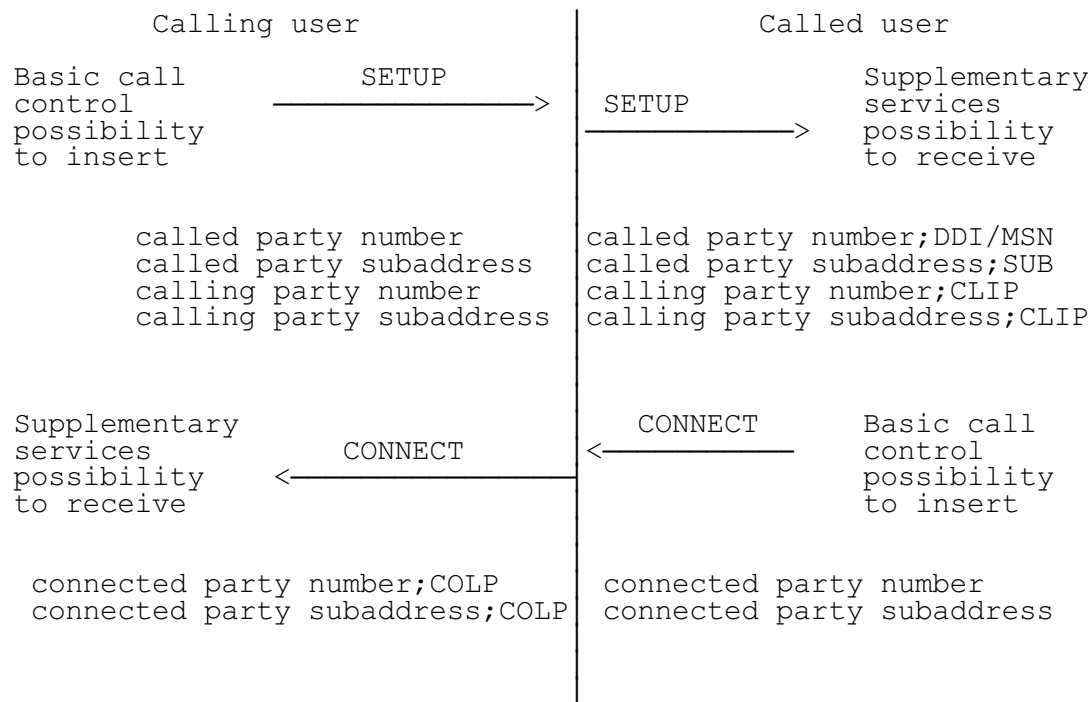

The following symbols appearing after an information element name indicate the service to which they apply.

Key:

- DDI: Direct Dialling In supplementary service.
- MSN: Multiple Subscriber Number supplementary service.
- SUB: Subaddressing supplementary service.
- CLIP: Calling Line Identification Presentation supplementary service.
- COLP: Connected Line Identification Presentation supplementary service.

**Figure B.1: Correlations of address information elements to the basic call control or supplementary services**

## History

<b>Document history</b>	
October 1991	First Edition
April 1994	Corrigendum to First Edition: change to part 1 of a multi-part standard
March 1996	Converted into Adobe Acrobat Portable Document Format (PDF) and incorporation of all prior Corrigenda