



EUROPEAN
TELECOMMUNICATION
STANDARD

FINAL DRAFT
pr **ETS 300 133-6**

January 1997

Second Edition

Source: ETSI TC-RES

Reference: RE/RES-04007-6

ICS: 33.020

Key words: ERMES, paging, radio, base station

**Radio Equipment and Systems (RES);
Enhanced Radio MESSage System (ERMES);
Part 6: Base station conformance specification**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

Contents

Foreword	5
1 Scope	7
2 Normative references	7
3 Definitions and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Base station description	8
5 RF requirements	8
5.1 General	8
5.1.1 Extreme test conditions	8
5.2 Modulation	8
5.2.1 Symbol transition shaping	8
5.2.2 In-channel RF spectrum	8
5.3 Frequency tolerances	8
5.4 Symbol rate	9
6 Test methods	9
6.1 General	9
6.2 Modulation	9
6.2.1 Symbol transition shaping	9
6.2.2 RF spectrum	9
6.3 Frequency tolerances	10
6.3.1 Centre frequency	10
6.3.2 Symbol frequency	10
6.4 Symbol rate	10
History	11

Blank page

Foreword

This final draft second edition European Telecommunication Standard (ETS) has been produced by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Voting phase of the ETSI standards approval procedure.

This ETS comprises seven parts with the generic title "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES)". The title of each part is listed below:

- Part 1: "General aspects";
- Part 2: "Service aspects";
- Part 3: "Network aspects";
- Part 4: "Air interface specification";
- Part 5: "Receiver conformance specification";
- Part 6: "Base station specification";**
- Part 7: "Operation and maintenance aspects".

This part, ETS 300 133-6, gives the Enhanced Radio MESSage System (ERMES) base station conformance specification and includes the technical characteristics of the transmitters.

ETSI Interim Intellectual Property Rights (IPR) Policy

The attention of ETSI has been drawn to the Intellectual Property Rights (IPRs) listed below which are, or may be, or may become, essential to the present standard. The IPR owner has undertaken to grant irrevocable licences on fair, reasonable and non-discriminatory terms and conditions to these IPRs pursuant to the ETSI Interim IPR Policy. Further details pertaining to these IPRs can be obtained directly from the IPR owner.

The present information is accurate to the best of ETSI's knowledge. Pursuant to the ETSI Interim IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs, which are, or may be, or may become, essential to the present standard.

IPRs:

- EP Patent No. 0090851: Decoder for Transmitted Message Activation Codes;
- EP App. No. 89909668,9: Multiple Frequency Message System;
- EP App. No. 89913131,2: Power Conservation Method and Apparatus for a Portion of Information Signal;
- EP App. No. 92901376,1: Multiple Format Signalling Protocol for a Selective Call Receiver;
- EP App. No. 90915018,7: Nationwide Paging with Local Modes of Operation;
- EP App. No. 91904526,0: Multiple Frequency Scanning.

IPR owner:

MOTOROLA Ltd, 110 Bath Road, Slough, GB-BERKSHIRE SL1 3SZ

Proposed transposition dates	
Date of latest announcement of this ETS (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

1 Scope

This ETS defines the requirements for base stations operating on the Enhanced Radio Message System (ERMES). A general description of the base station is given and detailed Radio Frequency (RF) characteristics defined.

2 Normative references

This ETS incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references subsequent amendments to, or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] prETS 300 133-3 (1997): "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES); Part 3: Network aspects".
- [2] prETS 300 133-4 (1997): "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES); Part 4: Air interface specification".
- [3] prETS 300 133-7 (1997): "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES); Part 7: Operation and maintenance aspects".
- [4] ETS 300 113: "Radio Equipment and Systems - Land mobile service - Technical characteristics and test conditions for radio equipment intended for the transmission of data (and speech) and having an antenna connector".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this ETS, the following definitions apply:

base station: Comprises one or more transmitters together with the associated control and timing equipment.

I1 interface: The radio interface between the base stations and the paging receivers.

I2 interface: An interface between the Paging Area Controller (PAC) and the Base Station (BS) supporting both telecommunication and operation & maintenance services (see ETS 300 133-7 [3]).

Paging Area Controller (PAC): The functional block which communicates to the Paging Network Controller (PNC) and manages one Paging Area (PA) through the I2 interface.

symbol: Two bits of information which are the basic unit of information on the air interface. It corresponds to one of the four modulation levels specified in subclause 8.3.1 of ETS 300 133-4 [2].

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

BS	Base Station
ERMES	Enhanced Radio MESSage System
PA	Paging Area
PAC	Paging Area Controller
PNC	Paging Network Controller
RF	Radio Frequency
4-PAM/FM	4-level Pulse Amplitude Modulated Frequency Modulation

4 Base station description

Base Stations (BSs) shall consist of one or more transmitters combined with associated control and timing equipment.

Transmissions shall be made on one or more of the sixteen ERMES channels and shall comply with ETS 300 133-4 [2].

Control and data information may be communicated to a BS from a PAC via a variety of transmission system types and may be connected via an optional standard interface I2 (as specified in ETS 300 133-3 [1]).

BS using the I2 interface are expected to receive a combination of paging and control information. The control information shall indicate the channel to be used. The required timing (subsequence and batch) within the transmission protocol shall be indicated within the system information part of the paging information. BSs of this type shall be responsible for the addition of preamble, synchronization, address partition terminators and message delimiters to the paging data. Error correction coding and interleaving as specified in ETS 300 133-4 [2] shall also be performed by such BSs.

5 RF requirements

5.1 General

Unless otherwise specified in this clause, all relevant requirements of ETS 300 113 [4] shall be fulfilled. Some requirements over and above the recommendations of ETS 300 113 [4] and specific to the present application are described in more detail in this clause.

5.1.1 Extreme test conditions

The extreme temperature range shall be $-10\text{ }^{\circ}\text{C}$ to $+55\text{ }^{\circ}\text{C}$.

5.2 Modulation

The modulation format shall be 4-level Pulse Amplitude Modulated Frequency Modulation (4-PAM/FM) as specified in ETS 300 133-4 [2].

5.2.1 Symbol transition shaping

The rise (or fall) time for the frequency transition between two successive symbols shall be $88\text{ }\mu\text{s} \pm 2\text{ }\mu\text{s}$.

5.2.2 In-channel RF spectrum

The RF spectrum of the continuous component at the output of the BS shall conform with the mask defined in table 1.

Table 1: Limits of in-channel RF spectrum

Frequency from carrier (kHz)	Upper mask (dB)	Lower mask (dB)
0,0	2,5	-2,5
4,5	2,5	-2,5
6	2,5	-
8	-23	-
10	-23	-
12,5	-42	-

5.3 Frequency tolerances

The nominal frequency of the transmissions shall be within $\pm 200\text{ Hz}$ of the centre frequency (see ETS 300 133-4 [2], subclause 8.2) under all circumstances.

Transmitters that are intended for use in a quasi synchronous network shall be capable of being configured so that relative offsets of less than 10 Hz are avoided in areas where overlapping radio coverage occurs.

The difference between any two adjacent symbol frequencies shall be $3\,125 \pm 15$ Hz.

5.4 Symbol rate

The short term symbol rate shall be $3\,125,00$ baud ± 1 ppm over periods of up to one second. For long term stability, the requirements of ETS 300 133-4 [2], subclause 12.3 shall apply.

6 Test methods

6.1 General

Measurements shall be performed with the test arrangement shown in figure 1.

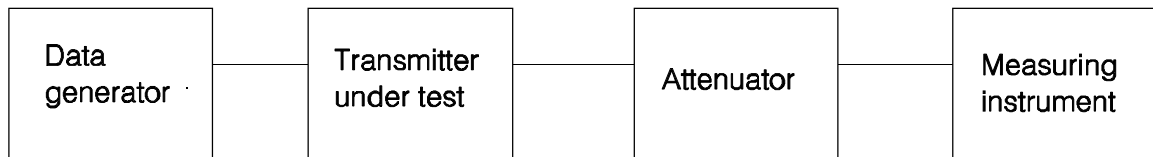


Figure 1: General test arrangement

All tests shall be carried out at the nominal power level specified by the manufacturer.

6.2 Modulation

6.2.1 Symbol transition shaping

The transmitter shall be modulated with each of the following six repetitive data streams in turn:

... 10 11 10 11 ...
... 10 01 10 01 ...
... 10 00 10 00 ...
... 11 01 11 01 ...
... 11 00 11 00 ...
... 01 00 01 00 ...

or with the following repetitive data stream:

... 00 01 01 11 01 00 10 10 01 10 00 11 11 10 11 00 ...

The transmitted signal shall be demodulated with a modulation analyser used as a reference frequency demodulator. Symbol transition shaping shall be checked on the demodulated signal.

For each transition of the data streams the 10 % to 90 % of the steady state value rise and fall times shall be measured. Each of the twelve measured values shall be the average of (at least) 100 individual transitions.

6.2.2 RF spectrum

The transmitter shall be modulated with a repetitive binary pseudo random sequence of length $2^{20} - 1$.

The RF spectrum shall be measured using a spectrum analyser with the parameter settings shown in table 2.

Table 2: Spectrum analyser settings

Parameter	Setting
Mode	normal
Centre frequency	intended centre operating frequency
Frequency span	50 kHz
Vertical scale	10 dB/division
Reference level	to be adjusted so that the spectrum is between the upper and lower mask
Resolution bandwidth	100 Hz
Video bandwidth	3 Hz

6.3 Frequency tolerances

6.3.1 Centre frequency

The transmitter shall be modulated with the following continuous data stream:

10 00 10 00 10 00 10 00

The average frequency of the transmission shall be measured using a suitable instrument.

6.3.2 Symbol frequency

Frequencies representing the four symbols (signalling frequencies) shall be measured by transmitting each of the following continuous data streams in turn:

- 10 10 10 10 10 10 for signalling frequency A;
- 11 11 11 11 11 11 for signalling frequency B;
- 01 01 01 01 01 01 for signalling frequency C;
- 00 00 00 00 00 00 for signalling frequency D.

The difference between adjacent symbol frequencies shall then be calculated as follows:

- $\Delta f(A/B) = f(B) - f(A)$;
- $\Delta f(B/C) = f(C) - f(B)$;
- $\Delta f(C/D) = f(D) - f(C)$.

6.4 Symbol rate

The symbol rate shall be measured using an appropriate access to the baud rate generator if such an access is provided on the BS equipment. Otherwise the following test shall be conducted:

- a continuous data stream of 10 00 10 00 10 00 shall be transmitted. The transmitter output shall be terminated in a power attenuator and demodulation equipment as shown in subclause 6.1. The demodulated signal shall be applied to a suitable frequency measuring equipment. The frequency measured shall be equal to half of the specified short term symbol rate.

The test shall be repeated at maximum and minimum operating voltages and at the extremes of temperatures specified.

History

Document history	
July 1992	First Edition
January 1997	Vote V 9711: 1997-01-14 to 1997-03-14