



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 138-5**

May 1997

---

Source: ETSI TC-SPS

Reference: DE/SPS-05061-H-5

ICS: 33.020

**Key words:** ISDN, DSS1, supplementary service, CUG, testing, TSS&TP, network

**Integrated Services Digital Network (ISDN);  
Closed User Group (CUG) supplementary service;  
Digital Subscriber Signalling System No. one (DSS1) protocol;  
Part 5: Test Suite Structure and Test Purposes (TSS&TP)  
specification for the network**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.



## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions .....	8
3.1 Definitions related to conformance testing .....	8
3.2 Definitions related to ETS 300 138-1 .....	8
4 Abbreviations .....	9
5 Test Suite Structure (TSS) .....	9
6 Test Purposes (TP) .....	10
6.1 Introduction .....	10
6.1.1 Test purpose naming convention .....	10
6.1.2 Source of TP definition .....	10
6.1.3 TP structure .....	10
6.1.4 Test strategy .....	11
6.1.5 Test of call states .....	11
6.2 Network TPs for CUG .....	12
6.2.1 Calling user interface .....	12
6.2.1.1 Explicit request .....	12
6.2.1.1.1 CUG call successful at originating network side and at destination network side .....	12
6.2.1.1.2 CUG call failed at originating network side .....	14
6.2.1.1.3 CUG call failed at destination network side .....	20
6.2.1.2 Default request .....	21
6.2.1.2.1 CUG call successful at originating network side and at destination network side .....	21
6.2.1.2.2 CUG call failed at originating network side .....	22
6.2.1.2.3 CUG call failed at destination network side .....	23
6.2.1.3 User without CUG .....	24
6.2.1.3.1 CUG call successful at originating network side and at destination network side .....	24
6.2.1.3.2 CUG call failed at originating network side .....	25
6.2.1.3.3 CUG call failed at destination network side .....	25
6.2.2 Called user interface .....	26
7 Compliance .....	26
8 Requirements for a comprehensive testing service .....	26
History .....	27

Blank page

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 5 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Closed User Group (CUG) supplementary service, as described below:

Part 1: "Protocol specification";

Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";

Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";

Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";

**Part 5: "TSS&TP specification for the network";**

Part 6: "ATS and partial PIXIT proforma specification for the network".

<b>Transposition dates</b>	
Date of adoption:	23 May 1997
Date of latest announcement of this ETS (doa):	31 August 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	28 February 1998
Date of withdrawal of any conflicting National Standard (dow):	28 February 1998

Blank page

## 1 Scope

This fifth part of ETS 300 138 specifies the Test Suite Structure and Test Purposes (TSS&TP) for the Network side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [6]) of implementations conforming to the stage three standard for the Closed User Group (CUG) supplementary service for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, ETS 300 138-1 [1].

A further part of this ETS specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma based on this ETS. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the User side of the T reference point or coincident S and T reference point of implementations conforming to ETS 300 138-1 [1].

## 2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 138-1 (1991): "Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [2] ETS 300 138-2 (1995): "Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [3] ISO/IEC 9646-1: "Information technology - OSI Conformance Testing Methodology and Framework; Part 1: General Concepts".
- [4] ISO/IEC 9646-2: "Information technology - OSI Conformance Testing Methodology and Framework; Part 2: Abstract Test Suite specification".
- [5] ISO/IEC 9646-3: "Information technology - OSI Conformance Testing Methodology and Framework; Part 3: The Tree and Tabular Combined Notation".
- [6] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
- [7] ETS 300 102-1: "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specifications for basic call control".
- [8] ITU-T Recommendation I.112 (1993): "Vocabulary and terms for ISDNs".
- [9] CCITT Recommendation E.164 (1991): "Numbering plan for the ISDN era".
- [10] ITU-T Recommendation I.210 (1993): "Principles of the telecommunication services supported by an ISDN and the means to describe them".

### 3 Definitions

For the purposes of this ETS, the following definitions apply:

#### 3.1 Definitions related to conformance testing

**abstract test case:** Refer to ISO/IEC 9646-1 [3].

**Abstract Test Suite (ATS):** Refer to ISO/IEC 9646-1 [3].

**active test:** A test case where the IUT is required to send a particular message, but not in reaction to a received message. This would usually involve the use of PIXIT information to see how this message can be generated and quite often is specified in an ATS using an implicit send event.

**Implementation Under Test (IUT):** Refer to ISO/IEC 9646-1 [3].

**implicit send event:** Refer to ISO/IEC 9646-3 [5].

**lower tester:** Refer to ISO/IEC 9646-1 [3].

**passive test:** A test case where the IUT is required to respond to a protocol event (e.g. received message) with another protocol event (e.g. send message) which normally does not require any special operator intervention as associated with the implicit send event.

**point of control and observation:** Refer to ISO/IEC 9646-1 [3].

**Protocol Implementation Conformance Statement (PICS):** Refer to ISO/IEC 9646-1 [3].

**PICS proforma:** Refer to ISO/IEC 9646-1 [3].

**Protocol Implementation eXtra Information for Testing (PIXIT):** Refer to ISO/IEC 9646-1 [3].

**PIXIT proforma:** Refer to ISO/IEC 9646-1 [3].

**system under test:** Refer to ISO/IEC 9646-1 [3].

**Test Purpose (TP):** Refer to ISO/IEC 9646-1 [3].

#### 3.2 Definitions related to ETS 300 138-1

**Integrated Services Digital Network (ISDN):** See ITU-T Recommendation I.112 [8], definition 308.

**ISDN number:** A number conforming to the numbering and structure specified in CCITT Recommendation E.164 [9].

**network:** The DSS1 protocol entity at the Network side of the user-network interface where a T reference point or coincident S and T reference point applies.

**network (S/T):** The DSS1 protocol entity at the Network side of the user-network interface where a coincident S and T reference point applies.

**network (T):** The DSS1 protocol entity at the Network side of the user-network interface where a T reference point applies (Network connected to Private ISDN).

**service; telecommunication service:** See ITU-T Recommendation I.112 [8], definition 201.

**supplementary service:** See ITU-T Recommendation I.210 [10], subclause 2.4.




## 4 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
CUG	Closed User Group
DNF	call at Destination Network Failed
IA	Incoming Access
ICB	Incoming Calls Barred
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
N00	Null call state
N01	Call Initiated call state
N03	Outgoing Call Proceeding call state
N04	Call Delivered call state
N06	Call Present call state
N07	Call Received call state
N08	Connect Request call state
N09	Incoming Call Proceeding call state
N12	Disconnect Indication call state
N19	Release Request call state
OA	Outgoing Access
OCB	Outgoing Calls Barred
ODNS	call at Originating and at Destination Network Successful
ONF	call at Originating Network Failed
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
TP	Test Purpose
TSS	Test Suite Structure

## 5 Test Suite Structure (TSS)

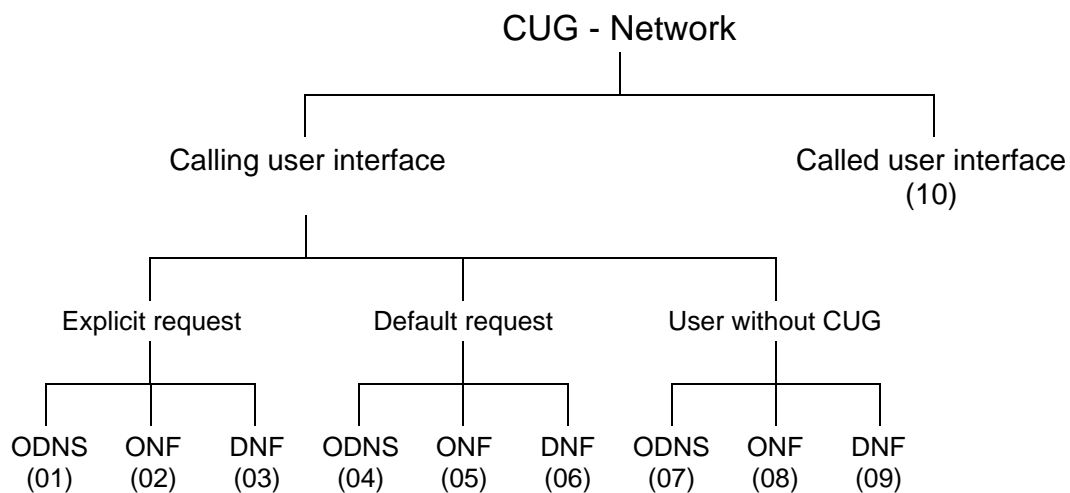

NOTE: Numbers in brackets represent group numbers and are used in TP identifiers.

Figure 1: Test suite structure

## 6 Test Purposes (TP)

### 6.1 Introduction

For each test requirement a TP is defined.

#### 6.1.1 Test purpose naming convention

The TPs are numbered, starting at 001, within each group. Groups are organized according to the TSS. Additional references are added to identify the actual test suite and whether it applies to the network or the user (see table 1).

**Table 1: TP identifier naming convention scheme**

Identifier:	<b>&lt;ss&gt;_&lt;iut&gt;&lt;group&gt;_&lt;nnn&gt;</b>		
<ss> =	supplementary service:		e.g. "CUG"
<iut> =	type of IUT:	U    User N    Network	
<group>	group		2 digit field representing group reference according to TSS
<nnn> =	sequential number		(001-999)

#### 6.1.2 Source of TP definition

The TPs are based on ETS 300 138-1 [1].

#### 6.1.3 TP structure

Each TP has been written in a manner which is consistent with all other TPs. The intention of this is to make the TPs more readable and checkable. A particular structure has been used and this is illustrated in table 2. This table should be read in conjunction with any TP i.e. use a TP as an example to fully understand the table.

Table 2: Structure of a single TP

TP Part	Text	Example
<b>Header</b>	<Identifier> <i>tab</i> <paragraph number in base ETS> <i>CR</i>	see table 1 <b>subclause 0.0.0</b>
<b>Stimulus</b>	Ensure that the IUT in the <basic call state> <trigger> <i>see below for message structure</i> <i>or</i> <goal>	N00, N10, etc. receiving a XXXX message to request a ...
<b>Reaction</b>	<action> <conditions> <i>if the action is sending</i> <i>see below for message structure</i> <next action>, <i>etc.</i> and enters <supplementary service state> <i>and/or</i> and remains in the same state(s) <i>or</i> and enters state <state> with CR<number(s)>	sends, saves, does, etc. using en bloc sending, ...
<b>Message structure</b>	<message type> message containing a a) <info element> information element with b) a <field name> encoded as <i>or</i> including <coding of the field> and <i>back to a or b,</i>	SETUP, FACILITY, CONNECT, ...  Bearer capability, Facility, ...
<b>NOTE:</b>	Text in italics will not appear in TPs and text between <> is filled in for each TP and may differ from one TP to the next.	

#### 6.1.4 Test strategy

As the base standard ETS 300 138-1 [1] contains no explicit requirements for testing, the TPs were generated as a result of an analysis of the base standard and the PICS specification ETS 300 138-2 [2]. The criteria applied include the following:

- only the requirements from the point of view of the T or coincident S and T reference point are considered;
- whether or not a test case can be built from the TP is not considered.

#### 6.1.5 Test of call states

Many TPs include a reference to the IUT's final call state after the realization of the TP. In these cases the TP includes the requirement to ensure that the IUT has entered this particular final call state. Ensuring that the IUT is in a particular call state shall be realized by following the procedures described in subclause 5.8.10 of ETS 300 102-1 [7]. According to these procedures, the IUT on receipt of a STATUS ENQUIRY message, shall respond with a STATUS message indicating, in the third octet of the Call state information element, the current call state of the IUT. This exchange of messages is not mentioned explicitly in each TP but is considered to be implicit in the reference to the final call state. This way of phrasing the TPs has been used to avoid over-complicating the text and structure of the TPs and to improve the readability.

## 6.2 Network TPs for CUG

All PICS items referred to in this subclause are as specified in ETS 300 138-2 [2] unless indicated otherwise by another numbered reference.

### 6.2.1 Calling user interface

#### 6.2.1.1 Explicit request

##### 6.2.1.1.1 CUG call successful at originating network side and at destination network side

NOTE: For all TPs in this subclause, the network (IUT) is to be configured so that the called user has subscribed to the CUG service and has the options Incoming Access (IA) set to allowed and not Incoming Calls Barred (ICB). This combination is only tested in this subclause as the "normal call" output is the subject of the TPs in subclause 6.2.1.2 (Default request).

##### **CUG\_N01\_001 subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03, and the calling user has subscribed to the CUG supplementary service and has the options Outgoing Access (OA) is not allowed, not Outgoing Calls Barred (OCB) and not preferential CUG, and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
responds with an ALERTING message and enters call state N04.

##### **CUG\_N01\_002 subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
responds with an ALERTING message and enters call state N04.

##### **CUG\_N01\_003 subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
responds with an ALERTING message and enters call state N04.

##### **CUG\_N01\_004 subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
responds with an ALERTING message and enters call state N04.

##### **CUG\_N01\_005 subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex is not included, to indicate that the called user has entered the alerting phase,  
responds with an ALERTING message and enters call state N04.

**CUG\_N01\_006**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex is not included, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_007**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex is not included, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_008**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex is not included, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_009**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_010**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_011**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex not included, the CUG interlock code is set to preferential CUG, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_012**                **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_013**                    **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, and there is a match between CUG index and CUG interlock code, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_014**                    **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex not included, the CUG interlock code is set to preferential CUG, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_015**                    **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex not included, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**CUG\_N01\_016**                    **subclause 9.2.1.1 and tables 5&6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and preferential CUG and the called user has subscribed to the CUG service and has the options IA set to allowed and not ICB, after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex not included, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**6.2.1.1.2**                    **CUG call failed at originating network side**

NOTE:            For all the TPs in this subclause, the CUG has the options IA set to allowed and not ICB.

**CUG\_N02\_001**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,  
    rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_002**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,  
    rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_003**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_004**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_005**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex is not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "inconsistencyInDesignatedFacilityAndSubscriberClass".

**CUG\_N02\_006**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex is not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "inconsistencyInDesignatedFacilityAndSubscriberClass".

**CUG\_N02\_007**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_008**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_009**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex is not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "inconsistencyInDesignatedFacilityAndSubscriberClass".

**CUG\_N02\_010**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex is not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "inconsistencyInDesignatedFacilityAndSubscriberClass".

**CUG\_N02\_011**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_012**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_013**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_014**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_015**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_016**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".



**CUG\_N02\_017**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_018**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_019**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_020**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_021**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "notSubscribed".

**CUG\_N02\_022**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex is included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_023**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex is included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and preferential CUG,

rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_024**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_025**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "notSubscribed".

**CUG\_N02\_026**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_027**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_028**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index is not appropriate to the requested basic service, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "requestedBasicServiceViolatesCUGConstraints".

**CUG\_N02\_029**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_030**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex is included, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_031**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex is included, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_032**                    **subclause 9.2.1.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex is not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and preferential CUG,  
rejects the call with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "outgoingCallsBarredWithinCUG".

**CUG\_N02\_033**                    **subclause 9.2.1.2 last paragraph**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Channel identification information element coded as "B1 exclusive" and B1-channel is already occupied, and a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, but the CUG index does not exist, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG,  
rejects the call with Cause #44 "requested circuit/channel not available", and with a Facility information element containing a cUGCall return error component indicating "invalidOrUnregisteredCUGIndex".

**CUG\_N02\_034**                    **subclause 9.2.1.2 last paragraph**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex included, and the calling user has not subscribed to the CUG supplementary service,  
rejects the call with Cause #29 "facility rejected", and with a Facility information element containing a cUGCall return error component indicating "notSubscribed".

**CUG\_N02\_035**                    **subclause 9.2.1.2 last paragraph**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex included, and the calling user has not subscribed to the CUG supplementary service,  
rejects the call with Cause #29 "facility rejected", and with a Facility information element containing a cUGCall return error component indicating "notSubscribed".

**CUG\_N02\_036**                    **subclause 9.2.1.2 last paragraph**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to FALSE and CUGIndex not included, and the calling user has not subscribed to the CUG supplementary service,  
rejects the call with Cause #29 "facility rejected", and with a Facility information element containing a cUGCall return error component indicating "notSubscribed".

**CUG\_N02\_037**                    **subclause 9.2.1.2 last paragraph**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARRequested set to TRUE and CUGIndex not included, and the calling user has not subscribed to the CUG supplementary service,  
rejects the call with Cause #29 "facility rejected", and with a Facility information element containing a cUGCall return error component indicating "notSubscribed".

### 6.2.1.1.3 CUG call failed at destination network side

#### **CUG\_N03\_001** subclause 9.2.1.2 and table 6

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received,

responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "IncomingCallsBarredWithinCUG" and enters call state N12 or N00, respectively.

**Selection:** IUT supports option to offer ICB. PICS: MC 3.

#### **CUG\_N03\_002** subclause 9.2.1.2 and table 6

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received,

responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "IncomingCallsBarredWithinCUG" and enters call state N12 or N00, respectively.

#### **CUG\_N03\_003** subclause 9.2.1.2 and table 6

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has not subscribed to the CUG supplementary service, and allowing for the possibility of a CALL PROCEEDING message being received,

responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and a Facility information element containing a cUGCall return error component indicating "userNotMemberOfCUG" and enters call state N12 or N00, respectively.

#### **CUG\_N03\_004** subclause 9.2.1.2 and table 6

Ensure that the IUT in the Call Initiated call state N01, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB, after receiving a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex is not included, and allowing for the possibility of a CALL PROCEEDING message being received,

responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not member of CUG" and enters call state N12 or N00, respectively.

#### **CUG\_N03\_005** subclause 9.2.1.2 and table 6

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex is not included, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB, and allowing for the possibility of a CALL PROCEEDING message being received,

responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not member of CUG" and enters call state N12 or N00, respectively.

**CUG\_N03\_006**                    **subclause 9.2.1.2, 2nd last paragraph**

Ensure that the IUT in the Call Initiated call state N01 and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB after the receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and there is a match between CUG index and CUG interlock code, on the second expiry of timer T303, and allowing for the possibility of a CALL PROCEEDING message being received,

sends a DISCONNECT or RELEASE COMPLETE message with Cause #18 "no user responding" and with a Facility information element containing a cUGCall return error component indicating "basicServiceNotProvided" and enters call state N12 or N00, respectively.

**6.2.1.2**                    **Default request**

**6.2.1.2.1**                    **CUG call successful at originating network side and at destination network side**

**CUG\_N04\_001**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, not ICB, to indicate that the called user has entered the alerting phase,

responds with an ALERTING message and enters call state N04.

**CUG\_N04\_002**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component and the CUG interlock code is set to preferential CUG, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB, to indicate that the called user has entered the alerting phase,

responds with an ALERTING message and enters call state N04.

**CUG\_N04\_003**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component and the CUG interlock code is set to preferential CUG, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, not ICB, to indicate that the called user has entered the alerting phase,

responds with an ALERTING message and enters call state N04.

**CUG\_N04\_004**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component and the CUG interlock code is set to preferential CUG, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB, to indicate that the called user has entered the alerting phase,

responds with an ALERTING message and enters call state N04.

**CUG\_N04\_005**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component and the CUG interlock code is set to preferential CUG, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, not ICB, to indicate that the called user has entered the alerting phase,

responds with an ALERTING message and enters call state N04.

**CUG\_N04\_006**                    **subclause 9.2.2.1 and table 6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has not subscribed to the CUG supplementary service, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**6.2.1.2.2**                    **CUG call failed at originating network side**

**CUG\_N05\_001**                    **subclause 9.2.2.2 and table 5**

Ensure that the IUT in the Call Initiated call state N01, after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and not preferential CUG, and allowing for the possibility of a CALL PROCEEDING message being received,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**CUG\_N05\_002**                    **subclause 9.2.2.2 and table 5**

Ensure that the IUT in the Call Initiated call state N01, after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and not preferential CUG, and allowing for the possibility of a CALL PROCEEDING message being received,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**CUG\_N05\_003**                    **subclause 9.2.2.2 and table 5**

Ensure that the IUT in the Call Initiated call state N01, after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, OCB and preferential CUG, and allowing for the possibility of a CALL PROCEEDING message being received,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" enters call state N12 or N00, respectively.

**CUG\_N05\_004**                    **subclause 9.2.2.2 and table 5**

Ensure that the IUT in the Call Initiated call state N01, after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and preferential CUG, and allowing for the possibility of a CALL PROCEEDING message being received,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**CUG\_N05\_005**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, not ICB, allowing for the possibility of a CALL PROCEEDING message being received,  
    responds with a DISCONNECT or RELEASE COMPLETE message with cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**CUG\_N05\_006**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received,  
    responds with a DISCONNECT or RELEASE COMPLETE message with cause #29 "facility rejected" and enters call state N12 or N00, respectively.

### 6.2.1.2.3 CUG call failed at destination network side

#### **CUG\_N06\_001 subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB, and allowing for the possibility of a CALL PROCEEDING message being received, responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

#### **CUG\_N06\_002 subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB and allowing for the possibility of a CALL PROCEEDING message being received, responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

#### **CUG\_N06\_003 subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB, and allowing for the possibility of a CALL PROCEEDING message being received, responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

#### **CUG\_N06\_004 subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received, responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

#### **CUG\_N06\_005 subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and there is a match between the CUG index and interlock code, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received, responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and enters call state N12 or N00, respectively.

#### **CUG\_N06\_006 subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and there is a match between the CUG index and interlock code, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received, responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" enters call state N12 or N00, respectively.

**CUG\_N06\_007**                    **subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and there is a match between the CUG index and interlock code, and the calling user has subscribed to the CUG supplementary service and has the options OA is not allowed, not OCB and preferential CUG, and the called user has not subscribed to the CUG supplementary service, and allowing for the possibility of a CALL PROCEEDING message being received,

    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

**CUG\_N06\_008**                    **subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and there is a match between the CUG index and interlock code, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received,

    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**CUG\_N06\_009**                    **subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and there is a match between the CUG index and interlock code, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, ICB, and allowing for the possibility of a CALL PROCEEDING message being received,

    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**CUG\_N06\_010**                    **subclause 9.2.2.2 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and there is a match between the CUG index and interlock code, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and preferential CUG, and the called user has not subscribed to the CUG supplementary service, and allowing for the possibility of a CALL PROCEEDING message being received,

    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

**CUG\_N06\_011**                    **subclause 9.2.2.1 and table 5**

Ensure that the IUT in the Call Initiated call state N01 after receiving a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has subscribed to the CUG supplementary service and has the options OA is allowed, not OCB and not preferential CUG, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, ICB, allowing for the possibility of a CALL PROCEEDING message being received,

    responds with a DISCONNECT or RELEASE COMPLETE message with cause #29 "facility rejected" and enters call state N12 or N00, respectively.

**6.2.1.3**                    **User without CUG**

**6.2.1.3.1**                    **CUG call successful at originating network side and at destination network side**

**CUG\_N07\_001**                    **subclause 9.2.3.1 and table 6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has not subscribed to the CUG supplementary service, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, ICB, to indicate that the called user has entered the alerting phase,

    responds with an ALERTING message and enters call state N04.



**CUG\_N07\_002**                    **subclause 9.2.3.1 and table 6**

Ensure that the IUT in the Outgoing Call Proceeding call state N03 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the calling user has not subscribed to the CUG supplementary service, and the called user has subscribed to the CUG supplementary service and has the options IA is allowed, not ICB, to indicate that the called user has entered the alerting phase,  
    responds with an ALERTING message and enters call state N04.

**6.2.1.3.2**                    **CUG call failed at originating network side**

**CUG\_N08\_001**                    **subclause 9.2.3.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex included, and the calling user has not subscribed to the CUG supplementary service,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #50 "requested facility not subscribed" and a Facility information element containing a cUGCall return error component indicating "notSubscribed" and enters call state N12 or N00, respectively.

**CUG\_N08\_002**                    **subclause 9.2.3.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex included, and the calling user has not subscribed to the CUG supplementary service,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #50 "requested facility not subscribed" and a Facility information element containing a cUGCall return error component indicating "notSubscribed" and enters call state N12 or N00, respectively.

**CUG\_N08\_003**                    **subclause 9.2.3.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to FALSE and CUGIndex not included, and the calling user has not subscribed to the CUG supplementary service,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #50 "requested facility not subscribed" and a Facility information element containing a cUGCall return error component indicating "notSubscribed" and enters call state N12 or N00, respectively.

**CUG\_N08\_004**                    **subclause 9.2.3.2 and table 5**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component with OARrequested set to TRUE and CUGIndex not included, and the calling user has not subscribed to the CUG supplementary service,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #50 "requested facility not subscribed" and a Facility information element containing a cUGCall return error component indicating "notSubscribed" and enters call state N12 or N00, respectively.

**CUG\_N08\_005**                    **subclause 9.2.3.2, 2nd paragraph**

Ensure that the IUT in the Null call state N00 on receipt of a SETUP message with a Facility information element containing a cUGCall invoke component but the network cannot recognize this supplementary service request, and the calling user has not subscribed to the CUG supplementary service,  
    responds with a FACILITY, SETUP ACKNOWLEDGE or CALL PROCEEDING message with a Facility information element containing a reject component and continues normal call handling.

**6.2.1.3.3**                    **CUG call failed at destination network side**

**CUG\_N09\_001**                    **subclause 9.2.3.1 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, not ICB, and allowing for receipt of a CALL PROCEEDING message,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

**CUG\_N09\_002**                    **subclause 9.2.3.1 and table 6**

Ensure that the IUT in the Call Initiated call state N01 after the receipt of a SETUP message without a Facility information element containing a cUGCall invoke component, and the called user has subscribed to the CUG supplementary service and has the options IA is not allowed, ICB, and allowing for receipt of a CALL PROCEEDING message,  
    responds with a DISCONNECT or RELEASE COMPLETE message with Cause #87 "user not a member of CUG" and enters call state N12 or N00, respectively.

**6.2.2**                    **Called user interface**

**CUG\_N10\_001**                    **subclause 9.2.4.1**

Ensure that the IUT in the Null call state N00, and both the calling user and the called user have subscribed to the CUG supplementary service,  
    is able to send a SETUP message with a Facility information element containing a cUGCall invoke component to the called user and enters call state N06.

**CUG\_N10\_002**                    **subclause 9.2.4.1**

Ensure that the IUT in the Incoming Call Proceeding call state N09, after sending a SETUP message with a Facility information element containing a cUGCall invoke component, and both the calling user and the called user have subscribed to the CUG supplementary service, on receipt of an ALERTING message,  
    continues normal call handling and enters call state N07.

**CUG\_N10\_003**                    **subclause 9.2.4.1**

Ensure that the IUT in the Incoming Call Proceeding call state N09, after sending a SETUP message with a Facility information element containing a cUGCall invoke component, and both the calling user and the called user have subscribed to the CUG supplementary service, on receipt of a CONNECT message,  
    continues normal call handling and enters call state N08.

**CUG\_N10\_004**                    **subclause 9.2.4.1 b**

Ensure that the IUT in the Incoming Call Proceeding call state N09, after sending a SETUP message with a Facility information element containing a cUGCall invoke component, on receipt of a DISCONNECT message containing a Facility information element with a cUGCall return error,  
    responds with a RELEASE message and enters call state N19.

## **7**                    **Compliance**

An ATS which complies with this TSS&TP specification shall:

- a) consist of a set of test cases corresponding to the set or to a subset of the TPs specified in clause 6;
- b) use a TSS which is an appropriate subset of the whole of the TSS specified in clause 5;
- c) use the same naming conventions for the test groups and test cases;
- d) maintain the relationship specified in clause 6 between the test groups and TPs and the entries in the PICS proforma to be used for test case deselection;
- e) comply with ISO/IEC 9646-2 [4].

In the case of a) or b) above, a subset shall be used only where a particular Abstract Test Method (ATM) makes some TPs untestable. All testable TPs from clause 6 shall be included in a compliant ATS.

## **8**                    **Requirements for a comprehensive testing service**

As a minimum the Remote test method, as specified in ISO/IEC 9646-2 [4], shall be used by any organization claiming to provide a comprehensive testing service for network equipment claiming conformance to ETS 300 138-1 [1].

## History

Document history			
March 1996	Public Enquiry	PE 103:	1996-03-04 to 1996-06-28
March 1997	Vote	V 9720:	1997-03-18 to 1997-05-16
May 1997	First Edition		