



EUROPEAN
TELECOMMUNICATION
STANDARD

DRAFT
pr **ETS 300 207-3**

October 1995

Source: ETSI TC-SPS

Reference: DE/SPS-05061-R-3

ICS: 33.080

Key words: ISDN, DSS1, supplementary service, TSS&TP

**Integrated Services Digital Network (ISDN);
Diversion supplementary services;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 3: Test Suite Structure and Test Purposes (TSS&TP)
specification for the user**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1995. All rights reserved.

Contents

Foreword	5
1 Scope	7
2 Normative references	7
3 Definitions	8
3.1 Definitions related to conformance testing	8
3.2 Definitions related to ETS 300 207-1	8
4 Abbreviations	9
5 Test suite structure	10
6 Test purposes	10
6.1 Introduction	10
6.1.1 TP naming convention	10
6.1.2 Source of TP definition	11
6.1.3 TP structure	11
6.1.4 Test strategy	12
6.2 User TPs for call diversion	12
6.2.1 Common S/T or T	12
6.2.1.1 Call forwarding	12
6.2.1.1.1 Activation	12
6.2.1.1.2 Deactivation	15
6.2.1.1.3 Interrogation - general	17
6.2.1.1.4 Interrogation - service	19
6.2.1.1.5 Operation	20
6.2.1.2 Call deflection - operation	21
6.2.2 S/T only	23
6.2.2.1 Reminder notification	23
6.2.3 T only	23
6.2.3.1 ETS 300 207-1, subclause 10.1	23
6.2.3.2 ETS 300 207-1, subclause 10.2	24
6.2.3.3 ETS 300 207-1, subclause 10.4	24
6.2.3.4 ETS 300 207-1, subclause 10.5	25
7 Compliance	26
8 Requirements for a comprehensive testing service	26
History	27

Blank page

Foreword

This draft European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Public Enquiry phase of the ETSI standards approval procedure.

This ETS is part 3 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Diversion supplementary services, as described below:

Part 1: "Protocol specification";

Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";

Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";

Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";

Part 5: "TSS&TP specification for the network";

Part 6: "ATS and partial PIXIT proforma specification for the network".

Proposed transposition dates	
Date of latest announcement of this ETS (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Blank page

1 Scope

This third part of ETS 300 207 specifies the user Test Suite Structure and Test Purposes (TSS&TP) of the Diversion supplementary services for the pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators at the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [7]) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol.

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 207-1 (1994): "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
 - [2] ETS 300 207-2: "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
 - [3] ISO/IEC 9646-1: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 1: General Concepts".
 - [4] ISO/IEC 9646-2: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 2: Abstract Test Suite specification".
 - [5] ISO/IEC 9646-3: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 3: The Tree and Tabular Combined Notation".
 - [6] ETS 300 196-1 (1993): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- NOTE: ETS 300 196-1 (1993) was initially published as ETS 300 196 (1993).
- [7] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
 - [8] ETS 300 102-1: "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specifications for basic call control".
 - [9] ITU-T Recommendation I.112 (1993): "Vocabulary and terms for ISDNs".
 - [10] CCITT Recommendation E.164 (1991): "Numbering plan for the ISDN era".
 - [11] ITU-T Recommendation I.210 (1993): "Principles of the telecommunication services supported by an ISDN and the means to describe them".
 - [12] I-ETS 300 314: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1); Protocol Implementation Conformance Statement (PICS) proforma specification for signalling network layer protocol for circuit-mode basic call control (basic access, user)".

[13] I-ETS 300 315: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1); Protocol Implementation Conformance Statement (PICS) proforma specification for signalling network layer protocol for circuit-mode basic call control (primary rate access, user)".

3 Definitions

For the purposes of this ETS, the following definitions apply:

3.1 Definitions related to conformance testing

abstract test case: Refer to ISO/IEC 9646-1 [3].

abstract test suite: Refer to ISO/IEC 9646-1 [3].

active test: A test case where the IUT is required to send a particular message, but not in reaction to a received message. This would usually involve the use of PIXIT information to see how this message can be generated and quite often is specified in an ATS using an Implicit Send event.

implementation under test: Refer to ISO/IEC 9646-1 [3].

implicit send event: Refer to ISO/IEC 9646-3 [5].

lower tester: Refer to ISO/IEC 9646-1 [3].

passive test: A test case where the IUT is required to respond to a protocol event (e.g. received message) with another protocol event (sends message) and normally does not require any special operator intervention such as is associated with the Implicit Send event.

point of control and observation: Refer to ISO/IEC 9646-1 [3].

Protocol Implementation Conformance Statement (PICS): Refer to ISO/IEC 9646-1 [3].

PICS proforma: Refer to ISO/IEC 9646-1 [3].

Protocol Implementation eXtra Information for Testing (PIXIT): Refer to ISO/IEC 9646-1 [3].

PIXIT proforma: Refer to ISO/IEC 9646-1 [3].

system under test: Refer to ISO/IEC 9646-1 [3].

test purpose: Refer to ISO/IEC 9646-1 [3].

3.2 Definitions related to ETS 300 207-1

call reference: See ETS 300 102-1 [8], subclause 4.3.

component: See ETS 300 196 [6], subclause 11.2.2.1.

Integrated Services Digital Network (ISDN): See ITU-T Recommendation I.112 [9], definition 308.

invoke component: See ETS 300 196 [6], subclause 11.2.2.1.

ISDN number: A number conforming to the numbering and structure specified in CCITT Recommendation E.164 [10].

return error component: See ETS 300 196 [6], subclause 11.2.2.1.

return result component: See ETS 300 196 [6], subclause 11.2.2.1.

served user: The served user is the user who invokes the Call Diversion supplementary service.

service; telecommunication service: See ITU-T Recommendation I.112 [9], definition 201.

supplementary service: See ITU-T Recommendation I.210 [11], subclause 2.4.

user: The DSS1 protocol entity at the User side of the user-network interface where a T reference point or coincident S and T reference point applies.

user (S/T): The DSS1 protocol entity at the network side of the user-network interface where a coincident S and T reference point applies.


user (T): The DSS1 protocol entity at the User side of the user-network interface where a T reference point applies (User is the Private ISDN).

4 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
CR	Call Reference
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
TP	Test Purpose
TSS	Test Suite Structure
U00	Null Call state
U03	Outgoing Call Proceeding Call state
U04	Call Delivered Call state
U07	Call Received Call state
U08	Connect Request Call state
U09	Incoming Call Proceeding Call state
U10	Active Call state
U25	Overlap Receiving Call state

5 Test suite structure

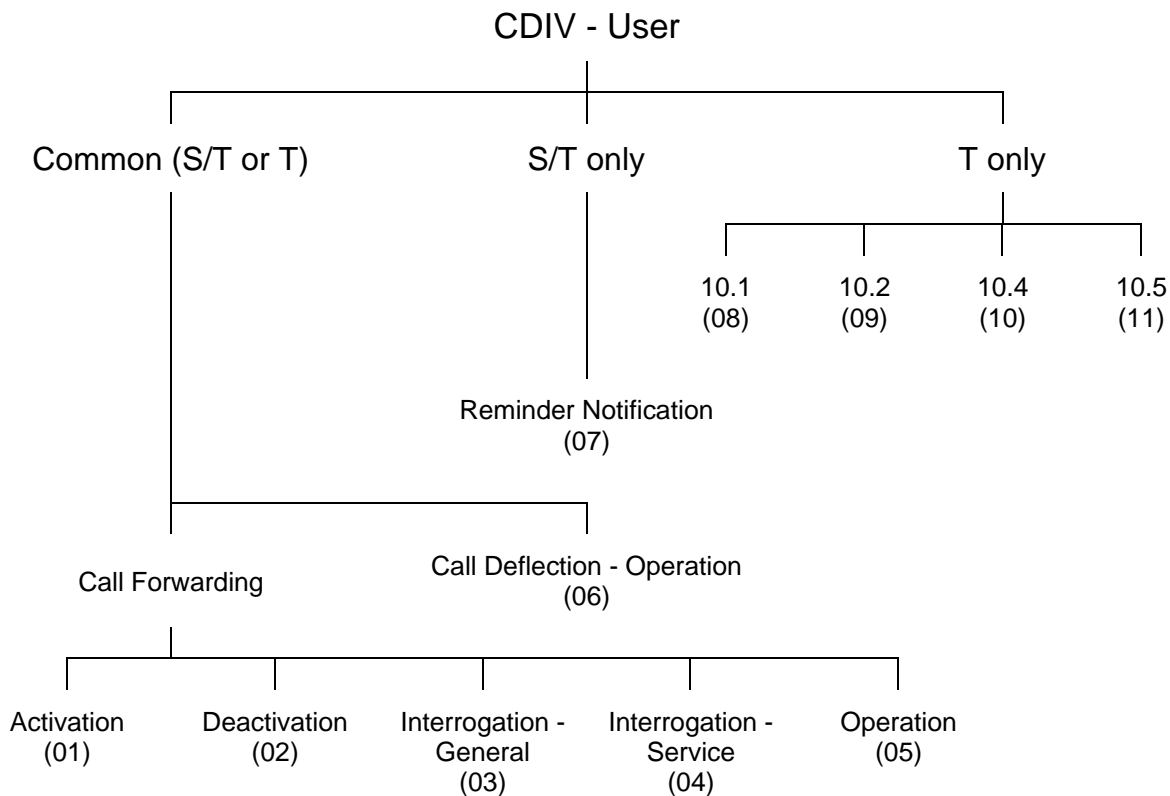

NOTE: Numbers in brackets represent group numbers and are used in Test Purpose (TP) identifiers.

Figure 1: Test suite structure

6 Test purposes

6.1 Introduction

For each test requirement a TP is defined.

6.1.1 TP naming convention

TPs are numbered, starting at 001, within each group. Groups are organized according to the Test Suite Structure (TSS). Additional references are added to identify the actual supplementary service and whether it applies to the network or the user (see table 1).

Table 1: TP Identifier naming convention scheme

Identifier:	<ss>_<iut><group>_<service>_<nnn>		
<ss> =	supplementary service:	e.g. "CDIV_"	
<iut> =	type of IUT:	U	User
		N	Network.
<group>	group	2 digit field representing group reference according to TSS	
<service>	forwarding service	optional field designating CFNR, CFB or CFU	
<nnn> =	sequential number	(001-999)	

6.1.2 Source of TP definition

The TPs were developed based on ETS 300 207-1 [1].

6.1.3 TP structure

Each TP has been written in a manner which is consistent with all other TPs. The intention of this is to make the TPs more readable and checkable. A particular structure has been used and this is illustrated in table 2. This table should be read in conjunction with any TP i.e. use a TP as an example to fully understand the table.

Table 2: Structure of a single TP for Call Diversion

TP Part	Text	Example
Header	<Identifier> <i>tab</i> <paragraph number in base ETS> <i>tab</i> <PICS reference (if any)> <i>tab</i> <type of test> <i>tab</i> <condition> <i>CR.</i>	see Table 1 subclause 0.0.0 XY 0.0 valid, invalid, inopportune mandatory, optional, conditional
Stimulus	Ensure that the IUT in the in <basic call state> and in <supplementary service state> <trigger> <i>see below for message structure</i> <i>or</i> <goal>	U10(idle), U10(call held), etc. CNFR Wait Deactivation state and receiving a XXXX message to request a
Reaction	<action> <conditions> <i>if the action is sending</i> <i>see below for message structure</i> <next action>, <i>etc.</i> and enters <supplementary service state> <i>and/or</i> and remains in the same state(s) <i>or</i> and enters state <state>	sends, saves, does, etc. using en bloc sending, ...
Message structure	<message type> message containing a a) <info element> information element with b) a <field name> encoded as <i>or</i> including <coding of the field> and <i>back to a or b,</i>	SETUP, FACILITY, CONNECT, Bearer capability, Facility, ...
NOTE:	Text in italics will not appear in TPs and text between <> is filled in for each TP and may differ from one TP to the next.	

6.1.4 Test strategy

As the base standard contained no explicit requirements for testing, the TPs were generated as a result of an analysis of the base standard and PICS. The criteria applied included the following:

- only the requirements from the point of view of the T or coincident S and T reference point are considered;
- whether or not a test case can be built from the TP is not considered.

6.2 User TPs for call diversion

6.2.1 Common S/T or T

Selection: IUT supports served user requirements. PICS: R 4.1.

NOTE: This subclause contains TPs for implementations which support coincident S and T reference point procedures and for implementations which support T reference point procedures. Thus this clause contains TPs which are generally independent of the reference point configuration. Note however that there are a number of exceptions, and in these cases the selection expression attached to the TP gives a clear indication of which reference point configuration is appropriate.

6.2.1.1 Call forwarding

Selection: Call forwarding supported. PICS: R 1.1.

<service> = CFB or CFNR or CFU

NOTE: As a large amount of the protocol for CFB, CFNR and CFU is independent of which of the three services is supported, the TPs have mostly been written in a general way. This ensures consistent TPs and should help in the development of consistent test cases and in their maintenance. Each TP containing "<service>" will expand into three test cases - one for each of the three services.

6.2.1.1.1 Activation

CDIV_U01_<service>_001 subclause 9.1.1.1 valid mandatory

Ensure that the IUT, in call state U00 in order to activate the call forwarding supplementary service <service>

sends a <service> ActivationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Activation state.

CDIV_U01_<service>_002 subclause 9.1.1.1 valid mandatory

Ensure that the IUT, in U00 in order to reactivate the call forwarding supplementary service <service> successfully activated

sends a <service> ActivationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Activation state.

CDIV_U01_<service>_003 subclause 9.1.1.1 valid mandatory

Ensure that the IUT, in U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return result component in the Facility information element of a FACILITY message using the dummy call reference,

enters the <service> Idle state.

CDIV_U01_<service>_004 subclause 9.1.1.1 valid optional

Ensure that the IUT, in call state U00 and in the <service> Idle state, on receipt of a <service> ActivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,

accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U01_<service>_005 subclause 9.1.1.1 valid optional

Ensure that the IUT, in U00 and in the <service> Activation Request state, on receipt of a <service> ActivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,
accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U01_<service>_006 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value notSubscribed in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_007 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value notAvailable in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_008 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value invalidServedUserNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_009 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value supplementaryServiceInteractionNotAllowed in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_010 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value basicServiceNotProvided in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_011 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value resourceUnavailable in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_012 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value InvalidDivertedToNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_013 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value SpecialServiceNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_014 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value DiversionToServedUserNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_015 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 while in the <service> Wait Activation state, on receipt of a FACILITY message using the dummy call reference with a Facility information element containing a reject component (resource-limitation),
sends no message and enters the <service> Idle state.

CDIV_U01_<service>_016 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Activation state, on expiry of timer T-ACTIVATE,
enters the <service> Idle state.

CDIV_U01_<service>_017 subclause 9.1.1.1 valid mandatory

Ensure that the IUT, in call state U10 in order to activate the call forwarding supplementary service <service>
sends a <service> ActivationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Activation state.

CDIV_U01_<service>_018 subclause 9.1.1.1 valid mandatory

Ensure that the IUT, in call state U10 in order to reactivate the call forwarding supplementary service <service> successfully activated
sends a <service> ActivationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Activation state.

CDIV_U01_<service>_019 subclause 9.1.1.1 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return result component in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_020 subclause 9.1.1.1 valid optional

Ensure that the IUT, in call state U10 and in the <service> Idle state, on receipt of a <service> ActivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,
accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U01_<service>_021 subclause 9.1.1.1 valid optional

Ensure that the IUT, in call state U10 and in the <service> Activation Request state, on receipt of a <service> ActivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,
accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U01_<service>_022 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value notSubscribed in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_023 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value notAvailable in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_024 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value invalidServedUserNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_025 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value supplementaryServiceInteractionNotAllowed in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_026 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value basicServiceNotProvided in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_027 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value resourceUnavailable in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_028 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value InvalidDivertedToNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_029 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value SpecialServiceNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_030 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on receipt of a <service> ActivationDiversion return error component containing the error value DiversionToServedUserNr in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U01_<service>_031 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 while in the <service> Wait Activation state on receipt of a FACILITY message using the dummy call reference with a Facility information element containing a reject component (resource-limitation),
sends no message and enters the <service> Idle state.

CDIV_U01_<service>_032 subclause 9.1.1.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Activation state, on expiry of timer T-ACTIVATE,
enters the <service> Idle state.

6.2.1.1.2 Deactivation**CDIV_U02_<service>_01 subclause 9.1.2.1 valid mandatory**

Ensure that the IUT, in call state U00 in order to deactivate the call forwarding supplementary service sends a <service> DeactivationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Deactivation state.

CDIV_U02_<service>_02 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return result component in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U02_<service>_003 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Idle state, on receipt of a <service> DeactivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,
accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U02_<service>_004 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,
accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U02_<service>_005 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "notAvailable" in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U02_<service>_006 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "notSubscribed" in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U02_<service>_007 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "invalidServedUserNr" in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U02_<service>_008 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "NotActivated" in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U02_<service>_009 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U00 while in the <service> Wait Deactivation state on receipt of a FACILITY message using the dummy call reference with a Facility information element containing a reject component (unrecognized-operation),
sends no message and enters the <service> Idle state.

CDIV_U02_<service>_010 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U00 and in the <service> Wait Deactivation state, on expiry of timer T-DEACTIVATE,
enters the <service> Idle state.

CDIV_U02_<service>_011 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U10 in order to deactivate the call forwarding supplementary service
sends a <service> DeactivationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Deactivation state.

CDIV_U02_<service>_012 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return result component in the Facility information element of a FACILITY message using the dummy call reference,
enters the <service> Idle state.

CDIV_U02_<service>_013 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Idle state, on receipt of a <service> DeactivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,

accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U02_<service>_014 subclause 9.1.2.1 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationStatusNotificationDiv invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,

accepts the provided information and does not respond and remains in the same states.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

CDIV_U02_<service>_015 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "notAvailable" in the Facility information element of a FACILITY message using the dummy call reference,

enters the <service> Idle state.

CDIV_U02_<service>_016 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "notSubscribed" in the Facility information element of a FACILITY message using the dummy call reference,

enters the <service> Idle state.

CDIV_U02_<service>_017 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "invalidServedUserNr" in the Facility information element of a FACILITY message using the dummy call reference,

enters the <service> Idle state.

CDIV_U02_<service>_018 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on receipt of a <service> DeactivationDiversion return error component containing the error value "NotActivated" in the Facility information element of a FACILITY message using the dummy call reference,

enters the <service> Idle state.

CDIV_U02_<service>_019 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U10 while in the <service> Wait Deactivation state on receipt of a FACILITY message using the dummy call reference with a Facility information element containing a reject component (unrecognized-operation),

sends no message and enters the <service> Idle state.

CDIV_U02_<service>_020 subclause 9.1.2.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Deactivation state, on expiry of timer T-DEACTIVATE,

enters the <service> Idle state.

6.2.1.1.3 Interrogation - general**CDIV_U03_001 subclause 9.1.3.1 valid mandatory**

Ensure that the IUT, in call state U00 in order to obtain the numbers at an interface for which call forwarding has been activated

transmits an InterrogateServedUserNumbers invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the Wait Number Interrogation state.

CDIV_U03_002 subclause 9.1.3.1 valid mandatory

Ensure that the IUT, in call state U00 and in the Wait Number Interrogation state, on receipt of a InterrogateServedUserNumbers return result component in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U03_003 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U00 and in the Wait Number Interrogation state, on receipt of a InterrogateServedUserNumbers return error component containing the error value "notAvailable" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U03_004 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U00 and in the Wait Number Interrogation state, on receipt of a InterrogateServedUserNumbers return error component containing the error value "notSubscribed" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U03_005 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U00 and in the Wait Number Interrogation state, on receipt of a FACILITY message using the dummy call reference with a Facility information element containing a reject component (unrecognized-operation),
sends no message and enters the Idle state.

CDIV_U03_006 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U00 and in the Wait Number Interrogation state, on expiry of timer T-INTERROGATE,
enters the Idle state.

CDIV_U03_007 subclause 9.1.3.1 valid mandatory

Ensure that the IUT, in call state U10 in order to obtain the numbers at an interface for which call forwarding has been activated
transmits an InterrogateServedUserNumbers invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the Wait Number Interrogation state.

CDIV_U03_008 subclause 9.1.3.1 valid mandatory

Ensure that the IUT, in call state U10 and in the Wait Number Interrogation state, on receipt of a InterrogateServedUserNumbers return result component in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U03_009 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U10 and in the Wait Number Interrogation state, on receipt of a InterrogateServedUserNumbers return error component containing the error value "notAvailable" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U03_010 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U10 and in the Wait Number Interrogation state, on receipt of a InterrogateServedUserNumbers return error component containing the error value "notSubscribed" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U03_011 subclause 9.1.3.2 valid mandatory

Ensure that the IUT, in call state U10 and in the Wait Number Interrogation state, on receipt of a reject component in the Facility information element of a FACILITY message using the dummy call reference,
sends no message and enters the Idle state.

CDIV_U03_012 **subclause 9.1.3.2** **valid mandatory**

Ensure that the IUT, in call state U10 and in the Wait Number Interrogation state, on expiry of timer T-INTERROGATE,
enters the Idle state.

6.2.1.1.4 **Interrogation - service****CDIV_U04_<service>_01** **subclause 9.1.4.1** **valid mandatory**

Ensure that the IUT, in call state U00 in order to obtain the details of the instance(s) of a call forwarding supplementary service <service>
transmits a <service> InterrogationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Interrogation state.

CDIV_U04_<service>_02 **subclause 9.1.4.1** **valid mandatory**

Ensure that the IUT, in call state U00 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return result component in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U04_<service>_03 **subclause 9.1.4.2** **valid mandatory**

Ensure that the IUT, in call state U00 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return error component containing the error value "notAvailable" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U04_<service>_04 **subclause 9.1.4.2** **valid mandatory**

Ensure that the IUT, in call state U00 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return error component containing the error value "notSubscribed" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U04_<service>_05 **subclause 9.1.4.2** **valid mandatory**

Ensure that the IUT, in call state U00 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return error component containing the error value "invalidServedUserNr" in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U04_<service>_06 **subclause 9.1.4.2** **valid mandatory**

Ensure that the IUT, in call state U00 and in the <service> Wait Interrogation state, on receipt of a reject component containing in the Facility information element of a FACILITY message using the dummy call reference,
sends no message and enters the Idle state.

CDIV_U04_<service>_07 **subclause 9.1.4.2** **valid mandatory**

Ensure that the IUT, in call state U00 and in the <service> Wait Interrogation state, on expiry of timer T-INTERROGATE,
enters the Idle state.

CDIV_U04_<service>_08 **subclause 9.1.4.1** **valid mandatory**

Ensure that the IUT, in call state U10 in order to obtain the details of the instance(s) of a call forwarding supplementary service <service>
transmits a <service> InterrogationDiversion invoke component in the Facility information element of a FACILITY message using the dummy call reference and enters the <service> Wait Interrogation state.

CDIV_U04_<service>_09 **subclause 9.1.4.1** **valid mandatory**

Ensure that the IUT, in call state U10 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return result component in the Facility information element of a FACILITY message using the dummy call reference,
accepts the provided information and enters the Idle state.

CDIV_U04_<service>_010 subclause 9.1.4.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return error component containing the error value "notAvailable" in the Facility information element of a FACILITY message using the dummy call reference, accepts the provided information and enters the Idle state.

CDIV_U04_<service>_011 subclause 9.1.4.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return error component containing the error value "notSubscribed" in the Facility information element of a FACILITY message using the dummy call reference, accepts the provided information and enters the Idle state.

CDIV_U04_<service>_012 subclause 9.1.4.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Interrogation state, on receipt of a <service> InterrogationDiversion return error component containing the error value "invalidServedUserNr" in the Facility information element of a FACILITY message using the dummy call reference, accepts the provided information and enters the Idle state.

CDIV_U04_<service>_013 subclause 9.1.4.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Interrogation state, on receipt of a reject component in the Facility information element of a FACILITY message using the dummy call reference, sends no message and enters the Idle state.

CDIV_U04_<service>_014 subclause 9.1.4.2 valid mandatory

Ensure that the IUT, in call state U10 and in the <service> Wait Interrogation state, on expiry of timer T-INTERROGATE, enters the Idle state.

6.2.1.1.5 Operation

<service> = CFB or CFU

CDIV_U05_<service>_001 subclause 9.2.4.1.1, 9.2.4.2.1, 9.2.4.3.1 valid optional

Ensure that the IUT, in call state U00 and in the <service> Idle state, on receipt of a valid <service> DiversionInformation invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link, accepts the provided information and does not respond.

Selection: support broadcast (bearer independent) connectionless transport mechanism? GFP PICS MCu 2.7.

CDIV_U05_<service>_002 subclause 9.2.4.1.1, 9.2.4.2.1, 9.2.4.3.1 valid optional

Ensure that the IUT, in call state U00 and in the <service> Idle state, on receipt of a valid <service> DiversionInformation invoke component in the Facility information element of a FACILITY message using the dummy call reference via point-to-point data link, accepts the provided information and does not respond.

Selection: support point-to-point (bearer independent) connectionless transport mechanism? GFP PICS MCu 2.6.

CDIV_U05_<service>_003 subclause 9.2.4.1.1, 9.2.4.2.1, 9.2.4.3.1 valid optional

Ensure that the IUT, in call state U10 and in the <service> Idle state, on receipt of a valid <service> DiversionInformation invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link, accepts the provided information and does not respond.

Selection: support broadcast (bearer independent) connectionless transport mechanism? GFP PICS MCu 2.7.

CDIV_U05_<service>_004 subclause 9.2.4.1.1, 9.2.4.2.1, 9.2.4.3.1 valid optional

Ensure that the IUT, in call state U10 and in the <service> Idle state, on receipt of a valid <service> DiversionInformation invoke component in the Facility information element of a FACILITY message using the dummy call reference via point-to-point data link,

accepts the provided information and does not respond.

Selection: support point-to-point (bearer independent) connectionless transport mechanism? GFP PICS MCu 2.6.

CDIV_U05_CFNR_001 subclause 9.2.4.4.1 valid optional

Ensure that the IUT, in call state U07 and in the CFNR Idle state, on receipt of a valid CFNR DiversionInformation invoke component in the Facility information element of a FACILITY message using the dummy call reference via broadcast data link,

accepts the provided information and does not respond.

Selection: support broadcast (bearer independent) connectionless transport mechanism? GFP PICS MCu 2.7.

CDIV_U05_CFNR_002 subclause 9.2.4.4.1 valid optional

Ensure that the IUT, in call state U07 and in the CFNR Idle state, on receipt of a valid CFNR DiversionInformation invoke component in the Facility information element of a FACILITY message using the dummy call reference via point-to-point data link,

accepts the provided information and does not respond.

Selection: support point-to-point (bearer independent) connectionless transport mechanism? GFP PICS MCu 2.6.

6.2.1.2 Call deflection - operation

Selection: Call deflection supported. PICS: R 1.2.

CDIV_U06_001 subclause 9.2.4.5.1 valid optional

Ensure that the IUT, in call state U07 in order to invoke the call deflection supplementary service sends a CallDeflection invoke component in the Facility information element of a FACILITY message and enters the Deflecting state.

Selection: IUT supports basic access, point-to-multipoint configuration? PICS: [12] MC 2.5.

Selection: IUT supports U07. PICS: [12]/[13] CS 7.

CDIV_U06_002 subclause 9.2.4.5.1 valid optional

Ensure that the IUT, in call state U09 in order to invoke the call deflection supplementary service sends a CallDeflection invoke component in the Facility information element of a FACILITY message and enters the Deflecting state.

Selection: IUT supports U09. PICS: [12]/[13] CS 9.

CDIV_U06_003 subclause 9.2.4.5.1 valid optional

Ensure that the IUT, in call state U25 in order to invoke the call deflection supplementary service sends a CallDeflection invoke component in the Facility information element of a FACILITY message and enters the Deflecting state.

Selection: IUT supports U25. PICS: [12]/[13] CS 17.

CDIV_U06_004 subclause 9.2.4.5.1 valid optional

Ensure that the IUT, in call state U07 and Deflecting state, on receipt of a CallDeflection return result component in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U07. PICS: [12]/[13] CS 7.

CDIV_U06_005 subclause 9.2.4.5.1 valid optional

Ensure that the IUT, in call state U07 and Deflecting state, on receipt of a CallDeflection return result component in the Facility information element of a DISCONNECT message which also includes a Cause information element with cause #31,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U07. PICS: [12]/[13] CS 7.

CDIV_U06_006 **subclause 9.2.4.5.1** **valid optional**

Ensure that the IUT, in call state U09 and Deflecting state, on receipt of a CallDeflection return result component in the Facility information element of a FACILITY message,
accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U09. PICS: [12]/[13] CS 9.

CDIV_U06_007 **subclause 9.2.4.5.1** **valid optional**

Ensure that the IUT, in call state U09 and Deflecting state, on receipt of a CallDeflection return result component in the Facility information element of a DISCONNECT message which also includes a Cause information element with cause #31,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U09. PICS: [12]/[13] CS 9.

CDIV_U06_008 **subclause 9.2.4.5.1** **valid optional**

Ensure that the IUT, in call state U25 and Deflecting state, on receipt of a CallDeflection return result component in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U25. PICS: [12]/[13] CS 17.

CDIV_U06_009 **subclause 9.2.4.5.1** **valid optional**

Ensure that the IUT, in call state U25 and Deflecting state, on receipt of a CallDeflection return result component in the Facility information element of a DISCONNECT message which also includes a Cause information element with cause #31,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U25. PICS: [12]/[13] CS 17.

NOTE: In the following nine TPs a series of Call Deflection return errors are sent to the IUT. These nine errors can be sent in any of three states. Rather than repeat every error for every state, the errors have been distributed among the states.

CDIV_U06_010 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U07 and Deflecting state, on receipt of a CallDeflection return error component, indicating "notSubscribed", in the Facility information element of a FACILITY message,
accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U07. PICS: [12]/[13] CS 7.

CDIV_U06_011 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U09 and Deflecting state, on receipt of a CallDeflection return error component, indicating "notAvailable", in the Facility information element of a FACILITY message,
accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U09. PICS: [12]/[13] CS 9.

CDIV_U06_012 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U25 and Deflecting state, on receipt of a CallDeflection return error component, indicating "InvalidDivertedToNr", in the Facility information element of a FACILITY message,
accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U25. PICS: [12]/[13] CS 17.

CDIV_U06_013 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U07 and Deflecting state, on receipt of a CallDeflection return error component, indicating "SpecialServiceNr", in the Facility information element of a FACILITY message,
accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U07. PICS: [12]/[13] CS 7.

CDIV_U06_014 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U09 and Deflecting state, on receipt of a CallDeflection return error component, indicating "DiversionToServedUserNr", in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U09. PICS: [12]/[13] CS 9.

CDIV_U06_015 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U25 and Deflecting state, on receipt of a CallDeflection return error component, indicating "IncomingCallAccepted", in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U25. PICS: [12]/[13] CS 17.

CDIV_U06_016 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U07 and Deflecting state, on receipt of a CallDeflection return error component, indicating "NumberOfDiversionExceeded", in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U07. PICS: [12]/[13] CS 7.

CDIV_U06_017 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U09 and Deflecting state, on receipt of a CallDeflection return error component, indicating "supplementaryServiceInteractionNotAllowed", in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U09. PICS: [12]/[13] CS 9.

CDIV_U06_018 **subclause 9.2.4.5.2** **valid optional**

Ensure that the IUT, in call state U25 and Deflecting state, on receipt of a CallDeflection return error component, indicating "RequestAlreadyAccepted", in the Facility information element of a FACILITY message,

accepts the provided information and enters the Call Deflection Idle state.

Selection: IUT supports U25. PICS: [12]/[13] CS 17.

6.2.2 **S/T only**

Selection: IUT supports coincident S and T reference point procedures. PICS: R 3.1.

6.2.2.1 **Reminder notification****CDIV_U07_001** **subclause 9.3.1** **valid mandatory**

Ensure that the IUT, in call state U01, on receipt of a SETUP ACKNOWLEDGE message with a Notification indicator information element containing a notification description value of "diversion activated",

accepts the provided information and enters call state U02.

CDIV_U07_002 **subclause 9.3.1** **valid mandatory**

Ensure that the IUT, in call state U01, on receipt of a CALL PROCEEDING message with a Notification indicator information element containing a notification description value of "diversion activated",

accepts the provided information and enters call state U03.

6.2.3 **T only**

Selection: IUT supports T reference point procedures. PICS: R 3.2.

6.2.3.1 **ETS 300 207-1, subclause 10.1**

Selection: IUT supports procedures where a call is diverted within or beyond the private ISDN. PICS: MC 6.

CDIV_U08_001 **subclause 10.1.1** **valid mandatory**

Ensure that the IUT, in call state U00, on receipt of a SETUP message and if the call is diverted within or beyond the private ISDN

continues normal call handling and sends a DivertingLegInformation1 invoke component in the Facility information element of either a FACILITY, PROGRESS or ALERTING message.

CDIV_U08_002 **subclause 10.1.1** **valid mandatory**

Ensure that the IUT, in call state U00, on receipt of a SETUP message and if the call is diverted within or beyond the private ISDN

continues normal call handling and sends a DivertingLegInformation1 invoke component in the Facility information element of either a FACILITY, PROGRESS or ALERTING message.

CDIV_U08_003 **subclause 10.1.2** **valid mandatory**

Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a reject component (resource-limitation) in response to a DivertingLegInformation1 component,

accepts this information and continues with call establishment.

CDIV_U08_004 **subclause 10.1.2** **valid mandatory**

Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a reject component (resource-limitation) in response to a DivertingLegInformation3 component,

accepts this information and continues with call establishment.

6.2.3.2 **ETS 300 207-1, subclause 10.2**

Selection: IUT supports procedures where a diverted call is presented to the private network.
PICS: R MC 7.

CDIV_U09_001 **subclause 10.2.1** **valid mandatory**

Ensure that the IUT, in call state U00, on receipt of a SETUP message containing a DiversionLegInformation2 invoke component in the Facility information element,

continues normal call handling and sends a DivertingLegInformation3 invoke component that indicates in the presentationAllowedIndicator parameter if presentation of the diverted-to user's ISDN number to the calling user is allowed in the Facility information element of either a FACILITY, ALERTING or CONNECT message.

CDIV_U09_002 **subclause 10.2.2** **valid optional**

Ensure that the IUT, on receipt of a FACILITY message with a Facility information element containing a reject component (resource-limitation) in response to a DivertingLegInformation3 component,

accepts this information and continues with call establishment.

6.2.3.3 **ETS 300 207-1, subclause 10.4**

Selection: IUT supports requirements where a diverted call is presented by the private ISDN.
PICS: MC 8.

CDIV_U10_001 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U00 in order to present a diverted call to the public ISDN, transmits a SETUP message containing a Facility information element including a DivertingLegInformation2 invoke component giving information about the call diversion(s) in the diversionCounter, the diversionReason, the divertingNr and if more than one diversion occurred the originalCalledNr parameter and enters call state U01 and the Private Network Diverting state.

CDIV_U10_002 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U01 and the Private Network Diverting state, on receipt of a DivertingLegInformation3 invoke component in the Facility information element of a FACILITY message, does not respond to this invoke component and remains in call state U01 and enters the Idle state.

CDIV_U10_003 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U03 and the Private Network Diverting state, on receipt of a DivertingLegInformation3 invoke component in the Facility information element of a FACILITY message, does not respond to this invoke component and remains in call state U03 and enters the Idle state.

CDIV_U10_004 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U04 and the Private Network Diverting state, on receipt of a DivertingLegInformation3 invoke component in the Facility information element of a FACILITY message, does not respond to this invoke component and remains in call state U04 and enters the Idle state.

CDIV_U10_005 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U03 and the Private Network Diverting state, on receipt of a DivertingLegInformation3 invoke component in the Facility information element of a ALERTING message, does not respond to this invoke component and enters call state U04 and enters the Idle state.

CDIV_U10_006 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U03 and the Private Network Diverting state, on receipt of a DivertingLegInformation3 invoke component in the Facility information element of a CONNECT message, does not respond to this invoke component and enters call state U10 and enters the Idle state.

CDIV_U10_007 **subclause 10.4.1** **valid mandatory**

Ensure that the IUT, in call state U04 and the Private Network Diverting state, on receipt of a DivertingLegInformation3 invoke component in the Facility information element of a CONNECT message, does not respond to this invoke component and enters call state U10 and enters the Idle state.

CDIV_U10_08 **subclause 10.4.2** **valid mandatory**

Ensure that the IUT, in call state U01 and the Private Network Diverting state, on receipt of a FACILITY message with a Facility information element containing a reject component (resource-limitation) corresponding to a previously sent invoke component, accepts this information and continues with call establishment.

6.2.3.4 **ETS 300 207-1, subclause 10.5**

Selection: IUT supports procedures for diversion by partial rerouteing: MC 9.

CDIV_U11_001 **subclause 10.5.1** **valid mandatory**

Ensure that the IUT, on receipt of a SETUP message, to request diversion by partial rerouteing transmits a FACILITY message containing in the Facility information element a valid CallRerouteing invoke component in call state U07, U09 or U25 and enters the Wait Route state.

CDIV_U11_002 **subclause 10.5.1** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return result component, accepts the information and enters the Idle state.

CDIV_U11_003 **subclause 10.5.1** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a DISCONNECT message containing in the Facility information element a valid CallRerouteing return result component and a Cause information element with cause #31, accepts the information, responds with a RELEASE message and enters the Idle state and call state U19.

CDIV_U11_04 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "notSubscribed", accepts the information and enters the Idle state.

CDIV_U11_05 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "notAvailable", accepts the information and enters the Idle state.

CDIV_U11_06 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "supplementaryServiceInteractionNotAllowed", accepts the information and enters the Idle state.

CDIV_U11_07 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "resourceUnavailable",
accepts the information and enters the Idle state.

CDIV_U11_08 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "InvalidDivertedToNr",
accepts the information and enters the Idle state.

CDIV_U11_09 **subclause 10.5.2** **valid mandatory**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "SpecialServiceNr",
accepts the information and enters the Idle state.

CDIV_U11_010 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "DiversionToServedUserNr",
accepts the information and enters the Idle state.

CDIV_U11_011 **subclause 10.5.2** **valid mandatory**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a valid CallRerouteing return error component, indicating "NumberOfDiversionsExceeded",
accepts the information and enters the Idle state.

CDIV_U11_012 **subclause 10.5.2** **valid optional**

Ensure that the IUT, while in the Wait Route state on receipt of a FACILITY message containing in the Facility information element a reject component (resource-limitation),
accepts the information and enters the Idle state.

7 Compliance

An ATS which complies with this TSS&TP specification shall:

- a) consist of a set of test cases corresponding to the set or to a subset of the TPs specified in clause 6;
- b) use a TSS which is an appropriate subset of the whole of the TSS specified in clause 5;
- c) use the same naming conventions for the test groups and test cases;
- d) maintain the relationship specified in clause 6 between the test groups and TPs and the entries in the PICS proforma to be used for test case deselection;
- e) comply with ISO/IEC 9646-2 [4].

In the case of a) or b) above, a subset shall be used only where a particular Abstract Test Method (ATM) makes some TPs untestable. All testable TPs from clause 6 shall be included in a compliant ATS.

8 Requirements for a comprehensive testing service

As a minimum the Remote test method, as specified in ISO/IEC 9646-2 [4], shall be used by any organization claiming to provide a comprehensive testing service for user equipment claiming conformance to ETS 300 207-1 [1].

History

Document history	
October 1995	Public Enquiry PE 94: 1995-10-23 to 1996-02-16
June 1996	Converted into Adobe Acrobat Portable Document Format (PDF)