

AMENDMENT

I-ETS 300 330
pr **A1**

August 1996

Source: ETSI TC-RES

Reference: RI/RES-080110

ICS: 33.060.20 33.060.50

Key words: radio, SRD, testing

**This draft amendment A1, if approved, will modify
the European Telecommunication Standard I-ETS 300 330 (1994)**

**Radio Equipment and Systems (RES);
Short Range Devices (SRDs);
Technical characteristics and test methods
for radio equipment in the frequency range 9 kHz to 25 MHz
and inductive loop systems in the frequency range
9 kHz to 30 MHz**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Foreword

This draft amendment to I-ETS 300 330 (1994) has been produced by the Radio Equipment and Systems (RES) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Unified Approval Procedure phase of the ETSI standards approval procedure.

Amendments

Page 21, table 2

Replace table 2 and the subsequent note with the following:

Table 2: H-field limits

Frequency range (MHz)	H-field strength limit (H _i) dB μ A/m at 10 m
For loop coil antennas with area $\geq 0,16 \text{ m}^2$	
$0,009 \leq f < 0,03$	72 or according to note
$0,03 \leq f < 0,135$	72 at 0,03 MHz descending 3,5 dB/octave or according to note
$0,135 \leq f < 4,78$	38 at 0,135 MHz descending 3,5 dB/octave
$4,78 \leq f < 30$	20
$6,765 \leq f < 6,795$ (ISM) $13,553 \leq f < 13,567$ (ISM) $26,957 \leq f < 27,283$ (ISM)	42
For loop coil antennas $< 0,05 \text{ m}^2$	
$0,009 \leq f < 0,03$	62 or according to note
$0,03 \leq f < 0,135$	62 at 0,03 MHz descending 3,5 dB/oct or according to note
$0,135 \leq f < 4,78$	38 at 0,135 MHz descending 3,5 dB/oct
$4,78 \leq f < 30$	20
$6,765 \leq f < 6,795$ (ISM) $13,553 \leq f < 13,567$ (ISM) $26,957 \leq f < 27,283$ (ISM)	42
For loop coil antennas with area between $0,05 \text{ m}^2$ and $0,16 \text{ m}^2$	
$0,009 \leq f < 0,135$	H _i table values for loop coils $\geq 0,16 \text{ m}^2 + 10 \times \log(\text{area}/0,16 \text{ m}^2)$ or according to note
$0,135 \leq f < 4,78$	38 at 0,135 MHz descending 3,5 dB/oct
$4,78 \leq f < 30$	20
$6,765 \leq f < 6,795$ (ISM) $13,553 \leq f < 13,567$ (ISM) $26,957 \leq f < 27,283$ (ISM)	42
NOTE:	The minimum limit to be applied at particular frequencies to protect existing services within these indicated bands is 42 dB μ A/m at 10 m.

Page 37, figure B.1

Replace figure B.1 with the following:

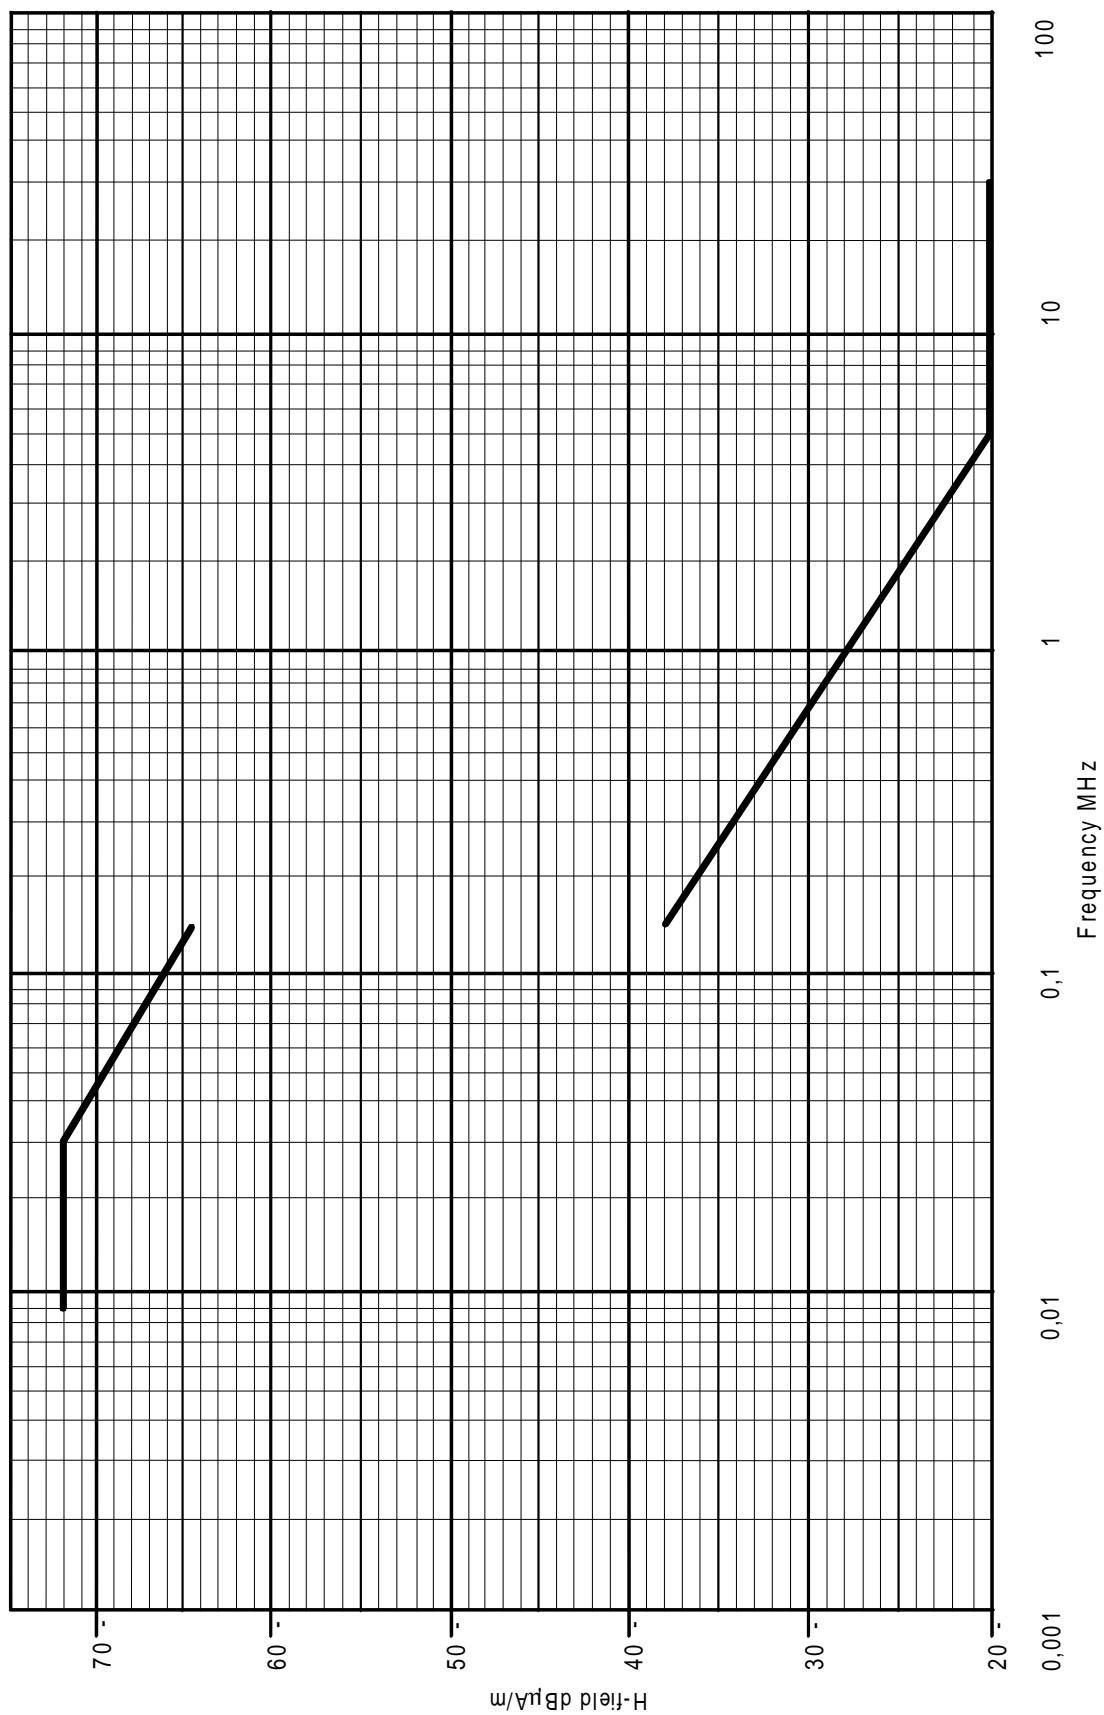


Figure B.1: Tx carrier limits, radiated H-field at 10 m distance

Page 38, figure C.1

Replace figure C.1 with the following:

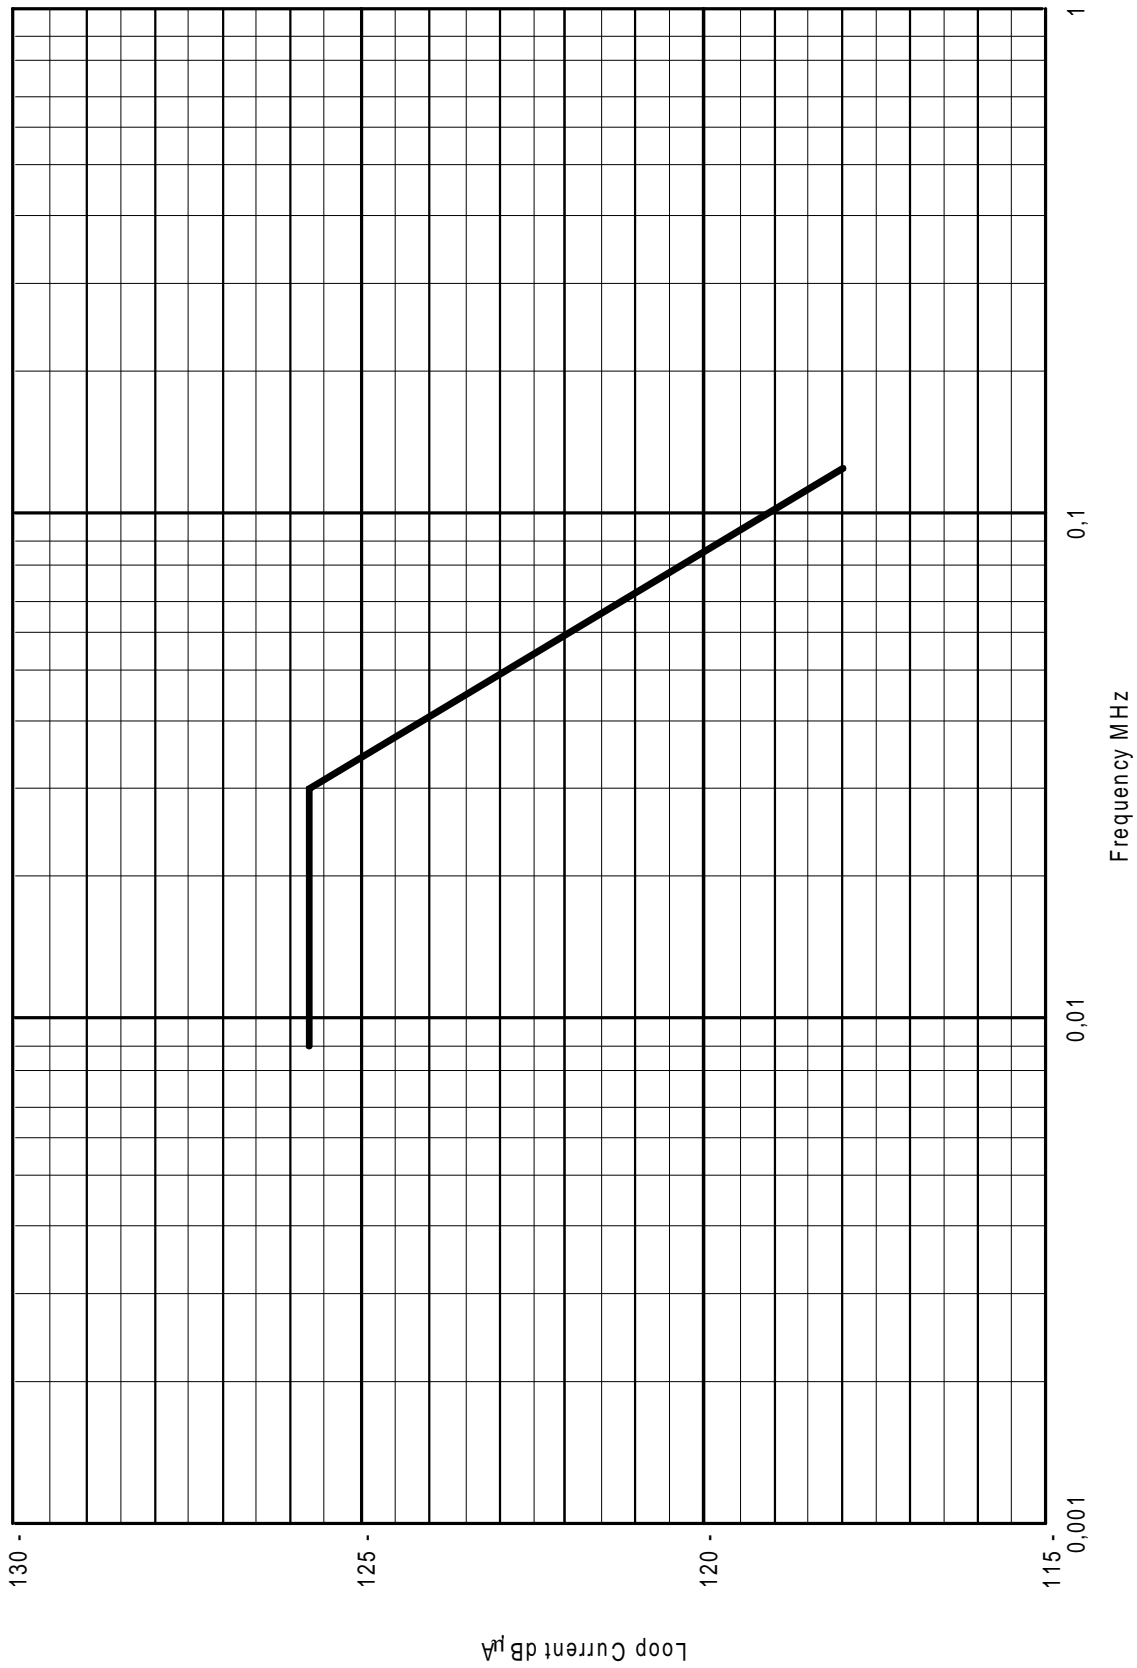


Figure C.1: Tx carrier current for a large-sized loop

Page 39, figure D.1

Replace figure D.1 with the following:

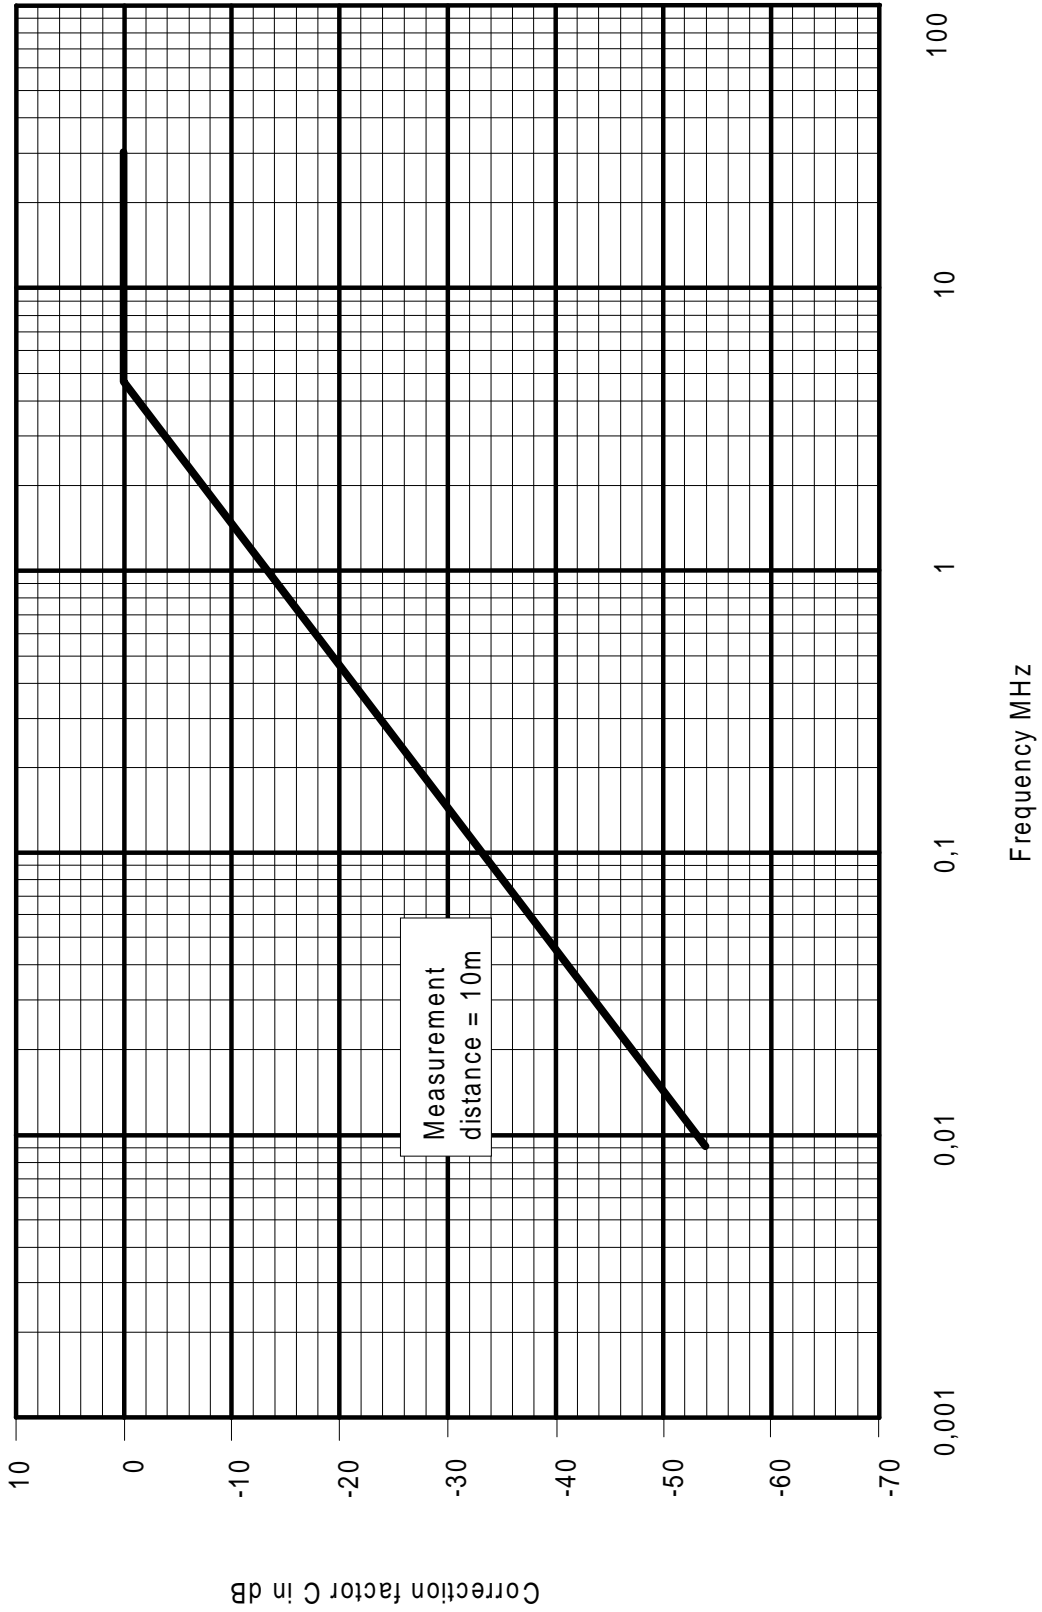


Figure D.1: H-field limit correction factor for electrically-generated field

Page 40, figure E.1

Replace figure E.1 with the following:

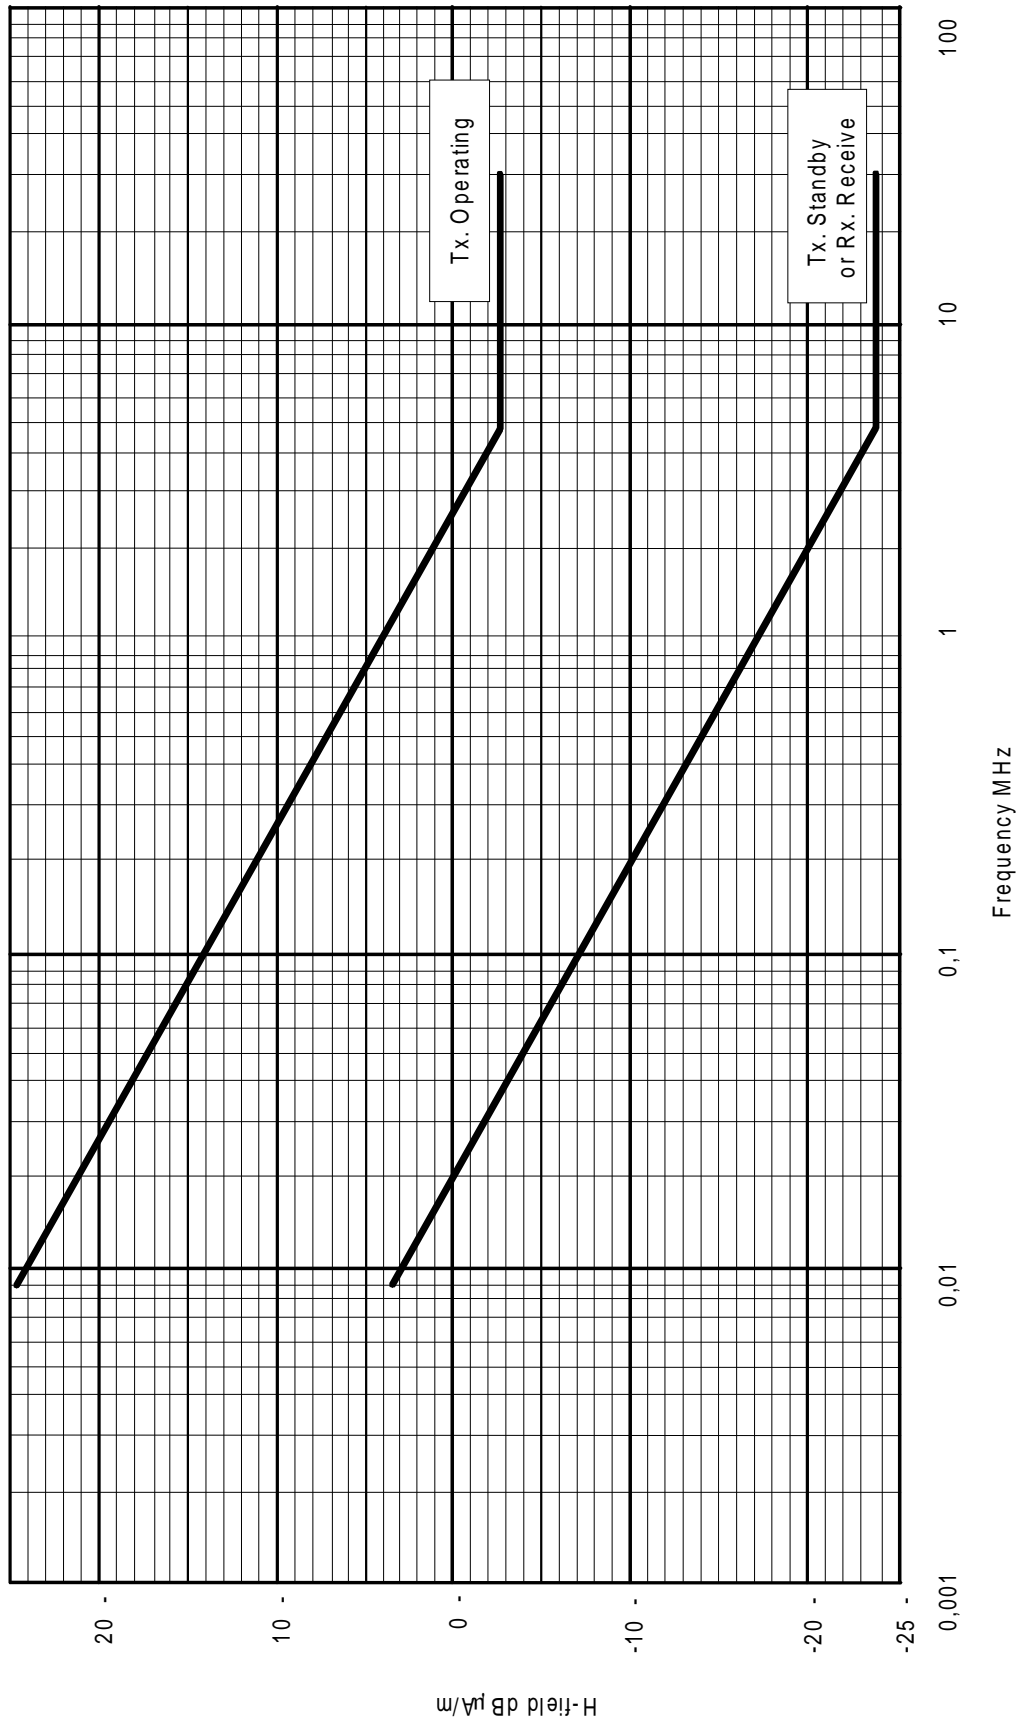


Figure E.1: Spurious limits, radiated H-field at 10 m distance

History

Document history	
December 1994	First Edition
August 1996	Unified Approval Procedure UAP 52: 1996-08-19 to 1996-12-13