



**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 394-2-3**

February 1998

---

Source: TETRA

Reference: DE/RES-06009-2-3

ICS: 33.020

**Key words:** TETRA, V+D, protocol, testing, voice, data, ATS

**Terrestrial Trunked Radio (TETRA);  
Conformance testing specification;  
Part 2: Protocol testing specification for Voice plus Data (V+D);  
Sub-part 3: Abstract Test Suite (ATS) for  
Logical Link Control (LLC)**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.



## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	7
3 Definitions and abbreviations .....	8
3.1 TETRA definitions .....	8
3.2 TETRA abbreviations .....	8
3.3 ISO 9646 definitions .....	8
3.4 ISO 9646 abbreviations .....	8
4 Abstract Test Method (ATM) .....	9
4.1 Lower Tester (LT) .....	9
4.2 Upper Tester (UT) .....	9
4.3 Test Co-ordination Procedures (TCP) .....	10
4.4 Point of Control and Observation (PCO) .....	10
5 ATS conventions .....	10
5.1 Naming conventions .....	10
5.1.1 Declarations part .....	10
5.1.1.1 Test suite type and structured type definitions .....	10
5.1.1.2 Test suite operations definitions .....	10
5.1.1.3 Test suite parameter declarations .....	10
5.1.1.4 Test case selection expression definitions .....	11
5.1.1.5 Test suite constant declarations .....	11
5.1.1.6 Test suite variable declarations .....	11
5.1.1.7 Test case variable declarations .....	11
5.1.1.8 PCO declarations .....	11
5.1.1.9 Timer declarations .....	11
5.1.1.10 ASP type definitions .....	12
5.1.1.11 PDU type definitions .....	12
5.1.1.12 Alias definitions .....	12
5.1.2 Constraints part .....	12
5.1.3 Dynamic part .....	12
5.1.3.1 Test case identifier .....	13
5.1.3.2 Test step identifier .....	13
5.1.3.3 Default identifier .....	13
5.2 Implementation conventions .....	13
5.3 TC and TP mapping .....	13
Annex A (normative): ATS for TETRA LLC .....	14
A.1 The TTCN Graphical form (TTCN.GR) .....	14
A.2 The TTCN Machine Processable form (TTCN.MP) .....	14
Annex B (normative): Partial PIXIT proforma for TETRA LLC .....	15
B.1 Identification summary .....	15
B.2 ATS summary .....	15
B.3 Test laboratory .....	15
B.4 Client identification .....	15

B.5	SUT.....	16
B.6	Protocol layer information .....	16
B.6.1	Protocol identification .....	16
B.6.2	IUT information.....	17
B.6.2.1	Implicit send events .....	17
B.6.2.2	Parameter values.....	18
Annex C (normative):	Protocol Conformance Test Report (PCTR) proforma for TETRA LLC .....	19
C.1	Identification summary.....	19
C.1.1	Protocol conformance test report.....	19
C.1.2	IUT identification.....	19
C.1.3	Testing environment.....	19
C.1.4	Limits and reservation .....	20
C.1.5	Comments.....	20
C.2	IUT conformance status .....	20
C.3	Static conformance summary .....	20
C.4	Dynamic conformance summary .....	20
C.5	Static conformance review report .....	21
C.6	Test campaign report.....	22
C.7	Observations.....	23
Annex D (informative):	Bibliography .....	24
History .....		25

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Terrestrial Trunked Radio (TETRA) Project of the European Telecommunications Standards Institute (ETSI).

Every ETS prepared by ETSI is a voluntary standard. This ETS contains text concerning conformance testing of the equipment to which it relates. This text should be considered only as guidance and does not make this ETS mandatory.

This ETS will consist of two parts with various sub-parts:

Part 1: "Radio";

**Part 2: "Protocol testing specification for Voice plus Data (V+D)".**

Transposition dates	
Date of adoption of this ETS:	6 February 1998
Date of latest announcement of this ETS (doa):	31 May 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 November 1998
Date of withdrawal of any conflicting National Standard (dow):	30 November 1998

Blank page

## 1 Scope

This European Telecommunication Standard (ETS) contains the Abstract Test Suite (ATS) to test the TETRA Logical Link Control (LLC) layer. The LLC protocol is specified in ETS 300 392-2 [2]. The Test Suite Structure (TSS) and Test Purposes (TPs) for this ATS are defined in ETS 300 394-2-1 [1].

The objective of this test specification is to provide a basis for approval tests for TETRA equipment giving a high probability of air interface inter-operability between different manufacturer's TETRA equipment.

The ISO standard for the methodology of conformance testing, ISO/IEC 9646-1 [3], ISO/IEC 9646-2 [4], ISO/IEC 9646-3 [5] and ISO/IEC 9646-5 [6], as well as the ETSI rules for conformance testing, ETS 300 406 [8] and ETR 141 (see annex D), are used as a basis for the test methodology.

Annex A provides the Tree and Tabular Combined Notation (TTCN) part of this ATS.

Annex B provides the Partial Protocol Implementation eXtra Information for Testing (PIXIT) Proforma of this ATS.

Annex C provides the Protocol Conformance Test Report (PCTR) Proforma of this ATS.

## 2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 394-2-1: "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA) system; Conformance testing specification; Part 2: Protocol testing specification for Voice plus Data (V+D); Part 2-1: Test suite structure and test purposes".
- [2] ETS 300 392-2: "Radio Equipment and Systems (RES); Trans-European Trunked Radio (TETRA) system; Voice plus Data (V+D); Part 2: Air Interface (AI)".
- [3] ISO/IEC 9646-1 (1991): "Information technology - Open Systems Interconnection - Conformance Testing Methodology and Framework - Part 1: General Concepts" (see also CCITT Recommendation X.290 (1991)).
- [4] ISO/IEC 9646-2 (1991): "Information technology - Open Systems Interconnection - Conformance Testing Methodology and Framework - Part 2: Abstract Test Suite Specification" (see also CCITT Recommendation X.291 (1991)).
- [5] ISO/IEC 9646-3 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The tree and tabular combined notation" (see also CCITT Recommendation X.292 (1992)).
- [6] ISO/IEC 9646-5 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process" (see also CCITT Recommendation X.292 (1992)).
- [7] ISO/IEC 9646-6 (1991): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 6: Protocol profile test specification".
- [8] ETS 300 406: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

### 3 Definitions and abbreviations

#### 3.1 TETRA definitions

For the purposes of this ETS, the definitions given in ETS 300 392-2 [2] apply.

#### 3.2 TETRA abbreviations

For the purposes of this ETS, the following TETRA abbreviations apply:

LLC	Logical Link Control
MAC	Medium Access Control
MS	Mobile Station
SDU	Service Data Unit

#### 3.3 ISO 9646 definitions

For the purposes of this ETS, the following ISO/IEC 9646-1 [3] definitions apply:

Abstract Test Suite (ATS)  
Abstract Test Method (ATM)  
Implementation Conformance Statement (ICS)  
Implementation Under Test (IUT)  
Implementation eXtra Information for Testing (IXIT)  
Lower Tester (LT)  
PICS proforma  
PIXIT proforma  
Point of Control and Observation (PCO)  
Protocol Implementation Conformance Statement (PICS)  
Protocol Implementation eXtra Information for Testing (PIXIT)  
Service Access Point (SAP)  
Single Party Testing (SPyT)  
System Under Test (SUT)  
Upper Tester (UT)

For the purposes of this ETS, the following ISO/IEC 9646-3 [5] definitions apply:

TTCN.GR  
TTCN.MP

For the purposes of this ETS, the following ISO/IEC 9646-5 [6] definitions apply:

Protocol Conformance Test Report (PCTR)  
PCTR proforma

#### 3.4 ISO 9646 abbreviations

For the purposes of this ETS, the following ISO/IEC 9646-1 [3] abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
IUT	Implementation Under Test
LT	Lower Tester
NWK	Network Layer
PCO	Point of Control and Observation
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statements
PIXIT	Protocol Implementation eXtra Information for Testing
SAP	Service Access Point
SPyT	Single Party Testing
SUT	System Under Test



TC	Test Case
TP	Test Purpose
TSS	Test Suite Structure
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester

For the purposes of this ETS, the following ISO/IEC 9646-5 [6] abbreviations apply:

PCTR	Protocol Conformance Test Report
------	----------------------------------

#### 4 Abstract Test Method (ATM)

This clause describes the ATM used for testing the TETRA LLC protocol. It is the embedded variant of the remote test method used in Single Party Testing (SPyT) context, as defined in ISO/IEC 9646-2 [4], clause 11. This test method has been selected, because:

- this test method implies no specific requirements from the Implementation Under Test (IUT);
- the upper Service Access Point (SAP) of the IUT cannot be directly observed;
- the variety of the possible TETRA implementations is a serious technical obstacle for the adoption of a different ATM;
- this test method places minimum limitations in the realization of conformance testing.

The selected test method is illustrated in figure 1.

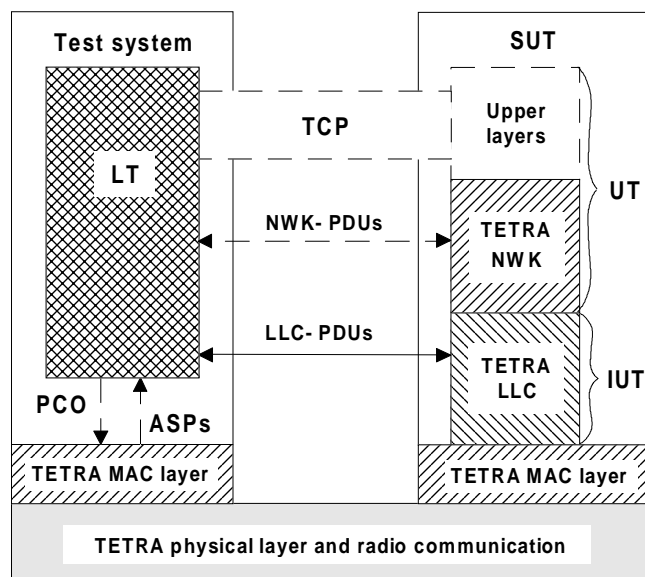


Figure 1: Remote SPyT test method for TETRA LLC

##### 4.1 Lower Tester (LT)

A LT is located in a remote TETRA test system. It controls and observes the behaviour of the IUT.

##### 4.2 Upper Tester (UT)

There is no explicit UT in the remote test method, but the TETRA Network (NWK) layer and the layers above inside the System Under Test (SUT) are used implicitly for testing the LLC layer.

### 4.3 Test Co-ordination Procedures (TCP)

The implicit send events defined by the provider of an implementation in annex B serve the purpose of the TCP. They are used as an input to the IUT communicating with the UT to initiate test events at the LLC layer.

In addition to the implicit send events, some NWK layer Protocol Data Units (PDUs) sent inside the LLC Service Data Units (SDUs) to the IUT are used for test co-ordination purposes. These PDUs, as sent to the IUT, should produce NWK layer responses, which then further on should cause LLC PDU transmissions by the IUT that are observable by the LT.

### 4.4 Point of Control and Observation (PCO)

The PCO for LLC layer testing is located inside the LLC protocol, i.e. between the different LLC protocol subentities and the formatter subentity. All test events at the PCO are specified in terms of LLC layer PDUs. The mapping of the LLC PDUs to possible Medium Access Control (MAC) layer service primitives is left to the test implementation.

## 5 ATS conventions

This clause describes the conventions applied to define the ATS and gives the naming conventions chosen for the different elements of the ATS.

The ATS conventions are intended to give a better understanding of the ATS but they describe also the conventions made for the development of the ATS, thus for any later maintenance purposes or further development of the ATS, the conventions described in this clause shall be considered.

### 5.1 Naming conventions

#### 5.1.1 Declarations part

This subclause describes the naming conventions chosen for the elements of the ATS declarations part.

##### 5.1.1.1 Test suite type and structured type definitions

The test suite type and test suite structured type identifiers describe the information elements, and each whole word included in the name is written in lowercase starting by an uppercase letter:

EXAMPLE:	DisconnectionReportType	simple type
	FCS_Type	simple type
	AcknowledgementBlockType	structured type

In the case an abbreviation is included in the declaration name, there is an underscore ("\_") before and/or after it, separating it from the rest of the identifier. This rule with abbreviations apply to all the naming conventions in the whole test suite.

##### 5.1.1.2 Test suite operations definitions

The test suite operation identifiers are composed of strings in uppercase letters starting by the uppercase string "TSO\_". The different strings in the definition are separated with underscores.

EXAMPLE:	TSO_CALCULATE_FCS
----------	-------------------

##### 5.1.1.3 Test suite parameter declarations

The test suite parameter identifiers are composed of strings in uppercase letters starting by the uppercase string "PIC\_" or "PIX\_" and separated by underscores.

If the test suite parameter references a PICS item, the prefix "PIC\_" is used.

EXAMPLE:	PIC_BL_UNACKNOWLEDGED_DATA_TRANSMISSION
----------	---

If the test suite parameter references a PIXIT item, the prefix "PIX\_" is used.

EXAMPLE:                   PIX\_ALA\_ACCEPTABLE\_QOS

Complete names as defined in the specifications are used.

#### **5.1.1.4           Test case selection expression definitions**

The naming conventions for the test case selection expression definitions use free text starting with an uppercase letter. The name of the expression shall explain clearly the selection rule. The test case selection expressions are generally logical combinations of the test suite parameter definitions.

#### **5.1.1.5           Test suite constant declarations**

The test suite constant identifiers are composed of strings in uppercase letters starting by the uppercase string "TSC\_".

EXAMPLE:                   TSC\_BL\_SDU\_NUMBER\_RANGE

Complete names as defined in the protocol specification are used. However, in the parameters including a dot character, the dot is replaced by an underscore.

#### **5.1.1.6           Test suite variable declarations**

The test suite variable identifiers are composed of string in lowercase letters starting by the lowercase string "tsv\_".

EXAMPLE:                   tsv\_ns

If the test suite variable represents a system parameter or value, the name defined in the protocol specification is used. However, in the variables including a dot character, the dot is replaced by an underscore.

#### **5.1.1.7           Test case variable declarations**

The test case variable identifiers are composed of strings in lowercase letters starting by the lowercase string "tcv\_".

EXAMPLE:                   tcv\_fcs

#### **5.1.1.8           PCO declarations**

The only point of control and observation is named LLLC, with "L" referring to LT.

#### **5.1.1.9           Timer declarations**

Two kinds of timers can be distinguished:

- 1) standardized:

Those defined in the standard, e.g. T.251, use the same name as in the standard, beginning with a capital "T", except that the dot is replaced by an underscore.

As there is a tolerance margin accepted for these timers, two values are needed:

- the maximum value allowed, which will use the suffix "\_Max";
- the minimum value allowed, which will use the suffix "\_Min".

EXAMPLE 1:                T\_251\_Min, T\_251\_Max

2) non-standardized:

Those not defined in the standard, i.e. for execution use, e.g. a timer waiting for a response. These timers begin with the prefix "T\_", followed by a string in lowercase letters with each word in the following string starting with an uppercase letter.

EXAMPLE 2:           T\_IUT\_Response  
                  T\_UserResponse

#### 5.1.1.10        **ASP type definitions**

No ASP definitions are used in the ATS.

#### 5.1.1.11        **PDU type definitions**

The identifier of a PDU is given in a string in uppercase letters, which represents the layer message.

EXAMPLE 1:           BL\_DATA   for the BL-DATA layer 2 PDU reception and transmission.

Where the message is a composite word, an underscore character appears in the string.

EXAMPLE 2:           AL\_FINAL\_AR   is the AL-FINAL-AR layer 2 message.

#### 5.1.1.12        **Alias definitions**

No alias definitions are used in the test suite.

#### 5.1.2           **Constraints part**

This subclause describes the naming conventions chosen for the elements of the ATS constraints part.

Constraint identifiers commence with uppercase. The remaining part of the name is separated from the beginning with an underscore and is written in lowercase with each word starting with an uppercase letter.

Identifier names of elements concerning the same subject have equivalent names in the declaration and the constraint part:

- Declaration part: BL\_DATA
- Constraint part: D\_BL\_DATA\_NoResponseRequired

The constraints used in uplink direction, i.e. received by the test system, and downlink direction, i.e. sent by the test system, are distinguished with prefixes U\_ and D\_ respectively.

When formal parameter lists are used, the variable names are written in lowercase. The variable name is the same as the name of the element it is representing starting with prefix "cpa\_".

EXAMPLE:           D\_AL\_DISC (cpa\_LinkNumber: LinkNumberType)

#### 5.1.3           **Dynamic part**

This subclause describes the naming conventions chosen for the elements of the ATS dynamic part.

**5.1.3.1 Test case identifier**

The identifier of a TC is built according to table 1.

**Table 1: TC naming convention**

<code>&lt;ts&gt;_&lt;x&gt;_&lt;s&gt;_&lt;nn&gt;</code>		
<code>&lt;ts&gt;</code>	= test suite	LLC Logical Link Control layer
x	= Type of testing	CA Capability tests BV Valid Behaviour tests BI Invalid Behaviour tests TI Timer expiry and counter mismatch tests
s	= test subgroup (as many subgroups as required)	as defined in the test suite structure
<code>&lt;nn&gt;</code>	= sequential number	(01-99) TC Number

**5.1.3.2 Test step identifier**

The test step identifier is built with a string of lowercase letters led by a string of capital letter and joined by an underscore character. The first string indicates the main function of the test step; e.g. PRE for preamble and LTS for local tree name. The second string indicates the meaning of the step. The implicit send events in the ATS are only used in test steps with prefix IMP.

EXAMPLES:           PRE\_IUT\_Reset  
                      LTS\_ReceiveNextSegment  
                      IMP\_ALA\_ConnectionSetup

**5.1.3.3 Default identifier**

Only one default identifier is used, namely: OtherwiseFail.

**5.2 Implementation conventions**

Fully functional underlying MAC protocol is assumed from the test system.

The LLC PDUs are assumed to be mapped to MAC layer service primitives in the test system implementation and therefore are not part of the ATS.

All PDUs sent to the IUT should be sent using valid individual address, including the BL-UDATA PDUs.

The test system is assumed to be configured so, that it sends valid D-MLE-SYNC and D-MLE-SYSINFO PDUs to the IUT. The BS service details element in the D-MLE-SYSINFO PDU should require registration on the cell, so that the IUT starts registration after power up as defined in the ATS in preamble PRE\_RESET\_AND\_REGISTER. Also, the advanced link support in the same element is required to be set on for the advanced link test cases. Other elements are to be configured according to the capabilities of the IUT.

**5.3 TC and TP mapping**

There is a one-to-one mapping between the TC identifiers and the TP identifiers. The correspondence rule is given by the following examples:

<b>TP identifier</b>	<b>TC identifier</b>
TP/LLC/CA/BA-01	LLC_CA_BA_01
TP/LLC/BV/AA/LR-02	LLC_BV_AA_LR_02
TP/LLC/TI/AA-01	LLC_TI_AA_01

## **Annex A (normative):      ATS for TETRA LLC**

The ATS is written in TTCN according to ISO/IEC 9646-3 [5].

As the ATS was developed on a separate TTCN tool the TTCN tables are not completely referenced in the contents table of this ETS. The ATS itself contains a test suite overview part which provides additional information and references.

### **A.1   The TTCN Graphical form (TTCN.GR)**

The TTCN.GR representation of this ATS is contained in a Postscript file (LLC.PS contained in archive 39423e1.LZH) which accompanies this ETS.

### **A.2   The TTCN Machine Processable form (TTCN.MP)**

The TTCN.MP representation corresponding to this ATS is contained in an ASCII text file (LLC.MP contained in archive 39423e1.LZH) which accompanies this ETS.

NOTE:       According to ISO/IEC 9646-3 [5], in case of a conflict in interpretation of the operational semantics of TTCN.GR and TTCN.MP, the operational semantics of the TTCN.GR representation takes precedence.

## Annex B (normative): Partial PIXIT proforma for TETRA LLC

Notwithstanding the provisions of the copyright clause related to the text of this ETS, ETSI grants that users of this ETS may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

The PIXIT proforma is based on ISO/IEC 9646-6 [7]. Any additional information needed can be found in this international standard document.

### B.1 Identification summary

Table B.1

PIXIT number:	
Test laboratory name:	
Date of issue:	
Issued to:	

### B.2 ATS summary

Table B.2

Protocol specification:	ETS 300 392-2
Protocol to be tested:	
ATS specification:	ETS 300 394-2-3
Abstract test method:	Remote test method, embedded variant

### B.3 Test laboratory

Table B.3

Test laboratory identification:	
Test laboratory manager:	
Means of testing:	
SAP address:	

### B.4 Client identification

Table B.4

Client identification:	
Client test manager:	
Test facilities required:	

## B.5 SUT

Table B.5

Name:	
Version:	
SCS number:	
Machine configuration:	
Operating system identification:	
IUT identification:	
PICS reference for IUT:	
Limitations of the SUT:	
Environmental conditions:	

## B.6 Protocol layer information

### B.6.1 Protocol identification

Table B.6

Name:	TETRA - Logical Link Control (LLC) layer - ETS 300 392-2
Version:	
PICS references:	



**B.6.2 IUT information**

**B.6.2.1 Implicit send events**

**Table B.7: Implicit send events**

Item	PIXIT (see note)	Related implicit send message (PDU)	Invocation description or reference
1	IMP_BLA_DataTransmission	This implicit send corresponds to the IUT initiating the basic link acknowledged data transmission. The resulting PDU may be one of the following: BL-DATA, BL-DATA-FCS, BL-ADATA or BL-ADATA-FCS. BL-ADATA or BL-ADATA-FCS PDUs should appear only when the IUT has received data to be acknowledged.	
2	IMP_BLU_DataTransmission	This implicit send corresponds to the IUT initiating the basic link unacknowledged data transmission. The resulting PDU may be one of the following: BL-UDATA, BL-UDATA-FCS.	
3	IMP_ALA_ConnectionSetup	This implicit send corresponds to the IUT initiating the advanced link acknowledged service connection setup procedure. The resulting PDU should be AL-SETUP.	
4	IMP_ALA_Disconnection	This implicit send corresponds to the IUT initiating the advanced link acknowledged service disconnection procedure. The resulting PDU should be AL-DISC.	
5	IMP_ALA_DataTransmission	This implicit send corresponds to the IUT initiating the advanced link acknowledged service data transfer procedure for one segmented or unsegmented SDU. The resulting PDUs should be for the first segments AL-DATA or AL-DATA-AR PDUs and for the last segment AL-FINAL or AL-FINAL-AR PDU.	
6	IMP_ALA_UnsegmentedDataTransmission	This implicit send corresponds to the IUT initiating the advanced link acknowledged service data transfer procedure for one unsegmented SDU. The resulting PDU should be AL-FINAL or AL-FINAL-AR.	
7	IMP_ALA_SegmentedDataTransmission	This implicit send corresponds to the IUT initiating the advanced link acknowledged service data transfer procedure for one segmented SDU. The resulting PDUs should be for the first segments AL-DATA or AL-DATA-AR PDUs and for the last segment AL-FINAL or AL-FINAL-AR PDU.	
NOTE: The PIXIT names for the implicit send events in this table are the same as those of the test steps in which the implicit send events are used.			

B.6.2.2 Parameter values

Table B.8: Parameter values

Item	Parameter	Parameter type	Explanation	Value or reference
1	PIX_ALA_UNSEGMENTED_SDU	TL_SDU_Type	A SDU that can be sent to the IUT via advanced link acknowledged service in one PDU. This element should not contain the FCS field.	
2	PIX_ALA_SEGMENTED_SDU	TL_SDU_Type	A SDU that can be sent to the IUT via advanced link acknowledged service using segmentation in more than one PDUs. This element should not contain the FCS field.	
3	PIX_ALA_ACCEPTABLE_QOS	QoS_Type	A QoS value set for acknowledged advanced link connection setup, which is acceptable by the IUT and should conclude to a successful connection establishment.	
4	PIX_ALA_UNACCEPTABLE_QOS	QoS_Type	A QoS value set for acknowledged advanced link connection setup, which is acceptable by the IUT and should conclude to a successful connection establishment.	

**Annex C (normative): Protocol Conformance Test Report (PCTR) proforma for TETRA LLC**

Notwithstanding the provisions of the copyright clause related to the text of this ETS, ETSI grants that users of this ETS may freely reproduce the PCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

The PCTR Proforma is based on ISO/IEC 9646-6 [7]. Any additional information needed can be found in this ETS.

**C.1 Identification summary**

**C.1.1 Protocol conformance test report**

**Table C.1**

PCTR number:	
PCTR date:	
Corresponding SCTR number:	
Corresponding SCTR date:	
Test laboratory identification:	
Test laboratory manager:	
Signature:	

**C.1.2 IUT identification**

**Table C.2**

Name:	
Version:	
Protocol specification:	
PICS:	
Previous PCTR if any:	

**C.1.3 Testing environment**

**Table C.3**

PIXIT number:	
ATS specification:	
Abstract test method:	Remote test method, embedded variant
Means of testing identification:	
Date of testing:	
Conformance log reference(s):	
Retention date for log reference(s):	

**C.1.4 Limits and reservation**

Additional information relevant to the technical contents or further use of the test report, or the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....  
.....  
.....  
.....  
.....

**C.1.5 Comments**

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....  
.....  
.....  
.....  
.....

**C.2 IUT conformance status**

This IUT has or has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements as specified in clause C.3 in this report and there are no "FAIL" verdicts to be recorded in clause C.6 strike the words "has or" otherwise strike the words "or has not".

**C.3 Static conformance summary**

The PICS for this IUT is or is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

**C.4 Dynamic conformance summary**

The test campaign did or did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded in clause C.6 of this report strike the words "did or" otherwise strike the words "or did not".

Summary of the results of groups of test:

.....  
.....  
.....  
.....  
.....



C.6 Test campaign report

Table C.4

ATS reference	Selected	Run	Verdict	Observations (see note)
LLC_CA_BA_01	Yes/No	Yes/No		
LLC_CA_BA_02	Yes/No	Yes/No		
LLC_CA_BA_03	Yes/No	Yes/No		
LLC_CA_BA_04	Yes/No	Yes/No		
LLC_CA_BA_05	Yes/No	Yes/No		
LLC_CA_BA_06	Yes/No	Yes/No		
LLC_CA_BA_07	Yes/No	Yes/No		
LLC_CA_BA_08	Yes/No	Yes/No		
LLC_CA_BA_09	Yes/No	Yes/No		
LLC_CA_BU_01	Yes/No	Yes/No		
LLC_CA_BU_02	Yes/No	Yes/No		
LLC_CA_BU_03	Yes/No	Yes/No		
LLC_CA_BU_04	Yes/No	Yes/No		
LLC_CA_AA_LE_01	Yes/No	Yes/No		
LLC_CA_AA_LE_02	Yes/No	Yes/No		
LLC_CA_AA_LE_03	Yes/No	Yes/No		
LLC_CA_AA_LE_04	Yes/No	Yes/No		
LLC_CA_AA_LE_05	Yes/No	Yes/No		
LLC_CA_AA_DT_01	Yes/No	Yes/No		
LLC_CA_AA_DT_02	Yes/No	Yes/No		
LLC_CA_AA_DT_03	Yes/No	Yes/No		
LLC_CA_AA_DT_04	Yes/No	Yes/No		
LLC_CA_AA_DT_05	Yes/No	Yes/No		
LLC_CA_AA_DT_06	Yes/No	Yes/No		
LLC_CA_AA_DT_07	Yes/No	Yes/No		
LLC_CA_AA_LR_01	Yes/No	Yes/No		
LLC_CA_AA_LR_02	Yes/No	Yes/No		
LLC_CA_AA_LR_03	Yes/No	Yes/No		
LLC_BV_BA_01	Yes/No	Yes/No		
LLC_BV_BA_02	Yes/No	Yes/No		
LLC_BV_BA_03	Yes/No	Yes/No		
LLC_BV_BU_01	Yes/No	Yes/No		
LLC_BV_AA_LE_01	Yes/No	Yes/No		
LLC_BV_AA_LE_02	Yes/No	Yes/No		
LLC_BV_AA_LE_03	Yes/No	Yes/No		
LLC_BV_AA_LE_04	Yes/No	Yes/No		
LLC_BV_AA_DT_01	Yes/No	Yes/No		
LLC_BV_AA_DT_02	Yes/No	Yes/No		
LLC_BV_AA_DT_03	Yes/No	Yes/No		
LLC_BV_AA_DT_04	Yes/No	Yes/No		
LLC_BV_AA_DT_05	Yes/No	Yes/No		
LLC_BV_AA_DT_06	Yes/No	Yes/No		
LLC_BV_AA_DT_07	Yes/No	Yes/No		
LLC_BV_AA_DT_08	Yes/No	Yes/No		
LLC_BV_AA_LR_01	Yes/No	Yes/No		
LLC_BV_AA_LR_02	Yes/No	Yes/No		
LLC_BV_AA_LR_03	Yes/No	Yes/No		

(continued)



**Annex D (informative): Bibliography**

- EWOS/ETSI Project Team No 5: "Project Report and Technical Report. OSI Conformance Testing Methodology and Procedures in Europe".
- ETR 022 (1991): "Advanced Testing Methods (ATM); Vocabulary of terms used in communications protocols conformance testing".
- ETR 141 (1994): "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; The Tree and Tabular Combined Notation (TTCN) style guide".



## History

Document history			
December 1996	Public Enquiry	PE 121:	1996-12-30 to 1997-04-25
December 1997	Vote	V 9805:	1997-12-02 to 1998-01-30
February 1998	First Edition		